



Plot 7-89. Conducted Spurious Plot (Bluetooth (LE), 1Mbps – Ch. 37) – Ant1

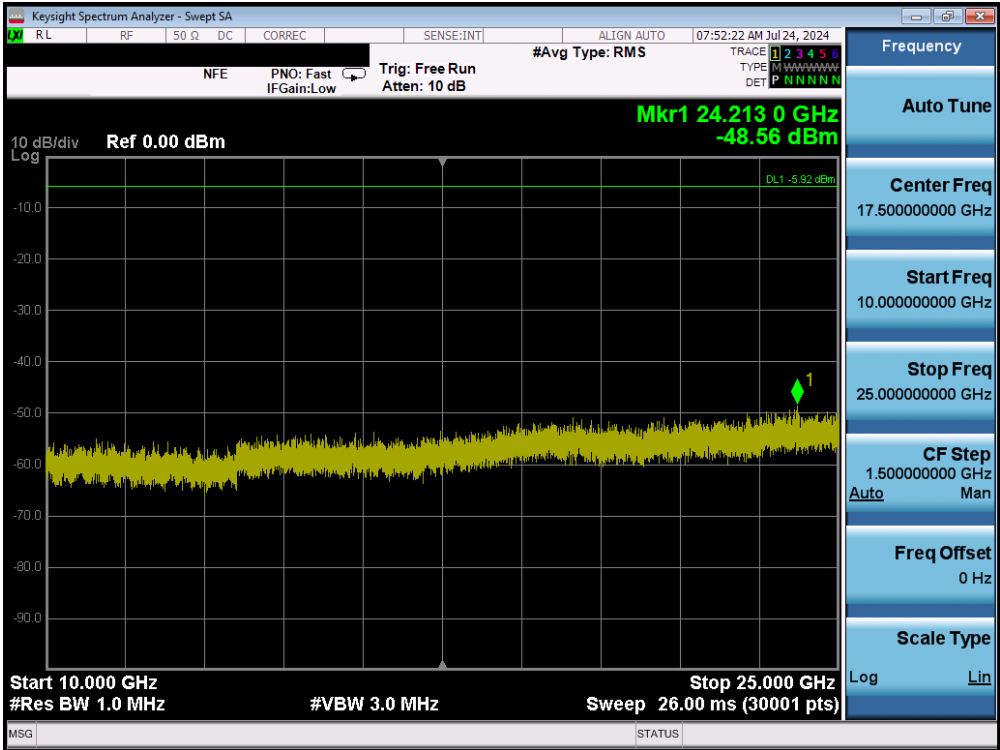


Plot 7-90. Conducted Spurious Plot (Bluetooth (LE), 1Mbps – Ch. 37) – Ant1

FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-09.A3L	Test Dates: 06/10/2024 – 07/30/2024	EUT Type: Portable Tablet	Page 67 of 86


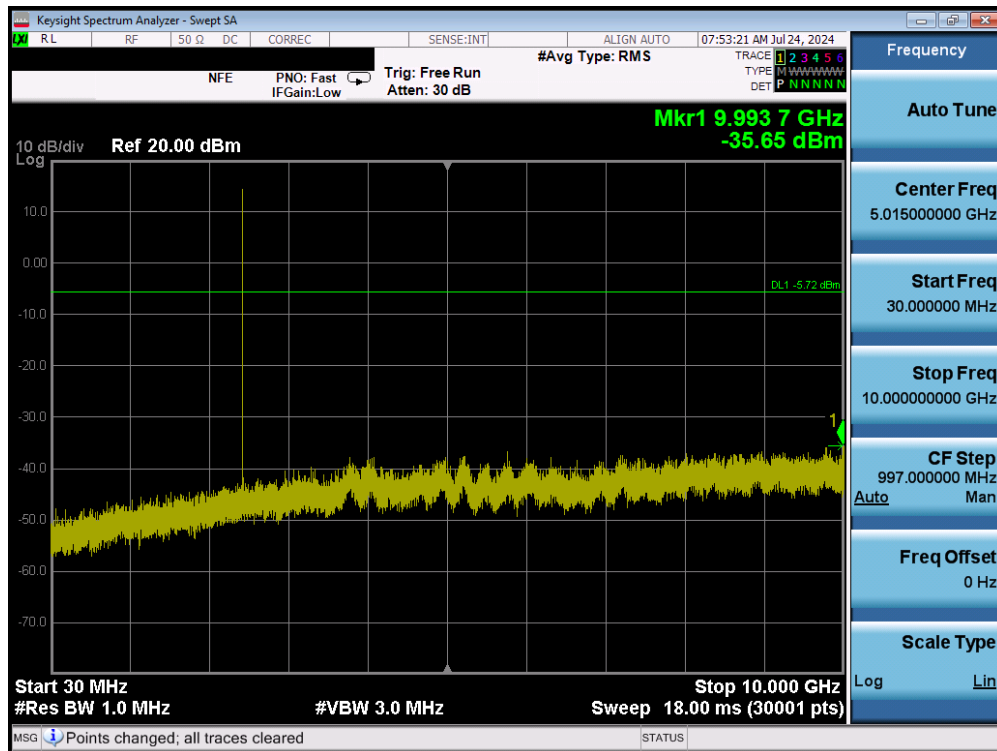


Plot 7-91. Conducted Spurious Plot (Bluetooth (LE), 1Mbps - Ch. 17) - Ant1

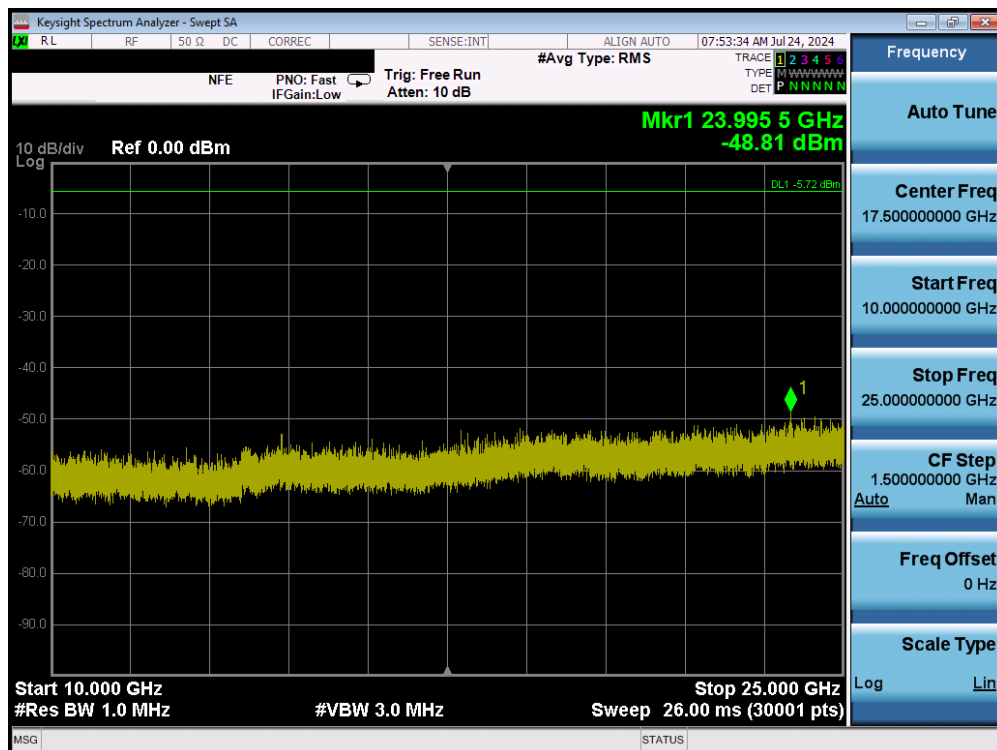



Plot 7-92. Conducted Spurious Plot (Bluetooth (LE), 1Mbps - Ch. 17) - Ant1

FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-09.A3L	Test Dates: 06/10/2024 - 07/30/2024	EUT Type: Portable Tablet	Page 68 of 86

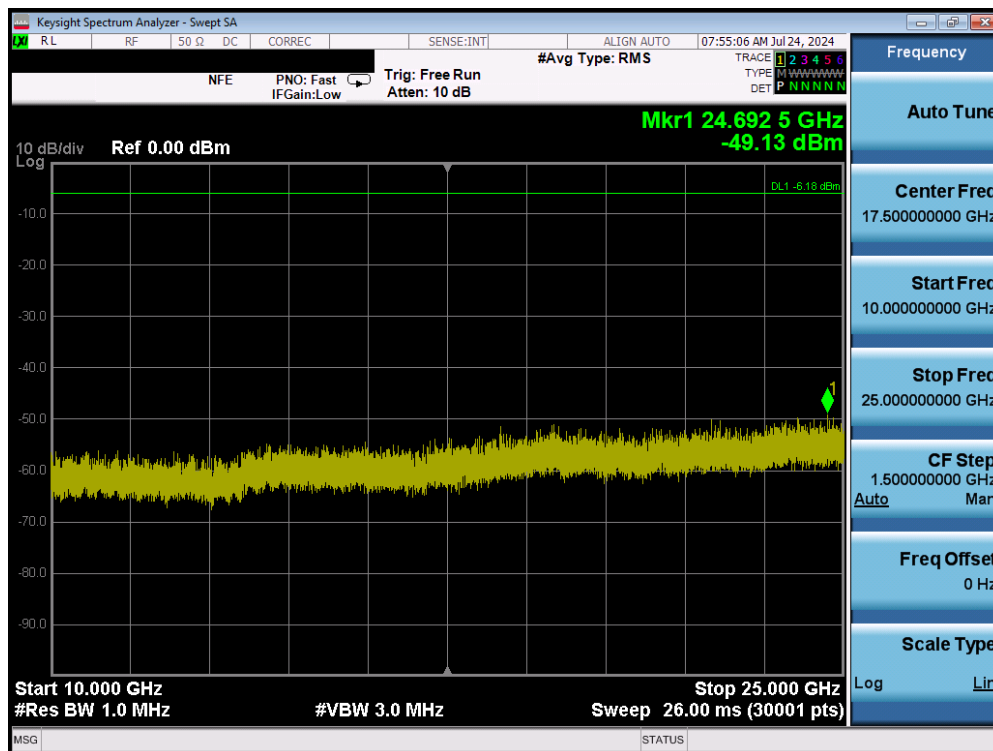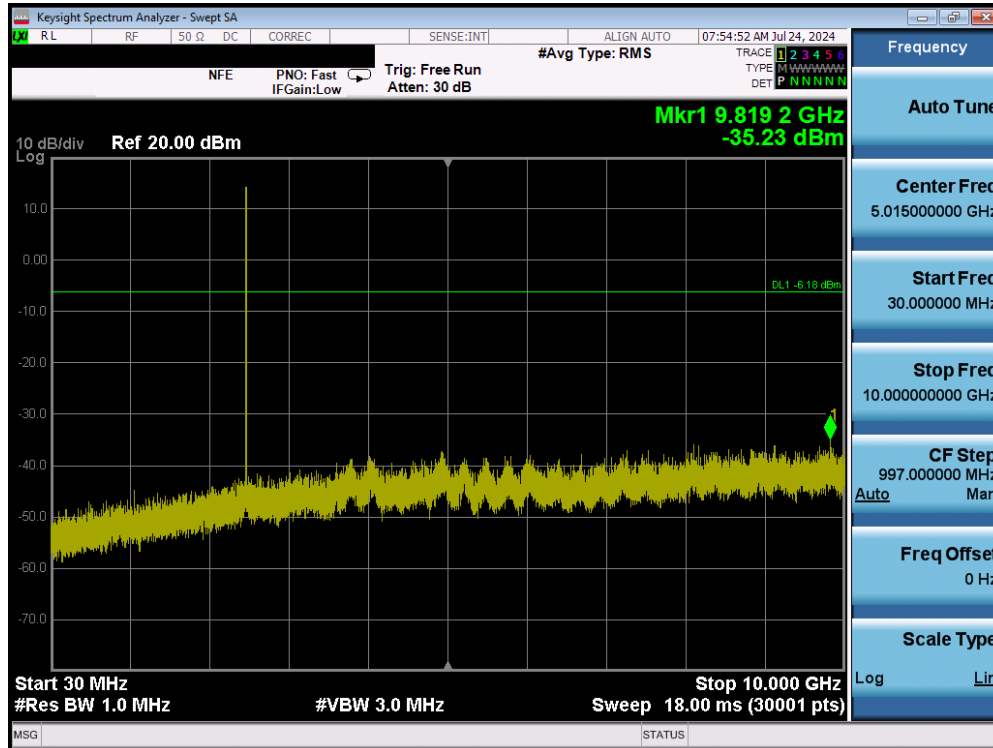


FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-09.A3L	Test Dates: 06/10/2024 – 07/30/2024	EUT Type: Portable Tablet	Page 69 of 86

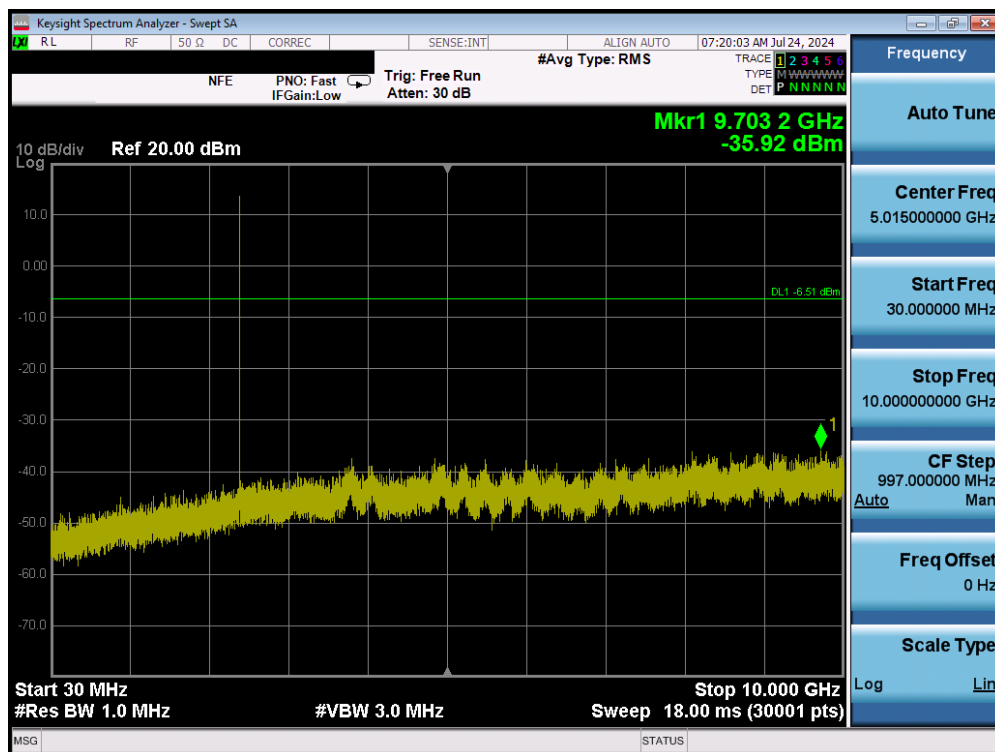

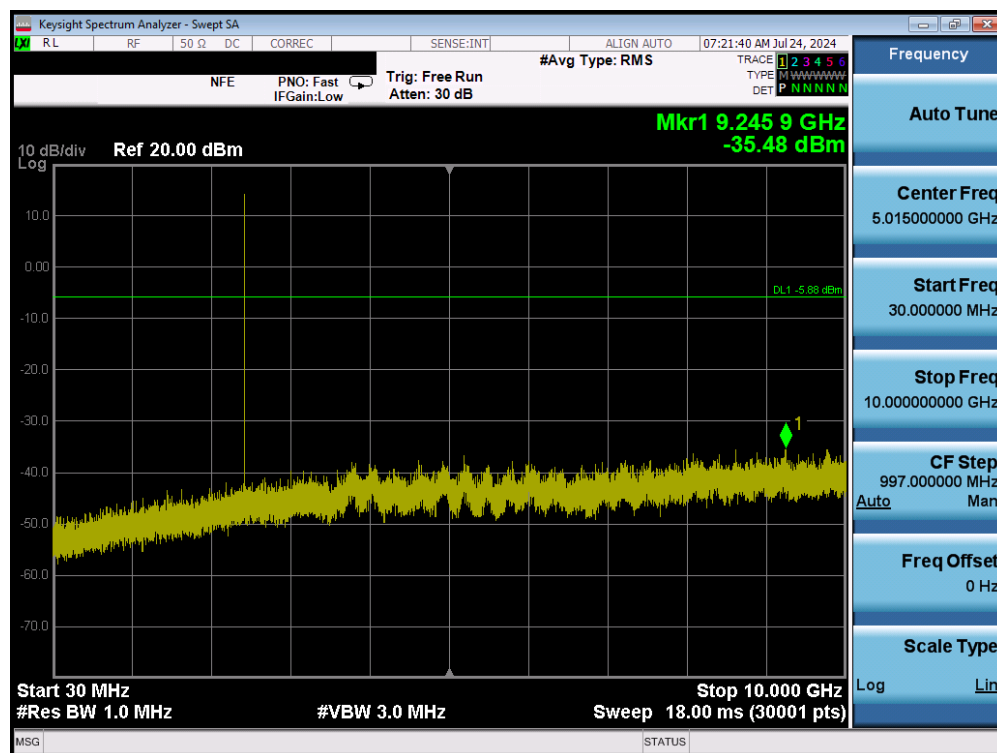


Plot 7-97. Conducted Spurious Plot (Bluetooth (LE), 1Mbps – Ch. 17) – Ant2

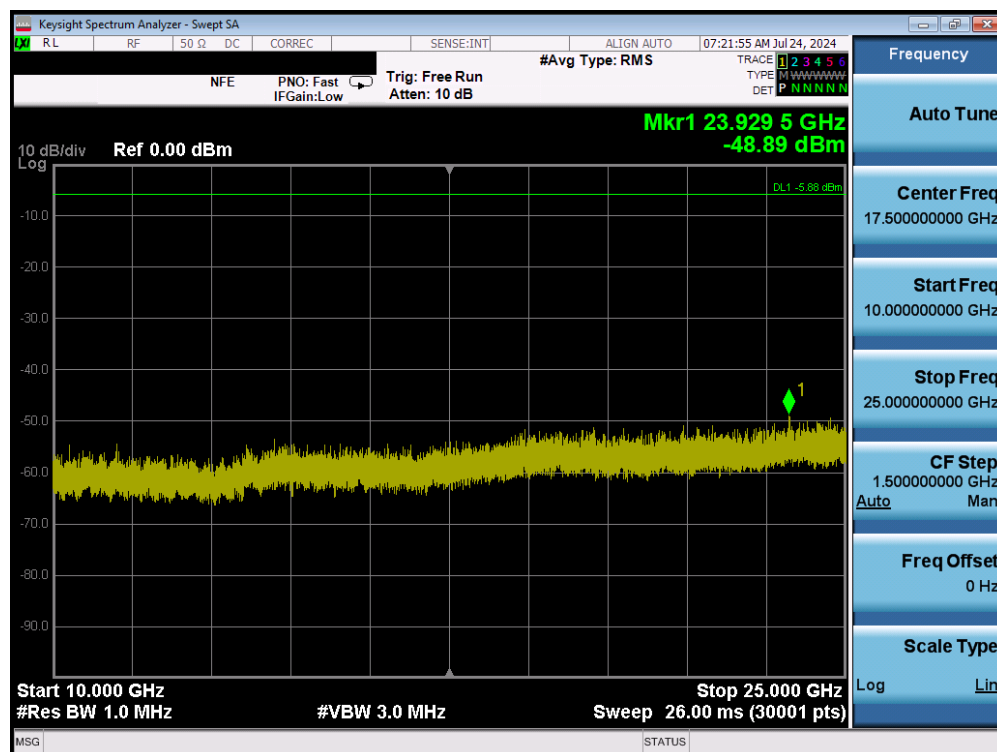


Plot 7-98. Conducted Spurious Plot (Bluetooth (LE), 1Mbps – Ch. 17) – Ant2

FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-09.A3L	Test Dates: 06/10/2024 – 07/30/2024	EUT Type: Portable Tablet	Page 71 of 86

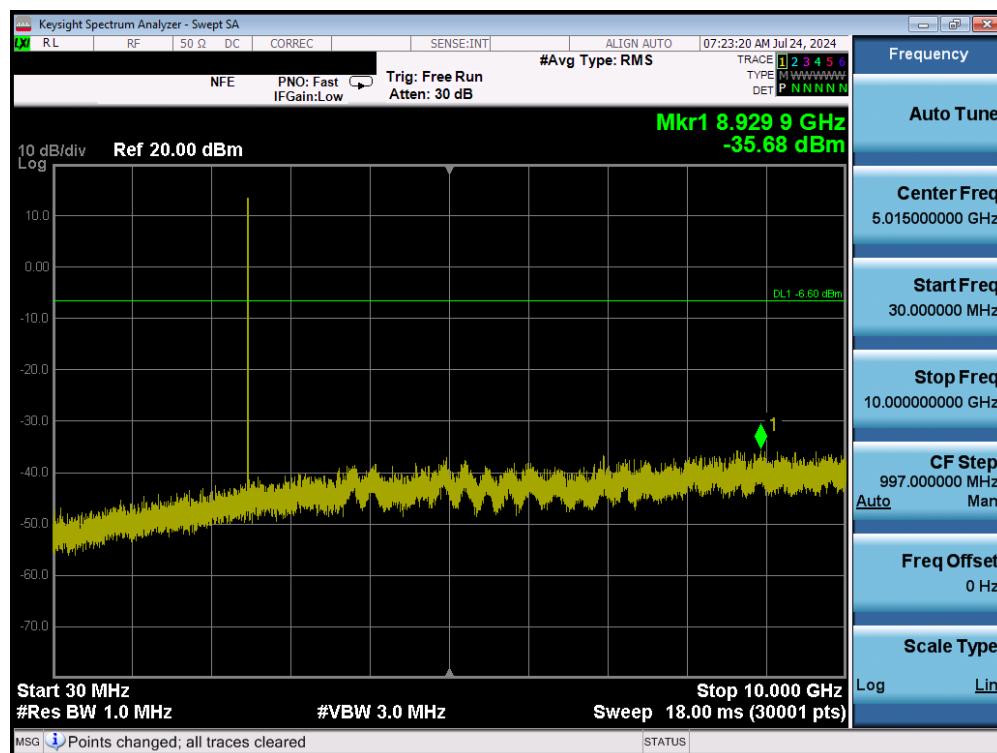

Plot 7-99. Conducted Spurious Plot (Bluetooth (LE), 1Mbps – Ch. 39) – Ant2

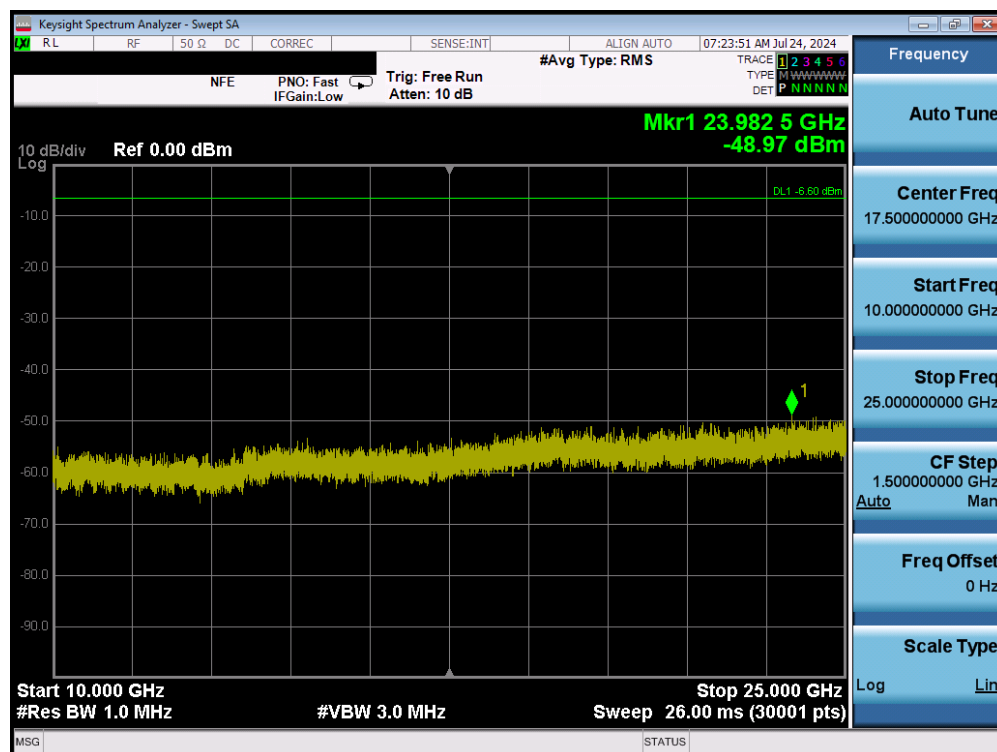

Plot 7-100. Conducted Spurious Plot (Bluetooth (LE), 1Mbps – Ch. 39) – Ant2

FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-09.A3L	Test Dates: 06/10/2024 – 07/30/2024	EUT Type: Portable Tablet	Page 72 of 86

## 7.7 Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247(d)

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 7-8 per Section 15.209.***

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

**Table 7-8. Radiated Limits**

### Test Procedures Used

ANSI C63.10-2013 – Section 6.6.4.3

### Test Settings

#### Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3kHz > 1/T
4. Averaging type was set to RMS to ensure that video filtering was applied in the power domain
5. Detector = peak
6. Sweep time = auto
7. Trace mode = max hold
8. Trace was allowed to run for at least 50 times (1/duty cycle) traces

FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-09.A3L	Test Dates: 06/10/2024 – 07/30/2024	EUT Type: Portable Tablet	Page 73 of 86

## Peak Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW is set depending on measurement frequency, as specified in Table 7-9 below
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Frequency	RBW
9 – 150kHz	200 – 300Hz
0.15 – 30MHz	9 – 10kHz
30 – 1000MHz	100 – 120kHz
> 1000MHz	1MHz

**Table 7-9. RBW as a Function of Frequency**

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

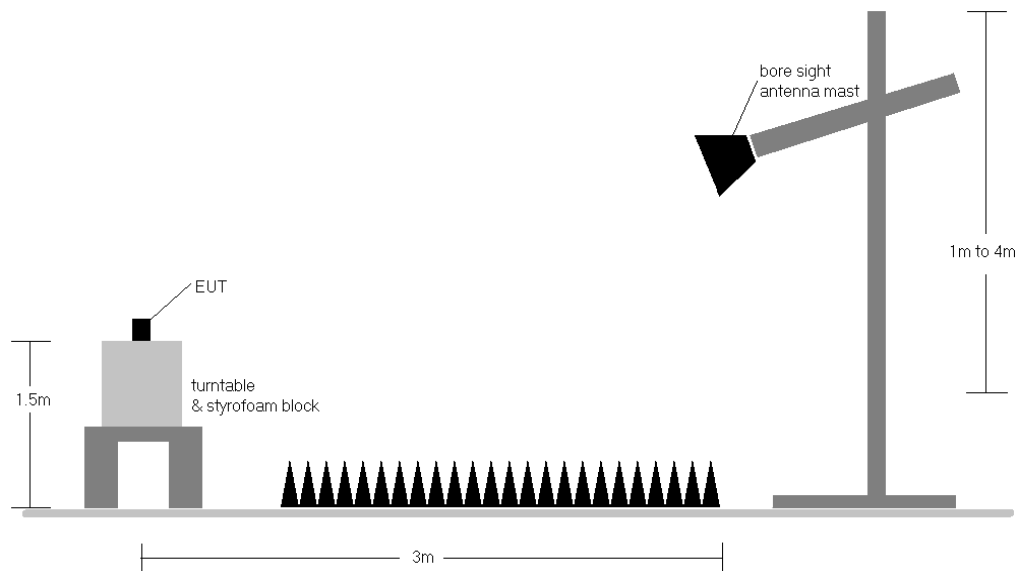

**Figure 7-6. Radiated Test Setup >1GHz**

<b>FCC ID:</b> A3LSMX920	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2405140040-09.A3L	<b>Test Dates:</b> 06/10/2024 – 07/30/2024	<b>EUT Type:</b> Portable Tablet	Page 74 of 86



## Test Notes

1. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in §15.205 below the limit shown in Table 7-8.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Average measurements were recorded using a VBW of 3kHz, per Section 4.1.4.2.3 of ANSI C63.10-2013, since 1/T is equal to just under 3kHz. This method was used because the EUT could not be configured to operate with a duty cycle > 98%. Both average and peak measurements were made using a peak detector
7. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
8. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
9. No Emission was founded above 18GHz.

## Sample Calculations

### Determining Spurious Emissions Levels

- Field Strength Level  $[\text{dB}_{\mu\text{V/m}}] = \text{Analyzer Level} [\text{dBm}] + 107 + \text{AFCL} [\text{dB/m}]$
- $\text{AFCL} [\text{dB/m}] = \text{Antenna Factor} [\text{dB/m}] + \text{Cable Loss} [\text{dB}]$
- $\text{Margin} [\text{dB}] = \text{Field Strength Level} [\text{dB}_{\mu\text{V/m}}] - \text{Limit} [\text{dB}_{\mu\text{V/m}}]$

### Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 7.8 was calculated using the formula:


$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-09.A3L	Test Dates: 06/10/2024 – 07/30/2024	EUT Type: Portable Tablet	Page 75 of 86




## Radiated Spurious Emission Measurements – Ant1


\$15.205 \$15.209 \$15.247(d)

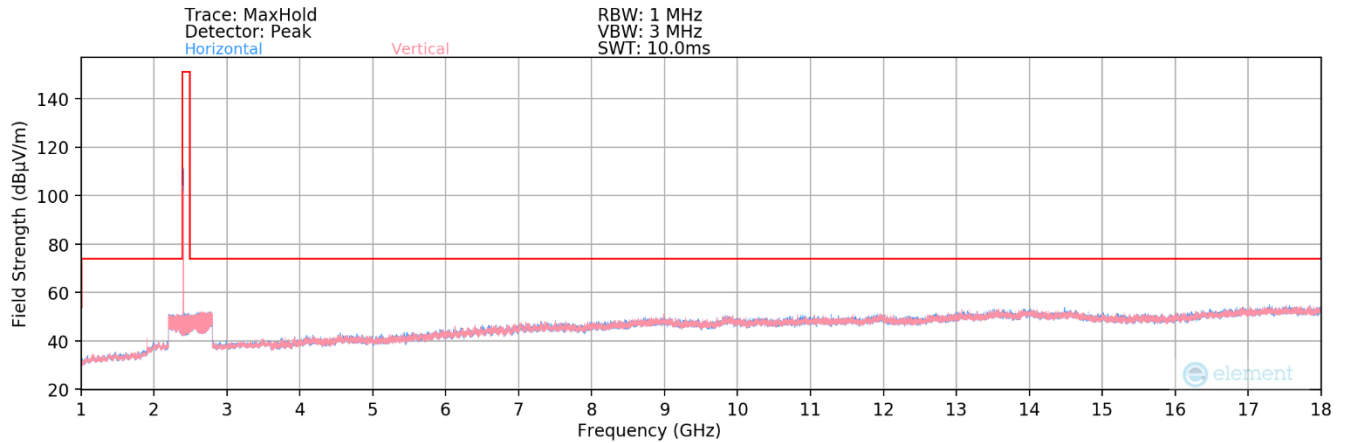

Plot 7-101. Radiated Spurious Plot above 1GHz (Bluetooth (LE) – Ch. 37) – Ant1

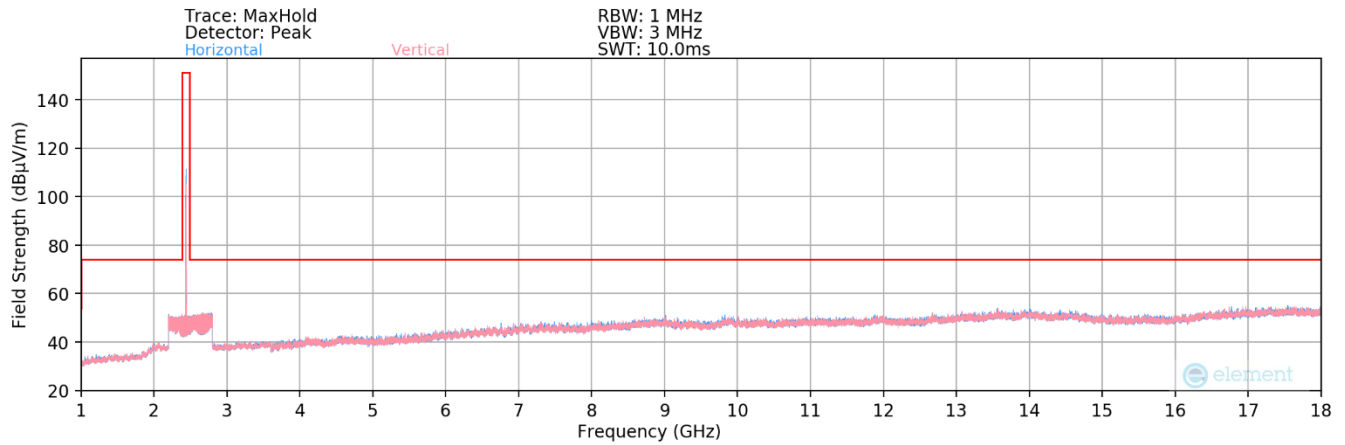

Plot 7-102. Radiated Spurious Plot above 1GHz (Bluetooth (LE) – Ch. 17) – Ant1

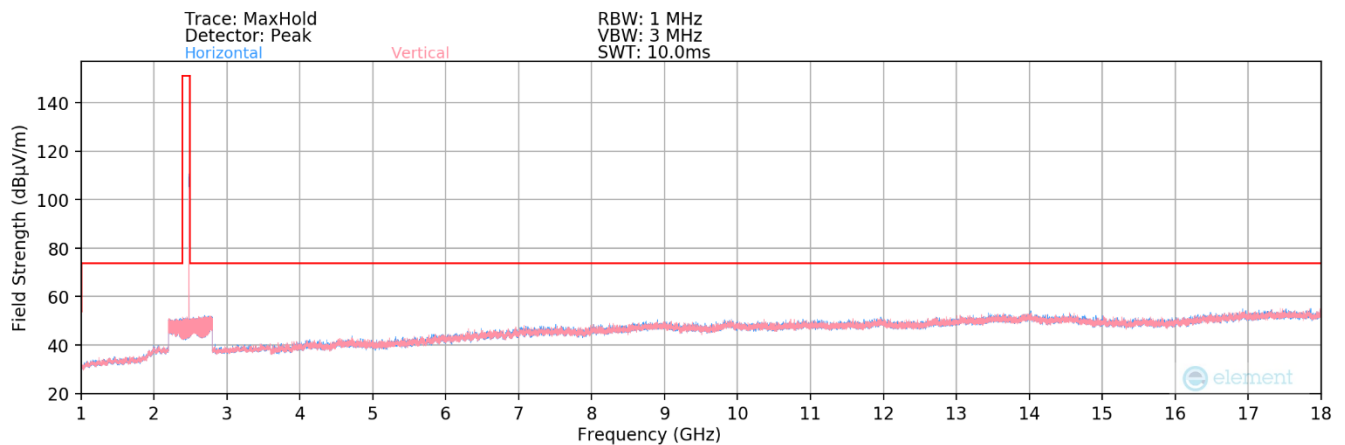

Plot 7-103. Radiated Spurious Plot above 1GHz (Bluetooth (LE) – Ch. 39) – Ant1

FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-09.A3L	Test Dates: 06/10/2024 – 07/30/2024	EUT Type: Portable Tablet	Page 76 of 86



## Radiated Spurious Emission Measurements – Ant1

§15.205 §15.209 §15.247(d)

Bluetooth Mode: LE  
Distance of Measurements: 3 Meters  
Operating Frequency: 2402MHz  
Channel: 37

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4804.00	Avg	H	-	-	-75.25	2.66	34.41	53.98	-19.57
4804.00	Peak	H	-	-	-66.25	2.66	43.41	73.98	-30.57
12010.00	Avg	H	-	-	-77.48	13.47	42.99	53.98	-10.99
12010.00	Peak	H	-	-	-68.24	13.47	52.23	73.98	-21.75

Table 7-10. Radiated Measurements – Ant1

Bluetooth Mode: LE  
Distance of Measurements: 3 Meters  
Operating Frequency: 2440MHz  
Channel: 17

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4880.00	Avg	H	-	-	-76.28	3.12	33.84	53.98	-20.13
4880.00	Peak	H	-	-	-67.04	3.12	43.08	73.98	-30.89
7320.00	Avg	H	-	-	-77.98	9.47	38.49	53.98	-15.49
7320.00	Peak	H	-	-	-67.82	9.47	48.65	73.98	-25.33
12200.00	Avg	H	-	-	-79.63	13.05	40.42	53.98	-13.56
12200.00	Peak	H	-	-	-66.89	13.05	53.16	73.98	-20.82

Table 7-11. Radiated Measurements – Ant1

FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-09.A3L	Test Dates: 06/10/2024 – 07/30/2024	EUT Type: Portable Tablet	Page 77 of 86

Bluetooth Mode: LE  
Distance of Measurements: 3 Meters  
Operating Frequency: 2480MHz  
Channel: 39

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4960.00	Avg	H	-	-	-78.75	3.20	31.45	53.98	-22.53
4960.00	Peak	H	-	-	-67.42	3.20	42.78	73.98	-31.20
7440.00	Avg	H	-	-	-79.97	9.00	36.03	53.98	-17.95
7440.00	Peak	H	-	-	-70.01	9.00	45.99	73.98	-27.99
12400.00	Avg	H	-	-	-78.52	13.04	41.52	53.98	-12.46
12400.00	Peak	H	-	-	-69.38	13.04	50.66	73.98	-23.32


**Table 7-12. Radiated Measurements – Ant1**

<b>FCC ID:</b> A3LSMX920	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2405140040-09.A3L	<b>Test Dates:</b> 06/10/2024 – 07/30/2024	<b>EUT Type:</b> Portable Tablet	Page 78 of 86




## Radiated Spurious Emission Measurements – Ant2


\$15.205 \$15.209 \$15.247(d)

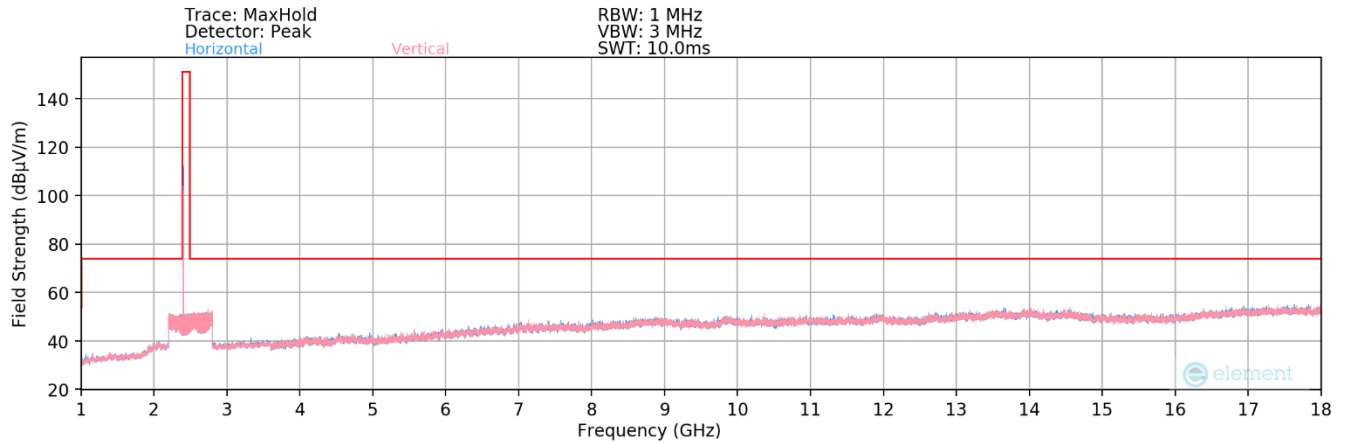

**Plot 7-104. Radiated Spurious Plot above 1GHz (Bluetooth (LE) – Ch. 37) – Ant2**

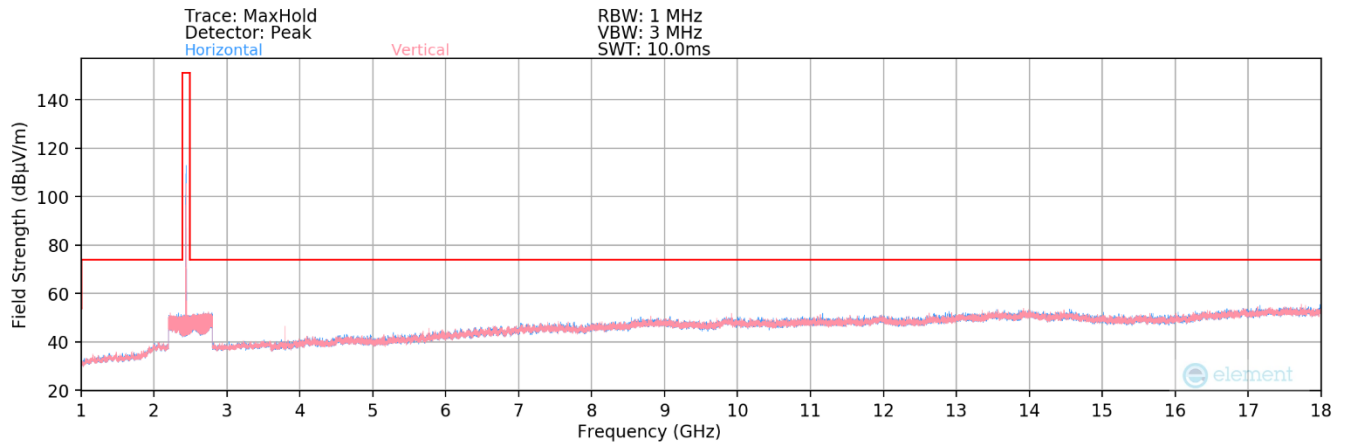

**Plot 7-105. Radiated Spurious Plot above 1GHz (Bluetooth (LE) – Ch. 17) – Ant2**

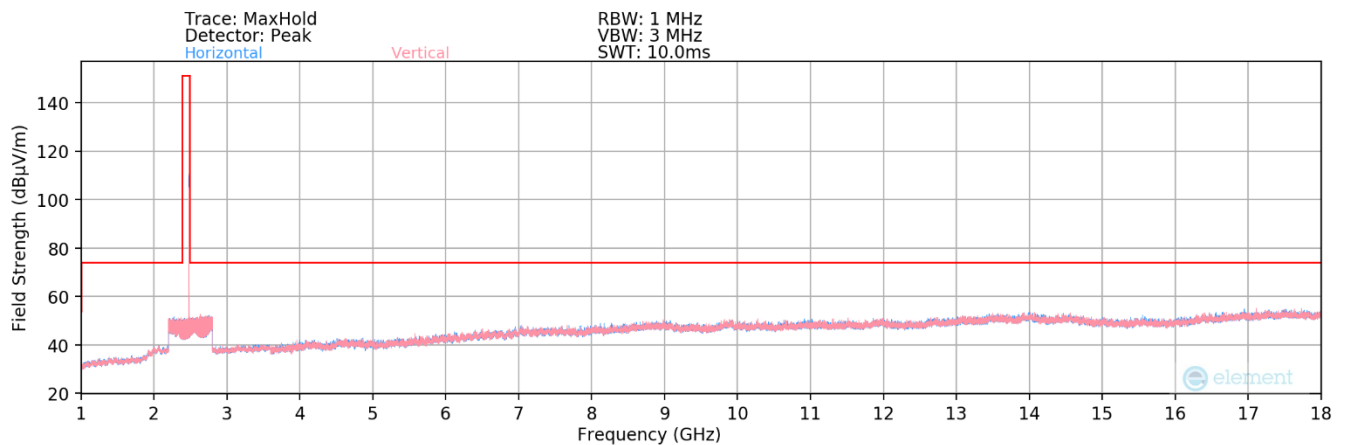

**Plot 7-106. Radiated Spurious Plot above 1GHz (Bluetooth (LE) – Ch. 39) – Ant2**

<b>FCC ID:</b> A3LSMX920	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2405140040-09.A3L	<b>Test Dates:</b> 06/10/2024 – 07/30/2024	<b>EUT Type:</b> Portable Tablet	Page 79 of 86



## Radiated Spurious Emission Measurements – Ant2

§15.205 §15.209 §15.247(d)

Bluetooth Mode: LE  
Distance of Measurements: 3 Meters  
Operating Frequency: 2402MHz  
Channel: 37

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4804.00	Avg	H	-	-	-78.57	2.66	0.00	31.09	53.98	-22.89
4804.00	Peak	H	-	-	-67.52	2.66	0.00	42.14	73.98	-31.84
12010.00	Avg	H	-	-	-80.00	13.47	0.00	40.47	53.98	-13.51
12010.00	Peak	H	-	-	-67.89	13.47	0.00	52.58	73.98	-21.40

Table 7-13. Radiated Measurements – Ant2

Bluetooth Mode: LE  
Distance of Measurements: 3 Meters  
Operating Frequency: 2440MHz  
Channel: 17

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4880.00	Avg	H	-	-	-74.28	3.12	0.00	35.84	53.98	-18.13
4880.00	Peak	H	-	-	-65.59	3.12	0.00	44.53	73.98	-29.44
7320.00	Avg	H	-	-	-77.82	9.47	0.00	38.65	53.98	-15.33
7320.00	Peak	H	-	-	-68.37	9.47	0.00	48.10	73.98	-25.88
12200.00	Avg	H	-	-	-78.98	13.05	0.00	41.07	53.98	-12.91
12200.00	Peak	H	-	-	-67.57	13.05	0.00	52.48	73.98	-21.50

Table 7-14. Radiated Measurements – Ant2

FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-09.A3L	Test Dates: 06/10/2024 – 07/30/2024	EUT Type: Portable Tablet	Page 80 of 86



Bluetooth Mode: LE  
Distance of Measurements: 3 Meters  
Operating Frequency: 2480MHz  
Channel: 39

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4960.00	Avg	H	-	-	-78.98	3.20	0.00	31.22	53.98	-22.76
4960.00	Peak	H	-	-	-69.35	3.20	0.00	40.85	73.98	-33.13
7440.00	Avg	H	-	-	-80.14	9.00	0.00	35.86	53.98	-18.12
7440.00	Peak	H	-	-	-69.97	9.00	0.00	46.03	73.98	-27.95
12400.00	Avg	H	-	-	-79.89	13.04	0.00	40.15	53.98	-13.83
12400.00	Peak	H	-	-	-69.93	13.04	0.00	50.11	73.98	-23.87

**Table 7-15. Radiated Measurements – Ant2**

<b>FCC ID:</b> A3LSMX920	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2405140040-09.A3L	<b>Test Dates:</b> 06/10/2024 – 07/30/2024	<b>EUT Type:</b> Portable Tablet	Page 81 of 86



## 7.8 Radiated Restricted Band Edge Measurements


\$15.205 \$15.209

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.


The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

Bluetooth Mode:	LE
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	39

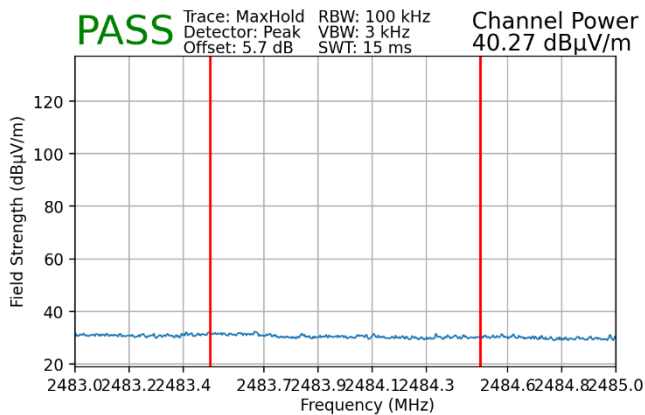


**Plot 7-107. Radiated Restricted Lower Band Edge Measurement (Average) – Ant1**

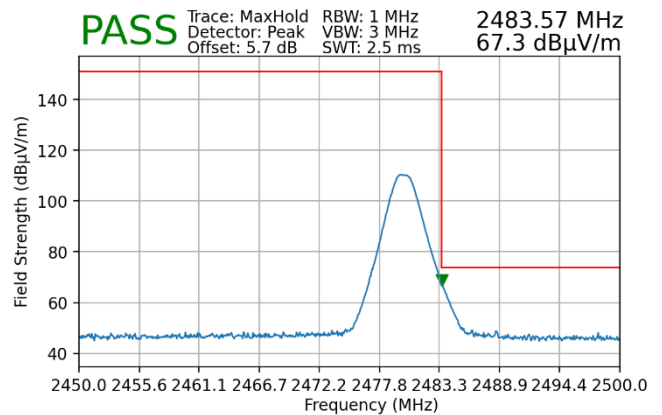


**Plot 7-108. Radiated Restricted Lower Band Edge Measurement (Peak) – Ant1**

Bluetooth Mode:	LE
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	39

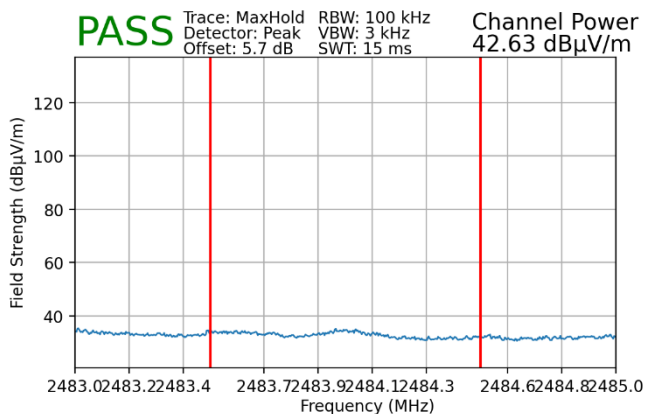

**Plot 7-109. Radiated Restricted Upper Band Edge Measurement (Average) – Ant2**

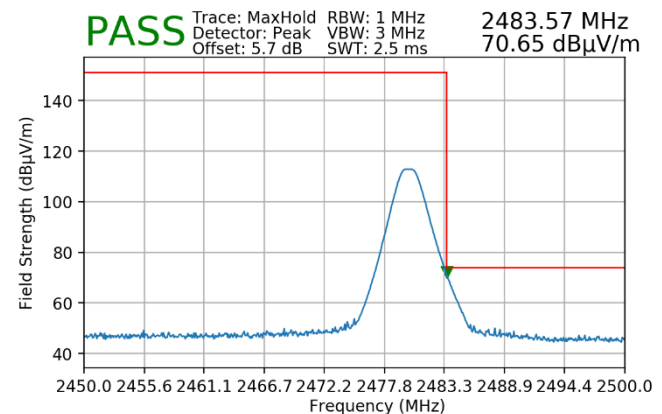

**Plot 7-110. Radiated Restricted Upper Band Edge Measurement (Peak) – Ant2**

FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-09.A3L	Test Dates: 06/10/2024 – 07/30/2024	EUT Type: Portable Tablet	Page 82 of 86



## 7.9 Line Conducted Measurement Data

### §15.207

#### Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

***All conducted emissions must not exceed the limits shown in the table below per Section 15.207.***

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

**Table 7-16. Conducted Limits**

\*Decreases with the logarithm of the frequency.

#### Test Procedures Used

ANSI C63.10-2013, Section 6.2

#### Test Settings

##### Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize


##### Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-09.A3L	Test Dates: 06/10/2024 – 07/30/2024	EUT Type: Portable Tablet	Page 83 of 86

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

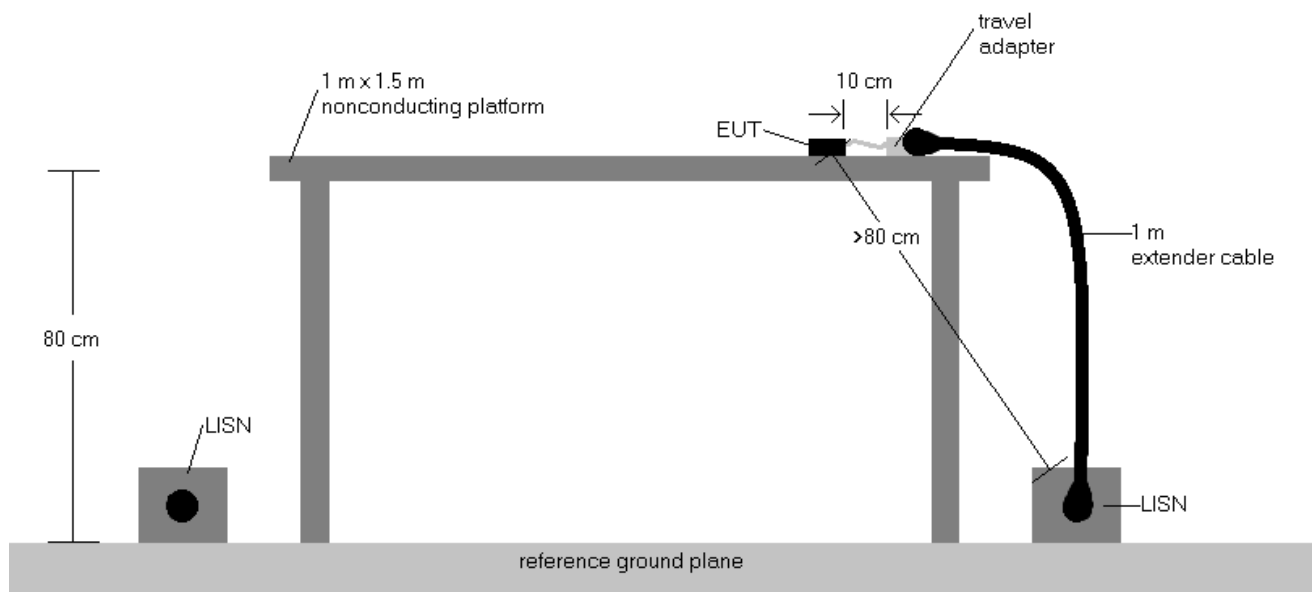


**Figure 7-7. Test Instrument & Measurement Setup**


## Test Notes

1. All modes of operation were investigated, and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207.
3.  $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4.  $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5.  $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

<b>FCC ID:</b> A3LSMX920	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2405140040-09.A3L	<b>Test Dates:</b> 06/10/2024 – 07/30/2024	<b>EUT Type:</b> Portable Tablet	Page 84 of 86

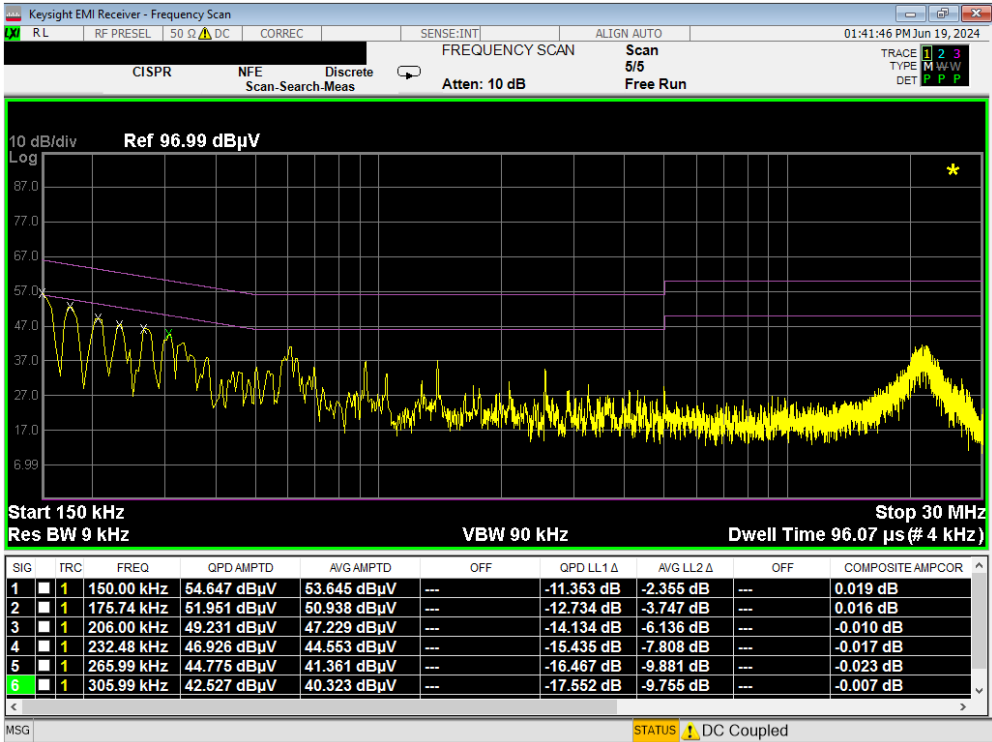

Plot 7-111. Line-Conducted Test Plot (L1)

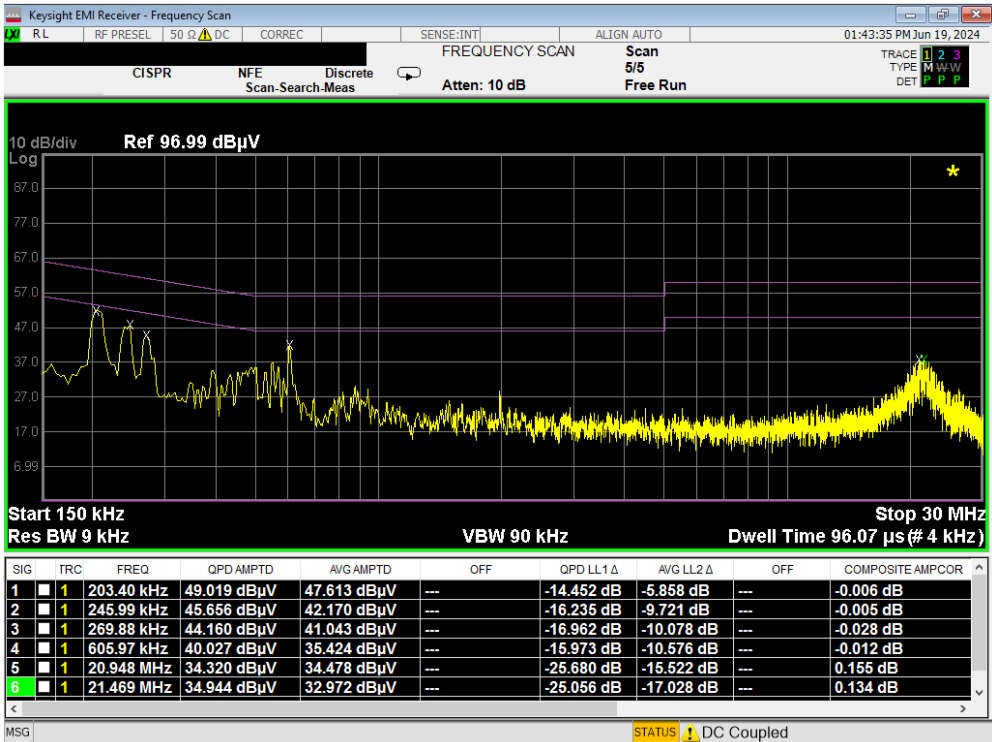

Plot 7-112. Line-Conducted Test Plot (N)

FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-09.A3L	Test Dates: 06/10/2024 – 07/30/2024	EUT Type: Portable Tablet	Page 85 of 86



## 8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Tablet FCC ID: A3LSMX920** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules.

FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-09.A3L	Test Dates: 06/10/2024 – 07/30/2024	EUT Type: Portable Tablet	Page 86 of 86