

FCC Test Report

(PART 27)

Report No.: RF201118C03-9

FCC ID: B32V2104G

Test Model: V210 4G

Received Date: Nov. 18, 2020

Test Date: Nov. 28, 2020 ~ Jan. 05, 2021

Issued Date: Jan. 11, 2021

Applicant: Verifone, Inc.

Address: 1400 West Stanford Ranch Road Suite 200 Rocklin CA 95765 USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location (1): No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, Taiwan

Test Location (2): B2F., No.215, Sec. 3, Beixin Rd., Xindian Dist., New Taipei City 231, Taiwan

FCC Registration /
Designation Number: 427177 / TW0011



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results.....	6
2.1 Measurement Uncertainty.....	6
2.2 Test Site and Instruments	7
3 General Information	8
3.1 General Description of EUT	8
3.2 Configuration of System under Test.....	10
3.2.1 Description of Support Units	10
3.3 Test Mode Applicability and Tested Channel Detail	11
3.4 EUT Operating Conditions	14
3.1 General Description of Applied Standards and references.....	14
4 Test Types and Results	15
4.1 Output Power Measurement.....	15
4.1.1 Limits of Output Power Measurement	15
4.1.2 Test Procedures.....	15
4.1.3 Test Setup.....	16
4.1.4 Test Results	17
4.2 Modulation Characteristics Measurement	25
4.2.1 Limits of Modulation Characteristics	25
4.2.2 Test Setup.....	25
4.2.3 Test Procedure	25
4.2.4 Test Results	26
4.3 Frequency Stability Measurement	27
4.3.1 Limits of Frequency Stability Measurement	27
4.3.2 Test Procedure	27
4.3.3 Test Setup.....	27
4.3.4 Test Results	28
4.4 Occupied Bandwidth Measurement.....	40
4.4.1 Limits of Occupied Bandwidth Measurement	40
4.4.2 Test Procedure	40
4.4.3 Test Setup.....	40
4.4.4 Test Results	41
4.5 Out-of-Band Emissions Measurement.....	47
4.5.1 Limits of Out-of-Band Emissions Measurement	47
4.5.2 Test Setup.....	47
4.5.3 Test Procedures.....	47
4.5.4 Test Results	48
4.6 Peak to Average Ratio	72
4.6.1 Limits of Peak to Average Ratio Measurement	72
4.6.2 Test Setup.....	72
4.6.3 Test Procedures.....	72
4.6.4 Test Results	73
4.7 Conducted Spurious Emissions	79
4.7.1 Limits of Conducted Spurious Emissions Measurement	79
4.7.2 Test Setup.....	79
4.7.3 Test Procedure	79
4.7.4 Test Results	80
4.8 Radiated Emission Measurement.....	116
4.8.1 Limits of Radiated Emission Measurement	116
4.8.2 Test Procedure	116
4.8.3 Deviation from Test Standard	116
4.8.4 Test Setup.....	117

4.8.5 Test Results	118
5 Pictures of Test Arrangements.....	154
Appendix – Information of the Testing Laboratories	155

Release Control Record

Issue No.	Description	Date Issued
RF201118C03-9	Original Release	Jan. 11, 2021

1 Certificate of Conformity

Product: Point of Sale Terminal

Brand: Verifone

Test Model: V210 4G

Sample Status: Identical Prototype

Applicant: Verifone, Inc.

Test Date: Nov. 28, 2020 ~ Jan. 05, 2021

Standards: FCC Part 27, Subpart C, M

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Gina Liu, **Date:** Jan. 11, 2021
Gina Liu / Specialist

Approved by : Dylan Chiou, **Date:** Jan. 11, 2021
Dylan Chiou / Senior Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 27 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(h)(2)	Equivalent Isotropic Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
2.1055 27.54	Frequency Stability	Pass	Meet the requirement of limit.
2.1049 27.53(m)(6)	Occupied Bandwidth	Pass	Meet the requirement of limit.
--	Peak to Average Ratio	Pass	Meet the requirement of limit.
27.53(m)(4)(6)	Out-of-Band Emissions Measurements	Pass	Meet the requirement of limit.
2.1051 27.53(m)(4)(6)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 27.53(m)(4)(6)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -1.94 dB at 10750.00 MHz.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.0400 dB
	30 MHz ~ 200 MHz	2.0153 dB
	200 MHz ~ 1000 MHz	2.0224 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	1.0121 dB
	18 GHz ~ 40 GHz	1.1508 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent Technologies	N9038A	MY52260177	Aug. 24, 2020	Aug. 23, 2021
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Apr. 16, 2020	Apr. 15, 2021
Spectrum Analyzer ROHDE & SCHWARZ	FSW43	101582	Mar. 31, 2020	Mar. 30, 2021
Loop Antenna TESEQ	HLA 6121	45745	Jul. 06, 2020	Jul. 05, 2021
HORN Antenna ETS-Lindgren	3117	00155510	Nov. 22, 2020	Nov. 21, 2021
HORN Antenna ETS-Lindgren	3117	00143293	Nov. 22, 2020	Nov. 21, 2021
BILOG Antenna SCHWARZBECK	VULB 9168	9168-616	Nov. 09, 2020	Nov. 08, 2021
HORN Antenna SCHWARZBECK	BBHA 9170	9170-480	Nov. 22, 2020	Nov. 21, 2021
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 14, 2020	Apr. 13, 2021
MXG Vector signal generator Agilent	N5182B	MY53050430	Nov. 25, 2020	Nov. 24, 2021
Preamplifier Agilent	310N	187226	Jun. 17, 2020	Jun. 16, 2021
Preamplifier Agilent	83017A	MY39501357	Jun. 17, 2020	Jun. 16, 2021
Preamplifier EMCI	EMC 184045	980116	Oct. 07, 2020	Oct. 06, 2021
RF signal cable ETS-LINDGREN	5D-FB	Cable-CH1-01(RFC-SM S-100-SMS-120+RFC- SMS-100-SMS-400)	Jun. 17, 2020	Jun. 16, 2021
RF signal cable ETS-LINDGREN	8D-FB	Cable-CH1-02(RFC-SM S-100-SMS-24)	Jun. 17, 2020	Jun. 17, 2021
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Software BV ADT	E3 8.130425b	NA	NA	NA
Antenna Tower MF	NA	NA	NA	NA
Turn Table MF	NA	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Radio Communication Analyzer Anritsu	MT8821C	6201462755	Feb. 13, 2020	Feb. 12, 2021
Radio Communication Analyzer Anritsu	MT8820C	6201300640	Aug. 19, 2019	Aug. 18, 2021
Temperature & Humidity Chamber	GTH-120-40-CP-AR	MAA1306-019	Sep. 09, 2020	Sep. 08, 2021
DC Power Supply Topward	33010D	807748	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HsinTien Chamber 1.

3 General Information

3.1 General Description of EUT

Product	Point of Sale Terminal	
Brand	Verifone	
Test Model	V210 4G	
Status of EUT	Identical Prototype	
Power Supply Rating	5.0 Vdc (adapter) 3.7 Vdc (battery)	
Modulation Type	QPSK, 16QAM	
Frequency Range	LTE Band 7 (Channel Bandwidth: 5 MHz)	2502.5 ~ 2567.5 MHz
	LTE Band 7 (Channel Bandwidth: 10 MHz)	2505 ~ 2565 MHz
	LTE Band 7 (Channel Bandwidth: 15 MHz)	2507.5 ~ 2562.5 MHz
	LTE Band 7 (Channel Bandwidth: 20 MHz)	2510 ~ 2560 MHz
	LTE Band 38 (Channel Bandwidth: 5 MHz)	2572.5 ~ 2617.5 MHz
	LTE Band 38 (Channel Bandwidth: 10 MHz)	2575.0 ~ 2615.0 MHz
	LTE Band 38 (Channel Bandwidth: 15 MHz)	2577.5 ~ 2612.5 MHz
	LTE Band 38 (Channel Bandwidth: 20 MHz)	2580.0 ~ 2610.0 MHz
	LTE Band 41 (Channel Bandwidth: 5 MHz)	2498.5 ~ 2687.5 MHz
	LTE Band 41 (Channel Bandwidth: 10 MHz)	2501.0 ~ 2685.0 MHz
	LTE Band 41 (Channel Bandwidth: 15 MHz)	2503.5 ~ 2682.5 MHz
	LTE Band 41 (Channel Bandwidth: 20 MHz)	2506.0 ~ 2680.0 MHz
Max. EIRP Power	LTE Band 7 (Channel Bandwidth: 5 MHz)	270.27 mW
	LTE Band 7 (Channel Bandwidth: 10 MHz)	272.33 mW
	LTE Band 7 (Channel Bandwidth: 15 MHz)	274.66 mW
	LTE Band 7 (Channel Bandwidth: 20 MHz)	277.33 mW
	LTE Band 38 (Channel Bandwidth: 5 MHz)	467.41 mW
	LTE Band 38 (Channel Bandwidth: 10 MHz)	472.82 mW
	LTE Band 38 (Channel Bandwidth: 15 MHz)	477.20 mW
	LTE Band 38 (Channel Bandwidth: 20 MHz)	481.61 mW
	LTE Band 41 (Channel Bandwidth: 5 MHz)	591.29 mW
	LTE Band 41 (Channel Bandwidth: 10 MHz)	597.17 mW
	LTE Band 41 (Channel Bandwidth: 15 MHz)	600.90 mW
	LTE Band 41 (Channel Bandwidth: 20 MHz)	606.74 mW
Emission Designator	LTE Band 7 (Channel Bandwidth: 5 MHz)	4M49D7W
	LTE Band 7 (Channel Bandwidth: 10 MHz)	8M95G7D
	LTE Band 7 (Channel Bandwidth: 15 MHz)	13M4G7D
	LTE Band 7 (Channel Bandwidth: 20 MHz)	17M9G7D
	LTE Band 38 (Channel Bandwidth: 5 MHz)	4M49G7D
	LTE Band 38 (Channel Bandwidth: 10 MHz)	8M95G7D
	LTE Band 38 (Channel Bandwidth: 15 MHz)	13M4G7D
	LTE Band 38 (Channel Bandwidth: 20 MHz)	17M9G7D
	LTE Band 41 (Channel Bandwidth: 5 MHz)	4M49G7D
	LTE Band 41 (Channel Bandwidth: 10 MHz)	8M95G7D
	LTE Band 41 (Channel Bandwidth: 15 MHz)	13M4G7D
	LTE Band 41 (Channel Bandwidth: 20 MHz)	17M9G7D

	LTE Band 41 (Channel Bandwidth: 20 MHz)	17M9G7D
Antenna Type	Refer to Note as below	
Accessory Device	Refer to Note as below	
Data Cable Supplied	Refer to Note as below	

Note:

1. The EUT contains following accessory devices.

Product	Brand	Model	Description
Adapter (EU Type)	Verifone	AM11E-050A	I/P: 100-240 Vac, 50-60 Hz, 0.5 A O/P: 5 Vdc, 2.2 A
Adapter (US Type)	Verifone	AM11A-050A	I/P: 100-240 Vac, 50-60 Hz, 0.5 A O/P: 5 Vdc, 2.2 A
Battery	Verifone	BPK183-001	3.7 Vdc, 3100 mAh (11.47 Wh)

*Adapter of US Type was chosen for final test.

2. The antenna information is listed as below.


The Antenna Information is listed as below:										
Ant. Type	Ant.	Antenna Peak Gain (dBi)								
		WCDMA 4 / LTE 4	GSM850 / WCDMA 5 / LTE 5	GSM1900 / WCDMA 2 / LTE 2, 25	LTE 7	LTE 12	LTE 13	LTE 26	LTE 38	LTE 41
Dipole	1	3.2	0	3.6	2.0	-0.5	0.3	0	2.3	3.1
	2	2.2	1.9	3.8	2.2	-4.5	-0.6	1.8	2.8	3.9
* The Max antenna gain was chosen for final test.										

* The Max antenna gain was chosen for final test.


3. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.
4. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

<Radiated Emission Test>

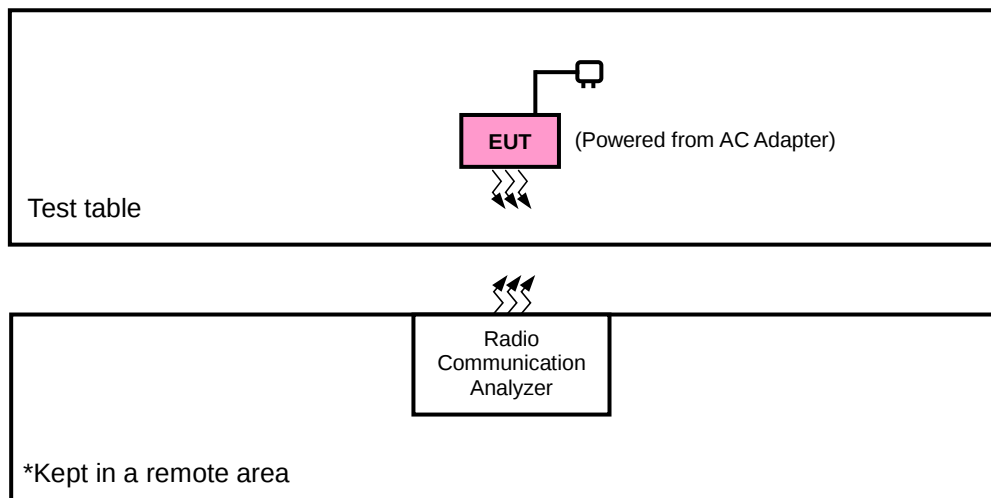

<E.I.R.P. Test>

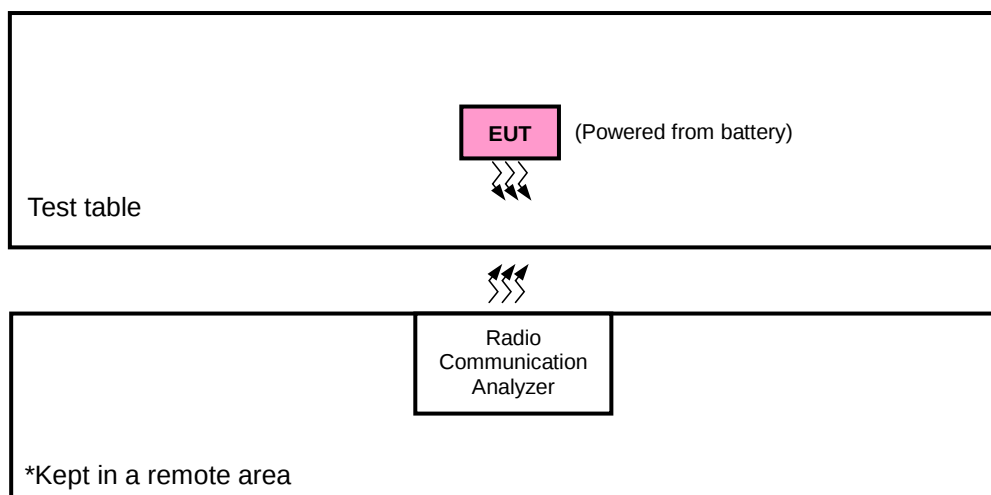

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports.

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	EIRP	Radiated Emission
LTE Band 7	Y-plane	Y-plane
LTE Band 38	Y-plane	Y-plane
LTE Band 41	Z-plane	Z-plane

LTE Band 7

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	20775 to 21425	20775, 21100, 21425	5 MHz	QPSK, 16QAM	1 RB / 12 RB Offset
		20800 to 21400	20800, 21100, 21400	10 MHz	QPSK, 16QAM	1 RB / 24 RB Offset
		20825 to 21375	20825, 21100, 21375	15 MHz	QPSK, 16QAM	1 RB / 37 RB Offset
		20850 to 21350	20850, 21100, 21350	20 MHz	QPSK, 16QAM	1 RB / 50 RB Offset
-	Modulation Characteristics	20850 to 21350	21110	20 MHz	QPSK	100 RB / 0 RB Offset
		20775 to 21425		5 MHz	16QAM	25 RB / 0 RB Offset
-	Frequency Stability	20775 to 21425	20775, 21425	5 MHz	QPSK	25 RB / 0 RB Offset
		20800 to 21400	20800, 21400	10 MHz	QPSK	50 RB / 0 RB Offset
		20825 to 21375	20825, 21375	15 MHz	QPSK	75 RB / 0 RB Offset
		20850 to 21350	20850, 21350	20 MHz	QPSK	100 RB / 0 RB Offset
-	Occupied Bandwidth	20775 to 21425	20775, 21100, 21425	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		20800 to 21400	20800, 21100, 21400	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
		20825 to 21375	20825, 21100, 21375	15 MHz	QPSK, 16QAM	75 RB / 0 RB Offset
		20850 to 21350	20850, 21100, 21350	20 MHz	QPSK, 16QAM	100 RB / 0 RB Offset
-	Peak to Average Ratio	20775 to 21425	20775, 21100, 21425	5 MHz	QPSK, 16QAM	1 RB / 12 RB Offset
		20800 to 21400	20800, 21100, 21400	10 MHz	QPSK, 16QAM	1 RB / 24 RB Offset
		20825 to 21375	20825, 21100, 21375	15 MHz	QPSK, 16QAM	1 RB / 37 RB Offset
		20850 to 21350	20850, 21100, 21350	20 MHz	QPSK, 16QAM	1 RB / 50 RB Offset
-	Out-of-Band Emissions	20775 to 21425	20775, 21425	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset 1 RB / 24 RB Offset 25 RB / 0 RB Offset
		20800 to 21400	20800, 21400	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset 1 RB / 49 RB Offset 50 RB / 0 RB Offset
		20825 to 21375	20825, 21375	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset 1 RB / 74 RB Offset 75 RB / 0 RB Offset
		20850 to 21350	20850, 21350	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset 1 RB / 99 RB Offset 100 RB / 0 RB Offset
-	Conducted Emission	20775 to 21425	20775, 21100, 21425	5 MHz	QPSK	1 RB / 12 RB Offset
		20800 to 21400	20800, 21100, 21400	10 MHz	QPSK	1 RB / 24 RB Offset
		20825 to 21375	20825, 21100, 21375	15 MHz	QPSK	1 RB / 37 RB Offset
		20850 to 21350	20850, 21100, 21350	20 MHz	QPSK	1 RB / 50 RB Offset
-	Radiated Emission	20775 to 21425	20775, 21100, 21425	5 MHz	QPSK	1 RB / 12 RB Offset
		20850 to 21350	20850, 21100, 21350	20 MHz	QPSK	1 RB / 50 RB Offset

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
2. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.
3. For radiated emissions below 1 GHz, select the worst radiated emission channel for final testing.

LTE Band 38

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	37775 to 38225	37775, 38000, 38225	5 MHz	QPSK, 16QAM	1 RB / 12 RB Offset
		37800 to 38200	37800, 38000, 38200	10 MHz	QPSK, 16QAM	1 RB / 24 RB Offset
		37825 to 38175	37825, 38000, 38175	15 MHz	QPSK, 16QAM	1 RB / 74 RB Offset
		37850 to 38150	37850, 38000, 38150	20 MHz	QPSK, 16QAM	1 RB / 50 RB Offset
-	Modulation Characteristics	37850 to 38150	38000	20 MHz	QPSK, 16QAM	100 RB / 0 RB Offset
		37775 to 38225		5 MHz	16QAM	25 RB / 0 RB Offset
-	Frequency Stability	37775 to 38225	37775, 38225	5 MHz	QPSK	25 RB / 0 RB Offset
		37800 to 38200	37800, 38200	10 MHz	QPSK	50 RB / 0 RB Offset
		37825 to 38175	37825, 38175	15 MHz	QPSK	75 RB / 0 RB Offset
		37850 to 38150	37850, 38150	20 MHz	QPSK	100 RB / 0 RB Offset
-	Occupied Bandwidth	37775 to 38225	37775, 38000, 38225	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		37800 to 38200	37800, 38000, 38200	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
		37825 to 38175	37825, 38000, 38175	15 MHz	QPSK, 16QAM	75 RB / 0 RB Offset
		37850 to 38150	37850, 38000, 38150	20 MHz	QPSK, 16QAM	100 RB / 0 RB Offset
-	Peak to Average Ratio	37775 to 38225	37775, 38000, 38225	5 MHz	QPSK, 16QAM	1 RB / 12 RB Offset
		37800 to 38200	37800, 38000, 38200	10 MHz	QPSK, 16QAM	1 RB / 24 RB Offset
		37825 to 38175	37825, 38000, 38175	15 MHz	QPSK, 16QAM	1 RB / 74 RB Offset
		37850 to 38150	37850, 38000, 38150	20 MHz	QPSK, 16QAM	1 RB / 50 RB Offset
-	Out-of-Band Emissions	37775 to 38225	37775, 38225	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset 1 RB / 24 RB Offset 25 RB / 0 RB Offset
		37800 to 38200	37800, 38200	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset 1 RB / 49 RB Offset 50 RB / 0 RB Offset
		37825 to 38175	37825, 38175	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset 1 RB / 74 RB Offset 75 RB / 0 RB Offset
		37850 to 38150	37850, 38150	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset 1 RB / 99 RB Offset 100 RB / 0 RB Offset
-	Conducted Emission	37775 to 38225	37775, 38000, 38225	5 MHz	QPSK	1 RB / 12 RB Offset
		37800 to 38200	37800, 38000, 38200	10 MHz	QPSK	1 RB / 24 RB Offset
		37825 to 38175	37825, 38000, 38175	15 MHz	QPSK	1 RB / 74 RB Offset
		37850 to 38150	37850, 38000, 38150	20 MHz	QPSK	1 RB / 50 RB Offset
-	Radiated Emission	37775 to 38225	37775, 38000, 38225	5 MHz	QPSK	1 RB / 12 RB Offset
		37850 to 38150	37850, 38000, 38150	20 MHz	QPSK	1 RB / 50 RB Offset

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
2. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.
3. For radiated emissions below 1 GHz, select the worst radiated emission channel for final testing.

LTE Band 41

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	39675 to 41565	39675, 40620, 41565	5 MHz	QPSK, 16QAM	1 RB / 12 RB Offset
		39700 to 41540	39700, 40620, 41540	10 MHz	QPSK, 16QAM	1 RB / 24 RB Offset
		39725 to 41515	39725, 40620, 41515	15 MHz	QPSK, 16QAM	1 RB / 74 RB Offset
		39750 to 41490	39750, 40620, 41490	20 MHz	QPSK, 16QAM	1 RB / 50 RB Offset
-	Modulation Characteristics	39750 to 41490	40620	20 MHz	QPSK	100 RB / 0 RB Offset
		39675 to 41565		5 MHz	16QAM	25 RB / 0 RB Offset
-	Frequency Stability	39675 to 41565	39675, 41565	5 MHz	QPSK	25 RB / 0 RB Offset
		39700 to 41540	39700, 41540	10 MHz	QPSK	50 RB / 0 RB Offset
		39725 to 41515	39725, 41515	15 MHz	QPSK	75 RB / 0 RB Offset
		39750 to 41490	39750, 41490	20 MHz	QPSK	100 RB / 0 RB Offset
-	Occupied Bandwidth	39675 to 41565	39675, 40620, 41565	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		39700 to 41540	39700, 40620, 41540	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
		39725 to 41515	39725, 40620, 41515	15 MHz	QPSK, 16QAM	75 RB / 0 RB Offset
		39750 to 41490	39750, 40620, 41490	20 MHz	QPSK, 16QAM	100 RB / 0 RB Offset
-	Peak to Average Ratio	39675 to 41565	39675, 40620, 41565	5 MHz	QPSK, 16QAM	1 RB / 12 RB Offset
		39700 to 41540	39700, 40620, 41540	10 MHz	QPSK, 16QAM	1 RB / 24 RB Offset
		39725 to 41515	39725, 40620, 41515	15 MHz	QPSK, 16QAM	1 RB / 74 RB Offset
		39750 to 41490	39750, 40620, 41490	20 MHz	QPSK, 16QAM	1 RB / 50 RB Offset
-	Out-of-Band Emissions	39675 to 41565	39675, 41565	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset 1 RB / 24 RB Offset 25 RB / 0 RB Offset
		39700 to 41540	39700, 41540	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset 1 RB / 49 RB Offset 50 RB / 0 RB Offset
		39725 to 41515	39725, 41515	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset 1 RB / 74 RB Offset 75 RB / 0 RB Offset
		39750 to 41490	39750, 41490	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset 1 RB / 99 RB Offset 100 RB / 0 RB Offset
-	Conducted Emission	39675 to 41565	39675, 40620, 41565	5 MHz	QPSK	1 RB / 12 RB Offset
		39700 to 41540	39700, 40620, 41540	10 MHz	QPSK	1 RB / 24 RB Offset
		39725 to 41515	39725, 40620, 41515	15 MHz	QPSK	1 RB / 74 RB Offset
		39750 to 41490	39750, 40620, 41490	20 MHz	QPSK	1 RB / 50 RB Offset
-	Radiated Emission	39675 to 41565	39675, 40620, 41565	5 MHz	QPSK	1 RB / 12 RB Offset
		39750 to 41490	39750, 40620, 41490	20 MHz	QPSK	1 RB / 50 RB Offset

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
2. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.
3. For radiated emissions below 1 GHz, select the worst radiated emission channel for final testing.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
EIRP	25 deg. C, 65 % RH	3.7 Vdc	Karl Lee, Charles Hsiao
Modulation Characteristics	25 deg. C, 65 % RH	3.7 Vdc	Gavin Wu
Frequency Stability	25 deg. C, 65 % RH	3.7 Vdc	Gavin Wu
Occupied Bandwidth	25 deg. C, 65 % RH	3.7 Vdc	Gavin Wu
Out-of-Band Emissions	25 deg. C, 65 % RH	3.7 Vdc	Gavin Wu
Peak to Average Ratio	25 deg. C, 65 % RH	3.7 Vdc	Gavin Wu
Conducted Emission	25 deg. C, 65 % RH	3.7 Vdc	Gavin Wu
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Karl Lee, Charles Hsiao

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.1 General Description of Applied Standards and references

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test Standard:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

ANSI 63.26-2015

Note: All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-E 2016

Note: All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

The radiated peak output power shall be according to the specific rule Part 27.50(h)(2) that “Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2 watts transmitter output power” and 27.50(i) specific that “Peak transmit power must be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage.”

4.1.2 Test Procedures

EIRP Measurement:

- a. All measurements were done at low, middle and high operational frequency range. RBW is 5 MHz ∖ 10 MHz ∖ 15 MHz ∖ 20 MHz for LTE mode, and VBW ≥ 3 x RBW.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- c. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15 \text{ dB}$. Correction Factor (includes EIRP and ERP unit conversion factor) = Antenna gain of substitution horn. – Tx cable loss.
- d. Measurement method refers to ANSI C63.26 section 5.2.7 & 5.2.4.


Conducted Power Measurement:

- a. The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- b. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.3 Test Setup

EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

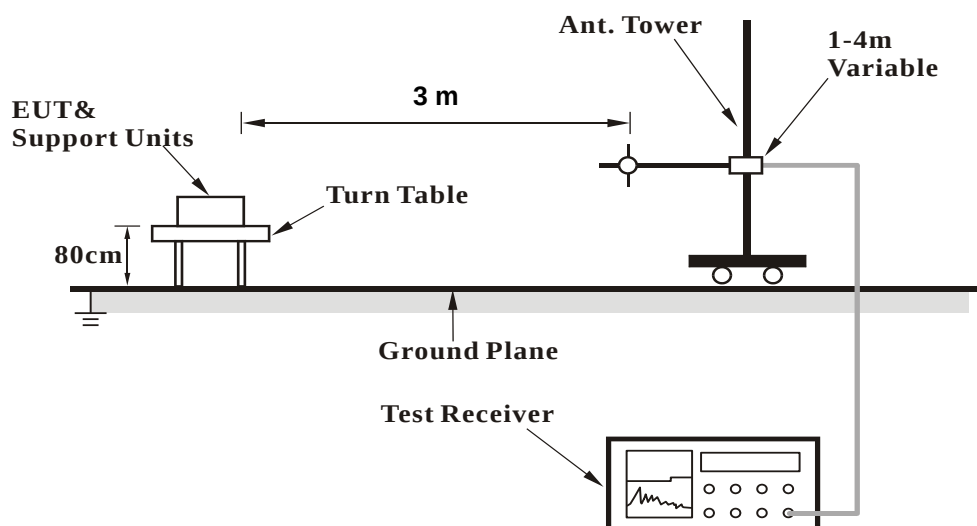

<Radiated Emission above 1 GHz>

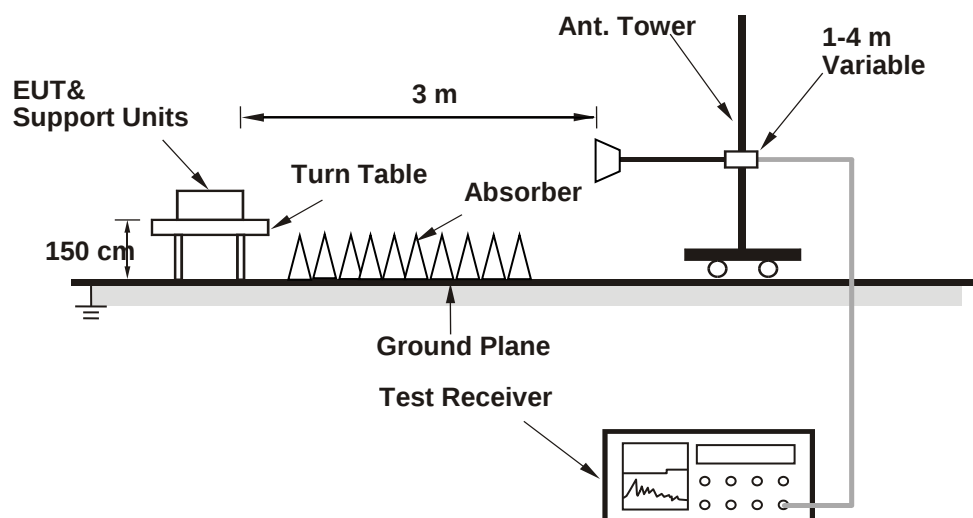

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Conducted Power Measurement:



4.1.4 Test Results

* For 16QAM modulated conducted output power and ERP/ EIRP power with bandwidth higher than 10MHz for reference.

Conducted Output Power (dBm)

LTE Band 7															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20850	21100	21350				Channel		20825	21100	21375	
		Frequency (MHz)		2510.0	2535.0	2560.0				Frequency (MHz)		2507.5	2535.0	2562.5	
20M	QPSK	1	0	23.17	23.35	22.92	0	15M	QPSK	1	0	23.10	22.87	22.98	0
		1	50	23.91	23.89	23.64	0			1	37	23.06	22.89	22.92	0
		1	99	23.08	22.97	23.00	0			1	74	23.04	22.79	22.89	0
		50	0	22.33	22.17	22.26	1			36	0	22.23	22.14	22.17	1
		50	25	22.38	22.20	22.30	1			36	19	22.24	22.07	22.26	1
		50	50	22.28	22.13	22.24	1			36	39	22.20	21.94	22.21	1
		100	0	22.44	22.26	22.29	1			75	0	22.34	22.19	22.30	1
	16QAM	1	0	22.41	22.23	22.26	1		16QAM	1	0	22.35	22.17	22.20	1
		1	50	22.39	22.21	22.24	1			1	37	22.33	22.15	22.18	1
		1	99	22.36	22.18	22.21	1			1	74	22.30	22.12	22.15	1
		50	0							36	0				
		50	25							36	19				
		50	50							36	39				
		100	0							75	0				
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20800	21100	21400				Channel		20775	21100	21425	
		Frequency (MHz)		2505.0	2535.0	2565.0				Frequency (MHz)		2502.5	2535.0	2567.5	
10M	QPSK	1	0	23.01	22.91	22.98	0	5M	QPSK	1	0	23.16	22.88	22.95	0
		1	24	23.05	22.93	22.90	0			1	12	23.16	22.89	23.05	0
		1	49	23.04	22.85	22.86	0			1	24	23.05	22.81	23.00	0
		25	0	22.16	22.04	22.21	1			12	0	22.23	22.11	22.15	1
		25	12	22.22	22.00	22.29	1			12	6	22.25	22.08	22.22	1
		25	25	22.30	21.94	22.16	1			12	13	22.19	21.97	22.03	1
		50	0	22.35	22.06	22.27	1			25	0	22.31	22.13	22.29	1
	16QAM	1	0	22.33	22.15	22.18	1		16QAM	1	0	22.29	22.13	22.14	1
		1	24	22.31	22.13	22.16	1			1	12	22.27	22.09	22.12	1
		1	49	22.28	22.10	22.13	1			1	24	22.24	22.06	22.09	1
		25	0	21.41	21.23	21.26	2			12	0	21.37	21.19	21.22	2
		25	12	21.35	21.17	21.20	2			12	6	21.31	21.13	21.16	2
		25	25	21.29	21.11	21.14	2			12	13	21.25	21.07	21.10	2
		50	0							25	0	21.22	21.04	21.07	2

LTE Band 38															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		37850	38000	38150				Channel		37825	38000	38175	
		Frequency (MHz)		2580.0	2595.0	2610.0				Frequency (MHz)		2577.5	2595.0	2612.5	
20M	QPSK	1	0	23.56	23.79	23.81	0	15M	QPSK	1	0	23.52	23.76	23.71	0
		1	50	24.41	24.38	24.46	0			1	37	24.33	24.34	24.38	0
		1	99	23.57	23.78	23.67	0			1	74	23.52	23.72	23.57	0
		50	0	23.23	23.19	23.39	1			36	0	23.13	23.14	23.39	1
		50	25	23.36	23.31	23.43	1			36	19	23.36	23.25	23.36	1
		50	50	23.11	23.12	23.16	1			36	39	23.03	23.11	23.11	1
		100	0	23.13	23.09	23.14	1			75	0	23.06	23.05	23.10	1
	16QAM	1	0	23.15	23.11	23.16	1		16QAM	1	0	23.09	23.05	23.10	1
		1	50	23.12	23.08	23.13	1			1	37	23.06	23.02	23.07	1
		1	99	23.09	23.05	23.10	1			1	74	23.03	22.99	23.04	1
		50	0							36	0				
		50	25							36	19				
		50	50							36	39				
		100	0							75	0				
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		37800	38000	38200				Channel		37775	38000	38225	
		Frequency (MHz)		2575.0	2595.0	2615.0				Frequency (MHz)		2572.5	2595.0	2617.5	
10M	QPSK	1	0	23.51	23.69	23.62	0	5M	QPSK	1	0	23.53	23.70	23.59	0
		1	24	24.37	24.26	24.44	0			1	12	24.31	24.19	24.24	0
		1	49	23.49	23.69	23.65	0			1	24	23.37	23.63	23.35	0
		25	0	23.14	23.10	23.27	1			12	0	23.12	23.03	23.29	1
		25	12	23.14	23.16	23.31	1			12	6	23.30	23.20	23.24	1
		25	25	22.99	23.04	23.09	1			12	13	22.93	23.06	22.91	1
		50	0	23.03	23.06	22.96	1			25	0	23.12	22.94	22.84	1
	16QAM	1	0	23.09	23.05	23.22	1		16QAM	1	0	23.05	23.01	23.18	1
		1	24	23.05	23.01	23.18	1			1	12	23.01	22.97	23.14	1
		1	49	23.02	22.98	23.15	1			1	24	22.98	22.94	23.11	1
		25	0	22.17	22.13	22.30	2			12	0	22.13	22.09	22.26	2
		25	12	22.12	22.08	22.25	2			12	6	22.08	22.04	22.21	2
		25	25	22.06	22.02	22.19	2			12	13	22.02	21.98	22.15	2
		50	0							25	0	21.95	21.91	22.08	2

LTE Band 41															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		39750	40620	41490				Channel		39725	40620	41515	
		Frequency (MHz)		2506.0	2593.0	2680.0				Frequency (MHz)		2503.5	2593.0	2682.5	
20M	QPSK	1	0	22.62	23.61	23.71	0	15M	QPSK	1	0	22.57	23.55	23.70	0
		1	50	23.83	23.97	23.93	0			1	37	23.82	23.91	23.89	0
		1	99	22.88	23.57	21.95	0			1	74	22.81	23.56	21.86	0
		50	0	22.91	22.89	22.93	1			36	0	22.85	22.84	22.89	1
		50	25	22.91	22.93	22.96	1			36	19	22.84	22.91	22.91	1
		50	50	22.92	22.88	22.92	1			36	39	22.85	22.85	22.90	1
	16QAM	100	0	22.91	22.92	22.87	1			75	0	22.85	22.82	22.87	1
		1	0	22.87	22.85	22.89	1		16QAM	1	0	22.83	22.81	22.85	1
		1	50	22.81	22.79	22.83	1			1	37	22.77	22.75	22.79	1
		1	99	22.78	22.76	22.80	1			1	74	22.74	22.72	22.76	1
		50	0							36	0				
		50	25							36	19				
10M	QPSK	50	50							36	39				
		100	0							75	0				
	16QAM	1	0	22.47	23.43	23.68	0	5M	QPSK	1	0	22.44	23.47	23.63	0
		1	24	23.73	23.81	23.84	0			1	12	23.80	23.84	23.85	0
		1	49	22.82	23.51	21.90	0			1	24	22.79	23.51	21.90	0
		25	0	22.87	22.77	22.77	1			12	0	22.81	22.87	22.84	1
		25	12	22.73	22.80	22.96	1			12	6	22.77	22.82	22.87	1
		25	25	22.79	22.76	22.75	1			12	13	22.79	22.76	22.91	1
	16QAM	50	0	22.77	22.89	22.81	1			25	0	22.79	22.79	22.83	1
		1	0	22.84	22.74	22.76	1		16QAM	1	0	22.79	22.69	22.71	1
		1	24	22.80	22.70	22.72	1			1	12	22.75	22.65	22.67	1
		1	49	22.75	22.65	22.67	1			1	24	22.70	22.60	22.62	1
		25	0	21.78	21.68	21.70	2			12	0	21.73	21.63	21.65	2
		25	12	21.75	21.65	21.67	2			12	6	21.70	21.60	21.62	2
5M	QPSK	25	25	21.70	21.60	21.62	2			12	13	21.65	21.55	21.57	2
		50	0							25	0	21.60	21.50	21.52	2
	16QAM	1	0	22.47	23.43	23.68	0		QPSK	1	0	22.44	23.47	23.63	0
		1	24	23.73	23.81	23.84	0			1	12	23.80	23.84	23.85	0
		1	49	22.82	23.51	21.90	0			1	24	22.79	23.51	21.90	0
		25	0	22.87	22.77	22.77	1			12	0	22.81	22.87	22.84	1
		25	12	22.73	22.80	22.96	1			12	6	22.77	22.82	22.87	1
		25	25	22.79	22.76	22.75	1			12	13	22.79	22.76	22.91	1
5M	QPSK	50	0	22.77	22.89	22.81	1			25	0	22.79	22.79	22.83	1
		1	0	22.84	22.74	22.76	1		16QAM	1	0	22.79	22.69	22.71	1
		1	24	22.80	22.70	22.72	1			1	12	22.75	22.65	22.67	1
		1	49	22.75	22.65	22.67	1			1	24	22.70	22.60	22.62	1
		25	0	21.78	21.68	21.70	2			12	0	21.73	21.63	21.65	2
		25	12	21.75	21.65	21.67	2			12	6	21.70	21.60	21.62	2
	16QAM	25	25	21.70	21.60	21.62	2			12	13	21.65	21.55	21.57	2
		50	0							25	0	21.60	21.50	21.52	2

EIRP Power (dBm)

LTE Band 7							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	20775	2502.5	-19.92	44.24	24.32	270.27	H
	21100	2535.0	-20.03	44.20	24.17	261.04	
	21425	2567.5	-20.81	44.80	23.99	250.67	
	20775	2502.5	-23.57	44.19	20.62	115.37	V
	21100	2535.0	-23.64	44.09	20.45	110.87	
	21425	2567.5	-24.32	44.50	20.18	104.21	
Channel Bandwidth: 5 MHz / 16QAM							
Y	20775	2502.5	-20.92	44.24	23.32	214.68	H
	21100	2535.0	-21.03	44.20	23.17	207.35	
	21425	2567.5	-21.82	44.80	22.98	198.66	
	20775	2502.5	-24.57	44.19	19.62	91.64	V
	21100	2535.0	-24.64	44.09	19.45	88.06	
	21425	2567.5	-25.32	44.50	19.18	82.78	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 7							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	20800	2505.0	-19.99	44.34	24.35	272.33	H
	21100	2535.0	-19.98	44.20	24.22	264.06	
	21400	2565.0	-20.69	44.72	24.03	253.10	
	20800	2505.0	-23.57	44.23	20.66	116.31	V
	21100	2535.0	-23.60	44.09	20.49	111.89	
	21400	2565.0	-24.18	44.41	20.23	105.34	
Channel Bandwidth: 10 MHz / 16QAM							
Y	20800	2505.0	-21.00	44.34	23.34	215.82	H
	21100	2535.0	-20.99	44.20	23.21	209.27	
	21400	2565.0	-21.69	44.72	23.03	201.05	
	20800	2505.0	-24.57	44.23	19.66	92.38	V
	21100	2535.0	-24.60	44.09	19.49	88.88	
	21400	2565.0	-25.18	44.41	19.23	83.68	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 7							
Channel Bandwidth: 15 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	20825	2507.5	-19.93	44.32	24.39	274.66	H
	21100	2535.0	-19.94	44.20	24.26	266.50	
	21375	2562.5	-20.79	44.85	24.06	254.57	
	20825	2507.5	-23.29	43.99	20.70	117.54	V
	21100	2535.0	-23.56	44.09	20.53	112.93	
	21375	2562.5	-24.25	44.51	20.26	106.17	
Channel Bandwidth: 15 MHz / 16QAM							
Y	20825	2507.5	-20.93	44.32	23.39	218.17	H
	21100	2535.0	-20.94	44.20	23.26	211.69	
	21375	2562.5	-21.79	44.85	23.06	202.21	
	20825	2507.5	-24.29	43.99	19.70	93.37	V
	21100	2535.0	-24.57	44.09	19.52	89.50	
	21375	2562.5	-25.26	44.51	19.25	84.14	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 7							
Channel Bandwidth: 20 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	20850	2510.0	-19.73	44.16	24.43	277.33	H
	21100	2535.0	-19.91	44.20	24.29	268.35	
	21350	2560.0	-20.71	44.81	24.10	256.86	
	20850	2510.0	-24.04	44.78	20.74	118.58	V
	21100	2535.0	-23.52	44.09	20.57	113.97	
	21350	2560.0	-24.41	44.72	20.31	107.40	
Channel Bandwidth: 20 MHz / 16QAM							
Y	20850	2510.0	-20.73	44.16	23.43	220.29	H
	21100	2535.0	-20.92	44.20	23.28	212.67	
	21350	2560.0	-21.72	44.81	23.09	203.56	
	20850	2510.0	-25.04	44.78	19.74	94.19	V
	21100	2535.0	-24.52	44.09	19.57	90.53	
	21350	2560.0	-25.41	44.72	19.31	85.31	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 38							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	37775	2572.5	-17.66	44.24	26.58	454.78	H
	38000	2595.0	-17.50	44.20	26.70	467.41	
	38225	2617.5	-18.33	44.80	26.47	443.71	
	37775	2572.5	-23.66	44.19	20.53	113.01	V
	38000	2595.0	-23.41	44.09	20.68	116.90	
	38225	2617.5	-24.22	44.50	20.28	106.64	
Channel Bandwidth: 5 MHz / 16QAM							
Y	37775	2572.5	-18.66	44.24	25.58	361.24	H
	38000	2595.0	-18.51	44.20	25.69	370.42	
	38225	2617.5	-19.33	44.80	25.47	352.45	
	37775	2572.5	-24.65	44.19	19.54	89.97	V
	38000	2595.0	-24.41	44.09	19.68	92.85	
	38225	2617.5	-25.21	44.50	19.29	84.90	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 38							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	37800	2575.0	-17.72	44.34	26.62	459.30	H
	38000	2595.0	-17.45	44.20	26.75	472.82	
	38200	2615.0	-18.21	44.72	26.51	448.02	
	37800	2575.0	-23.65	44.23	20.58	114.18	V
	38000	2595.0	-23.37	44.09	20.72	117.98	
	38200	2615.0	-24.09	44.41	20.32	107.55	
Channel Bandwidth: 10 MHz / 16QAM							
Y	37800	2575.0	-18.72	44.34	25.62	364.84	H
	38000	2595.0	-18.46	44.20	25.74	374.71	
	38200	2615.0	-19.20	44.72	25.52	356.70	
	37800	2575.0	-24.65	44.23	19.58	90.70	V
	38000	2595.0	-24.36	44.09	19.73	93.93	
	38200	2615.0	-25.10	44.41	19.31	85.23	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 38							
Channel Bandwidth: 15 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	37825	2577.5	-17.67	44.32	26.65	462.17	H
	38000	2595.0	-17.41	44.20	26.79	477.20	
	38175	2612.5	-18.30	44.85	26.55	451.65	
	37825	2577.5	-23.37	43.99	20.62	115.40	V
	38000	2595.0	-23.34	44.09	20.75	118.80	
	38175	2612.5	-24.14	44.51	20.37	108.89	
Channel Bandwidth: 15 MHz / 16QAM							
Y	37825	2577.5	-18.68	44.32	25.64	366.27	H
	38000	2595.0	-18.41	44.20	25.79	379.05	
	38175	2612.5	-19.31	44.85	25.54	357.93	
	37825	2577.5	-24.37	43.99	19.62	91.66	V
	38000	2595.0	-24.34	44.09	19.75	94.36	
	38175	2612.5	-25.15	44.51	19.36	86.30	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 38							
Channel Bandwidth: 20 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	37850	2580.0	-17.46	44.16	26.70	467.74	H
	38000	2595.0	-17.37	44.20	26.83	481.61	
	38150	2610.0	-18.23	44.81	26.58	454.67	
	37850	2580.0	-24.13	44.78	20.66	116.28	V
	38000	2595.0	-23.30	44.09	20.79	119.89	
	38150	2610.0	-24.31	44.72	20.41	109.90	
Channel Bandwidth: 20 MHz / 16QAM							
Y	37850	2580.0	-18.46	44.16	25.70	371.54	H
	38000	2595.0	-18.38	44.20	25.82	381.68	
	38150	2610.0	-19.23	44.81	25.58	361.16	
	37850	2580.0	-25.14	44.78	19.64	92.04	V
	38000	2595.0	-24.30	44.09	19.79	95.24	
	38150	2610.0	-25.32	44.72	19.40	87.10	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 41							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	39675	2498.5	-16.52	44.24	27.72	591.29	H
	40620	2593.0	-16.88	44.20	27.32	539.14	
	41565	2687.5	-17.30	44.80	27.50	562.47	
	39675	2498.5	-21.69	44.19	22.50	177.87	V
	40620	2593.0	-22.03	44.09	22.06	160.62	
	41565	2687.5	-22.19	44.50	22.31	170.18	
Channel Bandwidth: 5 MHz / 16QAM							
Z	39675	2498.5	-17.52	44.24	26.72	469.68	H
	40620	2593.0	-17.89	44.20	26.31	427.27	
	41565	2687.5	-18.31	44.80	26.49	445.76	
	39675	2498.5	-22.69	44.19	21.50	141.29	V
	40620	2593.0	-23.02	44.09	21.07	127.88	
	41565	2687.5	-23.18	44.50	21.32	135.49	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 41							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	39700	2501.0	-16.58	44.34	27.76	597.17	H
	40620	2593.0	-16.83	44.20	27.37	545.38	
	41540	2685.0	-17.18	44.72	27.54	567.94	
	39700	2501.0	-21.69	44.23	22.54	179.31	V
	40620	2593.0	-22.00	44.09	22.09	161.73	
	41540	2685.0	-22.06	44.41	22.35	171.63	
Channel Bandwidth: 10 MHz / 16QAM							
Z	39700	2501.0	-17.59	44.34	26.75	473.26	H
	40620	2593.0	-17.83	44.20	26.37	433.21	
	41540	2685.0	-18.18	44.72	26.54	451.13	
	39700	2501.0	-22.69	44.23	21.54	142.43	V
	40620	2593.0	-23.01	44.09	21.08	128.17	
	41540	2685.0	-23.06	44.41	21.35	136.33	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 41							
Channel Bandwidth: 15 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	39725	2503.5	-16.53	44.32	27.79	600.90	H
	40620	2593.0	-16.79	44.20	27.41	550.43	
	41515	2682.5	-17.26	44.85	27.59	573.85	
	39725	2503.5	-21.41	43.99	22.58	181.22	V
	40620	2593.0	-21.98	44.09	22.11	162.48	
	41515	2682.5	-22.13	44.51	22.38	172.98	
Channel Bandwidth: 15 MHz / 16QAM							
Z	39725	2503.5	-17.54	44.32	26.78	476.21	H
	40620	2593.0	-17.79	44.20	26.41	437.22	
	41515	2682.5	-18.26	44.85	26.59	455.83	
	39725	2503.5	-22.40	43.99	21.59	144.28	V
	40620	2593.0	-22.98	44.09	21.11	129.06	
	41515	2682.5	-23.13	44.51	21.38	137.40	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 41							
Channel Bandwidth: 20 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	39750	2506.0	-16.33	44.16	27.83	606.74	H
	40620	2593.0	-16.75	44.20	27.45	555.52	
	41490	2680.0	-17.18	44.81	27.63	579.03	
	39750	2506.0	-22.16	44.78	22.62	182.81	V
	40620	2593.0	-21.94	44.09	22.15	163.98	
	41490	2680.0	-22.31	44.72	22.41	174.18	
Channel Bandwidth: 20 MHz / 16QAM							
Z	39750	2506.0	-17.33	44.16	26.83	481.95	H
	40620	2593.0	-17.75	44.20	26.45	441.27	
	41490	2680.0	-18.18	44.81	26.63	459.94	
	39750	2506.0	-23.16	44.78	21.62	145.21	V
	40620	2593.0	-22.95	44.09	21.14	129.96	
	41490	2680.0	-23.32	44.72	21.40	138.04	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

4.2 Modulation Characteristics Measurement

4.2.1 Limits of Modulation Characteristics

N/A


4.2.2 Test Setup



4.2.3 Test Procedure

Connect the EUT to Communication Simulator via the antenna connector. The frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

4.2.4 Test Results

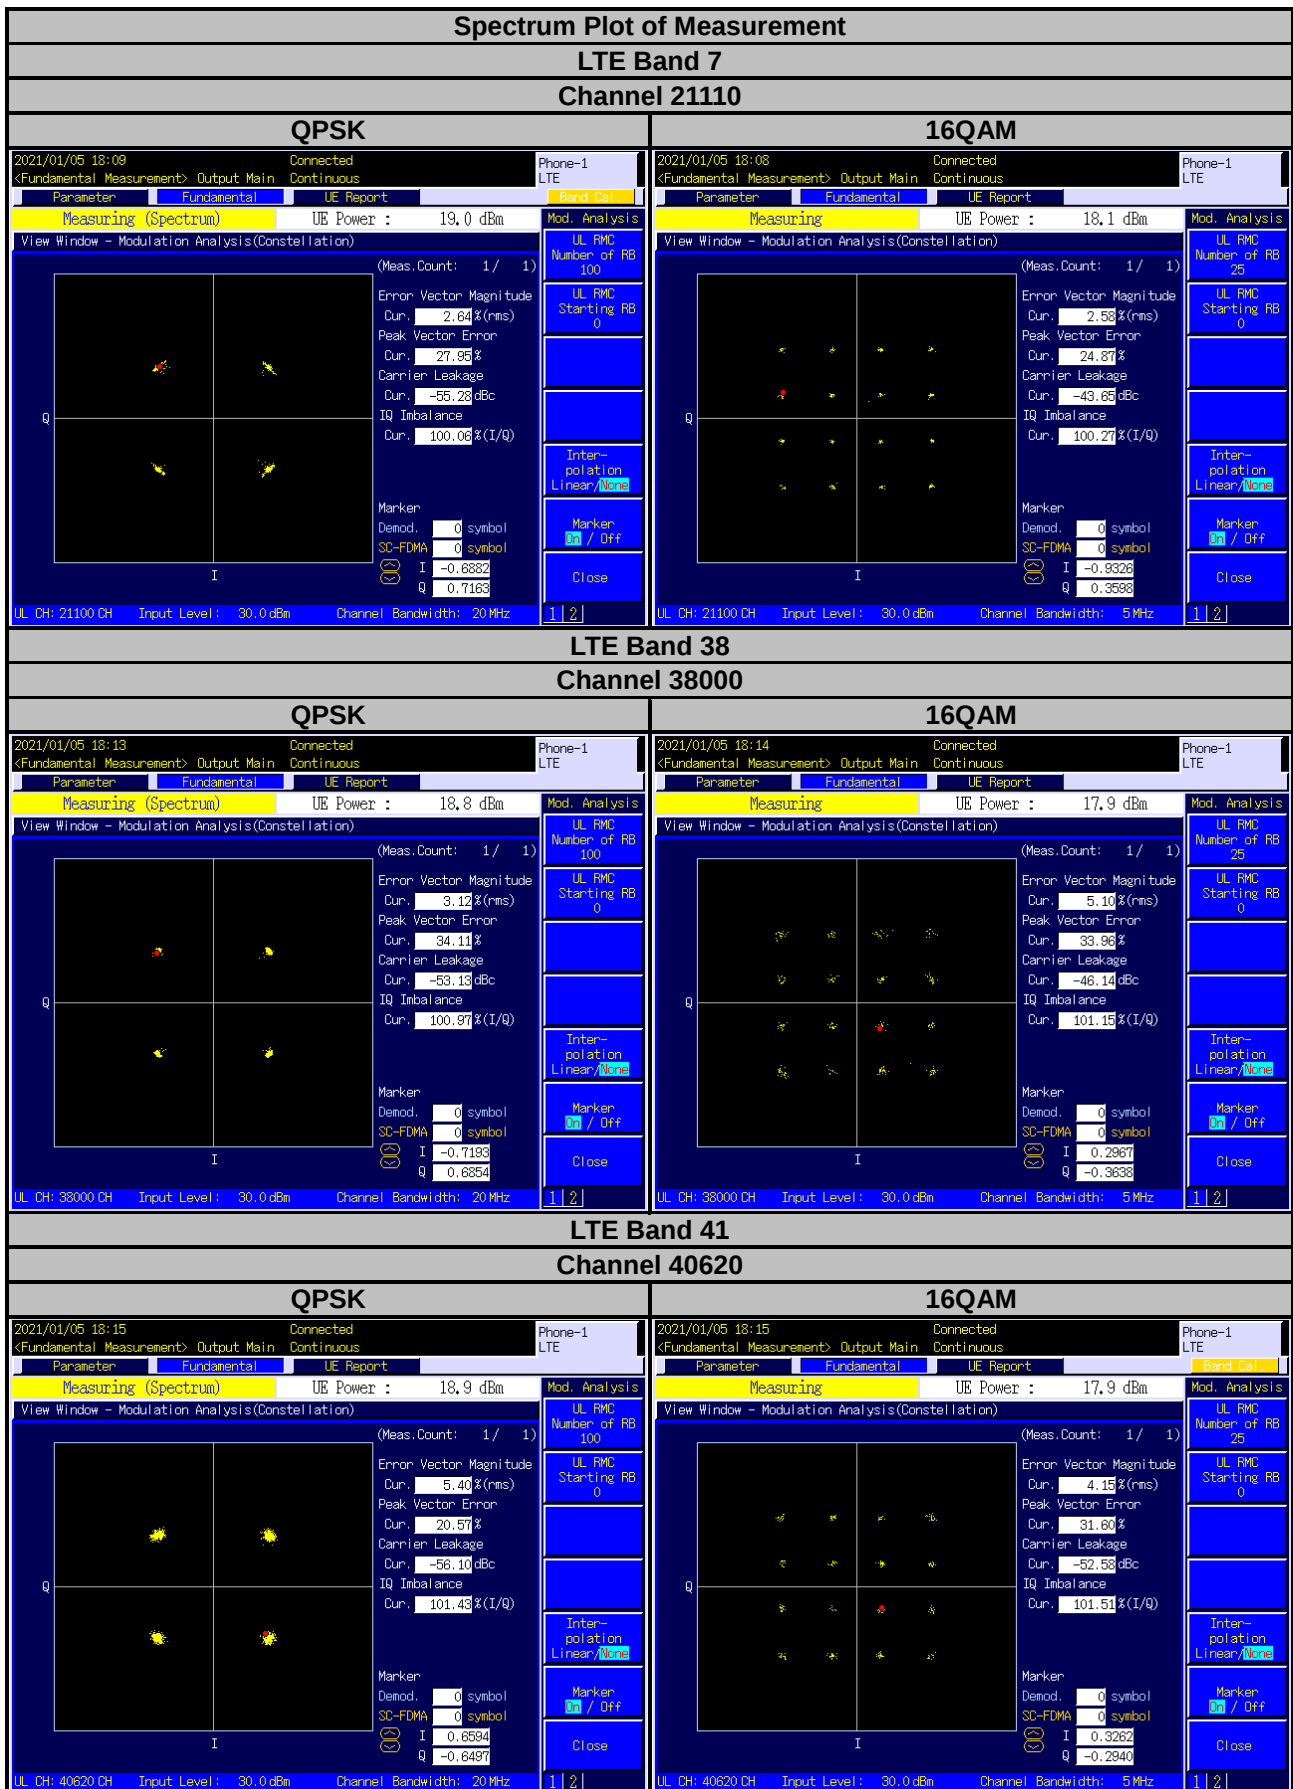

4.3 Frequency Stability Measurement

4.3.1 Limits of Frequency Stability Measurement


According to the FCC part 2.1055 shall be tested the frequency stability. The rule is defined that "The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block." The test extreme voltage is according to the 2.1055(d)(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment and the extreme temperature rule is comply with specification of EUT $-30^{\circ}\text{C} \sim 50^{\circ}\text{C}$.

4.3.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.3.3 Test Setup

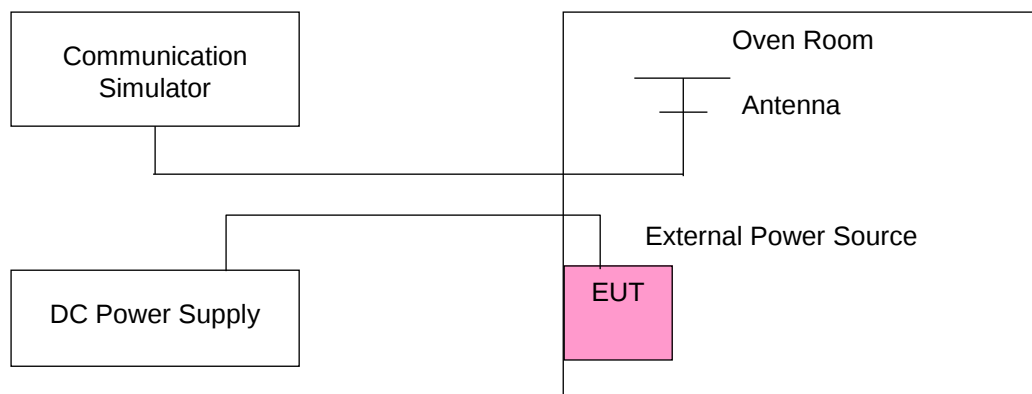

4.3.4 Test Results

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 7			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.7	2502.500002	0.000719	2567.500004	0.001441
3.14	2502.500004	0.001598	2567.500003	0.001091
4.25	2502.500001	0.000400	2567.500001	0.000389

Note: The applicant defined the normal working voltage of the battery is from 3.14 Vdc to 4.25 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 7			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-20	2502.500004	0.001479	2567.500003	0.001091
-10	2502.500002	0.000959	2567.500003	0.001246
0	2502.500004	0.001518	2567.500001	0.000389
10	2502.500002	0.000639	2567.500002	0.000623
20	2502.499999	-0.000440	2567.499998	-0.000740
30	2502.499997	-0.001399	2567.499996	-0.001558
40	2502.499997	-0.001359	2567.499999	-0.000584
50	2502.499997	-0.001359	2567.499998	-0.000779

Note: When the EUT temperature is below -20°C, it will shut down and will not work.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 7			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.7	2505.000003	0.001158	2565.000002	0.000702
3.14	2505.000002	0.000838	2565.000002	0.000585
4.25	2505.000002	0.000878	2565.000001	0.000429

Note: The applicant defined the normal working voltage of the battery is from 3.14 Vdc to 4.25 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 7			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-20	2505.000002	0.000639	2565.000002	0.000741
-10	2505.000002	0.000758	2565.000002	0.000702
0	2505.000003	0.001118	2565.000003	0.001053
10	2505.000003	0.001118	2565.000001	0.000468
20	2504.999999	-0.000479	2564.999998	-0.000702
30	2504.999999	-0.000599	2564.999999	-0.000429
40	2504.999997	-0.001397	2564.999997	-0.001014
50	2504.999997	-0.001198	2564.999998	-0.000819

Note: When the EUT temperature is below -20°C, it will shut down and will not work.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 7			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.7	2507.500002	0.000758	2562.500003	0.001054
3.14	2507.500004	0.001595	2562.500003	0.001288
4.25	2507.500002	0.000798	2562.500003	0.001327

Note: The applicant defined the normal working voltage of the battery is from 3.14 Vdc to 4.25 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 7			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-20	2507.500004	0.001396	2562.500001	0.000429
-10	2507.500004	0.001555	2562.500002	0.000898
0	2507.500002	0.000837	2562.500002	0.000937
10	2507.500002	0.000718	2562.500001	0.000507
20	2507.499998	-0.000758	2562.499998	-0.000937
30	2507.499998	-0.000997	2562.499999	-0.000507
40	2507.499996	-0.001595	2562.499998	-0.000702
50	2507.499999	-0.000399	2562.499997	-0.001327

Note: When the EUT temperature is below -20°C, it will shut down and will not work.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 7			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.7	2510.000001	0.000478	2560.000001	0.000391
3.14	2510.000003	0.001036	2560.000004	0.001563
4.25	2510.000002	0.000916	2560.000002	0.000859

Note: The applicant defined the normal working voltage of the battery is from 3.14 Vdc to 4.25 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 7			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-20	2510.000003	0.001116	2560.000003	0.000977
-10	2510.000002	0.000956	2560.000002	0.000703
0	2510.000001	0.000518	2560.000003	0.000977
10	2510.000003	0.001315	2560.000002	0.000586
20	2509.999998	-0.000637	2559.999997	-0.001055
30	2509.999998	-0.000996	2559.999997	-0.001172
40	2509.999997	-0.001076	2559.999998	-0.000938
50	2509.999996	-0.001514	2559.999998	-0.000781

Note: When the EUT temperature is below -20°C, it will shut down and will not work.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 38			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.7	2572.500002	0.000777	2617.500003	0.001184
3.14	2572.500002	0.000816	2617.500003	0.001146
4.25	2572.500002	0.000933	2617.500003	0.001146

Note: The applicant defined the normal working voltage of the battery is from 3.14 Vdc to 4.25 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 38			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-20	2572.500001	0.000389	2617.500004	0.001375
-10	2572.500002	0.000700	2617.500004	0.001337
0	2572.500004	0.001399	2617.500003	0.001261
10	2572.500001	0.000544	2617.500002	0.000879
20	2572.499997	-0.001361	2617.499997	-0.001261
30	2572.499997	-0.001050	2617.499997	-0.001184
40	2572.499997	-0.001361	2617.499996	-0.001528
50	2572.499996	-0.001555	2617.499997	-0.001108

Note: When the EUT temperature is below -20°C, it will shut down and will not work.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 38			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.7	2575.000001	0.000388	2615.000003	0.001185
3.14	2575.000001	0.000505	2615.000002	0.000841
4.25	2575.000003	0.001049	2615.000001	0.000535

Note: The applicant defined the normal working voltage of the battery is from 3.14 Vdc to 4.25 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 38			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-20	2575.000002	0.000893	2615.000003	0.000956
-10	2575.000002	0.000660	2615.000001	0.000535
0	2575.000003	0.001087	2615.000004	0.001453
10	2575.000003	0.001049	2615.000003	0.001185
20	2574.999998	-0.000621	2614.999999	-0.000382
30	2574.999997	-0.001010	2614.999997	-0.001185
40	2574.999998	-0.000660	2614.999998	-0.000841
50	2574.999997	-0.001126	2614.999997	-0.001109

Note: When the EUT temperature is below -20°C, it will shut down and will not work.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 38			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.7	2577.500001	0.000388	2612.500001	0.000421
3.14	2577.500001	0.000427	2612.500003	0.001187
4.25	2577.500003	0.001009	2612.500003	0.001072

Note: The applicant defined the normal working voltage of the battery is from 3.14 Vdc to 4.25 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 38			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-20	2577.500001	0.000388	2612.500002	0.000804
-10	2577.500003	0.001319	2612.500003	0.001225
0	2577.500002	0.000776	2612.500001	0.000459
10	2577.500002	0.000737	2612.500001	0.000383
20	2577.499997	-0.001086	2612.499998	-0.000842
30	2577.499997	-0.001048	2612.499998	-0.000727
40	2577.499999	-0.000466	2612.499996	-0.001455
50	2577.499997	-0.001048	2612.499999	-0.000421

Note: When the EUT temperature is below -20°C, it will shut down and will not work.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 38			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.7	2580.000003	0.001163	2610.000003	0.000958
3.14	2580.000002	0.000736	2610.000004	0.001418
4.25	2580.000003	0.001085	2610.000000	0.001379

Note: The applicant defined the normal working voltage of the battery is from 3.14 Vdc to 4.25 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 38			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-20	2580.000002	0.000659	2610.000001	0.000536
-10	2580.000004	0.001357	2610.000004	0.001494
0	2580.000003	0.001008	2610.000002	0.000920
10	2580.000004	0.001550	2610.000004	0.001533
20	2579.999997	-0.001008	2609.999996	-0.001379
30	2579.999997	-0.001240	2609.999997	-0.000996
40	2579.999996	-0.001434	2609.999997	-0.001073
50	2579.999998	-0.000620	2609.999996	-0.001456

Note: When the EUT temperature is below -20°C, it will shut down and will not work.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 41			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.7	2498.500003	0.001041	2687.500002	0.000633
3.14	2498.500002	0.000640	2687.500003	0.000967
4.25	2498.500004	0.001561	2687.500001	0.000521

Note: The applicant defined the normal working voltage of the battery is from 3.14 Vdc to 4.25 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 41			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-20	2498.500002	0.000841	2687.500001	0.000521
-10	2498.500001	0.000400	2687.500001	0.000521
0	2498.500004	0.001521	2687.500002	0.000744
10	2498.500002	0.000720	2687.500003	0.001228
20	2498.499999	-0.000400	2687.499997	-0.001191
30	2498.499999	-0.000600	2687.499998	-0.000819
40	2498.499997	-0.001281	2687.499998	-0.000930
50	2498.499998	-0.000720	2687.499998	-0.000670

Note: When the EUT temperature is below -20°C, it will shut down and will not work.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 41			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.7	2501.000003	0.001160	2685.000004	0.001304
3.14	2501.000002	0.000760	2685.000003	0.001155
4.25	2501.000002	0.000640	2685.000004	0.001415

Note: The applicant defined the normal working voltage of the battery is from 3.14 Vdc to 4.25 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 41			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-20	2501.000002	0.000920	2685.000002	0.000819
-10	2501.000004	0.001559	2685.000002	0.000857
0	2501.000001	0.000480	2685.000003	0.001080
10	2501.000003	0.001160	2685.000003	0.001192
20	2500.999999	-0.000520	2684.999997	-0.001006
30	2500.999998	-0.000680	2684.999998	-0.000894
40	2500.999997	-0.001080	2684.999998	-0.000708
50	2500.999998	-0.000640	2684.999996	-0.001378

Note: When the EUT temperature is below -20°C, it will shut down and will not work.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 41			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.7	2503.500002	0.000719	2682.500002	0.000820
3.14	2503.500001	0.000439	2682.500002	0.000857
4.25	2503.500002	0.000959	2682.500002	0.000857

Note: The applicant defined the normal working voltage of the battery is from 3.14 Vdc to 4.25 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 41			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-20	2503.500002	0.000839	2682.500003	0.001044
-10	2503.500002	0.000719	2682.500001	0.000447
0	2503.500001	0.000399	2682.500003	0.001081
10	2503.500002	0.000599	2682.500003	0.001156
20	2503.499997	-0.001078	2682.499997	-0.001007
30	2503.499997	-0.001278	2682.499996	-0.001417
40	2503.499997	-0.001039	2682.499999	-0.000373
50	2503.499997	-0.001118	2682.499996	-0.001454

Note: When the EUT temperature is below -20°C, it will shut down and will not work.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 41			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.7	2506.000003	0.001077	2680.000004	0.001343
3.14	2506.000001	0.000479	2680.000004	0.001418
4.25	2506.000004	0.001556	2680.000003	0.001007

Note: The applicant defined the normal working voltage of the battery is from 3.14 Vdc to 4.25 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 41			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-20	2506.000002	0.000958	2680.000002	0.000560
-10	2506.000004	0.001596	2680.000002	0.000746
0	2506.000003	0.001317	2680.000002	0.000597
10	2506.000001	0.000399	2680.000003	0.001194
20	2505.999999	-0.000599	2679.999998	-0.000709
30	2505.999998	-0.000798	2679.999997	-0.001119
40	2505.999996	-0.001556	2679.999998	-0.000634
50	2505.999998	-0.000798	2679.999998	-0.000784

Note: When the EUT temperature is below -20°C, it will shut down and will not work.

4.4 Occupied Bandwidth Measurement


4.4.1 Limits of Occupied Bandwidth Measurement

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

4.4.2 Test Procedure


- The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.
- Measurement method refer to section 5.4.4 of ANSI C63.26.
- For the 26dBc bandwidth measurement method, please refer to section 5.4.3 of ANSI C63.26.

4.4.3 Test Setup

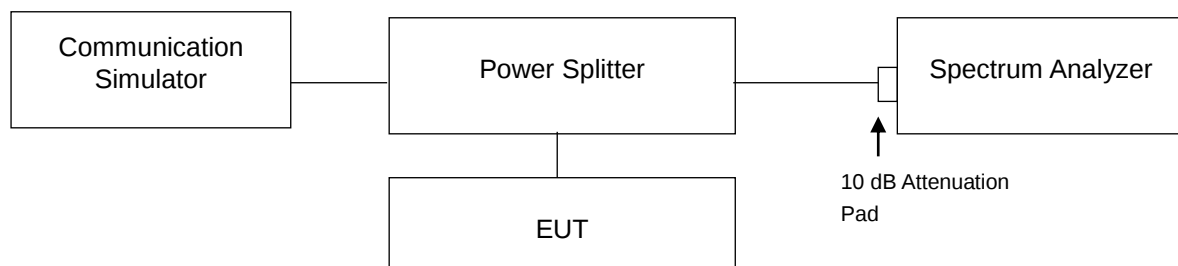


4.4.4 Test Results


LTE Band 7					
Channel Bandwidth: 5 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
20775	2502.5	4.49	4.49	4.83	4.83
21100	2535.0	4.49	4.49	4.80	4.82
21425	2567.5	4.49	4.49	4.81	4.81
Channel Bandwidth: 10 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
20800	2505.0	8.95	4.57	9.51	5.02
21100	2535.0	8.95	4.57	9.50	5.05
21400	2565.0	8.95	4.57	9.51	5.01

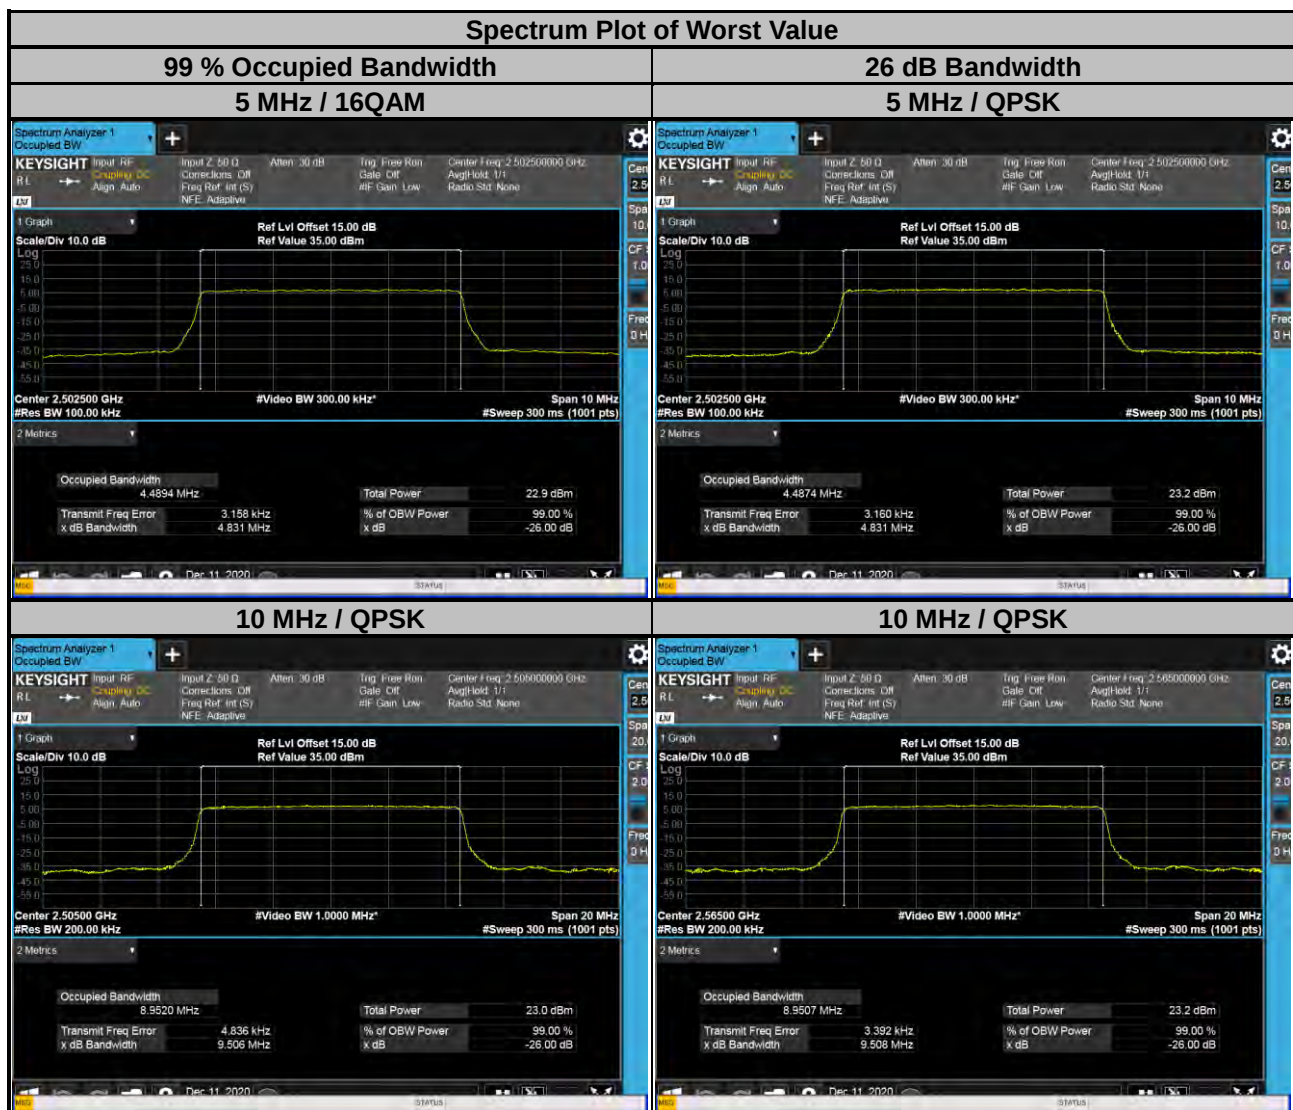


LTE Band 7					
Channel Bandwidth: 15 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
20825	2507.5	13.43	4.67	14.23	7.25
21100	2535.0	13.43	4.67	14.22	7.22
21375	2562.5	13.43	4.67	14.23	7.19
Channel Bandwidth: 20 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
20850	2510.0	17.89	4.81	19.02	9.67
21100	2535.0	17.89	4.81	19.01	9.64
21350	2560.0	17.91	4.82	19.02	9.56

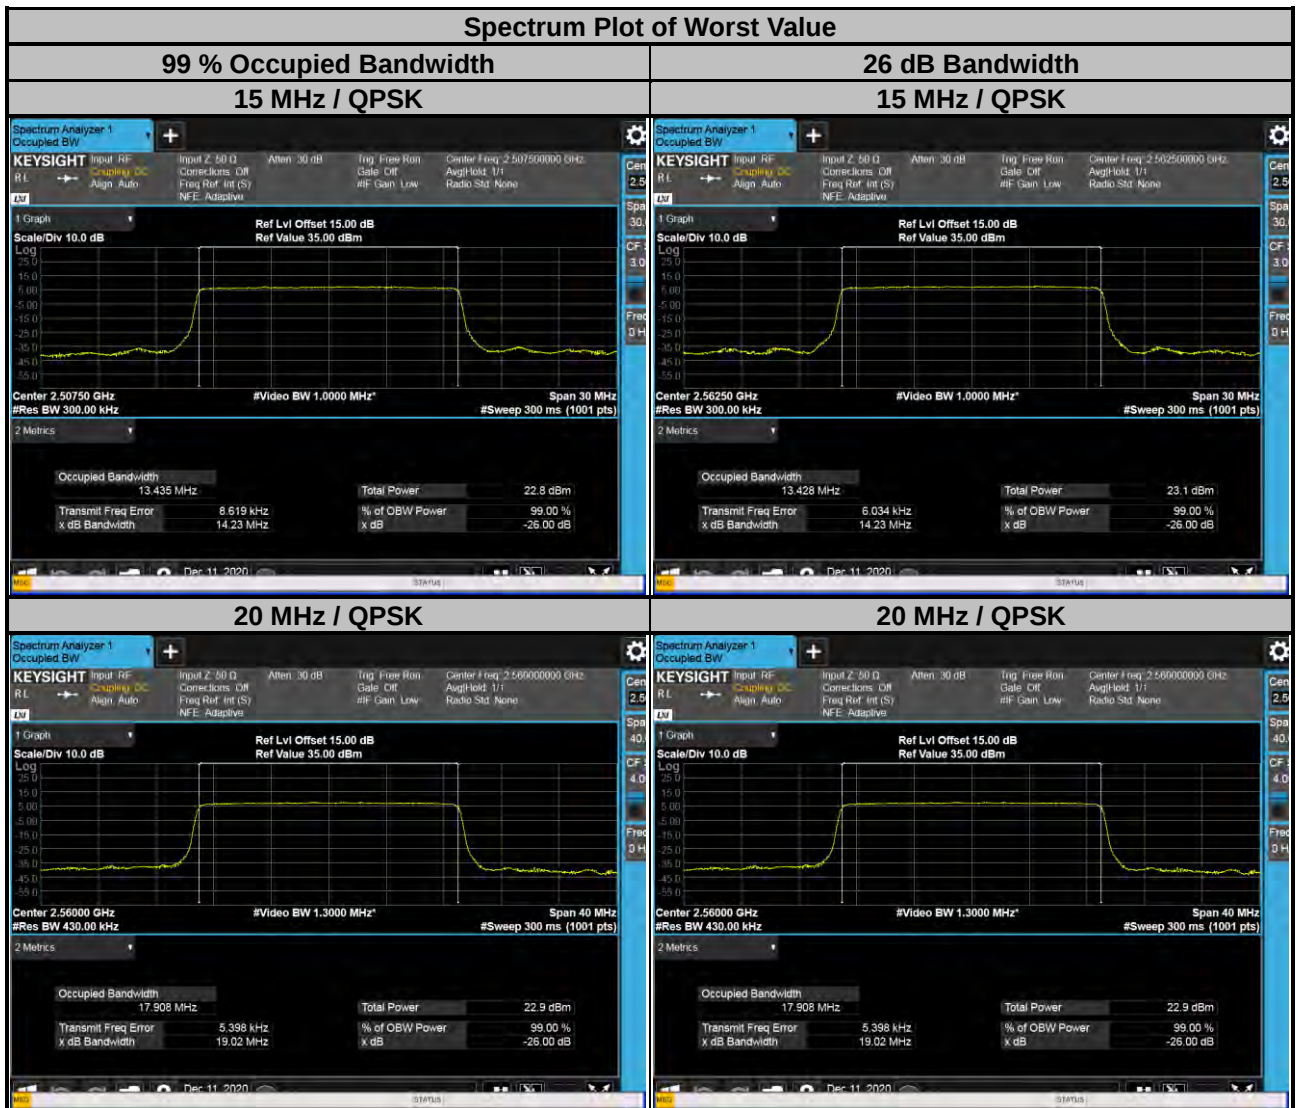


LTE Band 38					
Channel Bandwidth: 5 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
37775	2572.5	4.49	4.49	4.80	4.80
38000	2595.0	4.49	4.49	4.83	4.82
38225	2617.5	4.49	4.49	4.80	4.81
Channel Bandwidth: 10 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
37800	2575.0	8.94	4.56	9.49	5.01
38000	2595.0	8.94	4.57	9.48	5.04
38200	2615.0	8.94	4.57	9.48	5.01

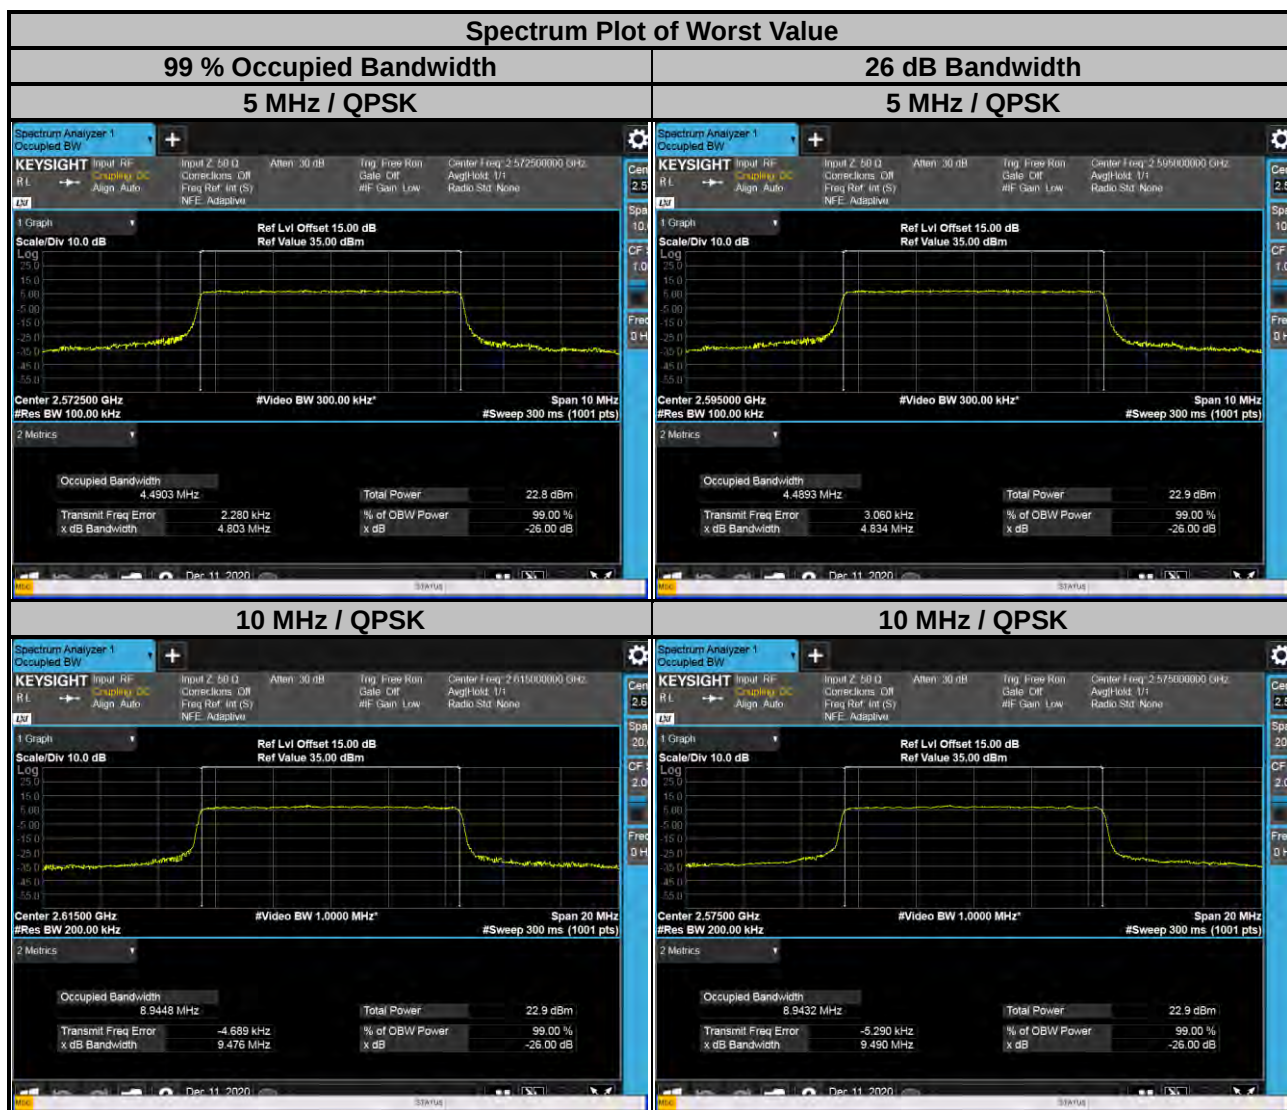


LTE Band 38					
Channel Bandwidth: 15 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
37825	2577.5	13.43	4.66	14.22	5.23
38000	2595.0	13.43	4.66	14.22	5.22
38175	2612.5	13.43	4.66	14.23	5.21
Channel Bandwidth: 20 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
37850	2580.0	17.88	4.80	19.00	5.51
38000	2595.0	17.88	4.80	19.00	5.52
38150	2610.0	17.88	4.80	19.01	5.50

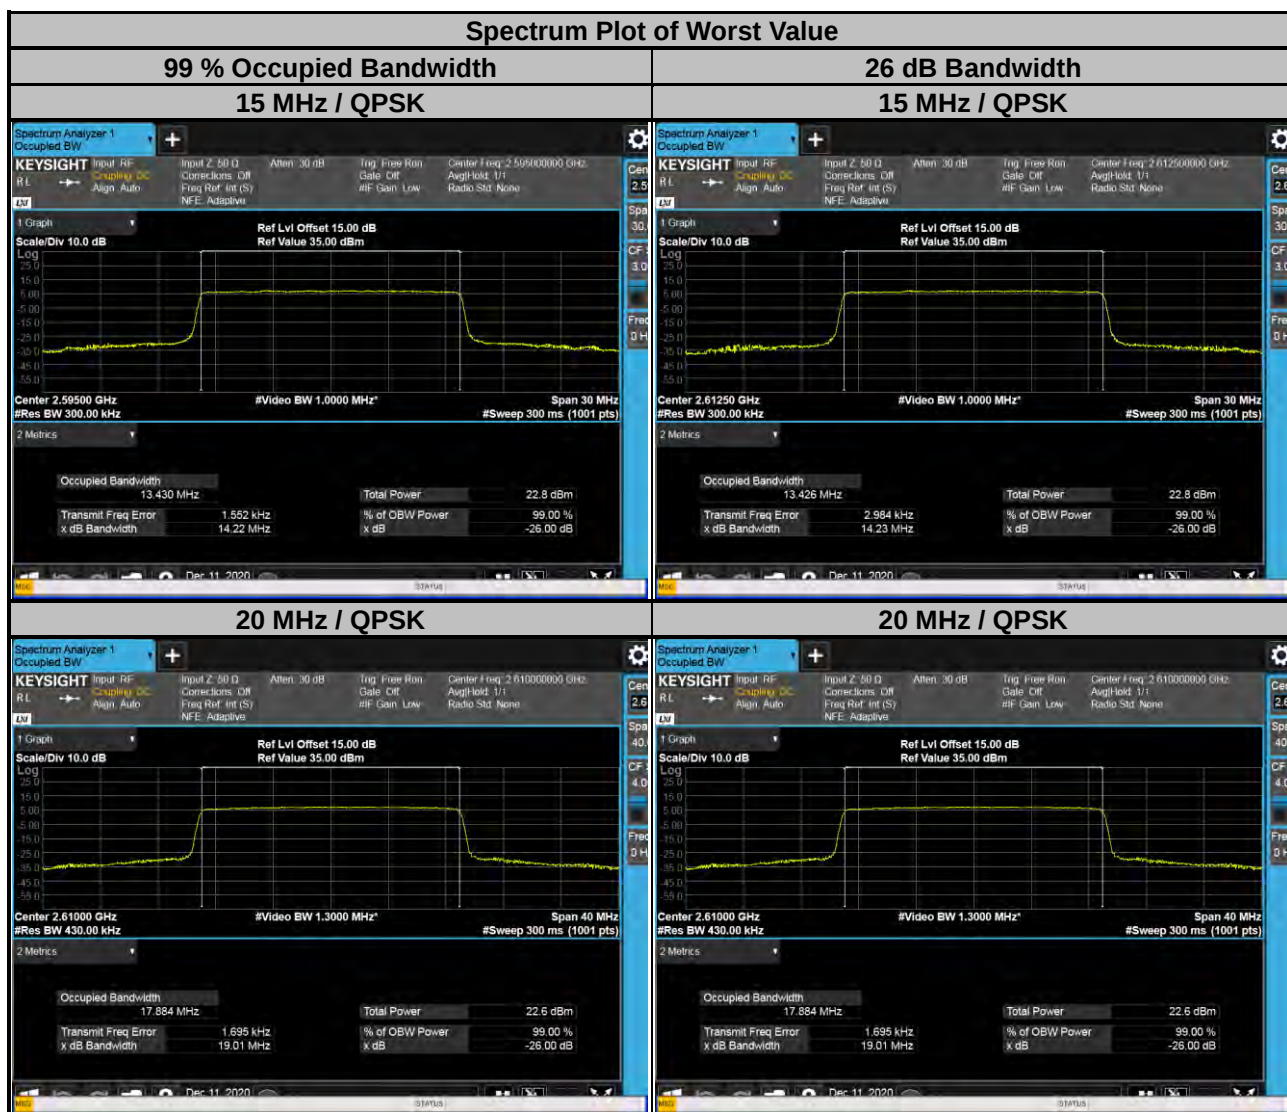

LTE Band 41					
Channel Bandwidth: 5 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
39675	2498.5	4.49	4.49	4.82	4.80
40620	2593.0	4.49	4.49	4.81	4.80
41565	2687.5	4.49	4.49	4.83	4.82
Channel Bandwidth: 10 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
39700	2501.0	8.94	4.56	9.49	5.02
40620	2593.0	8.95	4.57	9.49	5.01
41540	2685.0	8.94	4.57	9.48	5.00

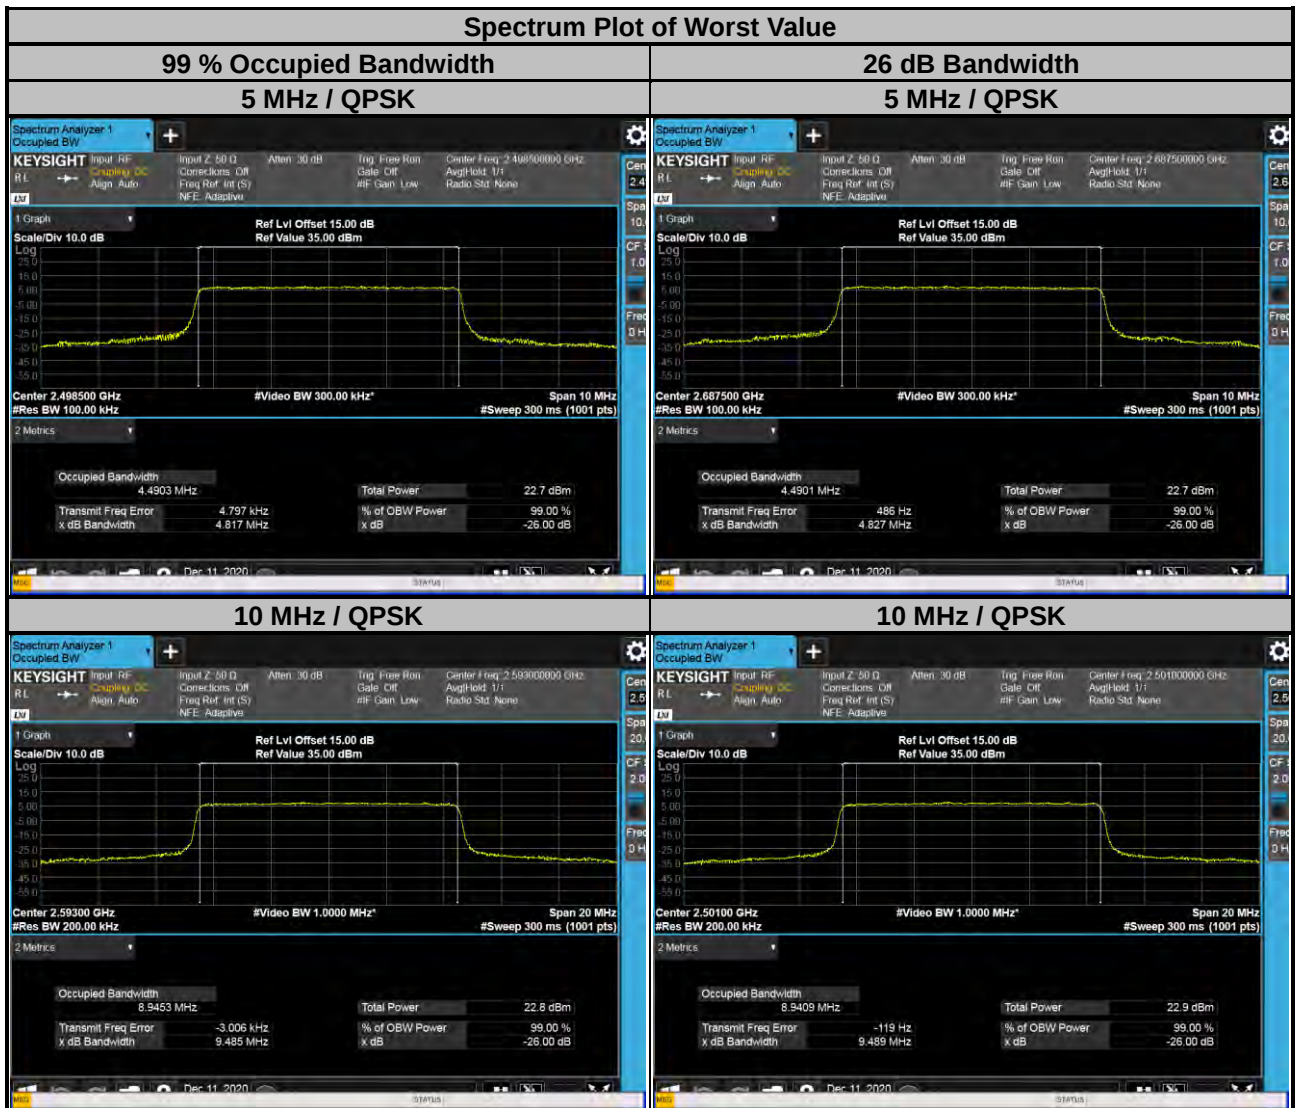

LTE Band 41					
Channel Bandwidth: 15 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
39725	2503.5	13.43	4.66	14.23	7.21
40620	2593.0	13.43	4.67	14.23	7.20
41515	2682.5	13.43	4.66	14.22	5.21
Channel Bandwidth: 20 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
39750	2506.0	17.87	4.81	18.99	9.57
40620	2593.0	17.89	4.81	19.01	9.60
41490	2680.0	17.87	4.80	18.98	5.52

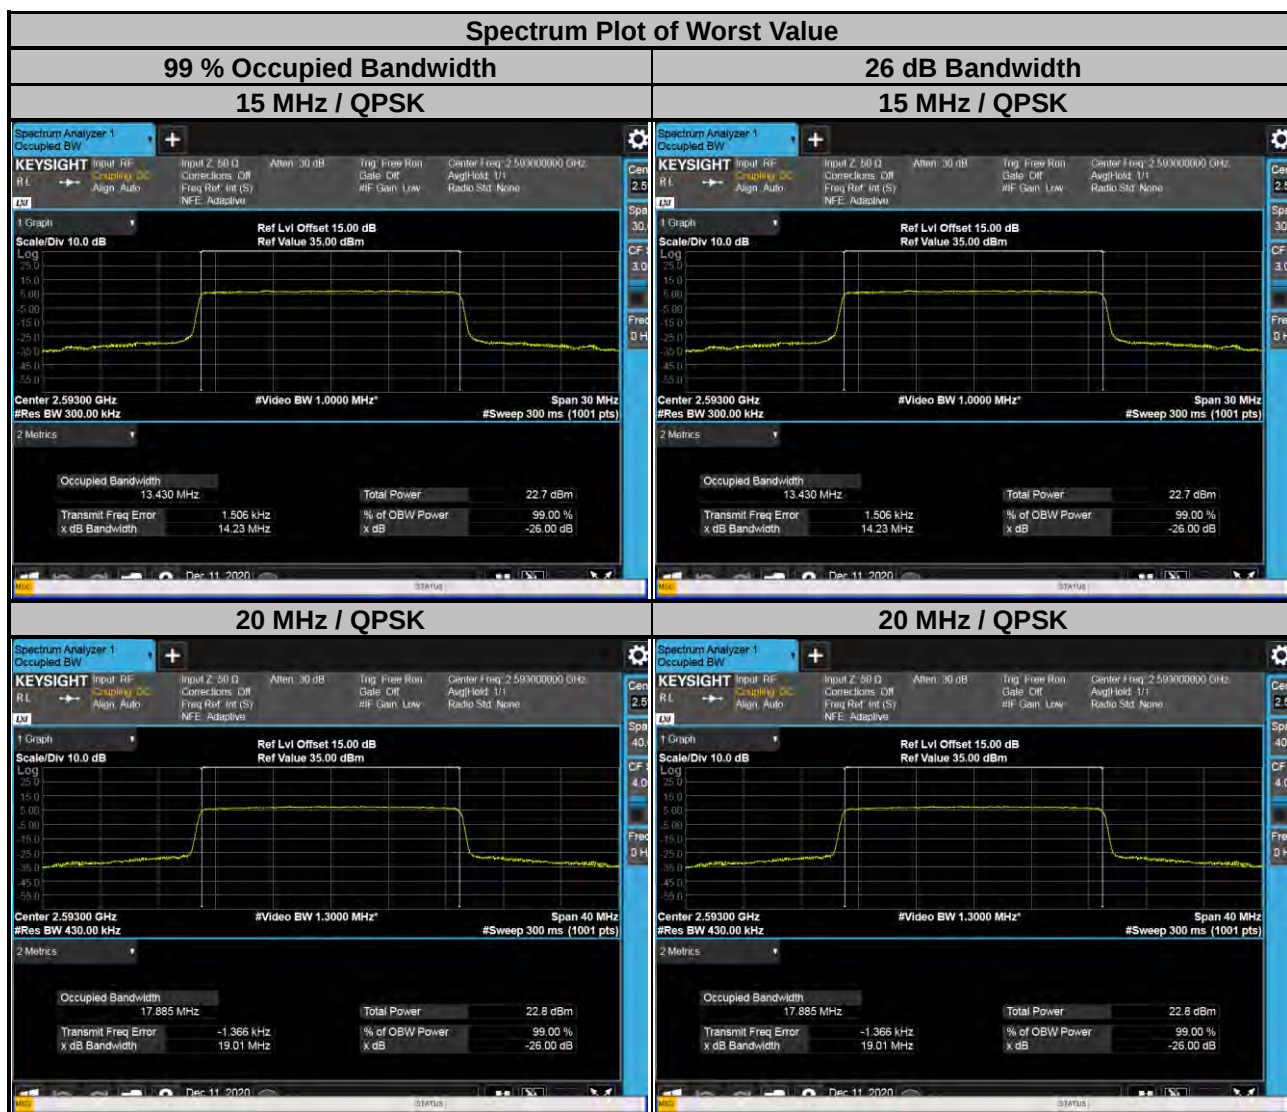


4.5 Out-of-Band Emissions Measurement

4.5.1 Limits of Out-of-Band Emissions Measurement

According to FCC 27.53(m)(4)&(6) specified that power of any emission outside of the channel edge must be attenuated below the transmitting power (P) by a factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed, except when the 1 megahertz band is 2495-2496 MHz, in which case a resolution bandwidth of at least one percent may be employed.


4.5.2 Test Setup

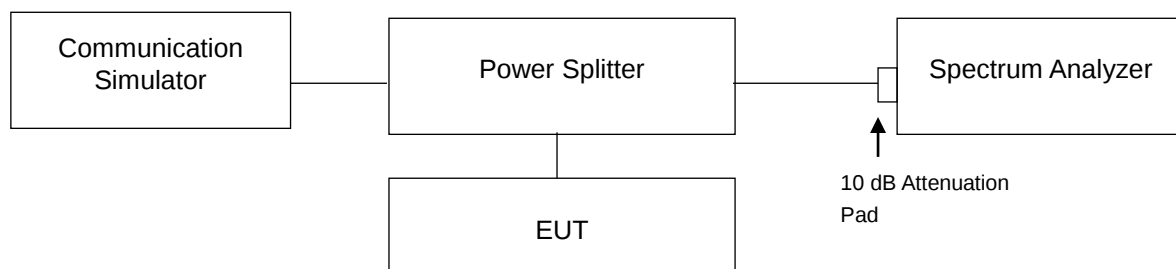

4.5.3 Test Procedures


- The EUT was set up for the maximum peak power with LTE link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels (low and high operational frequency range.).
- The out-of-band emissions measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Record the max. trace plot into the test report.


4.5.4 Test Results

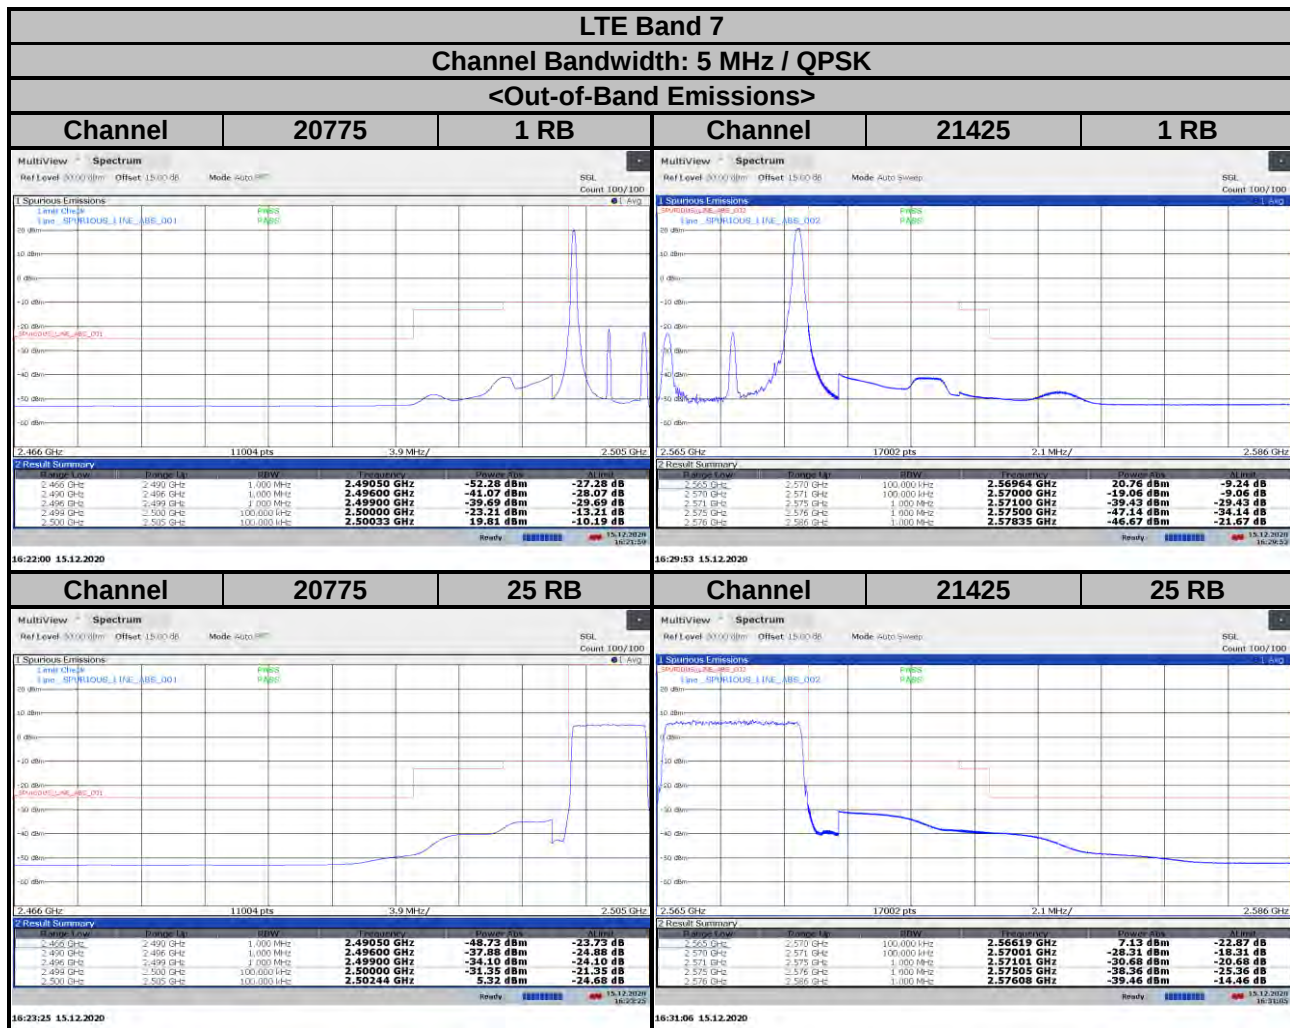


LTE Band 7
Channel Bandwidth: 5 MHz / 16QAM

<Out-of-Band Emissions>

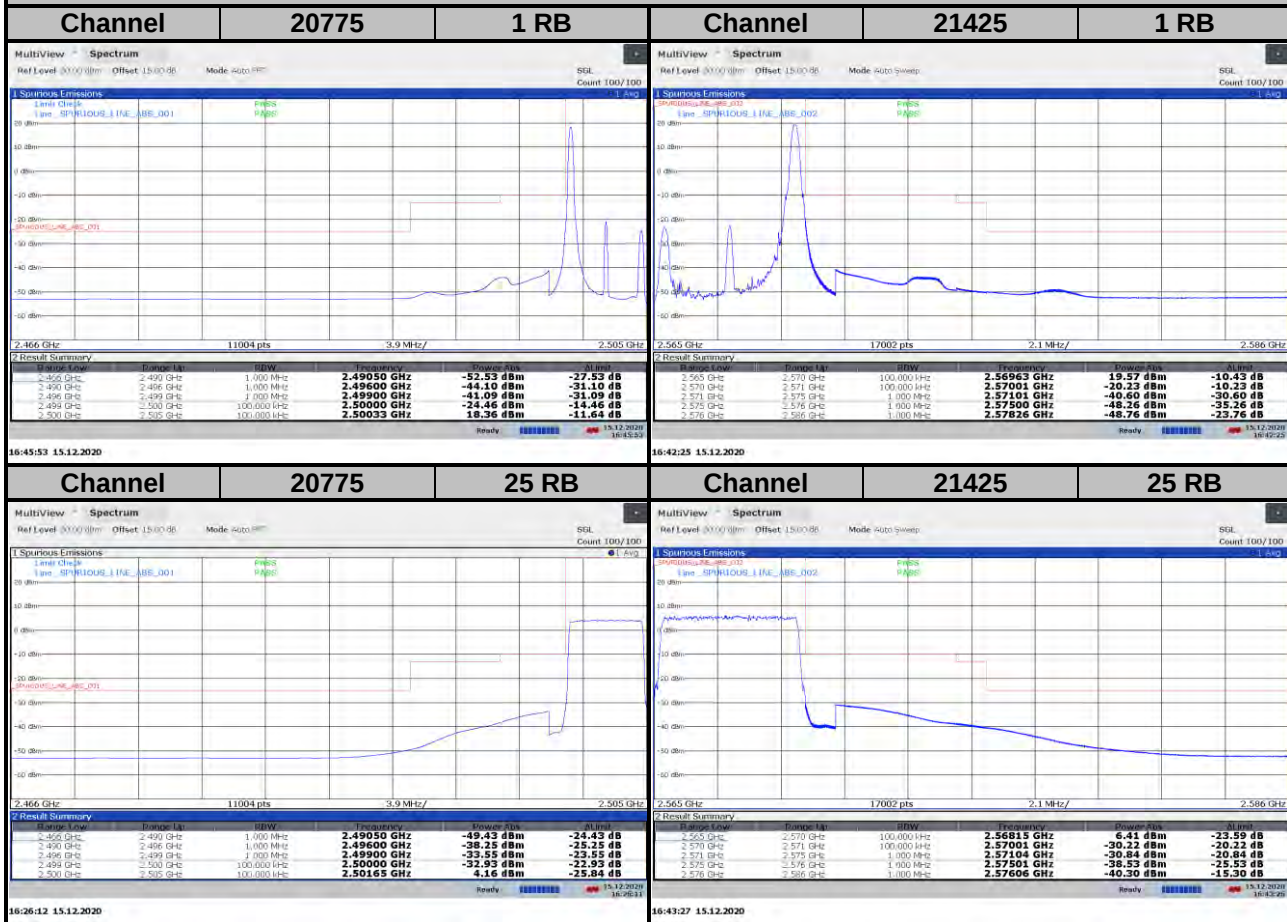

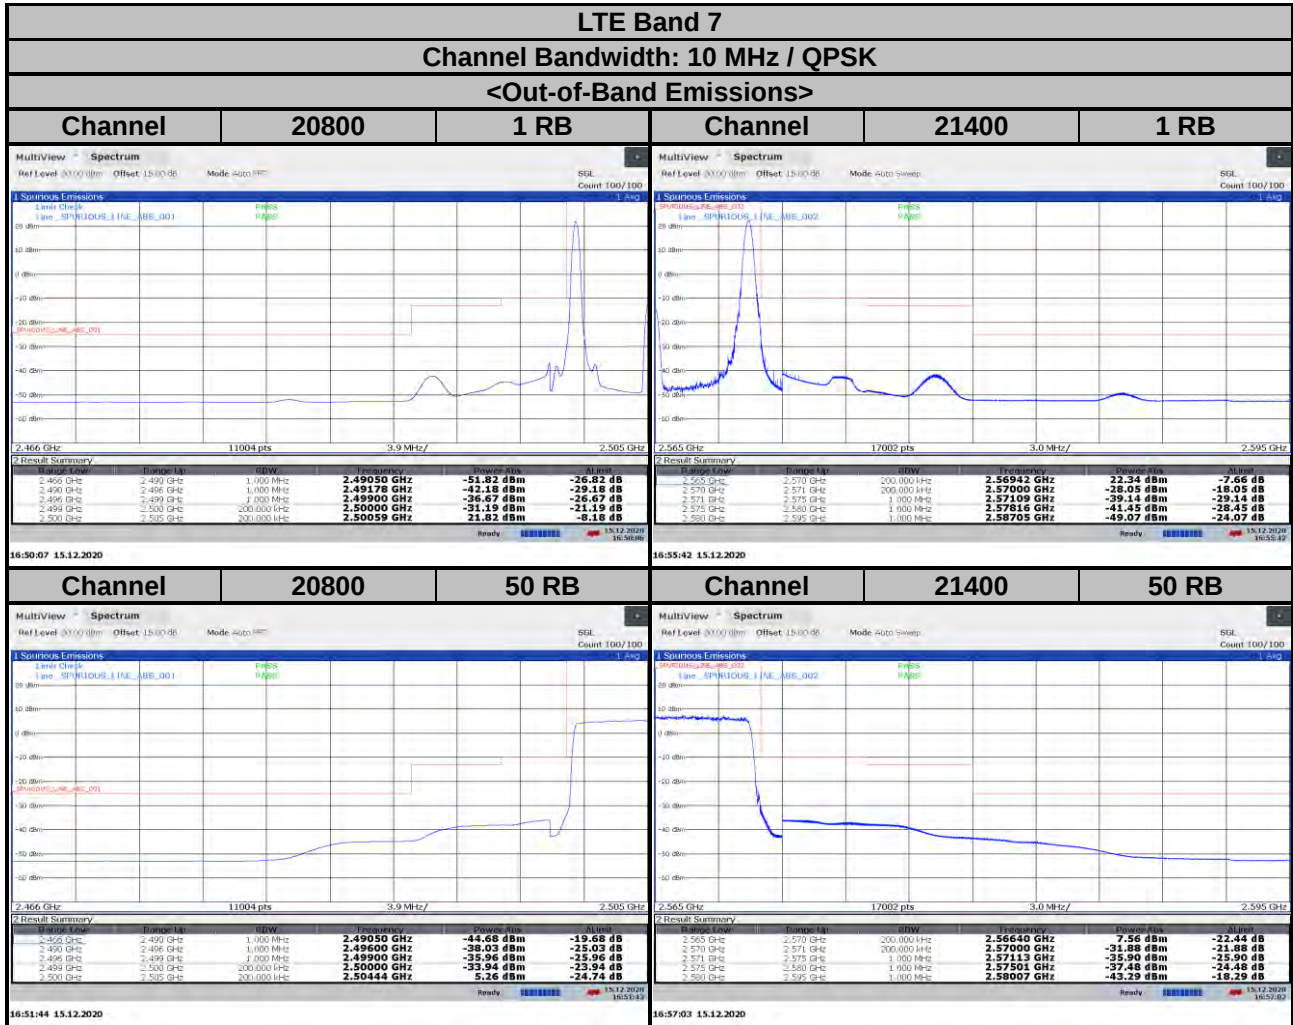


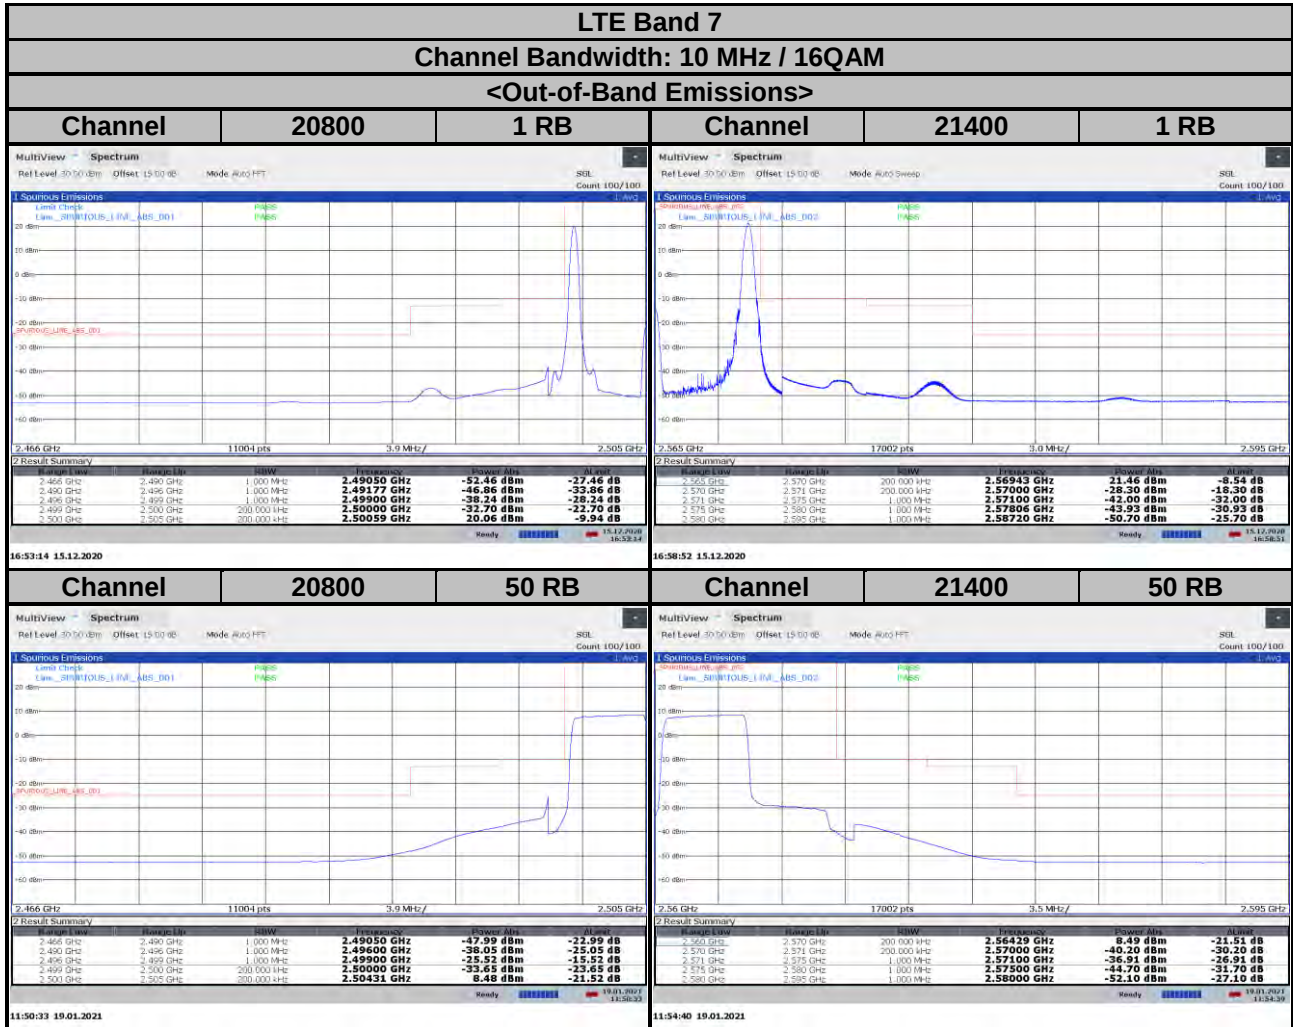


LTE Band 7


Channel Bandwidth: 15 MHz / QPSK


<Out-of-Band Emissions>

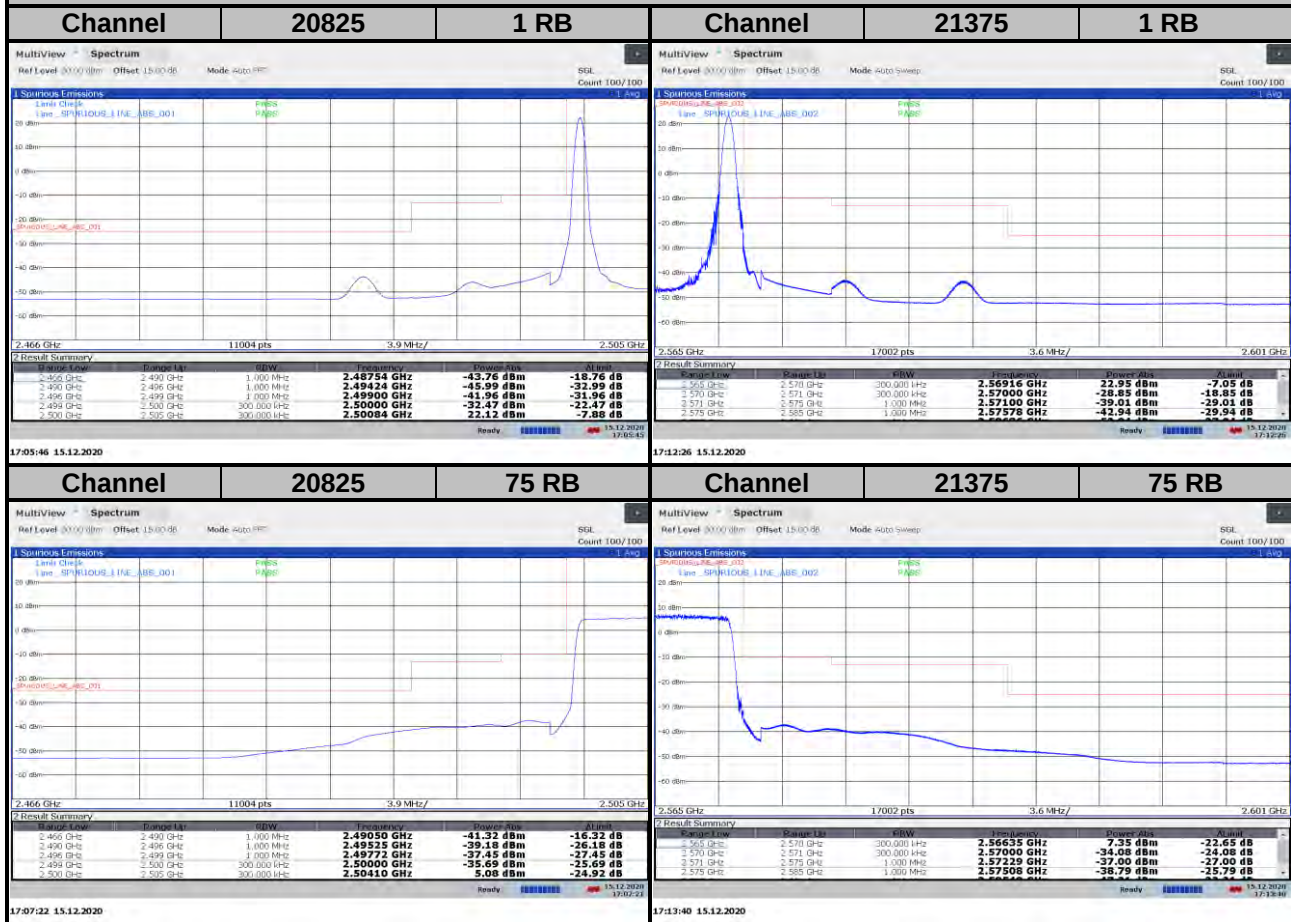


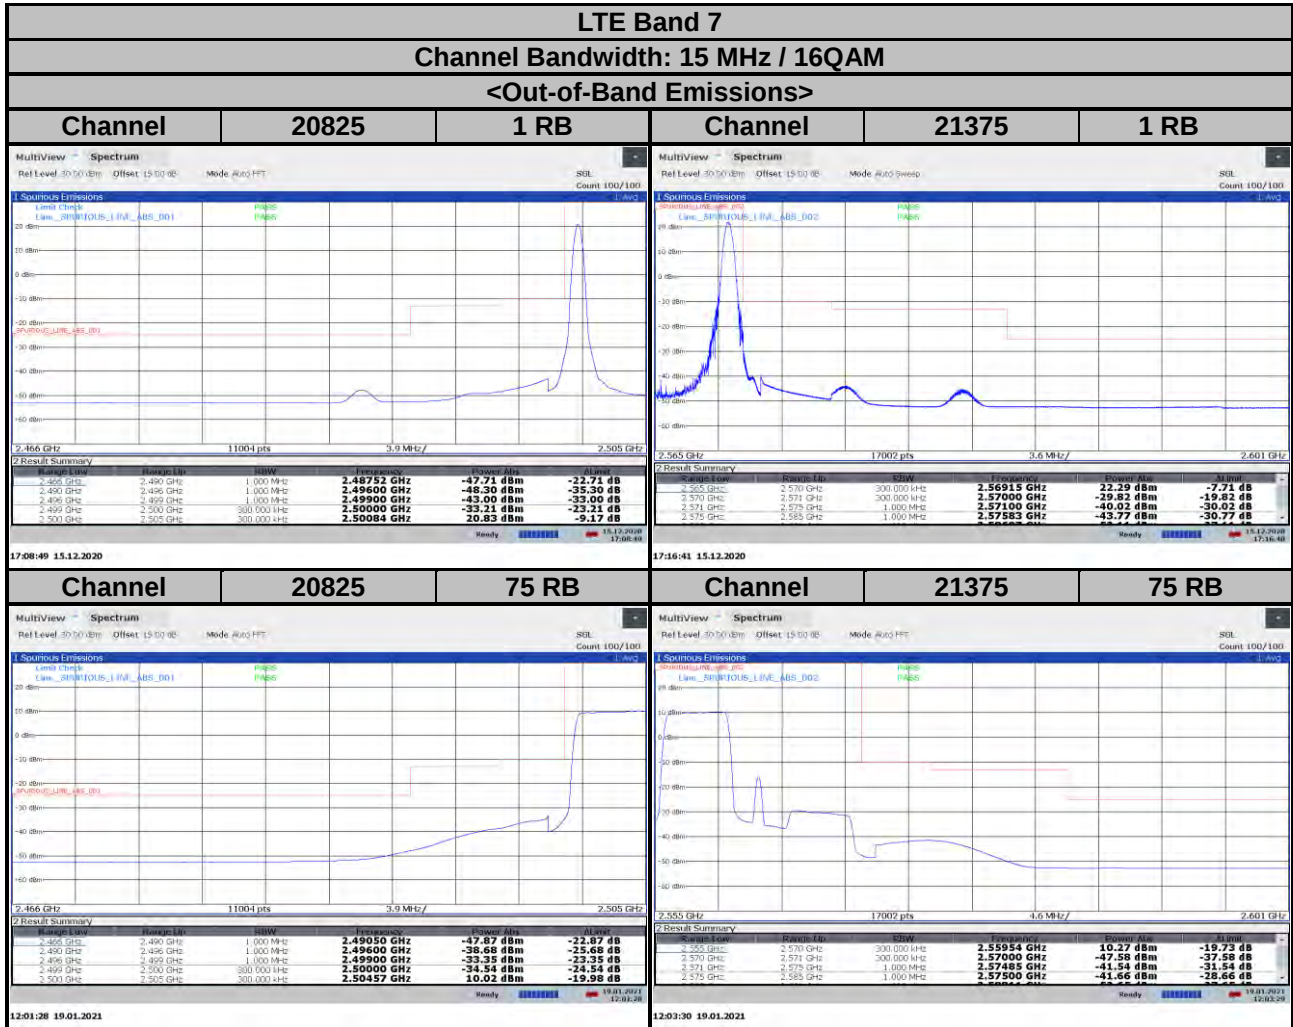



LTE Band 7
Channel Bandwidth: 20 MHz / QPSK
<Out-of-Band Emissions>

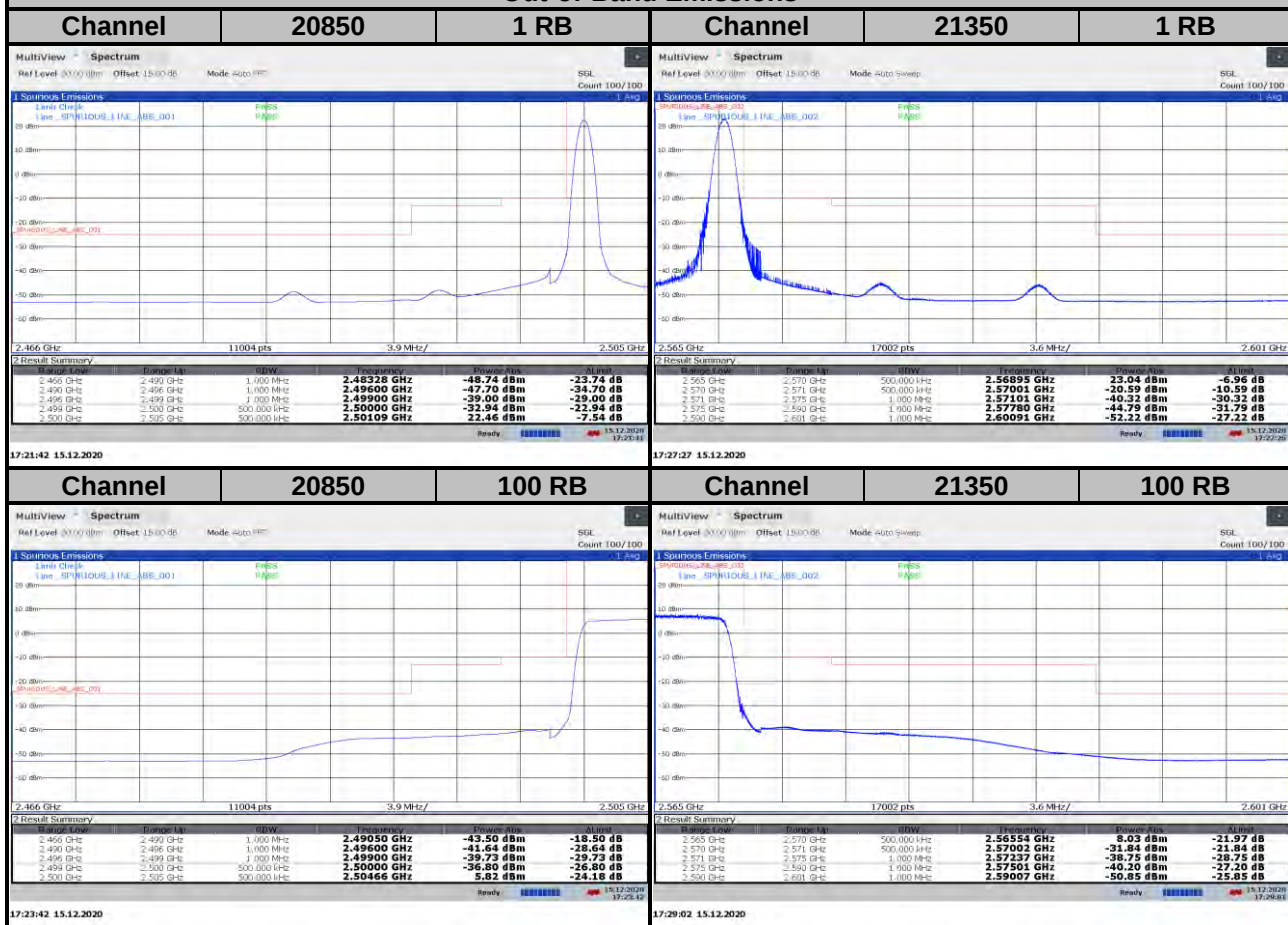

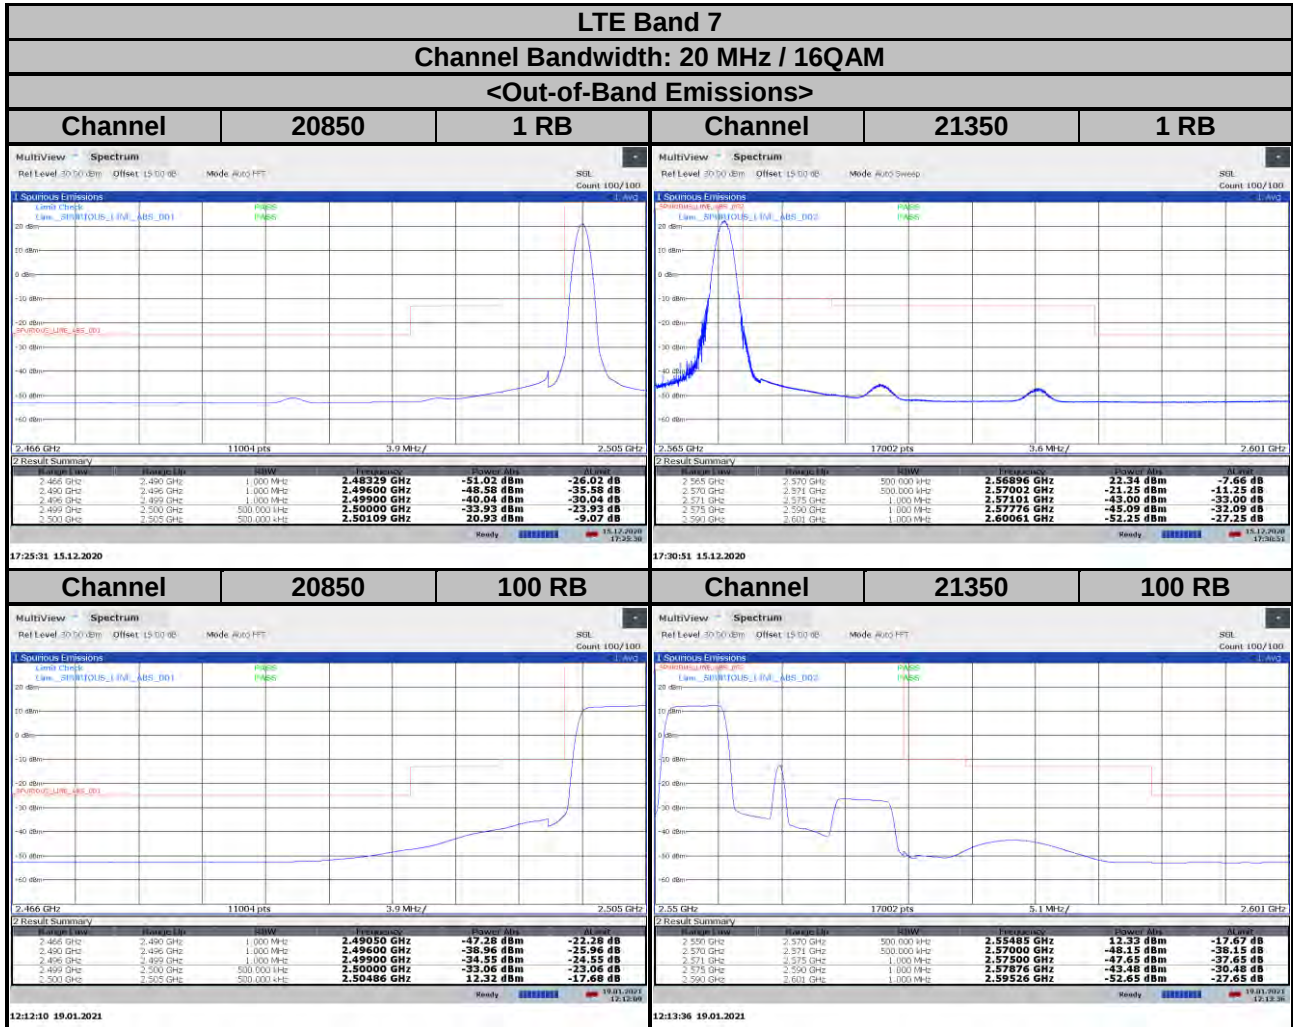

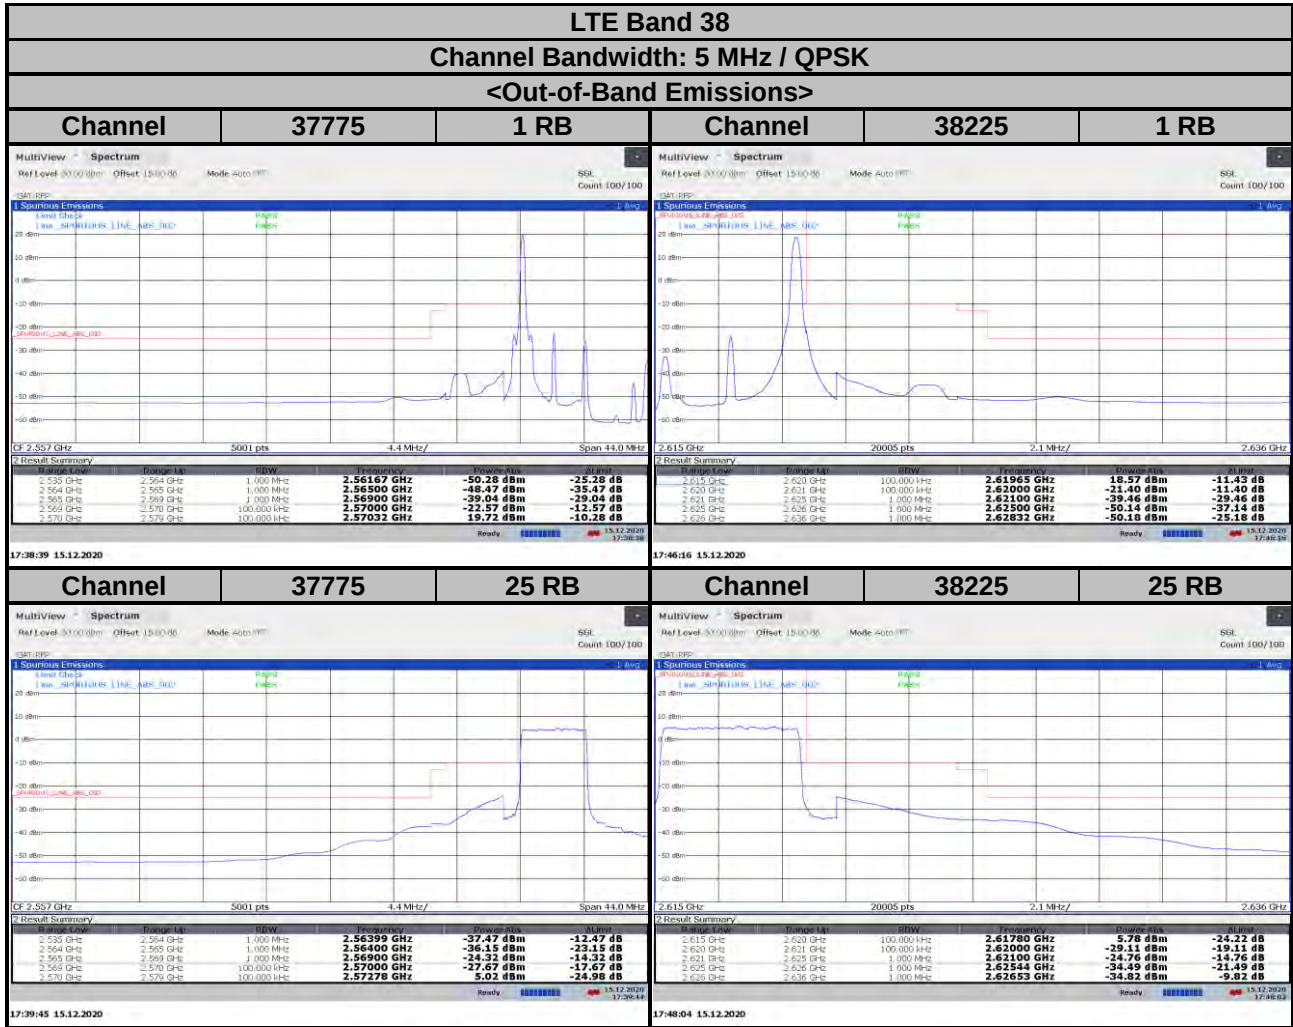

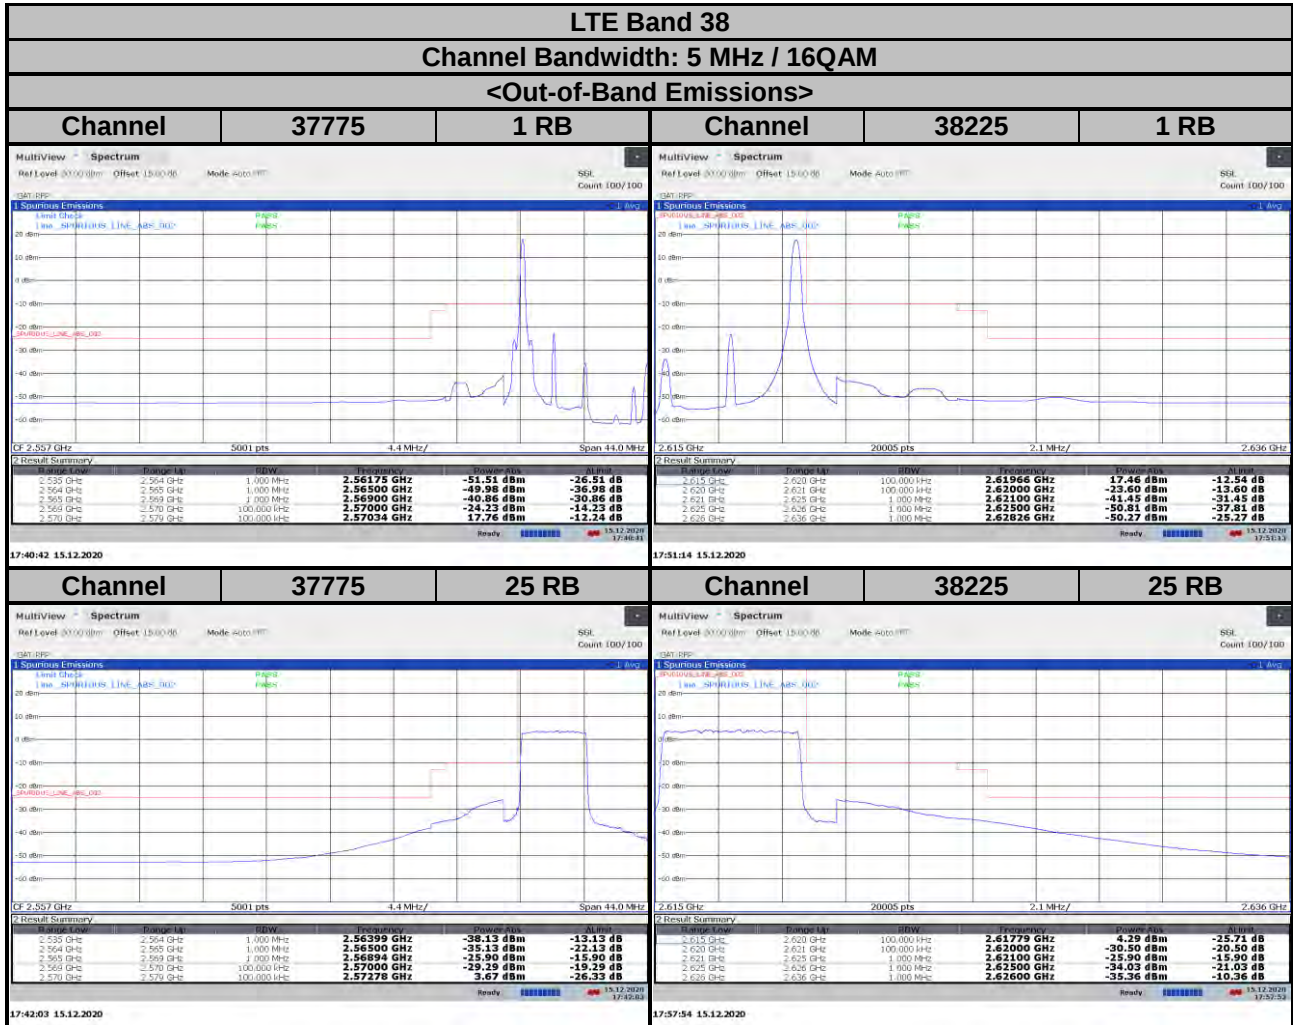


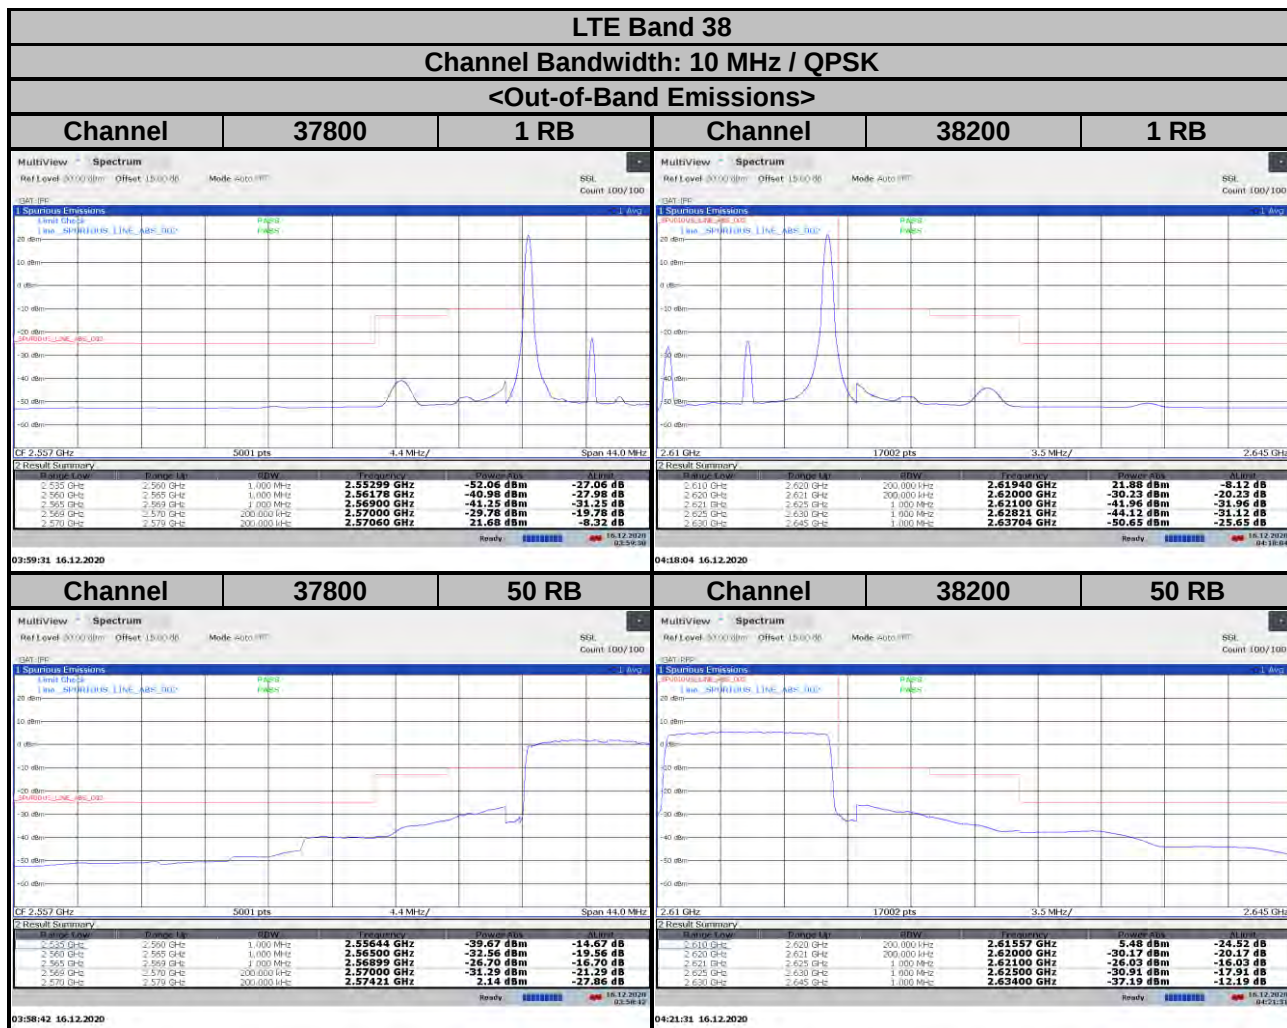



LTE Band 38


Channel Bandwidth: 15 MHz / QPSK

<Out-of-Band Emissions>

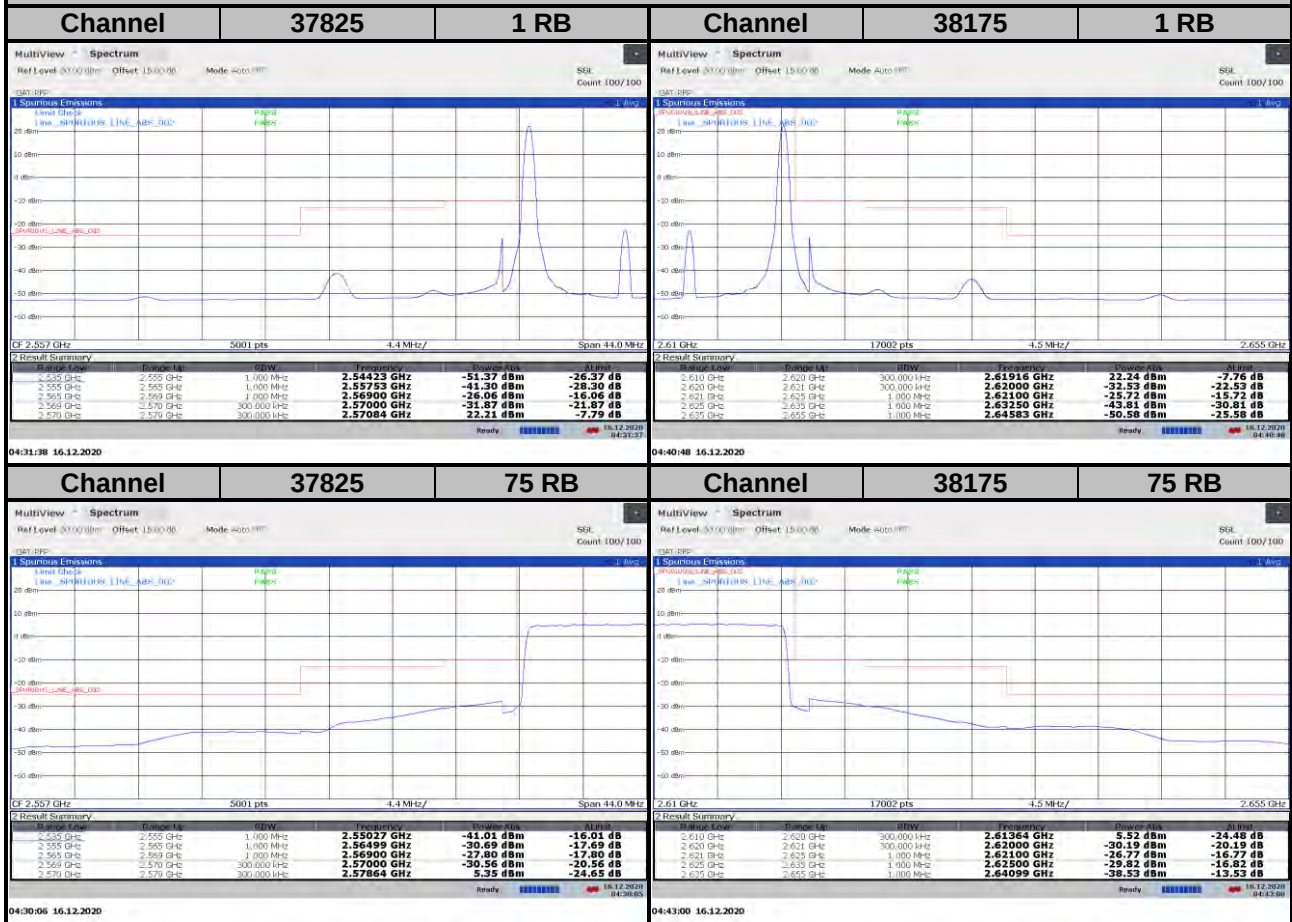


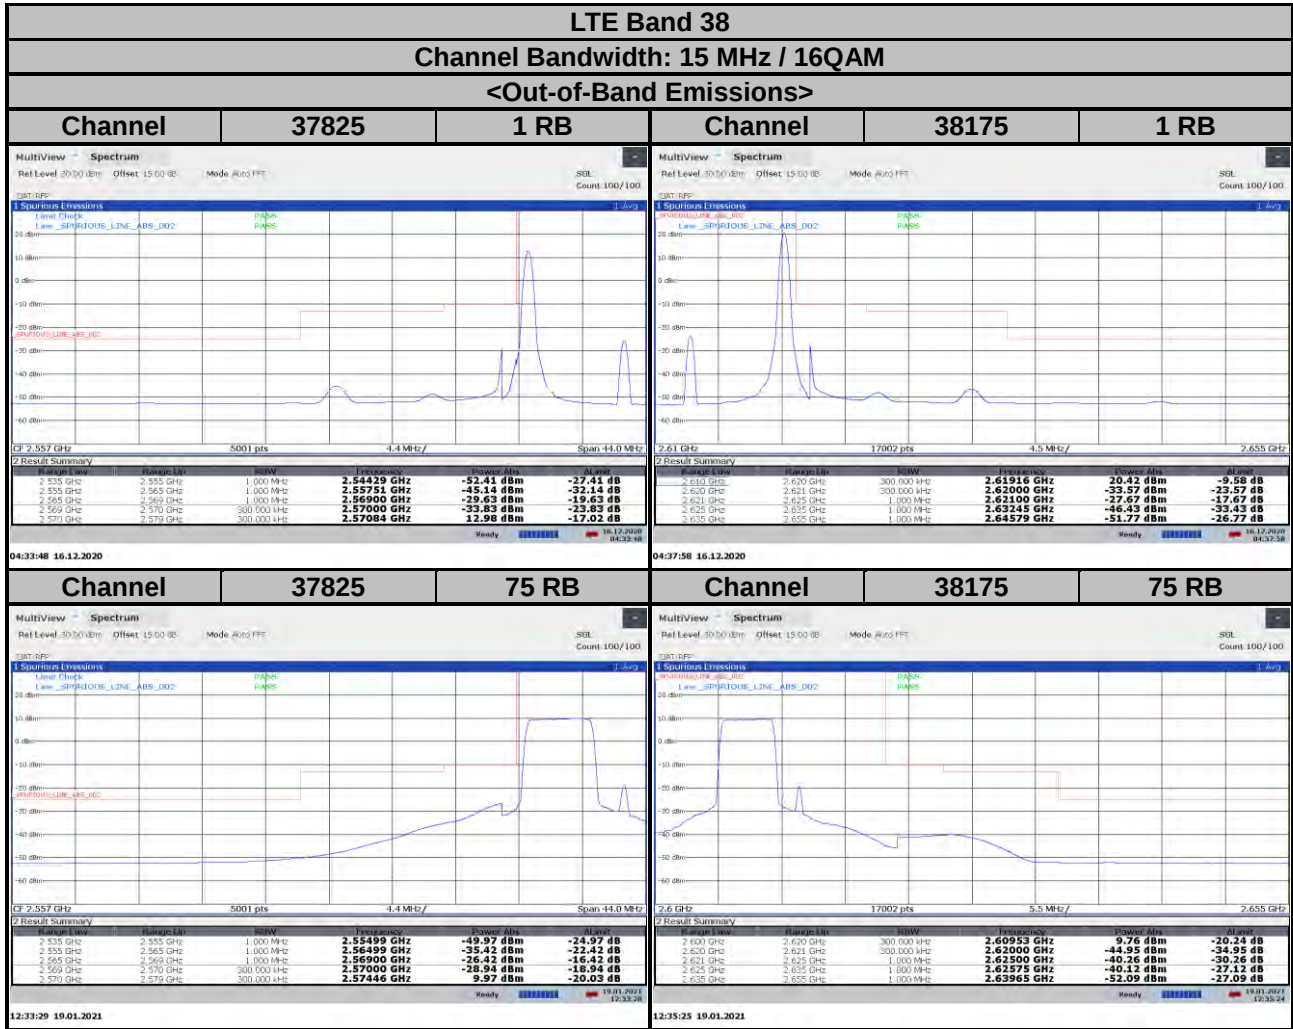


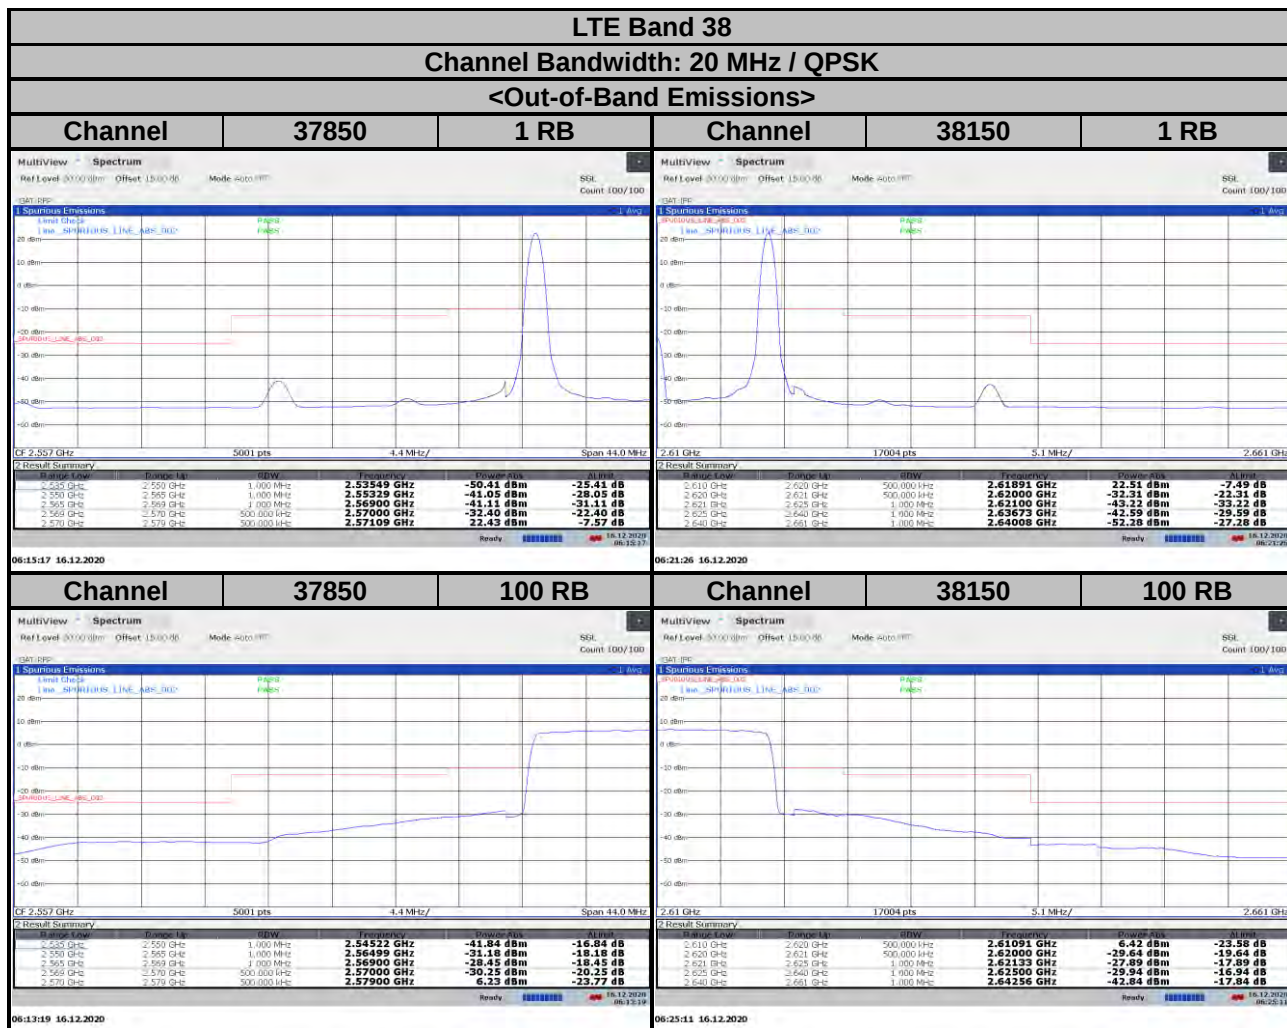


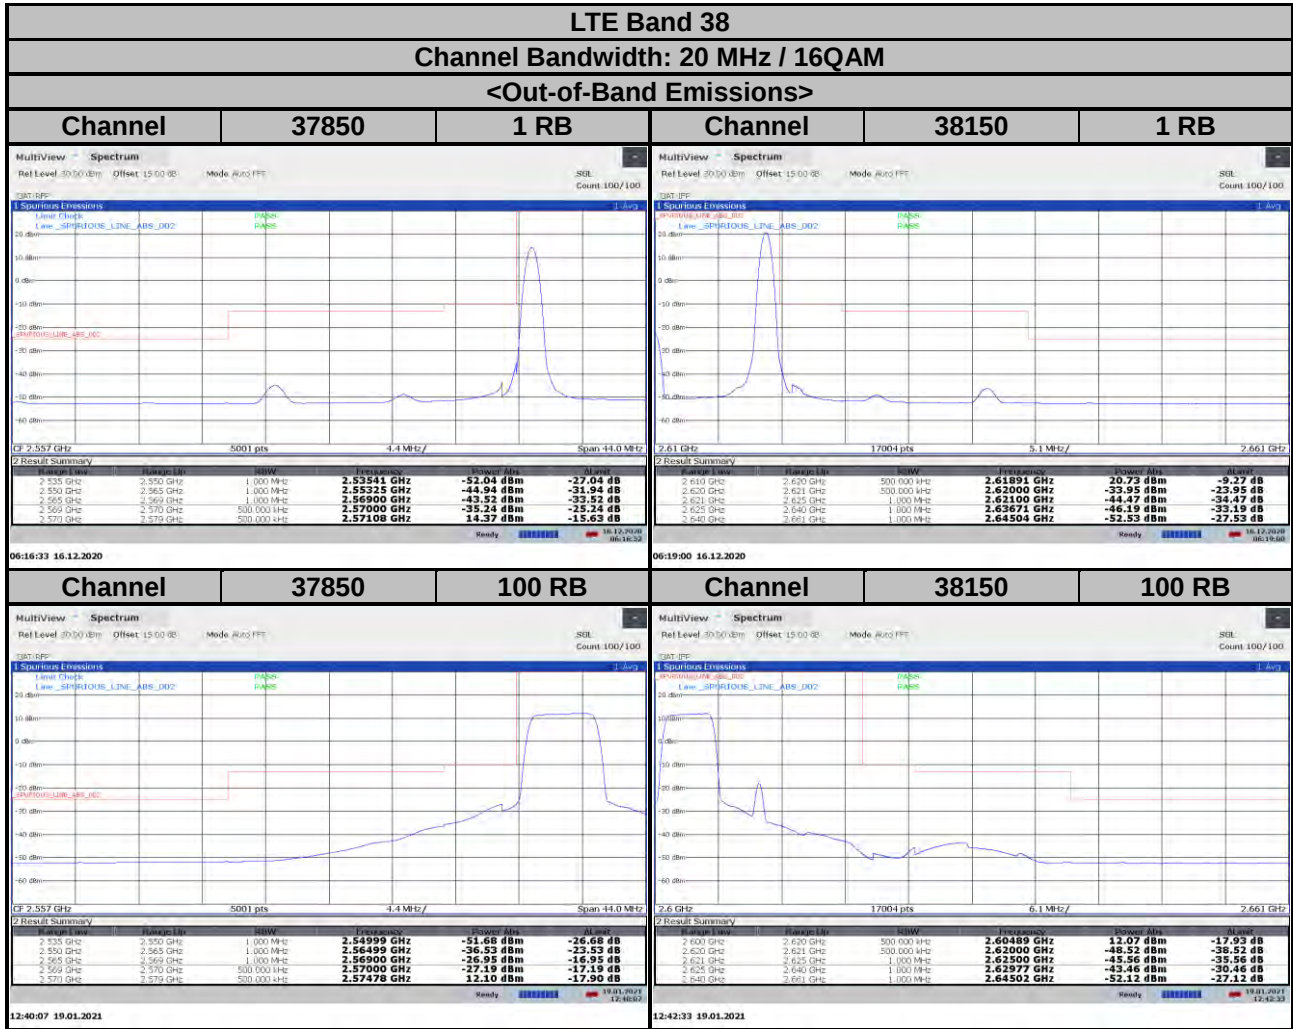



LTE Band 41
Channel Bandwidth: 5 MHz / QPSK
<Out-of-Band Emissions>

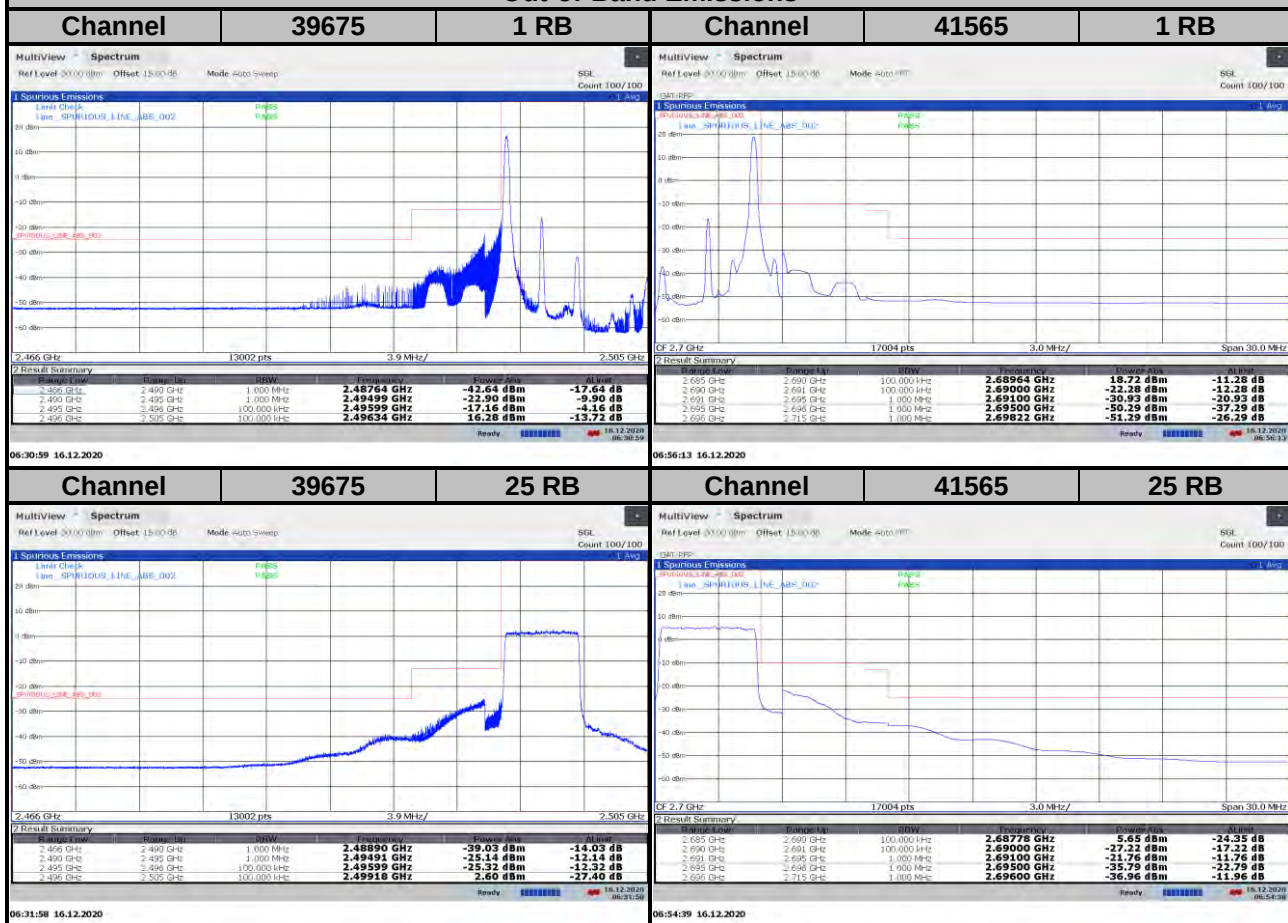


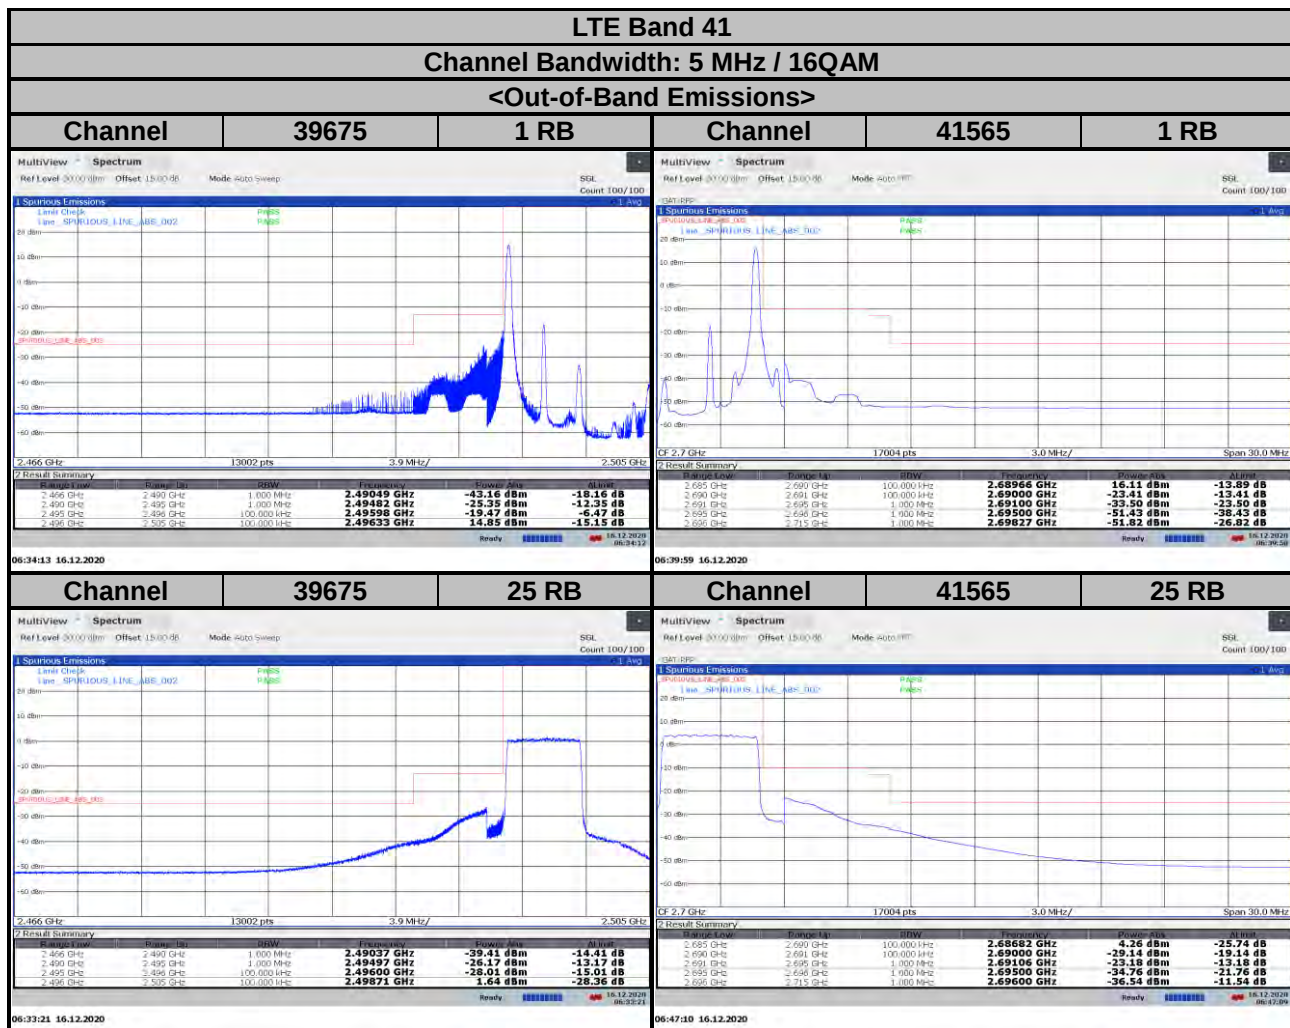

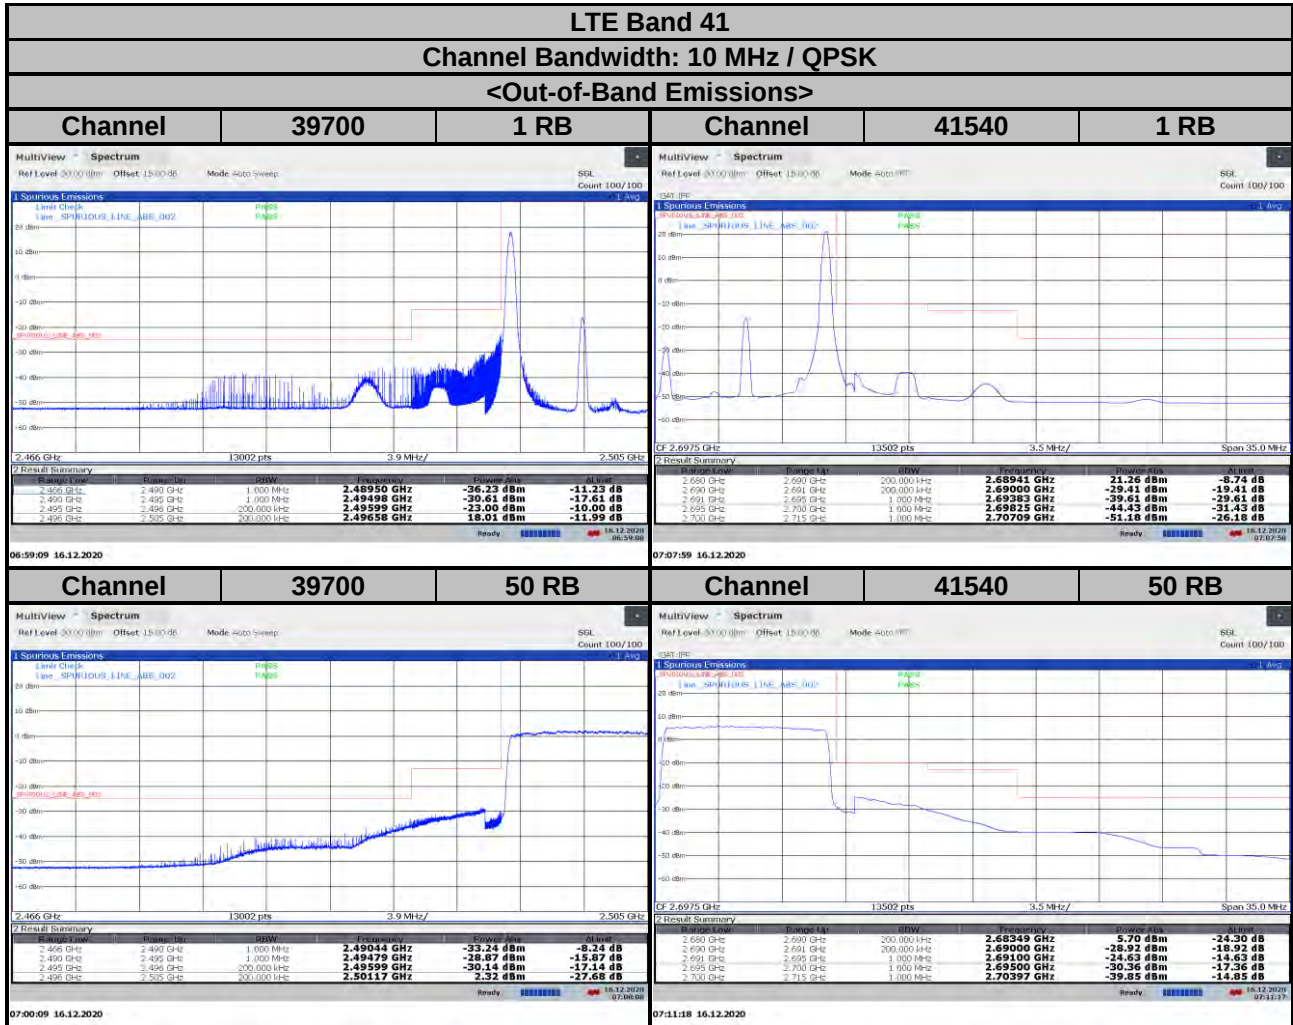

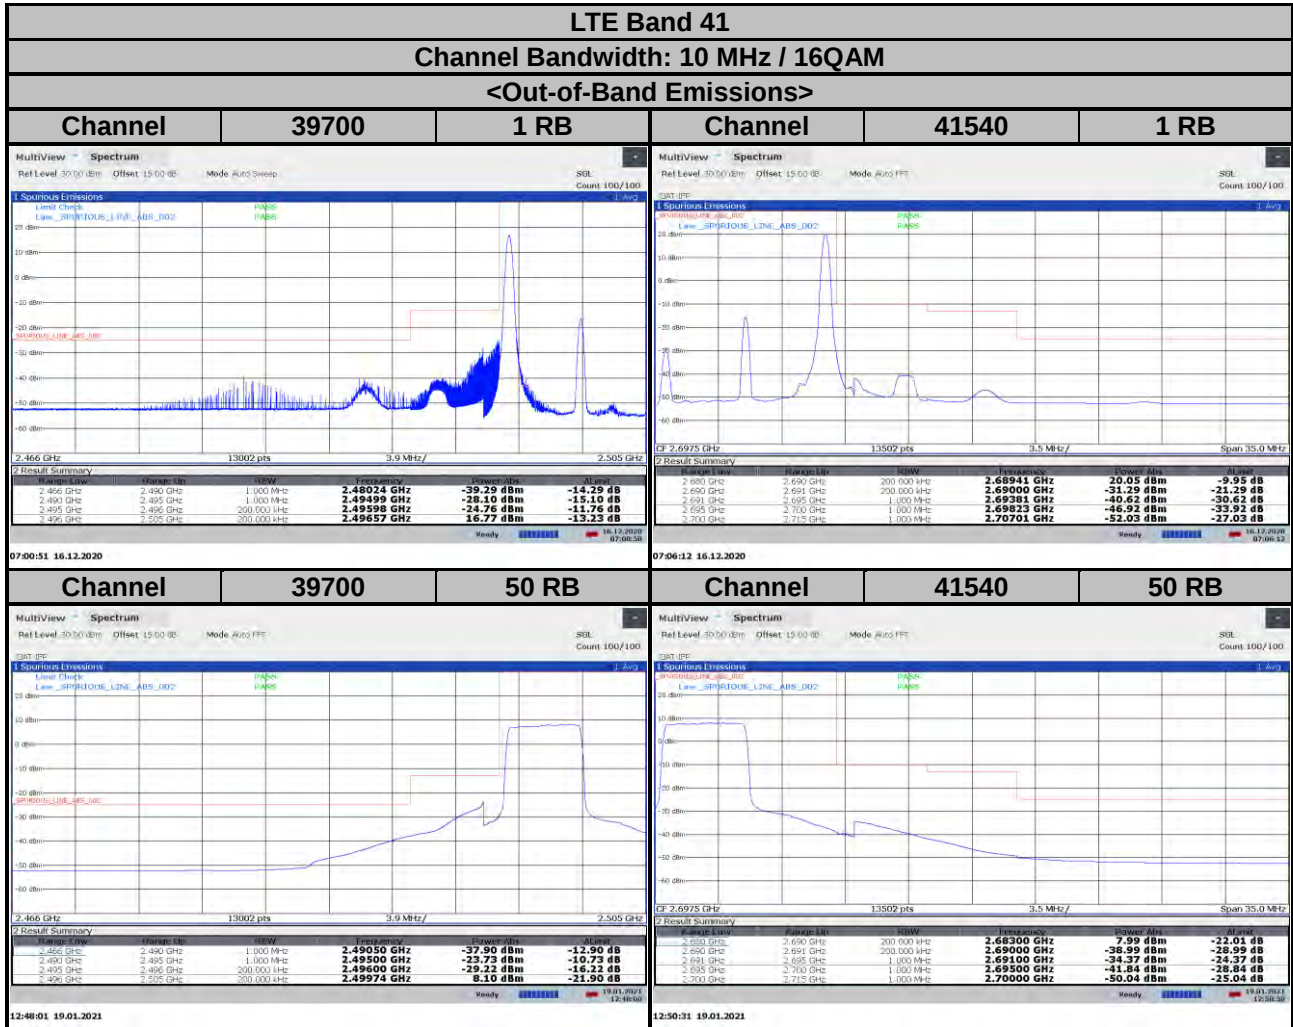

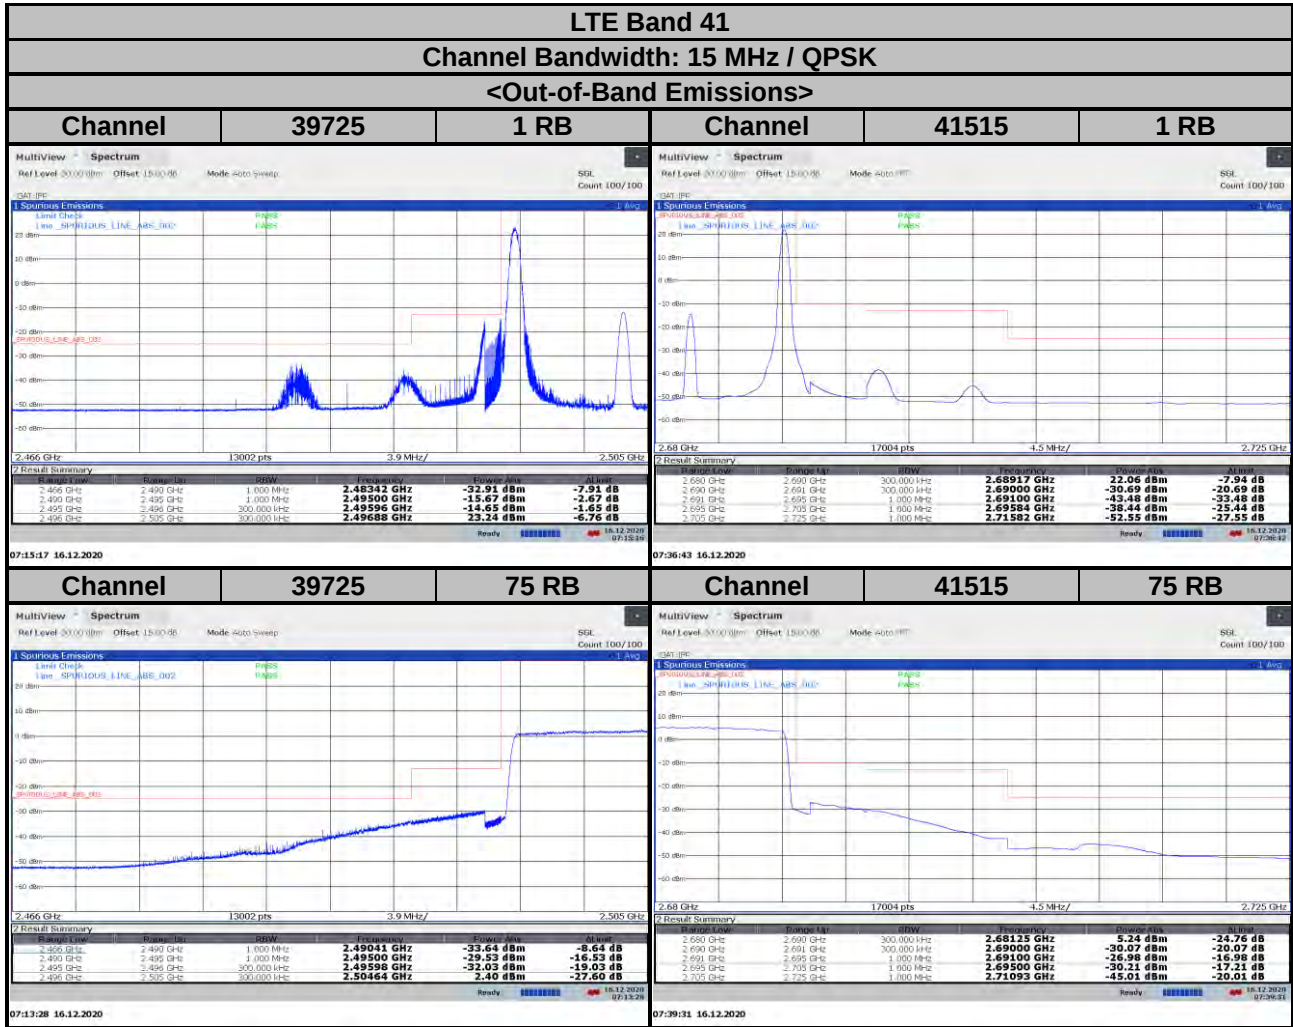


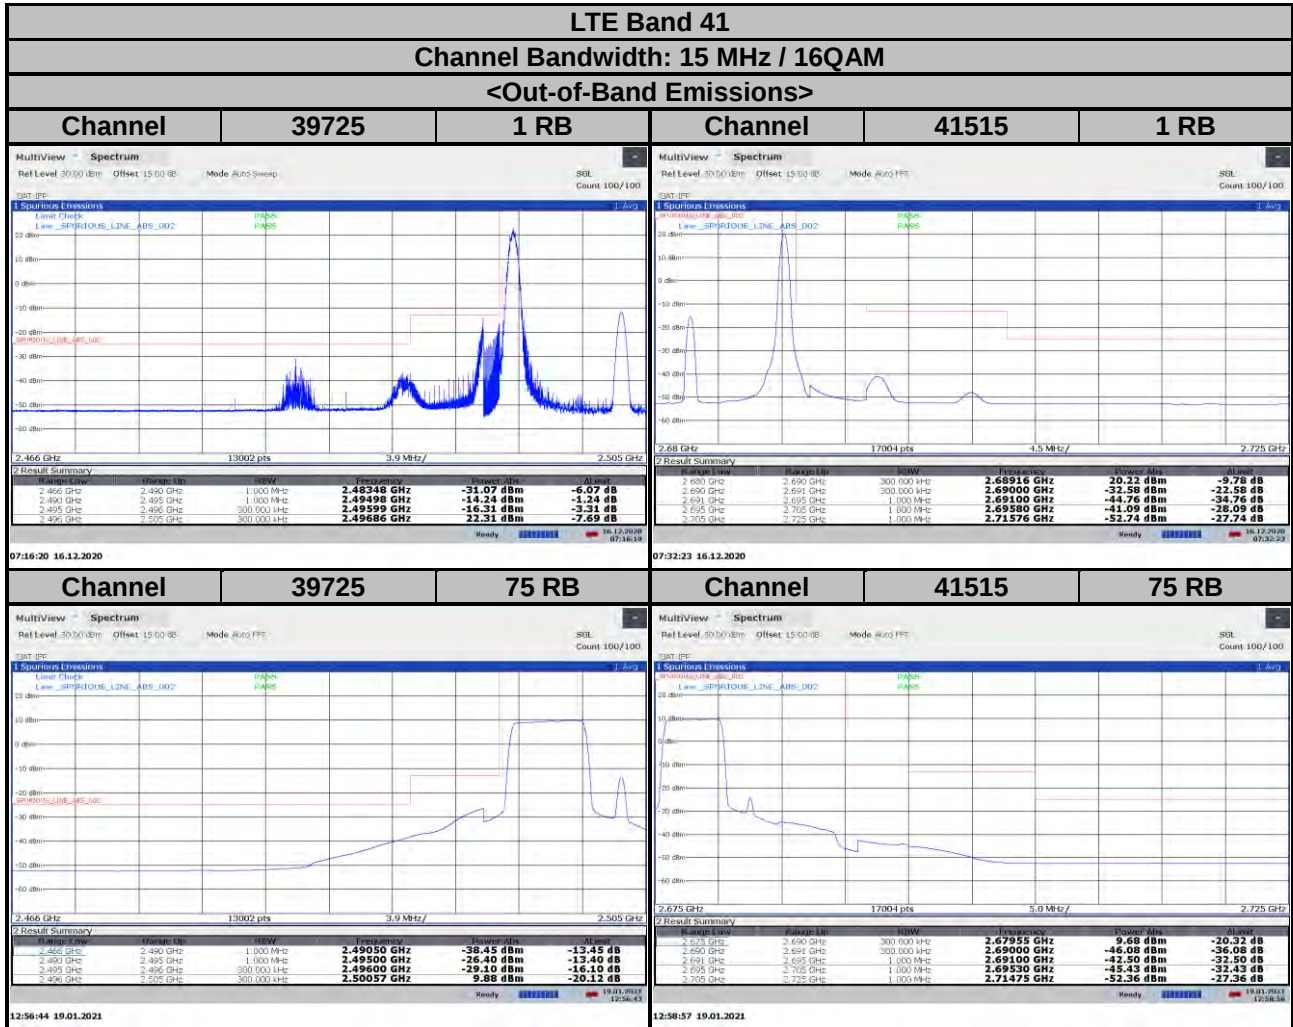

LTE Band 41

Channel Bandwidth: 20 MHz / QPSK

<Out-of-Band Emissions>

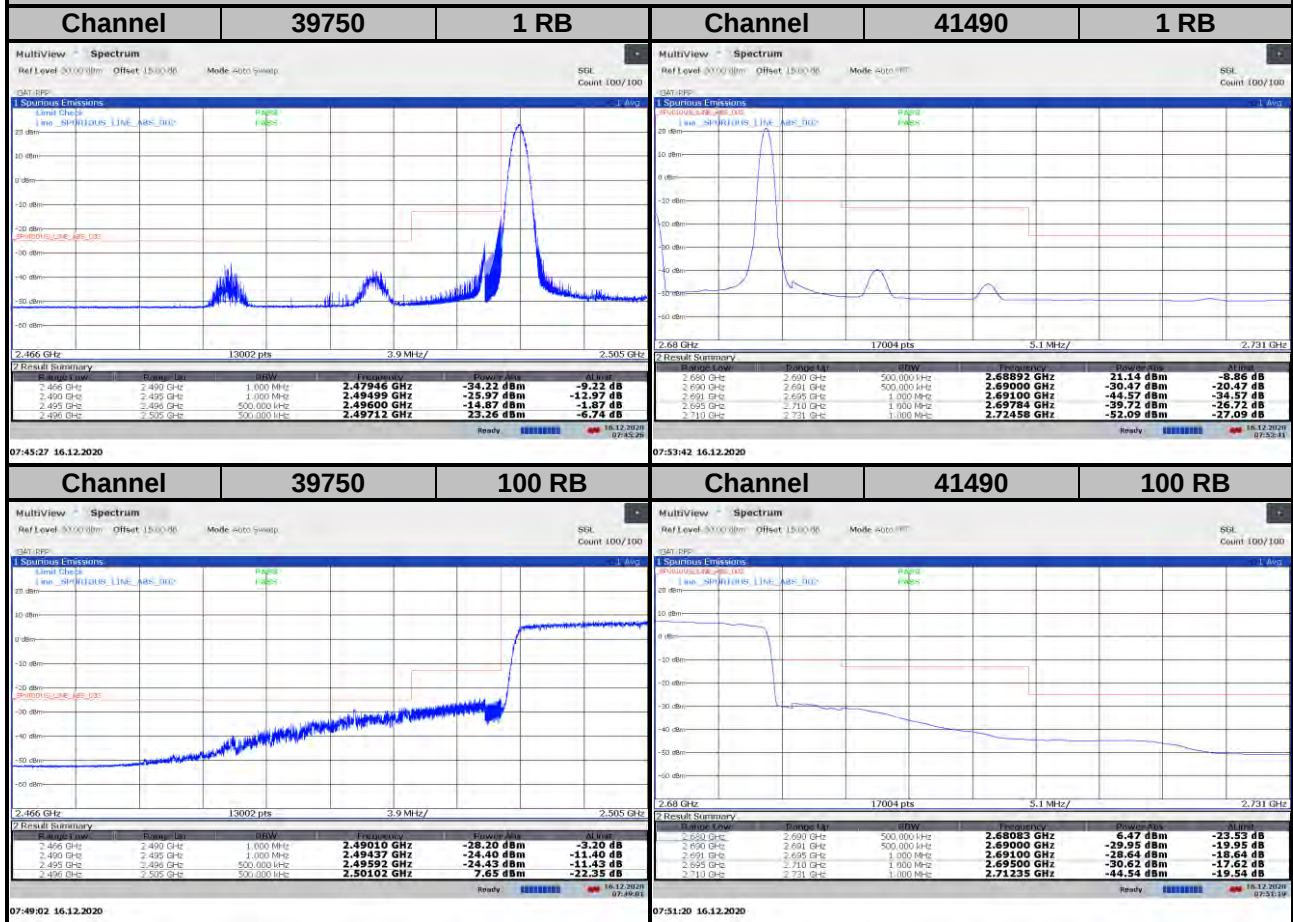


4.6 Peak to Average Ratio

4.6.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.6.2 Test Setup

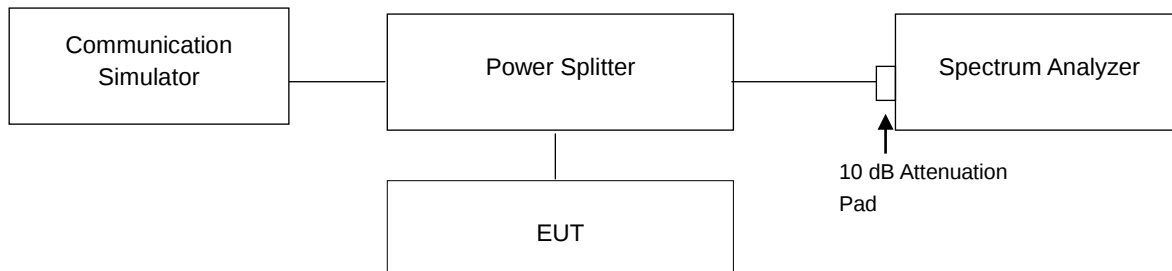


4.6.3 Test Procedures


1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1 %.

4.6.4 Test Results


LTE Band 7							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
20775	2502.5	4.10	5.02	20800	2505.0	4.01	4.95
21100	2535.0	4.35	5.20	21100	2535.0	4.26	5.15
21425	2567.5	4.17	5.14	21400	2565.0	4.61	5.16

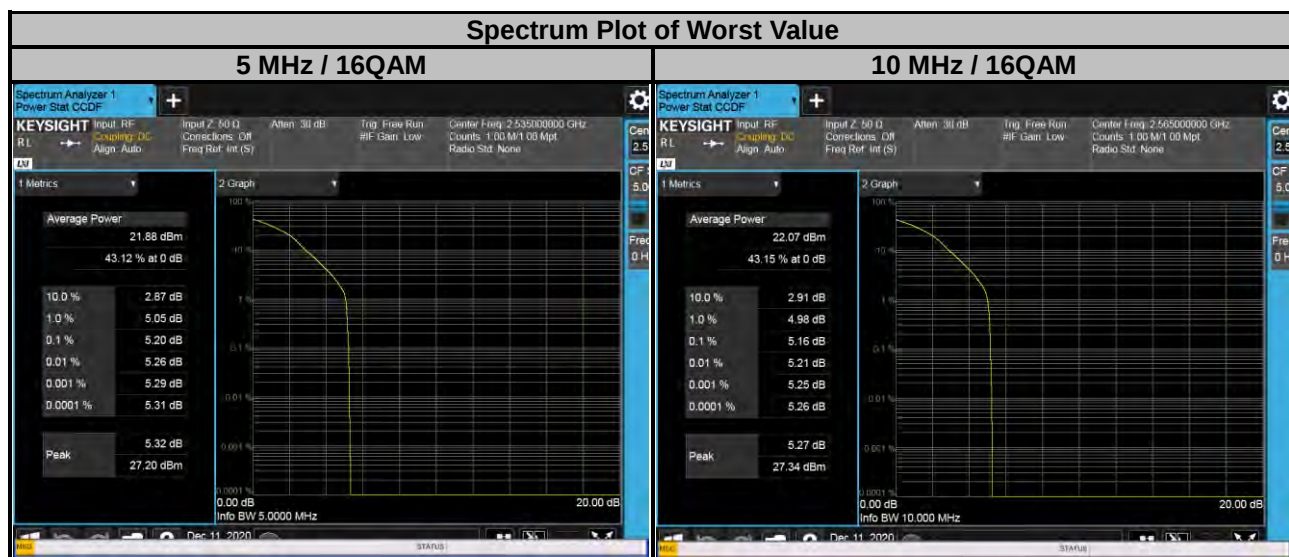

LTE Band 7							
Channel Bandwidth: 15 MHz				Channel Bandwidth: 20 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
20825	2507.5	3.99	4.90	20850	2510.0	4.03	4.98
21100	2535.0	4.18	5.04	21100	2535.0	4.24	5.14
21375	2562.5	4.43	5.13	21350	2560.0	4.46	5.11

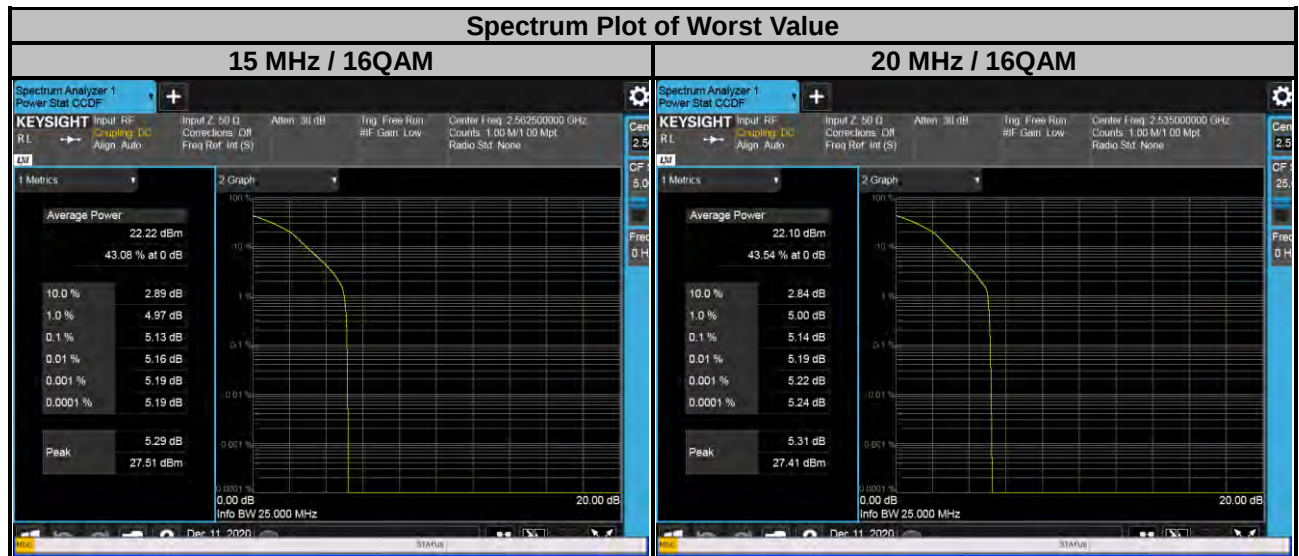


LTE Band 38							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
37775	2572.5	4.63	5.73	37800	2575.0	4.72	5.84
38000	2595.0	4.46	5.66	38000	2595.0	4.58	6.10
38225	2617.5	4.44	5.66	38200	2615.0	4.56	5.84

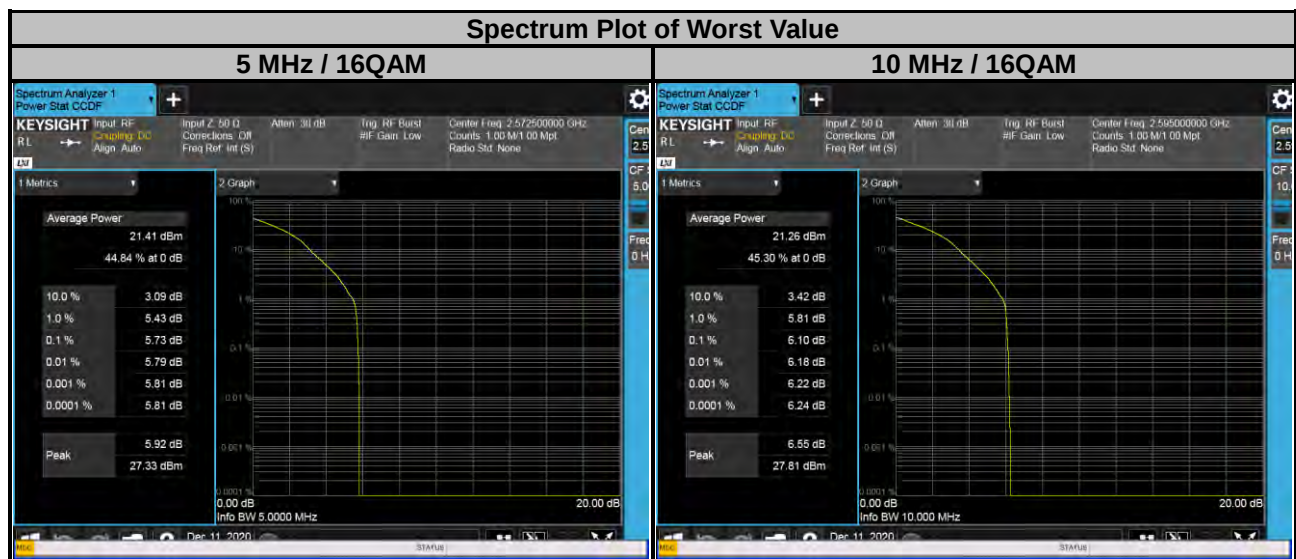

LTE Band 38

Channel Bandwidth: 15 MHz				Channel Bandwidth: 20 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
37825	2577.5	4.99	6.31	37850	2580.0	4.46	6.16
38000	2595.0	4.74	6.33	38000	2595.0	4.42	6.17
38175	2612.5	4.62	6.14	38150	2610.0	4.44	6.08


Spectrum Plot of Worst Value

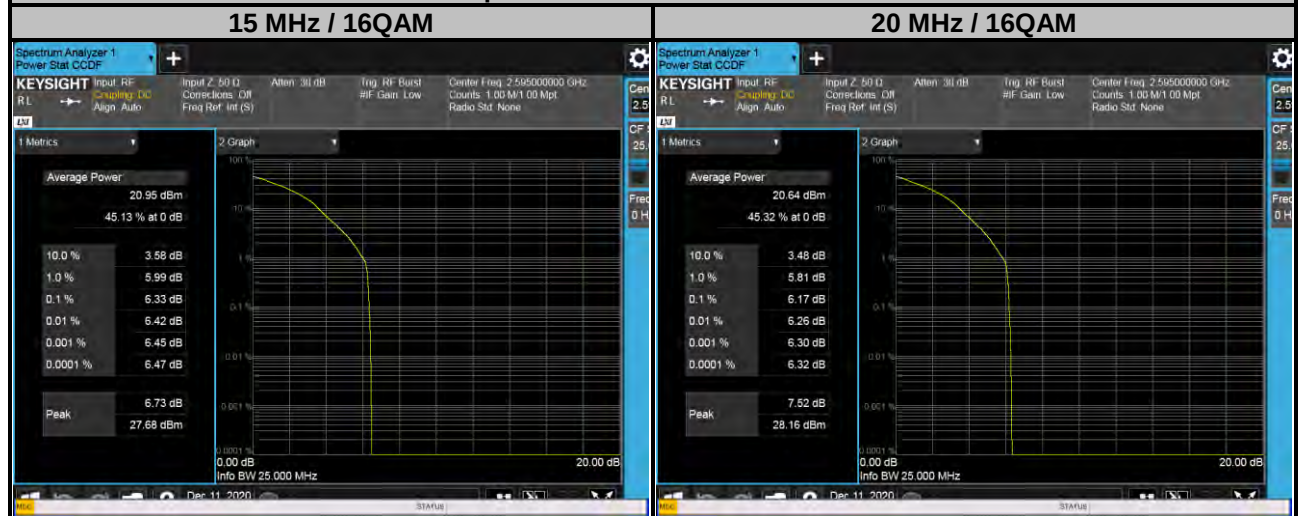

LTE Band 41

Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
39675	2498.5	4.54	6.44	39700	2501.0	5.38	6.10
40620	2593.0	4.51	6.23	40620	2593.0	4.63	6.19
41565	2687.5	4.61	6.06	41540	2685.0	4.74	6.28


Spectrum Plot of Worst Value

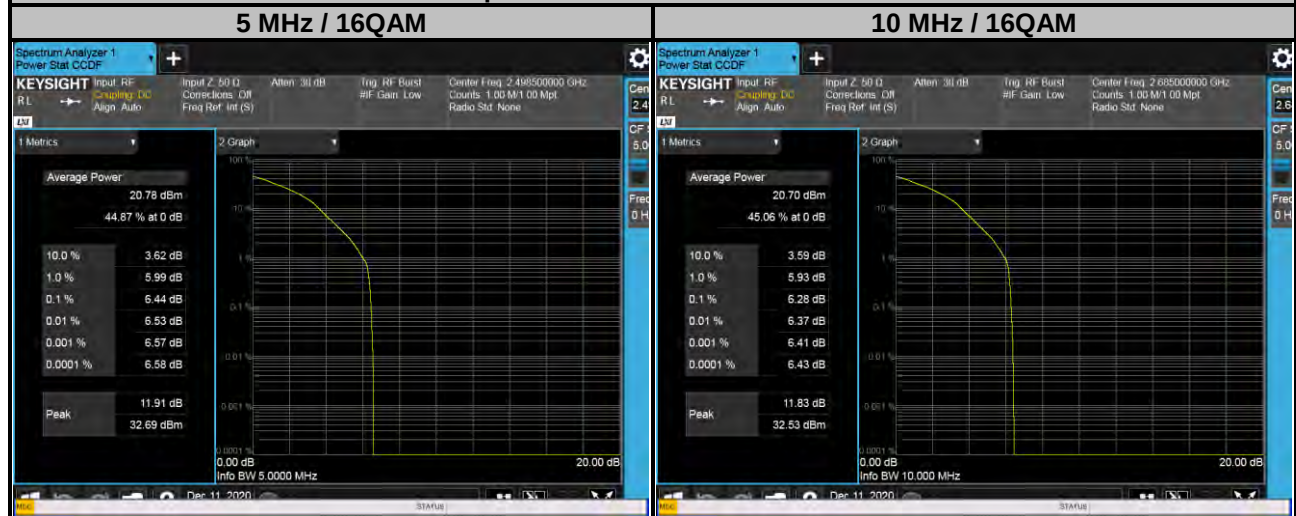

LTE Band 41

Channel Bandwidth: 15 MHz				Channel Bandwidth: 20 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
39725	2503.5	4.48	5.58	39750	2506.0	4.64	6.41
40620	2593.0	4.42	5.34	40620	2593.0	4.50	6.35
41515	2682.5	4.13	5.58	41490	2680.0	4.17	6.08

Spectrum Plot of Worst Value

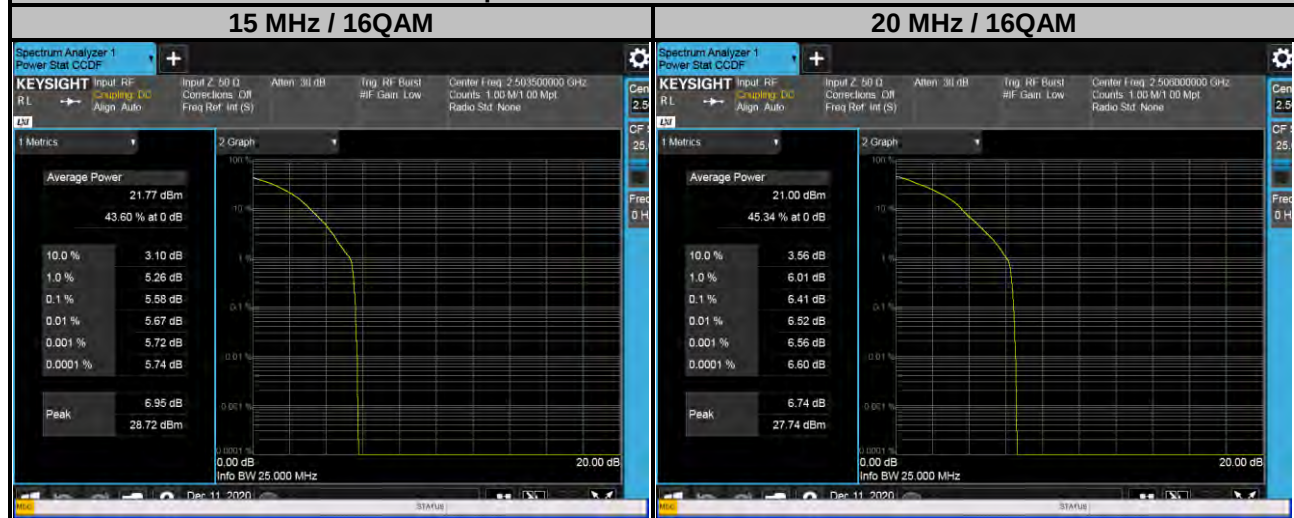


4.7 Conducted Spurious Emissions

4.7.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $55 + 10 \log (P)$ dB. The limit of emission is equal to -25 dBm.


4.7.2 Test Setup

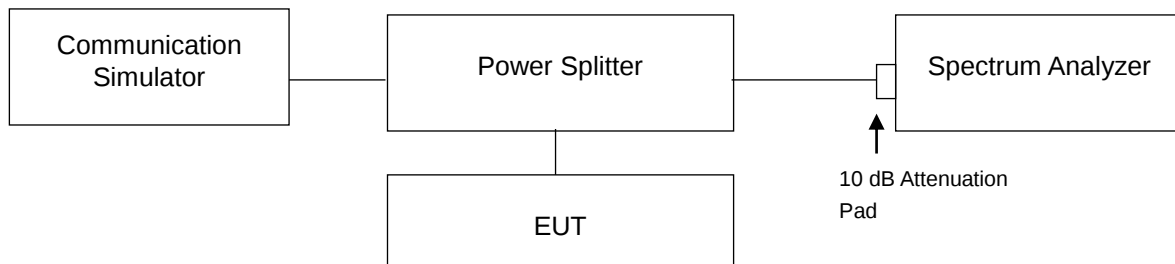


4.7.3 Test Procedure

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz to 1 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz are used for conducted emission measurement.
- Measuring frequency range is from 1 GHz to 26 / 27 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz are used for conducted emission measurement.


4.7.4 Test Results

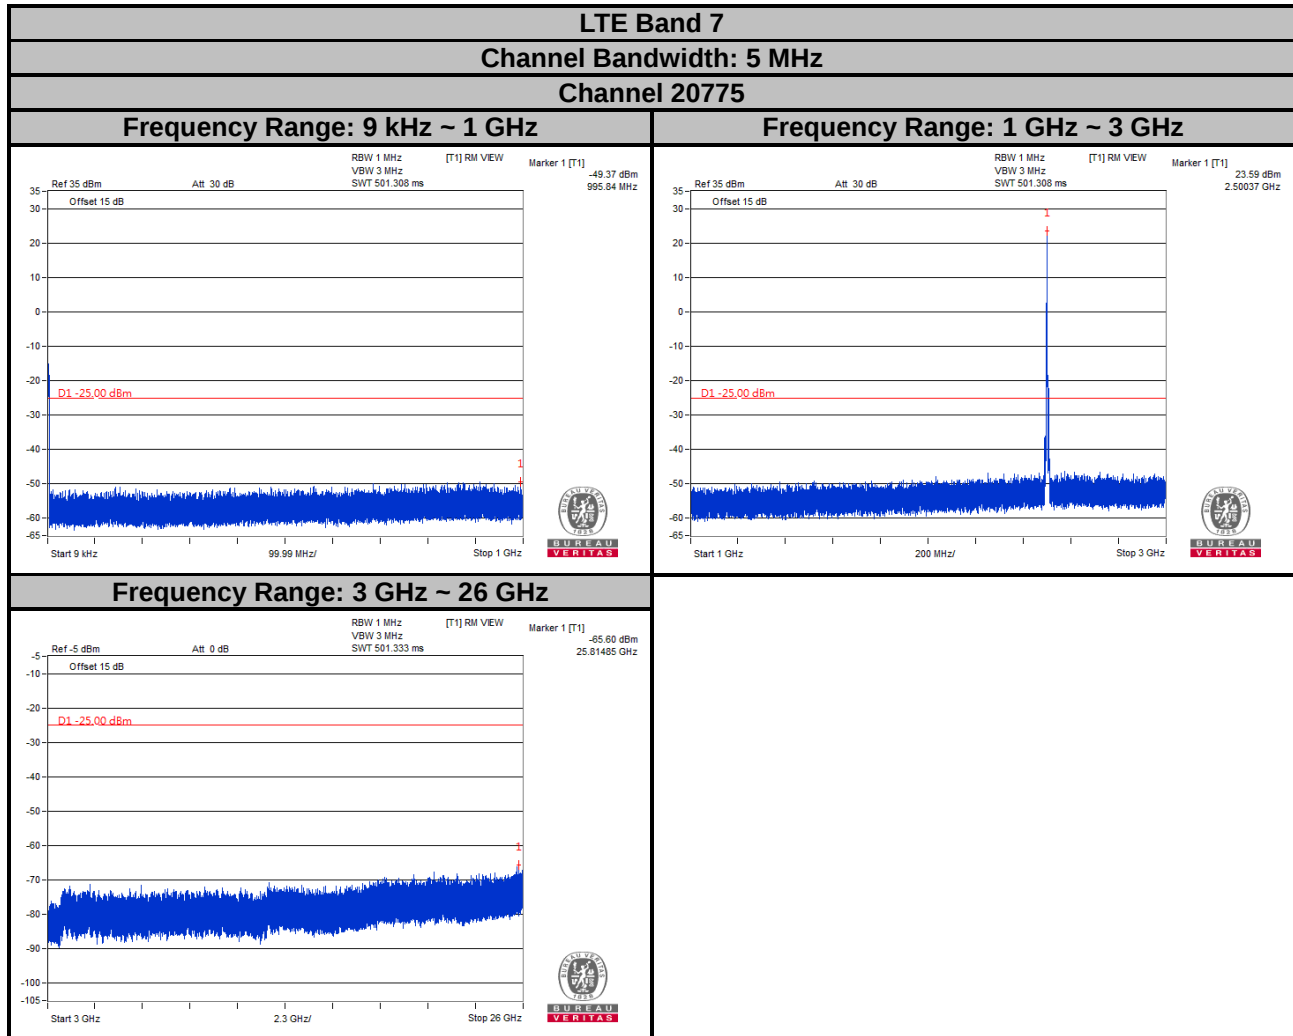


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

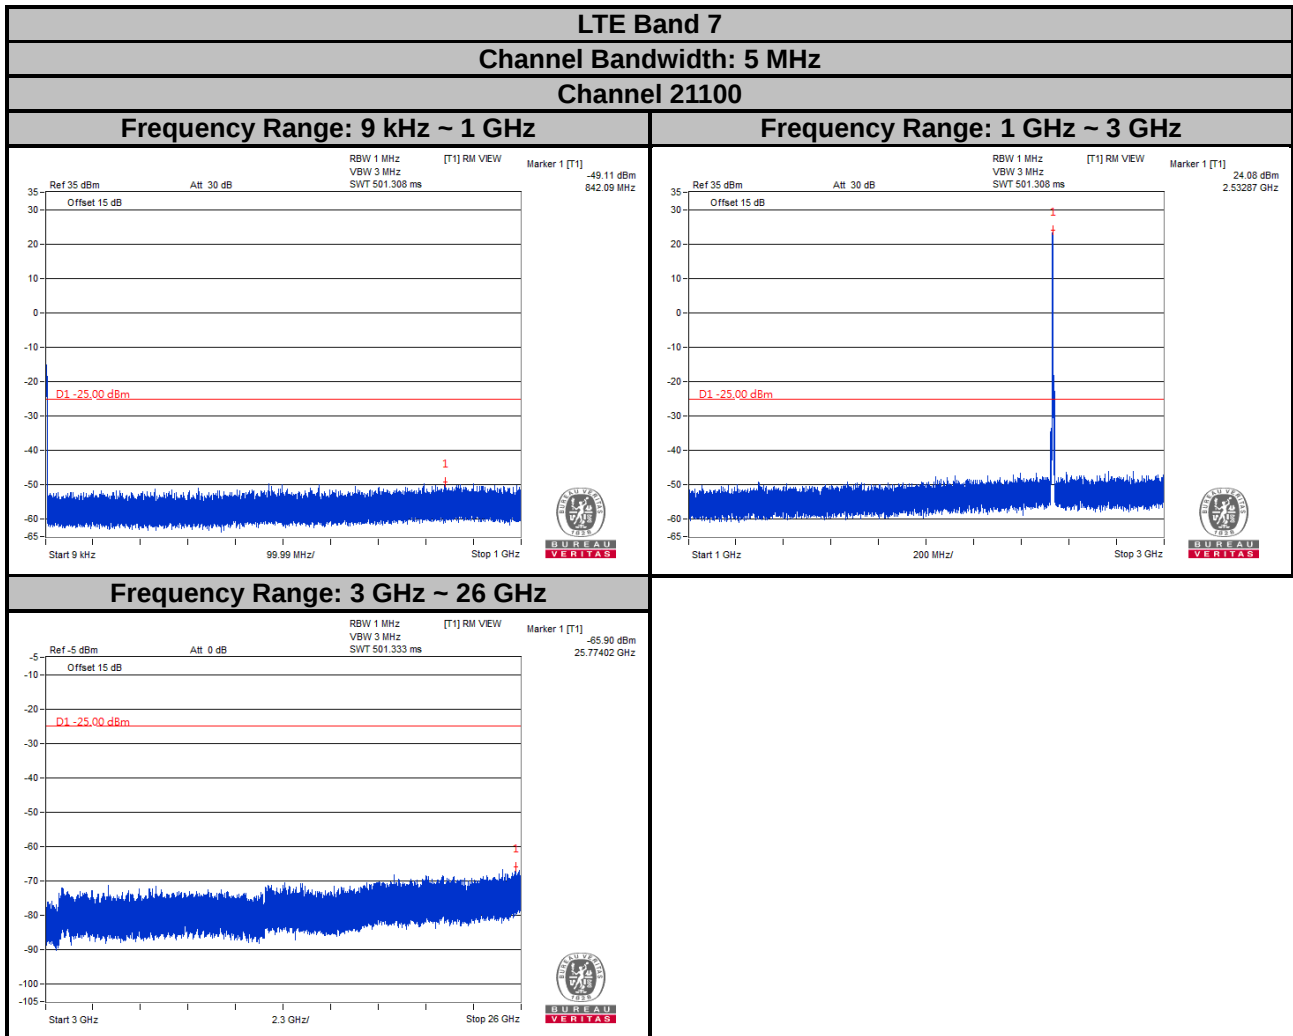


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

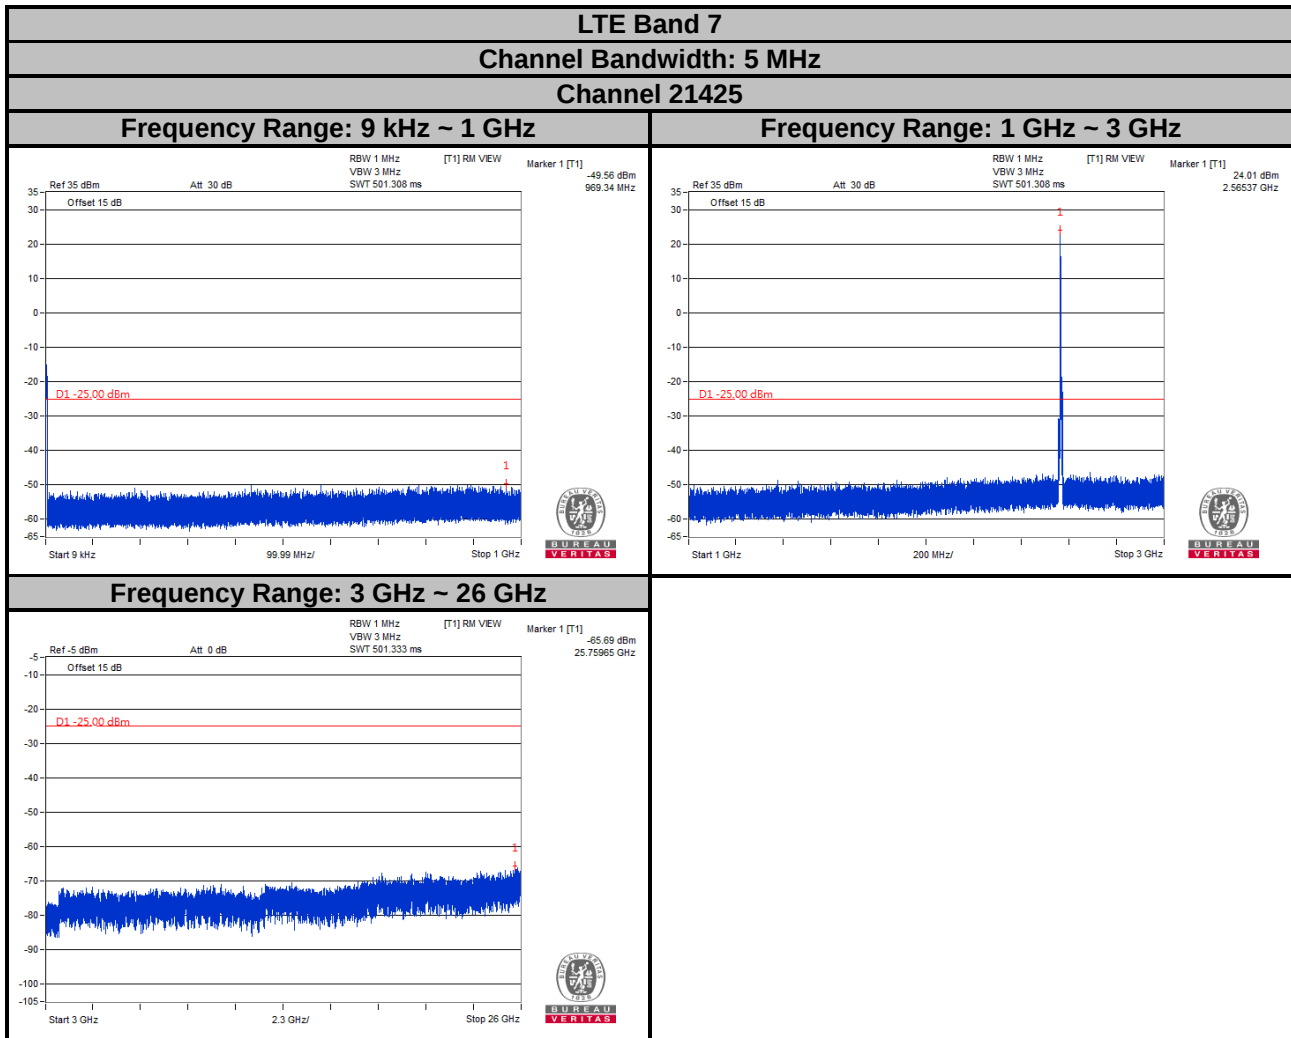


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

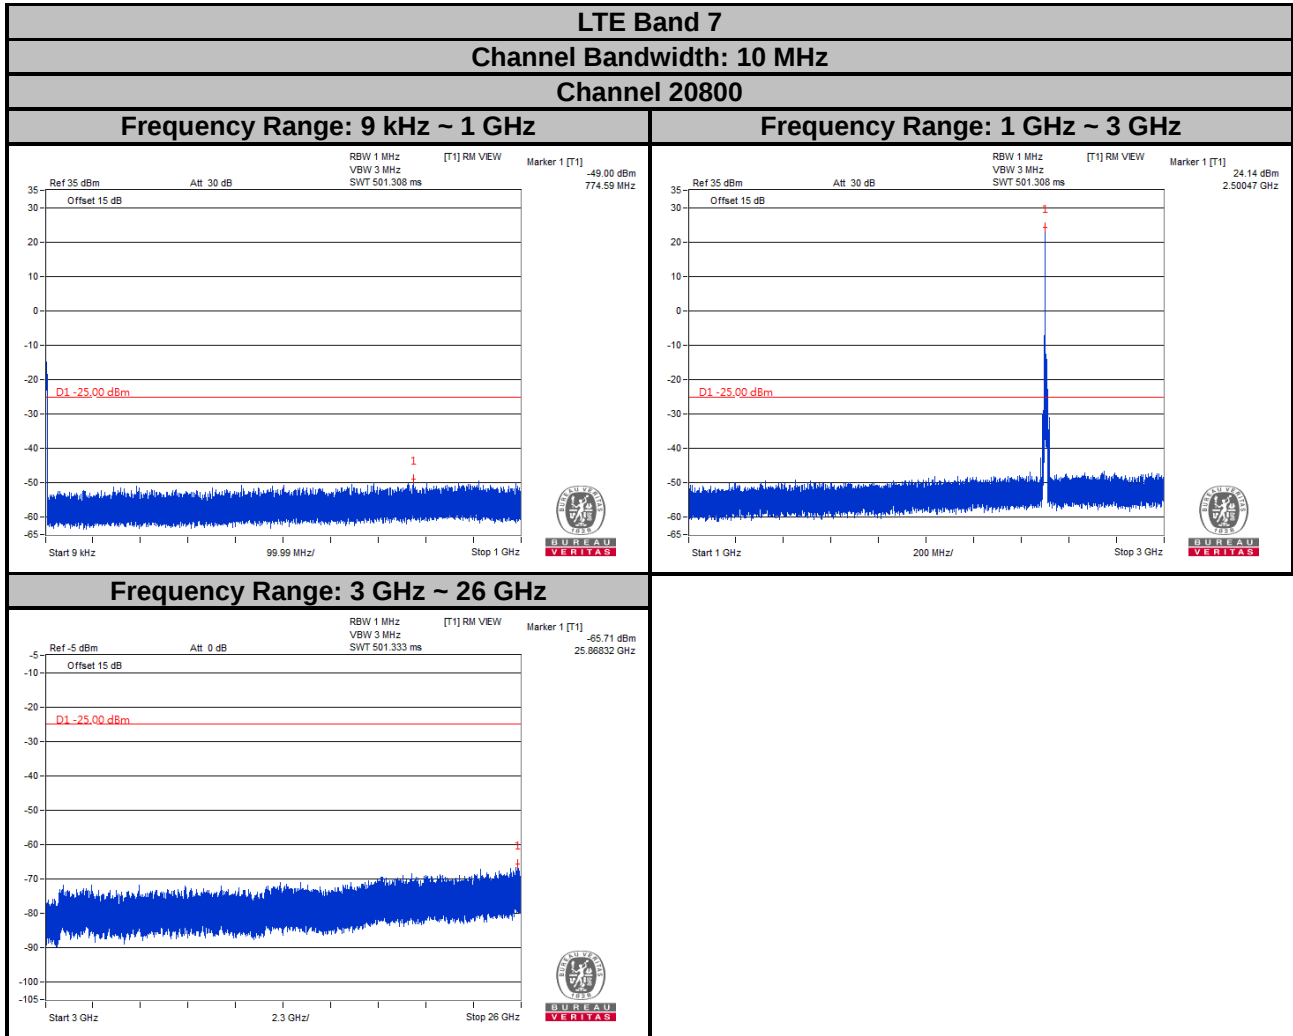


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

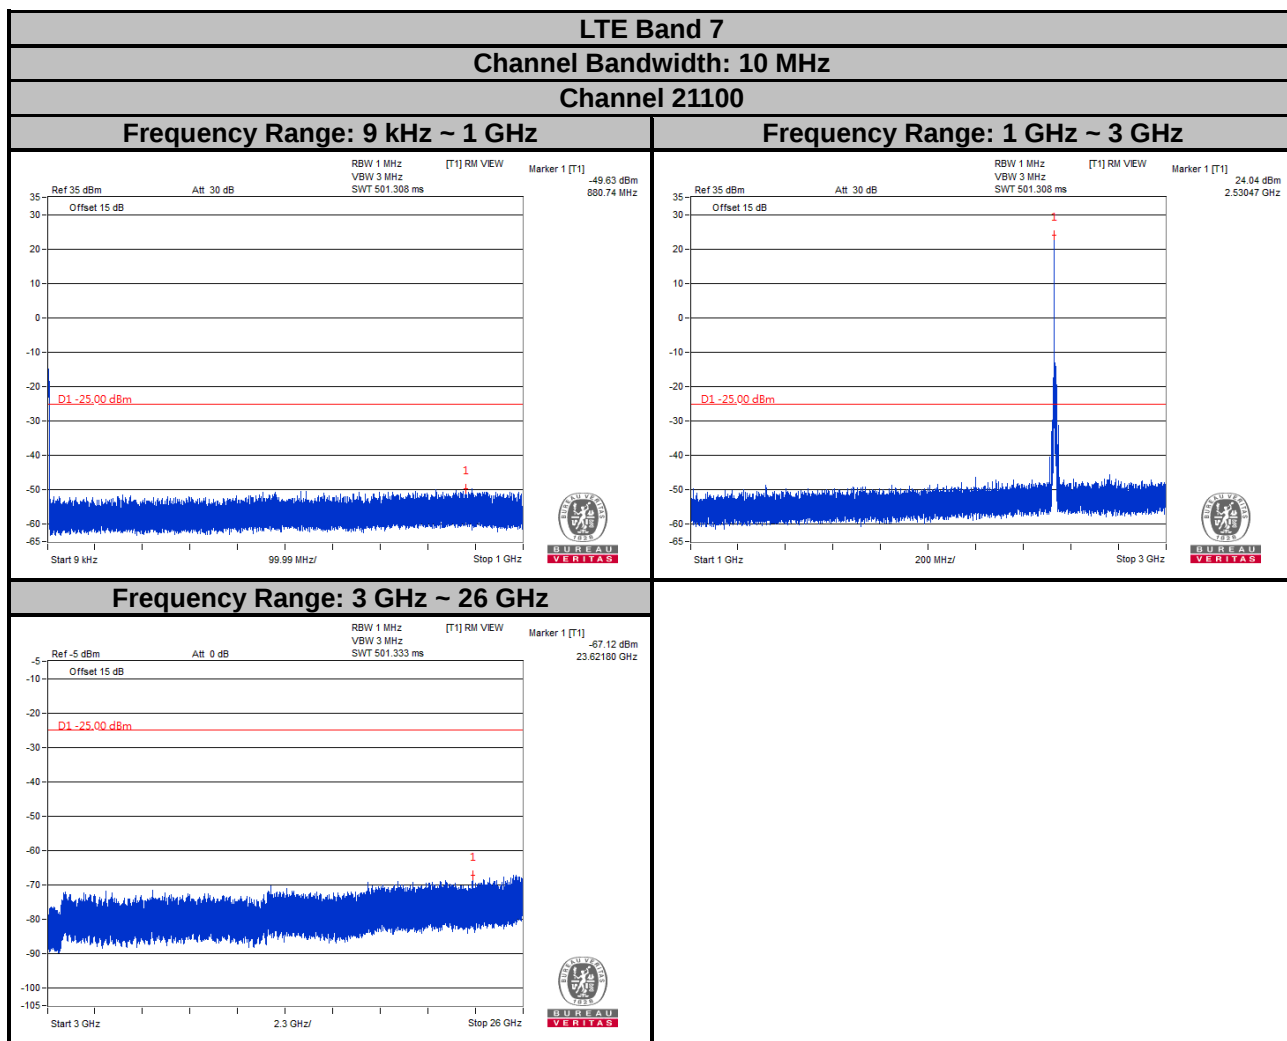


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

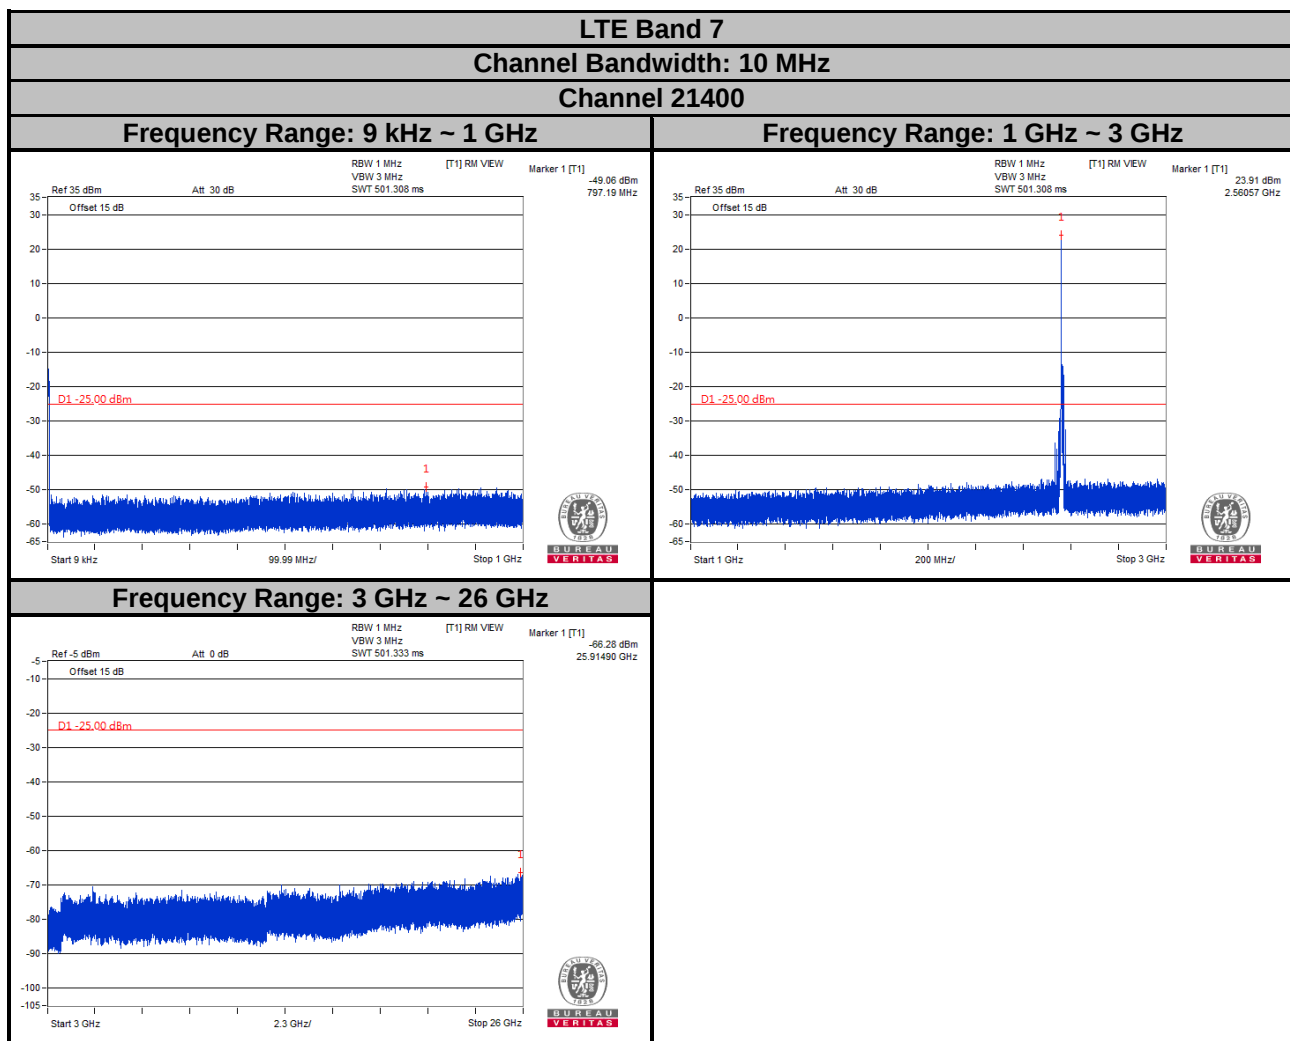


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

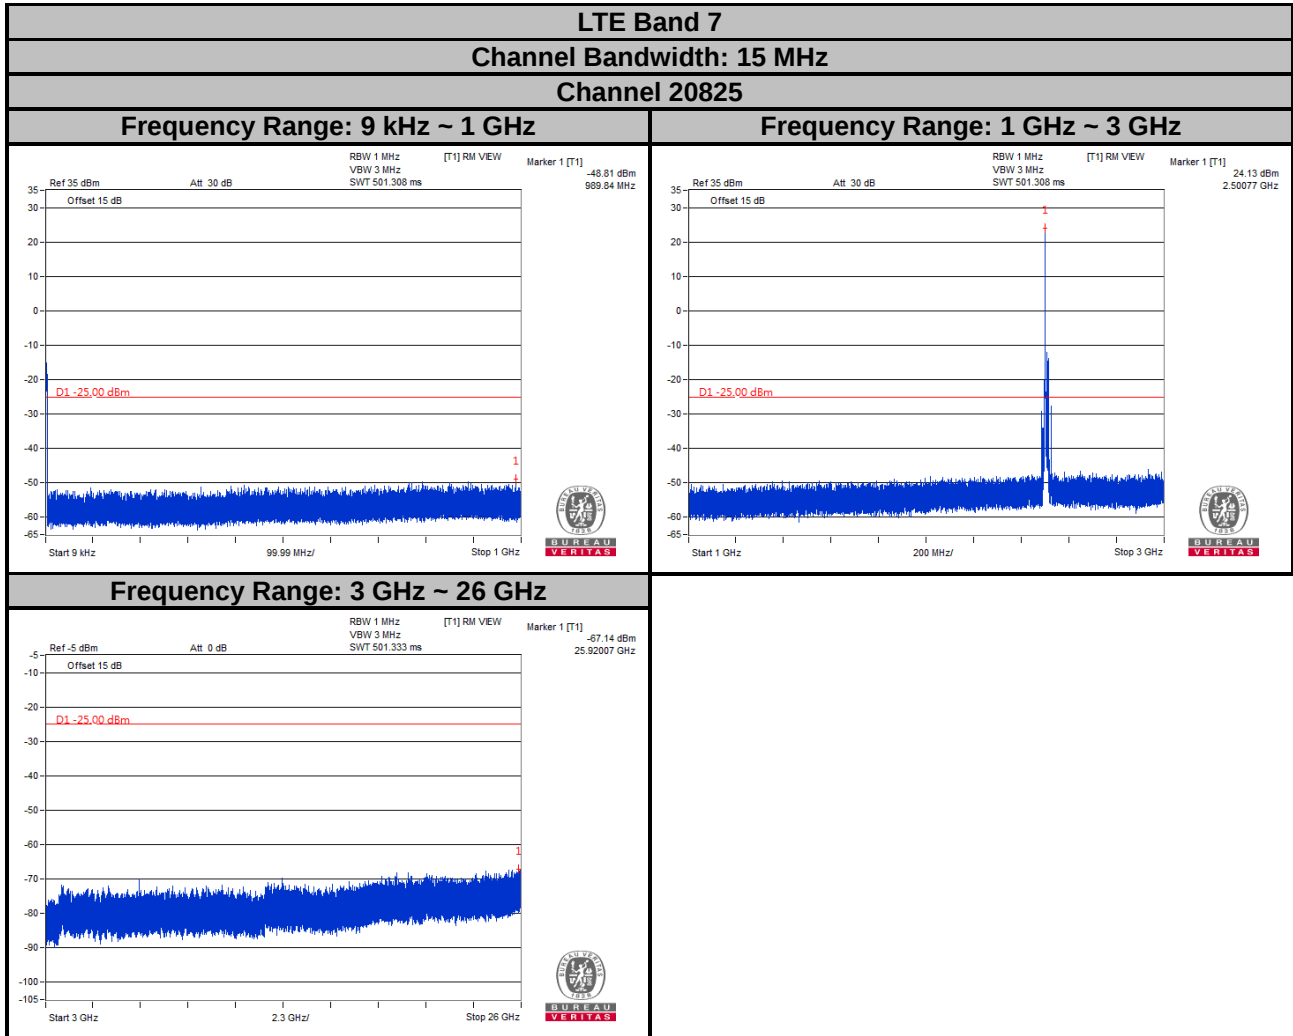


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

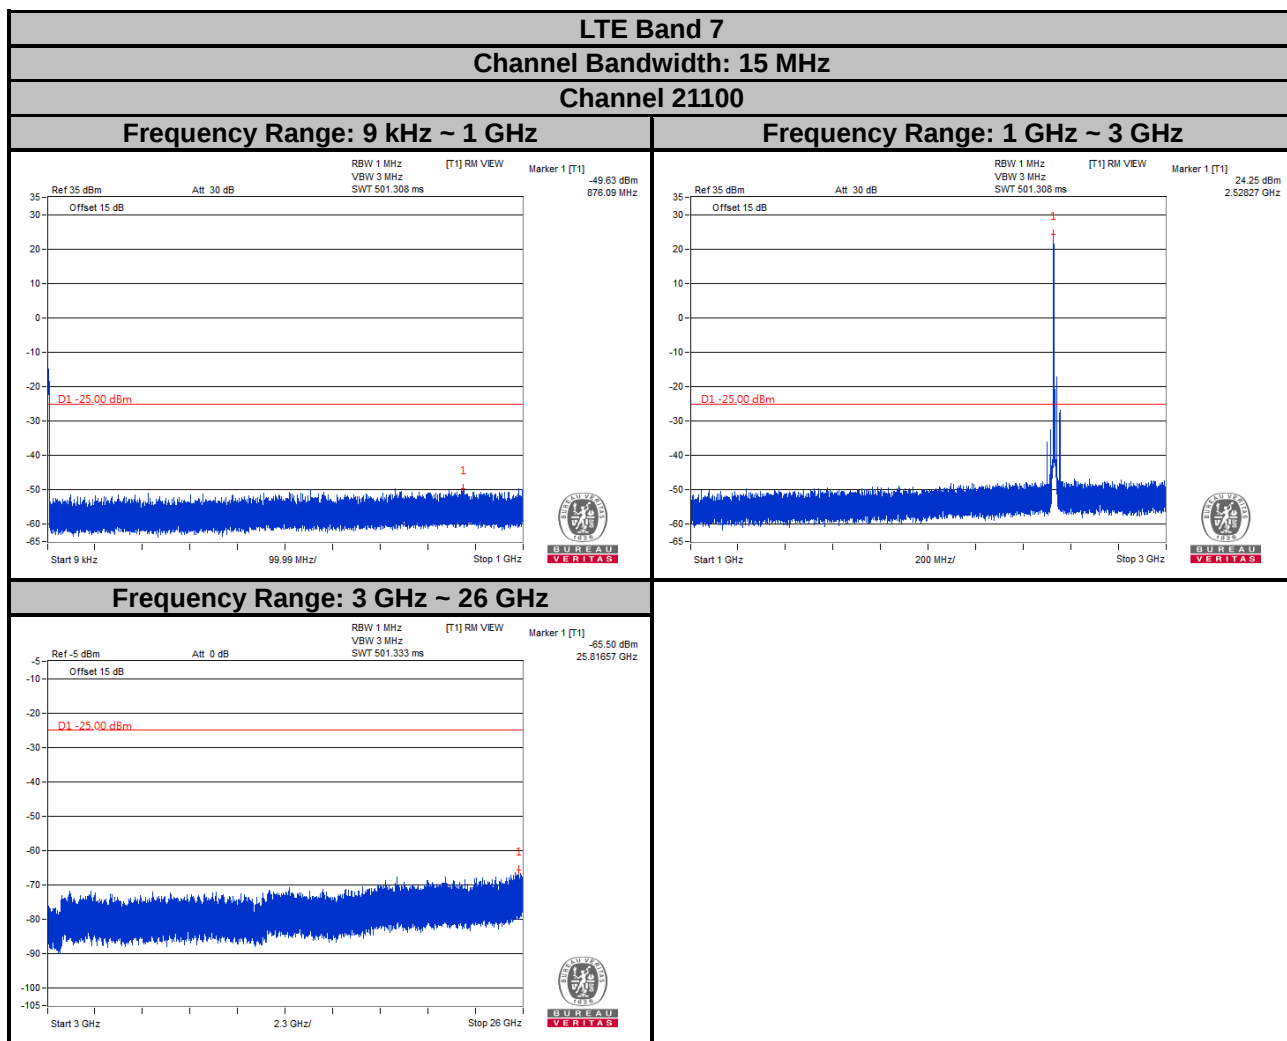


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

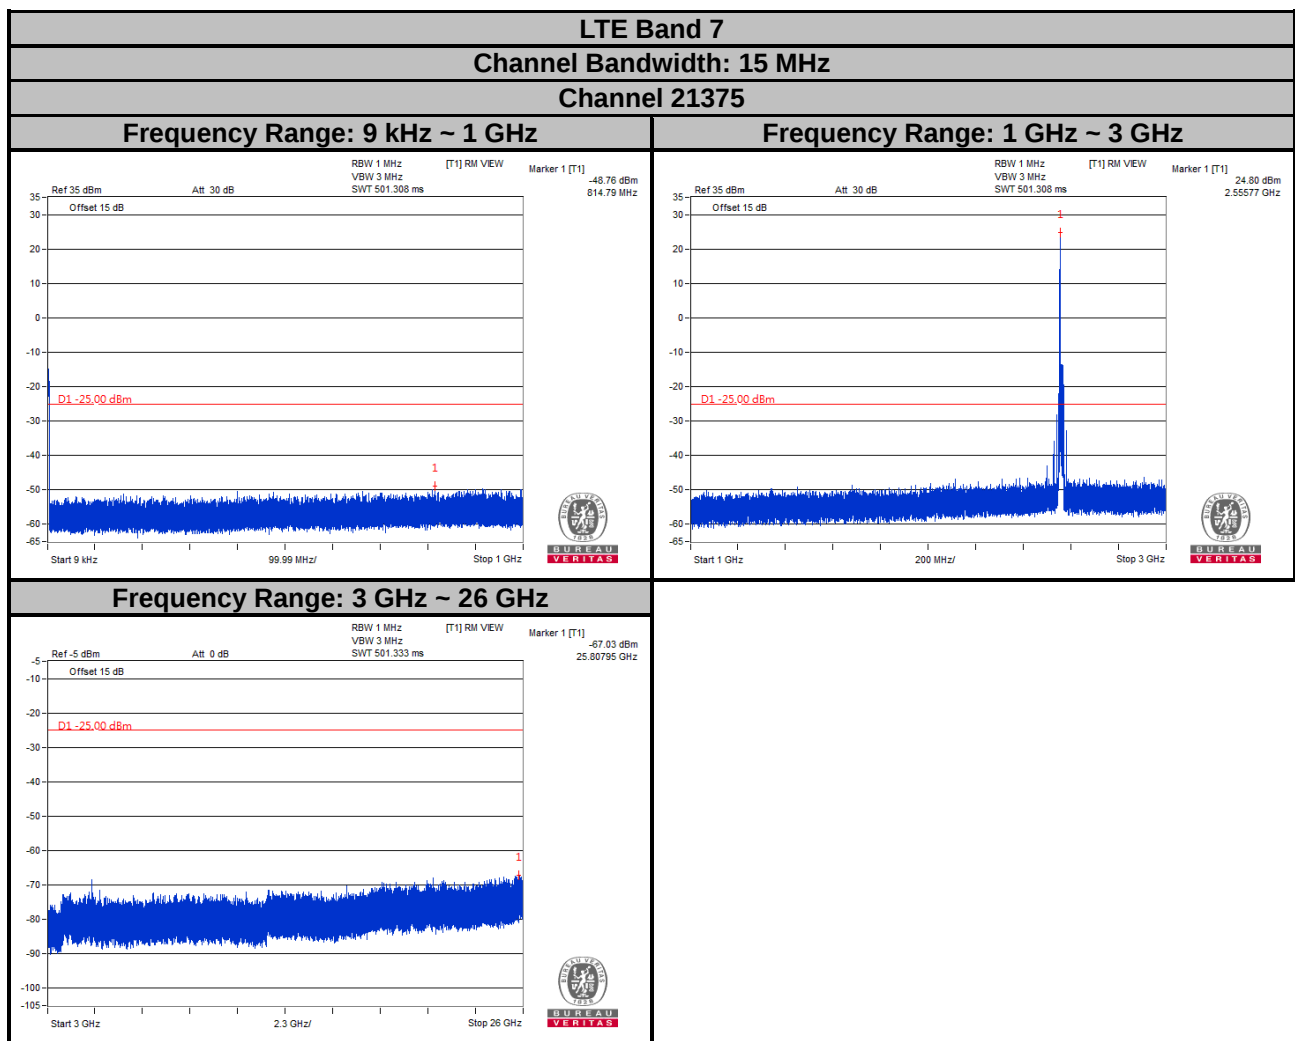


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

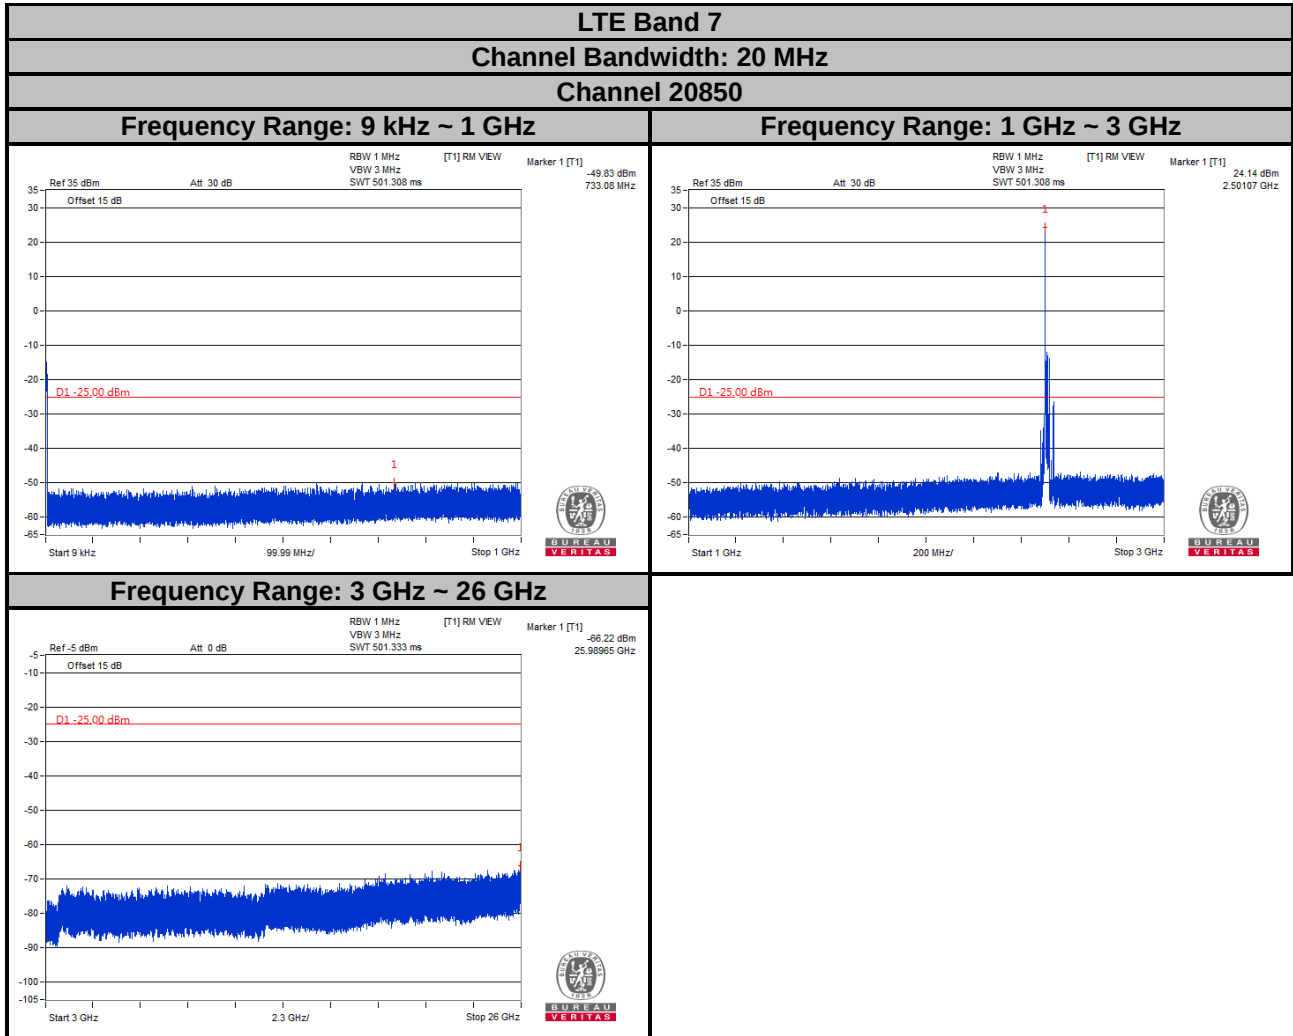


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

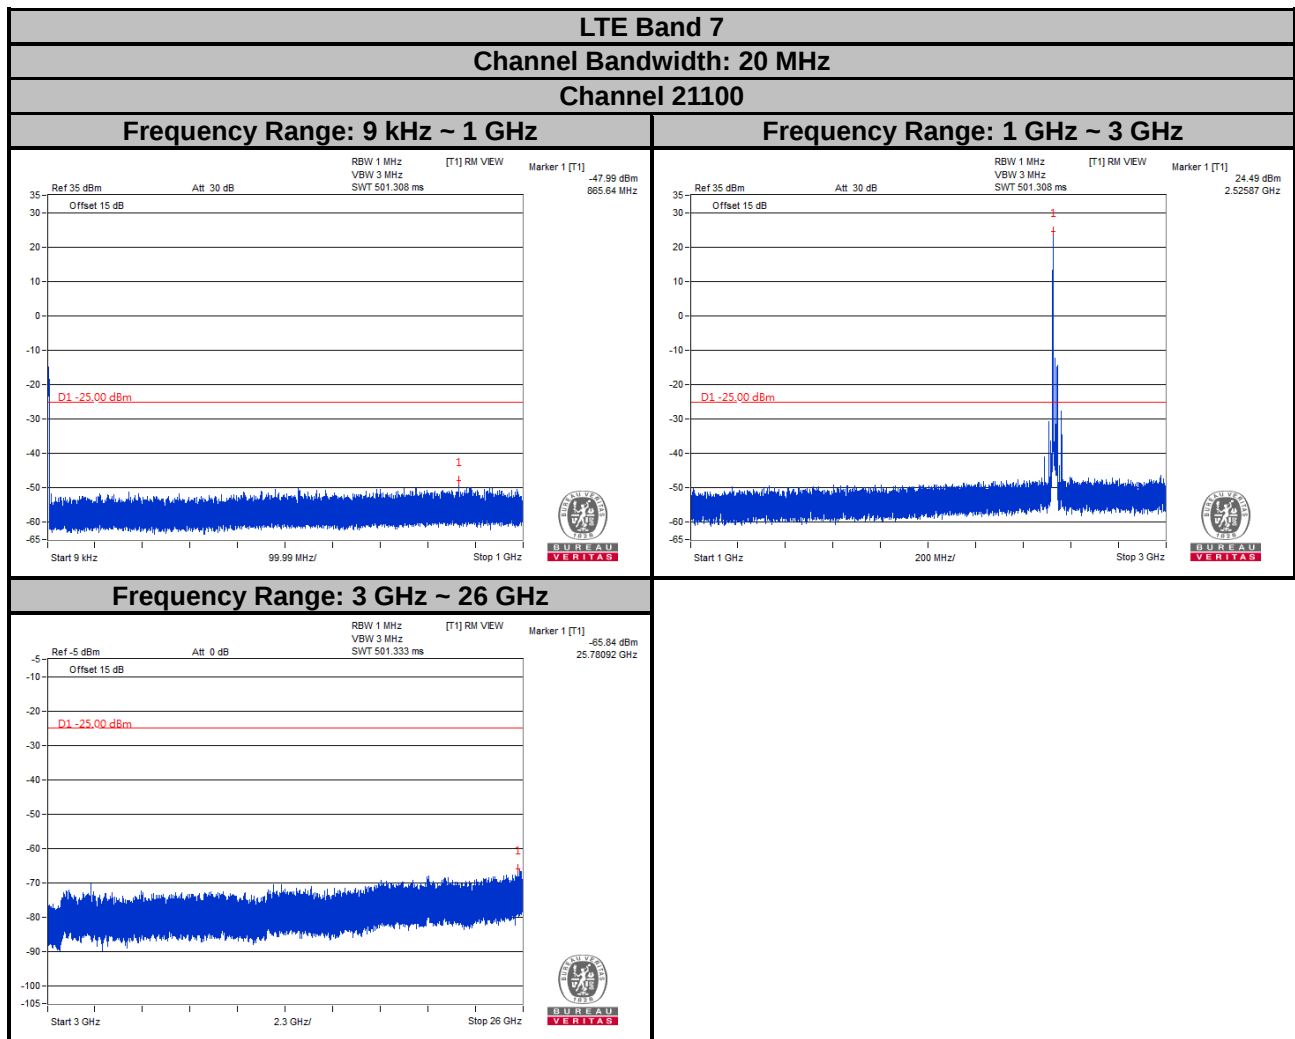


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

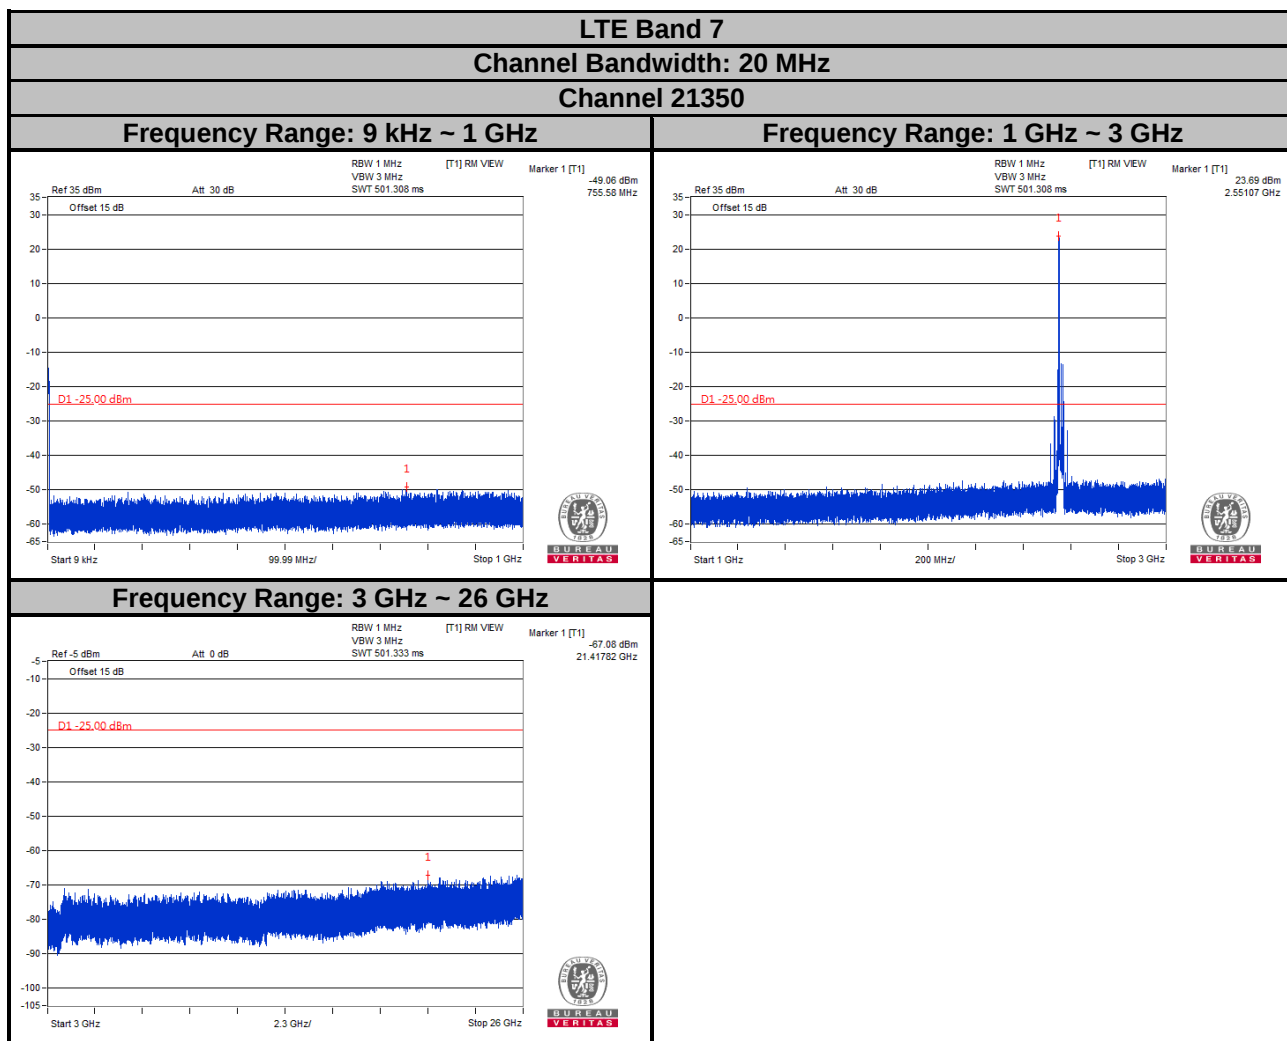


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

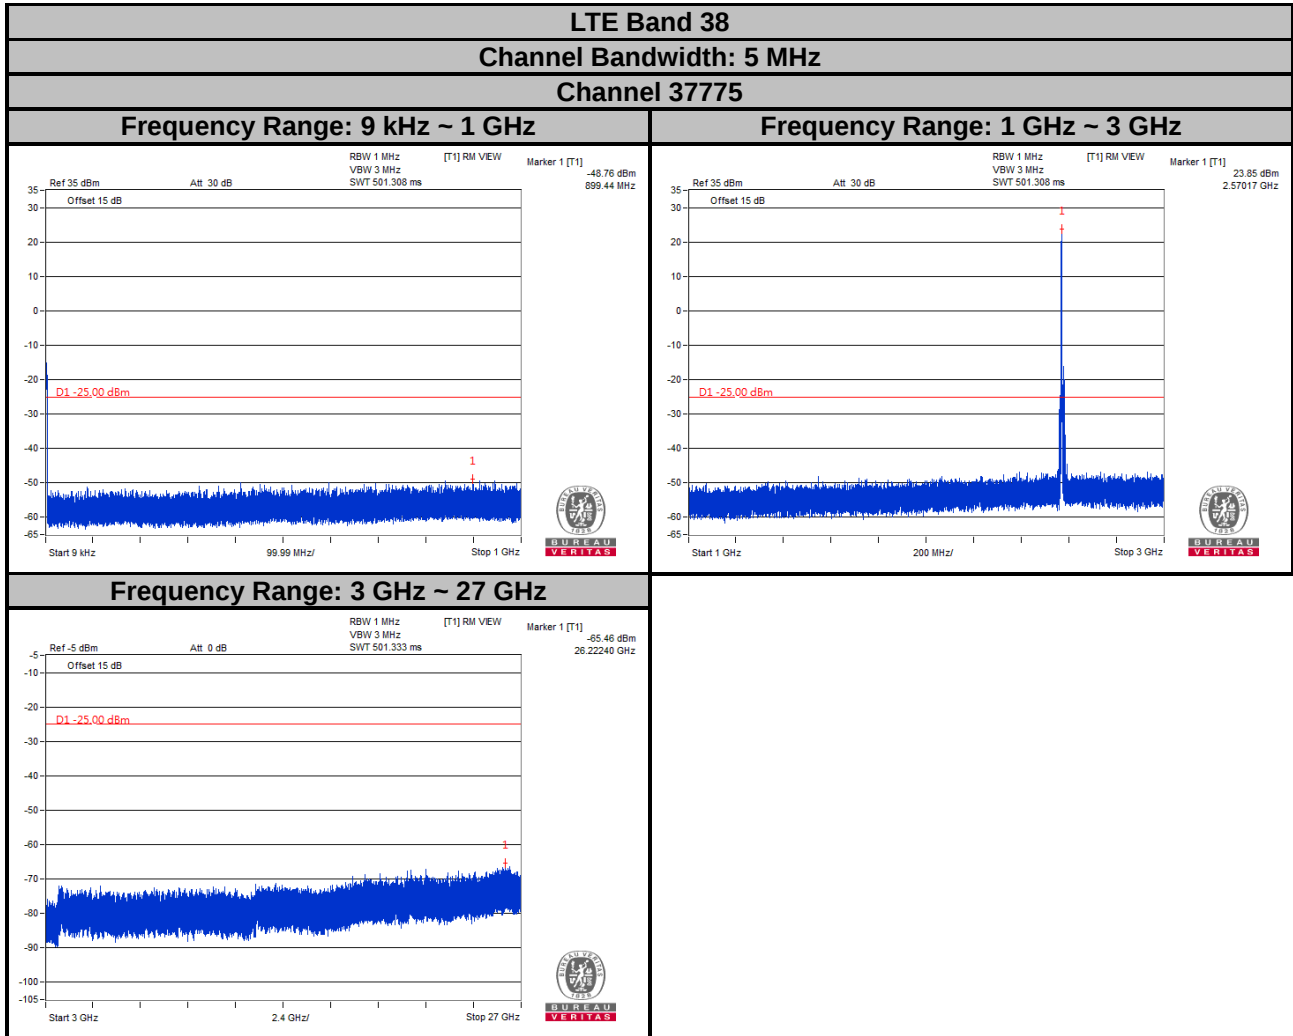


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

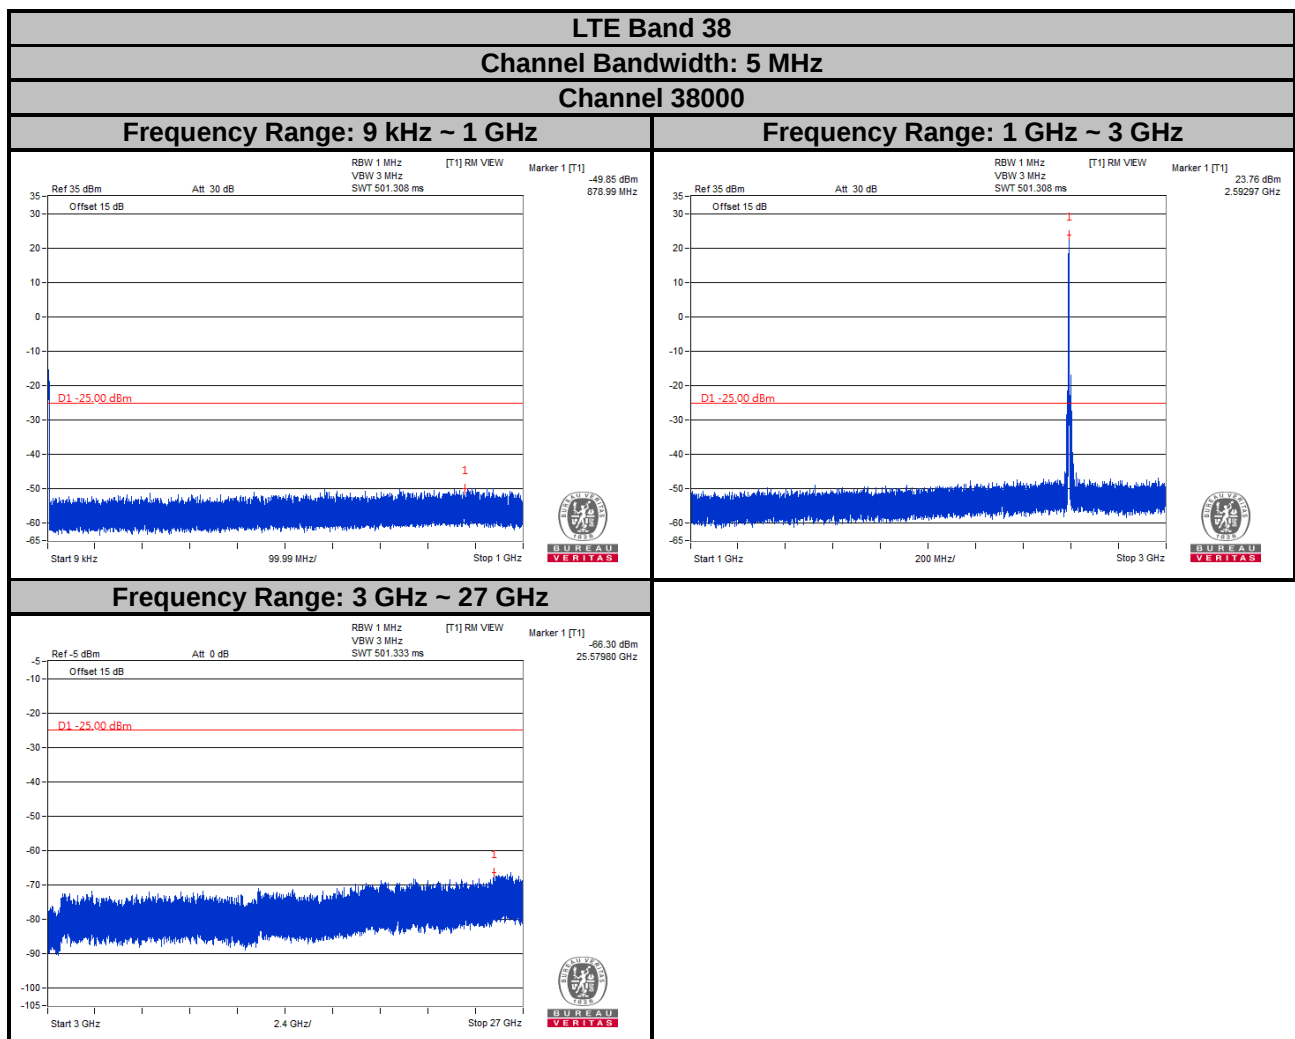


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

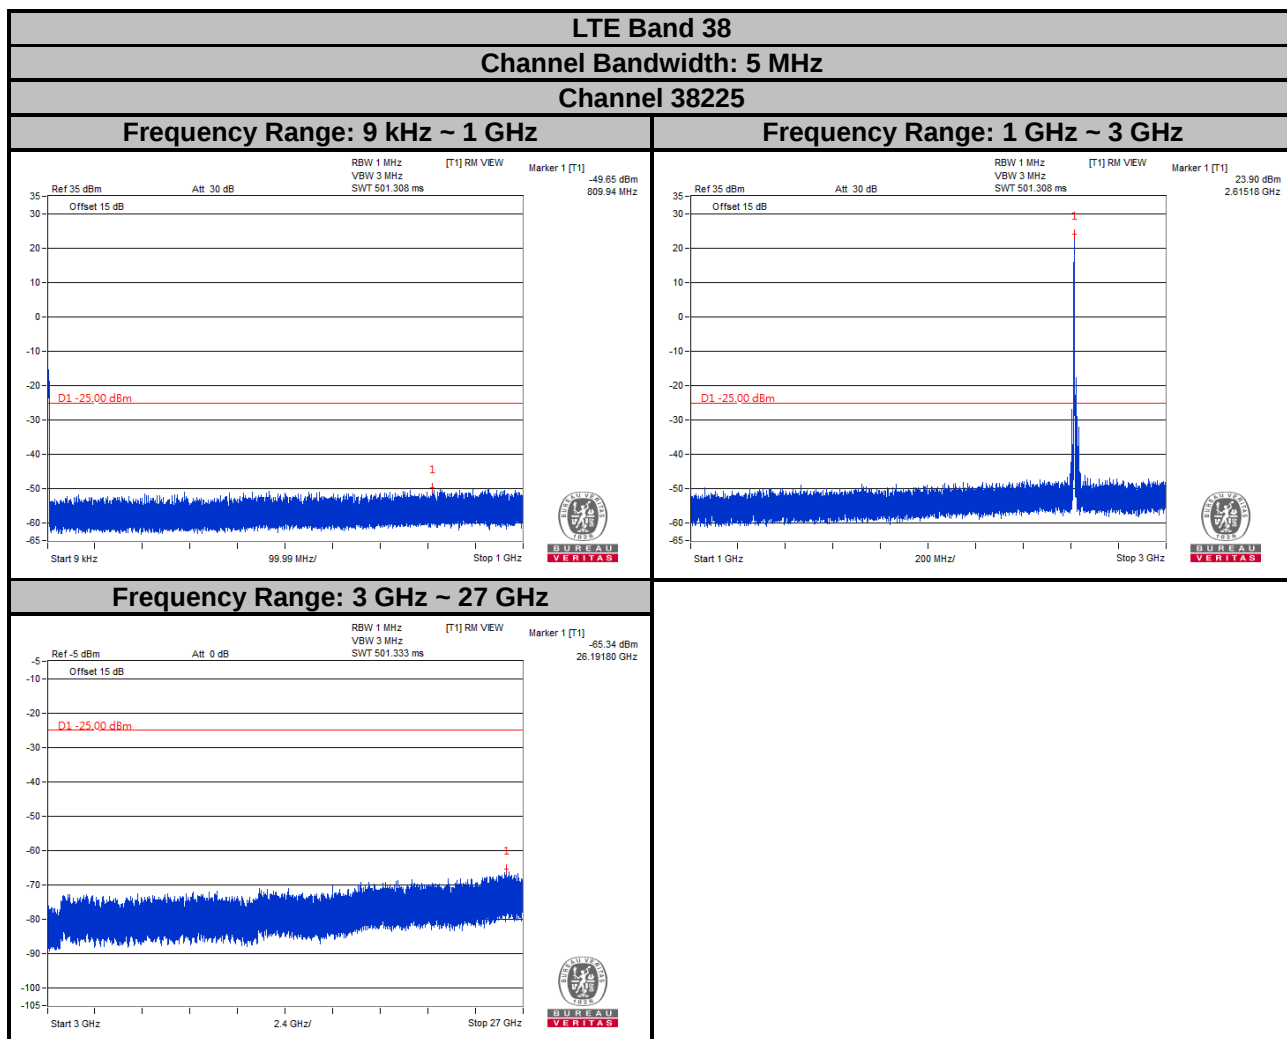


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

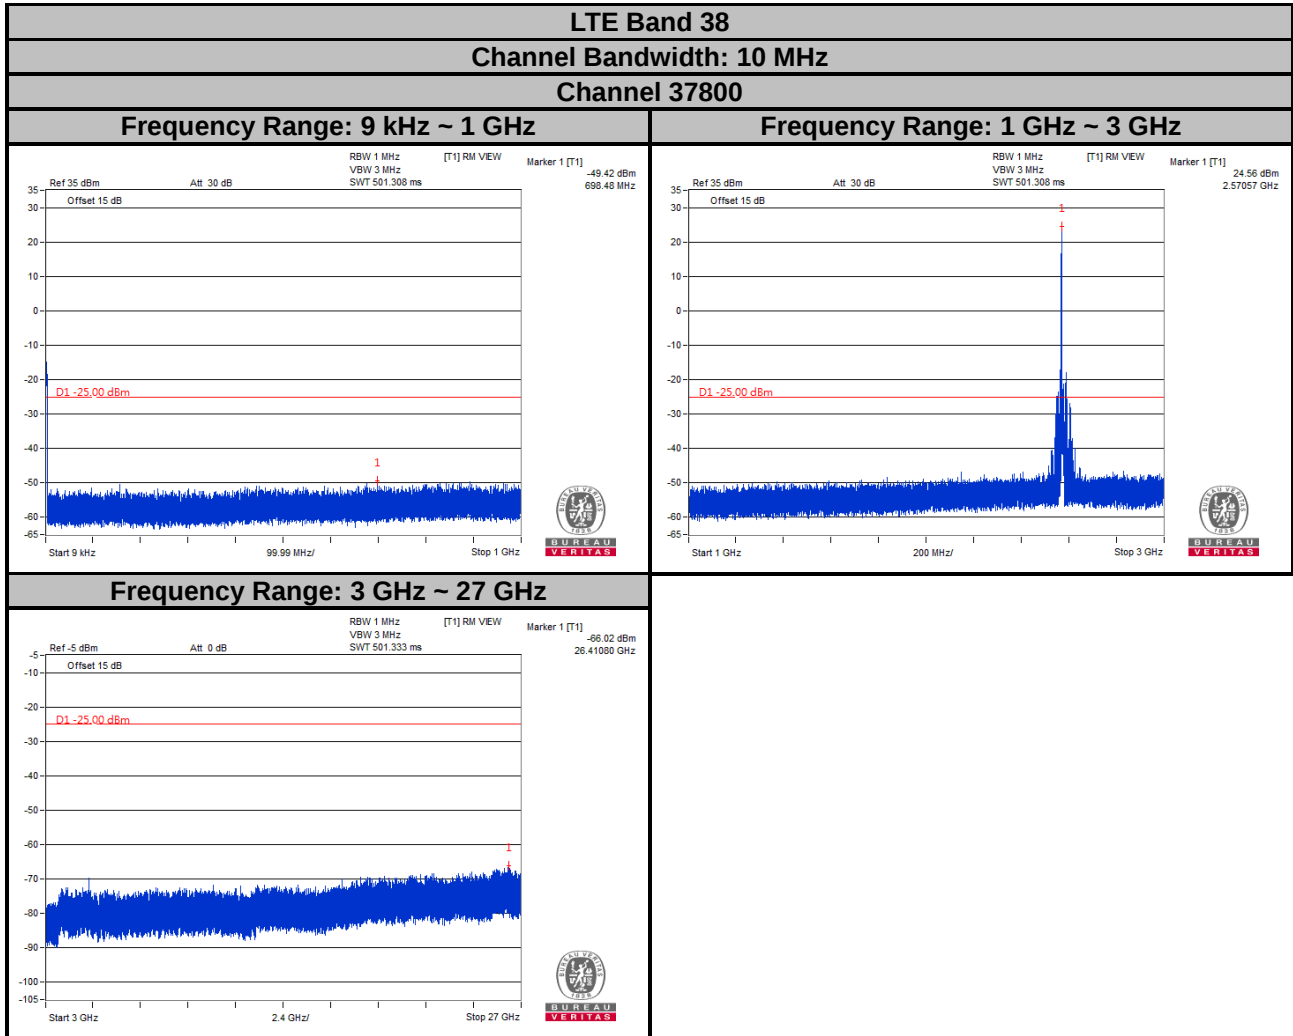


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

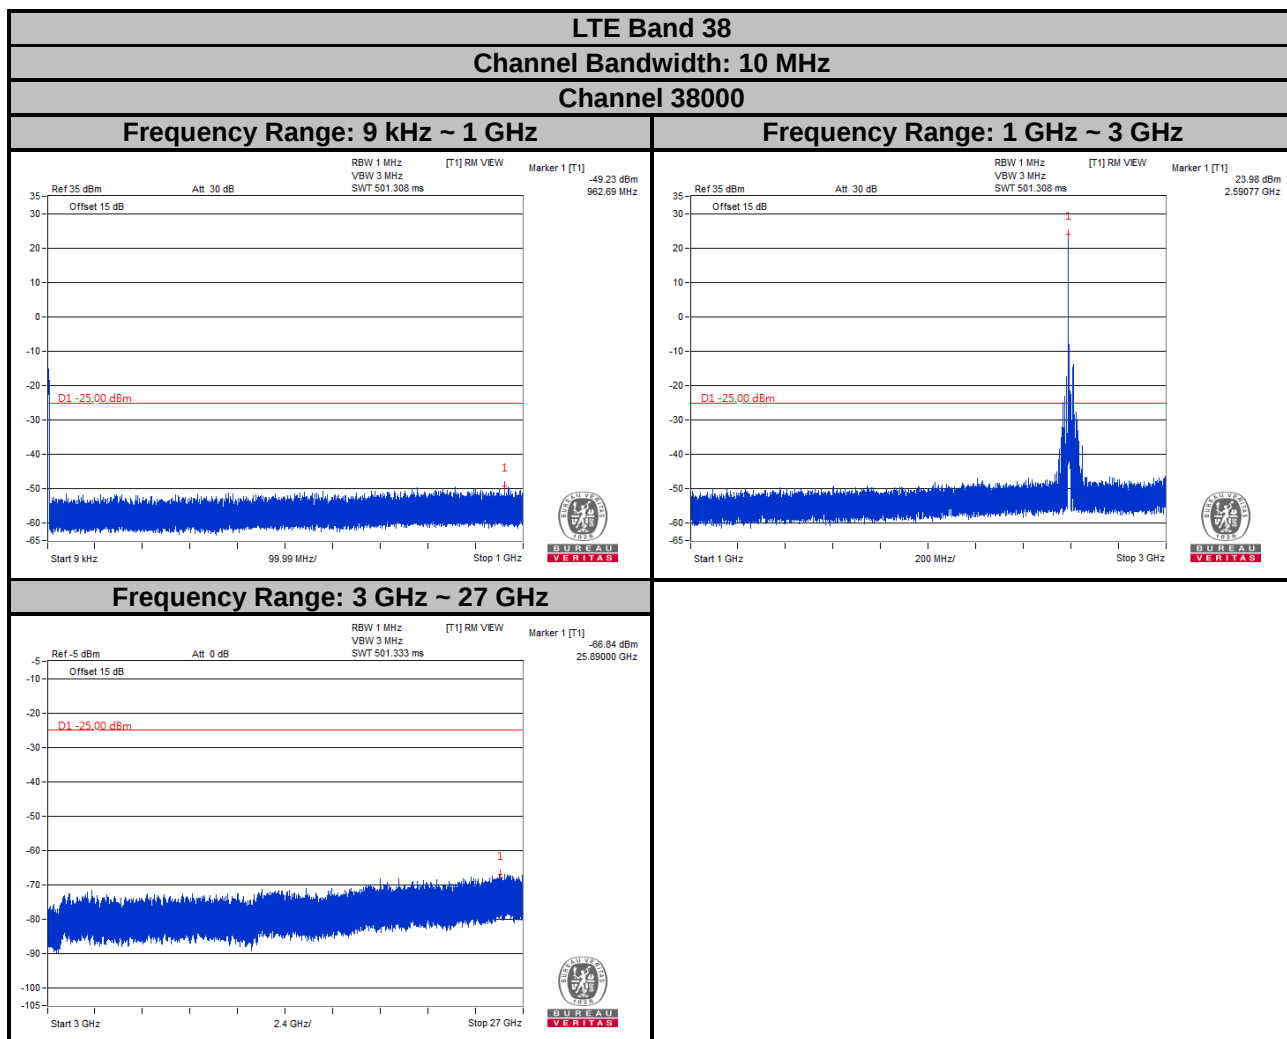


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

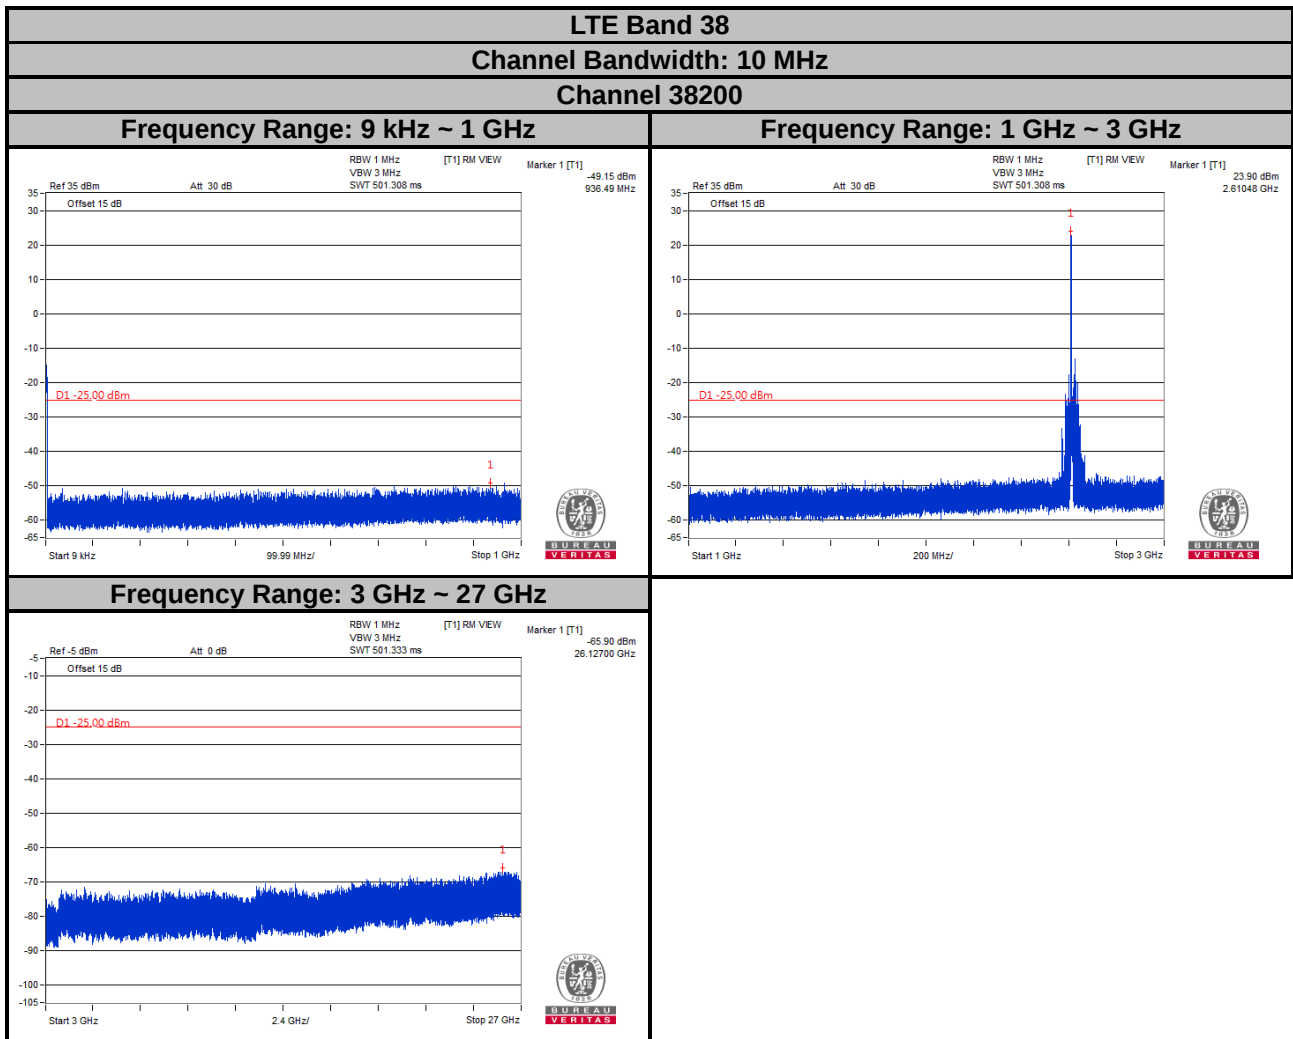


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

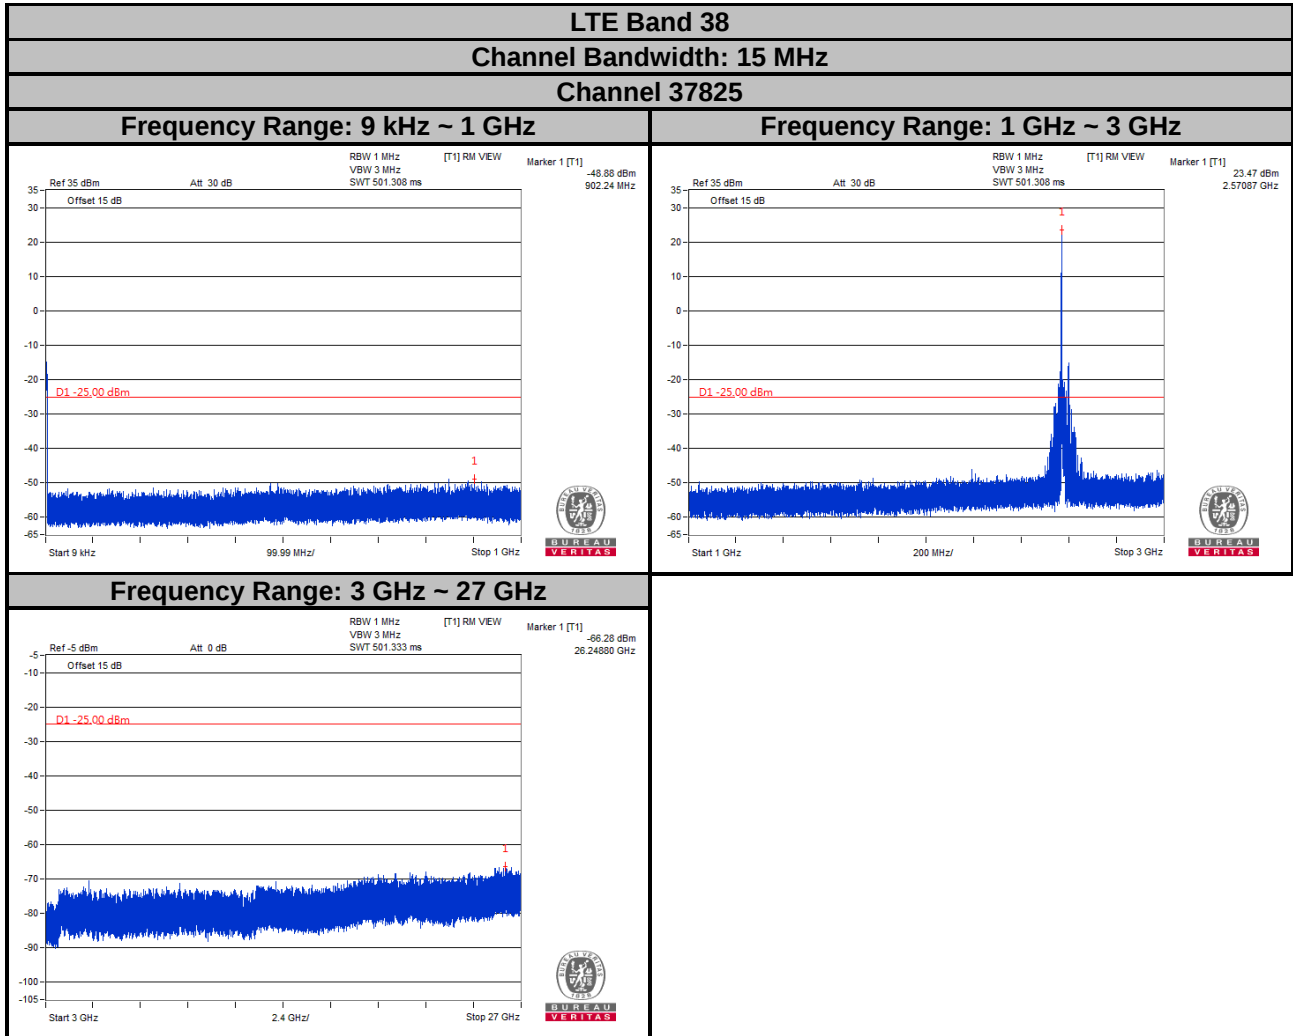


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

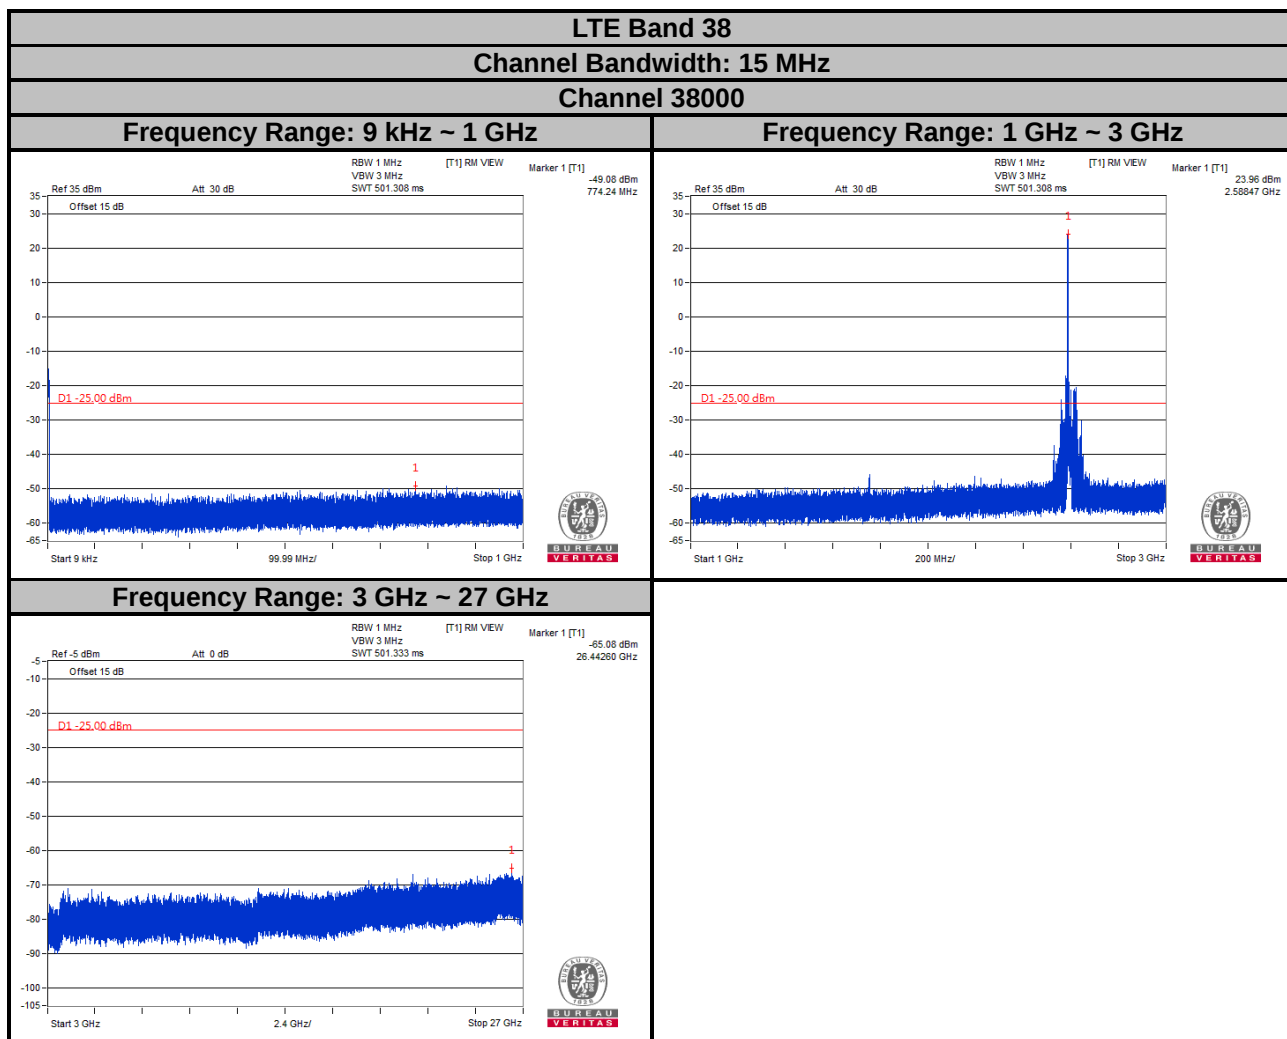


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

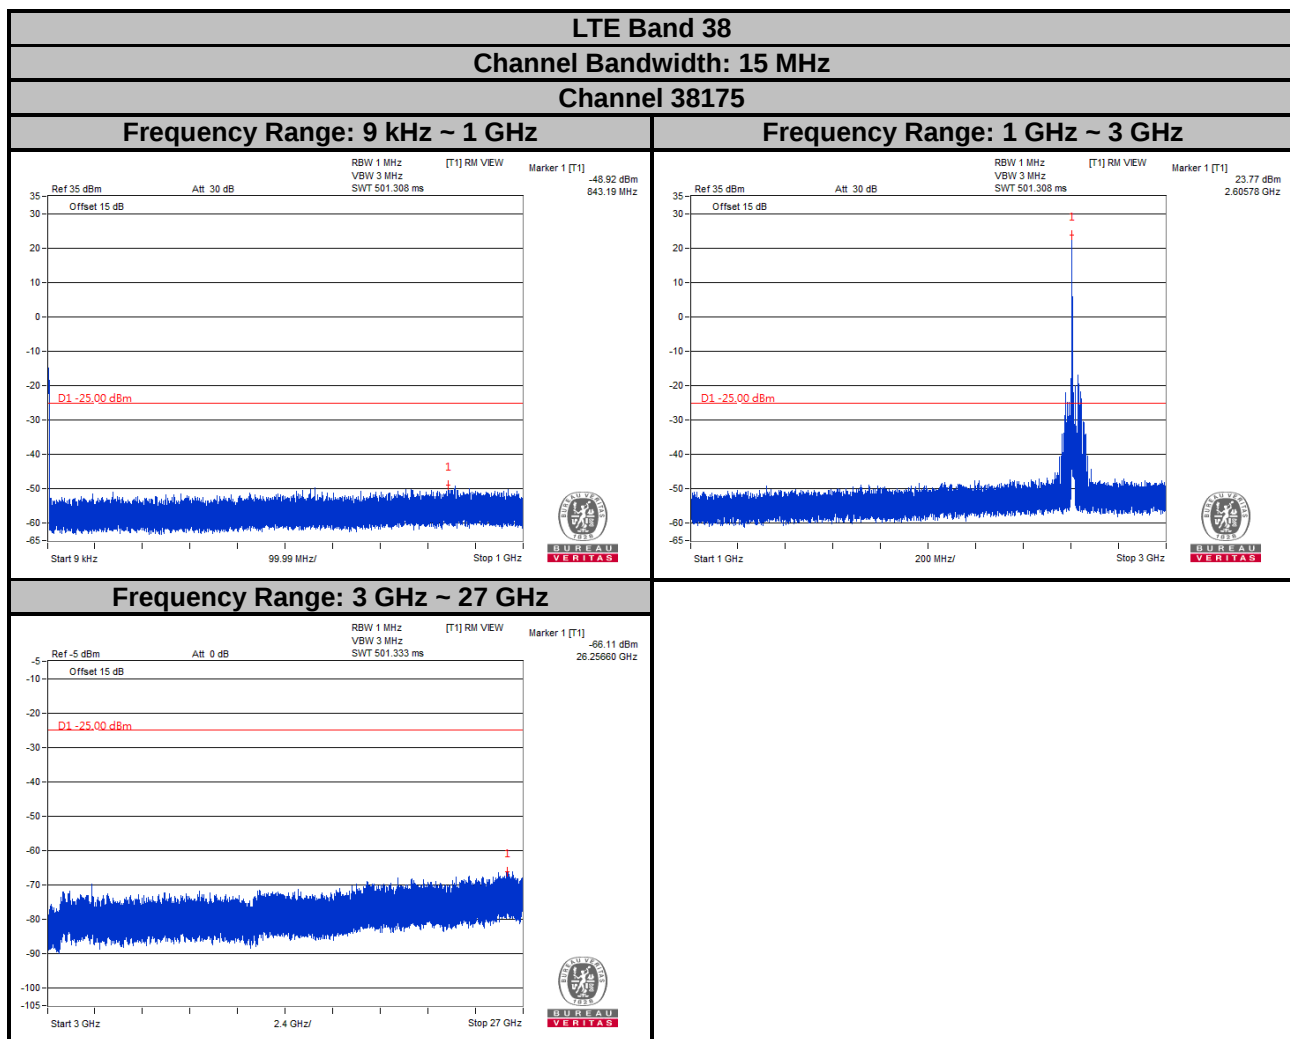

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

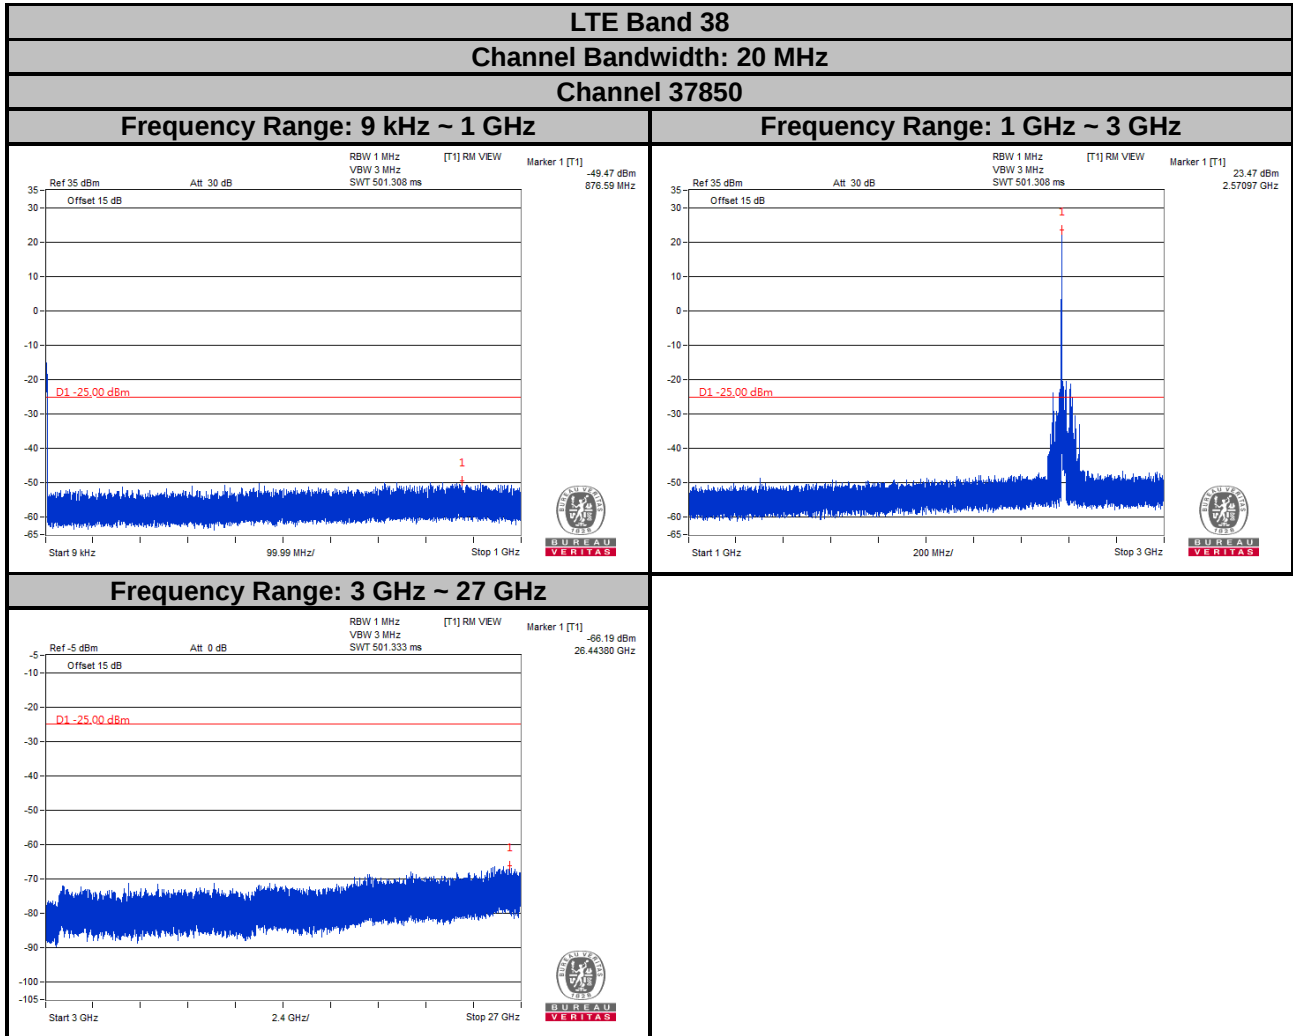

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

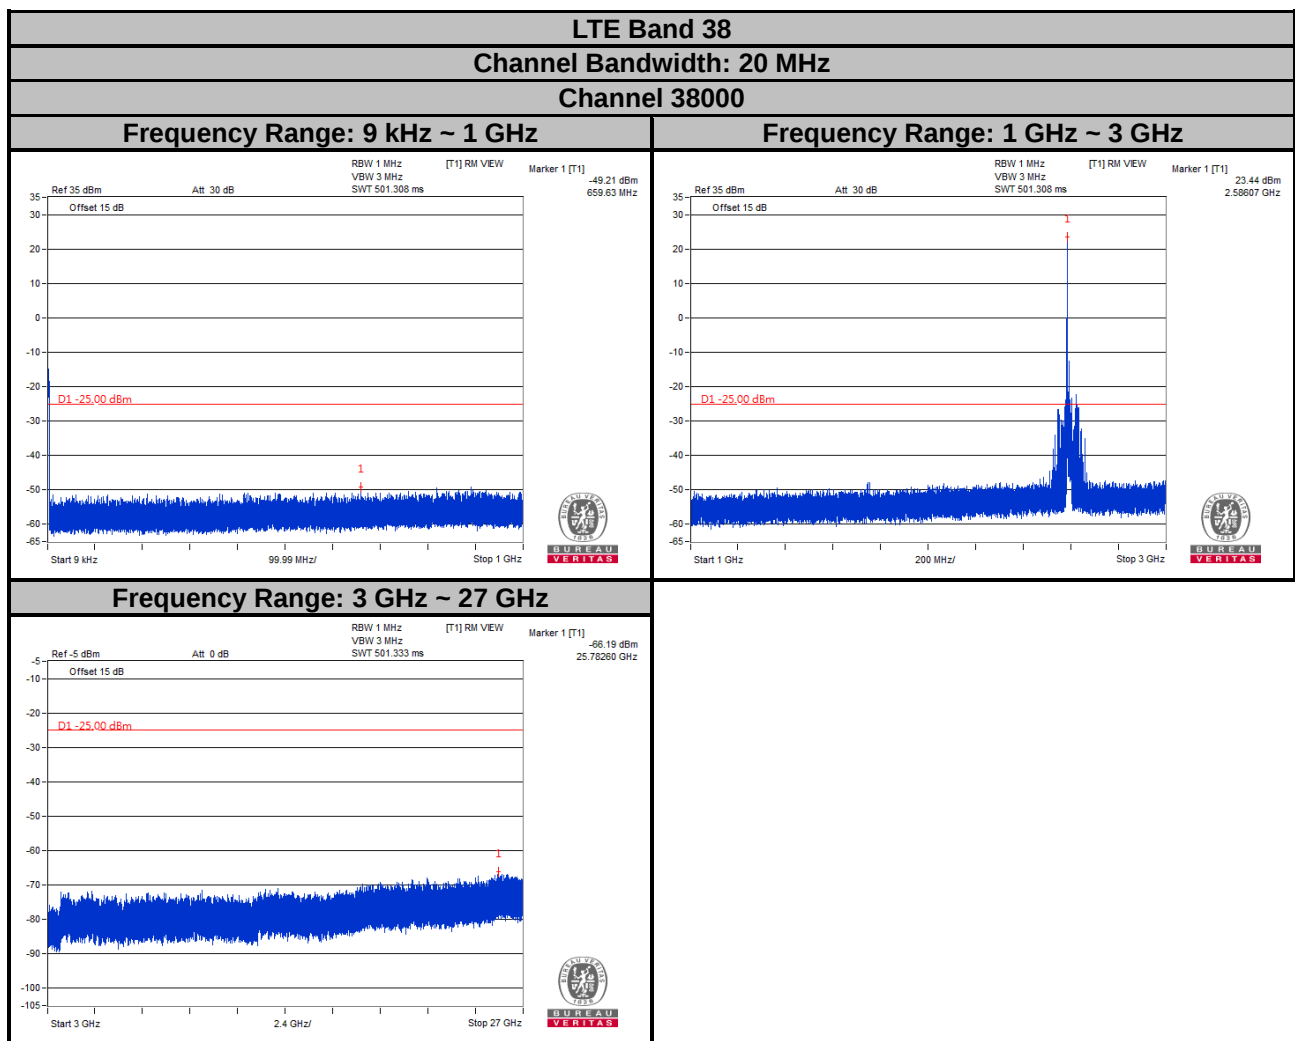


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 38


Channel Bandwidth: 20 MHz

Channel 38150


Frequency Range: 9 kHz ~ 1 GHz

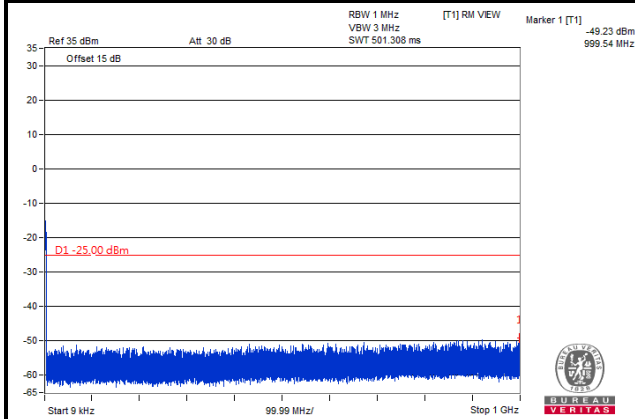


Frequency Range: 1 GHz ~ 3 GHz

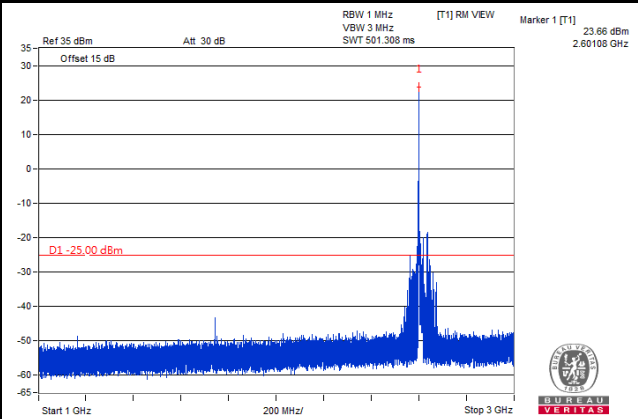


Frequency Range: 3 GHz ~ 27 GHz

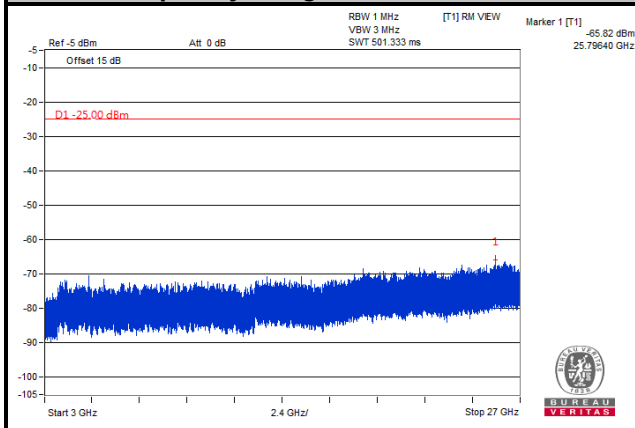


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

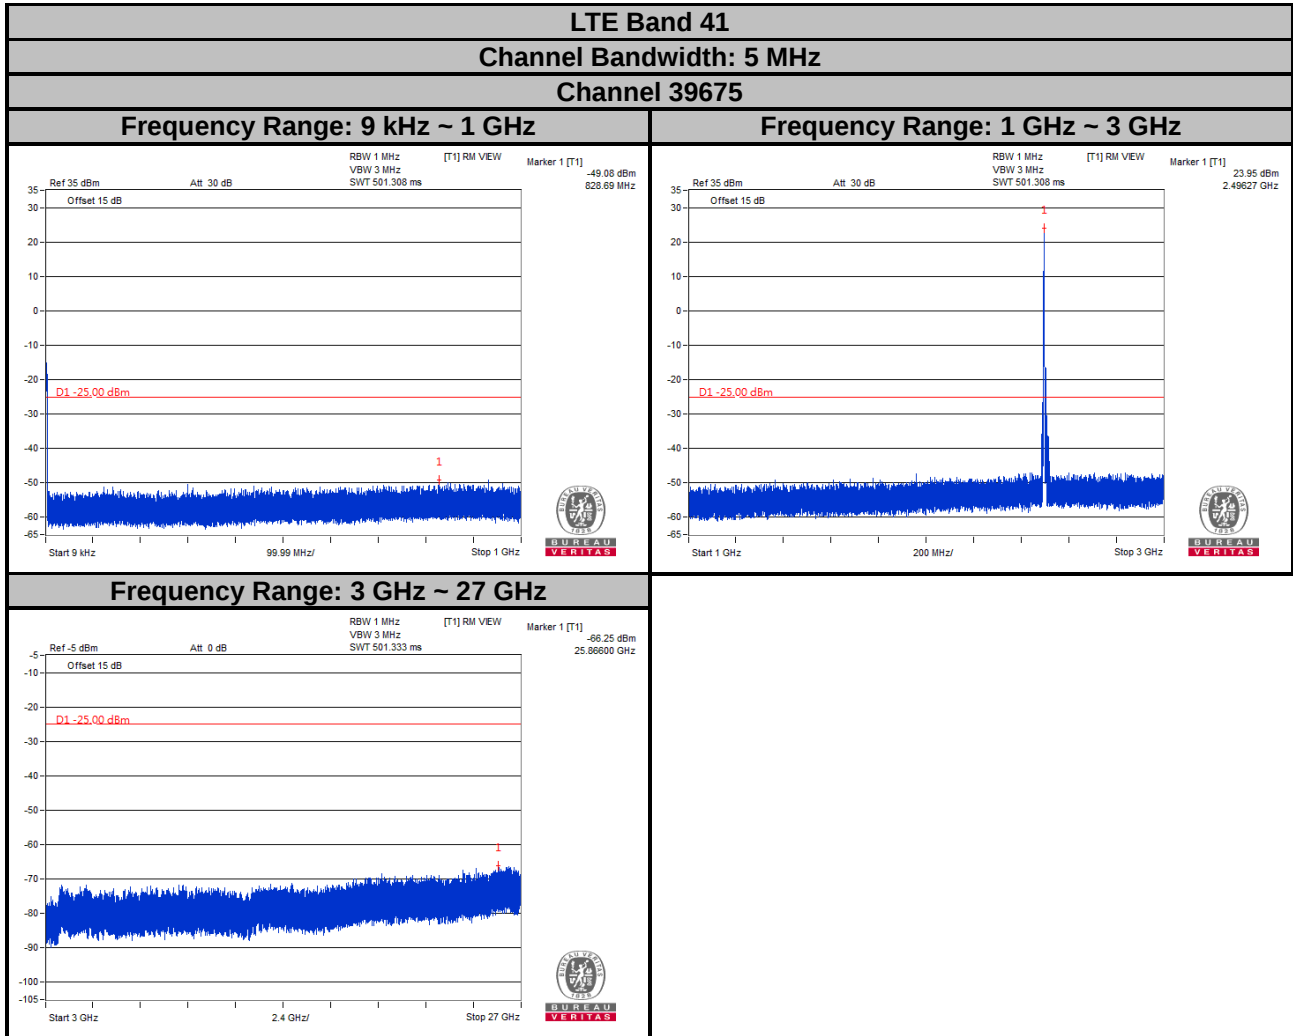


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

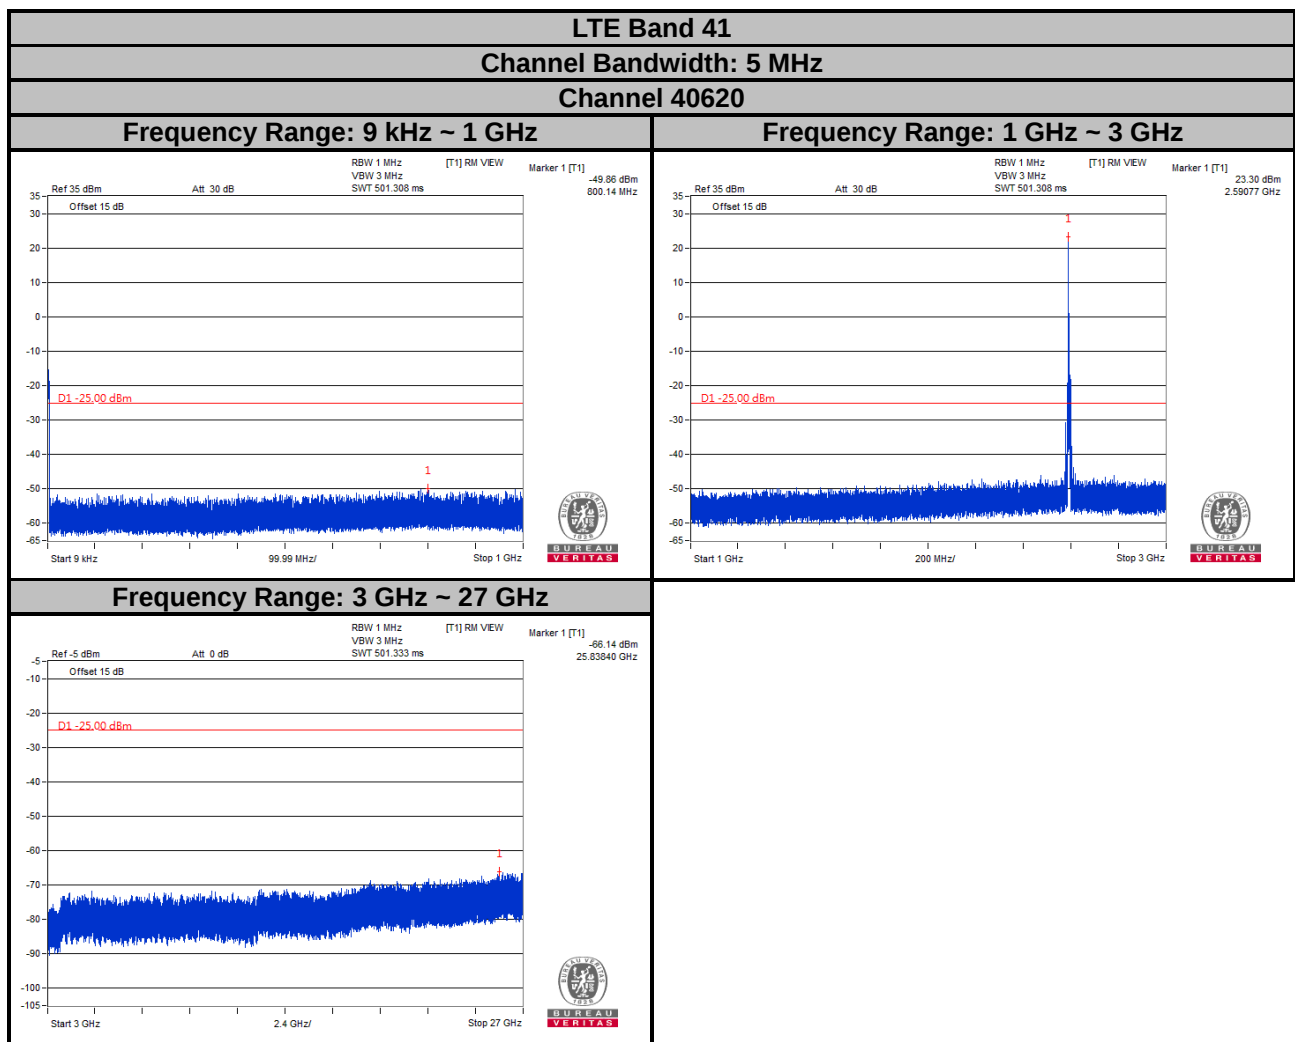


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

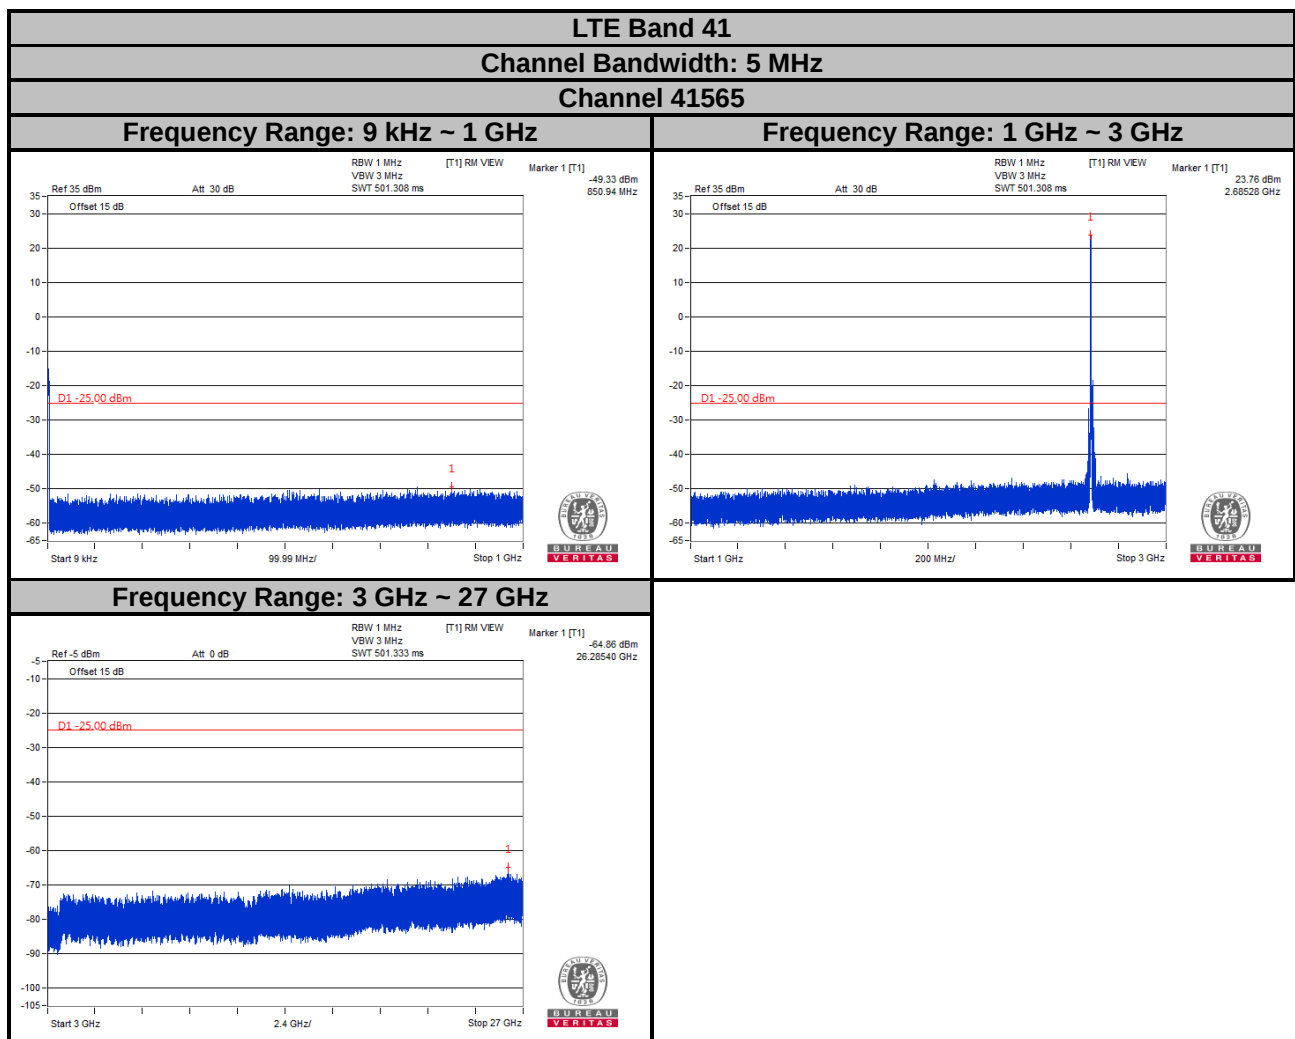


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

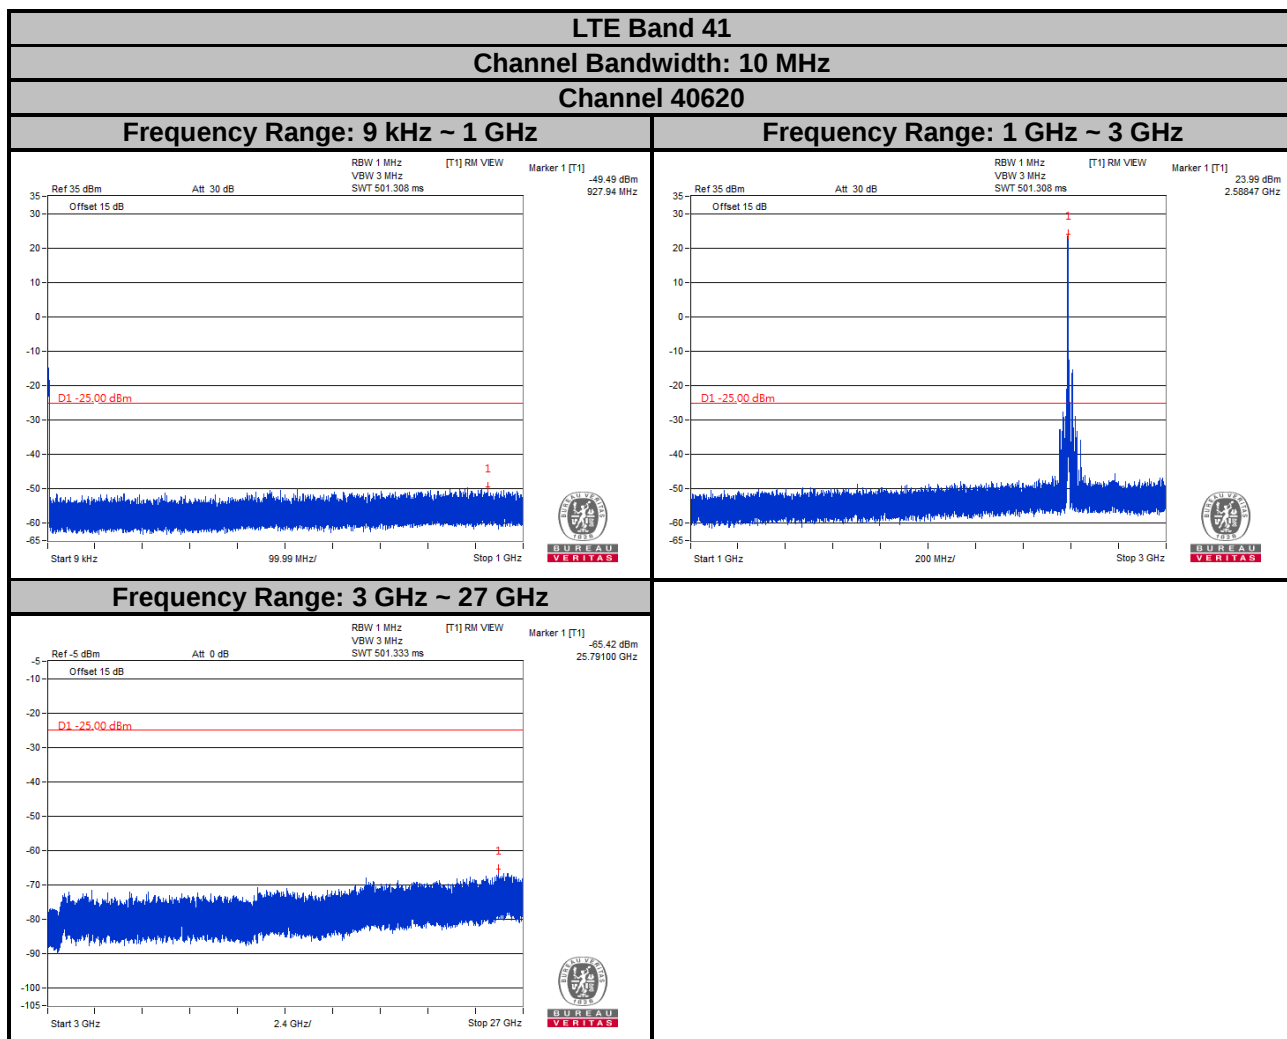


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

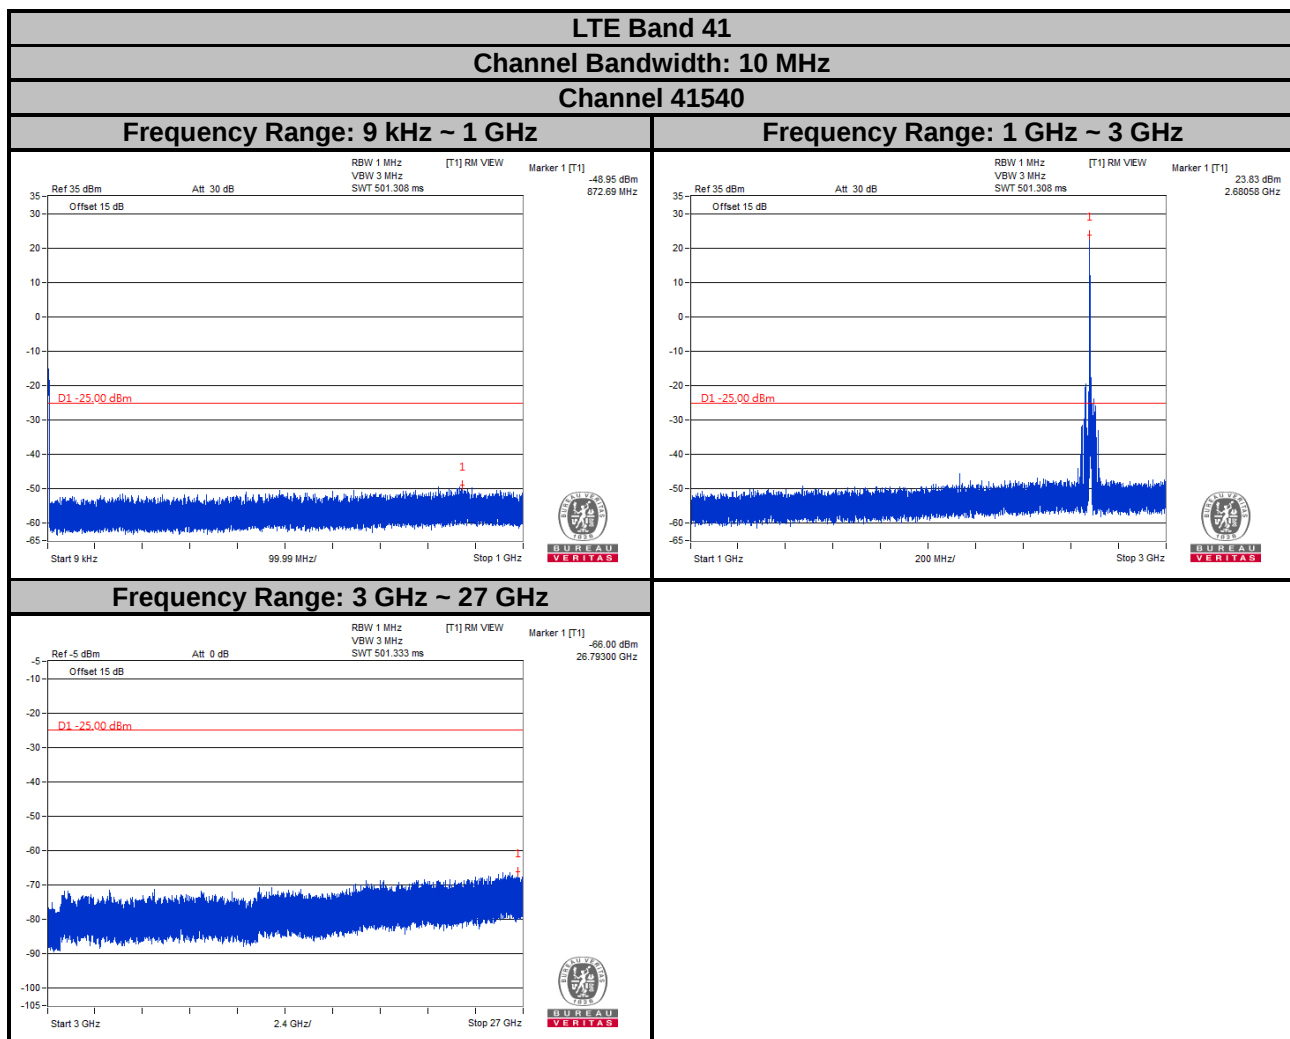


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

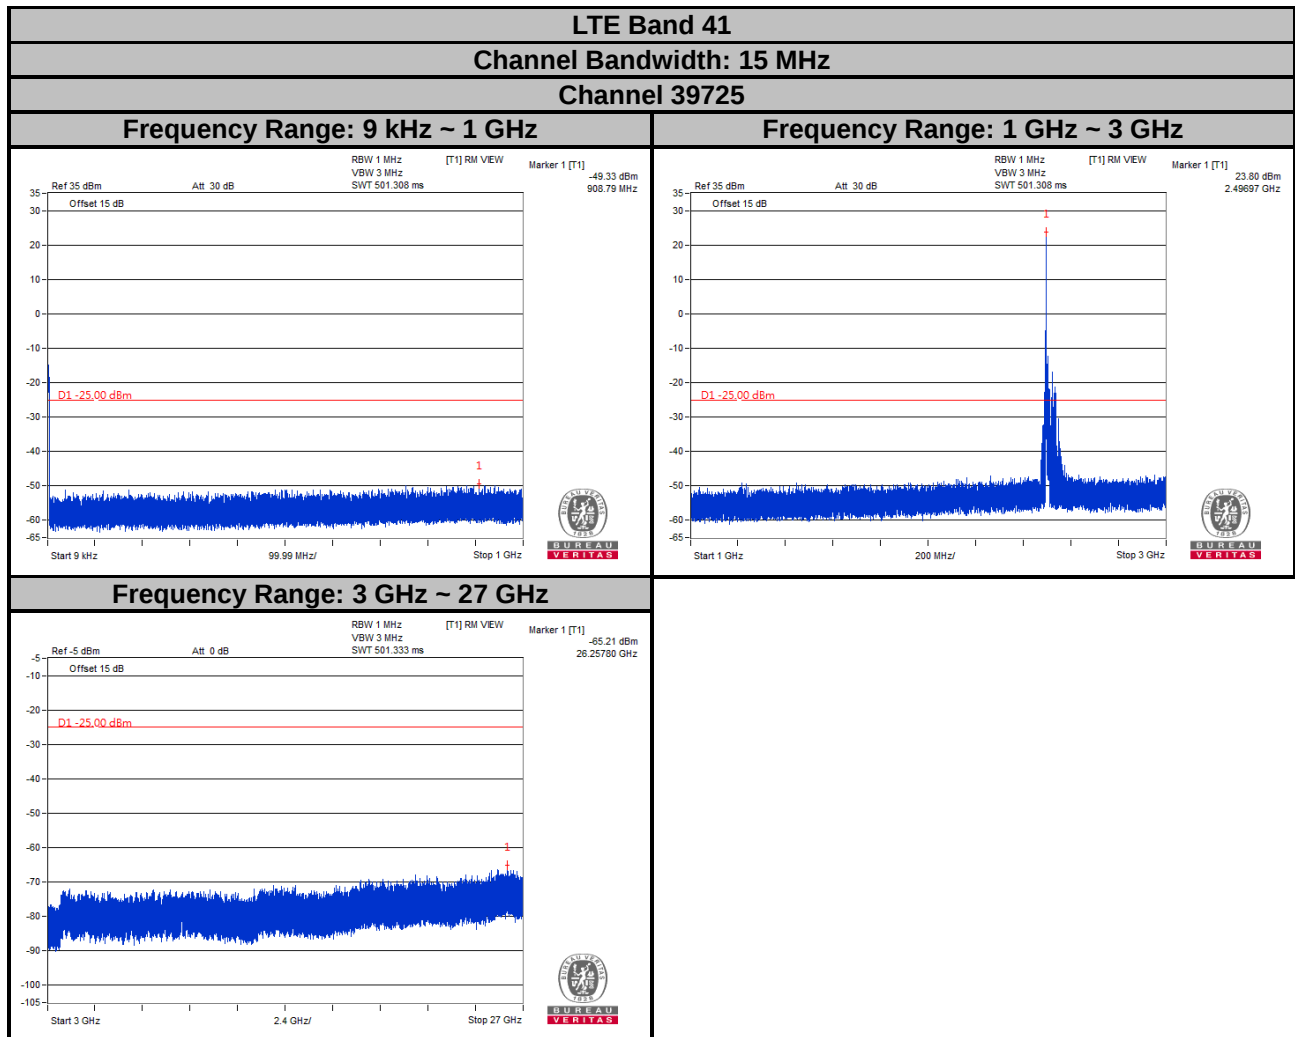


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

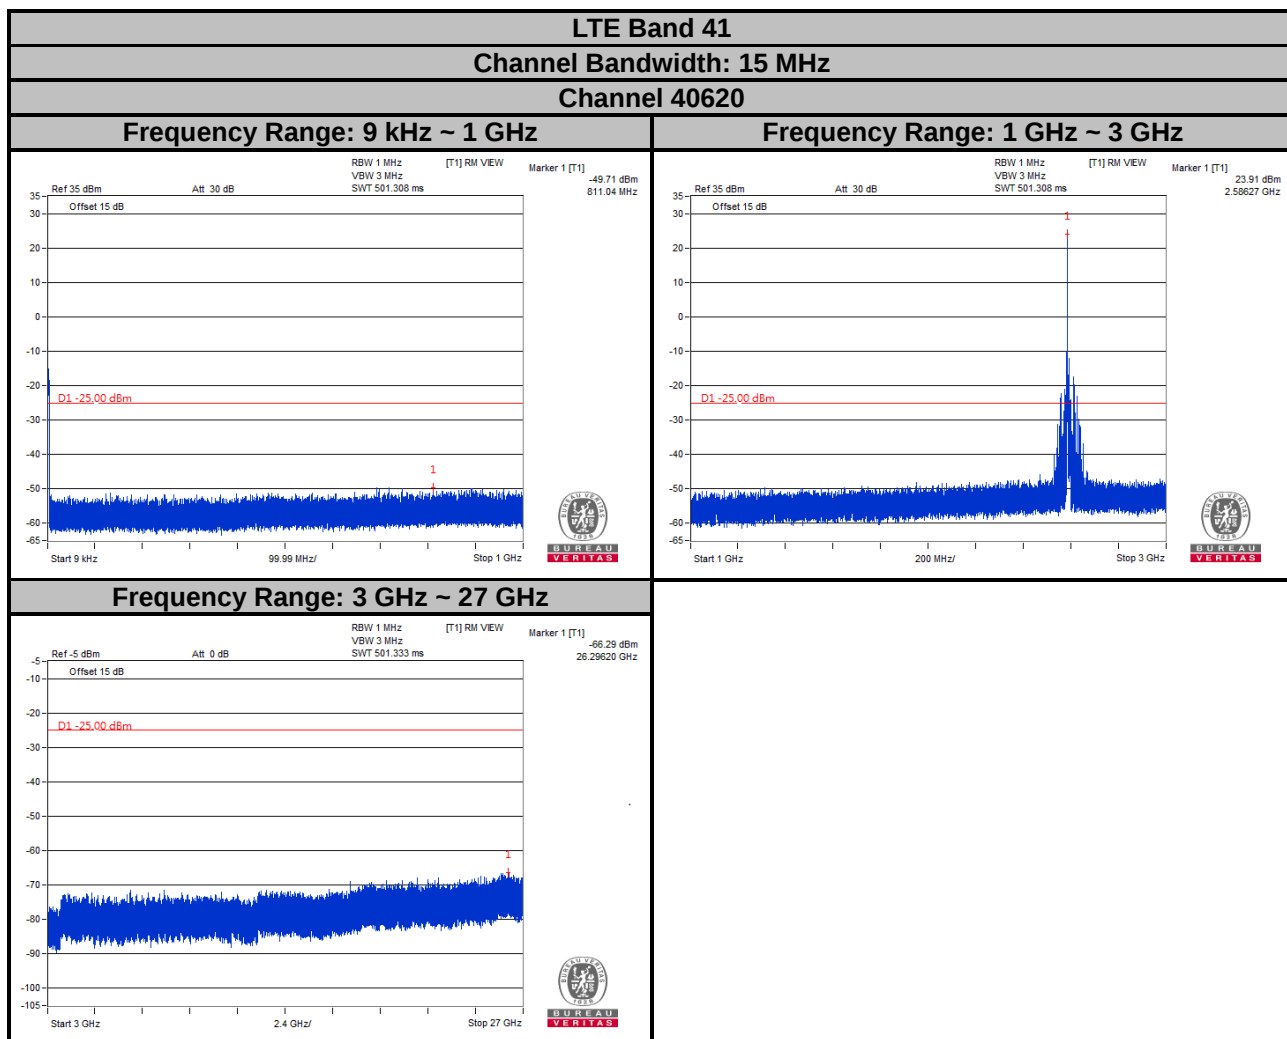


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

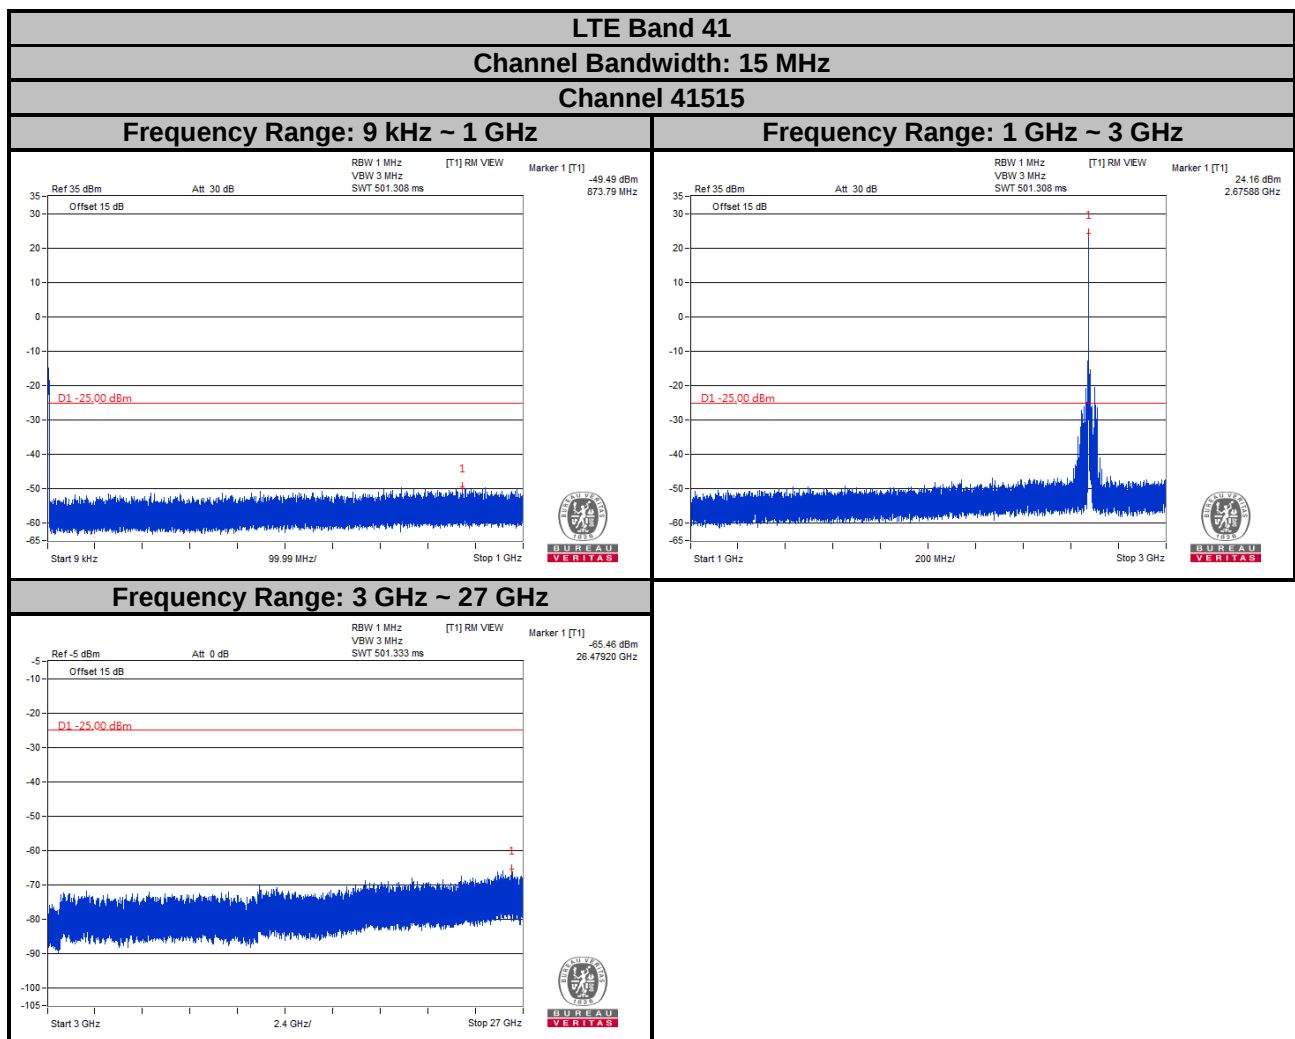


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

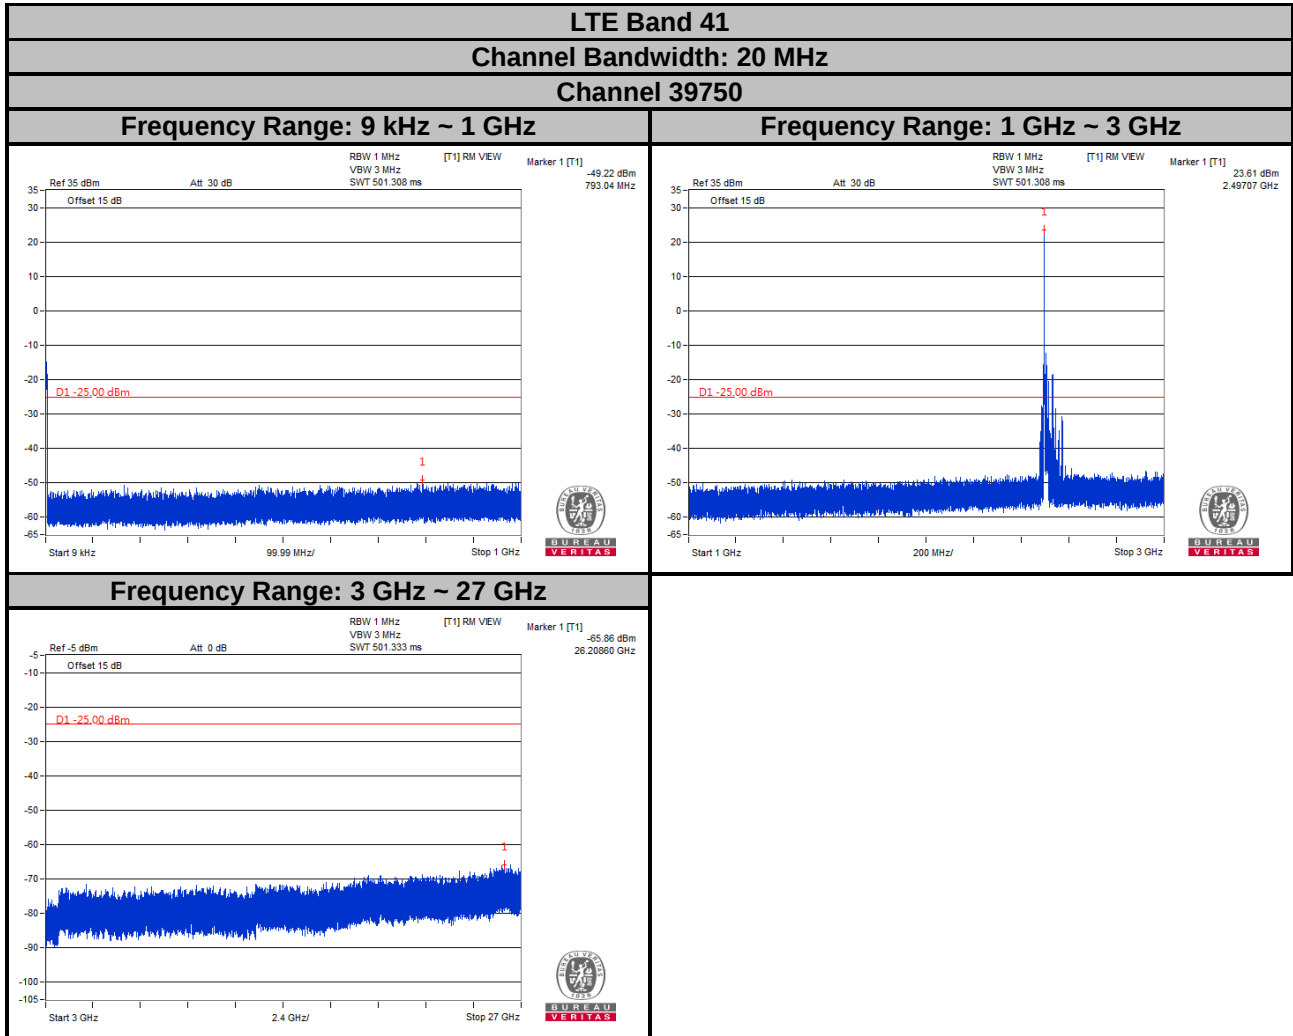

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

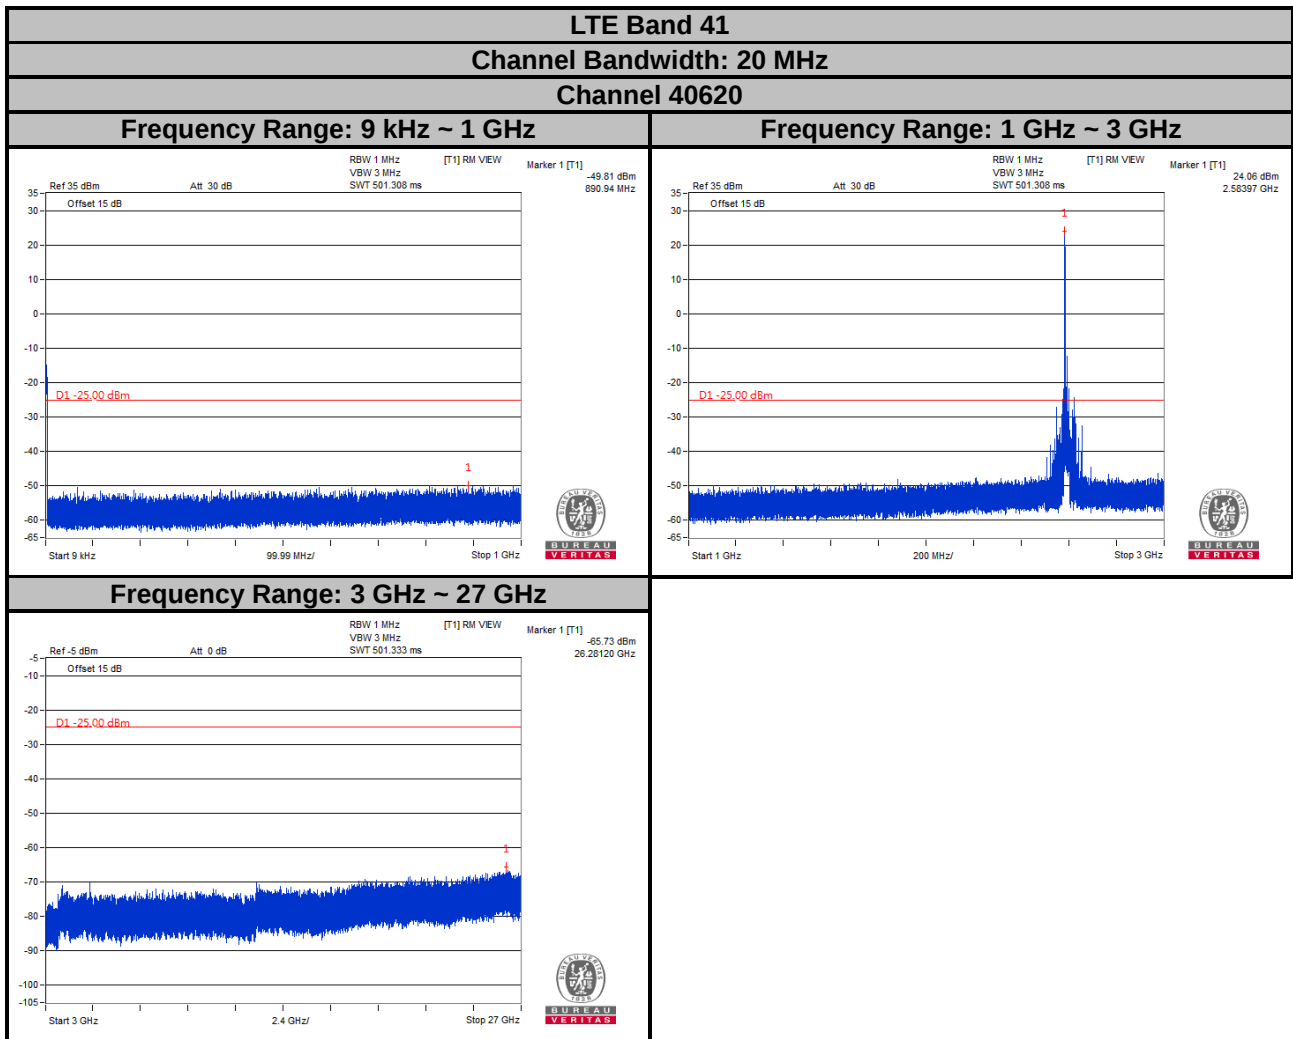

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

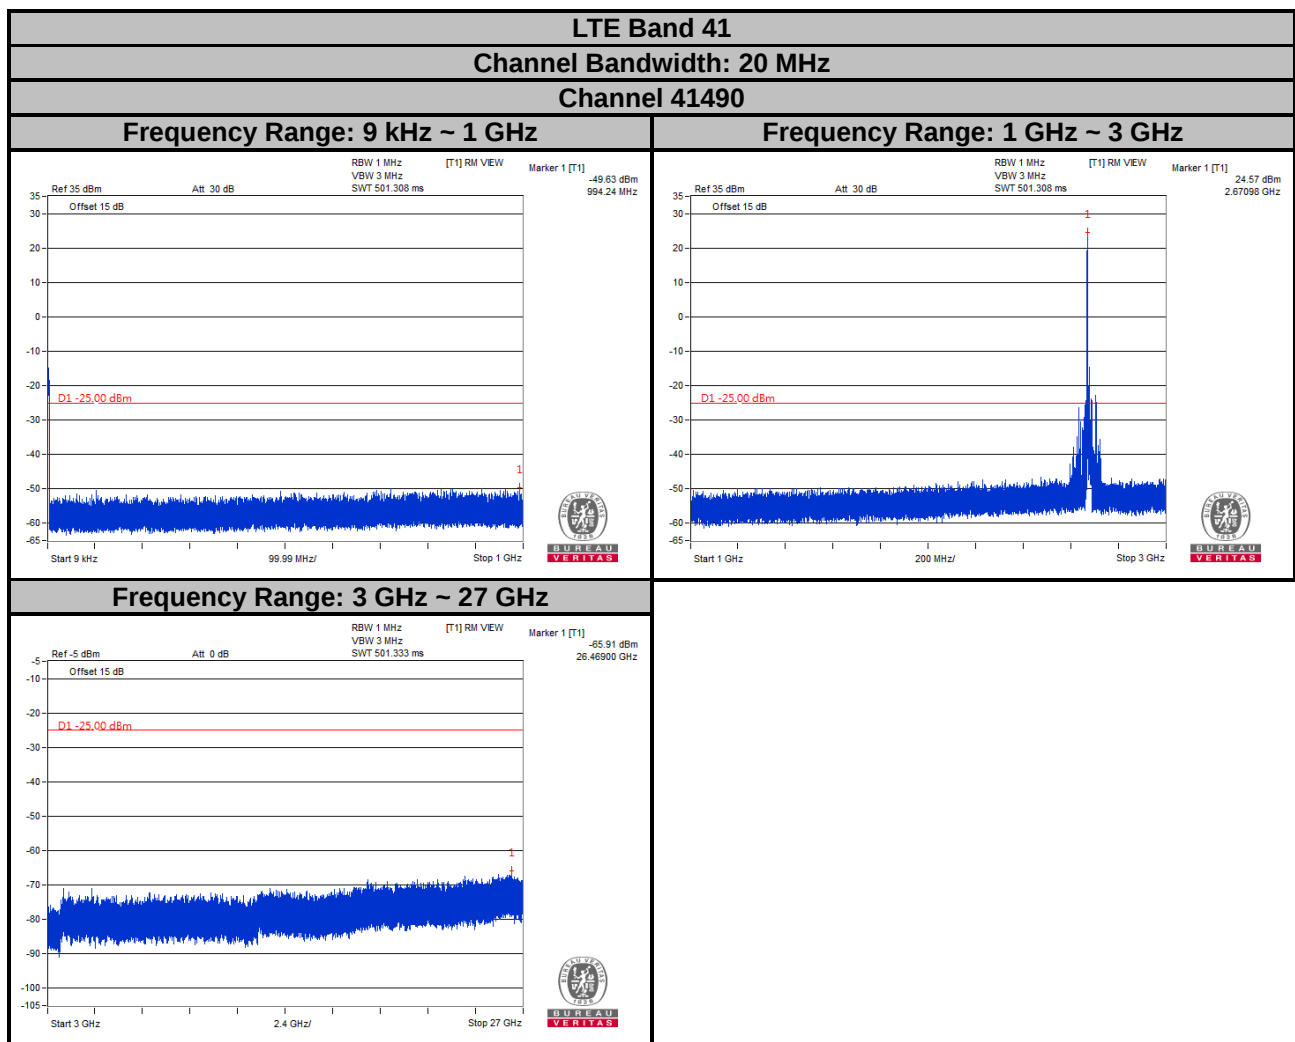

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

4.8 Radiated Emission Measurement

4.8.1 Limits of Radiated Emission Measurement

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $55 + 10 \log (P)$ dB. The limit of emission is equal to -25 dBm.

4.8.2 Test Procedure

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
- c. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.R.P power - 2.15 dB. Correction Factor (includes EIRP and ERP unit conversion factor) = Antenna gain of substitution horn. – Tx cable loss. Measurement method refers to ANSI C63.26 section 5.5.3.2.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz.
2. The emission levels were against the limit of frequency range 9 kHz ~ 30 MHz:


The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

4.8.3 Deviation from Test Standard


No deviation.

4.8.4 Test Setup

<Radiated Emission below or equal 1 GHz>

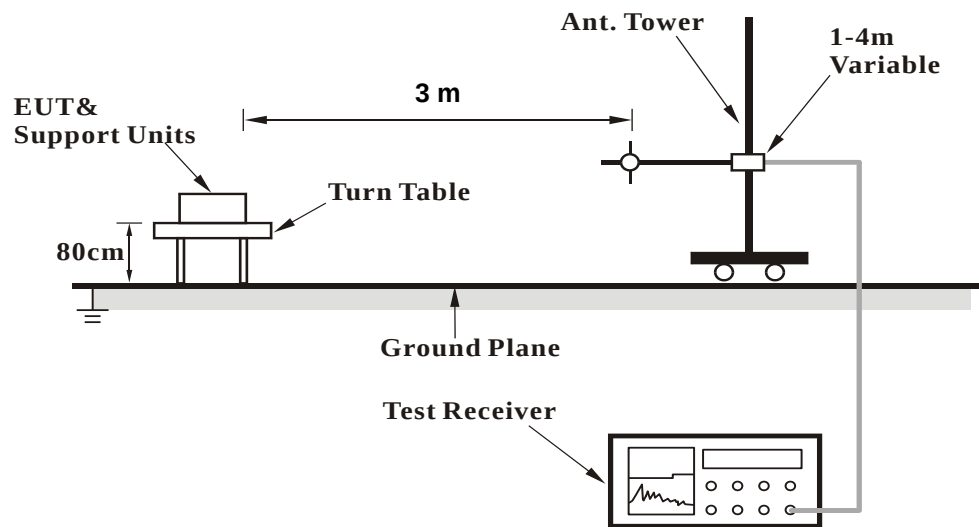

<Radiated Emission above 1 GHz>

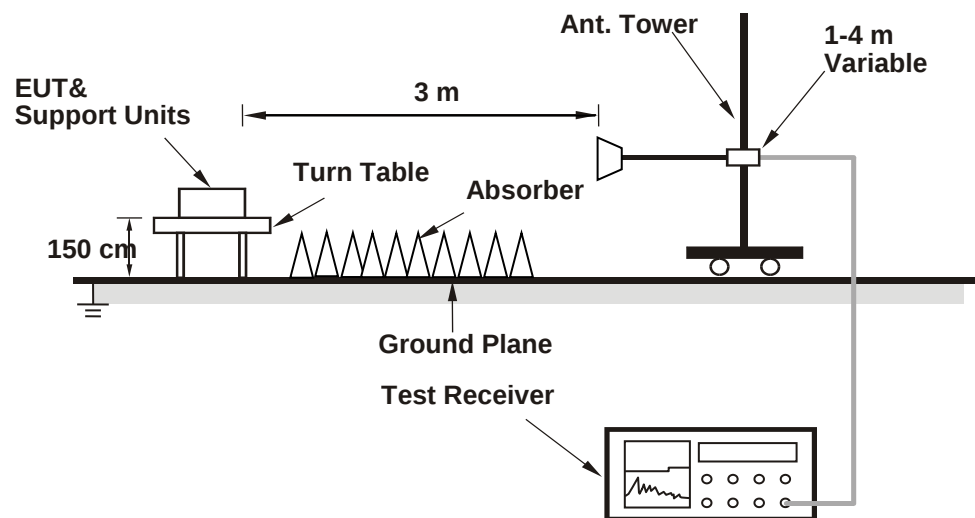

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.8.5 Test Results

LTE Band 7

Channel Bandwidth: 5 MHz / QPSK


Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

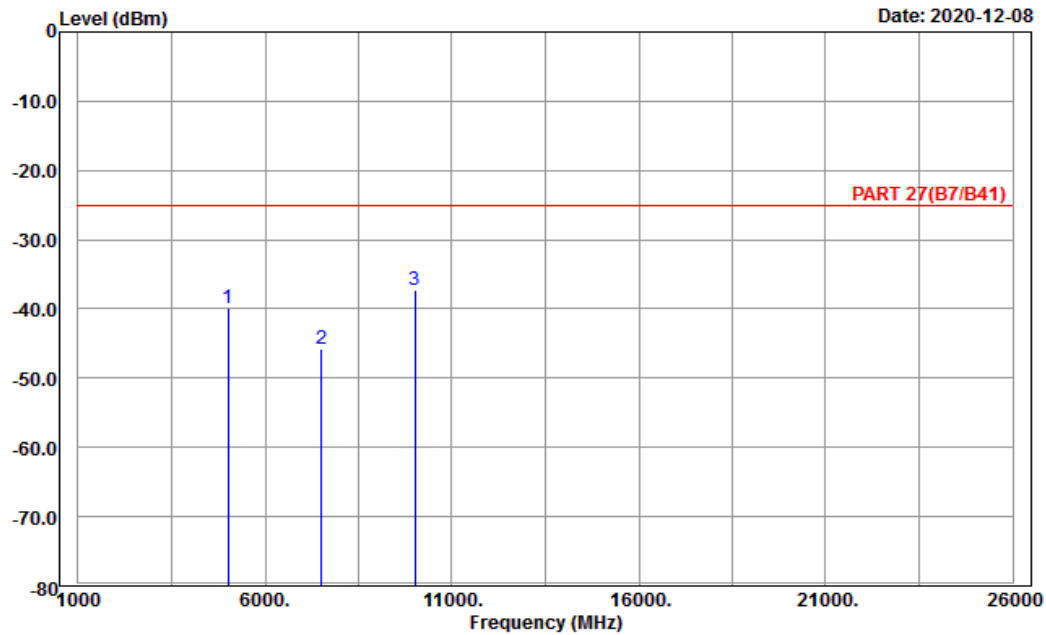

Site : 966 chamber 1
Condition: PART 27(B7/B41) Horizontal
Remark : LTE_Band 7_Link_L-Ch
Tested by: Karl Lee

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	5005.00	-39.88	-59.46	19.58	-25.00	-14.88	Peak
2	7507.50	-45.76	-68.44	22.68	-25.00	-20.76	Peak
3 pp	10010.00	-37.26	-63.51	26.25	-25.00	-12.26	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 2020-12-08

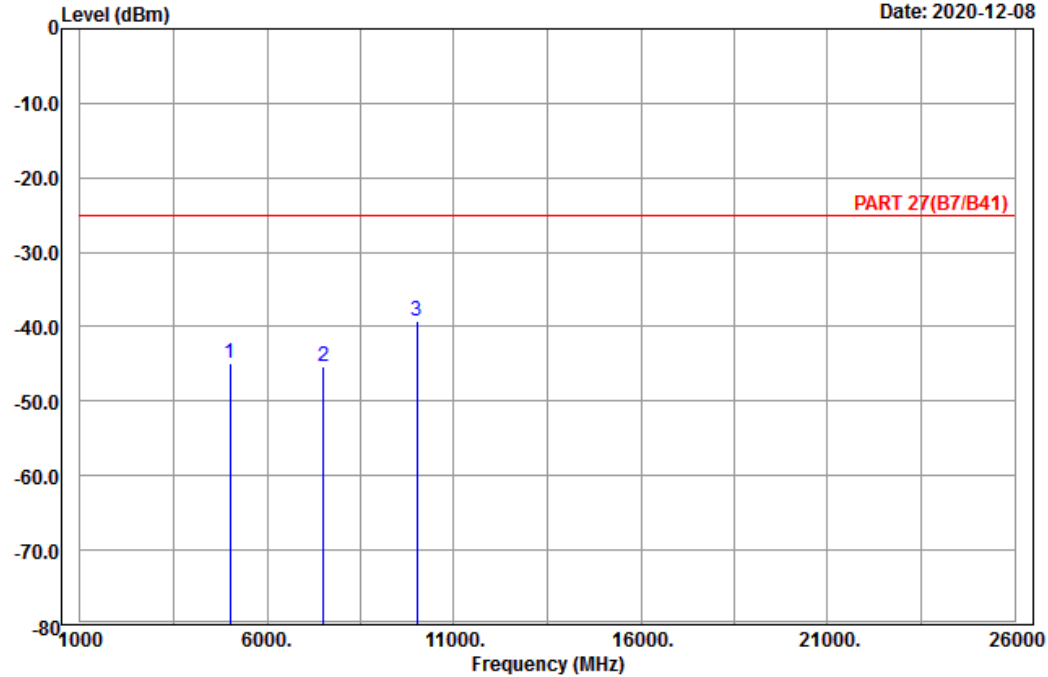

Site : 966 chamber 1
Condition: PART 27(B7/B41) Vertical
Remark : LTE_Band 7_Link_L-Ch
Tested by: Karl Lee

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	5005.00	-44.96	-64.54	19.58	-25.00	-19.96	Peak
2	7507.50	-45.34	-68.02	22.68	-25.00	-20.34	Peak
3 pp	10010.00	-39.34	-65.59	26.25	-25.00	-14.34	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

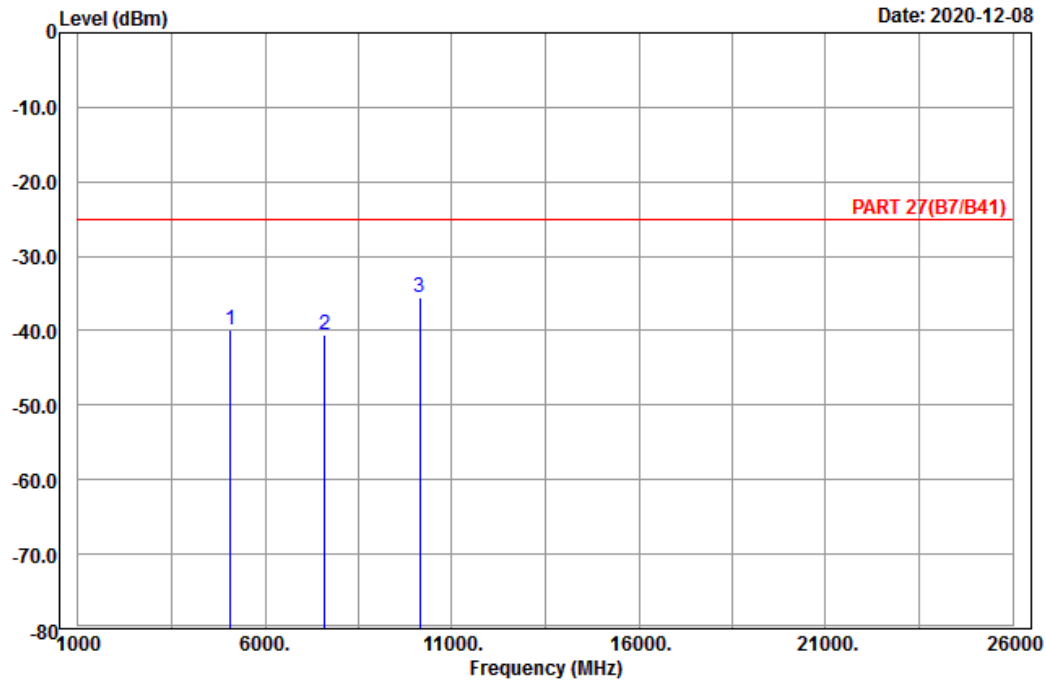

Site : 966 chamber 1
 Condition: PART 27(B7/B41) Horizontal
 Remark : LTE_Band 7_Link_M-Ch
 Tested by: Karl Lee

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	5070.00	-39.87	-59.26	19.39	-25.00	-14.87	Peak
2	7605.00	-40.59	-63.58	22.99	-25.00	-15.59	Peak
3 pp	10140.00	-35.54	-61.96	26.42	-25.00	-10.54	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 2020-12-08

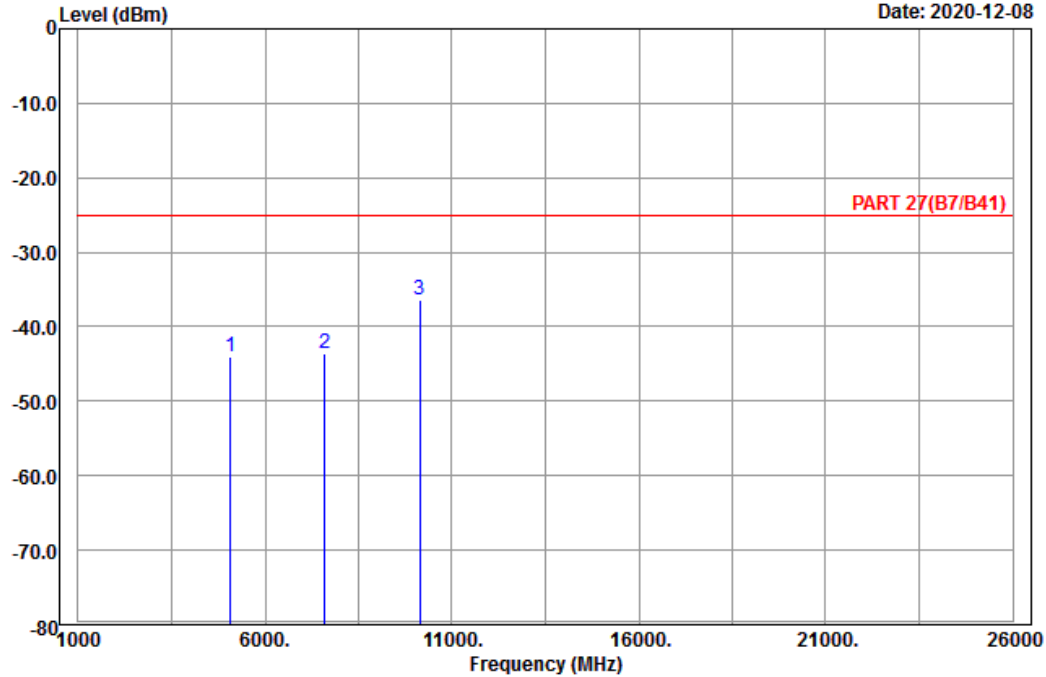

Site : 966 chamber 1
Condition: PART 27(B7/B41) Vertical
Remark : LTE_Band 7_Link_M-Ch
Tested by: Karl Lee

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	5070.00	-44.14	-63.53	19.39	-25.00	-19.14	Peak
2	7605.00	-43.60	-66.59	22.99	-25.00	-18.60	Peak
3 pp	10140.00	-36.46	-62.88	26.42	-25.00	-11.46	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

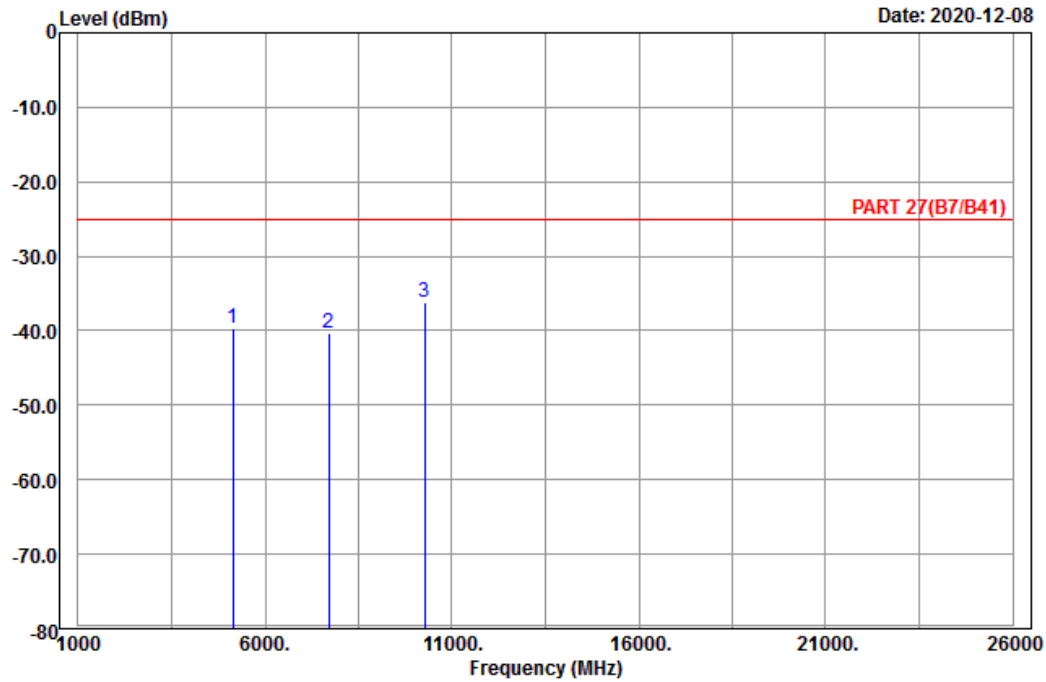

Site : 966 chamber 1
 Condition: PART 27(B7/B41) Horizontal
 Remark : LTE_Band 7_Link_H-Ch
 Tested by: Karl Lee

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	5135.00	-39.76	-59.57	19.81	-25.00	-14.76	Peak
2	7702.50	-40.22	-63.38	23.16	-25.00	-15.22	Peak
3 pp	10270.00	-36.19	-62.78	26.59	-25.00	-11.19	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 2020-12-08

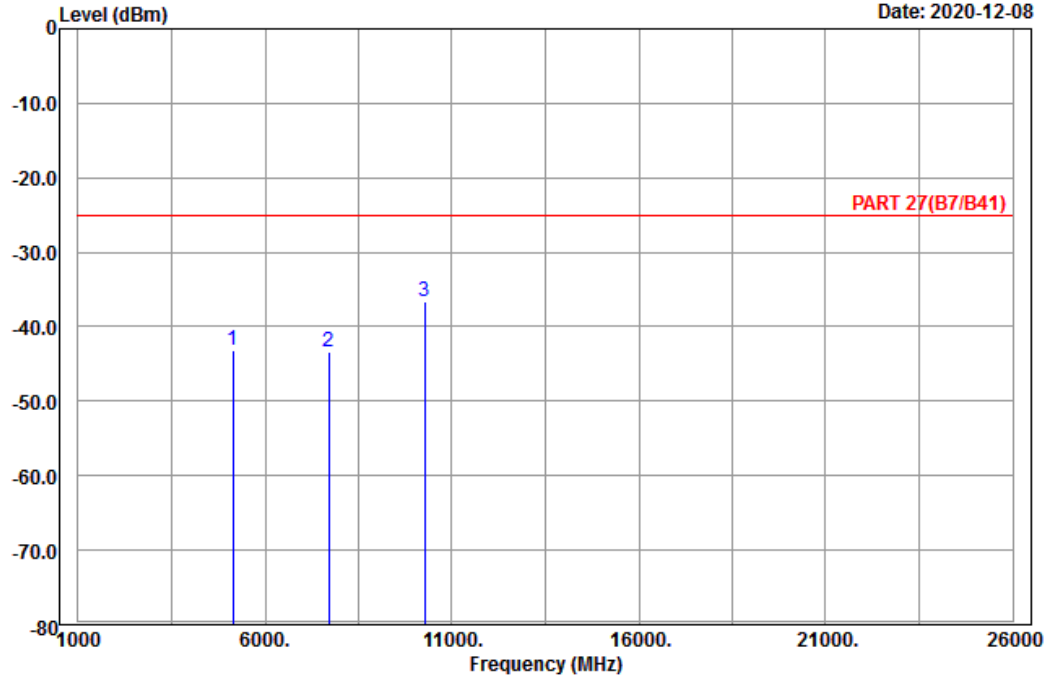

Site : 966 chamber 1
Condition: PART 27(B7/B41) Vertical
Remark : LTE_Band 7_Link_H-Ch
Tested by: Karl Lee

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	5135.00	-43.24	-63.05	19.81	-25.00	-18.24	Peak
2	7702.50	-43.41	-66.57	23.16	-25.00	-18.41	Peak
3 pp	10270.00	-36.71	-63.30	26.59	-25.00	-11.71	Peak


Channel Bandwidth: 20 MHz / QPSK
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

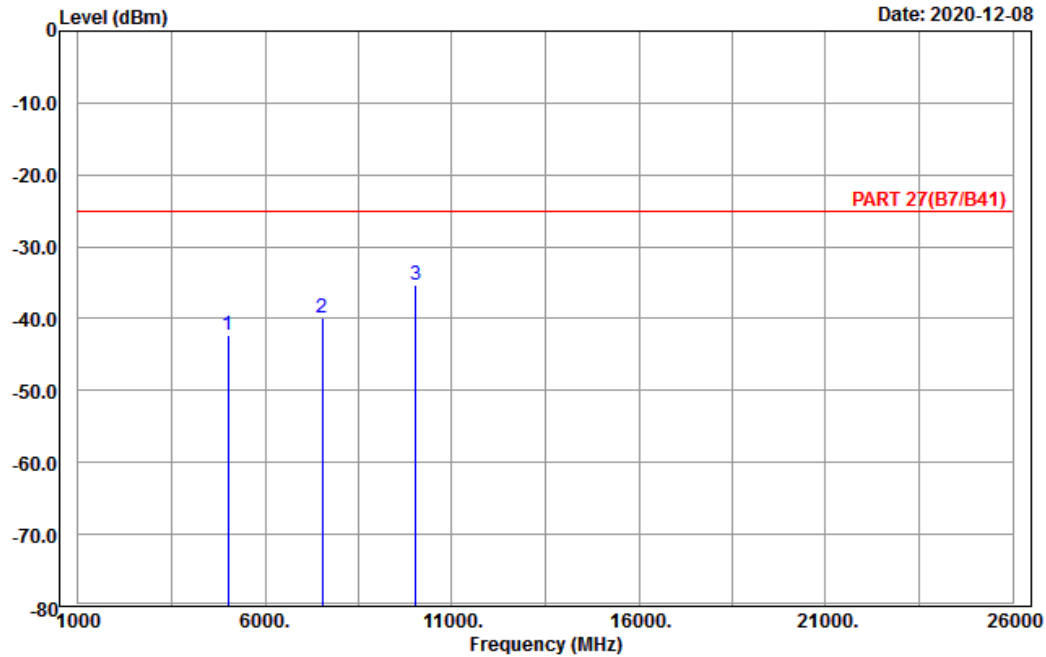

Site : 966 chamber 1
Condition: PART 27(B7/B41) Horizontal
Remark : LTE_Band 7_Link_L-Ch
Tested by: Karl Lee

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	5020.00	-42.23	-61.31	19.08	-25.00	-17.23	Peak
2	7530.00	-39.99	-62.84	22.85	-25.00	-14.99	Peak
3 pp	10040.00	-35.35	-61.62	26.27	-25.00	-10.35	Peak




Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 4

Date: 2020-12-08

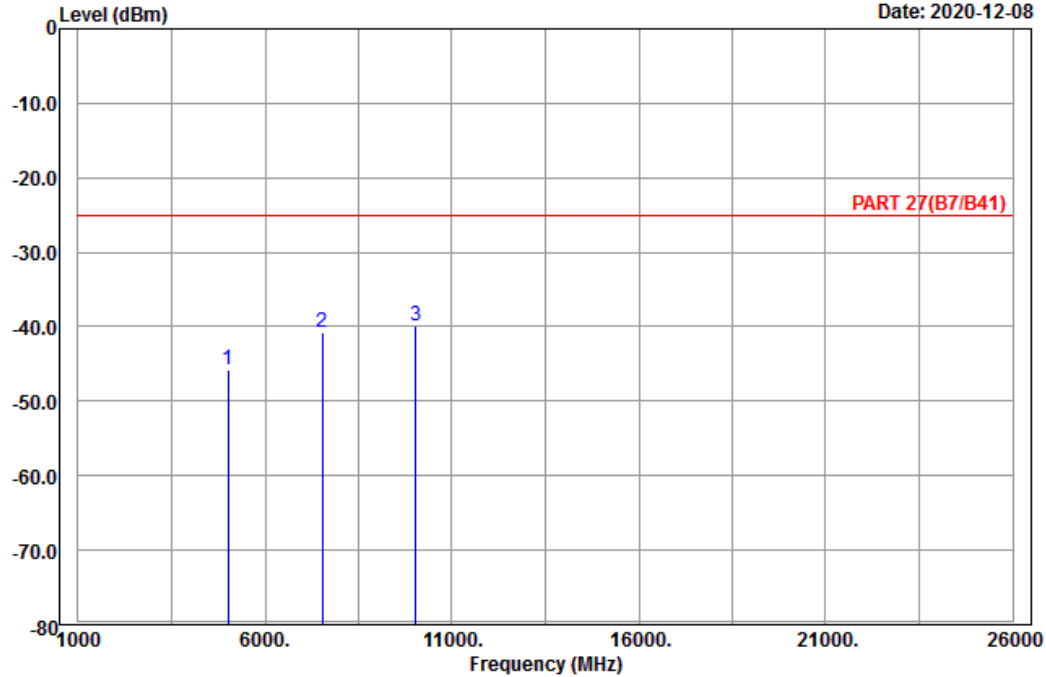

Site : 966 chamber 1
Condition: PART 27(B7/B41) Vertical
Remark : LTE_Band 7_Link_L-Ch
Tested by: Karl Lee

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	5020.00	-45.69	-64.77	19.08	-25.00	-20.69	Peak
2	7530.00	-40.76	-63.61	22.85	-25.00	-15.76	Peak
3 pp	10040.00	-39.79	-66.06	26.27	-25.00	-14.79	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 13

Date: 2020-11-28

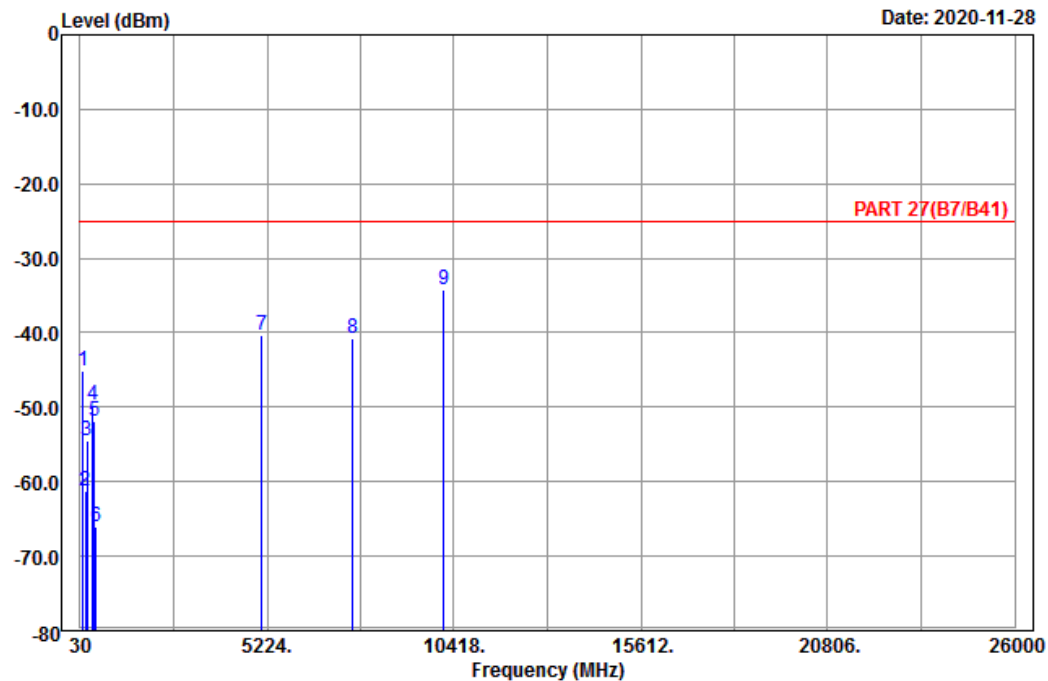

Site : 966 chamber 1
Condition: PART 27(B7/B41) Horizontal
Remark : LTE_Band 7_Link_M-Ch
Tested by: Karl Lee

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	99.93	-45.13	-35.01	-10.12	-25.00	-20.13	Peak
2	169.59	-61.24	-54.53	-6.71	-25.00	-36.24	Peak
3	224.67	-54.46	-48.61	-5.85	-25.00	-29.46	Peak
4	376.30	-49.60	-45.62	-3.98	-25.00	-24.60	Peak
5	419.70	-51.79	-48.60	-3.19	-25.00	-26.79	Peak
6	478.50	-66.09	-61.44	-4.65	-25.00	-41.09	Peak
7	5070.00	-40.28	-59.67	19.39	-25.00	-15.28	Peak
8	7605.00	-40.72	-63.71	22.99	-25.00	-15.72	Peak
9 pp	10140.00	-34.30	-60.72	26.42	-25.00	-9.30	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 14

Date: 2020-11-28

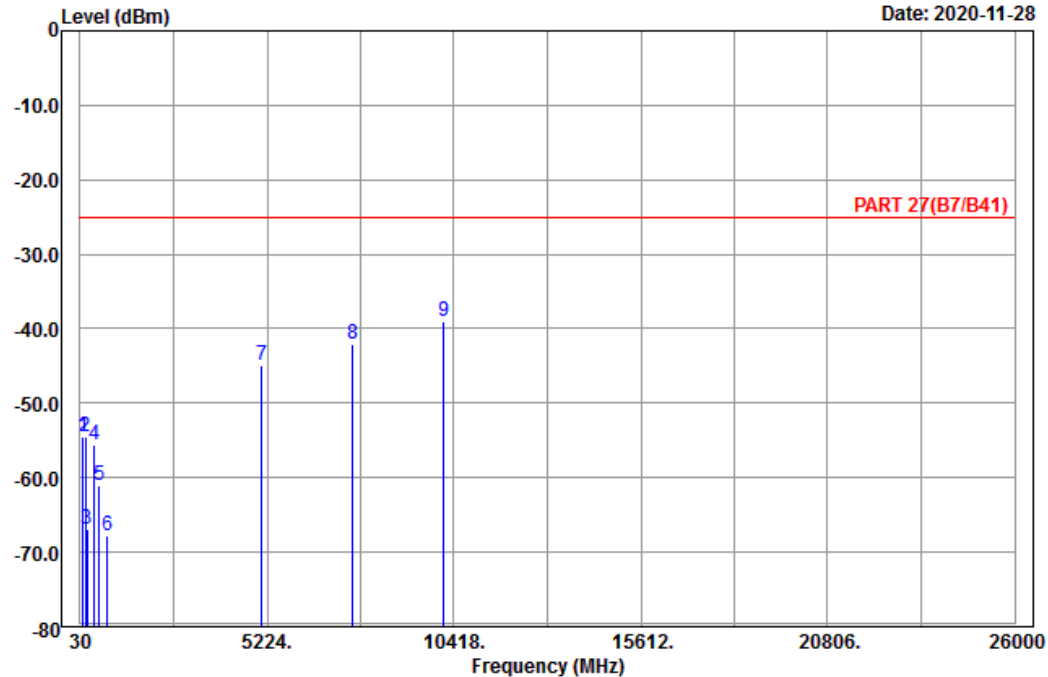

Site : 966 chamber 1
Condition: PART 27(B7/B41) Vertical
Remark : LTE_Band 7_Link_M-Ch
Tested by: Karl Lee

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	118.29	-54.39	-46.01	-8.38	-25.00	-29.39	Peak
2	171.75	-54.53	-48.03	-6.50	-25.00	-29.53	Peak
3	211.71	-66.87	-60.84	-6.03	-25.00	-41.87	Peak
4	419.70	-55.59	-52.40	-3.19	-25.00	-30.59	Peak
5	563.20	-61.02	-59.92	-1.10	-25.00	-36.02	Peak
6	797.70	-67.71	-69.53	1.82	-25.00	-42.71	Peak
7	5070.00	-44.96	-64.35	19.39	-25.00	-19.96	Peak
8	7605.00	-42.03	-65.02	22.99	-25.00	-17.03	Peak
9	10140.00	-39.12	-65.54	26.42	-25.00	-14.12	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

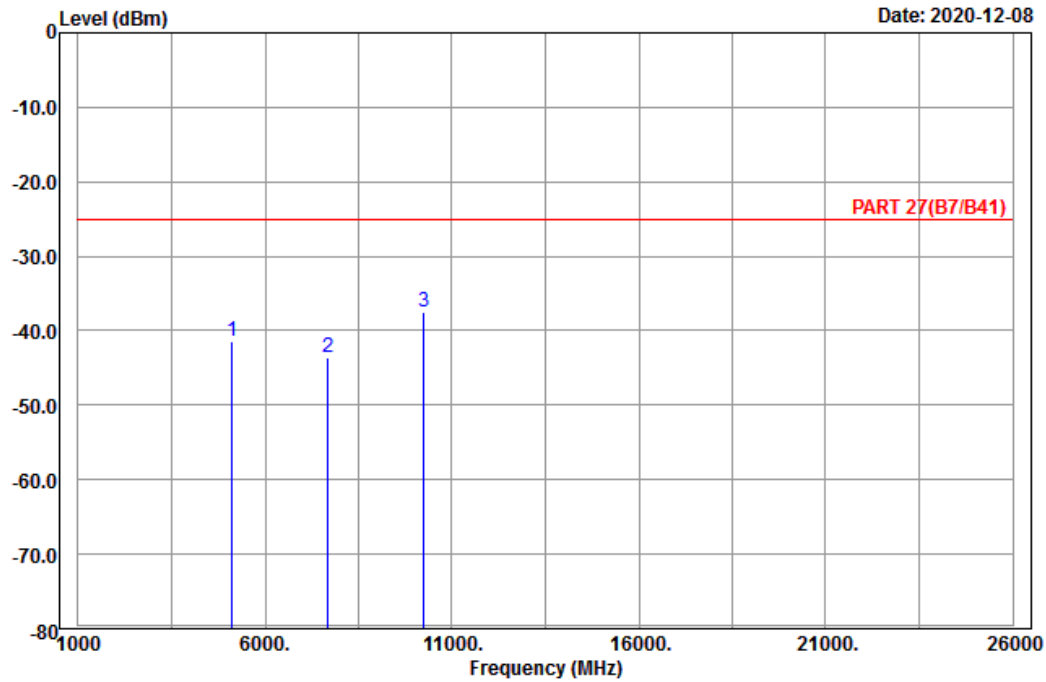

Site : 966 chamber 1
 Condition: PART 27(B7/B41) Horizontal
 Remark : LTE_Band 7_Link_H-Ch
 Tested by: Karl Lee

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	5120.00	-41.32	-61.03	19.71	-25.00	-16.32	Peak
2	7680.00	-43.60	-66.72	23.12	-25.00	-18.60	Peak
3 pp	10240.00	-37.53	-64.07	26.54	-25.00	-12.53	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 2020-12-08

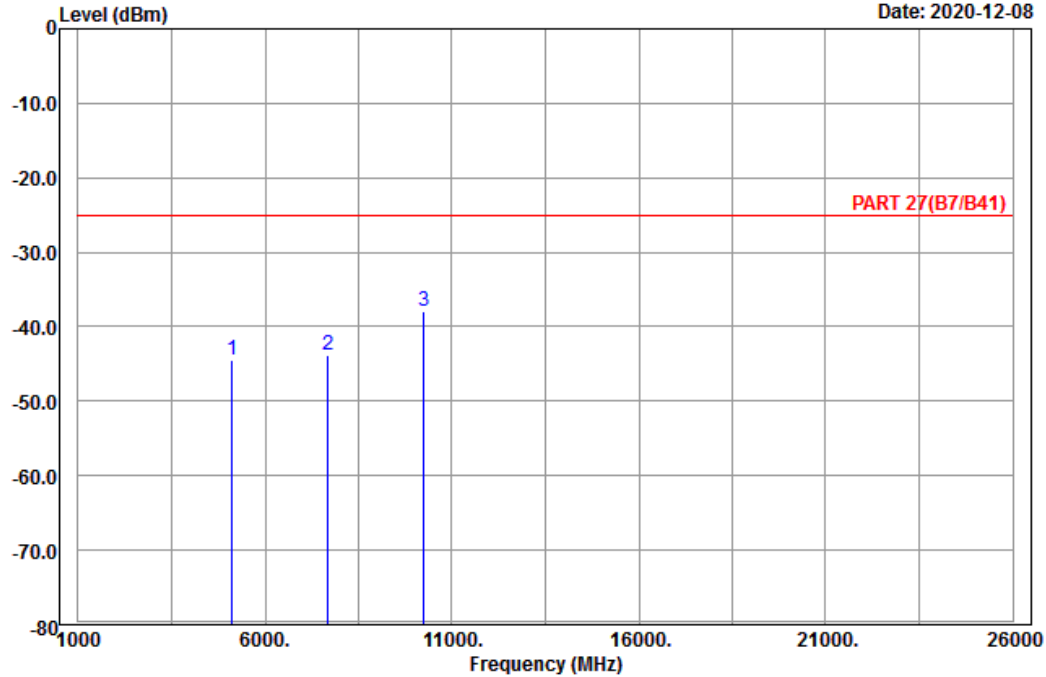

Site : 966 chamber 1
Condition: PART 27(B7/B41) Vertical
Remark : LTE_Band 7_Link_H-Ch
Tested by: Karl Lee

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	5120.00	-44.36	-64.07	19.71	-25.00	-19.36	Peak
2	7680.00	-43.71	-66.83	23.12	-25.00	-18.71	Peak
3 pp	10240.00	-37.87	-64.41	26.54	-25.00	-12.87	Peak


LTE Band 38
Channel Bandwidth: 5 MHz / QPSK
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

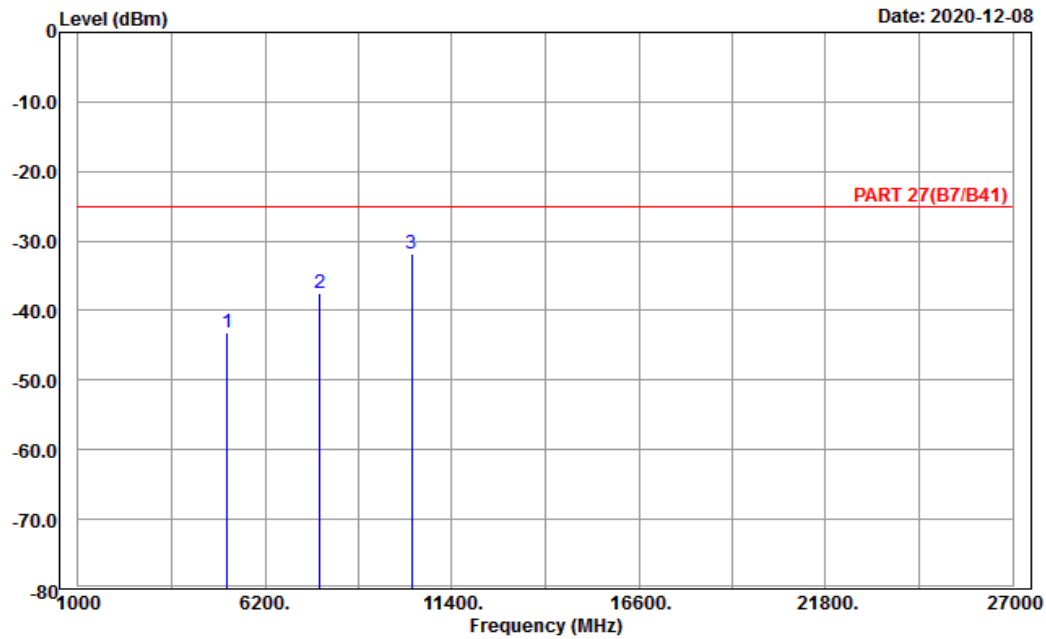

Site : 966 chamber 1
Condition: PART 27(B7/B41) Horizontal
Remark : LTE_Band 38_Link_L-Ch
Tested by: Charles Hsiao

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	5145.00	-43.14	-62.95	19.81	-25.00	-18.14	Peak
2	7717.50	-37.49	-60.68	23.19	-25.00	-12.49	Peak
3 pp	10290.00	-31.85	-58.47	26.62	-25.00	-6.85	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 2020-12-08

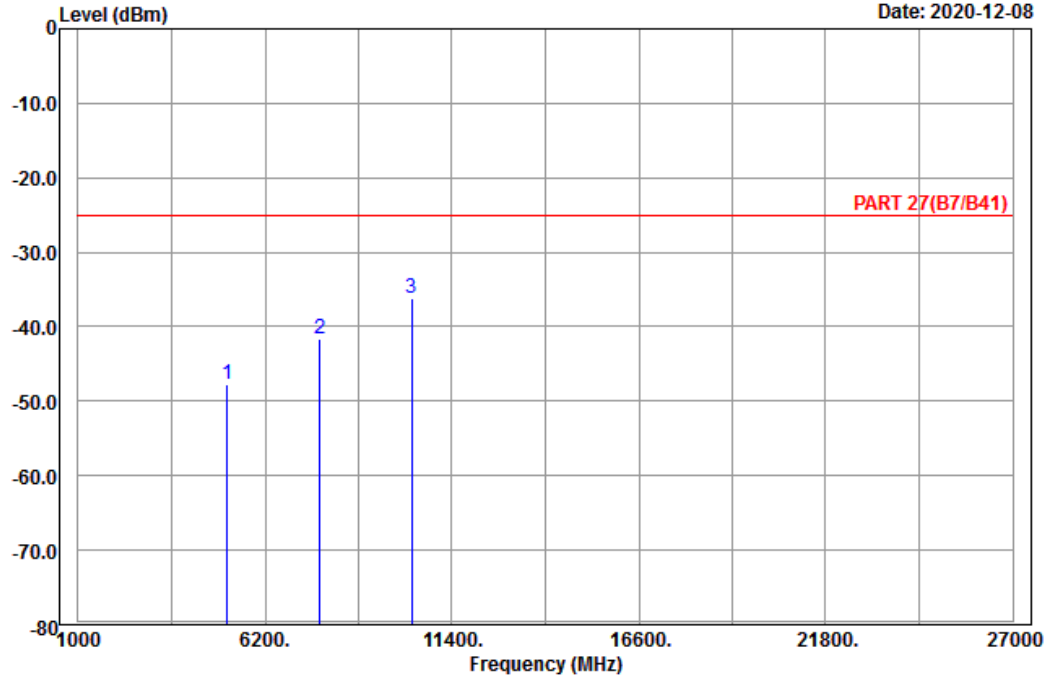

Site : 966 chamber 1
Condition: PART 27(B7/B41) Vertical
Remark : LTE_Band 38_Link_L-Ch
Tested by: Charles Hsiao

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	5145.00	-47.83	-67.64	19.81	-25.00	-22.83	Peak
2	7717.50	-41.74	-64.93	23.19	-25.00	-16.74	Peak
3 pp	10290.00	-36.14	-62.76	26.62	-25.00	-11.14	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

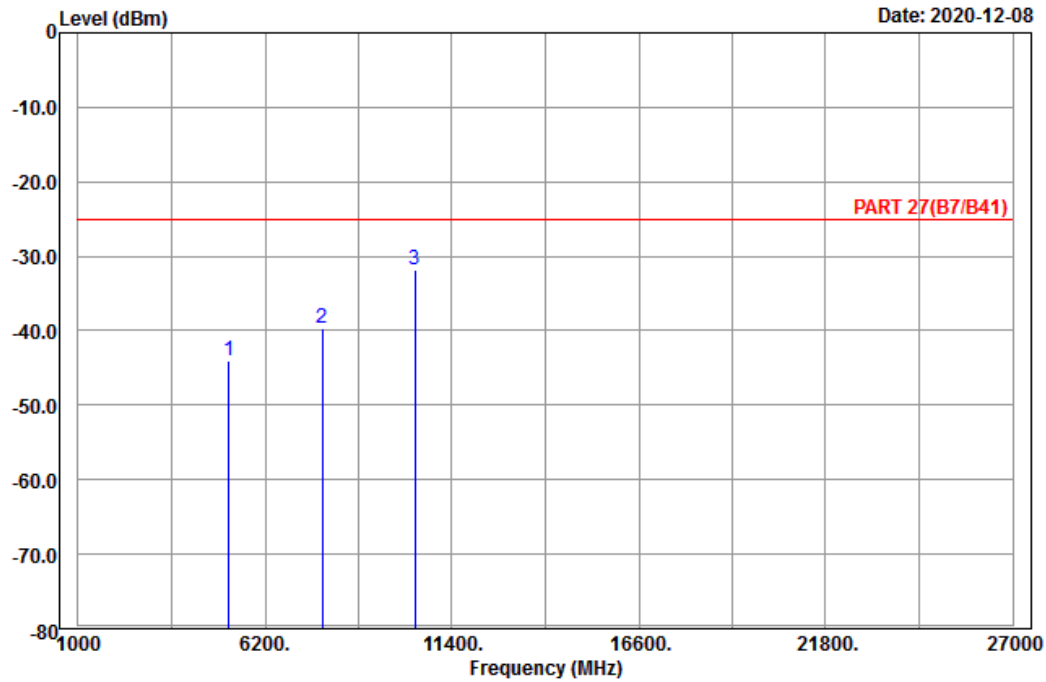

Site : 966 chamber 1
 Condition: PART 27(B7/B41) Horizontal
 Remark : LTE_Band 38_Link_M-Ch
 Tested by: Charles Hsiao

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	5190.00	-44.04	-64.16	20.12	-25.00	-19.04	Peak
2	7785.00	-39.71	-63.04	23.33	-25.00	-14.71	Peak
3 pp	10380.00	-31.93	-58.67	26.74	-25.00	-6.93	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 2020-12-08

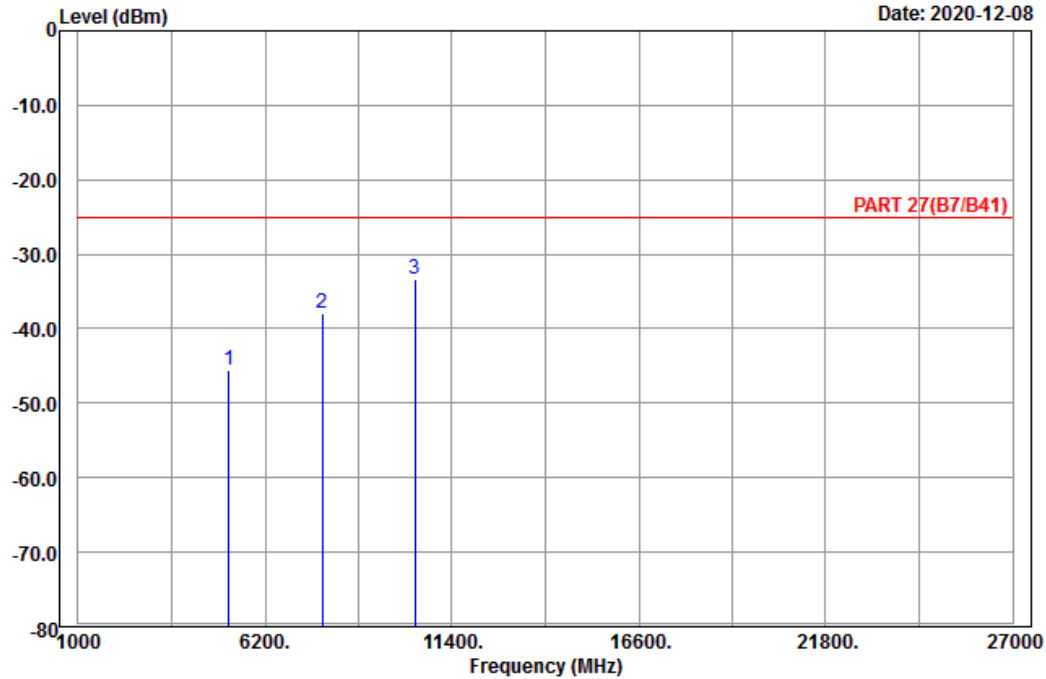

Site : 966 chamber 1
Condition: PART 27(B7/B41) Vertical
Remark : LTE_Band 38_Link_M-Ch
Tested by: Charles Hsiao

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	5190.00	-45.65	-65.77	20.12	-25.00	-20.65	Peak
2	7785.00	-37.97	-61.30	23.33	-25.00	-12.97	Peak
3 pp	10380.00	-33.28	-60.02	26.74	-25.00	-8.28	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

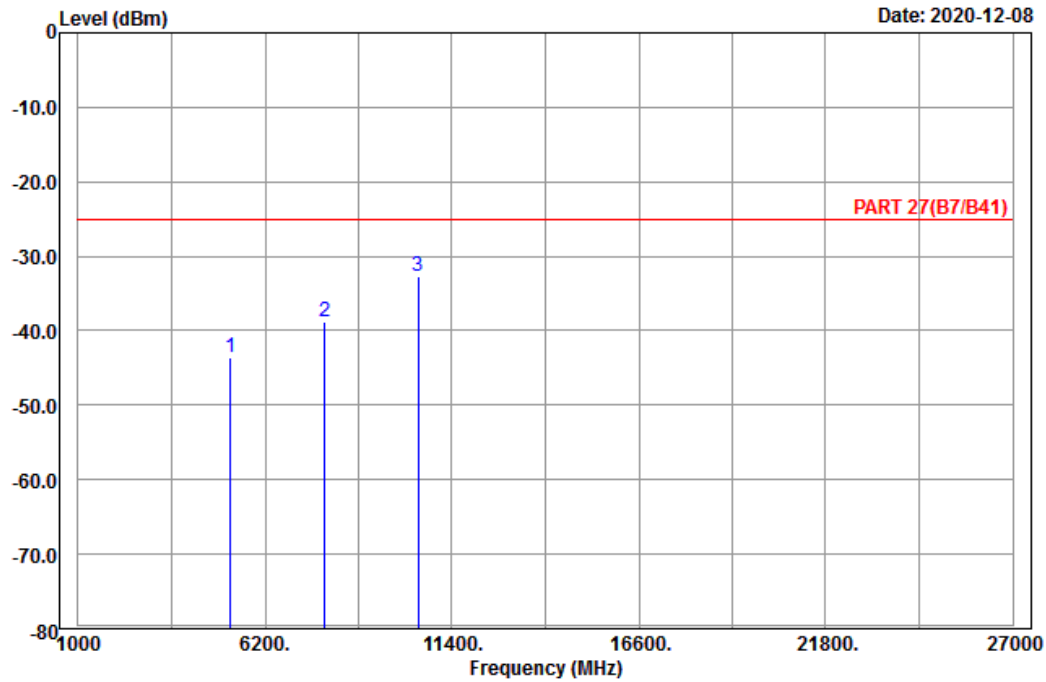

Site : 966 chamber 1
 Condition: PART 27(B7/B41) Horizontal
 Remark : LTE_Band 38_Link_H-Ch
 Tested by: Charles Hsiao

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	5235.00	-43.65	-63.81	20.16	-25.00	-18.65	Peak
2	7852.50	-38.79	-62.25	23.46	-25.00	-13.79	Peak
3 pp	10470.00	-32.76	-59.42	26.66	-25.00	-7.76	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 2020-12-08

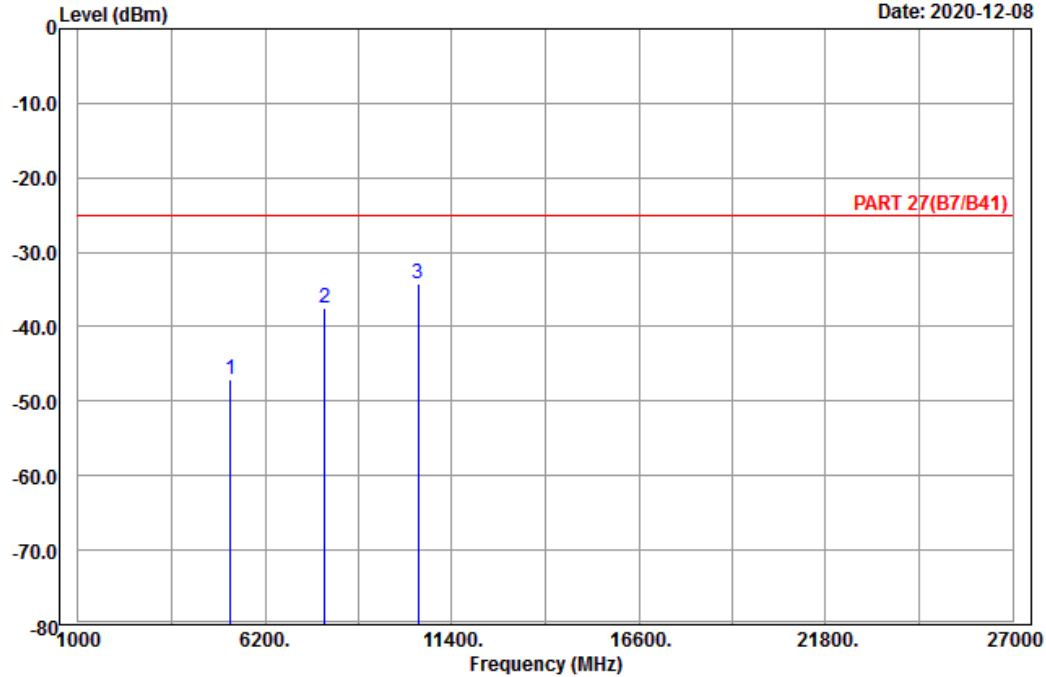

Site : 966 chamber 1
Condition: PART 27(B7/B41) Vertical
Remark : LTE_Band 38_Link_H-Ch
Tested by: Charles Hsiao

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	5235.00	-47.03	-67.19	20.16	-25.00	-22.03	Peak
2	7852.50	-37.43	-60.89	23.46	-25.00	-12.43	Peak
3 pp	10470.00	-34.21	-60.87	26.66	-25.00	-9.21	Peak


Channel Bandwidth: 20 MHz / QPSK
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

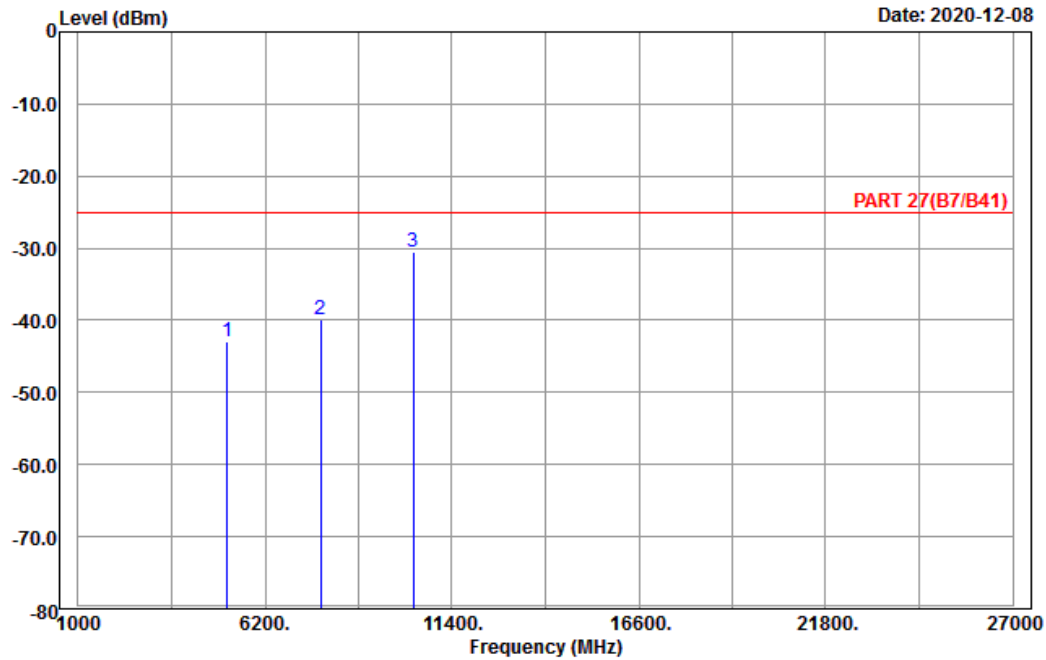

Site : 966 chamber 1
Condition: PART 27(B7/B41) Horizontal
Remark : LTE_Band 38_Link_L-Ch
Tested by: Charles Hsiao

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	5160.00	-42.88	-62.80	19.92	-25.00	-17.88	Peak
2	7740.00	-39.79	-63.02	23.23	-25.00	-14.79	Peak
3 pp	10320.00	-30.51	-57.18	26.67	-25.00	-5.51	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 2020-12-08

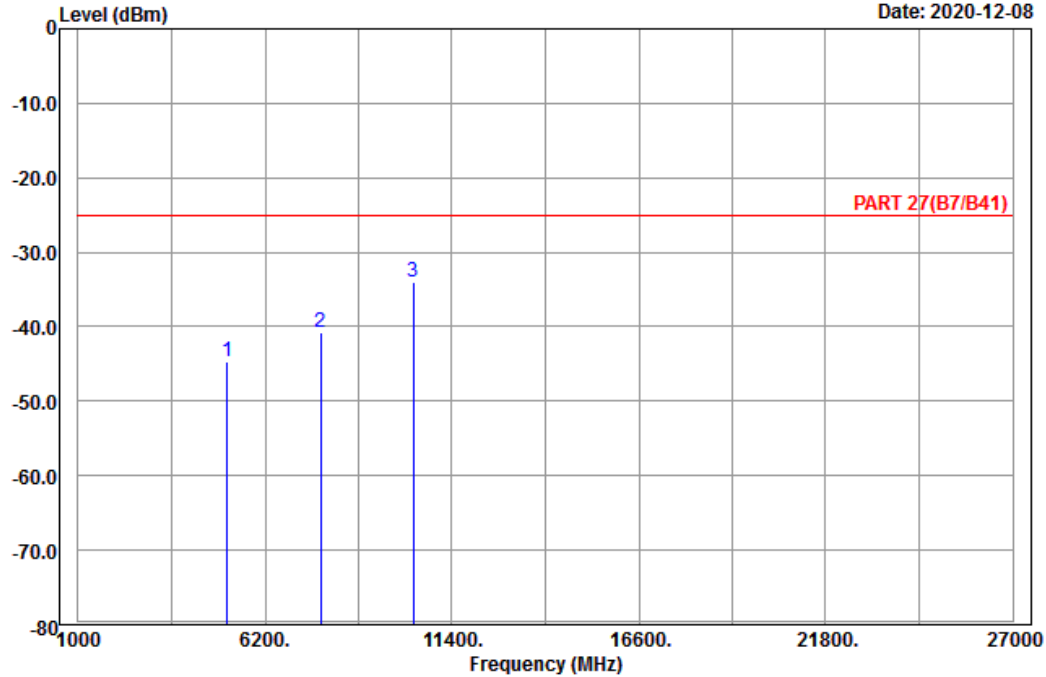

Site : 966 chamber 1
Condition: PART 27(B7/B41) Vertical
Remark : LTE_Band 38_Link_L-Ch
Tested by: Charles Hsiao

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	5160.00	-44.77	-64.69	19.92	-25.00	-19.77	Peak
2	7740.00	-40.70	-63.93	23.23	-25.00	-15.70	Peak
3 pp	10320.00	-34.00	-60.67	26.67	-25.00	-9.00	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

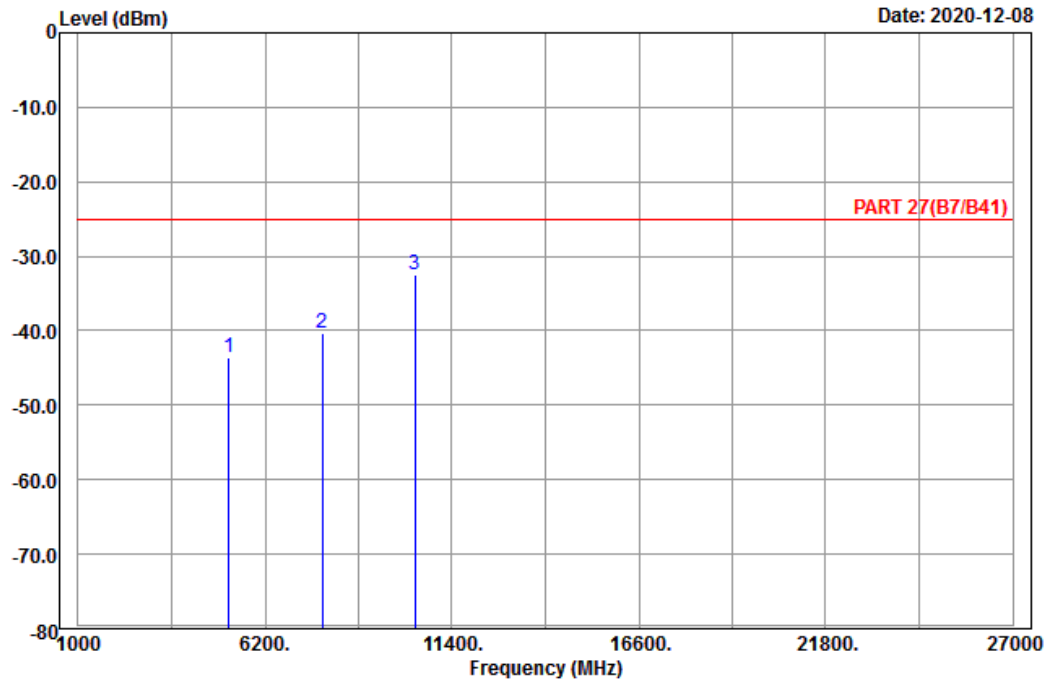

Site : 966 chamber 1
 Condition: PART 27(B7/B41) Horizontal
 Remark : LTE_Band 38_Link_M-Ch
 Tested by: Charles Hsiao

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	5190.00	-43.54	-63.66	20.12	-25.00	-18.54	Peak
2	7785.00	-40.23	-63.56	23.33	-25.00	-15.23	Peak
3 pp	10380.00	-32.50	-59.24	26.74	-25.00	-7.50	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 2020-12-08

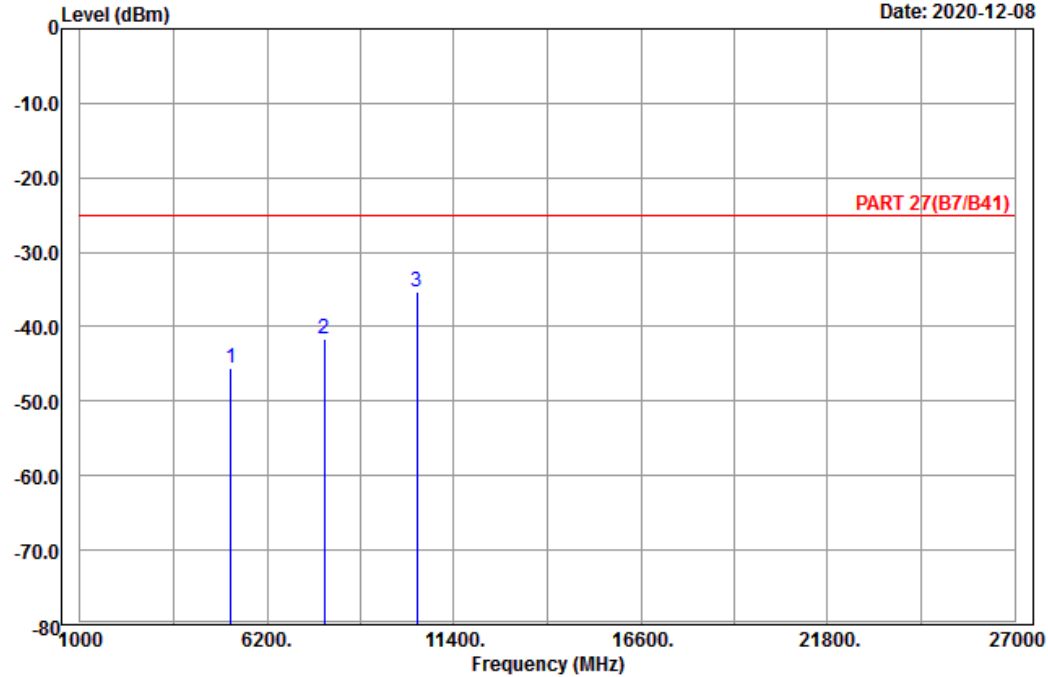

Site : 966 chamber 1
Condition: PART 27(B7/B41) Vertical
Remark : LTE_Band 38_Link_M-Ch
Tested by: Charles Hsiao

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	5190.00	-45.65	-65.77	20.12	-25.00	-20.65	Peak
2	7785.00	-41.73	-65.06	23.33	-25.00	-16.73	Peak
3 pp	10380.00	-35.42	-62.16	26.74	-25.00	-10.42	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 7

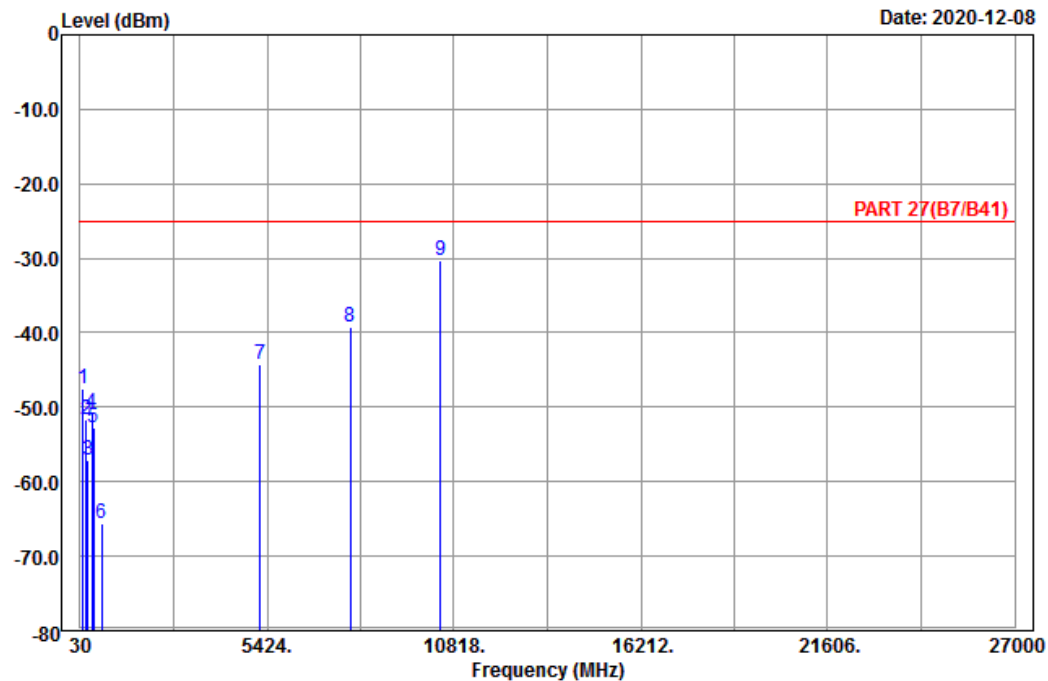

Site : 966 chamber 1
 Condition: PART 27(B7/B41) Horizontal
 Remark : LTE_Band 38_Link_H-Ch
 Tested by: Charles Hsiao

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	118.56	-47.56	-39.18	-8.38	-25.00	-22.56	Peak
2	203.88	-51.58	-45.45	-6.13	-25.00	-26.58	Peak
3	258.96	-57.18	-51.59	-5.59	-25.00	-32.18	Peak
4	373.50	-50.73	-46.59	-4.14	-25.00	-25.73	Peak
5	416.90	-52.64	-49.52	-3.12	-25.00	-27.64	Peak
6	646.50	-65.57	-65.47	-0.10	-25.00	-40.57	Peak
7	5220.00	-44.33	-64.47	20.14	-25.00	-19.33	Peak
8	7830.00	-39.15	-62.55	23.40	-25.00	-14.15	Peak
9 pp	10440.00	-30.33	-57.04	26.71	-25.00	-5.33	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 8

Date: 2020-12-08

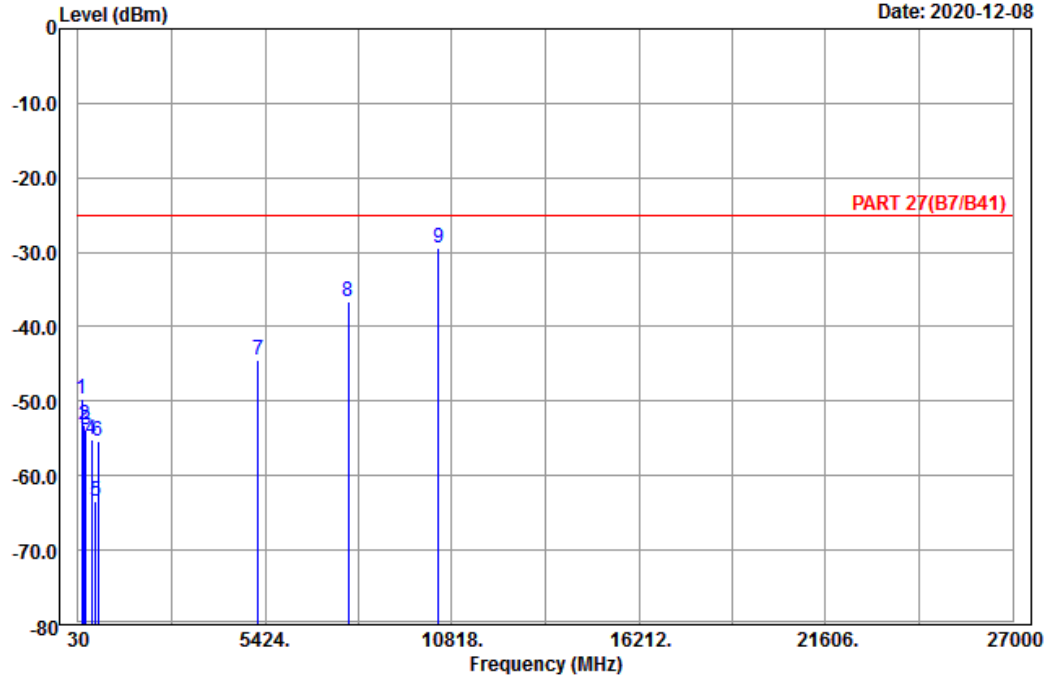

Site : 966 chamber 1
Condition: PART 27(B7/B41) Vertical
Remark : LTE_Band 38_Link_H-Ch
Tested by: Charles Hsiao

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	129.63	-49.79	-42.14	-7.65	-25.00	-24.79	Peak
2	206.04	-53.15	-47.04	-6.11	-25.00	-28.15	Peak
3	259.50	-53.83	-48.23	-5.60	-25.00	-28.83	Peak
4	416.90	-55.21	-52.09	-3.12	-25.00	-30.21	Peak
5	537.30	-63.44	-60.86	-2.58	-25.00	-38.44	Peak
6	601.70	-55.32	-55.74	0.42	-25.00	-30.32	Peak
7	5220.00	-44.47	-64.61	20.14	-25.00	-19.47	Peak
8	7830.00	-36.64	-60.04	23.40	-25.00	-11.64	Peak
9 pp	10440.00	-29.50	-56.21	26.71	-25.00	-4.50	Peak


LTE Band 41
Channel Bandwidth: 5 MHz / QPSK
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

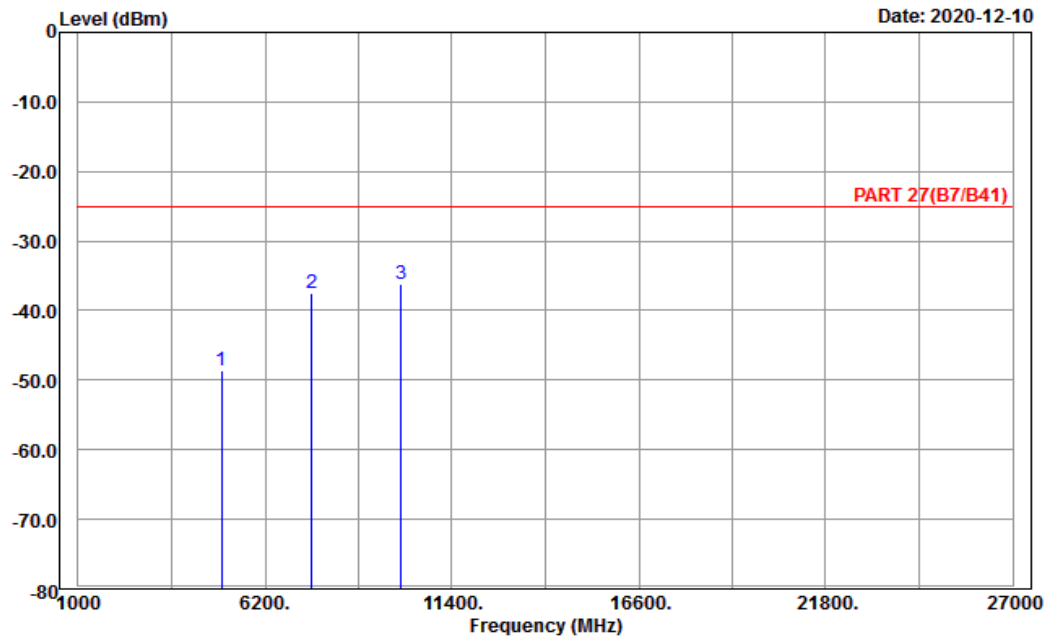

Site : 966 chamber 1
Condition: PART 27(B7/B41) Horizontal
Remark : LTE_Band 41_Link_L-Ch
Tested by: Charles Hsiao

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	4997.00	-48.68	-68.26	19.58	-25.00	-23.68	Peak
2	7495.50	-37.55	-59.75	22.20	-25.00	-12.55	Peak
3 pp	9994.00	-36.24	-62.46	26.22	-25.00	-11.24	Peak




Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 4

Date: 2020-12-10

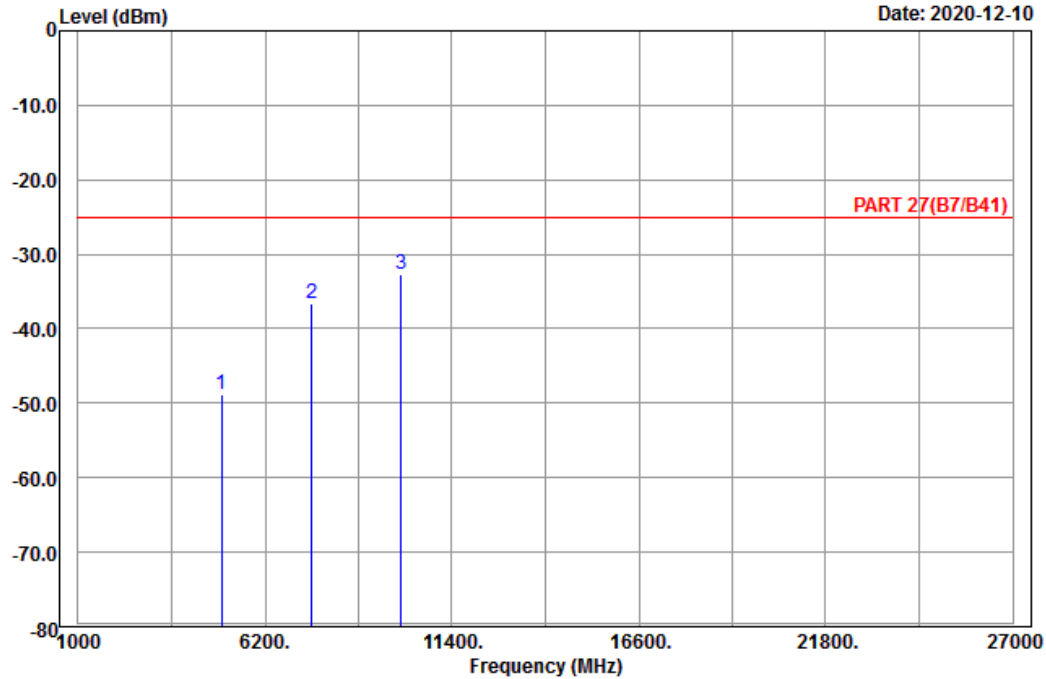

Site : 966 chamber 1
Condition: PART 27(B7/B41) Vertical
Remark : LTE_Band 41_Link_L-Ch
Tested by: Charles Hsiao

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	4997.00	-48.73	-68.31	19.58	-25.00	-23.73	Peak
2	7495.50	-36.59	-58.79	22.20	-25.00	-11.59	Peak
3 pp	9994.00	-32.60	-58.82	26.22	-25.00	-7.60	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

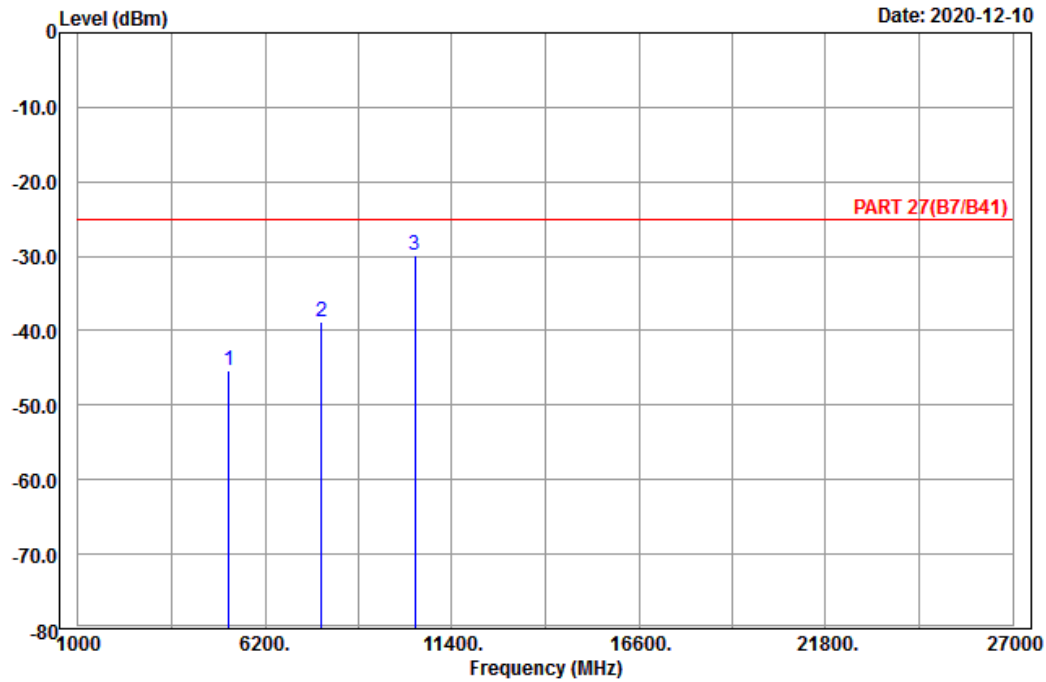

Site : 966 chamber 1
 Condition: PART 27(B7/B41) Horizontal
 Remark : LTE_Band 41_Link_M-Ch
 Tested by: Charles Hsiao

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	5186.00	-45.24	-65.36	20.12	-25.00	-20.24	Peak
2	7779.00	-38.77	-62.10	23.33	-25.00	-13.77	Peak
3 pp	10372.00	-29.76	-56.50	26.74	-25.00	-4.76	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 2020-12-10

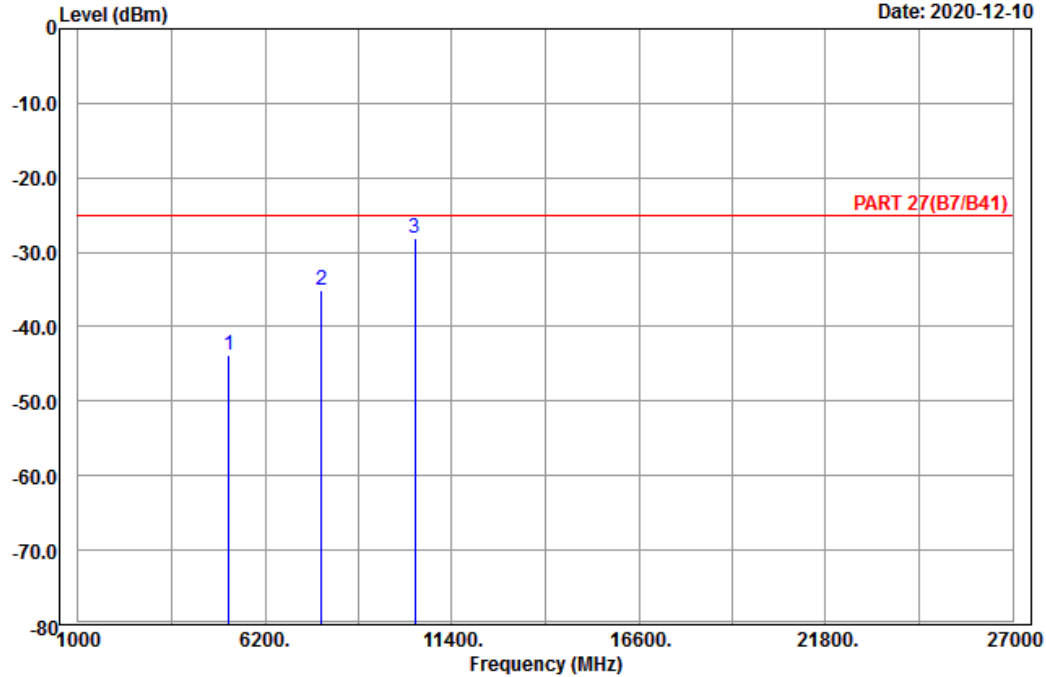

Site : 966 chamber 1
Condition: PART 27(B7/B41) Vertical
Remark : LTE_Band 41_Link_M-Ch
Tested by: Charles Hsiao

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	5186.00	-43.77	-63.89	20.12	-25.00	-18.77	Peak
2	7779.00	-35.13	-58.46	23.33	-25.00	-10.13	Peak
3 pp	10372.00	-28.06	-54.80	26.74	-25.00	-3.06	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 13

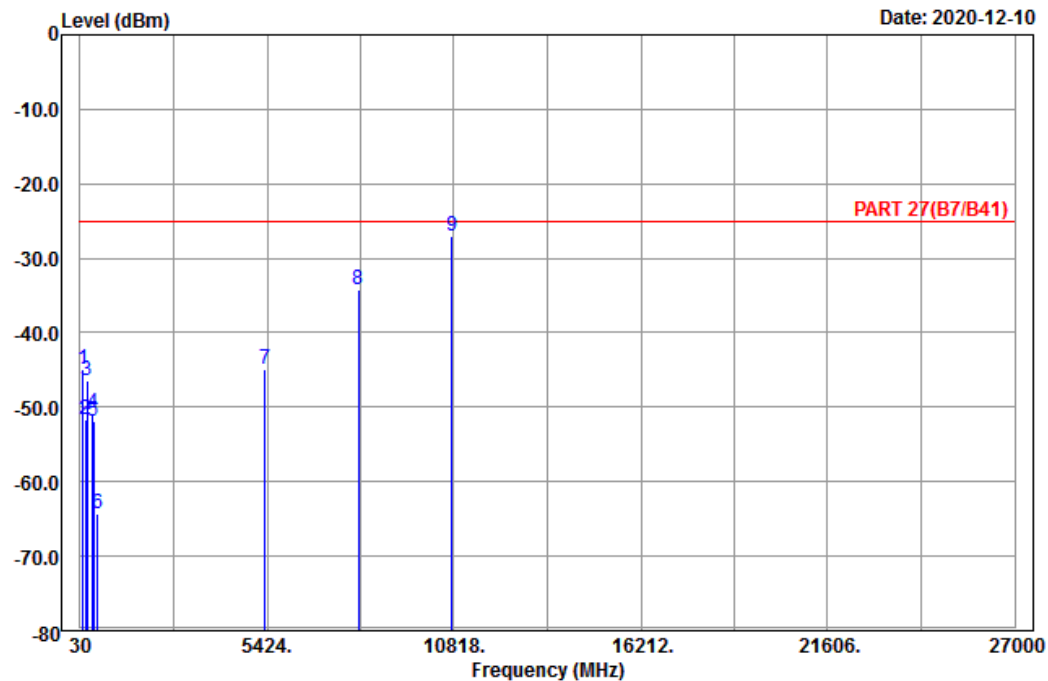

Site : 966 chamber 1
Condition: PART 27(B7/B41) Horizontal
Remark : LTE_Band 41_Link_H-Ch
Tested by: Charles Hsiao

		Read	Limit	Over	
Freq	Level	Level	Factor	Line	Limit Remark
MHz	dBm	dBm	dB	dBm	dB
1	121.53	-44.97	-36.78	-8.19	-25.00 -19.97 Peak
2	177.69	-51.64	-45.76	-5.88	-25.00 -26.64 Peak
3	218.46	-46.45	-40.51	-5.94	-25.00 -21.45 Peak
4	383.30	-50.76	-47.14	-3.62	-25.00 -25.76 Peak
5	413.40	-51.97	-48.93	-3.04	-25.00 -26.97 Peak
6	542.90	-64.41	-62.25	-2.16	-25.00 -39.41 Peak
7	5375.00	-44.81	-65.13	20.32	-25.00 -19.81 Peak
8	8062.50	-34.16	-57.93	23.77	-25.00 -9.16 Peak
9 pp	10750.00	-27.09	-54.25	27.16	-25.00 -2.09 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 14

Date: 2020-12-10

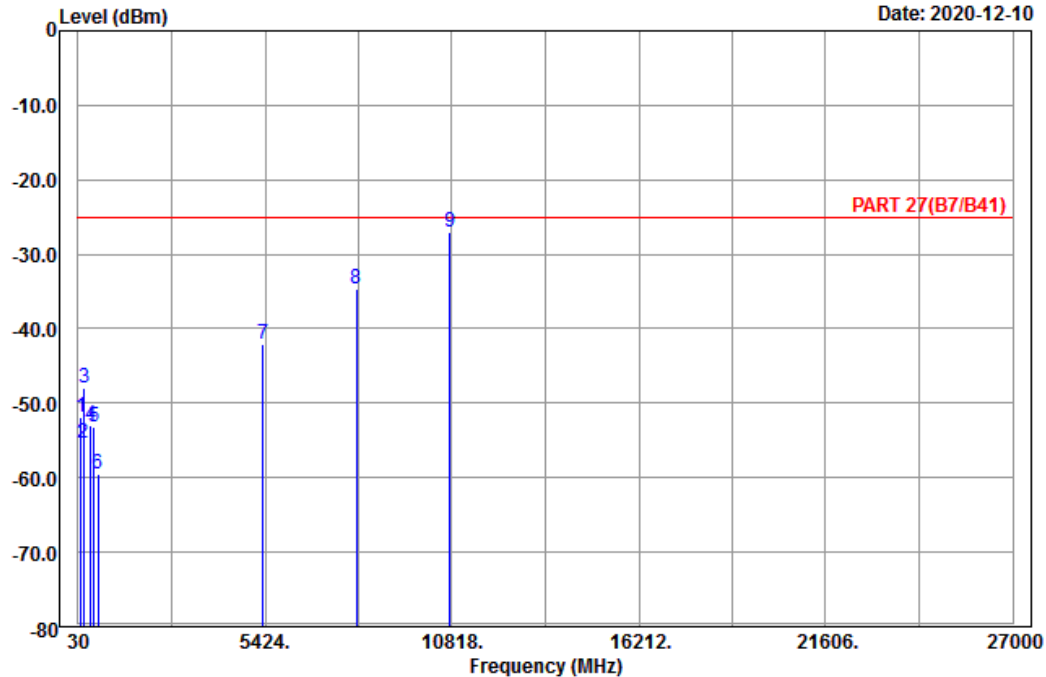

Site : 966 chamber 1
Condition: PART 27(B7/B41) Vertical
Remark : LTE_Band 41_Link_H-Ch
Tested by: Charles Hsiao

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	111.54	-51.78	-42.96	-8.82	-25.00	-26.78	Peak
2	179.04	-55.32	-49.64	-5.68	-25.00	-30.32	Peak
3	207.93	-47.91	-41.83	-6.08	-25.00	-22.91	Peak
4	404.30	-52.95	-50.10	-2.85	-25.00	-27.95	Peak
5	475.70	-53.16	-48.60	-4.56	-25.00	-28.16	Peak
6	610.10	-59.43	-59.75	0.32	-25.00	-34.43	Peak
7	5375.00	-41.97	-62.29	20.32	-25.00	-16.97	Peak
8	8062.50	-34.69	-58.46	23.77	-25.00	-9.69	Peak
9 pp	10750.00	-26.94	-54.10	27.16	-25.00	-1.94	Peak

Channel Bandwidth: 20 MHz / QPSK
Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 2020-12-10

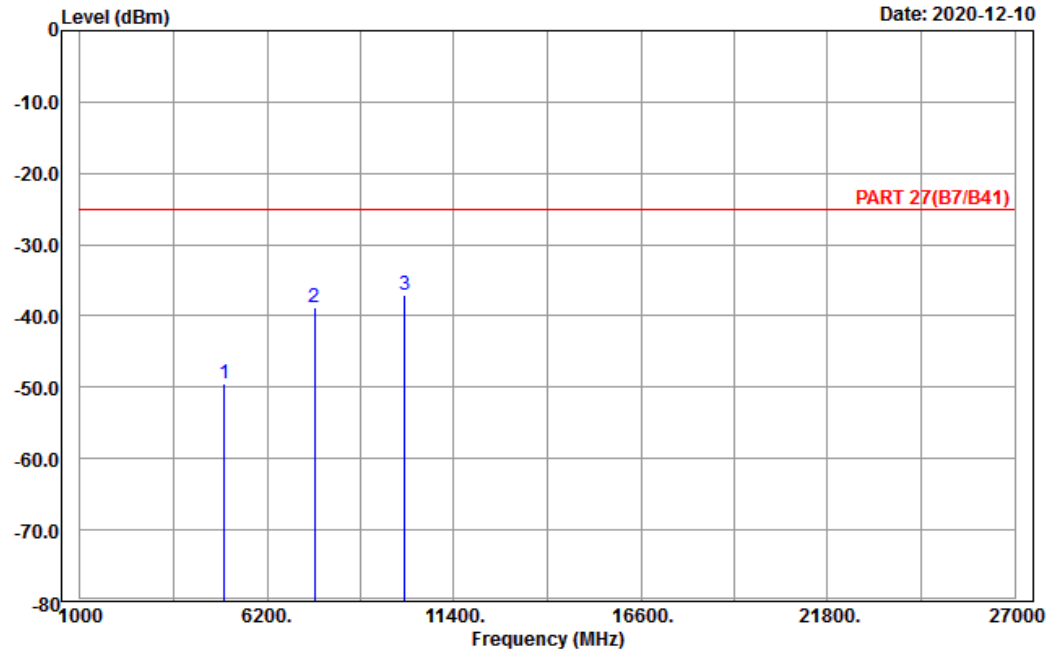

Site : 966 chamber 1
Condition: PART 27(B7/B41) Horizontal
Remark : LTE_Band 41_Link_L-Ch
Tested by: Charles Hsiao

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	5012.00	-49.47	-68.55	19.08	-25.00	-24.47	Peak
2	7518.00	-38.75	-61.43	22.68	-25.00	-13.75	Peak
3 pp	10024.00	-37.07	-63.32	26.25	-25.00	-12.07	Peak




Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 4

Date: 2020-12-10

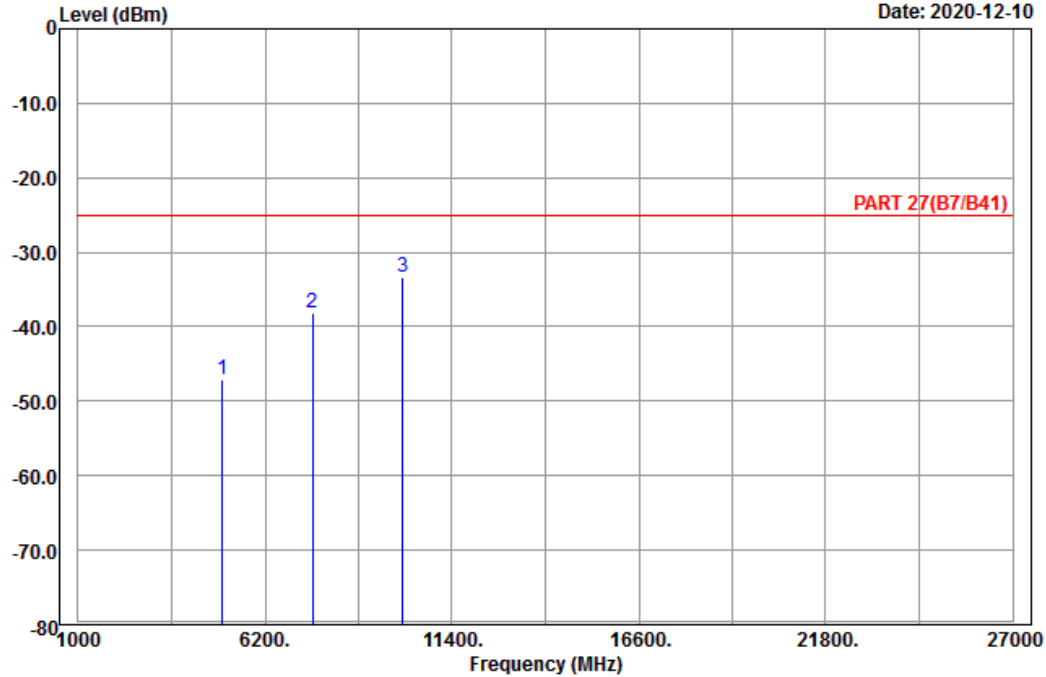

Site : 966 chamber 1
Condition: PART 27(B7/B41) Vertical
Remark : LTE_Band 41_Link_L-Ch
Tested by: Charles Hsiao

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	5012.00	-47.12	-66.20	19.08	-25.00	-22.12	Peak
2	7518.00	-38.19	-60.87	22.68	-25.00	-13.19	Peak
3 pp	10024.00	-33.29	-59.54	26.25	-25.00	-8.29	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

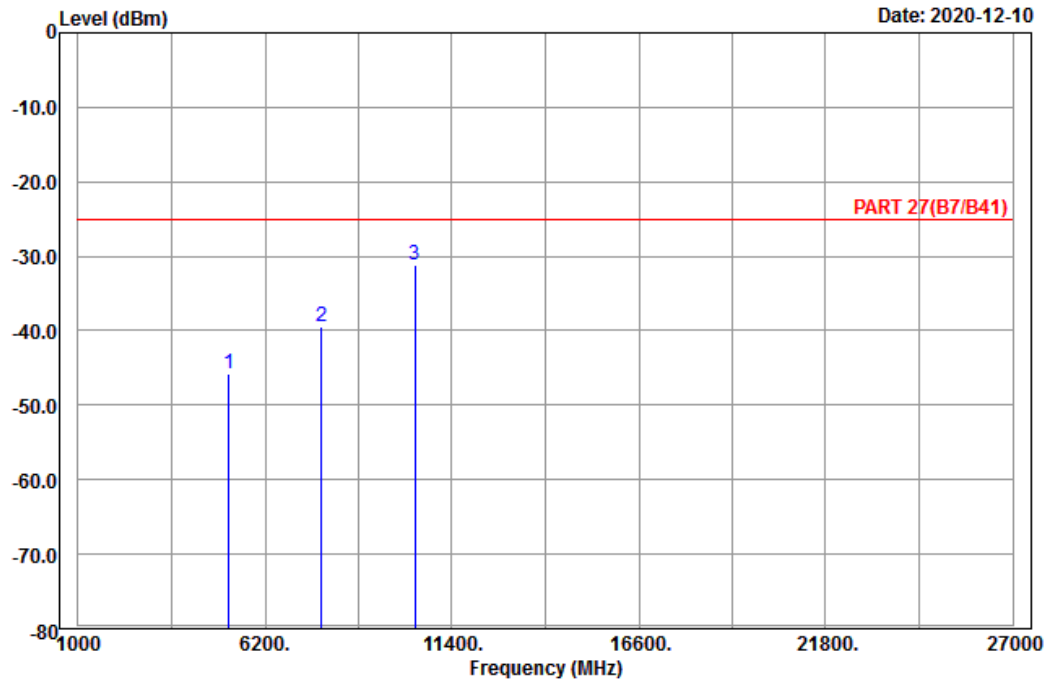

Site : 966 chamber 1
 Condition: PART 27(B7/B41) Horizontal
 Remark : LTE_Band 41_Link_M-Ch
 Tested by: Charles Hsiao

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	5186.00	-45.73	-65.85	20.12	-25.00	-20.73	Peak
2	7779.00	-39.51	-62.84	23.33	-25.00	-14.51	Peak
3 pp	10372.00	-31.08	-57.82	26.74	-25.00	-6.08	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2020-12-10

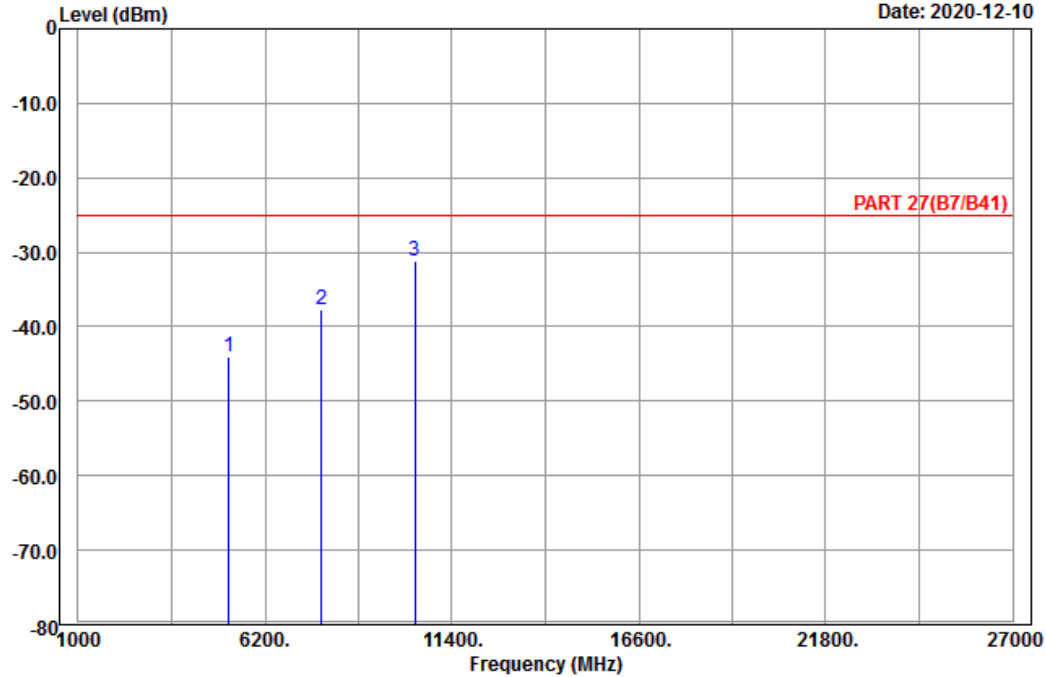

Site : 966 chamber 1
 Condition: PART 27(B7/B41) Vertical
 Remark : LTE_Band 41_Link_M-Ch
 Tested by: Charles Hsiao

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	5186.00	-43.95	-64.07	20.12	-25.00	-18.95	Peak
2	7779.00	-37.72	-61.05	23.33	-25.00	-12.72	Peak
3 pp	10372.00	-31.12	-57.86	26.74	-25.00	-6.12	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 8

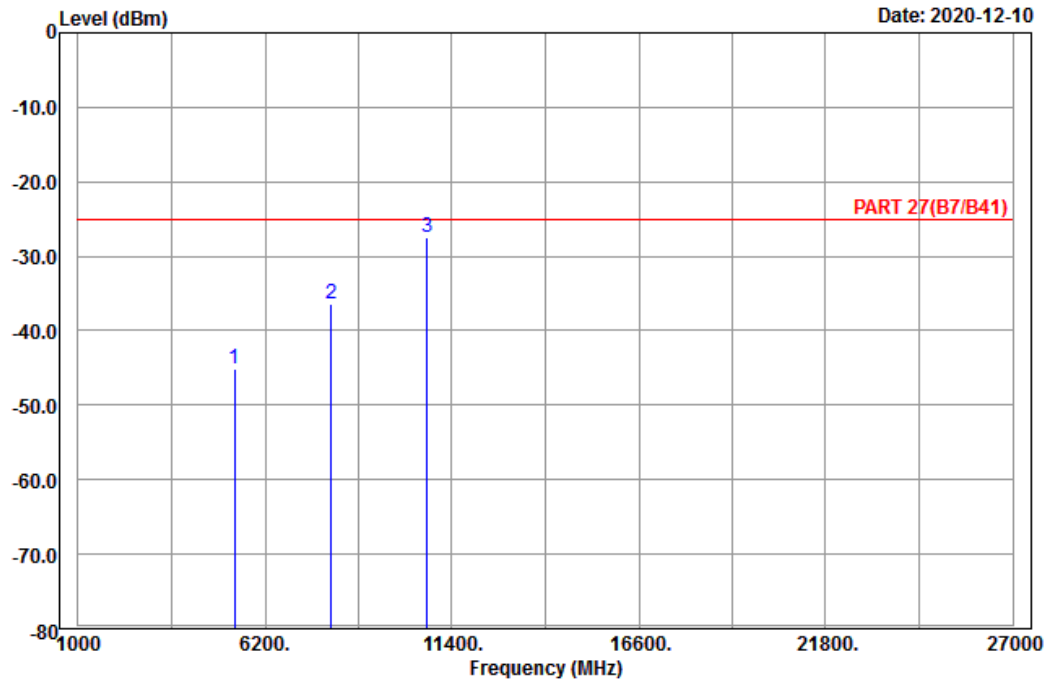

Site : 966 chamber 1
 Condition: PART 27(B7/B41) Horizontal
 Remark : LTE_Band 41_Link_H-Ch
 Tested by: Charles Hsiao

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	5360.00	-45.11	-65.41	20.30	-25.00	-20.11	Peak
2	8040.00	-36.30	-60.05	23.75	-25.00	-11.30	Peak
3 pp	10720.00	-27.37	-54.45	27.08	-25.00	-2.37	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2020-12-10

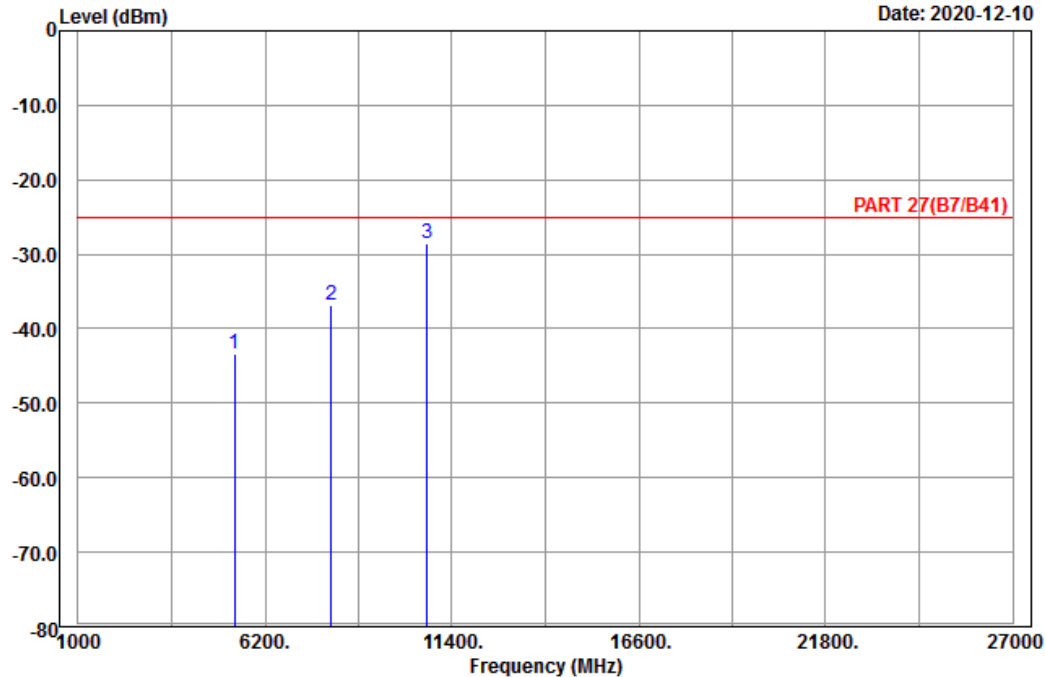

Site : 966 chamber 1
Condition: PART 27(B7/B41) Vertical
Remark : LTE_Band 41_Link_H-Ch
Tested by: Charles Hsiao

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	5360.00	-43.34	-63.64	20.30	-25.00	-18.34	Peak
2	8040.00	-36.75	-60.50	23.75	-25.00	-11.75	Peak
3 pp	10720.00	-28.47	-55.55	27.08	-25.00	-3.47	Peak

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---