




System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/24/2006 9:47:28 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Broadcom MCAG in Heavenly	Relative Permittivity:	50.96
Relative Humidity:	30%	Conductivity:	1.861
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	30.00 mm
DUT Position:	side contact	Max SAR Z-axis Location:	-169.40 mm
Antenna Configuration:	AUX & BT	Max E Field:	16.33 V/m
Test Frequency:	2412MHz & BT 2402	SAR 1g:	0.242 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.111 W/kg
Conversion Factors:	.490 / .490 / .490	SAR Start:	0.055 W/kg
Type of Modulation:		SAR End:	0.055 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	3/20/2006
Input Power Level:	max	Extrapolation:	poly4

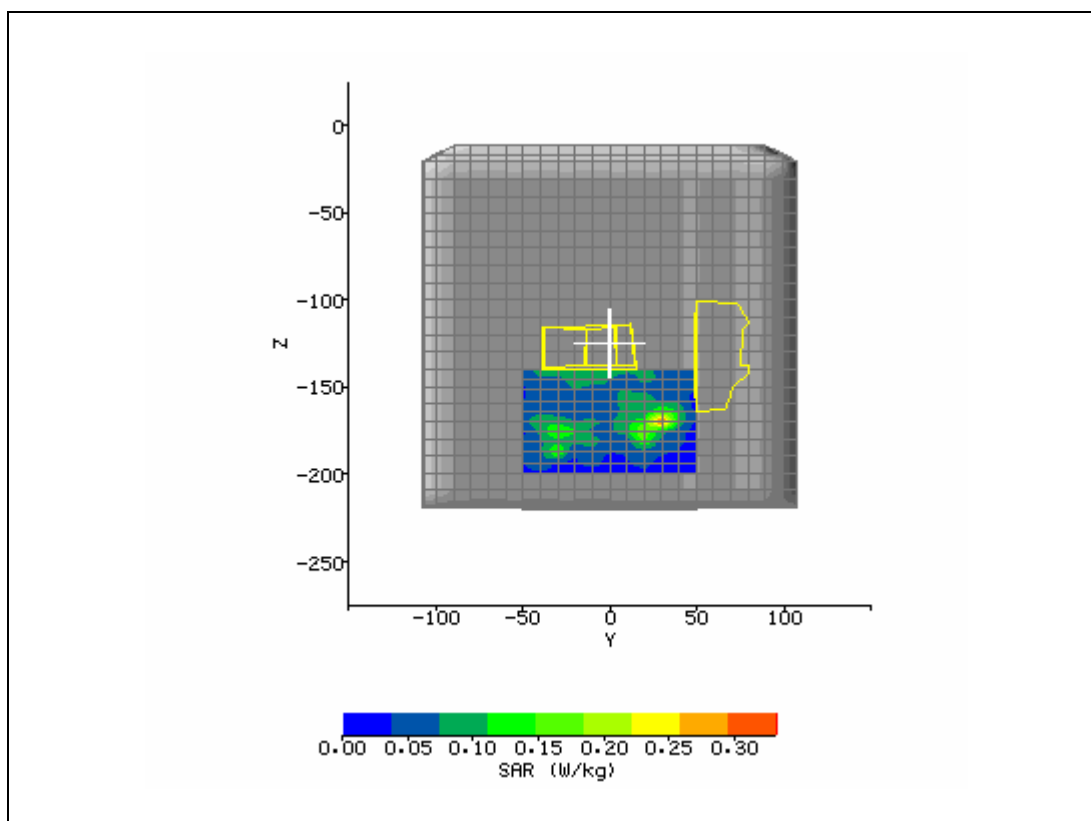

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/24/2006 9:47:28 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Broadcom MCAG in Heavenly	Relative Permittivity:	50.72
Relative Humidity:	30%	Conductivity:	1.911
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	22.00 mm
DUT Position:	side contact	Max SAR Z-axis Location:	-171.20 mm
Antenna Configuration:	AUX	Max E Field:	13.76 V/m
Test Frequency:	2442MHz	SAR 1g:	0.209 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.106 W/kg
Conversion Factors:	.490 / .490 / .490	SAR Start:	0.060 W/kg
Type of Modulation:		SAR End:	0.060 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.10 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	3/20/2006
Input Power Level:	max	Extrapolation:	poly4

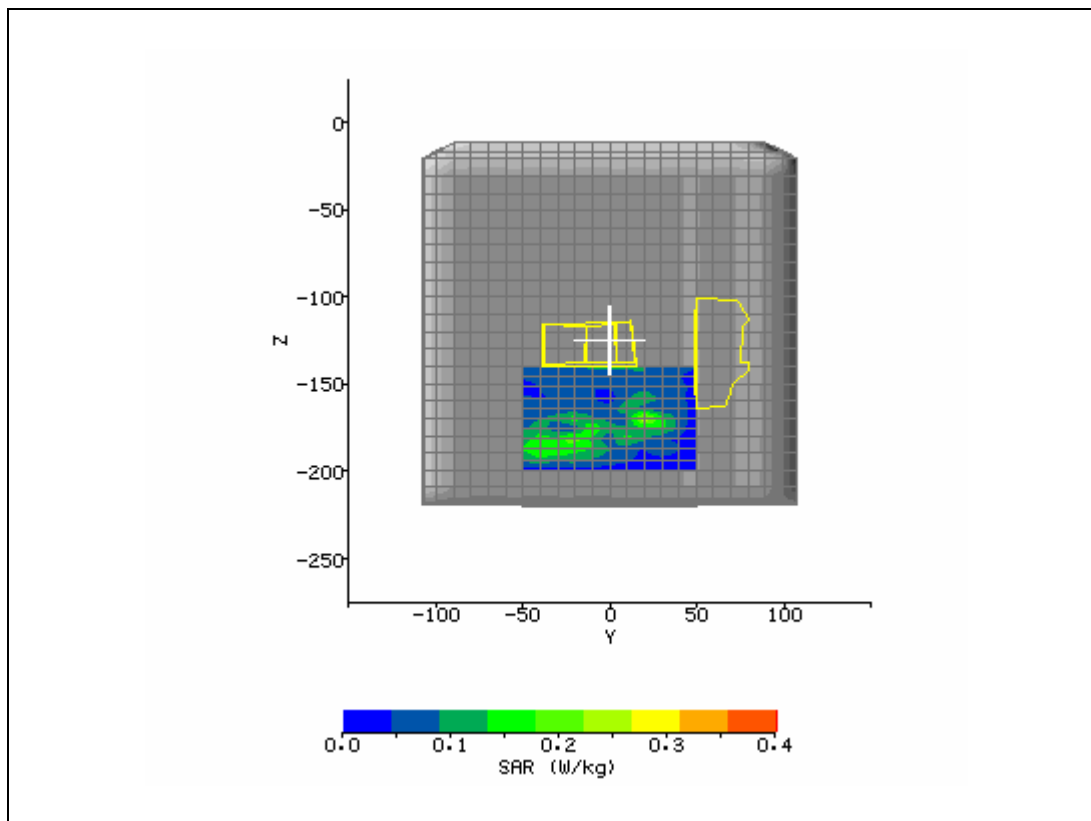

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/24/2006 9:47:28 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Broadcom MCAG in Heavenly	Relative Permittivity:	50.84
Relative Humidity:	30%	Conductivity:	1.932
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	23.00 mm
DUT Position:	side contact	Max SAR Z-axis Location:	-176.00 mm
Antenna Configuration:	AUX	Max E Field:	11.97 V/m
Test Frequency:	2462MHz	SAR 1g:	0.158 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.094 W/kg
Conversion Factors:	.490 / .490 / .490	SAR Start:	0.032 W/kg
Type of Modulation:		SAR End:	0.033 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.13 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	3/20/2006
Input Power Level:	max	Extrapolation:	poly4

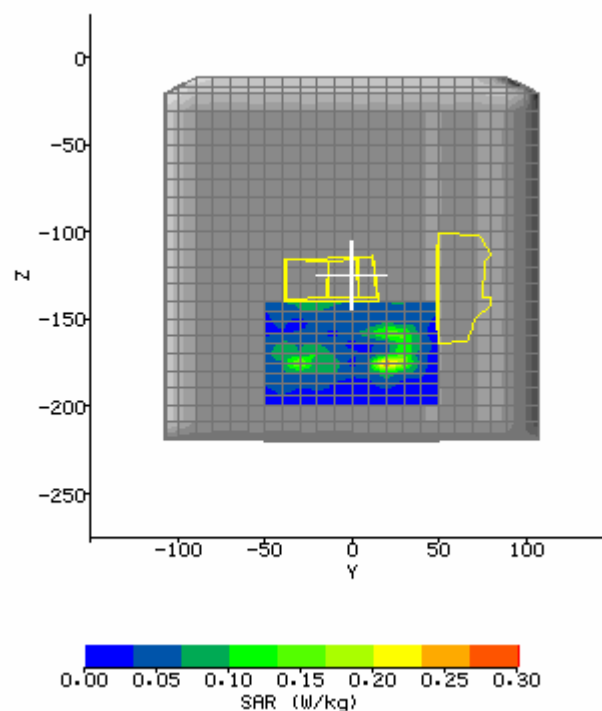

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/24/2006 9:41:02 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Verification	Relative Permittivity:	39.2
Relative Humidity:	30%	Conductivity:	1.8
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-3.00 mm
DUT Position:	verification	Max SAR Z-axis Location:	-147.20 mm
Antenna Configuration:	dipole	Max E Field:	197.82 V/m
Test Frequency:	2450MHz	SAR 1g:	51.286 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	23.742 W/kg
Conversion Factors:	.433 / .433 / .433	SAR Start:	10.536 W/kg
Type of Modulation:		SAR End:	10.575 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.37 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	2/10/06
Input Power Level:	30 dBm	Extrapolation:	poly4

