



Certificate Number: 5055.02

TEST REPORT FOR SAR TESTING

Report No.: SRTC2020-9004(F)-20111301(H)

Product Name: 5G Multi-mode Terminal

Product Model: A003ZT

Applicant: ZTE Corporation

Manufacturer: ZTE Corporation

Specification: Part 2.1093

IEEE Std 1528

KDB Procedures

FCC ID: SRQ-A003ZT

The State Radio_monitoring_center Testing Center (SRTC)

15th Building, No.30 Shixing Street, Shijingshan District, Beijing, P.R. China

Tel: 86-10-57996183 Fax: 86-10-57996388

Contents

1. GENERAL INFORMATION	2
1.1 NOTES OF THE TEST REPORT.....	2
1.2 INFORMATION ABOUT THE TESTING LABORATORY.....	2
1.3 APPLICANT'S DETAILS	2
1.4 MANUFACTURER'S DETAILS	2
1.5 TEST ENVIRONMENT	3
2. DESCRIPTION OF THE DEVICE UNDER TEST.....	3
2.1 FINAL EQUIPMENT BUILD STATUS	3
2.2 SUPPORT EQUIPMENT.....	4
3. REFERENCE SPECIFICATION.....	5
4. TEST CONDITIONS.....	6
4.1 PICTURE TO DEMONSTRATE THE REQUIRED LIQUID DEPTH	6
4.2 TEST SIGNAL, FREQUENCIES AND OUTPUT POWER.....	6
4.3 SAR MEASUREMENT SET-UP.....	6
4.4 PHANTOMS	7
4.5 TISSUE SIMULANTS	7
4.6 DESCRIPTION OF THE TEST PROCEDURE	8
5 RESULT SUMMAR	11
6 TEST RESULT	13
6.1 MANUFACTURING TOLERANCE.....	13
6.2 GSM MEASUREMENT RESULT.....	22
6.3 WCDMA MEASUREMENT RESULT	24
6.4 LTE MEASUREMENT RESULT	30
6.5 BLUETOOTH MEASUREMENT RESULT	52
6.6 WI-FI MEASUREMENT RESULT	52
6.7 STANDALONE SAR TEST EXCLUSION CONSIDERATIONS	56
6.8 RF EXPOSURE CONDITIONS	58
6.9 SYSTEM CHECKING.....	61
6.10 SAR TEST RESULT	63
6.11 SAR MEASUREMENT VARIABILITY	86
6.12 SIMULTANEOUS TRANSMISSION SAR ANALYSIS	87
7 MEASUREMENT UNCERTAINTY	88
8 TEST EQUIPMENTS	90
ANNEX A – TEST PLOTS	92
ANNEX B – RELEVANT PAGES FROM CALIBRATION REPORTS.....	92

1. GENERAL INFORMATION

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio_monitoring_center Testing Center (SRTC).

The test results relate only to individual items of the samples which have been tested.

The certification and accreditation identifiers used in this report shall not be applicable to the tested or calibrated samples thereof. The manufacturer shall not mark the tested samples or items (or a separate part of the item) with the identifiers of certification and accreditation to mislead relevant parties about the tested samples or items.

1.2 Information about the testing laboratory

Company:	The State Radio_monitoring_center Testing Center (SRTC)
Address:	15th Building, No.30 Shixing Street, Shijingshan District, Beijing P.R. China
City:	Beijing
Country or Region:	P.R. China
Contacted person:	Liu Jia
Tel:	+86 10 57996183
Fax:	+86 10 57996388
Email:	liujiaf@srtc.org.cn

1.3 Applicant's details

Company:	ZTE Corporation
Address:	No.55, Hi-tech Road South, Shenzhen, P. R. China
City:	Shenzhen
Country or Region:	China
Contacted person:	Wengy Wang
Tel:	+8615999501007
Email:	wang.wenge@zte.com.cn

1.4 Manufacturer's details

Company:	ZTE Corporation
Address:	No.55, Hi-tech Road South, Shenzhen, P. R. China
City:	Shenzhen
Country or Region:	China
Contacted person:	Wengy Wang
Tel:	+8615999501007
Email:	wang.wenge@zte.com.cn

1.5 Test Environment

Date of Receipt of test sample at SRTC:	2020.11.18
Testing Start Date:	2020.11.23
Testing End Date:	2020.12.08

Environmental Data:	Temperature (°C)	Humidity (%)
Ambient	20	40

Normal Supply Voltage (Vdc.):	3.87
-------------------------------	------

2. DESCRIPTION OF THE DEVICE UNDER TEST

2.1 Final Equipment Build Status

Wireless Technology and Frequency Bands	<input checked="" type="checkbox"/> GSM Band: GSM1900 <input checked="" type="checkbox"/> WCDMA Band: FDD II/IV <input checked="" type="checkbox"/> LTE Band: 2/41 <input checked="" type="checkbox"/> Wi-Fi Band: 2.4GHz/5GHz(UNII-1)/ 5GHz(UNII-2A)/ 5GHz(UNII-2C) <input checked="" type="checkbox"/> BT/BLE
Mode	GSM <input checked="" type="checkbox"/> GPRS (GMSK) <input checked="" type="checkbox"/> EGPRS (GMSK/8PSK) WCDMA <input checked="" type="checkbox"/> UMTS Rel. 99 <input checked="" type="checkbox"/> HSDPA (Rel. 5) <input checked="" type="checkbox"/> HSUPA (Rel. 6) <input checked="" type="checkbox"/> HSPA+ (Rel.7) <input checked="" type="checkbox"/> DC-HSDPA (Rel.8) Wi-Fi <input checked="" type="checkbox"/> 802.11a <input checked="" type="checkbox"/> 802.11b <input checked="" type="checkbox"/> 802.11g <input checked="" type="checkbox"/> 802.11n HT20 <input checked="" type="checkbox"/> 802.11n HT40 <input checked="" type="checkbox"/> 802.11ac VHT20 <input checked="" type="checkbox"/> 802.11ac VHT40 <input checked="" type="checkbox"/> 802.11ac VHT80 LTE <input checked="" type="checkbox"/> QPSK <input checked="" type="checkbox"/> 16QAM <input checked="" type="checkbox"/> 64QAM
Duty Cycle*	GPRS: 12.5% (1 Slot), 25% (2 Slots), 37.5% (3 Slots), 50% (4 Slots) EDGE(GMSK/8PSK) 12.5% (1 Slot), 25% (2 Slots), 37.5% (3 Slots), 50% (4 Slots)

	WCDMA: 100% LTE(FDD): 100% LTE(TDD): 63.3% maximum BT: DH5:76.84% 2DH5:63.32% 3DH5:77.22% BLE: 1M:65.97% 2M:36.43% WIFI2.4GHz: 11b:99.3% 11g:98.3% 11n20:98.1% 11n40:94.8% WIFI5GHz: 11a:98.1% 11n20:98.0% 11n40:96.0% 11ac20:98.0% 11ac40:96.0% 11ac80:92.7%
Multi-Slot Class for GPRS/EDGE	<input type="checkbox"/> Class 8 - One Up <input type="checkbox"/> Class 10 - Two Up <input type="checkbox"/> Class 12 - Four Up <input checked="" type="checkbox"/> Class 33- Four Up
Mobile Phone Capability	<input type="checkbox"/> Class A - Mobile phones can be connected to both GPRS and GSM services simultaneously. <input checked="" type="checkbox"/> Class B - Mobile phones can be attached to both GPRS and GSM services, using one service at a time. <input type="checkbox"/> Class C - Mobile phones are attached to either GPRS or GSM voice service. You need to switch manually between services
DTM	Not Supported
Note	For licensed cellular network duty cycle is inherent. For unlicensed network WLAN Duty cycle is depends on the data traffic, and the traffic allocation in operating mode could be the most conservative condition which with 100% duty cycle. SAR measurement also use non signalling mode, so the duty factor shall be taken into consideration.

2.2 Support Equipment

The following support equipment was used to exercise the DUT during testing:

State of sample	Normal
H/W Version	zd9B
S/W Version	A003ZT a.1.0
IMEI	865069050002319/865069050000974

Notes	As the information described above, we use test sample offered by the customer. The relevant tests have been performed in order to verify in which combination case the EUT would have the worst features.
-------	--

3. REFERENCE SPECIFICATION

Specification	Version	Title
Part 2.1093	2019	Radiofrequency radiation exposure evaluation: portable devices.
IEEE Std 1528	2013	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB 447498 D01	v06	General RF Exposure Guidance
KDB 447498 D02	v02r01	SAR MEASUREMENT PROCEDURES FOR USB DONGLE TRANSMITTERS
KDB 648474 D04	v01r03	Handset SAR
KDB 941225 D01	v03r01	3G SAR Procedures
KDB 248227 D01	v02r02	SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS
KDB 865664 D01	v01r04	SAR Measurement from 100 MHz to 6 GHz
KDB 865664 D02	v01r02	RF Exposure Reporting
KDB 941225 D05	v02r05	SAR for LTE Devices

4. TEST CONDITIONS

4.1 Picture to demonstrate the required liquid depth

The liquid depth is large than 15cm in the used SAM phantoms in flat section, and the depth of the tissue simulant was 15.0 ± 0.5 cm measured from the ear reference point during system checking and device measurements.



Liquid depth for SAR Measurement

4.2 Test Signal, Frequencies and Output Power

The device was put into operation by using a call tester. Communication between the device and the call tester was established by air link.

The device output power was set to maximum power level for all tests; a fully charged battery was used for every test sequence.

In all operating bands the measurements were performed on middle channel, and few of them were also performed on lowest and highest channels.

4.3 SAR Measurement Set-up

The system is based on a high precision robot (working range greater than 0.9m), which positions the probes with a positional repeatability of better than ± 0.02 mm. Special E-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines (length =300mm) to the data acquisition unit. A cell controller system contains the power supply, robot controller, teaches pendant (Joystick), and remote control, is used to drive the robot motors.

The PC consists of the Micron Pentium IV computer with Win7 system and SAR Measurement Software DASY5 Professional, A/D interface card, monitor, mouse, and keyboard. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot.

A data acquisition electronic (DAE) circuit performs the signal amplification; signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card. The DAE consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines.

The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection

The robot uses its own controller with a built in VME-bus computer.

4.4 Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin headed "SAM Phantom", manufactured by SPEAG. The phantom conforms to the requirements of IEEE 1528.

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.

The SPEAG device holder was used to position the device in all tests whilst a tripod was used to position the validation dipoles against the flat section of phantom.

4.5 Tissue Simulants

Recommended values for the dielectric parameters of the tissue simulants are given in IEEE 1528. All tests were carried out using simulants whose dielectric parameters were within $\pm 10\%$ below 3GHz and $\pm 5\%$ above 3GHz of the recommended values when use DASY system according to KDB865664D01. All tests were carried out within 24 hours of measuring the dielectric parameters.

Tissue Stimulant Recipes	
Name	Broadband tissue-equivalent liquid
Type	HBBL600-10000V6 Simulating Liquid

Note: The stimulant could be the same for head and body.

4.6 DESCRIPTION OF THE TEST PROCEDURE

4.6.1 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the Dasy system.



Device holder supplied by SPEAG

4.6.2 Test Exposure Conditions

4.6.2.1 Head Configuration

Measurements were made in “cheek” and “tilt” positions on both the left hand and right-hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".

4.6.2.2 Body Worn Configuration

The device was placed in the SPEAG holder below the flat section of the phantom. The distance between the device and the phantom was kept at the separation distance using a separate flat spacer that was removed before the start of the measurements. And the distance is normally determined according to the actual scene which might be the worst use condition for general exposure. The device's front and rear were oriented facing the phantom since these orientations give higher results for most regular portable devices.

4.6.2.3 Hotspot Configuration

Hotspot mode SAR is measured for all edges and surfaces of the device with a transmitting antenna located within 25 mm from that surface or edge; for the data modes, wireless technologies and frequency bands supporting hotspot mode.

4.6.3 Scan Procedure

First, area scans were used for determination of the field distribution and the approximate location of the local peak SAR values. The SAR distribution is scanned along the inside surface, at least for an area larger than the projection of the handset and antenna. The angle between the probe axis and the surface normal line is recommended but not required to be less than 30°. The SAR distribution is first measured on a 2-D coarse grid. The scan region should cover all areas that are exposed and encompassed by the projection of the handset. There are 15 mm × 15 mm (equal or less than 2GHz), 12 mm × 12 mm (from 2GHz~4GHz) and 10mm × 10mm (from 4GHz~6GHz) measurement grid used when two staggered one-dimensional cubic splines are used to estimate the maximum SAR location.

When the reported 1g-SAR estimated by area scan is less than 1.40 w/kg.

Zoom scan was performed by using the configuration mentioned below or more conservative scan area and step to determine the averaged SAR value. Drift was determined by measuring the same point at the start of the area scan and again at the end of the zoom scan.

Below 3GHz: 32mmX32mmX30mm scan area with 8 mm X8 mm X5 mm steps

2GHz-3GHz: 32mmX32mmX30mm scan area with 8 mm X8 mm X5 mm steps

3GHz-4GHz: 28mmX28mmX28mm scan area with 7 mm X7 mm X4 mm steps

4GHz-5GHz: 25mmX25mmX24mm scan area with 5 mm X5 mm X3 mm steps

5GHz-6GHz: 25mmX25mmX22mm scan area with 5 mm X5 mm X2 mm steps

4.6.4 SAR Averaging Methods

The maximum SAR value was averaged over a cube of tissue using interpolation and extrapolation.

The interpolation, extrapolation and maximum search routines within DASY5 are all based on the modified Quadratic Shepard's method (Robert J. Renka, Multivariate Interpolation of Large Sets of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148).

The interpolation scheme combines a least-square fitted function method with a weighted average method. A triradiate 3-D / bivariate 2-D quadratic function is computed for each measurement point and fitted to neighboring points by a least-square method. For the zoom scan, inverse distance weighting is incorporated to fit distant points more accurately. The interpolating function is finally calculated as a weighted average of the quadratics.

In the zoom scan, the interpolation function is used to extrapolate the Peak SAR from the deepest measurement points to the inner surface of the phantom.

5 RESULT SUMMARY



The maximum reported SAR values for Head/Body-Worn/Hotspot exposure conditions are given as follows. The device conforms to the requirements of the standard(s) when the maximum reported SAR value is less than or equal to the limit.

Standalone Transmission Summary(1g- SAR)					
Exposure Position	Frequency Band	SAR Result(W/kg)	Highest SAR Result(W/kg)	Limit(W/kg)	Result
Head	GSM 1900	0.18	1.37	1.60	Pass
	WCDMA Band II	0.29			
	WCDMA Band IV	0.35			
	LTE Band 2	0.29			
	LTE Band 41	0.01			
	BT/BLE-Antenna2	0.32			
	WLAN 2.4GHz-Antenna2	0.61			
	WLAN 5GHz UNII-1-Antenna2	0.89			
	WLAN 5GHz UNII-2A-Antenna2	0.72			
	WLAN 5GHz UNII-2C-Antenna2	1.19			
	WLAN 2.4GHz-Antenna4	1.02			
	WLAN 5GHz UNII-1-Antenna4	0.72			
	WLAN 5GHz UNII-2A-Antenna4	0.65			
	WLAN 5GHz UNII-2C-Antenna4	0.39			
	WLAN 2.4GH-MIMO	1.06			
	WLAN 5GHz UNII-1--MIMO	0.99			
	WLAN 5GHz UNII-2A--MIMO	0.81			
	WLAN 5GHz UNII-2C--MIMO	1.37			
Body-Worn (10mm Gap)	GSM 1900	0.31	0.80	1.60	Pass
	WCDMA Band II	0.47			
	WCDMA Band IV	0.80			
	LTE Band 2	0.51			
	LTE Band 41	0.11			
	BT/BLE-Antenna2	0.07			
	WLAN 2.4GHz-Antenna2	0.22			
	WLAN 5GHz UNII-1-Antenna2	0.45			
	WLAN 5GHz UNII-2A-Antenna2	0.33			
	WLAN 5GHz UNII-2C-Antenna2	0.53			
	WLAN 2.4GHz-Antenna4	0.43			
	WLAN 5GHz UNII-1-Antenna4	0.48			
	WLAN 5GHz UNII-2A-Antenna4	0.27			
	WLAN 5GHz UNII-2C-Antenna4	0.46			
	WLAN 2.4GH-MIMO	0.55			
	WLAN 5GHz UNII-1--MIMO	0.47			
	WLAN 5GHz UNII-2A--MIMO	0.51			
	WLAN 5GHz UNII-2C--MIMO	0.50			
Hotspot (10mm Gap)	GSM 1900	0.32	1.20	1.60	Pass
	WCDMA Band II	0.46			
	WCDMA Band IV	1.20			
	LTE Band 2	0.53			
	LTE Band 41	0.12			

BT/BLE-Antenna2	0.10				
WLAN 2.4GHz-Antenna2	0.27				
WLAN 5GHz UNII-1-Antenna2	0.45				
WLAN 5GHz UNII-2A-Antenna2	---				
WLAN 5GHz UNII-2C-Antenna2	---				
WLAN 2.4GHz-Antenna4	0.44				
WLAN 5GHz UNII-1-Antenna4	0.48				
WLAN 5GHz UNII-2A-Antenna4	---				
WLAN 5GHz UNII-2C-Antenna4	---				
WLAN 2.4GH-MIMO	0.51				
WLAN 5GHz UNII-1--MIMO	0.47				
WLAN 5GHz UNII-2A--MIMO	---				
WLAN 5GHz UNII-2C--MIMO	---				

Simultaneous Transmission Summary

Simultaneous Transmission Summary(1g- SAR)					
Exposure Position	Mode	SAR Result(W/kg)	Highest SAR Result(W/kg)	Limit(W/kg)	Result
Head	WWAN+WLAN MIMO	1.51	1.51	1.60	pass
Body-Worn	WWAN+WLAN MIMO	1.35			
Hotspot	WWAN+WLAN MIMO	1.33			

This Test Report Is Approved by: Mr. Peng Zhen 	Review by: Mr. Li Bin 
Tested and issued by: Mr. He Dengshun 	Approved date: 2020/12/11

6 TEST RESULT

6.1 Manufacturing Tolerance

GSM

PCS1900:

Carrier frequency (MHz)	Channel No.	Tune up Tolerance (dBm)
1850.2	512	30.0
1880.0	661	
1909.8	810	

GPRS/EGPRS (GMSK):

Carrier frequency (MHz)	Channel No.	TX Mode	Tune up Tolerance (dBm)
1850.2	512	4Downlink1uplink	30.0
1880.0	661		
1909.8	810		
1850.2	512	3Downlink2uplink	29.5
1880.0	661		
1909.8	810		
1850.2	512	2Downlink3uplink	29.5
1880.0	661		
1909.8	810		
1850.2	512	1Downlink4uplink	28.0
1880.0	661		
1909.8	810		

EGPRS (8PSK):

Carrier frequency (MHz)	Channel No.	TX Mode	Tune up Tolerance (dBm)
1850.2	512	8PSK 4Downlink1uplink	26.5
1880.0	661		
1909.8	810		
1850.2	512	8PSK 3Downlink2uplink	26.5
1880.0	661		
1909.8	810		
1850.2	512	8PSK 2Downlink3uplink	25.5
1880.0	661		
1909.8	810		
1850.2	512	8PSK 1Downlink4uplink	25.0
1880.0	661		
1909.8	810		

WCDMA
WCDMA band II

Mode		Carrier frequency (MHz)	Channel No.	Tune up Tolerance (dBm)
Release 99	RMC,12.2kbps	1852.4	9262	23.5
		1880.0	9400	
		1907.6	9538	
HSDPA	Subtest 1	1852.4	9262	23.0
		1880.0	9400	
		1907.6	9538	
	Subtest 2	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
	Subtest 3	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
	Subtest 4	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
HSUPA	Subtest 1	1852.4	9262	23.0
		1880.0	9400	
		1907.6	9538	
	Subtest 2	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
	Subtest 3	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
	Subtest 4	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
	Subtest 5	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
HSPA+	QPSK	1852.4	9262	23.0
		1880.0	9400	
		1907.6	9538	
	16QAM	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
DC-HSDPA	Subtest 1	1852.4	9262	23.0
		1880.0	9400	
		1907.6	9538	
	Subtest 2	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
	Subtest 3	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
	Subtest 4	1852.4	9262	
		1880.0	9400	
		1907.6	9538	

WCDMA band IV

Mode		Carrier frequency (MHz)	Channel No.	Tune up Tolerance (dBm)
Release 99	RMC,12.2kbps	1712.4	1312	24.5
		1732.4	1412	
		1752.6	1513	
HSDPA	Subtest 1	1712.4	1312	23.5
		1732.4	1412	
		1752.6	1513	
	Subtest 2	1712.4	1312	
		1732.4	1412	
		1752.6	1513	
	Subtest 3	1712.4	1312	
		1732.4	1412	
		1752.6	1513	
HSUPA	Subtest 4	1712.4	1312	23.5
		1732.4	1412	
		1752.6	1513	
	Subtest 1	1712.4	1312	
		1732.4	1412	
		1752.6	1513	
	Subtest 2	1712.4	1312	
		1732.4	1412	
		1752.6	1513	
	Subtest 3	1712.4	1312	
		1732.4	1412	
		1752.6	1513	
HSPA+	Subtest 4	1712.4	1312	23.5
		1732.4	1412	
		1752.6	1513	
	Subtest 5	1712.4	1312	
		1732.4	1412	
		1752.6	1513	
DC-HSDPA	QPSK	1712.4	1312	23.5
		1732.4	1412	
		1752.6	1513	
	16QAM	1712.4	1312	
		1732.4	1412	
		1752.6	1513	
	Subtest 1	1712.4	1312	
		1732.4	1412	
		1752.6	1513	
	Subtest 2	1712.4	1312	
		1732.4	1412	
		1752.6	1513	
	Subtest 3	1712.4	1312	
		1732.4	1412	
		1752.6	1513	
	Subtest 4	1712.4	1312	
		1732.4	1412	
		1752.6	1513	

LTE

Note: RB allocation mentioned below is for all Bandwidths, and the Frequency Range are divided to 3 ranges (Low, Mid, High)

Band 2

BW	Modulation	RB allocation with different offset	Frequency range	Tune up Tolerance (dBm)
All Bandwidth	QPSK	1	Low	24.0
			Mid	
			High	
		50%	Low	24.0
			Mid	
			High	
	16QAM	100%	Low	23.0
			Mid	
			High	
		1	Low	24.0
			Mid	
			High	
	64QAM	50%	Low	23.0
			Mid	
			High	
		100%	Low	22.0
			Mid	
			High	
		1	Low	22.5
			Mid	
			High	
		50%	Low	22.0
			Mid	
			High	
		100%	Low	22.0
			Mid	
			High	

Band 41

BW	Modulation	RB allocation with different offset	Frequency range	Tune up Tolerance (dBm)
All Bandwidth	QPSK	1	Low	24.0
			Mid	
			High	
		50%	Low	23.0
			Mid	
			High	
	16QAM	100%	Low	23.0
			Mid	
			High	
		1	Low	23.5
			Mid	
			High	
	64QAM	50%	Low	22.0
			Mid	
			High	
		100%	Low	22.0
			Mid	
			High	
		1	Low	22.0
			Mid	
			High	
		50%	Low	22.0
			Mid	
			High	
		100%	Low	22.0
			Mid	
			High	

Bluetooth

Modulation type	Tune up Tolerance (dBm)		
	2402MHz(Ch0)	2441MHz(Ch39)	2480MHz(Ch78)
GFSK	13.0		
$\pi/4$ DQPSK	11.0		
8DPSK	11.0		

Bluetooth (BLE)

Modulation type	Tune up Tolerance (dBm)		
	2402MHz (Ch0)	2440MHz (Ch19)	2480MHz (Ch39)
GFSK (LE 1Mbps)	8.5		
GFSK (LE 2Mbps)	8.5		

WLAN 2.4GHz

Modulation type	Tune up Tolerance (dBm)		
	2412MHz	2437MHz	2462MHz
11b Chain0		18.5	
11b Chain1		18.5	
11b MIMO		21.5	
11g Chain0		19.0	
11g Chain1		19.0	
11g MIMO		22.0	
11n HT20 Chain0		17.5	
11n HT20 Chain1		18.0	
11n HT20 MIMO		21.0	
11n HT40 Chain0		18.0	
11n HT40 Chain1		18.5	
11n HT40 MIMO		21.0	

WLAN 5GHz UNII-1

Modulation type	Tune up Tolerance (dBm)		
	5180MHz	5200MHz	5240MHz
11a Chain0		19.5	
11a Chain1		19.0	
11a MIMO		22.5	
11n HT20 Chain0		17.5	
11n HT20 Chain1		17.5	
11n HT20 MIMO		20.5	
11n HT40 Chain0		18.0	
11n HT40 Chain1		18.0	
11n HT40 MIMO		21.0	
11ac VHT20 Chain0		17.5	
11ac VHT20 Chain1		17.5	
11ac VHT20 MIMO		20.5	
11ac VHT40 Chain0		18.0	
11ac VHT40 Chain1		18.0	
11ac VHT40 MIMO		21.0	
11ac VHT80 Chain0		18.5	
11ac VHT80 Chain1		18.5	
11ac VHT80 MIMO		21.5	

WLAN 5GHz UNII-2A

Modulation type	Tune up Tolerance (dBm)		
	5260MHz	5300MHz	5320MHz
11a Chain0		18.0	
11a Chain1		18.0	
11a MIMO		21.0	
11n HT20 Chain0		16.0	
11n HT20 Chain1		16.0	
11n HT20 MIMO		19.0	
11n HT20 Chain0		16.0	
11n HT20 Chain1		16.0	
11n HT40 MIMO		19.0	
11ac VHT20 Chain0		16.0	
11ac VHT20 Chain1		16.0	
11ac VHT20 MIMO		19.0	
11ac VHT40 Chain0		16.0	
11ac VHT40 Chain1		16.0	
11ac VHT40 MIMO		19.0	
11ac VHT80 Chain0		16.0	
11ac VHT80 Chain1		16.0	
11ac VHT80 MIMO		19.0	

WLAN 5GHz UNII-2C

Modulation type	Tune up Tolerance (dBm)		
	5500MHz	5580MHz	5700MHz
11a Chain0		20.5	
11a Chain1		20.0	
11a MIMO		23.5	
11n HT20 Chain0		20.0	
11n HT20 Chain1		19.5	
11n HT20 MIMO		23.0	
11n HT40 Chain0		19.5	
11n HT40 Chain1		19.0	
11n HT40 MIMO		22.0	
11ac VHT20 Chain0		20.0	
11ac VHT20 Chain1		19.5	
11ac VHT20 MIMO		22.5	
11ac VHT40 Chain0		19.5	
11ac VHT40 Chain1		19.0	
11ac VHT40 MIMO		22.5	
11ac VHT80 Chain0		19.0	
11ac VHT80 Chain1		19.0	
11ac VHT80 MIMO		22.0	

6.2 GSM Measurement result

PCS1900

GSM Measured Power:

Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)	Frame average power(dBm)
1850.2	512	29.58	20.55
1880.0	661	29.53	20.50
1909.8	810	29.82	20.79

GPRS/EGPRS (GMSK) Measured Power:

Carrier frequency (MHz)	Channel No.	TX Mode	RF Power Output (dBm)	Frame average power(dBm)
1850.2	512	4Downlink1uplink	29.54	20.51
1880.0	661		29.40	20.37
1909.8	810		29.61	20.58
1850.2	512	3Downlink2uplink	28.98	22.96
1880.0	661		28.88	22.86
1909.8	810		29.14	23.12
1850.2	512	2Downlink3uplink	28.61	24.35
1880.0	661		29.00	24.74
1909.8	810		29.22	24.96
1850.2	512	1Downlink4uplink	26.89	23.88
1880.0	661		27.30	24.29
1909.8	810		27.52	24.51

EGPRS (8PSK) Measured Power:

Carrier frequency (MHz)	Channel No.	TX Mode	RF Power Output (dBm)	Frame average power(dBm)
1850.2	512	8PSK 4Downlink1uplink	26.19	17.16
1880.0	661		24.85	15.82
1909.8	810		25.14	16.11
1850.2	512	8PSK 3Downlink2uplink	26.08	20.06
1880.0	661		24.71	18.69
1909.8	810		25.00	18.98
1850.2	512	8PSK 2Downlink3uplink	24.46	20.20
1880.0	661		25.00	20.74
1909.8	810		24.81	20.55
1850.2	512	8PSK 1Downlink4uplink	24.24	21.23
1880.0	661		24.33	21.32
1909.8	810		24.58	21.57

Division Factors (for Measured Power and Frame Average Power):

To average the power, the division factor is as follows:

1TX-slot (1uplink) = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots(2uplink) = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots (3uplink) = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots (4uplink) = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

According to the frame average conducted power, Body-worn SAR measurements are performed with **3Txslots (3uplink)** of GMSK for GPRS1900

6.3 WCDMA Measurement result

Release 99

The following procedures are according to FCC KDB Publication 941225 D01.

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 1
	RMC mode	12.2kbps RMC
	AMR mode	12.2kbps RMC in 3.4 kbps SRB
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

Release 5

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	CM(dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/18	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note2: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$.

Note3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period(TF1,TF0) is achieved by setting the signaled gain factors for the reference TFC(TF1,TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Release 6

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121.

Sub-test	β_c	β_d	β_d (S F)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (S F)	β_{ed} (code s)	CM (2) (dB)	MP R (d B)	AG ⁽⁴⁾ Inde x	E-TF CI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/1 5	209/2 25	1039/2 25	4	1	1.0	2.0	20	75
2	6/15	15/15	64	6/15	12/1 5	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/1 5	30/15	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$	4	2	2.0	2.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/1 5	24/15	134/15	4	1	1.0	2.0	21	81

Note1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI}=8 \Leftrightarrow A_{hs}=\beta_{hs}/\beta_c=30/15 \Leftrightarrow \beta_{hs}=30/15 * \beta_c$.

Note2:CM=1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$.For all other combinations of DPDCH,DPCCH,HS-DPCCH,E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period(TF1,TF0) is achieved by setting the signaled gain factors for the reference TFC(TF1,TF1) to $\beta_c=10/15$ and $\beta_d=15/15$.

Note4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period(TF1,TF0) is achieved by setting the signaled gain factors for the reference TFC(TF1,TF1) to $\beta_c=14/15$ and $\beta_d=15/15$.

NOTE5: Testing UE using E-DPDCH Physical layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

NOTE6: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Release 7

The following 1 Sub-test was completed according to Release 7 procedures in section 5.2 of 3GPP TS34.121.

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note 3)	β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.

Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.

Release 8

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Proces ses	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK

Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.

Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.

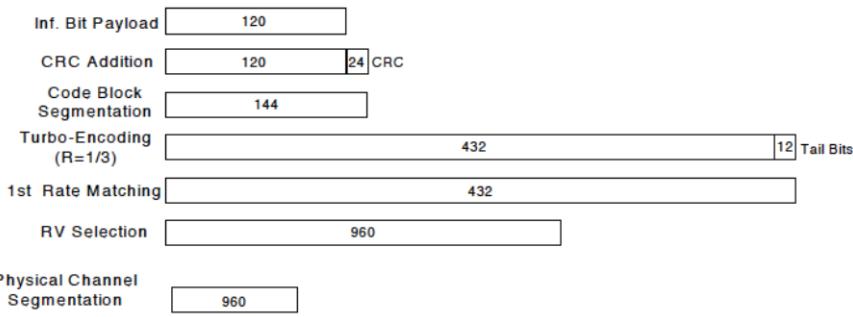


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 8 procedures in section 5.2 of 3GPP TS34.121.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	CM(dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/18	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI}=8 \Leftrightarrow A_{hs}=\beta_{hs}/\beta_c=30/15 \Leftrightarrow \beta_{hs}=30/15 * \beta_c$.

Note2: CM=1 for $\beta_c/\beta_d=12/15$, $\beta_{hs}/\beta_c=24/15$.

Note3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period(TF1,TF0) is achieved by setting the signaled gain factors for the reference TFC(TF1,TF1) to $\beta_c=11/15$ and $\beta_d=15/15$.

WCDMA band II

Mode		Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
Release 99	RMC, 12.2kbps	1852.4	9262	23.36
		1880.0	9400	23.42
		1907.6	9538	23.45
HSDPA	Subtest 1	1852.4	9262	22.49
		1880.0	9400	22.49
		1907.6	9538	22.60
	Subtest 2	1852.4	9262	22.49
		1880.0	9400	22.49
		1907.6	9538	22.60
	Subtest 3	1852.4	9262	22.49
		1880.0	9400	22.49
		1907.6	9538	22.60
	Subtest 4	1852.4	9262	22.49
		1880.0	9400	22.49
		1907.6	9538	22.60
HSUPA	Subtest 1	1852.4	9262	22.54
		1880.0	9400	22.50
		1907.6	9538	22.58
	Subtest 2	1852.4	9262	22.54
		1880.0	9400	22.50
		1907.6	9538	22.58
	Subtest 3	1852.4	9262	22.54
		1880.0	9400	22.50
		1907.6	9538	22.58
	Subtest 4	1852.4	9262	22.54
		1880.0	9400	22.50
		1907.6	9538	22.58
	Subtest 5	1852.4	9262	22.54
		1880.0	9400	22.50
		1907.6	9538	22.58
HSPA+	QPSK	1852.4	9262	22.49

16QAM		1880.0	9400	22.56
		1907.6	9538	22.57
		1852.4	9262	22.49
		1880.0	9400	22.56
		1907.6	9538	22.57

Mode		Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
DC-HSDPA	Subtest 1	1852.4	9262	22.53
		1880.0	9400	22.46
		1907.6	9538	22.57
	Subtest 2	1852.4	9262	22.53
		1880.0	9400	22.46
		1907.6	9538	22.57
	Subtest 3	1852.4	9262	22.53
		1880.0	9400	22.46
		1907.6	9538	22.57
	Subtest 4	1852.4	9262	22.53
		1880.0	9400	22.46
		1907.6	9538	22.57

WCDMA band IV

Mode		Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
Release 99	RMC, 12.2kbps	1712.4	1312	24.05
		1732.4	1412	24.09
		1752.6	1513	24.00
HSDPA	Subtest 1	1712.4	1312	23.13
		1732.4	1412	23.15
		1752.6	1513	23.13
	Subtest 2	1712.4	1312	23.13
		1732.4	1412	23.15
		1752.6	1513	23.13
	Subtest 3	1712.4	1312	23.13
		1732.4	1412	23.15
		1752.6	1513	23.13
	Subtest 4	1712.4	1312	23.13
		1732.4	1412	23.15
		1752.6	1513	23.13
HSUPA	Subtest 1	1712.4	1312	23.06
		1732.4	1412	23.12
		1752.6	1513	23.09
	Subtest 2	1712.4	1312	23.06
		1732.4	1412	23.12
		1752.6	1513	23.09
	Subtest 3	1712.4	1312	23.06


HSPA+	Subtest 4	1752.6	1513	23.09
		1712.4	1312	23.06
		1732.4	1412	23.12
		1752.6	1513	23.09
	Subtest 5	1712.4	1312	23.06
		1732.4	1412	23.12
		1752.6	1513	23.09
		1712.4	1312	23.17
	QPSK	1732.4	1412	23.16
		1752.6	1513	23.14
		1712.4	1312	23.17
	16QAM	1732.4	1412	23.16
		1752.6	1513	23.14

Mode		Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
DC-HSDPA	Subtest 1	1712.4	1312	23.16
		1732.4	1412	23.17
		1752.6	1513	23.12
	Subtest 2	1712.4	1312	23.16
		1732.4	1412	23.17
		1752.6	1513	23.12
	Subtest 3	1712.4	1312	23.16
		1732.4	1412	23.17
		1752.6	1513	23.12
	Subtest 4	1712.4	1312	23.16
		1732.4	1412	23.17
		1752.6	1513	23.12

Note: UMTS SAR was tested under Rel.99 RMC 12.2kbps mode per KDB Publication 941225 D01. for other higher release configuration, SAR was not required since any average output power was not more than 0.25 dB higher than the RMC level.


6.4 LTE Measurement result

General description: FDD-LTE frame structure

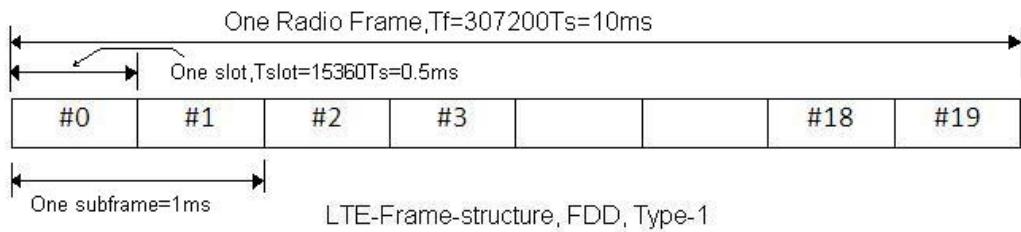

Type 1 is used as LTE FDD frame structure. As shown in the figure above, an LTE TDD frame is made of total 20 slots, each of 0.5ms. Two consecutive time slots will form one subframe. 10 such subframes form one radio frame. One subframe duration is about 1 ms. and the duty cycle is inherent as 100%

TDD-LTE frame structure

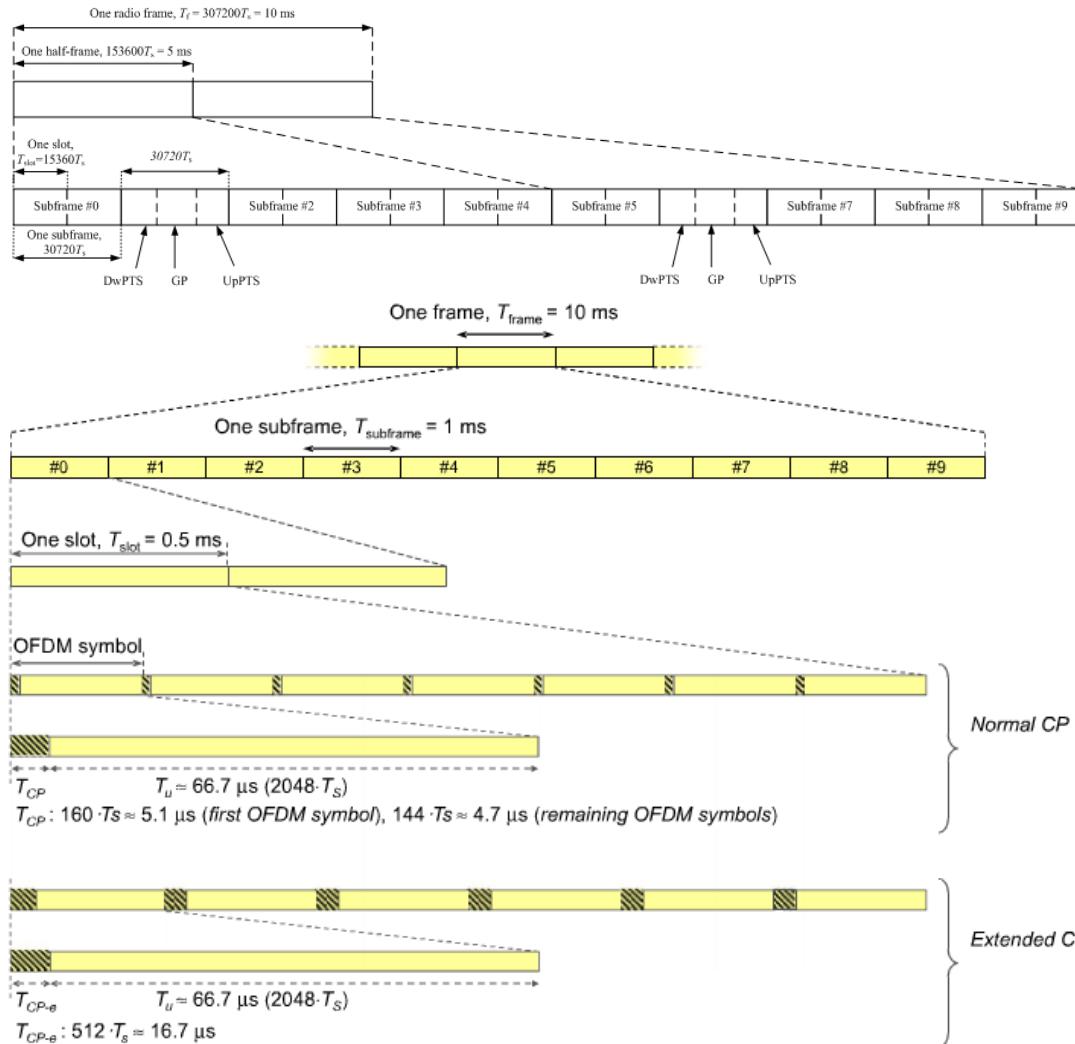

Uplink-downlink configuration

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Special sub-frame configuration

Special subframe configuration	DwPTS	Normal cyclic prefix in downlink		DwPTS	Extended cyclic prefix in downlink	
		Normal cyclic prefix in uplink	UpPTS		Normal cyclic prefix in uplink	UpPTS
0	6592· T_s	2192· T_s	2560· T_s	7680· T_s	2192· T_s	2560· T_s
1	19760· T_s			20480· T_s		
2	21952· T_s			23040· T_s		
3	24144· T_s			25600· T_s		
4	26336· T_s			7680· T_s		
5	6592· T_s	4384· T_s	5120· T_s	20480· T_s	4384· T_s	5120· T_s
6	19760· T_s			23040· T_s		
7	21952· T_s			-	-	-
8	24144· T_s			-	-	-

Special sub-frame with cyclic prefix uplink

Special sub-frame configuration		Duty factor with normal cyclic prefix in uplink	Duty factor with extended cyclic prefix in uplink
Normal cyclic prefix in downlink	0~4	7.13%	8.33%
	5~9	14.3%	16.7%
Extended cyclic prefix in downlink	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

So we perform SAR test with maximum duty factor equal to 63.3% by using uplink-downlink configuration 0.

Note: One sub-frame is $30720T_s=1ms$, when UpPTS(uplink) in special sub-frame with extended cyclic prefix, duty factor = $5120/30720=0.167$. There are 5 sub-frames in half frame(3up link), so the final duty factor is $(30720*3+5120)/(30720*5)=63.3\%$ which we used to evaluate the SAR compliance (worst case)

LTE Band 2

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)	
QPSK	1850.7	18607	1.4	1	0	23.70	
				1	3	23.65	
				1	5	23.62	
				3	0	23.73	
				3	1	23.70	
				3	3	23.77	
				6	0	22.80	
	1880	18900		1	0	23.51	
				1	3	23.49	
				1	5	23.49	
				3	0	23.50	
				3	1	23.48	
				3	3	23.54	
				6	0	22.61	
16QAM	1909.3	19193		1	0	23.64	
				1	3	23.59	
				1	5	23.63	
				3	0	23.60	
				3	1	23.62	
				3	3	23.66	
				6	0	22.63	
	1850.7	18607		1	0	23.00	
				1	3	22.85	
				1	5	22.87	
				3	0	22.96	
				3	1	22.85	
				3	3	22.85	
				6	0	21.76	
	1880	18900		1	0	22.74	
				1	3	22.65	
				1	5	22.65	
				3	0	22.83	
				3	1	22.81	
				3	3	22.85	
				6	0	21.61	
	1909.3	19193		1	0	22.80	
				1	3	22.87	
				1	5	22.83	
				3	0	22.63	
				3	1	22.71	
				3	3	22.65	
				6	0	21.72	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)	
64QAM	1850.7	18607	1.4	1	0	21.69	
				1	3	21.77	
				1	5	21.77	
				3	0	21.73	
				3	1	21.73	
				3	3	21.73	
				6	0	21.73	
	1880	18900		1	0	21.61	
				1	3	21.62	
				1	5	21.62	
				3	0	21.62	
				3	1	21.63	
				3	3	21.62	
				6	0	21.63	
	1909.3	19193		1	0	21.73	
				1	3	21.73	
				1	5	21.75	
				3	0	21.74	
				3	1	21.74	
				3	3	21.71	
				6	0	21.71	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)	
QPSK	1851.5	18615	3	1	0	23.85	
				1	8	23.75	
				1	14	23.74	
				8	0	22.90	
				8	4	22.82	
				8	7	22.82	
				15	0	22.91	
	1880	18900		1	0	23.70	
				1	8	23.58	
				1	14	23.57	
				8	0	22.73	
				8	4	22.65	
				8	7	22.55	
				15	0	22.73	
				1	0	23.71	
16QAM	1908.5	19185		1	8	23.60	
				1	14	23.65	
				8	0	22.77	
				8	4	22.67	
				8	7	22.68	
				15	0	22.75	
				1	0	23.60	
	1851.5	18615		1	8	23.48	
				1	14	23.37	
				8	0	22.12	
				8	4	22.05	
				8	7	22.06	
				15	0	21.95	
				1	0	22.96	
				1	8	22.68	
16QAM	1880	18900		1	14	22.78	
				8	0	21.67	
				8	4	21.63	
				8	7	21.57	
				15	0	21.59	
				1	0	22.92	
				1	8	22.77	
				1	14	22.82	
	1908.5	19185		8	0	21.84	
				8	4	21.70	
				8	7	21.77	
				15	0	21.77	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)	
64QAM	1851.5	18615	3	1	0	21.95	
				1	8	21.95	
				1	14	21.96	
				8	0	21.95	
				8	4	21.96	
				8	7	21.95	
				15	0	21.96	
	1880	18900		1	0	21.60	
				1	8	21.60	
				1	14	21.60	
				8	0	21.60	
				8	4	21.60	
				8	7	21.60	
				15	0	21.61	
				1	0	21.82	
1908.5	19185	19185		1	8	21.79	
				1	14	21.77	
				8	0	21.78	
				8	4	21.80	
				8	7	21.79	
				15	0	21.77	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)	
QPSK	1852.5	18625	5	1	0	23.87	
				1	12	23.72	
				1	24	23.78	
				12	0	22.93	
				12	7	22.79	
				12	13	22.86	
				25	0	22.89	
	1880	18900		1	0	23.69	
				1	12	23.64	
				1	24	23.61	
				12	0	22.80	
				12	7	22.66	
				12	13	22.66	
				25	0	22.73	
				1	0	23.65	
16QAM	1907.5	19175		1	12	23.73	
				1	24	23.70	
				12	0	22.80	
				12	7	22.76	
				12	13	22.76	
				25	0	22.81	
				1	0	22.91	
	1852.5	18625		1	12	22.79	
				1	24	22.75	
				12	0	21.92	
				12	7	21.84	
				12	13	21.85	
				25	0	21.96	
				1	0	23.02	
				1	12	22.90	
16QAM	1880	18900		1	24	22.91	
				12	0	21.82	
				12	7	21.68	
				12	13	21.72	
				25	0	21.67	
				1	0	22.89	
				1	12	22.76	
				1	24	22.90	
	1907.5	19175		12	0	21.77	
				12	7	21.70	
				12	13	21.70	
				25	0	21.81	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)	
64QAM	1852.5	18625	5	1	0	22.01	
				1	12	21.95	
				1	24	21.93	
				12	0	22.00	
				12	7	21.99	
				12	13	22.00	
				25	0	21.99	
	1880	18900		1	0	21.67	
				1	12	21.69	
				1	24	21.68	
				12	0	21.75	
				12	7	21.77	
				12	13	21.70	
				25	0	21.74	
				1	0	21.81	
1907.5	19175	19175		1	12	21.77	
				1	24	21.81	
				12	0	21.75	
				12	7	21.71	
				12	13	21.86	
				25	0	21.82	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)	
QPSK	1855	18650	10	1	0	23.77	
				1	25	23.80	
				1	49	23.70	
				25	0	22.93	
				25	12	22.92	
				25	25	22.86	
				50	0	22.89	
	1880	18900		1	0	23.72	
				1	25	23.57	
				1	49	23.64	
				25	0	22.72	
				25	12	22.67	
				25	25	22.62	
				50	0	22.66	
				1	0	23.66	
16QAM	1905	19150		1	25	23.74	
				1	49	23.71	
				25	0	22.74	
				25	12	22.69	
				25	25	22.71	
				50	0	22.79	
				1	0	23.47	
	1855	18650		1	25	23.43	
				1	49	23.32	
				25	0	22.04	
				25	12	21.96	
				25	25	22.06	
				50	0	21.89	
				1	0	22.87	
				1	25	22.70	
16QAM	1880	18900		1	49	22.77	
				25	0	21.79	
				25	12	21.62	
				25	25	21.63	
				50	0	21.63	
				1	0	22.83	
				1	25	22.90	
	1905	19150		1	49	22.89	
				25	0	21.90	
				25	12	21.91	
				25	25	21.92	
				50	0	21.84	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)	
64QAM	1855	18650	10	1	0	21.98	
				1	25	21.93	
				1	49	21.96	
				25	0	21.89	
				25	12	21.88	
				25	25	21.96	
				50	0	21.93	
	1880	18900		1	0	21.63	
				1	25	21.63	
				1	49	21.64	
				25	0	21.65	
				25	12	21.71	
				25	25	21.65	
				50	0	21.71	
				1	0	21.89	
1905	19150	19150		1	25	21.87	
				1	49	21.81	
				25	0	21.75	
				25	12	21.86	
				25	25	21.85	
				50	0	21.79	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)	
QPSK	1857.5	18675	15	1	0	23.78	
				1	37	23.73	
				1	74	23.66	
				36	0	22.84	
				36	29	22.74	
				36	30	22.72	
				75	0	22.73	
	1880	18900		1	0	23.49	
				1	37	23.57	
				1	74	23.56	
				36	0	22.67	
				36	29	22.51	
				36	30	22.58	
				75	0	22.57	
				1	0	23.50	
16QAM	1902.5	19125		1	37	23.70	
				1	74	23.72	
				36	0	22.58	
				36	29	22.74	
				36	30	22.70	
				75	0	22.68	
				1	0	23.42	
	1857.5	18675		1	37	23.39	
				1	74	23.33	
				36	0	21.82	
				36	29	21.77	
				36	30	21.75	
				75	0	21.72	
				1	0	22.71	
				1	37	22.71	
16QAM	1880	18900		1	74	22.81	
				36	0	21.66	
				36	29	21.54	
				36	30	21.56	
				75	0	21.57	
				1	0	23.29	
				1	37	23.27	
	1902.5	19125		1	74	23.14	
				36	0	21.65	
				36	29	21.69	
				36	30	21.66	
				75	0	21.57	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)	
64QAM	1857.5	18675	15	1	0	21.79	
				1	37	21.79	
				1	74	21.78	
				36	0	21.74	
				36	29	21.73	
				36	30	21.78	
				75	0	21.72	
	1880	18900		1	0	21.58	
				1	37	21.49	
				1	74	21.59	
				36	0	21.56	
				36	29	21.66	
				36	30	21.56	
				75	0	21.50	
				1	0	21.67	
1902.5	19125	19125		1	37	21.64	
				1	74	21.63	
				36	0	21.59	
				36	29	21.60	
				36	30	21.62	
				75	0	21.66	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)	
QPSK	1860	18700	20	1	0	23.74	
				1	49	23.59	
				1	99	23.64	
				50	0	22.85	
				50	24	22.73	
				50	50	22.69	
				100	0	22.83	
	1880	18900		1	0	23.78	
				1	49	23.67	
				1	99	23.73	
				50	0	22.68	
				50	24	22.56	
				50	50	22.56	
				100	0	22.56	
				1	0	23.55	
16QAM	1900	19100		1	49	23.61	
				1	99	23.67	
				50	0	22.66	
				50	24	22.78	
				50	50	22.76	
				100	0	22.76	
				1	0	23.07	
	1860	18700		1	49	23.07	
				1	99	23.01	
				50	0	21.80	
				50	24	21.72	
				50	50	21.73	
				100	0	21.78	
				1	0	22.92	
				1	49	22.87	
16QAM	1880	18900		1	99	22.80	
				50	0	21.63	
				50	24	21.55	
				50	50	21.47	
				100	0	21.56	
				1	0	23.25	
				1	49	23.22	
	1900	19100		1	99	23.36	
				50	0	21.65	
				50	24	21.74	
				50	50	21.73	
				100	0	21.64	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)	
64QAM	1860	18700	20	1	0	21.73	
				1	49	21.74	
				1	99	21.74	
				50	0	21.73	
				50	24	21.74	
				50	50	21.69	
				100	0	21.71	
	1880	18900		1	0	21.58	
				1	49	21.59	
				1	99	21.59	
				50	0	21.59	
				50	24	21.58	
				50	50	21.57	
				100	0	21.56	
				1	0	21.74	
1900	19100	19100		1	49	21.81	
				1	99	21.81	
				50	0	21.74	
				50	24	21.77	
				50	50	21.74	
				100	0	21.70	

LTE Band 41

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)	
QPSK	2498.5	39675	5	1	0	23.59	
				1	12	23.50	
				1	24	23.48	
				12	0	22.58	
				12	7	22.56	
				12	13	22.56	
				25	0	22.49	
	2593	40620		1	0	23.21	
				1	12	23.29	
				1	24	23.29	
				12	0	22.30	
				12	7	22.30	
				12	13	22.30	
				25	0	22.31	
				1	0	23.41	
16QAM	2687.5	41565		1	12	23.28	
				1	24	23.35	
				12	0	22.41	
				12	7	22.48	
				12	13	22.41	
				25	0	22.51	
				1	0	23.08	
	2498.5	39675		1	12	22.97	
				1	24	22.99	
				12	0	21.61	
				12	7	21.57	
				12	13	21.50	
				25	0	21.60	
				1	0	22.43	
				1	12	22.52	
16QAM	2593	40620		1	24	22.52	
				12	0	21.30	
				12	7	21.29	
				12	13	21.29	
				25	0	21.32	
				1	0	22.71	
				1	12	22.76	
				1	24	22.76	
	2687.5	41565		12	0	21.50	
				12	7	21.47	
				12	13	21.47	
				25	0	21.46	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)	
64QAM	2498.5	39675	5	1	0	21.60	
				1	12	21.59	
				1	24	21.57	
				12	0	21.57	
				12	7	21.56	
				12	13	21.61	
				25	0	21.57	
	2593	40620		1	0	21.27	
				1	12	21.33	
				1	24	21.26	
				12	0	21.32	
				12	7	21.25	
				12	13	21.25	
				25	0	21.33	
				1	0	21.43	
2687.5	41565	41565		1	12	21.47	
				1	24	21.49	
				12	0	21.46	
				12	7	21.49	
				12	13	21.51	
				25	0	21.46	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)	
QPSK	2501	39700	10	1	0	23.59	
				1	25	23.45	
				1	49	23.47	
				25	0	22.76	
				25	12	22.65	
				25	25	22.64	
				50	0	22.72	
	2593	40620		1	0	23.39	
				1	25	23.34	
				1	49	23.30	
				25	0	22.38	
				25	12	22.41	
				25	25	22.43	
				50	0	22.45	
				1	0	23.54	
16QAM	2685	41540		1	25	23.55	
				1	49	23.52	
				25	0	22.52	
				25	12	22.57	
				25	25	22.58	
				50	0	22.45	
				1	0	23.15	
	2501	39700		1	25	23.02	
				1	49	23.45	
				25	0	21.82	
				25	12	21.77	
				25	25	21.76	
				50	0	21.77	
				1	0	22.36	
16QAM	2593	40620		1	25	22.40	
				1	49	22.33	
				25	0	21.33	
				25	12	21.38	
				25	25	21.42	
				50	0	21.29	
				1	0	22.52	
	2685	41540		1	25	22.64	
				1	49	22.43	
				25	0	21.53	
				25	12	21.44	
				25	25	21.57	
				50	0	21.54	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)	
64QAM	2501	39700	10	1	0	21.73	
				1	25	21.72	
				1	49	21.72	
				25	0	21.72	
				25	12	21.72	
				25	25	21.76	
				50	0	21.72	
	2593	40620		1	0	21.36	
				1	25	21.36	
				1	49	21.34	
				25	0	21.35	
				25	12	21.34	
				25	25	21.31	
				50	0	21.35	
				1	0	21.51	
2685	41540	41540		1	25	21.48	
				1	49	21.59	
				25	0	21.54	
				25	12	21.52	
				25	25	21.50	
				50	0	21.54	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)	
QPSK	2507.5	39725	15	1	0	23.42	
				1	37	23.31	
				1	74	23.24	
				36	0	22.54	
				36	29	22.53	
				36	30	22.51	
				75	0	22.55	
	2593	40620		1	0	23.11	
				1	37	23.14	
				1	74	23.10	
				36	0	22.21	
				36	29	22.27	
				36	30	22.30	
				75	0	22.15	
				1	0	23.51	
16QAM	2682.5	41515		1	37	23.51	
				1	74	23.49	
				36	0	22.42	
				36	29	22.52	
				36	30	22.44	
				75	0	22.39	
				1	0	22.87	
	2507.5	39725		1	37	22.73	
				1	74	22.73	
				36	0	21.51	
				36	29	21.54	
				36	30	21.54	
				75	0	21.54	
				1	0	22.20	
				1	37	22.26	
16QAM	2593	40620		1	74	22.27	
				36	0	21.19	
				36	29	21.23	
				36	30	21.24	
				75	0	21.19	
				1	0	22.41	
				1	37	22.43	
				1	74	22.40	
	2682.5	41515		36	0	21.43	
				36	29	21.48	
				36	30	21.47	
				75	0	21.37	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)	
64QAM	2507.5	39725	15	1	0	21.54	
				1	37	21.60	
				1	74	21.54	
				36	0	21.53	
				36	29	21.63	
				36	30	21.63	
				75	0	21.56	
	2593	40620		1	0	21.20	
				1	37	21.24	
				1	74	21.19	
				36	0	21.20	
				36	29	21.24	
				36	30	21.24	
				75	0	21.30	
				1	0	21.37	
2682.5	41515	41515		1	37	21.36	
				1	74	21.37	
				36	0	21.44	
				36	29	21.41	
				36	30	21.38	
				75	0	21.37	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)	
QPSK	2506	39750	20	1	0	23.43	
				1	49	23.33	
				1	99	23.36	
				50	0	22.56	
				50	24	22.51	
				50	50	22.44	
				100	0	22.52	
	2593	40620		1	0	23.19	
				1	49	23.26	
				1	99	23.28	
				50	0	22.25	
				50	24	22.30	
				50	50	22.22	
				100	0	22.24	
				1	0	23.24	
16QAM	2680	41490		1	49	23.39	
				1	99	23.45	
				50	0	22.27	
				50	24	22.42	
				50	50	22.43	
				100	0	22.37	
				1	0	22.76	
	2506	39750		1	49	22.58	
				1	99	22.57	
				50	0	21.56	
				50	24	21.42	
				50	50	21.49	
				100	0	21.49	
				1	0	22.36	
				1	49	22.37	
16QAM	2593	40620		1	99	22.37	
				50	0	21.18	
				50	24	21.22	
				50	50	21.24	
				100	0	21.22	
				1	0	21.91	
				1	49	22.04	
				1	99	22.04	
	2680	41490		50	0	21.33	
				50	24	21.50	
				50	50	21.53	
				100	0	21.44	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)	
64QAM	2506	39750	20	1	0	21.45	
				1	49	21.52	
				1	99	21.56	
				50	0	21.59	
				50	24	21.53	
				50	50	21.46	
				100	0	21.57	
	2593	40620		1	0	21.27	
				1	49	21.26	
				1	99	21.23	
				50	0	21.26	
				50	24	21.26	
				50	50	21.26	
				100	0	21.26	
				1	0	21.36	
2680	41490	41490		1	49	21.43	
				1	99	21.42	
				50	0	21.42	
				50	24	21.39	
				50	50	21.39	
				100	0	21.39	

6.5 Bluetooth Measurement result

BT

Modulation type	Average Power Output (dBm)		
	2402MHz(Ch0)	2441MHz(Ch39)	2480MHz(Ch78)
GFSK	12.03	12.09	12.68
$\pi/4$ DQPSK	10.09	10.03	10.91
8DPSK	9.92	9.75	10.87

BLE

Modulation type	Average Power Output (dBm)		
	2402MHz (Ch0)	2440MHz (Ch19)	2480MHz (Ch39)
GFSK (LE 1Mbps)	7.37	7.22	8.04
GFSK (LE 2Mbps)	7.30	7.28	8.03

6.6 Wi-Fi Measurement result

WIFI 2.4GHz

Mode	Freq. (MHz)	Average power output(dBm)		
		Chain0	Chain1	MIMO
802.11b	2412	18.01	18.24	21.14
	2437	18.34	17.99	21.18
	2462	18.37	18.15	21.27
802.11g	2412	18.89	18.92	21.92
	2437	18.98	19.02	22.01
	2462	18.84	18.99	21.93
802.11n HT20	2412	17.49	17.82	20.67
	2437	17.57	17.79	20.69
	2462	17.59	18.01	20.82
802.11n HT40	2422	17.66	18.17	20.93
	2437	17.58	17.78	20.69
	2452	17.64	17.88	20.77

Reduced power with Acoustic output on
WIFI 2.4GHz

Mode	Freq. (MHz)	Average power output(dBm)		
		Chain0	Chain1	MIMO
802.11b	2412	14.01	14.24	17.14
	2437	14.34	13.99	17.18
	2462	14.37	14.15	17.27
802.11g	2412	14.89	14.92	17.92
	2437	14.98	15.02	18.01
	2462	14.84	14.99	17.93
802.11n HT20	2412	13.49	13.82	16.67
	2437	13.57	13.79	16.69
	2462	13.59	14.01	16.82
802.11n HT40	2422	13.66	14.17	16.93
	2437	13.58	13.78	16.69
	2452	13.64	13.88	16.77

WIFI 5GHz
UNII-1

Mode	Freq. (MHz)	Average power output(dBm)		
		Chain0	Chain1	MIMO
802.11a	5180	19.49	18.83	22.18
	5220	19.60	19.26	22.44
	5240	19.65	19.67	22.67
802.11n HT20	5180	17.43	17.11	20.28
	5220	17.52	17.43	20.49
	5240	17.69	17.78	20.75
802.11n HT40	5190	17.72	17.55	20.65
	5230	17.91	17.92	20.93
802.11ac VHT20	5180	17.37	17.01	20.20
	5220	17.51	17.42	20.48
	5240	17.69	17.71	20.71
802.11ac VHT40	5190	17.74	17.55	20.66
	5230	17.88	17.92	20.91
802.11ac VHT80	5210	18.18	18.01	21.11

UNII-2A

Mode	Freq. (MHz)	Average power output(dBm)		
		Chain0	Chain1	MIMO
802.11a	5260	17.75	17.94	20.86
	5300	17.92	17.95	20.95
	5320	18.04	17.93	21.00
802.11n HT20	5260	15.71	15.89	18.81
	5300	15.75	15.92	18.85
	5320	15.93	15.90	18.93
802.11n HT40	5270	15.66	15.96	18.82
	5310	15.74	15.98	18.87
802.11ac VHT20	5260	15.61	15.82	18.73
	5300	15.72	15.96	18.85
	5320	15.89	15.92	18.92
802.11ac VHT40	5270	15.61	15.78	18.71
	5310	15.79	15.93	18.87
802.11ac VHT80	5290	15.95	15.78	18.88

UNII-2C

Mode	Freq. (MHz)	Average power output(dBm)		
		Chain0	Chain1	MIMO
802.11a	5500	20.38	19.78	23.10
	5580	20.05	19.72	22.90
	5700	20.02	19.61	22.83
802.11n HT20	5500	19.80	19.23	22.53
	5580	19.45	19.28	22.38
	5700	19.32	19.01	22.18
802.11n HT40	5510	19.13	18.72	21.94
	5590	18.98	18.77	21.89
	5670	18.68	18.45	21.58
802.11ac VHT20	5500	19.76	19.18	22.49
	5580	19.51	19.29	22.41
	5700	19.36	19.03	22.21
802.11ac VHT40	5510	19.35	18.71	22.05
	5590	18.88	18.77	21.84
	5670	18.75	18.41	21.59
802.11ac VHT80	5530	18.98	18.58	21.79
	5610	18.54	18.29	21.43

6.7 Standalone SAR Test Exclusion Considerations

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied.

SAR Test Exclusion Thresholds for 100 MHz – 6 GHz and ≤ 50 mm

Method1:

According to the KDB447498 4.3.1 (1)

For 100 MHz to 6 GHz and test separation distances ≤ 50 mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f} (\text{GHz})] \leq 3.0$ for 1-g SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm, and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

This is equivalent to $[(\text{max. power of channel, including tune-up tolerance, mW}) / (60 / \sqrt{f(\text{GHz})} \text{ mW})] \cdot [20 \text{ mm} / (\text{min. test separation distance, mm})] \leq 1.0$ for 1-g SAR; also see Appendix A for approximate exclusion threshold values at selected frequencies and distances.

Method2:

According to the KDB447498 appendix A

Approximate SAR Test Exclusion Power Thresholds at Selected Frequencies and Test Separation Distances are illustrated in the following Table.


MHz	5	10	15	20	25	mm
150	39	77	116	155	194	<i>SAR Test Exclusion Threshold (mW)</i>
300	27	55	82	110	137	
450	22	45	67	89	112	
835	16	33	49	66	82	
900	16	32	47	63	79	
1500	12	24	37	49	61	
1900	11	22	33	44	54	
2450	10	19	29	38	48	
3600	8	16	24	32	40	
5200	7	13	20	26	33	
5400	6	13	19	26	32	
5800	6	12	19	25	31	

Summary of Transmitters

Band/Mode	Max conducted power adjusted for tune-up tolerance(mW)	Exposure condition	SAR test exclusion threshold (mW)	Standalone SAR Required
BT/BLE	19.95	Head	10	Yes
		Body-worn/Hotspot	19	Yes
Wi-Fi 2.4GHz	158.49	Head	10	Yes
		Body-worn/Hotspot	19	Yes
Wi-Fi 5GHz UNII-1	177.83	Head	7	Yes
		Body-worn/Hotspot	13	Yes
Wi-Fi 5GHz UNII-2A	125.89	Head	6	Yes
		Body-worn	13	Yes
Wi-Fi 5GHz UNII-2C	223.87	Head	6	Yes
		Body-worn	13	Yes

6.8 RF exposure conditions

Refer to the follow picture “Antenna information” for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

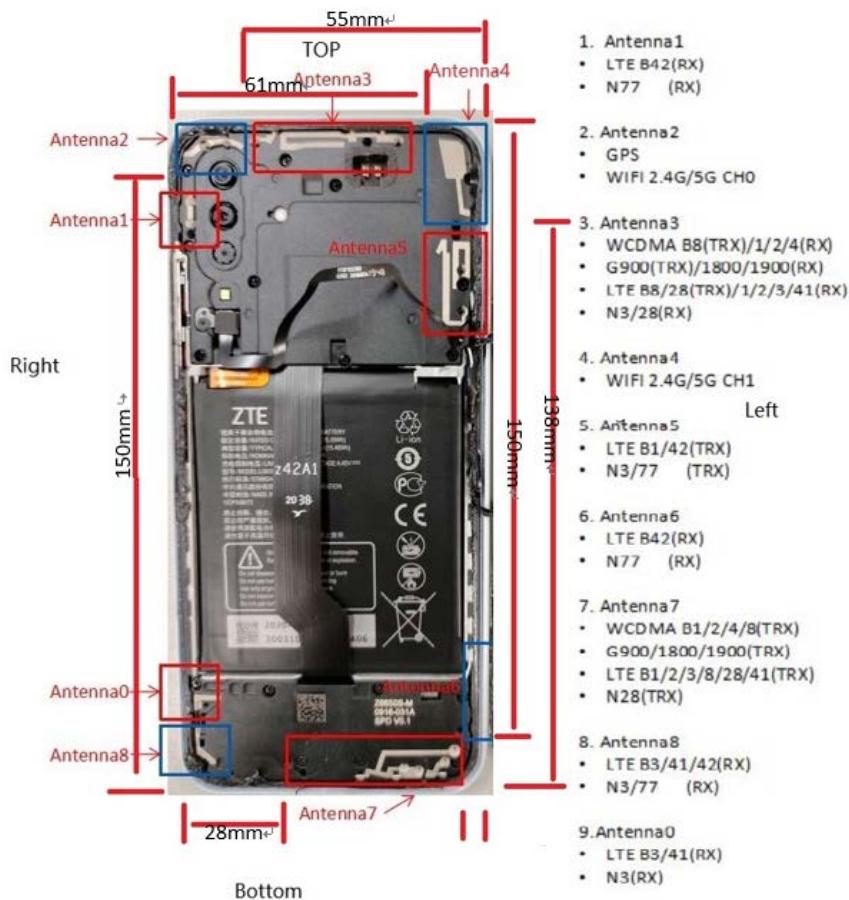

All of Implementation antenna

Primary antenna: antenna7 LTE FDD B1/2/3/8/28 TDD 41 RX&TX; UMTS B1/2/4/8 RX&TX; GSM 900/1800/1900 RX&TX. NR N28 RX&TX. Antenna5 LTE FDD B1/42 RX&TX; NR N3/77 RX&TX.

Diversity antenna: antenna1 LTE TDD 42 RX; NR N77 RX; antenna3 UMTS B1/2/4 RX B8 RX&TX; GSM 1800/1900 RX 900 RX&TX; LTE FDD B1/2/3 RX, B8/28 RX&TX, LTE TDD B41 RX; NR N3/28 RX. antenna6 LTE TDD B42 RX, NR N77 RX, antenna8 LTE FDD B3 RX, TDD B41/42 RX; NR N3/77 RX; antenna0 LTE FDD B3 RX, TDD B41 RX, NR N3 RX.

WBG antenna: antenna2 1575.42±1.023MHz; 2400MHz~2500MHz. WIFI 5GHz antenna: 5150MHz~5725MHz. antenna4 2400MHz~2500MHz. WIFI 5GHz antenna: 5150MHz~5725MHz.

Note: we defined these position when we face the screen of EUT, the reason why we perform SAR test for these edges is that the structures of antennas is close to our body, and for the other edges do not necessary cause we already consider the worst case.

6.8.1 Head Exposure Conditions

For WWAN

Test Configurations	SAR Required	Note
Left Touch	Yes	/
Left Tilt (15°)	Yes	/
Right Touch	Yes	/
Right Tilt (15°)	Yes	/

For WLAN

Test Configurations	SAR Required	Note
Left Touch	Yes	/
Left Tilt (15°)	Yes	/
Right Touch	Yes	/
Right Tilt (15°)	Yes	/

For BT/BLE

Test Configurations	SAR Required	Note
Left Touch	Yes	/
Left Tilt (15°)	Yes	/
Right Touch	Yes	/
Right Tilt (15°)	Yes	/

6.8.2 Body Worn Exposure conditions

For WWAN

Test Configurations	SAR Required	Note
Back	Yes	/
Front	Yes	/

For WLAN

Test Configurations	SAR Required	Note
Back	Yes	/
Front	Yes	/

For BT/BLE

Test Configurations	SAR Required	Note
Back	Yes	/
Front	Yes	/

6.8.3 Hotspot Exposure conditions

For Antenna7 (WWAN)

Test Configurations	SAR Required	Antenna-to-edge(s) distances
Back	Yes*	<25mm
Front	Yes*	<25mm
Top	No	>25mm
Bottom	Yes	<25mm
Left	Yes	<25mm
Right	No	>25mm

For Antenna2 (WLAN/BT/BLE)

Test Configurations	SAR Required	Antenna-to-edge(s) distances
Back	Yes*	<25mm
Front	Yes*	<25mm
Top	Yes	<25mm
Bottom	No	>25mm
Left	No	>25mm
Right	Yes	<25mm

For Antenna4 (WLAN)

Test Configurations	SAR Required	Antenna-to-edge(s) distances
Back	Yes*	<25mm
Front	Yes*	<25mm
Top	Yes	<25mm
Bottom	No	>25mm
Left	Yes	<25mm
Right	No	>25mm

Note*: For hotspot mode, it's not necessary test Rear and Front position for several bands which there is no "hotspot power reduction" scheme. Because we already test these positions without hotspot mode in Body Exposure conditions.

6.9 System Checking

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulants were measured every day using the dielectric probe kit and the network analyser. For the measurement of the following parameters the SPEAG DAKS-3.5 dielectric parameter probe is used, representing the open-ended coaxial probe measurement procedure.

Date Tested	Freq. (MHz)	Liquid parameters	measured	Target	Delta (%)	Tolerance (%)
2020.11.23	1800	ϵ_r	40.688	40.00	1.72	± 10
		$\sigma[\text{S/m}]$	1.418	1.40	1.29	± 10
2020.11.25	2000	ϵ_r	39.844	40.00	-0.39	± 10
		$\sigma[\text{S/m}]$	1.427	1.40	1.93	± 10
2020.11.26	2450	ϵ_r	38.343	39.20	-2.19	± 10
		$\sigma[\text{S/m}]$	1.866	1.80	3.67	± 10
2020.11.28	2600	ϵ_r	39.672	39.00	1.72	± 10
		$\sigma[\text{S/m}]$	1.951	1.96	-0.46	± 10
2020.12.01	5200	ϵ_r	36.811	36.0	2.25	± 5
		$\sigma[\text{S/m}]$	4.72	4.66	1.29	± 5
2020.12.03	5300	ϵ_r	35.42	35.9	-1.34	± 5
		$\sigma[\text{S/m}]$	4.65	4.76	-2.31	± 5
2020.12.05	5600	ϵ_r	36.18	35.5	1.92	± 5
		$\sigma[\text{S/m}]$	5.2	5.07	2.56	± 5

Note: For DASY system, the conservative tolerance 5% could expand to 10% when the frequency under 3GHz

A system check measurement was made following once the determination of the dielectric parameters of the simulant, using the dipole validation kit. The system checking results (dielectric parameters and SAR values) are given in the table below.

Date Tested	Freq. (MHz)	SAR measured (normalized to 1W)	Target (Ref. Value)	Delta (%)	Tolerance (%)
2020.11.23	1800	1g	38.0	38.9	-2.42
2020.11.25	2000	1g	39.3	40.3	-2.53
2020.11.26	2450	1g	54.0	53.0	1.89
2020.11.28	2600	1g	56.4	56.5	-0.18
2020.12.01	5200	1g	82.1	75.9	8.17
2020.12.03	5300	1g	84.6	78.0	8.46
2020.12.05	5600	1g	83.8	80.0	4.75

6.10 SAR TEST RESULT

In order to determine the largest value of the peak spatial-average SAR of a handset, all device positions, configurations, and operational modes should be tested for each frequency band according to Steps 1 to 3 below.

Step 1: The tests should be performed at the channel that is closest to the center of the transmit frequency band.

- a) All device positions (cheek and tilt, for both left and right sides of the SAM phantom),
- b) All configurations for each device position in a), e.g., antenna extended and retracted, and
- c) All operational modes for each device position in item a) and configuration in item b) in each frequency band, e.g., analog and digital, If more than three frequencies need to be tested (i.e., $N_c > 3$), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

Step 2: For the condition providing the highest peak spatial-average SAR determined in Step 1 for each frequency, perform all tests at all other test frequency channels, e.g., lowest and highest frequencies. In addition, for all other conditions (device position, configuration, and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies should be tested as well.

Step 3: Examine all data to determine the largest value of the peak.

Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.

Scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.

Duty Factor = 1 / Duty Cycle(%)

For cellular network:

Reported SAR (W/kg) = Measured SAR (W/kg) * Scaling Factor

For WLAN

Reported SAR (W/kg) = Measured SAR (W/kg) * Scaling Factor*Duty factor

2. Per KDB 447498 D01v06, for each exposure position, if the highest output channel reported SAR $\leq 0.8\text{W/kg}$, other channels SAR testing are not necessary.

3. The distance between the EUT and the phantom bottom is 10mm.

Mode	Duty cycle	Duty factor	Note
Licensed Frequency	GSM Band	37.5%	According to the theory, we configured duty cycle with relevant value on the communication tester, so correction factor do not need such as "duty factor"
	WCDMA Band	100%	
	FDD-LTE Band	100%	
	TDD-LTE Band	63.3%	
Unlicensed Frequency	BT DH5	76.8%	1.30
	WIFI 2.4GHz 802.11g	98.3%	1.02
	WIFI 5GHz 802.11a	98.1%	1.02

The measured and reported Head/body SAR values for the test device are tabulated below:

Mode: GSM 1900

fL (MHz)=1850.2MHz fM (MHz)=1880.0MHz fH (MHz)=1909.8MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test case				Meas power(dBm)	Tune-up(dBm)	Scaling factor	Meas SAR(w/kg)		Report SAR(w/kg)	
Mode	Exposure condition	Position	Channel				First	Second	First	Second
GPRS/EDGE GMSK 3slots	Head	Left Cheek	L	28.61	29.50	1.23	---	---	---	---
			M	29.00	29.50	1.12	0.160	---	0.179	---
			H	29.22	29.50	1.07	---	---	---	---
		Left tilt	L	28.61	29.50	1.23	---	---	---	---
			M	29.00	29.50	1.12	0.067	---	0.075	---
			H	29.22	29.50	1.07	---	---	---	---
		Right Cheek	L	28.61	29.50	1.23	---	---	---	---
			M	29.00	29.50	1.12	0.076	---	0.085	---
			H	29.22	29.50	1.07	---	---	---	---
		Right tilt	L	28.61	29.50	1.23	---	---	---	---
			M	29.00	29.50	1.12	0.062	---	0.069	---
			H	29.22	29.50	1.07	---	---	---	---
GPRS/EDGE GMSK 3slots	Body-worn	Back	L	28.61	29.50	1.23	---	---	---	---
			M	29.00	29.50	1.12	0.272	---	0.305	---
			H	29.22	29.50	1.07	---	---	---	---
		Front	L	28.61	29.50	1.23	---	---	---	---
			M	29.00	29.50	1.12	0.279	---	0.312	---
			H	29.22	29.50	1.07	---	---	---	---
	Hotspot	Back	L	28.61	29.50	1.23	---	---	---	---
			M	29.00	29.50	1.12	0.264	---	0.296	---
			H	29.22	29.50	1.07	---	---	---	---
		Front	L	28.61	29.50	1.23	---	---	---	---
			M	29.00	29.50	1.12	0.290	---	0.325	---
			H	29.22	29.50	1.07	---	---	---	---
		Top	L	28.61	29.50	1.23	---	---	---	---
			M	29.00	29.50	1.12	---	---	---	---
			H	29.22	29.50	1.07	---	---	---	---
		Bottom	L	28.61	29.50	1.23	---	---	---	---
			M	29.00	29.50	1.12	0.110	---	0.123	---
			H	29.22	29.50	1.07	---	---	---	---
		Left	L	28.61	29.50	1.23	---	---	---	---
			M	29.00	29.50	1.12	0.271	---	0.304	---
			H	29.22	29.50	1.07	---	---	---	---
		Right	L	28.61	29.50	1.23	---	---	---	---
			M	29.00	29.50	1.12	---	---	---	---
			H	29.22	29.50	1.07	---	---	---	---

Mode: WCDMA BAND II

fL (MHz)= 1852.4MHz fM (MHz)= 1880.0MHz fH (MHz)= 1907.6MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test case				Meas power(dBm)	Tune-up(dBm)	Scaling factor	Meas SAR(w/kg)		Report SAR(w/kg)	
Mode	Exposure condition	Position	Channel				First	Second	First	Second
RMC	Head	Left Cheek	L	23.36	23.50	1.03	---	---	---	---
			M	23.42	23.50	1.02	0.287	---	0.293	---
			H	23.45	23.50	1.01	---	---	---	---
		Left tilt	L	23.36	23.50	1.03	---	---	---	---
			M	23.42	23.50	1.02	0.105	---	0.107	---
			H	23.45	23.50	1.01	---	---	---	---
		Right Cheek	L	23.36	23.50	1.03	---	---	---	---
			M	23.42	23.50	1.02	0.141	---	0.144	---
			H	23.45	23.50	1.01	---	---	---	---
		Right tilt	L	23.36	23.50	1.03	---	---	---	---
			M	23.42	23.50	1.02	0.109	---	0.111	---
			H	23.45	23.50	1.01	---	---	---	---
	Body-worn	Back	L	23.36	23.50	1.03	---	---	---	---
			M	23.42	23.50	1.02	0.456	---	0.465	---
			H	23.45	23.50	1.01	---	---	---	---
		Front	L	23.36	23.50	1.03	---	---	---	---
			M	23.42	23.50	1.02	0.446	---	0.455	---
			H	23.45	23.50	1.01	---	---	---	---
	Hotspot	Back	L	23.36	23.50	1.03	---	---	---	---
			M	23.42	23.50	1.02	0.455	---	0.464	---
			H	23.45	23.50	1.01	---	---	---	---
		Front	L	23.36	23.50	1.03	---	---	---	---
			M	23.42	23.50	1.02	0.453	---	0.462	---
			H	23.45	23.50	1.01	---	---	---	---
		Top	L	23.36	23.50	1.03	---	---	---	---
			M	23.42	23.50	1.02	---	---	---	---
			H	23.45	23.50	1.01	---	---	---	---
		Bottom	L	23.36	23.50	1.03	---	---	---	---
			M	23.42	23.50	1.02	0.188	---	0.192	---
			H	23.45	23.50	1.01	---	---	---	---
		Left	L	23.36	23.50	1.03	---	---	---	---
			M	23.42	23.50	1.02	0.449	---	0.458	---
			H	23.45	23.50	1.01	---	---	---	---
		Right	L	23.36	23.50	1.03	---	---	---	---
			M	23.42	23.50	1.02	---	---	---	---
			H	23.45	23.50	1.01	---	---	---	---

Mode: WCDMA BAND IV

fL (MHz)=1712.4MHz fM (MHz)=1732.4MHz fH (MHz)= 1752.6MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test case				Meas power(dBm)	Tune-up(dBm)	Scaling factor	Meas SAR(w/kg)		Report SAR(w/kg)	
Mode	Exposure condition	Position	Channel				First	Second	First	Second
RMC	Head	Left Cheek	L	24.05	24.50	1.11	---	---	---	---
			M	24.09	24.50	1.10	0.318	---	0.350	---
			H	24.00	24.50	1.12	---	---	---	---
		Left tilt	L	24.05	24.50	1.11	---	---	---	---
			M	24.09	24.50	1.10	0.125	---	0.138	---
			H	24.00	24.50	1.12	---	---	---	---
		Right Cheek	L	24.05	24.50	1.11	---	---	---	---
			M	24.09	24.50	1.10	0.097	---	0.107	---
			H	24.00	24.50	1.12	---	---	---	---
		Right tilt	L	24.05	24.50	1.11	---	---	---	---
			M	24.09	24.50	1.10	0.127	---	0.140	---
			H	24.00	24.50	1.12	---	---	---	---
	Body-worn	Back	L	24.05	24.50	1.11	---	---	---	---
			M	24.09	24.50	1.10	0.729	---	0.802	---
			H	24.00	24.50	1.12	---	---	---	---
		Front	L	24.05	24.50	1.11	---	---	---	---
			M	24.09	24.50	1.10	0.586	---	0.645	---
			H	24.00	24.50	1.12	---	---	---	---
	Hotspot	Back	L	24.05	24.50	1.11	---	---	---	---
			M	24.09	24.50	1.10	0.741	---	0.815	---
			H	24.00	24.50	1.12	---	---	---	---
		Front	L	24.05	24.50	1.11	---	---	---	---
			M	24.09	24.50	1.10	0.588	---	0.647	---
			H	24.00	24.50	1.12	---	---	---	---
		Top	L	24.05	24.50	1.11	---	---	---	---
			M	24.09	24.50	1.10	---	---	---	---
			H	24.00	24.50	1.12	---	---	---	---
		Bottom	L	24.05	24.50	1.11	1.080	1.070	1.199	1.188
			M	24.09	24.50	1.10	0.910	0.956	1.001	1.052
			H	24.00	24.50	1.12	0.717	0.705	0.803	0.790
		Left	L	24.05	24.50	1.11	---	---	---	---
			M	24.09	24.50	1.10	0.489	---	0.538	---
			H	24.00	24.50	1.12	---	---	---	---
		Right	L	24.05	24.50	1.11	---	---	---	---
			M	24.09	24.50	1.10	---	---	---	---
			H	24.00	24.50	1.12	---	---	---	---

Mode: LTE Band 2

fL (MHz)= 1860MHz

fM (MHz)= 1880MHz

fH (MHz)= 1900MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Mode	Exposure condition	Test case		Meas power(dBm)	Tune-up (dBm)	Scaling factor	Meas SAR(w/kg)		Report SAR(w/kg)	
		Position	Channel				First	Second	First	Second
QPSK 1RB	Head	Left Cheek	L	23.74	24.00	1.06	---	---	---	---
			M	23.78	24.00	1.05	0.275	---	0.289	---
			H	23.67	24.00	1.08	---	---	---	---
		Left tilt	L	23.74	24.00	1.06	---	---	---	---
			M	23.78	24.00	1.05	0.128	---	0.134	---
			H	23.67	24.00	1.08	---	---	---	---
		Right Cheek	L	23.74	24.00	1.06	---	---	---	---
			M	23.78	24.00	1.05	0.112	---	0.118	---
			H	23.67	24.00	1.08	---	---	---	---
		Right tilt	L	23.74	24.00	1.06	---	---	---	---
			M	23.78	24.00	1.05	0.080	---	0.084	---
			H	23.67	24.00	1.08	---	---	---	---
	Body-worn	Back	L	23.74	24.00	1.06	---	---	---	---
			M	23.78	24.00	1.05	0.485	---	0.509	---
			H	23.67	24.00	1.08	---	---	---	---
		Front	L	23.74	24.00	1.06	---	---	---	---
			M	23.78	24.00	1.05	0.473	---	0.497	---
			H	23.67	24.00	1.08	---	---	---	---
QPSK 50%RB	Hotspot	Back	L	23.74	24.00	1.06	---	---	---	---
			M	23.78	24.00	1.05	0.505	---	0.530	---
			H	23.67	24.00	1.08	---	---	---	---
		Front	L	23.74	24.00	1.06	---	---	---	---
			M	23.78	24.00	1.05	0.472	---	0.496	---
			H	23.67	24.00	1.08	---	---	---	---
		Top	L	23.74	24.00	1.06	---	---	---	---
			M	23.78	24.00	1.05	---	---	---	---
			H	23.67	24.00	1.08	---	---	---	---
		Bottom	L	23.74	24.00	1.06	---	---	---	---
			M	23.78	24.00	1.05	0.183	---	0.192	---
			H	23.67	24.00	1.08	---	---	---	---
		Left	L	23.74	24.00	1.06	---	---	---	---
			M	23.78	24.00	1.05	0.414	---	0.435	---
			H	23.67	24.00	1.08	---	---	---	---
		Right	L	23.74	24.00	1.06	---	---	---	---
			M	23.78	24.00	1.05	---	---	---	---
			H	23.67	24.00	1.08	---	---	---	---
		Head	L	23.74	24.00	1.06	---	---	---	---
			M	23.78	24.00	1.05	0.270	---	0.284	---
			H	23.67	24.00	1.08	---	---	---	---
		Left tilt	L	23.74	24.00	1.06	---	---	---	---

			M	23.78	24.00	1.05	0.129	---	0.135	---
			H	23.67	24.00	1.08	---	---	---	---
Right Cheek			L	23.74	24.00	1.06	---	---	---	---
			M	23.78	24.00	1.05	0.103	---	0.108	---
			H	23.67	24.00	1.08	---	---	---	---
Right tilt			L	23.74	24.00	1.06	---	---	---	---
			M	23.78	24.00	1.05	0.078	---	0.082	---
			H	23.67	24.00	1.08	---	---	---	---
Body-worn		Back	L	23.74	24.00	1.06	---	---	---	---
			M	23.78	24.00	1.05	0.397	---	0.417	---
			H	23.67	24.00	1.08	---	---	---	---
		Front	L	23.74	24.00	1.06	---	---	---	---
			M	23.78	24.00	1.05	0.403	---	0.423	---
			H	23.67	24.00	1.08	---	---	---	---
Hotspot		Back	L	23.74	24.00	1.06	---	---	---	---
			M	23.78	24.00	1.05	0.398	---	0.418	---
			H	23.67	24.00	1.08	---	---	---	---
		Front	L	23.74	24.00	1.06	---	---	---	---
			M	23.78	24.00	1.05	0.399	---	0.419	---
			H	23.67	24.00	1.08	---	---	---	---
		Top	L	23.74	24.00	1.06	---	---	---	---
			M	23.78	24.00	1.05	---	---	---	---
			H	23.67	24.00	1.08	---	---	---	---
		Bottom	L	23.74	24.00	1.06	---	---	---	---
			M	23.78	24.00	1.05	0.142	---	0.149	---
			H	23.67	24.00	1.08	---	---	---	---
		Left	L	23.74	24.00	1.06	---	---	---	---
			M	23.78	24.00	1.05	0.337	---	0.354	---
			H	23.67	24.00	1.08	---	---	---	---
		Right	L	23.74	24.00	1.06	---	---	---	---
			M	23.78	24.00	1.05	---	---	---	---
			H	23.67	24.00	1.08	---	---	---	---

Note1: Several positions with 100RB allocation only need to be evaluated when 1RB/50%RB exceeds half limit.

Mode: LTE Band 41

fL (MHz)= 2498.5 MHz

fM (MHz)= 2593MHz

fH (MHz)= 2687.5MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test case				Meas power(dBm)	Tune-up(dBm)	Scaling factor	Meas SAR(w/kg)		Report SAR(w/kg)	
Mode	Exposure condition	Position	Channel				First	Second	First	Second
QPSK 1RB	Head	Left touch	L	23.43	23.50	1.02	---	---	---	---
			L-M	23.36	23.50	1.03	---	---	---	---
			M	23.28	23.50	1.05	0.002	---	0.002	---
			M-H	23.37	23.50	1.03	---	---	---	---
			H	23.45	23.50	1.01	---	---	---	---
		Left tilt	L	23.43	23.50	1.02	---	---	---	---
			L-M	23.36	23.50	1.03	---	---	---	---
			M	23.28	23.50	1.05	0.001	---	0.001	---
			M-H	23.37	23.50	1.03	---	---	---	---
			H	23.45	23.50	1.01	---	---	---	---
		Right touch	L	23.43	23.50	1.02	---	---	---	---
			L-M	23.36	23.50	1.03	---	---	---	---
			M	23.28	23.50	1.05	0.001	---	0.001	---
			M-H	23.37	23.50	1.03	---	---	---	---
			H	23.45	23.50	1.01	---	---	---	---
		Right tilt	L	23.43	23.50	1.02	---	---	---	---
			L-M	23.36	23.50	1.03	---	---	---	---
			M	23.28	23.50	1.05	0.001	---	0.001	---
			M-H	23.37	23.50	1.03	---	---	---	---
			H	23.45	23.50	1.01	---	---	---	---
	Body-worn	Back	L	23.43	23.50	1.02	---	---	---	---
			L-M	23.36	23.50	1.03	---	---	---	---
			M	23.28	23.50	1.05	0.109	---	0.114	---
			M-H	23.37	23.50	1.03	---	---	---	---
			H	23.45	23.50	1.01	---	---	---	---
		Front	L	23.43	23.50	1.02	---	---	---	---
			L-M	23.36	23.50	1.03	---	---	---	---
			M	23.28	23.50	1.05	0.052	---	0.055	---
			M-H	23.37	23.50	1.03	---	---	---	---
			H	23.45	23.50	1.01	---	---	---	---
	Hotspot	Back	L	23.43	23.50	1.02	---	---	---	---
			L-M	23.36	23.50	1.03	---	---	---	---
			M	23.28	23.50	1.05	0.110	---	0.116	---
			M-H	23.37	23.50	1.03	---	---	---	---
			H	23.45	23.50	1.01	---	---	---	---
		Front	L	23.43	23.50	1.02	---	---	---	---
			L-M	23.36	23.50	1.03	---	---	---	---
			M	23.28	23.50	1.05	0.052	---	0.055	---
			M-H	23.37	23.50	1.03	---	---	---	---
			H	23.45	23.50	1.01	---	---	---	---
		Top	L	23.43	23.50	1.02	---	---	---	---

			L-M	23.36	23.50	1.03	---	---	---	---
			M	23.28	23.50	1.05	---	---	---	---
			M-H	23.37	23.50	1.03	---	---	---	---
			H	23.45	23.50	1.01	---	---	---	---
Bottom			L	23.43	23.50	1.02	---	---	---	---
			L-M	23.36	23.50	1.03	---	---	---	---
			M	23.28	23.50	1.05	0.057	---	0.060	---
			M-H	23.37	23.50	1.03	---	---	---	---
			H	23.45	23.50	1.01	---	---	---	---
Left			L	23.43	23.50	1.02	---	---	---	---
			L-M	23.36	23.50	1.03	---	---	---	---
			M	23.28	23.50	1.05	0.001	---	0.001	---
			M-H	23.37	23.50	1.03	---	---	---	---
			H	23.45	23.50	1.01	---	---	---	---
Right			L	23.43	23.50	1.02	---	---	---	---
			L-M	23.36	23.50	1.03	---	---	---	---
			M	23.28	23.50	1.05	---	---	---	---
			M-H	23.37	23.50	1.03	---	---	---	---
			H	23.45	23.50	1.01	---	---	---	---
Left touch			L	23.43	23.50	1.02	---	---	---	---
			L-M	23.36	23.50	1.03	---	---	---	---
			M	23.28	23.50	1.05	0.001	---	0.001	---
			M-H	23.37	23.50	1.03	---	---	---	---
			H	23.45	23.50	1.01	---	---	---	---
Left tilt			L	23.43	23.50	1.02	---	---	---	---
			L-M	23.36	23.50	1.03	---	---	---	---
			M	23.28	23.50	1.05	0.001	---	0.001	---
			M-H	23.37	23.50	1.03	---	---	---	---
			H	23.45	23.50	1.01	---	---	---	---
Head			L	23.43	23.50	1.02	---	---	---	---
			L-M	23.36	23.50	1.03	---	---	---	---
			M	23.28	23.50	1.05	0.001	---	0.001	---
			M-H	23.37	23.50	1.03	---	---	---	---
			H	23.45	23.50	1.01	---	---	---	---
Right touch			L	23.43	23.50	1.02	---	---	---	---
			L-M	23.36	23.50	1.03	---	---	---	---
			M	23.28	23.50	1.05	0.001	---	0.001	---
			M-H	23.37	23.50	1.03	---	---	---	---
			H	23.45	23.50	1.01	---	---	---	---
Right tilt			L	23.43	23.50	1.02	---	---	---	---
			L-M	23.36	23.50	1.03	---	---	---	---
			M	23.28	23.50	1.05	0.001	---	0.001	---
			M-H	23.37	23.50	1.03	---	---	---	---
			H	23.45	23.50	1.01	---	---	---	---
Body-worn			L	23.43	23.50	1.02	---	---	---	---
			L-M	23.36	23.50	1.03	---	---	---	---
			M	23.28	23.50	1.05	0.055	---	0.058	---
			M-H	23.37	23.50	1.03	---	---	---	---
			H	23.45	23.50	1.01	---	---	---	---
Back			L	23.43	23.50	1.02	---	---	---	---
			L-M	23.36	23.50	1.03	---	---	---	---
			M	23.28	23.50	1.05	0.055	---	0.058	---
			M-H	23.37	23.50	1.03	---	---	---	---
			H	23.45	23.50	1.01	---	---	---	---

			L	23.43	23.50	1.02	---	---	---	---
			L-M	23.36	23.50	1.03	---	---	---	---
			M	23.28	23.50	1.05	0.042	---	0.044	---
			M-H	23.37	23.50	1.03	---	---	---	---
			H	23.45	23.50	1.01	---	---	---	---
Hotspot	Front	Back	L	23.43	23.50	1.02	---	---	---	---
			L-M	23.36	23.50	1.03	---	---	---	---
			M	23.28	23.50	1.05	0.059	---	0.062	---
			M-H	23.37	23.50	1.03	---	---	---	---
			H	23.45	23.50	1.01	---	---	---	---
	Front	Top	L	23.43	23.50	1.02	---	---	---	---
			L-M	23.36	23.50	1.03	---	---	---	---
			M	23.28	23.50	1.05	0.045	---	0.047	---
			M-H	23.37	23.50	1.03	---	---	---	---
			H	23.45	23.50	1.01	---	---	---	---
	Bottom	Left	L	23.43	23.50	1.02	---	---	---	---
			L-M	23.36	23.50	1.03	---	---	---	---
			M	23.28	23.50	1.05	0.051	---	0.054	---
			M-H	23.37	23.50	1.03	---	---	---	---
			H	23.45	23.50	1.01	---	---	---	---
	Right	Right	L	23.43	23.50	1.02	---	---	---	---
			L-M	23.36	23.50	1.03	---	---	---	---
			M	23.28	23.50	1.05	0.001	---	0.001	---
			M-H	23.37	23.50	1.03	---	---	---	---
			H	23.45	23.50	1.01	---	---	---	---

Mode: BT

fL (MHz)=2402 MHz

fM (MHz)=2441MHz

fH (MHz)= 2480MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Mode	Exposure condition	Test case		Meas power(dBm)	Tune-up (dBm)	Scaling factor	Duty factor	Meas SAR(w/kg)		Report SAR(w/kg)	
		Position	Channel					First	Second	First	Second
BR	Head	Left Cheek	L	12.03	13.00	1.25	1.30	---	---	---	---
			M	12.09	13.00	1.23	1.30	0.200	---	0.320	---
			H	12.68	13.00	1.08	1.30	---	---	---	---
		Left tilt	L	12.03	13.00	1.25	1.30	---	---	---	---
			M	12.09	13.00	1.23	1.30	0.175	---	0.280	---
			H	12.68	13.00	1.08	1.30	---	---	---	---
		Right Cheek	L	12.03	13.00	1.25	1.30	---	---	---	---
			M	12.09	13.00	1.23	1.30	0.071	---	0.114	---
			H	12.68	13.00	1.08	1.30	---	---	---	---
		Right tilt	L	12.03	13.00	1.25	1.30	---	---	---	---
			M	12.09	13.00	1.23	1.30	0.097	---	0.155	---
			H	12.68	13.00	1.08	1.30	---	---	---	---
	Body-worn	Back	L	12.03	13.00	1.25	1.30	---	---	---	---
			M	12.09	13.00	1.23	1.30	0.045	---	0.072	---
			H	12.68	13.00	1.08	1.30	---	---	---	---
		Front	L	12.03	13.00	1.25	1.30	---	---	---	---
			M	12.09	13.00	1.23	1.30	0.043	---	0.069	---
			H	12.68	13.00	1.08	1.30	---	---	---	---
	Hotspot	Back	L	12.03	13.00	1.25	1.30	---	---	---	---
			M	12.09	13.00	1.23	1.30	0.044	---	0.070	---
			H	12.68	13.00	1.08	1.30	---	---	---	---
		Front	L	12.03	13.00	1.25	1.30	---	---	---	---
			M	12.09	13.00	1.23	1.30	0.052	---	0.083	---
			H	12.68	13.00	1.08	1.30	---	---	---	---
		Top	L	12.03	13.00	1.25	1.30	---	---	---	---
			M	12.09	13.00	1.23	1.30	0.065	---	0.104	---
			H	12.68	13.00	1.08	1.30	---	---	---	---
		Bottom	L	12.03	13.00	1.25	1.30	---	---	---	---
			M	12.09	13.00	1.23	1.30	---	---	---	---
			H	12.68	13.00	1.08	1.30	---	---	---	---
		Left	L	12.03	13.00	1.25	1.30	---	---	---	---
			M	12.09	13.00	1.23	1.30	---	---	---	---
			H	12.68	13.00	1.08	1.30	---	---	---	---
		Right	L	12.03	13.00	1.25	1.30	---	---	---	---
			M	12.09	13.00	1.23	1.30	0.001	---	0.002	---
			H	12.68	13.00	1.08	1.30	---	---	---	---

Note: Product support “Bluetooth tethering” sharing internet connection via Bluetooth, that's a kind of hotspot mode.

Mode: Wi-Fi 2.4GHz Antenna2

fL (MHz)=2412MHz fM (MHz)=2437MHz
Limit of SAR (W/kg): <1.6W/kg (1g Average)

fH (MHz)= 2462MHz

Test case				Meas power(dBm)	Tune-up(dBm)	Scaling factor	Duty factor	Meas SAR(w/kg)		Report SAR(w/kg)	
Mode	Exposure condition	Position	Channel					First	Second	First	Second
802.11g	Head	Left Cheek	L	14.89	15.00	1.03	1.02	---	---	---	---
			M	14.98	15.00	1.00	1.02	0.597	---	0.607	---
			H	14.84	15.00	1.04	1.02	---	---	---	---
		Left tilt	L	14.89	15.00	1.03	1.02	---	---	---	---
			M	14.98	15.00	1.00	1.02	0.490	---	0.498	---
			H	14.84	15.00	1.04	1.02	---	---	---	---
		Right Cheek	L	14.89	15.00	1.03	1.02	---	---	---	---
			M	14.98	15.00	1.00	1.02	0.263	---	0.268	---
			H	14.84	15.00	1.04	1.02	---	---	---	---
		Right tilt	L	14.89	15.00	1.03	1.02	---	---	---	---
			M	14.98	15.00	1.00	1.02	0.270	---	0.275	---
			H	14.84	15.00	1.04	1.02	---	---	---	---
	Body-worn	Back	L	18.89	19.00	1.03	1.02	---	---	---	---
			M	18.98	19.00	1.00	1.02	0.212	---	0.216	---
			H	18.84	19.00	1.04	1.02	---	---	---	---
		Front	L	18.89	19.00	1.03	1.02	---	---	---	---
			M	18.98	19.00	1.00	1.02	0.207	---	0.211	---
			H	18.84	19.00	1.04	1.02	---	---	---	---
	Hotspot	Back	L	18.89	19.00	1.03	1.02	---	---	---	---
			M	18.98	19.00	1.00	1.02	0.215	---	0.219	---
			H	18.84	19.00	1.04	1.02	---	---	---	---
		Front	L	18.89	19.00	1.03	1.02	---	---	---	---
			M	18.98	19.00	1.00	1.02	0.200	---	0.203	---
			H	18.84	19.00	1.04	1.02	---	---	---	---
		Top	L	18.89	19.00	1.03	1.02	---	---	---	---
			M	18.98	19.00	1.00	1.02	0.264	---	0.269	---
			H	18.84	19.00	1.04	1.02	---	---	---	---
		Bottom	L	18.89	19.00	1.03	1.02	---	---	---	---
			M	18.98	19.00	1.00	1.02	---	---	---	---
			H	18.84	19.00	1.04	1.02	---	---	---	---
		Left	L	18.89	19.00	1.03	1.02	---	---	---	---
			M	18.98	19.00	1.00	1.02	---	---	---	---
			H	18.84	19.00	1.04	1.02	---	---	---	---
		Right	L	18.89	19.00	1.03	1.02	---	---	---	---
			M	18.98	19.00	1.00	1.02	0.148	---	0.151	---
			H	18.84	19.00	1.04	1.02	---	---	---	---

Mode: Wi-Fi5GHz UNII-1 Antenna2

fL (MHz)=5180MHz fM (MHz)=5200MHz
Limit of SAR (W/kg): <1.6W/kg (1g Average)

fH (MHz)= 5240MHz

Mode	Exposure condition	Test case		Meas power(dBm)	Tune-up(dBm)	Scaling factor	Duty factor	Meas SAR(w/kg)		Report SAR(w/kg)	
		Position	Channel					First	Second	First	Second
802.11a	Head	Left Cheek	L	19.49	20.00	1.12	1.02	---	---	---	---
			M	19.60	20.00	1.10	1.02	0.618	---	0.693	---
			H	19.65	20.00	1.08	1.02	---	---	---	---
		Left tilt	L	19.49	20.00	1.12	1.02	---	---	---	---
			M	19.60	20.00	1.10	1.02	0.797	---	0.894	---
			H	19.65	20.00	1.08	1.02	---	---	---	---
		Right Cheek	L	19.49	20.00	1.12	1.02	---	---	---	---
			M	19.60	20.00	1.10	1.02	0.309	---	0.346	---
			H	19.65	20.00	1.08	1.02	---	---	---	---
		Right tilt	L	19.49	20.00	1.12	1.02	---	---	---	---
			M	19.60	20.00	1.10	1.02	0.335	---	0.376	---
			H	19.65	20.00	1.08	1.02	---	---	---	---
	Body-worn	Back	L	19.49	20.00	1.12	1.02	---	---	---	---
			M	19.60	20.00	1.10	1.02	0.403	---	0.452	---
			H	19.65	20.00	1.08	1.02	---	---	---	---
		Front	L	19.49	20.00	1.12	1.02	---	---	---	---
			M	19.60	20.00	1.10	1.02	0.134	---	0.150	---
			H	19.65	20.00	1.08	1.02	---	---	---	---
Hotspot	Back	Back	L	19.49	20.00	1.12	1.02	---	---	---	---
			M	19.60	20.00	1.10	1.02	0.403	---	0.452	---
			H	19.65	20.00	1.08	1.02	---	---	---	---
		Front	L	19.49	20.00	1.12	1.02	---	---	---	---
			M	19.60	20.00	1.10	1.02	0.120	---	0.135	---
			H	19.65	20.00	1.08	1.02	---	---	---	---
		Top	L	19.49	20.00	1.12	1.02	---	---	---	---
			M	19.60	20.00	1.10	1.02	0.317	---	0.355	---
			H	19.65	20.00	1.08	1.02	---	---	---	---
	Bottom	Bottom	L	19.49	20.00	1.12	1.02	---	---	---	---
			M	19.60	20.00	1.10	1.02	---	---	---	---
			H	19.65	20.00	1.08	1.02	---	---	---	---
	Left	Left	L	19.49	20.00	1.12	1.02	---	---	---	---
			M	19.60	20.00	1.10	1.02	---	---	---	---
			H	19.65	20.00	1.08	1.02	---	---	---	---
	Right	Right	L	19.49	20.00	1.12	1.02	---	---	---	---
			M	19.60	20.00	1.10	1.02	0.146	---	0.164	---
			H	19.65	20.00	1.08	1.02	---	---	---	---

Mode: Wi-Fi5GHz UNII-2A Antenna2

fL (MHz)=5260MHz fM (MHz)=5300MHz
Limit of SAR (W/kg): <1.6W/kg (1g Average)

fH (MHz)= 5320MHz

Test case				Meas power(dBm)	Tune-up(dBm)	Scaling factor	Duty factor	Meas SAR(w/kg)		Report SAR(w/kg)	
Mode	Exposure condition	Position	Channel					First	Second	First	Second
802.11a	Head	Left Cheek	L	17.75	18.50	1.19	1.02	---	---	---	---
			M	17.92	18.50	1.14	1.02	0.509	---	0.591	---
			H	18.04	18.50	1.11	1.02	---	---	---	---
		Left tilt	L	17.75	18.50	1.19	1.02	---	---	---	---
			M	17.92	18.50	1.14	1.02	0.622	---	0.723	---
			H	18.04	18.50	1.11	1.02	---	---	---	---
		Right Cheek	L	17.75	18.50	1.19	1.02	---	---	---	---
			M	17.92	18.50	1.14	1.02	0.222	---	0.258	---
			H	18.04	18.50	1.11	1.02	---	---	---	---
		Right tilt	L	17.75	18.50	1.19	1.02	---	---	---	---
			M	17.92	18.50	1.14	1.02	0.258	---	0.300	---
			H	18.04	18.50	1.11	1.02	---	---	---	---
	Body-worn	Back	L	17.75	18.50	1.19	1.02	---	---	---	---
			M	17.92	18.50	1.14	1.02	0.288	---	0.335	---
			H	18.04	18.50	1.11	1.02	---	---	---	---
		Front	L	17.75	18.50	1.19	1.02	---	---	---	---
			M	17.92	18.50	1.14	1.02	0.104	---	0.121	---
			H	18.04	18.50	1.11	1.02	---	---	---	---

Note: Slave device do not support hotspot mode within band UNII-2A.

Mode: Wi-Fi5GHz UNII-2C Antenna2

fL (MHz)=5500MHz fM (MHz)=5580MHz
Limit of SAR (W/kg): <1.6W/kg (1g Average)

fH (MHz)= 5700MHz

Test case				Meas power(dBm)	Tune-up(dBm)	Scaling factor	Duty factor	Meas SAR(w/kg)		Report SAR(w/kg)	
Mode	Exposure condition	Position	Channel					First	Second	First	Second
802.11a	Head	Left Cheek	L	20.38	20.50	1.03	1.02	---	---	---	---
			M	20.05	20.50	1.11	1.02	0.754	---	0.853	---
			H	20.02	20.50	1.12	1.02	---	---	---	---
		Left tilt	L	20.38	20.50	1.03	1.02	0.987	0.978	1.036	1.027
			M	20.05	20.50	1.11	1.02	1.050	1.043	1.188	1.180
			H	20.02	20.50	1.12	1.02	0.993	0.985	1.134	1.125
		Right Cheek	L	20.38	20.50	1.03	1.02	---	---	---	---
			M	20.05	20.50	1.11	1.02	0.470	---	0.532	---
			H	20.02	20.50	1.12	1.02	---	---	---	---
		Right tilt	L	20.38	20.50	1.03	1.02	---	---	---	---
			M	20.05	20.50	1.11	1.02	0.494	---	0.559	---
			H	20.02	20.50	1.12	1.02	---	---	---	---
	Body-worn	Back	L	20.38	20.50	1.03	1.02	---	---	---	---
			M	20.05	20.50	1.11	1.02	0.468	---	0.530	---
			H	20.02	20.50	1.12	1.02	---	---	---	---
		Front	L	20.38	20.50	1.03	1.02	---	---	---	---
			M	20.05	20.50	1.11	1.02	0.149	---	0.169	---
			H	20.02	20.50	1.12	1.02	---	---	---	---

Note: Slave device do not support hotspot mode within band UNII-2C.

Mode: Wi-Fi 2.4GHz Antenna4

fL (MHz)=2412MHz fM (MHz)=2437MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

fH (MHz)= 2462MHz

Test case				Meas power(dBm)	Tune-up(dBm)	Scaling factor	Duty factor	Meas SAR(w/kg)		Report SAR(w/kg)	
Mode	Exposure condition	Position	Channel					First	Second	First	Second
802.11g	Head	Left Cheek	L	14.92	15.50	1.14	1.02	---	---	---	---
			M	15.02	15.50	1.12	1.02	0.310	---	0.353	---
			H	14.99	15.50	1.12	1.02	---	---	---	---
		Left tilt	L	14.92	15.50	1.14	1.02	---	---	---	---
			M	15.02	15.50	1.12	1.02	0.238	---	0.271	---
			H	14.99	15.50	1.12	1.02	---	---	---	---
		Right Cheek	L	14.92	15.50	1.14	1.02	0.606	---	0.703	---
			M	15.02	15.50	1.12	1.02	0.895	0.889	1.020	1.013
			H	14.99	15.50	1.12	1.02	0.759	---	0.865	---
		Right tilt	L	14.92	15.50	1.14	1.02	---	---	---	---
			M	15.02	15.50	1.12	1.02	0.578	---	0.659	---
			H	14.99	15.50	1.12	1.02	---	---	---	---
	Body-worn	Back	L	18.92	19.50	1.14	1.02	---	---	---	---
			M	19.02	19.50	1.12	1.02	0.376	---	0.428	---
			H	18.99	19.50	1.12	1.02	---	---	---	---
		Front	L	18.92	19.50	1.14	1.02	---	---	---	---
			M	19.02	19.50	1.12	1.02	0.273	---	0.311	---
			H	18.99	19.50	1.12	1.02	---	---	---	---
	Hotspot	Back	L	18.92	19.50	1.14	1.02	---	---	---	---
			M	19.02	19.50	1.12	1.02	0.382	---	0.435	---
			H	18.99	19.50	1.12	1.02	---	---	---	---
		Front	L	18.92	19.50	1.14	1.02	---	---	---	---
			M	19.02	19.50	1.12	1.02	0.295	---	0.336	---
			H	18.99	19.50	1.12	1.02	---	---	---	---
		Top	L	18.92	19.50	1.14	1.02	---	---	---	---
			M	19.02	19.50	1.12	1.02	0.105	---	0.120	---
			H	18.99	19.50	1.12	1.02	---	---	---	---
		Bottom	L	18.92	19.50	1.14	1.02	---	---	---	---
			M	19.02	19.50	1.12	1.02	---	---	---	---
			H	18.99	19.50	1.12	1.02	---	---	---	---
		Left	L	18.92	19.50	1.14	1.02	---	---	---	---
			M	19.02	19.50	1.12	1.02	0.284	---	0.324	---
			H	18.99	19.50	1.12	1.02	---	---	---	---
		Right	L	18.92	19.50	1.14	1.02	---	---	---	---
			M	19.02	19.50	1.12	1.02	---	---	---	---
			H	18.99	19.50	1.12	1.02	---	---	---	---

Mode: Wi-Fi5GHz UNII-1 Antenna4

fL (MHz)=5180MHz fM (MHz)=5200MHz
Limit of SAR (W/kg): <1.6W/kg (1g Average)

fH (MHz)= 5240MHz

Mode	Exposure condition	Test case		Meas power(dBm)	Tune-up(dBm)	Scaling factor	Duty factor	Meas SAR(w/kg)		Report SAR(w/kg)	
		Position	Channel					First	Second	First	Second
802.11a	Head	Left Cheek	L	18.83	20.00	1.31	1.02	---	---	---	---
			M	19.26	20.00	1.19	1.02	0.110	---	0.133	---
			H	19.67	20.00	1.08	1.02	---	---	---	---
		Left tilt	L	18.83	20.00	1.31	1.02	---	---	---	---
			M	19.26	20.00	1.19	1.02	0.130	---	0.158	---
			H	19.67	20.00	1.08	1.02	---	---	---	---
		Right Cheek	L	18.83	20.00	1.31	1.02	---	---	---	---
			M	19.26	20.00	1.19	1.02	0.592	---	0.718	---
			H	19.67	20.00	1.08	1.02	---	---	---	---
		Right tilt	L	18.83	20.00	1.31	1.02	---	---	---	---
			M	19.26	20.00	1.19	1.02	0.320	---	0.388	---
			H	19.67	20.00	1.08	1.02	---	---	---	---
	Body-worn	Back	L	18.83	20.00	1.31	1.02	---	---	---	---
			M	19.26	20.00	1.19	1.02	0.399	---	0.484	---
			H	19.67	20.00	1.08	1.02	---	---	---	---
		Front	L	18.83	20.00	1.31	1.02	---	---	---	---
			M	19.26	20.00	1.19	1.02	0.120	---	0.146	---
			H	19.67	20.00	1.08	1.02	---	---	---	---
Hotspot	Hotspot	Back	L	18.83	20.00	1.31	1.02	---	---	---	---
			M	19.26	20.00	1.19	1.02	0.399	---	0.484	---
			H	19.67	20.00	1.08	1.02	---	---	---	---
		Front	L	18.83	20.00	1.31	1.02	---	---	---	---
			M	19.26	20.00	1.19	1.02	0.132	---	0.160	---
			H	19.67	20.00	1.08	1.02	---	---	---	---
		Top	L	18.83	20.00	1.31	1.02	---	---	---	---
			M	19.26	20.00	1.19	1.02	0.326	---	0.395	---
			H	19.67	20.00	1.08	1.02	---	---	---	---
		Bottom	L	18.83	20.00	1.31	1.02	---	---	---	---
			M	19.26	20.00	1.19	1.02	---	---	---	---
			H	19.67	20.00	1.08	1.02	---	---	---	---
		Left	L	18.83	20.00	1.31	1.02	---	---	---	---
			M	19.26	20.00	1.19	1.02	0.001	---	0.001	---
			H	19.67	20.00	1.08	1.02	---	---	---	---
		Right	L	18.83	20.00	1.31	1.02	---	---	---	---
			M	19.26	20.00	1.19	1.02	---	---	---	---
			H	19.67	20.00	1.08	1.02	---	---	---	---

Mode: Wi-Fi5GHz UNII-2A Antenna4

fL (MHz)=5260MHz fM (MHz)=5300MHz
Limit of SAR (W/kg): <1.6W/kg (1g Average)

fH (MHz)= 5320MHz

Mode	Exposure condition	Position	Channel	Meas power(dBm)	Tune-up(dBm)	Scaling factor	Duty factor	Meas SAR(w/kg)		Report SAR(w/kg)	
								First	Second	First	Second
802.11a	Head	Left Cheek	L	17.94	18.00	1.01	1.02	---	---	---	---
			M	17.95	18.00	1.01	1.02	0.136	---	0.140	---
			H	17.93	18.00	1.02	1.02	---	---	---	---
		Left tilt	L	17.94	18.00	1.01	1.02	---	---	---	---
			M	17.95	18.00	1.01	1.02	0.060	---	0.062	---
			H	17.93	18.00	1.02	1.02	---	---	---	---
		Right Cheek	L	17.94	18.00	1.01	1.02	---	---	---	---
			M	17.95	18.00	1.01	1.02	0.632	---	0.651	---
			H	17.93	18.00	1.02	1.02	---	---	---	---
		Right tilt	L	17.94	18.00	1.01	1.02	---	---	---	---
			M	17.95	18.00	1.01	1.02	0.366	---	0.377	---
			H	17.93	18.00	1.02	1.02	---	---	---	---
	Body-worn	Back	L	17.94	18.00	1.01	1.02	---	---	---	---
			M	17.95	18.00	1.01	1.02	0.259	---	0.267	---
			H	17.93	18.00	1.02	1.02	---	---	---	---
		Front	L	17.94	18.00	1.01	1.02	---	---	---	---
			M	17.95	18.00	1.01	1.02	0.095	---	0.098	---
			H	17.93	18.00	1.02	1.02	---	---	---	---

Note: Slave device do not support hotspot mode within band UNII-2A.

Mode: Wi-Fi5GHz UNII-2C Antenna4

fL (MHz)=5500MHz fM (MHz)=5580MHz
Limit of SAR (W/kg): <1.6W/kg (1g Average)

fH (MHz)= 5700MHz

Mode	Exposure condition	Position	Channel	Meas power(dBm)	Tune-up(dBm)	Scaling factor	Duty factor	Meas SAR(w/kg)		Report SAR(w/kg)	
								First	Second	First	Second
802.11a	Head	Left Cheek	L	19.78	20.00	1.05	1.02	---	---	---	---
			M	19.72	20.00	1.07	1.02	0.063	---	0.068	---
			H	19.61	20.00	1.09	1.02	---	---	---	---
		Left tilt	L	19.78	20.00	1.05	1.02	---	---	---	---
			M	19.72	20.00	1.07	1.02	0.064	---	0.069	---
			H	19.61	20.00	1.09	1.02	---	---	---	---
		Right Cheek	L	19.78	20.00	1.05	1.02	---	---	---	---
			M	19.72	20.00	1.07	1.02	0.358	---	0.390	---
			H	19.61	20.00	1.09	1.02	---	---	---	---
		Right tilt	L	19.78	20.00	1.05	1.02	---	---	---	---
			M	19.72	20.00	1.07	1.02	0.118	---	0.129	---
			H	19.61	20.00	1.09	1.02	---	---	---	---
	Body-worn	Back	L	19.78	20.00	1.05	1.02	---	---	---	---
			M	19.72	20.00	1.07	1.02	0.425	---	0.464	---
			H	19.61	20.00	1.09	1.02	---	---	---	---
		Front	L	19.78	20.00	1.05	1.02	---	---	---	---
			M	19.72	20.00	1.07	1.02	0.158	---	0.172	---
			H	19.61	20.00	1.09	1.02	---	---	---	---

Note: Slave device do not support hotspot mode within band UNII-2C.

Mode: Wi-Fi 2.4GHz MIMO

fL (MHz)=2412MHz fM (MHz)=2437MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

fH (MHz)= 2462MHz

Test case				Meas power(dBm)	Tune-up(dBm)	Scaling factor	Duty factor	Meas SAR(w/kg)		Report SAR(w/kg)	
Mode	Exposure condition	Position	Channel					First	Second	First	Second
802.11g	Head	Left Cheek	L	17.92	18.50	1.14	1.02	---	---	---	---
			M	18.01	18.50	1.12	1.02	0.650	---	0.741	---
			H	17.93	18.50	1.14	1.02	---	---	---	---
		Left tilt	L	17.92	18.50	1.14	1.02	---	---	---	---
			M	18.01	18.50	1.12	1.02	0.546	---	0.622	---
			H	17.93	18.50	1.14	1.02	---	---	---	---
		Right Cheek	L	17.92	18.50	1.14	1.02	0.677	---	0.785	---
			M	18.01	18.50	1.12	1.02	0.927	0.911	1.056	1.038
			H	17.93	18.50	1.14	1.02	0.784	---	0.909	---
		Right tilt	L	17.92	18.50	1.14	1.02	---	---	---	---
			M	18.01	18.50	1.12	1.02	0.629	---	0.717	---
			H	17.93	18.50	1.14	1.02	---	---	---	---
	Body-worn	Back	L	21.92	22.50	1.14	1.02	---	---	---	---
			M	22.01	22.50	1.12	1.02	0.480	---	0.547	---
			H	21.93	22.50	1.14	1.02	---	---	---	---
		Front	L	21.92	22.50	1.14	1.02	---	---	---	---
			M	22.01	22.50	1.12	1.02	0.384	---	0.438	---
			H	21.93	22.50	1.14	1.02	---	---	---	---
	Hotspot	Back	L	21.92	22.50	1.14	1.02	---	---	---	---
			M	22.01	22.50	1.12	1.02	0.449	---	0.512	---
			H	21.93	22.50	1.14	1.02	---	---	---	---
		Front	L	21.92	22.50	1.14	1.02	---	---	---	---
			M	22.01	22.50	1.12	1.02	0.410	---	0.467	---
			H	21.93	22.50	1.14	1.02	---	---	---	---
		Top	L	21.92	22.50	1.14	1.02	---	---	---	---
			M	22.01	22.50	1.12	1.02	0.367	---	0.418	---
			H	21.93	22.50	1.14	1.02	---	---	---	---
		Bottom	L	21.92	22.50	1.14	1.02	---	---	---	---
			M	22.01	22.50	1.12	1.02	---	---	---	---
			H	21.93	22.50	1.14	1.02	---	---	---	---
		Left	L	21.92	22.50	1.14	1.02	---	---	---	---
			M	22.01	22.50	1.12	1.02	0.198	---	0.226	---
			H	21.93	22.50	1.14	1.02	---	---	---	---
		Right	L	21.92	22.50	1.14	1.02	---	---	---	---
			M	22.01	22.50	1.12	1.02	0.146	---	0.166	---
			H	21.93	22.50	1.14	1.02	---	---	---	---

Mode: Wi-Fi5GHz UNII-1 MIMO

fL (MHz)=5180MHz fM (MHz)=5200MHz
Limit of SAR (W/kg): <1.6W/kg (1g Average)

fH (MHz)= 5240MHz

Test case				Meas power(dBm)	Tune-up(dBm)	Scaling factor	Duty factor	Meas SAR(w/kg)		Report SAR(w/kg)	
Mode	Exposure condition	Position	Channel					First	Second	First	Second
802.11a	Head	Left Cheek	L	22.18	23.00	1.21	1.02	0.776	---	0.957	---
			M	22.44	23.00	1.14	1.02	0.835	0.833	0.970	0.968
			H	22.67	23.00	1.08	1.02	0.789	---	0.869	---
		Left tilt	L	22.18	23.00	1.21	1.02	0.788	---	0.972	---
			M	22.44	23.00	1.14	1.02	0.856	0.852	0.995	0.990
			H	22.67	23.00	1.08	1.02	0.792	---	0.872	---
		Right Cheek	L	22.18	23.00	1.21	1.02	0.799	---	---	---
			M	22.44	23.00	1.14	1.02	0.811	0.808	0.942	0.939
			H	22.67	23.00	1.08	1.02	0.782	---	---	---
		Right tilt	L	22.18	23.00	1.21	1.02	---	---	---	---
			M	22.44	23.00	1.14	1.02	0.458	---	0.532	---
			H	22.67	23.00	1.08	1.02	---	---	---	---
	Body-worn	Back	L	22.18	23.00	1.21	1.02	---	---	---	---
			M	22.44	23.00	1.14	1.02	0.404	---	0.469	---
			H	22.67	23.00	1.08	1.02	---	---	---	---
		Front	L	22.18	23.00	1.21	1.02	---	---	---	---
			M	22.44	23.00	1.14	1.02	0.133	---	0.155	---
			H	22.67	23.00	1.08	1.02	---	---	---	---
	Hotspot	Back	L	22.18	23.00	1.21	1.02	---	---	---	---
			M	22.44	23.00	1.14	1.02	0.404	---	0.469	---
			H	22.67	23.00	1.08	1.02	---	---	---	---
		Front	L	22.18	23.00	1.21	1.02	---	---	---	---
			M	22.44	23.00	1.14	1.02	0.150	---	0.174	---
			H	22.67	23.00	1.08	1.02	---	---	---	---
		Top	L	22.18	23.00	1.21	1.02	---	---	---	---
			M	22.44	23.00	1.14	1.02	0.314	---	0.365	---
			H	22.67	23.00	1.08	1.02	---	---	---	---
		Bottom	L	22.18	23.00	1.21	1.02	---	---	---	---
			M	22.44	23.00	1.14	1.02	---	---	---	---
			H	22.67	23.00	1.08	1.02	---	---	---	---
		Left	L	22.18	23.00	1.21	1.02	---	---	---	---
			M	22.44	23.00	1.14	1.02	0.149	---	0.173	---
			H	22.67	23.00	1.08	1.02	---	---	---	---
		Right	L	22.18	23.00	1.21	1.02	---	---	---	---
			M	22.44	23.00	1.14	1.02	0.157	---	0.182	---
			H	22.67	23.00	1.08	1.02	---	---	---	---

Mode: Wi-Fi5GHz UNII-2A MIMO

fL (MHz)=5260MHz fM (MHz)=5300MHz
Limit of SAR (W/kg): <1.6W/kg (1g Average)

fH (MHz)= 5320MHz

Mode	Exposure condition	Test case		Meas power(dBm)	Tune-up(dBm)	Scaling factor	Duty factor	Meas SAR(w/kg)		Report SAR(w/kg)	
		Position	Channel					First	Second	First	Second
802.11a	Head	Left Cheek	L	20.86	21.00	1.03	1.02	---	---	---	---
			M	20.95	21.00	1.01	1.02	0.542	---	0.558	---
			H	21.00	21.00	1.00	1.02	---	---	---	---
		Left tilt	L	20.86	21.00	1.03	1.02	---	---	---	---
			M	20.95	21.00	1.01	1.02	0.667	---	0.687	---
			H	21.00	21.00	1.00	1.02	---	---	---	---
		Right Cheek	L	20.86	21.00	1.03	1.02	---	---	---	---
			M	20.95	21.00	1.01	1.02	0.787	---	0.810	---
			H	21.00	21.00	1.00	1.02	---	---	---	---
		Right tilt	L	20.86	21.00	1.03	1.02	---	---	---	---
			M	20.95	21.00	1.01	1.02	0.370	---	0.381	---
			H	21.00	21.00	1.00	1.02	---	---	---	---
	Body-worn	Back	L	20.86	21.00	1.03	1.02	---	---	---	---
			M	20.95	21.00	1.01	1.02	0.498	---	0.513	---
			H	21.00	21.00	1.00	1.02	---	---	---	---
		Front	L	20.86	21.00	1.03	1.02	---	---	---	---
			M	20.95	21.00	1.01	1.02	0.111	---	0.114	---
			H	21.00	21.00	1.00	1.02	---	---	---	---

Note: Slave device do not support hotspot mode within band UNII-2A.

Mode: Wi-Fi5GHz UNII-2C MIMO

fL (MHz)=5500MHz fM (MHz)=5580MHz
Limit of SAR (W/kg): <1.6W/kg (1g Average)

fH (MHz)= 5700MHz

Mode	Exposure condition	Test case		Meas power(dBm)	Tune-up(dBm)	Scaling factor	Duty factor	Meas SAR(w/kg)		Report SAR(w/kg)	
		First	Second					First	Second	First	Second
802.11a	Head	Left Cheek	L	23.10	23.50	1.10	1.02	---	---	---	---
			M	22.90	23.50	1.15	1.02	0.640	---	0.750	---
			H	22.83	23.50	1.17	1.02	---	---	---	---
		Left tilt	L	23.10	23.50	1.10	1.02	1.081	1.068	1.212	1.198
			M	22.90	23.50	1.15	1.02	1.170	1.165	1.372	1.366
			H	22.83	23.50	1.17	1.02	1.079	1.076	1.287	1.283
		Right Cheek	L	23.10	23.50	1.10	1.02	---	---	---	---
			M	22.90	23.50	1.15	1.02	0.440	---	0.516	---
			H	22.83	23.50	1.17	1.02	---	---	---	---
		Right tilt	L	23.10	23.50	1.10	1.02	---	---	---	---
			M	22.90	23.50	1.15	1.02	0.493	---	0.578	---
			H	22.83	23.50	1.17	1.02	---	---	---	---
	Body-worn	Back	L	23.10	23.50	1.10	1.02	---	---	---	---
			M	22.90	23.50	1.15	1.02	0.428	---	0.502	---
			H	22.83	23.50	1.17	1.02	---	---	---	---
		Front	L	23.10	23.50	1.10	1.02	---	---	---	---
			M	22.90	23.50	1.15	1.02	0.173	---	0.203	---
			H	22.83	23.50	1.17	1.02	---	---	---	---

Note: Slave device do not support hotspot mode within band UNII-2C

6.11 SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

6.12 Simultaneous Transmission SAR Analysis

Antenna numbers of Simultaneous Transmission		Antennas of Simultaneous Transmission				
Two		WWAN ANT+ WLAN/BT WLANMIMO				
Three		WWAN ANT+ BT + WLAN5G WWAN ANT+ WLAN (MIMO)				

Exposure condition	Position	licenced ANT7	unlicenced ANT2	unlicenced ANT 4	unlicenced MIMO	Mult-TX
Head	Left cheek	0.350	0.853	0.353	0.970	1.320
	Left tilt	0.138	1.188	0.271	1.372	1.509
	Right cheek	0.144	0.532	1.020	1.056	1.200
	Right tilt	0.140	0.559	0.659	0.717	0.856
Body worn	Back	0.802	0.530	0.484	0.547	1.349
	Front	0.645	0.211	0.311	0.438	1.082
Hotspot	Back	0.815	0.452	0.484	0.512	1.327
	Front	0.647	0.203	0.336	0.467	1.114
	Top	0.000	0.355	0.395	0.418	0.418
	Bottom	1.199	0.000	0.000	0.000	1.199
	Left	0.538	0.000	0.324	0.226	0.861
	Right	0.000	0.164	0.000	0.182	0.182

According to the above tables, all the exposure condition of SAR values < 1.6W/kg.

7 MEASUREMENT UNCERTAINTY

(0.3 - 3 GHz range)								
Error Description	Uncert. value	Prob. Dist.	Div.	(c_i) 1g	(c_i) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(v_i) v_{eff}
Measurement System								
Probe Calibration	±6.0 %	N	1	1	1	±6.0 %	±6.0 %	∞
Axial Isotropy	±4.7 %	R	$\sqrt{3}$	0.7	0.7	±1.9 %	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	R	$\sqrt{3}$	0.7	0.7	±3.9 %	±3.9 %	∞
Boundary Effects	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %	∞
Linearity	±4.7 %	R	$\sqrt{3}$	1	1	±2.7 %	±2.7 %	∞
System Detection Limits	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %	∞
Modulation Response ^m	±2.4 %	R	$\sqrt{3}$	1	1	±1.4 %	±1.4 %	∞
Readout Electronics	±0.3 %	N	1	1	1	±0.3 %	±0.3 %	∞
Response Time	±0.8 %	R	$\sqrt{3}$	1	1	±0.5 %	±0.5 %	∞
Integration Time	±2.6 %	R	$\sqrt{3}$	1	1	±1.5 %	±1.5 %	∞
RF Ambient Noise	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
RF Ambient Reflections	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
Probe Positioner	±0.4 %	R	$\sqrt{3}$	1	1	±0.2 %	±0.2 %	∞
Probe Positioning	±2.9 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
Max. SAR Eval.	±2.0 %	R	$\sqrt{3}$	1	1	±1.2 %	±1.2 %	∞
Test Sample Related								
Device Positioning	±2.9 %	N	1	1	1	±2.9 %	±2.9 %	145
Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %	5
Power Drift	±5.0 %	R	$\sqrt{3}$	1	1	±2.9 %	±2.9 %	∞
Power Scaling ^p	±0 %	R	$\sqrt{3}$	1	1	±0.0 %	±0.0 %	∞
Phantom and Setup								
Phantom Uncertainty	±6.1 %	R	$\sqrt{3}$	1	1	±3.5 %	±3.5 %	∞
SAR correction	±1.9 %	R	$\sqrt{3}$	1	0.84	±1.1 %	±0.9 %	∞
Liquid Conductivity (mea.) ^{DAK}	±2.5 %	R	$\sqrt{3}$	0.78	0.71	±1.1 %	±1.0 %	∞
Liquid Permittivity (mea.) ^{DAK}	±2.5 %	R	$\sqrt{3}$	0.26	0.26	±0.3 %	±0.4 %	∞
Temp. unc. - Conductivity ^{BB}	±3.4 %	R	$\sqrt{3}$	0.78	0.71	±1.5 %	±1.4 %	∞
Temp. unc. - Permittivity ^{BB}	±0.4 %	R	$\sqrt{3}$	0.23	0.26	±0.1 %	±0.1 %	∞
Combined Std. Uncertainty						±11.2 %	±11.1 %	361
Expanded STD Uncertainty						±22.3 %	±22.2 %	

(3 - 6 GHz range)								
Error Description	Uncert. value	Prob. Dist.	Div.	(c_i) 1g	(c_i) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(v_i) v_{eff}
Measurement System								
Probe Calibration	±6.55 %	N	1	1	1	±6.55 %	±6.55 %	∞
Axial Isotropy	±4.7 %	R	$\sqrt{3}$	0.7	0.7	±1.9 %	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	R	$\sqrt{3}$	0.7	0.7	±3.9 %	±3.9 %	∞
Boundary Effects	±2.0 %	R	$\sqrt{3}$	1	1	±1.2 %	±1.2 %	∞
Linearity	±4.7 %	R	$\sqrt{3}$	1	1	±2.7 %	±2.7 %	∞
System Detection Limits	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %	∞
Modulation Response ^m	±2.4 %	R	$\sqrt{3}$	1	1	±1.4 %	±1.4 %	∞
Readout Electronics	±0.3 %	N	1	1	1	±0.3 %	±0.3 %	∞
Response Time	±0.8 %	R	$\sqrt{3}$	1	1	±0.5 %	±0.5 %	∞
Integration Time	±2.6 %	R	$\sqrt{3}$	1	1	±1.5 %	±1.5 %	∞
RF Ambient Noise	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
RF Ambient Reflections	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
Probe Positioner	±0.8 %	R	$\sqrt{3}$	1	1	±0.5 %	±0.5 %	∞
Probe Positioning	±6.7 %	R	$\sqrt{3}$	1	1	±3.9 %	±3.9 %	∞
Max. SAR Eval.	±4.0 %	R	$\sqrt{3}$	1	1	±2.3 %	±2.3 %	∞
Test Sample Related								
Device Positioning	±2.9 %	N	1	1	1	±2.9 %	±2.9 %	145
Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %	5
Power Drift	±5.0 %	R	$\sqrt{3}$	1	1	±2.9 %	±2.9 %	∞
Power Scaling ^p	±0 %	R	$\sqrt{3}$	1	1	±0.0 %	±0.0 %	∞
Phantom and Setup								
Phantom Uncertainty	±6.6 %	R	$\sqrt{3}$	1	1	±3.8 %	±3.8 %	∞
SAR correction	±1.9 %	R	$\sqrt{3}$	1	0.84	±1.1 %	±0.9 %	∞
Liquid Conductivity (mea.) ^{DAK}	±2.5 %	R	$\sqrt{3}$	0.78	0.71	±1.1 %	±1.0 %	∞
Liquid Permittivity (mea.) ^{DAK}	±2.5 %	R	$\sqrt{3}$	0.26	0.26	±0.3 %	±0.4 %	∞
Temp. unc. - Conductivity ^{BB}	±3.4 %	R	$\sqrt{3}$	0.78	0.71	±1.5 %	±1.4 %	∞
Temp. unc. - Permittivity ^{BB}	±0.4 %	R	$\sqrt{3}$	0.23	0.26	±0.1 %	±0.1 %	∞
Combined Std. Uncertainty						±12.3 %	±12.2 %	748
Expanded STD Uncertainty						±24.6 %	±24.5 %	

8 TEST EQUIPMENTS

The measurements were performed using an automated near-field scanning system, DASY5, manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland. The SAR extrapolation algorithm used in all measurements was the 'advanced extrapolation' algorithm.

The following table lists calibration dates of SPEAG components:

Test Equipment	Model	Serial Number	Calibration date	Calibration Due data
DAE	DAE4	720	2020.09.30	2021.09.29
Dosimetric E-field Probe	ES3DV3	3127	2020.09.01	2021.08.31
Dosimetric E-field Probe	EX3DV4	3708	2020.10.30	2021.10.29
Dipole Validation Kit	D750V3	1101	2020.10.16	2021.10.15
Dipole Validation Kit	D835V2	4d023	2020.10.16	2021.10.15
Dipole Validation Kit	D1800V2	2d084	2020.09.18	2021.09.17
Dipole Validation Kit	D2000V2	1009	2020.10.14	2021.10.13
Dipole Validation Kit	D2450V2	738	2020.10.13	2021.10.12
Dipole Validation Kit	D2600V2	1166	2019.11.08	2022.11.07
Dipole Validation Kit	D5GHzV2	1079	2020.10.10	2021.10.09

Additional test equipment used in testing:

Test Equipment	Model	Serial Number	Calibration date	Calibration Due data
Signal Generator	E4428C	MY45280865	2020.08.20	2021.08.19
Signal Generator	SML 03	103514	2020.08.20	2021.08.19
Power meter	E4417A	MY45101182	2020.08.20	2021.08.19
Power Sensor	E4412A	MY41502214	2020.08.20	2021.08.19
Power Sensor	E4412A	MY41502130	2020.08.20	2021.08.19
Power meter	E4417A	MY45101004	2020.08.20	2021.08.19
Power Sensor	E9300B	MY41496001	2020.08.20	2021.08.19
Power Sensor	E9300B	MY41496003	2020.08.20	2021.08.19
Communication Tester	E5515C	MY48367401	2020.08.20	2021.08.19
Communication Tester	CMW500	161702	2020.08.20	2021.08.19
Communication Tester	MT8820C	6201300660	2020.08.20	2021.08.19
Communication Tester	MT8821C	6201547819	2020.08.20	2021.08.19
Vector Network Analyzer	VNA R140	0011213	2020.09.18	2021.09.17
Dielectric Parameter Probe	DAKS-3.5	1042	2020.09.17	2021.09.16

Detailed information of Isotropic E-field Probe Type ES3DV3

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Calibration certificate in Appendix C
Frequency	10 MHz to 4 GHz; Linearity: ± 0.2 dB (30 MHz to 4 GHz)
Optical Surface Detection	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm
Dynamic Range	5 μ W/g to > 100 W/kg; Linearity: ± 0.2 dB
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones

Detailed information of Isotropic E-field Probe Type EX3DV4

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Calibration certificate in Appendix C
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Optical Surface Detection	± 0.3 mm repeatability in air and clear liquids over diffuse reflecting surfaces
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Dynamic Range	10 μ W/g to > 100 W/kg Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.

According to KDB 865664 D01 section 3.2.2, instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the **SAR target, impedance and return loss** of a dipole have remain stable according to the following requirements.

- 1) The test laboratory must ensure that the required supporting information and documentation are included in the SAR report to qualify for the three-year extended calibration interval; otherwise, the IEEE Std 1528-2013 recommended annual calibration applies.
- 2) Immediate re-calibration is required for the following conditions.
 - a) After a dipole is damaged and properly repaired to meet required specifications.
 - b) When the measured SAR deviates from the calibrated SAR value by more than 10% due to changes in physical, mechanical, electrical or other relevant dipole conditions; i.e., the error is not introduced by incorrect measurement procedures or other issues relating to the SAR measurement system.
 - c) When the most recent return-loss result, measured at least annually, deviates by more than 20% from the previous measurement (i.e. value in $\text{dB} \times 0.2$) or not meeting the required 20 dB minimum return-loss requirement.
 - d) When the most recent measurement of the real or imaginary parts of the impedance, measured at least annually, deviates by more than 5Ω from the previous measurement

Dipole2600

SAR target


Refers to system check, measured SAR (1g and 10g) deviates from the Target SAR value of calibration report within 10%.

Impedance and Return loss measured by Network analyzer

The most recent measurement of the real or imaginary parts of the impedance deviates within 5Ω from the previous measurement. (Data from the last calibration report)

The most recent return-loss result deviates within 20% from the previous measurement. (Data from the last calibration report)

TSL Parameters			
Parameters	Target (Ref. Value)	Measured data	Deviation
Impedance	$51.3\Omega+5.92j\Omega$	$48.9\Omega+4.78j\Omega$	<5Ω
Return loss	-24.5 dB	-22.6dB	<20%

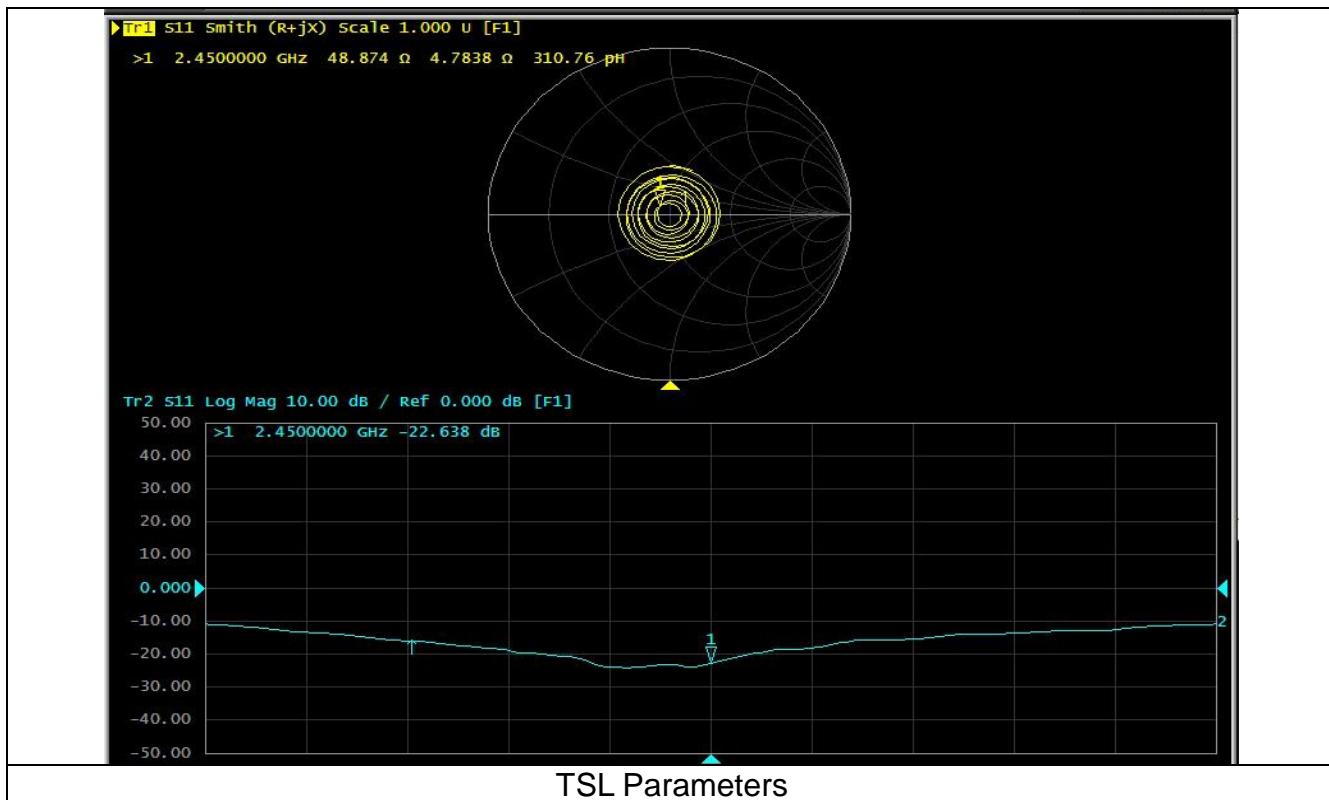

ANNEX A – TEST PLOTS

Please refer to the attachment.

ANNEX B – RELEVANT PAGES FROM CALIBRATION REPORTS

Please refer to the attachment.