




TEST REPORT

Application No.: GZCR2201000133AT
Applicant: DT Research, Inc.
Address of Applicant: 3RD FL NO 36 WUQUAN 7TH RD WUGU DISTRICT, NEW TAIPEI, Taiwan
Manufacturer: DT Research, Inc.
Address of Manufacturer: 2000 Concourse Drive, San Jose, CA 95131, USA
Factory: DT Research, Inc. Taiwan Branch
Address of Factory: 6F., No.36 Wuquan 7th Rd., Wugu Dist. New Taipei City 248 Taiwan
Equipment Under Test (EUT):
EUT Name: Rugged Tablet
Model No.: 340Qxxx(x= 0-9, A-Z, - or null) ♣
♣ Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.
Trade Mark: 
Standard(s) : 47 CFR Part 15, Subpart E 15.407
Date of Receipt: 2022-01-05
Date of Test: 2022-01-06 to 2022-01-27
Date of Issue: 2022-02-09

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.



Kobe Jian
EMC Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.198 Kexhu Road, Solentech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
Guangzhou Branch Testing & Inspection Laboratory 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2022-02-09		Original

Authorized for issue by:				
				
		Curry Wu/Project Engineer		
				
		Ricky Liu/Reviewer		

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart E 15.407	N/A	47 CFR Part 15, Subpart C 15.203	Pass
Transmission in the Absence of Data		N/A	47 CFR Part 15, Subpart C 15.407 (c)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart E 15.407	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207 & 15.407 b(6)	Pass
Radiated Emissions which fall in the restricted bands		KDB 789033 D02 II G	47 CFR Part 15, Subpart C 15.209 & 15.407(b)	Pass
Radiated Emissions (below 1GHz)		KDB 789033 D02 II G	47 CFR Part 15, Subpart C 15.209 & 15.407(b)	Pass
Radiated Emissions (above 1GHz)		KDB 789033 D02 II G	47 CFR Part 15, Subpart C 15.209 & 15.407(b)	Pass

Note:

E.U.T./EUT means Equipment Under Test.

Pass means the test result passed the test standard requirement, please find the detailed decision rule in the report relative section.

Declaration of EUT Family Grouping:

Model No.: 340Qxxxx (x= 0-9, A-Z, - or null)

Only the model 340Q was tested, since according to the declaration from the applicant, the electrical circuit design, layout, components used, internal wiring and functions were identical for the above models, with only difference on model No..

This report is prepared for FCC class II permissive change.

The modular approval by TCB, FCC ID:YE3600-SC600TA, Granted on 05/18/2020.

The module installed into host platform mentioned above is electronically and mechanically identical to the original certified module. The Original FCC testing on module under FCC ID:YE3600-SC600TA was performed with an antenna of higher gain, and the antenna was connected to the module in an open environment. The current host platform under application uses a new antenna of the different type, higher gain and is installed outside the host platform enclosure.

Therefore in this report Conducted Emissions at AC Power Line (150kHz-30MHz), Radiated Emissions which fall in the restricted bands and Radiated Spurious Emissions were fully retested on model 340Q and shown the data in this report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch Testing Laboratory

No.198 Kezhu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

3 Contents

	Page
1 Cover Page	1
2 Test Summary	3
3 Contents	4
4 General Information	6
4.1 Details of E.U.T.	6
4.2 Description of Support Units	7
4.3 Measurement Uncertainty	7
4.4 Test Location	7
4.5 Test Facility	8
4.6 Deviation from Standards	8
4.7 Abnormalities from Standard Conditions	8
5 Equipment List	9
6 Radio Spectrum Technical Requirement	11
6.1 Antenna Requirement	11
6.1.1 Test Requirement:	11
6.1.2 Conclusion	11
6.2 Transmission in the Absence of Data	11
6.2.1 Test Requirement:	11
6.2.2 Conclusion	11
7 Radio Spectrum Matter Test Results	12
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)	12
7.1.1 E.U.T. Operation	12
7.1.2 Test Mode Description	12
7.1.3 Test Setup Diagram	13
7.1.4 Measurement Procedure and Data	13
7.2 Radiated Emissions which fall in the restricted bands	16
7.2.1 E.U.T. Operation	17
7.2.2 Test Mode Description	17
7.2.3 Test Setup Diagram	18
7.2.4 Measurement Procedure and Data	19
7.3 Radiated Emissions (below 1GHz)	110
7.3.1 E.U.T. Operation	111
7.3.2 Test Mode Description	111
7.3.3 Test Setup Diagram	112
7.3.4 Measurement Procedure and Data	113
7.4 Radiated Emissions (above 1GHz)	116
7.4.1 E.U.T. Operation	117
7.4.2 Test Mode Description	117
7.4.3 Test Setup Diagram	118
7.4.4 Measurement Procedure and Data	119
8 Test Setup Photo	238



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

9 EUT Constructional Details (EUT Photos)238



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

4 General Information

4.1 Details of E.U.T.

Power supply: AC Adapter

Model: A11-065N1A

Input: AC 100-240V, 50/60Hz, 1.7A

Output: DC 19V, 3.42A, 65W

Rechargeable lithium-Ion polymer battery

Model: ACC-006-90K(3ICP7/36/115-2)

Rated Capacity: 8000mAh

Voltage: DC 11.4V

Watt-Hour: 91.2Wh

Max Charge Voltage: 13.05V

Test voltage:

AC 120V, 60Hz or AC 240V, 50Hz

Note: Both nominal AC 120V, 60Hz and AC 240 V, 50Hz are required for testing in accordance with FCC KDB174176, this report only shows the results of the worst test result(AC 120V, 60Hz);

Cable(s):

DC cable: 175cm with a ferrite core

Internal Source:

More than 108MHz

Operation Frequency:

Band	Mode	Frequency Range(MHz)	Number of channels
UNII Band I	IEEE 802.11a/n(HT20)/ac(HT20)	5180-5240	4
	IEEE 802.11n(HT40)/ac(HT40)	5190-5230	2
	IEEE 802.11ac(HT80)	5210	1
UNII Band II-A	IEEE 802.11a/n(HT20)/ac(HT20)	5260-5320	4
	IEEE 802.11n(HT40)/ac(HT40)	5270-5310	2
	IEEE 802.11ac(HT80)	5290	1
UNII Band II-C	IEEE 802.11a/n(HT20)/ac(HT20)	5500-5700	8
	IEEE 802.11n(HT40)/ac(HT40)	5510-5670	5
	IEEE 802.11ac(HT80)	5530,5610	2
UNII Band III	IEEE 802.11a/n(HT20)/ac(HT20)	5745-5825	5
	IEEE 802.11n(HT40)/ac(HT40)	5755-5795	2
	IEEE 802.11ac(HT80)	5775	1

Modulation Type:

IEEE 802.11a: OFDM(64QAM, 16QAM, QPSK, BPSK)

IEEE 802.11n: OFDM (BPSK, QPSK, 16QAM, 64QAM)

IEEE 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)

DFS Function:

Slave without radar detection

TPC Function:

Not support

Sample Type:

Fixed device

Antenna Type:

PIFA antenna

Antenna Gain:

3.6dBi



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
--	--	--	--
The EUT has been tested as an independent unit.			

4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emissions at AC Power Line (150kHz-30MHz)	$\pm 2.76\text{dB}$
Radiated Emissions which fall in the restricted bands	$\pm 5.00\text{dB}$ (30MHz-1GHz; 3m); $\pm 4.38\text{dB}$ (30MHz-1GHz; 10m); $\pm 4.52\text{dB}$ (1GHz-6GHz); $\pm 4.54\text{dB}$ (above 6GHz)
Radiated Emissions (below 1GHz)	$\pm 5.00\text{dB}$ (30MHz-1GHz; 3m); $\pm 4.38\text{dB}$ (30MHz-1GHz; 10m)
Radiated Emissions (above 1GHz)	$\pm 4.52\text{dB}$ (1GHz-6GHz); $\pm 4.54\text{dB}$ (above 6GHz)

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory,
198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District,
Guangzhou, China 510663

Tel: +86 20 82155555

Fax: +86 20 82075059

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP (Lab Code: 200611-0)**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

- **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian/New Zealand Regulatory Compliance Mark (RCM).

- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

- **CNAS (Lab Code: L0167)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2018 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2017 General Requirements) for the Competence of Testing Laboratories.

- **FCC Recognized Accredited Test Firm(Registration No.: 486818)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: CN5016, Test Firm Registration Number: 486818.

- **ISED (Registration No.: 4620B, CAB identifier: CN0052)**

SGS-CSTC Standards Technical Services Co., Ltd., has been registered by Innovation Science and Economic Development Canada for Wireless Device Testing laboratories to test to Canadian radio equipment requirements. Registration No. 4620B, CAB identifier: CN0052.

- **VCCI (Registration No.: R-12460, C-12584, G-20107 and T-11179)**

The 10m Semi-anechoic chamber, 966 Anechoic Chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-12460, C-12584, G-20107 and T-11179 respectively.

- **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2017, the Basic Rules, IECEE 01 and Rules of procedure IECEE 02, and the relevant IECEE CB-Scheme Operational documents.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

5 Equipment List

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Shielding Room	ChangZhou ZhongYu	8m x 3m x 3.8m	EMC0306	N/A	N/A
Two-Line V-Network	Rohde & Schwarz	ENV216	EMC0118	2021-12-23	2022-12-22
Two-Line V-Network-GZ	Rohde & Schwarz	ENV216	EMC2135	2021-09-24	2022-09-23
Coaxial Cable	HangTianXing	2m	EMC0107	2020-09-09	2022-09-08
Test Software E3c	Audix	Ver. 5.4.1221b	GZE100-62	N/A	N/A
EMI Test Receiver(9kHz-3.6GHz)	Rohde & Schwarz	ESR3	EMC2221	2021-06-01	2022-05-31

Radiated Spurious Emissions Below 1GHz					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI Test Receiver (10Hz-26.5GHz)	Rohde & Schwarz	ESIB26	EMC0522	2021-01-08	2022-01-07
				2022-01-06	2023-01-05
Chamber cable	HangTianXing	N/A	EMC0542	2021-06-28	2024-06-27
Trilog Broadband Antenna (25MHz-1GHz)- Lab	SCHWARZBECK MESS-ELEKTRONIK	VULB 9168	SEM003-18	2019-02-22	2022-02-22
Amplifier(9kHz-1.3GHz)	HP	8447F	EMC2065	2021-05-19	2022-05-18
High Pass Filter (915MHz)	FSY MICROWAVE	HM1465-9SS	EMC2079	2021-01-08	2022-01-07
				2022-01-06	2023-01-05
10m Semi-Anechoic Chamber	ETS	N/A	EMC0530	2019-10-20	2022-10-19
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A

Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI Test Receiver(20Hz-26.5GHz)	Rohde & Schwarz	ESIB26	EMC0522	2021-12-17	2022-12-16
Chamber cable(Above 1GHz)	Scoflex	KMKM-8.0m	EMC0545	2020-09-09	2022-09-08
Horn Antenna(1GHz-18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2026	2019-09-25	2022-09-24
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2021-12-17	2022-12-16
966 Anechoic Chamber	C.R.T	9m x 6m x 6m	EMC2142	2020-12-20	2023-12-19
MXE EMI Receiver(10Hz-8.4GHz)	Keysight	N9038A	EMC2139	2021-11-01	2022-10-31
EXA Signal Analyzer(10Hz-44GHz)	Keysight	N9010A	EMC2138	2021-09-16	2022-09-15



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.198 Kezhu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
 Guangzhou branch of SGS-CSTC Standards Technical Services Co., Ltd. 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A
Notch Filter (5150-5880)	Mico-Tronics	BRM50716	EMC2168	2021-07-29	2022-07-28
Horn Antenna(14-40GHz)	SCHWARZBECK	BBHA 9170	EMC2041	2020-06-28	2023-06-27
Microwave Broadband Preamplifier (18-40GHz)	SCHWARZBECK	BBV 9721	EMC2172	2021-08-30	2022-08-29

Radiated Emissions (above 1GHz)

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Chamber cable(Above 1GHz)	Scoflex	KMKM-8.0m	EMC0545	2020-09-09	2022-09-08
Horn Antenna(1GHz-18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2026	2019-09-25	2022-09-24
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2021-12-17	2022-12-16
2.4GHz Filter	Micro-Tronics	BRM 50702	EMC2069	2021-12-17	2022-12-16
966 Anechoic Chamber	C.R.T	9m x 6m x 6m	EMC2142	2020-12-20	2023-12-19
EXA Signal Analyzer(10Hz-44GHz)	Keysight	N9010A	EMC2138	2021-09-16	2022-09-15
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A
Notch Filter (5150-5880)	Mico-Tronics	BRM50716	EMC2168	2021-07-29	2022-07-28
Horn Antenna(14-40GHz)	SCHWARZBECK	BBHA 9170	EMC2041	2020-06-28	2023-06-27
Microwave Broadband Preamplifier (18-40GHz)	SCHWARZBECK	BBV 9721	EMC2172	2021-08-30	2022-08-29

General used equipment

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DMM	Fluke	73	EMC0006	2021-07-05	2022-07-05
DMM	Fluke	73	EMC0007	2021-07-05	2022-07-05



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

6.1.2 Conclusion

15.203 Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of 15.211, 15.213, 15.217, 15.219, 15.221, or 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the Antenna 3.6dBi.

Antenna location: Refer to external photo.

6.2 Transmission in the Absence of Data

6.2.1 Test Requirement:

47 CFR Part 15, Subpart C 15.407 (c)

6.2.2 Conclusion

6.2.2 Conclusion

Standard Requirement:

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

Applicants shall include in their application for equipment authorization a description of how this requirement is met.

EUT Details:

WIFI chip support automatically discontinue transmission in case of either absence of information to transmit or operational failure, if the chip detect absence of information to transmit or operational failure, it will be automatically shut off.



7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207 & 15.407 b(6)

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 23.1 °C Humidity: 46.5 % RH Atmospheric Pressure: 1015 mbar

7.1.2 Test Mode Description


Pre-scan / Final test	Mode Code	Description
Final test	14	Charge+TX mode (U-NII-1)_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Pre-scan	16	Charge+TX mode (U-NII-2A)_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Pre-scan	18	Charge+TX mode (U-NII-2C)_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.



Pre-scan 20

Charge+TX mode (U-NII-3)_Keep the EUT in charging and continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

7.1.3 Test Setup Diagram

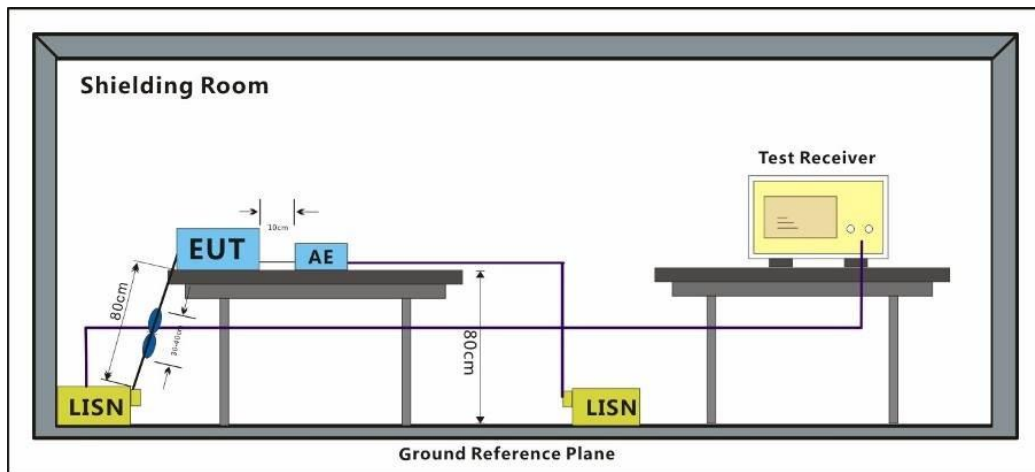

7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.


Remark: LISN=Read Level+ Cable Loss+ LISN Factor



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/terms-and-conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.198 Kezhu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

Test Mode: 14; Line: Live line

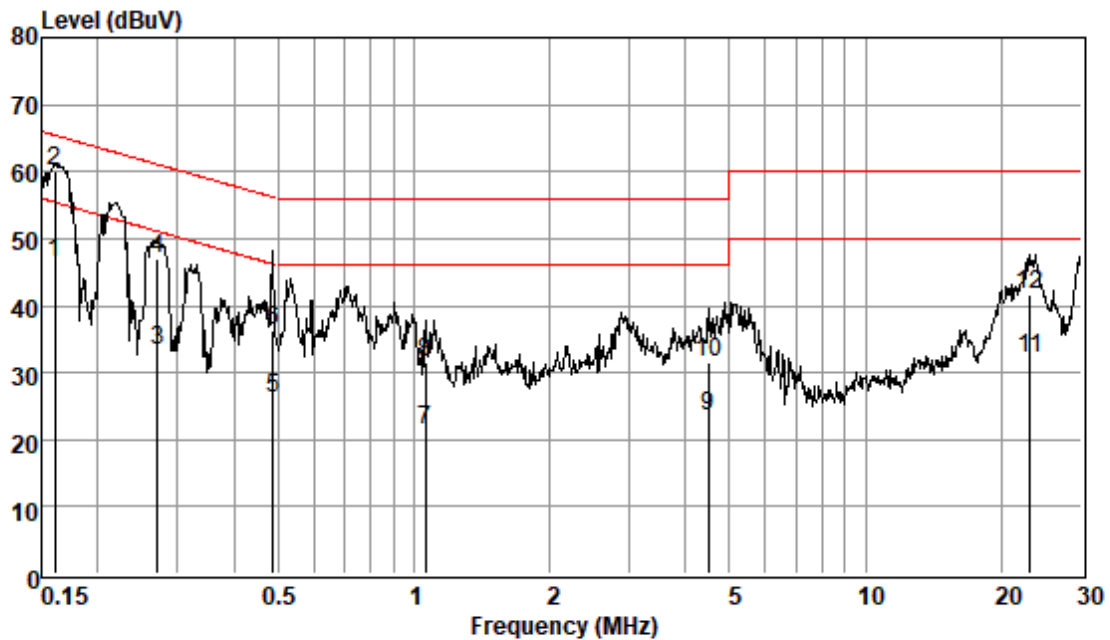Pol : LINE
Mode :
Model :

Frequency MHz	Read Level dBuV	Cable Loss dB	LISN Factor dB	Measured Level dBuV	Limit Line dBuV	Over Limit dB	Remark
0.16	36.67	0.06	9.62	46.35	55.43	-9.08	Average
0.16	50.42	0.06	9.62	60.10	65.43	-5.33	QP
0.27	23.76	0.06	9.62	33.44	51.07	-17.63	Average
0.27	37.18	0.06	9.62	46.86	61.07	-14.21	QP
0.49	16.55	0.07	9.63	26.25	46.19	-19.94	Average
0.49	26.43	0.07	9.63	36.13	56.19	-20.06	QP
1.06	11.82	0.07	9.62	21.51	46.00	-24.49	Average
1.06	21.89	0.07	9.62	31.58	56.00	-24.42	QP
4.48	13.66	0.17	9.64	23.47	46.00	-22.53	Average
4.48	21.79	0.17	9.64	31.60	56.00	-24.40	QP
23.14	21.79	0.39	9.84	32.02	50.00	-17.98	Average
23.14	31.47	0.39	9.84	41.70	60.00	-18.30	QP

Test Mode: 14; Line: Neutral Line

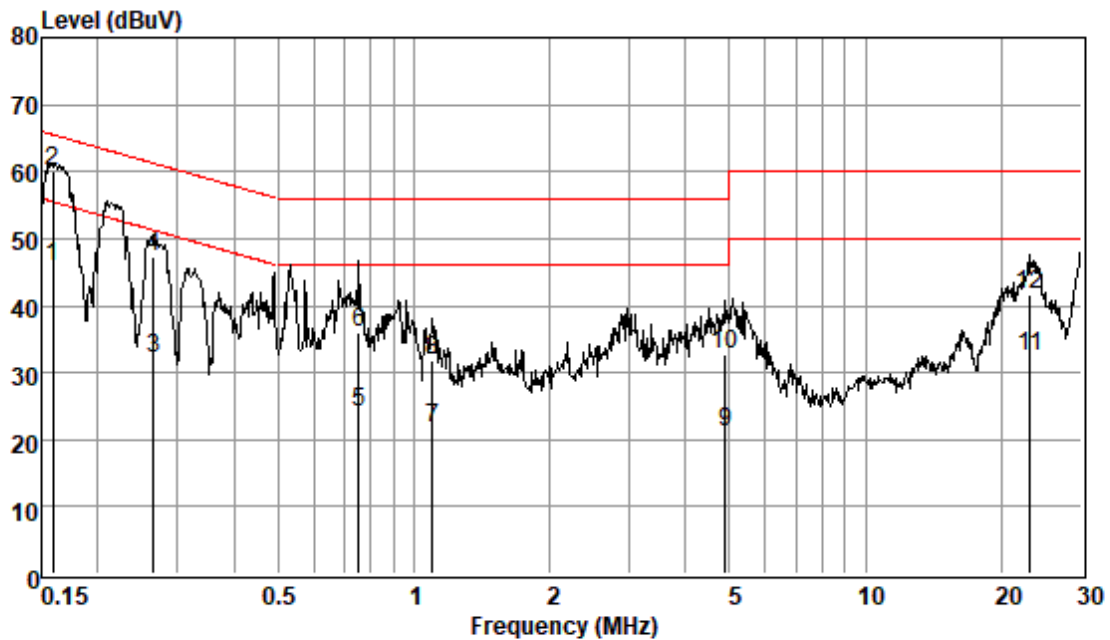

Pol : NEUTRAL
Mode :
Model :

Frequency MHz	Read Level dBuV	Cable Loss dB	LISN Factor dB	Measured Level dBuV	Limit Line dBuV	Over Limit dB	Remark
0.16	36.20	0.06	9.55	45.81	55.52	-9.71	Average
0.16	50.46	0.06	9.55	60.07	65.52	-5.45	QP
0.27	22.46	0.06	9.55	32.07	51.25	-19.18	Average
0.27	37.69	0.06	9.55	47.30	61.25	-13.95	QP
0.75	14.52	0.07	9.55	24.14	46.00	-21.86	Average
0.75	26.49	0.07	9.55	36.11	56.00	-19.89	QP
1.10	12.07	0.08	9.55	21.70	46.00	-24.30	Average
1.10	22.20	0.08	9.55	31.83	56.00	-24.17	QP
4.90	11.36	0.18	9.56	21.10	46.00	-24.90	Average
4.90	22.93	0.18	9.56	32.67	56.00	-23.33	QP
23.14	22.17	0.39	9.76	32.32	50.00	-17.68	Average
23.14	31.40	0.39	9.76	41.55	60.00	-18.45	QP

7.2 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.407(b)

Test Method: KDB 789033 D02 II G

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 23.5 °C Humidity: 56.3 % RH Atmospheric Pressure: 1015 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Pre-scan	13	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Final test	14	Charge+TX mode (U-NII-1)_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Pre-scan	15	TX mode (U-NII-2A)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Final test	16	Charge+TX mode (U-NII-2A)_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Pre-scan	17	TX mode (U-NII-2C)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Final test	18	Charge+TX mode (U-NII-2C)_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Pre-scan 19


Final test 20

modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

TX mode (U-NII-3)_Keep the EUT in continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

Charge+TX mode (U-NII-3)_Keep the EUT in charging and continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

7.2.3 Test Setup Diagram

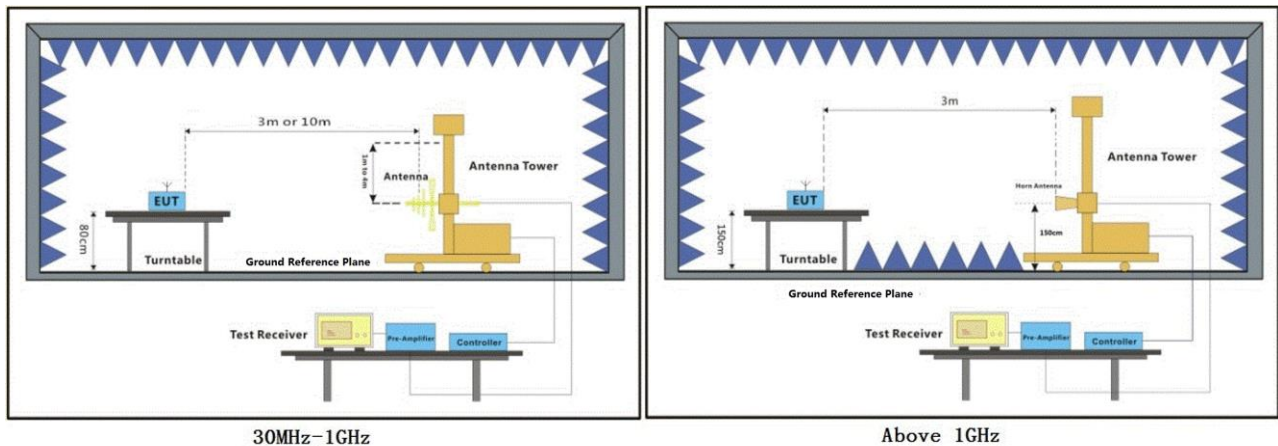

30MHz-1GHz

Above 1GHz


7.2.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor




Test Mode: 14; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

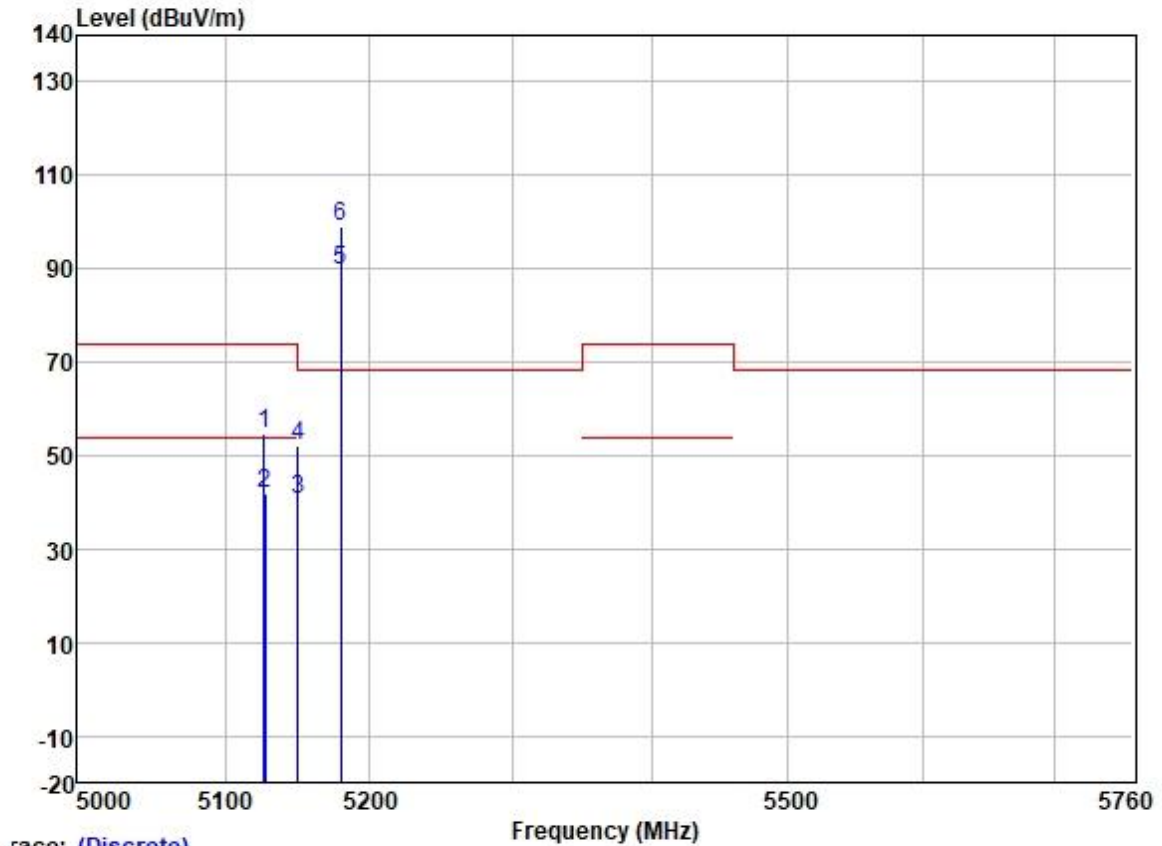

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5126.909	53.98	31.72	5.64	36.86	54.48	74.00	-19.52	HORIZONTAL Peak
2	5127.705	41.31	31.72	5.63	36.86	41.80	54.00	-12.20	HORIZONTAL Average
3	5149.980	40.30	31.72	5.62	36.86	40.78	54.00	-13.22	HORIZONTAL Average
4	5149.980	51.83	31.72	5.62	36.86	52.31	74.00	-21.69	HORIZONTAL Peak
5	5180.000	89.32	31.73	5.61	36.87	89.79	-----	-----	HORIZONTAL Average
6 *	5180.000	98.51	31.73	5.61	36.87	98.98	68.20	30.78	HORIZONTAL Peak

Test Mode: 14; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

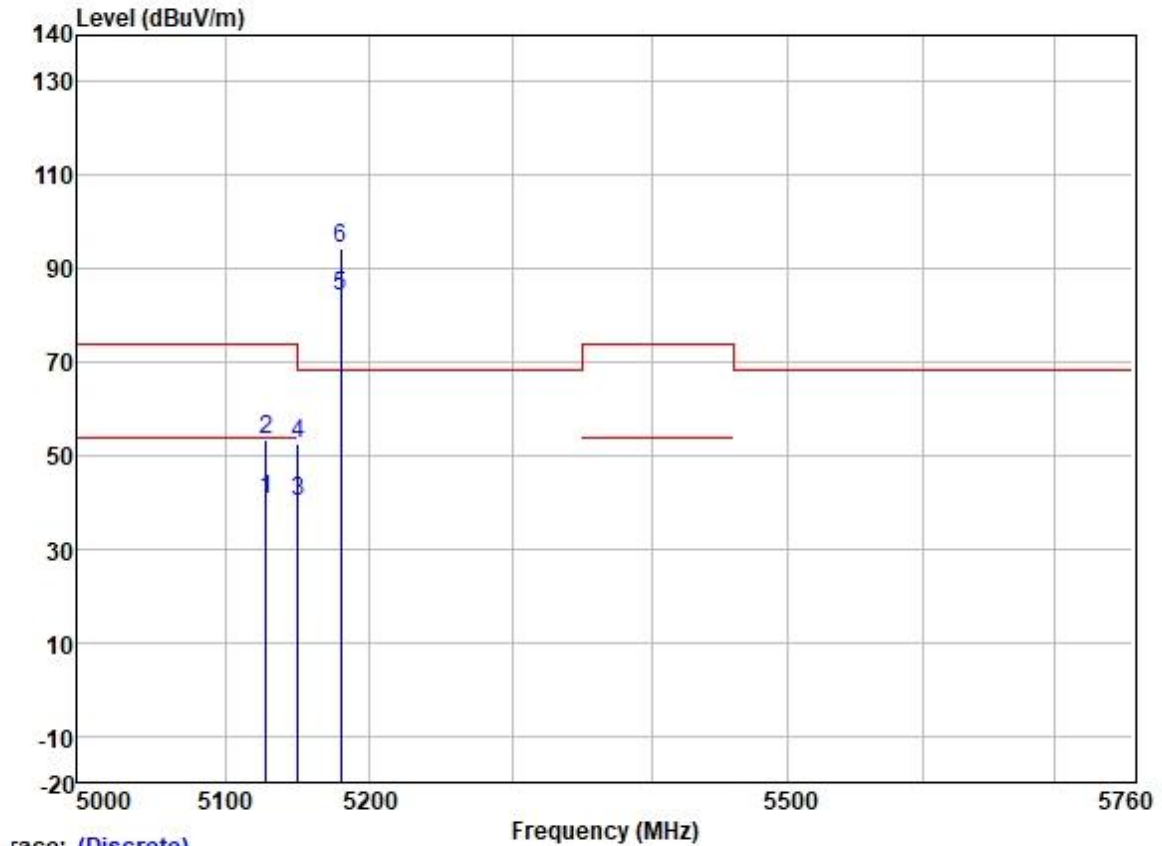


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5128.103	40.18	31.72	5.63	36.86	40.67	54.00	-13.33	VERTICAL
2	5128.103	52.95	31.72	5.63	36.86	53.44	74.00	-20.56	VERTICAL
3	5149.980	39.85	31.72	5.62	36.86	40.33	54.00	-13.67	VERTICAL
4	5149.980	52.01	31.72	5.62	36.86	52.49	74.00	-21.51	VERTICAL
5	5180.000	83.84	31.73	5.61	36.87	84.31	-----	-----	VERTICAL
6 *	5180.000	93.79	31.73	5.61	36.87	94.26	68.20	26.06	VERTICAL

Test Mode: 14; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

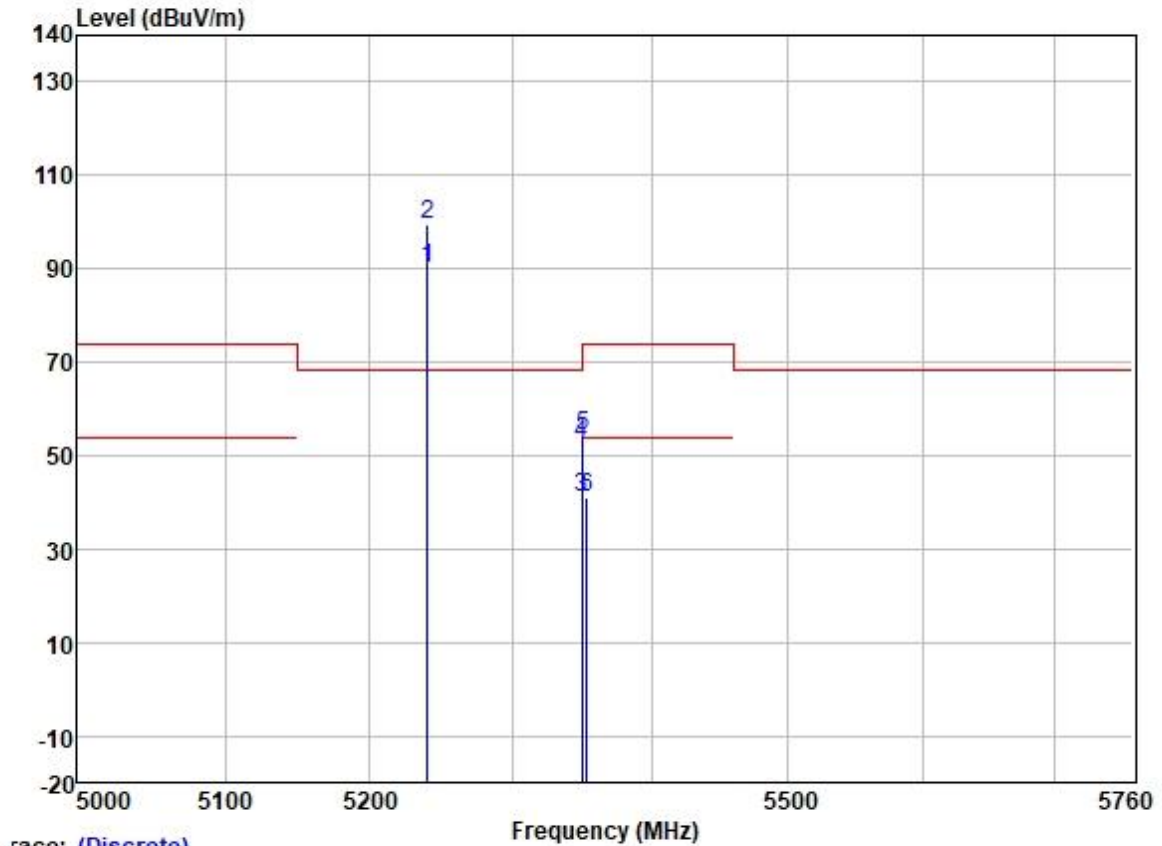

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5240.000	89.52	31.75	5.74	36.87	90.14	-----	-----	HORIZONTAL	Average
2 *	5240.000	98.97	31.75	5.74	36.87	99.59	68.20	31.39	HORIZONTAL	Peak
3	5350.020	39.90	31.77	6.05	36.88	40.84	54.00	-13.16	HORIZONTAL	Average
4	5350.020	51.71	31.77	6.05	36.88	52.65	74.00	-21.35	HORIZONTAL	Peak
5	5350.504	53.32	31.77	6.05	36.88	54.26	74.00	-19.74	HORIZONTAL	Peak
6	5353.053	40.07	31.77	6.05	36.88	41.01	54.00	-12.99	HORIZONTAL	Average


Test Mode: 14; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

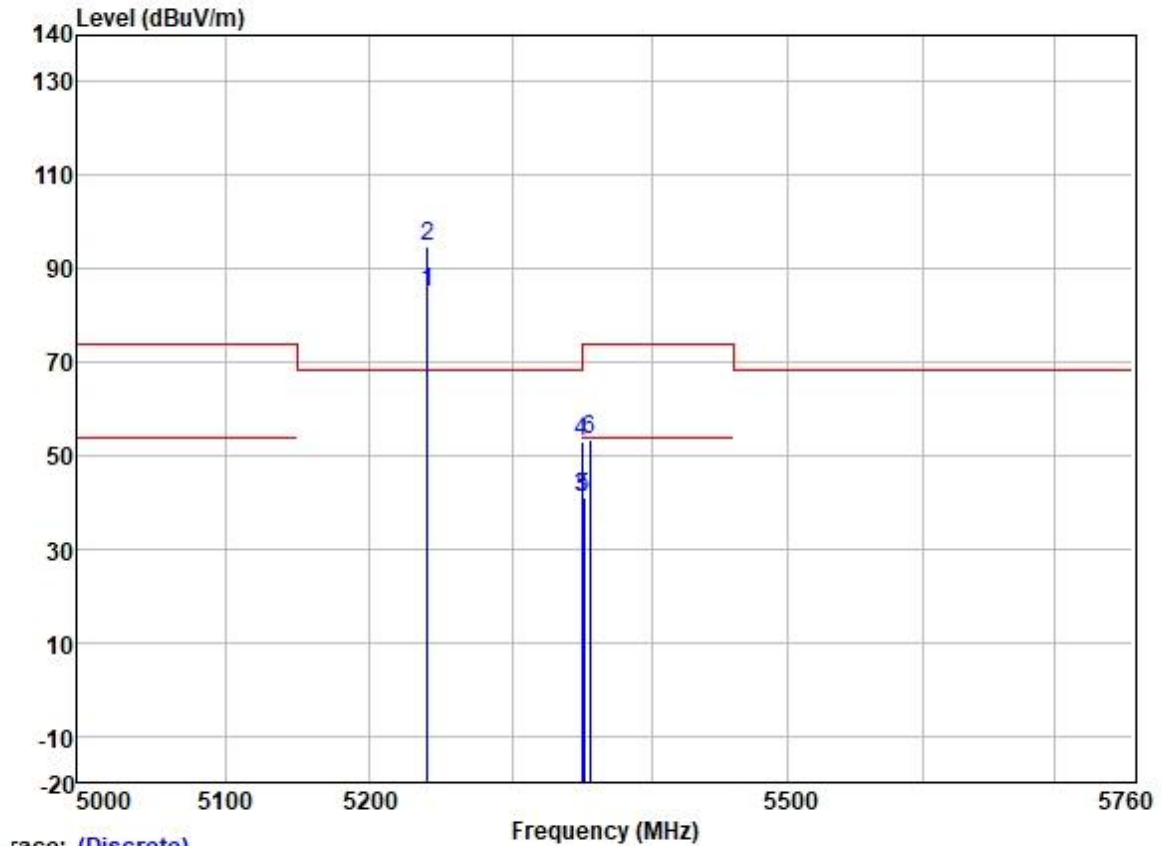

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5240.000	84.20	31.75	5.74	36.87	84.82	-----	-----	VERTICAL	Average
2 *	5240.000	94.03	31.75	5.74	36.87	94.65	68.20	26.45	VERTICAL	Peak
3	5350.020	39.91	31.77	6.05	36.88	40.85	54.00	-13.15	VERTICAL	Average
4	5350.020	51.85	31.77	6.05	36.88	52.79	74.00	-21.21	VERTICAL	Peak
5	5351.070	40.05	31.77	6.05	36.88	40.99	54.00	-13.01	VERTICAL	Average
6	5355.604	52.51	31.78	6.03	36.88	53.44	74.00	-20.56	VERTICAL	Peak


Test Mode: 14; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

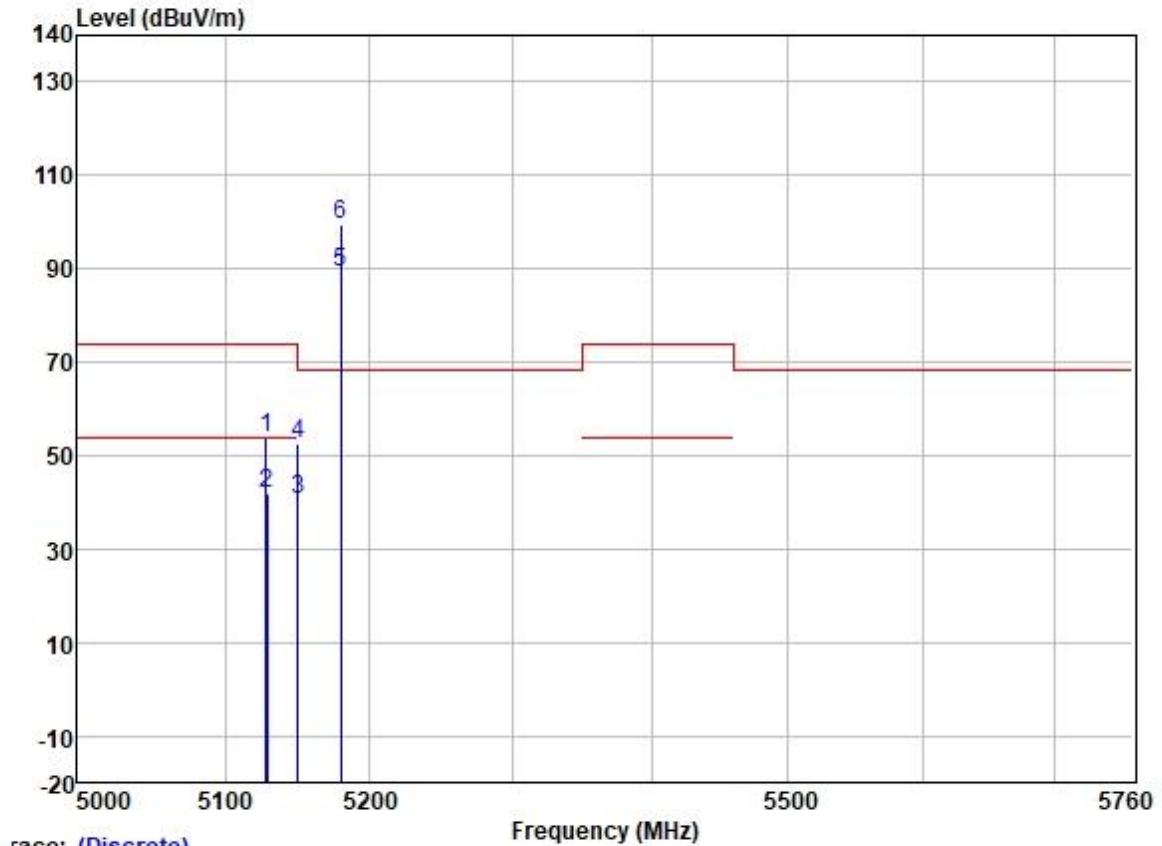

race: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5128.004	53.52	31.72	5.63	36.86	54.01	74.00	-19.99	HORIZONTAL Peak
2	5128.501	41.50	31.72	5.63	36.86	41.99	54.00	-12.01	HORIZONTAL Average
3	5149.980	40.16	31.72	5.62	36.86	40.64	54.00	-13.36	HORIZONTAL Average
4	5149.980	52.08	31.72	5.62	36.86	52.56	74.00	-21.44	HORIZONTAL Peak
5	5180.000	88.89	31.73	5.61	36.87	89.36	-----	-----	HORIZONTAL Average
6 *	5180.000	98.99	31.73	5.61	36.87	99.46	68.20	31.26	HORIZONTAL Peak


Test Mode: 14; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

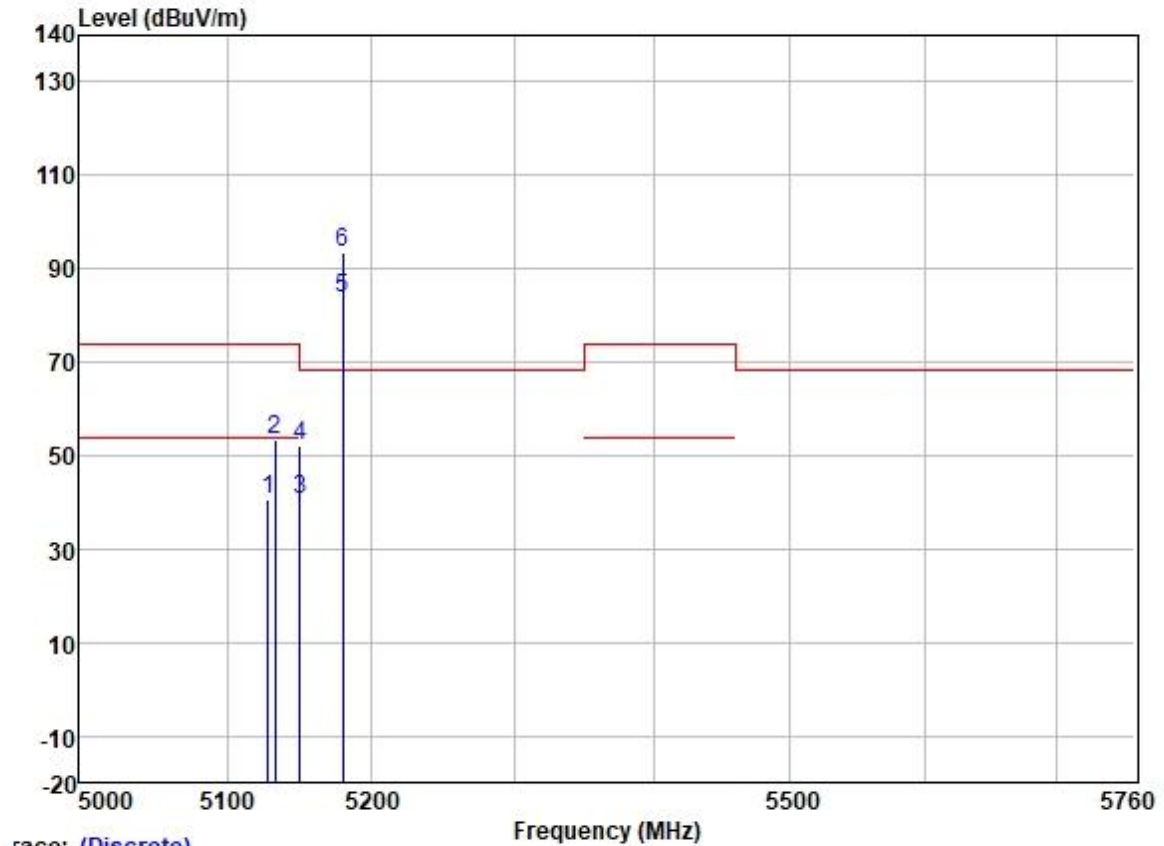

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5128.004	40.15	31.72	5.63	36.86	40.64	54.00	-13.36	VERTICAL
2	5132.885	52.81	31.72	5.63	36.86	53.30	74.00	-20.70	VERTICAL
3	5149.980	39.90	31.72	5.62	36.86	40.38	54.00	-13.62	VERTICAL
4	5149.980	51.47	31.72	5.62	36.86	51.95	74.00	-22.05	VERTICAL
5	5180.000	83.28	31.73	5.61	36.87	83.75	-----	-----	VERTICAL
6 *	5180.000	92.96	31.73	5.61	36.87	93.43	68.20	25.23	VERTICAL

Test Mode: 14; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

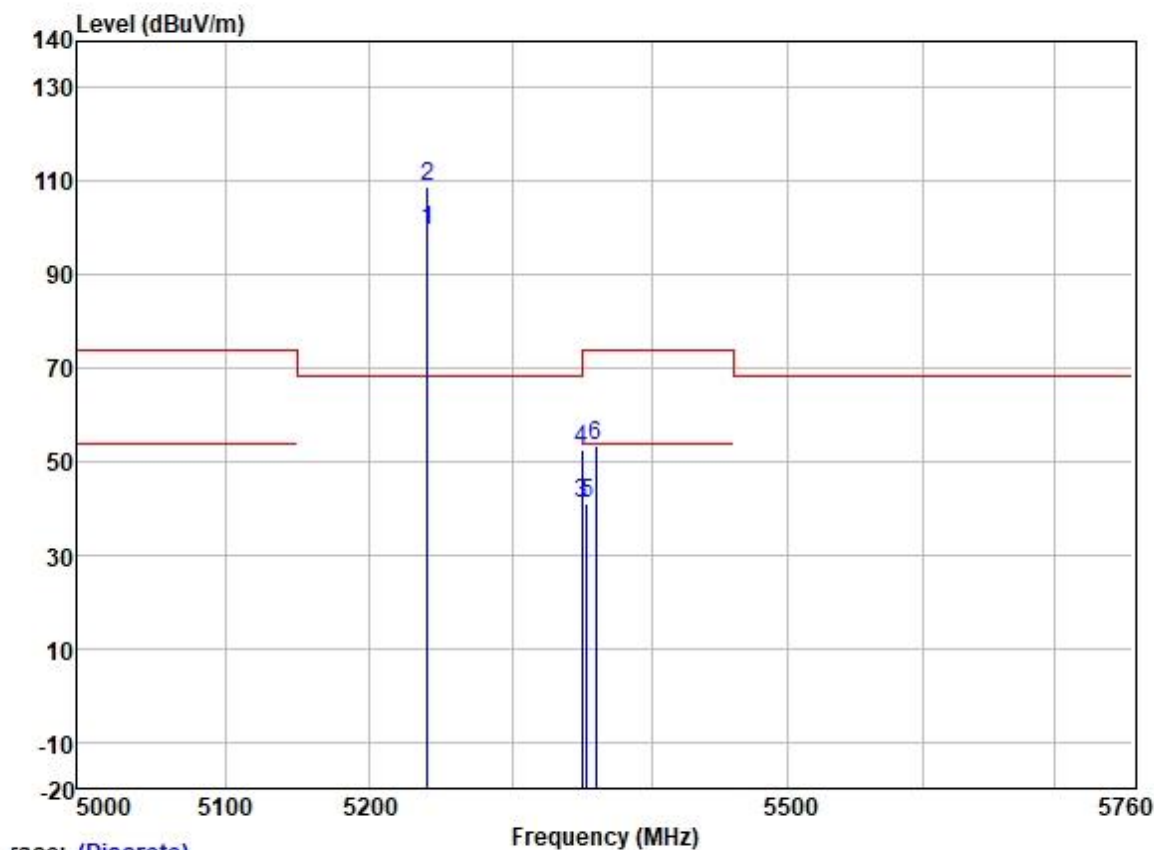

race: (Discrete)

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5240.000	98.76	31.75	5.74	36.87	99.38	-----	-----	HORIZONTAL	Average
2 *	5240.000	108.15	31.75	5.74	36.87	108.77	68.20	40.57	HORIZONTAL	Peak
3	5350.020	39.89	31.77	6.05	36.88	40.83	54.00	-13.17	HORIZONTAL	Average
4	5350.020	51.76	31.77	6.05	36.88	52.70	74.00	-21.30	HORIZONTAL	Peak
5	5353.053	40.06	31.77	6.05	36.88	41.00	54.00	-13.00	HORIZONTAL	Average
6	5359.574	52.48	31.78	6.03	36.88	53.41	74.00	-20.59	HORIZONTAL	Peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overal available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and for electronic forms of documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch Testing Center EEC Laboratory.

中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com


Test Mode: 14; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

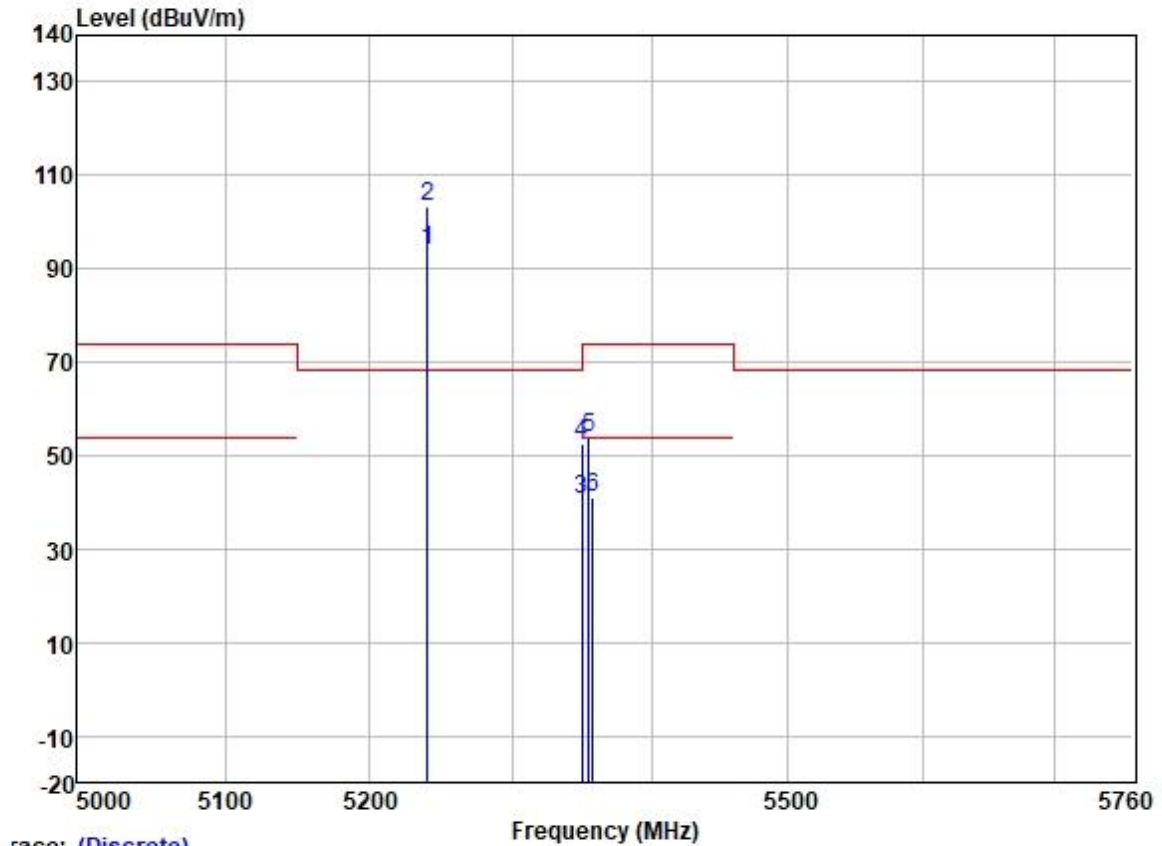

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5240.000	93.44	31.75	5.74	36.87	94.06	-----	-----	VERTICAL Average
2 *	5240.000	102.79	31.75	5.74	36.87	103.41	68.20	35.21	VERTICAL Peak
3	5350.020	39.81	31.77	6.05	36.88	40.75	54.00	-13.25	VERTICAL Average
4	5350.020	51.60	31.77	6.05	36.88	52.54	74.00	-21.46	VERTICAL Peak
5	5354.470	52.85	31.78	6.03	36.88	53.78	74.00	-20.22	VERTICAL Peak
6	5357.305	39.91	31.78	6.03	36.88	40.84	54.00	-13.16	VERTICAL Average


Test Mode: 14; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

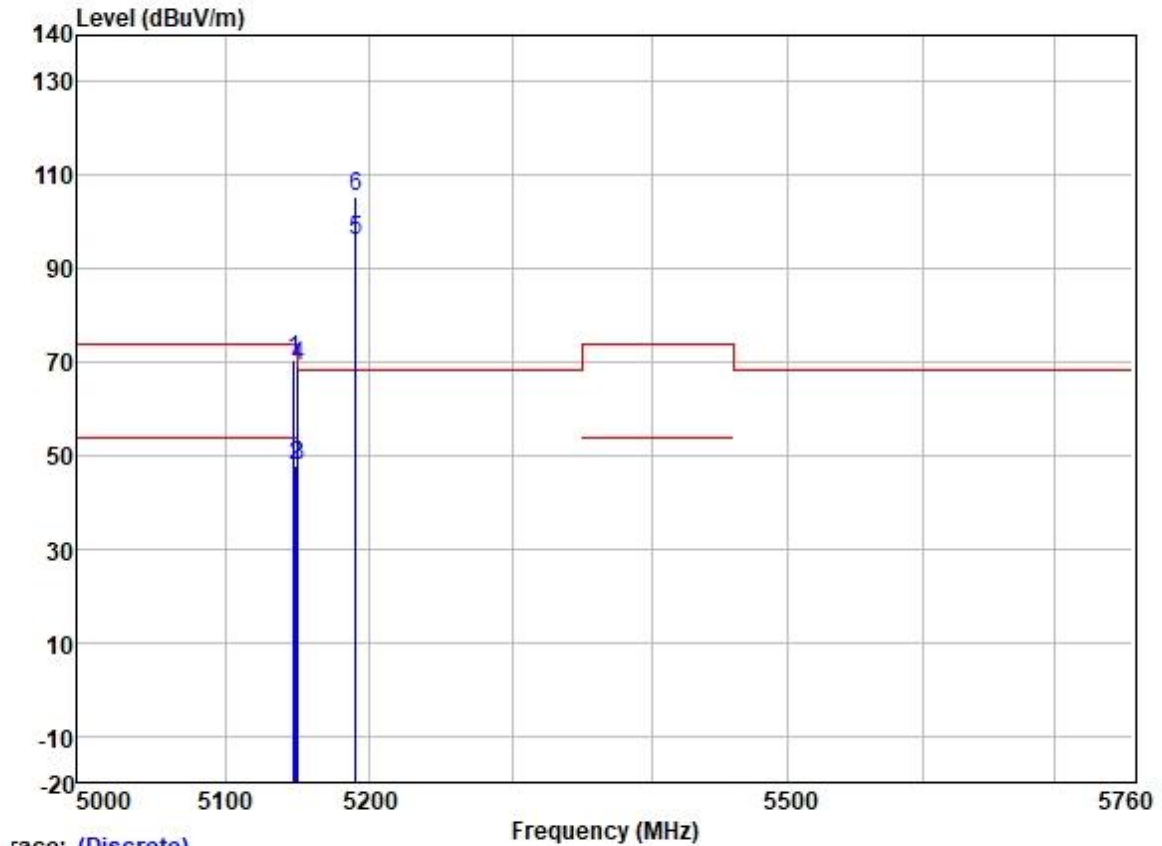

race: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5147.187	70.00	31.72	5.62	36.86	70.48	74.00	-3.52	HORIZONTAL Peak
2	5148.743	47.37	31.72	5.62	36.86	47.85	54.00	-6.15	HORIZONTAL Average
3	5149.980	47.16	31.72	5.62	36.86	47.64	54.00	-6.36	HORIZONTAL Average
4	5149.980	68.86	31.72	5.62	36.86	69.34	74.00	-4.66	HORIZONTAL Peak
5	5190.000	95.67	31.73	5.60	36.87	96.13	-----	-----	HORIZONTAL Average
6 *	5190.000	105.12	31.73	5.60	36.87	105.58	68.20	37.38	HORIZONTAL Peak

Test Mode: 14; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

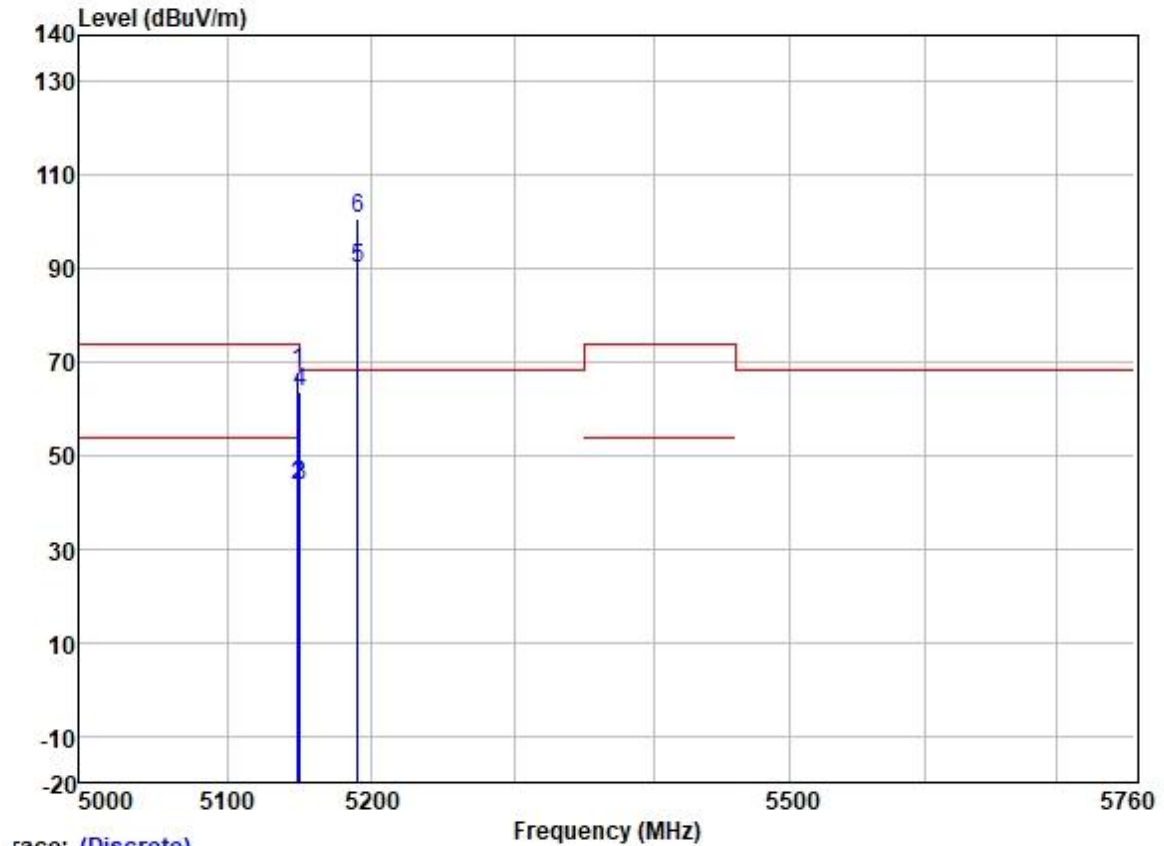

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5148.743	67.61	31.72	5.62	36.86	68.09	74.00	-5.91	VERTICAL
2	5148.863	43.16	31.72	5.62	36.86	43.64	54.00	-10.36	VERTICAL
3	5149.980	43.00	31.72	5.62	36.86	43.48	54.00	-10.52	VERTICAL
4	5149.980	63.06	31.72	5.62	36.86	63.54	74.00	-10.46	VERTICAL
5	5190.000	89.76	31.73	5.60	36.87	90.22	-----	-----	VERTICAL
6 *	5190.000	100.15	31.73	5.60	36.87	100.61	68.20	32.41	VERTICAL


Test Mode: 14; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

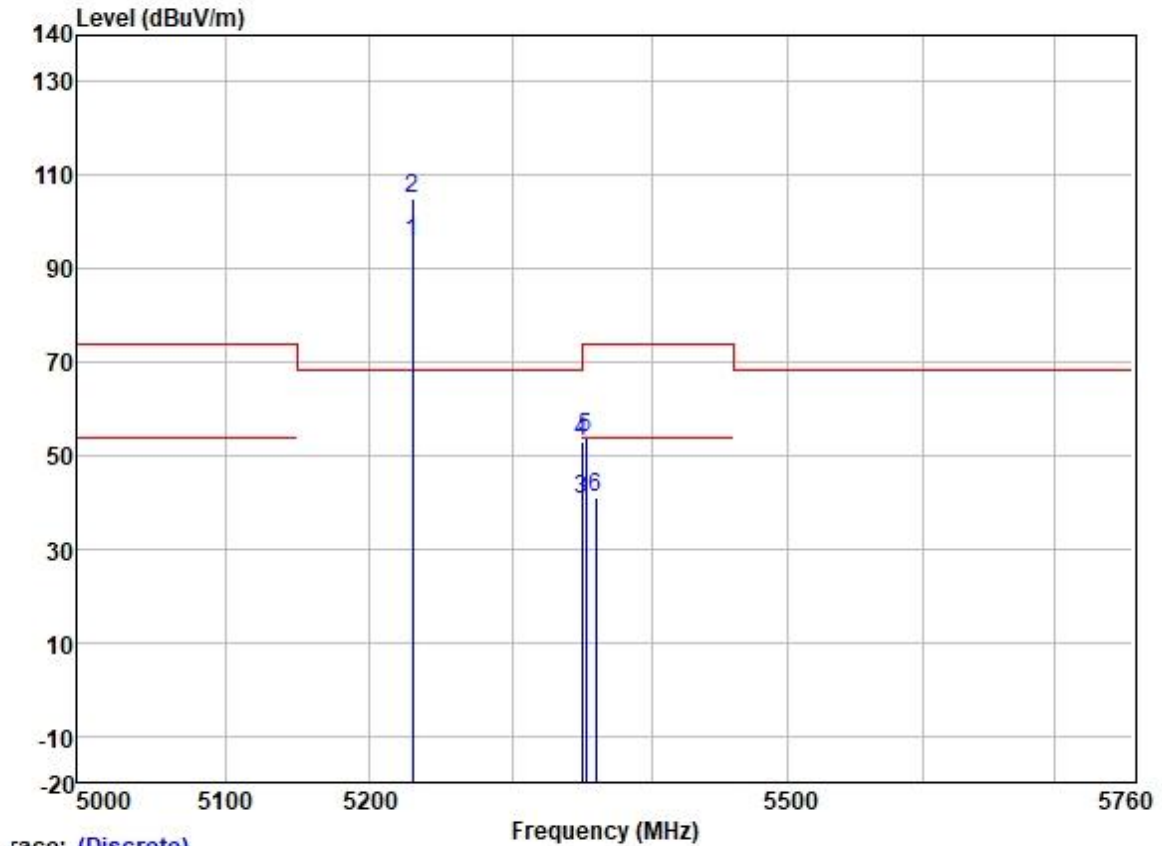

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5230.000	95.11	31.74	5.70	36.87	95.68	-----	-----	HORIZONTAL Average
2 *	5230.000	104.61	31.74	5.70	36.87	105.18	68.20	36.98	HORIZONTAL Peak
3	5350.020	39.67	31.77	6.05	36.88	40.61	54.00	-13.39	HORIZONTAL Average
4	5350.020	51.82	31.77	6.05	36.88	52.76	74.00	-21.24	HORIZONTAL Peak
5	5352.533	52.82	31.77	6.05	36.88	53.76	74.00	-20.24	HORIZONTAL Peak
6	5359.675	40.07	31.78	6.03	36.88	41.00	54.00	-13.00	HORIZONTAL Average

Test Mode: 14; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

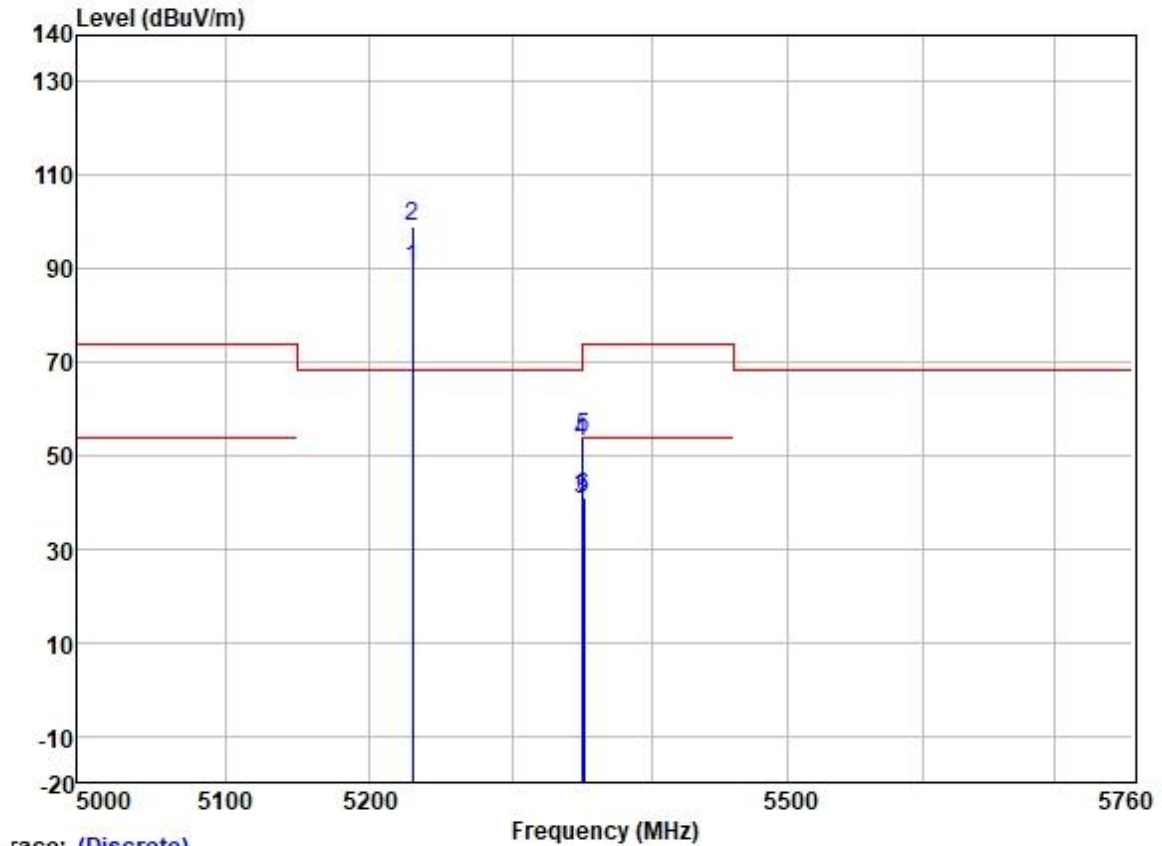


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5230.000	89.54	31.74	5.70	36.87	90.11	-----	VERTICAL	Average
2 *	5230.000	98.42	31.74	5.70	36.87	98.99	68.20	30.79	VERTICAL
3	5350.020	39.73	31.77	6.05	36.88	40.67	54.00	-13.33	VERTICAL
4	5350.020	52.04	31.77	6.05	36.88	52.98	74.00	-21.02	VERTICAL
5	5350.749	52.71	31.77	6.05	36.88	53.65	74.00	-20.35	VERTICAL
6	5351.398	39.87	31.77	6.05	36.88	40.81	54.00	-13.19	VERTICAL



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


Test Mode: 14; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

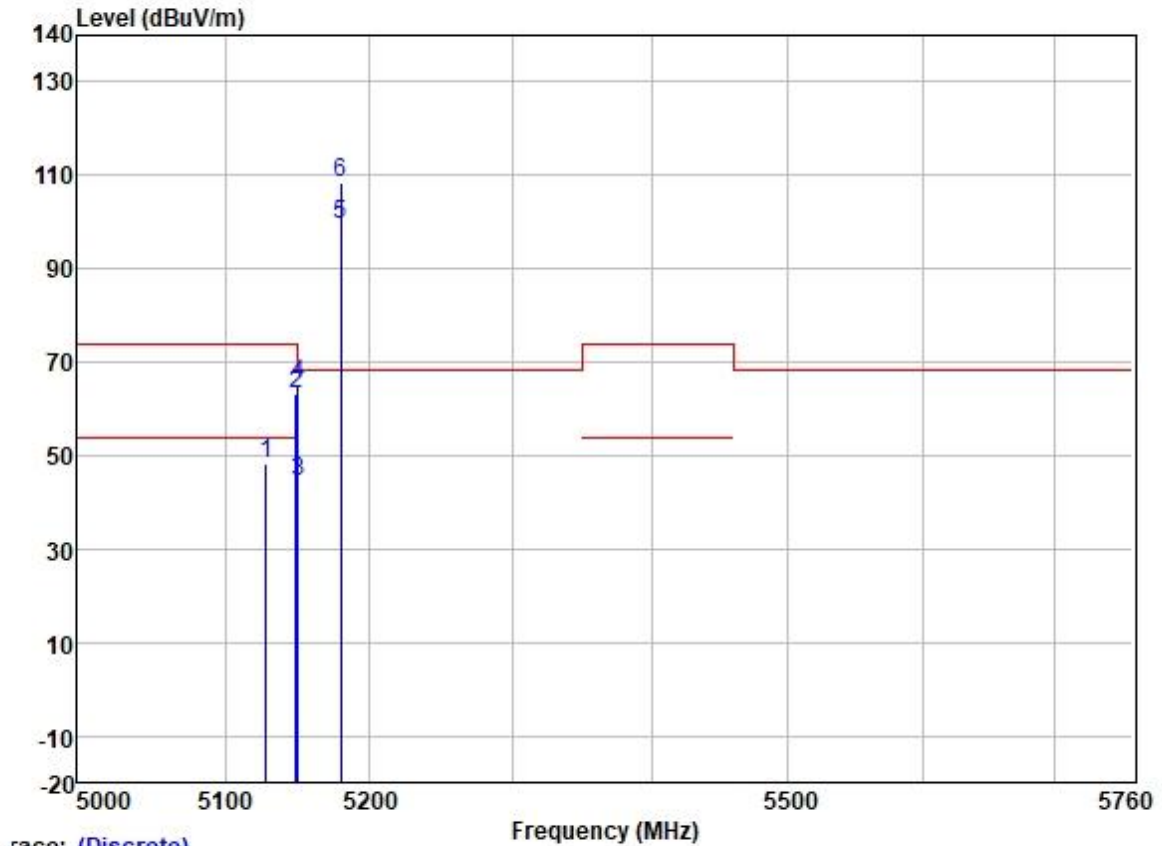

race: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5128.103	47.65	31.72	5.63	36.86	48.14	54.00	-5.86	HORIZONTAL Average
2	5148.958	62.51	31.72	5.62	36.86	62.99	74.00	-11.01	HORIZONTAL Peak
3	5149.980	43.88	31.72	5.62	36.86	44.36	54.00	-9.64	HORIZONTAL Average
4	5149.980	64.92	31.72	5.62	36.86	65.40	74.00	-8.60	HORIZONTAL Peak
5	5180.000	98.93	31.73	5.61	36.87	99.40	-----	-----	HORIZONTAL Average
6 *	5180.000	107.85	31.73	5.61	36.87	108.32	68.20	40.12	HORIZONTAL Peak

Test Mode: 14; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

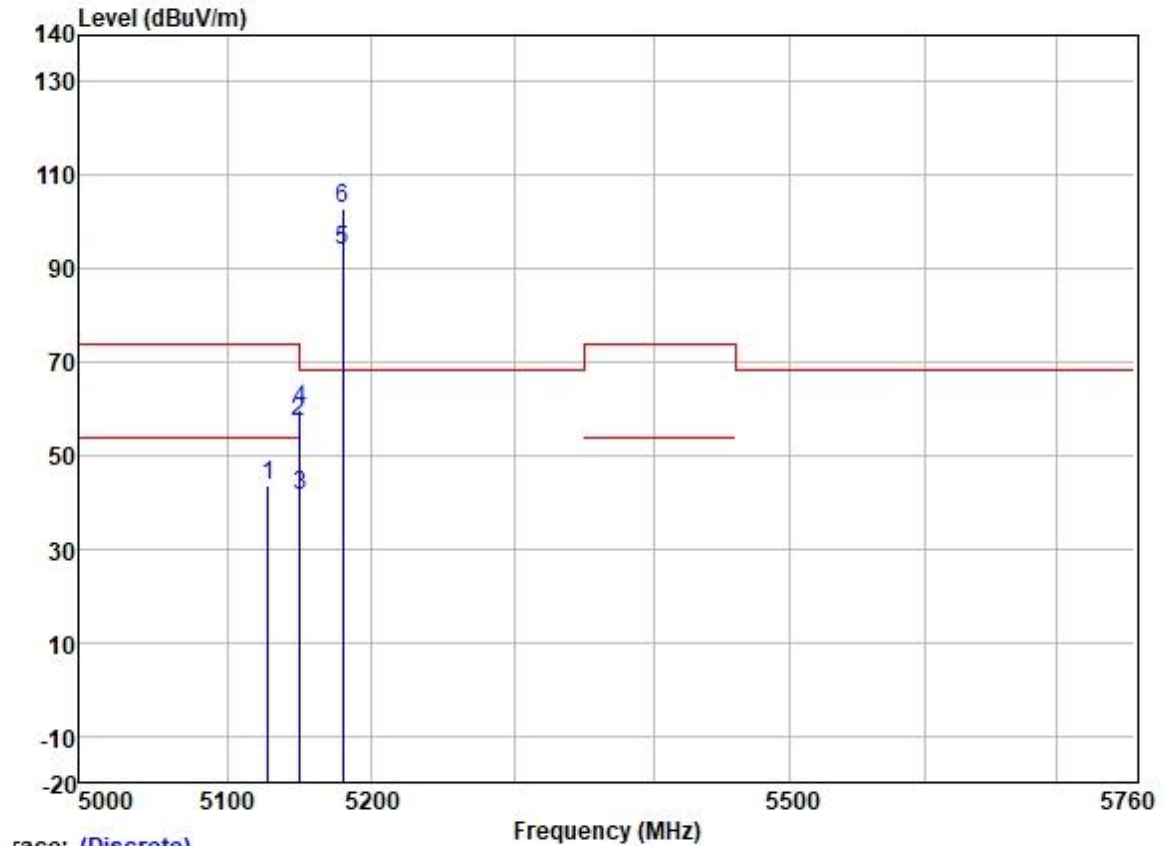

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5128.203	43.23	31.72	5.63	36.86	43.72	54.00	-10.28	VERTICAL
2	5149.458	56.89	31.72	5.62	36.86	57.37	74.00	-16.63	VERTICAL
3	5149.980	41.13	31.72	5.62	36.86	41.61	54.00	-12.39	VERTICAL
4	5149.980	59.11	31.72	5.62	36.86	59.59	74.00	-14.41	VERTICAL
5	5180.000	93.44	31.73	5.61	36.87	93.91	-----	-----	VERTICAL
6 *	5180.000	102.26	31.73	5.61	36.87	102.73	68.20	34.53	VERTICAL


Test Mode: 14; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

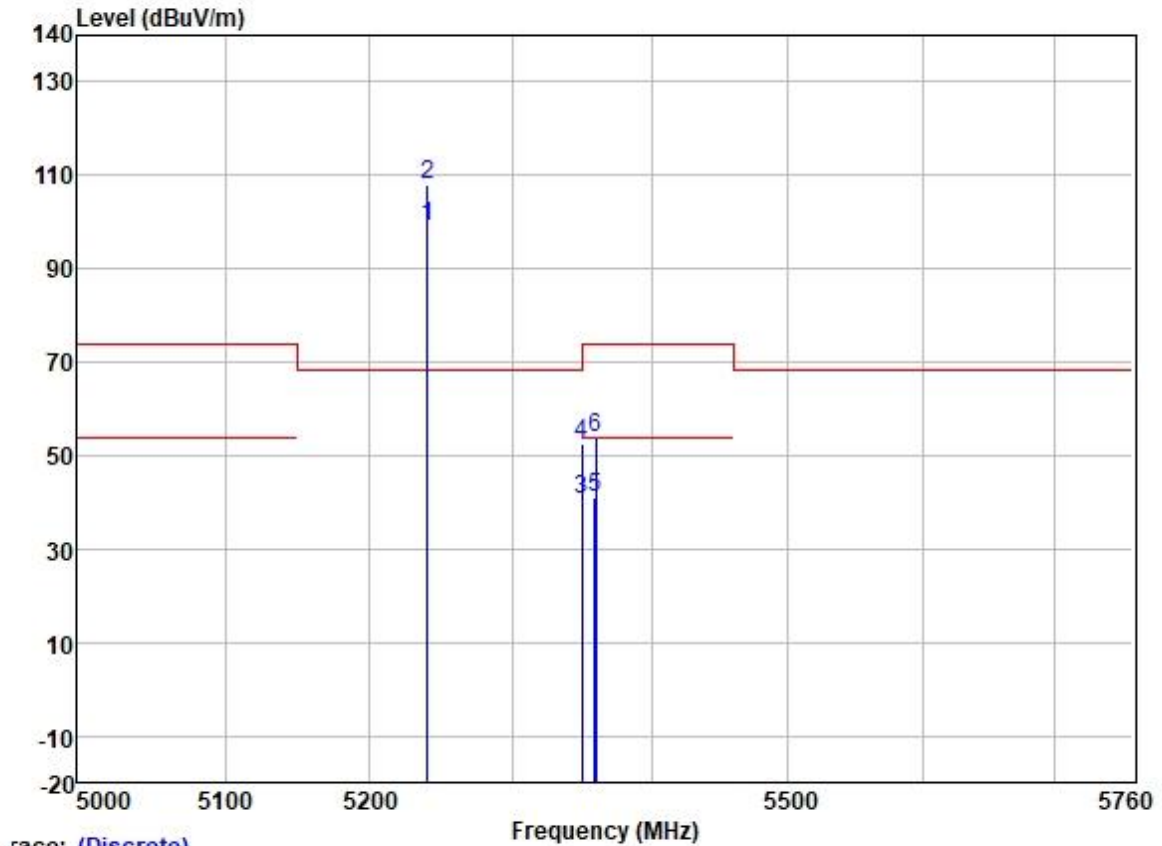

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5240.000	98.45	31.75	5.74	36.87	99.07	-----	-----	HORIZONTAL Average
2 *	5240.000	107.24	31.75	5.74	36.87	107.86	68.20	39.66	HORIZONTAL Peak
3	5350.020	39.69	31.77	6.05	36.88	40.63	54.00	-13.37	HORIZONTAL Average
4	5350.020	51.41	31.77	6.05	36.88	52.35	74.00	-21.65	HORIZONTAL Peak
5	5359.149	39.93	31.78	6.03	36.88	40.86	54.00	-13.14	HORIZONTAL Average
6	5359.716	53.06	31.78	6.03	36.88	53.99	74.00	-20.01	HORIZONTAL Peak

Test Mode: 14; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

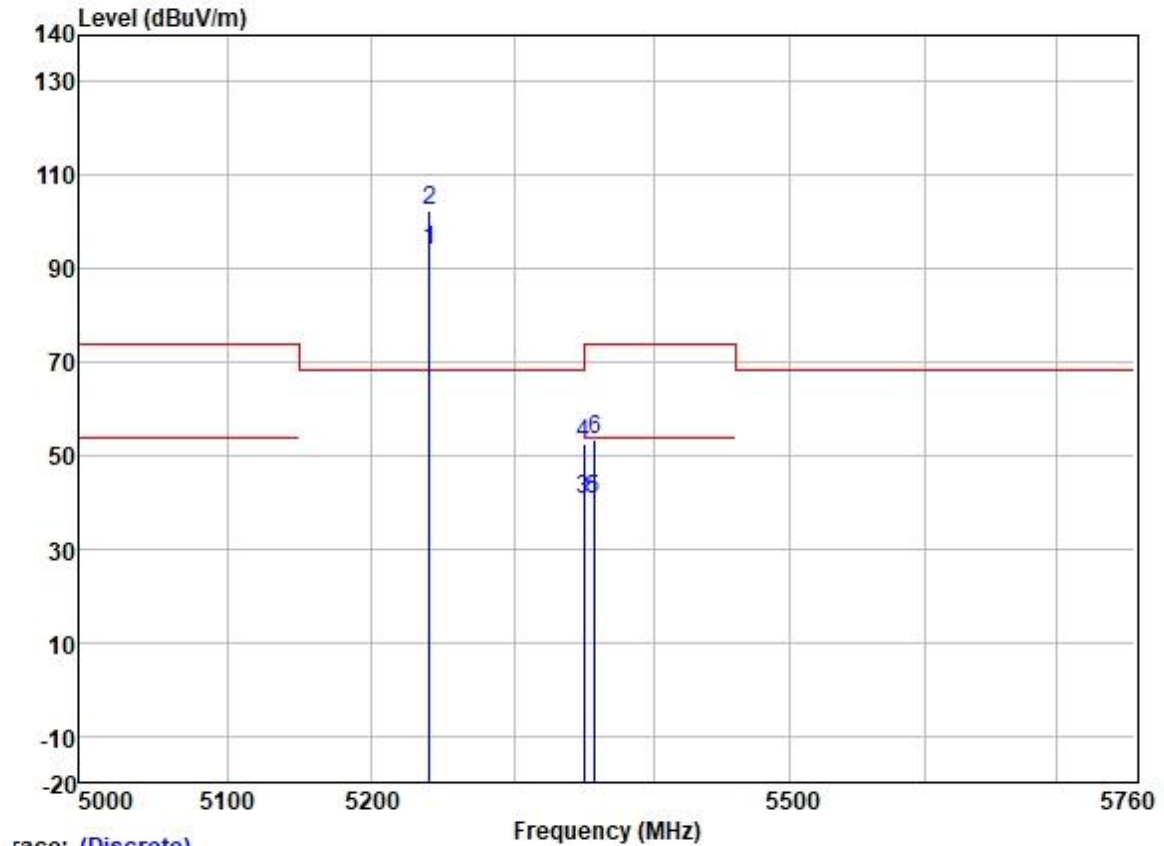

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5240.000	93.22	31.75	5.74	36.87	93.84	-----	-----	VERTICAL Average
2 *	5240.000	101.98	31.75	5.74	36.87	102.60	68.20	34.40	VERTICAL Peak
3	5350.020	39.61	31.77	6.05	36.88	40.55	54.00	-13.45	VERTICAL Average
4	5350.020	51.52	31.77	6.05	36.88	52.46	74.00	-21.54	VERTICAL Peak
5	5356.880	39.84	31.78	6.03	36.88	40.77	54.00	-13.23	VERTICAL Average
6	5357.730	52.65	31.78	6.03	36.88	53.58	74.00	-20.42	VERTICAL Peak


Test Mode: 14; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

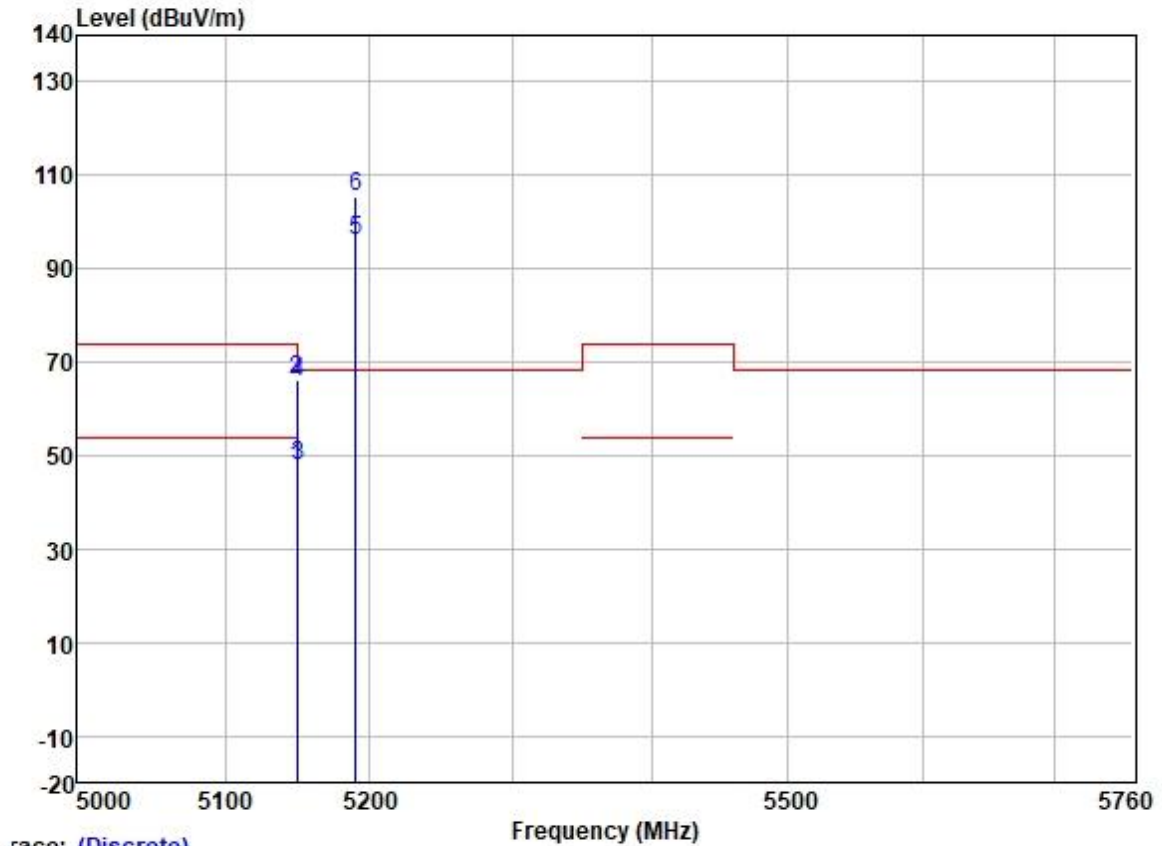

race: (Discrete)


		Freq	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1		5149.102	47.08	31.72	5.62	36.86	47.56	54.00	-6.44	HORIZONTAL Average
2		5149.461	65.50	31.72	5.62	36.86	65.98	74.00	-8.02	HORIZONTAL Peak
3		5149.980	47.16	31.72	5.62	36.86	47.64	54.00	-6.36	HORIZONTAL Average
4		5149.980	65.48	31.72	5.62	36.86	65.96	74.00	-8.04	HORIZONTAL Peak
5		5190.000	95.39	31.73	5.60	36.87	95.85	-----	-----	HORIZONTAL Average
6	*	5190.000	104.92	31.73	5.60	36.87	105.38	68.20	37.18	HORIZONTAL Peak

Test Mode: 14; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

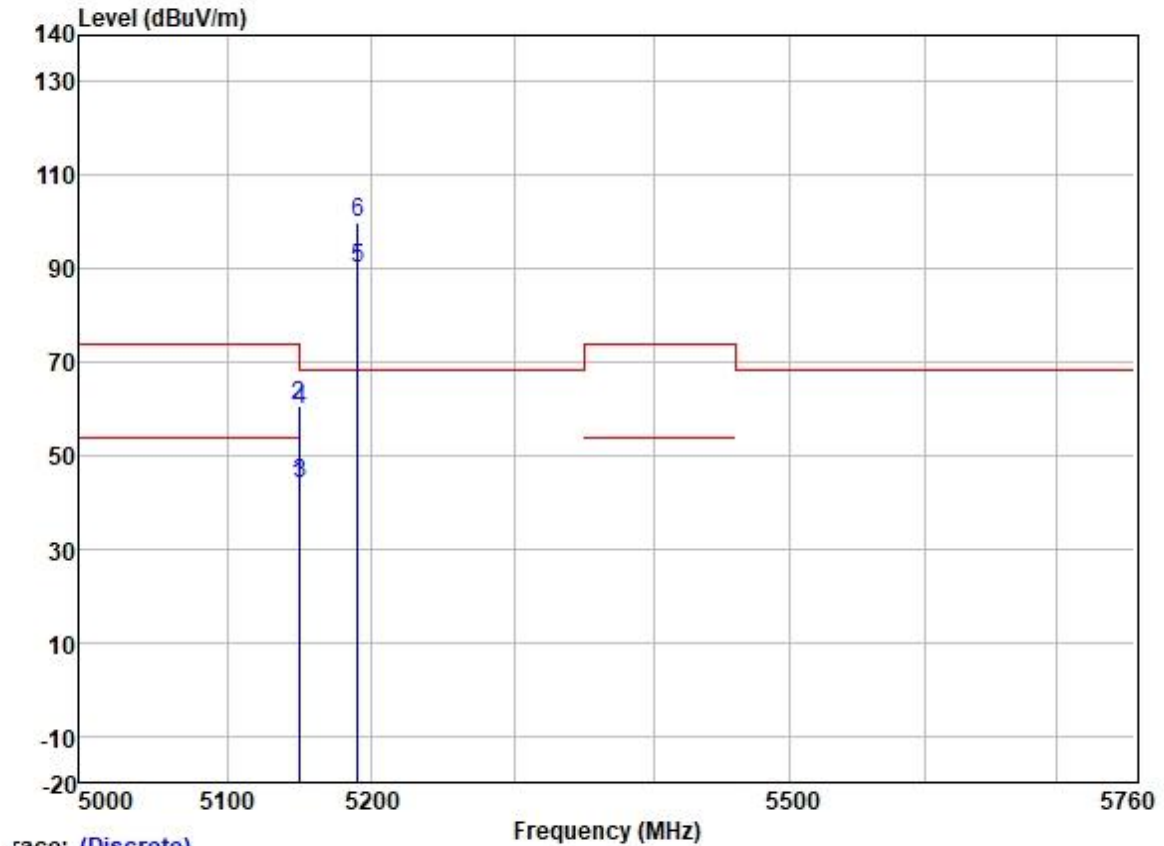

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5149.102	43.30	31.72	5.62	36.86	43.78	54.00	-10.22	VERTICAL
2	5149.342	60.26	31.72	5.62	36.86	60.74	74.00	-13.26	VERTICAL
3	5149.980	43.55	31.72	5.62	36.86	44.03	54.00	-9.97	VERTICAL
4	5149.980	59.49	31.72	5.62	36.86	59.97	74.00	-14.03	VERTICAL
5	5190.000	89.59	31.73	5.60	36.87	90.05	-----	-----	VERTICAL
6 *	5190.000	99.48	31.73	5.60	36.87	99.94	68.20	31.74	VERTICAL


Test Mode: 14; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

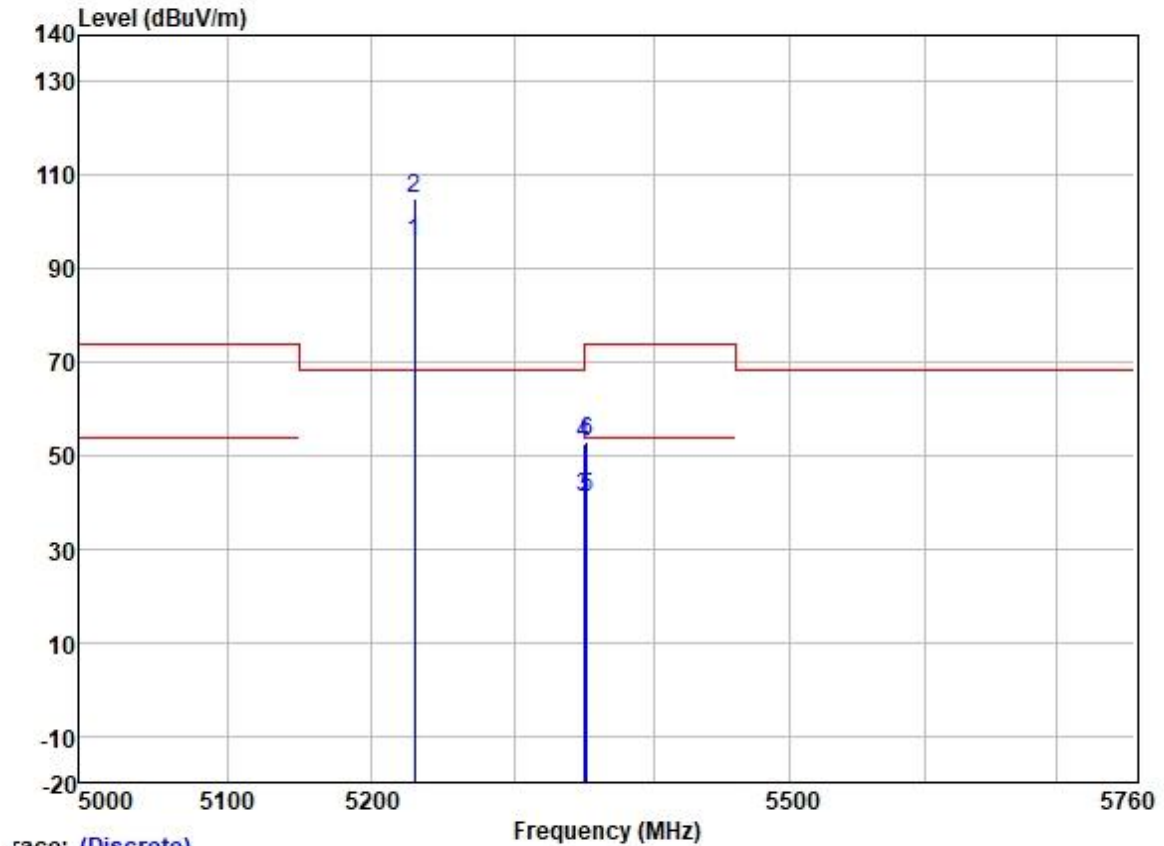

race: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5230.000	94.89	31.74	5.70	36.87	95.46	-----	-----	HORIZONTAL Average
2 *	5230.000	104.57	31.74	5.70	36.87	105.14	68.20	36.94	HORIZONTAL Peak
3	5350.020	39.90	31.77	6.05	36.88	40.84	54.00	-13.16	HORIZONTAL Average
4	5350.020	51.58	31.77	6.05	36.88	52.52	74.00	-21.48	HORIZONTAL Peak
5	5351.560	40.01	31.77	6.05	36.88	40.95	54.00	-13.05	HORIZONTAL Average
6	5351.722	52.21	31.77	6.05	36.88	53.15	74.00	-20.85	HORIZONTAL Peak


Test Mode: 14; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

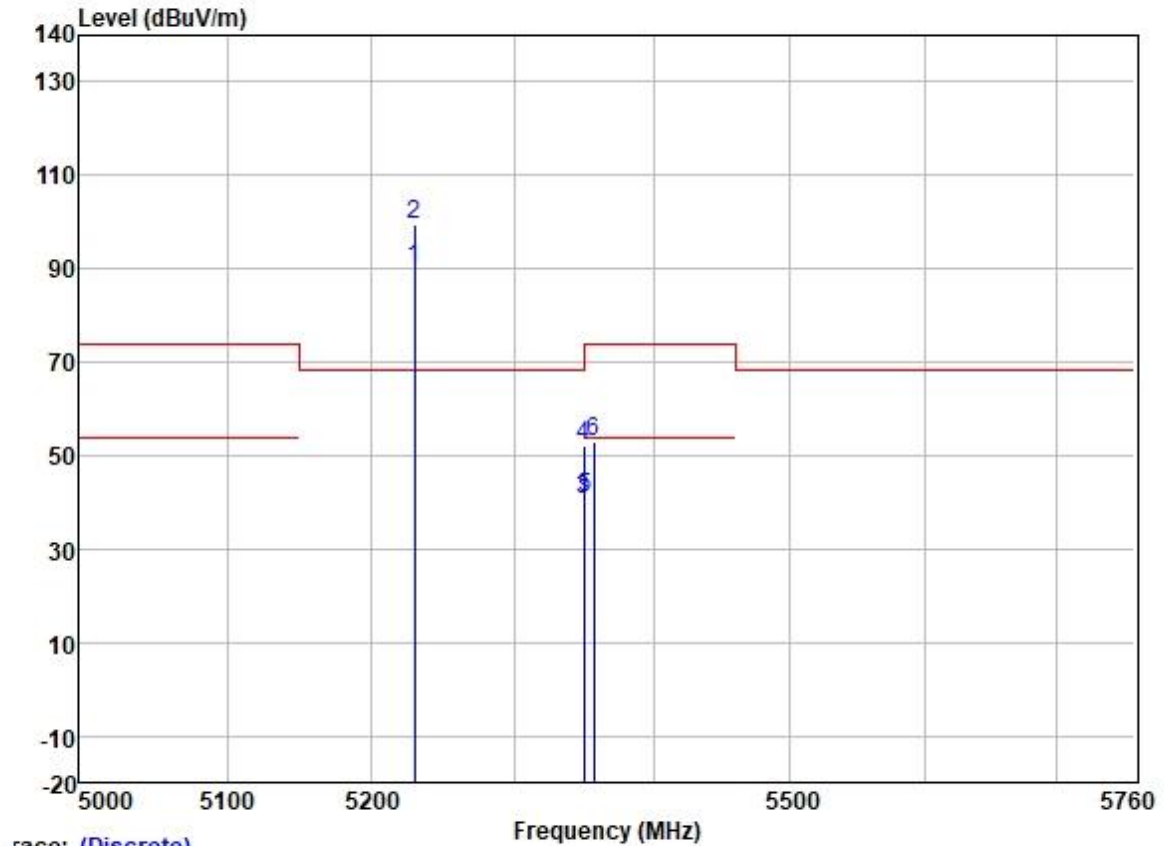

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5230.000	89.56	31.74	5.70	36.87	90.13	-----	-----	VERTICAL	Average
2 *	5230.000	99.09	31.74	5.70	36.87	99.66	68.20	31.46	VERTICAL	Peak
3	5350.020	39.69	31.77	6.05	36.88	40.63	54.00	-13.37	VERTICAL	Average
4	5350.020	51.29	31.77	6.05	36.88	52.23	74.00	-21.77	VERTICAL	Peak
5	5350.749	39.92	31.77	6.05	36.88	40.86	54.00	-13.14	VERTICAL	Average
6	5356.590	52.04	31.78	6.03	36.88	52.97	74.00	-21.03	VERTICAL	Peak


Test Mode: 14; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

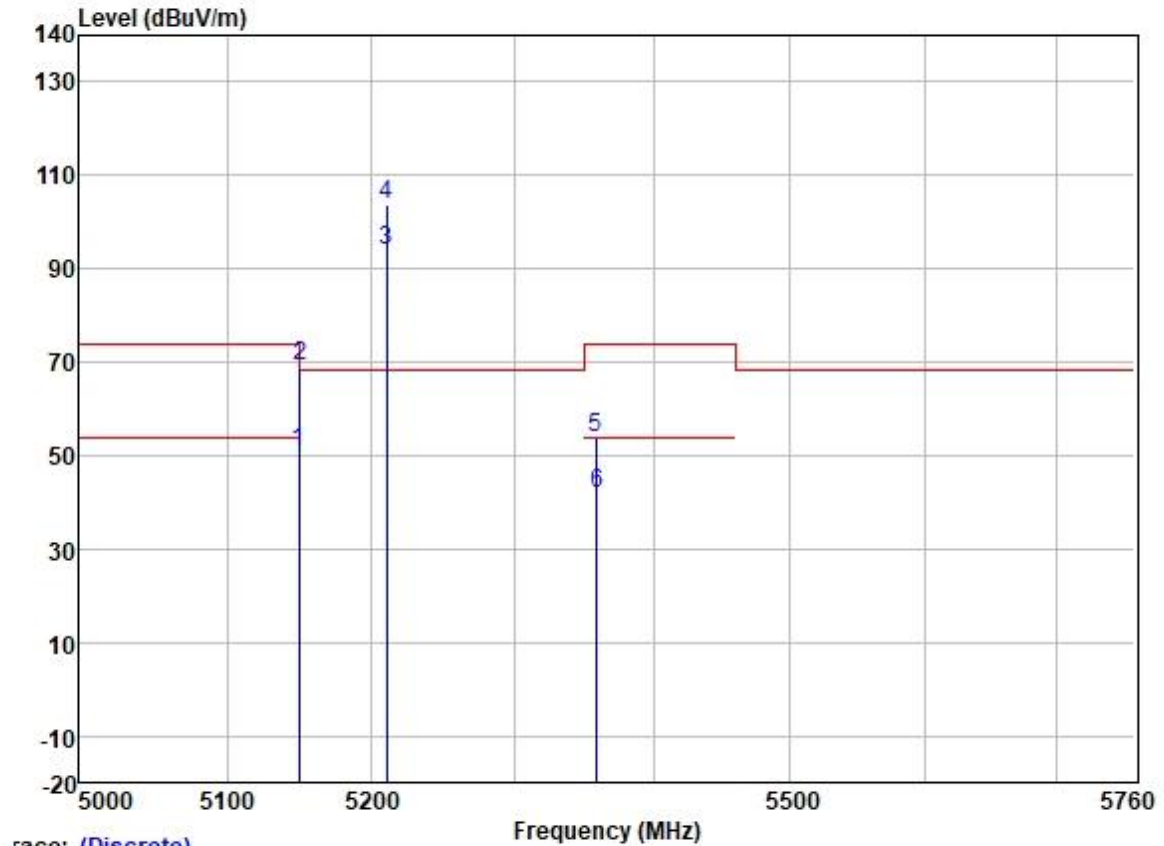

race: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5149.435	50.24	31.72	5.62	36.86	50.72	54.00	-3.28	HORIZONTAL Average
2	5149.690	68.48	31.72	5.62	36.86	68.96	74.00	-5.04	HORIZONTAL Peak
3	5210.000	93.40	31.74	5.65	36.87	93.92	-----	-----	HORIZONTAL Average
4 *	5210.000	103.09	31.74	5.65	36.87	103.61	68.20	35.41	HORIZONTAL Peak
5	5358.667	52.89	31.78	6.03	36.88	53.82	74.00	-20.18	HORIZONTAL Peak
6	5359.201	40.90	31.78	6.03	36.88	41.83	54.00	-12.17	HORIZONTAL Average


Test Mode: 14; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

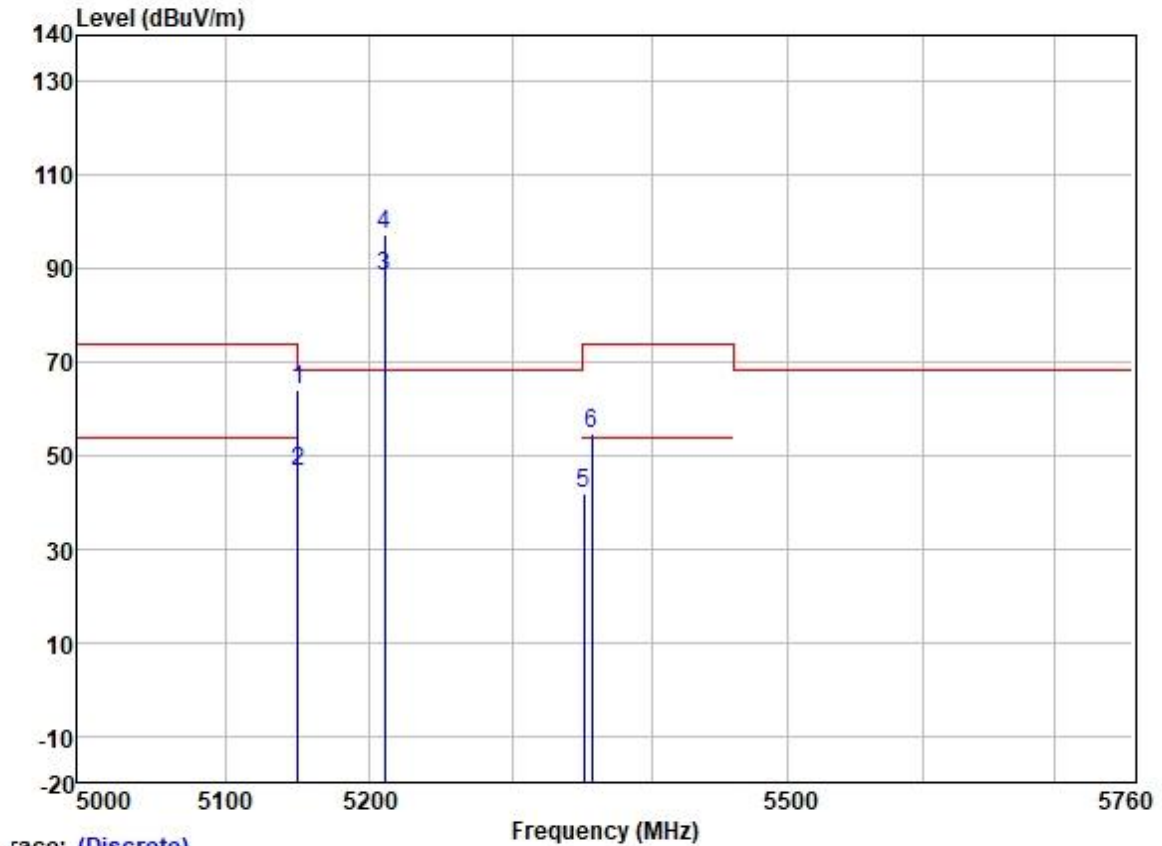

Trace: (Discrete)


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5149.690	63.63	31.72	5.62	36.86	64.11	74.00	-9.89	VERTICAL	Peak
2	5149.947	46.15	31.72	5.62	36.86	46.63	54.00	-7.37	VERTICAL	Average
3	5210.000	87.83	31.74	5.65	36.87	88.35	-----	-----	VERTICAL	Average
4 *	5210.000	96.90	31.74	5.65	36.87	97.42	68.20	29.22	VERTICAL	Peak
5	5350.946	40.77	31.77	6.05	36.88	41.71	54.00	-12.29	VERTICAL	Average
6	5357.069	53.64	31.78	6.03	36.88	54.57	74.00	-19.43	VERTICAL	Peak

Test Mode: 16; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

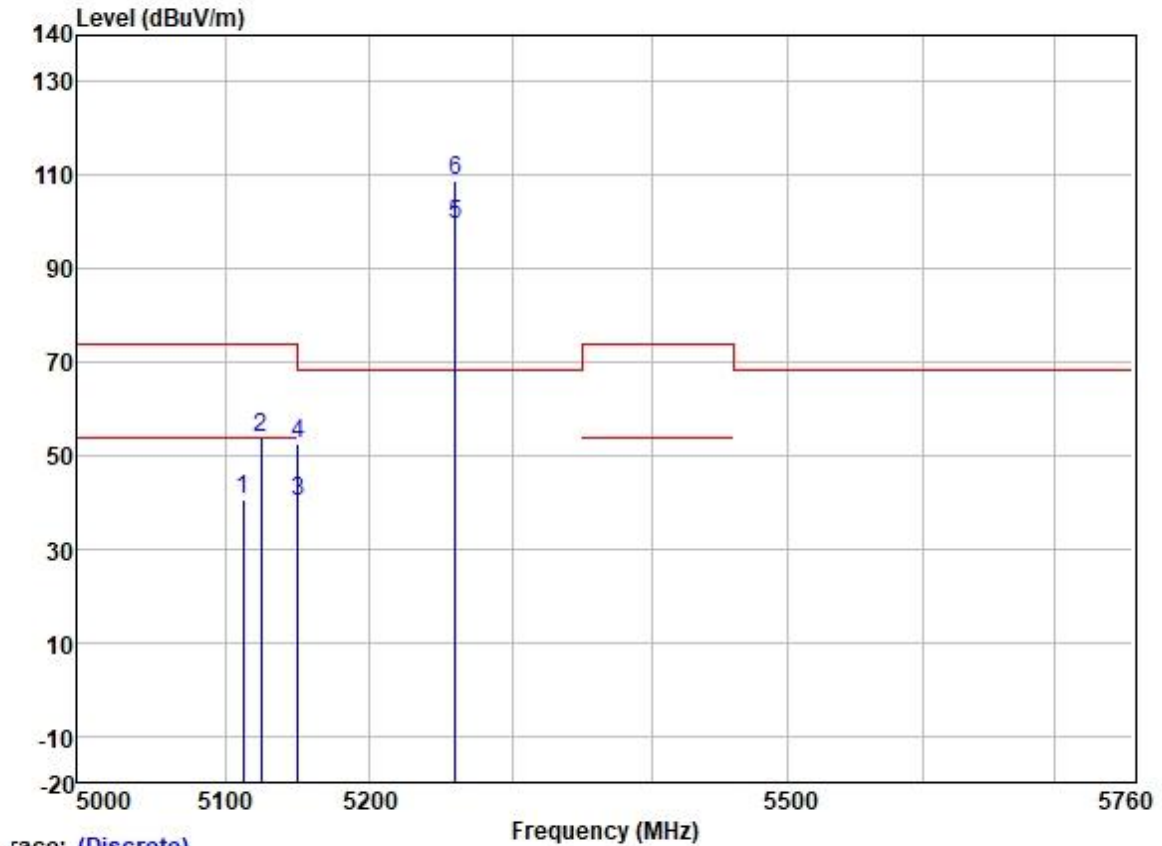


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5112.043	40.03	31.72	5.65	36.86	40.54	54.00	-13.46	HORIZONTAL Average
2	5124.470	53.15	31.72	5.64	36.86	53.65	74.00	-20.35	HORIZONTAL Peak
3	5149.980	39.58	31.72	5.62	36.86	40.06	54.00	-13.94	HORIZONTAL Average
4	5149.980	51.88	31.72	5.62	36.86	52.36	74.00	-21.64	HORIZONTAL Peak
5	5260.000	98.65	31.75	5.77	36.87	99.30	-----	-----	HORIZONTAL Average
6 *	5260.000	108.13	31.75	5.77	36.87	108.78	68.20	40.58	HORIZONTAL Peak

Test Mode: 16; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

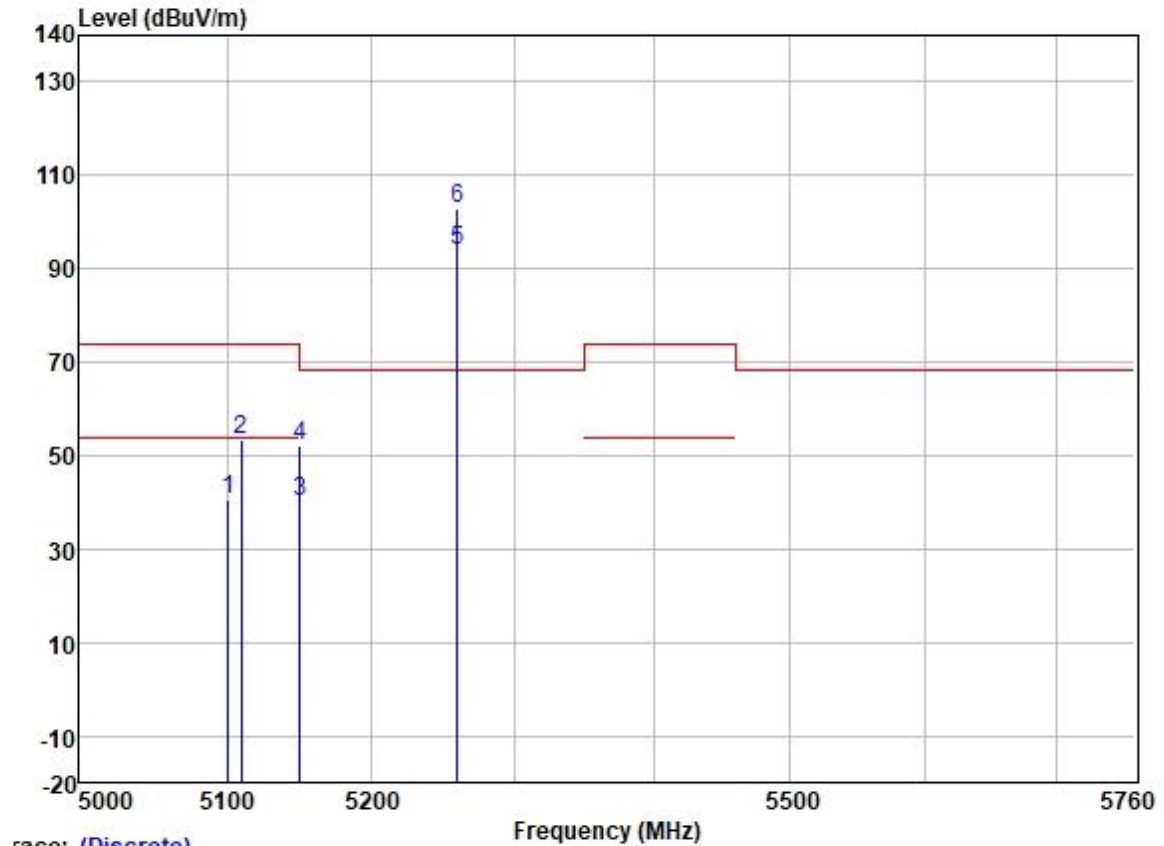


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5100.885	39.95	31.72	5.65	36.86	40.46	54.00	-13.54	VERTICAL
2	5109.562	52.77	31.72	5.65	36.86	53.28	74.00	-20.72	VERTICAL
3	5149.980	39.48	31.72	5.62	36.86	39.96	54.00	-14.04	VERTICAL
4	5149.980	51.49	31.72	5.62	36.86	51.97	74.00	-22.03	VERTICAL
5	5260.000	93.46	31.75	5.77	36.87	94.11	-----	-----	VERTICAL
6 *	5260.000	102.18	31.75	5.77	36.87	102.83	68.20	34.63	VERTICAL

Test Mode: 16; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

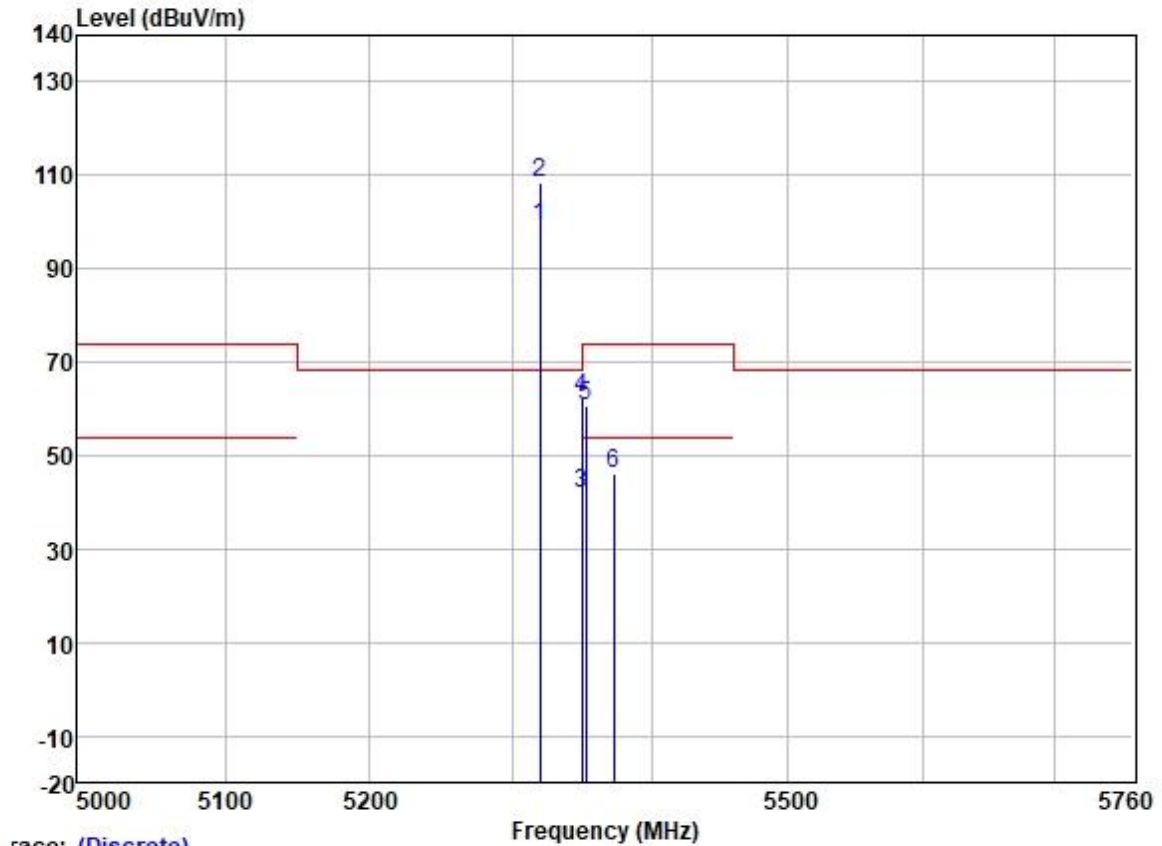


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5320.000	97.88	31.77	6.08	36.88	98.85	-----	-----	HORIZONTAL	Average
2 *	5320.000	107.38	31.77	6.08	36.88	108.35	68.20	40.15	HORIZONTAL	Peak
3	5350.020	40.91	31.77	6.05	36.88	41.85	54.00	-12.15	HORIZONTAL	Average
4	5350.020	61.61	31.77	6.05	36.88	62.55	74.00	-11.45	HORIZONTAL	Peak
5	5352.467	59.91	31.77	6.05	36.88	60.85	74.00	-13.15	HORIZONTAL	Peak
6	5372.313	45.34	31.78	6.02	36.88	46.26	54.00	-7.74	HORIZONTAL	Average

Test Mode: 16; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

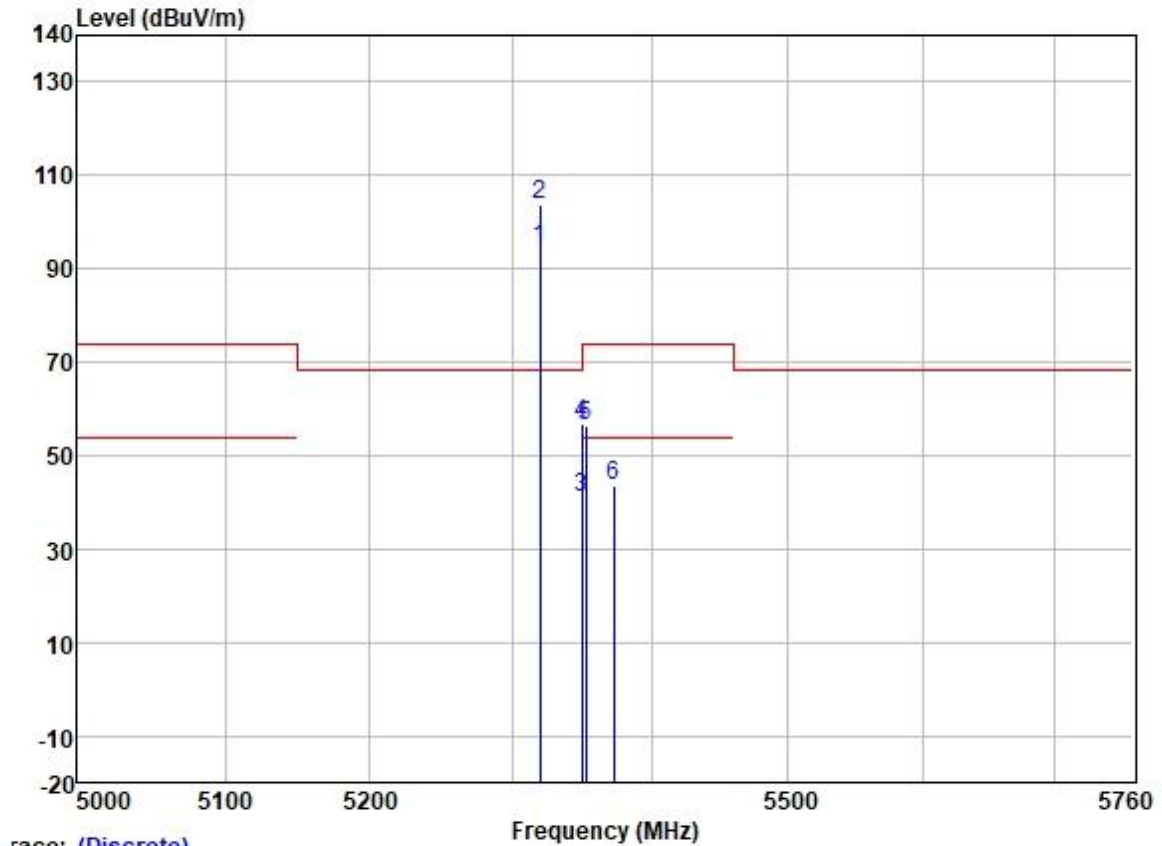


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5320.000	93.45	31.77	6.08	36.88	94.42	-----	-----	VERTICAL	Average
2 *	5320.000	102.73	31.77	6.08	36.88	103.70	68.20	35.50	VERTICAL	Peak
3	5350.020	40.14	31.77	6.05	36.88	41.08	54.00	-12.92	VERTICAL	Average
4	5350.020	56.04	31.77	6.05	36.88	56.98	74.00	-17.02	VERTICAL	Peak
5	5352.767	55.32	31.77	6.05	36.88	56.26	74.00	-17.74	VERTICAL	Peak
6	5372.414	42.53	31.78	6.02	36.88	43.45	54.00	-10.55	VERTICAL	Average

Test Mode: 16; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

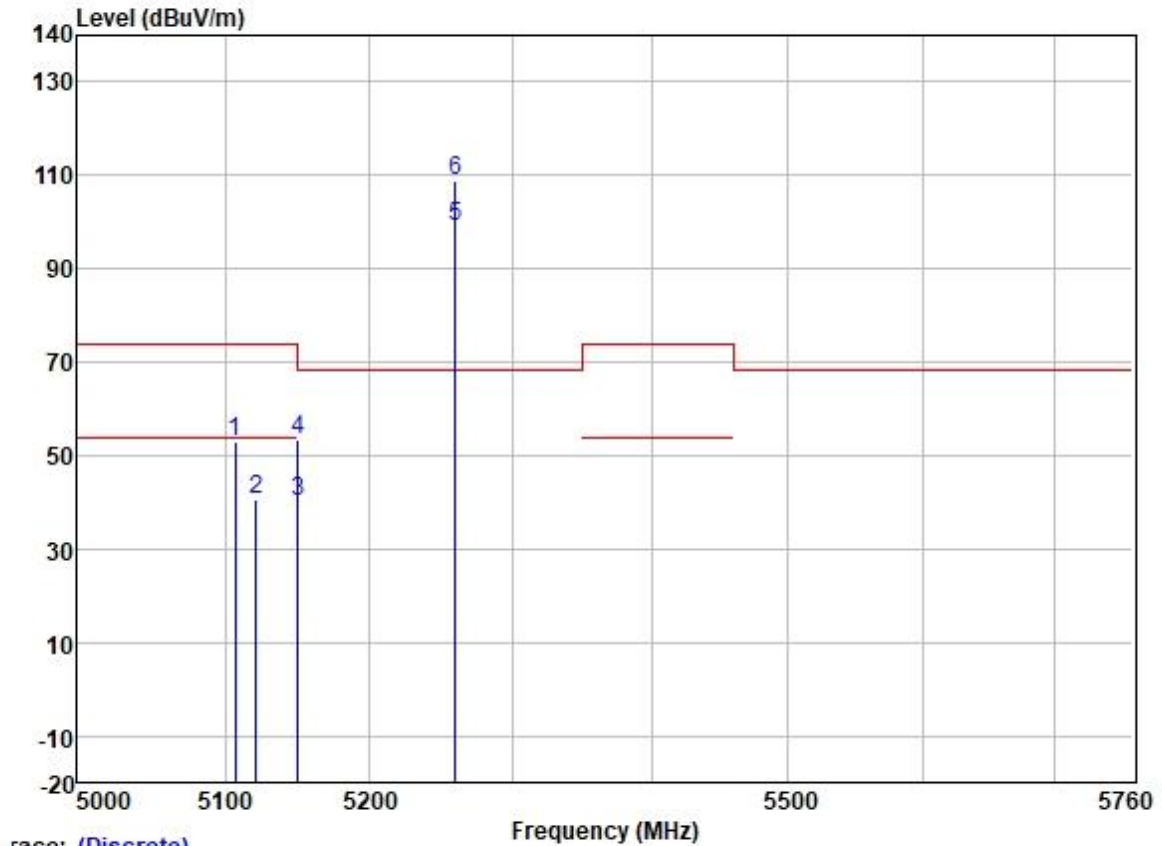


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5106.549	52.38	31.72	5.65	36.86	52.89	74.00	-21.11	HORIZONTAL Peak
2	5120.917	39.98	31.72	5.64	36.86	40.48	54.00	-13.52	HORIZONTAL Average
3	5149.980	39.59	31.72	5.62	36.86	40.07	54.00	-13.93	HORIZONTAL Average
4	5149.980	52.99	31.72	5.62	36.86	53.47	74.00	-20.53	HORIZONTAL Peak
5	5260.000	98.27	31.75	5.77	36.87	98.92	-----	-----	HORIZONTAL Average
6 *	5260.000	108.38	31.75	5.77	36.87	109.03	68.20	40.83	HORIZONTAL Peak

Test Mode: 16; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

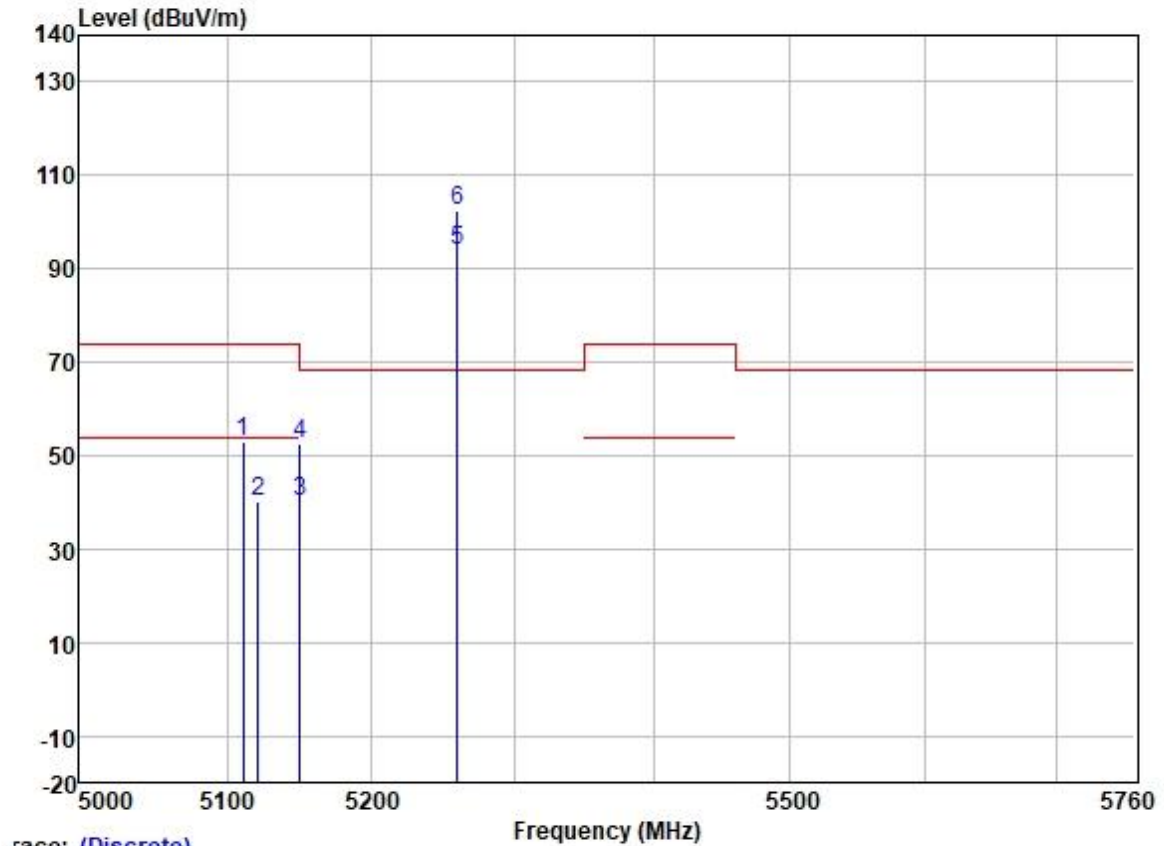

	Freq	ReadAntenna Level Factor	Cable Preamp Loss Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5111.157	52.60	31.72	5.65	36.86	53.11	74.00	-20.89	VERTICAL	Peak
2	5121.094	39.86	31.72	5.64	36.86	40.36	54.00	-13.64	VERTICAL	Average
3	5149.980	39.68	31.72	5.62	36.86	40.16	54.00	-13.84	VERTICAL	Average
4	5149.980	52.12	31.72	5.62	36.86	52.60	74.00	-21.40	VERTICAL	Peak
5	5260.000	93.07	31.75	5.77	36.87	93.72	-----	-----	VERTICAL	Average
6 *	5260.000	101.80	31.75	5.77	36.87	102.45	68.20	34.25	VERTICAL	Peak

Test Mode: 16; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

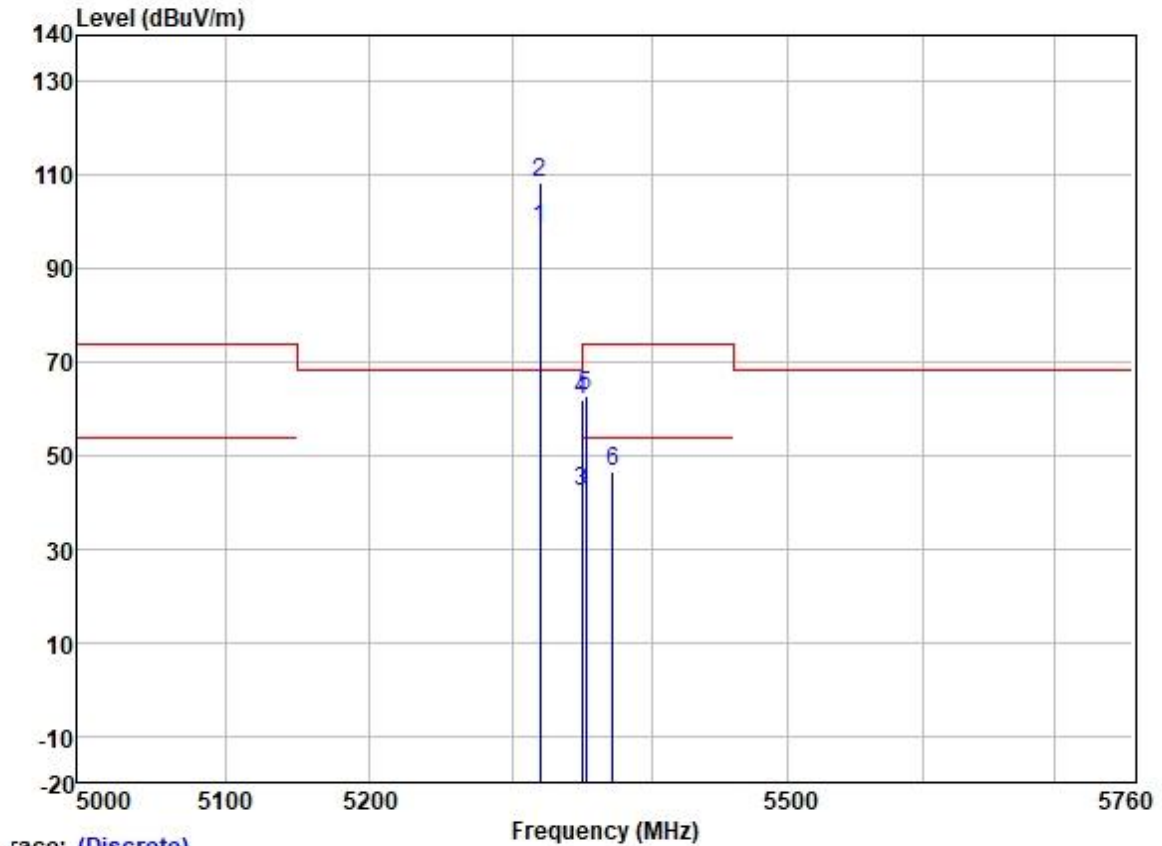

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5320.000	97.75	31.77	6.08	36.88	98.72	-----	-----	HORIZONTAL Average
2 *	5320.000	107.40	31.77	6.08	36.88	108.37	68.20	40.17	HORIZONTAL Peak
3	5350.020	41.40	31.77	6.05	36.88	42.34	54.00	-11.66	HORIZONTAL Average
4	5350.020	61.13	31.77	6.05	36.88	62.07	74.00	-11.93	HORIZONTAL Peak
5	5352.267	61.69	31.77	6.05	36.88	62.63	74.00	-11.37	HORIZONTAL Peak
6	5371.610	45.49	31.78	6.02	36.88	46.41	54.00	-7.59	HORIZONTAL Average



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


Test Mode: 16; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

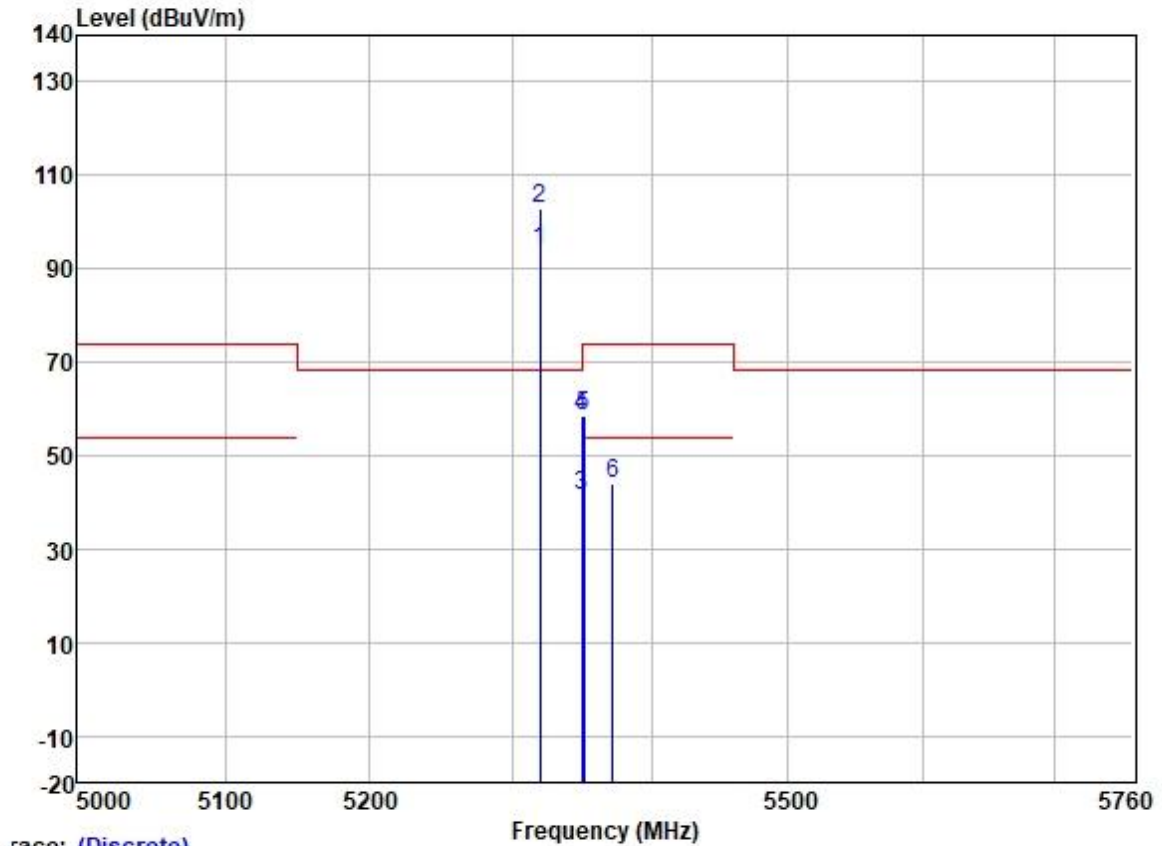

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5320.000	93.08	31.77	6.08	36.88	94.05	-----	-----	VERTICAL Average
2 *	5320.000	101.83	31.77	6.08	36.88	102.80	68.20	34.60	VERTICAL Peak
3	5350.020	40.38	31.77	6.05	36.88	41.32	54.00	-12.68	VERTICAL Average
4	5350.020	57.64	31.77	6.05	36.88	58.58	74.00	-15.42	VERTICAL Peak
5	5350.866	57.64	31.77	6.05	36.88	58.58	74.00	-15.42	VERTICAL Peak
6	5371.912	42.92	31.78	6.02	36.88	43.84	54.00	-10.16	VERTICAL Average


Test Mode: 16; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

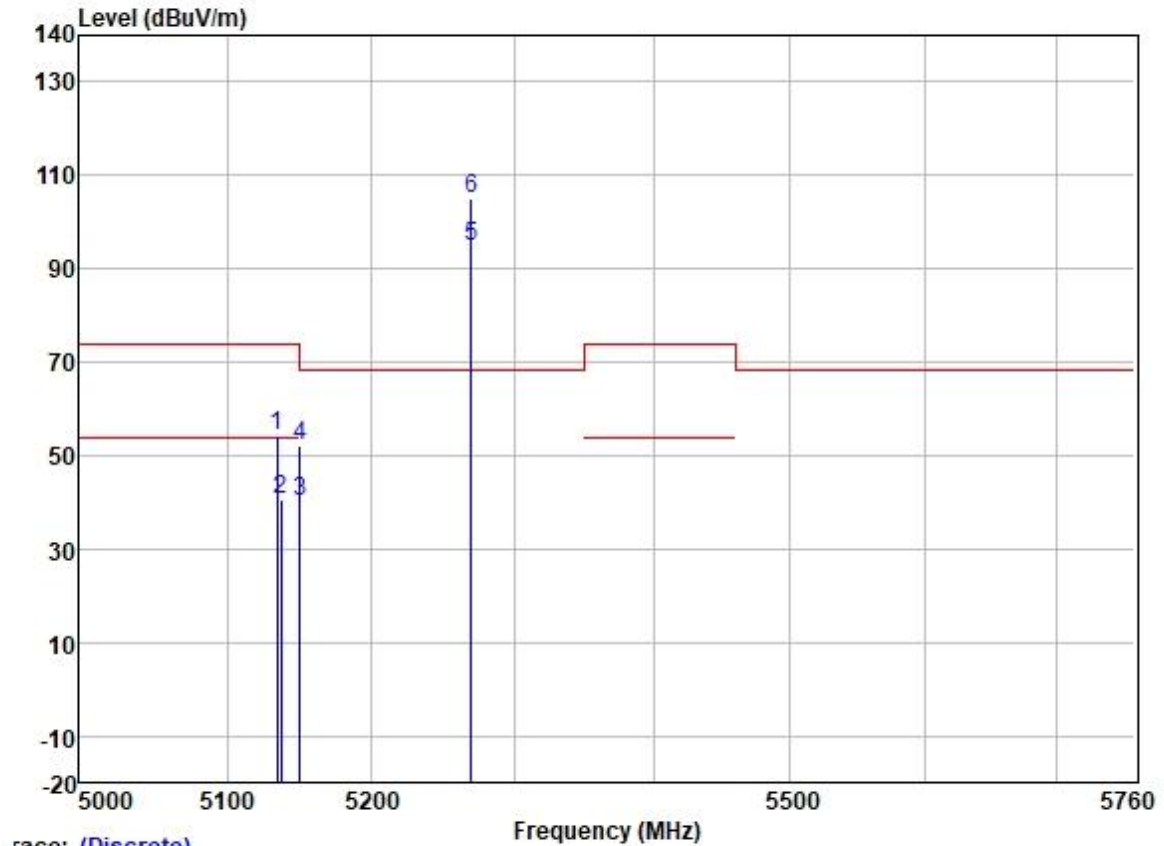

race: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5134.250	53.86	31.72	5.63	36.86	54.35	74.00	-19.65	HORIZONTAL Peak
2	5137.213	40.21	31.72	5.63	36.86	40.70	54.00	-13.30	HORIZONTAL Average
3	5149.980	39.62	31.72	5.62	36.86	40.10	54.00	-13.90	HORIZONTAL Average
4	5149.980	51.60	31.72	5.62	36.86	52.08	74.00	-21.92	HORIZONTAL Peak
5	5270.000	94.28	31.75	5.80	36.87	94.96	-----	-----	HORIZONTAL Average
6 *	5270.000	104.45	31.75	5.80	36.87	105.13	68.20	36.93	HORIZONTAL Peak

Test Mode: 16; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

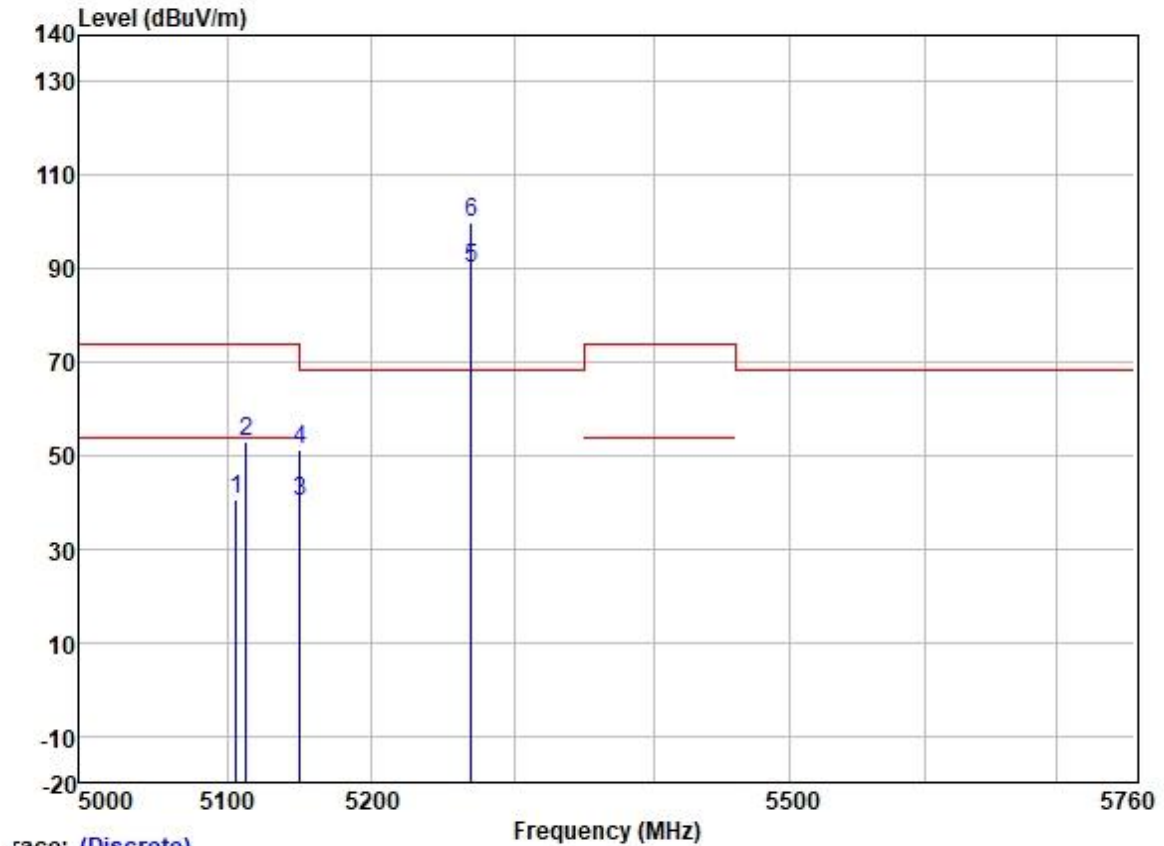

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5106.478	39.88	31.72	5.65	36.86	40.39	54.00	-13.61	VERTICAL
2	5112.964	52.66	31.72	5.64	36.86	53.16	74.00	-20.84	VERTICAL
3	5149.980	39.54	31.72	5.62	36.86	40.02	54.00	-13.98	VERTICAL
4	5149.980	50.93	31.72	5.62	36.86	51.41	74.00	-22.59	VERTICAL
5	5270.000	89.23	31.75	5.80	36.87	89.91	-----	-----	VERTICAL
6 *	5270.000	99.01	31.75	5.80	36.87	99.69	68.20	31.49	VERTICAL


Test Mode: 16; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

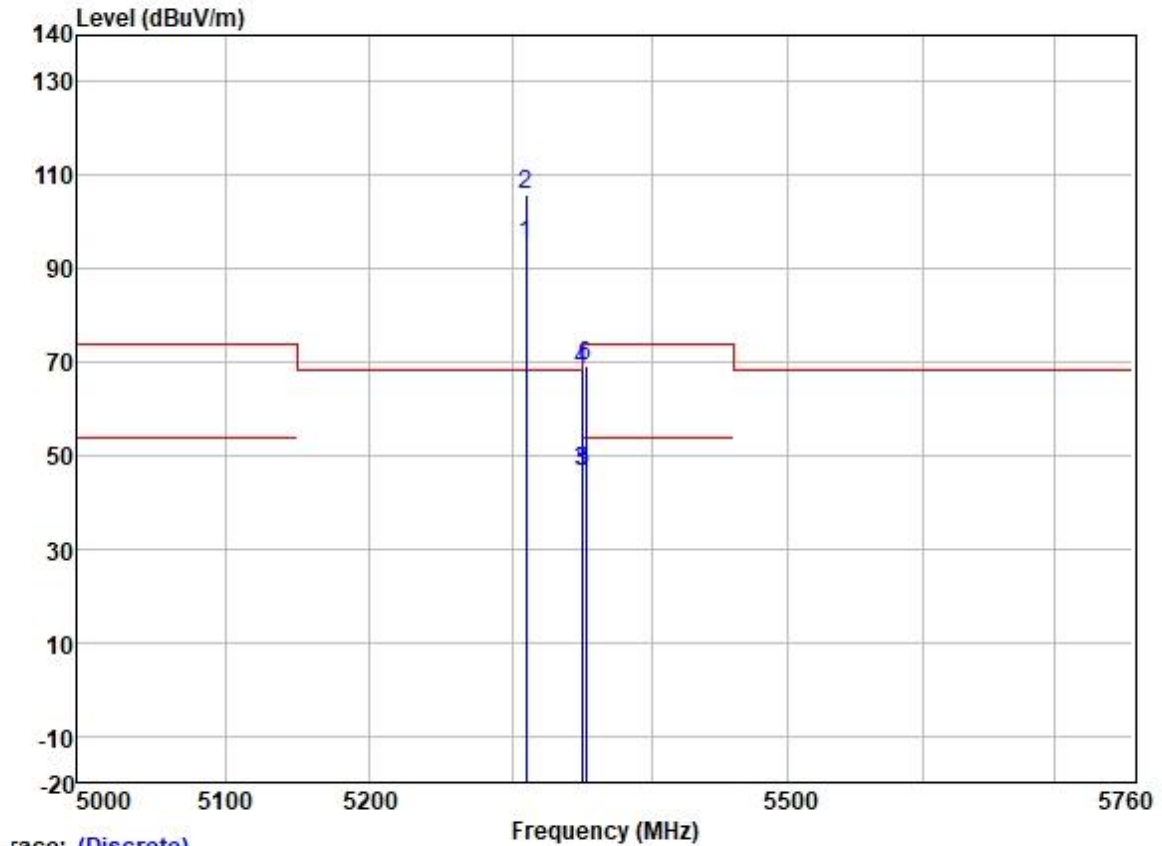

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5310.000	94.08	31.77	6.08	36.87	95.06	-----	-----	HORIZONTAL Average
2 *	5310.000	104.81	31.77	6.08	36.87	105.79	68.20	37.59	HORIZONTAL Peak
3	5350.020	45.72	31.77	6.05	36.88	46.66	54.00	-7.34	HORIZONTAL Average
4	5350.020	67.56	31.77	6.05	36.88	68.50	74.00	-5.50	HORIZONTAL Peak
5	5350.714	45.66	31.77	6.05	36.88	46.60	54.00	-7.40	HORIZONTAL Average
6	5352.277	68.41	31.77	6.05	36.88	69.35	74.00	-4.65	HORIZONTAL Peak

Test Mode: 16; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

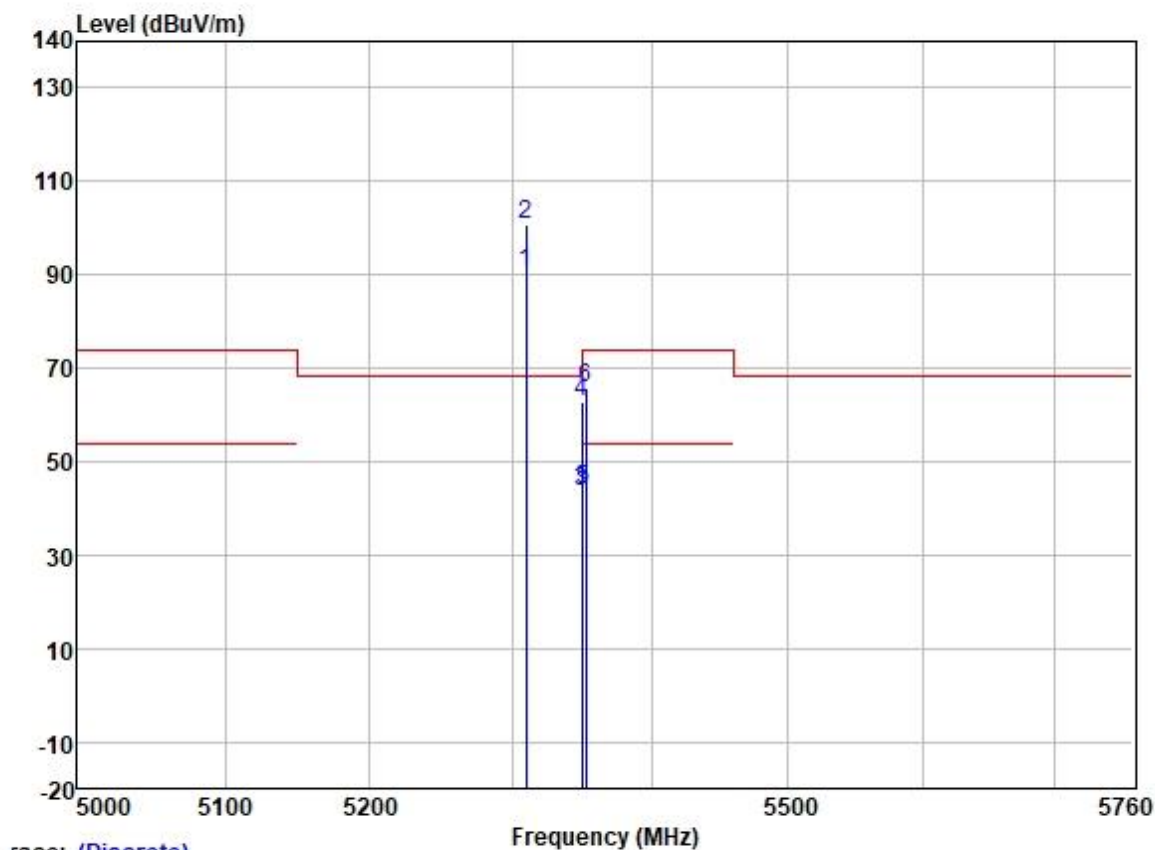

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5310.000	89.36	31.77	6.08	36.87	90.34	-----	-----	VERTICAL Average
2 *	5310.000	99.84	31.77	6.08	36.87	100.82	68.20	32.62	VERTICAL Peak
3	5350.020	42.55	31.77	6.05	36.88	43.49	54.00	-10.51	VERTICAL Average
4	5350.020	61.79	31.77	6.05	36.88	62.73	74.00	-11.27	VERTICAL Peak
5	5350.474	42.90	31.77	6.05	36.88	43.84	54.00	-10.16	VERTICAL Average
6	5352.879	64.63	31.77	6.05	36.88	65.57	74.00	-8.43	VERTICAL Peak


Test Mode: 16; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

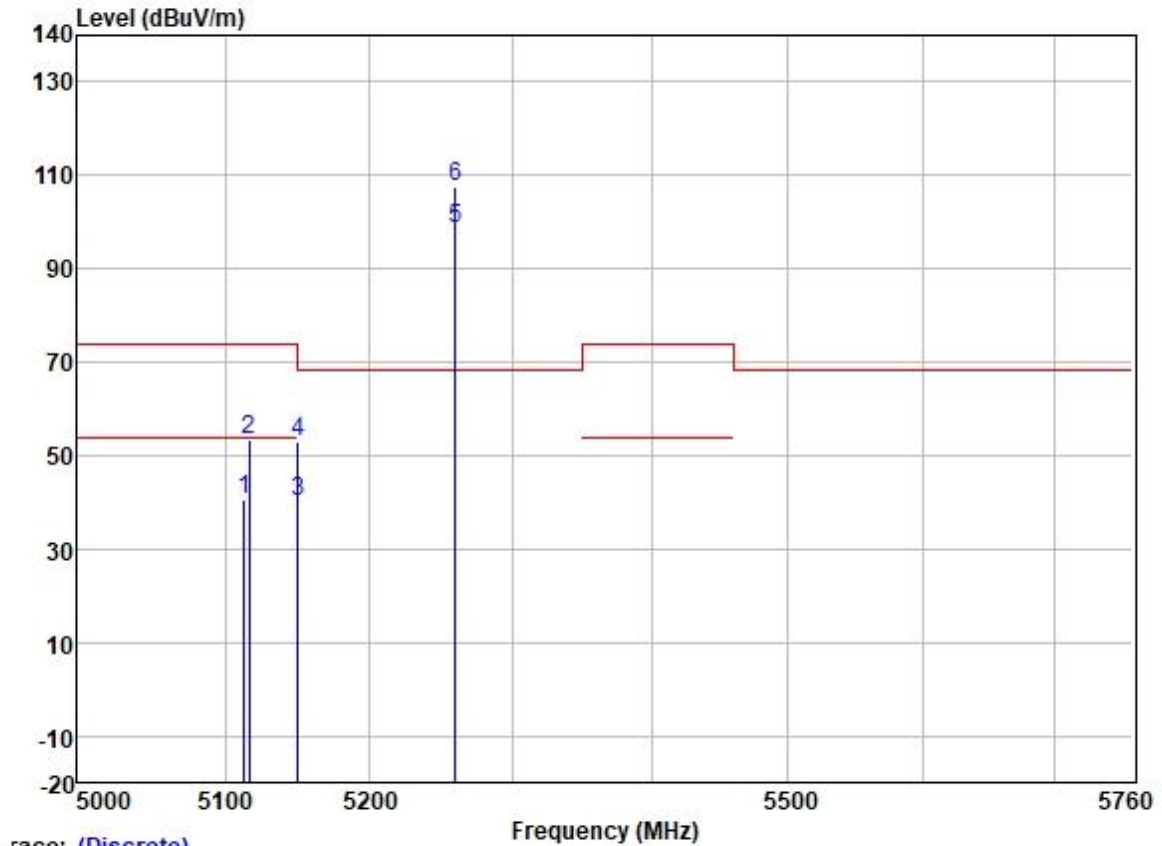

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5112.752	40.05	31.72	5.64	36.86	40.55	54.00	-13.45	HORIZONTAL Average
2	5116.123	53.09	31.72	5.64	36.86	53.59	74.00	-20.41	HORIZONTAL Peak
3	5149.980	39.60	31.72	5.62	36.86	40.08	54.00	-13.92	HORIZONTAL Average
4	5149.980	52.48	31.72	5.62	36.86	52.96	74.00	-21.04	HORIZONTAL Peak
5	5260.000	98.17	31.75	5.77	36.87	98.82	-----	-----	HORIZONTAL Average
6 *	5260.000	106.92	31.75	5.77	36.87	107.57	68.20	39.37	HORIZONTAL Peak


Test Mode: 16; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

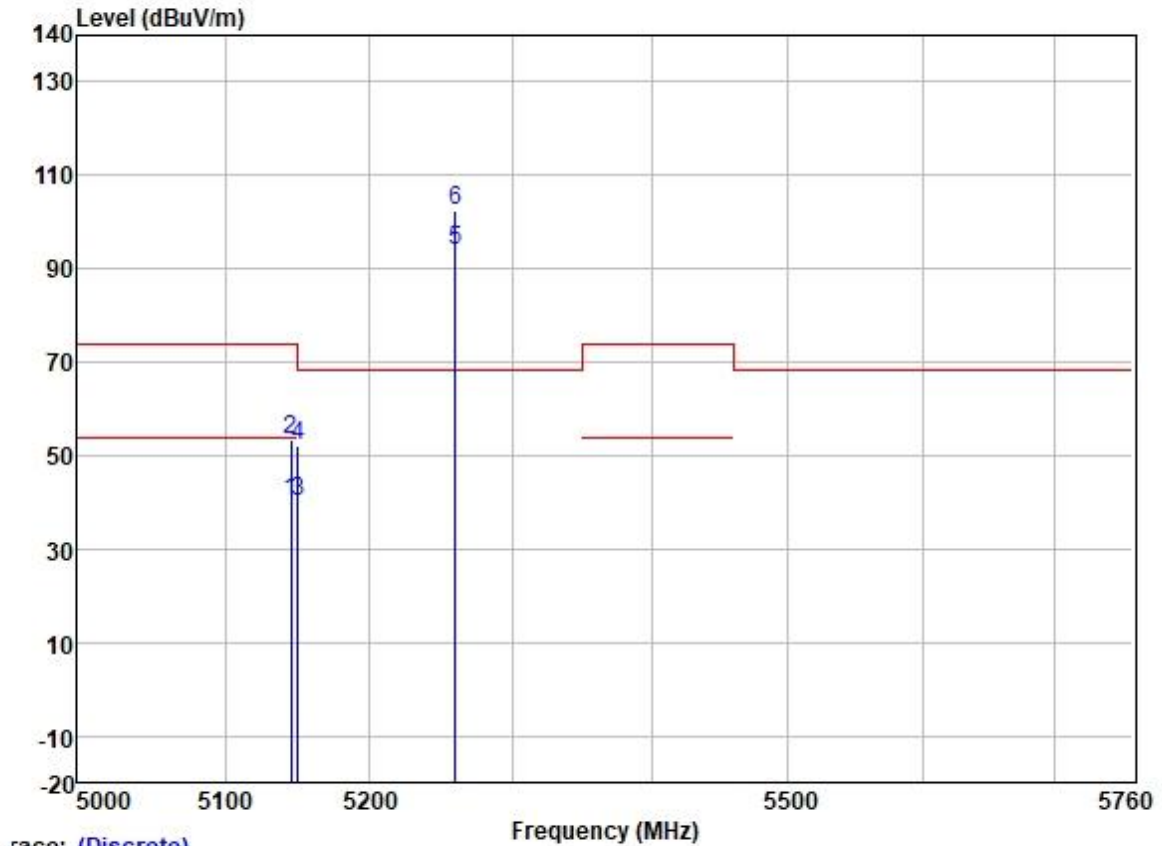

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5145.309	39.86	31.72	5.62	36.86	40.34	54.00	-13.66	VERTICAL
2	5145.309	52.80	31.72	5.62	36.86	53.28	74.00	-20.72	VERTICAL
3	5149.980	39.51	31.72	5.62	36.86	39.99	54.00	-14.01	VERTICAL
4	5149.980	51.50	31.72	5.62	36.86	51.98	74.00	-22.02	VERTICAL
5	5260.000	93.16	31.75	5.77	36.87	93.81	-----	-----	VERTICAL
6 *	5260.000	101.91	31.75	5.77	36.87	102.56	68.20	34.36	VERTICAL


Test Mode: 16; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

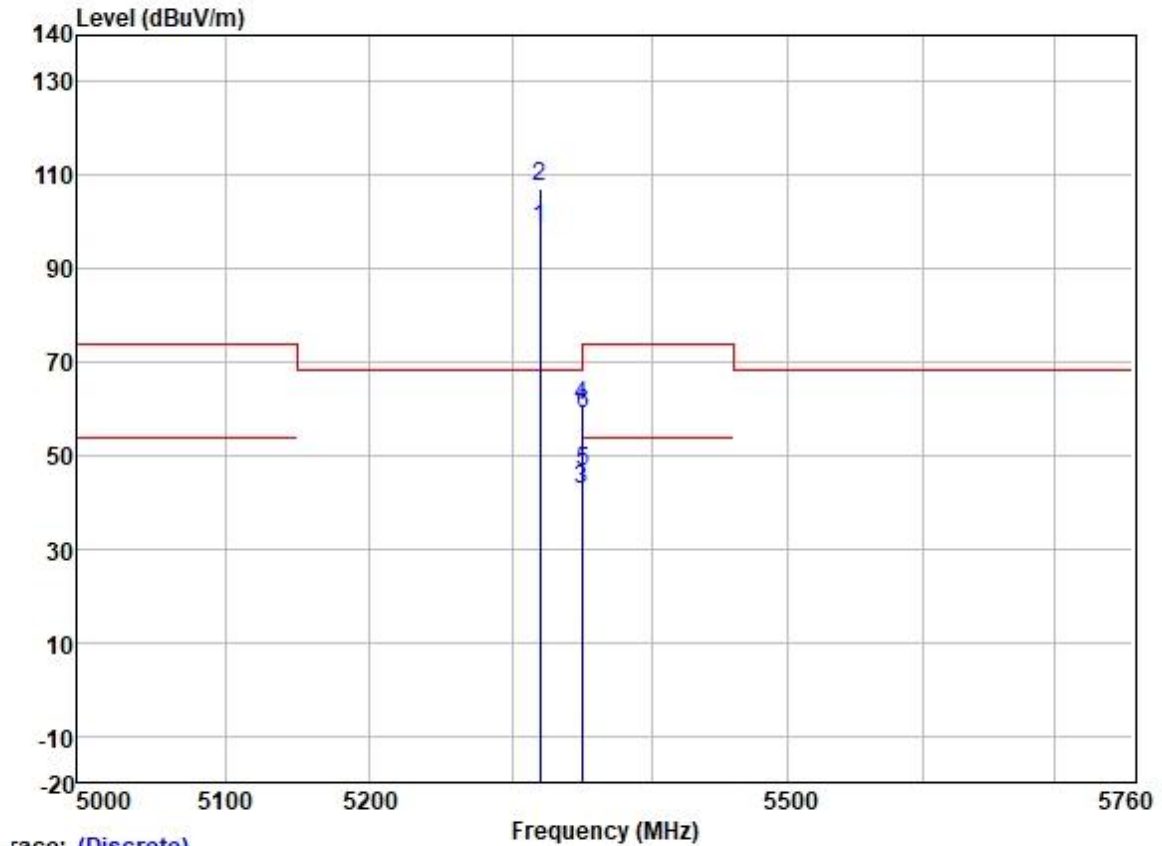

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5320.000	97.61	31.77	6.08	36.88	98.58	-----	-----	HORIZONTAL Average
2 *	5320.000	106.39	31.77	6.08	36.88	107.36	68.20	39.16	HORIZONTAL Peak
3	5350.020	41.59	31.77	6.05	36.88	42.53	54.00	-11.47	HORIZONTAL Average
4	5350.020	59.52	31.77	6.05	36.88	60.46	74.00	-13.54	HORIZONTAL Peak
5	5350.566	45.63	31.77	6.05	36.88	46.57	54.00	-7.43	HORIZONTAL Average
6	5350.566	58.12	31.77	6.05	36.88	59.06	74.00	-14.94	HORIZONTAL Peak


Test Mode: 16; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

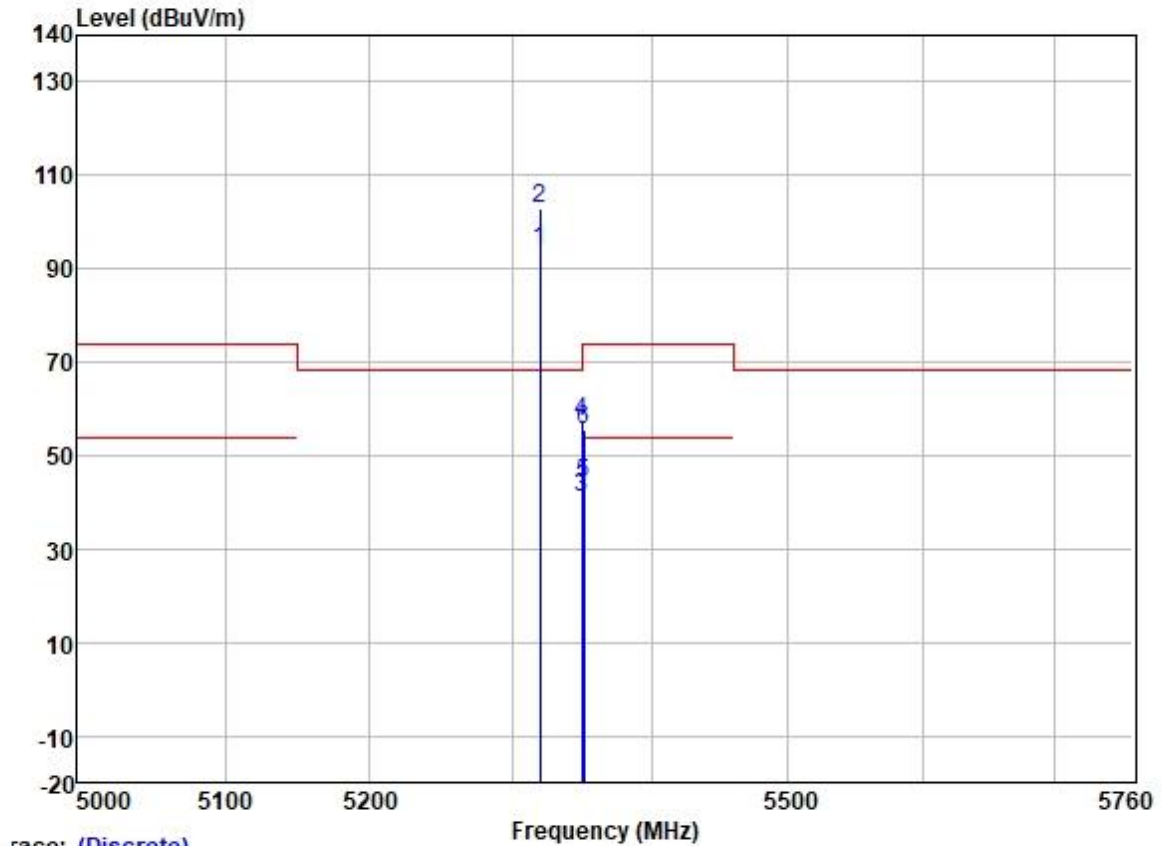

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5320.000	92.81	31.77	6.08	36.88	93.78	-----	-----	VERTICAL Average
2 *	5320.000	101.73	31.77	6.08	36.88	102.70	68.20	34.50	VERTICAL Peak
3	5350.020	40.17	31.77	6.05	36.88	41.11	54.00	-12.89	VERTICAL Average
4	5350.020	56.42	31.77	6.05	36.88	57.36	74.00	-16.64	VERTICAL Peak
5	5351.467	42.87	31.77	6.05	36.88	43.81	54.00	-10.19	VERTICAL Average
6	5351.467	54.53	31.77	6.05	36.88	55.47	74.00	-18.53	VERTICAL Peak

Test Mode: 16; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

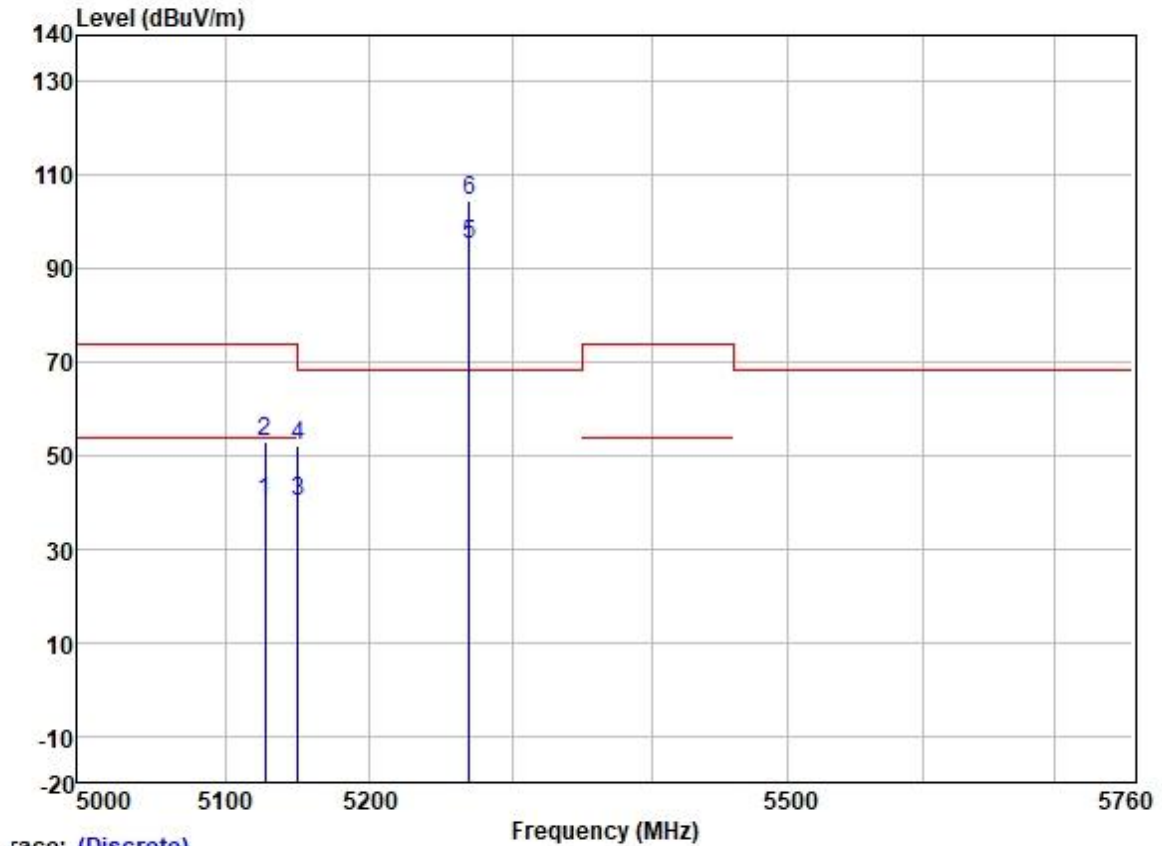


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5127.145	39.88	31.72	5.63	36.86	40.37	54.00	-13.63	HORIZONTAL Average
2	5127.145	52.51	31.72	5.63	36.86	53.00	74.00	-21.00	HORIZONTAL Peak
3	5149.980	39.65	31.72	5.62	36.86	40.13	54.00	-13.87	HORIZONTAL Average
4	5149.980	51.62	31.72	5.62	36.86	52.10	74.00	-21.90	HORIZONTAL Peak
5	5270.000	94.34	31.75	5.80	36.87	95.02	-----	-----	HORIZONTAL Average
6 *	5270.000	104.06	31.75	5.80	36.87	104.74	68.20	36.54	HORIZONTAL Peak

Test Mode: 16; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

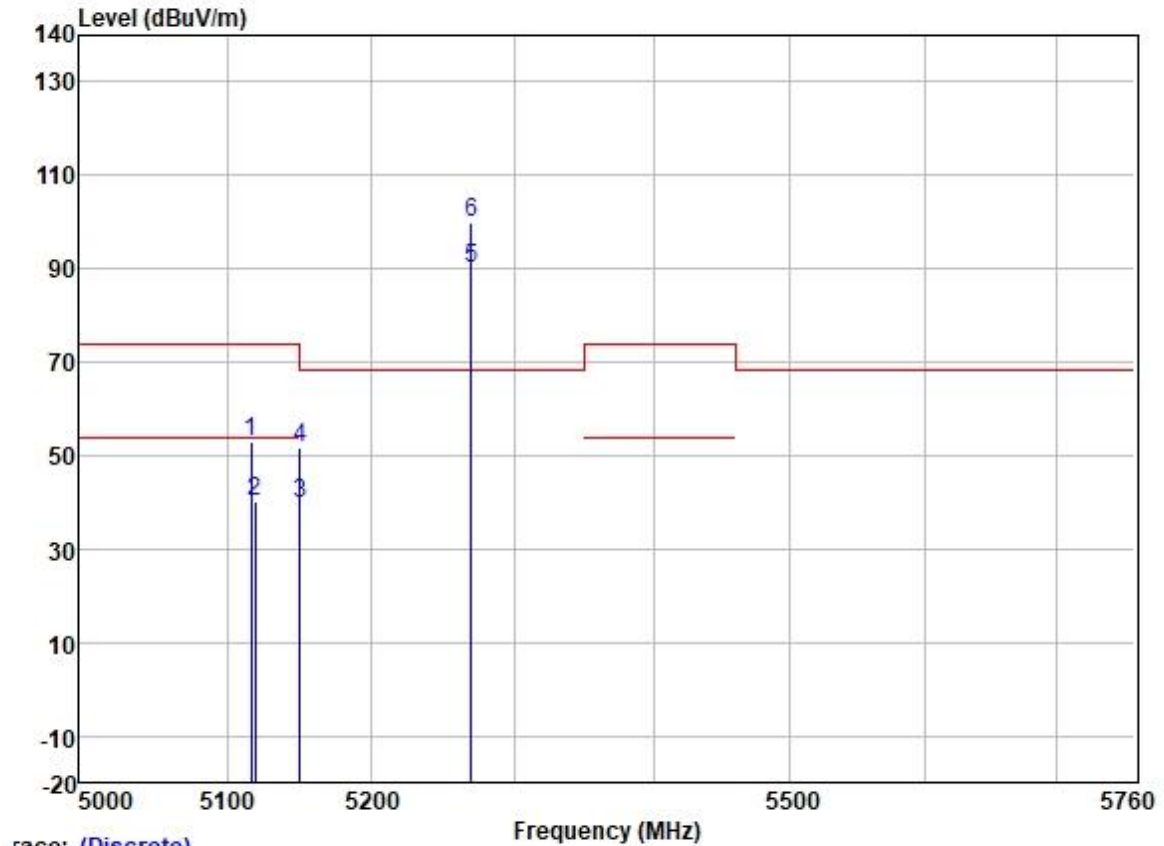

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5116.309	52.55	31.72	5.64	36.86	53.05	74.00	-20.95	VERTICAL	Peak
2	5119.262	39.78	31.72	5.64	36.86	40.28	54.00	-13.72	VERTICAL	Average
3	5149.980	39.38	31.72	5.62	36.86	39.86	54.00	-14.14	VERTICAL	Average
4	5149.980	51.09	31.72	5.62	36.86	51.57	74.00	-22.43	VERTICAL	Peak
5	5270.000	89.20	31.75	5.80	36.87	89.88	-----	-----	VERTICAL	Average
6 *	5270.000	99.13	31.75	5.80	36.87	99.81	68.20	31.61	VERTICAL	Peak


Test Mode: 16; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

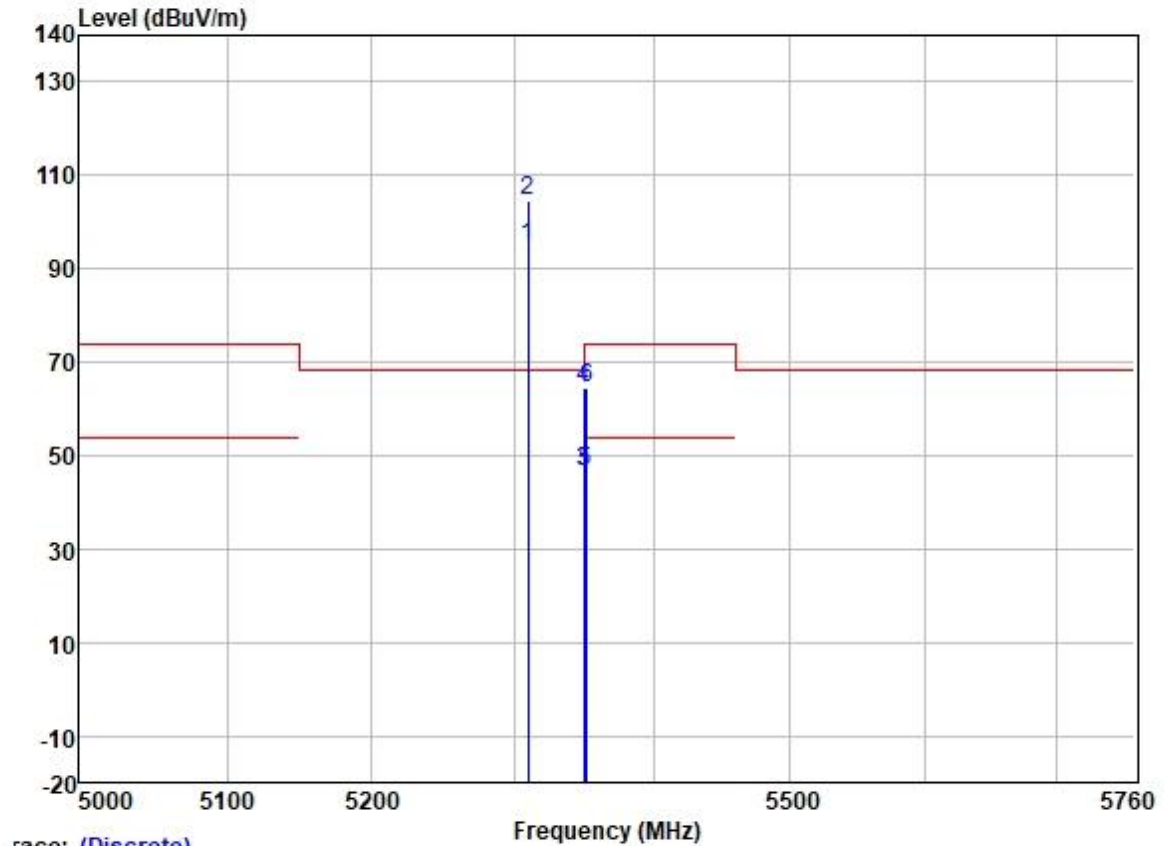

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5310.000	93.74	31.77	6.08	36.87	94.72	-----	-----	HORIZONTAL Average
2 *	5310.000	103.52	31.77	6.08	36.87	104.50	68.20	36.30	HORIZONTAL Peak
3	5350.020	45.60	31.77	6.05	36.88	46.54	54.00	-7.46	HORIZONTAL Average
4	5350.020	63.50	31.77	6.05	36.88	64.44	74.00	-9.56	HORIZONTAL Peak
5	5350.474	45.75	31.77	6.05	36.88	46.69	54.00	-7.31	HORIZONTAL Average
6	5351.917	63.44	31.77	6.05	36.88	64.38	74.00	-9.62	HORIZONTAL Peak

Test Mode: 16; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

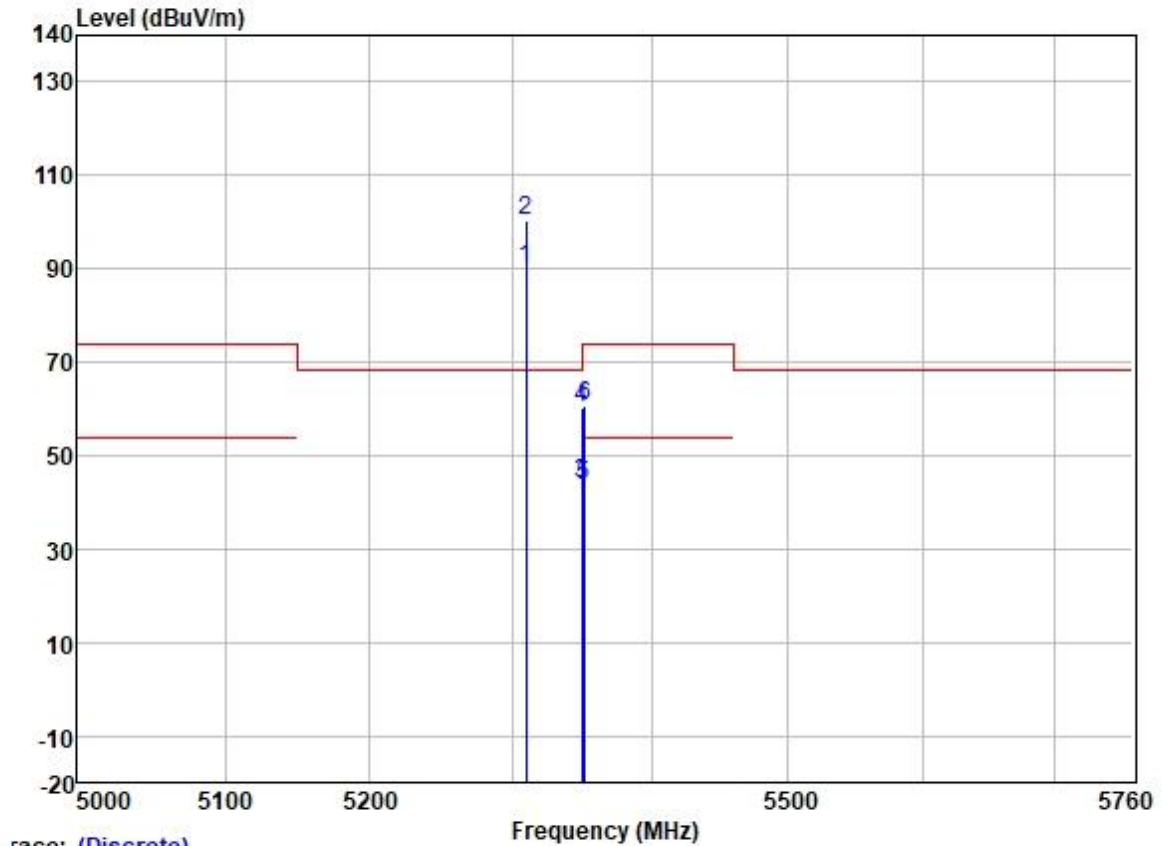

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5310.000	89.15	31.77	6.08	36.87	90.13	-----	-----	VERTICAL Average
2 *	5310.000	99.21	31.77	6.08	36.87	100.19	68.20	31.99	VERTICAL Peak
3	5350.020	43.02	31.77	6.05	36.88	43.96	54.00	-10.04	VERTICAL Average
4	5350.020	59.23	31.77	6.05	36.88	60.17	74.00	-13.83	VERTICAL Peak
5	5350.955	42.72	31.77	6.05	36.88	43.66	54.00	-10.34	VERTICAL Average
6	5351.676	59.61	31.77	6.05	36.88	60.55	74.00	-13.45	VERTICAL Peak


Test Mode: 16; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

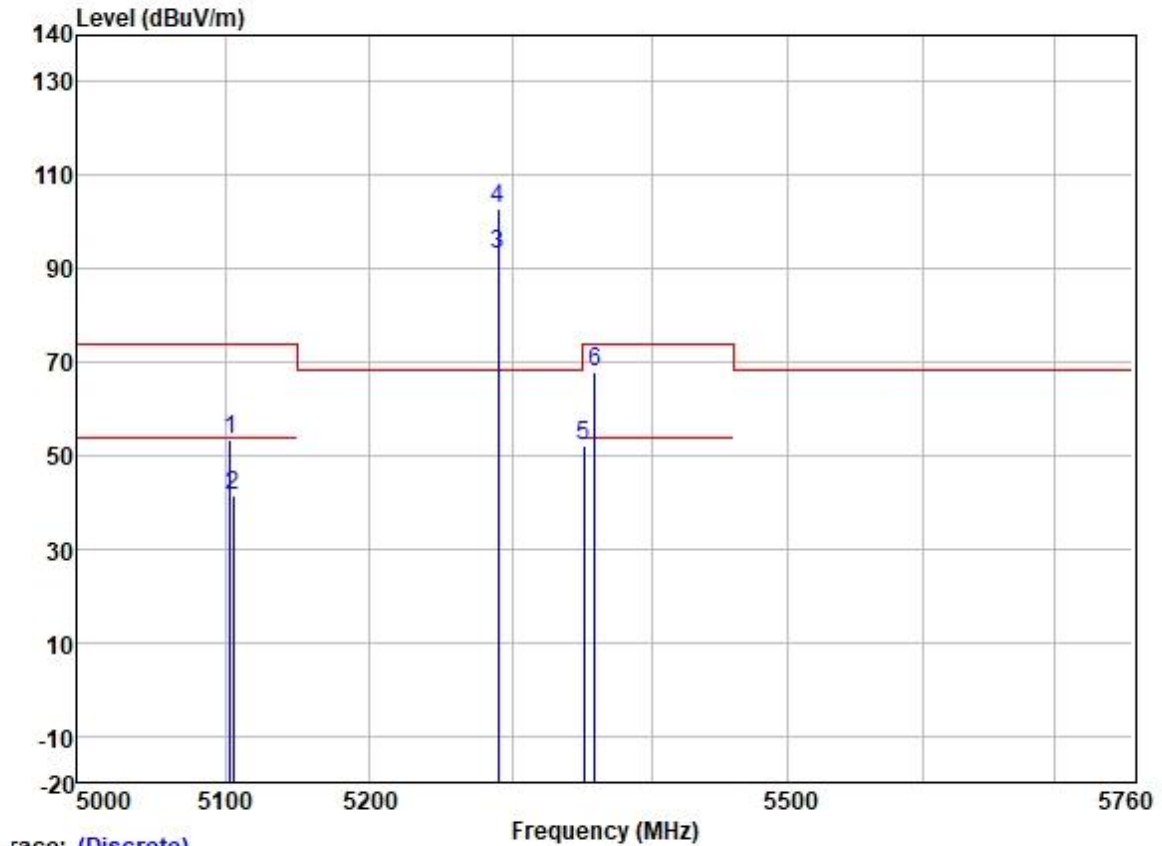

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5103.208	52.93	31.72	5.65	36.86	53.44	74.00	-20.56	HORIZONTAL Peak
2	5105.542	40.75	31.72	5.65	36.86	41.26	54.00	-12.74	HORIZONTAL Average
3	5290.000	92.27	31.76	6.00	36.87	93.16	-----	-----	HORIZONTAL Average
4 *	5290.000	101.79	31.76	6.00	36.87	102.68	68.20	34.48	HORIZONTAL Peak
5	5350.840	51.27	31.77	6.05	36.88	52.21	54.00	-1.79	HORIZONTAL Average
6	5359.104	66.98	31.78	6.03	36.88	67.91	74.00	-6.09	HORIZONTAL Peak

Test Mode: 16; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

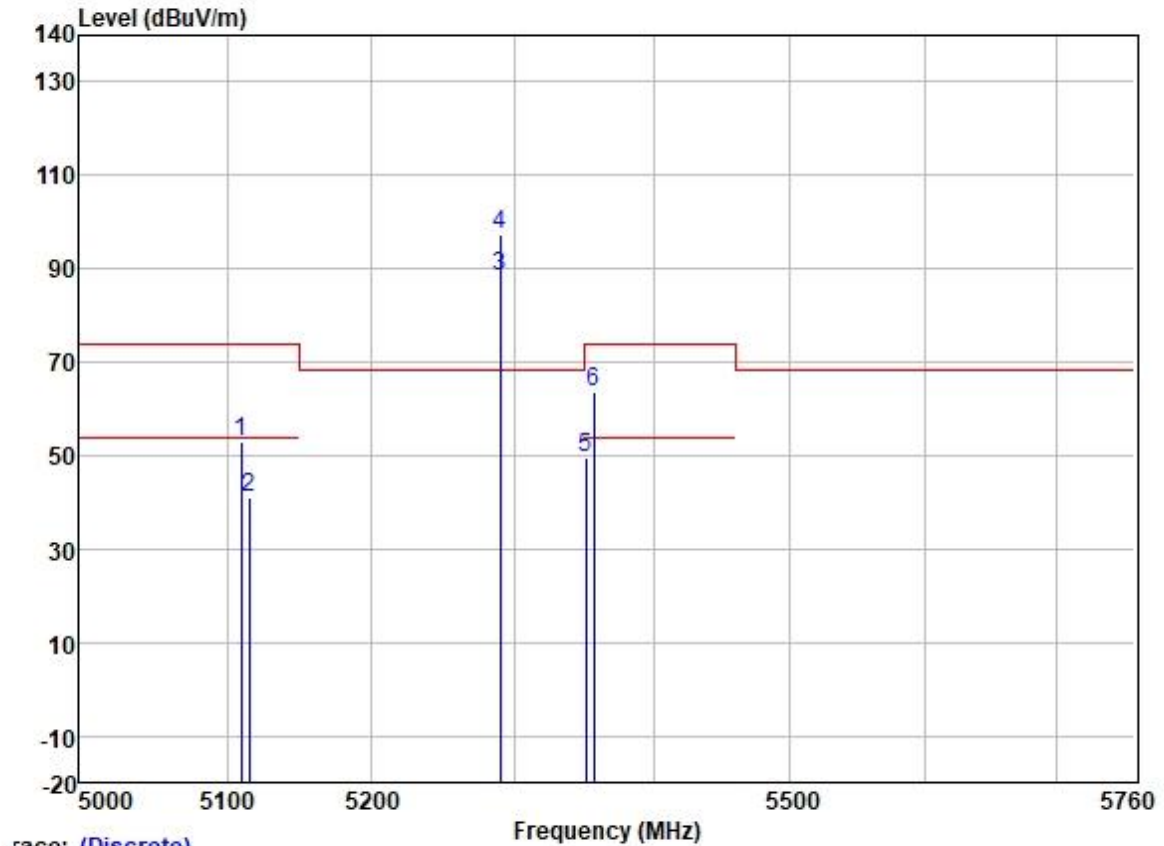


	Freq	Read	Antenna	Cable	Preamp		Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5109.629	52.29	31.72	5.65	36.86	52.80	74.00	-21.20	VERTICAL	Peak
2	5115.181	40.53	31.72	5.64	36.86	41.03	54.00	-12.97	VERTICAL	Average
3	5290.000	87.63	31.76	6.00	36.87	88.52	-----	-----	VERTICAL	Average
4 *	5290.000	96.52	31.76	6.00	36.87	97.41	68.20	29.21	VERTICAL	Peak
5	5350.840	48.60	31.77	6.05	36.88	49.54	54.00	-4.46	VERTICAL	Average
6	5356.960	62.62	31.78	6.03	36.88	63.55	74.00	-10.45	VERTICAL	Peak

Test Mode: 18; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

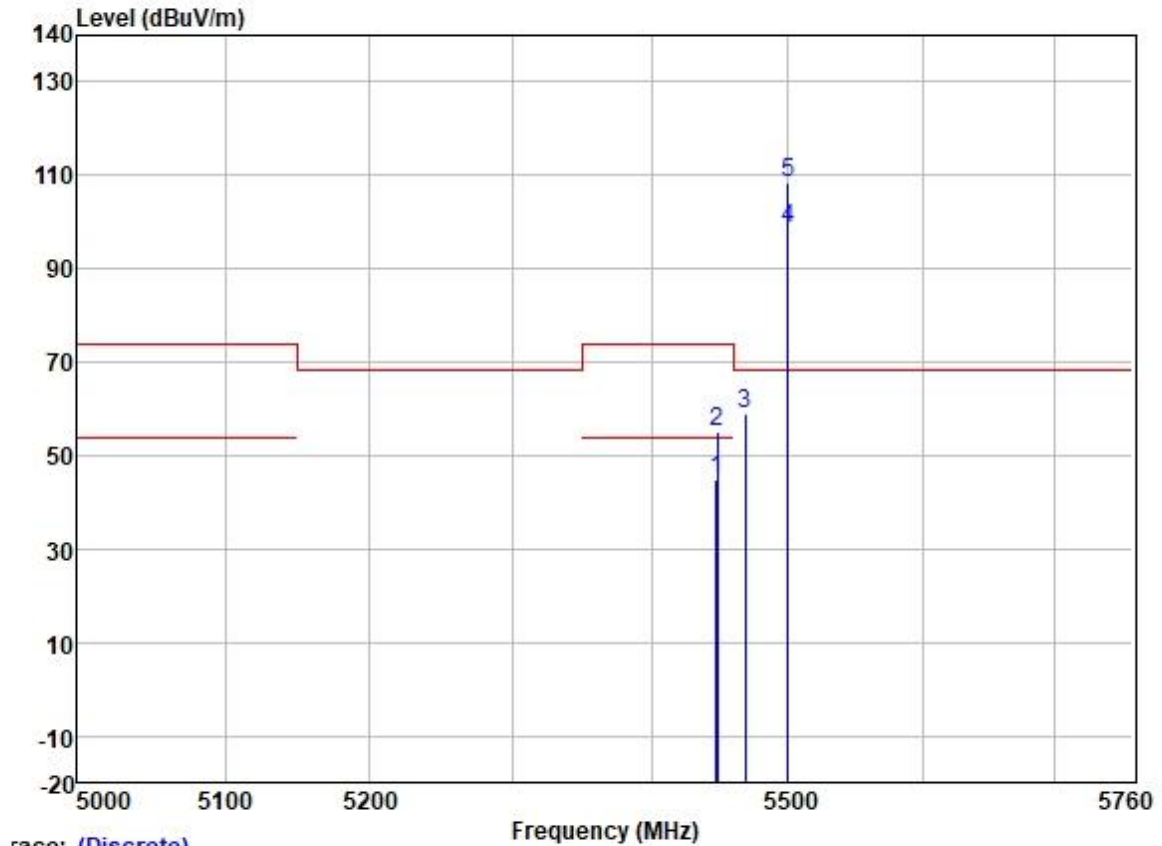

	Freq	ReadAntenna	Cable	Preamp	Limit	Over			
	MHz	Level	Loss	Factor	Line	Limit	Pol/Phase	Remark	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	5447.325	43.94	31.79	6.20	36.88	45.05	54.00	-8.95	HORIZONTAL Average
2	5447.444	54.00	31.79	6.20	36.88	55.11	74.00	-18.89	HORIZONTAL Peak
3	5468.317	57.78	31.80	6.31	36.88	59.01	68.20	-9.19	HORIZONTAL Peak
4	5500.000	97.38	31.80	6.40	36.88	98.70	-----	-----	HORIZONTAL Average
5 *	5500.000	107.08	31.80	6.40	36.88	108.40	68.20	40.20	HORIZONTAL Peak

Test Mode: 18; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

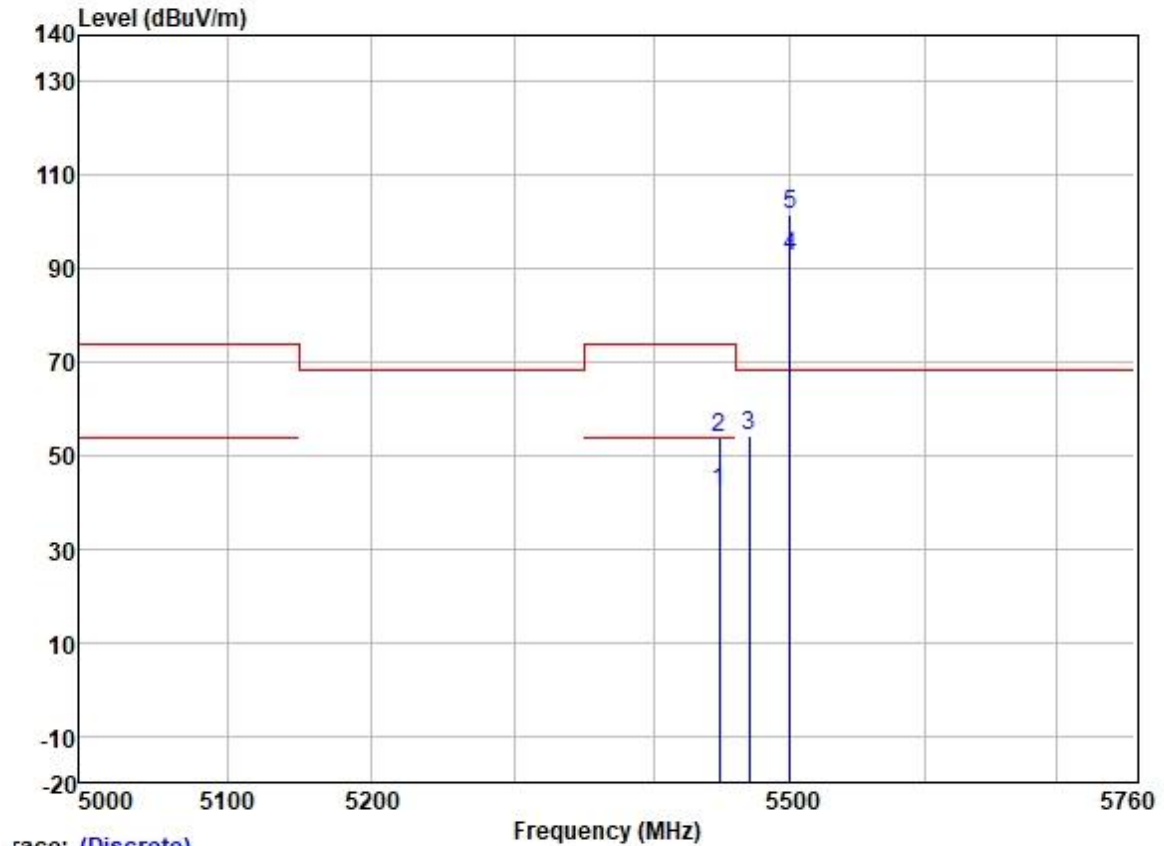

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5447.684	41.04	31.79	6.20	36.88	42.15	54.00	-11.85	VERTICAL Average
2	5447.684	52.80	31.79	6.20	36.88	53.91	74.00	-20.09	VERTICAL Peak
3	5469.279	53.16	31.80	6.31	36.88	54.39	68.20	-13.81	VERTICAL Peak
4	5500.000	91.49	31.80	6.40	36.88	92.81	-----	-----	VERTICAL Average
5 *	5500.000	100.26	31.80	6.40	36.88	101.58	68.20	33.38	VERTICAL Peak