

# FCC /ISED REPORT

## Certification

**Applicant Name:**

SOLiD, Inc.

**Date of Issue:**

August 22, 2018

**Address:**10, 9th Floor, SOLiD Space, Pangyoyeok-ro  
220, Bundang-gu, Seongnam-si, Gyeonggi-do, 463-  
400, South Korea**Location:**HCT CO., LTD.,  
74, Seoicheon-ro 578beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA**Report No.:** HCT-RF-1808-FI004**FCC ID:****W6UL2500M****IC:****9354A-L2500M****APPLICANT:****SOLiD, Inc.****FCC/ISED Model:**

N2RDU\_2500TDD\_M

**EUT Type:**

ALLIANCE\_2W

**Frequency Ranges:**

Lower Band (LB)	FCC	2 496.8 MHz ~ 2568.0 MHz
	ISED	2 500.0 MHz ~ 2568.0 MHz
Middle Band (MB)	FCC/ISED	2 574.1 MHz ~ 2 611.9 MHz
Upper Band (UB)	FCC/ISED	2 618.8 MHz ~ 2 690.0 MHz

**Conducted Output Power:**

1.6 W (32 dBm, Downlink)

**Date of Test:**

August 02, 2018 ~ August 08, 2018

**FCC Rule Part(s):**

CFR 47 Part 2, Part 27

**ISED Rules(s):**RSS-Gen (Issue 5, April 2018), RSS-131 (Issue 3, January 2017),  
RSS-199 (Issue 3, December 2016)

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC / ISED Rules under normal use and maintenance.

**Report prepared by : A Ram Han****Engineer of Telecommunication testing center****Approved by : Jong Seok Lee****Manager of Telecommunication testing center**

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-1808-FI004	August 22, 2018	- First Approval Report

# Table of Contents

1. CLIENT INFORMATION ..... 4

    1.1. APPLICANT INFORMATION ..... 4

    1.2. PRODUCT INFORMATION ..... 4

    1.3. TEST INFORMATION..... 4

2. FACILITIES AND ACCREDITATIONS..... 5

    2.1. FACILITIES..... 5

    2.2. EQUIPMENT..... 5

3. TEST SPECIFICATIONS ..... 6

    3.1. STANDARDS..... 6

    3.2. MODE OF OPERATION DURING THE TEST ..... 7

    3.3. MAXIMUM MEASUREMENTUNCERTAINTY..... 8

    3.4. STANDARDS ENVIRONMENTAL TEST CONDITIONS..... 8

4. TEST EQUIPMENT..... 9

5. RF OUTPUT POWER ..... 10

6. OCCUPIED BANDWIDTH ..... 16

7. INPUT VERSUS OUTPUT SPECTRUM..... 21

8. OUT OF BAND REJECTION & MEAN OUTPUT POWER AND ZONE ENHANCER GAIN ..... 23

9. SPURIOUS AND HARMONIC EMISSION AT ANTENNA TERMINAL ..... 27

10. RADIATED SPURIOUS EMISSIONS ..... 37

11. FREQUENCY STABILITY OVER TEMPERATURE AND VOLTAGE VARIATIONS ..... 42

12. Annex A\_EUT AND TEST SETUP PHOTO ..... 46

## 1. CLIENT INFORMATION

### 1.1. APPLICANT INFORMATION

Company Name	SOLiD, Inc.
Company Address	10, 9th Floor, SOLiD Space, Pangyoyeok-ro 220, Bundang-gu, Seongnam-si, Gyeonggi-do, 463-400, South Korea

### 1.2. PRODUCT INFORMATION

EUT Type	ALLIANCE_N2ROU		
FCC/ISED Model	N2RDU_2500TDD_M		
Power Supply	120 VAC, 50 Hz / DC -48 V		
Frequency Range	Lower Band (LB)	FCC	2 496.8 MHz ~ 2568.0 MHz
		ISED	2 500.0 MHz ~ 2568.0 MHz
	Middle Band (MB)	FCC/ISED	2 574.1 MHz ~ 2 611.9 MHz
	Upper Band (UB)	FCC/ISED	2 618.8 MHz ~ 2 690.0 MHz
Tx Output Power	1.6 W (32 dBm, Downlink)		
Supporting Technologies	LTE 20 MHz		
Antenna Specification	Manufacturer does not provide an antenna.		

### 1.3. TEST INFORMATION

FCC Rule Parts	CFR 47 Part 2, Part 27
ISED Rule Parts	RSS-Gen (Issue 5, April 2018), RSS-131 (Issue 3, January 2017), RSS-199 (Issue 3, December 2016)
Measurement standards	ANSI C63.26-2015, KDB 971168 D01 v03r01, KDB 935210 D05 v01r02, RSS-GEN, RSS-131, RSS-199
Place of Test	HCT CO., LTD. 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA (ISED Registration Number : 5944A)

## **2. FACILITIES AND ACCREDITATIONS**

### **2.1. FACILITIES**

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version: 2014) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

For ISCED, test facility was accepted dated October 19, 2015(Registration Number: 5944A-6)

### **2.2. EQUIPMENT**

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 3. TEST SPECIFICATIONS

#### 3.1. STANDARDS

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 2, Part 27, RSS-Gen, RSS-131, RSS-199

Description	Reference (FCC)	Reference (ISED)	Results
Conducted RF Output Power	§2.1046, §27.50(h)	RSS-199, Section 4.4 SRSP-517	Compliant
Occupied Bandwidth	§2.1049	RSS-Gen, Section 6.7	Compliant
Input-versus-output Spectrum	-	RSS-131, Section 5.2.2	Compliant
Out of Band Rejection & Mean Output Power and Zone Enhancer Gain	KDB 935210 D05 v01r02	RSS-131, Section 5.2.1 RSS-131, Section 5.2.3	Compliant
Spurious Emissions at Antenna Terminals	§2.1051, §27.53(m)	RSS-Gen, Section 6.13 RSS-199, Section 4.5	Compliant
Radiated Spurious Emissions	§2.1053, §27.53(m)	RSS-Gen, Section 7.3 RSS-199, Section 4.5	Compliant
Frequency Stability	§2.1055, §27.54	RSS-131, Section 5.2.4 RSS-199, Section 4.3	Compliant

### 3.2. MODE OF OPERATION DURING THE TEST

The EUT was operated in a manner representative of the typical usage of the equipment.

During all testing, system components were manipulated within the confines of typical usage to maximize each emission.

The device does not supply antenna(s) with the system, so the dummy loads were connected to the RF output ports for radiated spurious emission testing.

\* This EUT is supported power supply both of AC and DC. Test results are only attached worst cases.

\* The tests results in plots are already including the actual value of loss for the attenuator and cable combination. Please check correction factors below table.

#### ■ Correction Factor

Freq(MHz)	Factor(dB)
30	30.566
100	30.388
200	30.728
300	30.899
400	30.975
500	30.789
600	30.952
700	31.156
800	31.105
900	31.153
1000	31.324
2000	31.874
3000	31.834
4000	31.583
5000	31.963
6000	32.065
7000	32.513
8000	32.585
9000	32.294
10000	32.623
20000	36.428
26000	36.623

### 3.3. MAXIMUM MEASUREMENT UNCERTAINTY

The value of the measurement uncertainty for the measurement of each parameter.

Coverage factor  $k = 2$ , Confidence levels of 95 %

Description	Condition	Uncertainty
Conducted RF Output Power	-	$\pm 0.72$ dB
Occupied Bandwidth	OBW $\leq 20$ MHz	$\pm 52$ kHz
Input-versus-output Spectrum		
Out of Band Rejection & Mean Output Power and Zone Enhancer Gain	Gain 20 dB bandwidth	$\pm 0.89$ dB $\pm 0.58$ MHz
Transmitter unwanted emissions	-	$\pm 1.08$ dB
Radiated Spurious Emissions	$f \leq 1$ GHz	$\pm 4.80$ dB
	$f > 1$ GHz	$\pm 6.07$ dB
Frequency Stability	-	$\pm 1.22 \times 10^{-6}$

### 3.4. STANDARDS ENVIRONMENTAL TEST CONDITIONS

Temperature :	+ 15 °C to + 35 °C
Relative humidity:	30 % to 60 %
Air pressure	860 mbar to 1 060 mbar



## 4. TEST EQUIPMENT

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Agilent	N9020A / Spectrum Analyzer	09/15/2017	Annual	MY46471250
Agilent	N5128A / Signal Generator	03/05/2018	Annual	MY50141649
Agilent	N5128A / Signal Generator	02/17/2018	Annual	MY46240523
AGILENT	8498A / Coaxial Attenuator	02/19/2018	Annual	51162
Agilent	11636A / Power Divider	07/26/2018	Annual	09109
KIKUSUI	CBL06185030 / DC Power Supply	02/27/2018	Annual	RE001149
DEAYOUNG ENT	DFSS60 / AC Power Supply	04/05/2018	Annual	1003030-1
NANGYEUL CO., LTD.	NY-THR18750 / Temperature and Humidity Chamber	10/21/2017	Annual	NY-2009012201A
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Audix	Turn Table	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	04/19/2017	Biennial	1513-175
Schwarzbeck	VULB 9168 / Hybrid Antenna	04/06/2017	Biennial	760
Schwarzbeck	BBHA 9120D / Horn Antenna	05/02/2017	Biennial	9120D-937
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	12/04/2017	Biennial	BBHA9170541
Rohde & Schwarz	FSP / Spectrum Analyzer	09/06/2017	Annual	100688
Wainwright Instruments	WHKX10-900-1000-15000-40SS	07/20/2018	Annual	5
Wainwright Instruments	WHK3.0/18G-10EF / High Pass Filter	06/07/2018	Annual	8
CERNEX	CBLU1183540 / Power Amplifier	07/10/2018	Annual	22964
CERNEX	CBL06185030 / Power Amplifier	07/10/2018	Annual	22965
CERNEX	CBL18265035 / Power Amplifier	01/10/2018	Annual	22966

## 5. RF OUTPUT POWER

### FCC Rules

#### Test Requirements:

##### § 2.1046 Measurements required: RF power output:

- (a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.
- (b) For single sideband, independent sideband, and single channel, controlled carrier radio telephone transmitters, the procedure specified in paragraph (a) of this section shall be employed and, in addition, the transmitter shall be modulated during the test as specified and as applicable in § 2.1046 (b) (1-5). In all tests, the input level of the modulating signal shall be such as to develop rated peak envelope power or carrier power, as appropriate, for the transmitter.
- (c) For measurements conducted pursuant to paragraphs (a) and (b) of this section, all calculations and methods used by the applicant for determining carrier power or peak envelope power, as appropriate, on the basis of measured power in the radio frequency load attached to the transmitter output terminals shall be shown. Under the test conditions specified, no components of the emission spectrum shall exceed the limits specified in the applicable rule parts as necessary for meeting occupied bandwidth or emission limitations.

##### § 27.50 Power limits and duty cycle.

- (h) The following power limits shall apply in the BRS and EBS:
  - (1) Main, booster and base stations.
    - (i) The maximum EIRP of a main, booster or base station shall not exceed  $33 \text{ dBW} + 10\log(X/Y) \text{ dBW}$ , where X is the actual channel width in MHz and Y is either 6 MHz if prior to transition or the station is in the MBS following transition or 5.5 MHz if the station is in the LBS and UBS following transition, except as provided in paragraph (h)(1)(ii) of this section.
    - (ii) If a main or booster station sectorizes or otherwise uses one or more transmitting antennas with a non-omnidirectional horizontal plane radiation pattern, the maximum EIRP in dBW in a given direction shall be determined by the following formula:  $\text{EIRP} = 33 \text{ dBW} + 10 \log(X/Y) \text{ dBW} + 10 \log(360/\text{beamwidth}) \text{ dBW}$ , where X is the actual channel width in MHz, Y is either (i) 6 MHz if prior to transition or the station is in the MBS following transition or (ii) 5.5 MHz if the station is in the LBS and UBS following transition, and beamwidth is the total horizontal plane beamwidth of the individual transmitting antenna for the station or any sector measured at the half-power points.

**ISED Rules****Test Requirements:****RSS-199****4. Transmitter and receiver standard specifications****4.4 Transmitter output power and equivalent isotropically radiated power (e.i.r.p.)**

The transmitter output power shall be measured in terms of average value.

For base station equipment, refer to SRSP-517 for the maximum permissible e.i.r.p.

In addition, the peak-to-average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1% of the time and shall use a signal corresponding to the highest PAPR during periods of continuous transmission.

**SRSP-517****5. Technical Criteria****5.1 Radiated Power Limits and Antenna Height Limits****5.1.1 Fixed and Base Stations**

Fixed and base stations (except fixed subscriber stations) are limited to a maximum permissible equivalent isotropically radiated power (e.i.r.p.) of 1640 W/MHz (i.e. no more than 1640 W e.i.r.p. in any 1 MHz band segment) with an antenna height above average terrain (HAAT)Footnote 7 up to 300 metres. For all installations with antenna HAAT in excess of 300 metres, a corresponding reduction in e.i.r.p. according to Table 2 shall be applied.

<b>Table 2 — Reduction to Maximum Allowable E.I.R.P. for HAAT &gt; 300 m</b>	
<b>HAAT (m)</b>	<b>Reduction in maximum e.i.r.p. (dB)</b>
300 < HAAT ≤500	2
500 < HAAT ≤1,000	5
1,000 < HAAT ≤1,500	8
1,500 < HAAT ≤2,000	10

**Test Procedures:**

Measurements were in accordance with the test methods section 3.5.2 of KDB 935210 D05 v01r02.

- Connect a signal generator to the input of the EUT.
- Configure to generate the AWGN (broadband) test signal.
- The frequency of the signal generator shall be set to the frequency  $f_0$  as determined from 3.3.
- Connect a spectrum analyzer or power meter to the output of the EUT using appropriate attenuation as necessary.
- Set the signal generator output power to a level that produces an EUT output level that is just below the AGC threshold (see 3.2), but not more than 0.5 dB below.
- Measure and record the output power of the EUT; use 3.5.3 or 3.5.4 for power measurement.
- Remove the EUT from the measurement setup. Using the same signal generator settings,

- repeat the power measurement at the signal generator port, which was used as the input signal to the EUT, and record as the input power. EUT gain may be calculated as described in 3.5.5.
- h) Repeat steps f) and g) with input signal amplitude set to 3 dB above the AGC threshold level.
  - i) Repeat steps e) to h) with the narrowband test signal.
  - j) Repeat steps e) to i) for all frequency bands authorized for use by the EUT.

**RSS-131**


**4. Measurement Methods**

**4.1 Output power**

Unless indicated otherwise in the applicable standards of the equipment with which the zone enhancer is to be used, the output power and noise limit of the zone enhancer shall be measured in terms of root-mean-square (RMS) average value.

**Power measurement Method:**

Guidance for performing input/output power measurements using a spectrum or signal analyzer is provided in 5.2 of KDB Publication 971168 D01 v03r01.

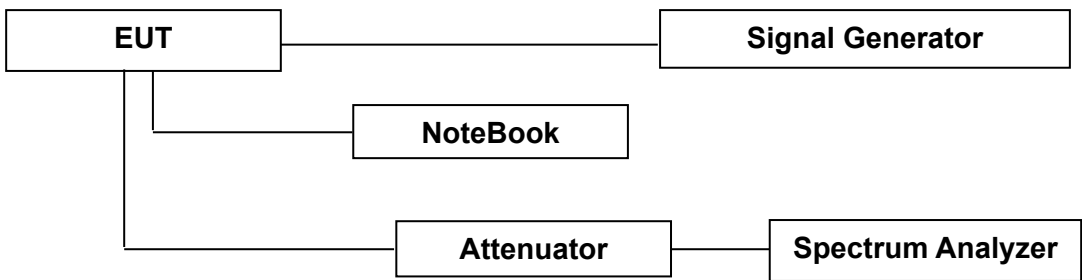

**Block Diagram 1. RF Power Output Test Setup**

**Test Results:**

Input Signal	Input Level	Maximum Amp Gain
2 500 TDD_M	-20 dBm	52 dB

\* Note: Due to EUT’s ALC function (Auto Level Control), even if input signal is increased, the same output power is transmit.


### Tabular Data of Output Power

2 500 TDD_M	Channel	Frequency (MHz)	Output Power	
			(dBm)	(W)
LTE 20 MHz AGC threshold	Low	2510.00	31.92	1.556
	Middle	2595.00	31.95	1.567
	High	2680.00	31.98	1.578
LTE 20 MHz +3 dB above the AGC threshold	Low	2510.00	32.01	1.589
	Middle	2595.00	31.89	1.545
	High	2680.00	32.07	1.611

### Tabular Data of Peak-to-Average Ratio (PAR)

2 500 TDD_M	Channel	Frequency (MHz)	PAR (dB)
LTE 20 MHz AGC threshold	Middle	2595.00	9.29

# Plots of RF Output Power for LTE 20 MHz\_2 500 TDD\_M

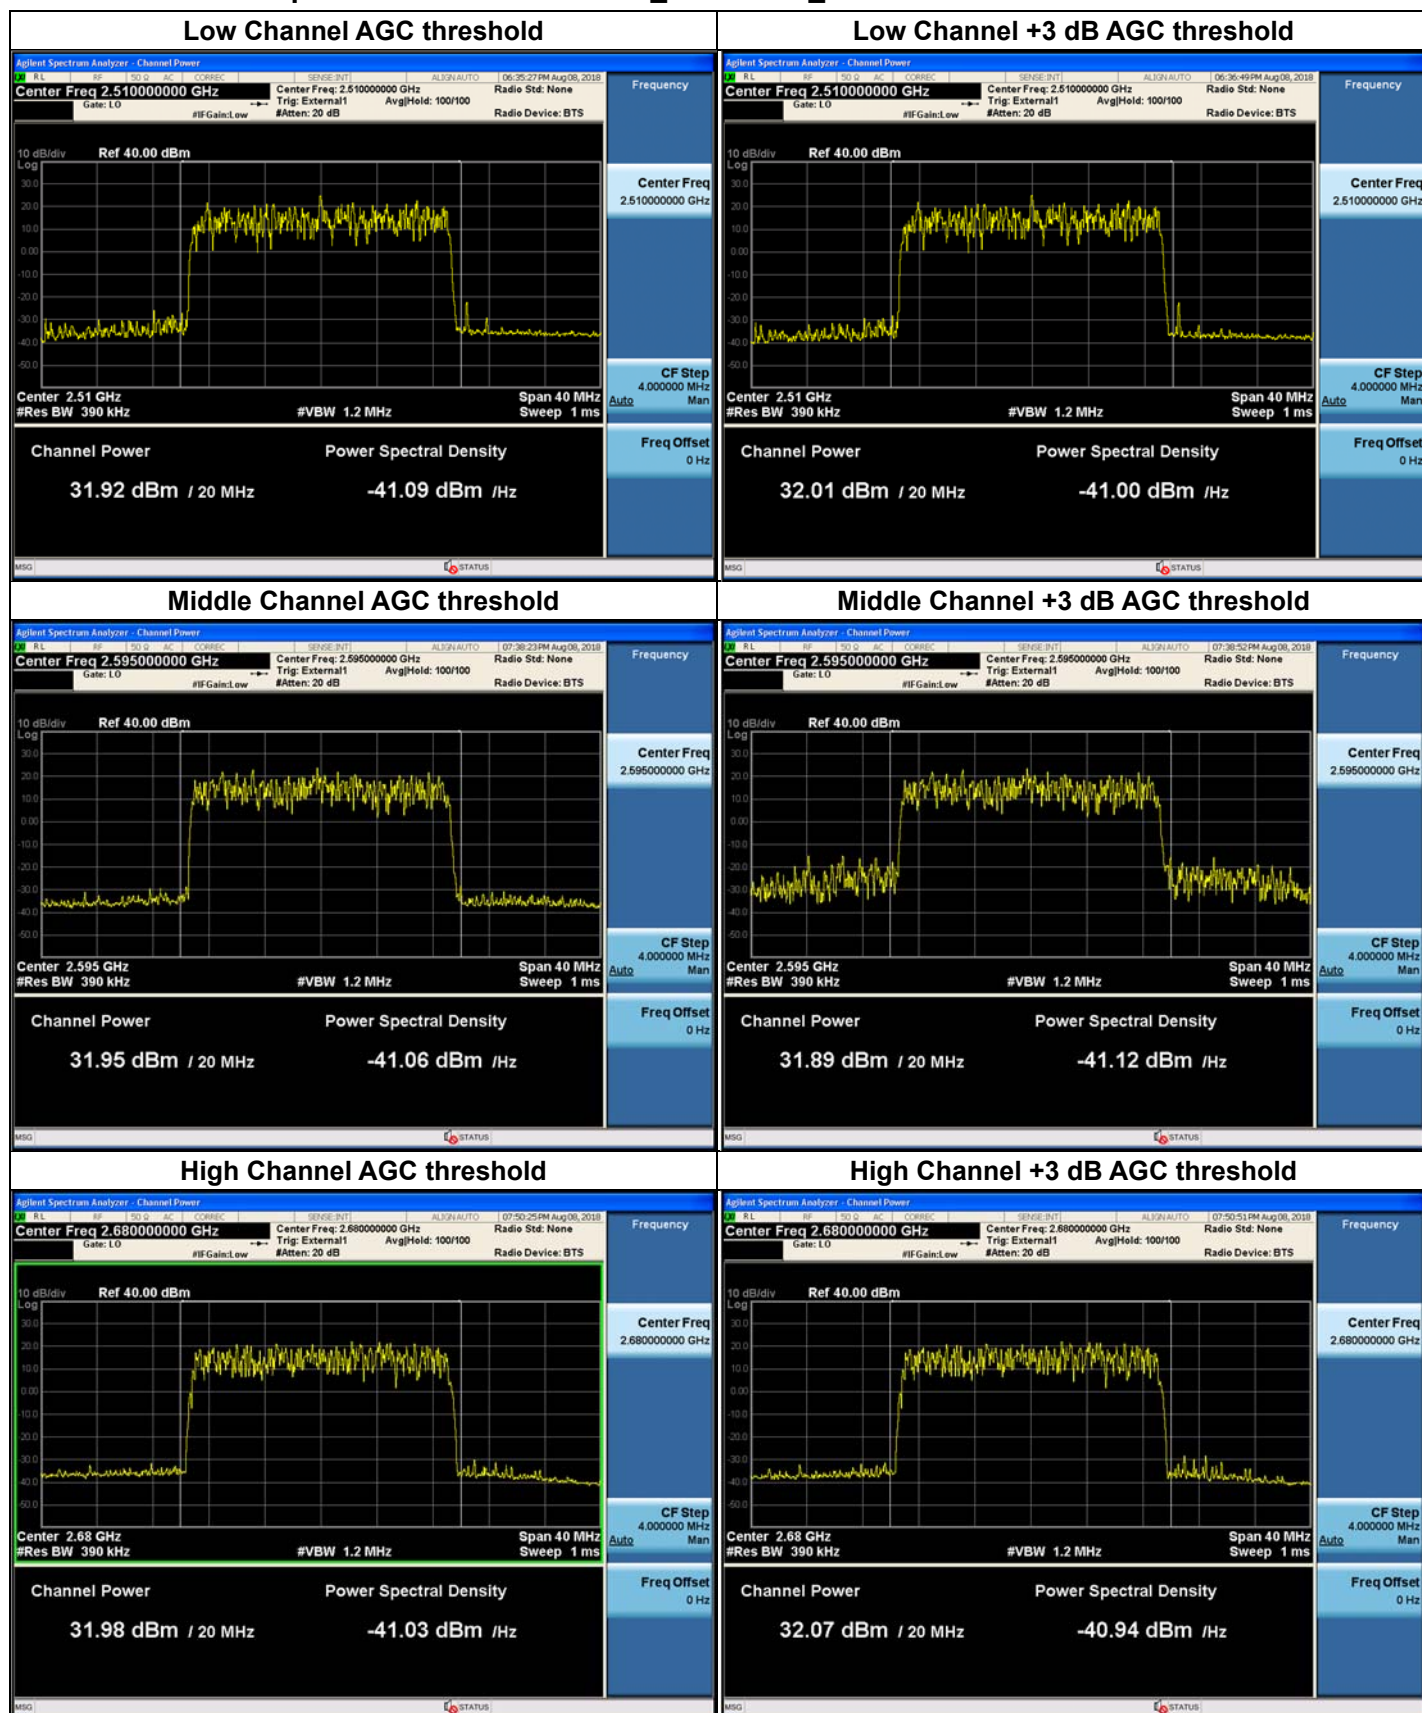

Plots of PAR for LTE 20 MHz\_2 500 TDD\_M

LTE 20 MHz, Middle Channel AGC threshold





## 6. OCCUPIED BANDWIDTH

### FCC Rules

#### Test Requirements:

##### § 2.1049 Measurements required: Occupied bandwidth:

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the specified conditions of § 2.1049 (a) through (i) as applicable.

### ISED Rules

#### Test Requirements:

#### RSS-Gen

#### 6 General administrative and technical requirements

##### 6.7 Occupied bandwidth (or 99% emission bandwidth) and x dB bandwidth

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

#### Test Procedures:

Measurements were in accordance with the test methods section 3.4 of KDB 935210 D05 v01r02 and section 4.2 of KDB 971168 D01 v03r01.

Test is 99% OBW measured and used.

- a) Connect a signal generator to the input of the EUT.
- b) Configure the signal generator to transmit the AWGN signal.
- c) Configure the signal amplitude to be just below the AGC threshold level (see 3.2), but not more than 0.5 dB below.
- d) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation.
- e) Set the spectrum analyzer center frequency to the center frequency of the operational band under test. The span range of the spectrum analyzer shall be between 2 times to 5 times the emission bandwidth (EBW) or alternatively, the OBW.
- f) The nominal RBW shall be in the range of 1 % to 5 % of the anticipated OBW, and the VBW shall be  $\geq 3 \times \text{RBW}$ .
- g) Set the reference level of the instrument as required to preclude the signal from exceeding the maximum spectrum analyzer input mixer level for linear operation. In general, the peak of the spectral envelope must be more than  $[10 \log (\text{OBW} / \text{RBW})]$  below the reference level.



Steps f) and g) may require iteration to enable adjustments within the specified tolerances.

h) The noise floor of the spectrum analyzer at the selected RBW shall be at least 36 dB below the reference level.

i) Set spectrum analyzer detection function to positive peak.

j) Set the trace mode to max hold.

k) Determine the reference value: Allow the trace to stabilize. Set the spectrum analyzer marker to the highest amplitude level of the displayed trace (this is the reference value) and record the associated frequency as  $f_0$ .

l) Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the -26 dB down amplitude. The 26 dB EBW (alternatively OBW) is the positive frequency difference between the two markers. If the spectral envelope crosses the -26 dB down amplitude at multiple points, the lowest or highest frequency shall be selected as the frequencies that are the furthest removed from the center frequency at which the spectral envelope crosses the -26 dB down amplitude point.

m) Repeat steps e) to l) with the input signal connected directly to the spectrum analyzer (i.e., input signal measurement).

n) Compare the spectral plot of the input signal (determined from step m) to the output signal (determined from step l) to affirm that they are similar (in passband and rolloff characteristic features and relative spectral locations), and include plot(s) and descriptions in test report.

o) Repeat the procedure [steps e) to n)] with the input signal amplitude set to 3 dB above the AGC threshold.

p) Repeat steps e) to o) with the signal generator set to the narrowband signal.

q) Repeat steps e) to p) for all frequency bands authorized for use by the EUT.

## RSS-Gen

### 6 General administrative and technical requirements

#### 6.7 Occupied bandwidth (or 99% emission bandwidth) and x dB bandwidth

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

## Test Results:


### Tabular Data of Output Occupied Bandwidth

2 500 TDD_M	Channel	Frequency (MHz)	OBW (MHz)
LTE 20 MHz AGC threshold	Low	2510.00	17.956
	Middle	2595.00	17.992
	High	2680.00	17.946
LTE 20 MHz +3 dB above the AGC threshold	Low	2510.00	17.964
	Middle	2595.00	17.990
	High	2680.00	17.930

### Tabular Data of Input Occupied Bandwidth


2 500 TDD_M	Channel	Frequency (MHz)	OBW (MHz)
LTE 20 MHz AGC threshold	Low	2510.00	17.976
	Middle	2595.00	17.986
	High	2680.00	17.981

## Plots of Output Occupied Bandwidth for LTE 20 MHz\_2 500 TDD\_M

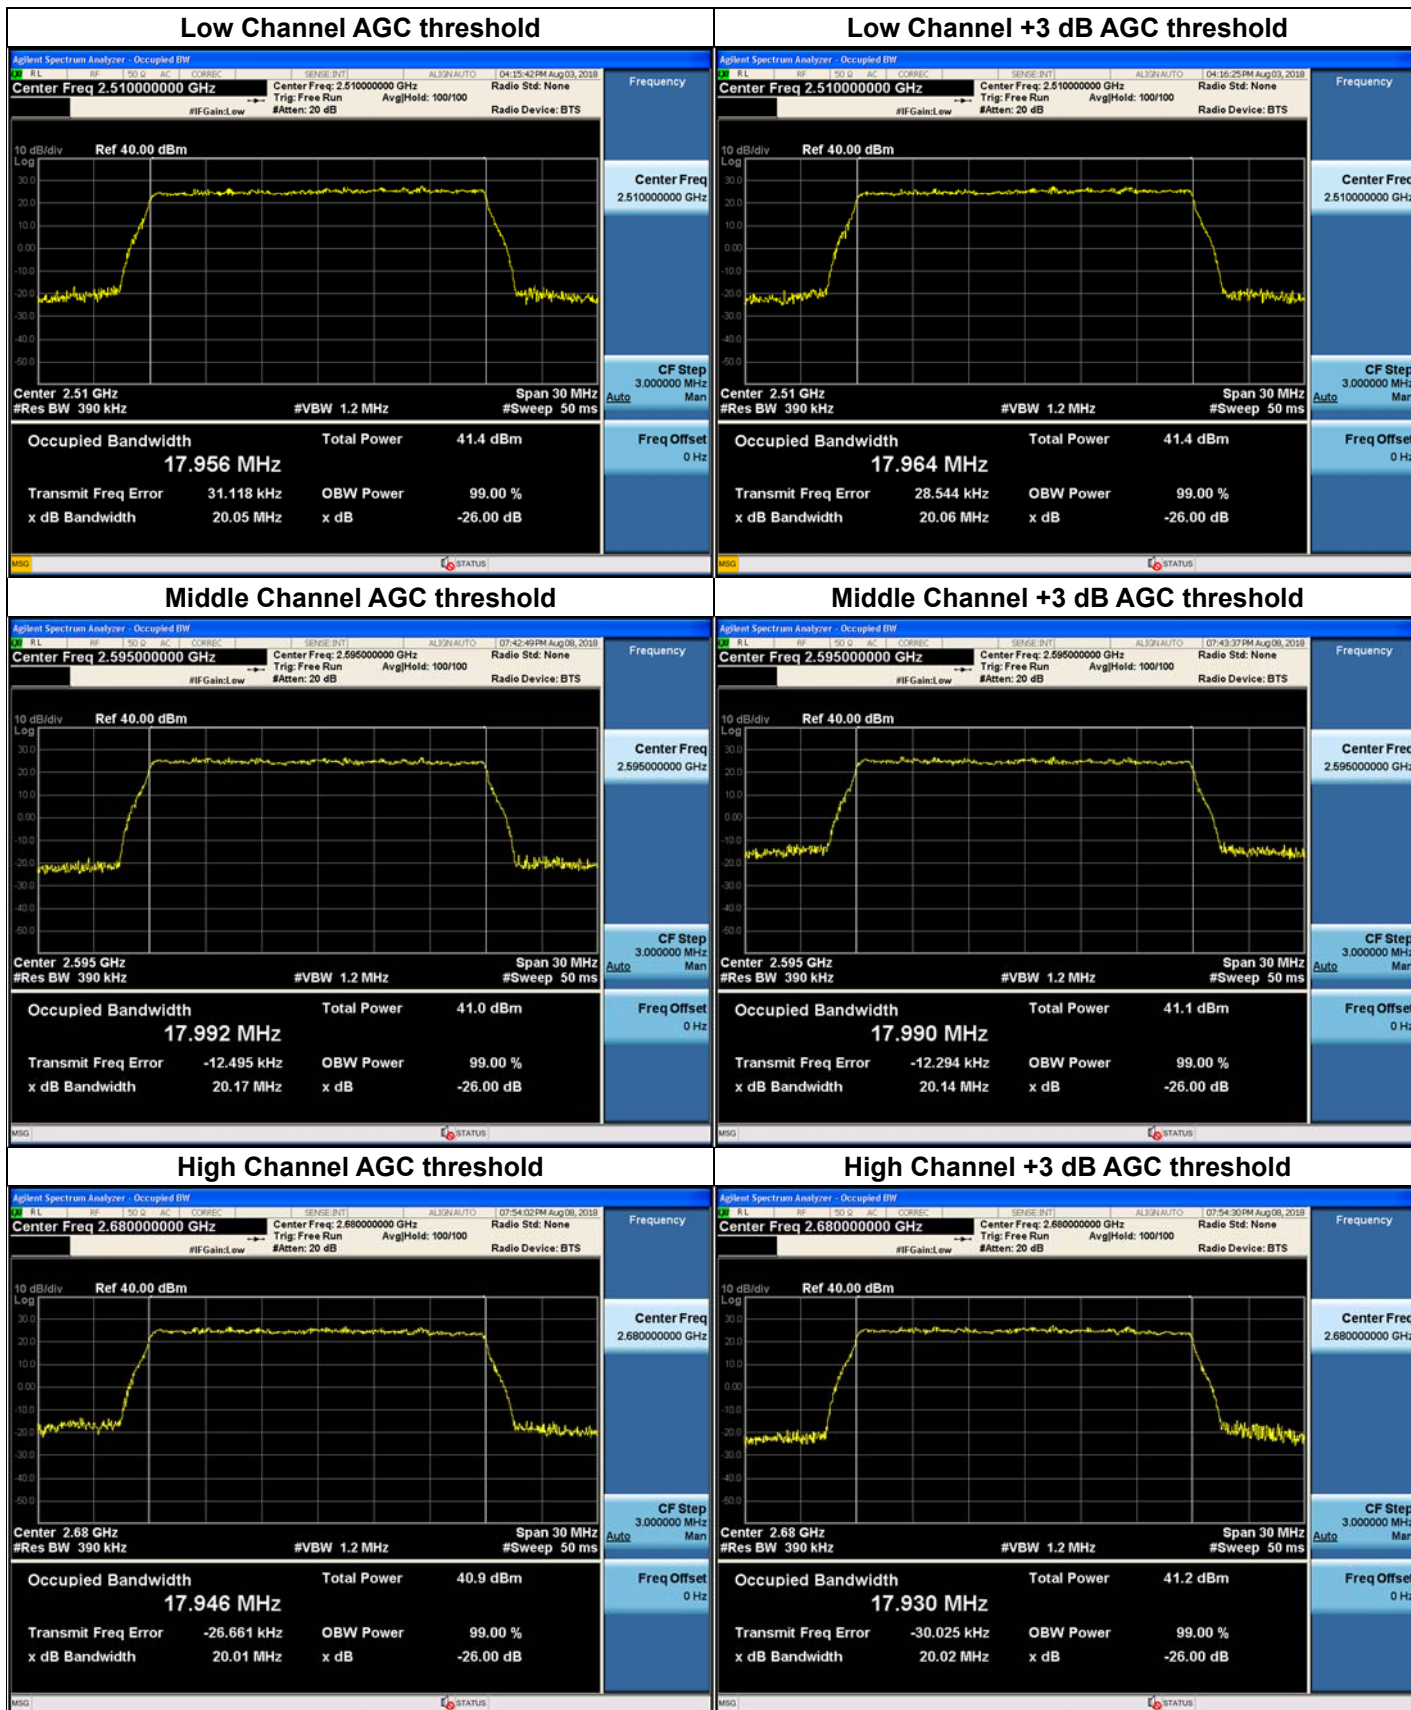


## Plots of Input Occupied Bandwidth for LTE 20 MHz\_2 500 TDD\_M


### Low Channel AGC threshold

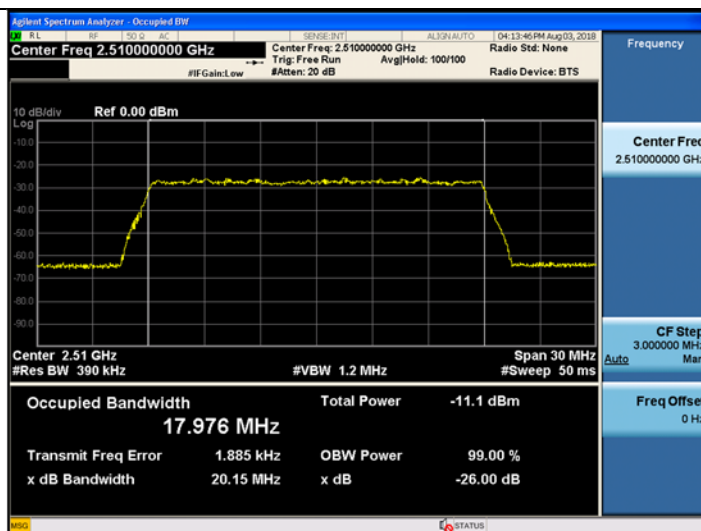

### Middle Channel AGC threshold

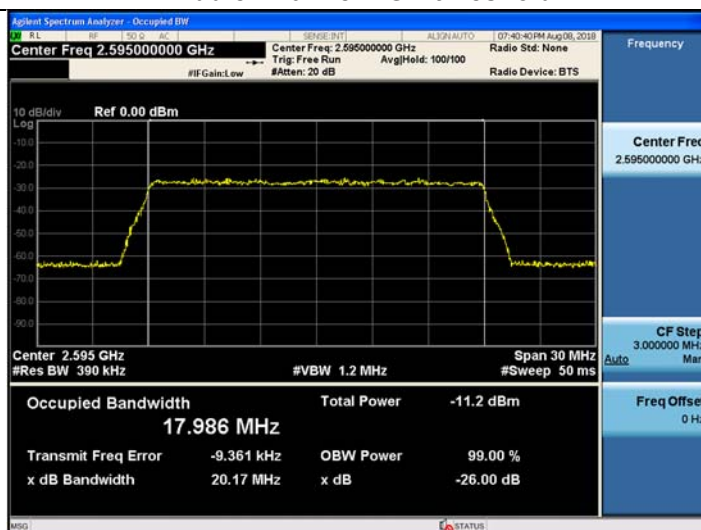

### High Channel AGC threshold

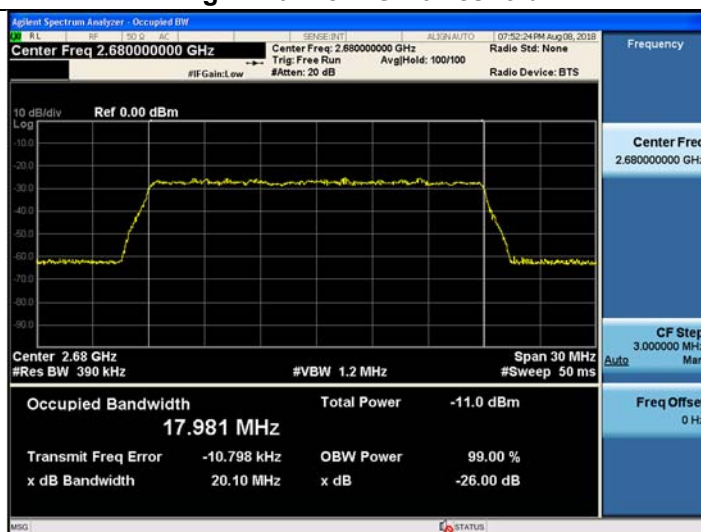

## 7. INPUT VERSUS OUTPUT SPECTRUM

### ISED Rules

#### Test Requirements:

##### RSS-131

**5. Equipment standard specifications for zone enhancers working with equipment certified in RSSs listed in section 1 except RSS-119**

##### 5.2 Industrial Zone Enhancers

##### 5.2.2 Input-versus-output spectrum

The spectral growth of the 26 dB bandwidth of the output signal shall be less than 5% of the input signal spectrum.

#### Test Procedures:

##### RSS-Gen

#### 6 General administrative and technical requirements

##### 6.7 Occupied bandwidth (or 99% emission bandwidth) and x dB bandwidth

The following conditions shall be observed for measuring the occupied bandwidth and x dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to "Sample". However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or "Max Hold") may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

**Note:** It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

Note: We tested using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 26 dB.

**Test Results:**

**Tabular Data of Input Versus Output Spectrum**

2 500 TDD_M	Channel	Frequency (MHz)	26 dB BW (MHz)	Growth (%)
LTE 20 MHz AGC threshold	Low	2510.00	20.05	-0.50
	Middle	2595.00	20.17	0.00
	High	2680.00	20.01	-0.45
LTE 20 MHz +3 dB above the AGC threshold	Low	2510.00	20.06	-0.45
	Middle	2595.00	20.14	-0.15
	High	2680.00	20.02	-0.40

\* Plots of results are the same as Section 6.

## **8. OUT OF BAND REJECTION & MEAN OUTPUT POWER AND ZONE ENHANCER GAIN**

### **FCC Rules**

#### **Test Requirements:**

##### **KDB 935210 D05 v01r02**

Out of Band Rejection – Testing for rejection of out of band signals. Alternatively, filter freq. response plots are acceptable.

### **ISED Rules**

#### **Test Requirements:**

##### **RSS-131**

**5. Equipment standard specifications for zone enhancers working with equipment certified in RSSs listed in section 1 except RSS-119**

##### **5.2 Industrial Zone Enhancers**

###### **5.2.1 Out-of-band rejection**

The gain-versus-frequency response and the 20 dB bandwidth of the zone enhancer shall be reported. The zone enhancer shall reject amplification of other signals outside the passband of the zone enhancer.

###### **5.2.3 Mean output power and zone enhancer gain**

The zone enhancer gain shall not exceed the nominal gain by more than 1.0 dB. Outside of the 20 dB bandwidth, the gain shall not exceed the gain at the 20 dB point.

### **Test Procedures:**

Measurements were in accordance with the test methods section 3.3 of KDB 935210 D05 v01r02.

#### **3.3 EUT out-of-band rejection**

- a) Connect a signal generator to the input of the EUT.
- b) Configure a swept CW signal with the following parameters:
  - 1) Frequency range =  $\pm 250$  % of the passband from the center of the passband.
  - 2) Level = a sufficient level to affirm that the out-of-band rejection is  $> 20$  dB above the noise floor and will not engage the AGC during the entire sweep.
  - 3) Dwell time = approx. 10 ms.
  - 4) Number of points =  $\text{SPAN}/(\text{RBW}/2)$ .
- c) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation.
- d) Set the span of the spectrum analyzer to the same as the frequency range of the signal generator.
- e) Set the resolution bandwidth of the spectrum analyzer to be 1 % to 5 % of the passband and the video bandwidth shall be set to  $\geq 3 \times \text{RBW}$ .

- f) Set the detector to Peak Max-Hold and wait for the spectrum analyzer's spectral display to fill.
- g) Place a marker to the peak of the frequency response and record this frequency as  $f_0$ .
- h) Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the -20 dB down amplitude to determine the 20 dB bandwidth. Capture the frequency response of the EUT.

**Test Results:**


Input Signal	Input Level	Maximum Amp Gain
CW	-20 dBm	52 dB




### Tabular Data of Band Rejection & Mean Output Power and Zone Enhancer Gain

Band	20 dB point frequency (MHz)	Output power (dBm)	Gain (dB)
2 500 TDD_M	2485.210 ~ 2587.550 (LB)	31.932	51.932
	2532.294 ~ 2646.478 (MB)	31.826	51.826
	2591.566 ~ 2700.234 (UB)	31.793	51.793


### Plot of Out of Band Rejection & Mean Output Power and Zone Enhancer Gain

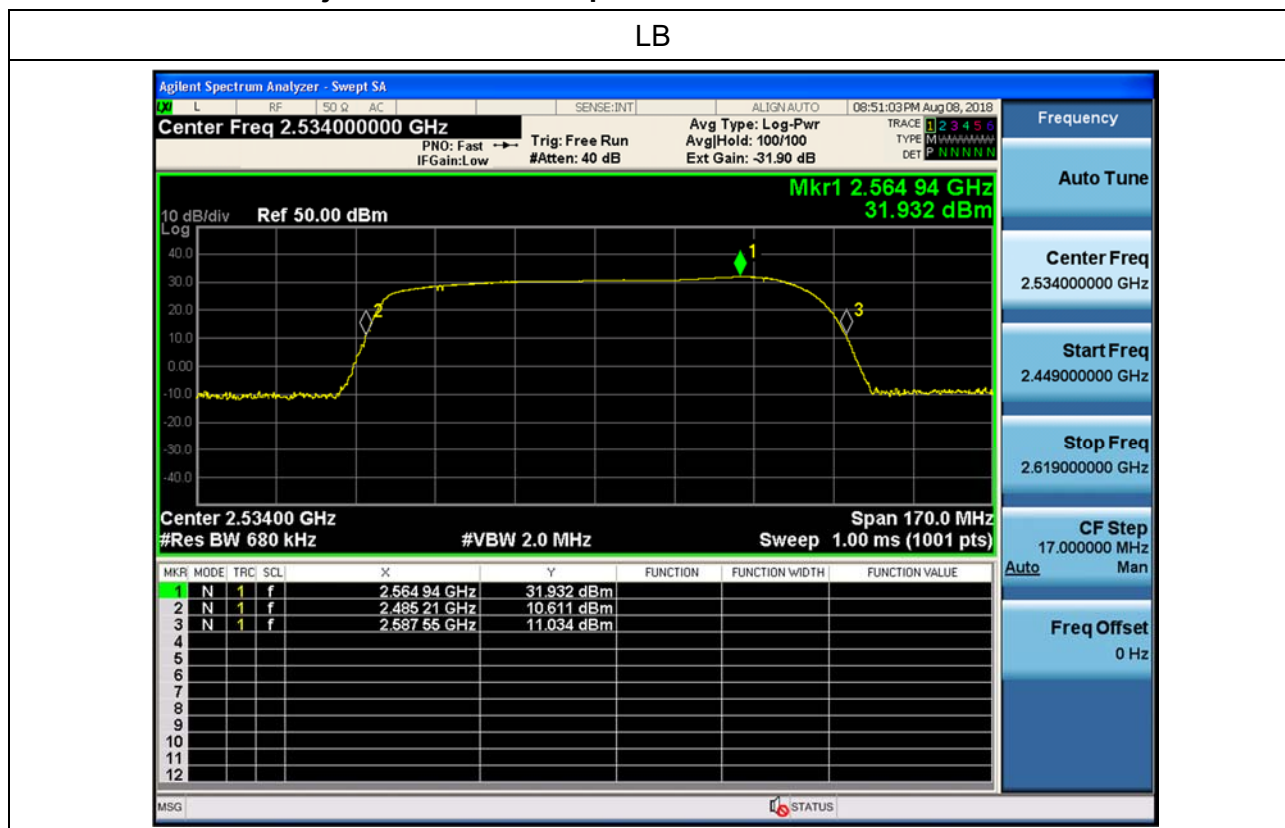

MB

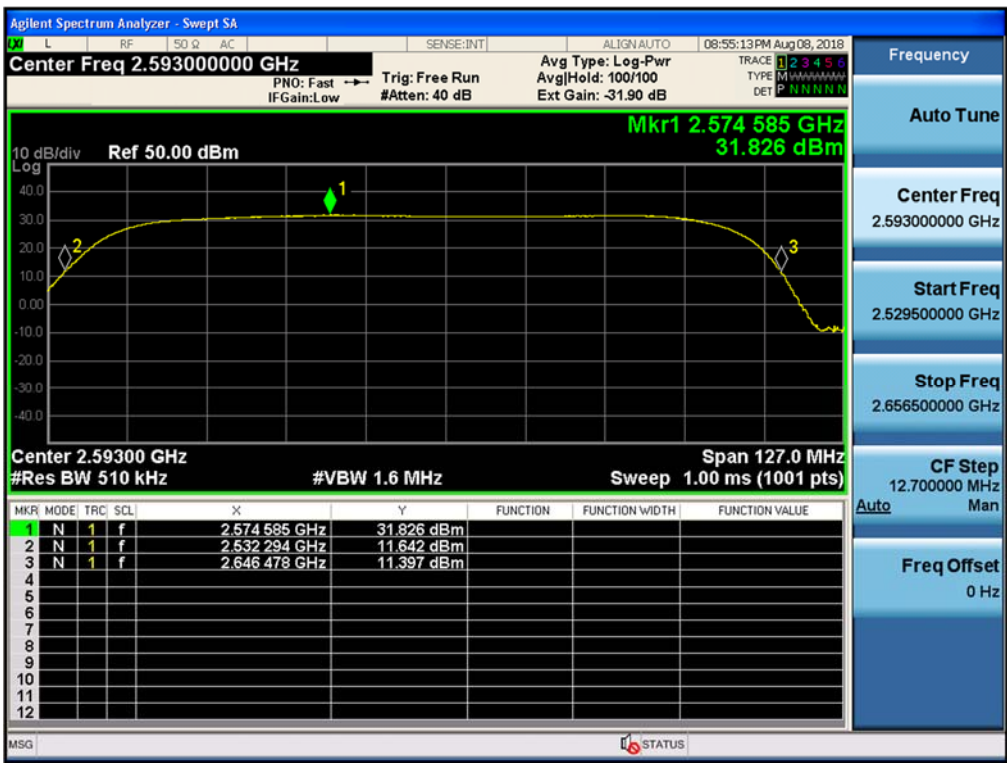

UB

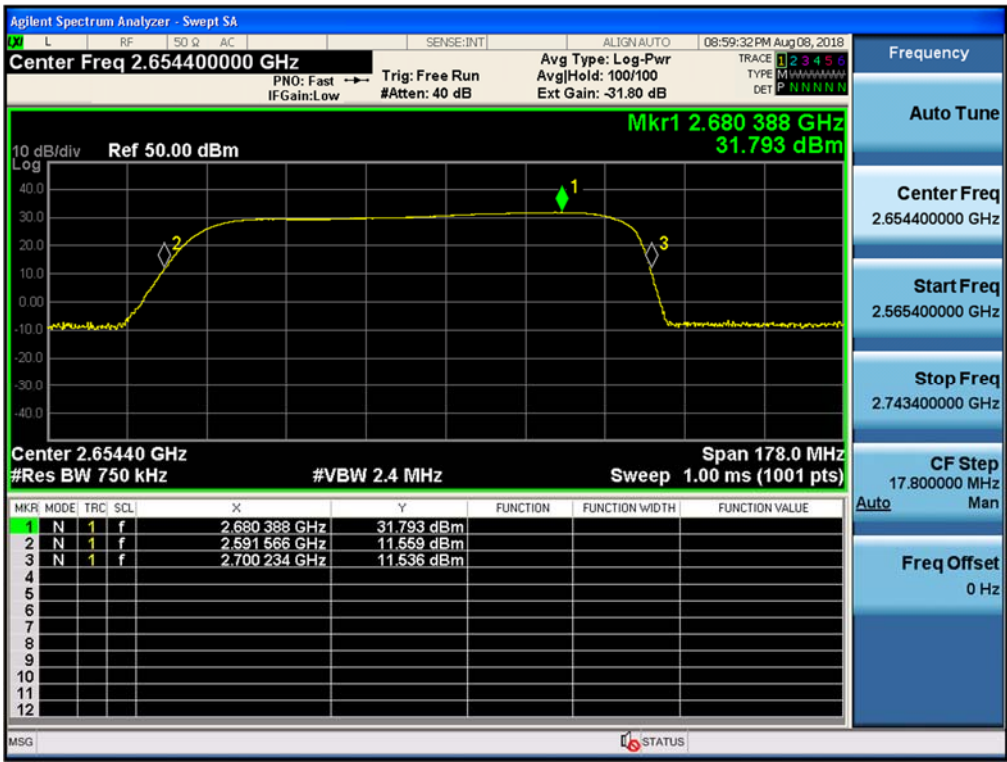

## 9. SPURIOUS AND HARMONIC EMISSION AT ANTENNA TERMINAL

### FCC Rules

#### Test Requirements:

##### **§ 2.1051 Measurements required: Spurious emissions at antenna terminals:**

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in § 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

##### **§ 27.53 Emission limits.**

(m) For BRS and EBS stations, the power of any emissions outside the licensee's frequency bands of operation shall be attenuated below the transmitter power (P) measured in watts in accordance with the standards below. If a licensee has multiple contiguous channels, out-of-band emissions shall be measured from the upper and lower edges of the contiguous channels.

(2) For digital base stations, the attenuation shall be not less than  $43 + 10 \log (P)$  dB, unless a documented interference complaint is received from an adjacent channel licensee with an overlapping Geographic Service Area. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS No. 1 on the same terms and conditions as adjacent channel BRS or EBS licensees. Provided that a documented interference complaint cannot be mutually resolved between the parties prior to the applicable deadline, then the following additional attenuation requirements shall apply:

(i) If a pre-existing base station suffers harmful interference from emissions caused by a new or modified base station located 1.5 km or more away, within 24 hours of the receipt of a documented interference complaint the licensee of the new or modified base station must attenuate its emissions by at least  $67 + 10 \log (P)$  dB measured at 3 megahertz, above or below, from the channel edge of its frequency block and shall immediately notify the complaining licensee upon implementation of the additional attenuation. No later than 60 days after the implementation of such additional attenuation, the licensee of the complaining base station must attenuate its base station emissions by at least  $67 + 10 \log (P)$  dB measured at 3 megahertz, above or below, from the channel edge of its frequency block of the new or modified base station.

(ii) If a pre-existing base station suffers harmful interference from emissions caused by a new or modified base station located less than 1.5 km away, within 24 hours of receipt of a documented interference complaint the licensee of the new or modified base station must

attenuate its emissions by at least  $67 + 10 \log (P) - 20 \log (D\text{km}/1.5)$  dB measured at 3 megahertz, above or below, from the channel edge of its frequency block of the complaining licensee, or if both base stations are co-located, limit its undesired signal level at the pre-existing base station receiver(s) to no more than  $-107$  dBm measured in a 5.5 megahertz bandwidth and shall immediately notify the complaining licensee upon such reduction in the undesired signal level. No later than 60 days after such reduction in the undesired signal level, the complaining licensee must attenuate its base station emissions by at least  $67 + 10 \log (P)$  dB measured at 3 megahertz, above or below, from the channel edge of its frequency block of the new or modified base station.

(iii) If a new or modified base station suffers harmful interference from emissions caused by a pre-existing base station located 1.5 km or more away, within 60 days of receipt of a documented interference complaint the licensee of each base station must attenuate its base station emissions by at least  $67 + 10 \log (P)$  dB measured at 3 megahertz, above or below, from the channel edge of its frequency block of the other licensee.

(iv) If a new or modified base station suffers harmful interference from emissions caused by a pre-existing base station located less than 1.5 km away, within 60 days of receipt of a documented interference complaint: (a) The licensee of the new or modified base station must attenuate its OOB by at least  $67 + 10 \log (P) - 20 \log (D\text{km}/1.5)$  measured 3 megahertz above or below, from the channel edge of its frequency block of the other licensee, or if the base stations are co-located, limit its undesired signal level at the other base station receiver(s) to no more than  $-107$  dBm measured in a 5.5-megahertz bandwidth; and (b) the licensee causing the interference must attenuate its emissions by at least  $67 + 10 \log (P)$  dB measured at 3 megahertz, above or below, from the channel edge of its frequency block of the new or modified base station.

(v) For all fixed digital user stations, the attenuation factor shall be not less than  $43 + 10 \log (P)$  dB at the channel edge.

## **ISED Rules**

### **Test Requirement(s):**

#### **RSS-Gen**

### **6. General administrative and technical requirements**

#### **6.13 Transmitter unwanted emissions**

##### **6.13.2 Frequency range for measuring unwanted emission**

In measuring unwanted emissions, the spectrum shall be investigated from 30 MHz or the lowest radio frequency signal generated or used in the equipment, whichever is lower, without going below 9 kHz, up to at least the applicable frequency given below:

If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

If the equipment operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.

If the equipment operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise in the applicable RSS.

If the equipment contains a digital device that is exclusively used for enabling the operation of the radio apparatus: the spectrum shall be investigated according to the conditions specified in paragraphs (a) through (c) of this section or the range applicable to the digital device, as shown in table 2, whichever is the higher frequency range of investigation.

Table 2 – Frequency range for radiated measurement for equipment with a digital device	
Highest frequency generated, operated or used in the equipment (MHz)	Upper frequency limit of measurement range (MHz)
< 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
> 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower

It is not necessary to report the amplitude of spurious emissions attenuated more than 20 dB below the permissible value

## RSS-199

### 4. Transmitter and receiver standard specifications

#### 4.5 Transmitter unwanted emissions

In the 1 MHz band immediately outside and adjacent to the channel edge, the unwanted emission power shall be measured with a resolution bandwidth of at least 1% of the occupied bandwidth for base station and fixed subscriber equipment, and 2% for mobile subscriber equipment. Beyond the 1 MHz band, a resolution bandwidth of 1 MHz shall be used. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full required measurement bandwidth of 1 MHz, or 1% or 2% of the occupied bandwidth, as applicable.

Equipment shall comply with the following unwanted emission limits:

- for base station and fixed subscriber equipment, the power of any unwanted emissions measured as above shall be attenuated (in dB) below the transmitter power, P (dBW), by at least  $43 + 10 \log_{10} p$

## Test Procedures:

Measurements were in accordance with the test methods section 3.6 of KDB 935210 D05 v01r02.

### 3.6.1 General

Refer to the applicable rule part(s) for specified limits on unwanted (out-of-band/out-of-block and spurious) emissions.

Spurious emissions shall be measured using a single test signal sequentially tuned to the low, middle, and high channels or frequencies within each authorized frequency band of operation.

Out-of-band/out-of-block emissions (including intermodulation products) shall be measured under each of the following two stimulus conditions:

- a) two adjacent test signals sequentially tuned to the lower and upper frequency band/block edges;
- b) a single test signal, sequentially tuned to the lowest and highest frequencies or channels within the frequency band/block under examination.

NOTE—Single-channel boosters that cannot accommodate two simultaneous signals within the passband may be excluded from the test stipulated in step a).

### 3.6.2 Out-of-band/out-of-block emissions conducted measurements

- a) Connect a signal generator to the input of the EUT.

If the signal generator is not capable of generating two modulated carriers simultaneously, then two discrete signal generators can be connected with an appropriate combining network to support this two-signal test.

- b) Set the signal generator to produce two AWGN signals as previously described (e.g., 4.1 MHz OBW).

- c) Set the center frequencies such that the AWGN signals occupy adjacent channels, as defined by industry standards such as 3GPP or 3GPP2, at the upper edge of the frequency band or block under test.

- d) Set the composite power levels such that the input signal is just below the AGC threshold (see 3.2), but not more than 0.5 dB below. The composite power can be measured using the procedures provided in KDB Publication 971168, but it will be necessary to expand the power integration bandwidth so as to include both of the transmit channels. Alternatively, the composite power can be measured using an average power meter as described in KDB Publication 971168.

- e) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation as necessary.

- f) Set the RBW = reference bandwidth in the applicable rule section for the supported frequency band (typically 1 % of the EBW or 100 kHz or 1 MHz)

- g) Set the VBW =  $3 \times \text{RBW}$ .

- h) Set the detector to power averaging (rms) detector.

- i) Set the Sweep time = auto-couple.

- j) Set the spectrum analyzer start frequency to the upper block edge frequency, and the stop



frequency to the upper block edge frequency plus 300 kHz or 3 MHz, for frequencies below and above 1 GHz, respectively.

k) Trace average at least 100 traces in power averaging (rms) mode.

l) Use the marker function to find the maximum power level.

m) Capture the spectrum analyzer trace of the power level for inclusion in the test report.

n) Repeat steps k) to m) with the composite input power level set to 3 dB above the AGC threshold.

o) Reset the frequencies of the input signals to the lower edge of the frequency block or band under test.

p) Reset the spectrum analyzer start frequency to the lower block edge frequency minus 300 kHz or 3 MHz, for frequencies below and above 1 GHz, respectively, and the stop frequency to the lower band or block edge frequency.

q) Repeat steps k) to n).

r) Repeat steps a) to q) with the signal generator configured for a single test signal tuned as close as possible to the block edges.

s) Repeat steps a) to r) with the narrowband test signal.

t) Repeat steps a) to s) for all authorized frequency bands or blocks used by the EUT.

### 3.6.3 Spurious emissions conducted measurements

a) Connect a signal generator to the input of the EUT.

b) Set the signal generator to produce the broadband test signal as previously described (i.e., 4.1 MHz OBW AWGN).

c) Set the center frequency of the test signal to the lowest available channel within the frequency band or block.

d) Set the EUT input power to a level that is just below the AGC threshold (see 3.2), but not more than 0.5 dB below.

e) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation as necessary.

f) Set the RBW = reference bandwidth in the applicable rule section for the supported frequency band of operation (e.g., reference bandwidth is typically 100 kHz or 1 MHz).

g) Set the VBW  $\geq 3 \times$  RBW.

h) Set the Sweep time = auto-couple.

i) Set the spectrum analyzer start frequency to the lowest RF signal generated in the equipment, without going below 9 kHz, and the stop frequency to the lower band/block edge frequency minus 100 kHz or 1 MHz, as specified in the applicable rule part.

The number of measurement points in each sweep must be  $\geq (2 \times \text{span}/\text{RBW})$ , which may require that the measurement range defined by the start and stop frequencies be subdivided, depending on the available number of measurement points provided by the spectrum analyzer.

j) Select the power averaging (rms) detector function.

- k) Trace average at least 10 traces in power averaging (rms) mode.
- l) Use the peak marker function to identify the highest amplitude level over each measured frequency range. Record the frequency and amplitude and capture a plot for inclusion in the test report.
- m) Reset the spectrum analyzer start frequency to the upper band/block edge frequency plus 100 kHz or 1 MHz, as specified in the applicable rule part, and the spectrum analyzer stop frequency to 10 times the highest frequency of the fundamental emission (see § 2.1057). The number of measurement points in each sweep must be  $\geq (2 \times \text{span}/\text{RBW})$ , which may require that the measurement range defined by the start and stop frequencies be subdivided, depending on the available number of measurement points provided by the spectrum analyzer.
- n) Trace average at least 10 traces in power averaging (rms) mode.
- o) Use the peak marker function to identify the highest amplitude level over each of the measured frequency ranges. Record the frequency and amplitude and capture a plot for inclusion in the test report; also provide tabular data, if required.
- p) Repeat steps i) to o) with the input test signals firstly tuned to a middle band/block frequency/channel, and then tuned to a high band/block frequency/channel.
- q) Repeat steps b) to p) with the narrowband test signal.
- r) Repeat steps b) to q) for all authorized frequency bands/blocks used by the EUT.

**Notes:**


1. In 9 kHz ~ 150 kHz and 150 kHz ~ 30 MHz bands, RBW was reduced to 1 % and 10 % of the reference bandwidth for measuring unwanted emission level (typically, 100 kHz if the authorized frequency band is below 1 GHz) and power was integrated. (1 % = +20 dB, 10 % = +10 dB )




## Plots of Spurious Emissions for LTE 20 MHz\_2 500 TDD\_M

### Low Channel


#### 9 kHz ~ 150 kHz

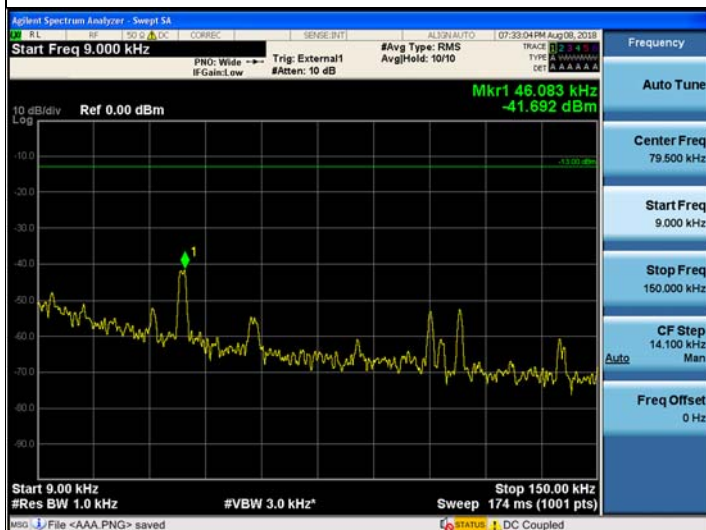


#### 150 kHz ~ 30 MHz

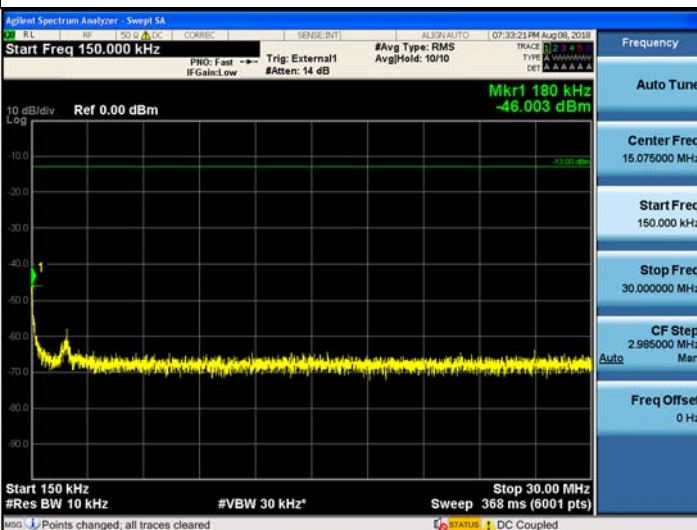

#### 30 MHz ~ 1 GHz

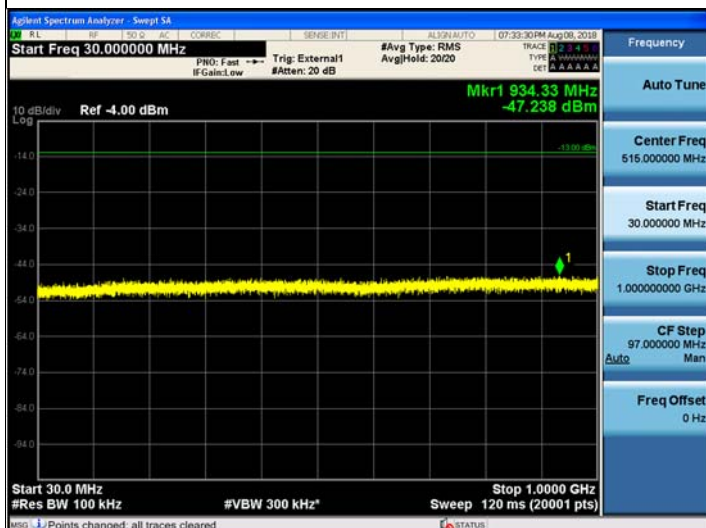


#### 1 GHz ~ 2.48 GHz

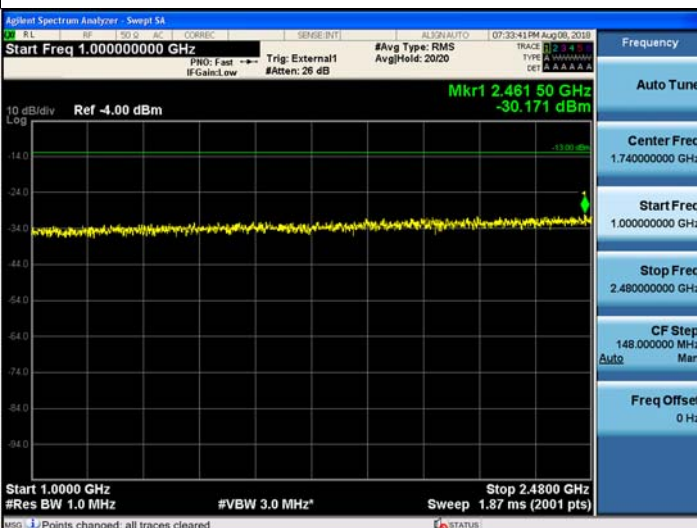

#### 2.71 GHz ~ 12.75 GHz



#### 12.75 GHz ~ 26.5 GHz

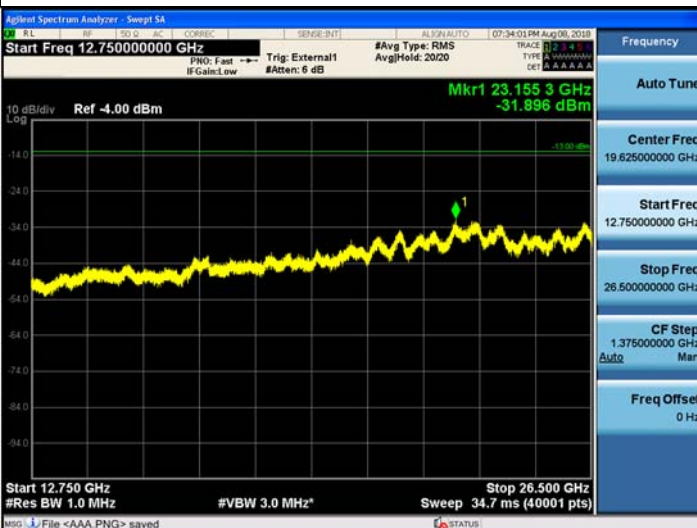


### Middle Channel

#### 9 kHz ~ 150 kHz




#### 150 kHz ~ 30 MHz

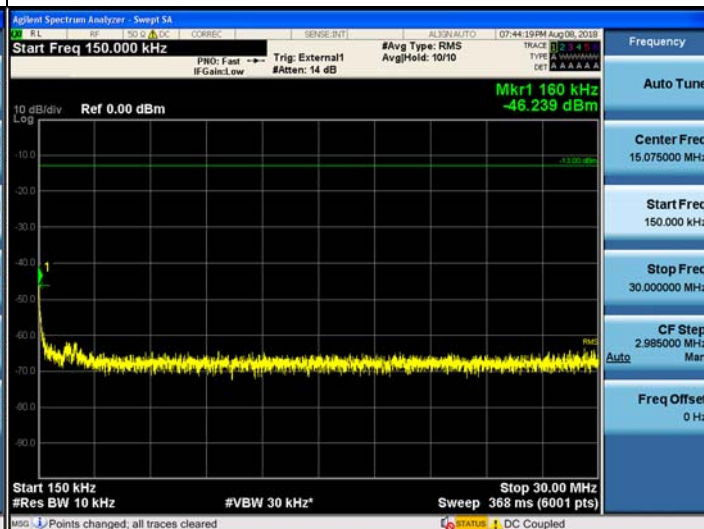

#### 30 MHz ~ 1 GHz




#### 1 GHz ~ 2.48 GHz

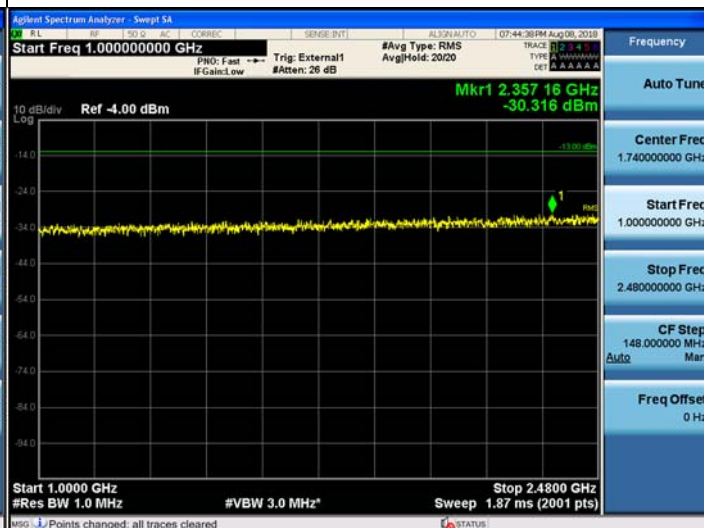

#### 2.71 GHz ~ 12.75 GHz



#### 12.75 GHz ~ 26.5 GHz

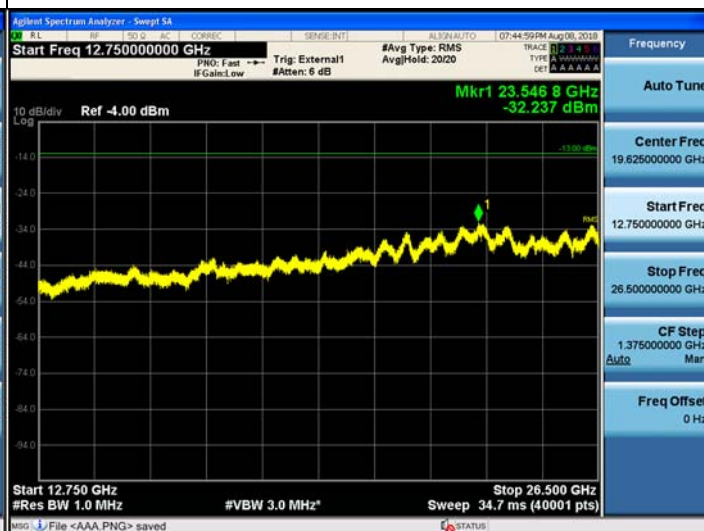




## High Channel


### 9 kHz ~ 150 kHz




### 150 kHz ~ 30 MHz

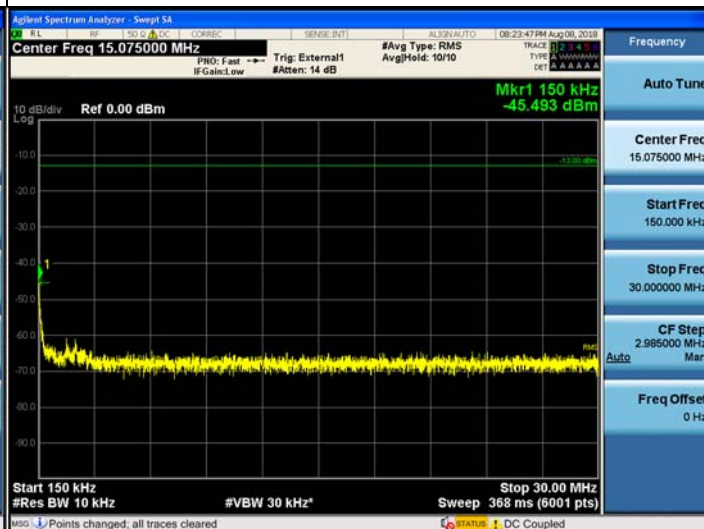


### 30 MHz ~ 1 GHz

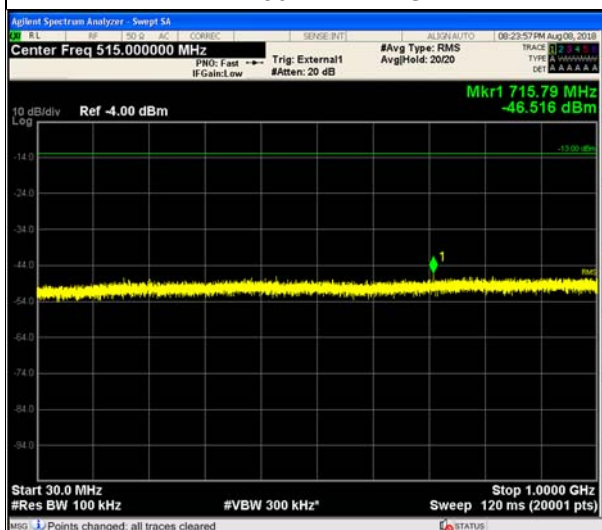

### 1 GHz ~ 2.48 GHz

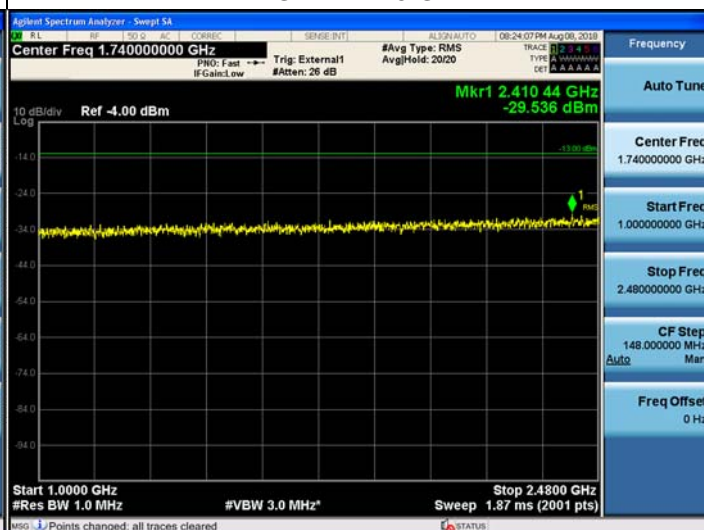


### 2.71 GHz ~ 12.75 GHz

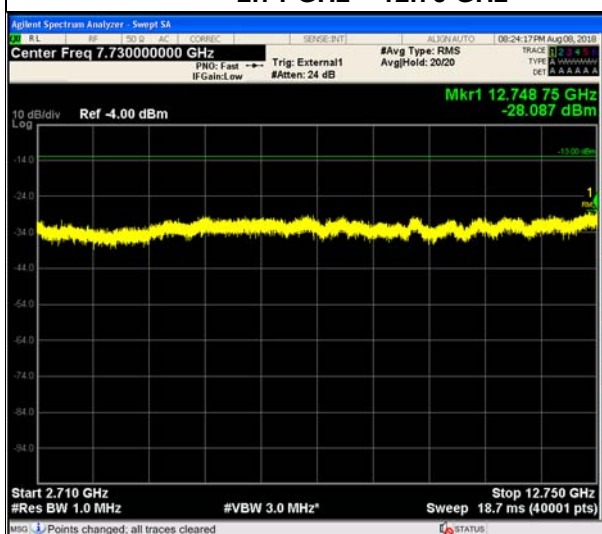


### 12.75 GHz ~ 26.5 GHz



Plots of Intermodulation for LTE 20 MHz\_2 500 TDD\_M

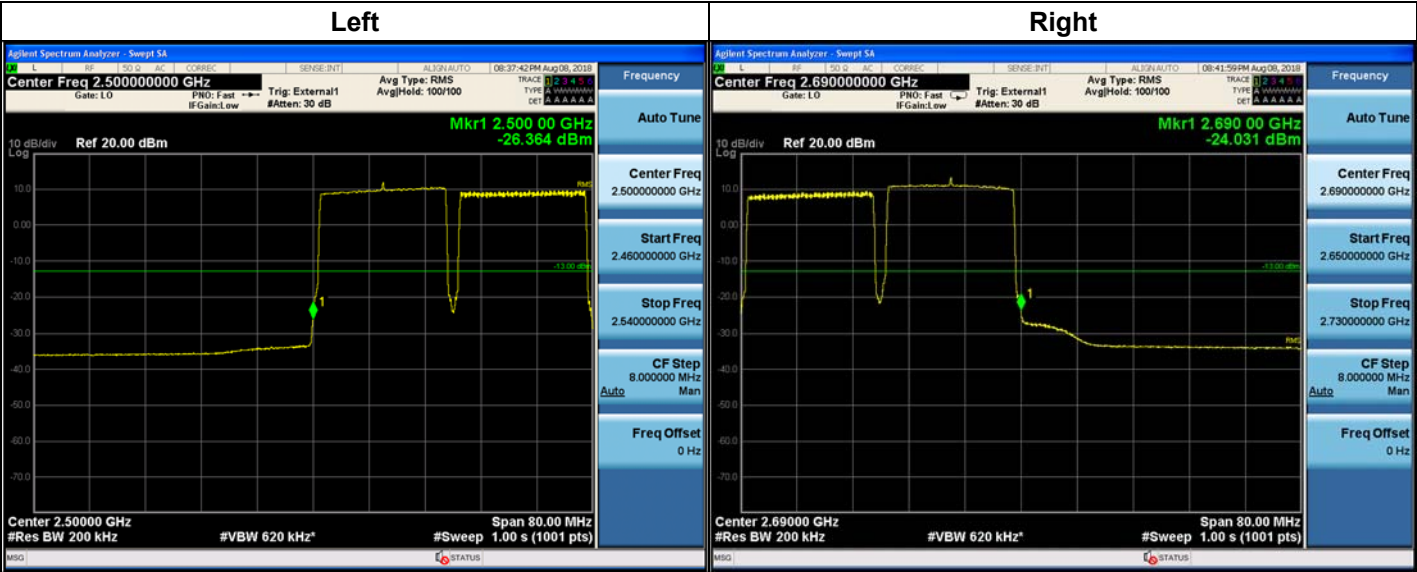

Plots of Band Edge for LTE 20 MHz\_2 500 TDD\_M

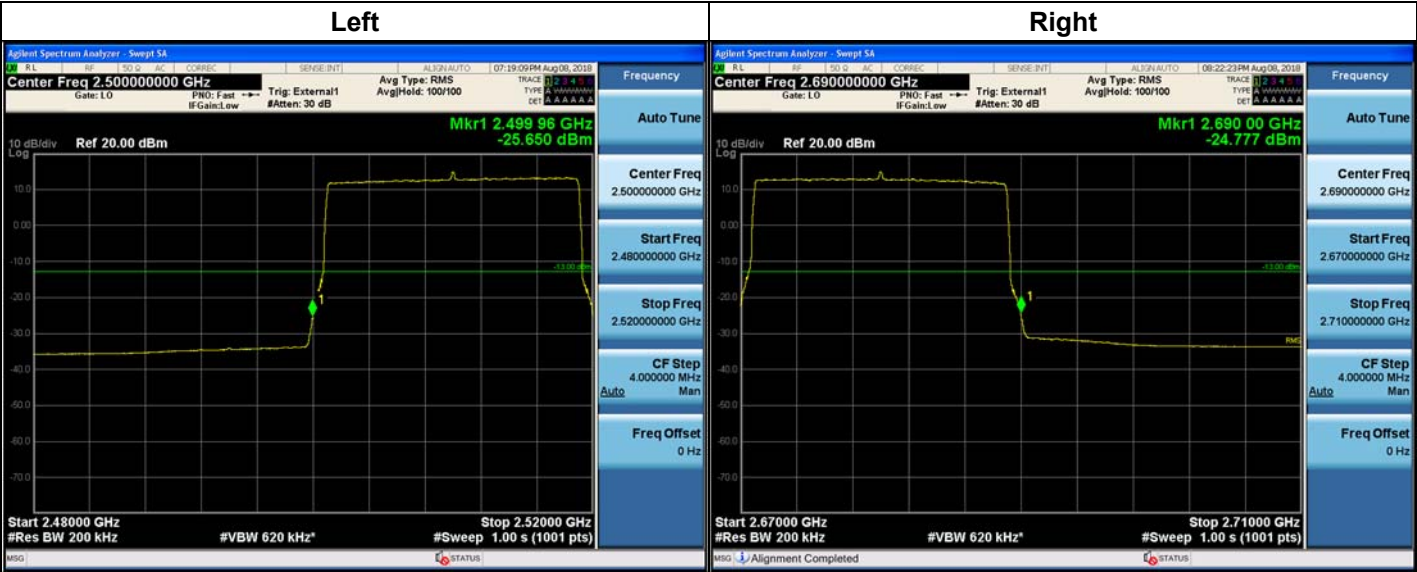

## 10. RADIATED SPURIOUS EMISSIONS

### FCC Rules

#### Test Requirements:

##### § 2.1053 Measurements required: Field strength of spurious radiation.

(a) Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of §2.1049, as appropriate. For equipment operating on frequencies below 890 MHz, an open field test is normally required, with the measuring instrument antenna located in the far-field at all test frequencies. In the event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurements will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from halfwave dipole antennas.

(b) The measurements specified in paragraph (a) of this section shall be made for the following equipment:

- (1) Those in which the spurious emissions are required to be 60 dB or more below the mean power of the transmitter.
- (2) All equipment operating on frequencies higher than 25 MHz.
- (3) All equipment where the antenna is an integral part of, and attached directly to the transmitter.
- (4) Other types of equipment as required, when deemed necessary by the Commission.

### ISED Rules

#### Test Requirements:

#### RSS-Gen

#### 7. Receiver emissions limits

##### 7.3 Receiver radiated emission limits

Radiated emission measurements shall be performed with the receiver antenna connected to the receiver antenna ports. The search for spurious emissions shall be from the lowest frequency internally generated or used in the receiver (e.g. local oscillator, intermediate or carrier frequency), or 30 MHz, whichever is higher, to at least five times the highest tunable or

local oscillator frequency, whichever is higher, without exceeding 40 GHz. Spurious emissions from receivers shall not exceed the radiated emissions limits shown in Table 3.

<b>Table 3 – Receiver radiated emissions limits</b>	
<b>Frequency (MHz)</b>	<b>Field Strength (<math>\mu\text{V/m}</math> at 3 metres)*</b>
30-88	100
88-216	150
216-960	200
Above 960	500

**Footnote** \*: Measurements for compliance with the limits in table 3 may be performed at distances other than 3 metres, in accordance with section 6.6.

### Test Procedures:

The measurement is performed in accordance with Section 5.5.3.2 of ANSI C63.26.

a) Place the EUT in the center of the turntable. The EUT shall be configured to transmit into the standard non-radiating load (for measuring radiated spurious emissions), connected with cables of minimal length unless specified otherwise. If the EUT uses an adjustable antenna, the antenna shall be positioned to the length that produces the worst case emission at the fundamental operating frequency.


b) Each emission under consideration shall be evaluated:

- 1) Raise and lower the measurement antenna in accordance 5.5.2, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
- 2) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
- 3) Return the turntable to the azimuth where the highest emission amplitude level was observed.
- 4) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
- 5) Record the measured emission amplitude level and frequency using the appropriate RBW.

c) Repeat step b) for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.

d) ~ j) Omitted

k) Provide the complete measurement results as a part of the test report.

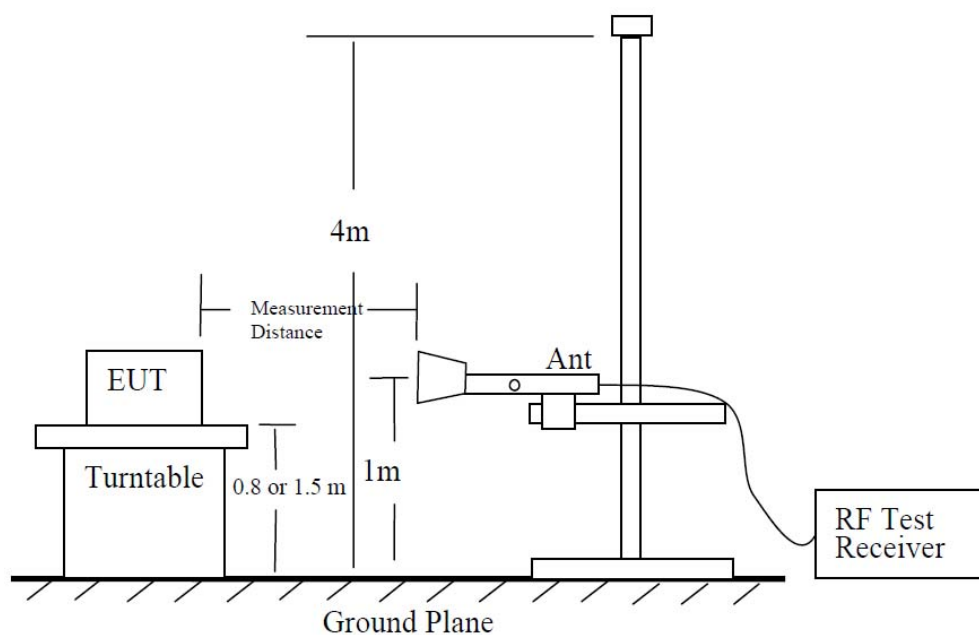**Test Setup:****Note:**

- 1) According to SVSWR requirement in ANSI 63.4 (2014), we performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor (reference distance: 3 m).
- 2) Distance extrapolation factor =  $20 \log (\text{test distance} / \text{specific distance})$  (dB)
- 3) Position of EUT for testing below 1 GHz test is 80 cm, and above 1 GHz is 1.5 m

## Receiver Spurious Emissions Test Result:

**ISED Rule(s):** RSS-Gen  
**Test Requirements:** Blow the table  
**Operating conditions:** Under normal test conditions  
**Method of testing:** Radiated

**S/A. Settings:** F < 1 GHz: RBW: 120 kHz, VBW: 300 kHz (Quasi Peak)  
 F > 1 GHz: RBW: 1 MHz, VBW: 1 MHz (Peak)  
**Mode of operation:** Receive

Frequency (MHz)	Field Strength (microvolts/m at 3 meters)
30 – 88	100
88 - 216	150
216 – 960	200
Above 960	500

### Operation Mode: Receive:

30 MHz ~ 1 GHz

Frequency (MHz)	Reading (dB $\mu$ V)	Ant. factor (dB /m)	Cable loss (dB)	Ant. POL (H/V)	Total (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
No critical peaks found							

Above 1 GHz

Frequency (MHz)	Reading (dB $\mu$ V)	Ant. factor (dB /m)	Cable loss (dB)	Ant. POL (H/V)	Total (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
No critical peaks found							



**Radiated Spurious Emissions Test Result:**

Frequency (MHz)	Reading (dB $\mu$ V)	Ant. factor (dB /m)	Cable loss (dB)	Ant. POL (H/V)	Total (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
No critical peaks found							

**Notes:**

1. We have done horizontal and vertical polarizaion in detecting antenna.

## 11. FREQUENCY STABILITY OVER TEMPERATURE AND VOLTAGE VARIATIONS

### FCC Rules

#### Test Requirements:

##### **§2.1055 Measurements required: Frequency stability.**

(a) The frequency stability shall be measured with variation of ambient temperature as follows:

- (1) From  $-30^{\circ}$  to  $+50^{\circ}$  centigrade for all equipment except that specified in paragraphs (a) (2) and (3) of this section.

##### **§ 27.54 Frequency stability.**

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

### ISED Rules

#### Test Requirements:

##### **RSS-131**

**5. Equipment standard specifications for zone enhancers working with equipment certified in RSSs listed in section 1 except RSS-119**

##### **5.2 Industrial Zone Enhancers**

##### **5.2.4 Frequency stability**

Industrial Zone Enhancers shall comply with the frequency stability given in the RSS that applies to the equipment with which the zone enhancer is to be used. In cases where the frequency stability limit is not given in the applicable RSS, the equipment shall comply with a frequency stability of  $\pm 1.5$  ppm.

For zone enhancers with no input signal processing capability, the frequency stability measurement in this section is not required.

##### **RSS-199**

#### **4. Transmitter and receiver standard specifications**

##### **4.3 Transmitter Frequency Stability**

The transmitter frequency stability limit shall be determined as follows:

- a. the frequency offset shall be measured according to the procedure described in RSS-Gen and recorded
- b. using a resolution bandwidth equal to that permitted within the 1 MHz band immediately outside the channel edge, as found in section 4.5, reference points will be selected at the unwanted emission limits, which comply with the attenuation specified in section 4.5 for the type of device under test, on the emission mask of the lowest and highest channels.

The frequency at these points shall be recorded as  $f_L$  and  $f_H$  respectively

The applicant shall ensure compliance with frequency stability requirements by showing that  $f_L$  minus the frequency offset and  $f_H$  plus the frequency offset is within the frequency range in which the equipment is designed to operate.

**Test Procedures:**

As required by 47 CFR 2.1055, *Frequency Stability measurements* were made at the RF output terminals using a Spectrum Analyzer.

The EUT was placed in the Environmental Chamber.

A CW signal was injected into the EUT at the appropriate RF level. The frequency counter option on the Spectrum Analyzer was used to measure frequency deviations.

The frequency drift was investigated for every 10 °C increment until the unit is stabilized then recorded the reading in tabular format with the temperature range of -30 to 50 °C.

Voltage supplied to EUT is 110 Vac reference temperature was done at 20°C.

The voltage was varied by  $\pm 15\%$  of nominal

**RSS-Gen****6. General administrative and technical requirements****6.11 Transmitter Frequency Stability**

Frequency stability is a measure of frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at an appropriate reference temperature and the rated supply voltage.

When the measurement method of transmitter frequency stability is not stated in the applicable RSS or reference standards, the following conditions apply:

- a. The reference temperature for radio transmitters is +20°C (+68°F).
- b. A hand-held device that is only capable of operating using internal batteries shall be tested at the battery's nominal voltage, and again at the battery's operating end-point voltage, which shall be specified by the equipment manufacturer. For this test, either a battery or an external power supply can be used.
- c. The operating carrier frequency shall be set up in accordance with the manufacturer's published operation and instruction manual prior to the commencement of these tests. No adjustment of any frequency-determining circuit element shall be made subsequent to this initial set-up.

With the transmitter installed in an environmental test chamber, the unmodulated carrier frequency and frequency stability shall be measured under the conditions specified below for licensed and licence-exempt devices, unless specified otherwise in the applicable RSS. A sufficient stabilization period at each temperature shall be used prior to each frequency

measurement.

For licensed devices, the following measurement conditions apply:

- a. at the temperatures of  $-30^{\circ}\text{C}$  ( $-22^{\circ}\text{F}$ ),  $+20^{\circ}\text{C}$  ( $+68^{\circ}\text{F}$ ) and  $+50^{\circ}\text{C}$  ( $+122^{\circ}\text{F}$ ), and at the manufacturer's rated supply voltage
- b. at the temperature of  $+20^{\circ}\text{C}$  ( $+68^{\circ}\text{F}$ ) and at  $\pm 15\%$  of the manufacturer's rated supply voltage

For licence-exempt devices, the following conditions apply:


- a. at the temperatures of  $-20^{\circ}\text{C}$  ( $-4^{\circ}\text{F}$ ),  $+20^{\circ}\text{C}$  ( $+68^{\circ}\text{F}$ ) and  $+50^{\circ}\text{C}$  ( $+122^{\circ}\text{F}$ ), and at the manufacturer's rated supply voltage
- b. at the temperature of  $+20^{\circ}\text{C}$  ( $+68^{\circ}\text{F}$ ) and at  $\pm 15\%$  of the manufacturer's rated supply voltage

If the frequency stability limits are only met within a temperature range that is smaller than the range specified in (a) for licensed or licence-exempt devices, the frequency stability requirement will be deemed to be met if the transmitter is automatically prevented from operating outside this smaller temperature range and if the published operating characteristics for the equipment are revised to reflect this restricted temperature range.

If the device contains both licence and licence-exempt transmitter modules, the device's frequency stability shall be measured under the most stringent condition specified in the applicable RSS of the transmitter module.

In addition, if an unmodulated carrier is not available, the method used to measure frequency stability shall be described in the test report.

#### Test Setup:

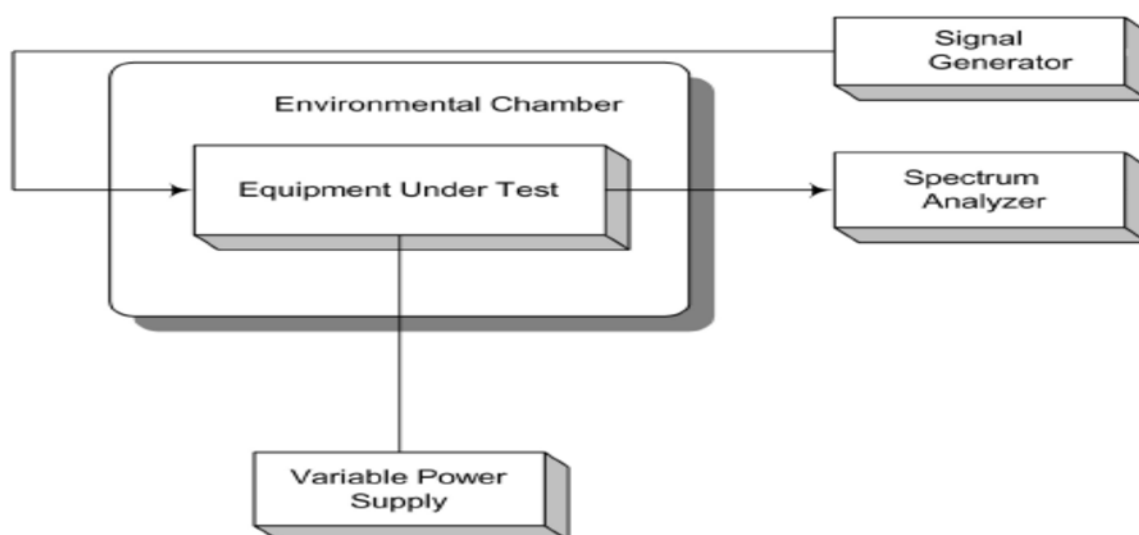

\* Note: This EUT is supported power supply both of AC and DC. Test results are only attached worst cases.

**Test Results:**  
**Frequency Stability and Voltage Test Results**

**Reference:** 120 Vac at 20°C      **Freq.** = 2590.0 MHz

Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	ppm
100%	+20(Ref)	2595 000 000	0.421	0.000
	-30	2594 999 999	-0.858	-1.278
	-20	2594 999 999	-0.786	-1.207
	-10	2594 999 999	-0.845	-1.266
	0	2595 000 000	0.131	-0.290
	+10	2595 000 001	0.809	0.388
	+30	2595 000 001	0.962	0.541
	+40	2595 000 001	0.827	0.406
	+50	2595 000 000	-0.421	-0.842
115%	+20	2595 000 001	0.951	0.530
85%	+20	2595 000 000	-0.252	-0.673

## 12. Annex A\_EUT AND TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-1808-FI004-P