



FCC/IC Test Report

FOR:

TZ Medical, Inc.

**Model:
TZMR3G**

Product Description:

The Aera CT is a battery operated ambulatory electrocardiograph recorder for use in mobile cardiovascular telemetry.

FCC ID: ZIMTZMR3G

IC Certification Number: 9647A-TZMR3G

47 CFR Part 2, 22, 24

RSS-GEN issue 3

RSS-132 Issue 3

RSS-133 Issue 6

TEST REPORT #: EMC_TZMED_007_14001_FCC_22_24_rev1

DATE: 2014-11-05



**FCC:
Accredited**

**IC recognized #
3462B-1**

CETECOM Inc.

411 Dixon Landing Road ♦ Milpitas, CA 95035 ♦ U.S.A.

Phone: + 1 (408) 586 6200 ♦ Fax: + 1 (408) 586 6299 ♦ E-mail: info@cetecomusa.com ♦ <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2905571

Table of Contents

1	Assessment.....	3
2	Administrative Data	4
2.1	Identification of the Testing Laboratory Issuing the Test Report	4
2.2	Identification of the Client	4
2.3	Identification of the Manufacturer	4
2.4	Dates of Testing:	4
3	Equipment under Test (EUT).....	5
3.1	Specification of the Equipment under Test	5
3.2	Identification of the Equipment under Test (EUT)	6
3.3	Identification of Accessory equipment.....	6
4	Summary of Measurement Results	7
5	Measurements.....	9
5.1	Measurement Uncertainty	9
5.2	Nominal Environmental Test Conditions.....	9
6	RF Output Power.....	10
6.1.1	References	10
6.1.2	Limits:	10
6.1.3	<i>Conducted Output Power Verification</i>	11
6.1.4	<i>Measurement Results</i>	12
6.1.5	<i>Test Verdict</i>	13
7	Spurious Emissions Radiated	14
7.1.1	<i>References</i>	14
7.1.2	<i>Limits:</i>	14
7.1.3	<i>Radiated out of band measurement procedure:</i>	16
7.1.4	<i>Sample Calculations for Radiated Measurements</i>	17
7.1.5	<i>Spectrum Analyzer Settings</i>	17
7.1.6	<i>Test Verdict:</i>	18
7.1.7	<i>Plots:</i>	19
6.	Test Equipment and Ancillaries used for tests	52
8	Block Diagrams.....	53
9	Revision History.....	54

1 Assessment

The following equipment as further described in section 3 of this test report was evaluated against the applicable criteria specified in FCC CFR47 Parts 2, 22 and 24 & Industry Canada Radio Standard Specifications RSS-GEN Issue 3, RSS-132 Issue 3 and RSS-133 Issue 6.

No deviations were ascertained during the course of the tests performed.

Company	Description	Model #
TZ Medical, Inc.	The Aera CT is a battery operated ambulatory electrocardiograph recorder for use in mobile cardiovascular telemetry.	TZMR3G

Report reviewed by:

2014-11-05	Compliance	Josie Sabado (Test Lab Manager)	Signing on behalf of Franz Engert (Compliance Manager)
Date	Section	Name	Signature

Responsible for the Report:

2014-11-05	Compliance	Douglas Antioco (EMC Engineer)	
Date	Section	Name	Signature

The test results of this test report relate exclusively to the test item specified in Section3. CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM Inc. USA.

2 Administrative Data

2.1 Identification of the Testing Laboratory Issuing the Test Report

Company Name:	CETECOM Inc.
Department:	Compliance
Address:	CETECOM Inc. 411 Dixon Landing Rd Milpitas, CA 95035
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Compliance Manager:	Franz Engert
Responsible Project Leader	Douglas Antioco

2.2 Identification of the Client

Applicant's Name:	TZ Medical, Inc.
Street Address:	17750 SW Upper Boones Ferry Rd. #150
City/Zip Code	Portland, OR 97224
Country	USA
Contact Person:	John Moore & Chris Hammond
Phone No.	800-944-0187
Fax:	503-639-0239
e-mail:	jmoore@tzmedical.com

2.3 Identification of the Manufacturer

Manufacturer's Name:	Same as client.
Manufacturers Address:	
City/Zip Code	
Country	

2.4 Dates of Testing: September 16-17, 2014

3 Equipment under Test (EUT)

3.1 Specification of the Equipment under Test

Model Number:	TZMR3G
FCC-ID :	ZIMTZMR3G
IC Certification Number:	9647A-TZMR3G
Product Description:	The Aera CT is a battery operated ambulatory electrocardiograph recorder for use in mobile cardiovascular telemetry.
Technology / Type(s) of Modulation:	see the following spec of incorporated cellular module:
Integrated Module Info:	Cinterion Wireless Module PHS8-P (FCC ID: QIPPHS8-US/ IC ID: 7830A-PHS8US) • GPRS/ GSM/ EDGE 1900/1800/900/850 • Modulation: GMSK, EGPRS/8PSK • WCDMA/ HSPA+/HSDPA 2100/1900/900/850/800 • Modulation:, QPSK, 16QAM
Operating Frequency Ranges (MHz) / Channels:	824-849 MHz and 1850-1910 MHz Dual Band UMTS/HSPA+ (850, 1900 MHz) Dual Band GSM (850, 1900 MHz)
Antenna info:	Taoglas PCS03 GSM custom antenna documented max.antenna gain: 824-849 MHz: -1.0 dBi; 1850-1910 MHz: 0.8 dBi
Rated Operating Voltage Range:	Vmin: 3.2V/ Vnom: 3.6/ Vmax: 4.2V
Rated Operating Temperature Range:	Tmin: 0°C/ Tmax: 50°C
Test Sample Status:	Pre-production
Other radios included in the device:	None.

3.2 Identification of the Equipment under Test (EUT)

EUT #	IMEI	Sample	HW/SW Version
1	351502050185123	Radiated	2.0/2.1
2	351502050185313	Conducted	2.0/2.1

3.3 Identification of Accessory equipment

AE #	Type	Manufacturer	Model	Serial Number
1	N/A	-	-	-

4 Summary of Measurement Results

GSM/ UMTS 850MHz Band:

Test Specification	Test Case	Temperature and Voltage Conditions	Mode	Pass	Fail	NA	NP	Result
§2.1046 §22.913 (a) RSS132 5.4	RF Output Power	Nominal	GSM/UMTS 850	■	□	□	□	Complies
§2.1055 §22.355 RSS132 5.3	Frequency Stability	Nominal	N/A	□	□	□	■	Note 1
§2.1049 §22.917(b) RSS132 5.2	Occupied Bandwidth	Nominal	N/A	□	□	□	■	Note 1
§2.1051 §22.917 RSS132 5.5	Band Edge Compliance	Nominal	N/A	□	□	□	■	Note 1
§2.1051 §22.917 RSS132 5.5	Conducted Spurious Emissions	Nominal	N/A	□	□	□	■	Note 1
§2.1053 §22.917 RSS132 5.5	Radiated Spurious Emissions	Nominal	GSM/UMTS 850	■	□	□	□	Complies

Note: NA= Not Applicable; NP= Not Performed.

Note 1: Leveraged from module certification. See Section 5.4

GSM/UMTS 1900MHz Band:

Test Specification	Test Case	Temperature and Voltage Conditions	Mode	Pass	Fail	NA	NP	Result
§2.1046 §24.232 (a) RSS133 6.4	RF Output Power	Nominal	GSM/UMTS 1900	■	□	□	□	Complies
§2.1055 §24.235 RSS133 6.3	Frequency Stability	Nominal	N/A	□	□	□	■	Note 1
§2.1049 §24.238(b) RSS133 6.2	Occupied Bandwidth	Nominal	N/A	□	□	□	■	Note 1
§2.1051 §24.238 RSS133 6.5	Band Edge Compliance	Nominal	N/A	□	□	□	■	Note 1
§2.1051 §24.238 RSS133 6.5	Conducted Spurious Emissions	Nominal	N/A	□	□	□	■	Note 1
§2.1053 §24.238 RSS133 6.5	Radiated Spurious Emissions	Nominal	GSM/UMTS 1900	■	□	□	□	Complies

Note: NA= Not Applicable; NP= Not Performed.

Note 1: Leveraged from module certification.

5 Measurements

5.1 Measurement Uncertainty

	Uncertainty in dB radiated <30MHz	Uncertainty in dB radiated 30MHz - 1GHz	Uncertainty in dB radiated > 1GHz	Uncertainty in dB Conducted measurement
standard deviation k=1	2.48	1.94	2.16	0.64
95% confidence interval in dB	4.86	3.79	4.24	1.25
95% confidence interval in dB in delta to Result	+2.5 dB	+2.0 dB	+2.3dB	+0.7dB

5.2 Nominal Environmental Test Conditions

- Ambient Temperature: 20-25 °C
- Relative humidity: 40-60%

5.3 Default Test Temperature and Voltage

- Test Temperature: 20°C (nominal);
- Test Voltage: 3.7 VDC(nominal);

Deviating test conditions are indicated at individual test description where applicable.

5.4 Inheriting Test Results from Incorporated Module Certification:

The EUT integrates a pre-certified module Cinterion PHS8-P.
 with FCC ID: QIPPHS8-US; IC Certification Number: 7830A-PHS8US

Taking into account guidance from FCC KDB 996369 (modular approval) and where relevant test procedures did not change conducted test results are leveraged from the conducted test report for the PHS8-P modem given by 7Layers AG, dated December 1, 2011 with Report Reference(s): MDE_CINTE_1108_FCCd and MDE_CINTE_1108_FCCe ; FCC ID: QIPPHS8-US; IC Certification Number: 7830A-PHS8US.

This test report contains full radiated testing as per FCC 22H/24E and RSS-132/133 and conducted power verification required per KDB 996369.

5.5 Other Testing Notes:

1. The different cellular operation modes of the EUT as required for testing are controlled through the link with the Digital Radio Communication Tester (R&S CMU200).
2. The EUT is tested on the low, mid and high channel of each of the supported cellular operation modes.

5.6 Measurement Method:

Testing is performed according to the guidelines provided in *FCC publication (KDB) 971168 D01 Power Meas License Digital Systems v02r01: Measurement Guidance for Certification of Licensed Digital Transmitters*, June 2013 and according to relevant parts of TIA-603C 2004 as detailed below.

6 RF Output Power

6.1.1 References

FCC: CFR Part 2.1046, CFR Part 22.913, CFR Part 24.232, CFR Part 27.50

IC: RSS-Gen Section 4.8; RSS-132 Section 5.4; RSS-133 Section 6.4, RSS-139 Section 6.4

6.1.2 Limits:

6.1.2.1 FCC 22.913 (a) Effective radiated power limits.

(2) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

6.1.2.2 FCC 24.232 (c)(d)(e) Power limits.

(c) Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

(d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

(e) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, *etc.*, so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

6.1.2.3 RSS-132, Issue 3, cl. 5.4

The transmitter output power shall be measured in terms of average power. The equivalent isotropically radiated power (e.i.r.p.) for mobile equipment shall not exceed 11.5 watts.

In addition, the peak-to-average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1% of the time using a signal corresponding to the highest PAPR during periods of continuous transmission.

6.1.2.4 RSS-133, Issue 6, cl. 4.1 and 6.4


The transmitter power shall be measured in terms of average power.

The equivalent isotropically radiated power (e.i.r.p.) for transmitters shall not exceed 2 watts maximum e.i.r.p. In addition, the transmitter's peak-to-average power ratio (PAPR) shall not exceed 13 dB for more than 0.1% of the time using a signal corresponding to the highest PAPR during periods of continuous transmission.

6.1.3 Conducted Output Power Verification

6.1.3.1 Measurement Procedure

Ref: TIA-603C 2004 2.2.1

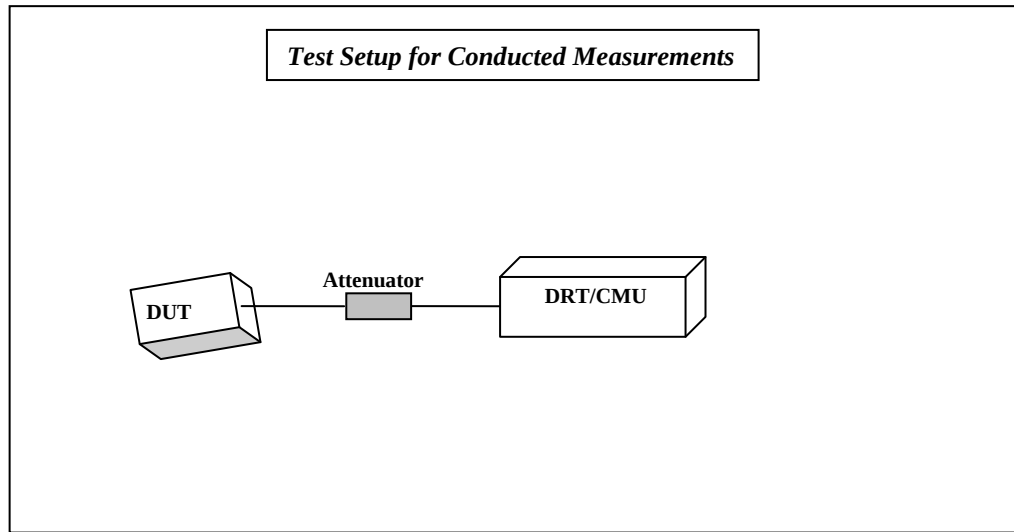

1. Connect the equipment as shown in the above diagram. A Digital Radio Communication Tester (DRT: R&S CMU200 here) is used to enable the EUT to transmit and to measure the output power.
2. Adjust the settings of the CMU200 to set the EUT to its maximum power at the required channel.
3. Record the Peak and Average Output power level measured by the CMU200.
4. Correct the measured level for all losses in the RF path.
5. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band and for all types of modulation schemes.

6.1.4 Measurement Results

GSM/UMTS/WCDMA 850

Frequency (MHz)	Measured Average Output Power from module's test report	Conducted Peak Output Power	Conducted Average Output Power	Calculated Peak ERP/EIRP	PAR Calculated
GSM 850 GMSK					
824.2	33.5	32.9	33	29.76/31.9	0.7
836.6	33.1	33.1	33.2	29.96/32.1	0.7
848.8	33.3	32.7	32.9	29.56/31.7	0.6
GSM 850 EGPRS/8PSK					
824.2	27.1	30.2	27.9	27.06/29.2	3.1
836.6	27.1	30.3	27.9	27.16/29.3	3.2
848.8	27.1	30.1	27.7	26.96/29.1	3.2
UMTS/WCDMA 850					
826.4	23.5	27.1	24	23.96/26.1	3.9
836.6	23.3	28.1	24.2	24.96/27.1	4.7
846.6	23.8	27.4	24	24.26/26.4	4.2

GSM/UMTS/WCDMA 1900

Frequency (MHz)	Measured Average Output Power from module's test report	Conducted Peak Output Power	Conducted Average Output Power	Calculated Peak EIRP	PAR (Calculated)
GSM 1900 GMSK					
1850.2	29.9	29.7	29.3	30.5	0.4
1880	30.3	29.4	29.1	30.2	0.3
1909.8	30.0	29.1	28.8	29.9	0.3
GSM 1900 EGPRS/8PSK					
1850.2	26.2	28.4	25.3	29.2	3.1
1880	26.1	28.3	25.1	29.1	3.2
1909.8	26.2	28	24.8	28.8	3.2
UMTS/WCDMA 1900					
1852.4	23.0	27	22.8	27.8	4.2
1880	22.9	26.3	22.5	27.1	3.8
1907.6	23.0	26.6	22.4	27.4	4.2

6.1.5 Test Verdict

All measured results remain within the manufacturing tolerance as taken from the module manufacturer's specification. All values within ERP / EIRP limits.

7 Spurious Emissions Radiated

7.1.1 References

FCC: CFR Part 2.1053, CFR Part 22.917, CFR Part 24.238
IC: RSS-Gen Section 4.9; RSS 132 Section 5.5; RSS 133 Section 6.5

7.1.2 Limits:

(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

For all power levels +30dBm to 0dBm, this becomes a constant specification of -13dBm.

7.1.2.1 FCC 22.917 Emission limitations for cellular equipment.

The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

7.1.2.2 FCC 24.238 Emission limitations for Broadband PCS equipment.

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

7.1.2.3 RSS-132 Section 5.5.1.1 and RSS-133 Section 6.5.1

In the first 1.0 MHz band immediately outside and adjacent to the licensee's frequency block, the power of emissions per any 1% of the emission bandwidth shall be attenuated below the transmitter output power P (in watts) by at least $43 + 10 \log_{10}(P)$, dB. After the first 1.0 MHz, the power of emissions shall be attenuated below the transmitter output power by at least $43 + 10 \log_{10}(P)$, dB, in any 100 kHz bandwidth.

After the first 1.5 MHz, the power of emissions shall be attenuated below the transmitter output power by at least $43 + 10 \log_{10}(P)$, dB, in any MHz of bandwidth.


7.1.2.4 RSS-139 Section 6.5

In the first 1.0 MHz bands immediately outside and adjacent to the equipment's operating frequency block, the emission power per any 1% of the emission bandwidth shall be attenuated below the transmitter output power P (in watts) by at least $43 + 10 \log_{10}(P)$, dB.

After the first 1.0 MHz outside the equipment's operating frequency block, the emission power in any 1 MHz bandwidth shall be attenuated below the transmitter output power P (in watts) by at least $43 + 10 \log_{10}(P)$, dB.

7.1.3 Radiated out of band measurement procedure:

Ref: TIA-603C 2004- 2.2.12 Unwanted emissions: Radiated Spurious

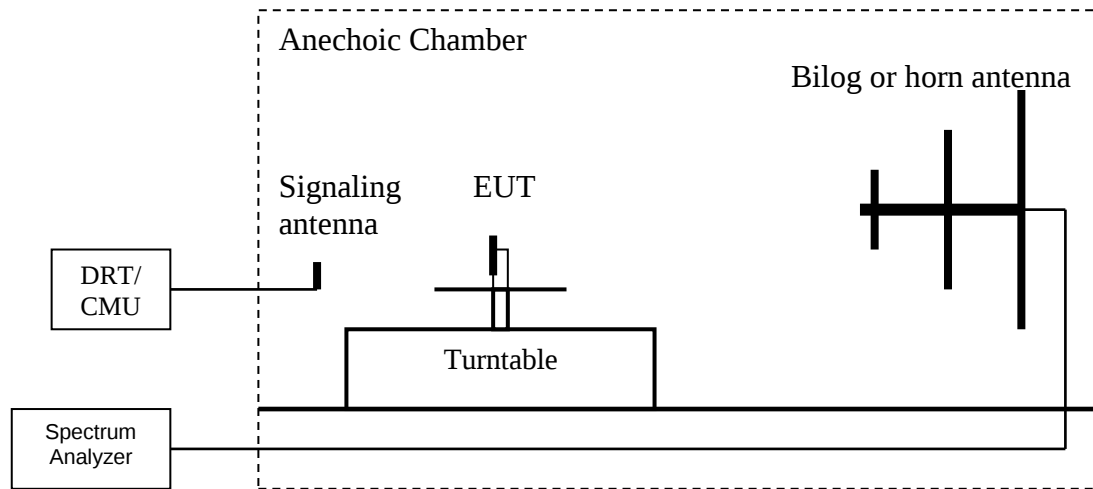

1. Connect the equipment as shown in the above diagram with the EUT's antenna in a horizontal orientation.
2. Adjust the settings of the Digital Radio Communication Tester (DRT) to set the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to measure peak hold with the required settings.
4. Place the measurement antenna in a horizontal orientation. Rotate the EUT 360°. Raise the measurement antenna up to 4 meters in 0.5 meters increments and rotate the EUT 360° at each height to maximize all emissions. Measure and record all spurious emissions (**LVL**) up to the tenth harmonic of the carrier frequency.
5. Replace the EUT with a horizontally polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
6. Connect the antenna to a signal generator with known output power and record the path loss in dB (**LOSS**). **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
7. Determine the level of spurious emissions using the following equation:
Spurious (dBm) = **LVL** (dBm) + **LOSS** (dB):
8. Repeat steps 4, 5 and 6 with all antennas vertically polarized.
9. Determine the level of spurious emissions using the following equation:
Spurious (dBm) = **LVL** (dBm) + **LOSS** (dB):
10. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.
(**Note:** Steps 5 and 6 above are performed prior to testing and **LOSS** is recorded by test software. Steps 3, 4 and 7 above are performed with test software.)

7.1.4 Sample Calculations for Radiated Measurements

7.1.4.1 Power Measurements using Substitution Procedure:

The measurement on the Spectrum Analyzer is used as a basis for the Substitution procedure. The EUT is replaced with a Signal Generator and an antenna. The setting on the Signal Generator is varied until the Spectrum Analyzer displays the original reading. EIRP is calculated as-

$$\text{EIRP (dBm)} = \text{Signal Generator setting (dBm)} - \text{Cable Loss (dB)} + \text{Antenna Gain (dBi)}$$

Example:

Frequency (MHz)	Measured SA (dBμV)	Signal Generator setting (dBm)	Antenna Gain (dBi)	Dipole Gain (dBd)	Cable Loss (dB)	EIRP (dBm)
1000	95.5	24.5	6.5	0	3.5	27.5

7.1.5 Spectrum Analyzer Settings

Settings for FCC 22

	9 kHz – 30 MHz		
	9 – 150 kHz	150 – 490 kHz	490 kHz – 30 MHz
Resolution Bandwidth	200 Hz	9 kHz	9 kHz
Video Bandwidth	2 kHz	100 kHz	100 kHz
Detector	Peak	Peak	Peak
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep Time	Auto	Auto	Auto

	30MHz – 1 GHz	1 – 1.58 GHz	1.58 – 9 GHz
Resolution Bandwidth	100 kHz	1 MHz	1 MHz
Video Bandwidth	100 kHz	1 MHz	1 MHz
Detector	Peak	Peak	Peak
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep Time	Auto	Auto	Auto

Settings for FCC 24

	9 kHz – 30 MHz		
	9 – 150 kHz	150 – 490 kHz	490 kHz – 30 MHz
Resolution Bandwidth	200 Hz	9 kHz	9 kHz
Video Bandwidth	2 kHz	100 kHz	100 kHz
Detector	Peak	Peak	Peak
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep Time	Auto	Auto	Auto


	30MHz – 1 GHz	1 – 2.7 GHz	2.7 – 18 GHz	18 – 22 GHz
Resolution Bandwidth	100 kHz	1 MHz	1 MHz	1 MHz
Video Bandwidth	100 kHz	1 MHz	1 MHz	1 MHz
Detector	Peak	Peak	Peak	Peak
Trace Mode	Max Hold	Max Hold	Max Hold	Max Hold
Sweep Time	Auto	Auto	Auto	Auto

7.1.6 Test Verdict:

Pass, no emissions from the EUT measured within 6 dB of the limit.


7.1.7 Plots:

Radiated Spurious Emissions (GSM-850) Tx: Low Channel Test results 30MHz-1GHz

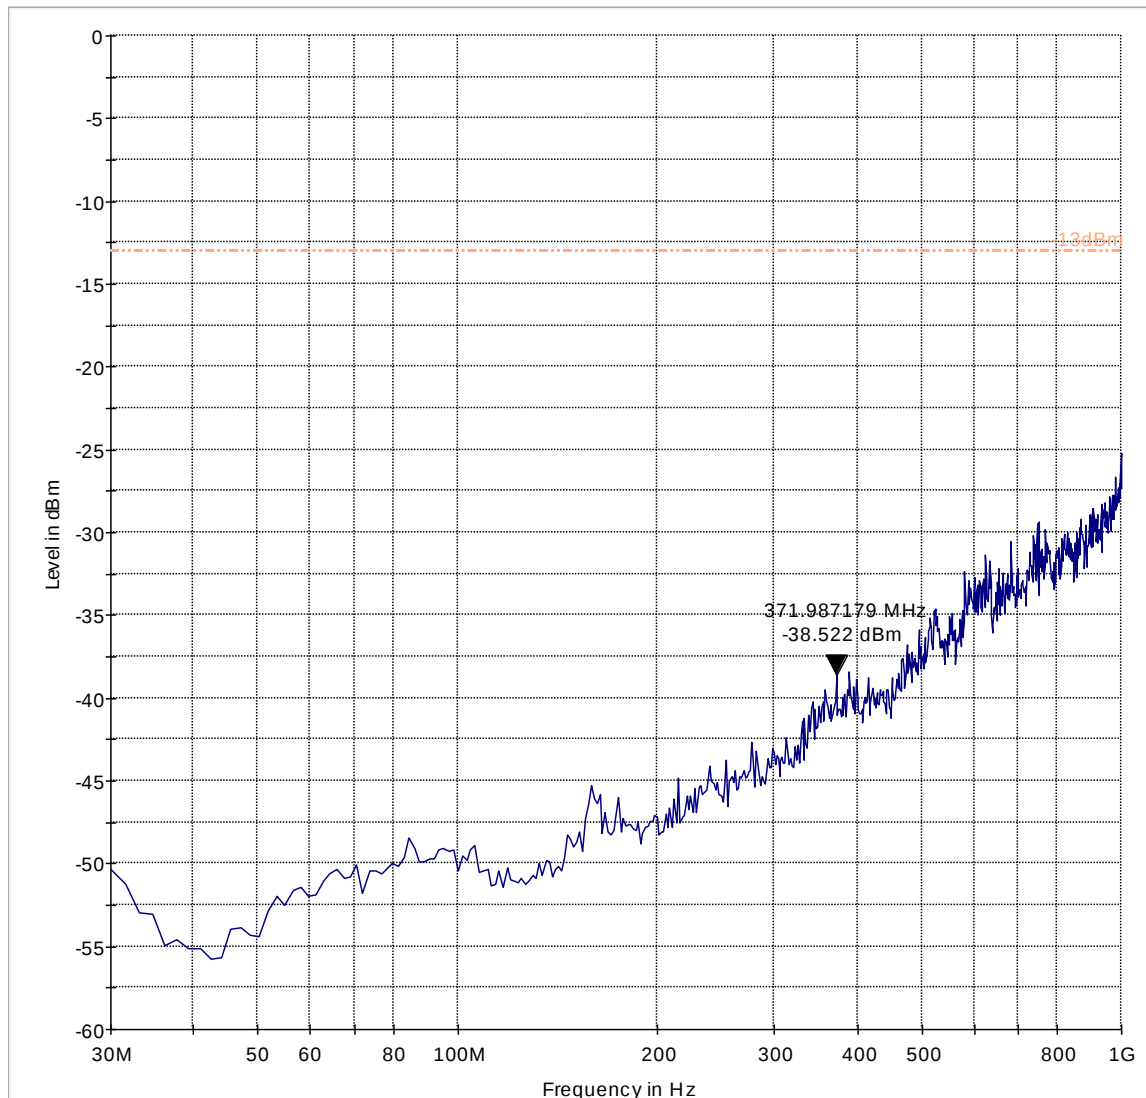

----- -13dBm — Preview Result 1-PK+


Test results 1GHz-9GHz

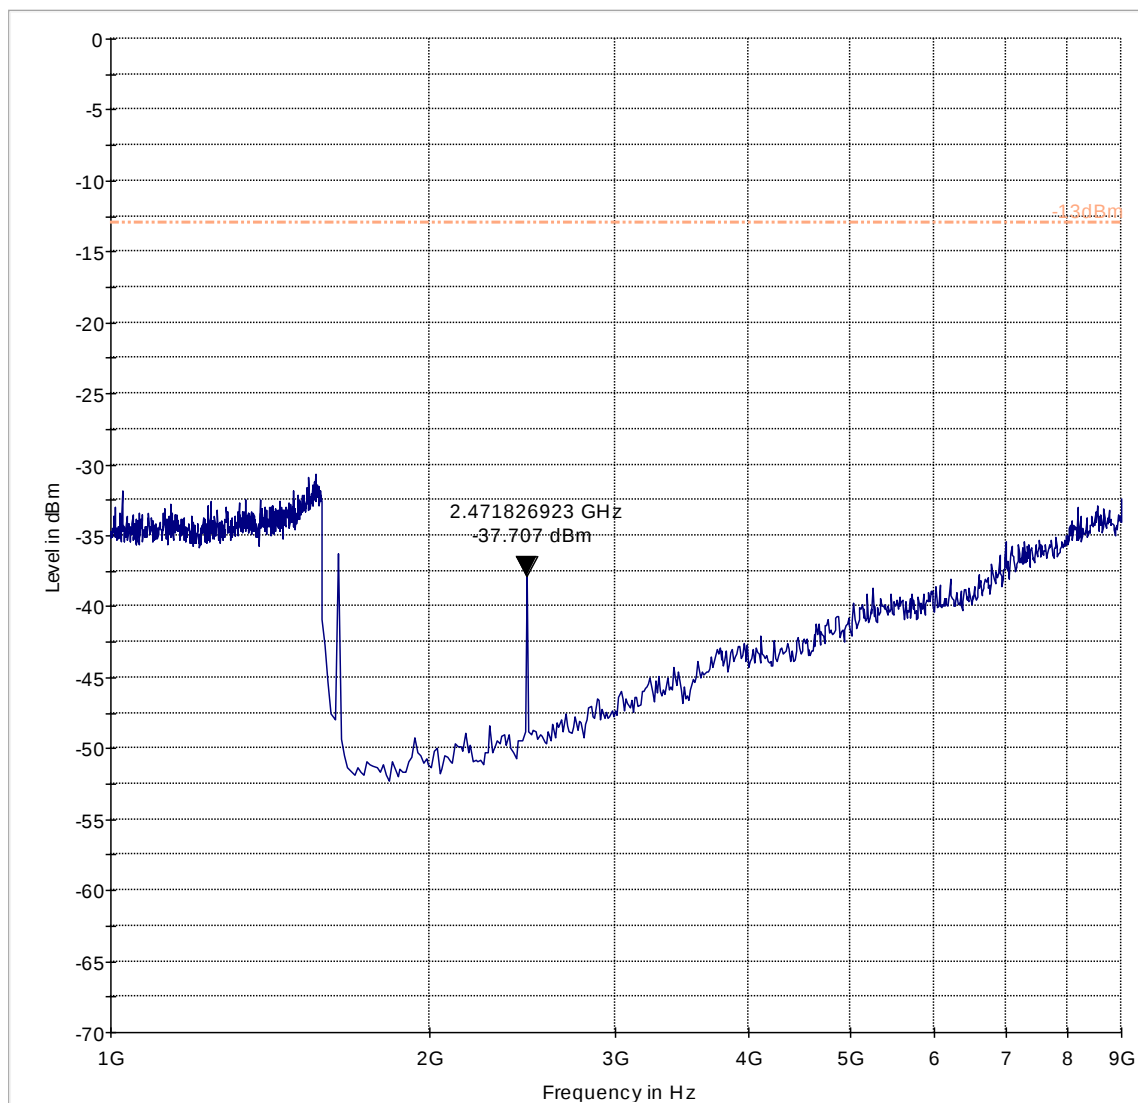

Radiated Spurious Emissions (GSM-850) Tx: Mid Channel


Test results 9KHz-30MHz

Note: Emission at 70.236KHz is ambient noise.

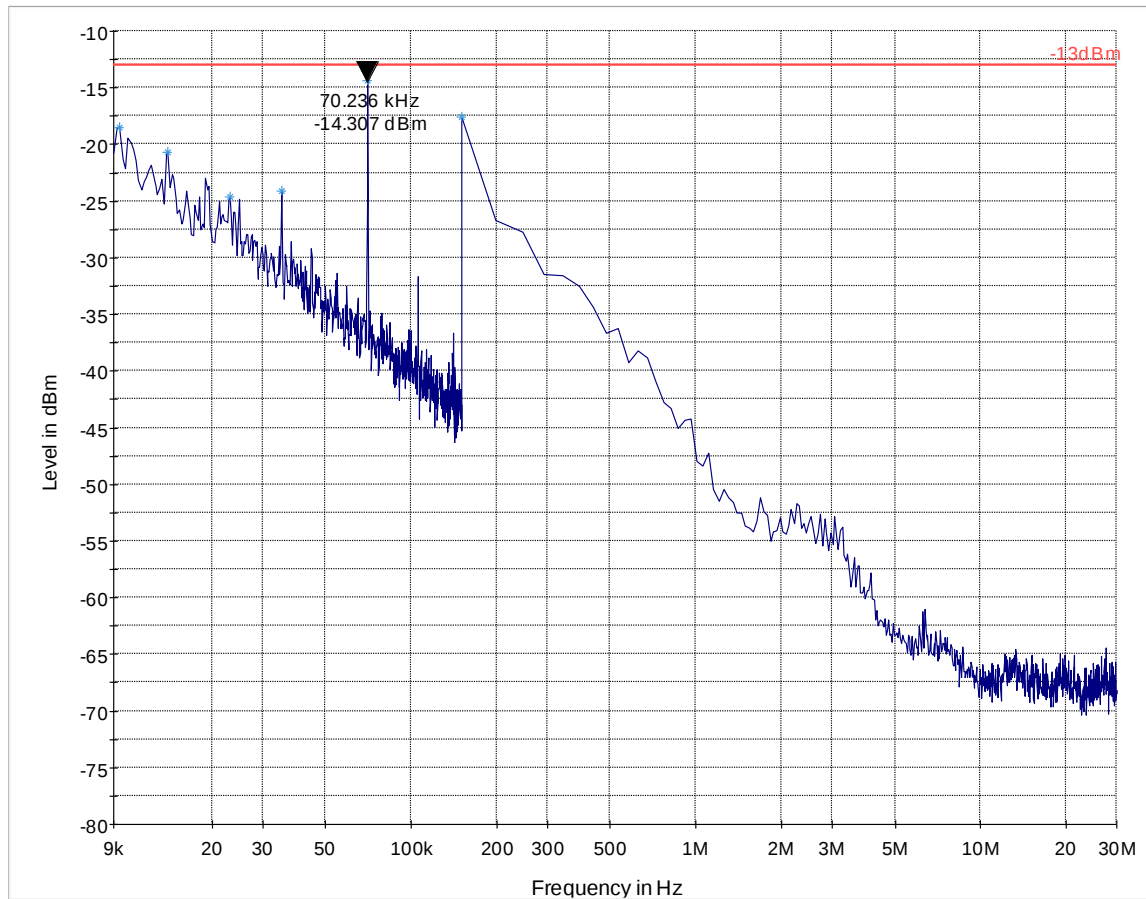


— -13dBm — Preview Result 1-PK+ * Data Reduction Result 1 [1]-PK+

Test results 30MHz-1GHz

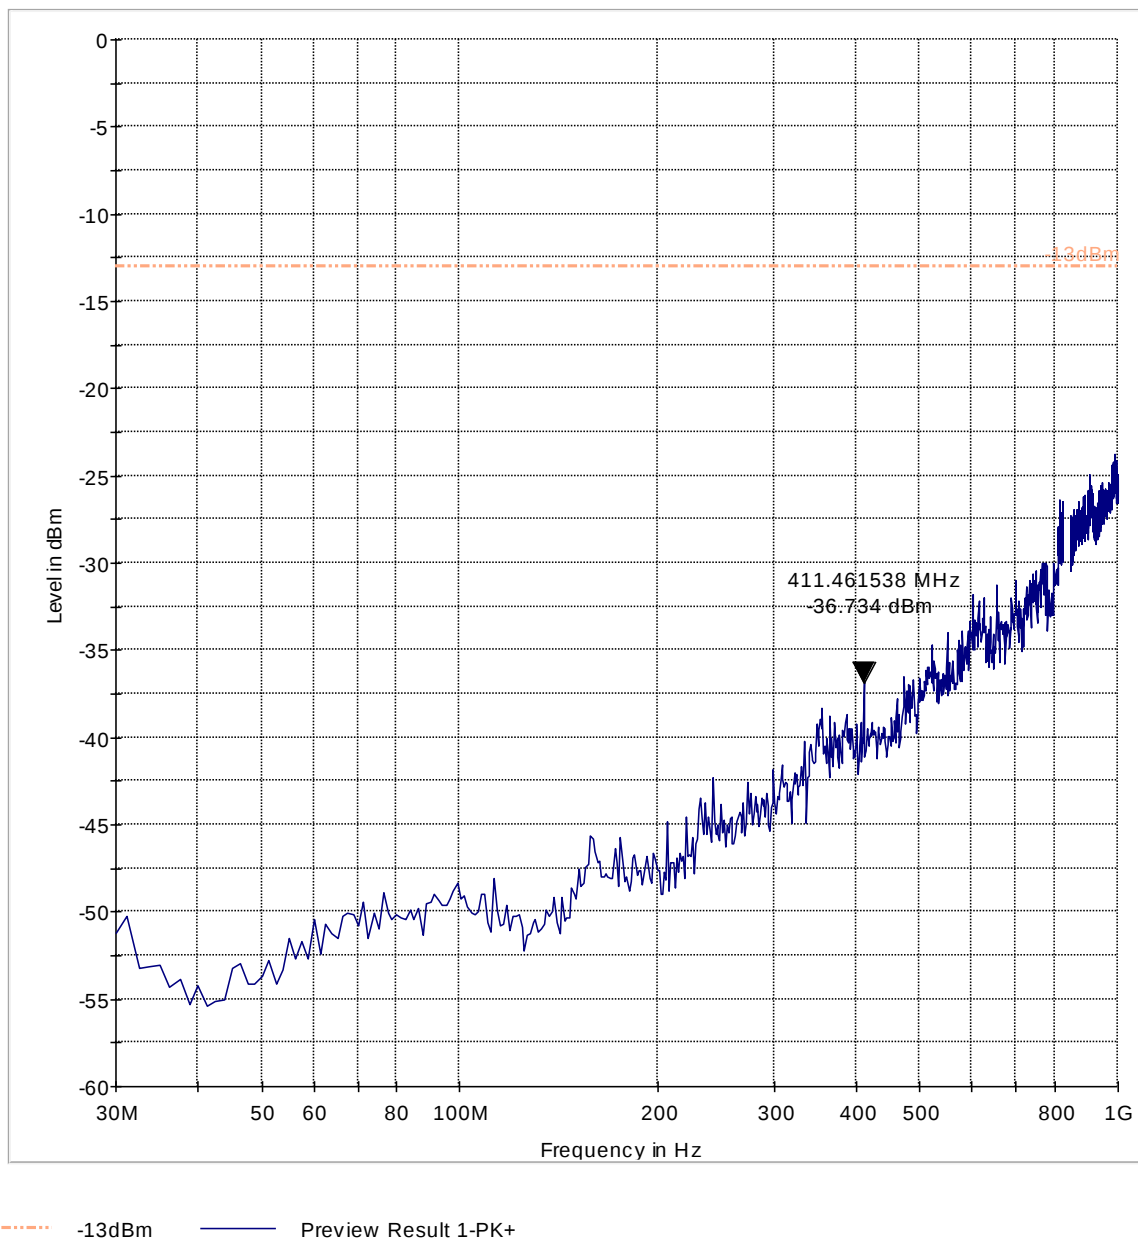


Test results 1GHz-9GHz

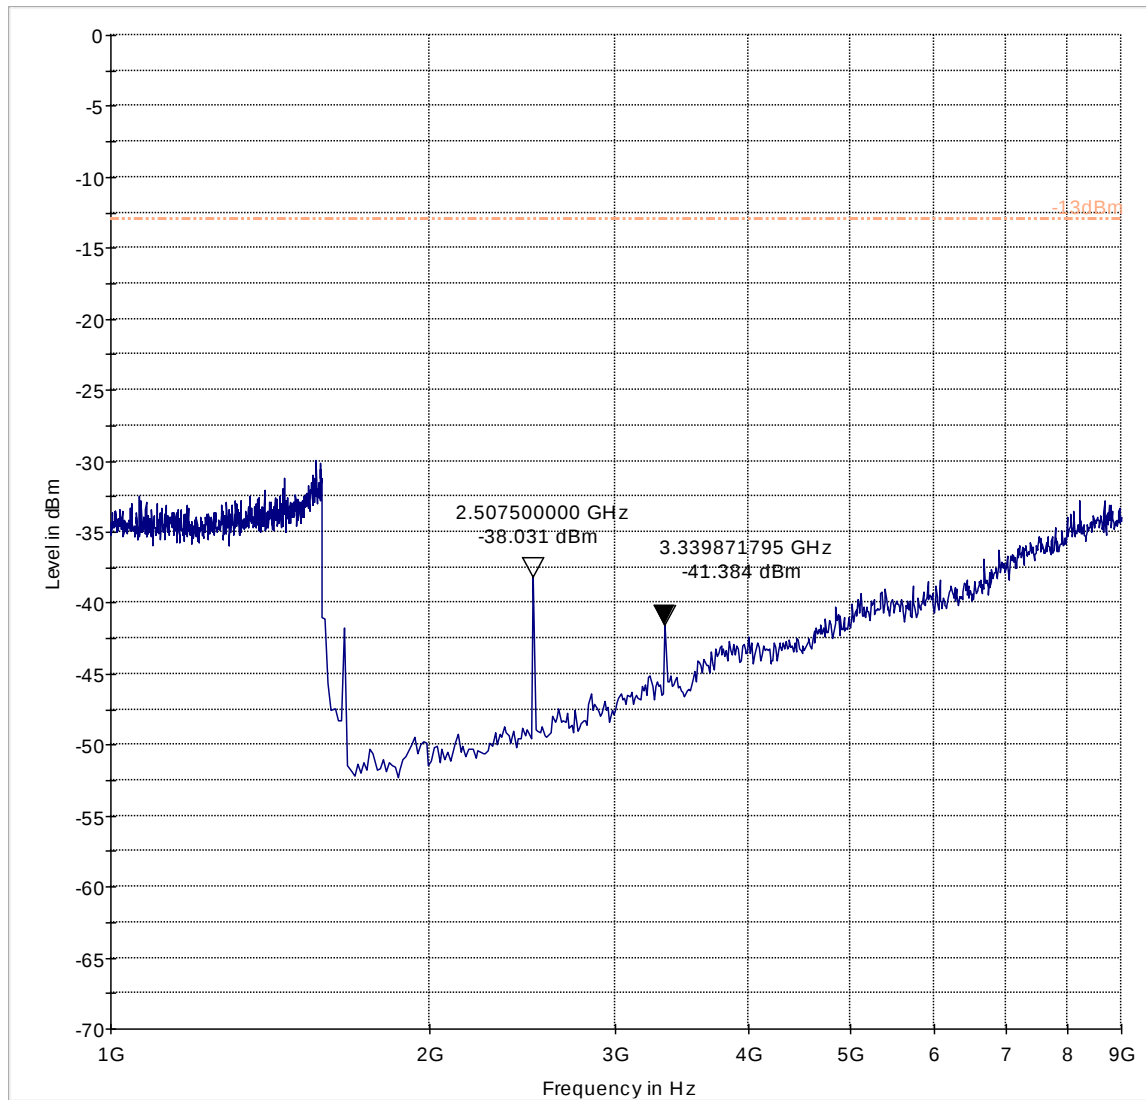

----- -13dBm — Preview Result 1-PK+


Radiated Spurious Emissions (GSM-850) Tx: High Channel

Test results 30MHz-1GHz

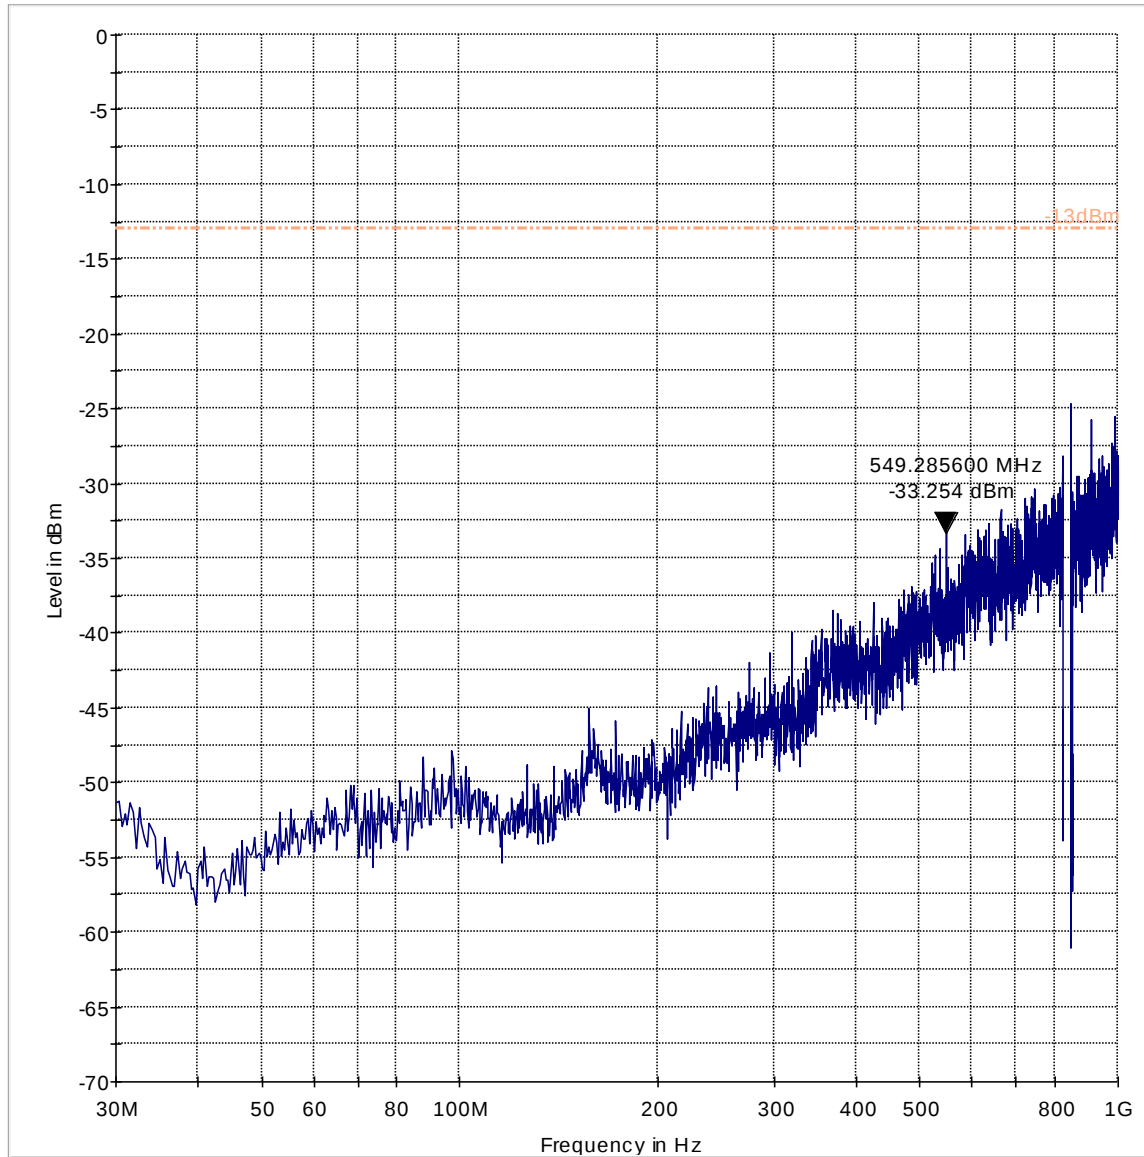


----- -13dBm ——— Preview Result 1-PK+

Test results 1GHz-9GHz

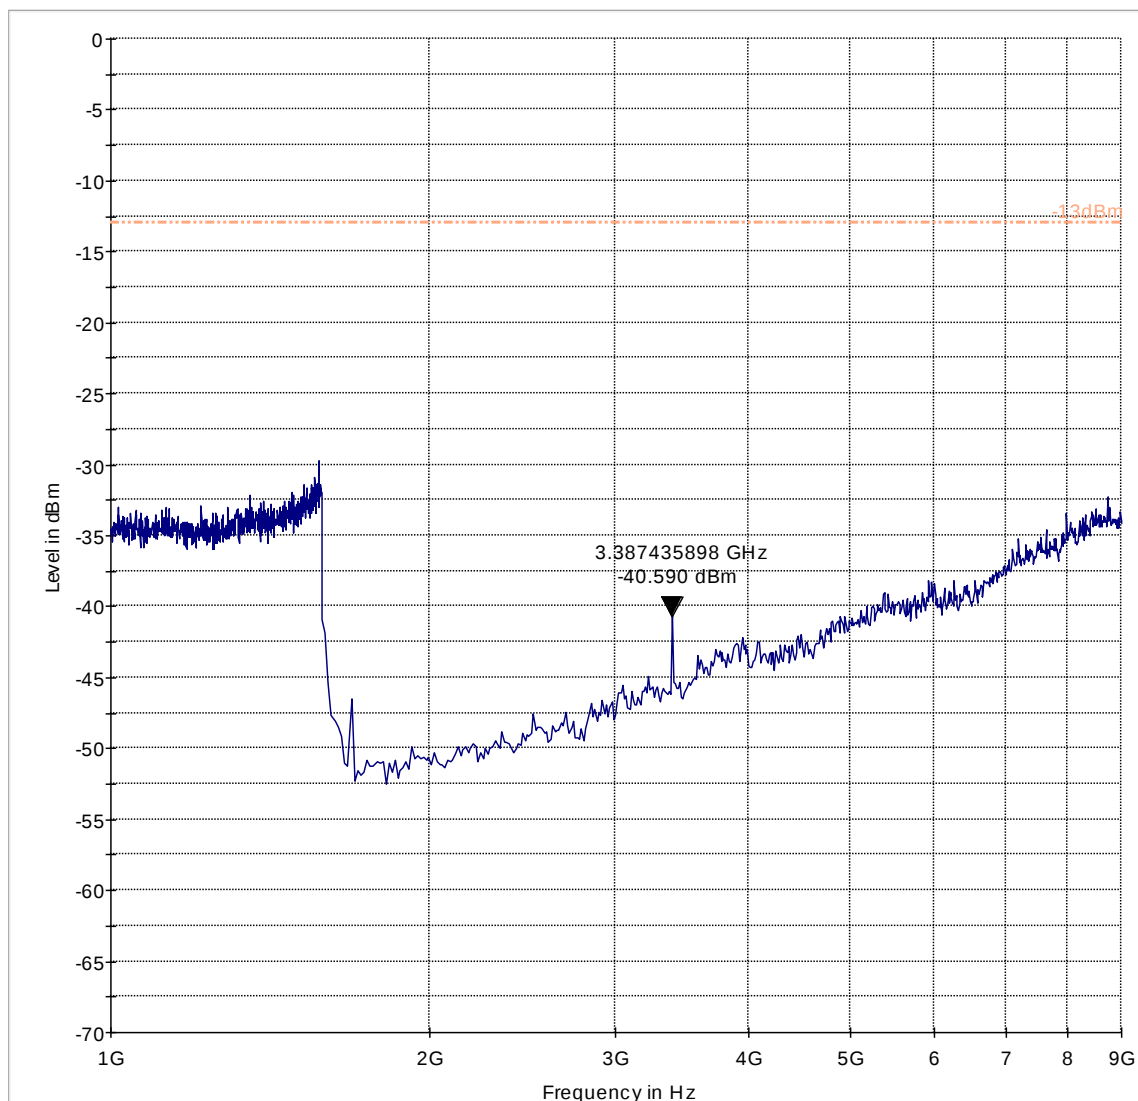


Radiated Spurious Emissions (GSM-1900) Tx: Low Channel
Test results 30MHz-1GHz

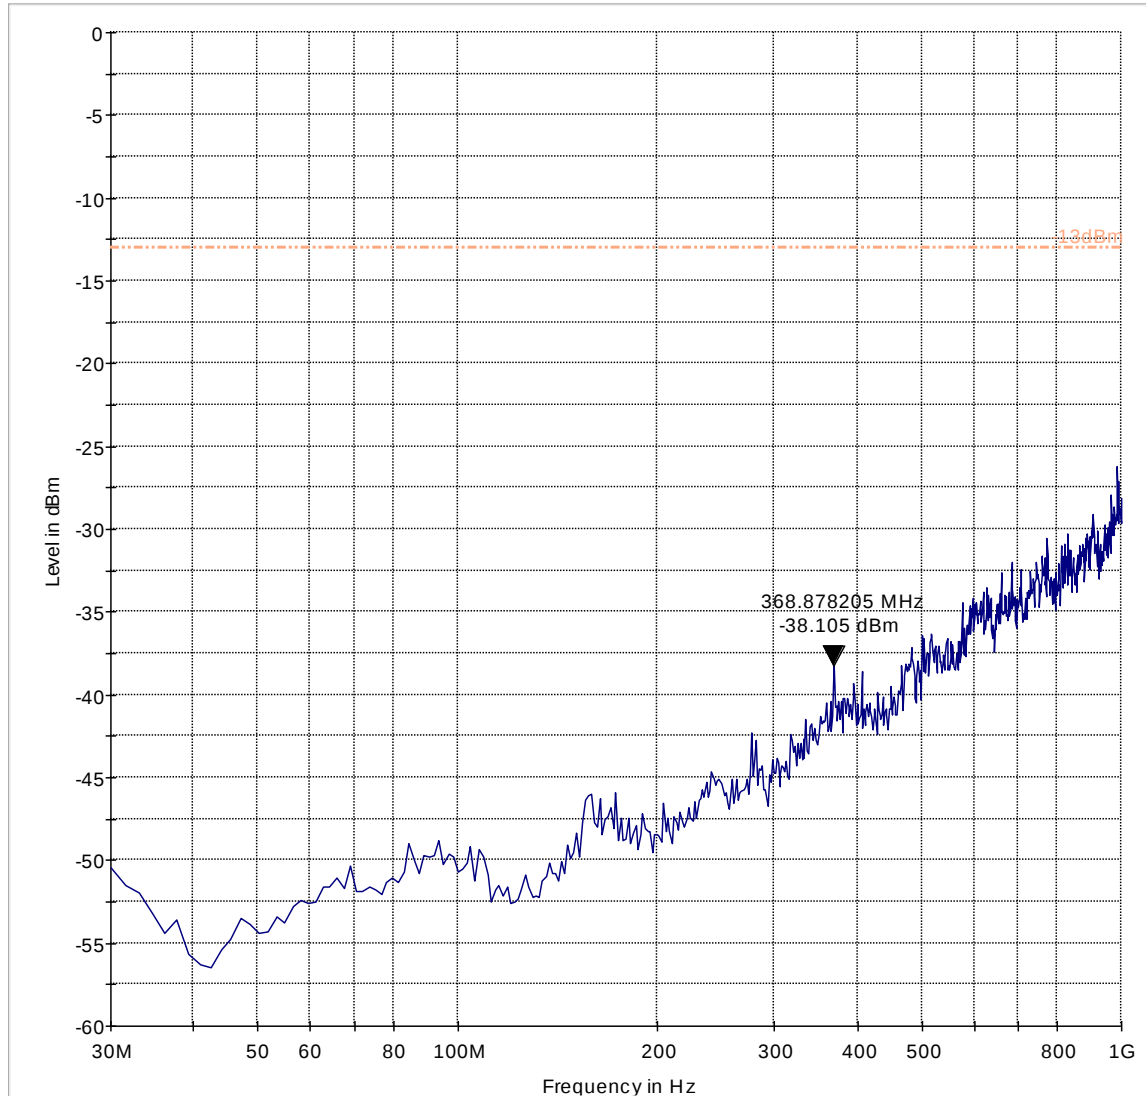


----- -13dBm — Preview Result 1-PK+

Test results 1GHz-18GHz

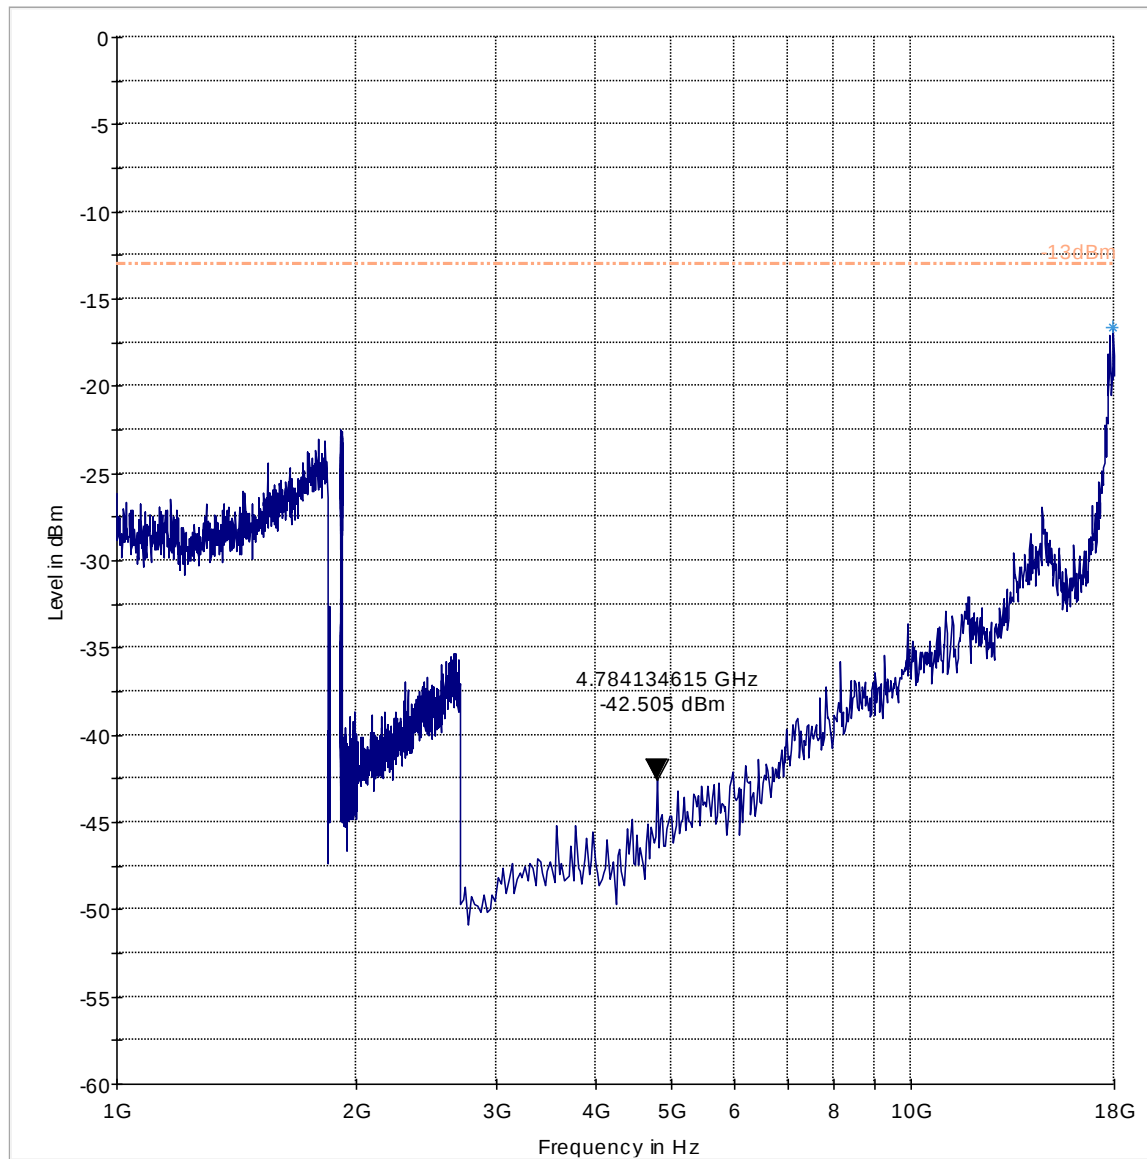

----- -13dBm Preview Result 1-PK+ * Data Reduction Result 1 [2]-PK+

Test results 18GHz-22GHz

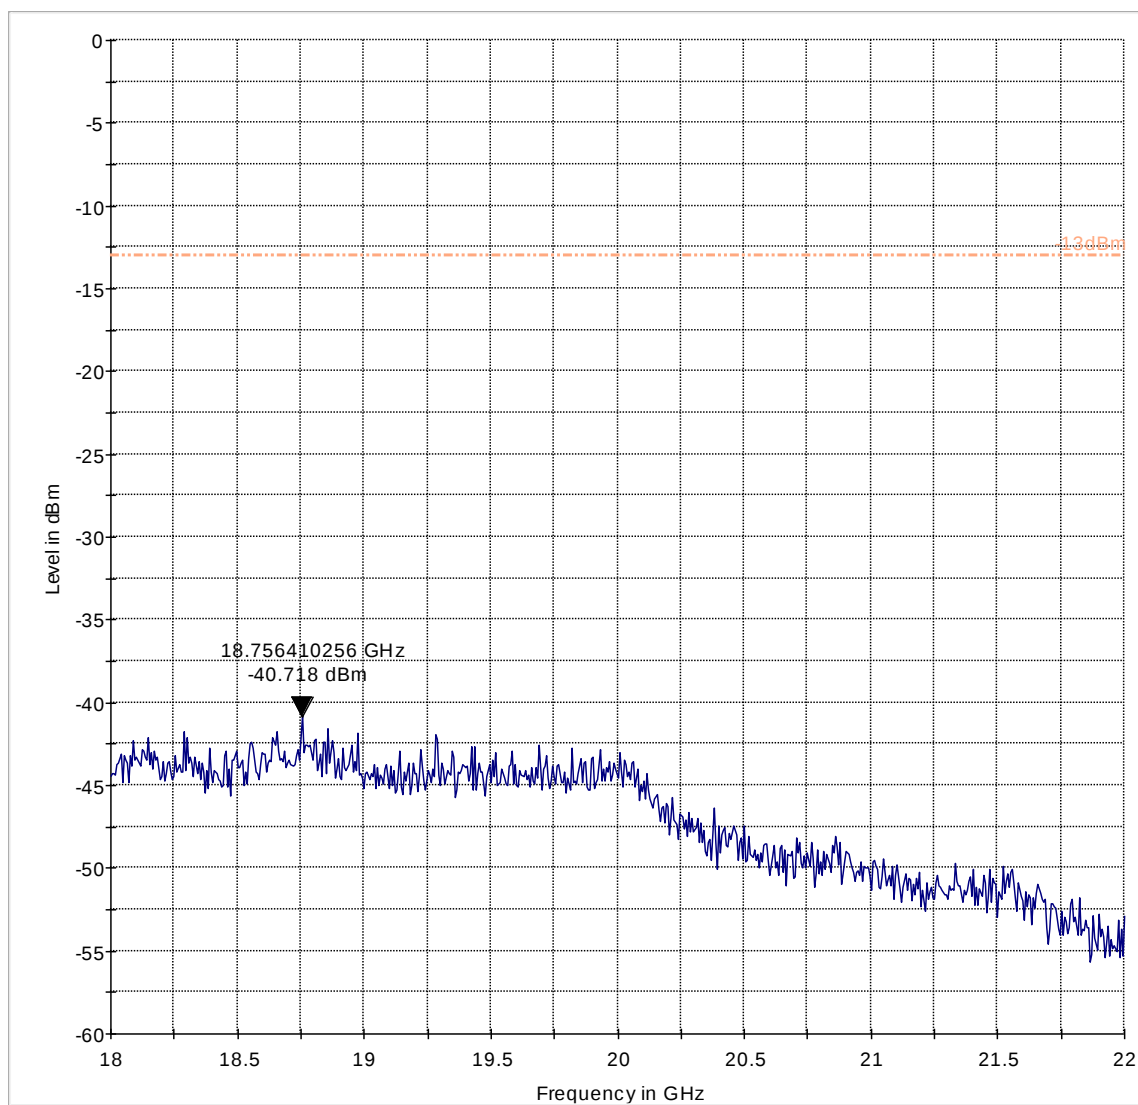


----- -13dBm ——— Preview Result 1-PK+

Radiated Spurious Emissions (GSM-1900) Tx: Mid Channel


Test results 9KHz-30MHz

Note: Emission at 70.236KHz is ambient noise.

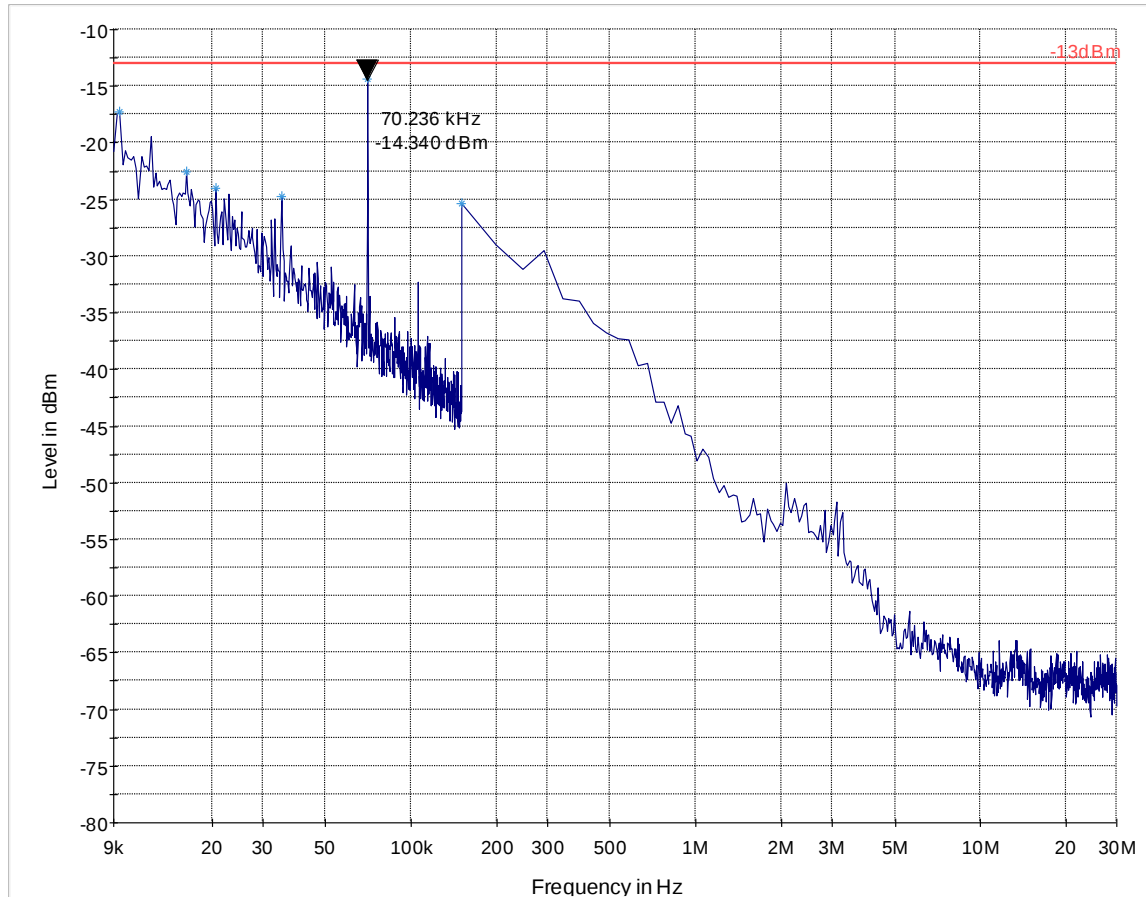


— -13dBm — Preview Result 1-PK+ * Data Reduction Result 1 [1]-PK+

Test results 30MHz-1GHz

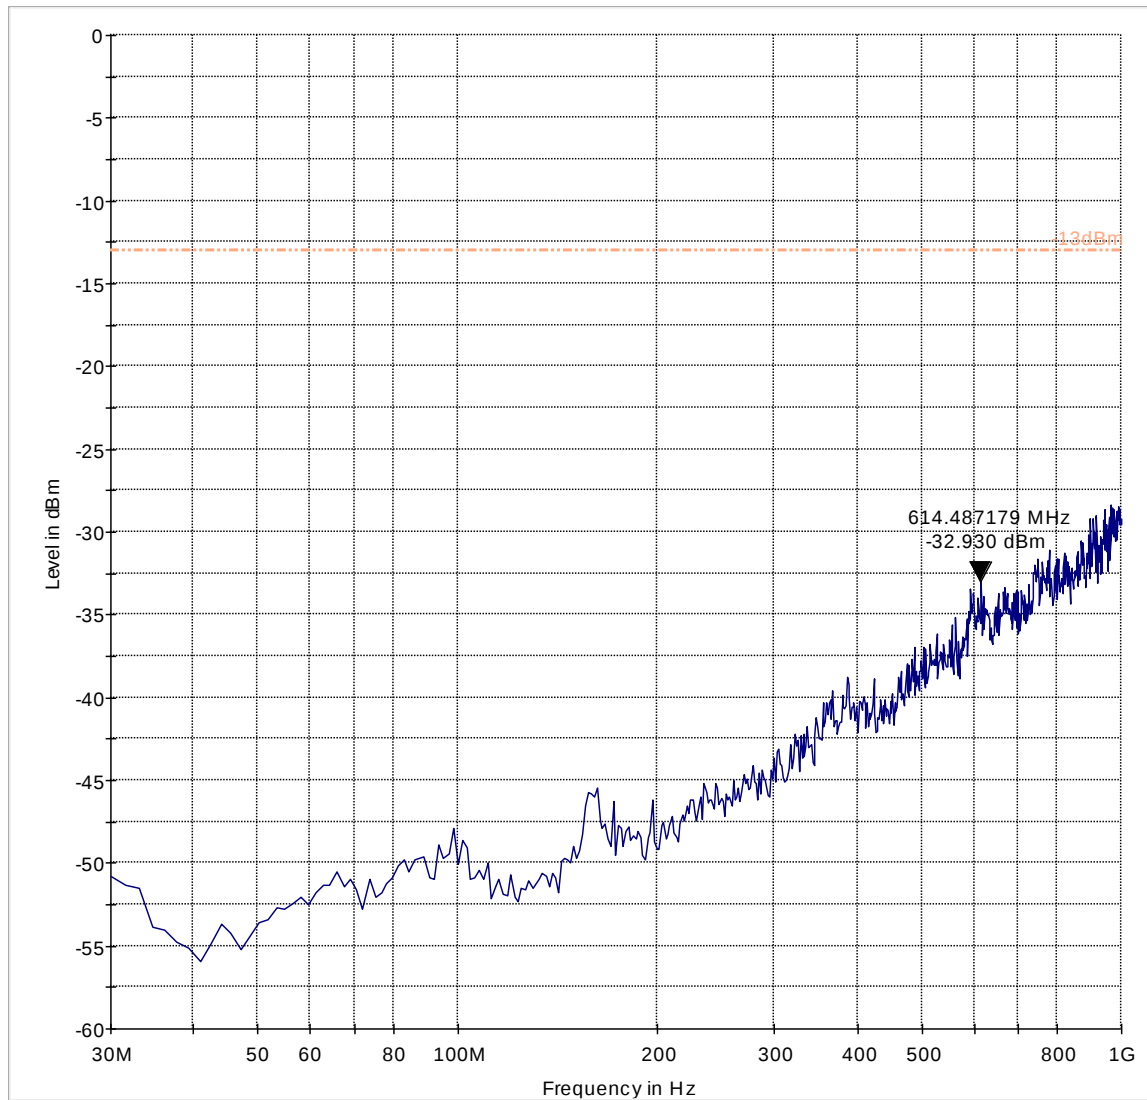


----- -13dBm ——— Preview Result 1-PK+

Test results 1GHz-18GHz

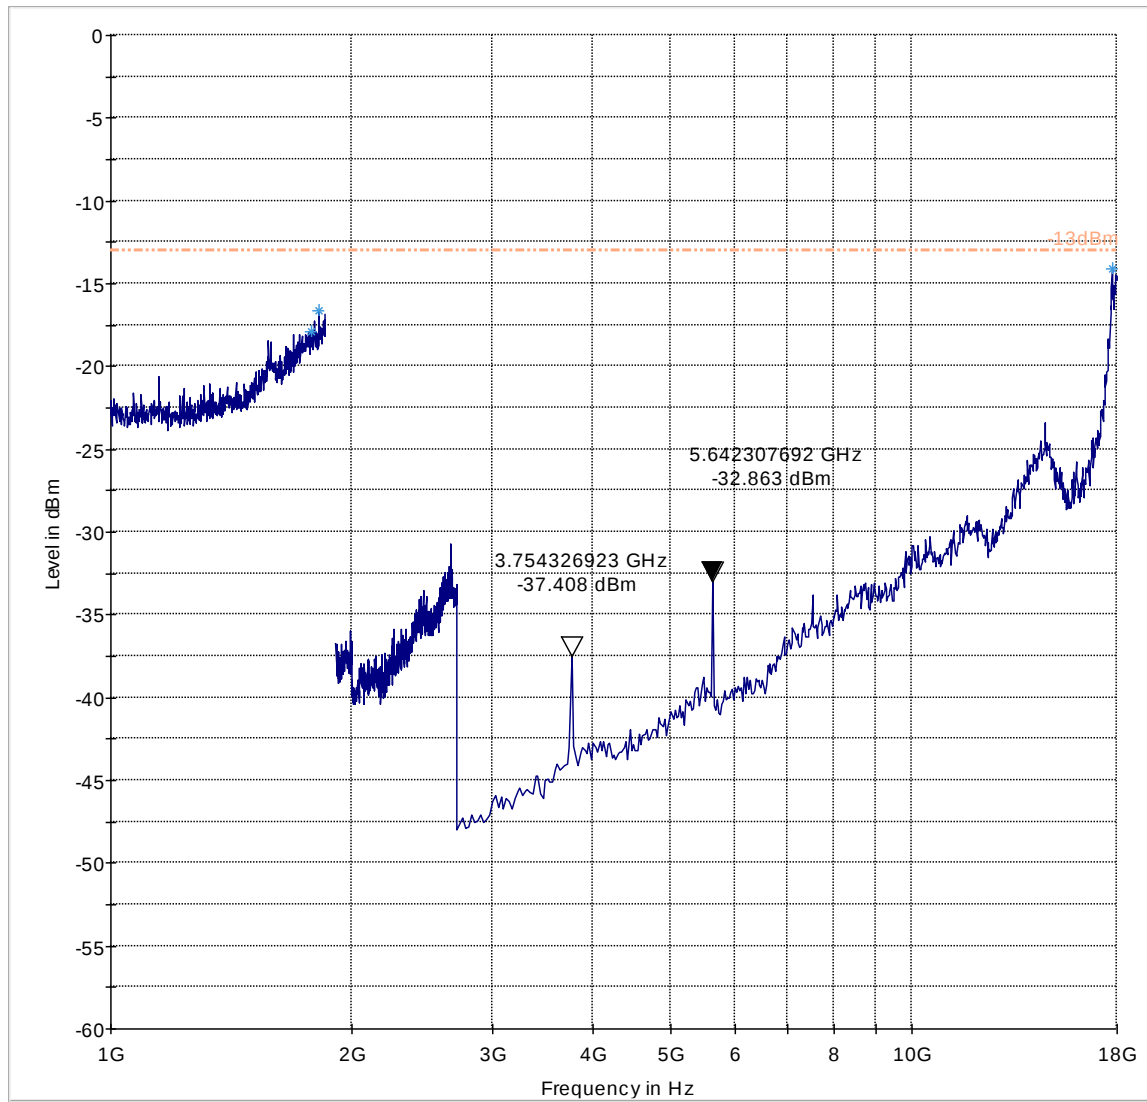


----- -13dBm Preview Result 1-PK+ * Data Reduction Result 1 [2]-PK+

Test results 18GHz-22GHz

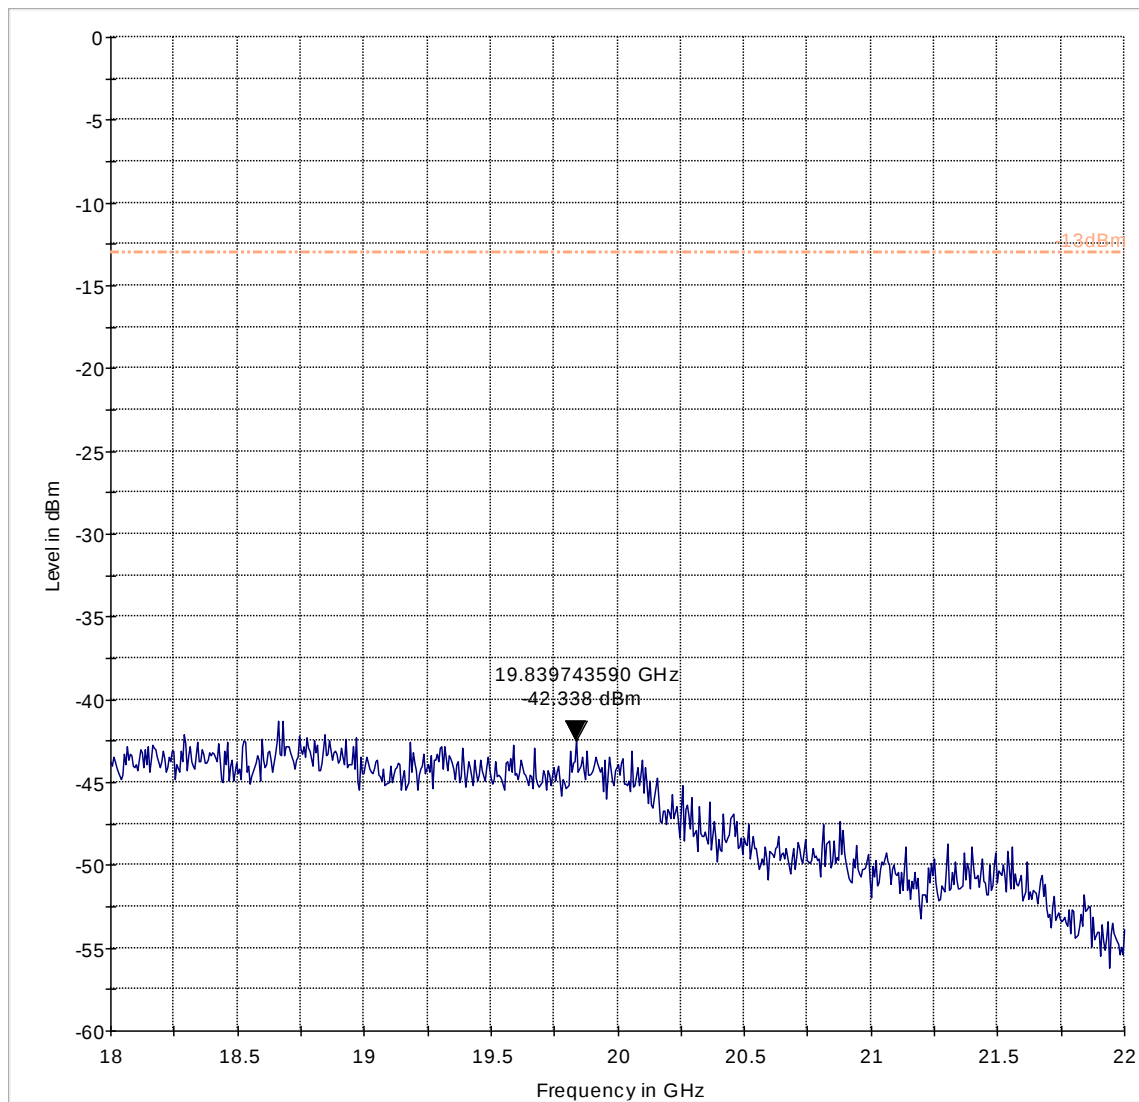


----- -13dBm Preview Result 1-PK+

Radiated Spurious Emissions (GSM-1900) Tx: High Channel
Test results 30MHz-1GHz

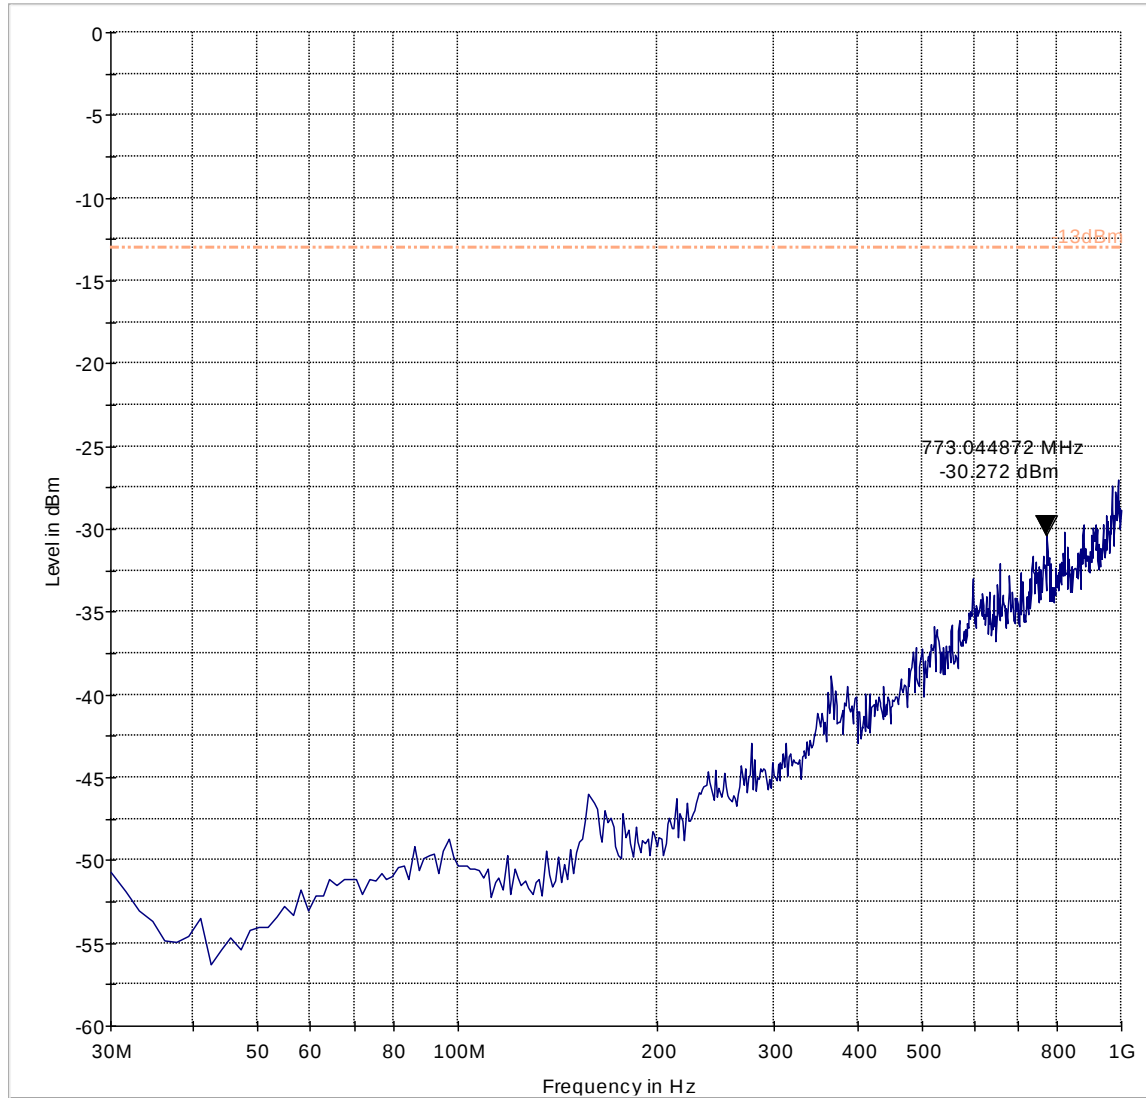


----- -13dBm ——— Preview Result 1-PK+

Test results 1GHz-18GHz

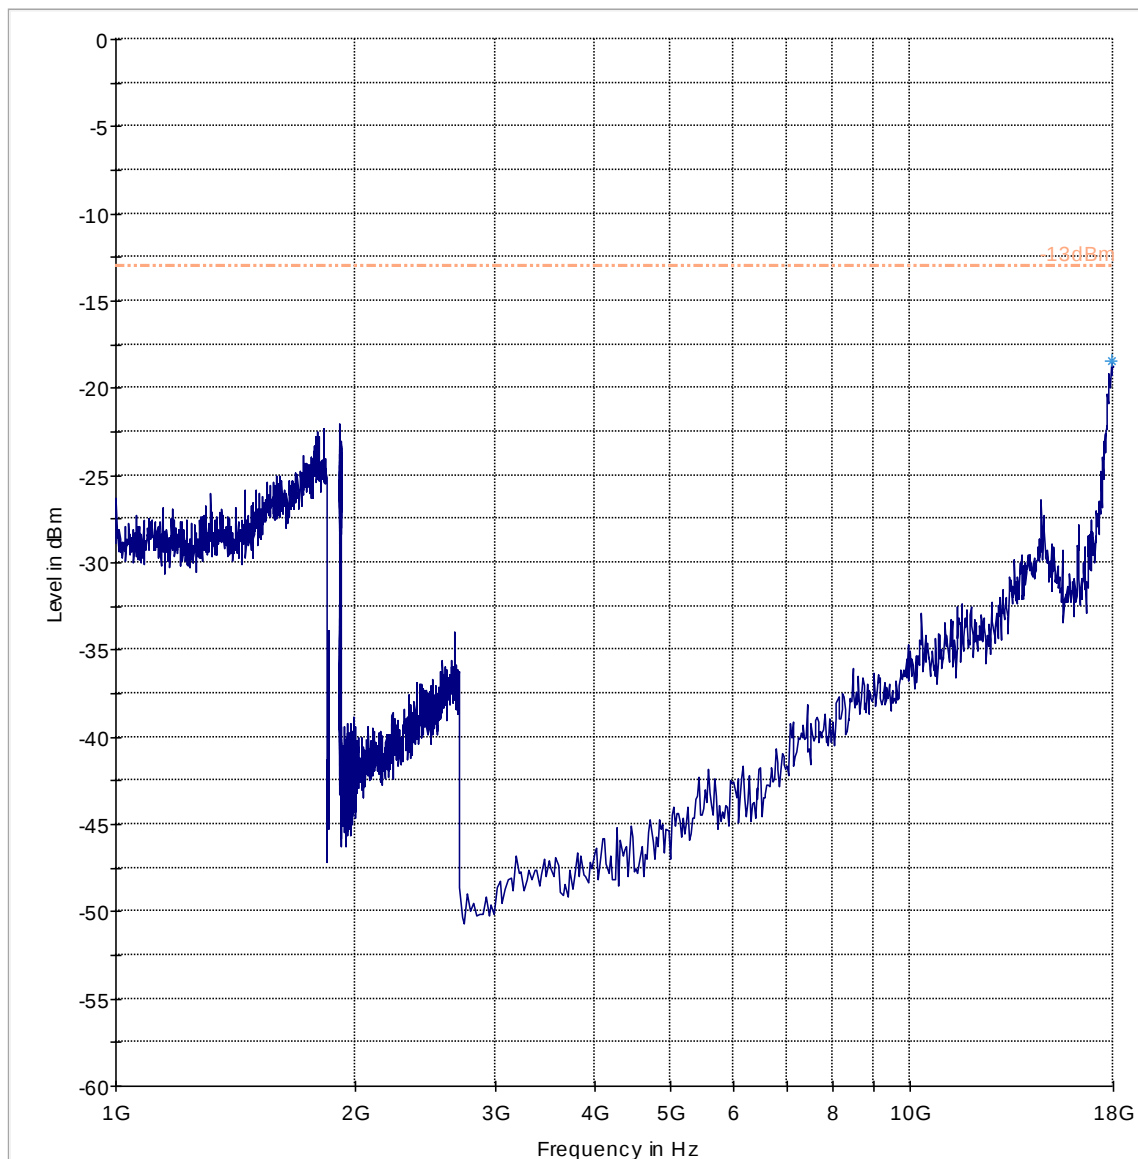


----- -13dBm ——— Preview Result 1-PK+ * Data Reduction Result 1 [2]-PK+

Radiated Spurious Emissions (UMTS-850) Tx: Low Channel
Test results 30MHz-1GHz

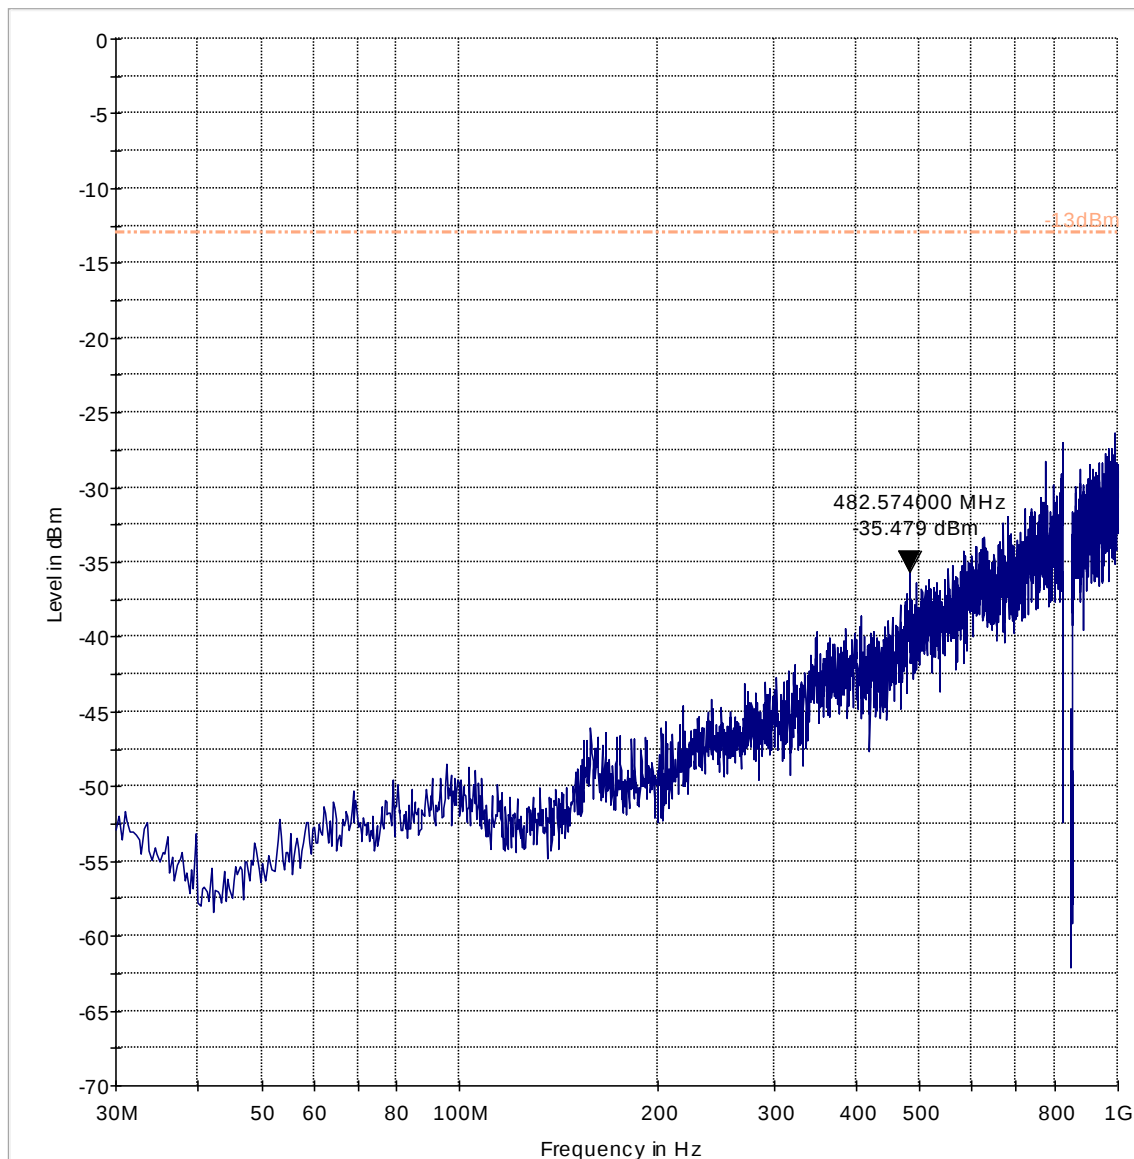

----- -13dBm ——— Preview Result 1-PK+


Test results 1-9GHz

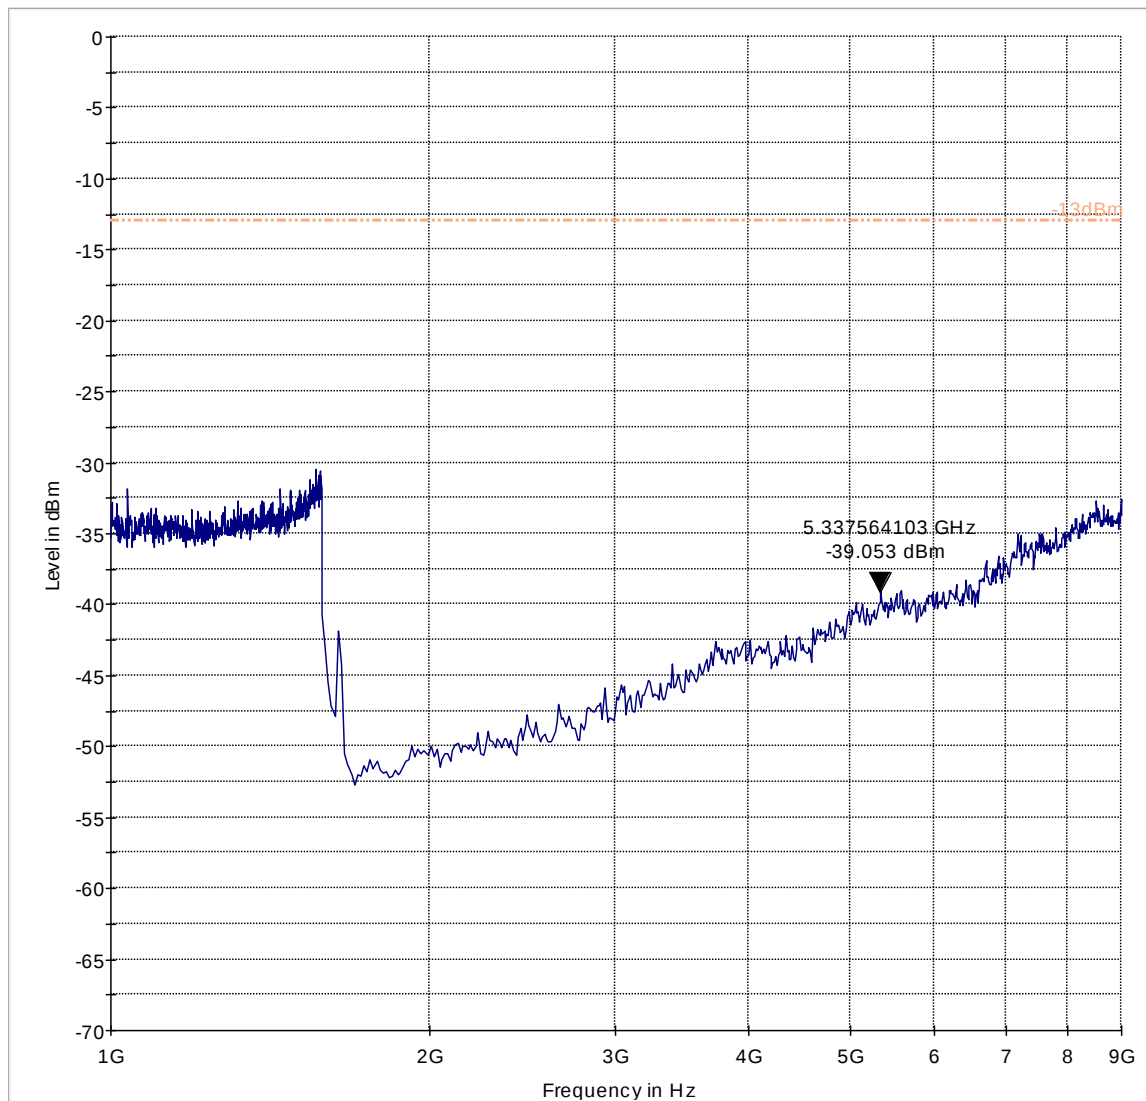

Radiated Spurious Emissions (UMTS-850) Tx: Mid Channel


Test results 9KHz-30MHz

Note: Emission at 70.236KHz is ambient noise.

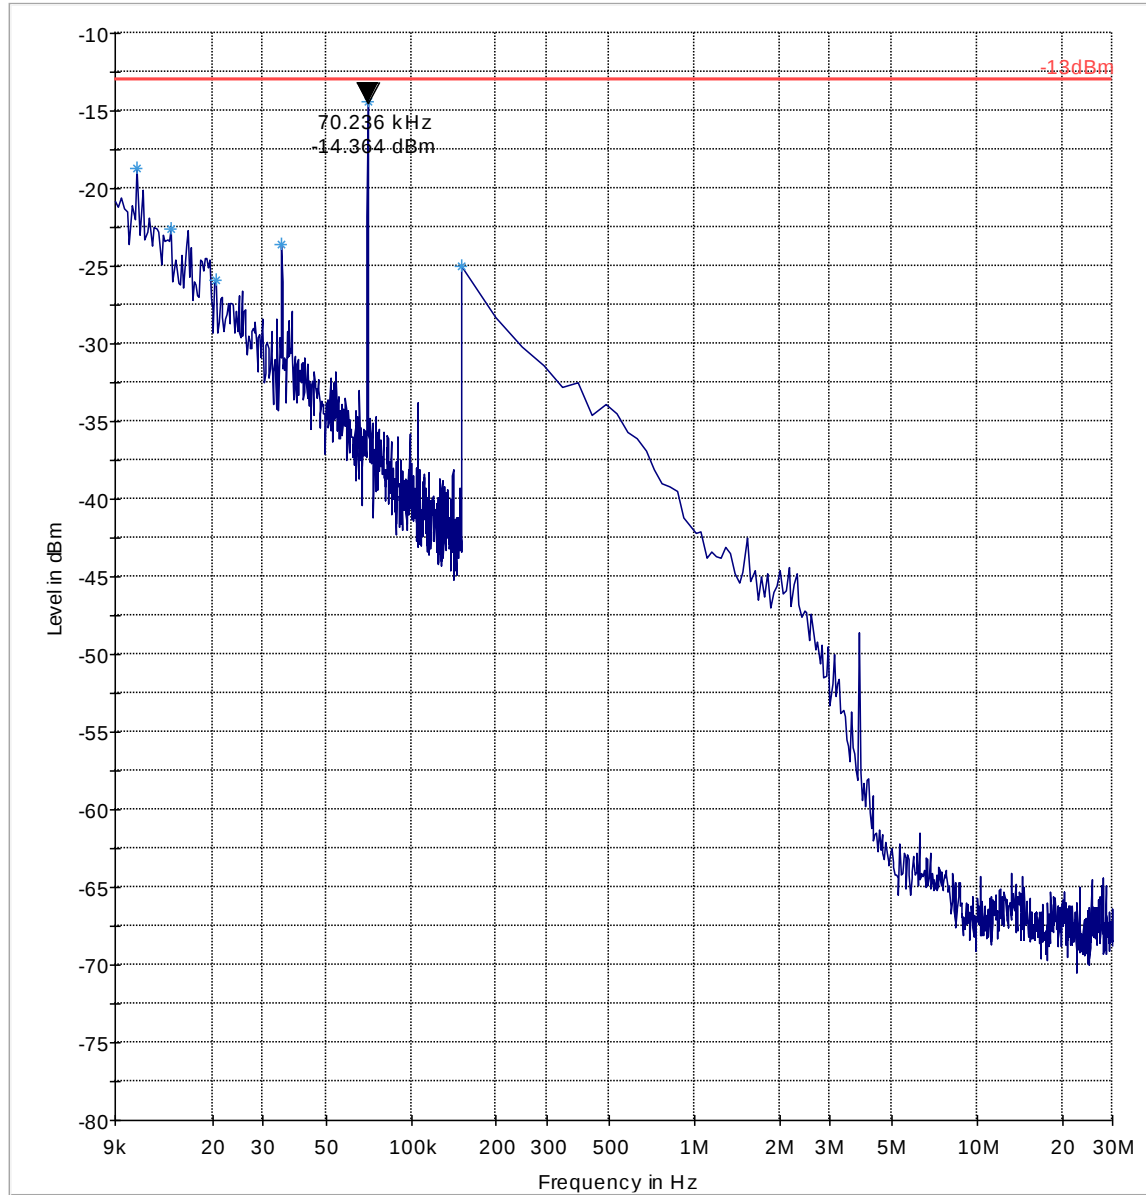


— -13dBm — Preview Result 1-PK+ * Data Reduction Result 1 [1]-PK+

Test results 30MHz-1GHz

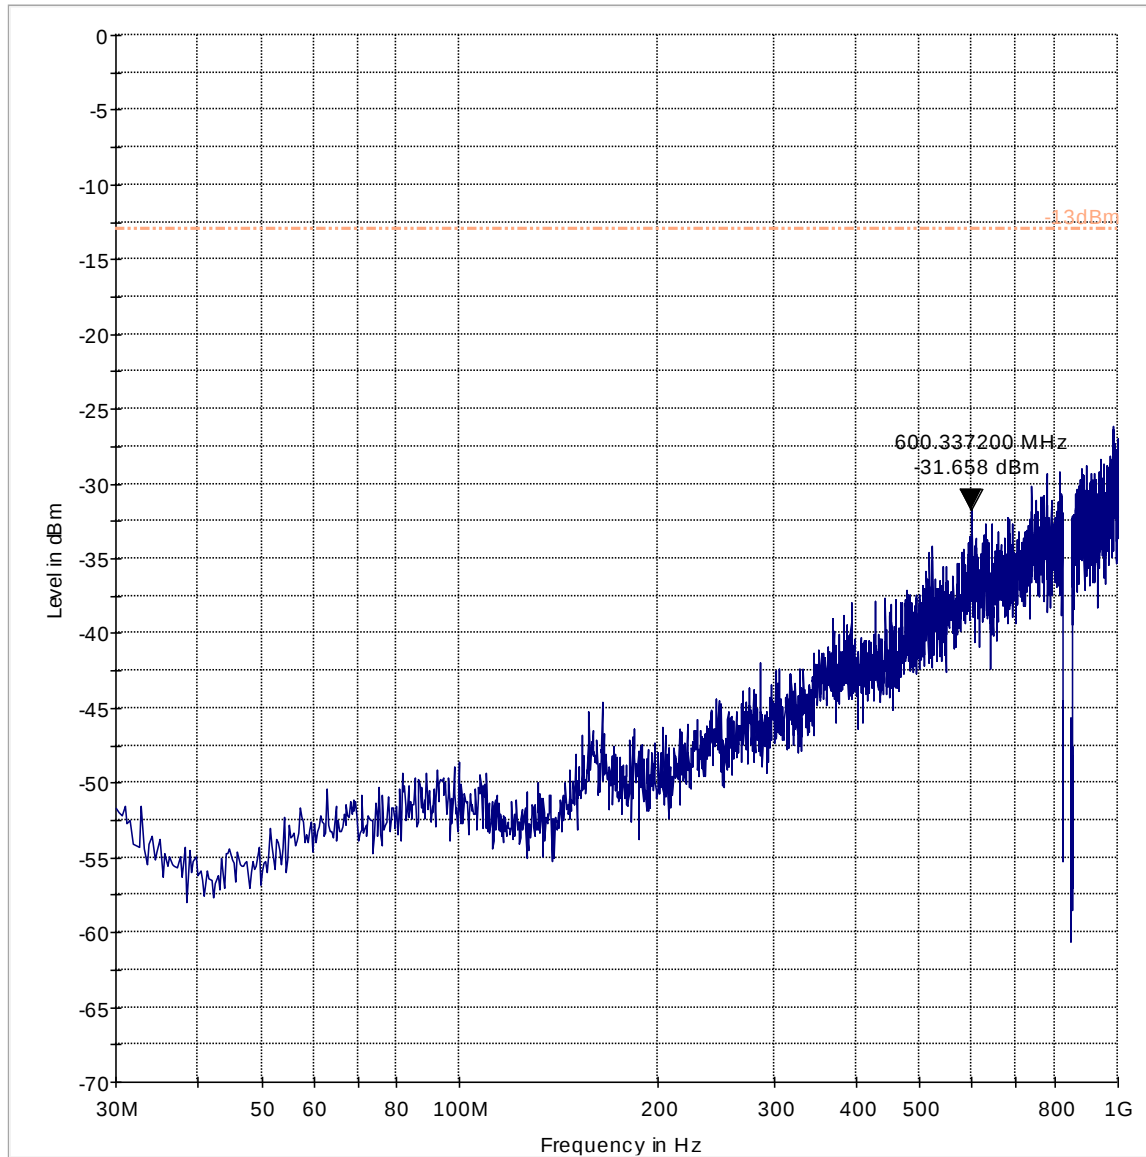


----- -13dBm ——— Preview Result 1-PK+

Test results 1-9GHz

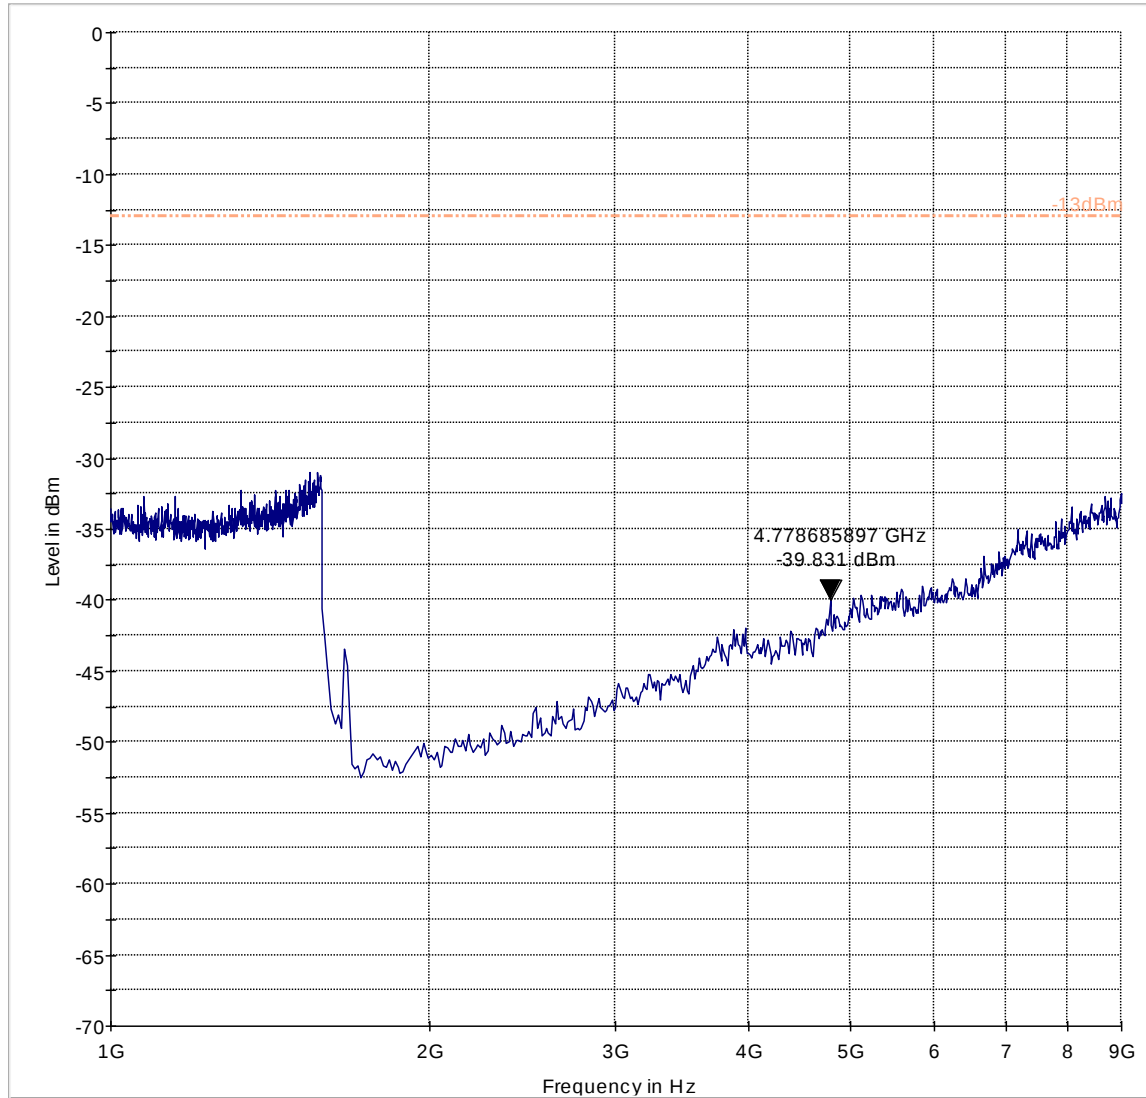


----- -13dBm ——— Preview Result 1-PK+

Radiated Spurious Emissions (UMTS-850) Tx: High Channel
Test results 30MHz-1GHz

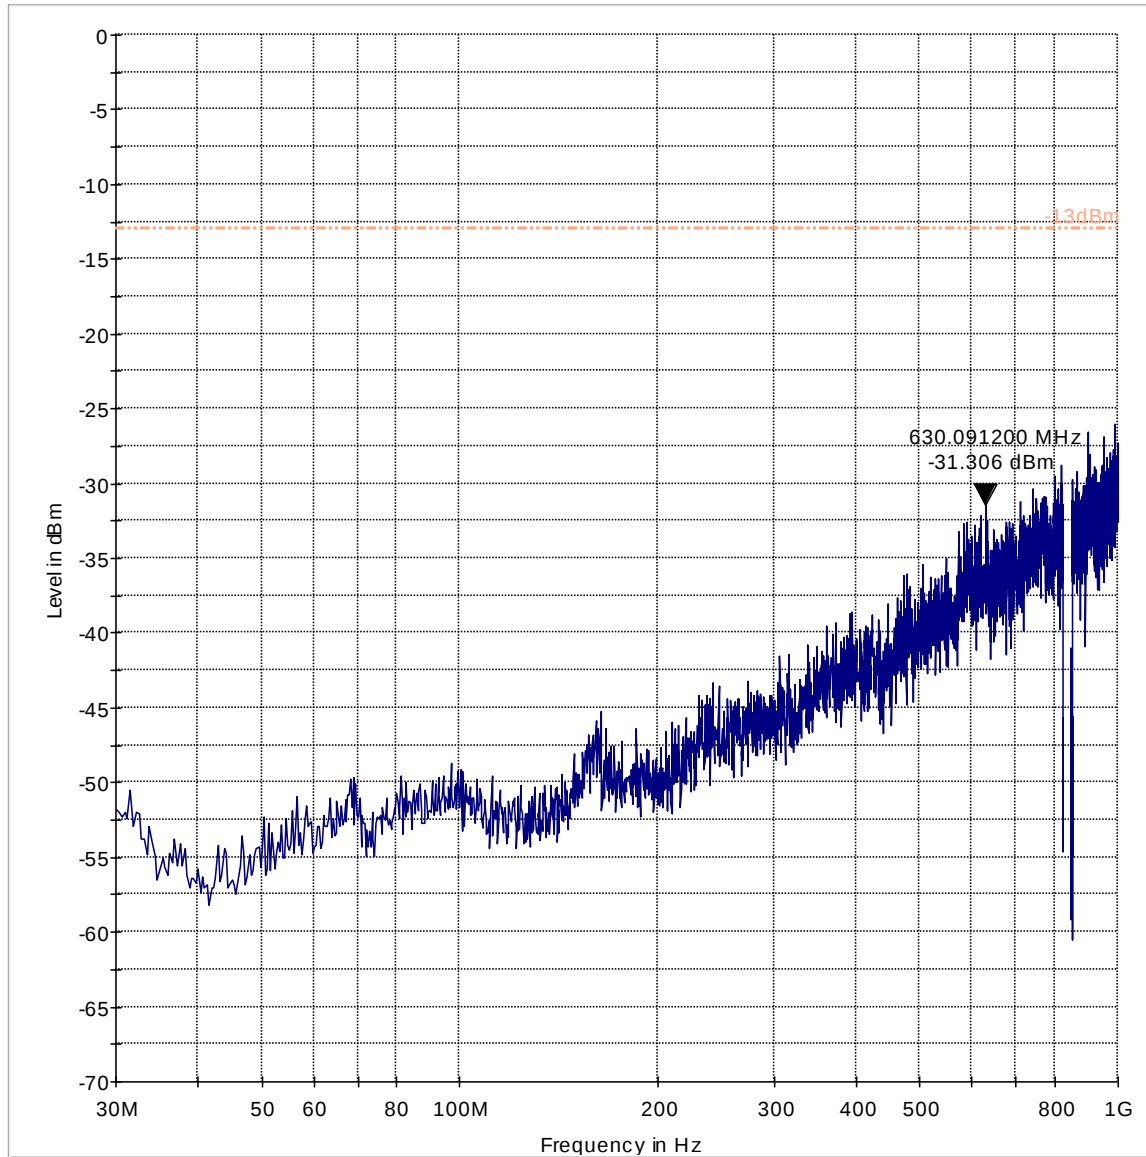


----- -13dBm ——— Preview Result 1-PK+

Test results 1-9GHz

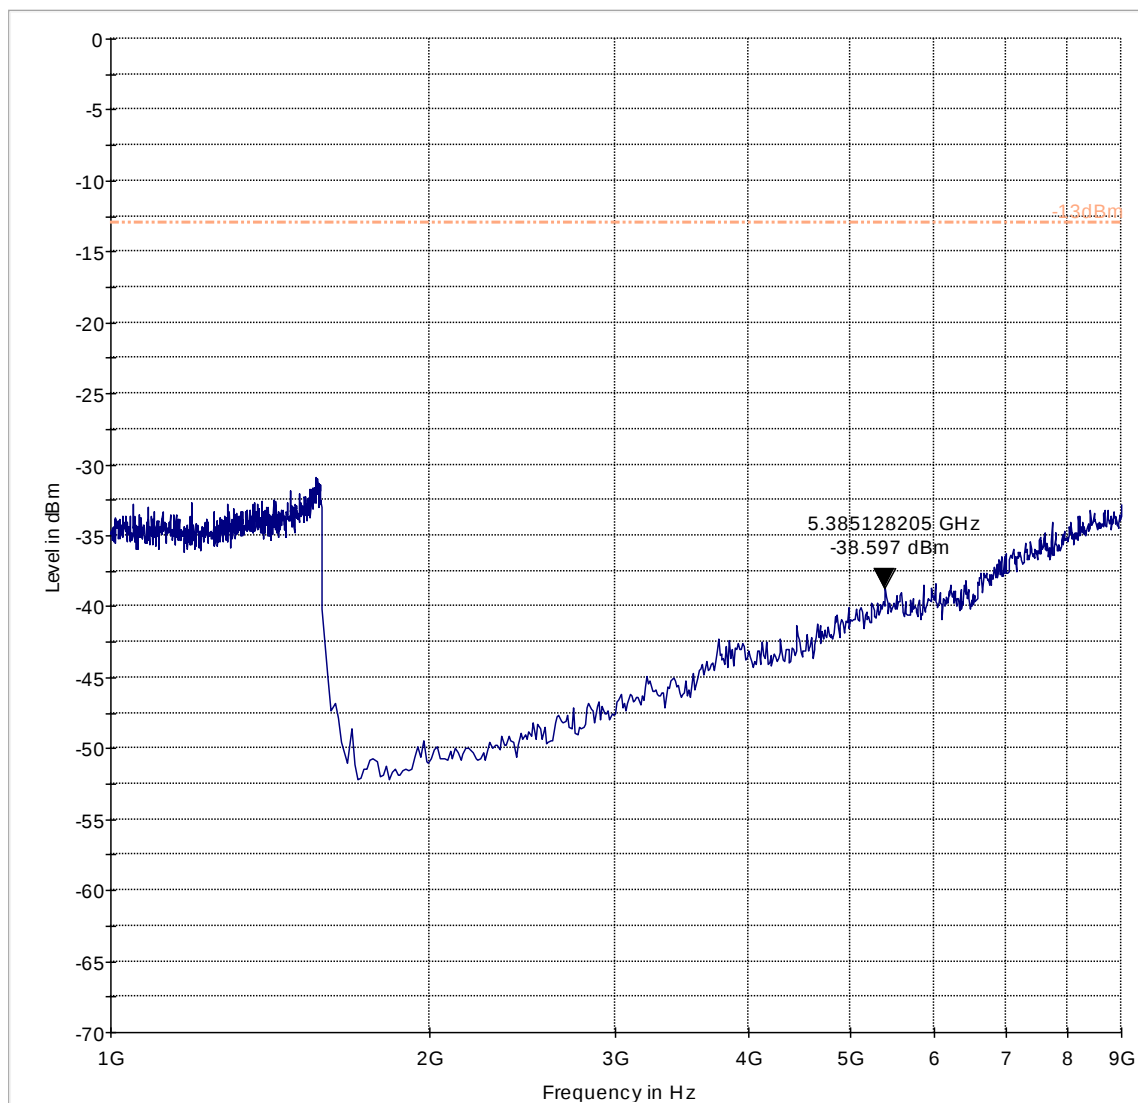


Radiated Spurious Emissions (UMTS-1900) Tx: Low Channel
Test results 30MHz-1GHz

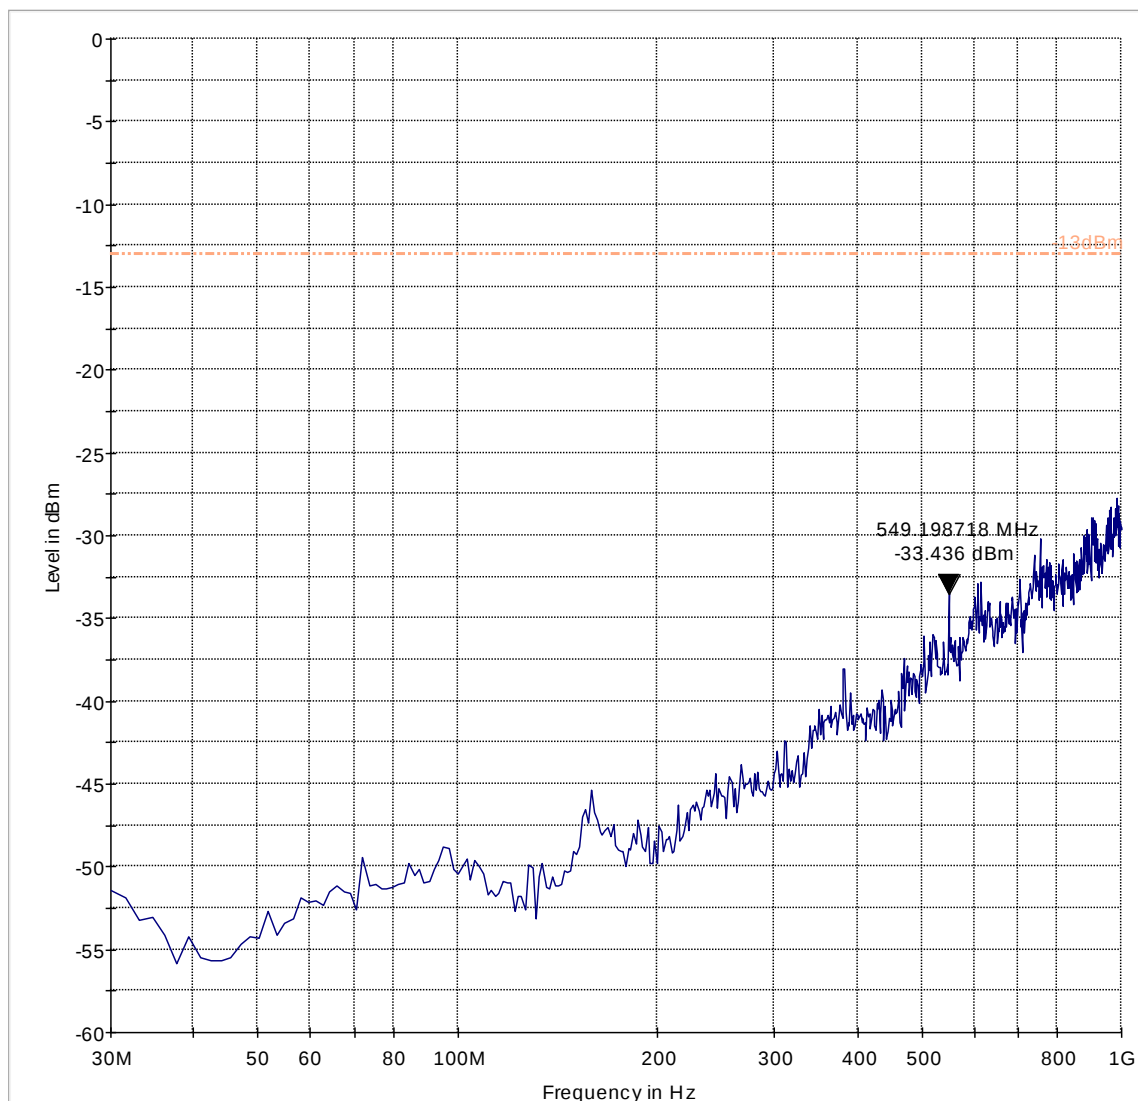


----- -13dBm Preview Result 1-PK+

Test results 1-18GHz

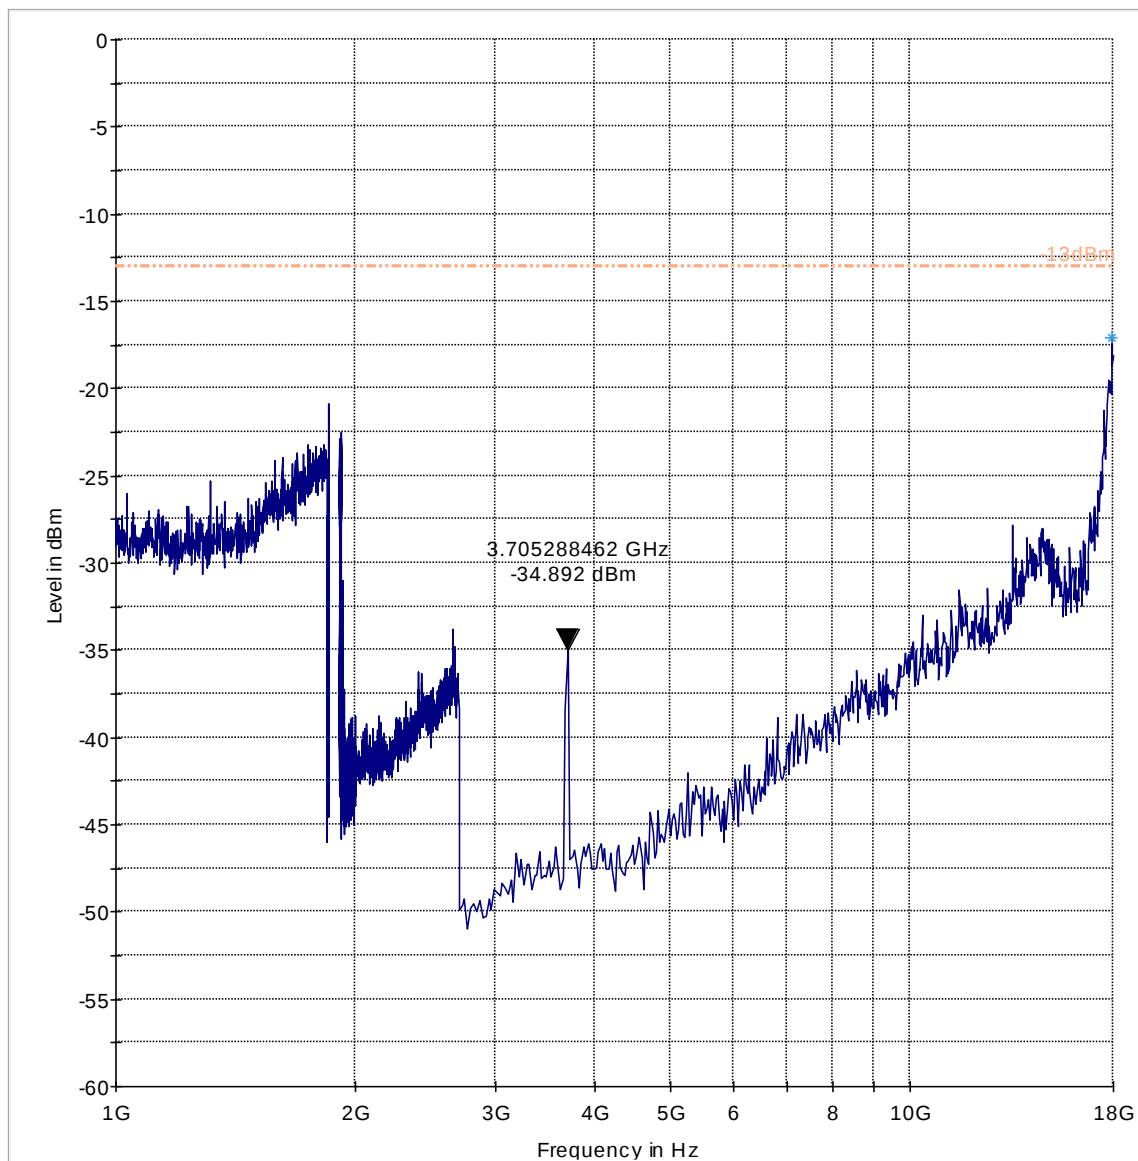

----- -13dBm ——— Preview Result 1-PK+ * Data Reduction Result 1 [2]-PK+

Test results 18-22GHz

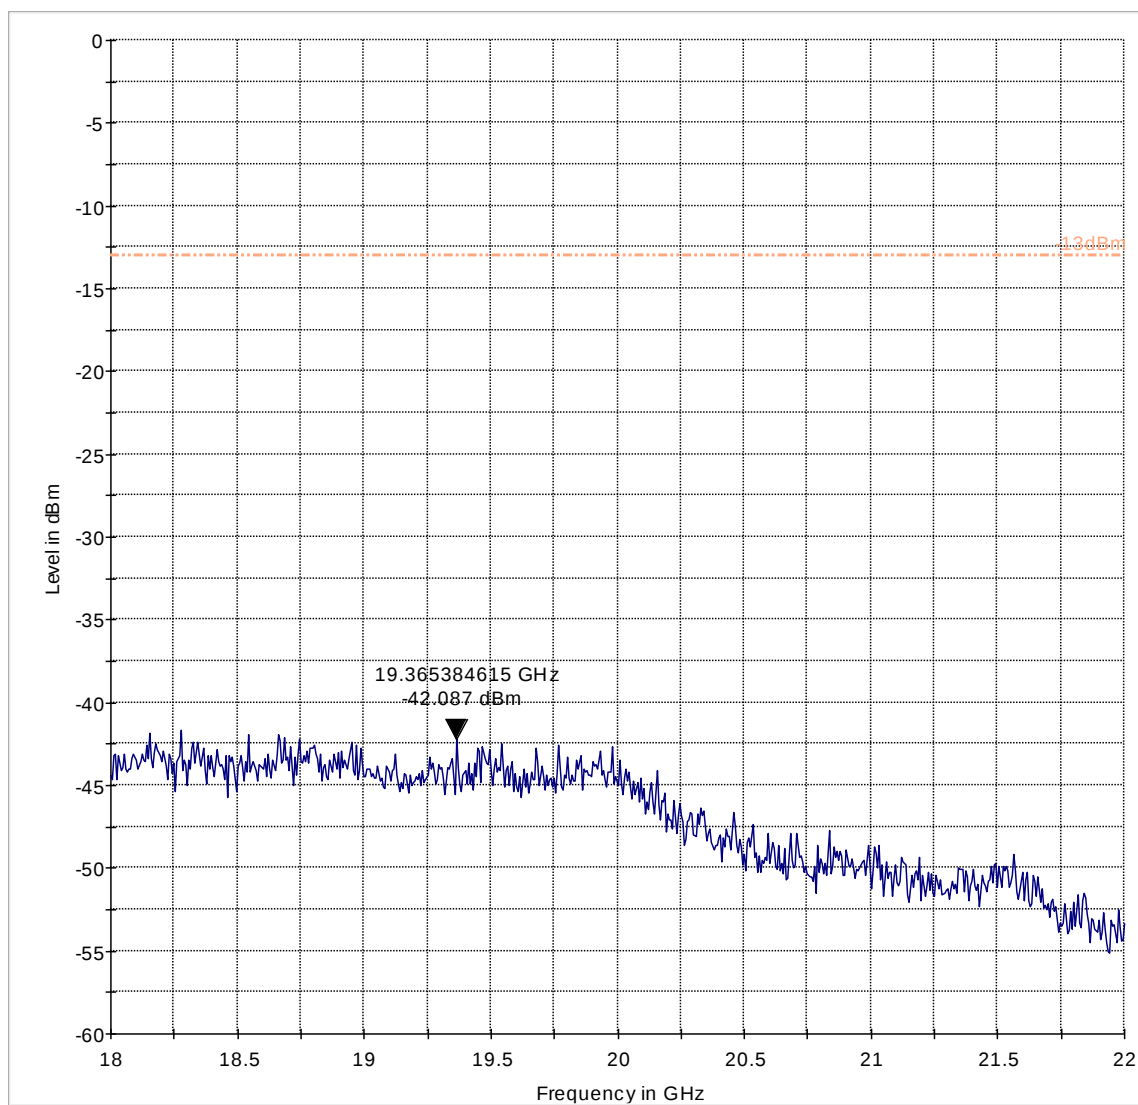


----- -13dBm ——— Preview Result 1-PK+

Radiated Spurious Emissions (UMTS-1900) Tx: Mid Channel


Test results 9KHz-30MHz

Note: Emission at 70.236KHz is ambient noise.

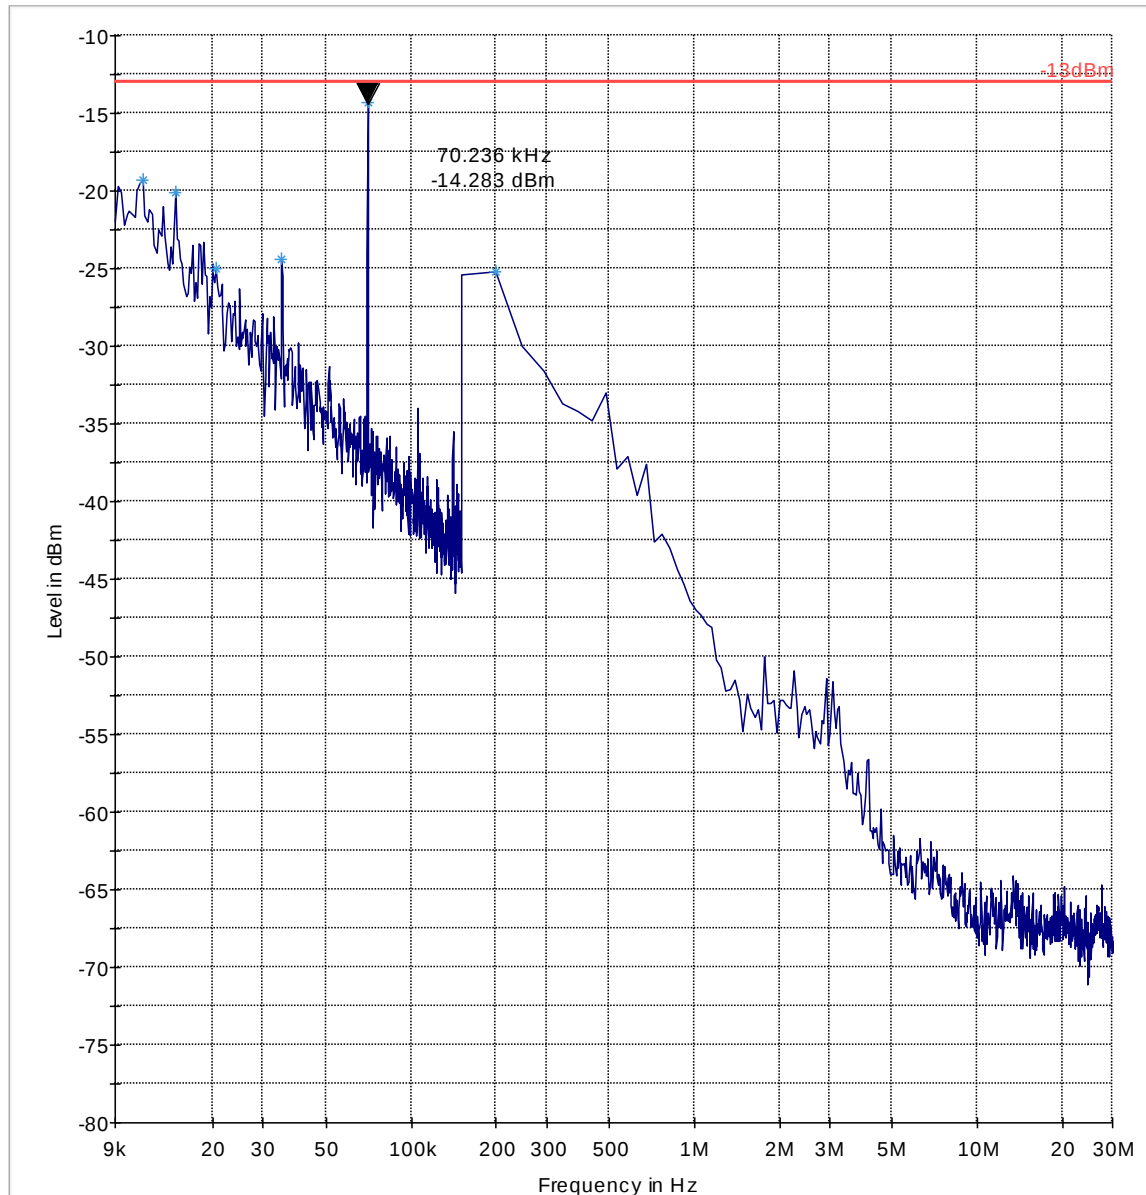


— -13dBm — Preview Result 1-PK+ * Data Reduction Result 1 [1]-PK+


Test results 30MHz-1GHz

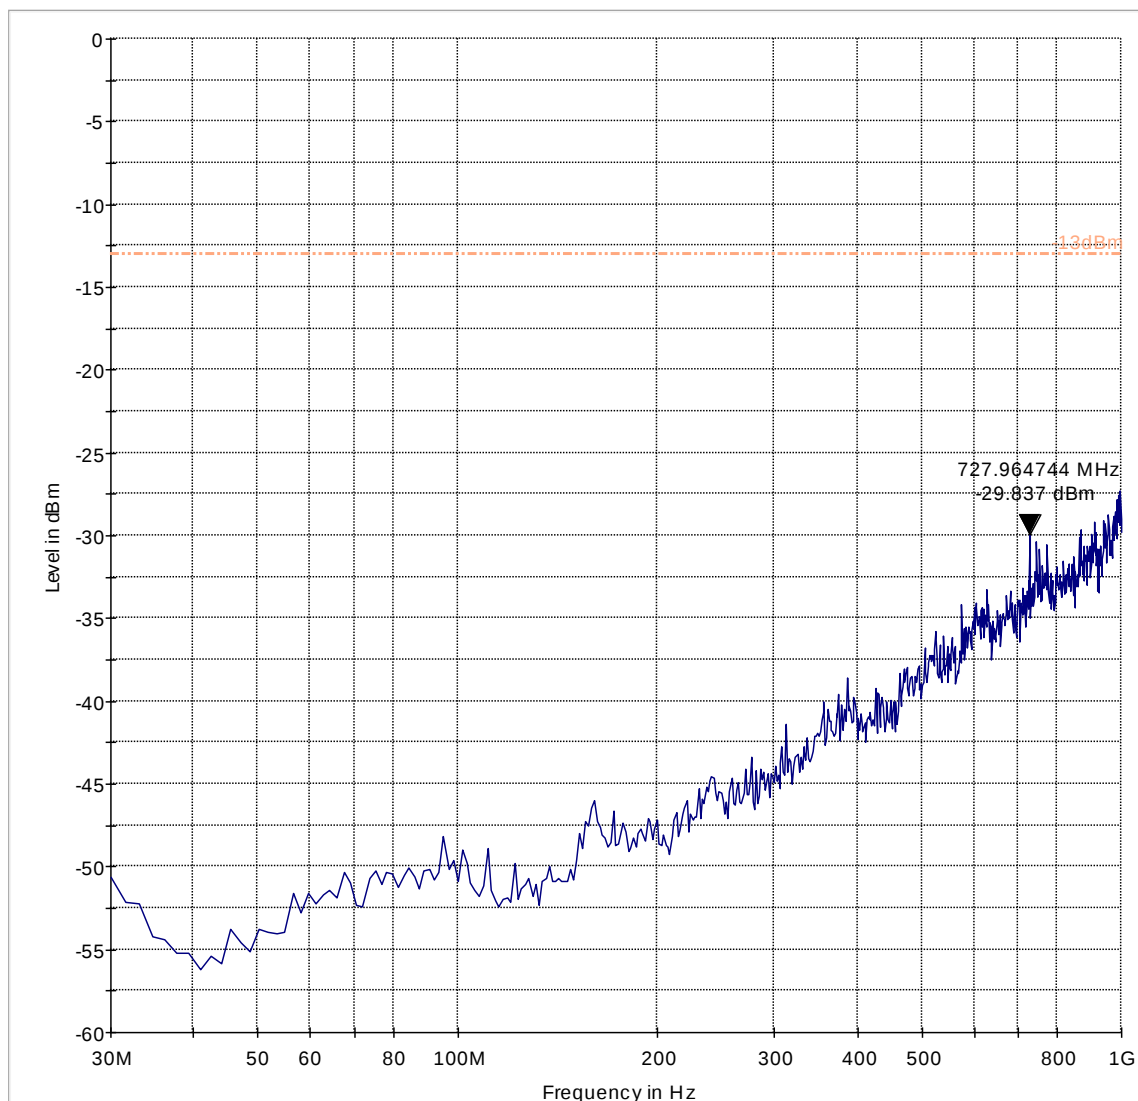


Test results 1-18GHz

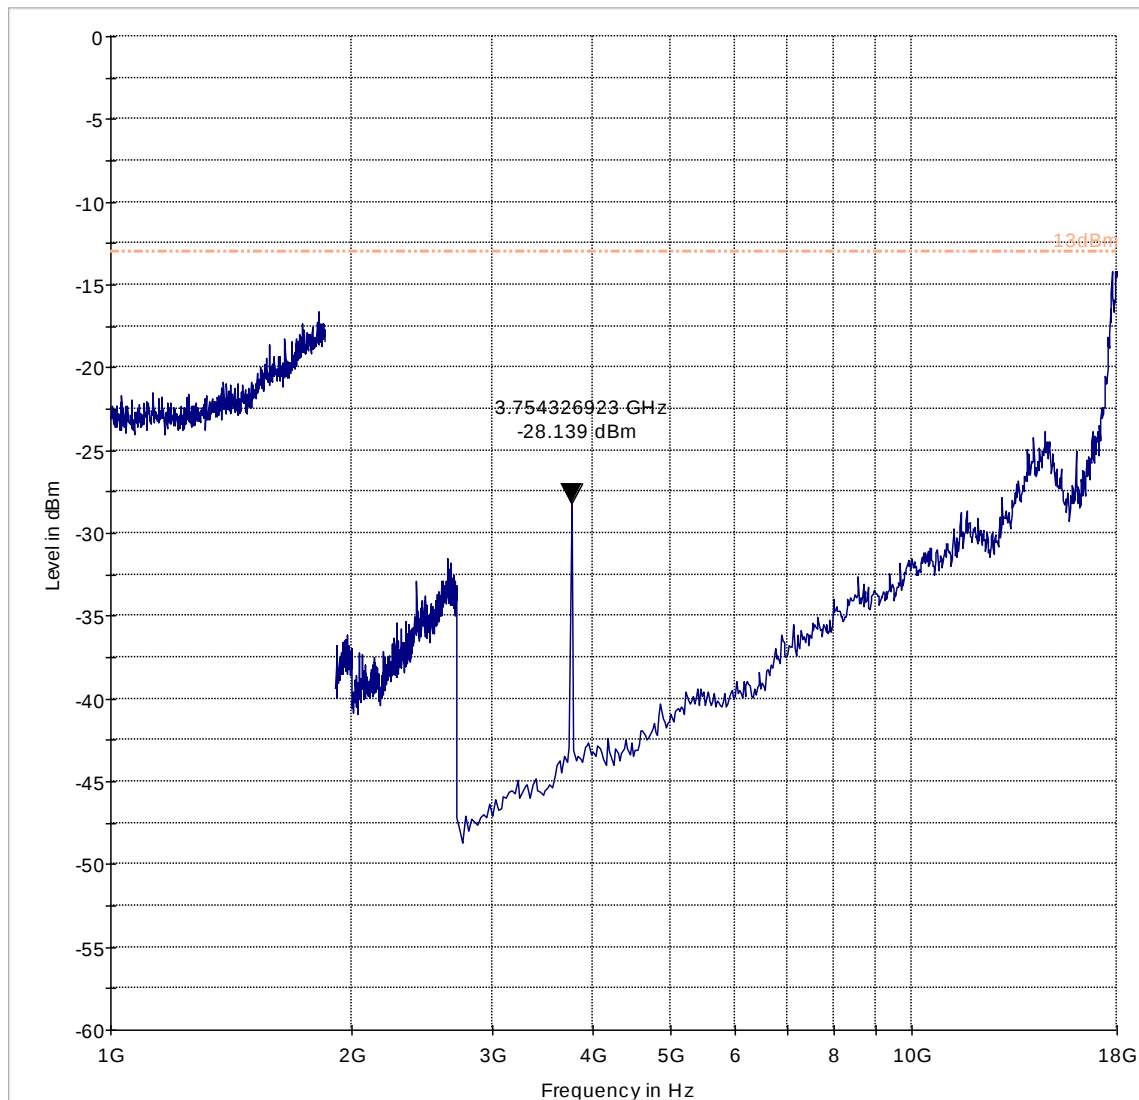

Test results 18-22GHz

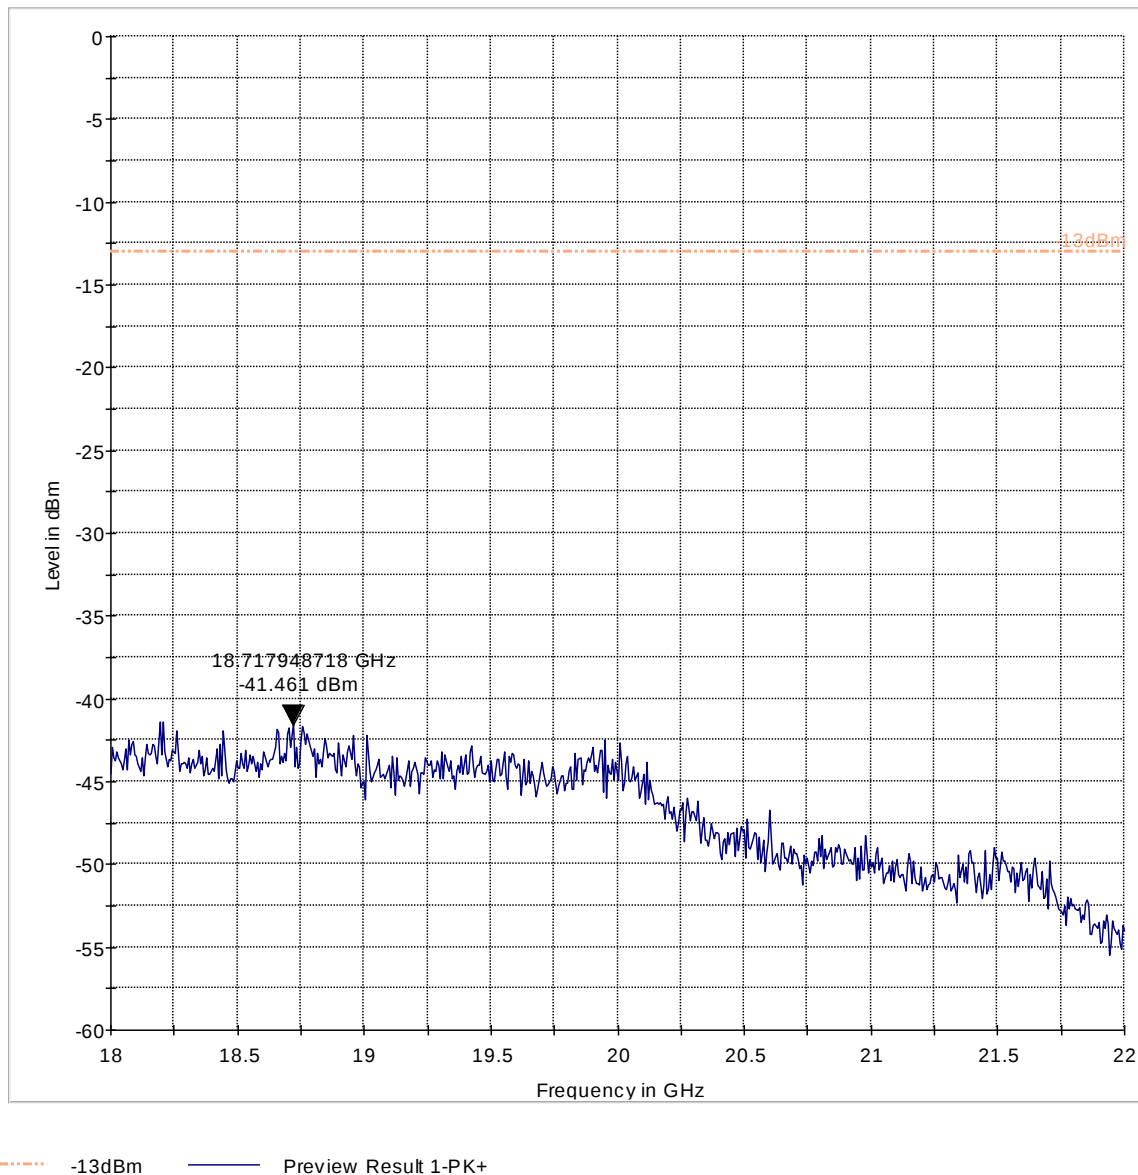


Radiated Spurious Emissions (UMTS-1900) Tx: High Channel
Test results 30MHz-1GHz

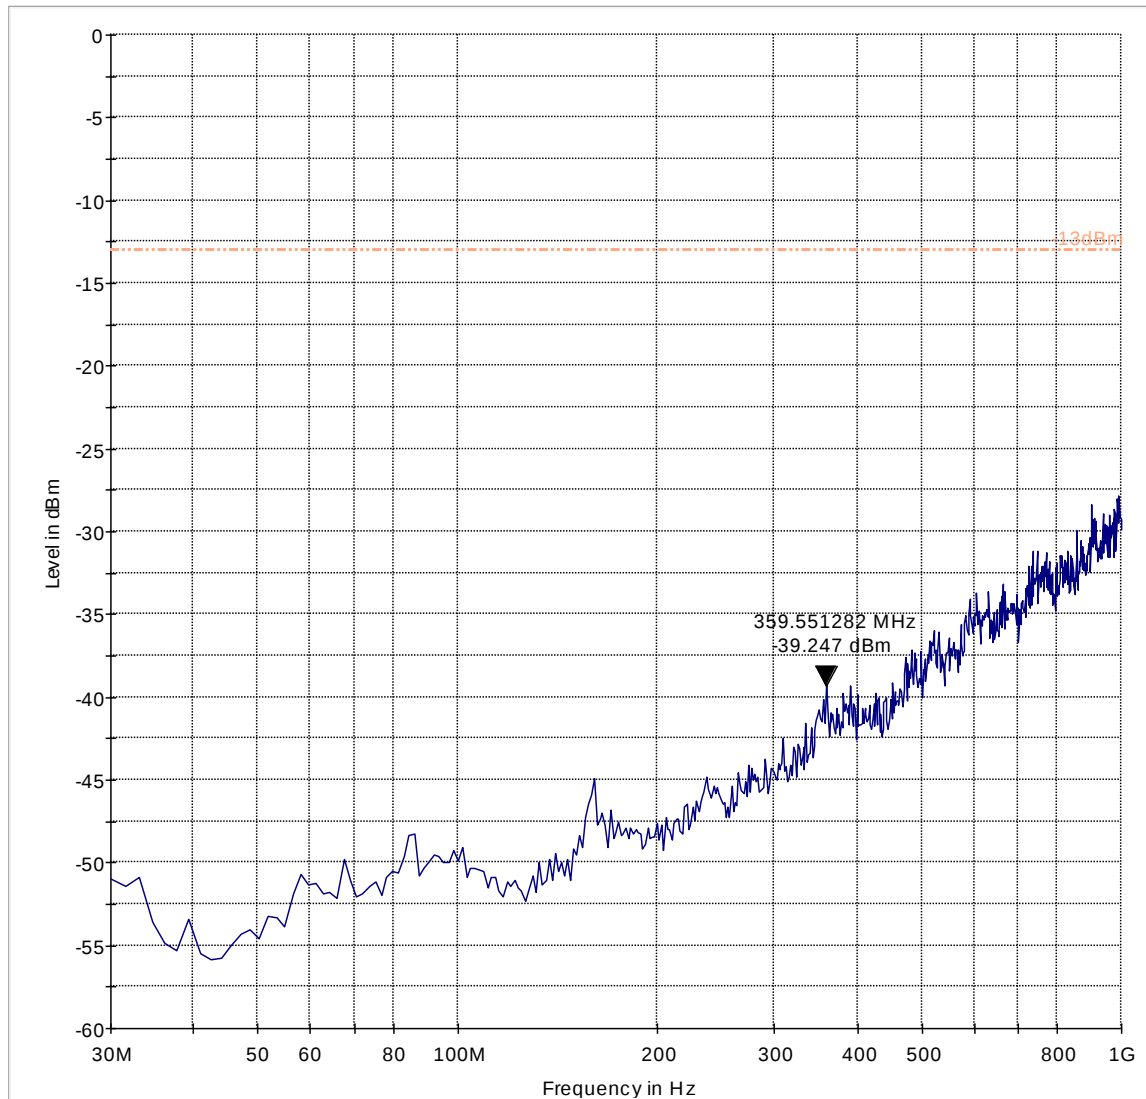


----- -13dBm — Preview Result 1-PK+

Test results 1-18GHz

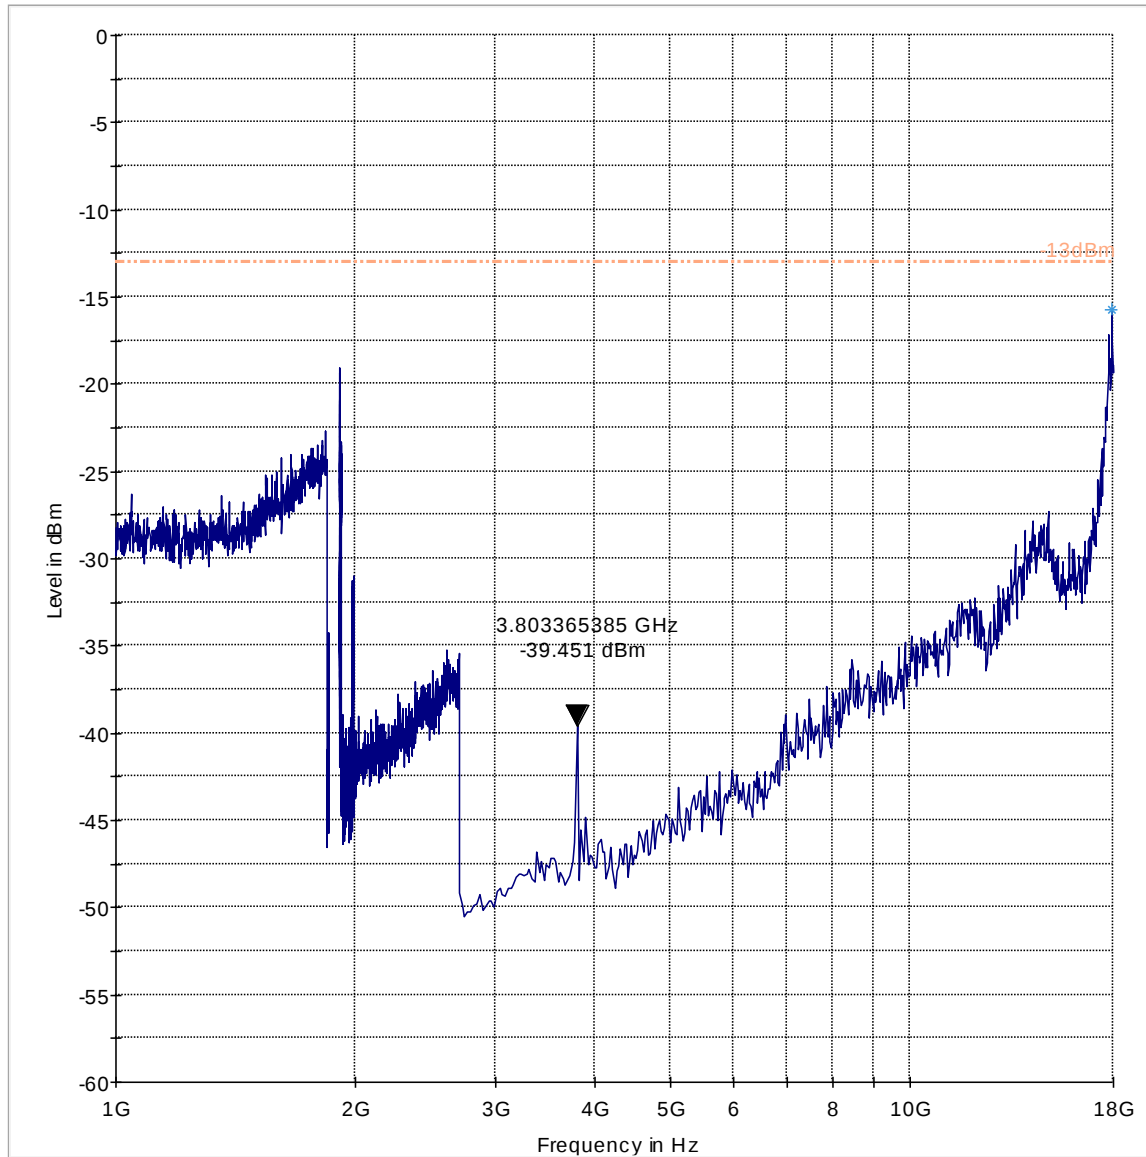

----- -13dBm Preview Result 1-PK+ * Data Reduction Result 1 [2]-PK+

Test results 18-22GHz


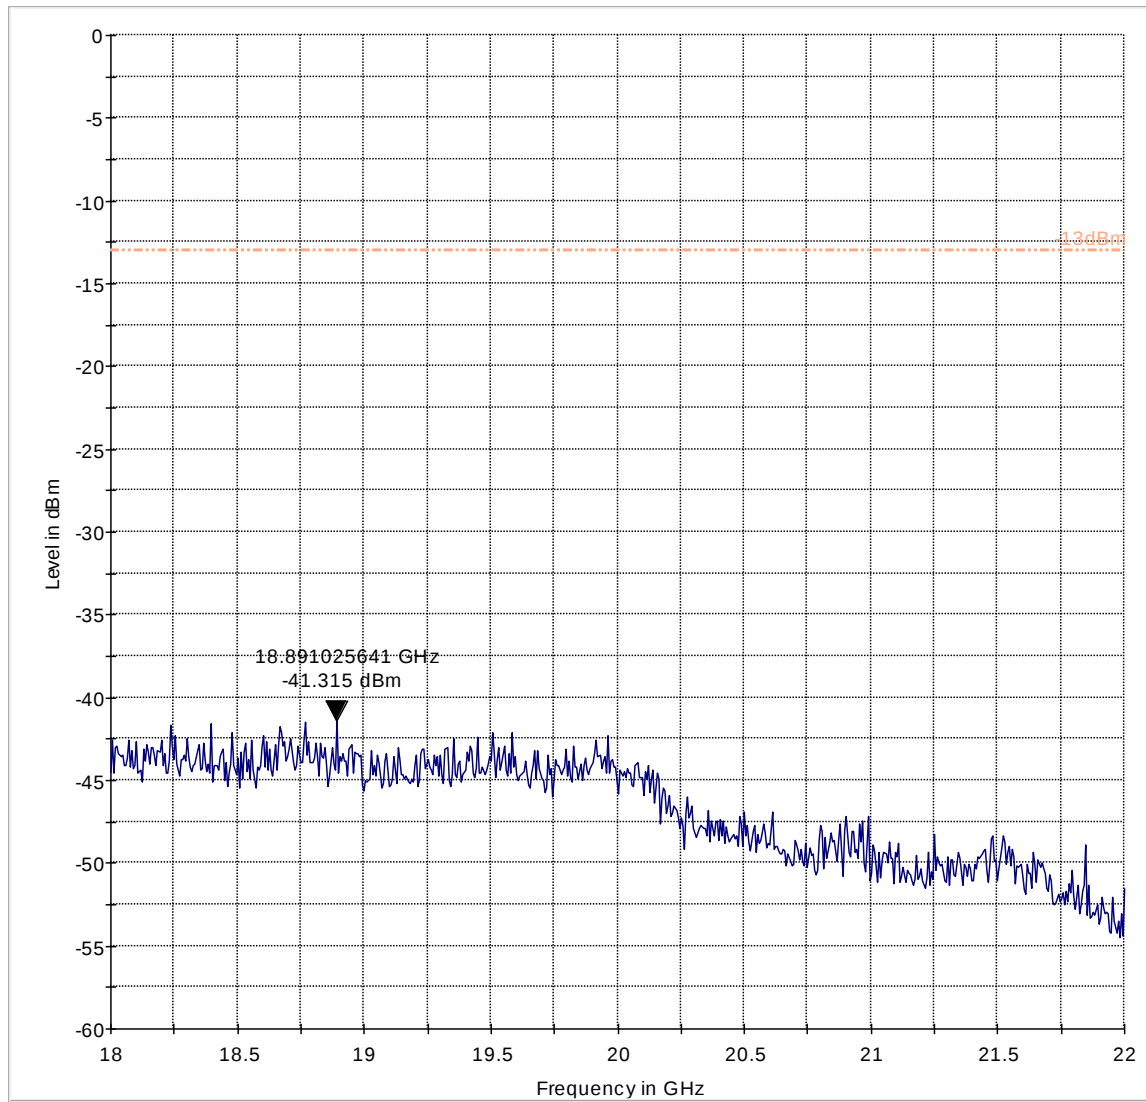


----- -13dBm ——— Preview Result 1-PK+

6. Test Equipment and Ancillaries used for tests

No.	Equipment Name	Manufacturer	Type/model	Serial No.	Cal Date	Cal Interval
3m Semi- Anechoic Chamber:						
	Digital Radio Comm. Tester	Rohde&Schwarz	CMU 200	101821	Jun 2013	2 Years
	EMC32 Measurement Software	Rohde&Schwarz	8.52.0	N/A	N/A	N/A
	Turn table	EMCO	2075	N/A	N/A	N/A
	MAPS Position Controller	ETS Lindgren	2092	0004-1510	N/A	N/A
	Antenna Mast	EMCO	2075	N/A	N/A	N/A
	Relay Switch Unit	Rohde&Schwarz	RSU	338964/001	N/A	N/A
	EMI Receiver/Analyzer	Rohde&Schwarz	ESU 40	100251	Sep 2013	2 Years
	1500MHz HP Filter	Filtek	HP12/1700	14c48	N/A	N/A
	2800 MHz HP Filter	Filtek	HP12/2800	14C47	N/A	N/A
	Pre-Amplifier	Miteq	JS40010260	340125	N/A	N/A
	Binconilog Antenna	EMCO	3141	0005-1186	Apr 2012	3 Years
	Horn Antenna	EMCO	3115	35114	Mar 2012	3 Years
	Horn Antenna	ETS Lindgren	3116	70497	Mar 2012	3 Years
	Loop Antenna 6512	ETS Lindgren	6512	49838	Mar 2014	3 Years
Ancillary equipment						
	Thermometer Humidity	Dickson	TM320	03280063	Jul 2014	1 Year
	Communication Antenna	IBP5-900/1940	Kathrein	N/A	N/A	N/A

8 Block Diagrams

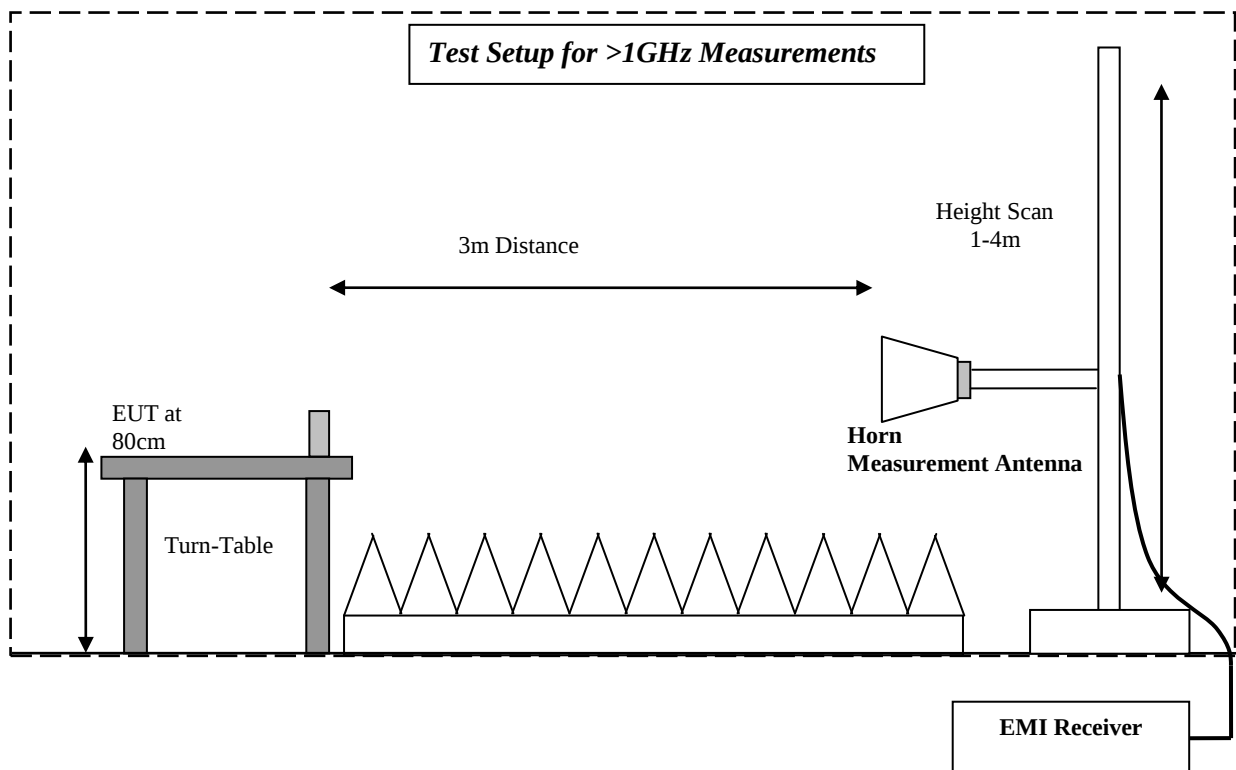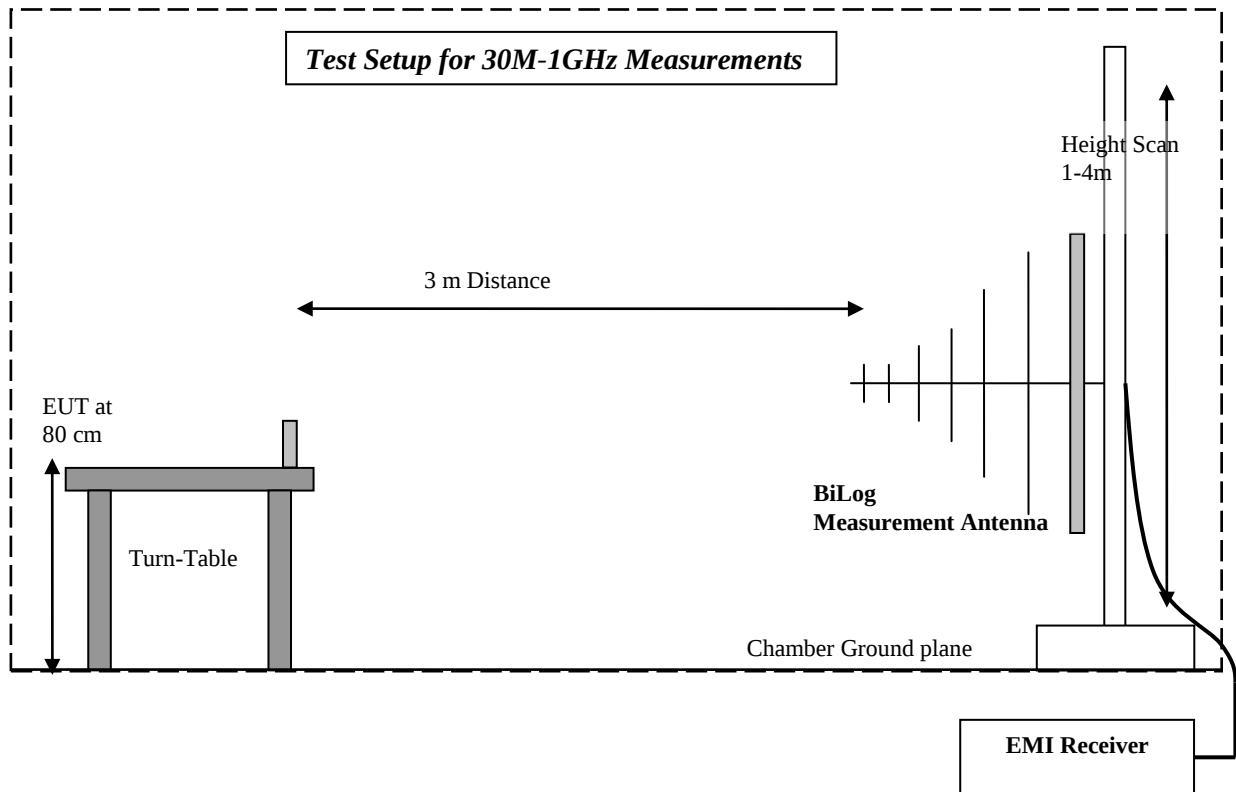

9 Revision History

Date	Report Name	Changes to report	Report prepared by
2014-09-23	EMC_TZMED_007_14001_FCC_22_24	First Version	Douglas Antioco
2014-11-05	EMC_TZMED_007_14001_FCC_22_24_rev1	Updated Model # on title page, Antenna gain info in Section 3.1, updated table in Section 6.1.4	Douglas Antioco