

#01_HAC_E_GSM850_Voice_Ch128

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 824.2 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 824.2 MHz; Calibrated: 2021/1/25
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2021/4/8
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 40.08 V/m; Power Drift = -0.05 dB

Applied MIF = 3.63 dB

RF audio interference level = 33.45 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 32.23 dBV/m	Grid 2 M4 33.45 dBV/m	Grid 3 M4 33.33 dBV/m
Grid 4 M4 32.02 dBV/m	Grid 5 M4 33.15 dBV/m	Grid 6 M4 33.06 dBV/m
Grid 7 M4 31.66 dBV/m	Grid 8 M4 32.24 dBV/m	Grid 9 M4 32.01 dBV/m

Cursor:

Total = 33.45 dBV/m

E Category: M4

Location: -4.5, -23.5, 8.7 mm



#02_HAC_E_GSM850_Voice_Ch189

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 836.4 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 836.4 MHz; Calibrated: 2021/1/25
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2021/4/8
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 42.00 V/m; Power Drift = -0.04 dB

Applied MIF = 3.63 dB

RF audio interference level = 33.89 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 32.52 dBV/m	Grid 2 M4 33.89 dBV/m	Grid 3 M4 33.79 dBV/m
Grid 4 M4 32.56 dBV/m	Grid 5 M4 33.59 dBV/m	Grid 6 M4 33.5 dBV/m
Grid 7 M4 32.17 dBV/m	Grid 8 M4 32.68 dBV/m	Grid 9 M4 32.43 dBV/m

Cursor:

Total = 33.89 dBV/m

E Category: M4

Location: -5, -24.5, 8.7 mm



#03_HAC_E_GSM850_Voice_Ch251

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 848.8 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 848.8 MHz; Calibrated: 2021/1/25
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2021/4/8
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 39.24 V/m; Power Drift = -0.04 dB

Applied MIF = 3.63 dB

RF audio interference level = 33.59 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 31.61 dBV/m	Grid 2 M4 33.59 dBV/m	Grid 3 M4 33.56 dBV/m
Grid 4 M4 31.44 dBV/m	Grid 5 M4 33.14 dBV/m	Grid 6 M4 33.13 dBV/m
Grid 7 M4 31.15 dBV/m	Grid 8 M4 31.85 dBV/m	Grid 9 M4 31.74 dBV/m

Cursor:

Total = 33.59 dBV/m

E Category: M4

Location: -7, -23, 8.7 mm

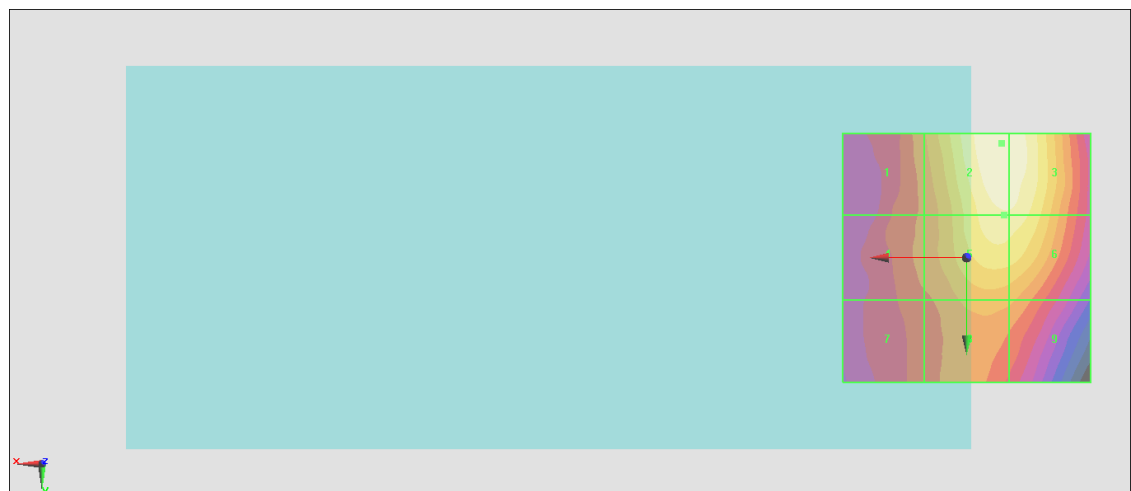

0 dB = 47.79 V/m = 33.59 dBV/m

#04_HAC_E_GSM1900_Voice_Ch512

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1850.2 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 1850.2 MHz; Calibrated: 2021/1/25
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2021/4/8
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 12.31 V/m; Power Drift = -0.15 dB

Applied MIF = 3.63 dB

RF audio interference level = 27.89 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 27.89 dBV/m	Grid 2 M4 25.83 dBV/m	Grid 3 M4 22.99 dBV/m
Grid 4 M4 27.42 dBV/m	Grid 5 M4 25.26 dBV/m	Grid 6 M4 23.02 dBV/m
Grid 7 M4 26.59 dBV/m	Grid 8 M4 25.47 dBV/m	Grid 9 M4 23.89 dBV/m

Cursor:

Total = 27.89 dBV/m

E Category: M4

Location: 25, -25, 8.7 mm

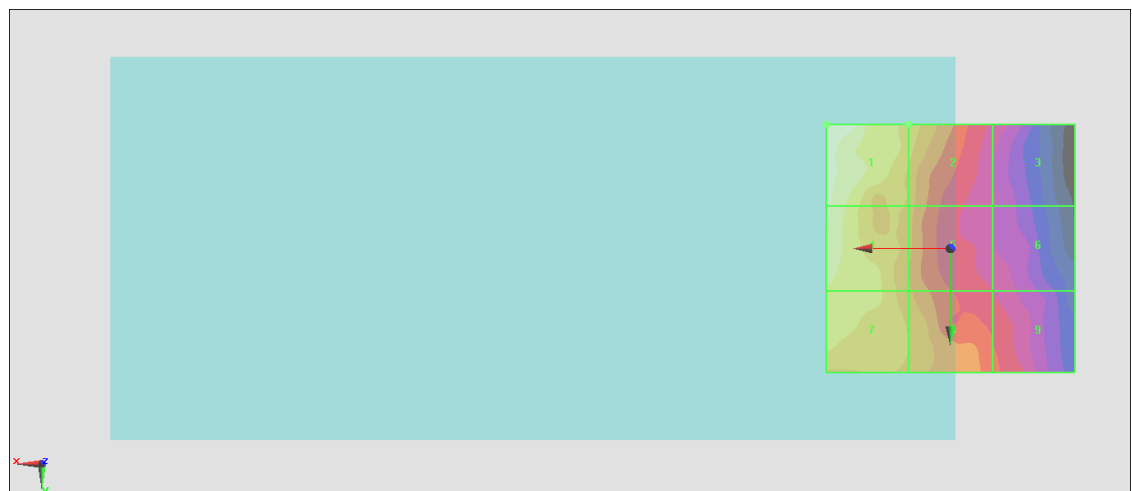

0 dB = 24.81 V/m = 27.89 dBV/m

#05_HAC_E_GSM1900_Voice_Ch661

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 1880 MHz; Calibrated: 2021/1/25
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2021/4/8
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 12.36 V/m; Power Drift = 0.17 dB

Applied MIF = 3.63 dB

RF audio interference level = 28.22 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 28.22 dBV/m	Grid 2 M4 26.37 dBV/m	Grid 3 M4 24.08 dBV/m
Grid 4 M4 27.81 dBV/m	Grid 5 M4 25.22 dBV/m	Grid 6 M4 23.38 dBV/m
Grid 7 M4 26.64 dBV/m	Grid 8 M4 26.07 dBV/m	Grid 9 M4 24.7 dBV/m

Cursor:

Total = 28.22 dBV/m

E Category: M4

Location: 25, -25, 8.7 mm

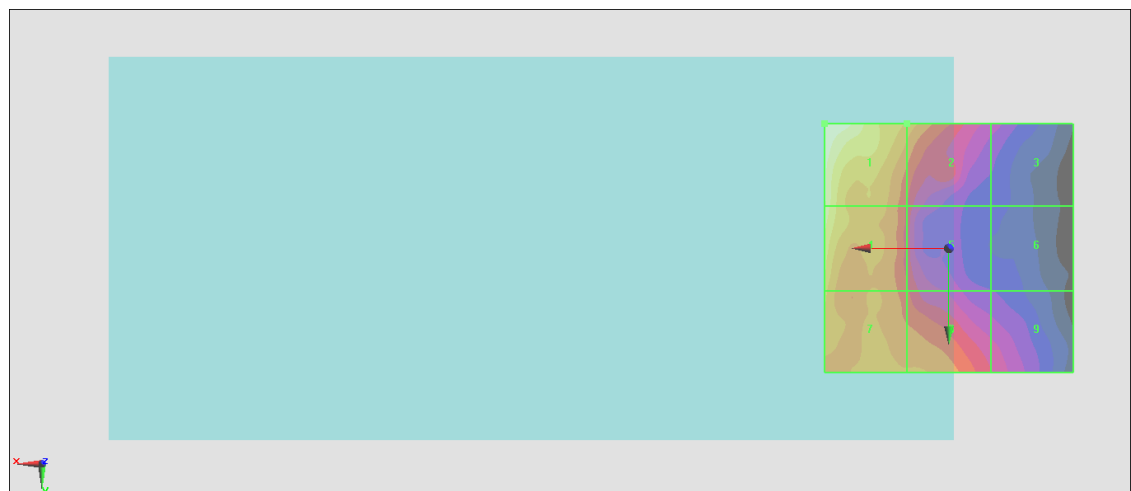

0 dB = 25.76 V/m = 28.22 dBV/m

#06_HAC_E_GSM1900_Voice_Ch810

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1909.8 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 1909.8 MHz; Calibrated: 2021/1/25
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2021/4/8
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 13.90 V/m; Power Drift = -0.18 dB

Applied MIF = 3.63 dB

RF audio interference level = 29.47 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 29.47 dBV/m	Grid 2 M4 26.64 dBV/m	Grid 3 M4 25.28 dBV/m
Grid 4 M4 27.68 dBV/m	Grid 5 M4 24.94 dBV/m	Grid 6 M4 24.72 dBV/m
Grid 7 M4 26.99 dBV/m	Grid 8 M4 26.86 dBV/m	Grid 9 M4 26.25 dBV/m

Cursor:

Total = 29.47 dBV/m

E Category: M4

Location: 23.5, -25, 8.7 mm



#07_HAC_E_LTE Band 41_20M_QPSK_1_0_Ch40140

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 2545 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2545 MHz; Calibrated: 2021/1/25
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2021/4/8
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 16.78 V/m; Power Drift = 0.05 dB

Applied MIF = -1.44 dB

RF audio interference level = 24.03 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 24.03 dBV/m	Grid 2 M4 22.44 dBV/m	Grid 3 M4 20.04 dBV/m
Grid 4 M4 24.02 dBV/m	Grid 5 M4 22.73 dBV/m	Grid 6 M4 22.73 dBV/m
Grid 7 M4 23.86 dBV/m	Grid 8 M4 23.37 dBV/m	Grid 9 M4 23.37 dBV/m

Cursor:

Total = 24.03 dBV/m

E Category: M4

Location: 25, -18, 8.7 mm

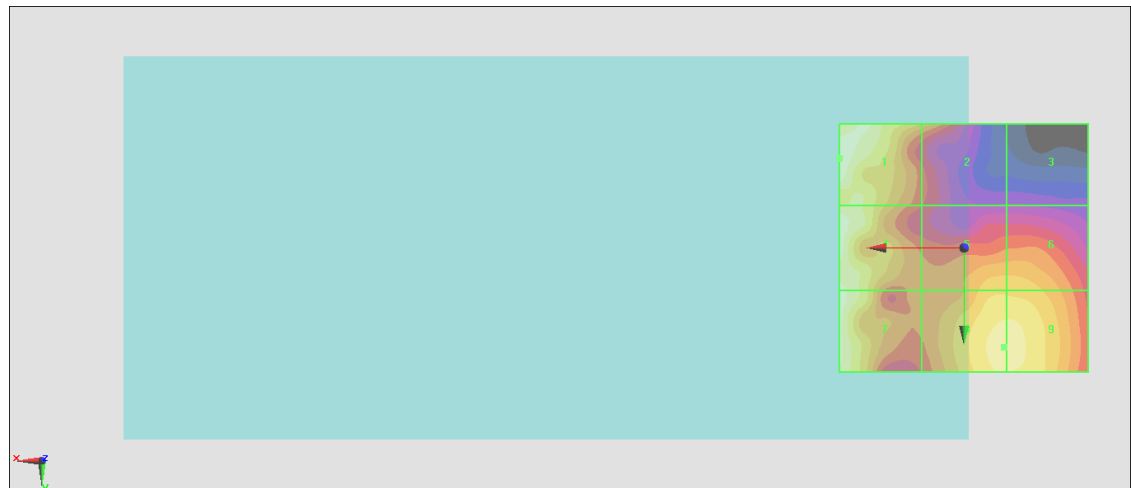

0 dB = 15.91 V/m = 24.03 dBV/m

#08_HAC_E_LTE Band 41_20M_QPSK_1_0_Ch40400

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 2571 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2571 MHz; Calibrated: 2021/1/25
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2021/4/8
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 16.92 V/m; Power Drift = 0.03 dB

Applied MIF = -1.44 dB

RF audio interference level = 24.19 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 24.19 dBV/m	Grid 2 M4 22.41 dBV/m	Grid 3 M4 19.89 dBV/m
Grid 4 M4 24.14 dBV/m	Grid 5 M4 22.56 dBV/m	Grid 6 M4 22.54 dBV/m
Grid 7 M4 23.88 dBV/m	Grid 8 M4 23.34 dBV/m	Grid 9 M4 23.34 dBV/m

Cursor:

Total = 24.19 dBV/m

E Category: M4

Location: 25, -23.5, 8.7 mm

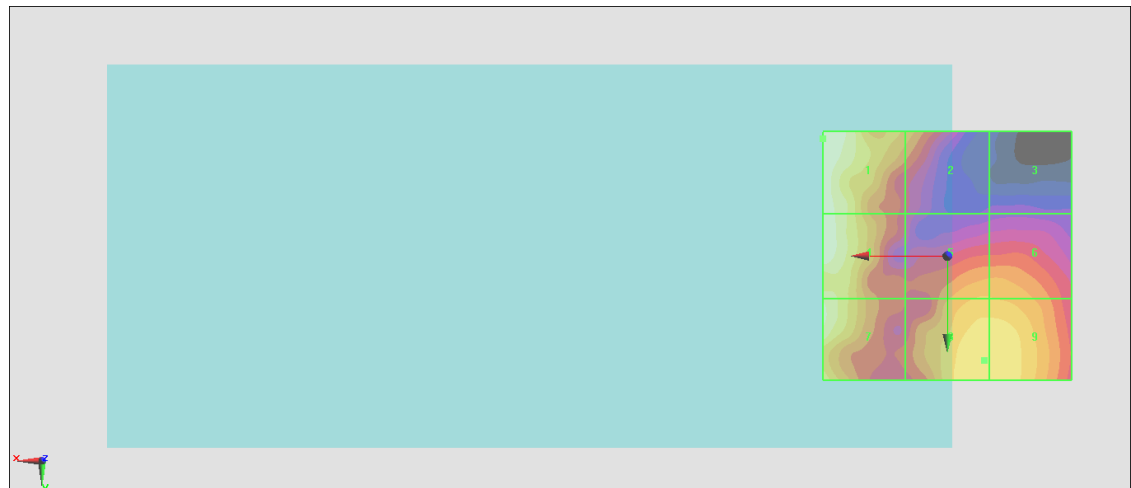

0 dB = 16.20 V/m = 24.19 dBV/m

#09_HAC_E_LTE Band 41_20M_QPSK_1_0_Ch40670

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 2598 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2598 MHz; Calibrated: 2021/1/25
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2021/4/8
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 16.63 V/m; Power Drift = 0.02 dB

Applied MIF = -1.44 dB

RF audio interference level = 23.96 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 23.96 dBV/m	Grid 2 M4 22.28 dBV/m	Grid 3 M4 19.96 dBV/m
Grid 4 M4 23.96 dBV/m	Grid 5 M4 22.3 dBV/m	Grid 6 M4 22.32 dBV/m
Grid 7 M4 23.7 dBV/m	Grid 8 M4 22.89 dBV/m	Grid 9 M4 22.9 dBV/m

Cursor:

Total = 23.96 dBV/m

E Category: M4

Location: 25, -8, 8.7 mm

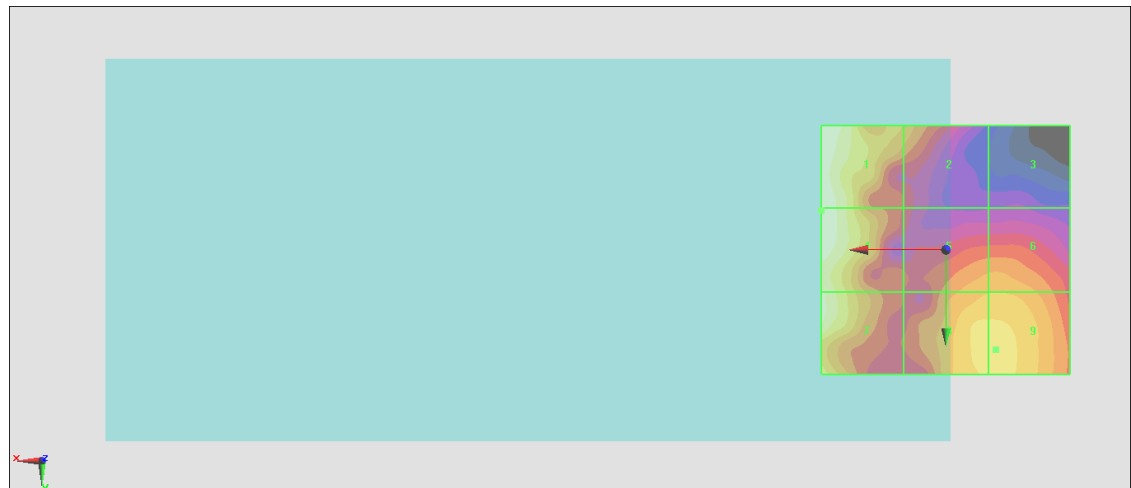

0 dB = 15.77 V/m = 23.96 dBV/m

#10_HAC_E_LTE Band 41_20M_QPSK_1_0_Ch41140

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 2645 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2645 MHz; Calibrated: 2021/1/25
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2021/4/8
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 6.102 V/m; Power Drift = 0.10 dB

Applied MIF = -1.44 dB

RF audio interference level = 14.33 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 14.33 dBV/m	Grid 2 M4 13.5 dBV/m	Grid 3 M4 13.24 dBV/m
Grid 4 M4 14.14 dBV/m	Grid 5 M4 13.24 dBV/m	Grid 6 M4 13.44 dBV/m
Grid 7 M4 13.66 dBV/m	Grid 8 M4 13.55 dBV/m	Grid 9 M4 13.36 dBV/m

Cursor:

Total = 14.33 dBV/m

E Category: M4

Location: 25, -10.5, 8.7 mm

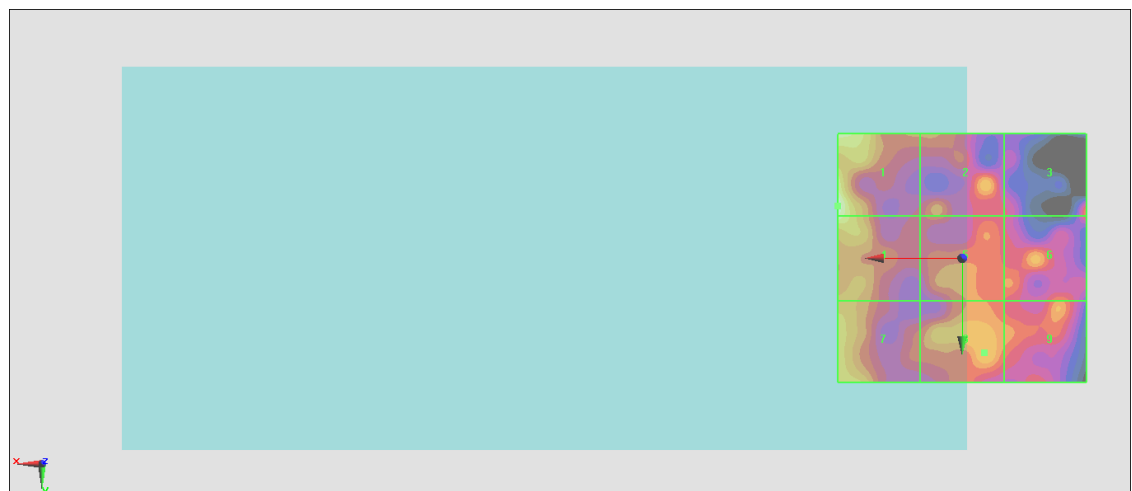

0 dB = 5.207 V/m = 14.33 dBV/m

#11_HAC_E_WLAN2.4GHz_802.11g 6Mbps_Ch1;Ant 6

Communication System: IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps); Frequency: 2412 MHz; Duty Cycle: 1:12.5777

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2412 MHz; Calibrated: 2021/1/25
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2021/4/8
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 65.59 V/m; Power Drift = -0.11 dB

Applied MIF = 0.12 dB

RF audio interference level = 34.40 dBV/m

Emission category: M3

MIF scaled E-field



Grid 1 M4 29.02 dBV/m	Grid 2 M3 31.47 dBV/m	Grid 3 M3 31.47 dBV/m
Grid 4 M3 31.67 dBV/m	Grid 5 M3 34.28 dBV/m	Grid 6 M3 34 dBV/m
Grid 7 M3 31.71 dBV/m	Grid 8 M3 34.4 dBV/m	Grid 9 M3 34.12 dBV/m

Cursor:

Total = 34.40 dBV/m

E Category: M3

Location: -3.5, 12, 8.7 mm

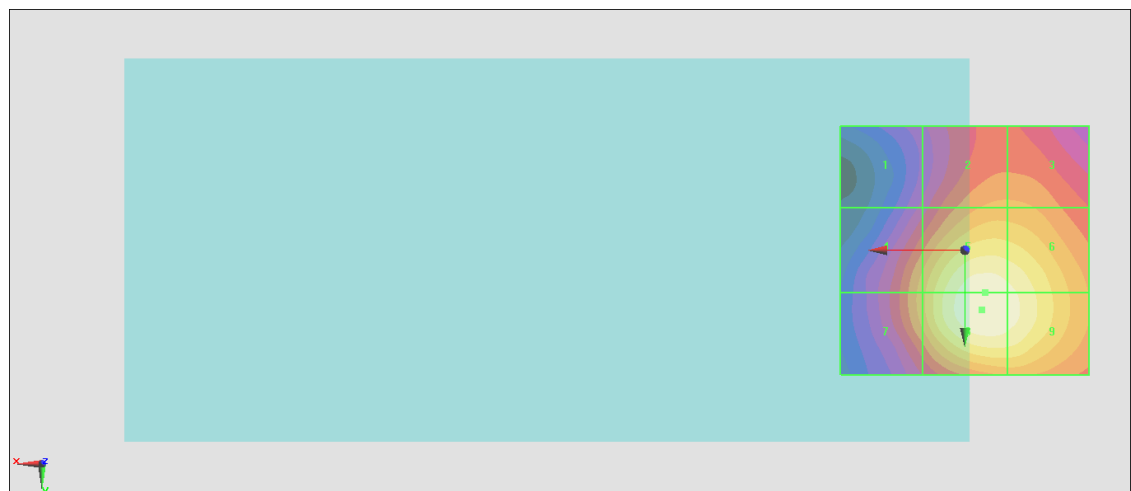

0 dB = 52.50 V/m = 34.40 dBV/m

#12_HAC_E_WLAN2.4GHz_802.11g 6Mbps_Ch6;Ant 6

Communication System: IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps); Frequency: 2437 MHz; Duty Cycle: 1:12.5777

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2437 MHz; Calibrated: 2021/1/25
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2021/4/8
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 63.42 V/m; Power Drift = 0.01 dB

Applied MIF = 0.12 dB

RF audio interference level = 34.24 dBV/m

Emission category: M3

MIF scaled E-field



Grid 1 M4 28.62 dBV/m	Grid 2 M3 31.03 dBV/m	Grid 3 M3 31.02 dBV/m
Grid 4 M3 31.66 dBV/m	Grid 5 M3 34.12 dBV/m	Grid 6 M3 33.73 dBV/m
Grid 7 M3 31.71 dBV/m	Grid 8 M3 34.24 dBV/m	Grid 9 M3 33.88 dBV/m

Cursor:

Total = 34.24 dBV/m

E Category: M3

Location: -3.5, 11.5, 8.7 mm

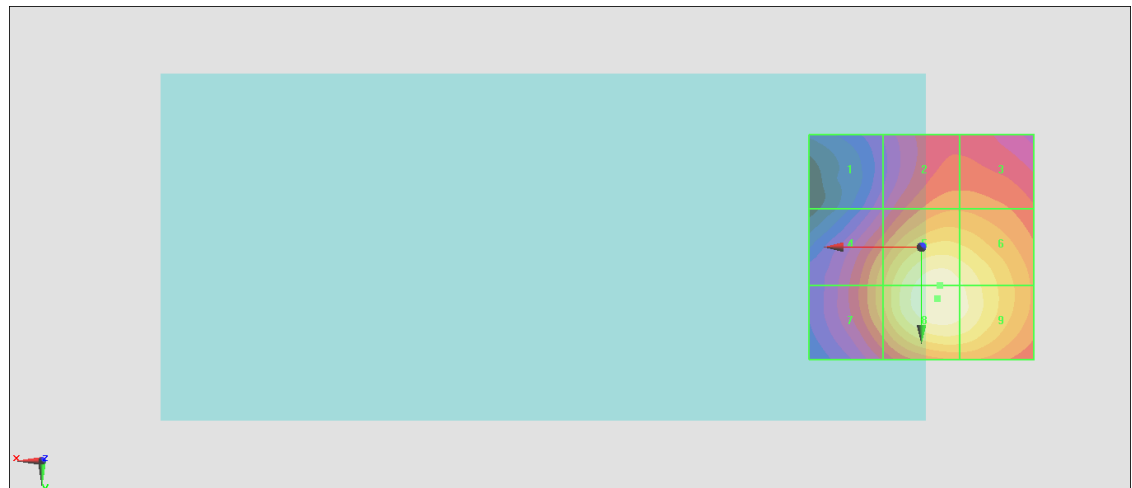

0 dB = 51.50 V/m = 34.24 dBV/m

#13_HAC_E_WLAN2.4GHz_802.11g 6Mbps_Ch11;Ant 6

Communication System: IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps); Frequency: 2462 MHz; Duty Cycle: 1:12.5777

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2462 MHz; Calibrated: 2021/1/25
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2021/4/8
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 62.39 V/m; Power Drift = -0.06 dB

Applied MIF = 0.12 dB

RF audio interference level = 33.82 dBV/m

Emission category: M3

MIF scaled E-field



Grid 1 M4 28.47 dBV/m	Grid 2 M3 30.57 dBV/m	Grid 3 M3 30.54 dBV/m
Grid 4 M3 31.65 dBV/m	Grid 5 M3 33.71 dBV/m	Grid 6 M3 33.26 dBV/m
Grid 7 M3 31.69 dBV/m	Grid 8 M3 33.82 dBV/m	Grid 9 M3 33.36 dBV/m

Cursor:

Total = 33.82 dBV/m

E Category: M3

Location: -2.5, 11.5, 8.7 mm

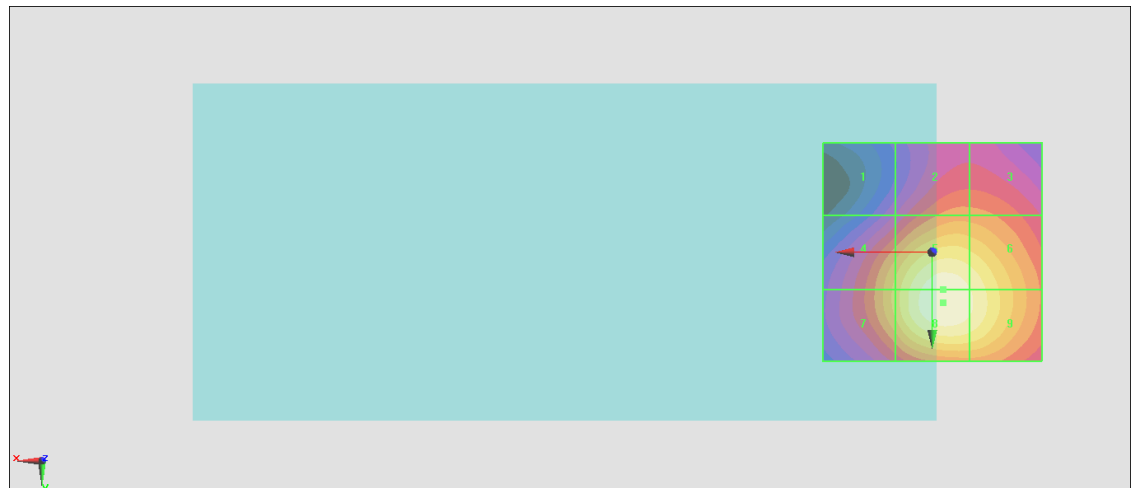

0 dB = 49.12 V/m = 33.83 dBV/m

#14_HAC E WLAN2.4GHz_802.11g 6Mbps_Ch1;ANT 6

Communication System: IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps);

Frequency: 2412 MHz; Duty Cycle: 1:12.5777

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1) @ 2412 MHz; Calibrated: 2021.1.25

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn799; Calibrated: 2021.3.26

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan -ER3D:15mm from probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 76.98 V/m; Power Drift = -0.06 dB

Applied MIF = 0.12 dB

RF audio interference level = 31.66 dBV/m

Emission category: M3

MIF scaled E-field


Grid 1 M4 26.94 dBV/m	Grid 2 M4 28.38 dBV/m	Grid 3 M4 28.21 dBV/m
Grid 4 M4 29.52 dBV/m	Grid 5 M3 31 dBV/m	Grid 6 M3 30.5 dBV/m
Grid 7 M3 31.66 dBV/m	Grid 8 M3 31.13 dBV/m	Grid 9 M3 30.72 dBV/m

Cursor:

Total = 31.66 dBV/m

E Category: M3

Location: 21, 25, 8.7 mm

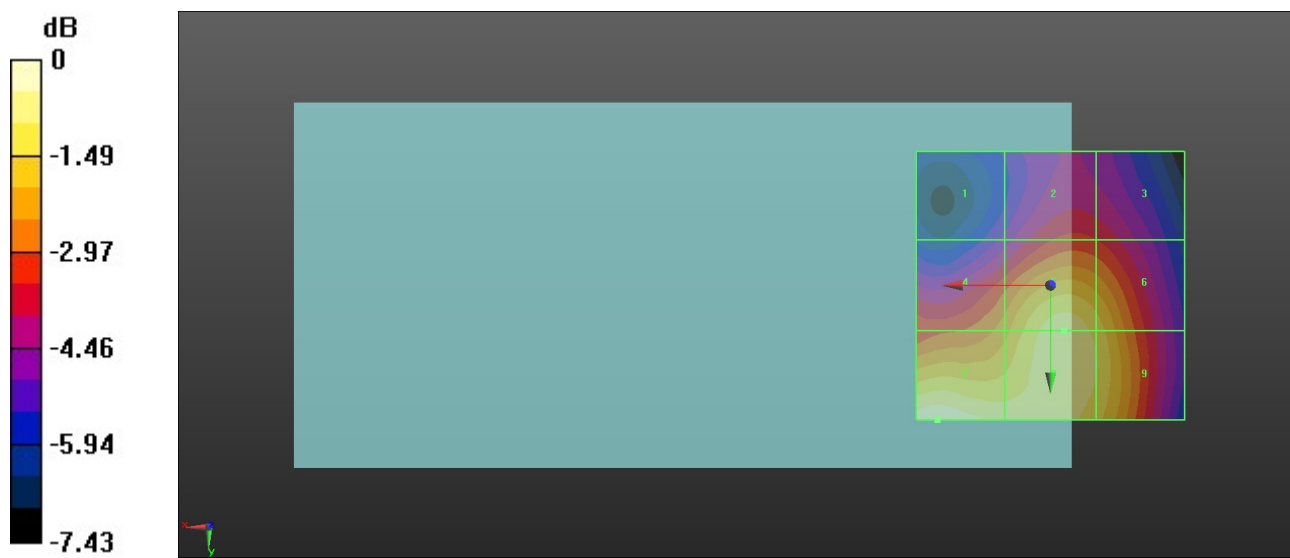

0 dB = 38.30 V/m = 31.66 dBV/m