

Bluetooth Test Report

Test Report Number: **WR961.203****Terminal device:**FCC ID: **QMNRM-120** Model: **6175i** Type: **RM-120** HW: **3002** SW: **MR100_b01.nep**
(Detailed information is listed in section 4).

Originator: Hai To
Function: TCC - Dallas – EMC
Version/Status: 2.0 / Approved
Location: TCC Directories
Date: 21-Apr-06

Change History:

Version	Date	Status	Handled By	Comments
0.1	30-Mar-06	Draft	Hai To	
0.2	30-Mar-06	Review	Viet Do	
1.0	30-Mar-06	Approved	Viet Do	
1.1	21-Apr-06	Review	Viet Do	
2.0	21-Apr-06	Approved	Viet Do	

Testing laboratory:

Test & Certification Center (TCC) Dallas
Nokia Mobile Phones
6021 Connection Drive
Irving, Texas 75039
U.S.A.
Tel. 972-894-5000
Fax.

Client:

Nokia Inc.
San Diego
12278 Scripps Summit Dr.
San Diego
CA 92131
USA
Tel. +1858 831 5000
Fax. +1 858 831 6500

Date and signatures:**21-Apr-06**

For the contents:

Hai To
Test Engineer

Viet Do
Technical Review

TABLE OF CONTENTS

1. GENERAL	4
1.1 QUALITY SYSTEM.....	4
1.2 OBJECTIVE	4
1.3 TEST SUMMARY	4
2. STANDARDS BASIS	5
3. LIST OF ABBREVIATIONS, ACRONYMS AND TERMS	6
3.1 ABBREVIATIONS	6
3.2 ACRONYMS.....	6
3.3 TERMS	6
4. EQUIPMENT-UNDER-TEST (EUT)	7
4.1 DESCRIPTION OF TESTED DEVICE(S):.....	7
5. TEST EQUIPMENT LIST	8
6. EUT TEST SETUPS	9
6.1 EUT TEST SET-UP A (CONDUCTED MEASUREMENT).....	9
7. CARRIER FREQUENCY SEPARATION	10
7.1 SETUP	10
7.2 TEST RESULTS	10
7.3 EUT OPERATION MODE	10
7.4 PASS/FAIL CRITERIA	11
7.5 RESULTS	11
8. NUMBER OF HOPPING FREQUENCIES	14
8.1 SETUP.....	14
8.2 TEST RESULTS	14
8.3 EUT OPERATION MODE	14
8.4 PASS/FAIL CRITERIA	14
8.5 RESULTS	15
9. TIME OF OCCUPANCY	18
9.1 SETUP	18
9.2 TEST RESULTS	18
9.3 EUT OPERATION MODE: CONNECTED MODE	18
9.4 PASS/FAIL CRITERIA	18
9.5 RESULTS	19
10. 20DB BANDWIDTH	25
10.1 SETUP.....	25
10.2 TEST RESULTS	25
10.3 EUT OPERATION MODE	25
10.4 PASS/FAIL CRITERIA	25
10.5 RESULTS	26
11. OUTPUT PEAK POWER	32
11.1 SETUP.....	32



Test & Certification Center (TCC) - Dallas

FCC ID: QMNRM-120
Test Report #: 961.203
21-Apr-06

Accredited Laboratory
Certificate Number: 1819-01

Ver 2.0

11.2	TEST RESULTS	32
11.3	EUT OPERATION MODE	32
11.4	PASS/FAIL CRITERIA	32
11.5	RESULTS	33
12.	BAND-EDGE COMPLIANCE OF RF CONDUCTED EMISSIONS	39
12.1	SETUP	39
12.2	TEST RESULTS	39
12.3	EUT OPERATION MODE	39
12.4	PASS/FAIL CRITERIA	39
12.5	RESULTS	40

© No part of this report shall be reproduced out of the context of the report without the written approval of Nokia Mobile Phones, Inc., Dallas Product Creation, TCC – Dallas.

1. GENERAL

1.1 Quality System

The quality system in place for TCC-Dallas conforms to ISO/IEC 17025 and has been audited to the standard by A2LA (American Association of Laboratory Accreditation). TCC - Dallas has also been audited using the ISO 9000 Quality System, as part of Nokia Mobile Phones, Inc., by ABS (American Bureau of Shipping) Quality Evaluations Inc.

TCC-Dallas is a recognized laboratory with the Federal Communications Commission in filing applications for Certification under Parts 15 and 18, Registration Number 100060, and Industry Canada, Registration Number IC 661N.

1.2 Objective

All tests and measurement data shown was performed to determine whether the selected handset was in compliance as specified in FCC: CFR47 Parts 15.207 and 15.247.

1.3 Test Summary

Test Results: *The test result relates only to those tested devices mentioned in Section 4 of this test report.*

Test Performed	CFR 47	RSS-210	Section of Report	Complies / Does not comply / Not Tested
Carrier frequency separation	15.247 (a)(1)	6.2.2 (o), a1	7	Complies
Number of hopping frequencies	15.247 (a)(1)(iii)	6.2.2 (o), a3	8	Complies
Time of occupancy	15.247 (a)(1)(iii)	6.2.2 (o), a3	9	Complies
20dB bandwidth	15.247 (a)(1)	6.2.2 (o), a1	10	Complies
Peak output power	15.247 (b)(1)	6.2.2 (o), a3	11	Complies
Band-edge compliance of RF emissions	15.247 (c)	6.2.2 (o), e1	12	Complies

2. STANDARDS BASIS

Testing has been carried out in accordance with:

REF.	Code of the standard	Name of the standard
1	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz.
2	FCC: CFR 47 Part 15	Code of Federal Regulations (CFR) Title 47, Part 15 – Radio Frequency Devices: Subpart B – Unintentional Radiators and Subpart C – Intentional Radiators
3	CISPR 22 / EN55022	Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement.
4	ICES-003	Digital Apparatus, Industry Canada
5	RSS-210	Low Power License-Exempt Radio communication Devices (All Frequency Bands)
6	RSS-212	Test Facilities and Test Methods for Radio Equipment, Industry Canada (Provisional)
7	RSP-100	Radio Equipment Certification Procedure

Note: Unless otherwise stated, (by reference to a version number and a publication date), the latest version of the above documents applies.

Deviations:

Not Applicable.

3. LIST OF ABBREVIATIONS, ACRONYMS AND TERMS

3.1 Abbreviations

dB - decibel

dBm - decibels per milliwatt (absolute measurement)

dB μ V - decibel per microvolt

dB μ V/m - decibel of microvolt per meter

GHz - gigahertz or 1000000000 hertz

kHz - kilohertz or 1000 hertz

MHz - megahertz or 1000000 hertz

ms - millisecond or 0.001 second

μ s - microsecond or 0.000001 second

3.2 Acronyms

BT - Bluetooth

EMC - Electromagnetic Compatibility

EMI - Electromagnetic Interference

EUT - Equipment under Test

PRBS - Pseudo Random Bit Sequence

RF - Radio Frequency

3.3 Terms

Base Station Simulator (BSS) - simulates all the necessary signals that a phone would experience while on a live network. There are many types of base station simulators catering for all current protocols, i.e., GSM, AMPS, TDMA, and CDMA.

4. EQUIPMENT-UNDER-TEST (EUT)

The results in this report relate only to the items listed below:

4.1 Description of Tested Device(s):

Test Performed	Mode of Operation	Date of Receipt	Condition of Sample	Item	Identifying Information
47CFR15.247	BT/EDR	28-Mar-06	Operational	Phone	ESN: 02603562877 FCC ID: QMNRM-120 Type: RM-120 HW: 3002 SW: MR100_b01.nep
N/A	N/A	N/A	N/A	Battery	Type: BL-5C Other: 3.7 V

5. TEST EQUIPMENT LIST

The listing below indicates the test equipment utilized for the test (s). Calibration interval on all items listed can be obtained from the Engineering Services Group within NMP, Product Creation - Dallas. Where relevant, measuring equipment is subjected to in-service checks between testing. TCC - Dallas shall notify clients promptly, in writing, of identification of defective measuring equipment that casts doubt on the validity of results given in this report.

Section of Report	NMP#	Test Equipment	Mfr. #	Model #	Calibration Due Date	Calibration Interval
7,8,9,10,11,12	N/A	10dB Attenuator	Weinschel	Model 2	N/A	N/A
7,8,9,10,11,12	02666	Base Station	R&S	CMU 200	25-May-06	12 months
7,8,9,10,11,12		Power Splitter (must have 6 dB insertion loss)	Agilent	33120A	N/A	N/A
7,8,9,10,11,12	N/A	6dB Attenuator	Weinschel	Model 2	N/A	N/A
7,8,9,10,11,12	03462	Spectrum Analyzer	Rhodes & Schwartz	FSP	20-Jul-06	12 months

6. EUT TEST SETUPS

For each test the EUT was exercised to find out the worst case of operation modes and device configuration.


Two different test setups were used: one for conducted measurements, another for radiated measurements. One EUT was equipped with an external antenna connector for conductive measurements.

6.1 EUT test set-up A (conducted measurement)

This setup was used in conducted measurements. The Bluetooth simulator was used to control the following:

- set the EUT channel (0 – 79)
- set the number of EUT TX slots (1, 3, 5)
- set the EUT to TX, RX and TX/RX mode
- enable/disable frequency hopping
- select between several different test modulation patterns

In tests, where absolute level reporting were required, the results were corrected with all applicable factors as detailed in the result section of each measurement.

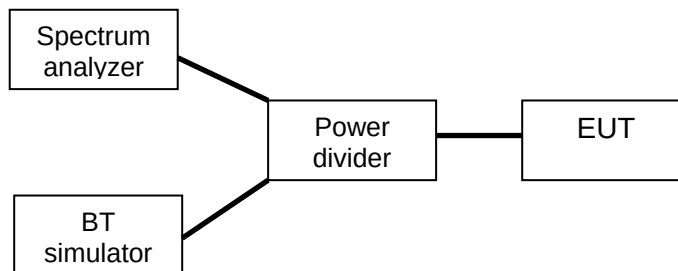

7. CARRIER FREQUENCY SEPARATION

Specification: FCC Part 15.247(a)(1); RSS-210 6.2.2(o), a1

7.1 Setup

Used test set-up: A (see section 6)

7.2 Test Results

Test Operator	Hai To
Date of Measurement	28-Mar-06
Temperature	24 °C
Humidity	33 %RH
Test Result	Complies

7.3 EUT operation mode

EUT operation mode	Connected, DH5, Static PRBS
EUT channel	Hopping mode (Euro/US)
EUT TX power level	Nominal

7.4 Pass/Fail Criteria


Limit
≥ 25 kHz or 2/3 of 20dB Bandwidth

7.5 Results

GSFK Modulation, PRBS packet type

Hopping on, Carrier Frequency Separation of Channels 38 and 39

Measured value (MHz)	Result
0.99	Passed

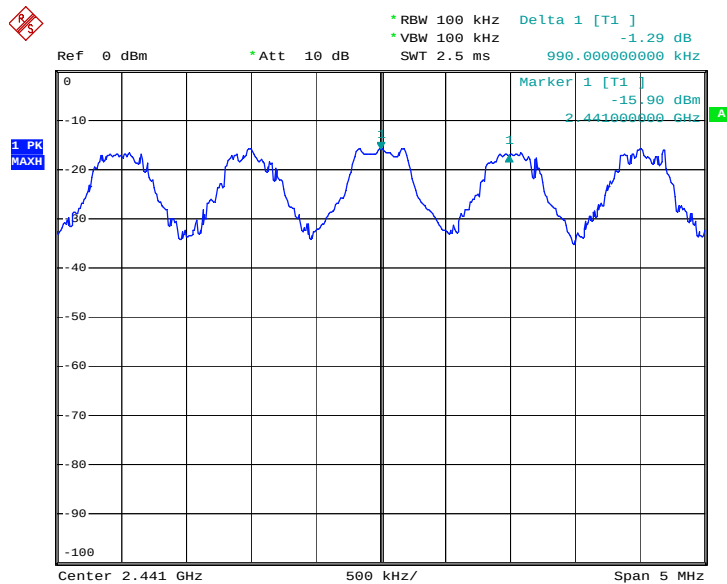


Date: 28.MAR.2006 20:46:33

($\pi/4$ -DQPSK), Modulation, PRBS packet type

Hopping on, Carrier Frequency Separation of Channels 39 and 40

Measured value (MHz)	Result
0.99	Passed

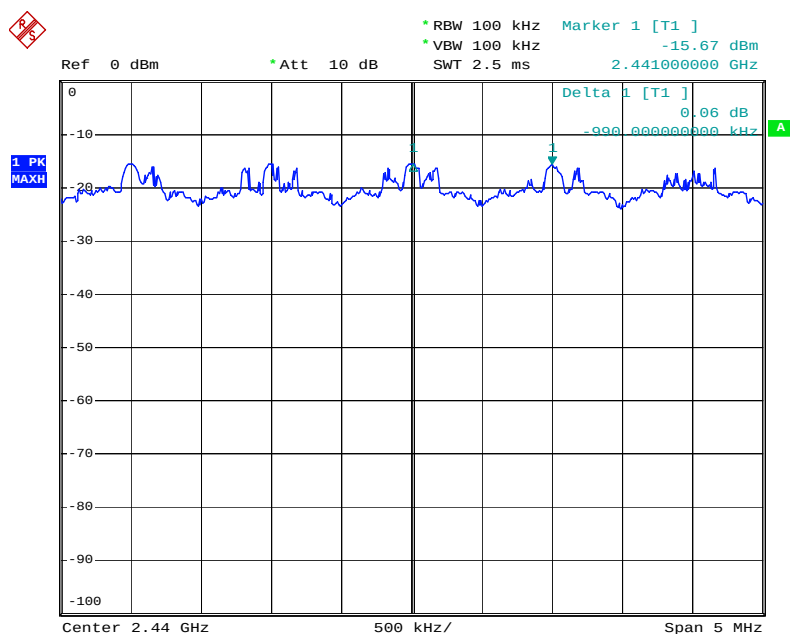


Date: 11.APR.2006 21:36:21

8DPSK Modulation, PRBS packet type

Hopping on, Carrier Frequency Separation of Channels 39 and 40

Measured value (MHz)	Result
1.0	Passed

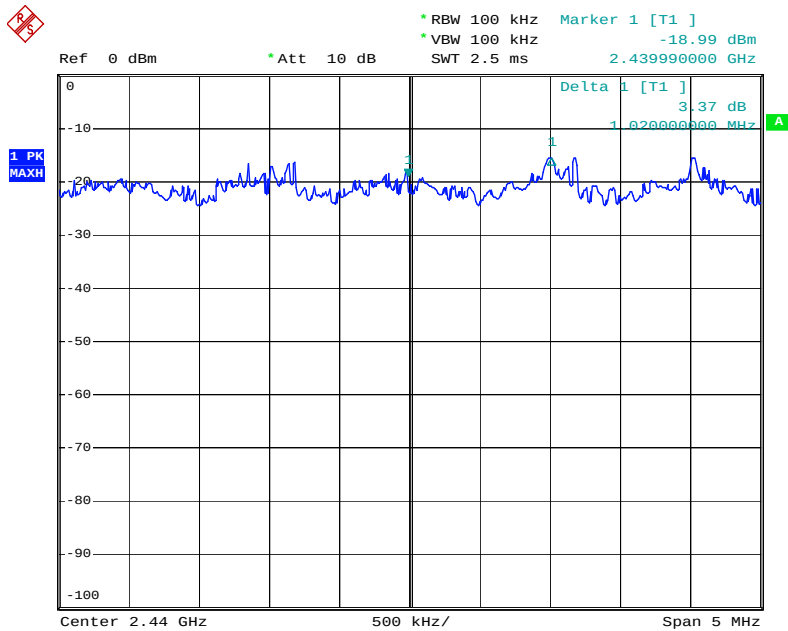

Date: 11.APR.2006 21:39:22

8. NUMBER OF HOPPING FREQUENCIES

Specification: FCC Part 15.247(a)(1)(iii); RSS-210 6.2.2(o), a3

8.1 Setup

Used test set-up: A (see section 6)

8.2 Test Results

Test Operator	Hai To
Date of Measurement	28-Mar-06
Temperature	24°C
Humidity	33 %RH
Test Result	Complies

8.3 EUT operation mode

EUT operation mode	Connected, DH5, Static PRBS
EUT channel	Hopping Mode
EUT TX power level	Nominal

8.4 Pass/Fail Criteria


Number
≥ 75

8.5 Results

GSFK Modulation, PRBS packet type

Number of Hopping Frequencies

Measured value	Result
79	Passed

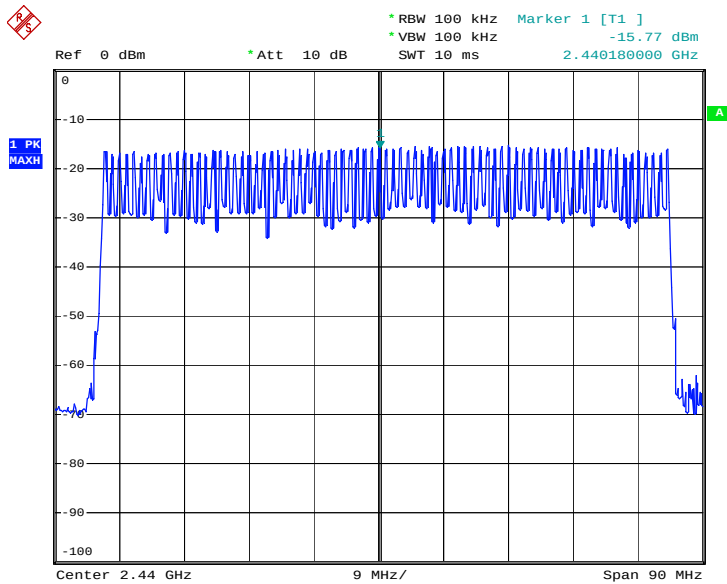


Date: 28.MAR.2006 20:49:57

($\pi/4$ -DQPSK), Modulation, PRBS packet type

Number of Hopping Frequencies

Measured value	Result
79	Passed

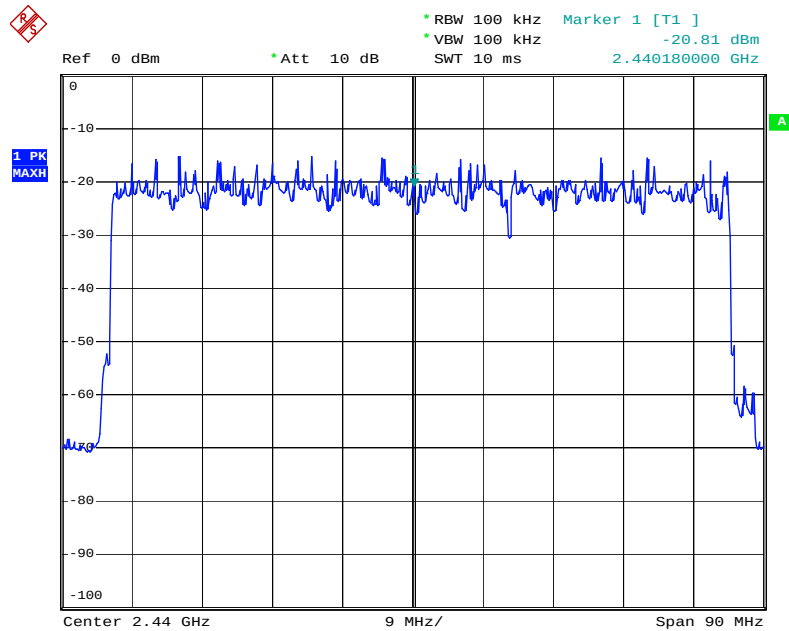


Date: 11.APR.2006 21:41:21

8DPSK Modulation, PRBS packet Type

Number of Hopping Frequencies

Measured value	Result
79	Passed

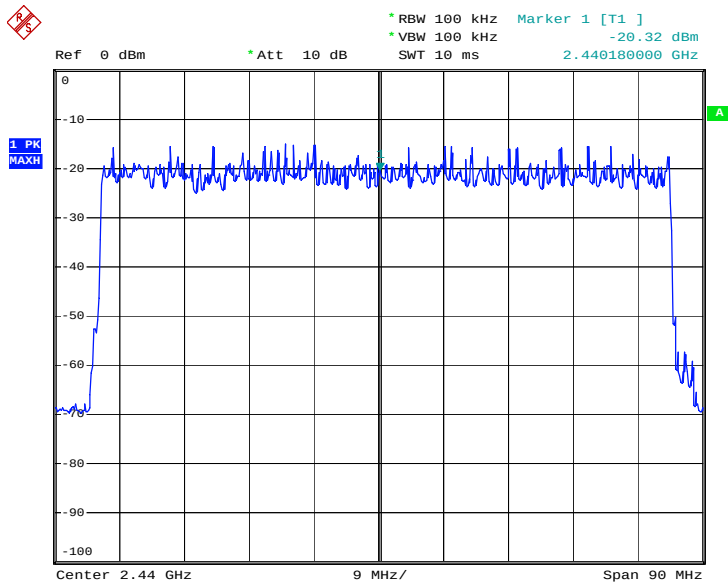

Date: 28.MAR.2006 21:45:03

9. TIME OF OCCUPANCY

Specification: FCC Part 15.247(a)(1)(iii); RSS-210 6.2.2(o), a3

9.1 Setup

Used test set-up: A (see section 6)

9.2 Test Results

Test Operator	Hai To
Date of Measurement	28-Mar-06
Temperature	24°C
Humidity	33 %RH
Test Result Connected mode	Complies

9.3 EUT operation mode: Connected mode

EUT operation mode	Connected, DH5, static PRBS
EUT channel	Hopping mode
EUT TX power level	Nominal

9.4 Pass/Fail Criteria

Limit (ms)
≤ 400

9.5 Results


GSFK Modulation, PRBS packet type

Hopping on, Number of transmissions channel 39

Number of transmissions	Duration of transmissions (ms)	Time of Occupancy (ms)	Result
64	2.88	184.32	Passed


$$\text{Time of Occupancy} = TX_n * TX_d$$

where: TX_n = Number of transmissions in 31.6 seconds (0.4 seconds * 79 channels)
 TX_d = Duration of transmission

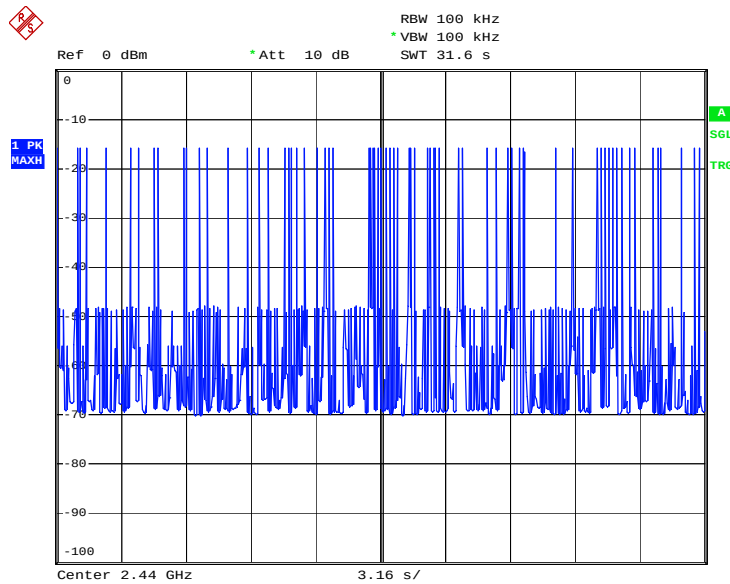

Date: 28.MAR.2006 21:22:53

Hopping on, Duration of one transmissions channel 39

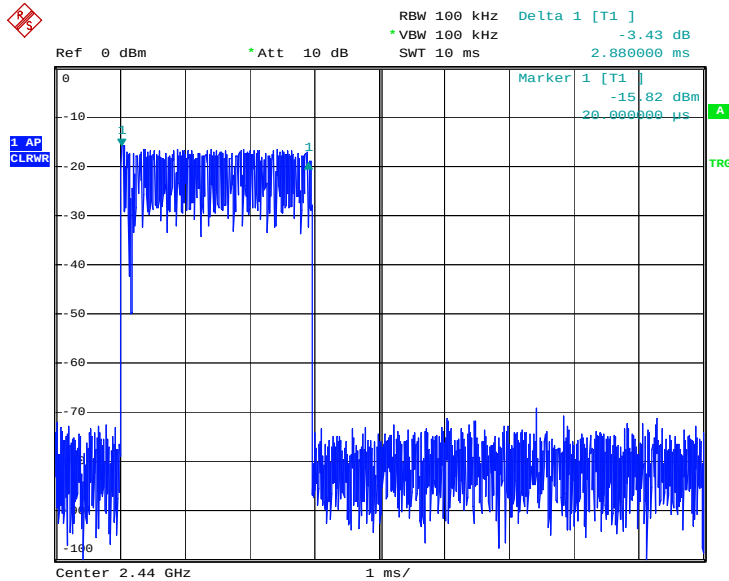

Date: 28.MAR.2006 21:21:19


($\pi/4$ -DQPSK), Modulation, PRBS packet type

Hopping on, Number of transmissions channel 39

Number of transmissions	Duration of transmissions (ms)	Time of Occupancy (ms)	Result
110	2.88	316.8	Passed


$$\text{Time of Occupancy} = TX_n * TX_d$$

where: TX_n = Number of transmissions in 31.6 seconds (0.4 seconds * 79 channels)
 TX_d = Duration of transmission

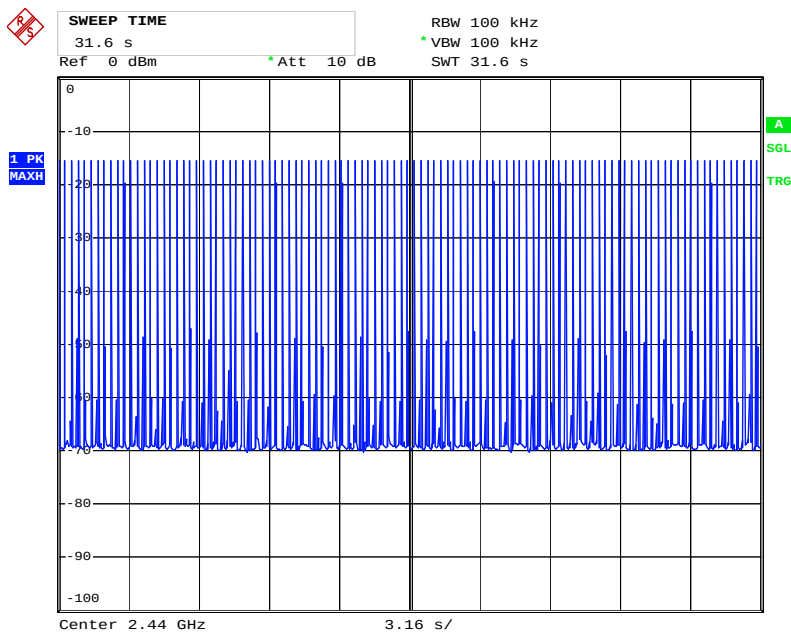

Date: 12.APR.2006 17:07:20

Hopping on, Duration of one transmissions channel 39

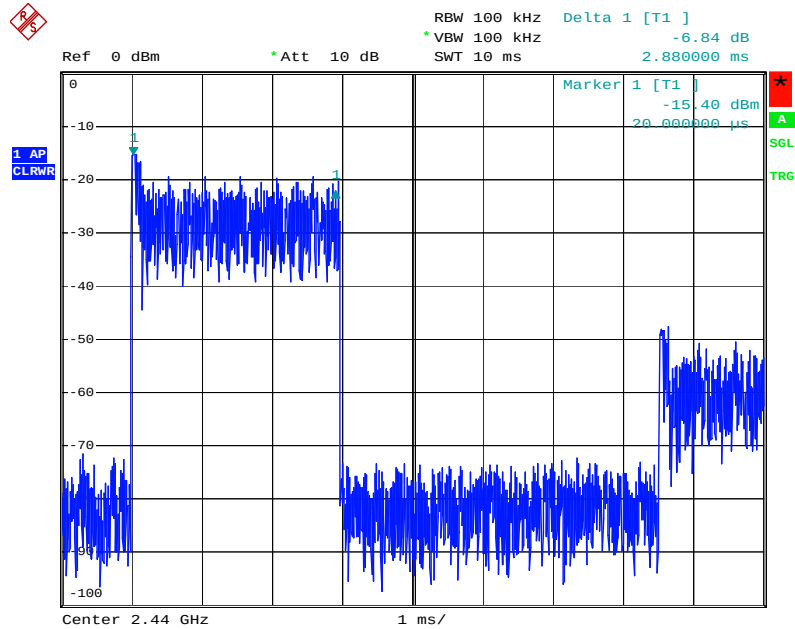

Date: 11.APR.2006 21:47:35


8DPSK Modulation, PRBS packet Type

Hopping on, Number of transmissions channel 39

Number of transmissions	Duration of transmissions (ms)	Time of Occupancy (ms)	Result
110	2.92	321.2	Passed


$$\text{Time of Occupancy} = TX_n * TX_d$$

where: TX_n = Number of transmissions in 31.6 seconds (0.4 seconds * 79 channels)
 TX_d = Duration of transmission

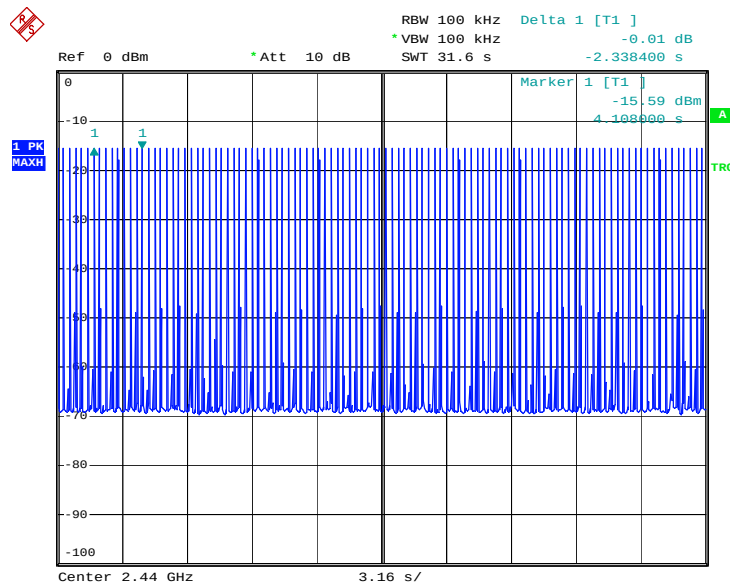

Date: 28.MAR.2006 22:01:41

Hopping on, Duration of one transmissions channel 39

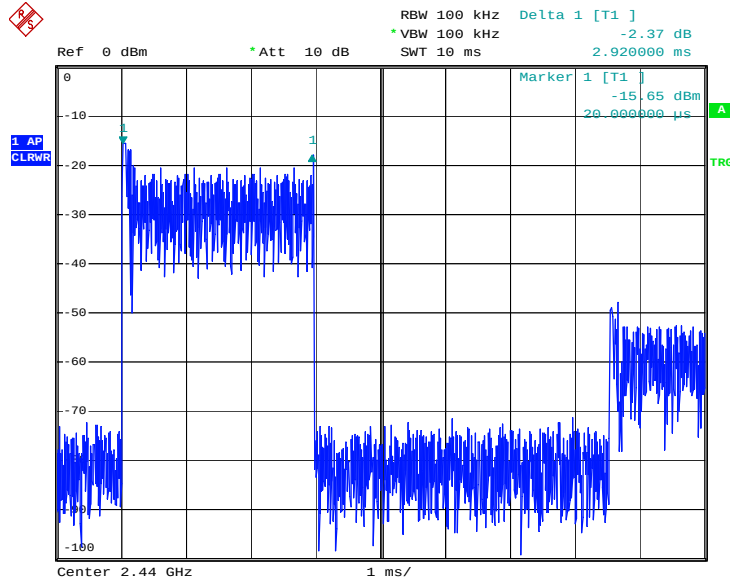

Date: 28.MAR.2006 21:58:59

10. 20dB BANDWIDTH

Specification: FCC Part 15.247(a)(1); RSS-210 6.2.2(o), a1

10.1 Setup

Used test set-up: A (see section 6)

10.2 Test Results

Test Operator	Hai To
Date of Measurement	28-Mar-06
Temperature	24 °C
Humidity	33 %RH
Test Result	Complies

10.3 EUT operation mode

EUT operation mode	Connected, DH5, Static PRBS
EUT channel	0 (2402 MHz), 39 (2441 MHz), 78 (2480MHz)
EUT TX power level	Nominal

10.4 Pass/Fail Criteria


Limit (MHz)
N/A

10.5 Results

GSFK Modulation, PRBS packet type


EUT channel	Measured value (kHz)
0	636
39	732
78	690

20dB bandwidth, channel 0

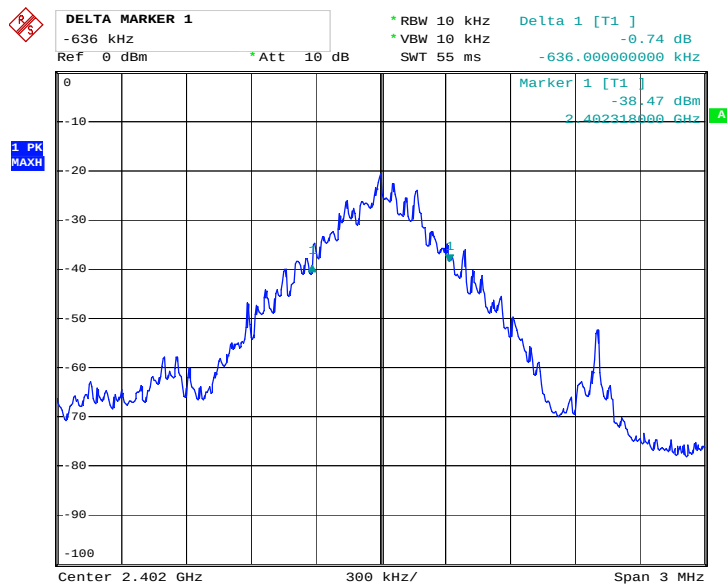


Date: 28.MAR.2006 21:04:32

20dB bandwidth, channel 39

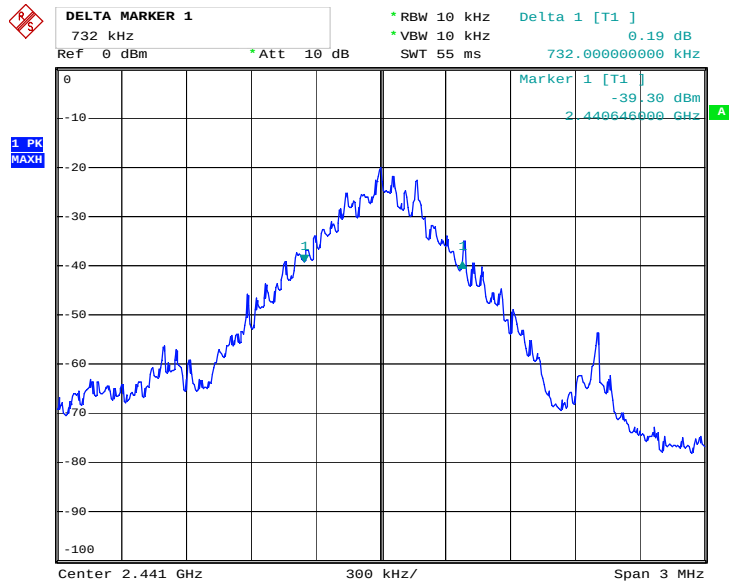

Date: 28.MAR.2006 21:02:32

20dB bandwidth, channel 78

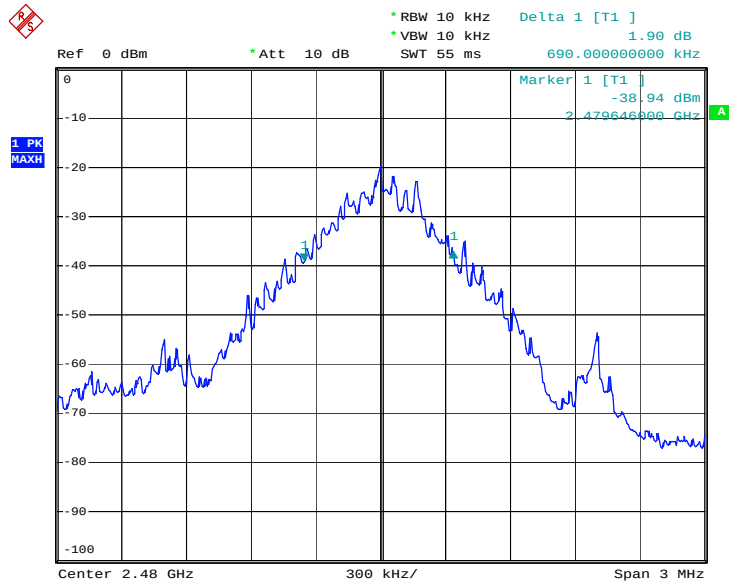


Date: 28.MAR.2006 21:01:11

($\pi/4$ -DQPSK), Modulation, PRBS packet type


EUT channel	Measured value (kHz)
0	1182
39	1182
78	1134

Channel 0

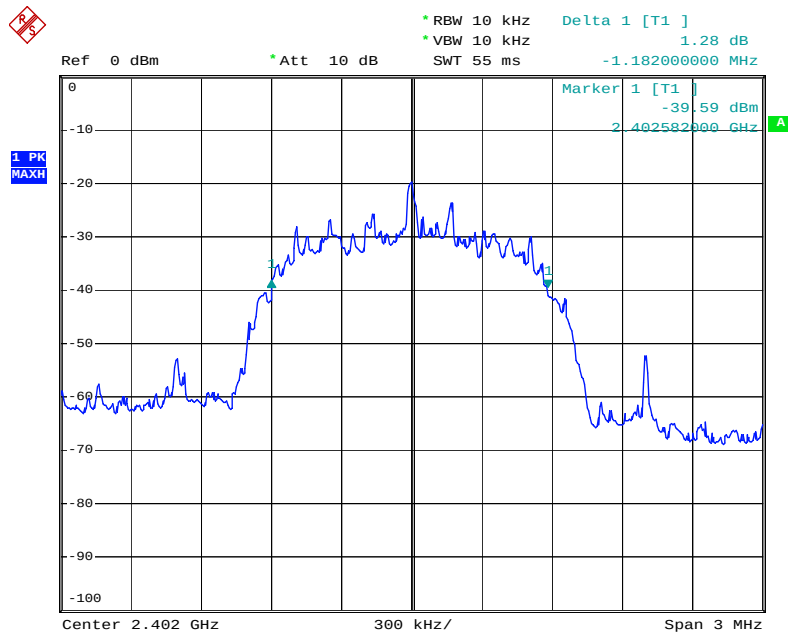


Date: 11.APR.2006 17:50:24

Channel 39

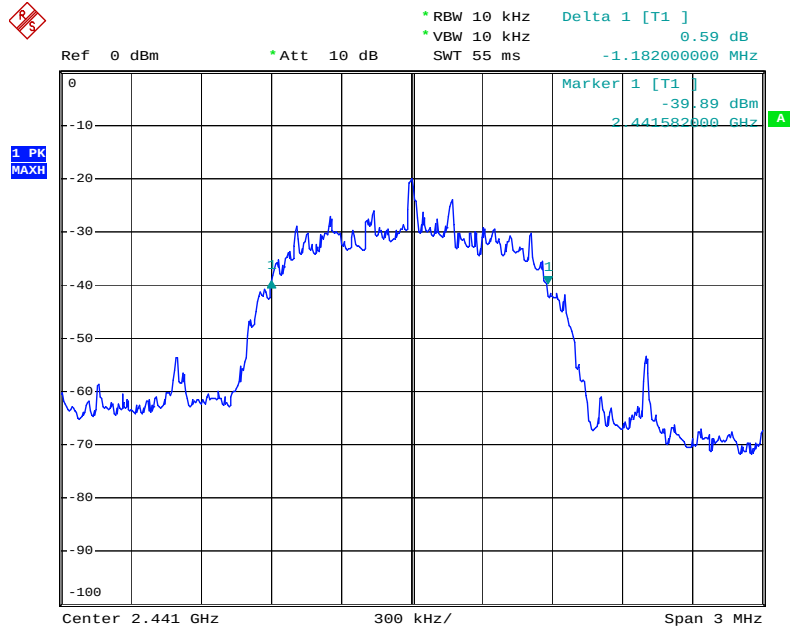

Date: 11.APR.2006 17:52:40

Channel 78

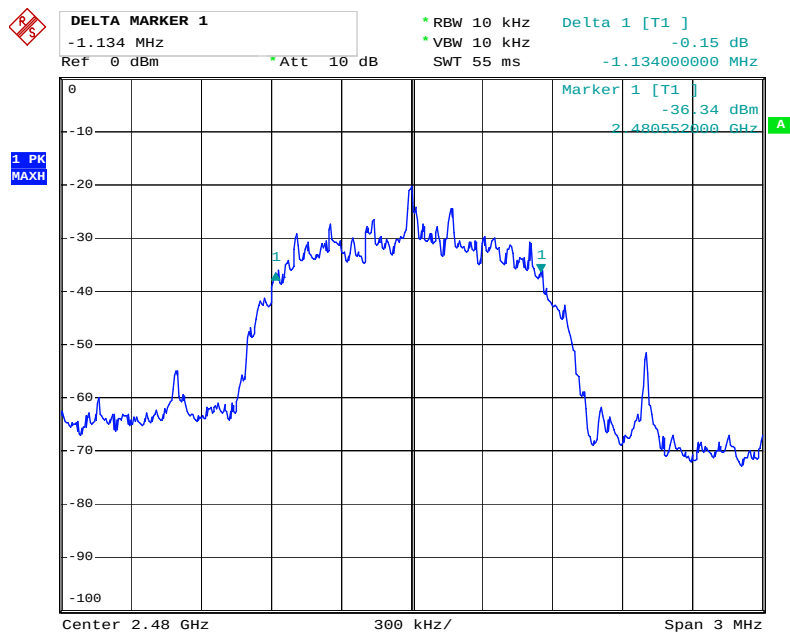


Date: 11.APR.2006 17:53:56

8DPSK Modulation, PRBS packet Type


EUT channel	Measured value (kHz)
0	1194
39	1188
78	1188

Channel 0

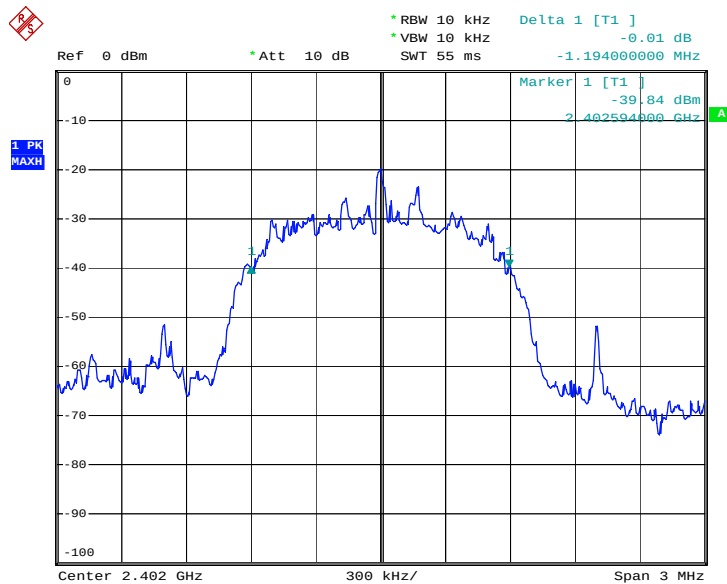


Date: 28.MAR.2006 22:04:09

Channel 39

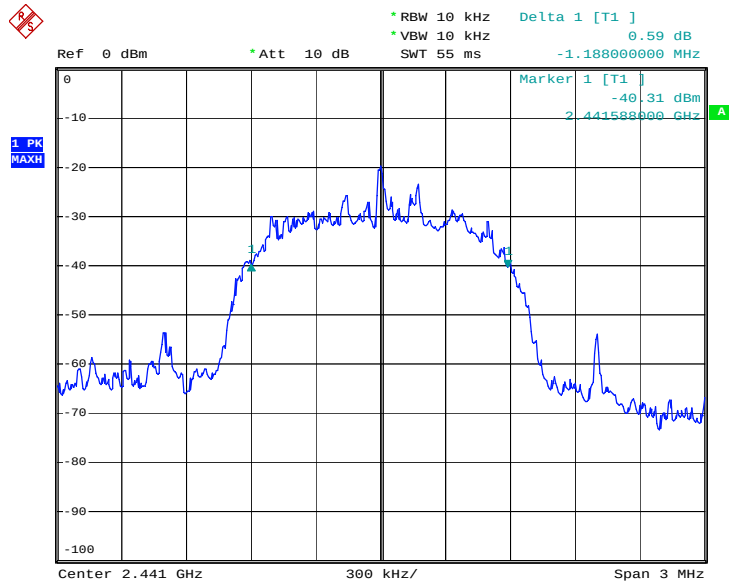

Date: 28.MAR.2006 22:05:55

Channel 78

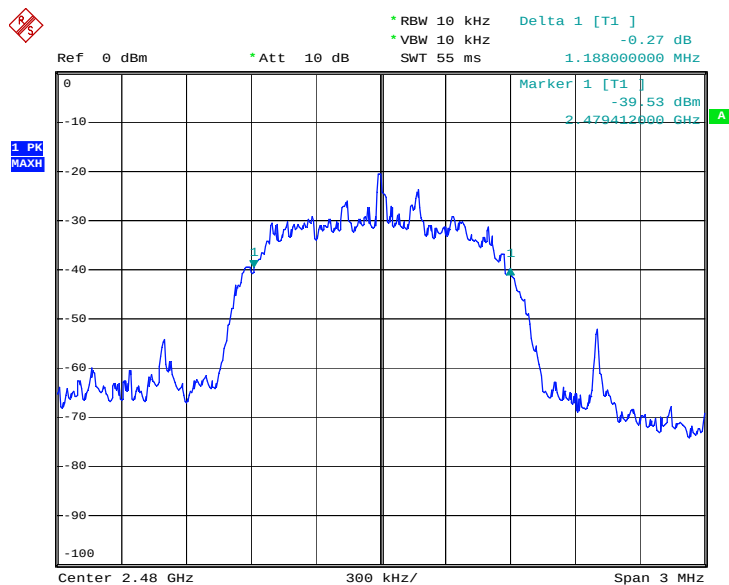

Date: 28.MAR.2006 22:09:57

11. OUTPUT PEAK POWER

Specification: FCC Part 15.247(b)(1); RSS-210 6.2.2(o), a3

11.1 Setup

Used test set-up: A (see section 6)

11.2 Test Results

Test Operator	Viet Do
Date of Measurement	28-Mar-06
Temperature	24 °C
Humidity	33 %RH
Test Result	Complies

11.3 EUT operation mode

EUT operation mode	Connected, DH5, Static PRBS
EUT channel	0 (2402 MHz), 39 (2441 MHz), 78 (2480MHz)
EUT TX power level	Nominal

11.4 Pass/Fail Criteria

Limit (W)
≤ 1.0


11.5 Results

GSFK Modulation, PRBS packet type

The measured power values were corrected with the attenuation of the cables, attenuator and power divider using the formula:


EUT channel	Trace value (dBm)	Cable loss (dB)	Divider loss (dB)	Peak output power (dBm)	Peak output power (mW)	Results
0	-16.46	10.2	6	-0.26	0.942	Passed
40	-15.61	10.2	6	0.59	1.146	Passed
78	-15.94	10.2	6	0.26	1.062	Passed

Peak output power, channel 0

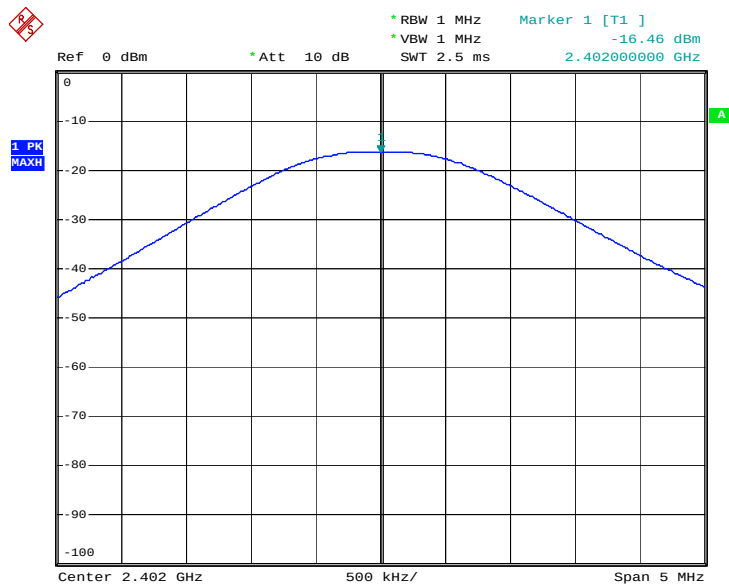


Date: 28.MAR.2006 21:06:59

Peak output power, channel 40

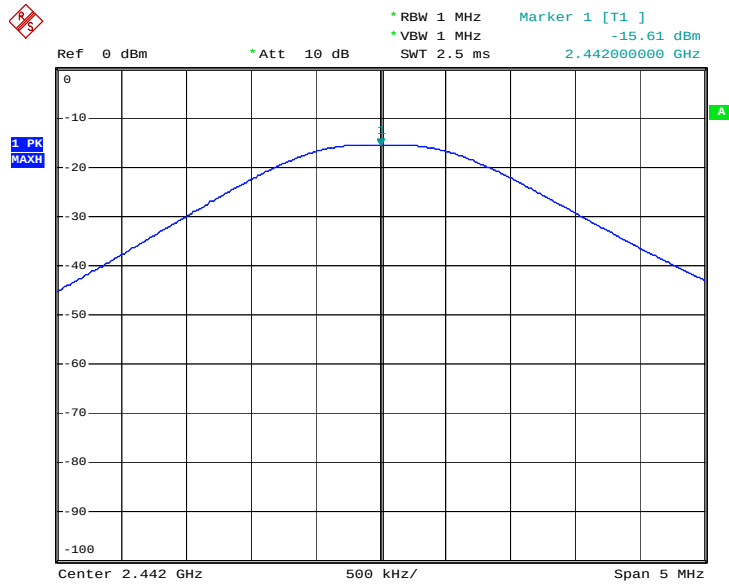

Date: 28.MAR.2006 21:08:03

Peak output power, channel 78

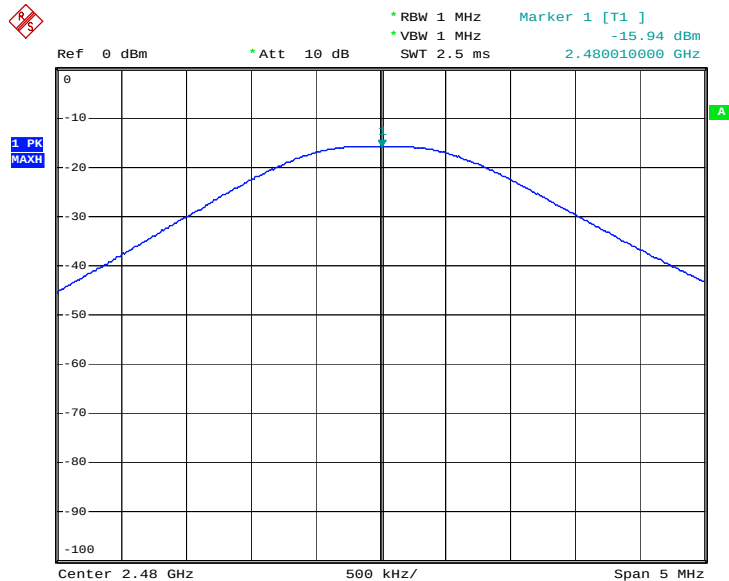


Date: 28.MAR.2006 21:09:11

($\pi/4$ -DQPSK), Modulation, PRBS packet type

The measured power values were corrected with the attenuation of the cables, attenuator and power divider using the formula:


EUT channel	Trace value (dBm)	Cable loss (dB)	Divider loss (dB)	Peak output power (dBm)	Peak output power (mW)	Results
0	-15.36	10.2	6	0.84	1.213	Passed
39	-15.34	10.2	6	0.86	1.219	Passed
78	-15.71	10.2	6	0.49	1.119	Passed

Peak output power, channel 0

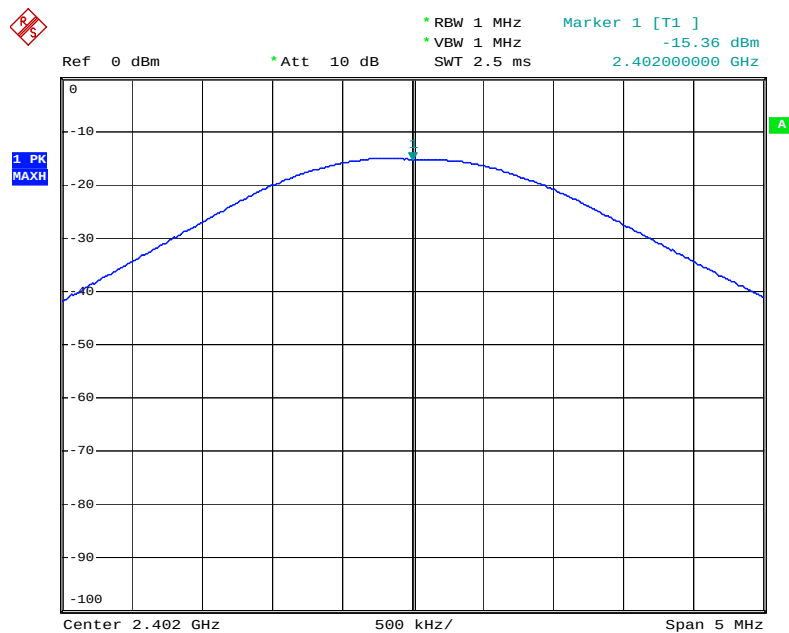


Date: 11.APR.2006 17:59:42

Peak output power, channel 39

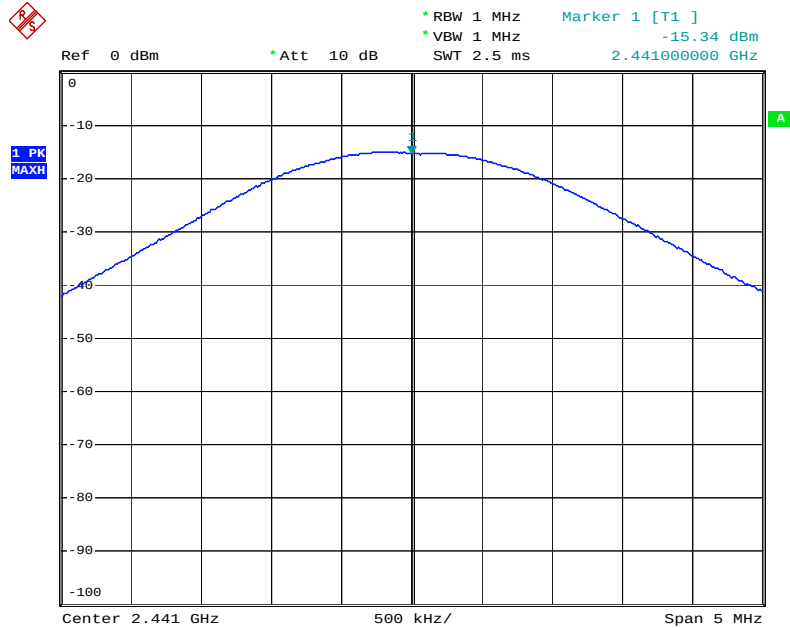

Date: 11.APR.2006 17:58:15

Peak output power, channel 78

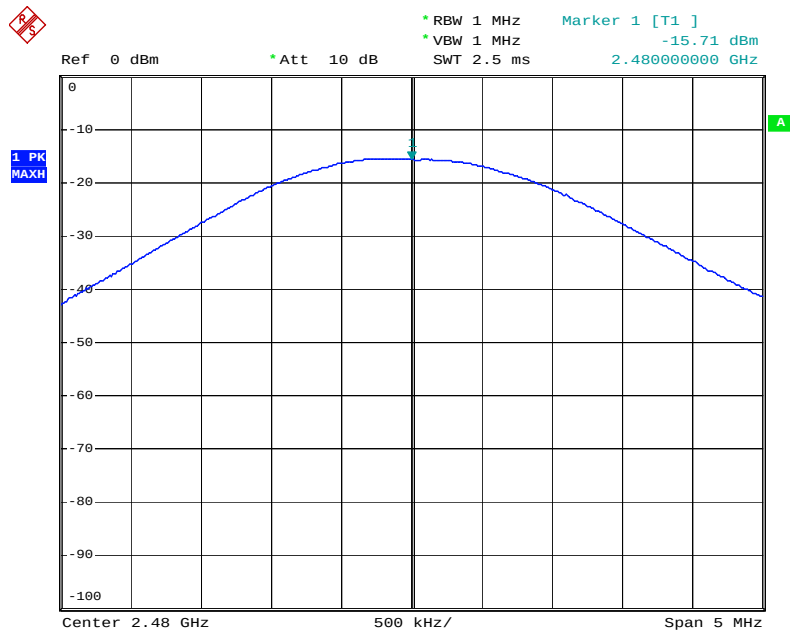


Date: 11.APR.2006 17:56:40

8DPSK Modulation, PRBS packet Type

The measured power values were corrected with the attenuation of the cables, attenuator and power divider using the formula:


EUT channel	Trace value (dBm)	Cable loss (dB)	Divider loss (dB)	Peak output power (dBm)	Peak output power (mW)	Results
0	-14.75	10.2	6	1.45	1.396	Passed
39	-14.75	10.2	6	1.45	1.396	Passed
78	-15.12	10.2	6	1.08	1.282	Passed

Peak output power, channel 0

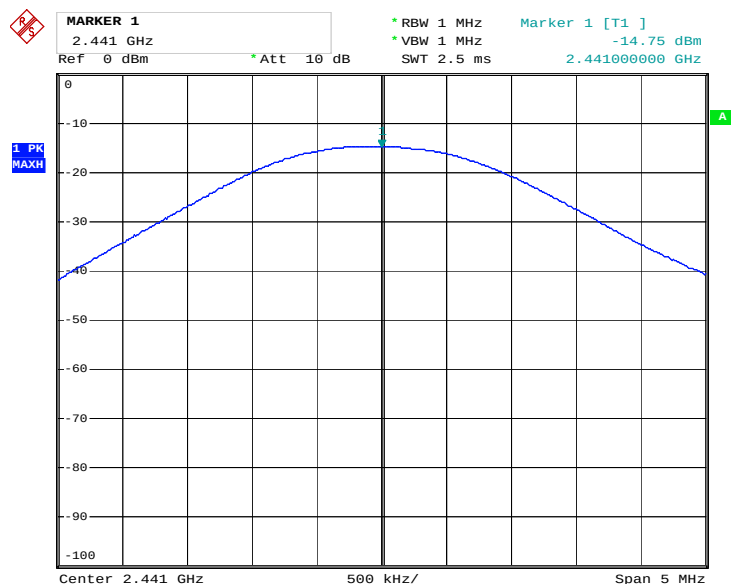


Date: 28.MAR.2006 22:13:34

Peak output power, channel 39

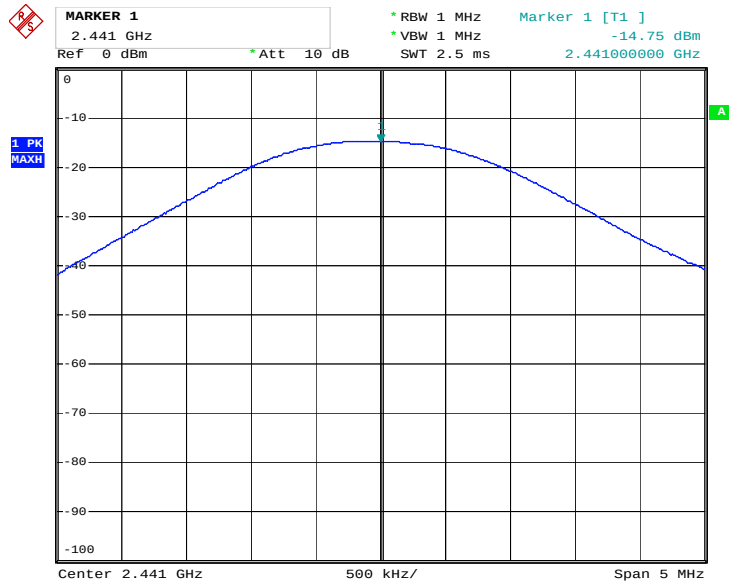

Date: 28.MAR.2006 22:13:34

Peak output power, channel 78

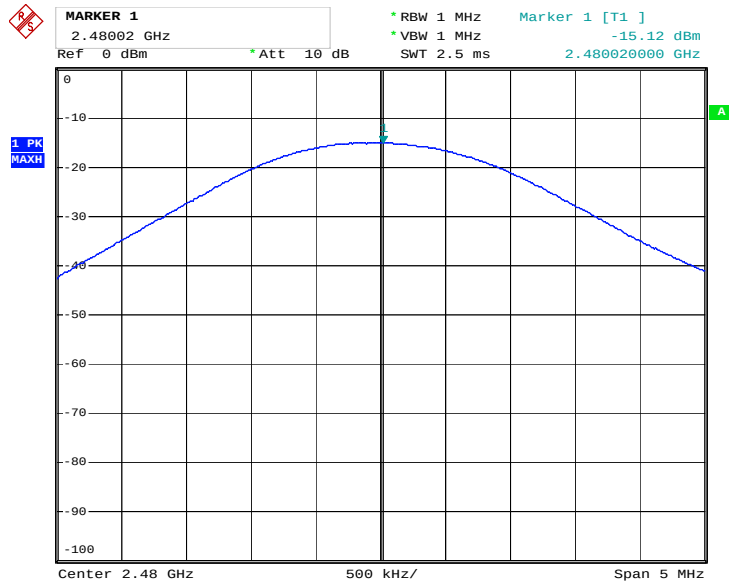

Date: 28.MAR.2006 22:12:05

12. BAND-EDGE COMPLIANCE OF RF CONDUCTED EMISSIONS

Specification: FCC Part 15.247(c); RSS-210 6.2.2(o), e1

12.1 Setup

Used test set-up: A (see section 6)

12.2 Test Results

Test Operator	Hai To
Date of Measurement	28-Mar-06
Temperature	24°C
Humidity	33 %RH
Test Result	Complies

12.3 EUT operation mode

EUT operation mode	Connected, DH5, Static PRBS
EUT channel	Hopping mode, 0 (2402 MHz); 78 (2480 MHz)
EUT TX power level	Nominal

12.4 Pass/Fail Criteria


Limit (dBc)
≤ -20

12.5 Results

GSFK Modulation, PRBS packet type


EUT channel	Measured value (dBc)	Results
Low End, Hopping Mode	-48.76	Passed
High End, Hopping Mode	-48.35	Passed
0	-48.58	Passed
78	-46.44	Passed

Hopping on, low end

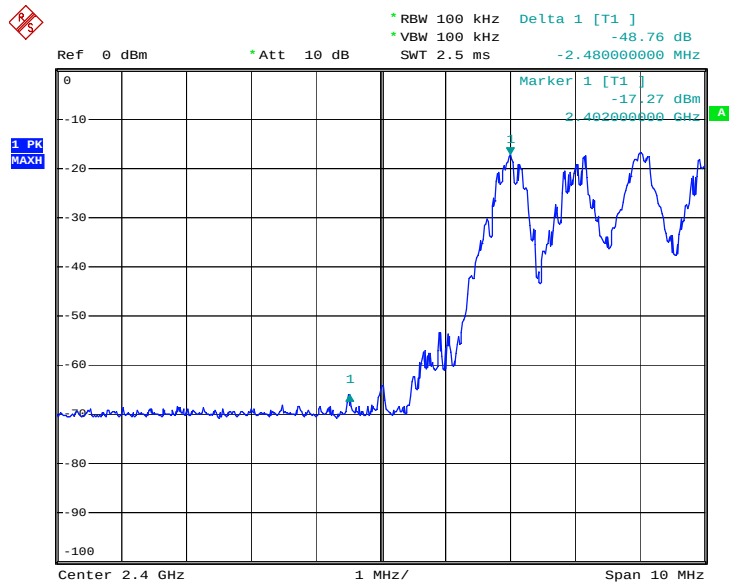


Date: 30.MAR.2006 18:26:51

Hopping on, high end

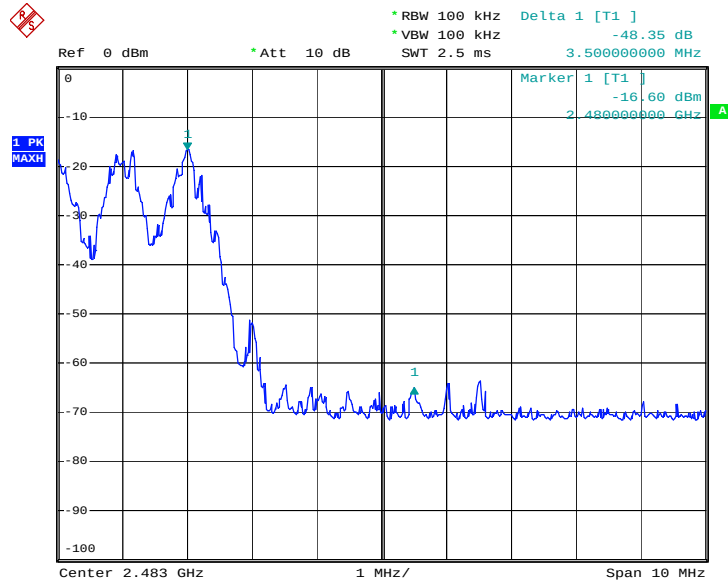


Date: 30.MAR.2006 18:27:49

Channel 0

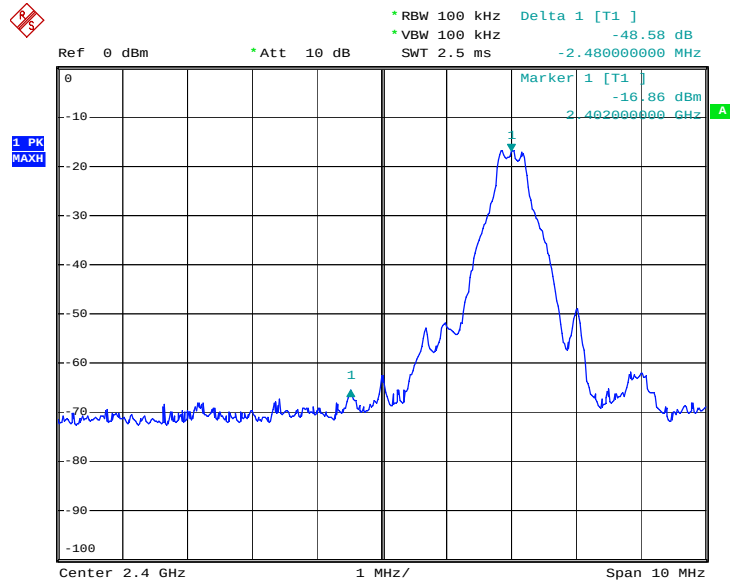

Date: 30.MAR.2006 18:29:41

Channel 78

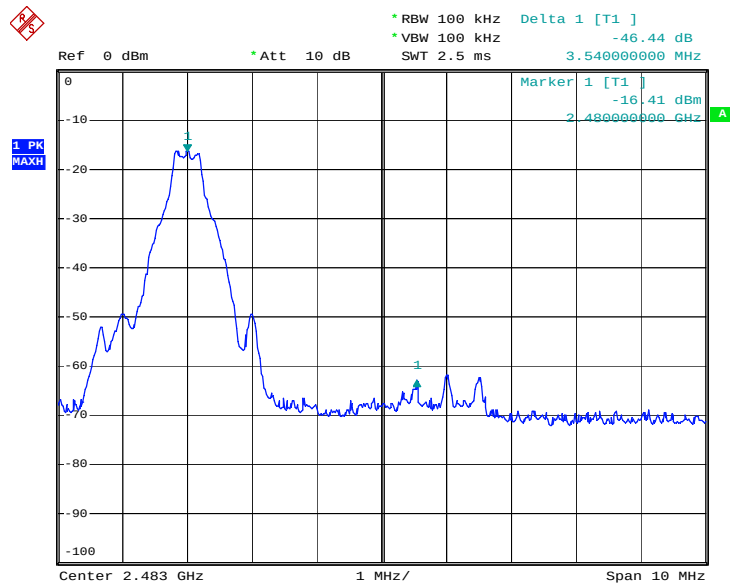


Date: 30.MAR.2006 18:29:02

($\pi/4$ -DQPSK), Modulation, PRBS packet type


EUT channel	Measured value (dBc)	Results
Low End, Hopping Mode	-47.22	Passed
High End, Hopping Mode	-39.09	Passed
0	-49.52	Passed
78	-42.40	Passed

Hopping on, Low end

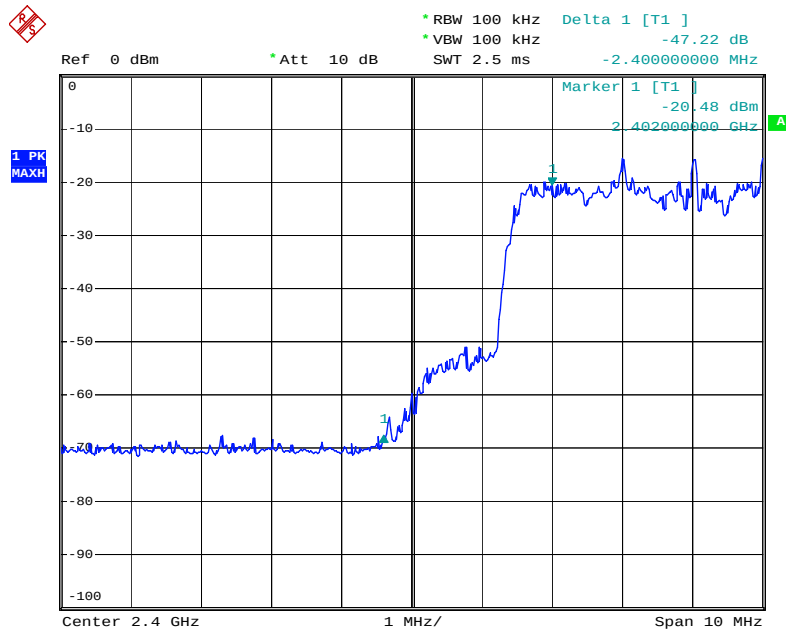


Date: 11.APR.2006 21:20:23

Hopping on, high end

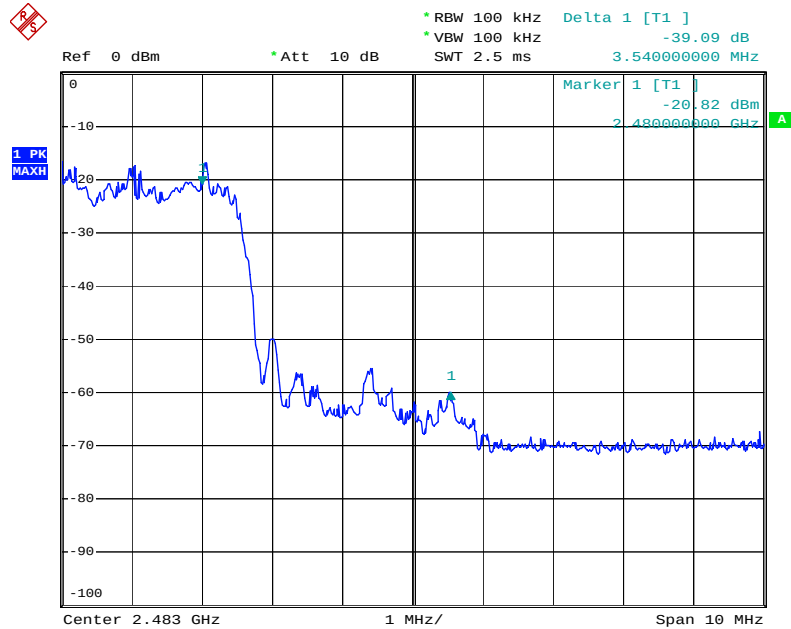


Date: 11.APR.2006 21:22:59

Channel 0

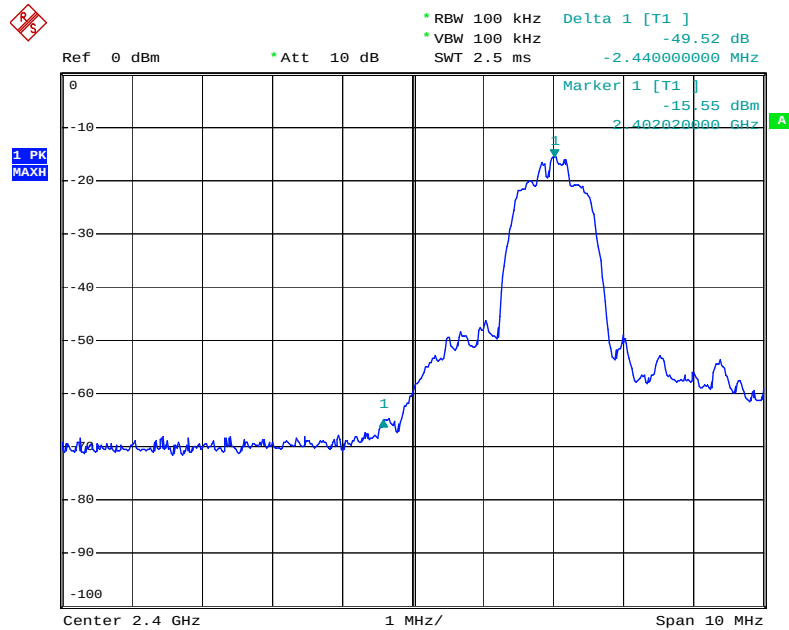

Date: 11.APR.2006 21:26:49

Channel 78

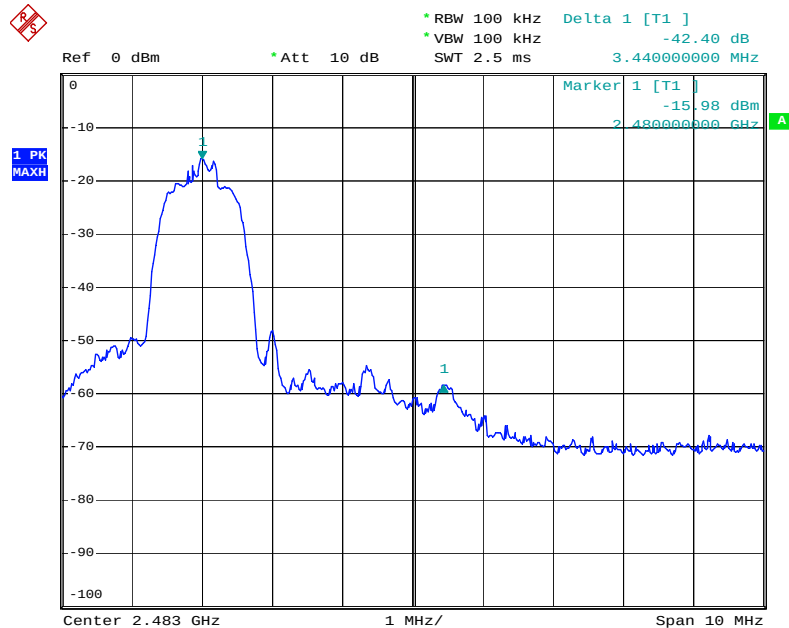


Date: 11.APR.2006 21:24:53

8DPSK Modulation, PRBS packet type


EUT channel	Measured value (dBc)	Results
Low End, Hopping Mode	-45.56	Passed
High End, Hopping Mode	-39.28	Passed
0	-49.98	Passed
78	-43.34	Passed

Hopping on, Low end

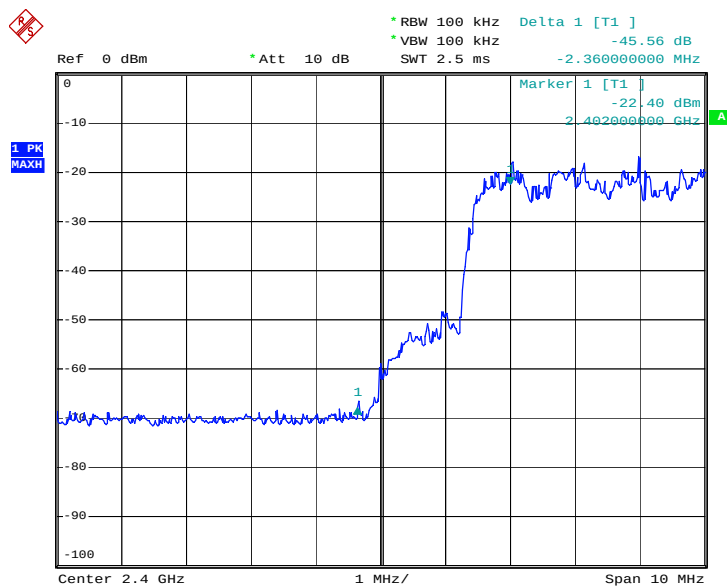


Date: 30.MAR.2006 18:13:13

Hopping on, high end

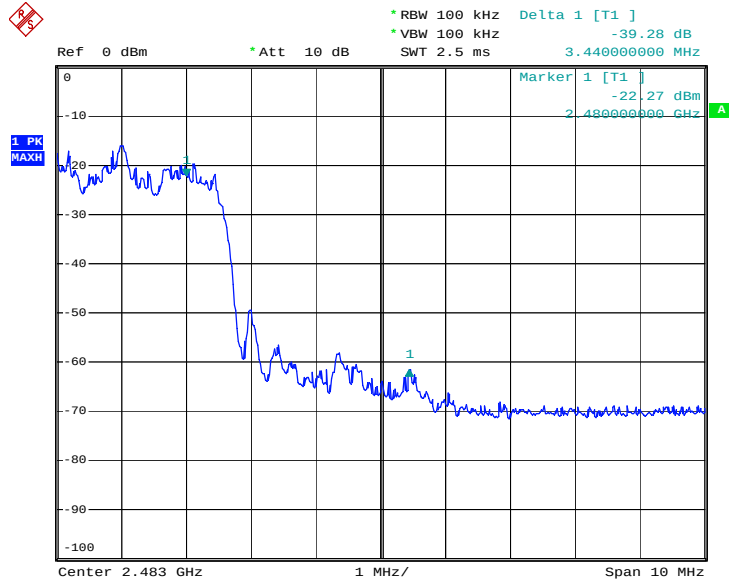


Date: 30.MAR.2006 18:16:59

Channel 0

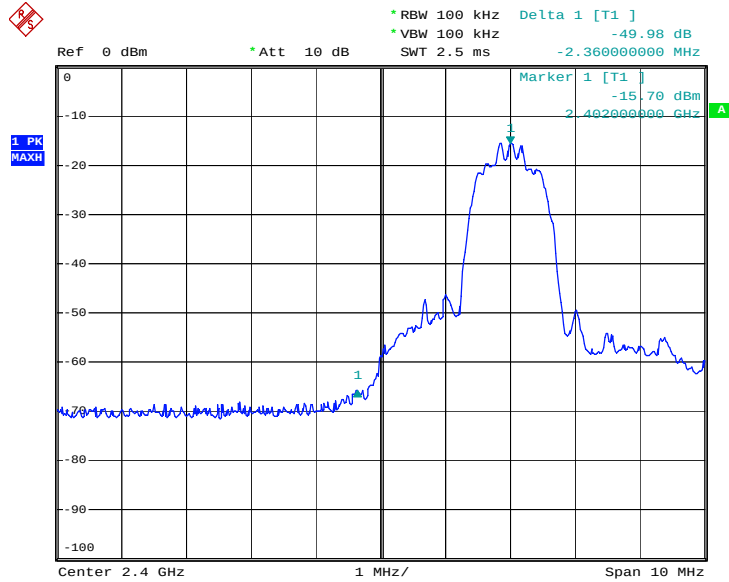

Date: 30.MAR.2006 18:20:09

Channel 78

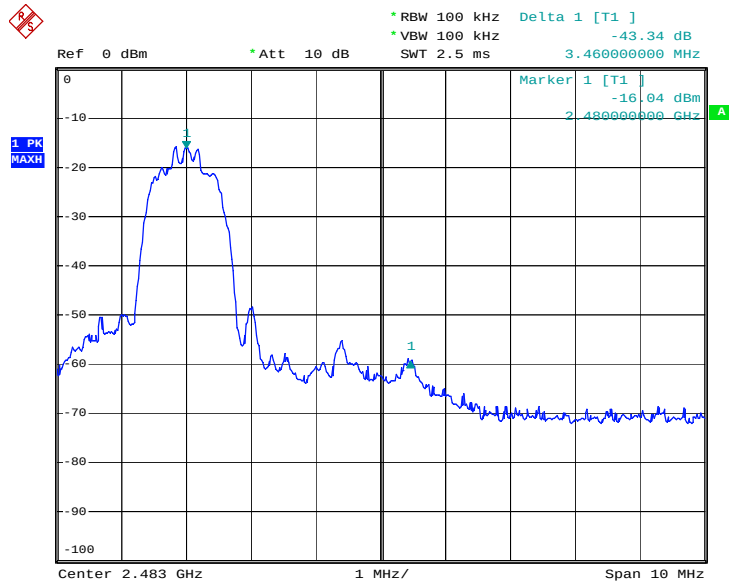

Date: 30.MAR.2006 18:18:41