

FCC PART 15.407

TEST REPORT

For

Shenzhen Renqing Excellent Technology Co., Ltd.

104, No.15, Longfu Industrial Zone, Tongsheng Community, Dalang Street, Longhua District,
Shenzhen, China

FCC ID:2AUA9-RQZY008

Report Type: Original Report	Product Name: AX1800 Dual-Band Wi-Fi 6 Router
Report Number: RDG201208016-00B	
Report Date: 2021-01-29	
Ivan Cao 	
Reviewed By: Assistant Manager	
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.12, Pulong East 1 st Road, Tangxia Town, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
DECLARATIONS.....	6
SYSTEM TEST CONFIGURATION.....	7
DESCRIPTION OF TEST CONFIGURATION	7
EUT EXERCISE SOFTWARE	8
EQUIPMENT MODIFICATIONS	12
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	12
SUPPORT CABLE LIST AND DETAILS	12
BLOCK DIAGRAM OF TEST SETUP	13
SUMMARY OF TEST RESULTS.....	14
FCC §15.407 (f) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)	15
APPLICABLE STANDARD	15
FCC §15.203- ANTENNA REQUIREMENT.....	17
APPLICABLE STANDARD	17
ANTENNA CONNECTOR CONSTRUCTION	17
FCC §15.207(a)– CONDUCTED EMISSIONS.....	18
APPLICABLE STANDARD	18
EUT SETUP.....	18
EMI TEST RECEIVER SETUP.....	18
CORRECTED AMPLITUDE & MARGIN CALCULATION	19
TEST EQUIPMENT LIST AND DETAILS.....	19
TEST PROCEDURE	19
TEST DATA	20
FCC §15.209, §15.205 , §15.407(b) –UNWANTED EMISSION	22
APPLICABLE STANDARD	22
EUT SETUP.....	23
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	24
TEST PROCEDURE	24
CORRECTED AMPLITUDE & MARGIN CALCULATION	25
TEST EQUIPMENT LIST AND DETAILS.....	26
TEST DATA	26
FCC §15.407(a)(e)–EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH.....	46
APPLICABLE STANDARD	46
TEST EQUIPMENT LIST AND DETAILS.....	46
TEST PROCEDURE	46
TEST DATA	46
FCC §15.407(a) –MAXIMUM CONDUCTED OUTPUT POWER.....	80
APPLICABLE STANDARD	80
TEST EQUIPMENT LIST AND DETAILS.....	81

TEST PROCEDURE	81
TEST DATA	81
FCC §15.407(a) - POWER SPECTRAL DENSITY	83
APPLICABLE STANDARD	83
TEST PROCEDURE	84
TEST EQUIPMENT LIST AND DETAILS.....	84
TEST DATA	84

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:		AX1800 Dual-Band Wi-Fi 6 Router
EUT Model:		RSD0619
Operation Frequency:		5180-5240(802.11a/n ht20/ac vht20/ax hew20) 5190-5230 MHz(802.11n ht40/ac vht40/ax hew40) 5210 MHz(802.11ac vht80/ax hew80) 5745-5825(802.11a/n ht20/ac vht20/ax hew20) 5755-5795 MHz(802.11n ht40/ac vht40/ax hew40) 5775 MHz(802.11ac vht80/ax hew80)
Maximum Output Power (Conducted):		5150-5250 MHz: 17.85 dBm 5725-5850 MHz: 22.62 dBm
Modulation Type:		802.11a/n/ac:OFDM-BPSK, QPSK, 16QAM, 64QAM,256QAM 802.11ax: OFDMA- BPSK, QPSK, 16QAM, 64QAM,256QAM, 1024QAM
Antenna Gain ▲:		5.0 dBi
Rated Input Voltage:		DC 12V from adapter
Adapter #1 Information	Model:	TPA259-18120-US
	Input:	100~240V 50/60Hz 0.6A
	Output:	12V 1.5A
Adapter #2 Information	Model:	HB10P-1201004SPA
	Input:	100~240V 50/60Hz 0.4A
	Output:	12V 1A
Serial Number:		RDG201208016-RF-S1
EUT Received Date:		2020.12.10
EUT Received Status:		Good

Note: Per 15B emission test, the adapter #1 was the worst and test for this report.

Objective

This type approval report is prepared on behalf of **Shenzhen Renqing Excellent Technology Co., Ltd.** in accordance with Part 2-Subpart J, Part 15-Subparts A, and E of the Federal Communications Commission's rules.

The tests were performed in order to determine compliance with FCC Rules Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Related Submittal(s)/Grant(s)

FCC Part 15C DTS submissions with FCC ID: 2AUA9-RQZY008

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And KDB 789033 D02 General U-NII Test Procedures New Rules v02r01.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB, 200M~1GHz: 5.92 dB, 1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system support 802.11a/n ht20/n ht40/ac vht20/40/80/ax hew 20/40/80, the vht20/vht40 were reduced since the identical parameters with 802.11n ht20 and ht40.

For 5150~5250 MHz band, 7 channels are provided:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240
42	5210	/	/

For 802.11a, 802.11n ht20, 802.11ax hew20 channel 36, 40 and 48 was tested, for 802.11n ht40, 802.11ax hew40 channel 38, 46 were tested, for 802.11ac vht80,802.11ax hew80 channel 42 was tested.

For 5725~5850MHz band, 8 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785
151	5755	159	5795
153	5765	161	5805
155	5775	165	5825

For 802.11a, 802.11n ht20, 802.11ax hew20 channel 149, 157 and 165 was tested, for 802.11n ht40, 802.11ax hew40 channel 151, 159 were tested, for 802.11ac vht80,802.11ax hew80 channel 155 was tested.

EUT Exercise Software


The software “MT7915 QA” was used for testing, which was provided by Manufacturer. The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations. The device supports SISO and MIMO at 802.11n/ac/ax mode, per pre-test, MIMO 2TX mode was the worst and reported. The maximum power was configured as below table, that provided by the Manufacturer:

Band	Mode	Channel	Frequency (MHz)	Data rate	Power level Setting	
					Chain 0	Chain 1
5150-5250 MHz	802.11a	Low	5745	6Mbps	17.5	17.5
		Middle	5785	6Mbps	18	18
		High	5825	6Mbps	18	18
	802.11n ht20	Low	5745	MCS0	16	16
		Middle	5785	MCS0	16	16
		High	5825	MCS0	16	16
	802.11ax hew20	Low	5745	MCS0	17.5	17.5
		Middle	5785	MCS0	18	18
		High	5825	MCS0	18	18
	802.11n ht40	Low	5755	MCS0	14.5	14.5
		High	5795	MCS0	16	16
	802.11ax hew40	Low	5755	MCS0	18	18
		High	5795	MCS0	19	19
	802.11ac vht80	Middle	5775	MCS0	19	19
	802.11ax hew80	Middle	5775	MCS0	18	18
5725-5850 MHz	802.11a	Low	5745	6Mbps	22.5	22
		Middle	5785	6Mbps	25	25
		High	5825	6Mbps	25	25
	802.11n ht20	Low	5745	MCS0	18	18
		Middle	5785	MCS0	18	18
		High	5825	MCS0	18	18
	802.11ax hew20	Low	5745	MCS0	18	18
		Middle	5785	MCS0	18	18
		High	5825	MCS0	18	18
	802.11n ht40	Low	5755	MCS0	18	18
		High	5795	MCS0	18	18
	802.11ax hew40	Low	5755	MCS0	19	19
		High	5795	MCS0	19	19
	802.11ac vht80	Middle	5775	MCS0	18	18
	802.11ax hew80	Middle	5775	MCS0	18.5	18.5

The duty cycle as below:


Mode	T _{on} (ms)	T _{on+off} (ms)	Duty Cycle (%)
802.11 a	1.428	1.460	97.81
802.11n ht20	0.695	0.738	94.17
802.11n ht40	0.358	0.407	87.96
802.11ac vht80	0.030	0.078	38.46
802.11ax hew20	0.118	0.469	25.16
802.11ax hew40	0.088	0.414	21.26
802.11ax hew80	0.087	0.421	20.67

802.11a

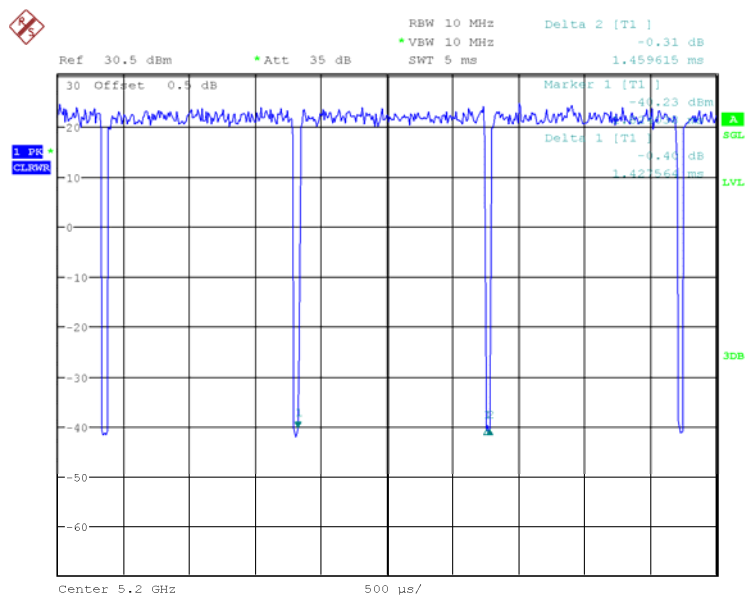


Date: 14.JAN.2021 15:46:32

802.11n ht20

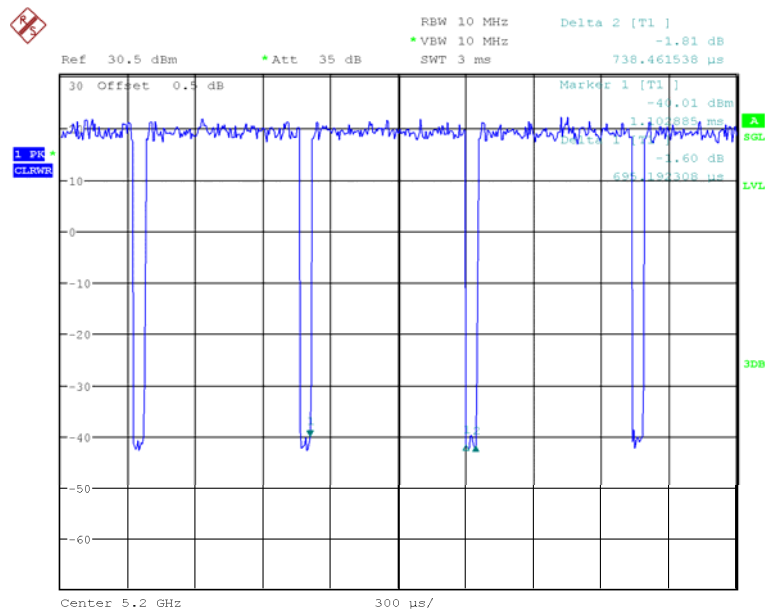


Date: 14.JAN.2021 15:48:02

802.11n ht40

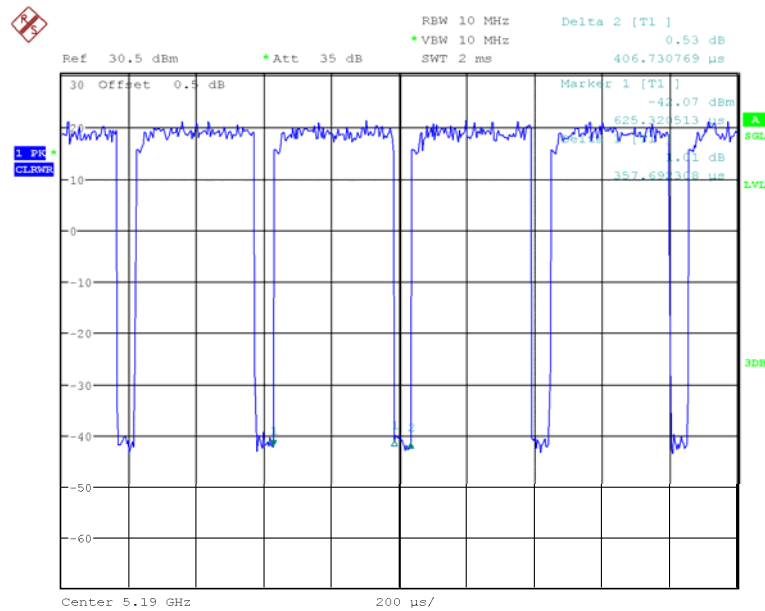


Date: 14.JAN.2021 15:53:46

802.11ac vht80

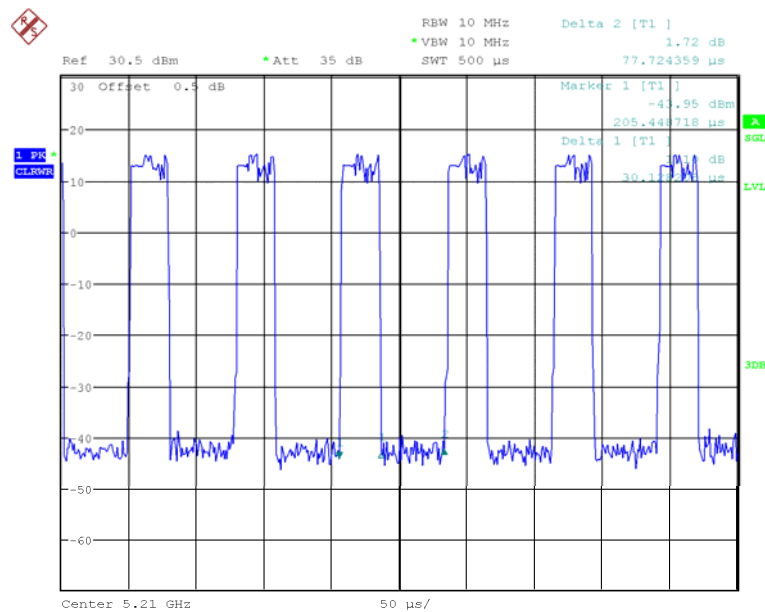


Date: 14.JAN.2021 16:07:56

802.11ax n20

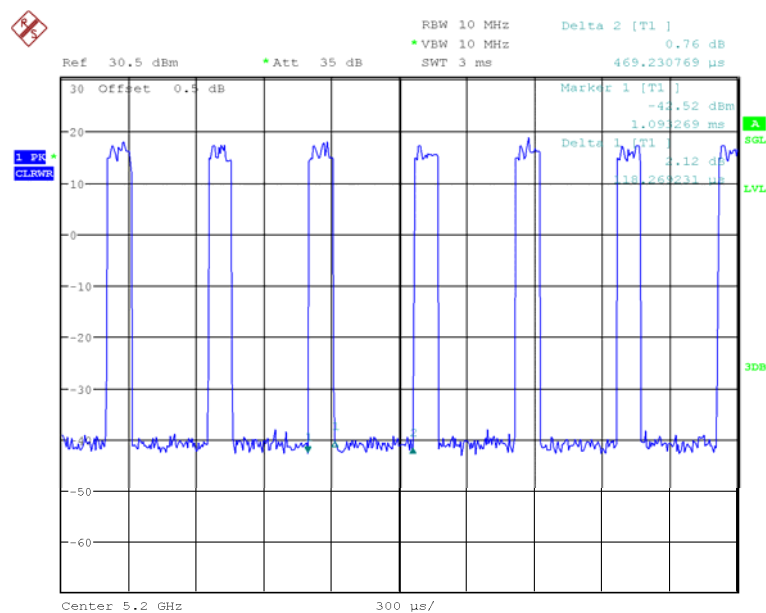

Date: 14.JAN.2021 15:48:51

802.11ax n40

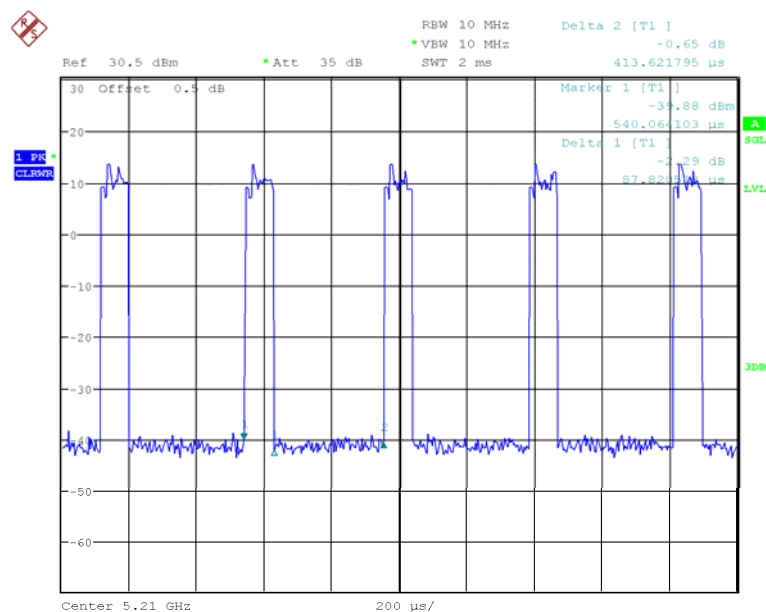

Date: 14.JAN.2021 16:09:41

1 PR
CL1000

Ref 30.5 dBm * Att 35 dB

RBW 10 MHz Delta 2 [T1] -2.14 dB
VBW 10 MHz
SWT 3 ms 420.833333 μs

30 Offset 0.5 dB

Marker 1 [T1]
-3.25 dBm
646.47359 μs
Delta 1 [T1]
-3.15 dB
86.5346 μs

Center 5.21 GHz 300 μs/


Date: 14.JAN.2021 16:06:21

No modification was made to the EUT.

Manufacturer	Description	Model	Serial Number
DELL	Laptop	PP11L	QDS-BRCM1232
DELL	Laptop	PP11L	QDS-BRCM1012
Unknown	Load	RJ45 Load	0078

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Adapter Cable	No	No	1.2	Adapter	EUT
RJ45 Cable	Yes	No	10	EUT	Laptop
RJ45 Cable	Yes	No	10	EUT	Laptop
RJ45 Cable*2	Yes	No	10	EUT	Load

Block Diagram of Test Setup

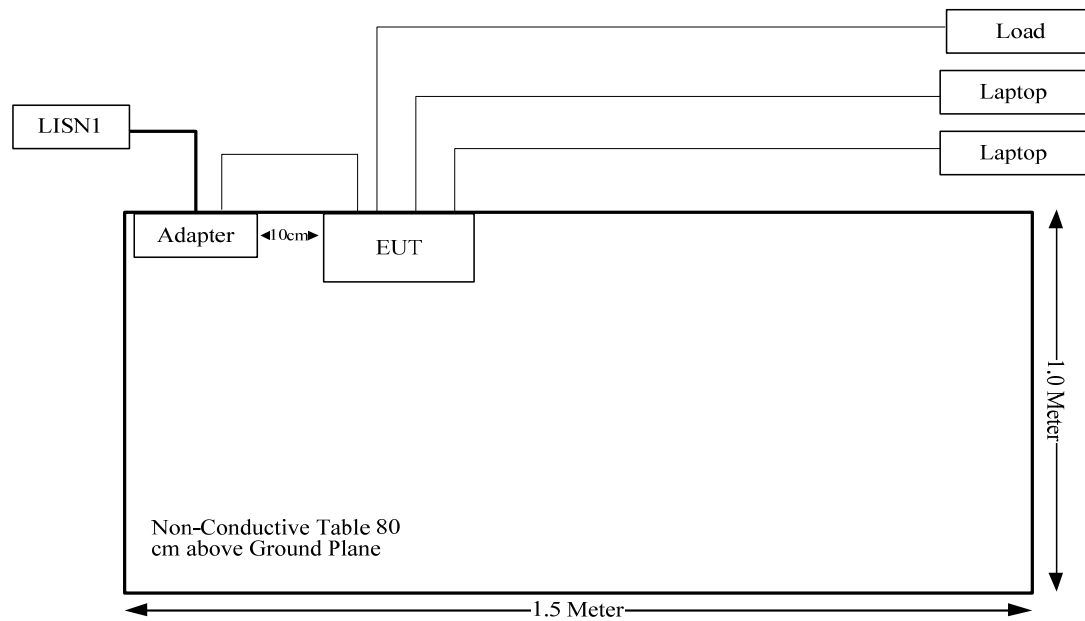

SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC §15.407 (f) & §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
FCC§15.203	Antenna Requirement	Compliance
FCC§15.407(b)(8)& §15.207(a)	Conducted Emissions	Compliance
FCC§15.205& §15.209 &§15.407(b)	Undesirable Emission& Restricted Bands	Compliance
FCC§15.407(b)	Out Of Band Emissions	Compliance
FCC§15.407(a) (e)	Emission Bandwidth	Compliance
FCC§15.407(a)	Conducted Transmitter Output Power	Compliance
FCC§15.407 (a)	Power Spectral Density	Compliance

FCC §15.407 (f) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.407(f) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculation formula:

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Calculated Data:

Mode	Frequency (MHz)	Antenna Gain		Conducted output power including Tune-up Tolerance		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
WLAN	2412-2462	5	3.16	27	501.19	20.00	0.32	1.0
WLAN	5150-5250	5	3.16	18	63.10	20.00	0.04	1.0
WLAN	5725-5850	5	3.16	23	199.53	20.00	0.13	1.0

The WLAN 2.4G and 5G can transmit simultaneously:

$$\sum_i \frac{S_i}{S_{Limit,i}}$$

$$= S_{2.4}/S_{limit-2.4} + S_5/S_{limit-5}$$

$$= 0.32/1 + 0.13/1$$

$$= 0.45$$

$$< 1.0$$

Result: The device meet FCC MPE at **20 cm** distance

FCC §15.203- ANTENNA REQUIREMENT

Applicable Standard

According to FCC§ 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Connector Construction

The EUT has 2 external antennas for 2.4G WLAN and 2 external antennas for 5G WLAN, which was permanently attached to the unit, fulfill the requirement of this section. Please refer to the EUT photos and below information:

Antenna	Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range
2.4 G Chain 0	Dipole	50	5.0 dBi/2.4-2.5GHz
2.4 G Chain 1	Dipole	50	5.0 dBi/2.4-2.5GHz
5 G Chain 0	Dipole	50	5.0 dBi/5.15-5.85GHz
5 G Chain 1	Dipole	50	5.0 dBi/5.15-5.85GHz


Result: Compliance.

FCC §15.207(a)– CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a), §15.407(b) (8).

EUT Setup

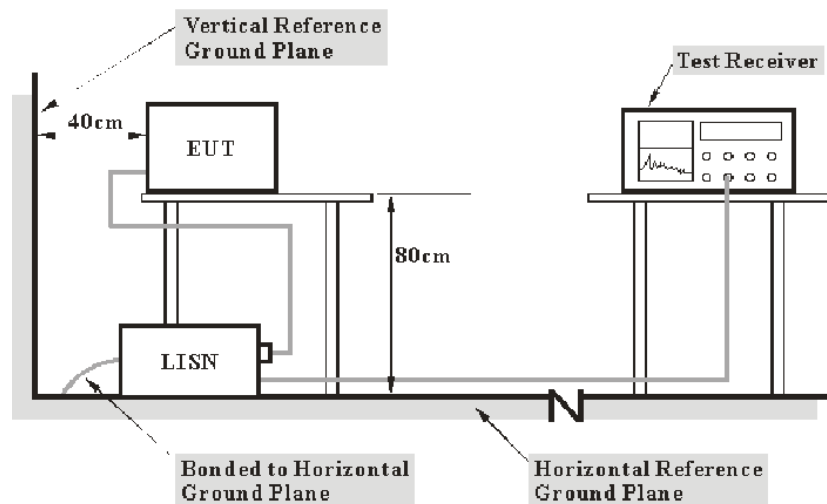

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main lisn with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_c : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV 216	101614	2020-09-12	2021-09-12
R&S	EMI Test Receiver	ESCI	101121	2020-07-07	2021-07-07
MICRO-COAX	Coaxial Cable	C-NJNJ-50	C-0200-01	2020-09-05	2021-09-05
R&S	Test Software	EMC32	Version 9.10.00	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

During the conducted emission test, the adapter was connected to the first LISN.

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

Test Data


Environmental Conditions

Temperature:	17.9°C
Relative Humidity:	40%
ATM Pressure:	101.8kPa
Tester:	Walker Chen
Test Date:	2020-12-17

Test Result: Compliance


Test Mode: Transmitting

AC120 V, 60 Hz, Line:

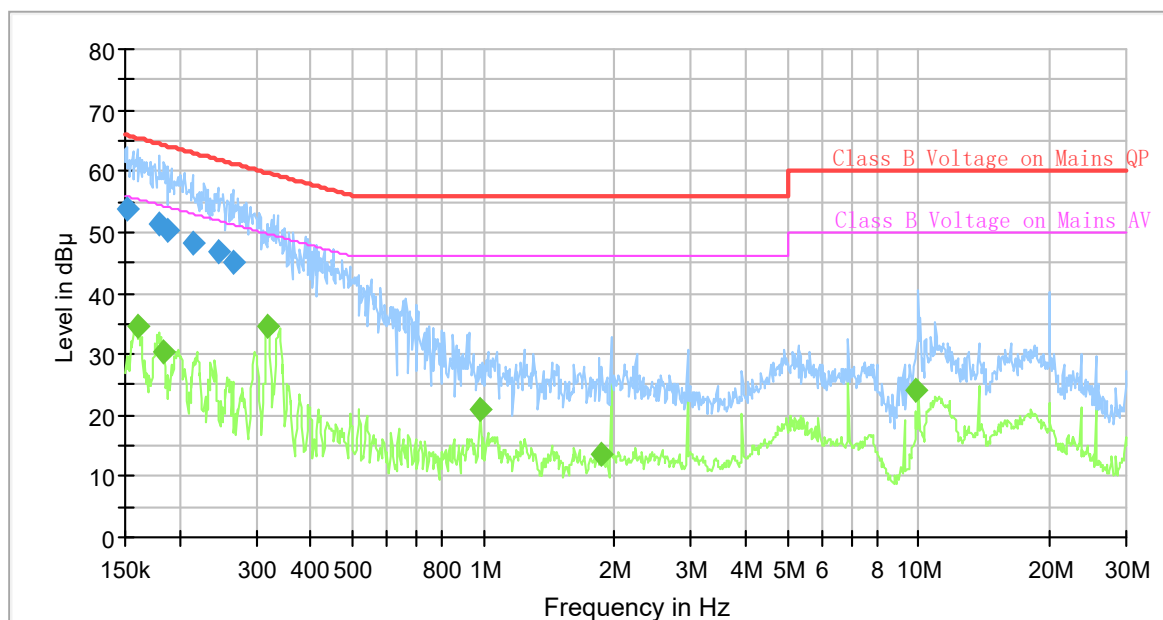

Final Result

Frequency (MHz)	QuasiPeak (dB μV)	Average (dB μV)	Limit (dB μV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.151504	53.74	---	65.92	12.18	9.000	L1	9.6
0.160048	---	34.52	55.46	20.94	9.000	L1	9.6
0.179502	51.41	---	64.51	13.10	9.000	L1	9.6
0.183119	---	30.33	54.34	24.01	9.000	L1	9.6
0.188682	50.27	---	64.09	13.82	9.000	L1	9.6
0.214807	48.26	---	63.02	14.76	9.000	L1	9.6
0.245771	46.86	---	61.90	15.04	9.000	L1	9.6
0.264864	44.91	---	61.28	16.37	9.000	L1	9.6
0.318542	---	34.73	49.74	15.01	9.000	L1	9.6
0.978432	---	20.82	46.00	25.18	9.000	L1	9.7
1.861883	---	13.65	46.00	32.35	9.000	L1	9.7
9.849566	---	24.12	50.00	25.88	9.000	L1	9.9

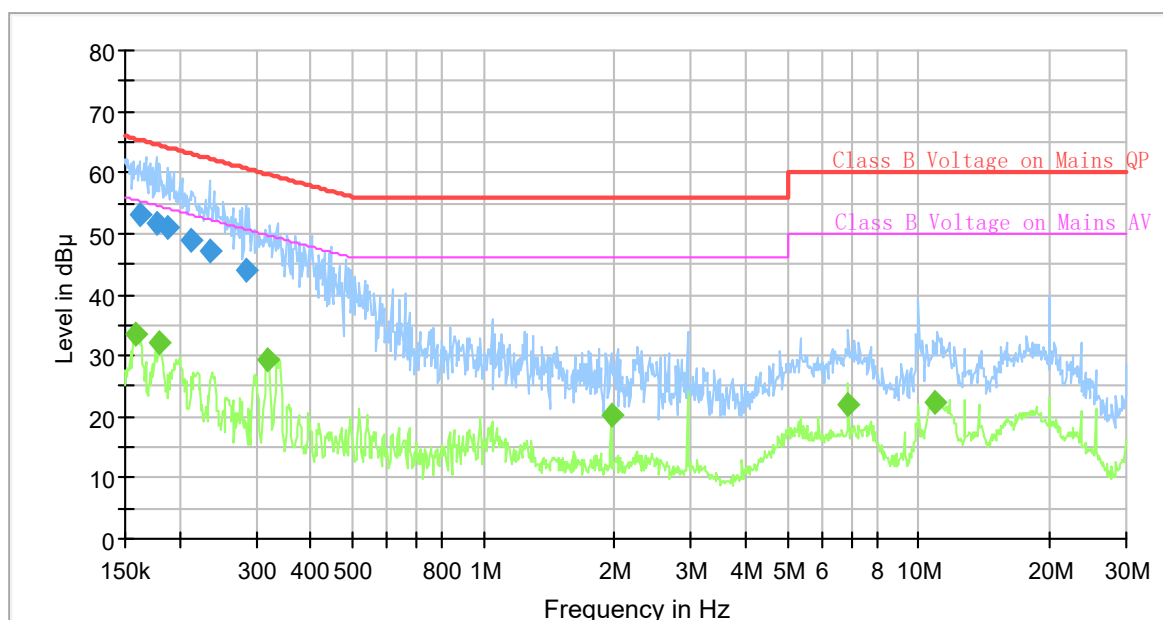AC120 V, 60 Hz, Neutral:**Final Result**

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.159252	---	33.61	55.50	21.89	9.000	N	9.6
0.161652	53.13	---	65.38	12.25	9.000	N	9.6
0.176836	51.71	---	64.63	12.92	9.000	N	9.6
0.178609	---	32.13	54.55	22.42	9.000	N	9.6
0.188682	50.98	---	64.09	13.11	9.000	N	9.6
0.213738	48.89	---	63.06	14.17	9.000	N	9.6
0.234983	47.28	---	62.27	14.99	9.000	N	9.6
0.284019	43.86	---	60.70	16.84	9.000	N	9.6
0.316957	---	29.51	49.79	20.28	9.000	N	9.6
1.966886	---	20.27	46.00	25.73	9.000	N	9.6
6.877976	---	22.01	50.00	27.99	9.000	N	9.6
10.882741	---	22.50	50.00	27.50	9.000	N	9.7

FCC §15.209, §15.205 , §15.407(b) –UNWANTED EMISSION

Applicable Standard

FCC §15.407; §15.209; §15.205;

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufac vhturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufac vhturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.


(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.


(7) The provisions of §15.205 apply to intentional radiators operating under this section.

EUT Setup


Below 1 GHz:

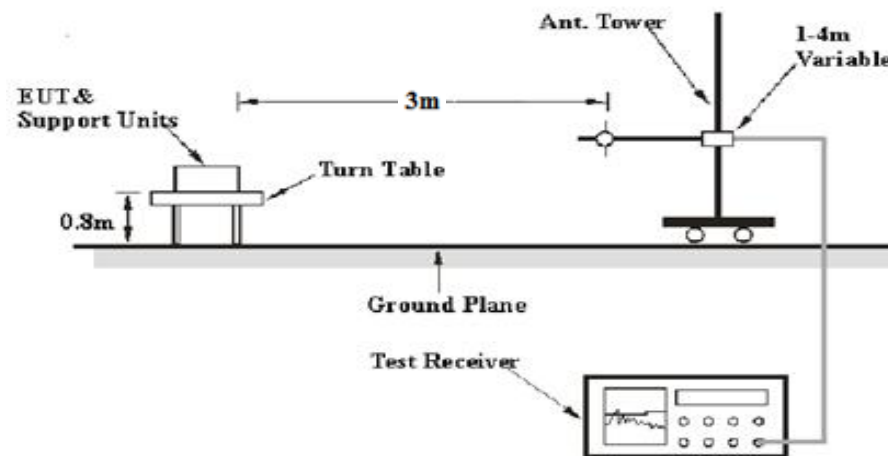

1-26.5 GHz:

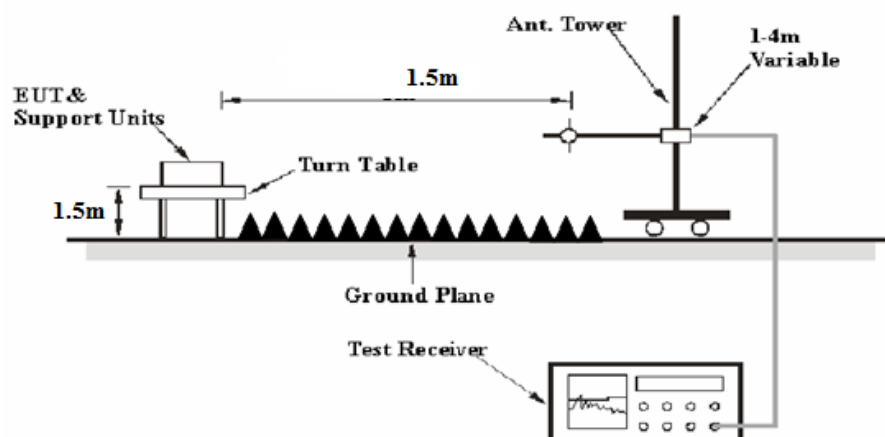

26.5-40 GHz:

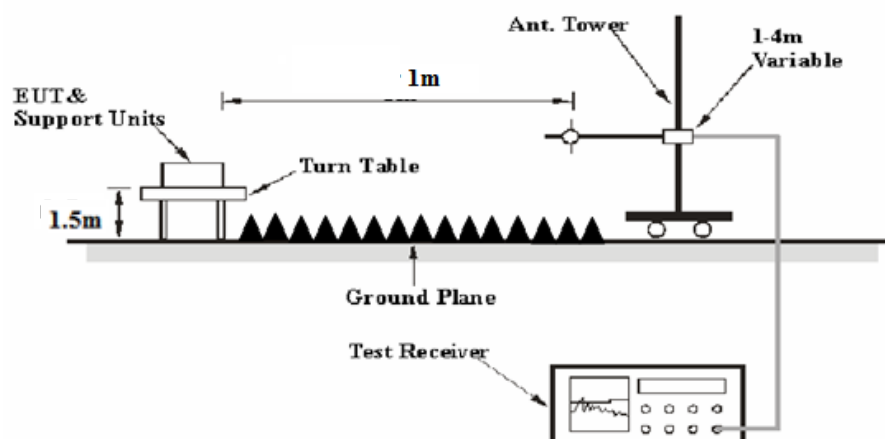

The radiated emission Below 1GHz tests were performed in the 3 meters chamber test site A, above 1GHz tests were performed in the 3 meters chamber test site B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 40GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
Ave.	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E [dB\mu V/m] = EIRP[dBm] + 95.2$, for $d = 3$ meters.

According to C63.10, the above 1G test result shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m or 1m

Distance extrapolation factor = $20 \log (\text{specific distance } [3m] / \text{test distance } [1.5m])$ dB= 6.02 dB
or

Distance extrapolation factor = $20 \log (\text{specific distance } [3m] / \text{test distance } [1m])$ dB= 9.54 dB

All emissions under the average limit and under the noise floor have not recorded in the report.

Corrected Amplitude & Margin Calculation

For the range 30MHz-1GHz, the Corrected Amplitude is calculated by adding the Antenna Fac vhtor and Cable Loss, and subtrac vhting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Fac vhtor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

For the range 1GHz-40GHz, Test performed at 1.5m or 1m, the Corrected Amplitude is calculated by adding the Antenna Fac vhtor and Cable Loss, and subtrac vhting the Amplifier Gain from the Meter Reading and the Distance extrapolation fac vhtor. The basic equation is as follows:

$$\begin{aligned} &\text{Corrected Amplitude} \\ &= \text{Meter Reading} + \text{Antenna Fac vhtor} + \text{Cable Loss} - \text{Amplifier Gain} - \text{Distance extrapolation fac vhtor} \end{aligned}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiation Below 1GHz Test					
Sunol Sciences	Antenna	JB3	A060611-1	2020-11-10	2023-11-10
R&S	EMI Test Receiver	ESR3	102453	2020-09-12	2021-09-12
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2020-05-06	2021-05-06
HP	Amplifier	8447D	2727A05902	2020-09-05	2021-09-05
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Radiation Above 1GHz Test					
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2020-12-05	2023-12-04
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-01 1302	2020-12-05	2023-12-04
R&S	Spectrum Analyzer	FSP 38	100478	2020-07-07	2021-07-07
Agilent	Spectrum Analyzer	E4440A	SG43360054	2020-07-07	2021-07-07
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2020-06-27	2021-06-27
Mini-Circuit	Amplifier	ZVA-213-S+	54201245	2020-09-05	2021-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2020-06-27	2021-06-27
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sinoscite	Bandstop Filters	BSF5150-5850MN-0899-003	0899003	2020-05-06	2021-05-06
Mini Circuits	High Pass Filter	VHF-6010+	31118	2020-06-16	2021-06-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Test Items	Radiation Below 1GHz	Radiation Above 1GHz
Temperature:	21.1°C	19.4°C
Relative Humidity:	40 %	40 %
ATM Pressure:	101.2kPa	101.7kPa
Tester:	Jalon Liu	Felix Wang
Test Date:	2020-12-23	2020-12-18


Test Mode: Transmitting

1) Below 1GHz(802.11a chain 0 5745 MHz was the worst):

Horizontal:

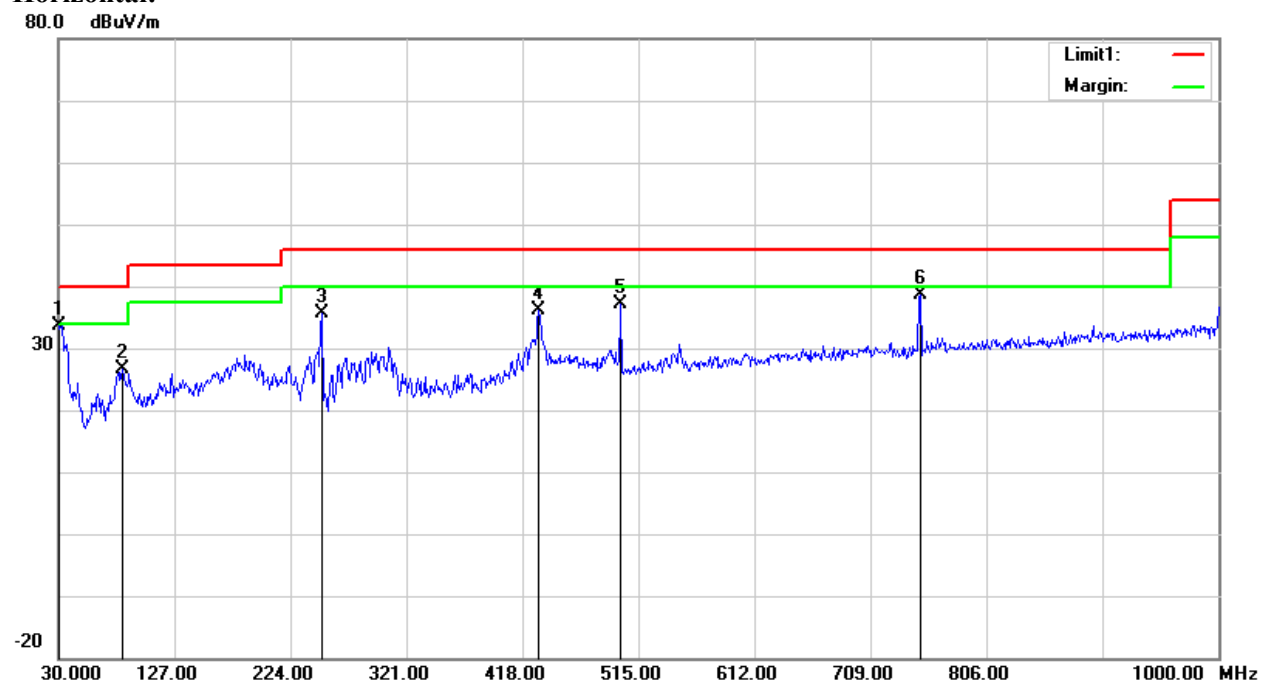

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30.0000	32.09	peak	1.46	33.55	40.00	6.45
83.3500	38.09	peak	-11.54	26.55	40.00	13.45
250.1900	41.65	peak	-5.99	35.66	46.00	10.34
431.5800	37.58	peak	-1.40	36.18	46.00	9.82
500.4500	37.47	peak	-0.39	37.08	46.00	8.92
750.7100	35.40	peak	3.17	38.57	46.00	7.43

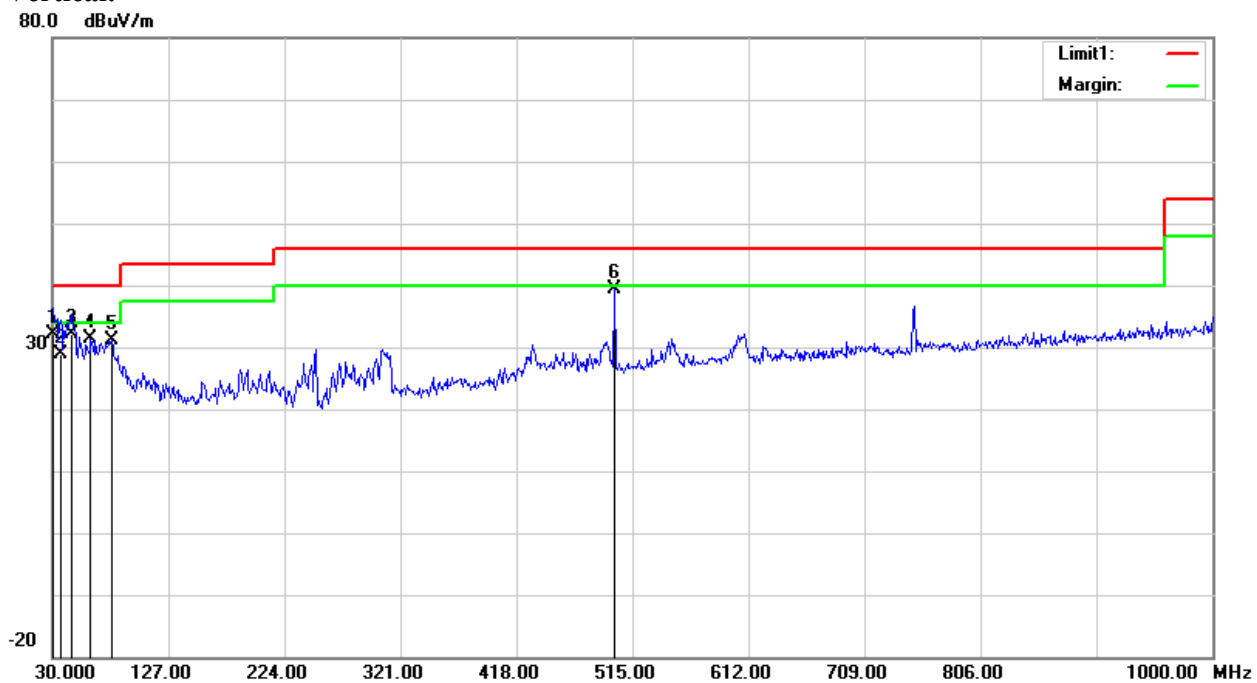Vertical:

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30.9700	31.29	QP	0.74	32.03	40.00	7.97
36.7900	32.53	QP	-3.58	28.95	40.00	11.05
45.5200	41.76	QP	-9.63	32.13	40.00	7.87
62.0100	43.50	peak	-12.23	31.27	40.00	8.73
79.4700	42.59	peak	-11.40	31.19	40.00	8.81
500.4500	39.74	peak	-0.39	39.35	46.00	6.65

2) 1GHz-40GHz:**802.11a****Chain 0**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Fac vhtor (dB/m)						
Low Channel: 5180 MHz										
5180.00	70.72	PK	H	33.59	3.58	0.00	107.89	101.87	N/A	N/A
5180.00	61.95	AV	H	33.59	3.58	0.00	99.12	93.1	N/A	N/A
5180.00	81.40	PK	V	33.59	3.58	0.00	118.57	112.55	N/A	N/A
5180.00	72.61	AV	V	33.59	3.58	0.00	109.78	103.76	N/A	N/A
5150.00	41.14	PK	V	33.54	3.56	0.00	78.24	72.22	74.00	1.78
5150.00	19.96	AV	V	33.54	3.56	0.00	57.06	51.04	54.00	2.96
10360.00	37.45	PK	V	38.17	6.29	25.46	56.45	50.43	68.20	17.77
15540.00	38.41	PK	V	38.06	8.85	24.27	61.05	55.03	74.00	18.97
15540.00	26.08	AV	V	38.06	8.85	24.27	48.72	42.7	54.00	11.30
4998.00	39.26	PK	V	33.30	3.18	25.60	50.14	44.12	74.00	29.88
4998.00	29.16	AV	V	33.30	3.18	25.60	40.04	34.02	54.00	19.98
Middle Channel: 5200 MHz										
5200.00	70.89	PK	H	33.62	3.60	0.00	108.11	102.09	N/A	N/A
5200.00	62.17	AV	H	33.62	3.60	0.00	99.39	93.37	N/A	N/A
5200.00	81.63	PK	V	33.62	3.60	0.00	118.85	112.83	N/A	N/A
5200.00	72.83	AV	V	33.62	3.60	0.00	110.05	104.03	N/A	N/A
10400.00	38.26	PK	V	38.18	6.32	25.46	57.30	51.28	68.20	16.92
15600.00	40.77	PK	V	38.00	8.83	24.31	63.29	57.27	74.00	16.73
15600.00	27.81	AV	V	38.00	8.83	24.31	50.33	44.31	54.00	9.69
4998.00	38.63	PK	V	33.30	3.18	25.60	49.51	43.49	74.00	30.51
4998.00	28.54	AV	V	33.30	3.18	25.60	39.42	33.4	54.00	20.60
High Channel: 5240 MHz										
5240.00	69.25	PK	H	33.68	3.52	0.00	106.45	100.43	N/A	N/A
5240.00	59.67	AV	H	33.68	3.52	0.00	96.87	90.85	N/A	N/A
5240.00	80.01	PK	V	33.68	3.52	0.00	117.21	111.19	N/A	N/A
5240.00	70.97	AV	V	33.68	3.52	0.00	108.17	102.15	N/A	N/A
5350.00	27.57	PK	V	33.86	3.52	0.00	64.95	58.93	74.00	15.07
5350.00	15.70	AV	V	33.86	3.52	0.00	53.08	47.06	54.00	6.94
10480.00	38.48	PK	V	38.20	6.37	25.47	57.58	51.56	68.20	16.64
15720.00	43.20	PK	V	37.88	8.79	24.39	65.48	59.46	74.00	14.54
15720.00	30.15	AV	V	37.88	8.79	24.39	52.43	46.41	54.00	7.59
4998.00	40.57	PK	V	33.30	3.18	25.60	51.45	45.43	74.00	28.57
4998.00	30.39	AV	V	33.30	3.18	25.60	41.27	35.25	54.00	18.75

Chain 1

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Fac vhtor (dB/m)						
Low Channel: 5180 MHz										
5180.00	70.02	PK	H	33.59	3.58	0.00	107.19	101.17	N/A	N/A
5180.00	60.86	AV	H	33.59	3.58	0.00	98.03	92.01	N/A	N/A
5180.00	83.23	PK	V	33.59	3.58	0.00	120.40	114.38	N/A	N/A
5180.00	74.12	AV	V	33.59	3.58	0.00	111.29	105.27	N/A	N/A
5150.00	41.24	PK	V	33.54	3.56	0.00	78.34	72.32	74.00	1.68
5150.00	19.51	AV	V	33.54	3.56	0.00	56.61	50.59	54.00	3.41
10360.00	43.56	PK	V	38.17	6.29	25.46	62.56	56.54	68.20	11.66
15540.00	36.79	PK	V	38.06	8.85	24.27	59.43	53.41	74.00	20.59
15540.00	24.56	AV	V	38.06	8.85	24.27	47.20	41.18	54.00	12.82
4998.00	41.32	PK	V	33.30	3.18	25.60	52.20	46.18	74.00	27.82
4998.00	31.56	AV	V	33.30	3.18	25.60	42.44	36.42	54.00	17.58
Middle Channel: 5200 MHz										
5200.00	72.87	PK	H	33.62	3.60	0.00	110.09	104.07	N/A	N/A
5200.00	63.75	AV	H	33.62	3.60	0.00	100.97	94.95	N/A	N/A
5200.00	85.10	PK	V	33.62	3.60	0.00	122.32	116.3	N/A	N/A
5200.00	76.37	AV	V	33.62	3.60	0.00	113.59	107.57	N/A	N/A
10400.00	47.19	PK	V	38.18	6.32	25.46	66.23	60.21	68.20	7.99
15600.00	40.82	PK	V	38.00	8.83	24.31	63.34	57.32	74.00	16.68
15600.00	27.63	AV	V	38.00	8.83	24.31	50.15	44.13	54.00	9.87
4998.00	43.39	PK	V	33.30	3.18	25.60	54.27	48.25	74.00	25.75
4998.00	33.27	AV	V	33.30	3.18	25.60	44.15	38.13	54.00	15.87
High Channel: 5240 MHz										
5240.00	70.69	PK	H	33.68	3.52	0.00	107.89	101.87	N/A	N/A
5240.00	61.57	AV	H	33.68	3.52	0.00	98.77	92.75	N/A	N/A
5240.00	83.82	PK	V	33.68	3.52	0.00	121.02	115	N/A	N/A
5240.00	74.68	AV	V	33.68	3.52	0.00	111.88	105.86	N/A	N/A
5350.00	28.45	PK	V	33.86	3.52	0.00	65.83	59.81	74.00	14.19
5350.00	15.86	AV	V	33.86	3.52	0.00	53.24	47.22	54.00	6.78
10480.00	48.24	PK	V	38.20	6.37	25.47	67.34	61.32	68.20	6.88
15720.00	38.02	PK	V	37.88	8.79	24.39	60.30	54.28	74.00	19.72
15720.00	25.32	AV	V	37.88	8.79	24.39	47.60	41.58	54.00	12.42
4998.00	41.79	PK	V	33.30	3.18	25.60	52.67	46.65	74.00	27.35
4998.00	31.67	AV	V	33.30	3.18	25.60	42.55	36.53	54.00	17.47

802.11n ht20(2Tx mode was the worst):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Fac vhtor (dB/m)						
Low Channel: 5180 MHz										
5180.00	71.21	PK	H	33.59	3.58	0.00	108.38	102.36	N/A	N/A
5180.00	61.25	AV	H	33.59	3.58	0.00	98.42	92.4	N/A	N/A
5180.00	85.45	PK	V	33.59	3.58	0.00	122.62	116.6	N/A	N/A
5180.00	75.46	AV	V	33.59	3.58	0.00	112.63	106.61	N/A	N/A
5150.00	38.47	PK	V	33.54	3.56	0.00	75.57	69.55	74.00	4.45
5150.00	20.86	AV	V	33.54	3.56	0.00	57.96	51.94	54.00	2.06
10360.00	44.70	PK	V	38.17	6.29	25.46	63.70	57.68	68.20	10.52
15540.00	36.45	PK	V	38.06	8.85	24.27	59.09	53.07	74.00	20.93
15540.00	24.31	AV	V	38.06	8.85	24.27	46.95	40.93	54.00	13.07
4998.00	42.36	PK	V	33.30	3.18	25.60	53.24	47.22	74.00	26.78
4998.00	32.37	AV	V	33.30	3.18	25.60	43.25	37.23	54.00	16.77
Middle Channel: 5200 MHz										
5200.00	71.16	PK	H	33.62	3.60	0.00	108.38	102.36	N/A	N/A
5200.00	61.35	AV	H	33.62	3.60	0.00	98.57	92.55	N/A	N/A
5200.00	85.54	PK	V	33.62	3.60	0.00	122.76	116.74	N/A	N/A
5200.00	75.75	AV	V	33.62	3.60	0.00	112.97	106.95	N/A	N/A
10400.00	44.65	PK	V	38.18	6.32	25.46	63.69	57.67	68.20	10.53
15600.00	36.78	PK	V	38.00	8.83	24.31	59.30	53.28	74.00	20.72
15600.00	24.63	AV	V	38.00	8.83	24.31	47.15	41.13	54.00	12.87
4998.00	41.58	PK	V	33.30	3.18	25.60	52.46	46.44	74.00	27.56
4998.00	31.56	AV	V	33.30	3.18	25.60	42.44	36.42	54.00	17.58
High Channel: 5240 MHz										
5240.00	70.15	PK	H	33.68	3.52	0.00	107.35	101.33	N/A	N/A
5240.00	60.87	AV	H	33.68	3.52	0.00	98.07	92.05	N/A	N/A
5240.00	84.38	PK	V	33.68	3.52	0.00	121.58	115.56	N/A	N/A
5240.00	75.04	AV	V	33.68	3.52	0.00	112.24	106.22	N/A	N/A
5350.00	28.46	PK	V	33.86	3.52	0.00	65.84	59.82	74.00	14.18
5350.00	16.90	AV	V	33.86	3.52	0.00	54.28	48.26	54.00	5.74
10480.00	45.16	PK	V	38.20	6.37	25.47	64.26	58.24	68.20	9.96
15720.00	36.41	PK	V	37.88	8.79	24.39	58.69	52.67	74.00	21.33
15720.00	24.32	AV	V	37.88	8.79	24.39	46.60	40.58	54.00	13.42
4998.00	40.86	PK	V	33.30	3.18	25.60	51.74	45.72	74.00	28.28
4998.00	30.72	AV	V	33.30	3.18	25.60	41.60	35.58	54.00	18.42

802.11ax hew20(2Tx was the worst):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Fac vhtor (dB/m)						
Low Channel: 5180 MHz										
5180.00	68.47	PK	H	33.59	3.58	0.00	105.64	99.62	N/A	N/A
5180.00	60.16	AV	H	33.59	3.58	0.00	97.33	91.31	N/A	N/A
5180.00	82.60	PK	V	33.59	3.58	0.00	119.77	113.75	N/A	N/A
5180.00	74.11	AV	V	33.59	3.58	0.00	111.28	105.26	N/A	N/A
5150.00	37.24	PK	V	33.54	3.56	0.00	74.34	68.32	74.00	5.68
5150.00	20.26	AV	V	33.54	3.56	0.00	57.36	51.34	54.00	2.66
10360.00	39.86	PK	V	38.17	6.29	25.46	58.86	52.84	68.20	15.36
15540.00	36.26	PK	V	38.06	8.85	24.27	58.90	52.88	74.00	21.12
15540.00	24.15	AV	V	38.06	8.85	24.27	46.79	40.77	54.00	13.23
4998.00	41.05	PK	V	33.30	3.18	25.60	51.93	45.91	74.00	28.09
4998.00	31.06	AV	V	33.30	3.18	25.60	41.94	35.92	54.00	18.08
Middle Channel: 5200 MHz										
5200.00	70.65	PK	H	33.62	3.60	0.00	107.87	101.85	N/A	N/A
5200.00	62.39	AV	H	33.62	3.60	0.00	99.61	93.59	N/A	N/A
5200.00	84.33	PK	V	33.62	3.60	0.00	121.55	115.53	N/A	N/A
5200.00	76.37	AV	V	33.62	3.60	0.00	113.59	107.57	N/A	N/A
10400.00	41.11	PK	V	38.18	6.32	25.46	60.15	54.13	68.20	14.07
15600.00	36.39	PK	V	38.00	8.83	24.31	58.91	52.89	74.00	21.11
15600.00	24.25	AV	V	38.00	8.83	24.31	46.77	40.75	54.00	13.25
4998.00	41.19	PK	V	33.30	3.18	25.60	52.07	46.05	74.00	27.95
4998.00	31.23	AV	V	33.30	3.18	25.60	42.11	36.09	54.00	17.91
High Channel: 5240 MHz										
5240.00	69.33	PK	H	33.68	3.52	0.00	106.53	100.51	N/A	N/A
5240.00	61.51	AV	H	33.68	3.52	0.00	98.71	92.69	N/A	N/A
5240.00	83.54	PK	V	33.68	3.52	0.00	120.74	114.72	N/A	N/A
5240.00	75.62	AV	V	33.68	3.52	0.00	112.82	106.8	N/A	N/A
5350.00	28.45	PK	V	33.86	3.52	0.00	65.83	59.81	74.00	14.19
5350.00	17.47	AV	V	33.86	3.52	0.00	54.85	48.83	54.00	5.17
10480.00	41.62	PK	V	38.20	6.37	25.47	60.72	54.7	68.20	13.50
15720.00	36.02	PK	V	37.88	8.79	24.39	58.30	52.28	74.00	21.72
15720.00	23.96	AV	V	37.88	8.79	24.39	46.24	40.22	54.00	13.78
4998.00	42.05	PK	V	33.30	3.18	25.60	52.93	46.91	74.00	27.09
4998.00	32.09	AV	V	33.30	3.18	25.60	42.97	36.95	54.00	17.05

802.11n ht40(2Tx was the worst):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Fac vhtor (dB/m)						
Low Channel: 5190 MHz										
5190.00	66.77	PK	H	33.60	3.59	0.00	103.96	97.94	N/A	N/A
5190.00	57.52	AV	H	33.60	3.59	0.00	94.71	88.69	N/A	N/A
5190.00	81.58	PK	V	33.60	3.59	0.00	118.77	112.75	N/A	N/A
5190.00	72.21	AV	V	33.60	3.59	0.00	109.40	103.38	N/A	N/A
5150.00	36.02	PK	V	33.54	3.56	0.00	73.12	67.1	74.00	6.90
5150.00	22.45	AV	V	33.54	3.56	0.00	59.55	53.53	54.00	0.47
10380.00	39.03	PK	V	38.18	6.31	25.46	58.06	52.04	68.20	16.16
15570.00	36.35	PK	V	38.03	8.84	24.29	58.93	52.91	74.00	21.09
15570.00	24.23	AV	V	38.03	8.84	24.29	46.81	40.79	54.00	13.21
4998.00	43.16	PK	V	33.30	3.18	25.60	54.04	48.02	74.00	25.98
4998.00	33.25	AV	V	33.30	3.18	25.60	44.13	38.11	54.00	15.89
High Channel: 5230 MHz										
5230.00	67.59	PK	H	33.67	3.54	0.00	104.80	98.78	N/A	N/A
5230.00	58.37	AV	H	33.67	3.54	0.00	95.58	89.56	N/A	N/A
5230.00	82.93	PK	V	33.67	3.54	0.00	120.14	114.12	N/A	N/A
5230.00	73.36	AV	V	33.67	3.54	0.00	110.57	104.55	N/A	N/A
5350.00	28.48	PK	V	33.86	3.52	0.00	65.86	59.84	74.00	14.16
5350.00	17.10	AV	V	33.86	3.52	0.00	54.48	48.46	54.00	5.54
10460.00	40.76	PK	V	38.19	6.36	25.47	59.84	53.82	68.20	14.38
15690.00	36.46	PK	V	37.91	8.80	24.37	58.80	52.78	74.00	21.22
15690.00	24.33	AV	V	37.91	8.80	24.37	46.67	40.65	54.00	13.35
4998.00	42.28	PK	V	33.30	3.18	25.60	53.16	47.14	74.00	26.86
4998.00	32.29	AV	V	33.30	3.18	25.60	43.17	37.15	54.00	16.85

802.11ax hew40(2Tx was the worst):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Fac vhtor (dB/m)						
Low Channel: 5190 MHz										
5190.00	64.99	PK	H	33.60	3.59	0.00	102.18	96.16	N/A	N/A
5190.00	55.78	AV	H	33.60	3.59	0.00	92.97	86.95	N/A	N/A
5190.00	81.17	PK	V	33.60	3.59	0.00	118.36	112.34	N/A	N/A
5190.00	72.03	AV	V	33.60	3.59	0.00	109.22	103.2	N/A	N/A
5150.00	38.42	PK	V	33.54	3.56	0.00	75.52	69.5	74.00	4.50
5150.00	21.38	AV	V	33.54	3.56	0.00	58.48	52.46	54.00	1.54
10380.00	36.02	PK	V	38.18	6.31	25.46	55.05	49.03	68.20	19.17
15570.00	36.27	PK	V	38.03	8.84	24.29	58.85	52.83	74.00	21.17
15570.00	24.15	AV	V	38.03	8.84	24.29	46.73	40.71	54.00	13.29
4998.00	43.69	PK	V	33.30	3.18	25.60	54.57	48.55	74.00	25.45
4998.00	33.56	AV	V	33.30	3.18	25.60	44.44	38.42	54.00	15.58
High Channel: 5795 MHz										
5230.00	64.89	PK	H	33.67	3.54	0.00	102.10	96.08	N/A	N/A
5230.00	55.73	AV	H	33.67	3.54	0.00	92.94	86.92	N/A	N/A
5230.00	81.11	PK	V	33.67	3.54	0.00	118.32	112.3	N/A	N/A
5230.00	72.47	AV	V	33.67	3.54	0.00	109.68	103.66	N/A	N/A
5350.00	27.33	PK	V	33.86	3.52	0.00	64.71	58.69	74.00	15.31
5350.00	17.86	AV	V	33.86	3.52	0.00	55.24	49.22	54.00	4.78
10460.00	40.29	PK	V	38.19	6.36	25.47	59.37	53.35	68.20	14.85
15690.00	36.40	PK	V	37.91	8.80	24.37	58.74	52.72	74.00	21.28
15690.00	24.28	AV	V	37.91	8.80	24.37	46.62	40.6	54.00	13.40
4998.00	42.75	PK	V	33.30	3.18	25.60	53.63	47.61	74.00	26.39
4998.00	32.69	AV	V	33.30	3.18	25.60	43.57	37.55	54.00	16.45

802.11ac vht80(2Tx was the worst):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Fac vhtor (dB/m)						
5210 MHz										
5210.00	61.62	PK	H	33.64	3.58	0.00	98.84	92.82	N/A	N/A
5210.00	53.37	AV	H	33.64	3.58	0.00	90.59	84.57	N/A	N/A
5210.00	76.25	PK	V	33.64	3.58	0.00	113.47	107.45	N/A	N/A
5210.00	67.69	AV	V	33.64	3.58	0.00	104.91	98.89	N/A	N/A
5150.00	32.48	PK	V	33.54	3.56	0.00	69.58	63.56	74.00	10.44
5150.00	22.53	AV	V	33.54	3.56	0.00	59.63	53.61	54.00	0.39
5350.00	28.84	PK	V	33.86	3.52	0.00	66.22	60.2	74.00	13.80
5350.00	17.55	AV	V	33.86	3.52	0.00	54.93	48.91	54.00	5.09
10420.00	37.93	PK	V	38.18	6.33	25.47	56.97	50.95	68.20	17.25
15630.00	36.44	PK	V	37.97	8.82	24.33	58.90	52.88	74.00	21.12
15630.00	24.35	AV	V	37.97	8.82	24.33	46.81	40.79	54.00	13.21
4998.00	43.67	PK	V	33.30	3.18	25.60	54.55	48.53	74.00	25.47
4998.00	33.52	AV	V	33.30	3.18	25.60	44.40	38.38	54.00	15.62

802.11ax hew80(2Tx was the worst):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Fac vhtor (dB/m)						
5210 MHz										
5210.00	61.92	PK	H	33.64	3.58	0.00	99.14	93.12	N/A	N/A
5210.00	53.18	AV	H	33.64	3.58	0.00	90.40	84.38	N/A	N/A
5210.00	75.23	PK	V	33.64	3.58	0.00	112.45	106.43	N/A	N/A
5210.00	66.87	AV	V	33.64	3.58	0.00	104.09	98.07	N/A	N/A
5150.00	33.91	PK	V	33.54	3.56	0.00	71.01	64.99	74.00	9.01
5150.00	22.59	AV	V	33.54	3.56	0.00	59.69	53.67	54.00	0.33
5350.00	28.09	PK	V	33.86	3.52	0.00	65.47	59.45	74.00	14.55
5350.00	17.17	AV	V	33.86	3.52	0.00	54.55	48.53	54.00	5.47
10420.00	36.40	PK	V	38.18	6.33	25.47	55.44	49.42	68.20	18.78
15630.00	36.27	PK	V	37.97	8.82	24.33	58.73	52.71	74.00	21.29
15630.00	24.16	AV	V	37.97	8.82	24.33	46.62	40.6	54.00	13.40
4998.00	44.25	PK	V	33.30	3.18	25.60	55.13	49.11	74.00	24.89
4998.00	34.29	AV	V	33.30	3.18	25.60	45.17	39.15	54.00	14.85

5725-5850MHz
802.11a, Chain 0

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Fac vhtor (dB/m)						
Low Channel: 5745 MHz										
5745.00	70.98	PK	H	34.20	3.69	0.00	108.87	102.85	N/A	N/A
5745.00	61.55	AV	H	34.20	3.69	0.00	99.44	93.42	N/A	N/A
5745.00	86.57	PK	V	34.20	3.69	0.00	124.46	118.44	N/A	N/A
5745.00	78.07	AV	V	34.20	3.69	0.00	115.96	109.94	N/A	N/A
5725.00	66.75	PK	V	34.19	3.69	0.00	104.63	98.61	122.20	23.59
5720.00	58.16	PK	V	34.19	3.69	0.00	96.04	90.02	110.80	20.78
5700.00	47.93	PK	V	34.18	3.68	0.00	85.79	79.77	105.20	25.43
5650.00	33.61	PK	V	34.16	3.63	0.00	71.40	65.38	68.20	2.82
11490.00	45.94	PK	V	38.99	6.59	25.51	66.01	59.99	74.00	14.01
11490.00	34.32	AV	V	38.99	6.59	25.51	54.39	48.37	54.00	5.63
17235.00	36.06	PK	V	41.56	8.78	23.72	62.68	56.66	68.20	11.54
4998.00	43.52	PK	V	33.30	3.18	25.60	54.40	48.38	74.00	25.62
4998.00	33.31	AV	V	33.30	3.18	25.60	44.19	38.17	54.00	15.83
Middle Channel: 5785 MHz										
5785.00	72.86	PK	H	34.21	3.71	0.00	110.78	104.76	N/A	N/A
5785.00	63.75	AV	H	34.21	3.71	0.00	101.67	95.65	N/A	N/A
5785.00	88.36	PK	V	34.21	3.71	0.00	126.28	120.26	N/A	N/A
5785.00	79.53	AV	V	34.21	3.71	0.00	117.45	111.43	N/A	N/A
11570.00	50.15	PK	V	39.00	6.61	25.46	70.30	64.28	74.00	9.72
11570.00	39.23	AV	V	39.00	6.61	25.46	59.38	53.36	54.00	0.64
17355.00	37.49	PK	V	42.26	8.81	23.60	64.96	58.94	68.20	9.26
4998.00	43.67	PK	V	33.30	3.18	25.60	54.55	48.53	74.00	25.47
4998.00	33.44	AV	V	33.30	3.18	25.60	44.32	38.3	54.00	15.70
High Channel: 5825 MHz										
5825.00	70.66	PK	H	34.23	3.73	0.00	108.62	102.6	N/A	N/A
5825.00	61.48	AV	H	34.23	3.73	0.00	99.44	93.42	N/A	N/A
5825.00	86.23	PK	V	34.23	3.73	0.00	124.19	118.17	N/A	N/A
5825.00	77.12	AV	V	34.23	3.73	0.00	115.08	109.06	N/A	N/A
5850.00	58.69	PK	V	34.24	3.75	0.00	96.68	90.66	122.20	31.54
5855.00	53.34	PK	V	34.24	3.75	0.00	91.33	85.31	110.80	25.49
5875.00	45.13	PK	V	34.25	3.77	0.00	83.15	77.13	105.20	28.07
5925.00	32.74	PK	V	34.27	3.80	0.00	70.81	64.79	68.20	3.41
11650.00	46.97	PK	V	39.00	6.64	25.41	67.20	61.18	74.00	12.82
11650.00	35.82	AV	V	39.00	6.64	25.41	56.05	50.03	54.00	3.97
17475.00	37.26	PK	V	42.96	8.84	23.48	65.58	59.56	68.20	8.64
4998.00	42.58	PK	V	33.30	3.18	25.60	53.46	47.44	74.00	26.56
4998.00	32.67	AV	V	33.30	3.18	25.60	43.55	37.53	54.00	16.47

802.11a, Chain 1

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Fac vhtor (dB/m)						
Low Channel: 5745 MHz										
5745.00	71.89	PK	H	34.20	3.69	0.00	109.78	103.76	N/A	N/A
5745.00	62.77	AV	H	34.20	3.69	0.00	100.66	94.64	N/A	N/A
5745.00	85.94	PK	V	34.20	3.69	0.00	123.83	117.81	N/A	N/A
5745.00	77.01	AV	V	34.20	3.69	0.00	114.90	108.88	N/A	N/A
5725.00	65.07	PK	V	34.19	3.69	0.00	102.95	96.93	122.20	25.27
5720.00	58.26	PK	V	34.19	3.69	0.00	96.14	90.12	110.80	20.68
5700.00	50.21	PK	V	34.18	3.68	0.00	88.07	82.05	105.20	23.15
5650.00	34.06	PK	V	34.16	3.63	0.00	71.85	65.83	68.20	2.37
11490.00	40.37	PK	V	38.99	6.59	25.51	60.44	54.42	74.00	19.58
11490.00	29.25	AV	V	38.99	6.59	25.51	49.32	43.3	54.00	10.70
17235.00	41.56	PK	V	41.56	8.78	23.72	68.18	62.16	68.20	6.04
4998.00	41.26	PK	V	33.30	3.18	25.60	52.14	46.12	74.00	27.88
4998.00	31.29	AV	V	33.30	3.18	25.60	42.17	36.15	54.00	17.85
Middle Channel: 5785 MHz										
5785.00	74.07	PK	H	34.21	3.71	0.00	111.99	105.97	N/A	N/A
5785.00	65.16	AV	H	34.21	3.71	0.00	103.08	97.06	N/A	N/A
5785.00	87.49	PK	V	34.21	3.71	0.00	125.41	119.39	N/A	N/A
5785.00	78.52	AV	V	34.21	3.71	0.00	116.44	110.42	N/A	N/A
11570.00	39.60	PK	V	39.00	6.61	25.46	59.75	53.73	74.00	20.27
11570.00	28.52	AV	V	39.00	6.61	25.46	48.67	42.65	54.00	11.35
17355.00	40.37	PK	V	42.26	8.81	23.60	67.84	61.82	68.20	6.38
4998.00	42.25	PK	V	33.30	3.18	25.60	53.13	47.11	74.00	26.89
4998.00	32.38	AV	V	33.30	3.18	25.60	43.26	37.24	54.00	16.76
High Channel: 5825 MHz										
5825.00	72.09	PK	H	34.23	3.73	0.00	110.05	104.03	N/A	N/A
5825.00	63.15	AV	H	34.23	3.73	0.00	101.11	95.09	N/A	N/A
5825.00	85.79	PK	V	34.23	3.73	0.00	123.75	117.73	N/A	N/A
5825.00	76.64	AV	V	34.23	3.73	0.00	114.60	108.58	N/A	N/A
5850.00	66.33	PK	V	34.24	3.75	0.00	104.32	98.3	122.20	23.90
5855.00	63.81	PK	V	34.24	3.75	0.00	101.80	95.78	110.80	15.02
5875.00	45.16	PK	V	34.25	3.77	0.00	83.18	77.16	105.20	28.04
5925.00	33.90	PK	V	34.27	3.80	0.00	71.97	65.95	68.20	2.25
11650.00	39.90	PK	V	39.00	6.64	25.41	60.13	54.11	74.00	19.89
11650.00	28.79	AV	V	39.00	6.64	25.41	49.02	43	54.00	11.00
17475.00	39.04	PK	V	42.96	8.84	23.48	67.36	61.34	68.20	6.86
4998.00	43.69	PK	V	33.30	3.18	25.60	54.57	48.55	74.00	25.45
4998.00	33.54	AV	V	33.30	3.18	25.60	44.42	38.4	54.00	15.60

802.11n ht20(2Tx mode was the worst):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Fac vhtor (dB/m)						
Low Channel: 5745 MHz										
5745.00	71.88	PK	H	34.20	3.69	0.00	109.77	103.75	N/A	N/A
5745.00	62.21	AV	H	34.20	3.69	0.00	100.10	94.08	N/A	N/A
5745.00	86.33	PK	V	34.20	3.69	0.00	124.22	118.2	N/A	N/A
5745.00	76.89	AV	V	34.20	3.69	0.00	114.78	108.76	N/A	N/A
5725.00	58.40	PK	V	34.19	3.69	0.00	96.28	90.26	122.20	31.94
5720.00	49.72	PK	V	34.19	3.69	0.00	87.60	81.58	110.80	29.22
5700.00	41.10	PK	V	34.18	3.68	0.00	78.96	72.94	105.20	32.26
5650.00	28.48	PK	V	34.16	3.63	0.00	66.27	60.25	68.20	7.95
11490.00	42.34	PK	V	38.99	6.59	25.51	62.41	56.39	74.00	17.61
11490.00	31.23	AV	V	38.99	6.59	25.51	51.30	45.28	54.00	8.72
17235.00	37.20	PK	V	41.56	8.78	23.72	63.82	57.8	68.20	10.40
4998.00	43.21	PK	V	33.30	3.18	25.60	54.09	48.07	74.00	25.93
4998.00	33.29	AV	V	33.30	3.18	25.60	44.17	38.15	54.00	15.85
Middle Channel: 5785 MHz										
5785.00	72.85	PK	H	34.21	3.71	0.00	110.77	104.75	N/A	N/A
5785.00	63.73	AV	H	34.21	3.71	0.00	101.65	95.63	N/A	N/A
5785.00	86.99	PK	V	34.21	3.71	0.00	124.91	118.89	N/A	N/A
5785.00	78.35	AV	V	34.21	3.71	0.00	116.27	110.25	N/A	N/A
11570.00	45.12	PK	V	39.00	6.61	25.46	65.27	59.25	74.00	14.75
11570.00	34.08	AV	V	39.00	6.61	25.46	54.23	48.21	54.00	5.79
17355.00	36.25	PK	V	42.26	8.81	23.60	63.72	57.7	68.20	10.50
4998.00	41.11	PK	V	33.30	3.18	25.60	51.99	45.97	74.00	28.03
4998.00	31.17	AV	V	33.30	3.18	25.60	42.05	36.03	54.00	17.97
High Channel: 5825 MHz										
5825.00	72.21	PK	H	34.23	3.73	0.00	110.17	104.15	N/A	N/A
5825.00	63.09	AV	H	34.23	3.73	0.00	101.05	95.03	N/A	N/A
5825.00	86.73	PK	V	34.23	3.73	0.00	124.69	118.67	N/A	N/A
5825.00	77.43	AV	V	34.23	3.73	0.00	115.39	109.37	N/A	N/A
5850.00	50.62	PK	V	34.24	3.75	0.00	88.61	82.59	122.20	39.61
5855.00	45.65	PK	V	34.24	3.75	0.00	83.64	77.62	110.80	33.18
5875.00	38.75	PK	V	34.25	3.77	0.00	76.77	70.75	105.20	34.45
5925.00	28.91	PK	V	34.27	3.80	0.00	66.98	60.96	68.20	7.24
11650.00	45.85	PK	V	39.00	6.64	25.41	66.08	60.06	74.00	13.94
11650.00	34.76	AV	V	39.00	6.64	25.41	54.99	48.97	54.00	5.03
17475.00	36.28	PK	V	42.96	8.84	23.48	64.60	58.58	68.20	9.62
4998.00	44.36	PK	V	33.30	3.18	25.60	55.24	49.22	74.00	24.78
4998.00	34.52	AV	V	33.30	3.18	25.60	45.40	39.38	54.00	14.62

802.11 ax20:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Fac vhtor (dB/m)						
Low Channel: 5745 MHz										
5745.00	70.12	PK	H	34.20	3.69	0.00	108.01	101.99	N/A	N/A
5745.00	60.10	AV	H	34.20	3.69	0.00	97.99	91.97	N/A	N/A
5745.00	85.53	PK	V	34.20	3.69	0.00	123.42	117.4	N/A	N/A
5745.00	76.52	AV	V	34.20	3.69	0.00	114.41	108.39	N/A	N/A
5725.00	58.66	PK	V	34.19	3.69	0.00	96.54	90.52	122.20	31.68
5720.00	47.51	PK	V	34.19	3.69	0.00	85.39	79.37	110.80	31.43
5700.00	36.48	PK	V	34.18	3.68	0.00	74.34	68.32	105.20	36.88
5650.00	28.50	PK	V	34.16	3.63	0.00	66.29	60.27	68.20	7.93
11490.00	38.29	PK	V	38.99	6.59	25.51	58.36	52.34	74.00	21.66
11490.00	28.15	AV	V	38.99	6.59	25.51	48.22	42.2	54.00	11.80
17235.00	36.65	PK	V	41.56	8.78	23.72	63.27	57.25	68.20	10.95
4998.00	46.51	PK	V	33.30	3.18	25.60	57.39	51.37	74.00	22.63
4998.00	36.39	AV	V	33.30	3.18	25.60	47.27	41.25	54.00	12.75
Middle Channel: 5785 MHz										
5785.00	69.57	PK	H	34.21	3.71	0.00	107.49	101.47	N/A	N/A
5785.00	60.73	AV	H	34.21	3.71	0.00	98.65	92.63	N/A	N/A
5785.00	84.39	PK	V	34.21	3.71	0.00	122.31	116.29	N/A	N/A
5785.00	75.46	AV	V	34.21	3.71	0.00	113.38	107.36	N/A	N/A
11570.00	38.49	PK	V	39.00	6.61	25.46	58.64	52.62	74.00	21.38
11570.00	28.33	AV	V	39.00	6.61	25.46	48.48	42.46	54.00	11.54
17355.00	35.22	PK	V	42.26	8.81	23.60	62.69	56.67	68.20	11.53
4998.00	45.27	PK	V	33.30	3.18	25.60	56.15	50.13	74.00	23.87
4998.00	35.31	AV	V	33.30	3.18	25.60	46.19	40.17	54.00	13.83
High Channel: 5825 MHz										
5825.00	70.36	PK	H	34.23	3.73	0.00	108.32	102.3	N/A	N/A
5825.00	60.88	AV	H	34.23	3.73	0.00	98.84	92.82	N/A	N/A
5825.00	85.74	PK	V	34.23	3.73	0.00	123.70	117.68	N/A	N/A
5825.00	77.10	AV	V	34.23	3.73	0.00	115.06	109.04	N/A	N/A
5850.00	47.10	PK	V	34.24	3.75	0.00	85.09	79.07	122.20	43.13
5855.00	44.39	PK	V	34.24	3.75	0.00	82.38	76.36	110.80	34.44
5875.00	37.52	PK	V	34.25	3.77	0.00	75.54	69.52	105.20	35.68
5925.00	28.10	PK	V	34.27	3.80	0.00	66.17	60.15	68.20	8.05
11650.00	38.41	PK	V	39.00	6.64	25.41	58.64	52.62	74.00	21.38
11650.00	28.26	AV	V	39.00	6.64	25.41	48.49	42.47	54.00	11.53
17475.00	35.67	PK	V	42.96	8.84	23.48	63.99	57.97	68.20	10.23
4998.00	41.69	PK	V	33.30	3.18	25.60	52.57	46.55	74.00	27.45
4998.00	31.72	AV	V	33.30	3.18	25.60	42.60	36.58	54.00	17.42

802.11n ht40(2Tx was the worst):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Fac vhtor (dB/m)						
Low Channel: 5755 MHz										
5755.00	69.30	PK	H	34.20	3.70	0.00	107.20	101.18	N/A	N/A
5755.00	60.22	AV	H	34.20	3.70	0.00	98.12	92.1	N/A	N/A
5755.00	84.96	PK	V	34.20	3.70	0.00	122.86	116.84	N/A	N/A
5755.00	75.69	AV	V	34.20	3.70	0.00	113.59	107.57	N/A	N/A
5725.00	56.00	PK	V	34.19	3.69	0.00	93.88	87.86	122.20	34.34
5720.00	55.33	PK	V	34.19	3.69	0.00	93.21	87.19	110.80	23.61
5700.00	42.51	PK	V	34.18	3.68	0.00	80.37	74.35	105.20	30.85
5650.00	31.68	PK	V	34.16	3.63	0.00	69.47	63.45	68.20	4.75
11510.00	39.21	PK	V	39.00	6.59	25.50	59.30	53.28	74.00	20.72
11510.00	28.66	AV	V	39.00	6.59	25.50	48.75	42.73	54.00	11.27
17265.00	36.41	PK	V	41.74	8.79	23.69	63.25	57.23	68.20	10.97
4998.00	42.46	PK	V	33.30	3.18	25.60	53.34	47.32	74.00	26.68
4998.00	32.52	AV	V	33.30	3.18	25.60	43.40	37.38	54.00	16.62
High Channel: 5795 MHz										
5795.00	69.89	PK	H	34.22	3.71	0.00	107.82	101.8	N/A	N/A
5795.00	59.75	AV	H	34.22	3.71	0.00	97.68	91.66	N/A	N/A
5795.00	85.10	PK	V	34.22	3.71	0.00	123.03	117.01	N/A	N/A
5795.00	75.65	AV	V	34.22	3.71	0.00	113.58	107.56	N/A	N/A
5850.00	44.74	PK	V	34.24	3.75	0.00	82.73	76.71	122.20	45.49
5855.00	40.27	PK	V	34.24	3.75	0.00	78.26	72.24	110.80	38.56
5875.00	38.27	PK	V	34.25	3.77	0.00	76.29	70.27	105.20	34.93
5925.00	30.45	PK	V	34.27	3.80	0.00	68.52	62.5	68.20	5.70
11590.00	40.39	PK	V	39.00	6.62	25.45	60.56	54.54	74.00	19.46
11590.00	29.26	AV	V	39.00	6.62	25.45	49.43	43.41	54.00	10.59
17385.00	35.22	PK	V	42.43	8.82	23.57	62.90	56.88	68.20	11.32
4998.00	43.66	PK	V	33.30	3.18	25.60	54.54	48.52	74.00	25.48
4998.00	33.52	AV	V	33.30	3.18	25.60	44.40	38.38	54.00	15.62

802.11 ax40:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Fac vhtor (dB/m)						
Low Channel: 5755 MHz										
5755.00	65.57	PK	H	34.20	3.70	0.00	103.47	97.45	N/A	N/A
5755.00	66.38	AV	H	34.20	3.70	0.00	104.28	98.26	N/A	N/A
5755.00	81.55	PK	V	34.20	3.70	0.00	119.45	113.43	N/A	N/A
5755.00	72.45	AV	V	34.20	3.70	0.00	110.35	104.33	N/A	N/A
5725.00	46.78	PK	V	34.19	3.69	0.00	84.66	78.64	122.20	43.56
5720.00	47.40	PK	V	34.19	3.69	0.00	85.28	79.26	110.80	31.54
5700.00	38.52	PK	V	34.18	3.68	0.00	76.38	70.36	105.20	34.84
5650.00	29.29	PK	V	34.16	3.63	0.00	67.08	61.06	68.20	7.14
11510.00	36.26	PK	V	39.00	6.59	25.50	56.35	50.33	74.00	23.67
11510.00	24.15	AV	V	39.00	6.59	25.50	44.24	38.22	54.00	15.78
17265.00	35.21	PK	V	41.74	8.79	23.69	62.05	56.03	68.20	12.17
4998.00	43.87	PK	V	33.30	3.18	25.60	54.75	48.73	74.00	25.27
4998.00	33.67	AV	V	33.30	3.18	25.60	44.55	38.53	54.00	15.47
High Channel: 5795 MHz										
5795.00	65.21	PK	H	34.22	3.71	0.00	103.14	97.12	N/A	N/A
5795.00	56.19	AV	H	34.22	3.71	0.00	94.12	88.1	N/A	N/A
5795.00	81.09	PK	V	34.22	3.71	0.00	119.02	113	N/A	N/A
5795.00	72.33	AV	V	34.22	3.71	0.00	110.26	104.24	N/A	N/A
5850.00	40.27	PK	V	34.24	3.75	0.00	78.26	72.24	122.20	49.96
5855.00	40.63	PK	V	34.24	3.75	0.00	78.62	72.6	110.80	38.20
5875.00	35.97	PK	V	34.25	3.77	0.00	73.99	67.97	105.20	37.23
5925.00	29.15	PK	V	34.27	3.80	0.00	67.22	61.2	68.20	7.00
11590.00	38.33	PK	V	39.00	6.62	25.45	58.50	52.48	74.00	21.52
11590.00	26.19	AV	V	39.00	6.62	25.45	46.36	40.34	54.00	13.66
17385.00	34.92	PK	V	42.43	8.82	23.57	62.60	56.58	68.20	11.62
4998.00	45.39	PK	V	33.30	3.18	25.60	56.27	50.25	74.00	23.75
4998.00	35.45	AV	V	33.30	3.18	25.60	46.33	40.31	54.00	13.69

802.11ac vht80(2Tx mode was the worst):




Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector	Polar (H/V)	Fac vhtor (dB/m)						
Middle Channel: 5775 MHz										
5775.00	59.36	PK	H	34.21	3.70	0.00	97.27	91.25	N/A	N/A
5775.00	50.28	AV	H	34.21	3.70	0.00	88.19	82.17	N/A	N/A
5775.00	75.47	PK	V	34.21	3.70	0.00	113.38	107.36	N/A	N/A
5775.00	67.07	AV	V	34.21	3.70	0.00	104.98	98.96	N/A	N/A
5725.00	35.51	PK	V	34.19	3.69	0.00	73.39	67.37	122.20	54.83
5720.00	31.74	PK	V	34.19	3.69	0.00	69.62	63.6	110.80	47.20
5700.00	28.90	PK	V	34.18	3.68	0.00	66.76	60.74	105.20	44.46
5650.00	28.91	PK	V	34.16	3.63	0.00	66.70	60.68	68.20	7.52
5850.00	35.80	PK	V	34.24	3.75	0.00	73.79	67.77	122.20	54.43
5855.00	29.56	PK	V	34.24	3.75	0.00	67.55	61.53	110.80	49.27
5875.00	33.86	PK	V	34.25	3.77	0.00	71.88	65.86	105.20	39.34
5925.00	29.67	PK	V	34.27	3.80	0.00	67.74	61.72	68.20	6.48
11550.00	36.26	PK	V	39.00	6.61	25.48	56.39	50.37	74.00	23.63
11550.00	24.18	AV	V	39.00	6.61	25.48	44.31	38.29	54.00	15.71
17325.00	34.85	PK	V	42.09	8.80	23.63	62.11	56.09	68.20	12.11
4998.00	42.36	PK	V	33.30	3.18	25.60	53.24	47.22	74.00	26.78
4998.00	32.37	AV	V	33.30	3.18	25.60	43.25	37.23	54.00	16.77


802.11 ax80:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Fac vhtor (dB/m)						
Middle Channel: 5775 MHz										
5775.00	60.06	PK	H	34.21	3.70	0.00	97.97	91.95	N/A	N/A
5775.00	52.15	AV	H	34.21	3.70	0.00	90.06	84.04	N/A	N/A
5775.00	75.85	PK	V	34.21	3.70	0.00	113.76	107.74	N/A	N/A
5775.00	67.69	AV	V	34.21	3.70	0.00	105.60	99.58	N/A	N/A
5725.00	34.63	PK	V	34.19	3.69	0.00	72.51	66.49	122.20	55.71
5720.00	34.43	PK	V	34.19	3.69	0.00	72.31	66.29	110.80	44.51
5700.00	32.25	PK	V	34.18	3.68	0.00	70.11	64.09	105.20	41.11
5650.00	28.13	PK	V	34.16	3.63	0.00	65.92	59.9	68.20	8.30
5850.00	33.49	PK	V	34.24	3.75	0.00	71.48	65.46	122.20	56.74
5855.00	37.51	PK	V	34.24	3.75	0.00	75.50	69.48	110.80	41.32
5875.00	31.57	PK	V	34.25	3.77	0.00	69.59	63.57	105.20	41.63
5925.00	34.27	PK	V	34.27	3.80	0.00	72.34	66.32	68.20	1.88
11550.00	35.91	PK	V	39.00	6.61	25.48	56.04	50.02	74.00	23.98
11550.00	23.87	AV	V	39.00	6.61	25.48	44.00	37.98	54.00	16.02
17325.00	35.61	PK	V	42.09	8.80	23.63	62.87	56.85	68.20	11.35
4998.00	44.28	PK	V	33.30	3.18	25.60	55.16	49.14	74.00	24.86
4998.00	34.35	AV	V	33.30	3.18	25.60	45.23	39.21	54.00	14.79



Test Plots(802.11a chain 0 5785 MHz was the worst)



Horizontal

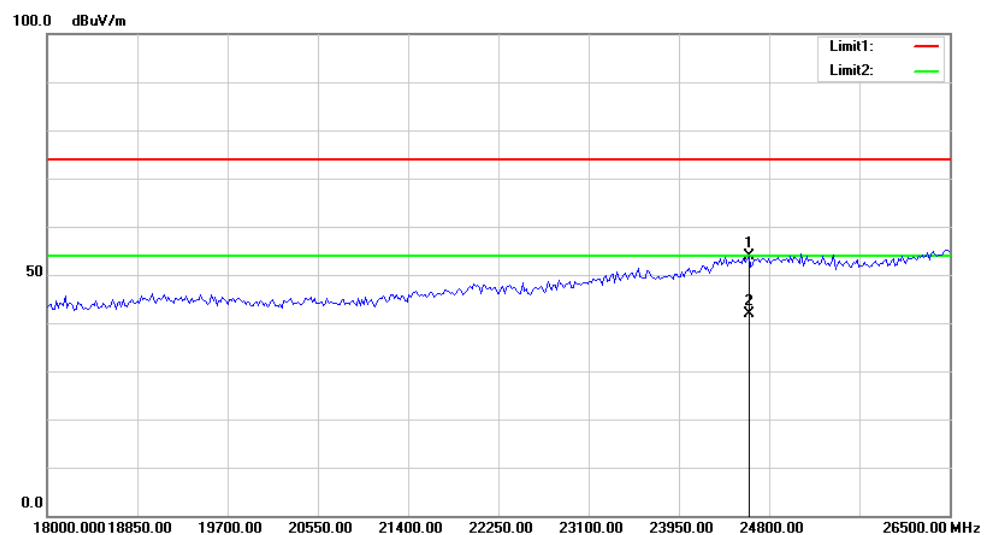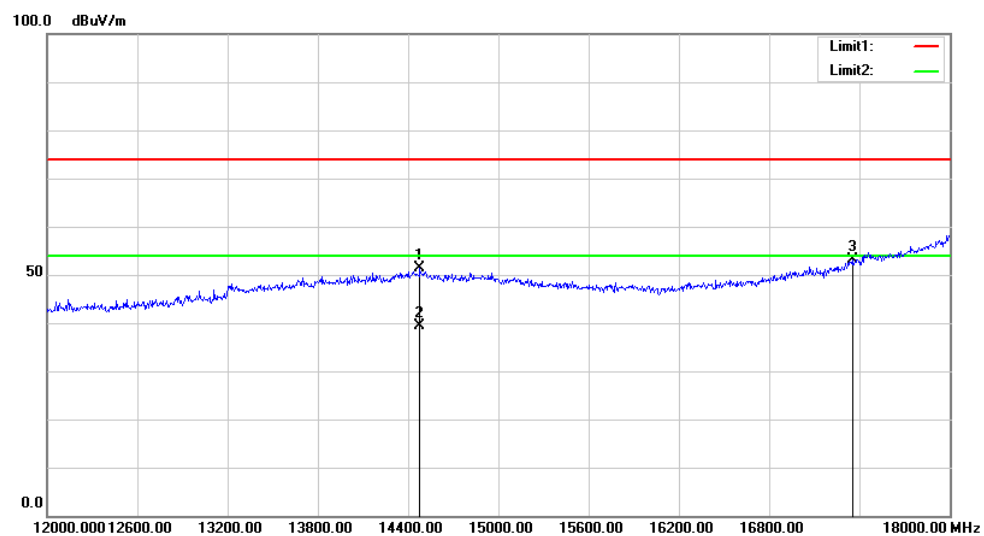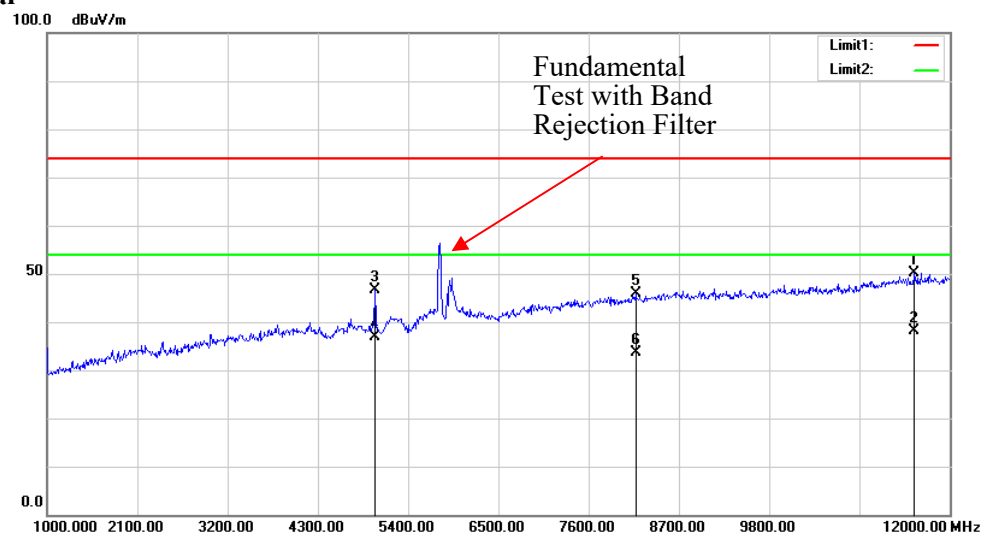

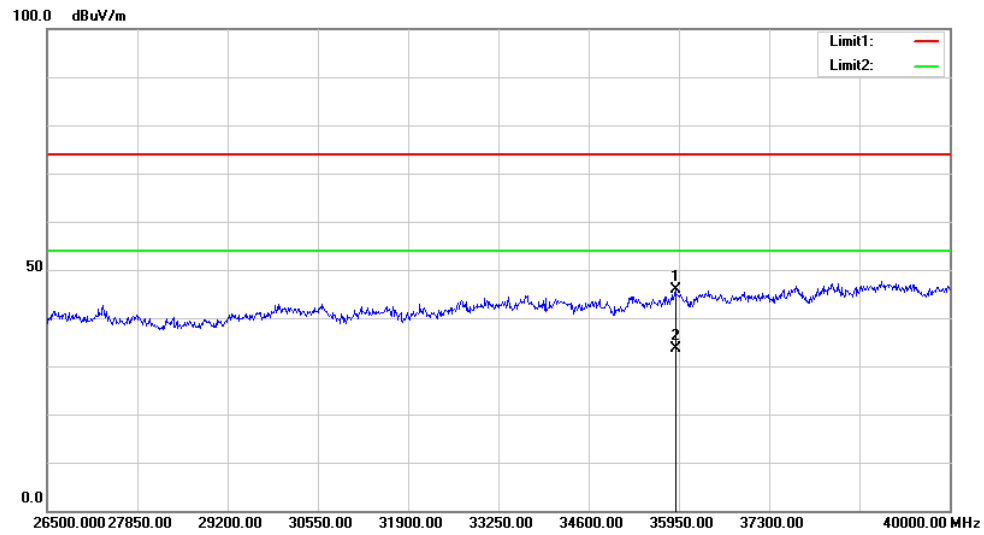

Vertical:

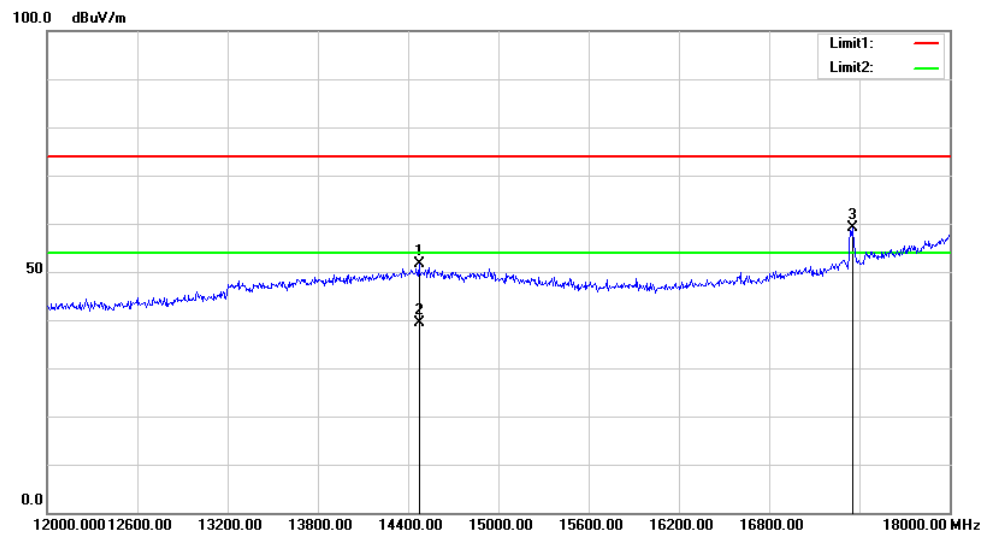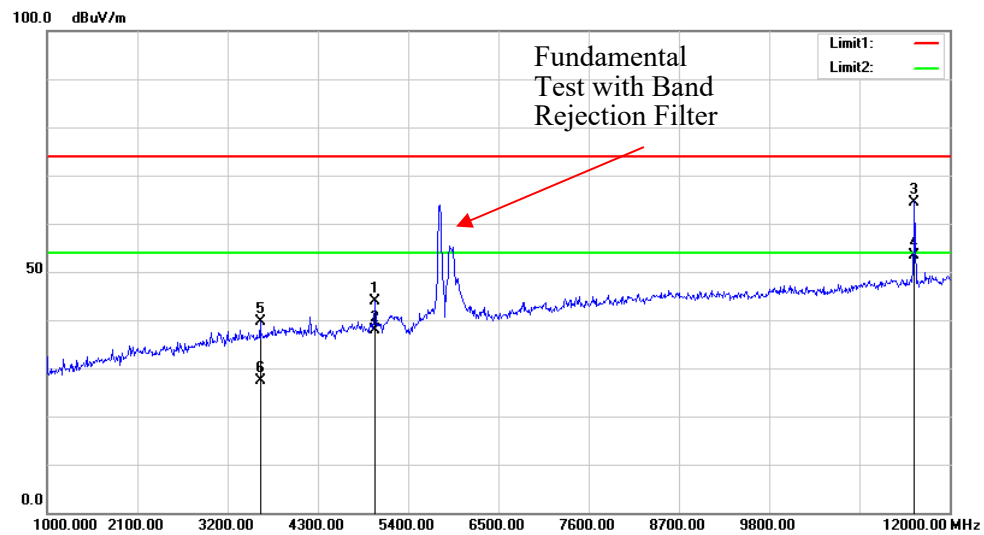

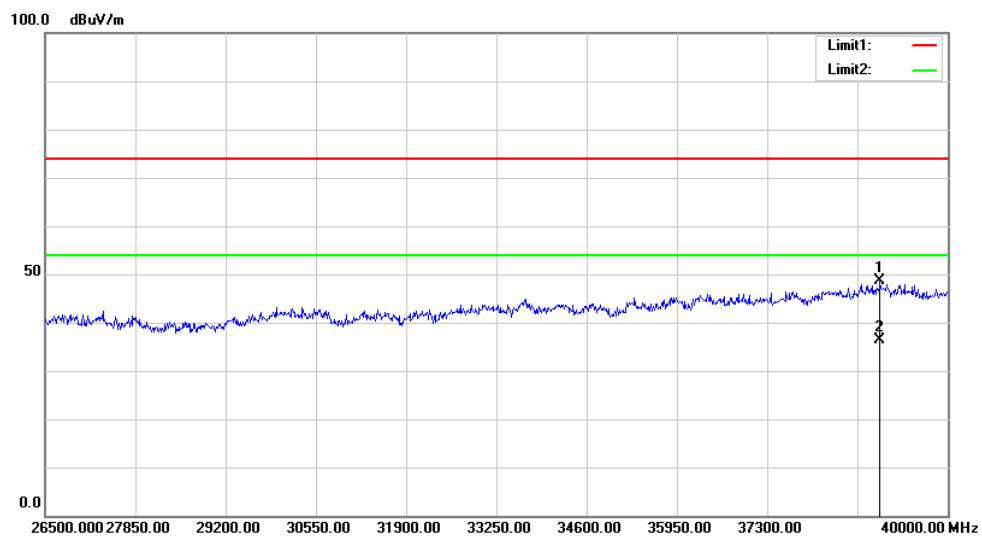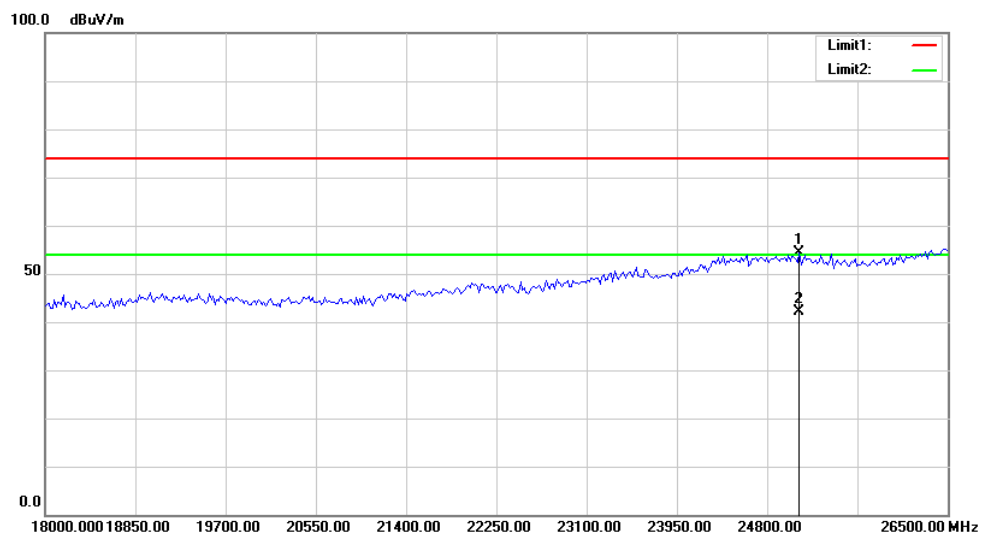

FCC §15.407(a)(e)–EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH**Applicable Standard**

15.407(a) (e)

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2020-07-07	2021-07-07
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Test Data**Environmental Conditions**

Temperature:	16.7~24.2°C
Relative Humidity:	29 ~51%
ATM Pressure:	100.8~102.1 kPa
Tester:	Taylor Li,Bond qin
Test Date:	2021-01-04~2021-01-29

Test Result: Pass.

Please refer to the following tables and plots.

Test mode: Transmitting (test was only performed at chain 0)

5150-5250MHz:

Mode	Frequency (MHz)	26 dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11 a	5180	20.320	16.880
	5200	20.320	16.960
	5240	20.480	16.960
802.11n ht20	5180	20.560	17.760
	5200	20.480	17.760
	5240	20.400	17.760
802.11n ht40	5190	39.680	36.000
	5230	39.360	36.000
802.11ax hew20	5180	33.854	19.360
	5200	35.064	19.360
	5240	35.641	19.360
802.11ax hew40	5190	39.680	38.080
	5230	39.680	38.080
802.11ac vht80	5210	80.320	75.520
802.11ax hew80	5210	81.280	77.760


5725-5850MHz:

Mode	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	6 dB Emission Bandwidth Limits (MHz)	99% Occupied Bandwidth (MHz)
802.11 a	5745	15.600	≥0.5	17.200
	5785	15.760	≥0.5	17.120
	5825	15.920	≥0.5	17.040
802.11n ht20	5745	16.240	≥0.5	17.920
	5785	16.080	≥0.5	17.920
	5825	16.080	≥0.5	17.920
802.11ax hew20	5745	19.200	≥0.5	19.520
	5785	19.200	≥0.5	19.440
	5825	19.120	≥0.5	19.440
802.11n ht40	5755	35.200	≥0.5	36.160
	5795	35.040	≥0.5	36.160
802.11ax hew40	5755	37.920	≥0.5	38.080
	5795	38.080	≥0.5	38.080
802.11ac vht80	5775	76.480	≥0.5	76.160
802.11ax hew80	5775	77.760	≥0.5	77.440

Note: the 99% Occupied Bandwidth have not fall into the band 5250-5350MHz or 5470-5725MHz, please refer to the test plots of 99% Occupied Bandwidth.


5150-5250MHz:
26dB Emission Bandwidth:

802.11a Low Channel

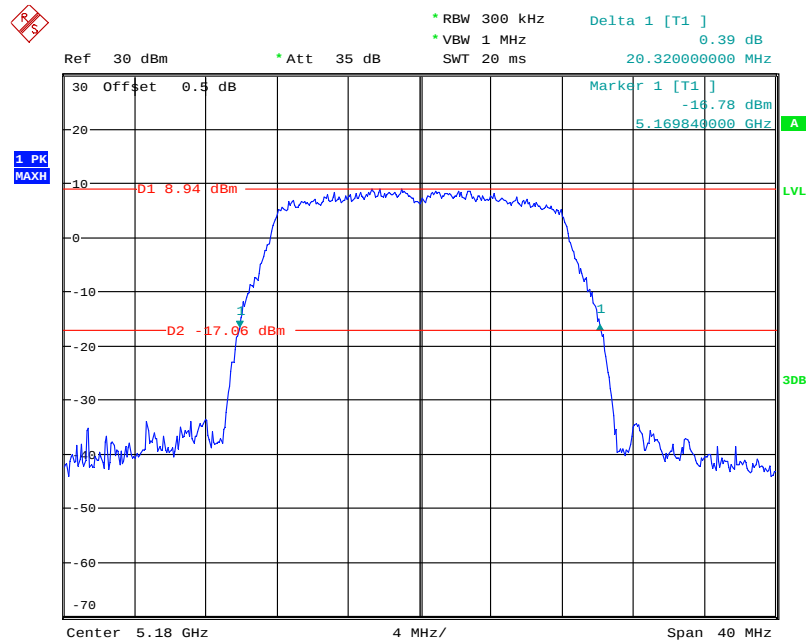


Date: 14.JAN.2021 14:32:03

802.11a Middle Channel

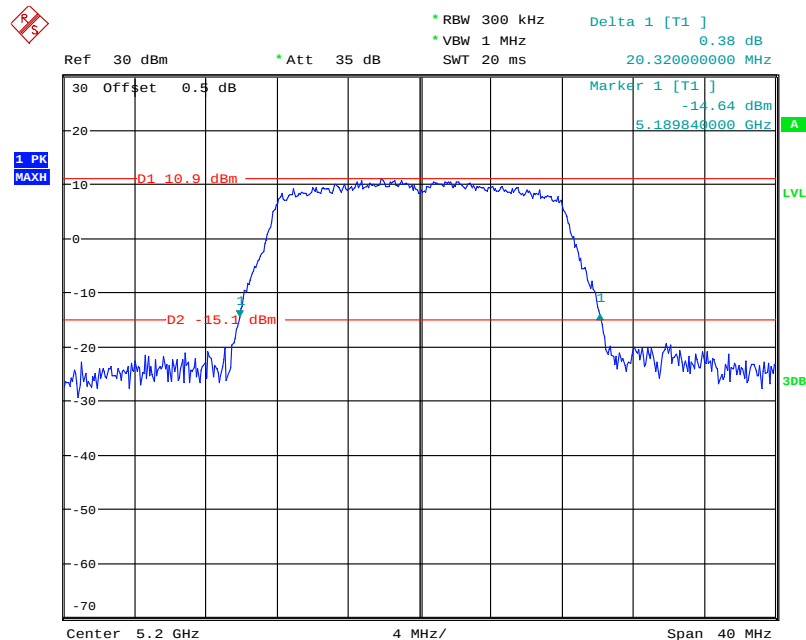


Date: 14.JAN.2021 14:33:14

802.11a High Channel

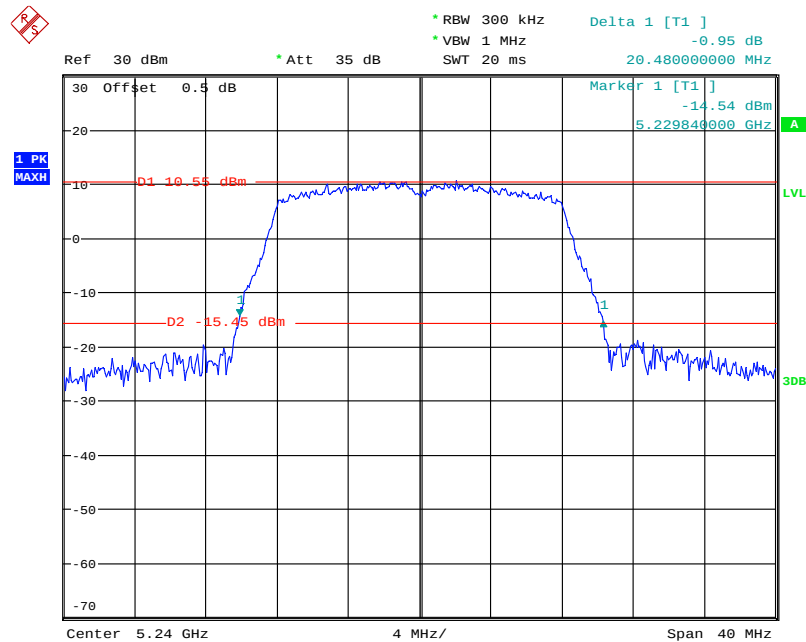


Date: 14.JAN.2021 14:30:31

802.11n ht20 Low Channel

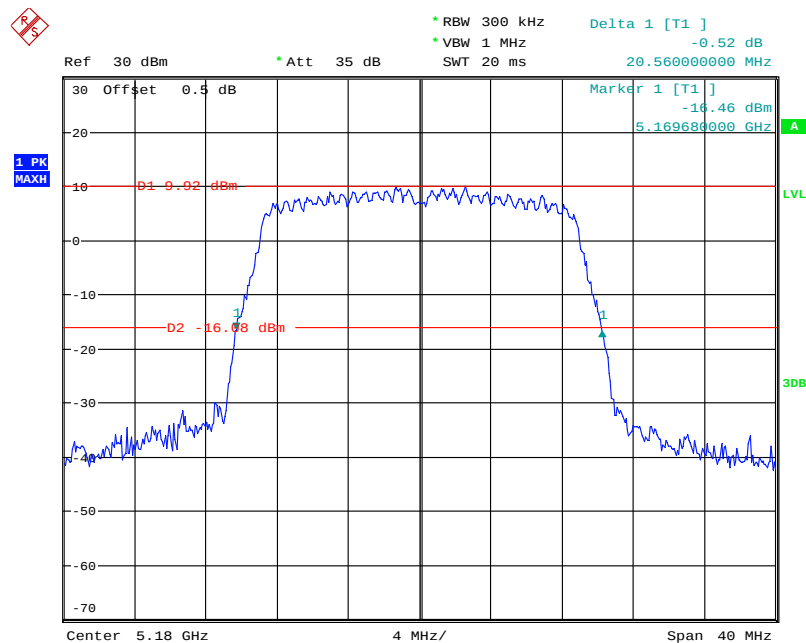


Date: 14.JAN.2021 14:34:58

802.11n ht20 Middle Channel

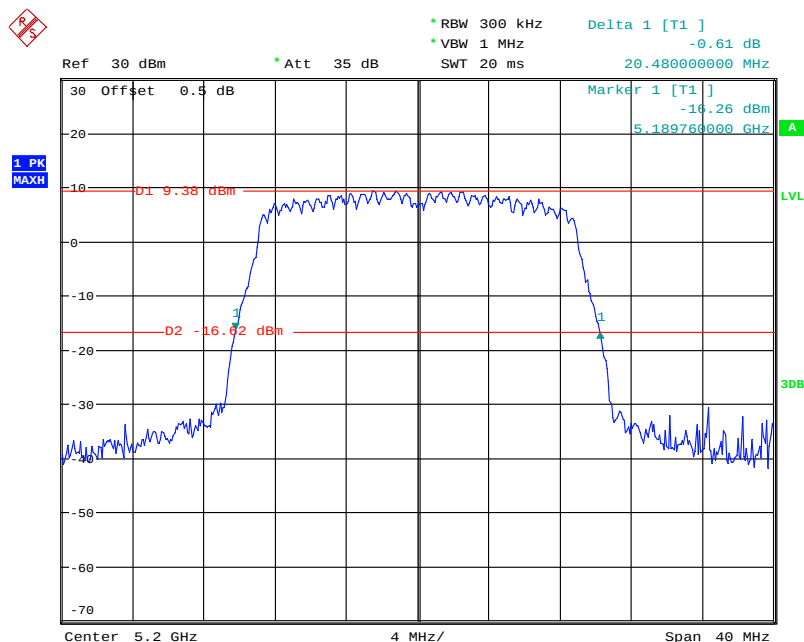


Date: 14.JAN.2021 14:36:36

802.11n ht20 High Channel

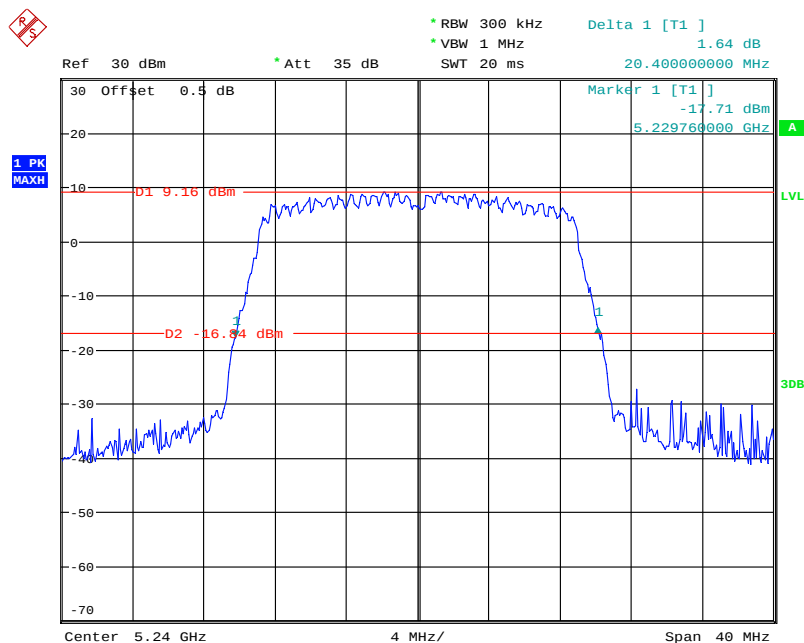


Date: 14.JAN.2021 14:37:46

802.11n ht40 Low Channel

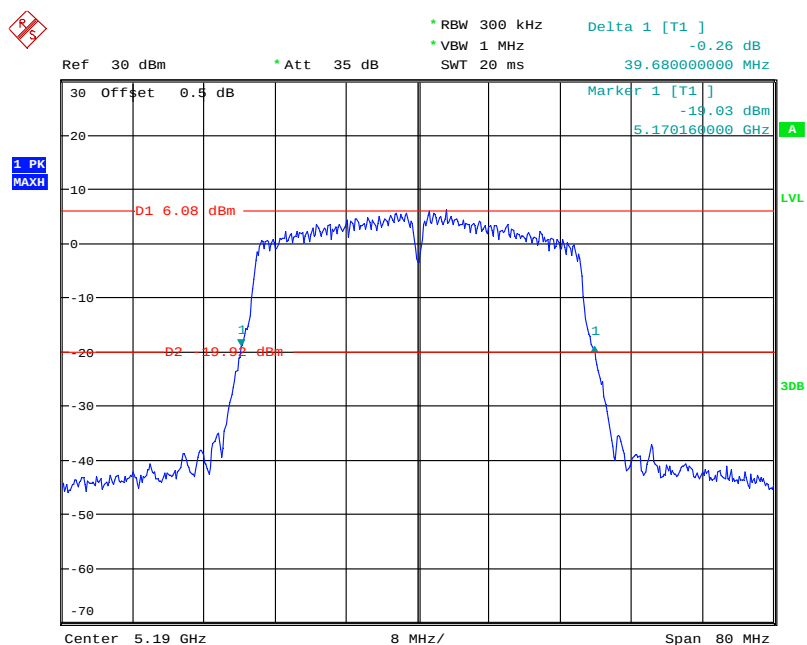


Date: 14.JAN.2021 15:21:07

802.11n ht40 High Channel

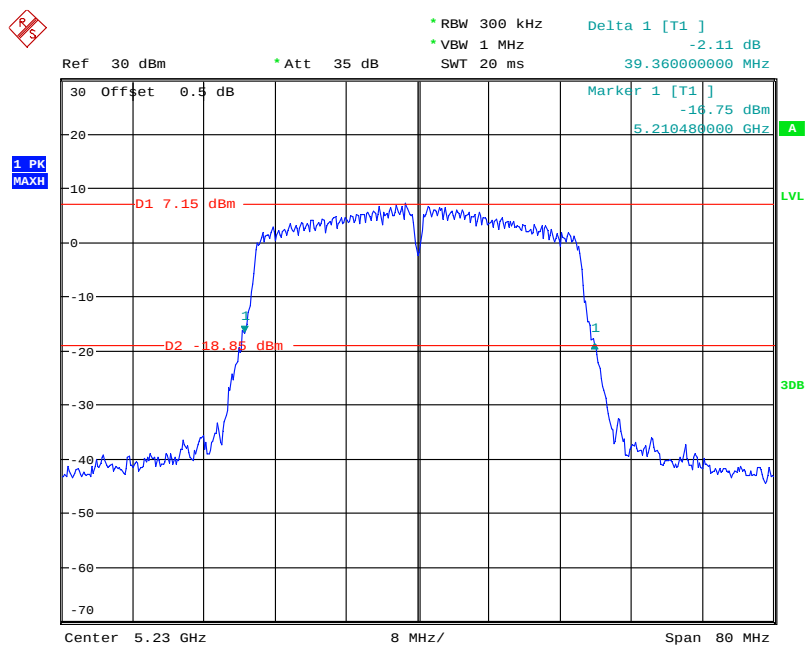


Date: 14.JAN.2021 15:22:21

802.11 ax20 Low Channel

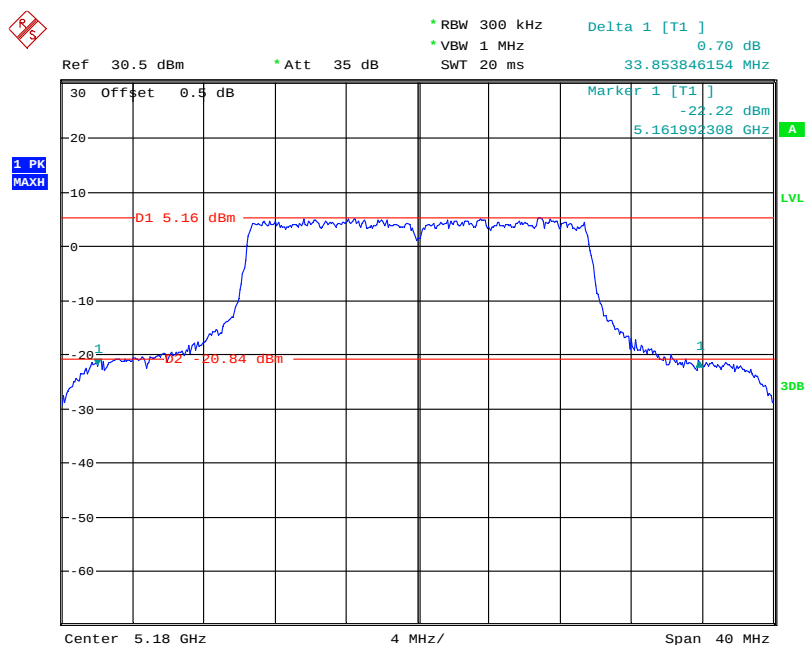


Date: 29.JAN.2021 14:02:51

802.11 ax20 Middle Channel

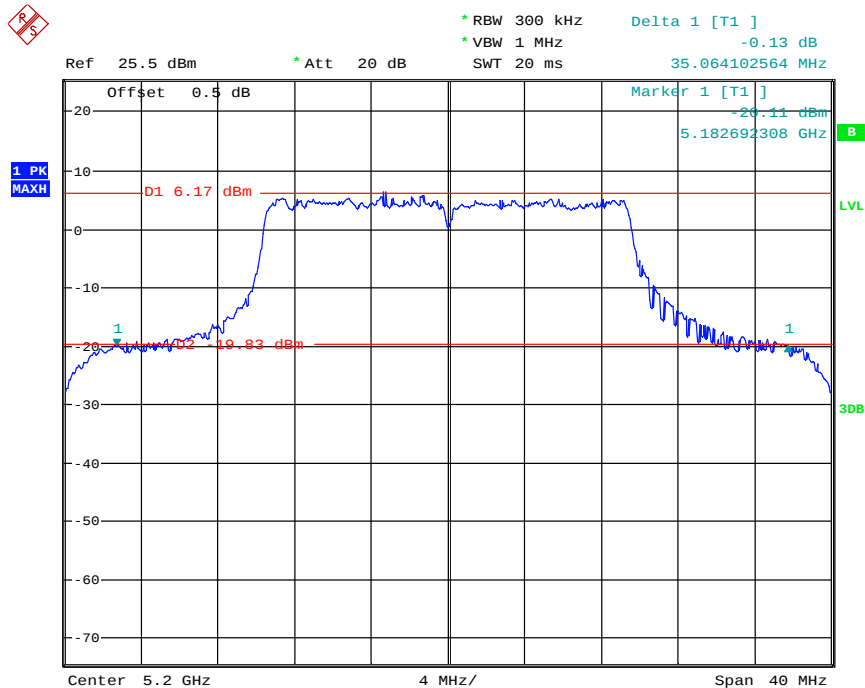


Date: 26.JAN.2021 16:20:15

802.11 ax20 High Channel

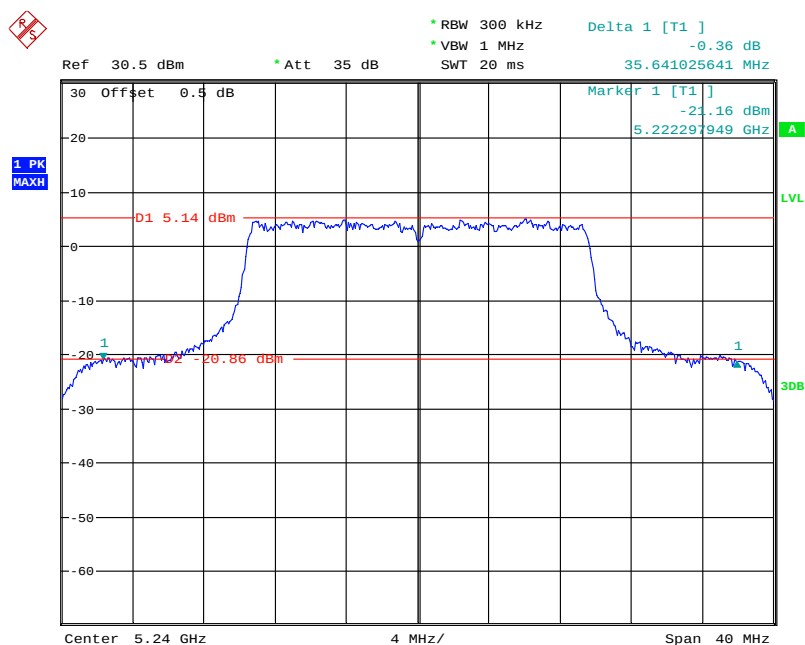


Date: 29.JAN.2021 13:57:04

802.11 ax40 Low Channel

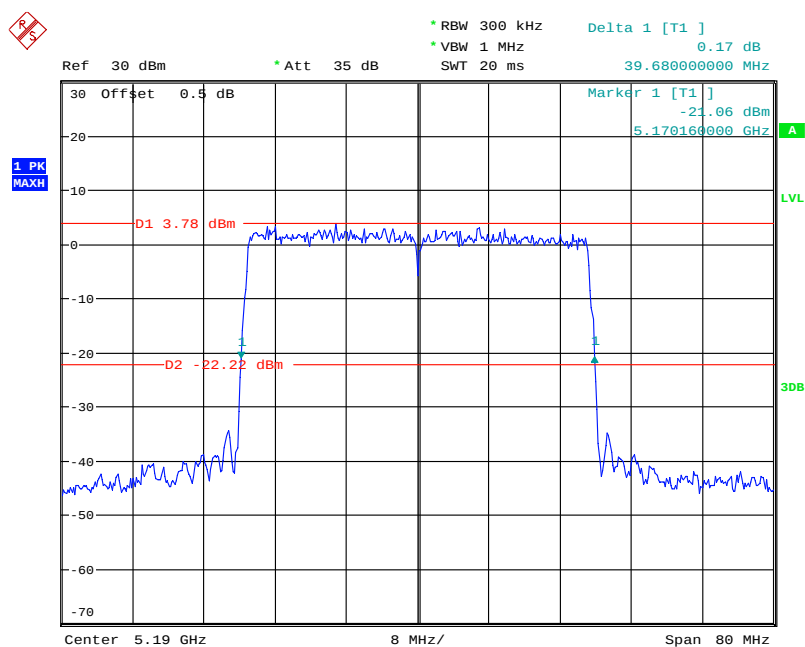


Date: 14.JAN.2021 15:24:10

802.11 ax40 High Channel

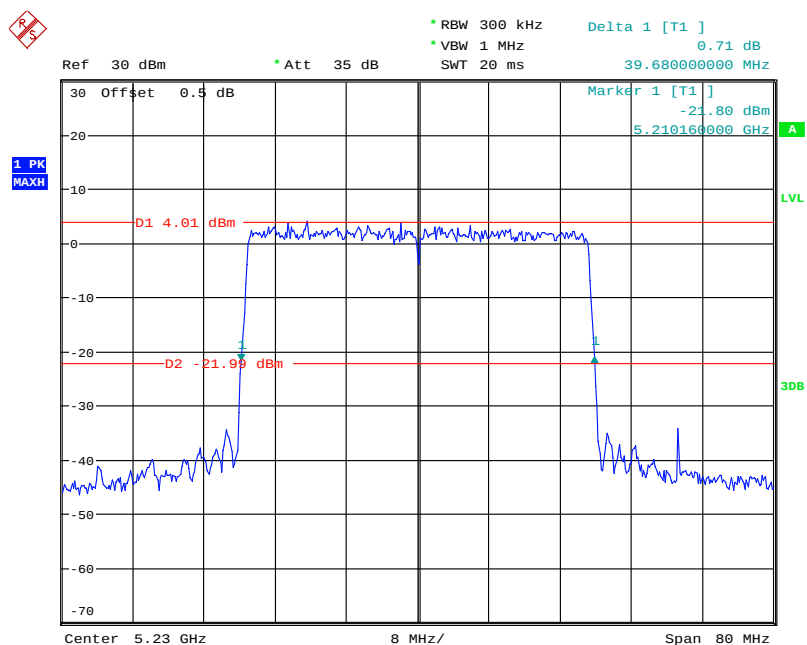


Date: 14.JAN.2021 15:25:31

802.11ac vht80 Middle Channel

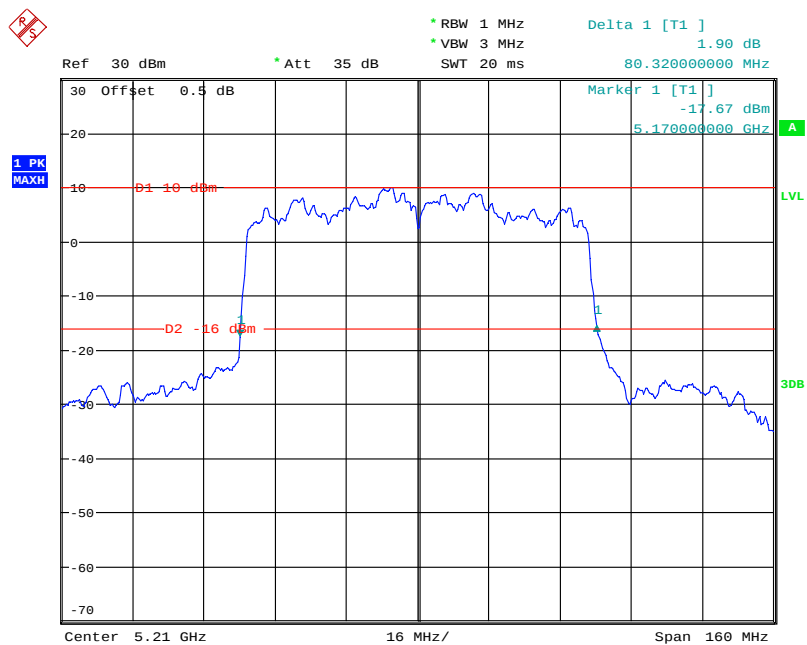

Date: 14.JAN.2021 15:30:44


802.11ax hew80 Middle Channel

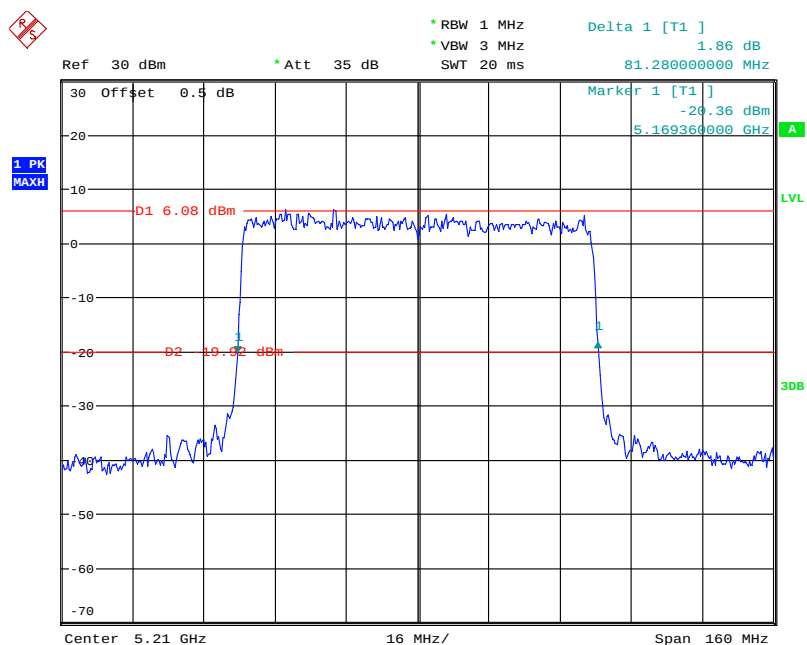

Date: 14.JAN.2021 15:39:47


99% Occupied Bandwidth:

802.11a Low Channel

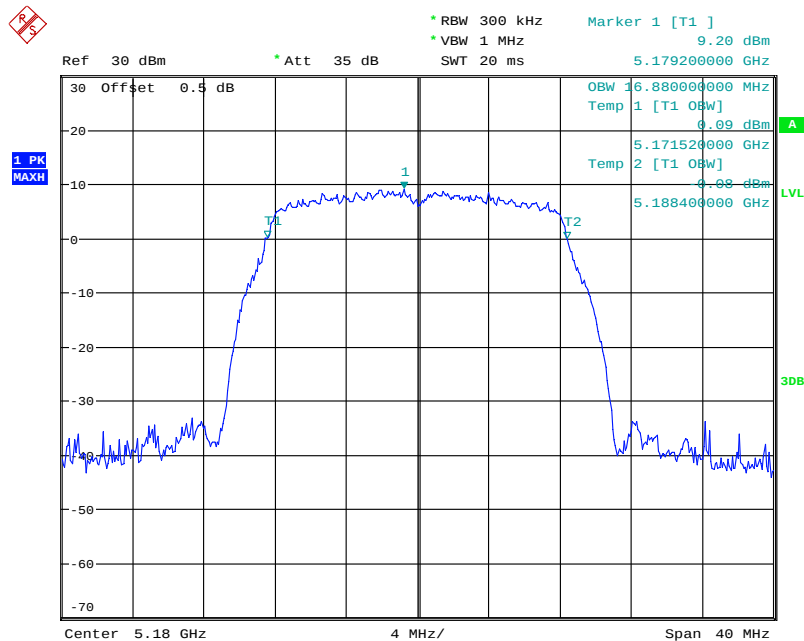


Date: 14.JAN.2021 14:32:19

802.11a Middle Channel

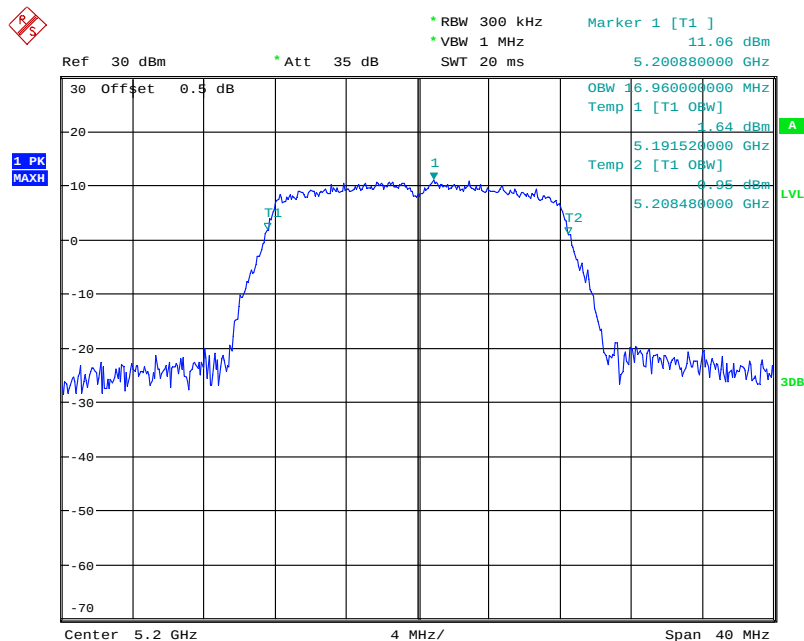


Date: 14.JAN.2021 14:33:31

802.11a High Channel

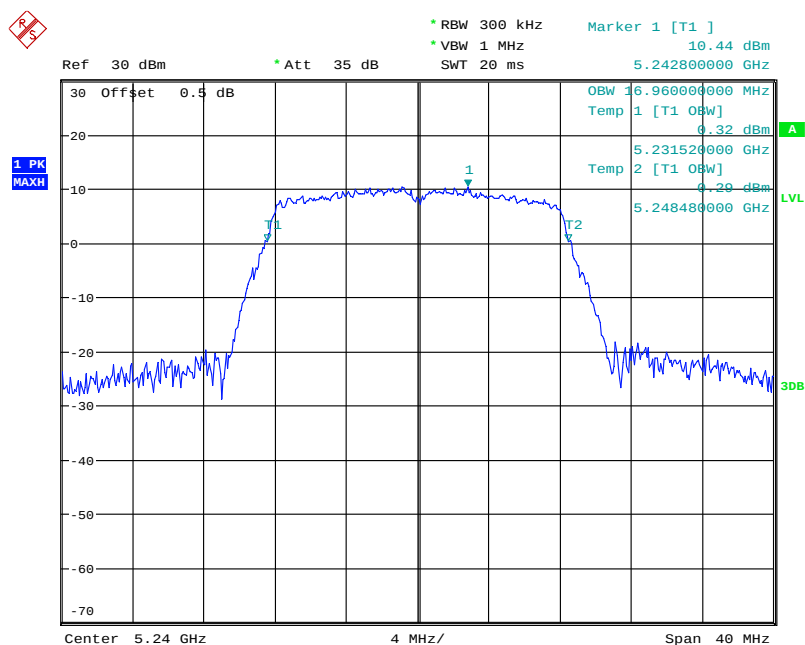


Date: 14.JAN.2021 14:30:48

802.11n ht20 Low Channel

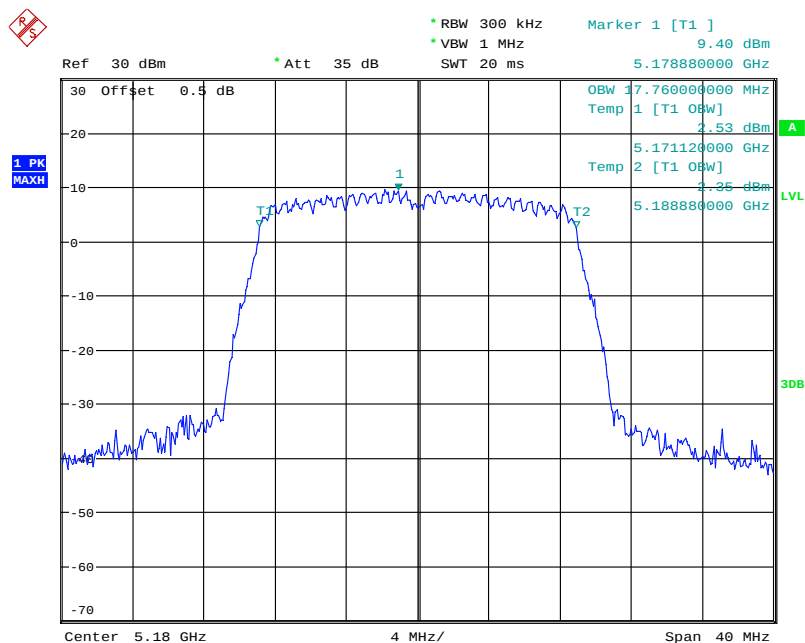


Date: 14.JAN.2021 14:35:11

802.11n ht20 Middle Channel

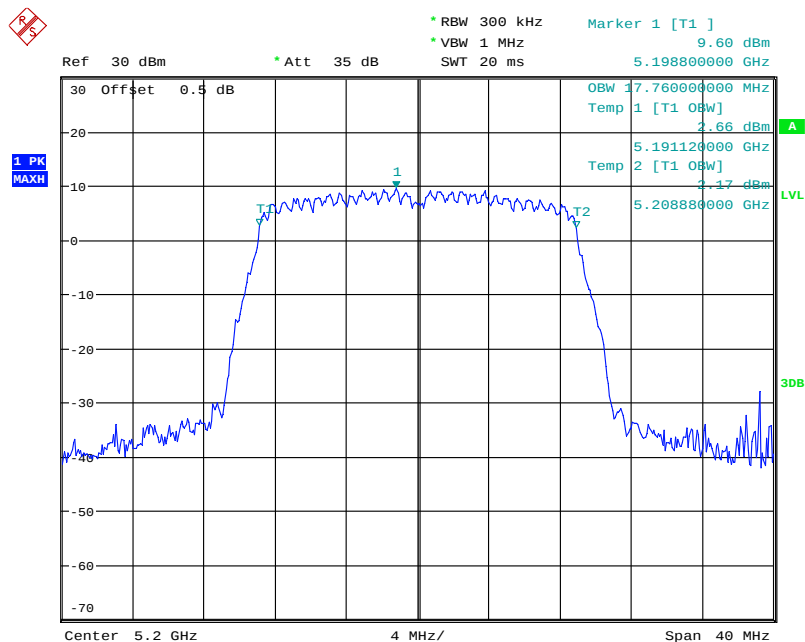


Date: 14.JAN.2021 14:36:53

802.11n ht20 High Channel

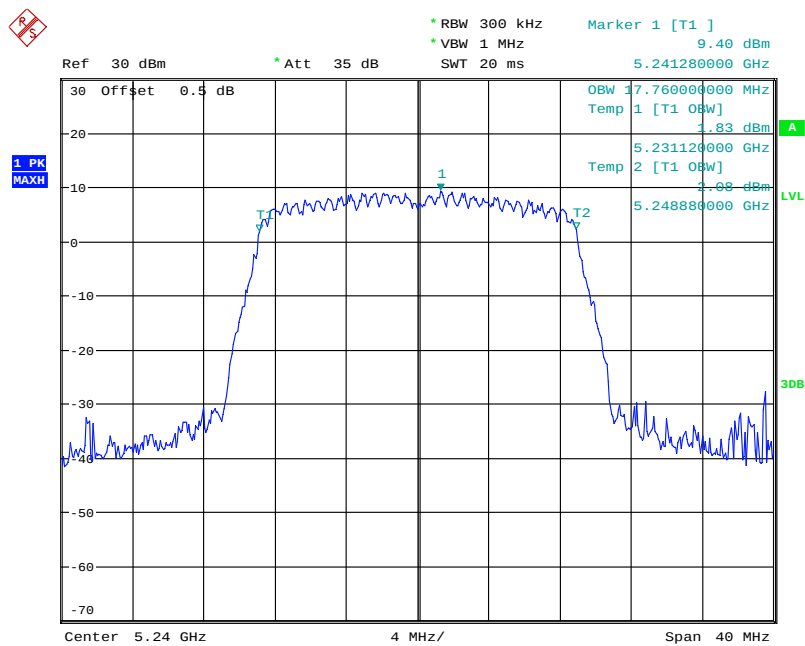


Date: 14.JAN.2021 14:38:02

802.11n ht40 Low Channel

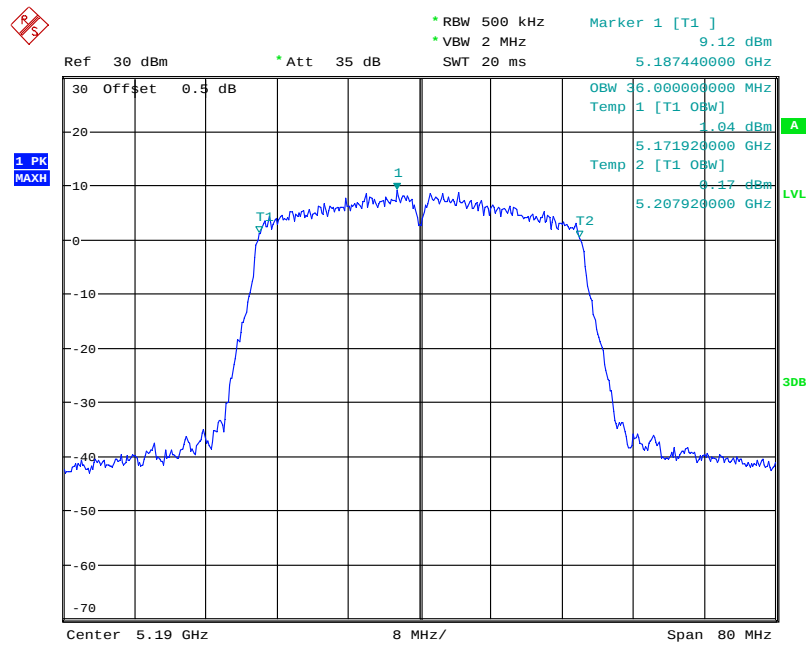


Date: 14.JAN.2021 15:21:24

802.11n ht40 High Channel

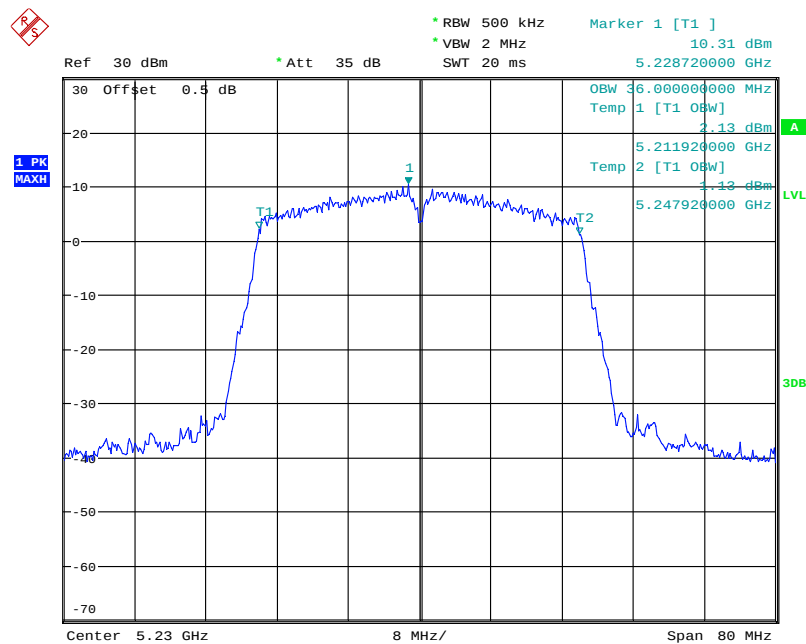


Date: 14.JAN.2021 15:22:34

802.11 ax20 Low Channel

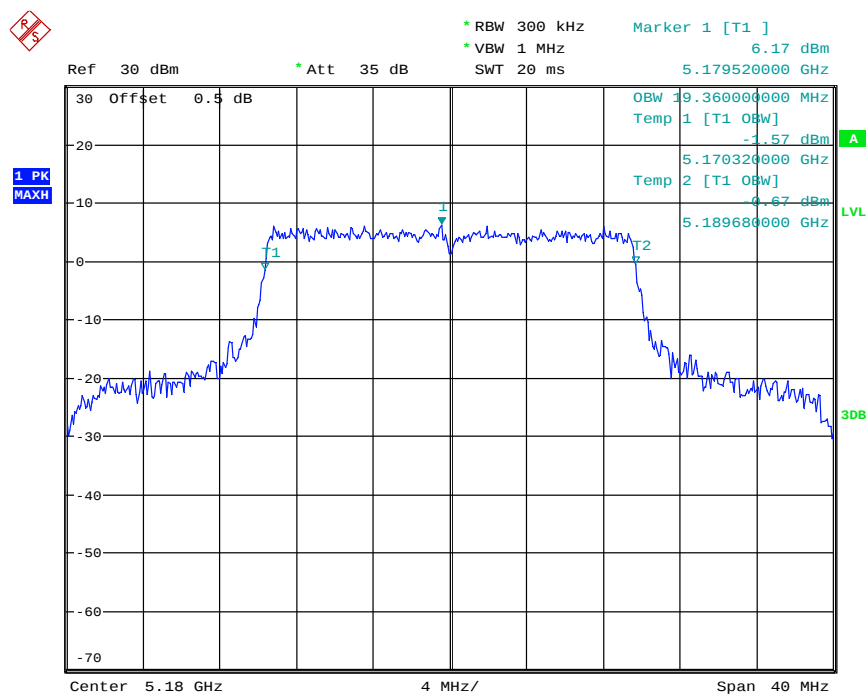


Date: 14.JAN.2021 14:40:14

802.11 ax20 Middle Channel

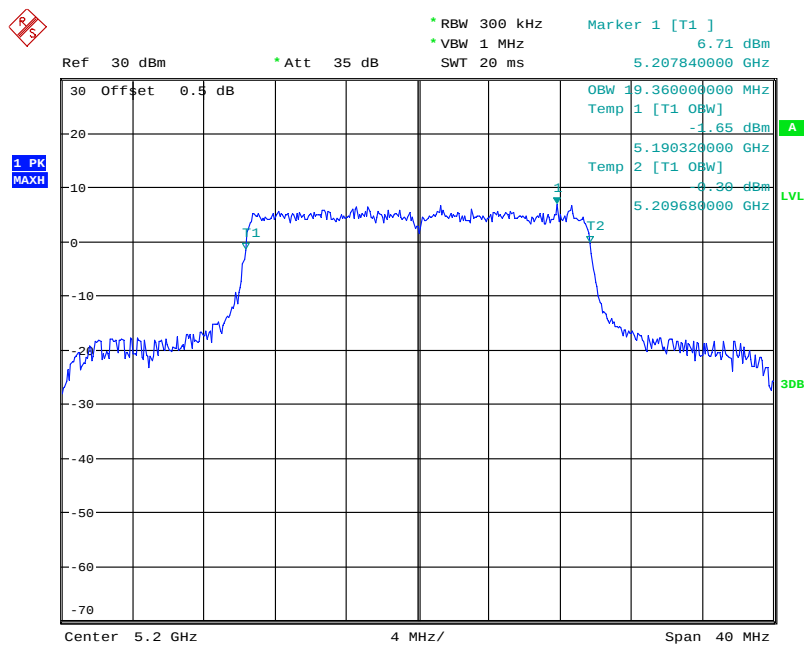


Date: 14.JAN.2021 14:57:22

802.11 ax20 High Channel

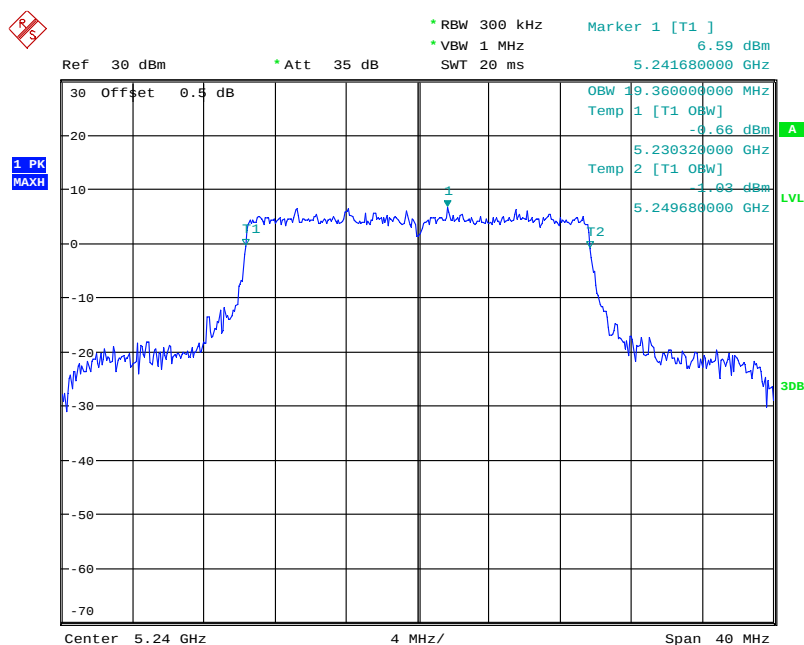


Date: 14.JAN.2021 15:19:35

802.11 ax40 Low Channel

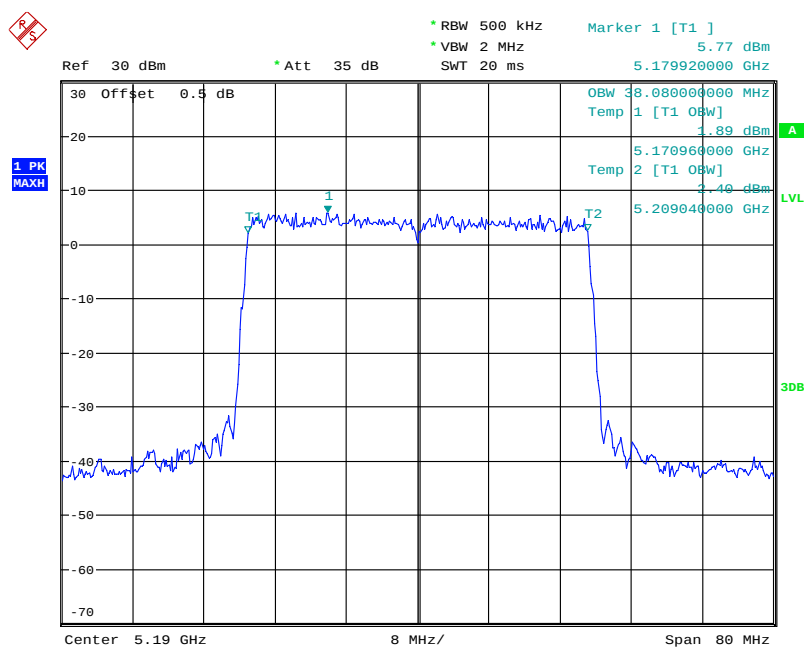


Date: 14.JAN.2021 15:24:27

802.11 ax40 High Channel

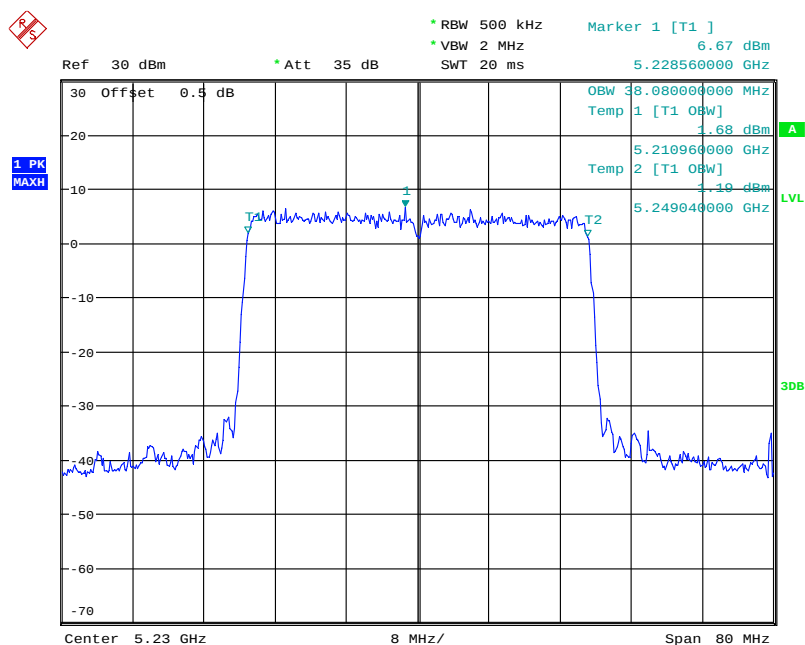


Date: 14.JAN.2021 15:25:48

802.11ac vht80 Middle Channel

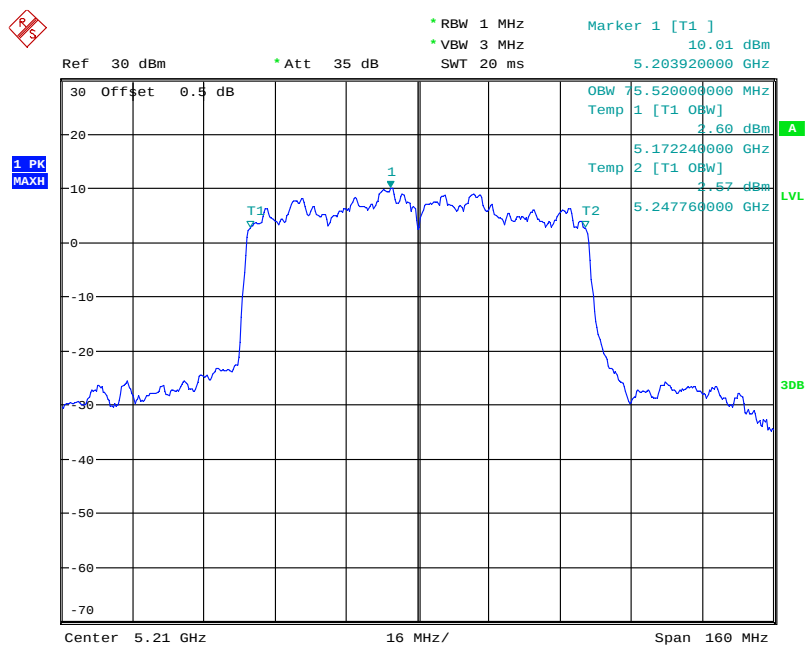

Date: 14.JAN.2021 15:30:53


802.11ax hew80 Middle Channel

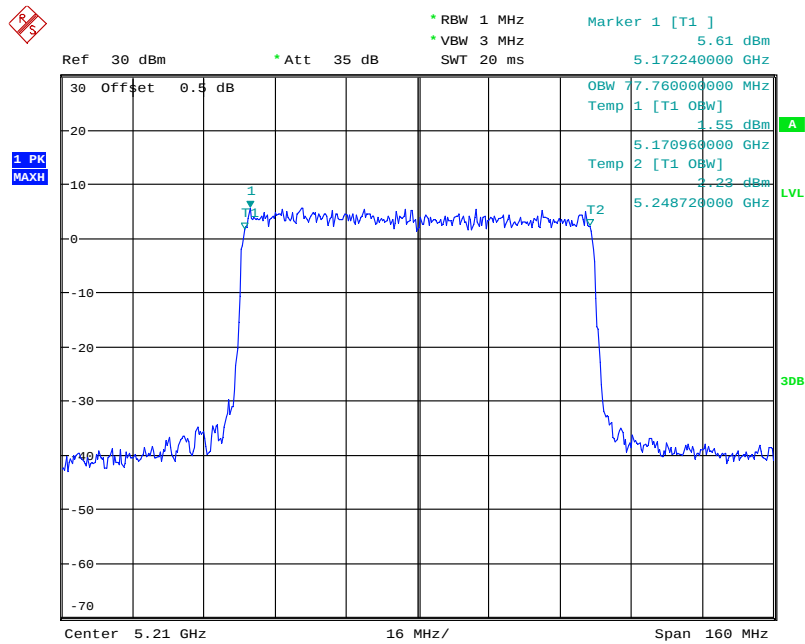

Date: 14.JAN.2021 15:40:04


5725-5850MHz:
6dB Emission Bandwidth:

802.11a Low Channel

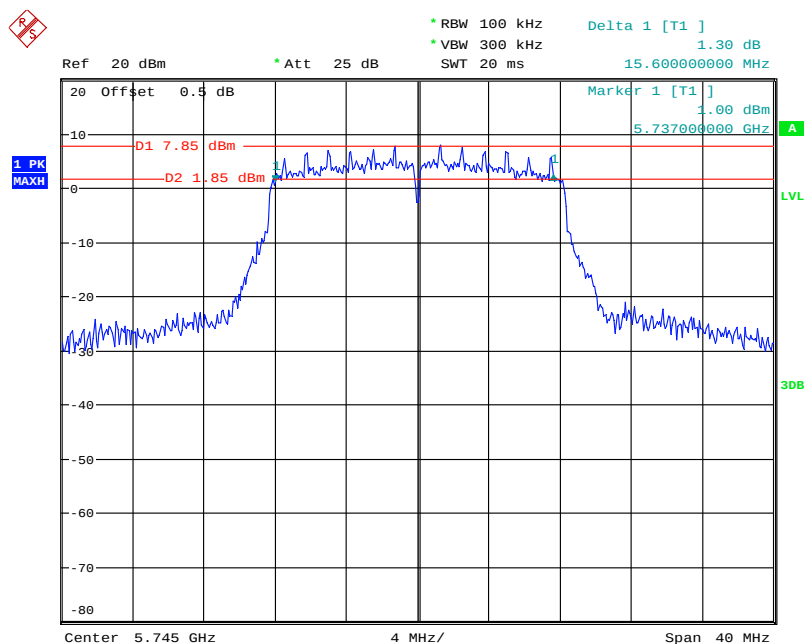


Date: 8.JAN.2021 13:35:32

802.11a Middle Channel

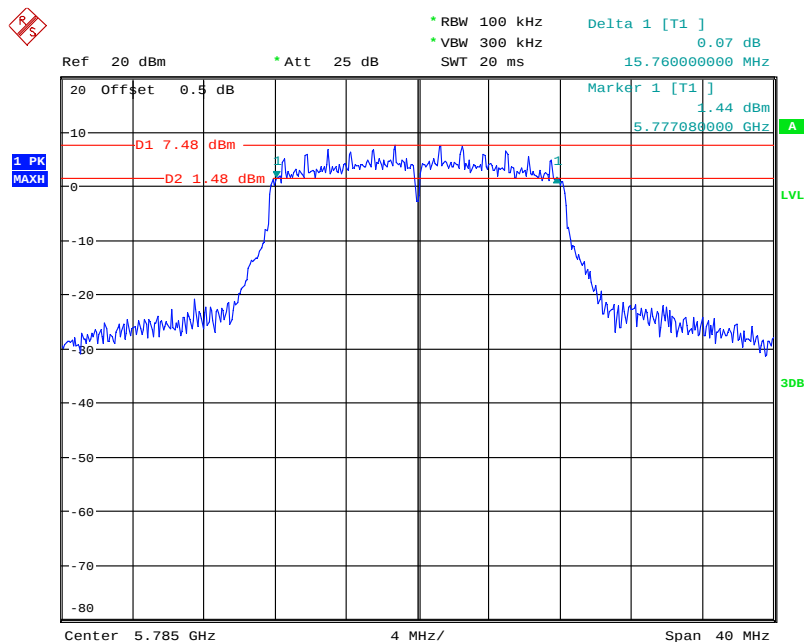


Date: 8.JAN.2021 13:37:12

802.11a High Channel

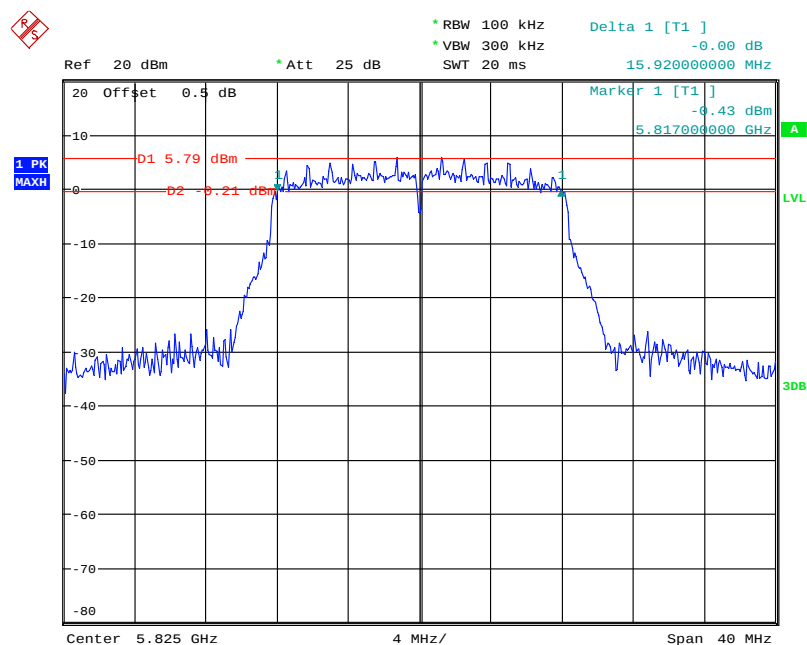


Date: 8.JAN.2021 13:39:33

802.11n ht20 Low Channel

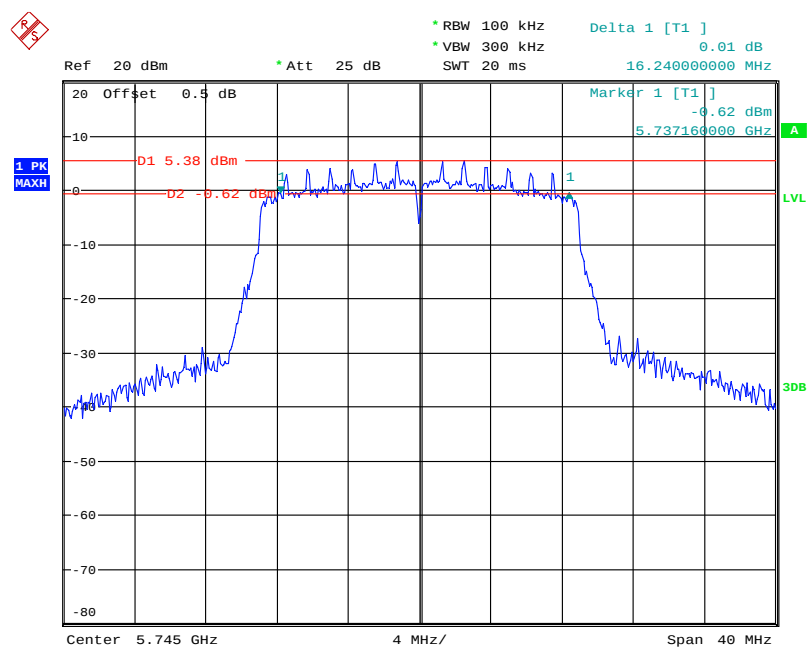


Date: 8.JAN.2021 13:51:50

802.11n ht20 Middle Channel

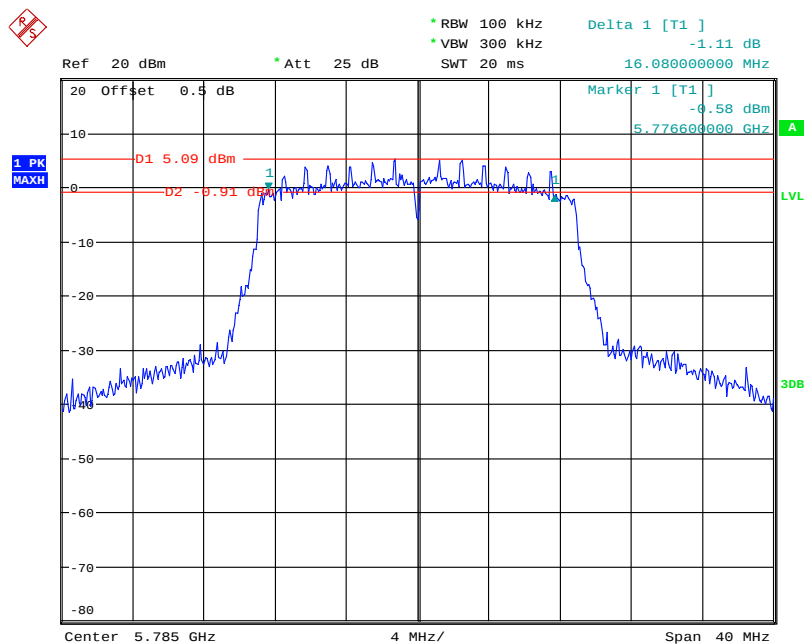


Date: 8.JAN.2021 13:57:08

802.11n ht20 High Channel

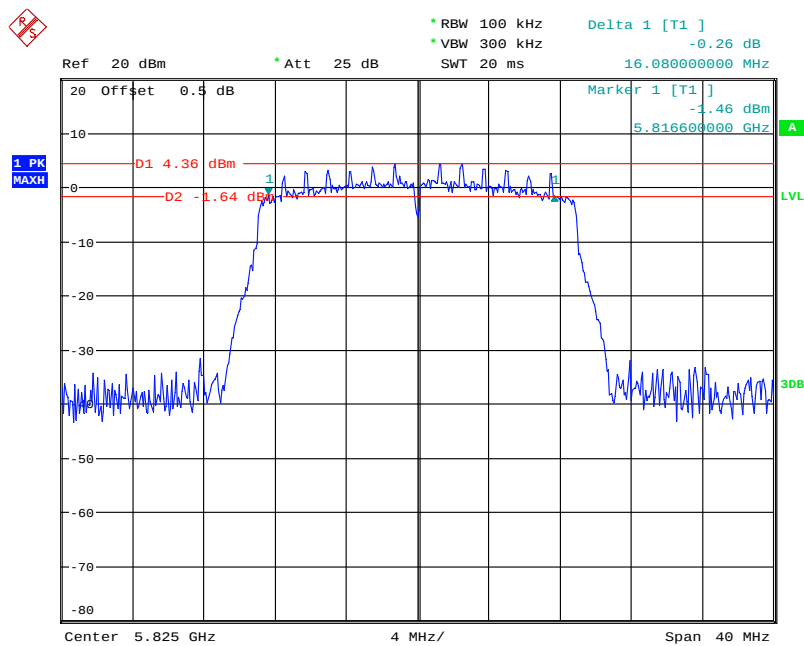


Date: 8.JAN.2021 14:00:12

802.11n ht40 Low Channel

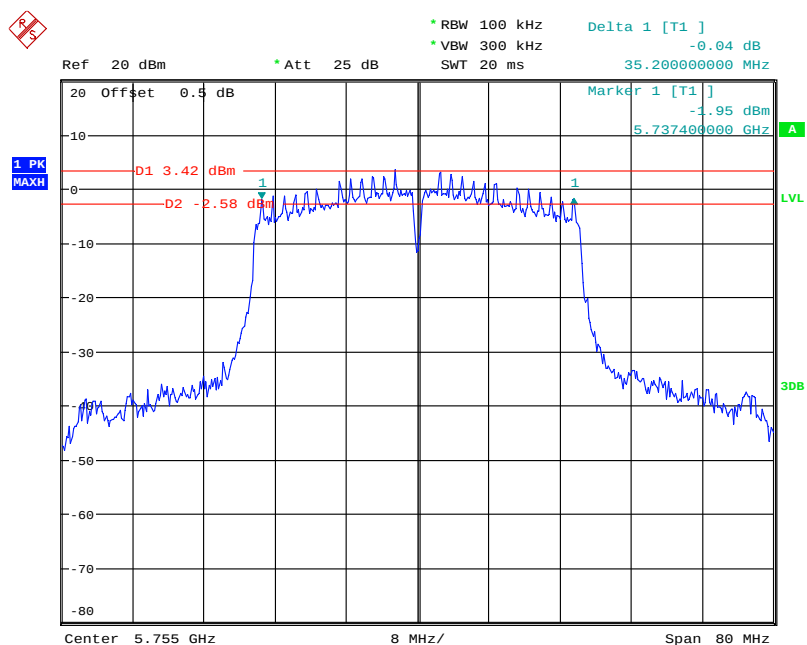


Date: 8.JAN.2021 14:07:09

802.11n ht40 High Channel

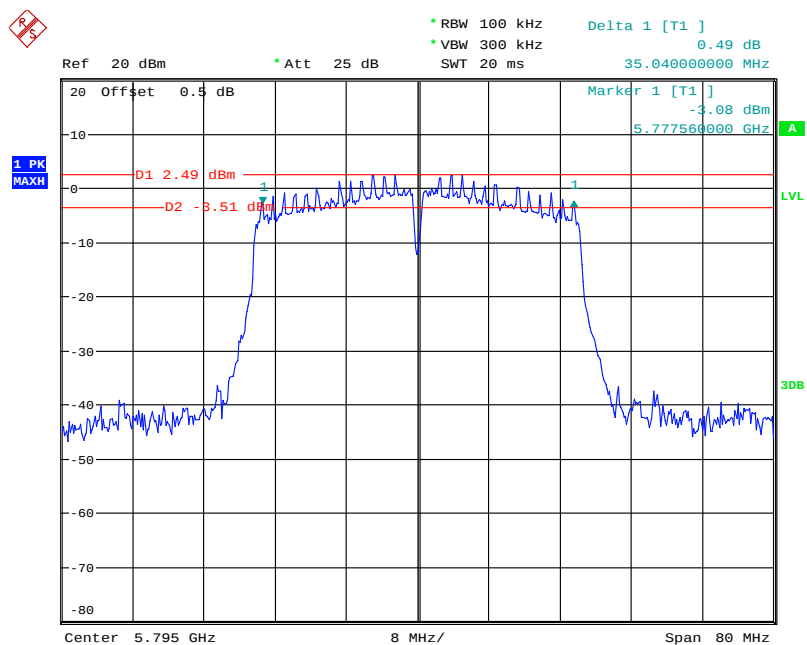


Date: 8.JAN.2021 14:08:43

802.11 ax20 Low Channel

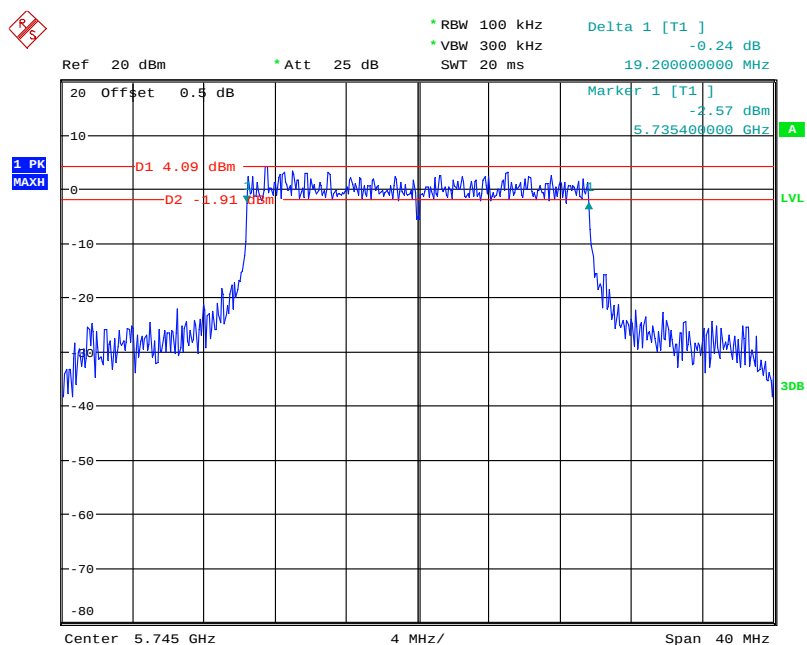


Date: 8.JAN.2021 14:31:01

802.11 ax20 Middle Channel

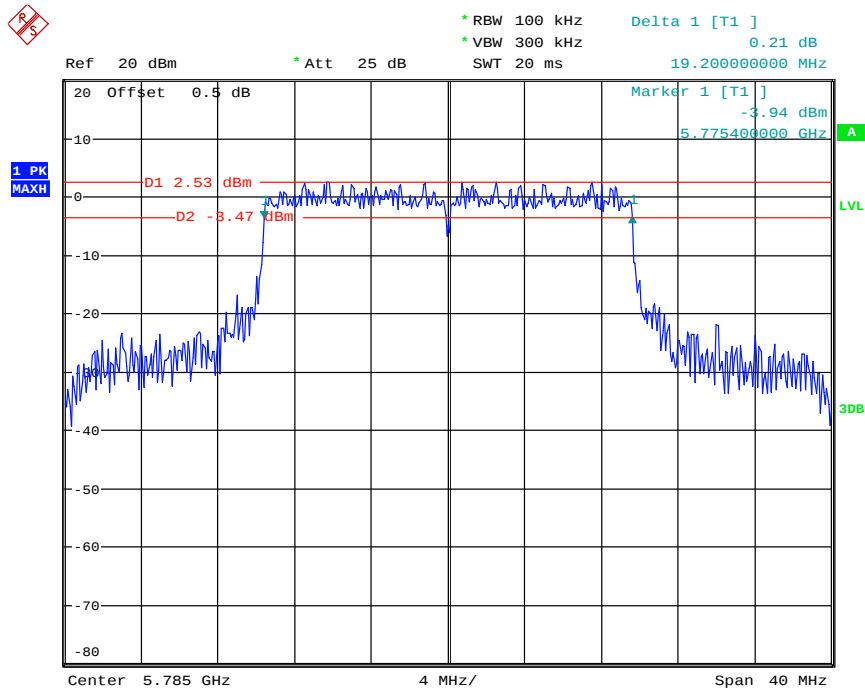


Date: 8.JAN.2021 14:42:40

802.11 ax20 High Channel

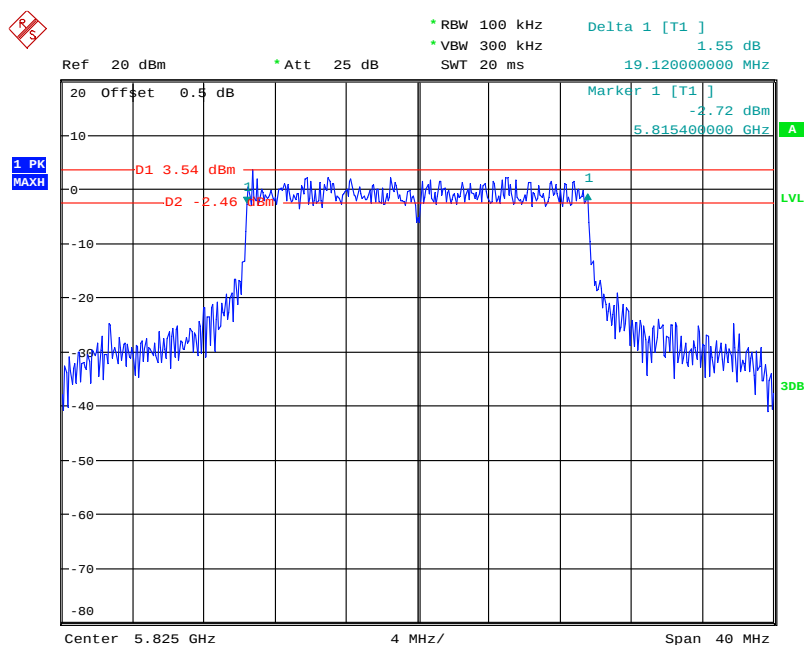


Date: 8.JAN.2021 14:45:11

802.11 ax40 Low Channel

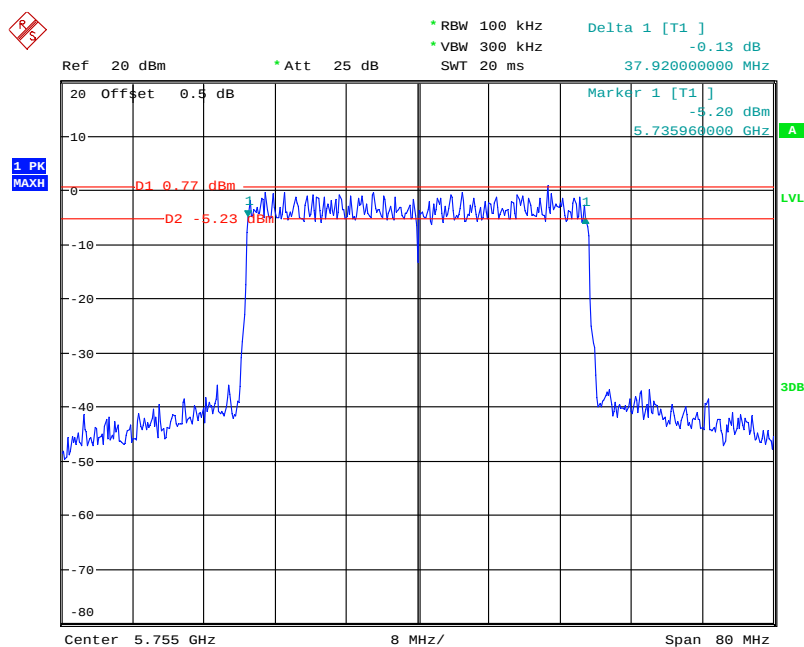


Date: 8.JAN.2021 14:51:04

802.11 ax40 High Channel

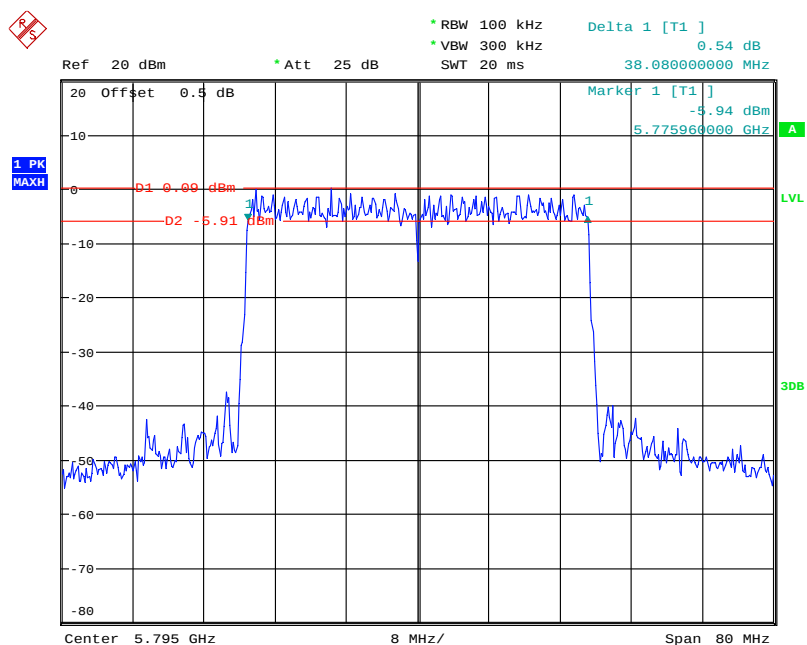


Date: 8.JAN.2021 14:52:36

802.11ac vht80 Middle Channel

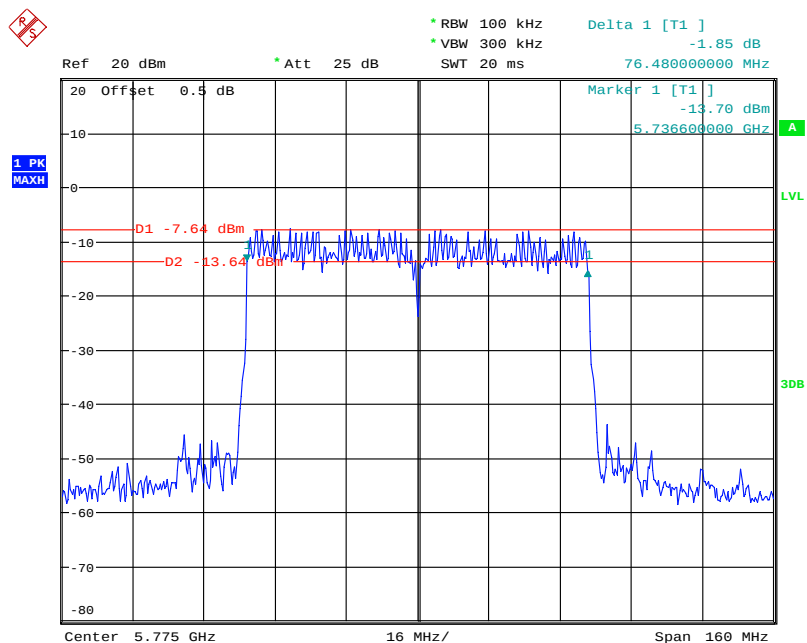


Date: 8.JAN.2021 14:17:15


802.11ax hew80 Middle Channel

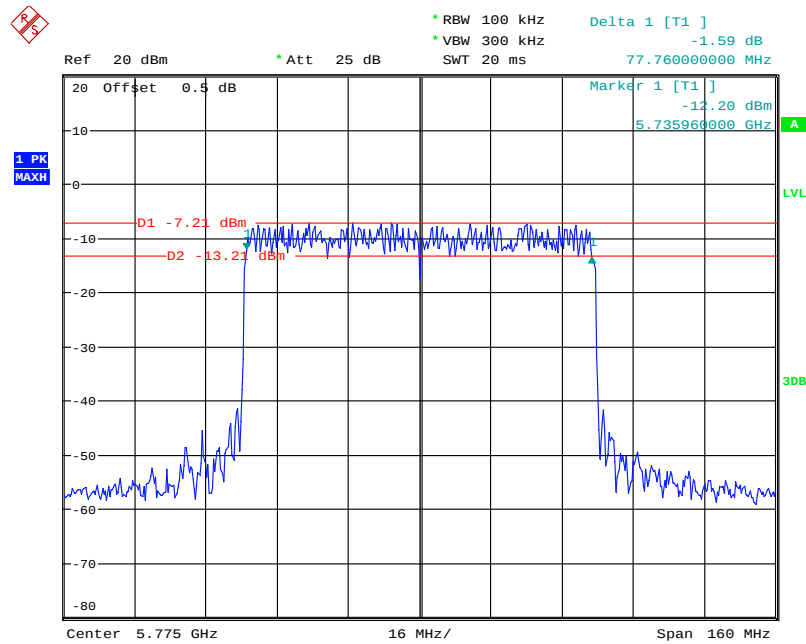

Date: 8.JAN.2021 14:54:53

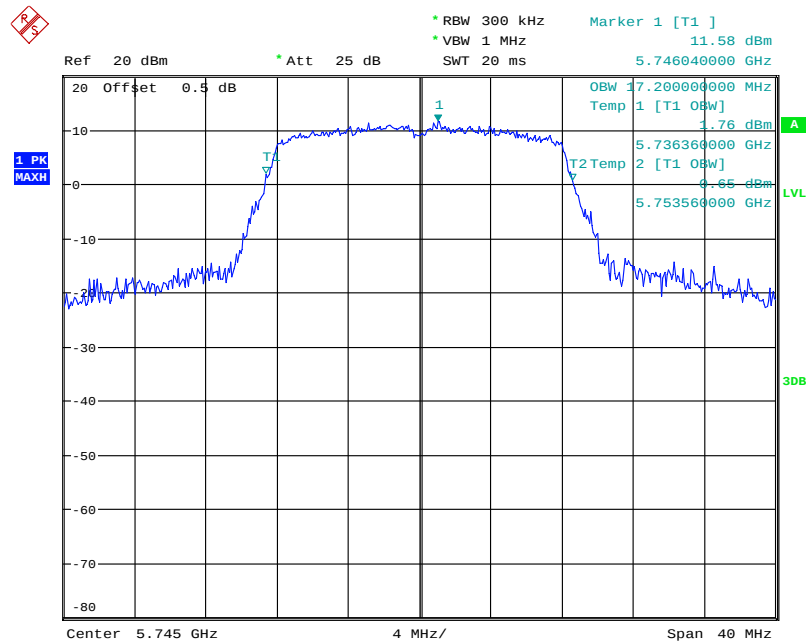
99% Occupied Bandwidth:**802.11a Low Channel**

Date: 8.JAN.2021 13:35:46

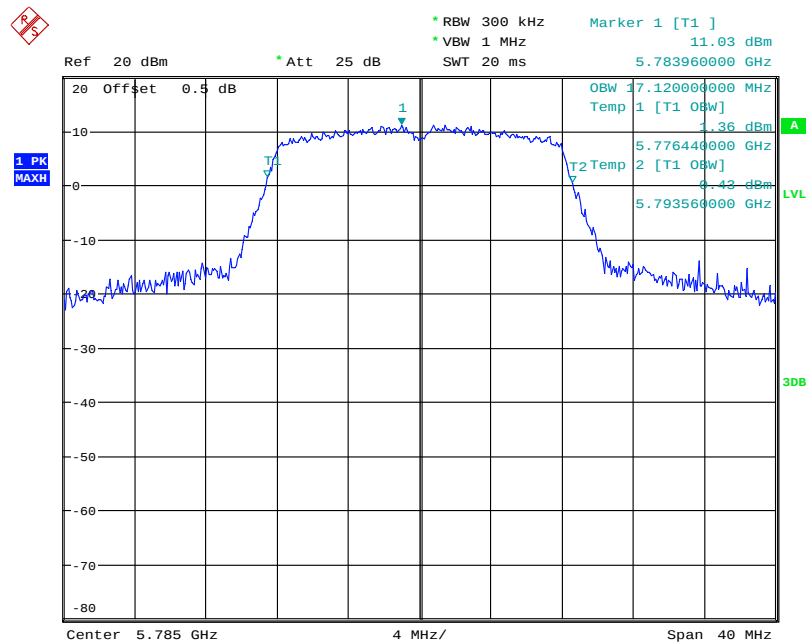802.11a Middle Channel


Date: 8.JAN.2021 13:37:29

802.11a High Channel

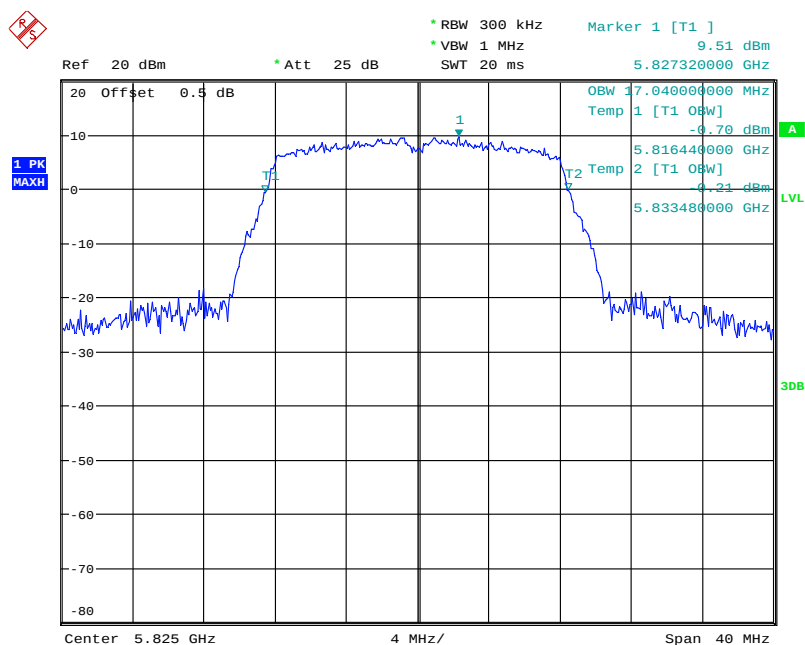


Date: 8.JAN.2021 13:39:50

802.11n ht20 Low Channel

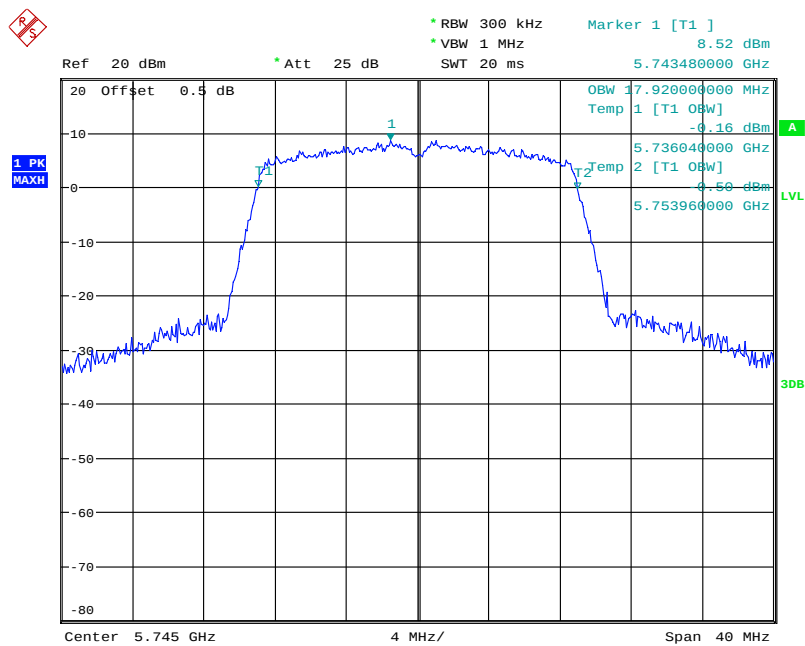


Date: 8.JAN.2021 13:52:04

802.11n ht20 Middle Channel

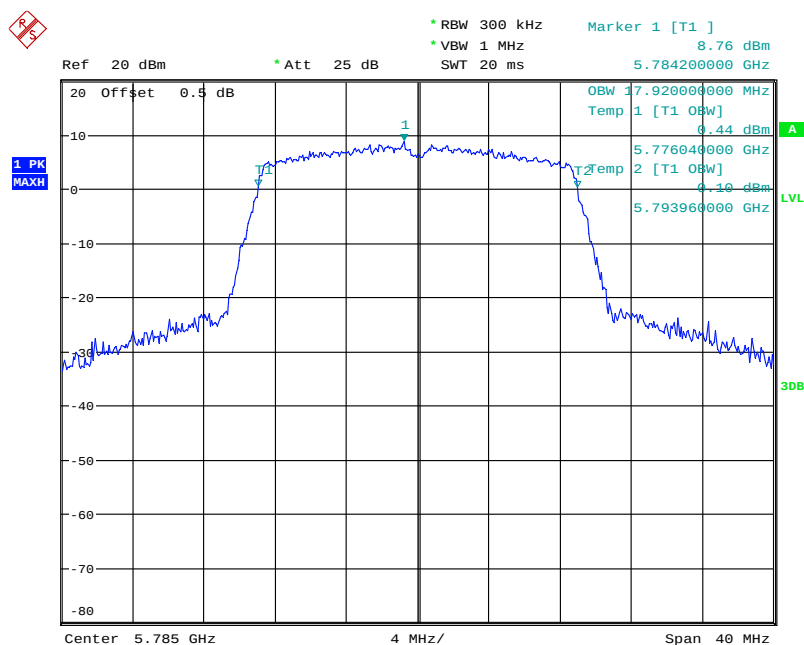


Date: 8.JAN.2021 13:57:25

802.11n ht20 High Channel

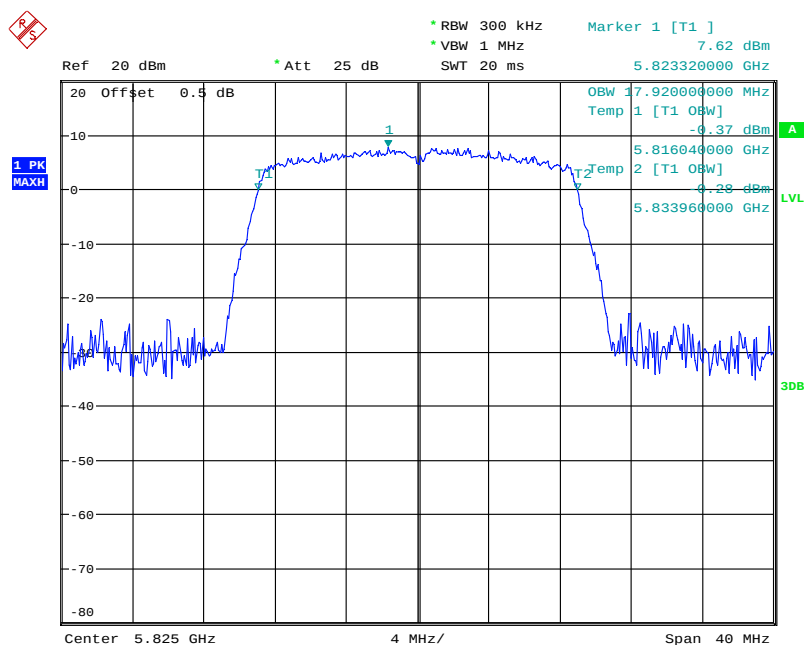


Date: 8.JAN.2021 14:00:32

802.11n ht40 Low Channel

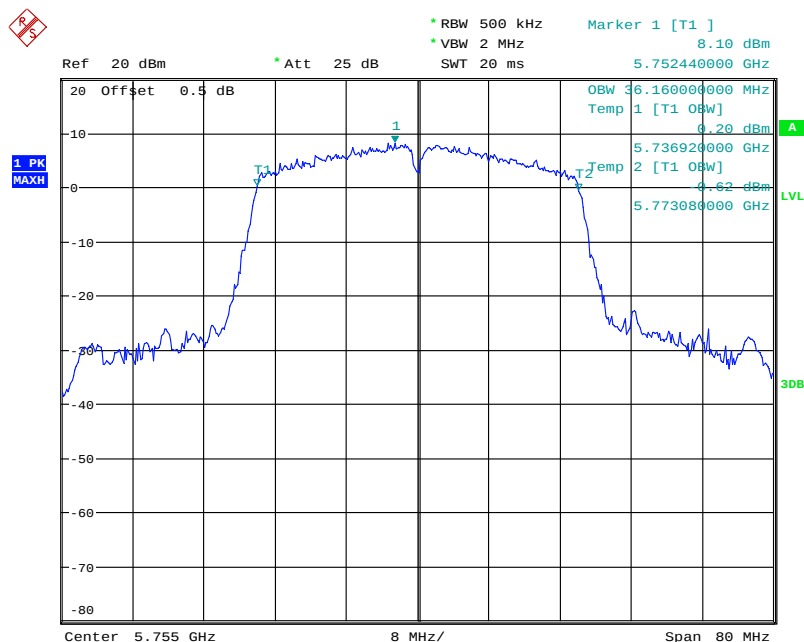


Date: 8.JAN.2021 14:07:23

802.11n ht40 High Channel

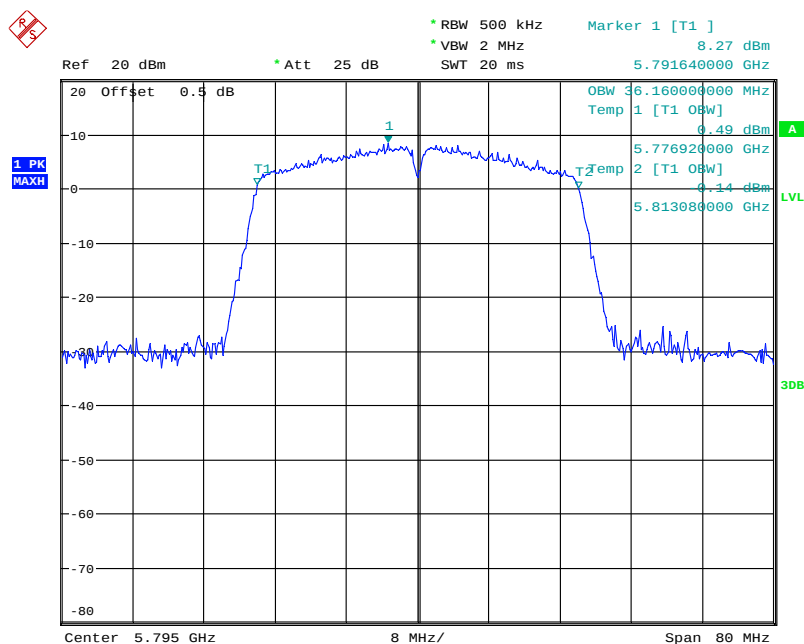


Date: 8.JAN.2021 14:09:00

802.11 ax20 Low Channel

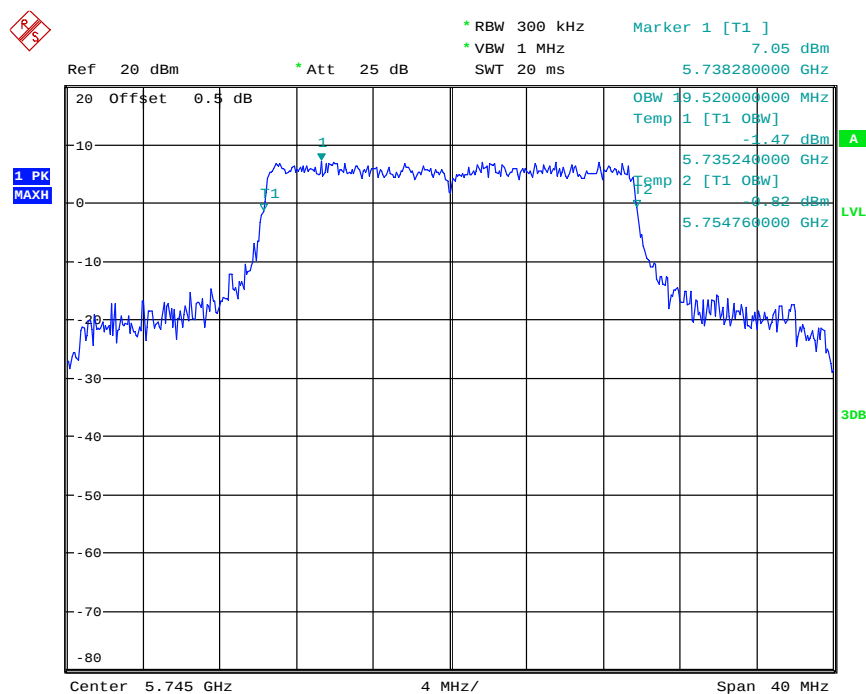


Date: 8.JAN.2021 14:31:18

802.11 ax20 Middle Channel

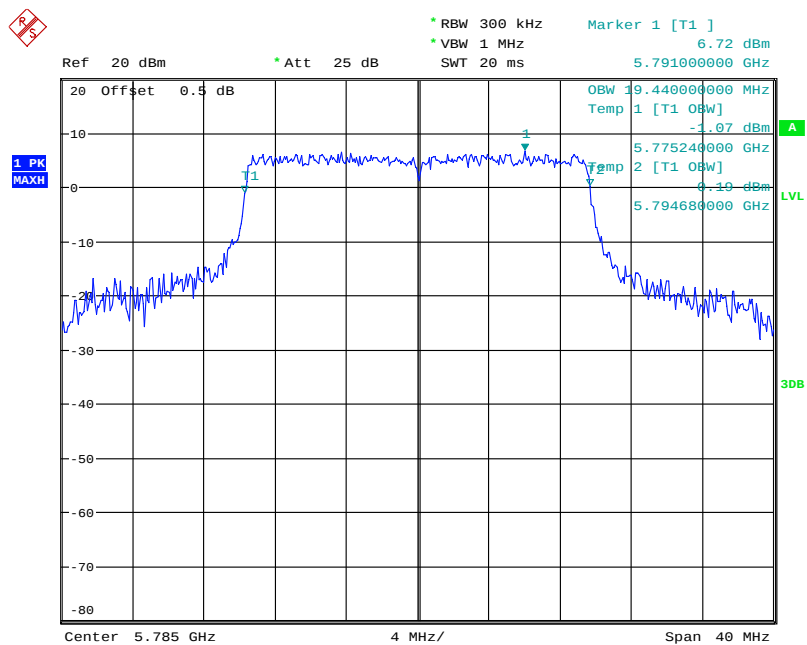


Date: 8.JAN.2021 14:43:01

802.11 ax20 High Channel

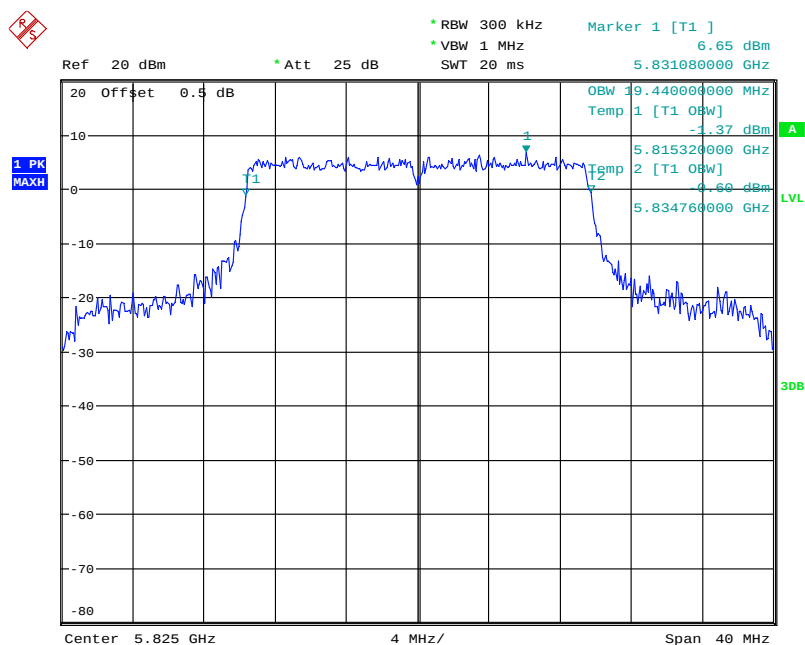


Date: 8.JAN.2021 14:45:28

802.11 ax40 Low Channel

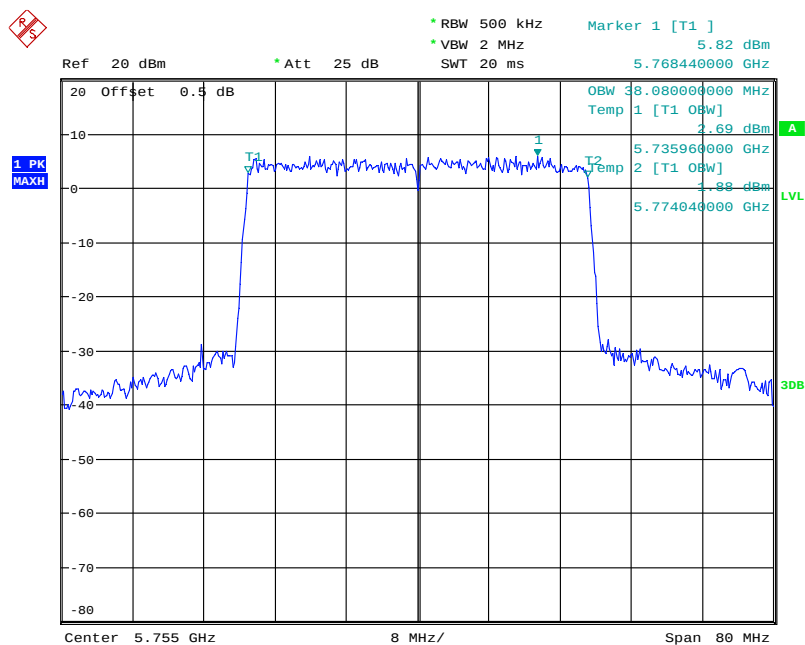


Date: 8.JAN.2021 14:51:20

802.11 ax40 High Channel

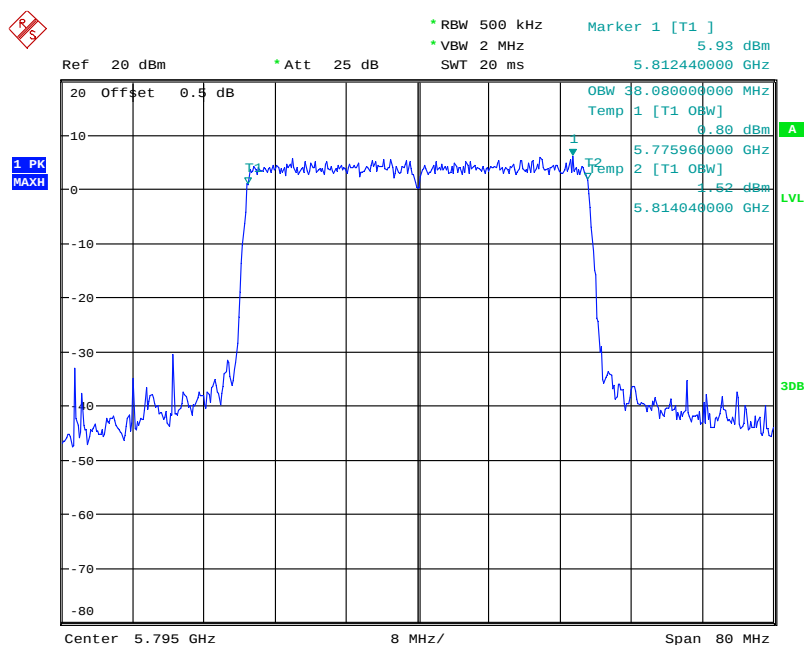


Date: 8.JAN.2021 14:52:53

802.11ac vht80 Middle Channel

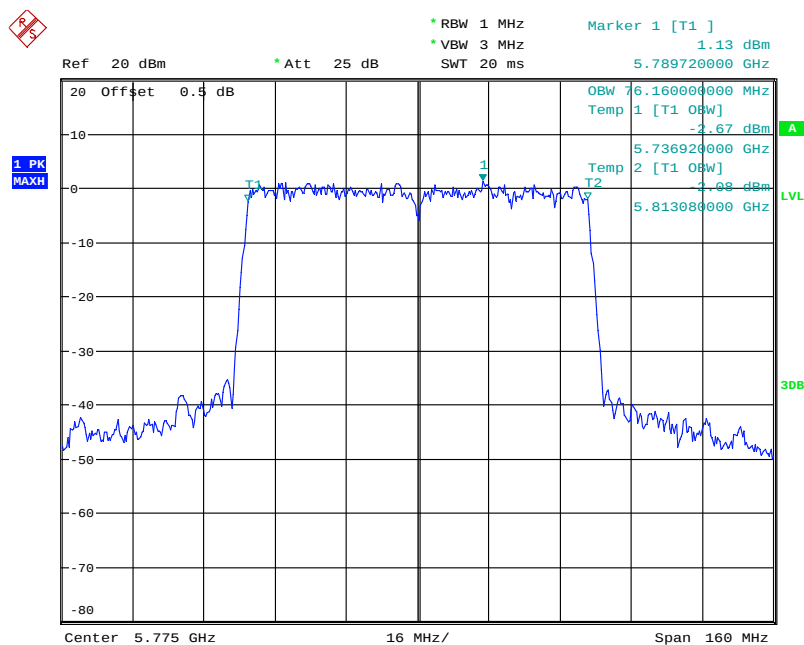

Date: 8.JAN.2021 14:17:33

802.11ax hew80 Middle Channel

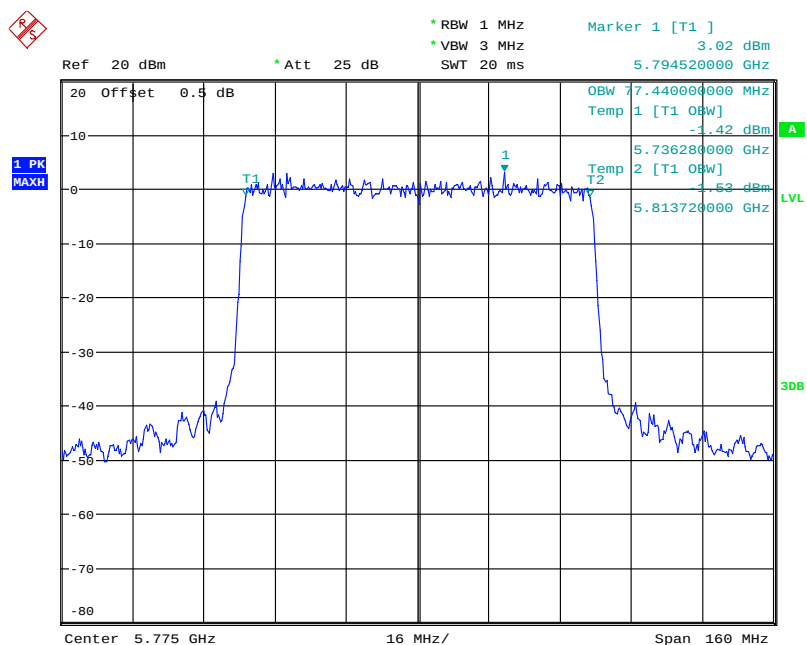

Date: 8.JAN.2021 14:55:11

FCC §15.407(a) –MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.407(a)

(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(4) The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
E-Microwave	Coaxial Attenuators	EMCA10-5RN-6	OE01203239	Each time	N/A
Agilent	USB Wideband Power Sensor	U2022XA	MY5417006	2020-09-12	2021-09-12

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Test Data

Environmental Conditions

Temperature:	16.7~23.7°C
Relative Humidity:	29 ~37%
ATM Pressure:	101.2~102.1 kPa
Tester:	Taylor Li,Bond qin
Test Date:	2021-01-04~2021-01-14

Test Mode: Transmitting

5150-5250MHz:

Mode	Frequency (MHz)	Conducted Average Output Power (dBm)			Limit (dBm)
		Chain 0	Chain 1	Total	
802.11 a	5180	16.38	16.04	/	30
	5200	17.47	15.83	/	30
	5240	17.85	15.64	/	30
802.11n ht20	5180	14.62	13.74	17.21	30
	5200	14.71	13.94	17.35	30
	5240	14.78	14.07	17.45	30
802.11n ht40	5190	13.92	13.95	16.95	30
	5230	14.77	14.21	17.51	30
	5180	11.8	11.74	14.78	30
802.11ax hew20	5200	12.01	11.83	14.93	30
	5240	12.32	11.89	15.12	30
802.11ax hew40	5190	11.86	11.78	14.83	30
	5230	11.91	11.88	14.91	30
802.11ac vht80	5210	8.41	8.29	11.36	30
802.11ax hew80	5210	10.53	10.48	13.52	30

5725-5850 MHz:

Mode	Frequency (MHz)	Conducted Average Output Power (dBm)			Limit (dBm)
		Chain 0	Chain 1	Total	
802.11 a	5745	18.36	19.78	/	30
	5785	18.29	17.9	/	30
	5825	17.76	17.5	/	30
802.11n ht20	5745	18.46	18.06	21.27	30
	5785	17.75	17.7	20.74	30
	5825	17.77	17.68	20.74	30
802.11n ht40	5755	18.52	18.45	18.45	30
	5795	18.48	18.36	21.43	30
	5745	19.77	19.44	22.62	30
802.11ax hew20	5785	18.41	18.08	21.26	30
	5825	18.37	18.12	21.26	30
802.11ax hew40	5755	12.65	12.97	15.82	30
	5795	12.69	12.58	15.65	30
802.11ac vht80	5775	9.64	9.23	12.45	30
802.11ax hew80	5775	10.82	10.79	13.82	30

Note:

The device is an indoor Router.

The duty cycle factor has been calculated into the test data.

The maximum antenna gain is 5 dBi. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4;

So:

Directional gain = GANT + Array Gain = 5 dBi

FCC §15.407(a) - POWER SPECTRAL DENSITY

Applicable Standard

According to FCC §15.407(a)

(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm $10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output

power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2020-07-07	2021-07-07
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	16.7~24.2°C
Relative Humidity:	29 ~51%
ATM Pressure:	101.2~102.1 kPa
Tester:	Taylor Li,Bond qin
Test Date:	2021-01-04~2021-01-26

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plot.

5150-5250MHz

Mode	Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)			Limit (dBm/MHz)
		Chain 0	Chain 1	Total	
802.11a	5180	8.01	6.23	/	17
	5200	8.55	8.44	/	17
	5240	8.76	7.68	/	17
802.11n ht20	5180	6.29	6.33	9.32	15
	5200	6.35	6.53	9.45	15
	5240	6.87	5.90	9.42	15
802.11n ht40	5190	4.32	2.53	6.53	15
	5230	4.38	3.61	7.02	15
802.11ax hew20	5180	3.55	2.94	6.27	15
	5200	4.01	3.63	6.83	15
	5240	3.32	3.41	6.38	15
802.11ax hew40	5190	0.06	-1.05	2.55	15
	5230	0.35	0.2	3.29	15
802.11ac vht80	5210	2.76	2.75	5.77	15
802.11ax hew80	5210	-2.72	-3.7	-0.17	15

5725-5850 MHz:

Mode	Frequency (MHz)	Maximum Power Spectral Density (dBm/500kHz)			Limit (dBm/500kHz)
		Chain 0	Chain 1	Total	
802.11a	5745	6.37	5.41	/	30
	5785	6.43	7.45	/	30
	5825	4.48	4.98	/	30
802.11n ht20	5745	3.89	4.11	7.01	28
	5785	3.82	3.89	6.87	28
	5825	3.16	3.82	6.51	28
802.11n ht40	5755	1.60	1.84	4.73	28
	5795	1.38	1.40	4.40	28
802.11ax hew20	5745	2.58	2.44	5.52	28
	5785	2.29	2.94	5.64	28
	5825	3.08	1.21	5.26	28
802.11ax hew40	5755	-1.87	-1.57	1.29	28
	5795	-2.49	-1.79	0.11	28
802.11ac vht80	5775	-9.56	-9.41	-6.47	28
802.11ax hew80	5775	-8.47	-8.96	-5.7	28

Note:

The maximum antenna gain is 5dBi. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:

$$\text{Array Gain} = 10 \log(\text{NANT}/\text{NSS}) \text{ dB.}$$

So:


$$\text{Directional gain} = \text{GANT} + \text{Array Gain} = 5\text{dBi} + 10 \cdot \log(2/1) = 8 \text{ dBi}$$

For 5.8GHz band, If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.

Method SA-3 in KDB 789033 D02 General UNII Test Procedures New Rules v02r01 was used for PSD test.


5150-5250MHz
Chain 0

802.11a Low Channel

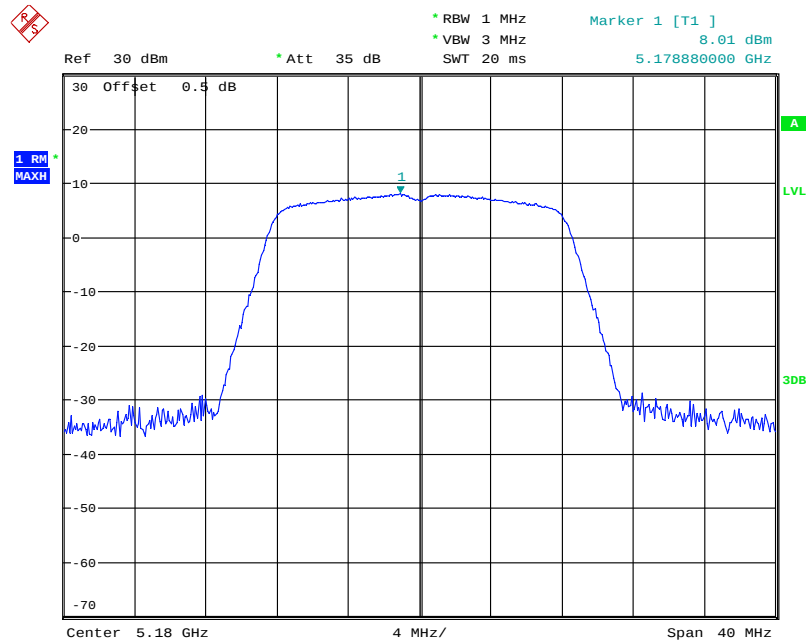


Date: 14.JAN.2021 11:29:33

802.11a Middle Channel

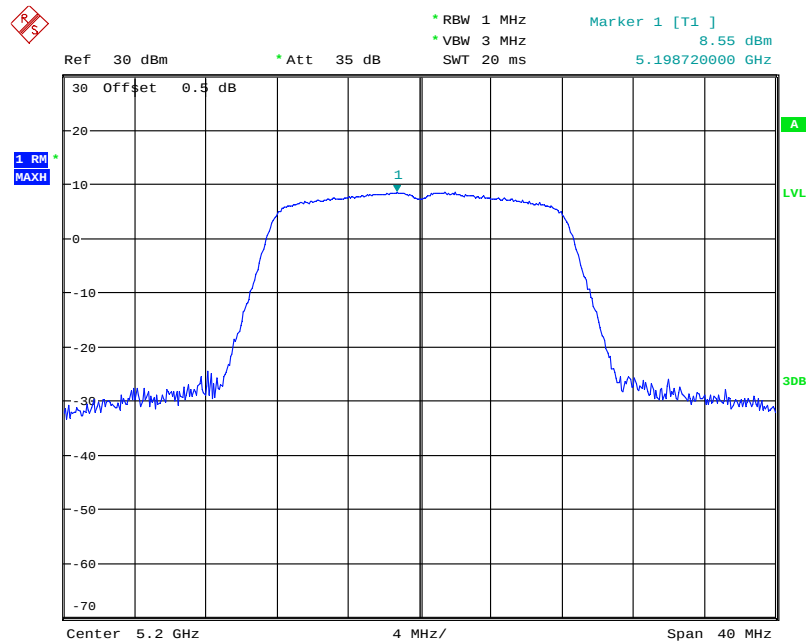


Date: 14.JAN.2021 13:35:57

802.11a High Channel

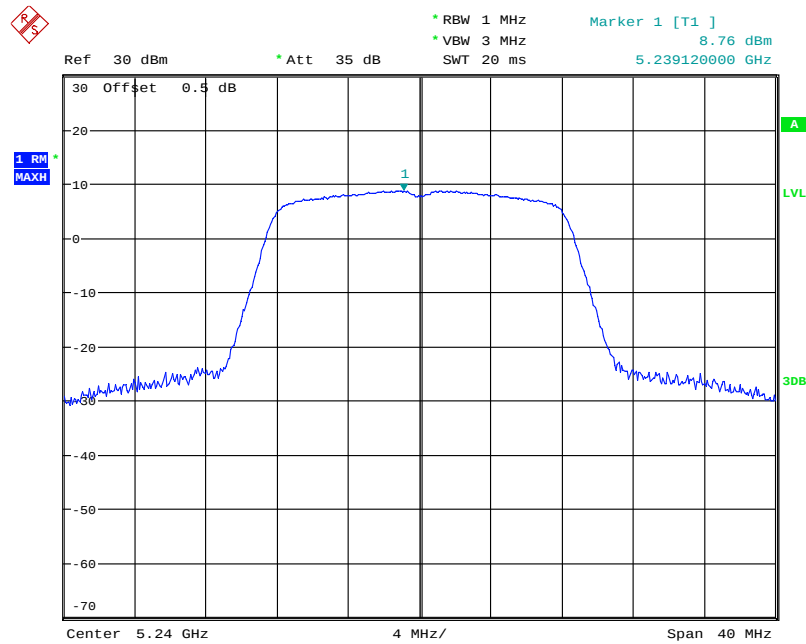


Date: 14.JAN.2021 13:37:39

802.11n ht20 Low Channel

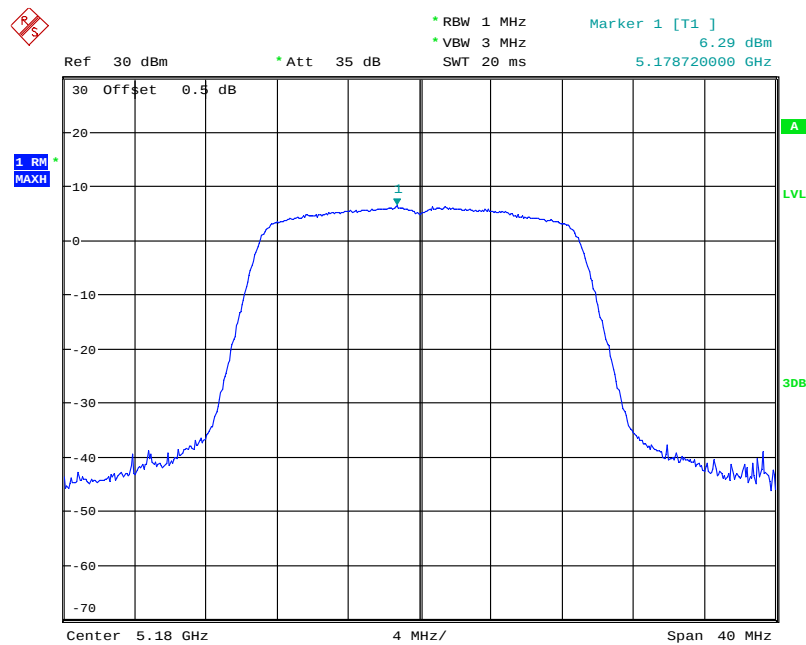


Date: 14.JAN.2021 13:40:31

802.11n ht20 Middle Channel

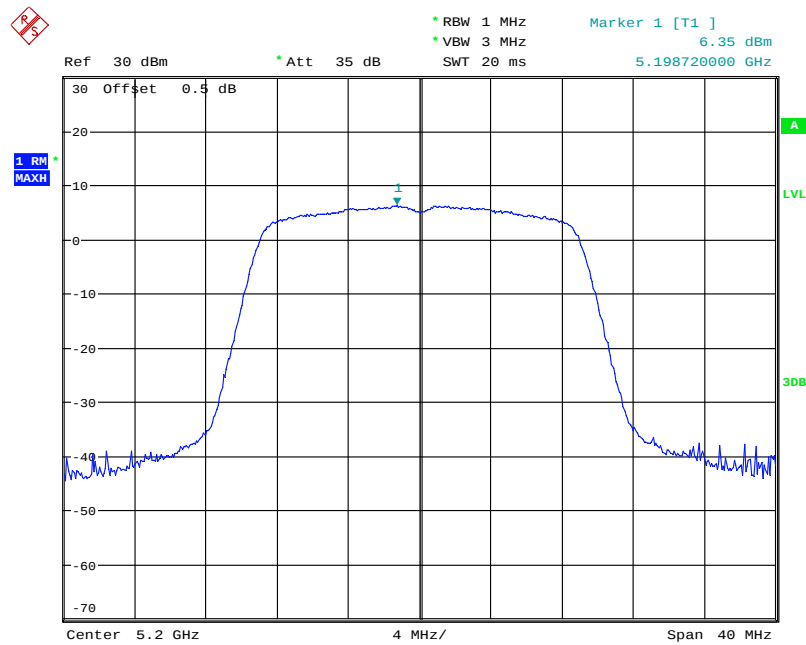


Date: 14.JAN.2021 13:42:03

802.11n ht20 High Channel

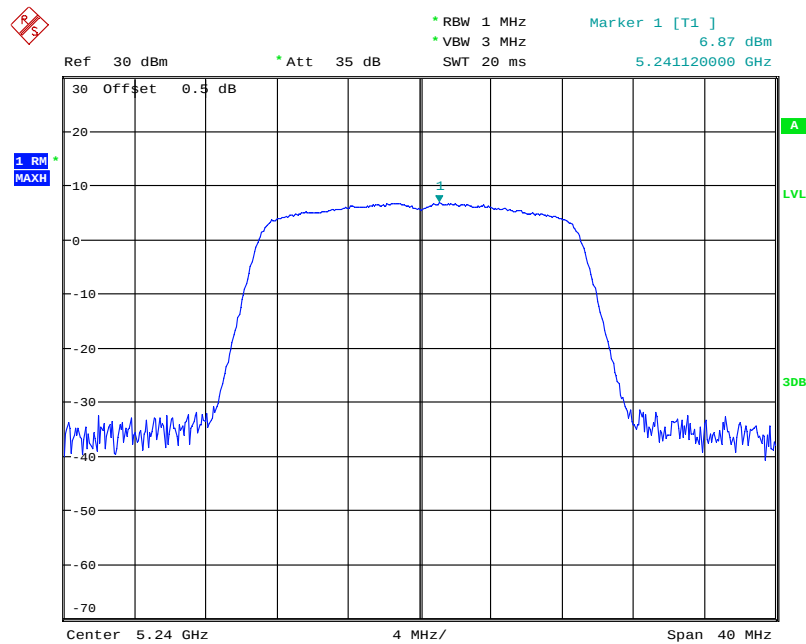


Date: 14.JAN.2021 13:43:37

802.11n ht40 Low Channel

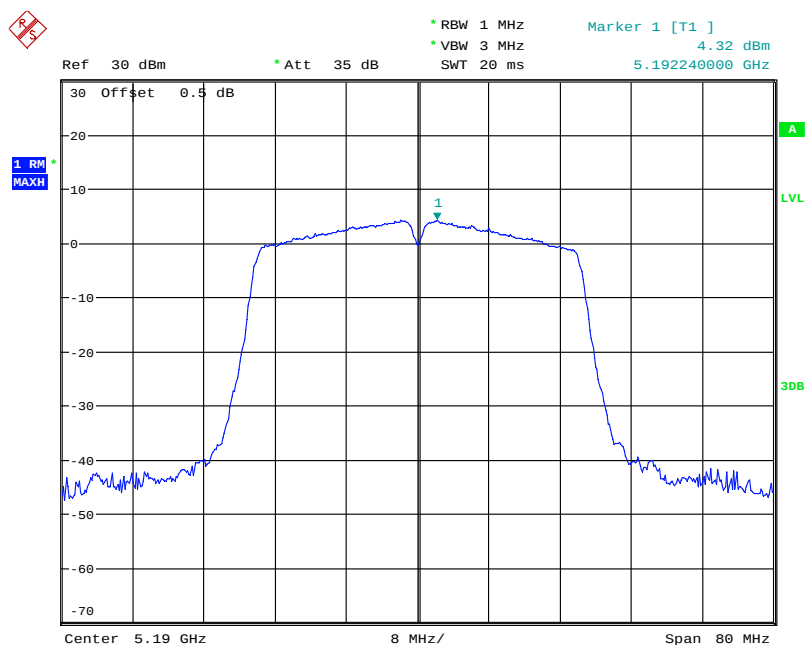


Date: 14.JAN.2021 11:52:00

802.11n ht40 High Channel

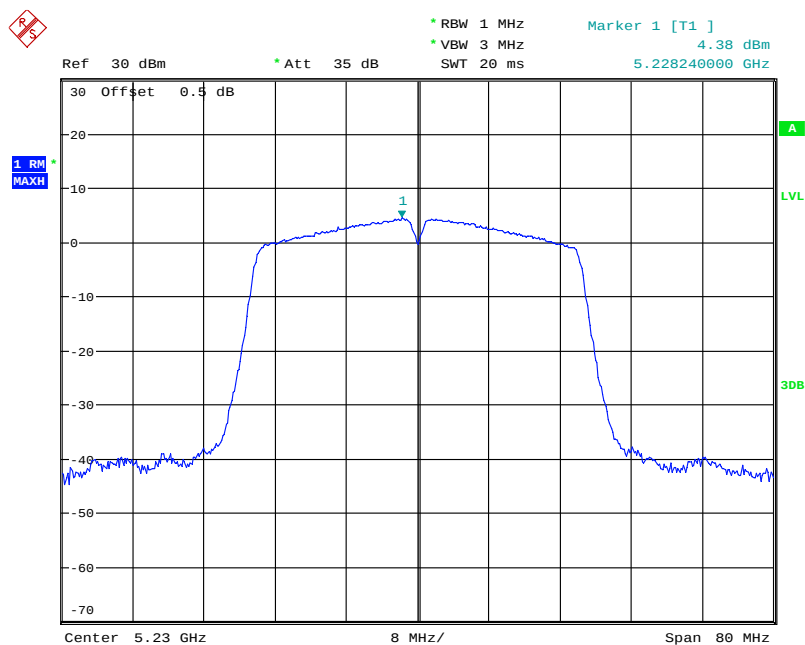


Date: 14.JAN.2021 13:45:35

802.11n ax20 Low Channel

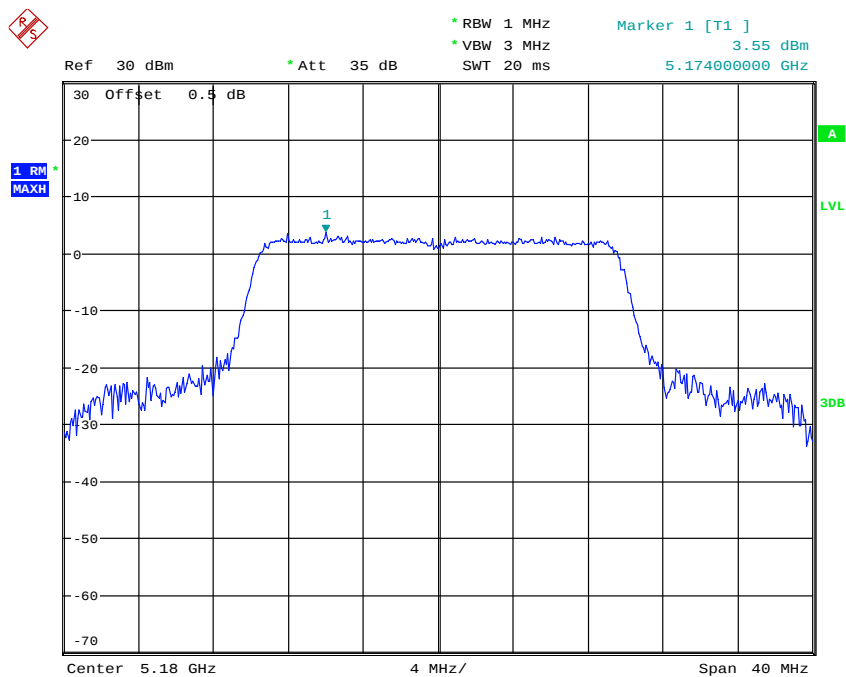


Date: 14.JAN.2021 14:40:34

802.11n ax20 Middle Channel

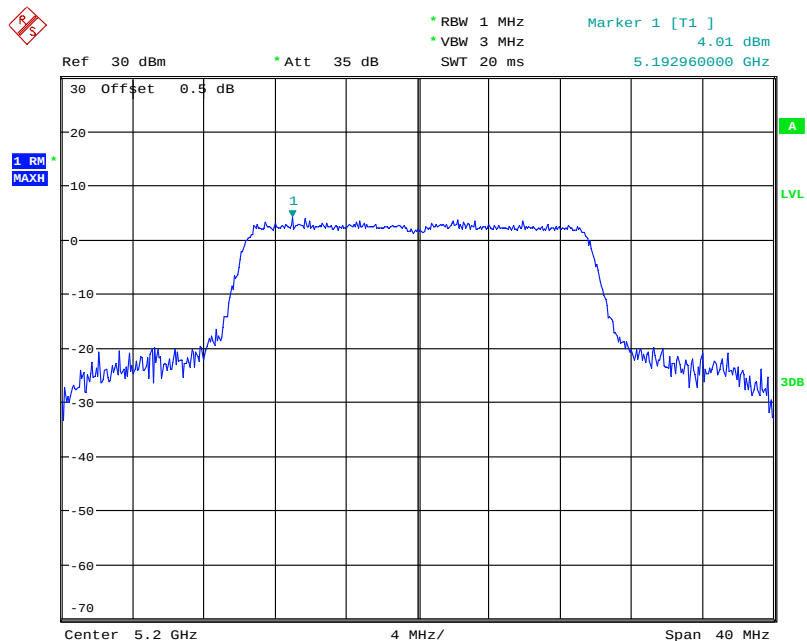


Date: 14.JAN.2021 14:57:42

802.11n ax20 High Channel

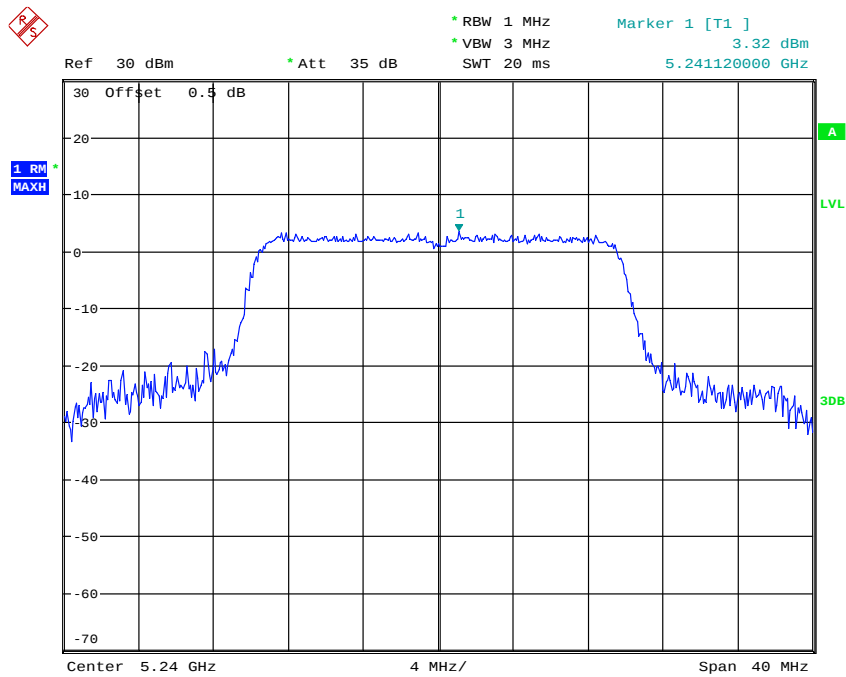


Date: 14.JAN.2021 15:19:54

802.11n ax40 Low Channel

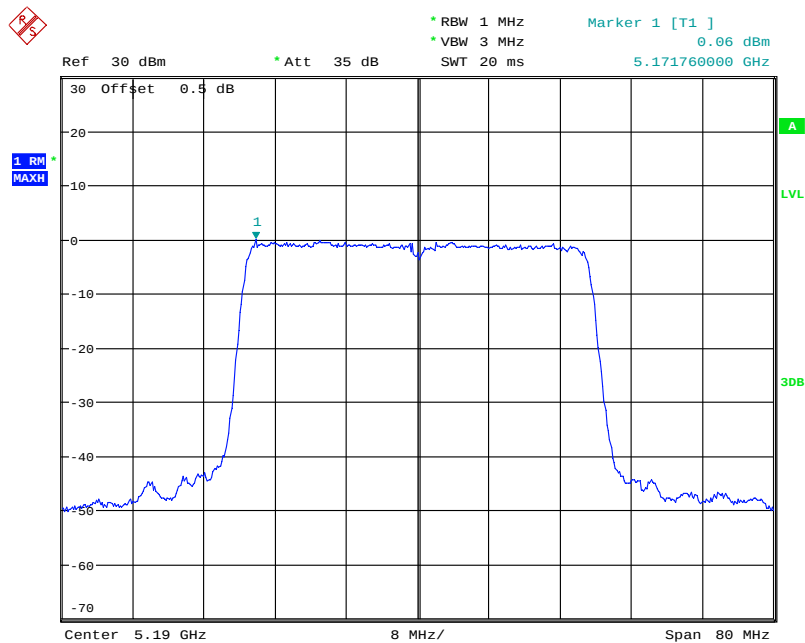


Date: 14.JAN.2021 15:24:39

802.11n ax40 High Channel

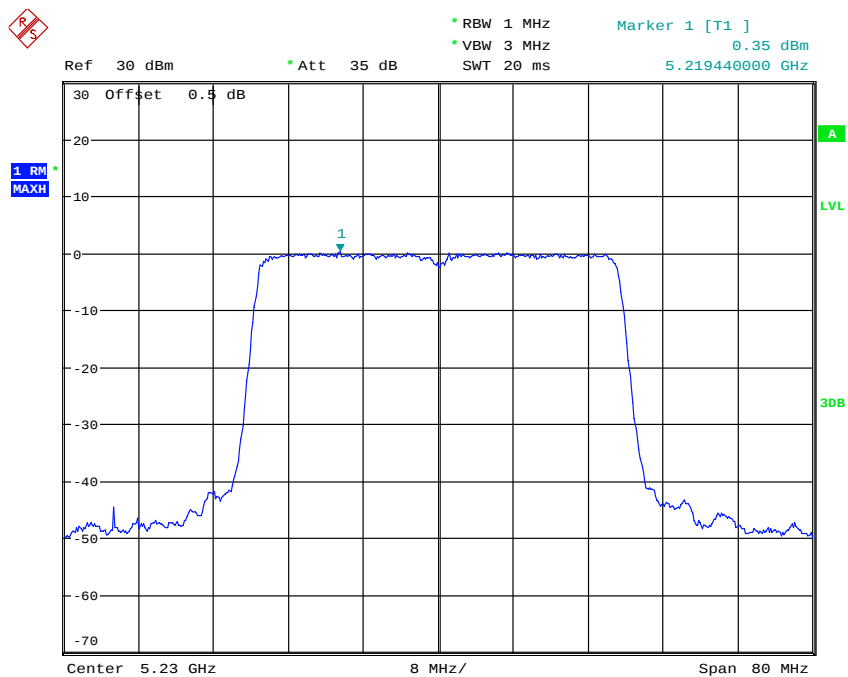


Date: 14.JAN.2021 13:49:16

802.11ac vht80 Middle Channel

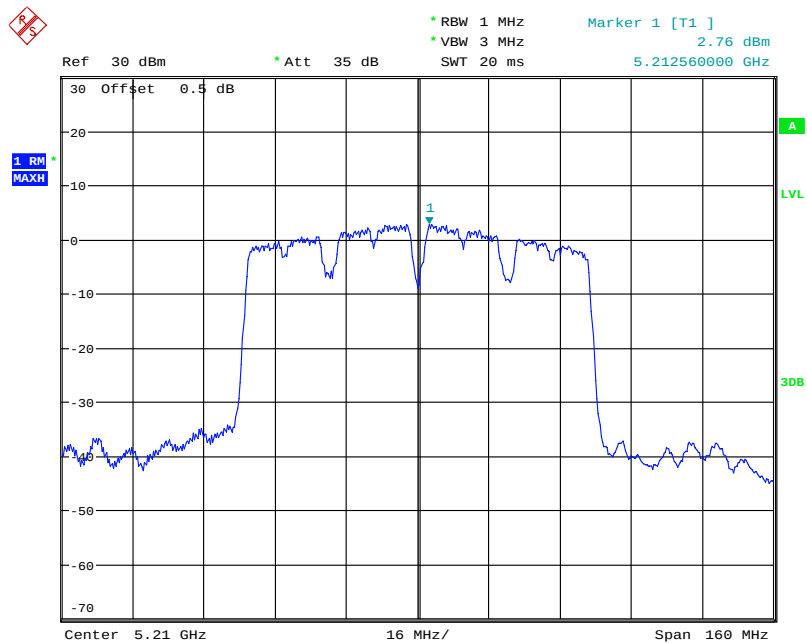

Date: 14.JAN.2021 14:16:13


802.11ax hew80 Middle Channel

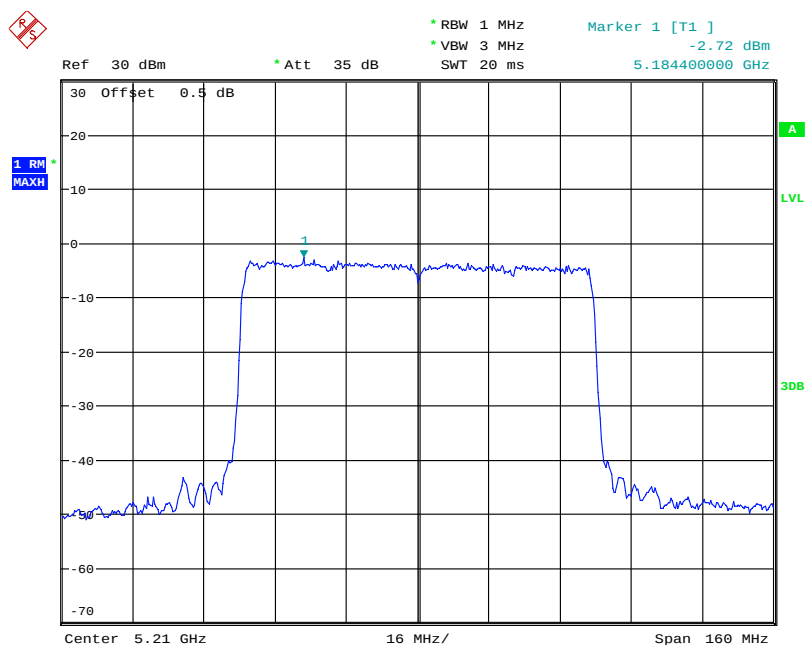

Date: 14.JAN.2021 15:40:20


Chain 1

802.11a Low Channel

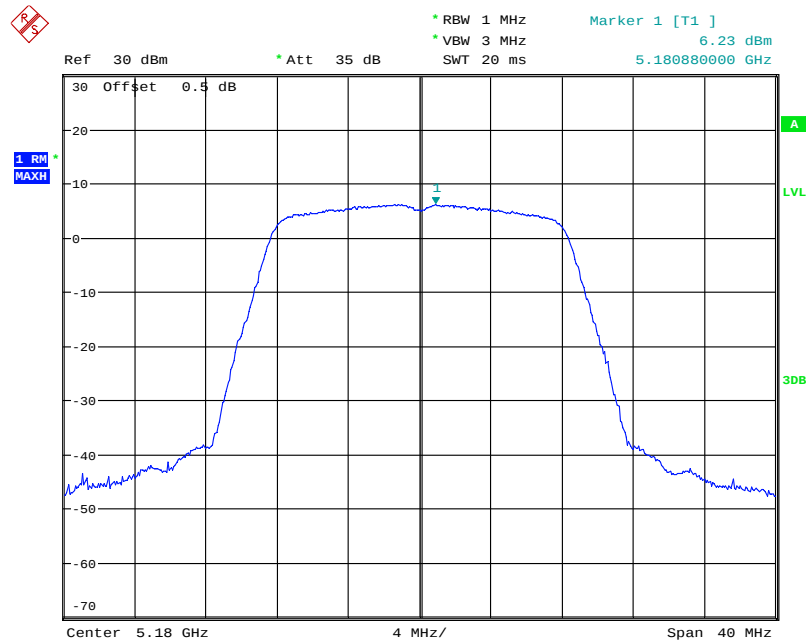


Date: 14.JAN.2021 14:32:28

802.11a Middle Channel

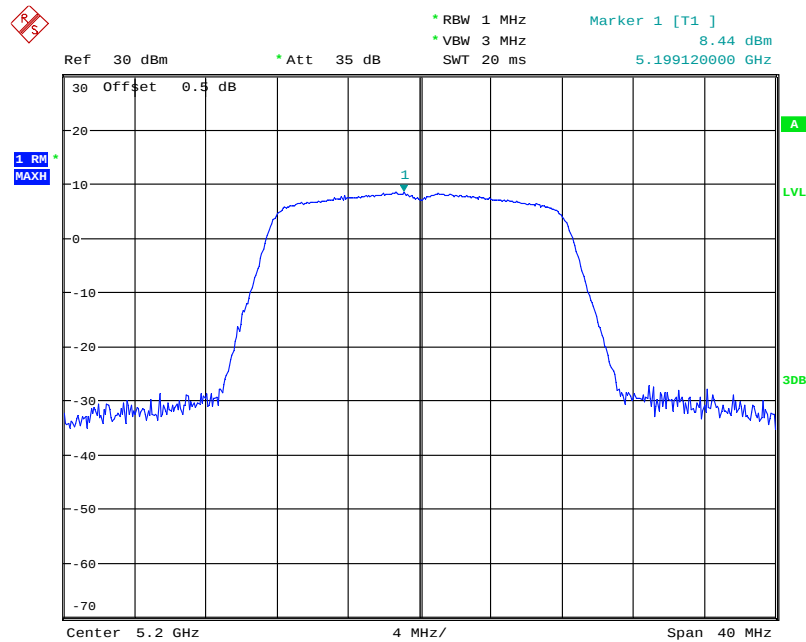


Date: 14.JAN.2021 14:33:47

802.11a High Channel

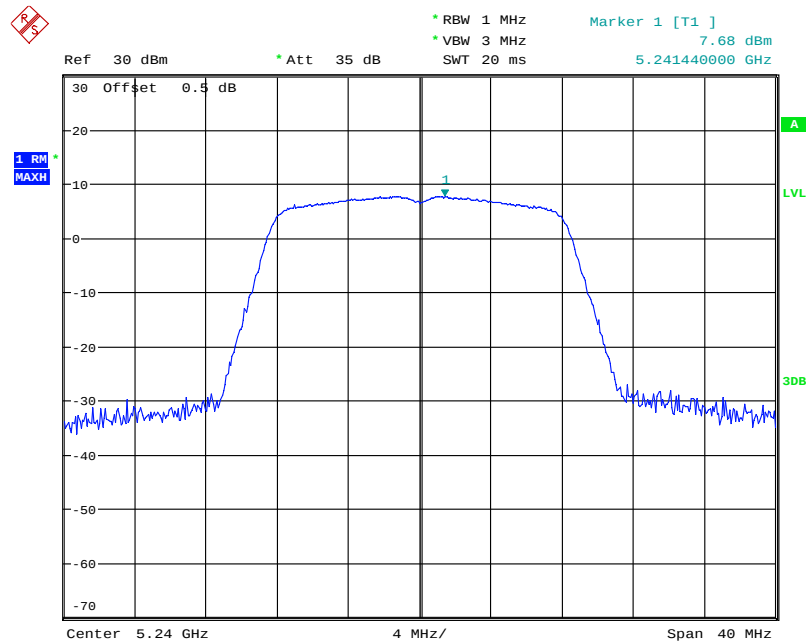


Date: 14.JAN.2021 14:31:00

802.11n ht20 Low Channel

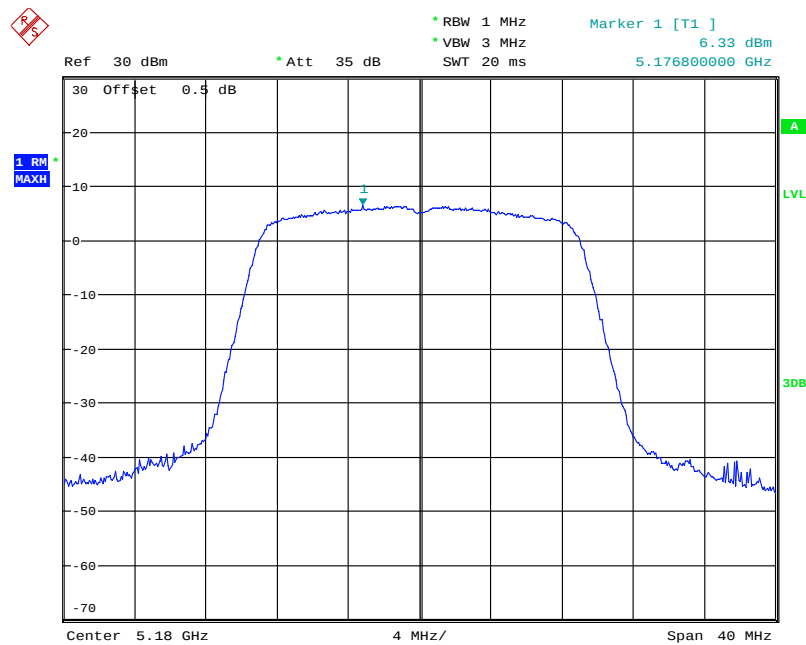


Date: 14.JAN.2021 14:35:23

802.11n ht20 Middle Channel

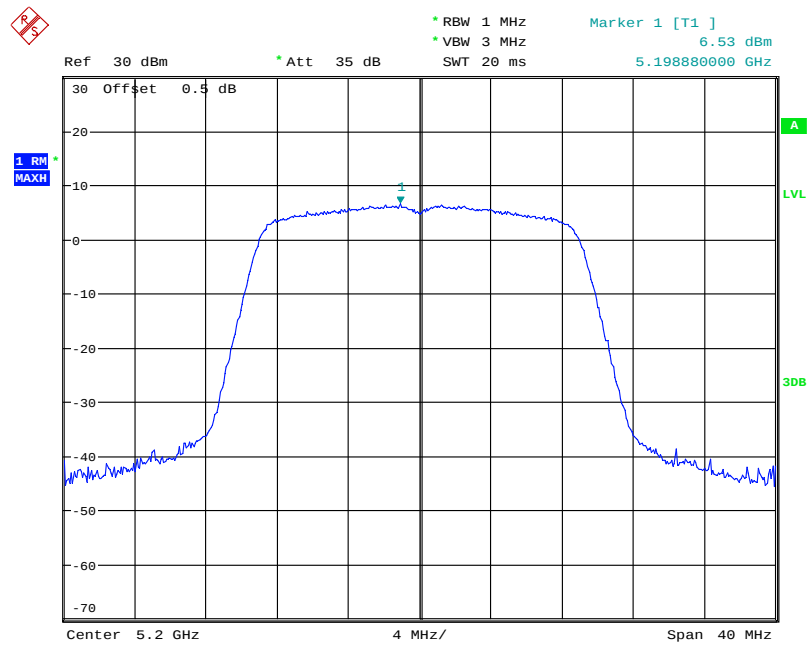


Date: 14.JAN.2021 14:37:05

802.11n ht20 High Channel

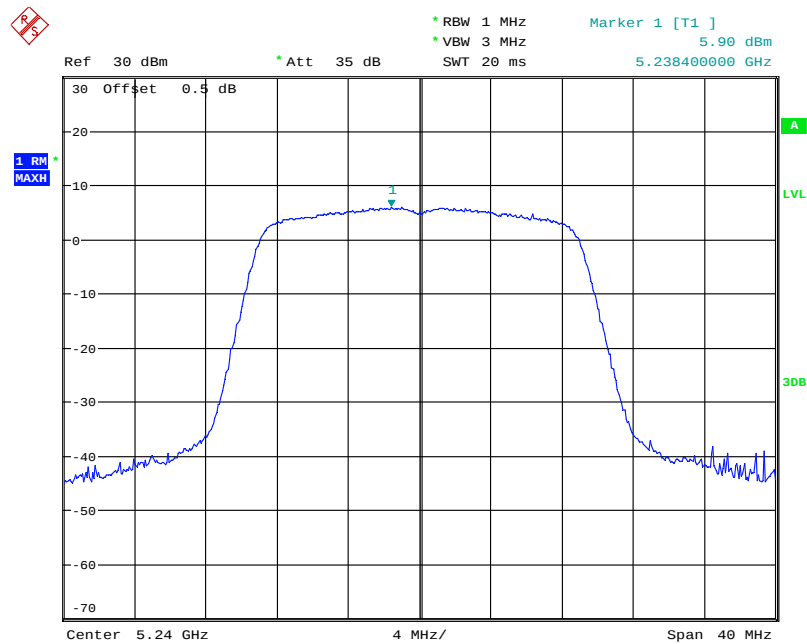


Date: 14.JAN.2021 14:38:15

802.11n ht40 Low Channel

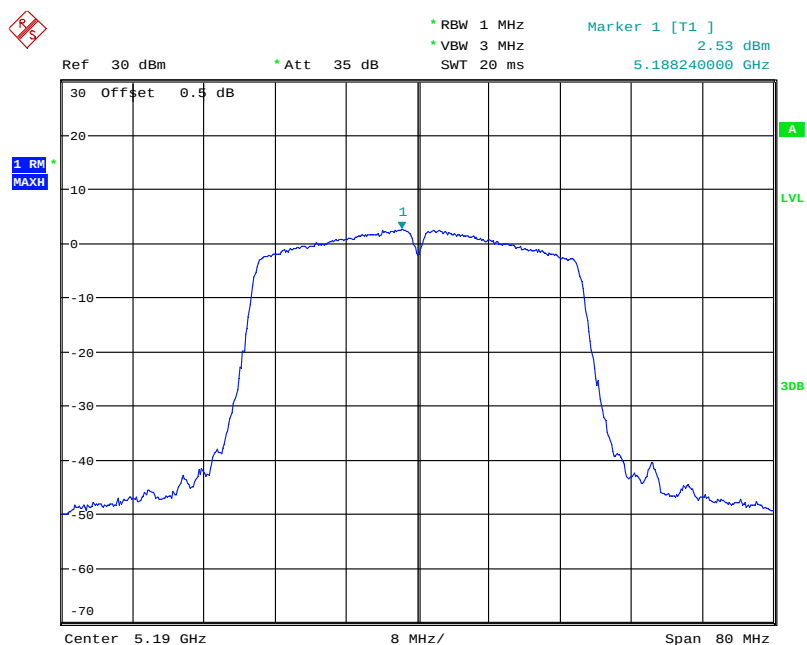


Date: 14.JAN.2021 15:21:36

802.11n ht40 High Channel

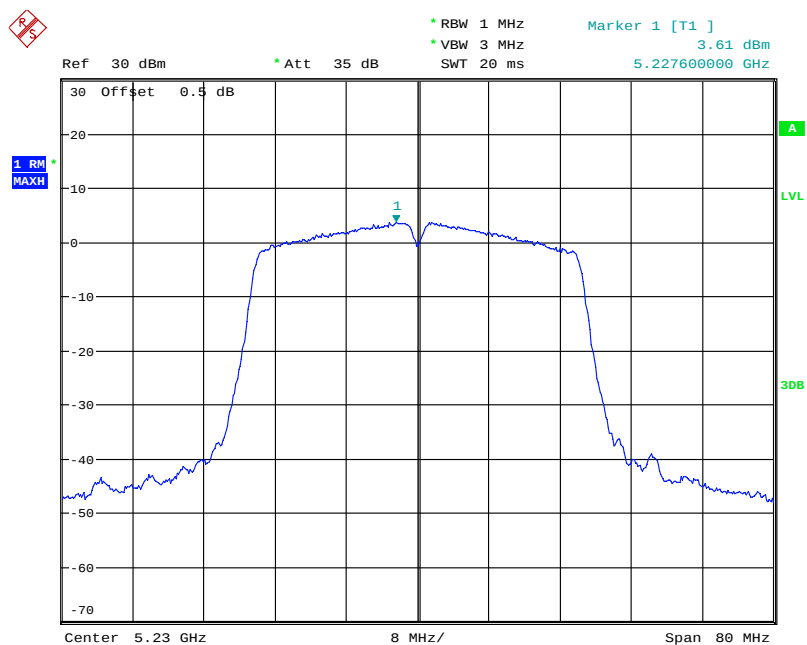


Date: 14.JAN.2021 15:22:46

802.11 ax20 Low Channel

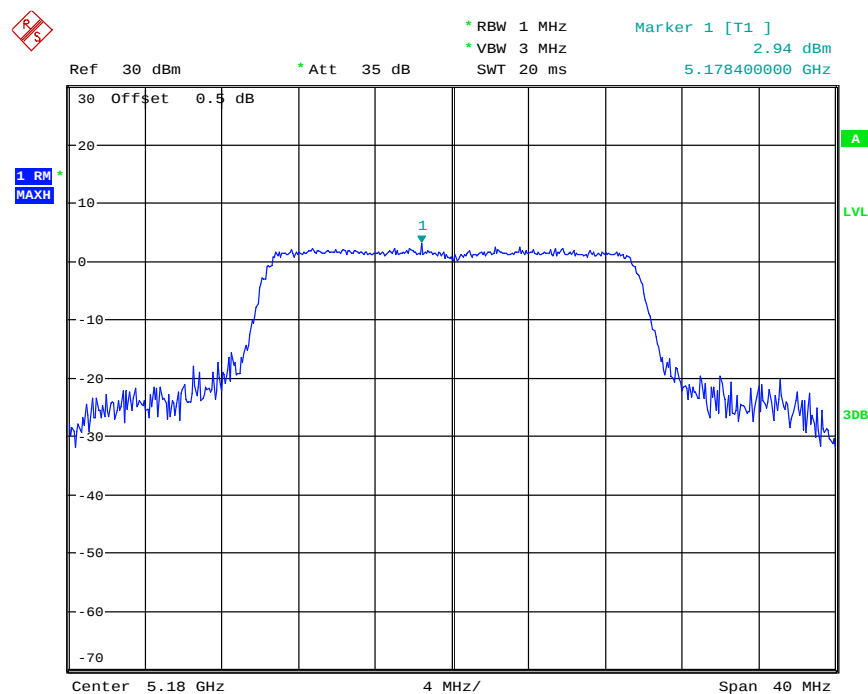


Date: 14.JAN.2021 13:19:11

802.11 ax20 Middle Channel

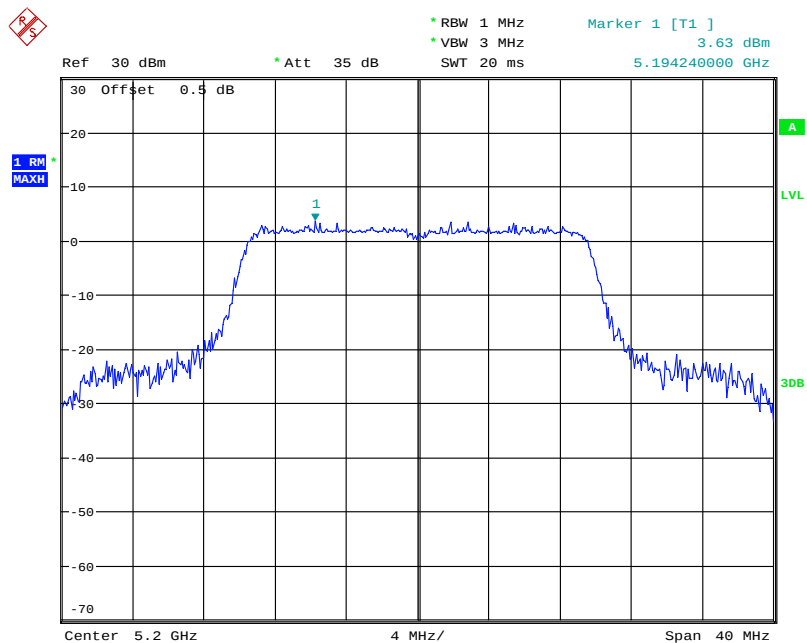


Date: 14.JAN.2021 13:20:57

802.11 ax20 High Channel

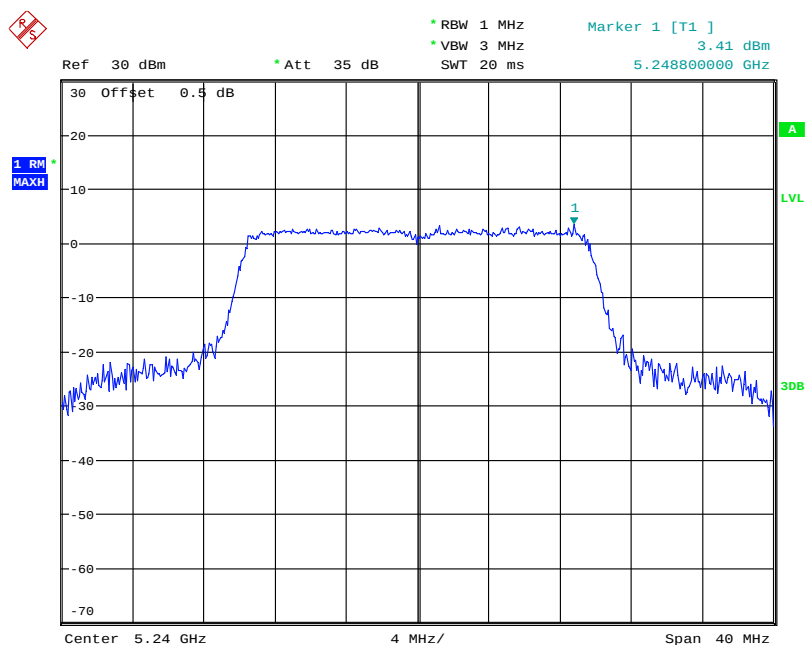


Date: 14.JAN.2021 13:22:22

802.11 ax40 LowChannel

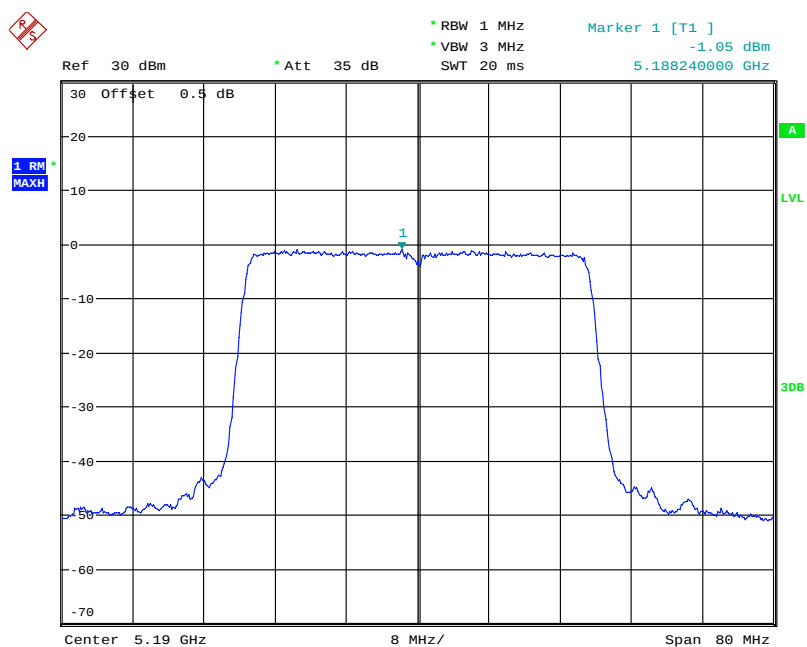


Date: 14.JAN.2021 13:48:01

802.11 ax40 High Channel

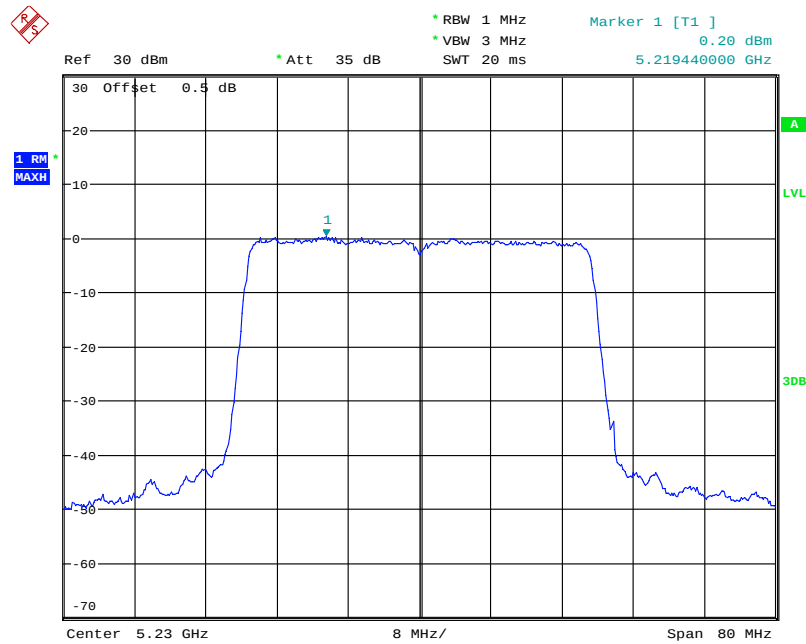


Date: 14.JAN.2021 15:26:00

802.11ac vht80 Middle Channel

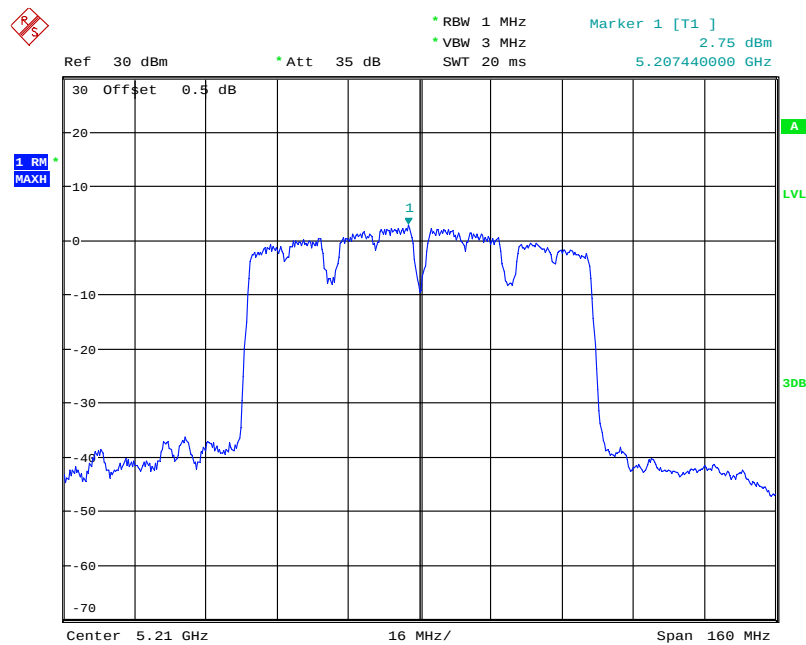

Date: 14.JAN.2021 15:31:02


802.11ax hew80 Middle Channel

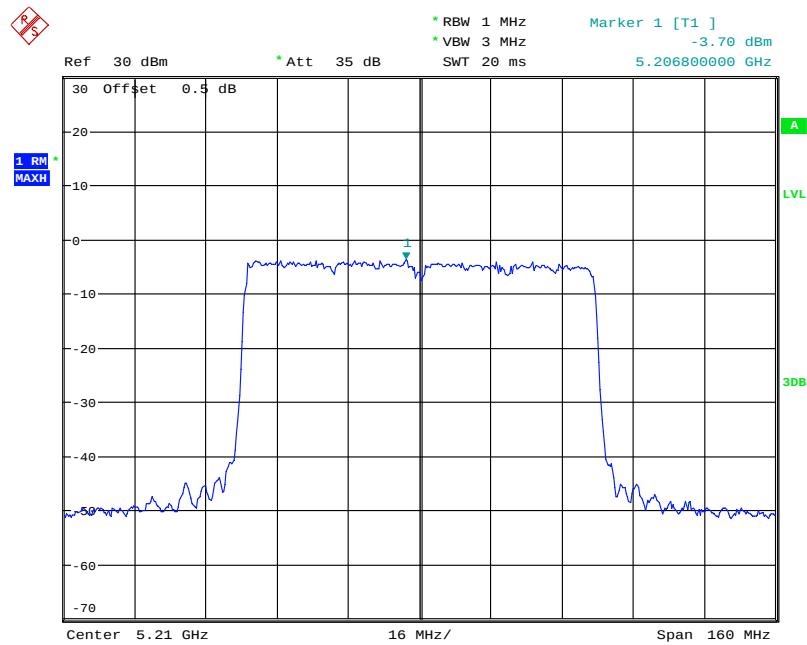

Date: 14.JAN.2021 13:51:12


5725-5850MHz
Chain 0

802.11a Low Channel

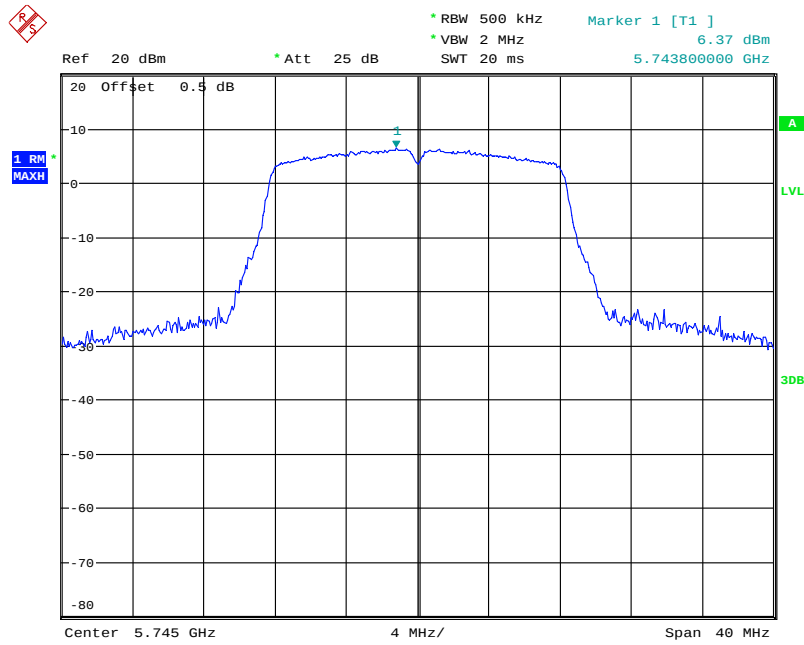


Date: 8.JAN.2021 13:36:19

802.11a Middle Channel

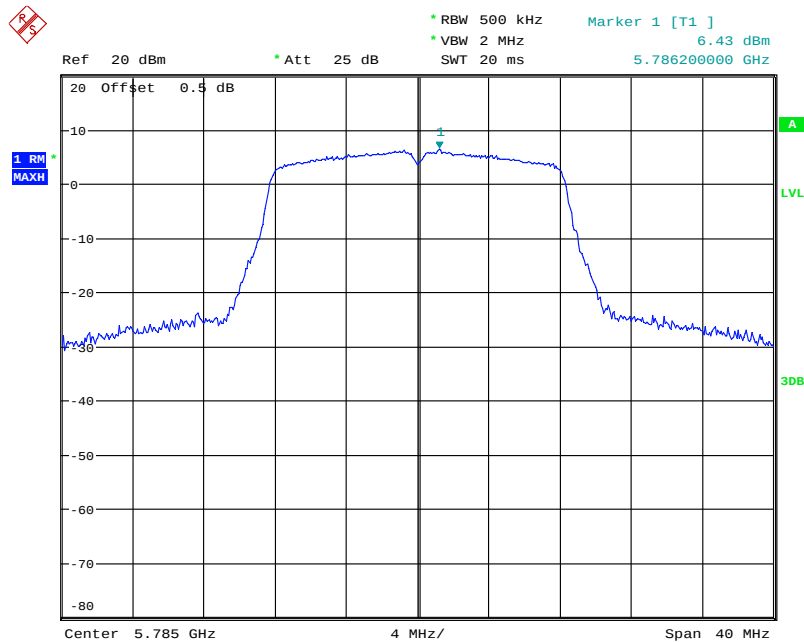


Date: 8.JAN.2021 13:38:34

802.11a High Channel

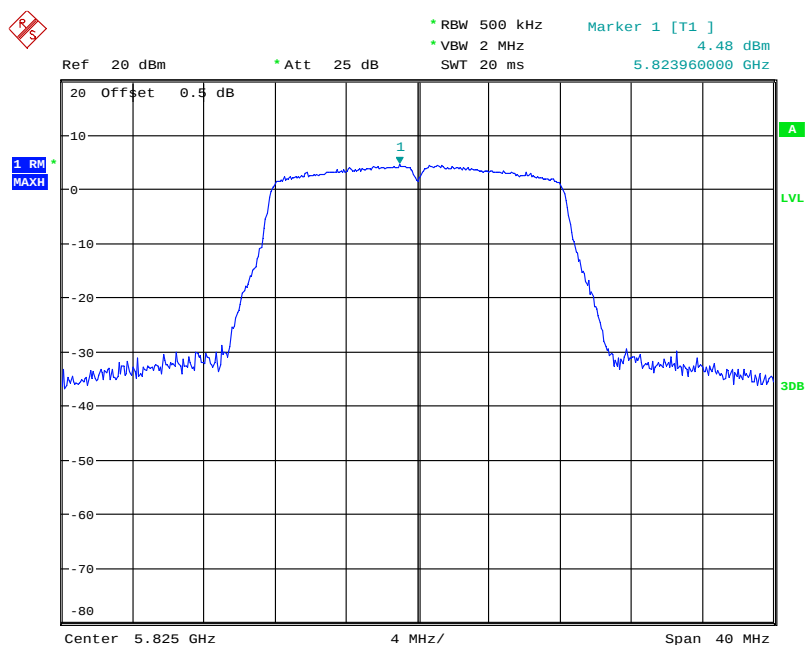


Date: 8.JAN.2021 13:40:49

802.11n ht20 Low Channel

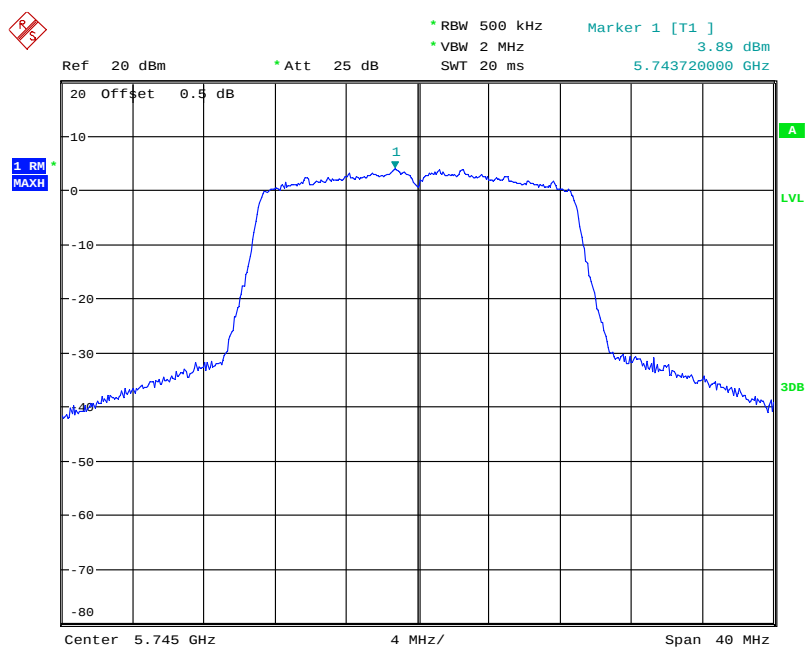


Date: 8.JAN.2021 13:52:32

802.11n ht20 Middle Channel

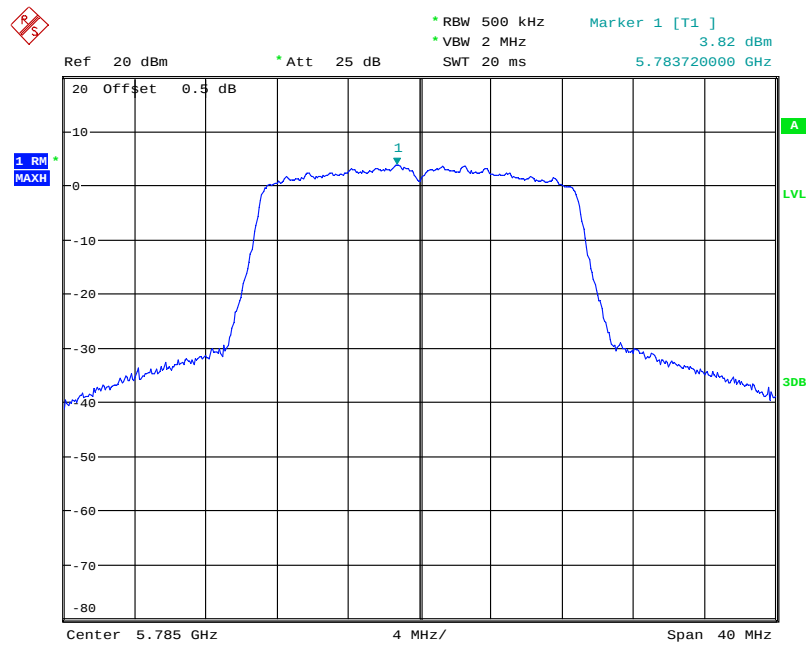


Date: 8.JAN.2021 13:58:23

802.11n ht20 High Channel

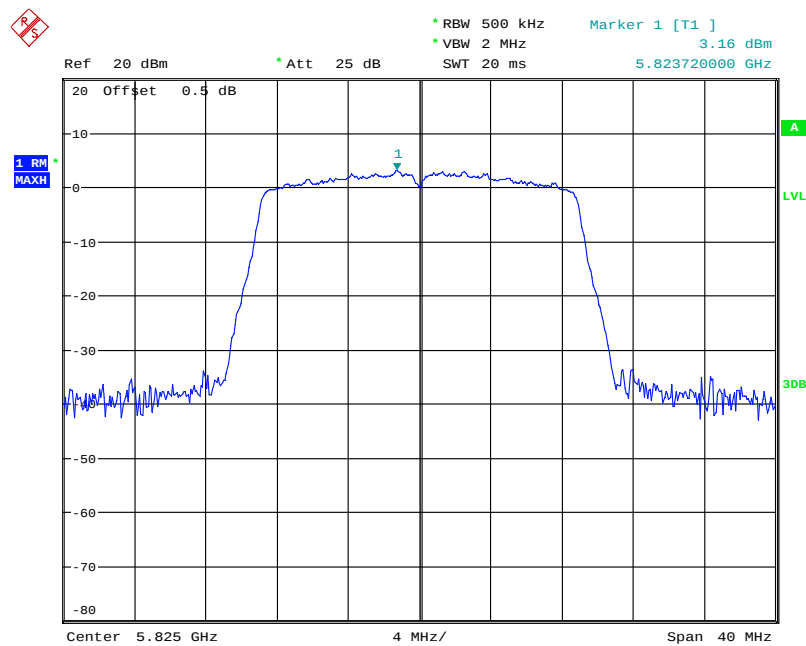


Date: 8.JAN.2021 14:01:52

802.11n ht40 Low Channel

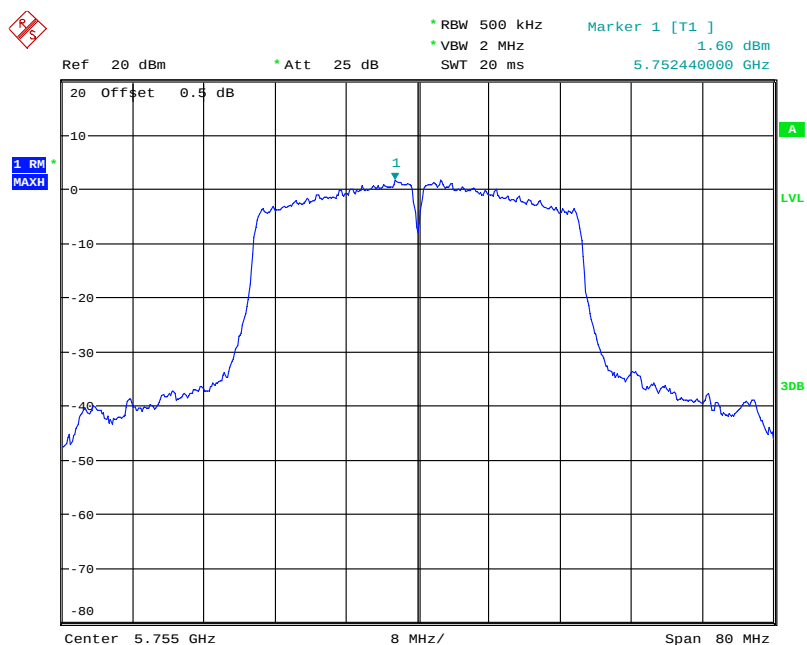


Date: 8.JAN.2021 14:08:00

802.11n ht40 High Channel

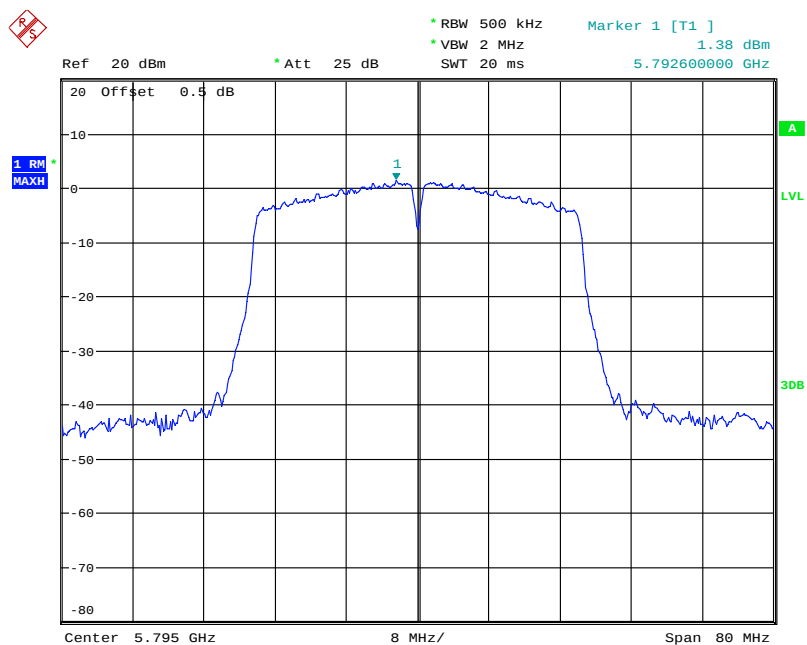


Date: 8.JAN.2021 14:09:41

802.11n ax20 Low Channel

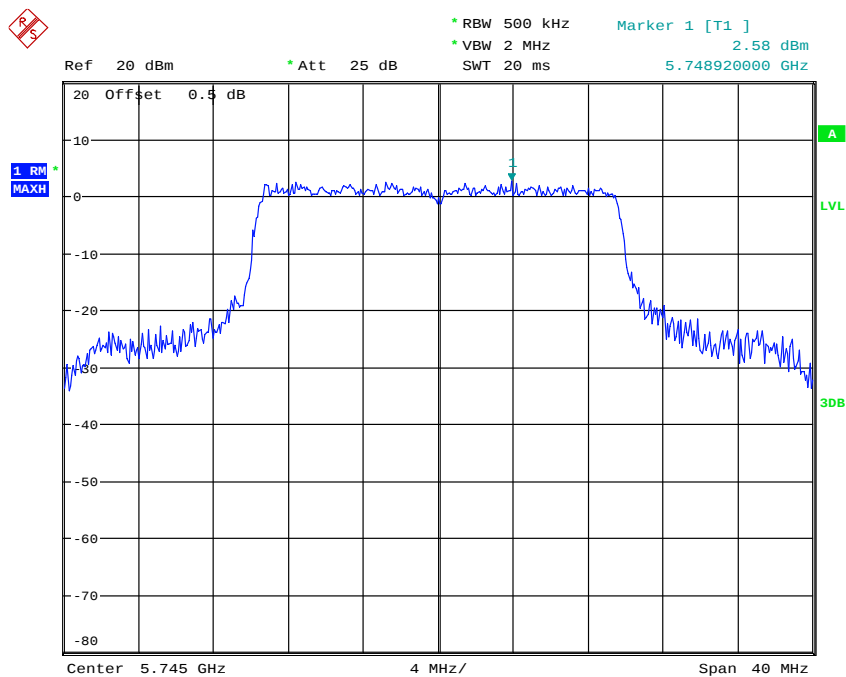


Date: 8.JAN.2021 14:32:09

802.11n ax20 Middle Channel

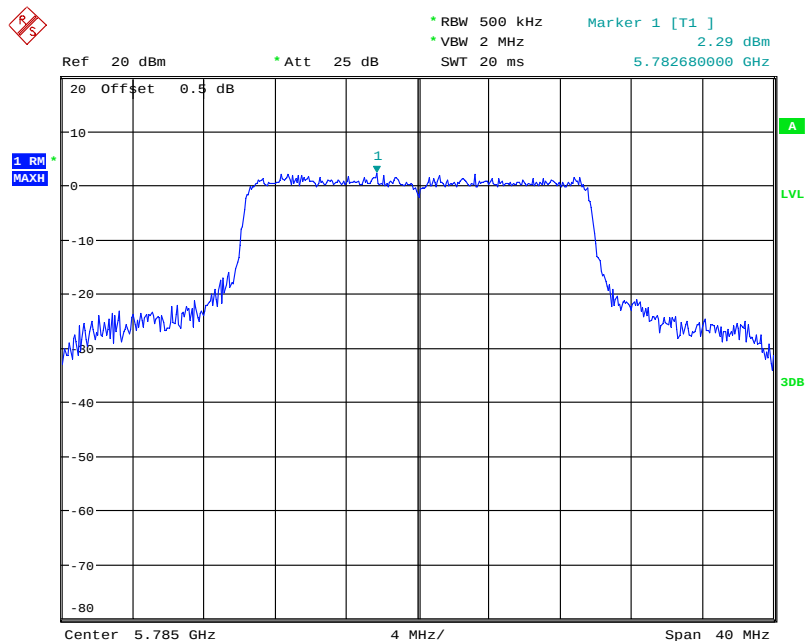


Date: 8.JAN.2021 14:44:23

802.11n ax20 High Channel

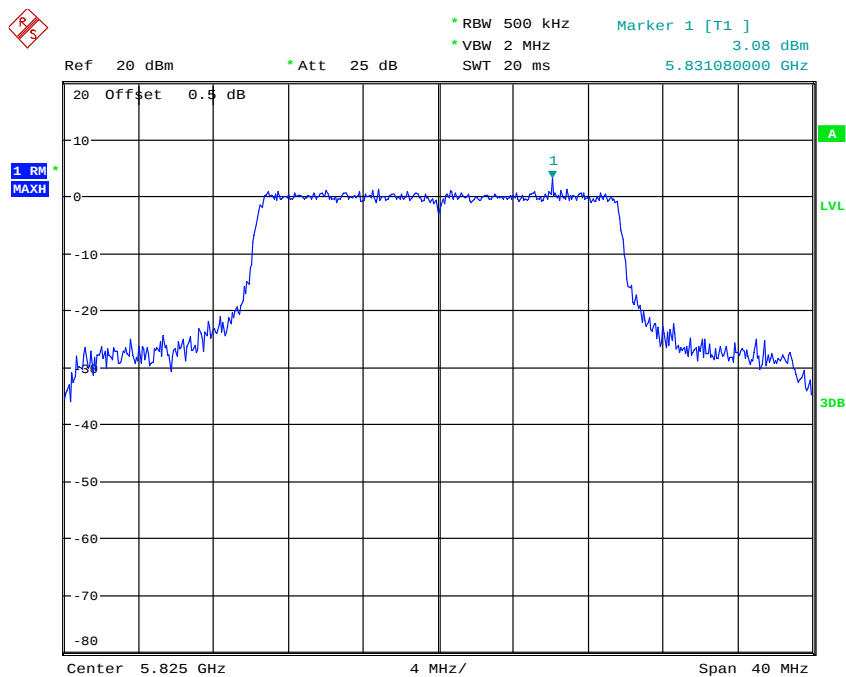


Date: 8.JAN.2021 14:46:23

802.11n ax40 Low Channel

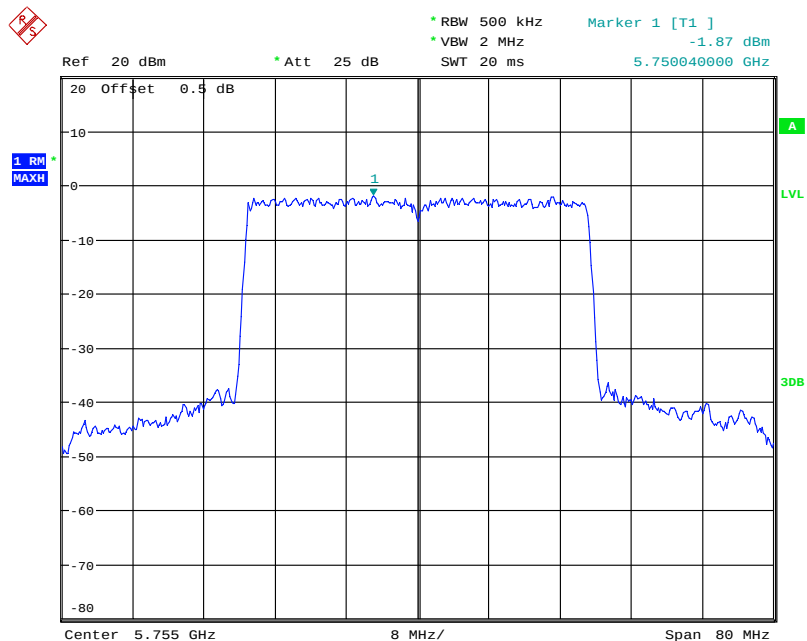


Date: 8.JAN.2021 14:51:57

802.11n ax40 High Channel

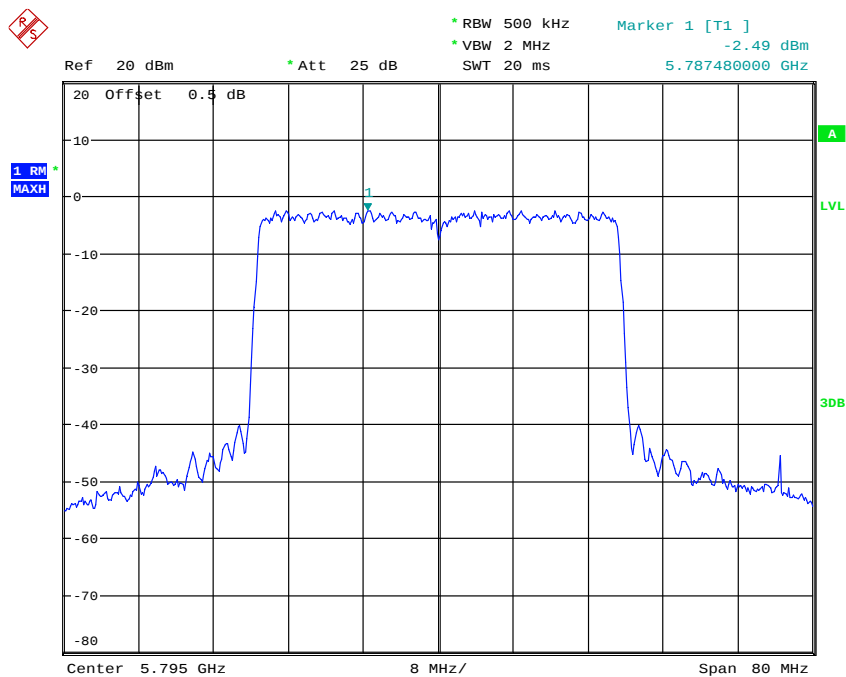


Date: 8.JAN.2021 14:53:19

802.11ac vht80 Middle Channel

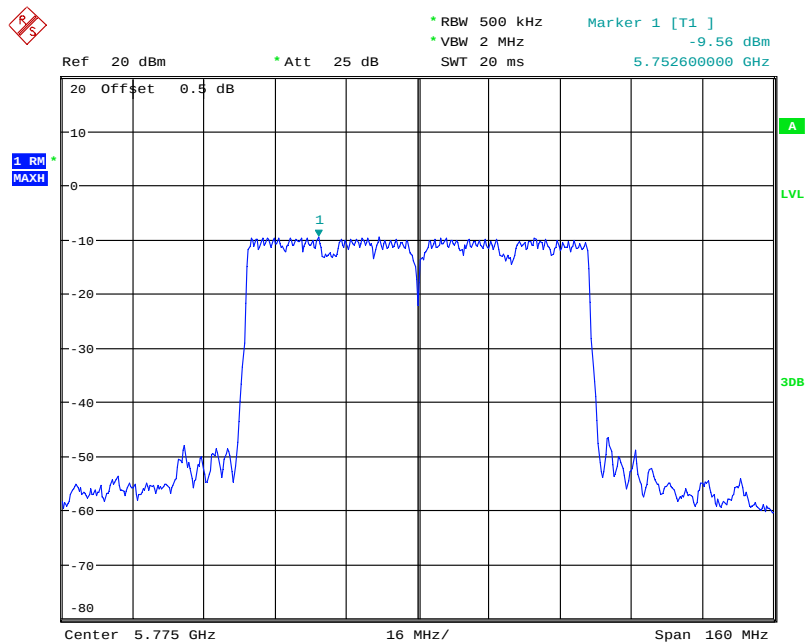

Date: 8.JAN.2021 14:18:39


802.11ax hew80 Middle Channel

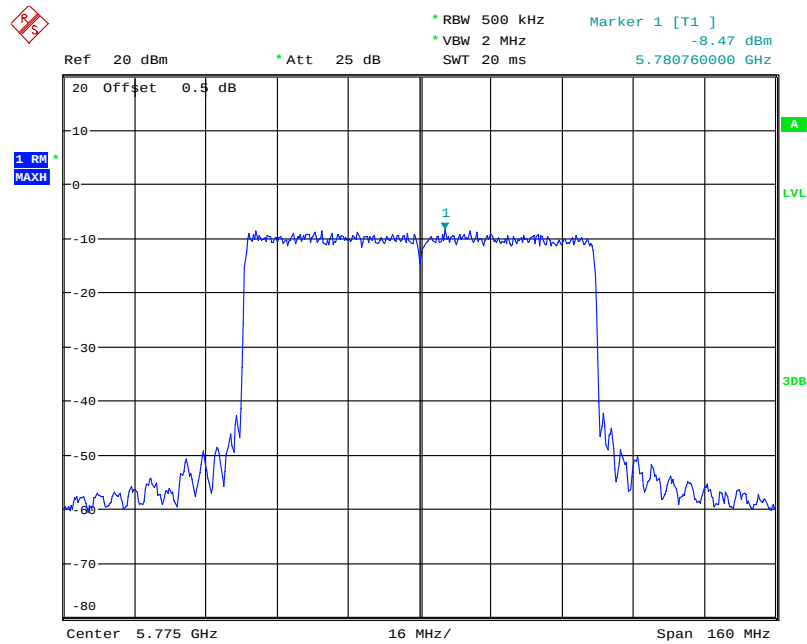

Date: 8.JAN.2021 14:55:44


Chain 1

802.11a Low Channel

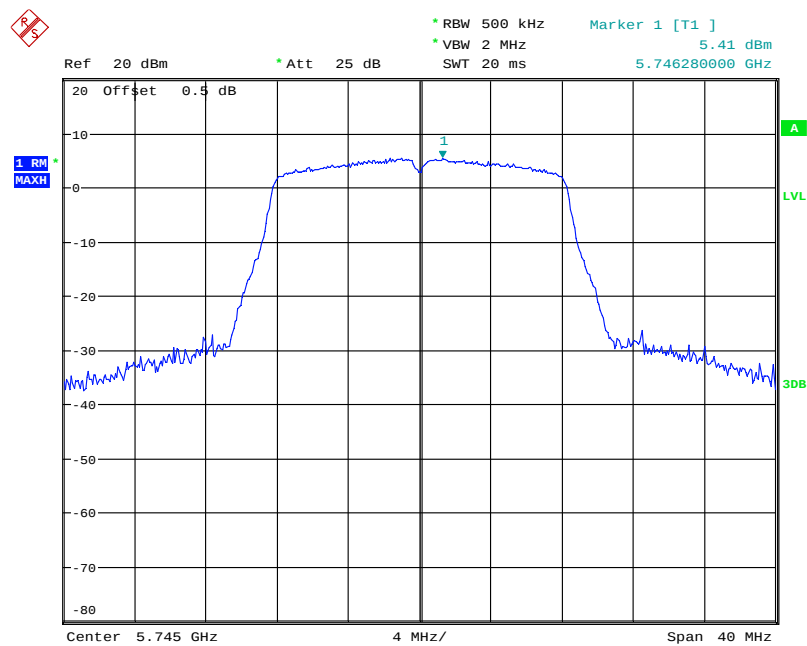


Date: 8.JAN.2021 13:42:58

802.11a Middle Channel

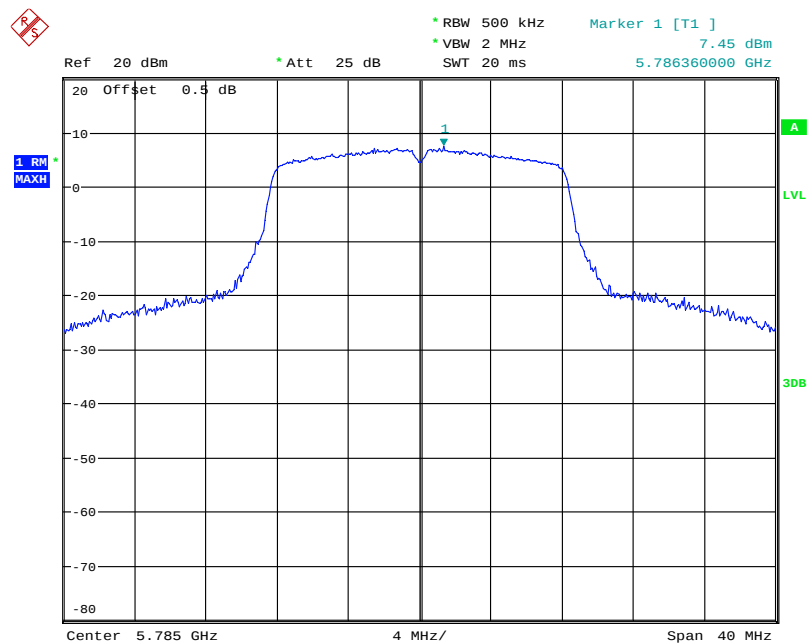


Date: 8.JAN.2021 13:46:11

802.11a High Channel

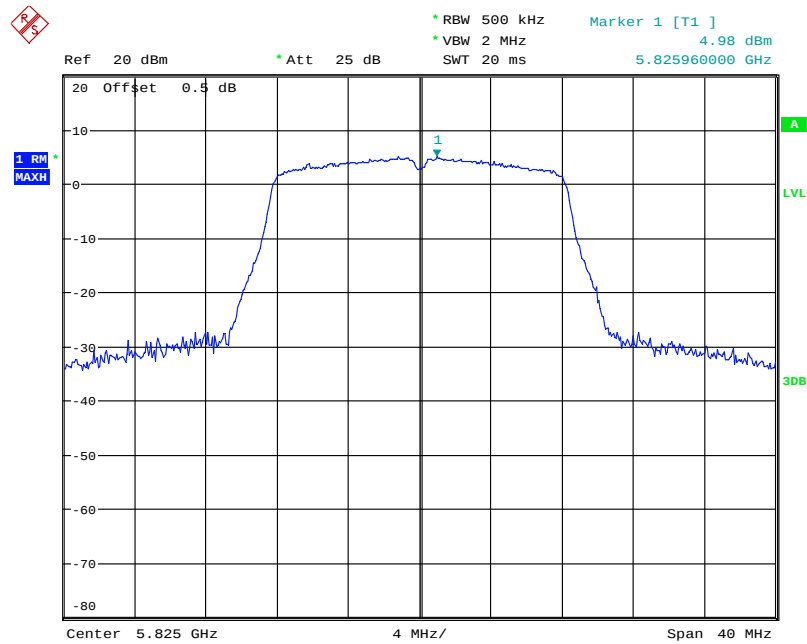


Date: 8.JAN.2021 13:48:00

802.11n ht20 Low Channel

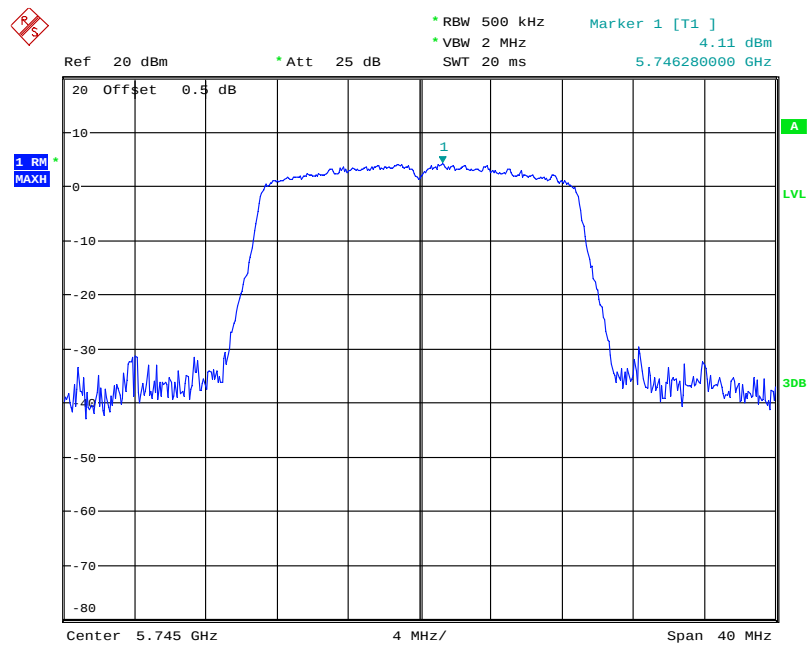


Date: 8.JAN.2021 13:54:42

802.11n ht20 Middle Channel

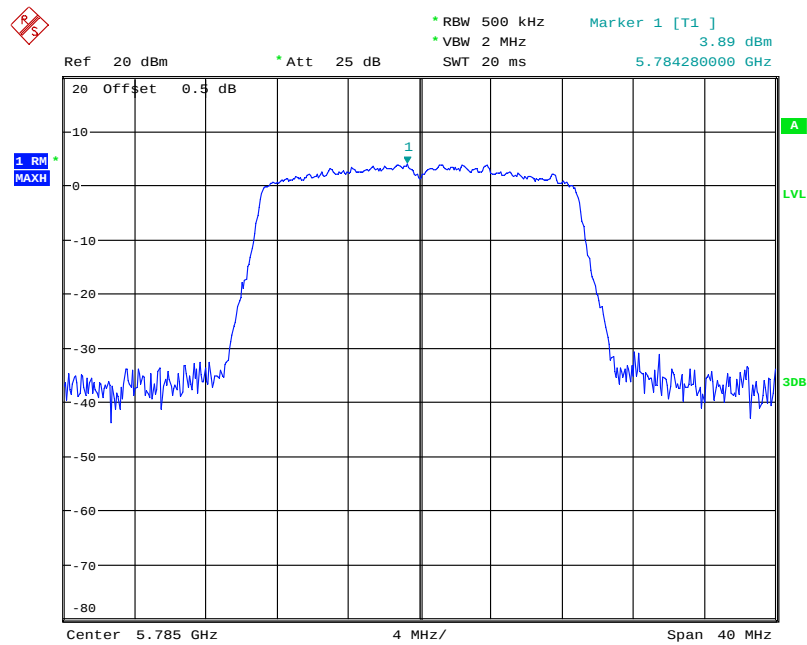


Date: 8.JAN.2021 13:56:34

802.11n ht20 High Channel

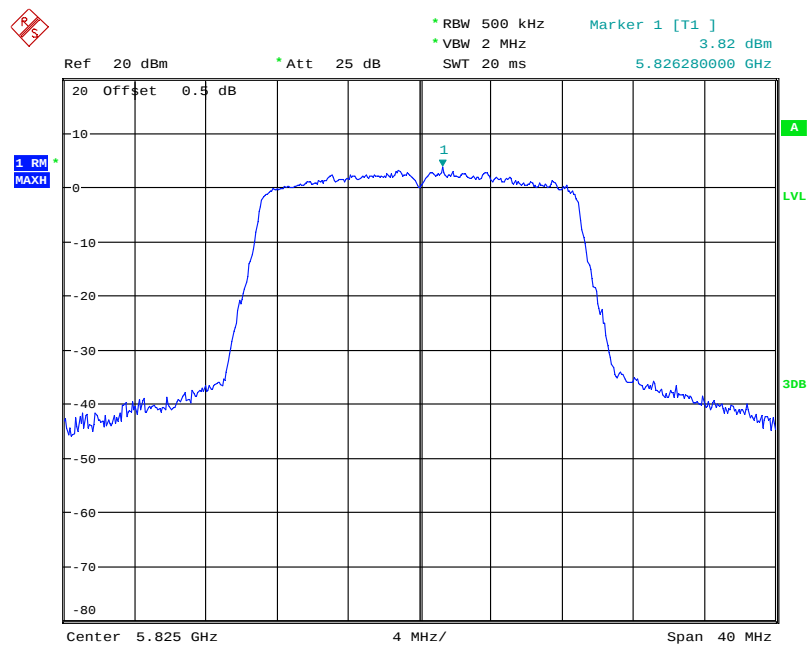


Date: 8.JAN.2021 14:03:49

802.11n ht40 Low Channel

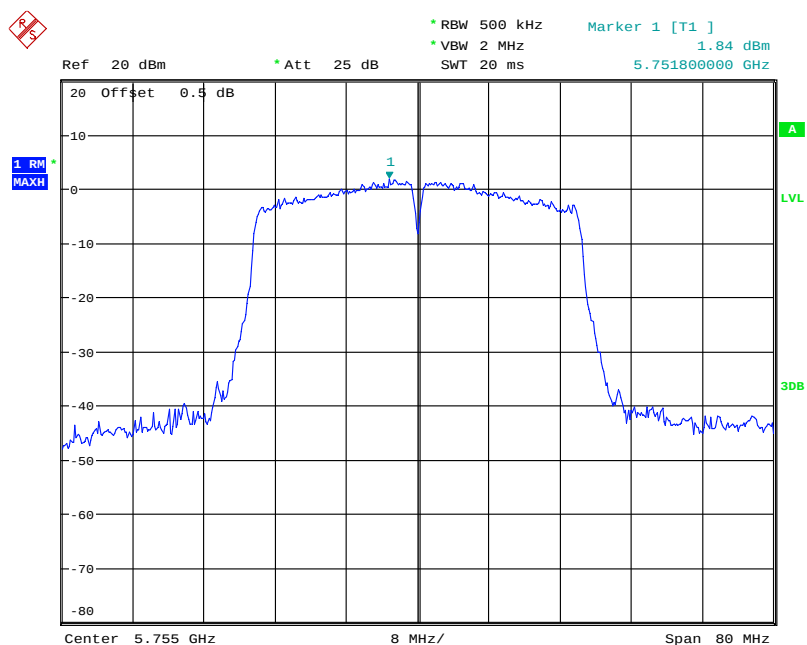


Date: 8.JAN.2021 14:06:19

802.11n ht40 High Channel

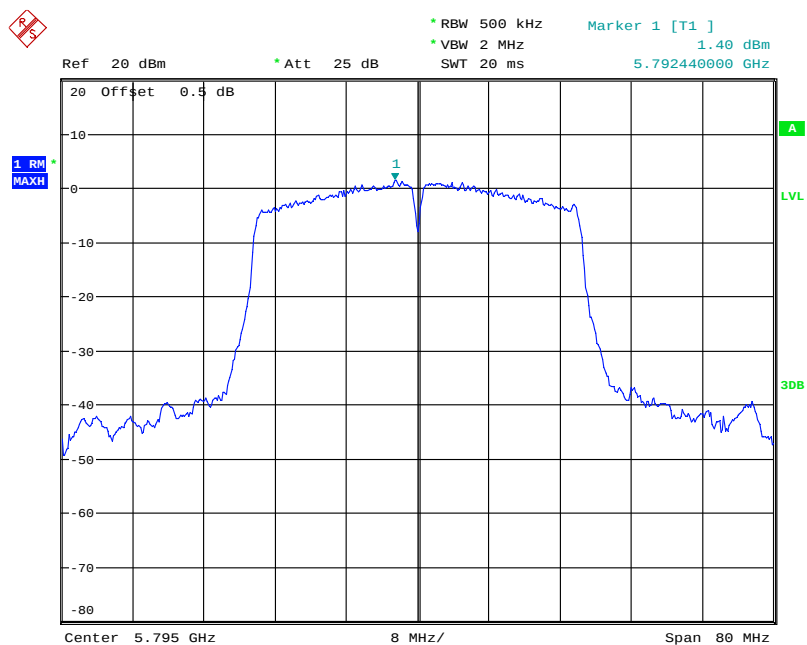


Date: 8.JAN.2021 14:11:01

802.11 ax20 Low Channel

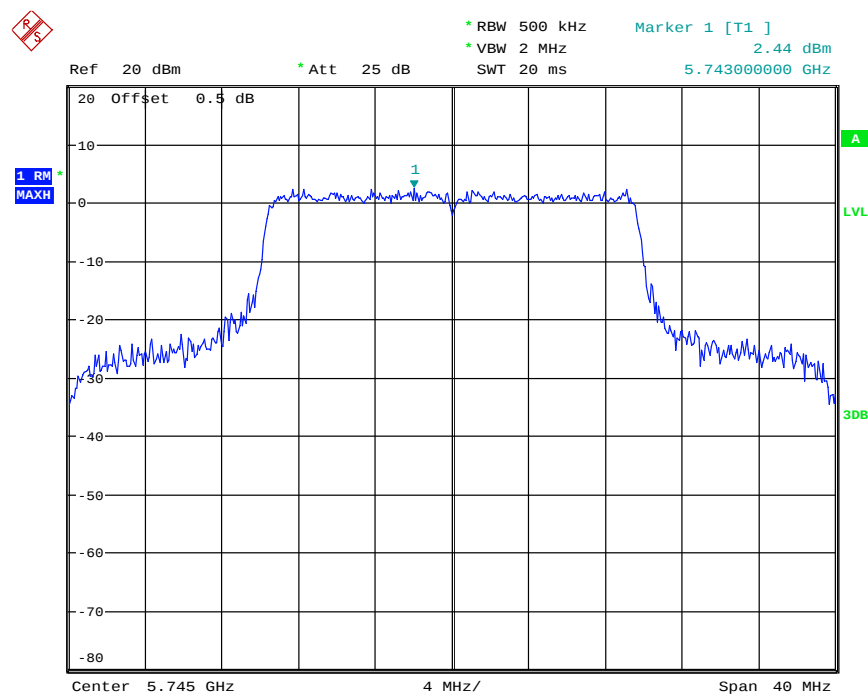


Date: 8.JAN.2021 14:36:15

802.11 ax20 Middle Channel

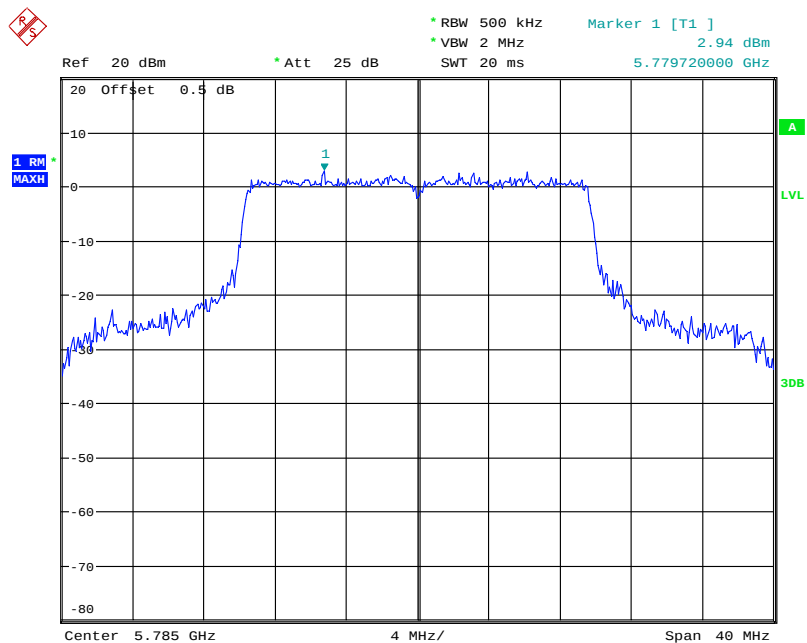


Date: 8.JAN.2021 14:41:51

802.11 ax20 High Channel

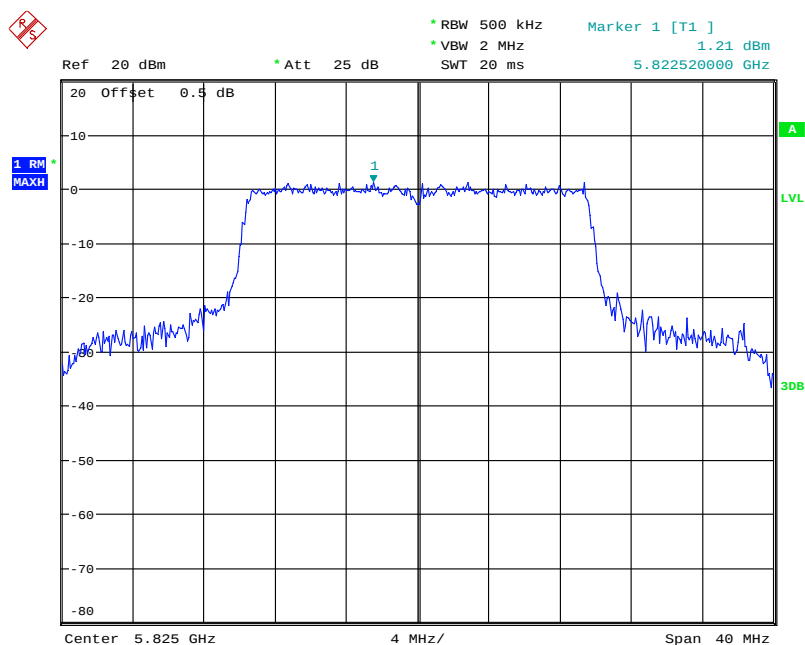


Date: 8.JAN.2021 14:48:16

802.11 ax40 LowChannel

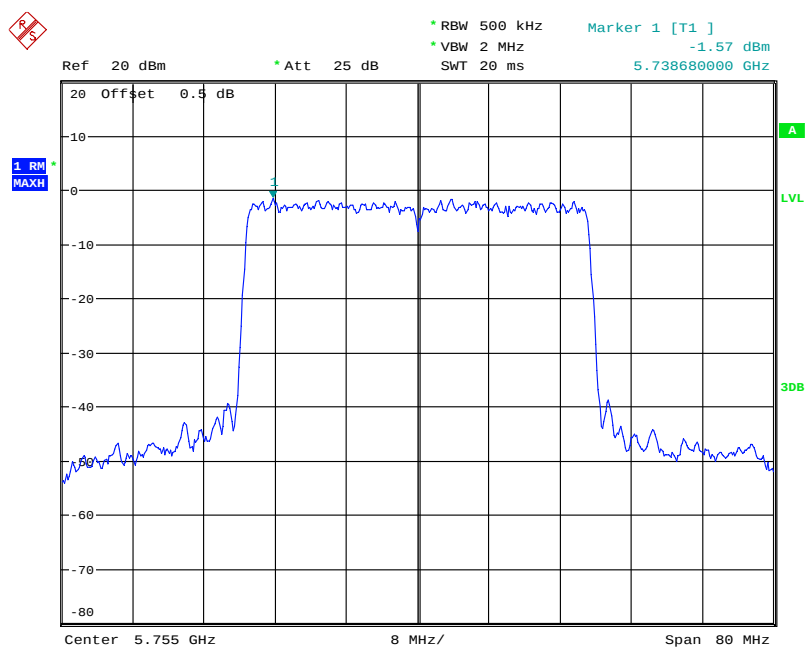


Date: 8.JAN.2021 14:50:33

802.11 ax40 High Channel

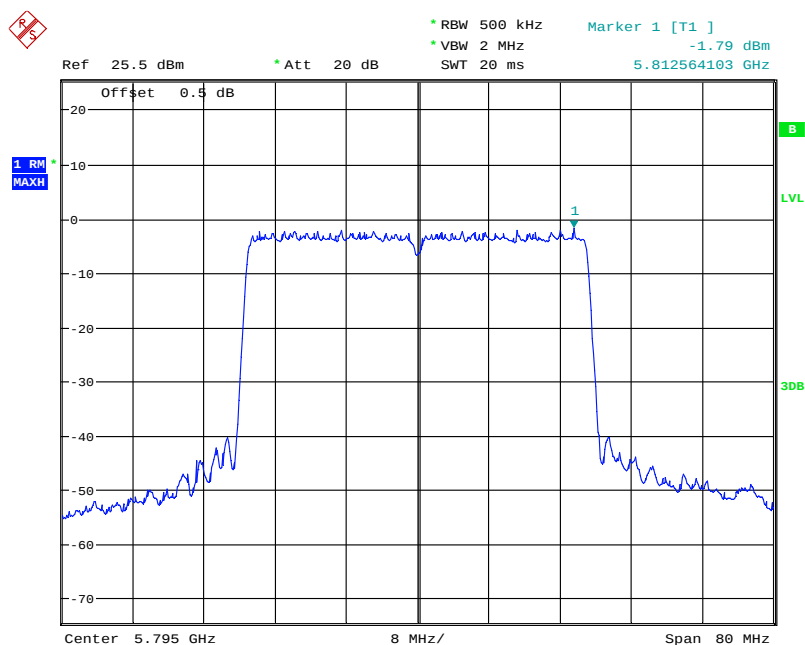


Date: 26.JAN.2021 16:32:44

802.11ac vht80 Middle Channel

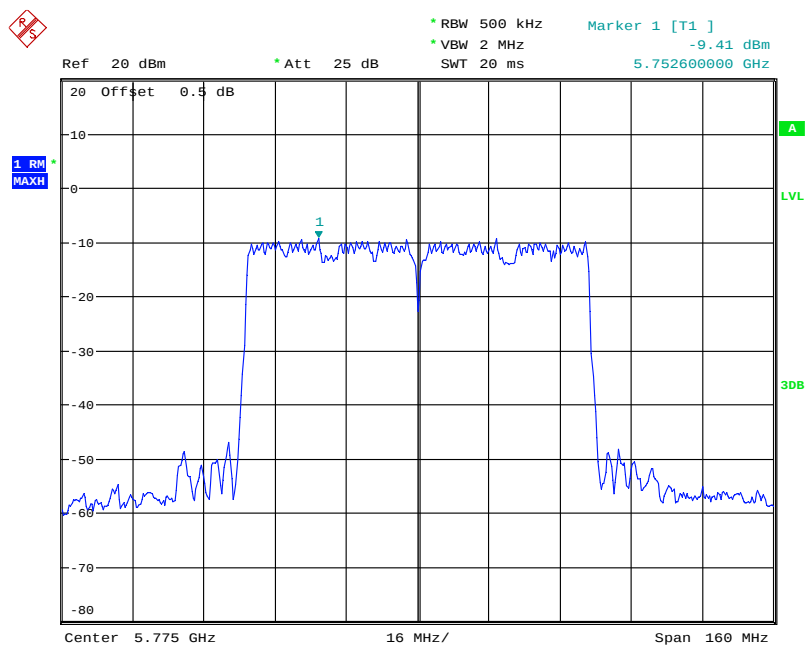

Date: 8.JAN.2021 14:15:50

802.11ax hew80 Middle Channel

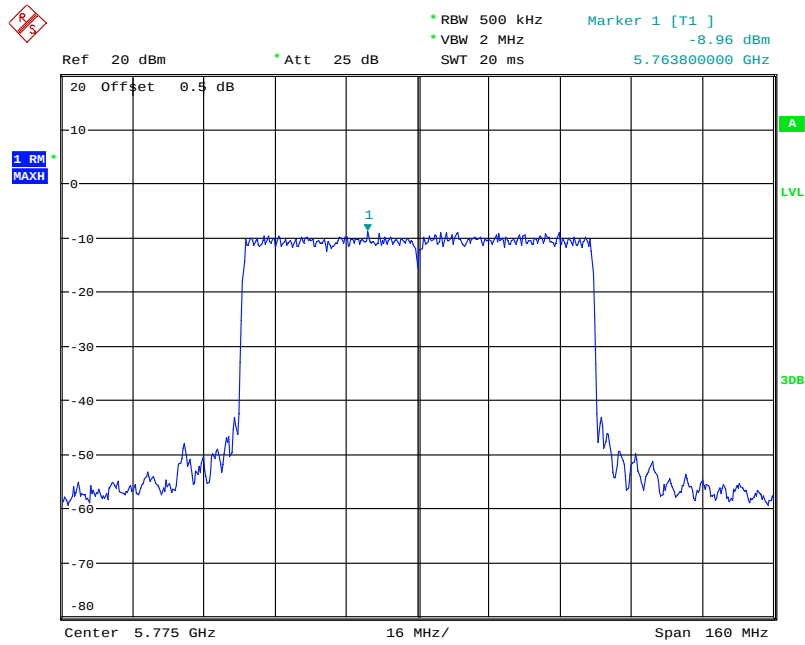

Date: 8.JAN.2021 14:57:12

***** END OF REPORT *****