



The Photos of SAR test

No. I14Z45690-SEM01

For

TCT Mobile Limited

HSUPA/HSDPA+/UMTS triband/GSM quad-band mobile phone

Mode Name: Yaris 4 ULC

Marketing Name: 4032E

With

Hardware Version: PIO

Software Version: vE71

FCC ID: RAD498

Issued Date: 2014-04-15



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

TMC Beijing, Telecommunication Metrology Center of MIIT


No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2079, Fax:+86(0)10-62304633 Email:welcome@emcite.com. www.emcite.com


©Copyright. All rights reserved by TMC Beijing.




Picture 1: Constituents of the sample

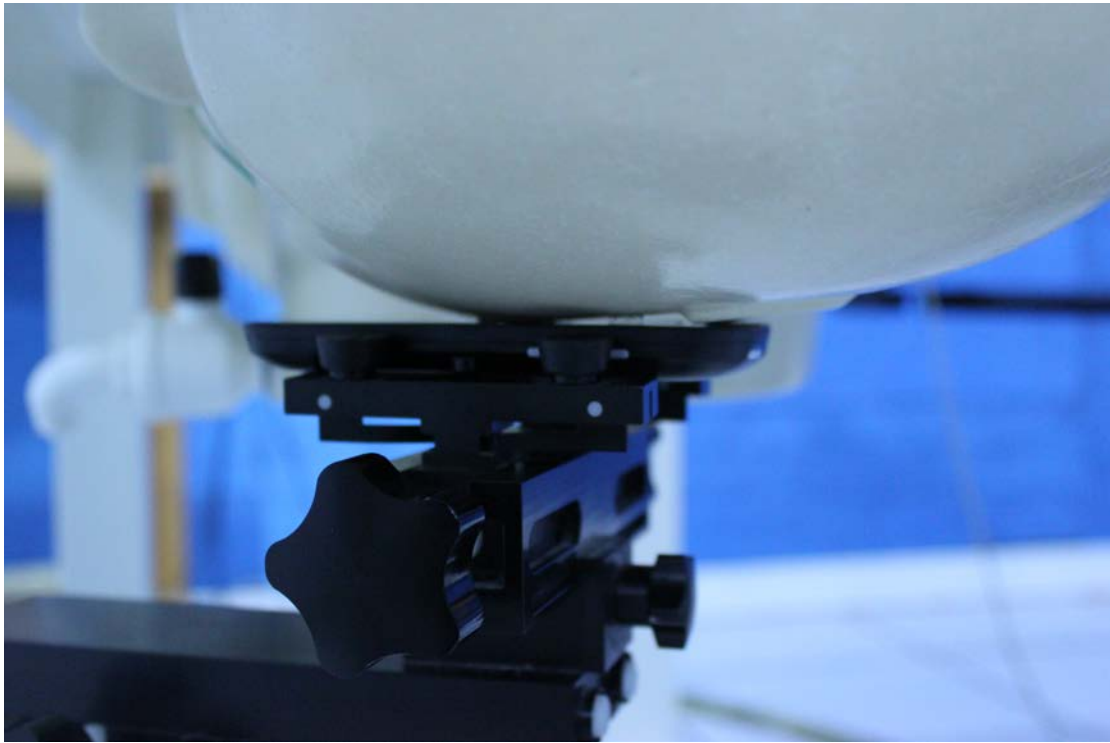

Picture 2: Left Hand Touch Cheek Position

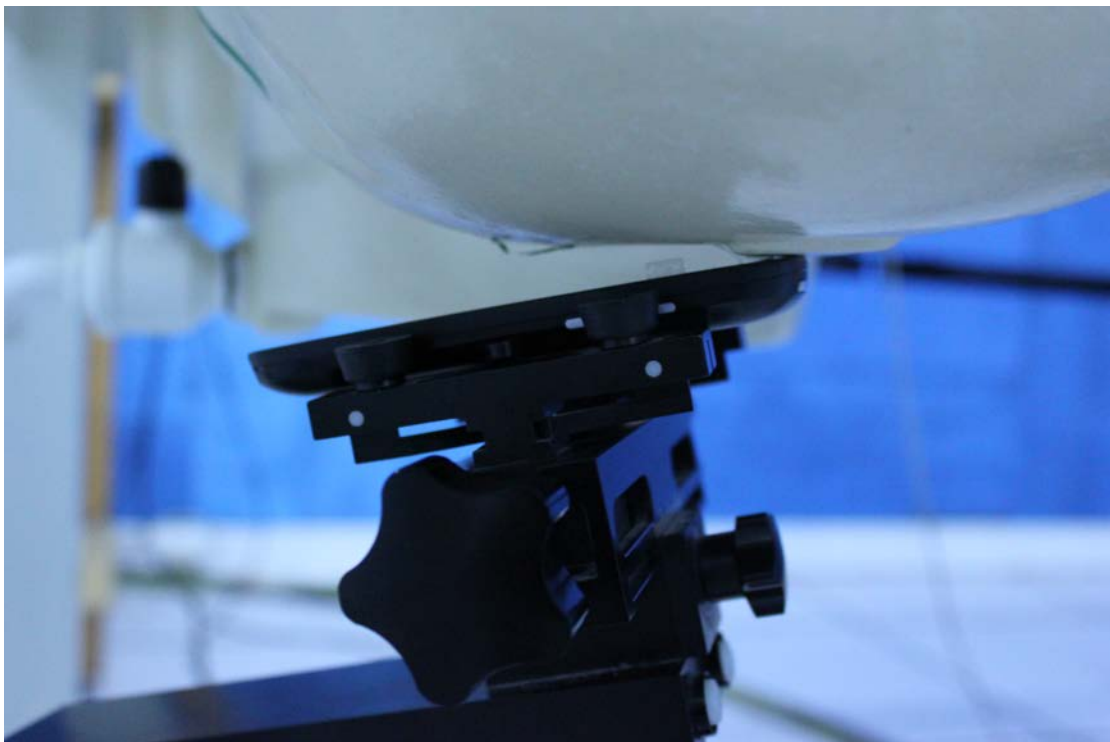

Picture 3: Left Hand Tilt 15° Position

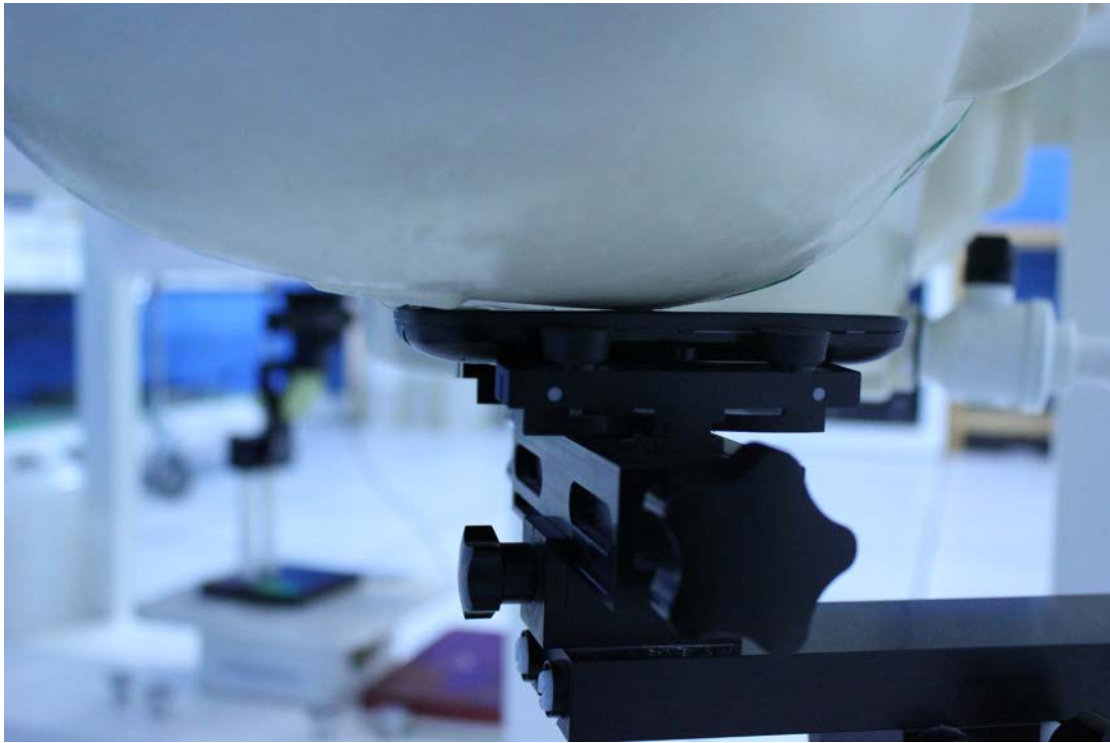



Picture 4: Right Hand Touch Cheek Position




Picture 5: Right Hand Tilt 15° Position

Test positions for body:



The Body SAR is tested at the following 6 test positions all with the distance =10mm between the EUT and the phantom bottom:

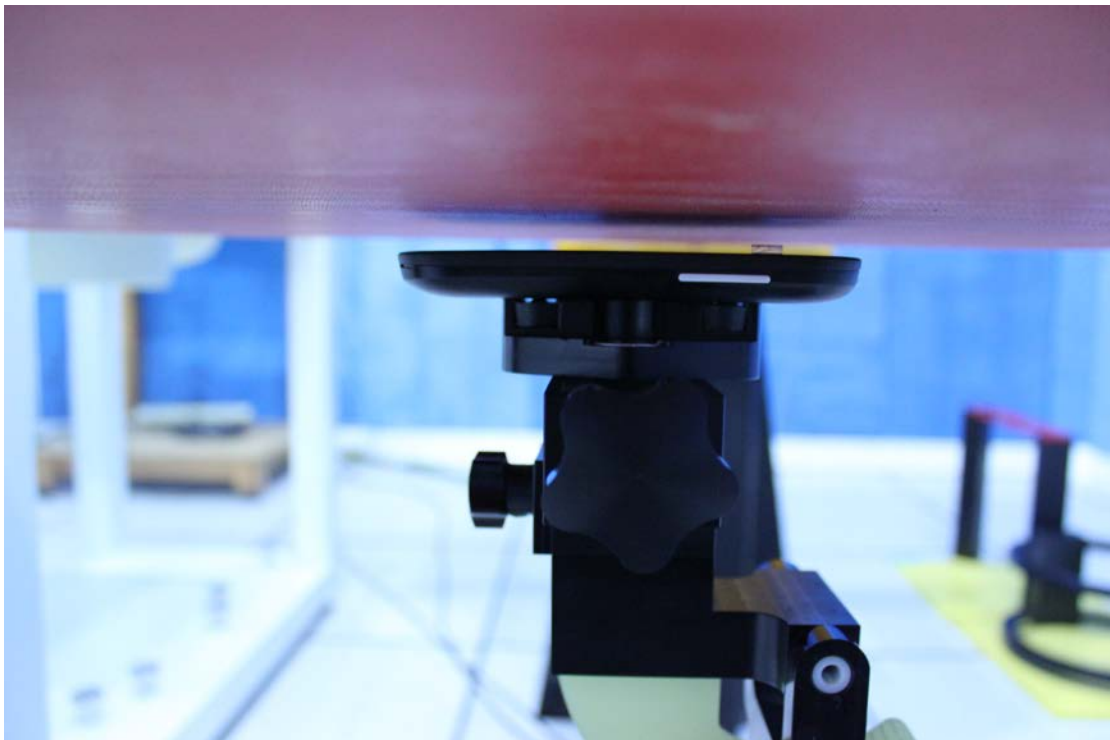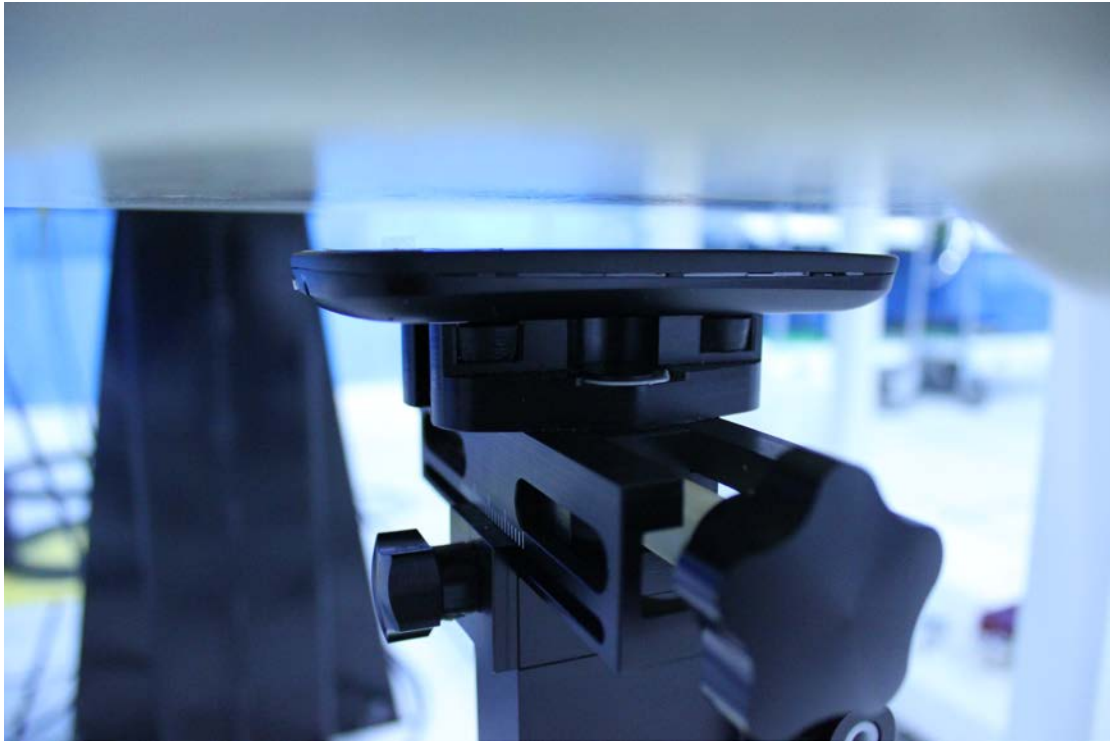


Picture 6: Front

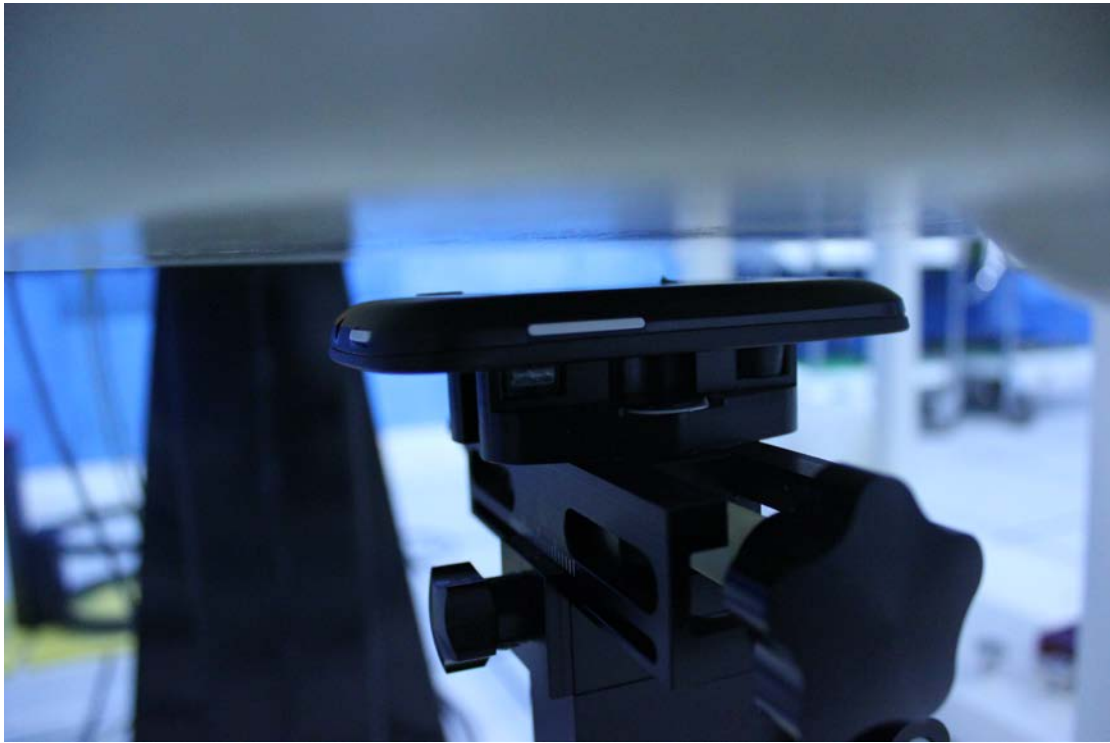


Picture 7: Rear

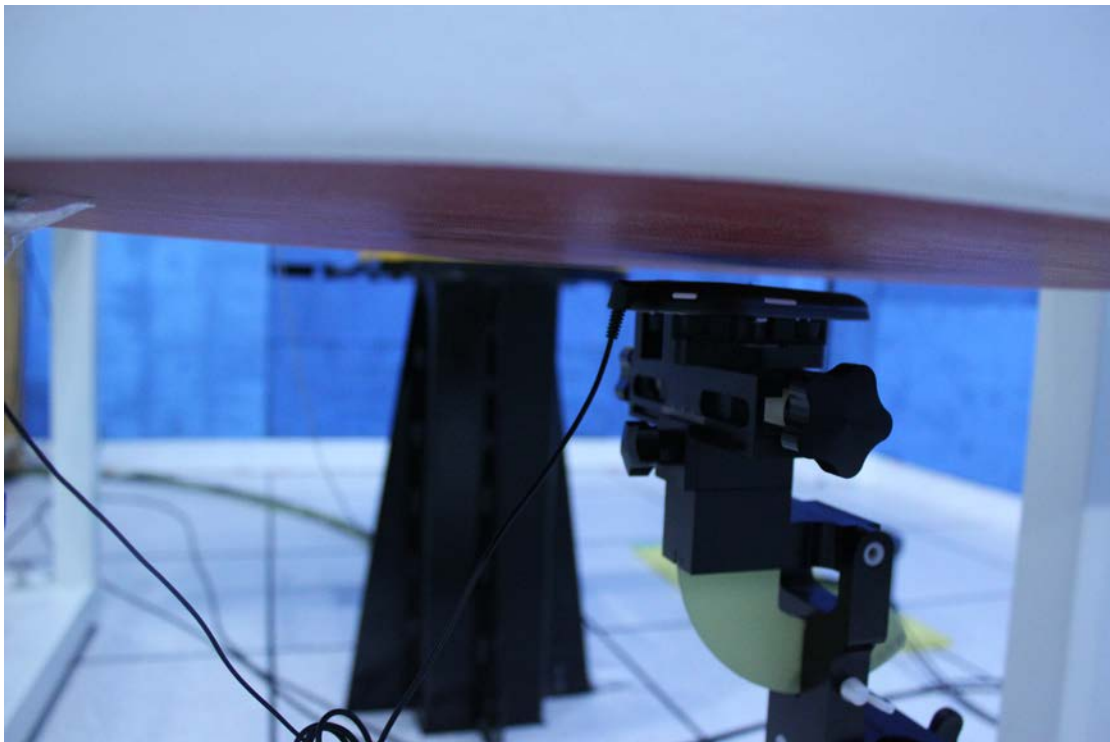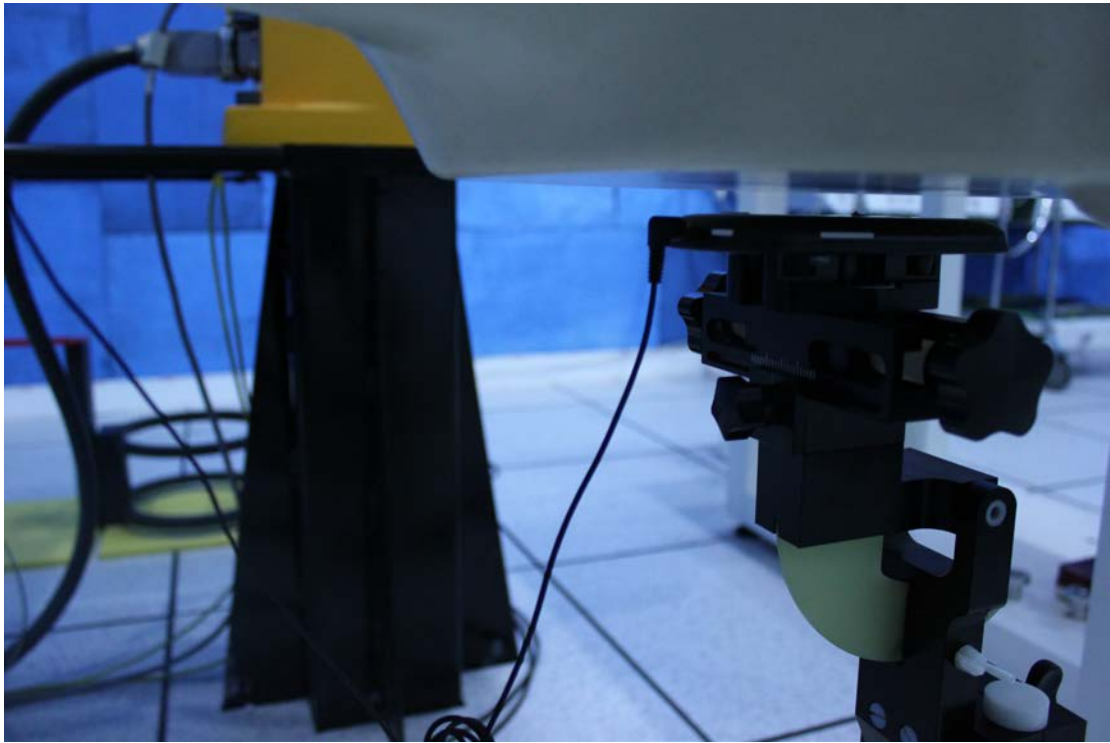


Picture 7-1: Rear with Headset

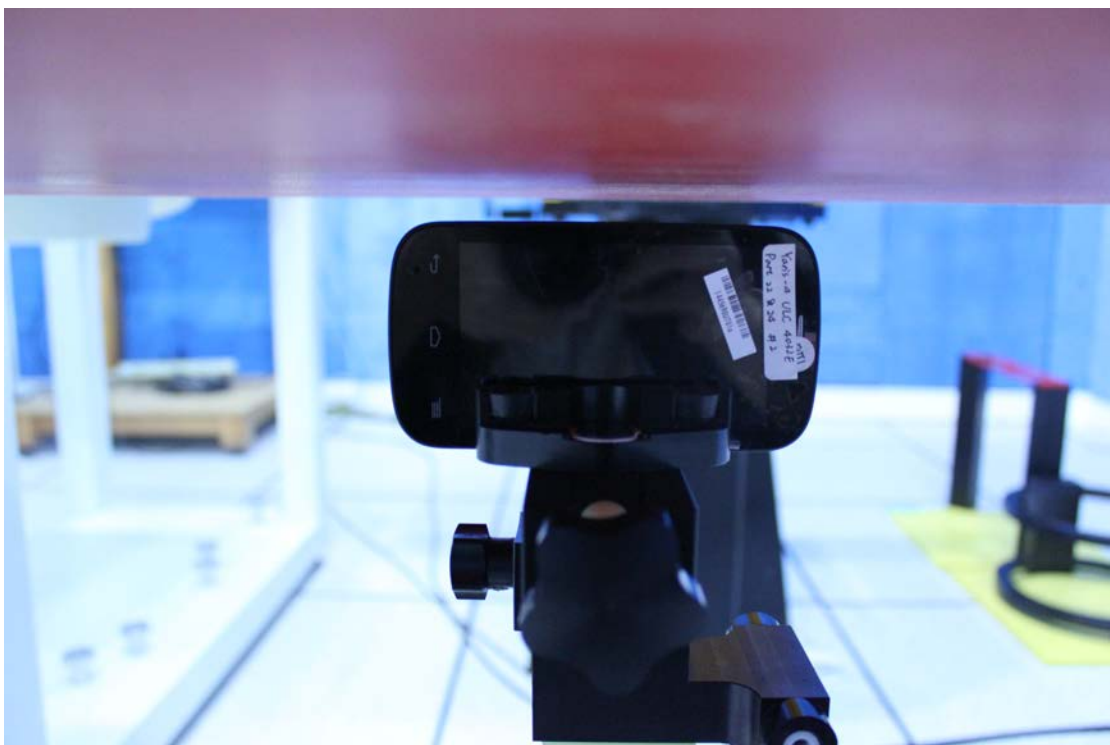


Picture 8: Left Edge

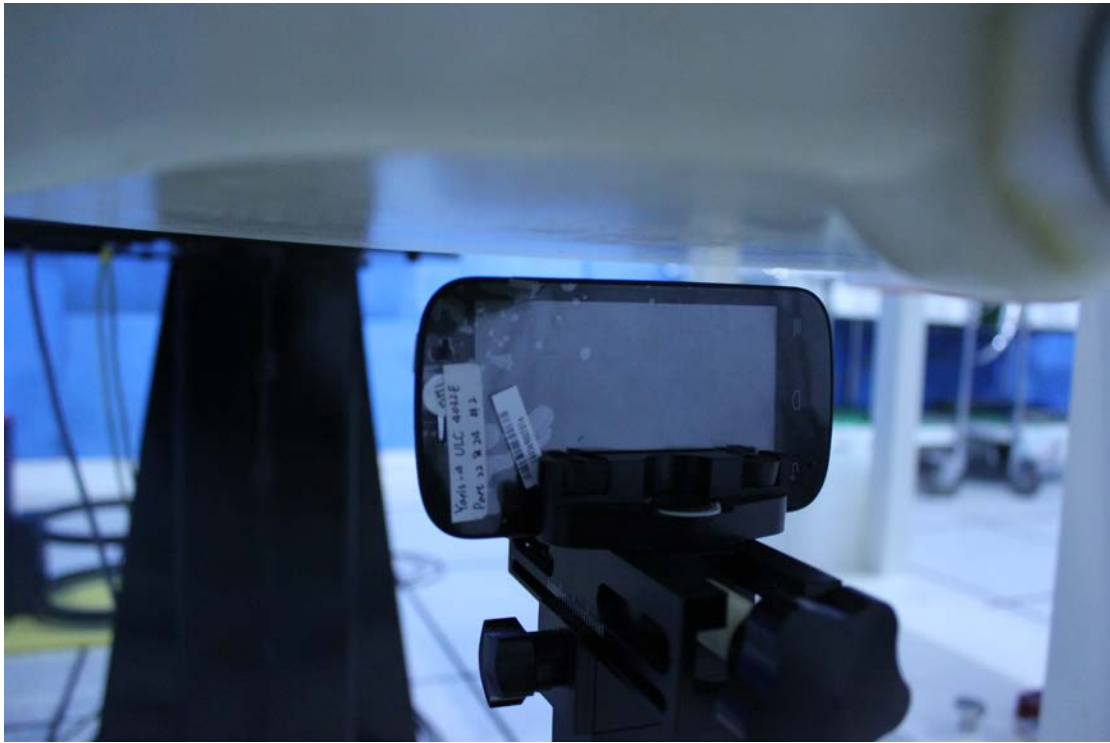

Picture 9: Right Edge

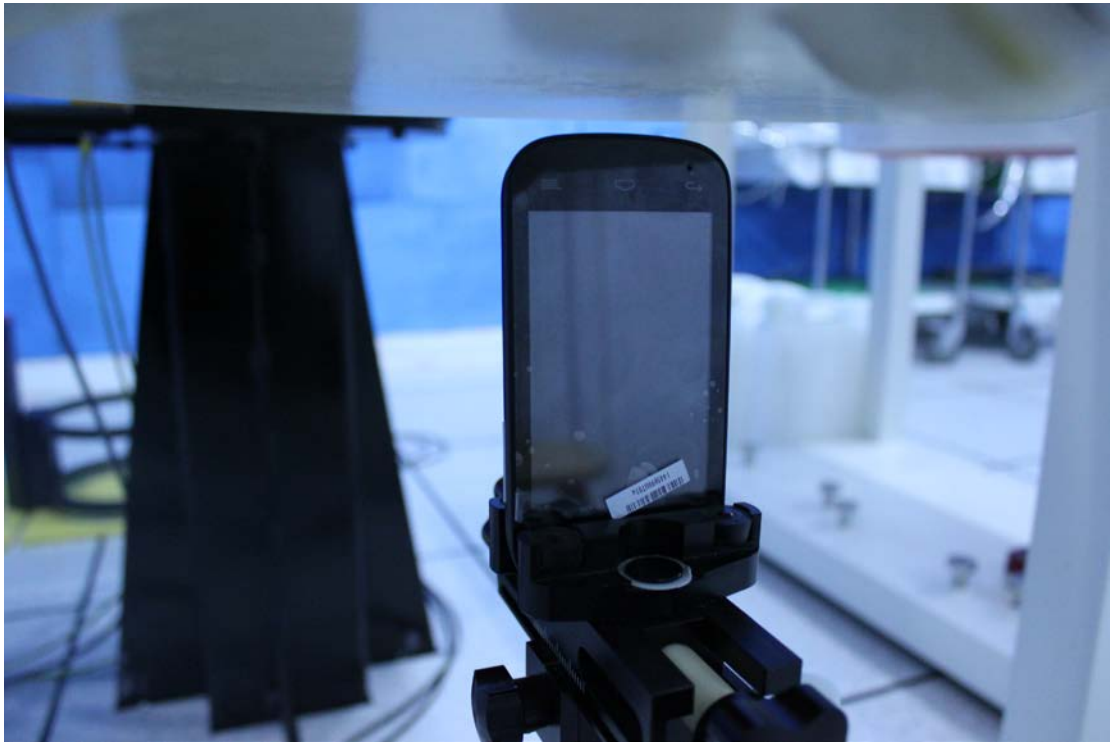

Picture 10: Bottom Edge

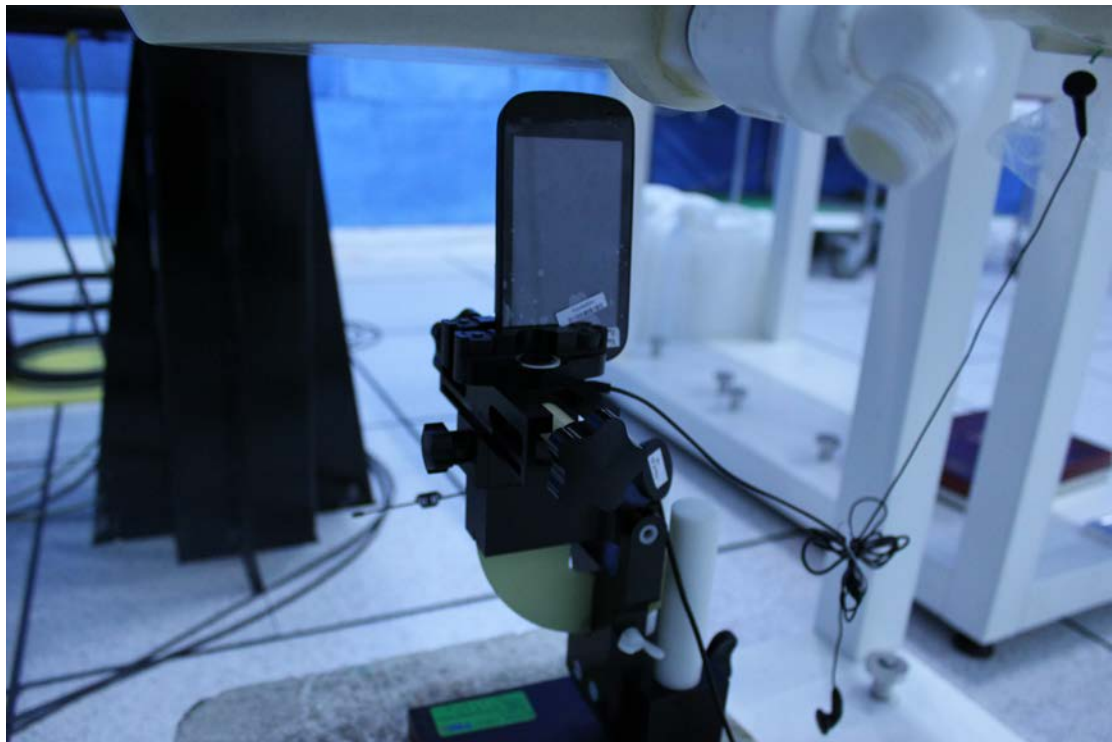

Picture 10-1: Bottom Edge with Headset



Picture 11: Top Edge