




Test Mode : 2TX 11ac40 CH54 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

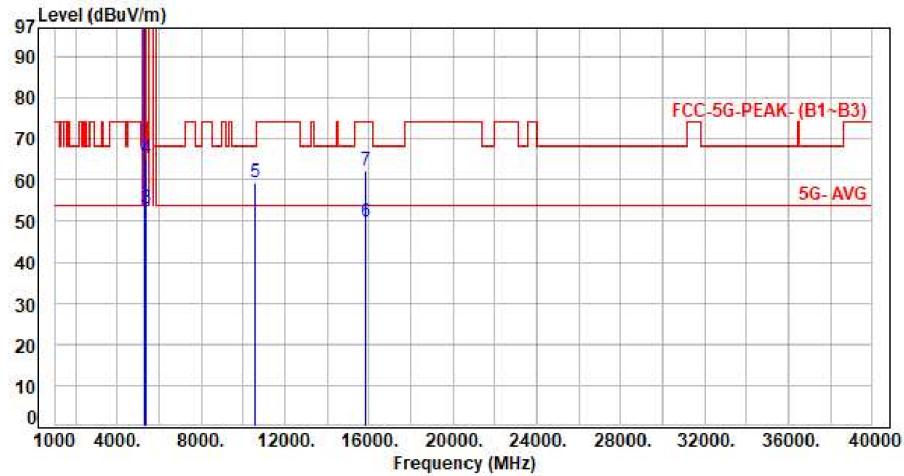


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5270.00	7.04	96.72	103.76	200.00	-96.24	Average	227	43	P
2	5270.00	7.04	106.41	113.45	200.00	-86.55	Peak	227	43	P
3	5350.00	7.27	45.67	52.94	54.00	-1.06	Average	227	43	P
4	5350.00	7.27	57.84	65.11	74.00	-8.89	Peak	227	43	P
5	10540.00	15.17	44.37	59.54	68.20	-8.66	Peak	100	122	P
6	15810.00	17.49	32.35	49.84	54.00	-4.16	Average	100	153	P
7	15810.00	17.49	44.93	62.42	74.00	-11.58	Peak	100	153	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH54 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

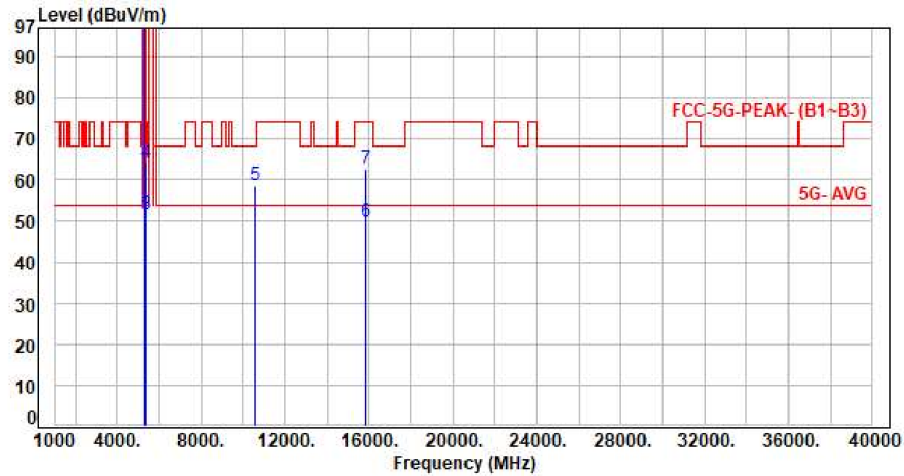


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5270.00	7.04	91.09	98.13	200.00	-101.87	Average	378	171	P
2	5270.00	7.04	100.55	107.59	200.00	-92.41	Peak	378	171	P
3	5350.00	7.27	44.19	51.46	54.00	-2.54	Average	378	171	P
4	5350.00	7.27	56.79	64.06	74.00	-9.94	Peak	378	171	P
5	10540.00	15.17	43.36	58.53	68.20	-9.67	Peak	100	221	P
6	15810.00	17.49	32.36	49.85	54.00	-4.15	Average	100	165	P
7	15810.00	17.49	45.16	62.65	74.00	-11.35	Peak	100	165	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH62 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

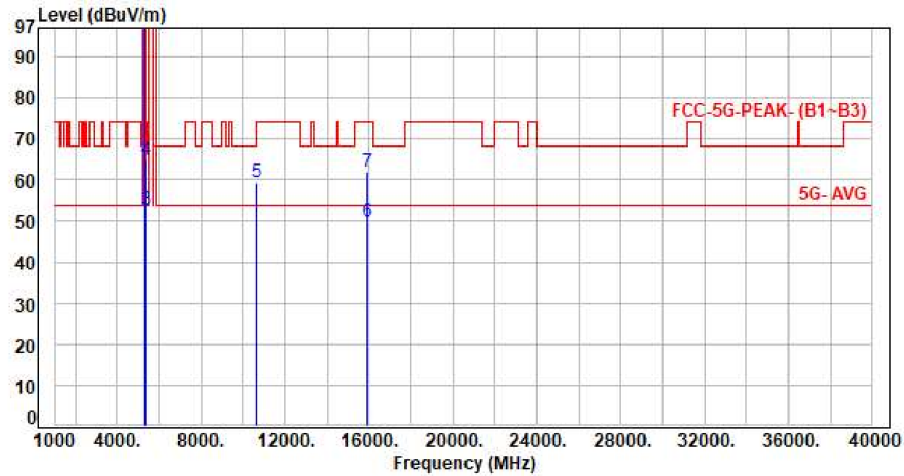


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5310.00	7.22	88.65	95.87	200.00	-104.13	Average	264	97	P
2	5310.00	7.22	98.62	105.84	200.00	-94.16	Peak	264	97	P
3	5350.00	7.27	45.33	52.60	54.00	-1.40	Average	264	97	P
4	5350.00	7.27	57.58	64.85	74.00	-9.15	Peak	264	97	P
5	10620.00	15.37	44.06	59.43	74.00	-14.57	Peak	100	195	P
6	15930.00	17.44	32.37	49.81	54.00	-4.19	Average	100	194	P
7	15930.00	17.44	44.68	62.12	74.00	-11.88	Peak	100	194	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH62 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

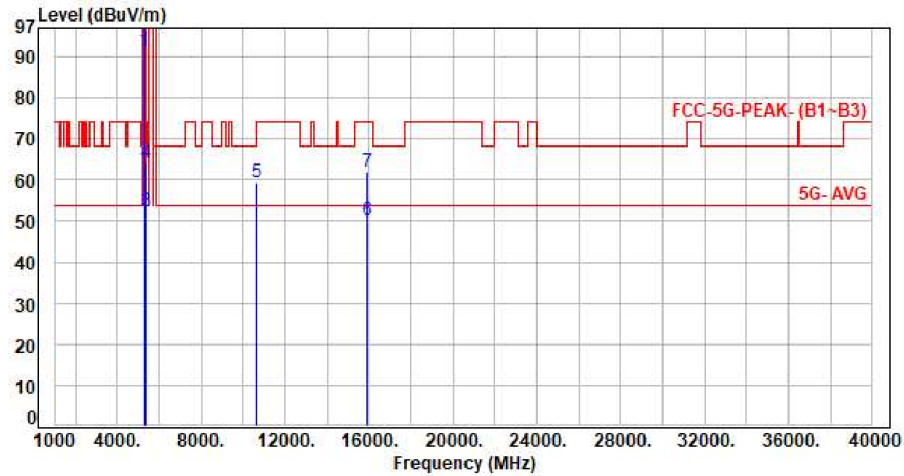


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5310.00	7.22	84.13	91.35	200.00	-108.65	Average	111	173	P
2	5310.00	7.22	93.05	100.27	200.00	-99.73	Peak	111	173	P
3	5350.00	7.27	45.20	52.47	54.00	-1.53	Average	111	173	P
4	5350.00	7.27	57.07	64.34	74.00	-9.66	Peak	111	173	P
5	10620.00	15.37	43.94	59.31	74.00	-14.69	Peak	100	139	P
6	15930.00	17.44	32.74	50.18	54.00	-3.82	Average	100	227	P
7	15930.00	17.44	44.43	61.87	74.00	-12.13	Peak	100	227	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac80 CH58 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

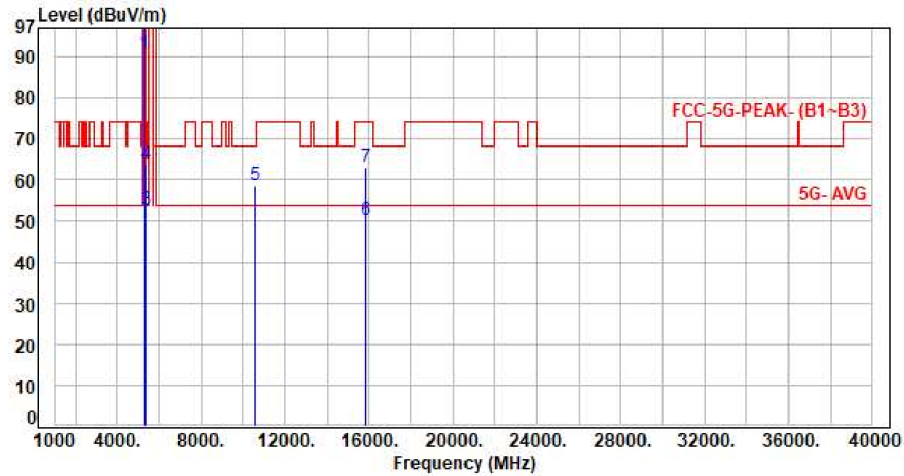


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5290.00	7.15	83.70	90.85	200.00	-109.15	Average	219	41	P
2	5290.00	7.15	92.71	99.86	200.00	-100.14	Peak	219	41	P
3	5350.00	7.27	45.62	52.89	54.00	-1.11	Average	219	41	P
4	5350.00	7.27	56.62	63.89	74.00	-10.11	Peak	219	41	P
5	10580.00	15.25	43.52	58.77	68.20	-9.43	Peak	100	138	P
6	15870.00	17.47	32.82	50.29	54.00	-3.71	Average	100	188	P
7	15870.00	17.47	45.46	62.93	74.00	-11.07	Peak	100	188	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac80 CH58 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

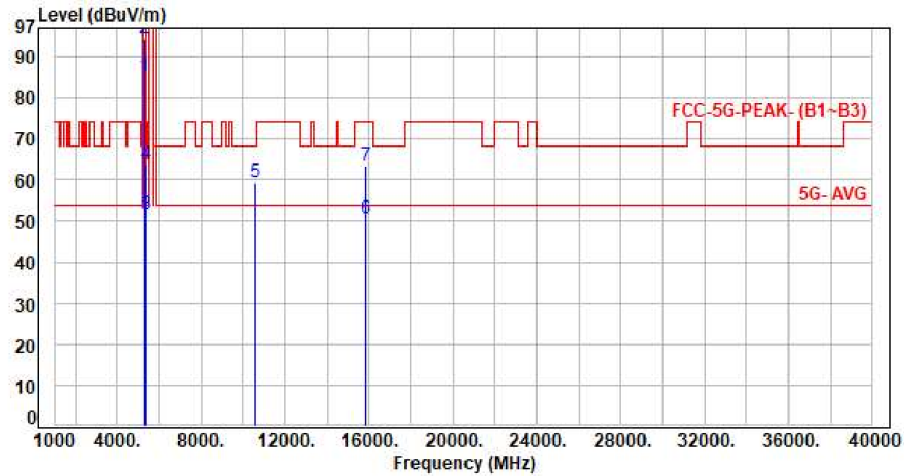


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5290.00	7.15	78.03	85.18	200.00	-114.82	Average	133	194	P
2	5290.00	7.15	87.17	94.32	200.00	-105.68	Peak	133	194	P
3	5350.00	7.27	44.52	51.79	54.00	-2.21	Average	133	194	P
4	5350.00	7.27	56.46	63.73	74.00	-10.27	Peak	133	194	P
5	10580.00	15.25	44.09	59.34	68.20	-8.86	Peak	100	176	P
6	15870.00	17.47	32.96	50.43	54.00	-3.57	Average	100	161	P
7	15870.00	17.47	45.94	63.41	74.00	-10.59	Peak	100	161	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH100 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

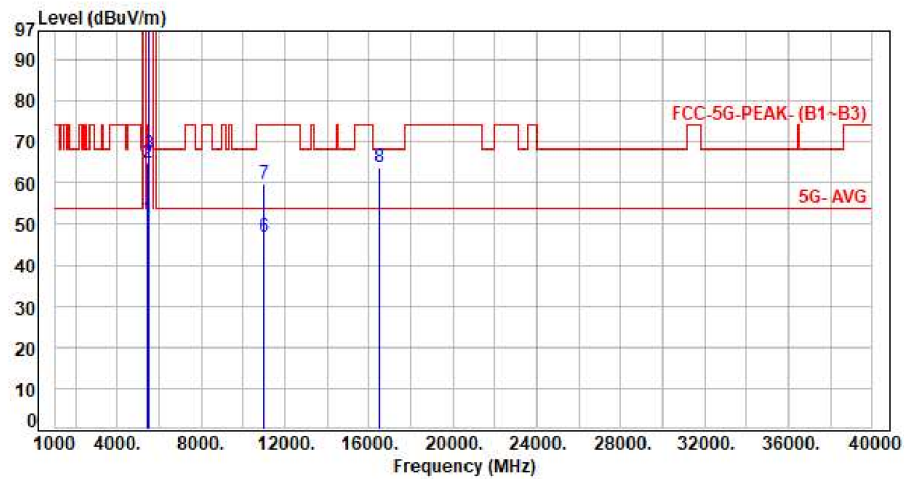


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.87	51.42	54.00	-2.58	Average	188	36	P
2	5460.00	7.55	57.39	64.94	74.00	-9.06	Peak	188	36	P
3	5470.00	7.58	59.41	66.99	68.20	-1.21	Peak	188	36	P
4	5500.00	7.68	97.08	104.76	200.00	-95.24	Average	188	36	P
5	5500.00	7.68	107.22	114.90	200.00	-85.10	Peak	188	36	P
6	11000.00	16.20	30.77	46.97	54.00	-7.03	Average	100	151	P
7	11000.00	16.20	43.41	59.61	74.00	-14.39	Peak	100	151	P
8	16500.00	18.92	44.74	63.66	68.20	-4.54	Peak	100	161	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH100 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

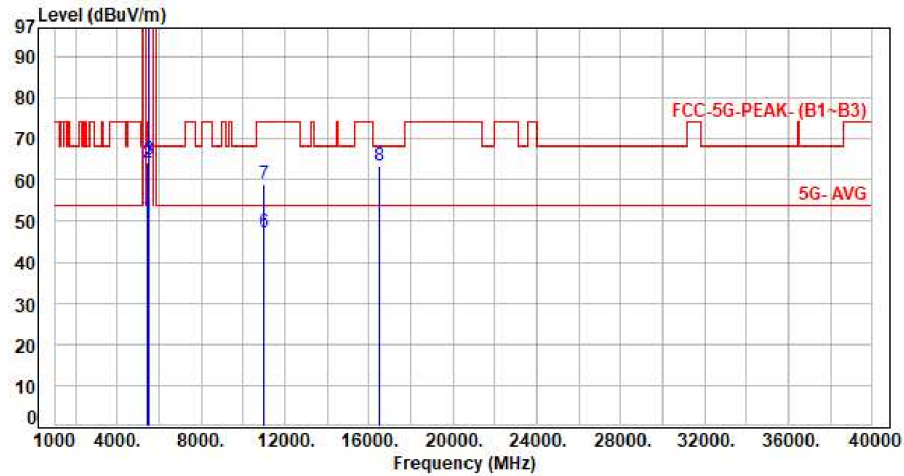

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.24	50.79	54.00	-3.21	Average	273	148	P
2	5460.00	7.55	56.77	64.32	74.00	-9.68	Peak	273	148	P
3	5470.00	7.58	57.19	64.77	68.20	-3.43	Peak	273	148	P
4	5500.00	7.68	89.07	96.75	200.00	-103.25	Average	273	148	P
5	5500.00	7.68	98.60	106.28	200.00	-93.72	Peak	273	148	P
6	11000.00	16.20	30.95	47.15	54.00	-6.85	Average	100	147	P
7	11000.00	16.20	42.88	59.08	74.00	-14.92	Peak	100	147	P
8	16500.00	18.92	44.38	63.30	68.20	-4.90	Peak	100	251	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH120 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

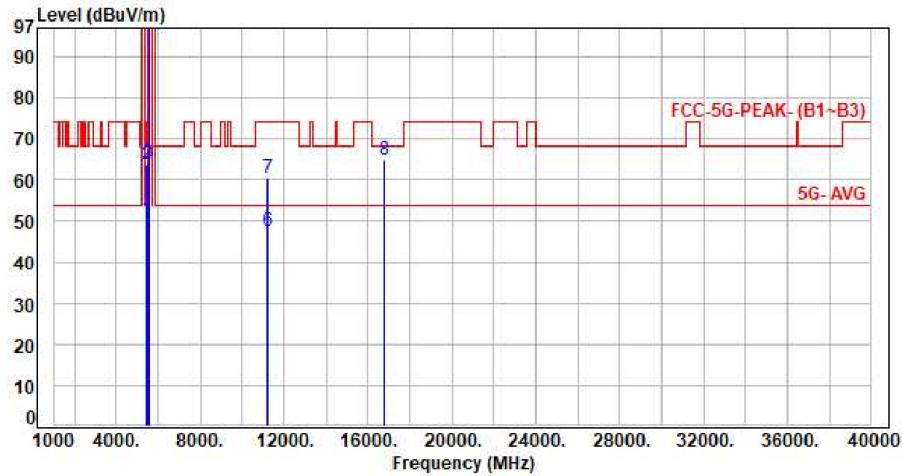


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.12	50.67	54.00	-3.33	Average	209	50	P
2	5460.00	7.55	56.21	63.76	74.00	-10.24	Peak	209	50	P
3	5470.00	7.58	56.55	64.13	68.20	-4.07	Peak	209	50	P
4	5600.00	7.51	98.83	106.34	200.00	-93.66	Average	209	50	P
5	5600.00	7.51	108.06	115.57	200.00	-84.43	Peak	209	50	P
6	11200.00	16.28	31.25	47.53	54.00	-6.47	Average	100	195	P
7	11200.00	16.28	44.06	60.34	74.00	-13.66	Peak	100	195	P
8	16800.00	20.60	44.31	64.91	68.20	-3.29	Peak	100	214	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH120 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

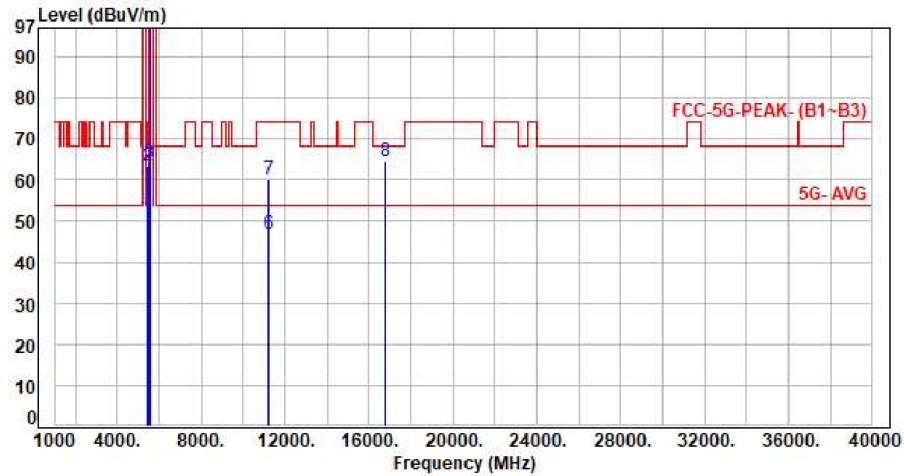

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.29	50.84	54.00	-3.16	Average	100	205	P
2	5460.00	7.55	55.97	63.52	74.00	-10.48	Peak	100	205	P
3	5470.00	7.58	56.50	64.08	68.20	-4.12	Peak	100	205	P
4	5600.00	7.51	90.99	98.50	200.00	-101.50	Average	100	205	P
5	5600.00	7.51	101.93	109.44	200.00	-90.56	Peak	100	205	P
6	11200.00	16.28	30.42	46.70	54.00	-7.30	Average	100	104	P
7	11200.00	16.28	43.67	59.95	74.00	-14.05	Peak	100	104	P
8	16800.00	20.60	43.95	64.55	68.20	-3.65	Peak	100	192	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH140 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

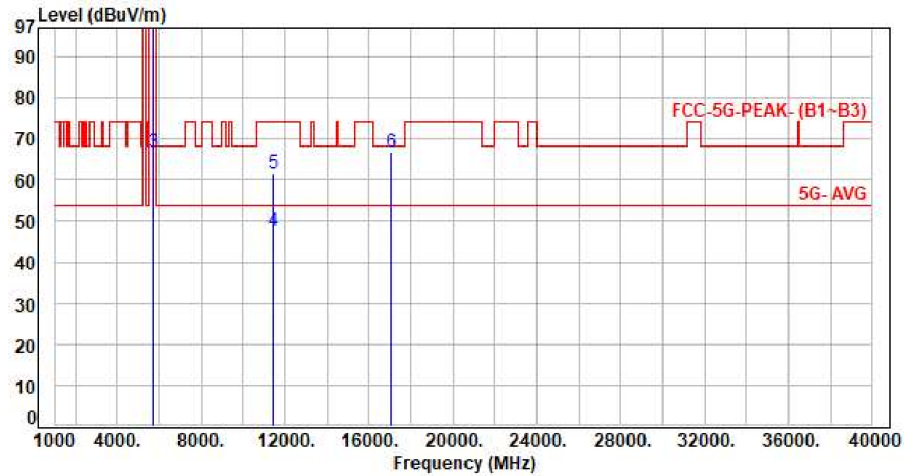


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.43	95.09	102.52	200.00	-97.48	Average	211	45	P
2	5700.00	7.43	105.38	112.81	200.00	-87.19	Peak	211	45	P
3	5725.00	7.43	59.38	66.81	68.20	-1.39	Peak	211	45	P
4	11400.00	16.35	31.08	47.43	54.00	-6.57	Average	100	210	P
5	11400.00	16.35	45.10	61.45	74.00	-12.55	Peak	100	210	P
6	17100.00	21.91	44.89	66.80	68.20	-1.40	Peak	100	161	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH140 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

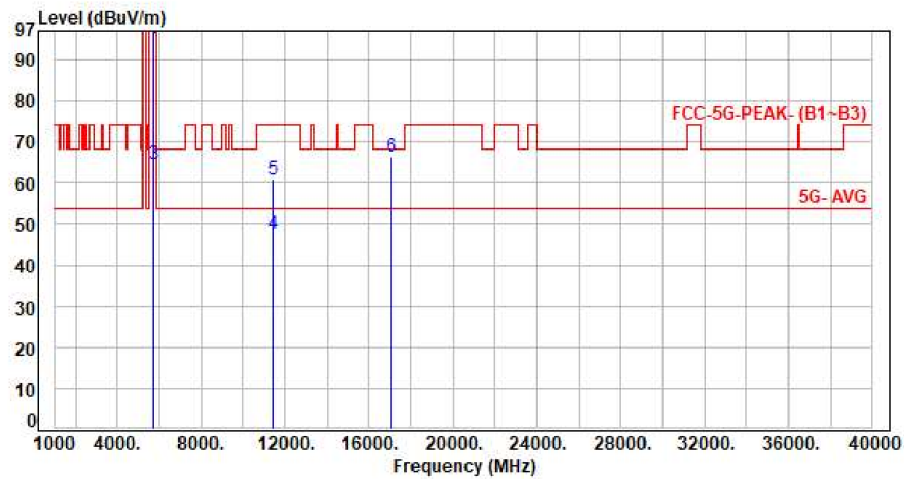


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.43	87.61	95.04	200.00	-104.96	Average	100	208	P
2	5700.00	7.43	97.93	105.36	200.00	-94.64	Peak	100	208	P
3	5725.00	7.43	57.10	64.53	68.20	-3.67	Peak	100	208	P
4	11400.00	16.35	31.36	47.71	54.00	-6.29	Average	100	175	P
5	11400.00	16.35	44.61	60.96	74.00	-13.04	Peak	100	175	P
6	17100.00	21.91	44.55	66.46	68.20	-1.74	Peak	100	135	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH100 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

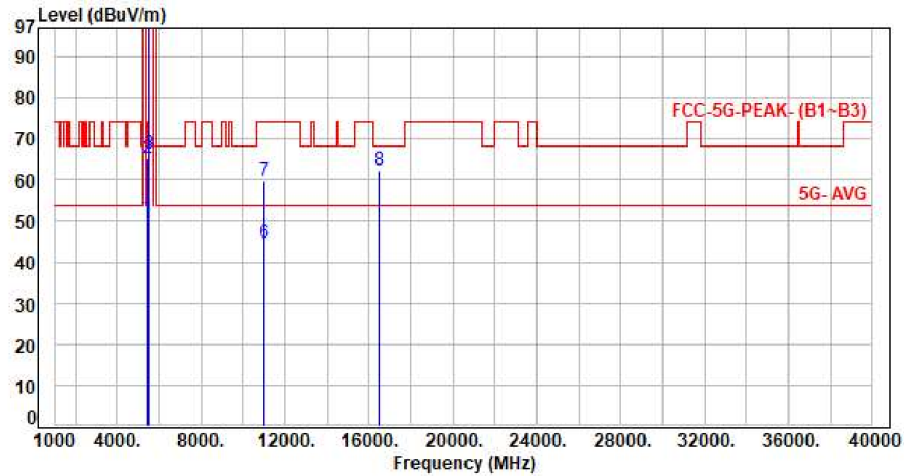

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.43	50.98	54.00	-3.02	Average	197	36	P
2	5460.00	7.55	57.75	65.30	74.00	-8.70	Peak	197	36	P
3	5470.00	7.58	58.98	66.56	68.20	-1.64	Peak	197	36	P
4	5500.00	7.68	101.02	108.70	200.00	-91.30	Average	197	36	P
5	5500.00	7.68	111.27	118.95	200.00	-81.05	Peak	197	36	P
6	11000.00	16.20	28.57	44.77	54.00	-9.23	Average	100	254	P
7	11000.00	16.20	43.60	59.80	74.00	-14.20	Peak	100	254	P
8	16500.00	18.92	43.58	62.50	68.20	-5.70	Peak	100	85	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH100 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

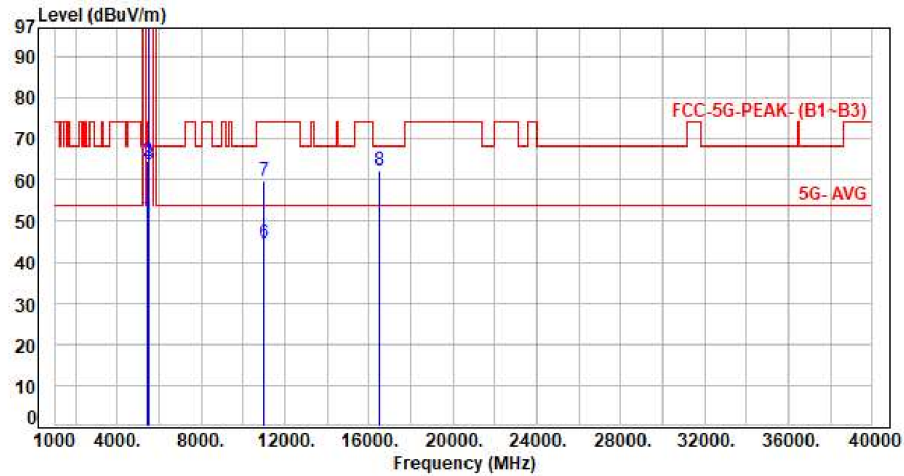

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.45	51.00	54.00	-3.00	Average	280	196	P
2	5460.00	7.55	57.09	64.64	74.00	-9.36	Peak	280	196	P
3	5470.00	7.58	56.32	63.90	68.20	-4.30	Peak	280	196	P
4	5500.00	7.68	98.36	106.04	200.00	-93.96	Average	280	196	P
5	5500.00	7.68	88.35	96.03	200.00	-103.97	Peak	280	196	P
6	11000.00	16.20	28.36	44.56	54.00	-9.44	Average	100	146	P
7	11000.00	16.20	43.56	59.76	74.00	-14.24	Peak	100	146	P
8	16500.00	18.92	43.29	62.21	68.20	-5.99	Peak	100	223	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH120 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

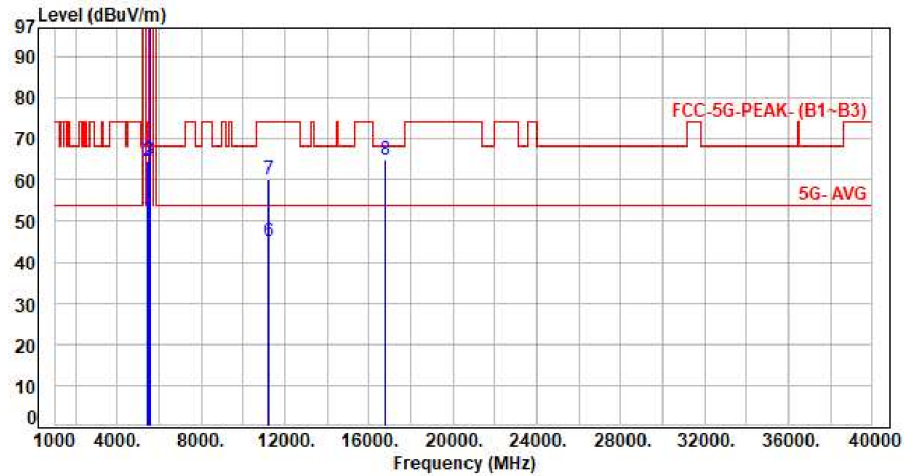

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.28	50.83	54.00	-3.17	Average	292	43	P
2	5460.00	7.55	56.90	64.45	74.00	-9.55	Peak	292	43	P
3	5470.00	7.58	57.45	65.03	68.20	-3.17	Peak	292	43	P
4	5600.00	7.51	98.49	106.00	200.00	-94.00	Average	292	43	P
5	5600.00	7.51	108.53	116.04	200.00	-83.96	Peak	292	43	P
6	11200.00	16.28	28.66	44.94	54.00	-9.06	Average	100	253	P
7	11200.00	16.28	43.84	60.12	74.00	-13.88	Peak	100	253	P
8	16800.00	20.60	44.16	64.76	68.20	-3.44	Peak	100	86	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH120 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

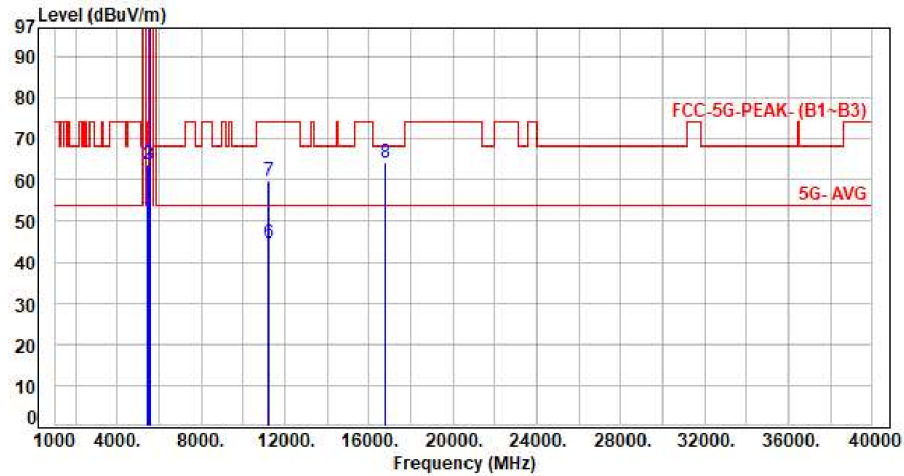

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.31	50.86	54.00	-3.14	Average	147	200	P
2	5460.00	7.55	56.07	63.62	74.00	-10.38	Peak	147	200	P
3	5470.00	7.58	56.26	63.84	68.20	-4.36	Peak	147	200	P
4	5600.00	7.51	92.15	99.66	200.00	-100.34	Average	147	200	P
5	5600.00	7.51	102.49	110.00	200.00	-90.00	Peak	147	200	P
6	11200.00	16.28	28.46	44.74	54.00	-9.26	Average	100	144	P
7	11200.00	16.28	43.35	59.63	74.00	-14.37	Peak	100	144	P
8	16800.00	20.60	43.52	64.12	68.20	-4.08	Peak	100	218	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor