

**MEASUREMENT REPORT**
FCC PART 15.407 Narrowband UNII HDR**Applicant Name:**

Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States

Date of Testing:

5/2/2023 - 8/10/2023

Test Report Issue Date:

8/25/2023

Test Site/Location:

Element Materials Technology Morgan Hill, CA, USA

Test Report Serial No.:

1C2305020011-08.BCG

FCC ID:

BCG-A3048

APPLICANT:

Apple Inc.

Application Type:

Certification

Model:

A3048

EUT Type:

Wireless Earbud

Frequency Range:

5157 – 5245MHz and 5731 – 5844MHz

Modulation Type:

$\pi/4$ DQPSK

FCC Classification:

Unlicensed National Information Infrastructure (UNII)

FCC Rule Part(s):

Part 15 Subpart E (15.407)

Test Procedure(s):

ANSI C63.10-2013, KDB 789033 D02 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 789033 D02 v02r01. Test results reported herein relate only to the item(s) tested.


I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortanez

Executive Vice President




| | | | |
|--|---|--|--|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 1 of 72 |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


T A B L E O F C O N T E N T S

| | | |
|-----|--|----|
| 1.0 | INTRODUCTION | 4 |
| 1.1 | Scope..... | 4 |
| 1.2 | Element Materials Technology Test Location | 4 |
| 1.3 | Test Facility / Accreditations..... | 4 |
| 2.0 | PRODUCT INFORMATION | 5 |
| 2.1 | Equipment Description | 5 |
| 2.2 | Device Capabilities..... | 5 |
| 2.3 | Antenna Description..... | 6 |
| 2.4 | Test Support Equipment..... | 6 |
| 2.5 | Test Configuration | 7 |
| 2.6 | Software and Firmware | 7 |
| 2.7 | EMI Suppression Device(s)/Modifications..... | 7 |
| 3.0 | DESCRIPTION OF TESTS | 8 |
| 3.1 | Evaluation Procedure..... | 8 |
| 3.2 | AC Line Conducted Emissions | 8 |
| 3.3 | Radiated Emissions..... | 9 |
| 3.4 | Environmental Conditions..... | 9 |
| 4.0 | ANTENNA REQUIREMENTS | 10 |
| 5.0 | MEASUREMENT UNCERTAINTY | 11 |
| 6.0 | TEST EQUIPMENT CALIBRATION DATA..... | 12 |
| 7.0 | TEST RESULTS | 13 |
| 7.1 | Summary..... | 13 |
| 7.2 | 26dB & 99% Bandwidth Measurement – HDR..... | 14 |
| 7.3 | 6dB & 99% Bandwidth Measurement – HDR..... | 22 |
| 7.4 | Conducted Output Power - HDR | 30 |
| 7.5 | Maximum Power Spectral Density – HDR | 32 |
| 7.6 | Radiated Spurious Emissions – Above 1GHz..... | 47 |
| 7.7 | Radiated Spurious Emissions – Below 1GHz | 64 |
| 7.8 | AC Line-Conducted Emissions Measurement..... | 68 |
| 8.0 | CONCLUSION..... | 72 |


| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 2 of 72 |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.




MEASUREMENT REPORT



| UNII Band | Tx Frequency (MHz) | Mode | Max. Power (mW) | Max. Power (dBm) |
|-----------|--------------------|-------|-----------------|------------------|
| 1 | 5157-5245 | HDR4 | 7.870 | 8.96 |
| | | HDR8 | 7.925 | 8.99 |
| | | HDRp4 | 7.745 | 8.89 |
| | | HDRp8 | 7.834 | 8.94 |
| 3 | 5731-5844 | HDR4 | 9.817 | 9.92 |
| | | HDR8 | 9.727 | 9.88 |
| | | HDRp4 | 9.750 | 9.89 |
| | | HDRp8 | 9.683 | 9.86 |

EUT Overview

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 3 of 72 |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.


1.2 Element Materials Technology Test Location

These measurement tests were conducted at the Element Materials Technology facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology located in Morgan Hill, CA 95037, U.S.A.

- Element Materials Technology is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Materials Technology facility is a registered (22831) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs)

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 4 of 72 |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Wireless Left Earbud FCC ID: BCG-A3048**. The test data contained in this report pertains only to the emissions due to the EUT's Narrowband UNII HDR transmitter.

- This Narrowband UNII module has been tested by manufacturer and the following were confirmed:
 - A) The hopping sequence is pseudorandom
 - B) 79 channels can be used at a time for hopping
 - C) The receiver input bandwidth equals the transmit bandwidth
 - D) The receiver hops in sequence with the transmit signal
 - E) Narrowband UNII can only hop within the same UNII band and cannot hop between bands

Test Device Serial No.: GX1KJ4EG26JY, GX1KJ41026JY, GX1KJ3WN26JY, GX1KJ5AT26JY

2.2 Device Capabilities

This device contains the following capabilities:


Bluetooth (1x, EDR, LE1M, LE2M, HDR4, HDR8, HDRp4, HDRp8), NB UNII (1x, LE2M, HDR4, HDR8, HDRp4, HDRp8)

| Band 1 | Band 3 |
|-----------------|-----------------|
| Frequency (MHz) | Frequency (MHz) |
| 5157 | 5731 |
| : | : |
| 5201 | 5788 |
| : | : |
| 5245 | 5844 |

Table 2-1. Narrowband UNII HDR Frequency of Operations

Notes:

This device is capable of operating in hopping and non-hopping mode. The EUT can hop between 79 different channels in the U-NII Band 1 & U-NII Band 3. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of KDB 789033 D02 V02r01 and ANSI C63.10-2013. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 5 of 72 |

V 10.5 12/15/2021

| Measured Duty Cycles | | |
|----------------------|-----------------|----------------|
| Mode | Frequency (MHz) | Duty Cycle [%] |
| HDR4 | 5157-5245 | 77.9 |
| | 5731-5844 | 77.9 |
| HDR8 | 5157-5245 | 78.3 |
| | 5731-5844 | 78.3 |
| HDRp4 | 5157-5245 | 87.1 |
| | 5731-5844 | 87.1 |
| HDRp8 | 5157-5245 | 88.1 |
| | 5731-5844 | 88.1 |

Table 2-2. Measured Duty Cycles

1. Additionally, this device is sold together in the same package as a system with FCC ID: BCG-A3047 & FCC ID: BCG-A2968. Co-Tx configurations were tested and the worst case has been included in the RF BTLE Report.

2.3 Antenna Description

Following antenna gains provided by manufacturer were used for the testing.


| Frequency [GHz] | Antenna Gain (dBi) |
|-----------------|--------------------|
| 5.157 – 5.245 | -2.12 |
| 5.731 – 5.844 | -2.55 |

Table 2-3. Highest Antenna Gain

2.4 Test Support Equipment

| | | | |
|---|----------------------------|----------------|-------------------|
| 1 | Apple MacBook Pro | Model: A2141 | S/N: C02DV7VKMD6T |
| | w/AC/DC Adapter | Model: A2166 | S/N: N/A |
| 2 | Apple Airpod Charging Case | Model: A2968 | S/N: W1G9FWQMLX |
| | Apple Airpod (Right) | Model: A3047 | S/N: GFJKJ17326K0 |
| 3 | Apple USB-C Cable | Model: Spartan | S/N: 000MKTR02U |
| 4 | USB-C Cable | Model: A146 | S/N: N/A |
| | w/ AC Adapter | Model: A2305 | S/N: N/A |

Table 2-4. Test Support Equipment List

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 6 of 72 |

V 10.5 12/15/2021

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2013 and KDB 789033 D02 v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, and 7.5 for antenna port conducted emissions test setups.

The EUT was also investigated with and without charging case.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

For AC line conducted and radiated test below 1GHz, following configuration were investigated,


- EUT charged by charging case and powered by AC/DC adaptor with USB-C cable.
- EUT charged by charging case and powered by host PC with USB-C cable.

2.6 Software and Firmware

The test was conducted with firmware version 5A92420m installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 7 of 72 |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 789033 D02 v02r01 were used in the measurement of the EUT.

Deviation from measurement procedure.....None


3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-6. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is EPCOS 2X60A Power Line Filter (100dB Attenuation, 14kHz-18GHz) and the two EPCOs 2X48A filters (100dB Minimum Insertion Loss, 14kHz - 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.8. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.50.40.

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 8 of 72 |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.


Per KDB 414788, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

| | | | |
|---|---|------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 9 of 72 |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

4.0 ANTENNA REQUIREMENTS


Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.


| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 10 of 72 |

V 10.5 12/15/2021

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Contribution | Expanded Uncertainty (\pm dB) |
|-------------------------------------|----------------------------------|
| Conducted Bench Top Measurements | 1.77 |
| Line Conducted Disturbance | 2.70 |
| Radiated Disturbance (<30MHz) | 4.38 |
| Radiated Disturbance (30MHz - 1GHz) | 4.75 |
| Radiated Disturbance (1 - 18GHz) | 5.20 |
| Radiated Disturbance (>18GHz) | 4.72 |

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 11 of 72 |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

6.0 TEST EQUIPMENT CALIBRATION DATA


Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

| Manufacturer | Model | Description | Cal Date | Cal Interval | Cal Due | Serial # |
|-----------------------|-------------|---|------------|--------------|------------|------------|
| Anritsu | MA2411B | Pulse Power Sensor | 4/5/2023 | Annual | 4/5/2024 | 1726261 |
| Anritsu | ML2496A | Power Meter | 10/17/2022 | Annual | 10/17/2023 | 2002005 |
| ETS-Lindgren | 3117 | Double Ridged Guide Horn Antenna (1-18 GHz) | 3/7/2023 | Annual | 3/7/2024 | 00227949 |
| Keysight Technologies | N9030A | PXA Signal Analyzer | 12/9/2022 | Annual | 12/9/2023 | MY55330128 |
| Keysight Technologies | N9040B | UXA Spectrum Analyzer | 7/10/2023 | Annual | 7/10/2024 | US57212289 |
| Rohde & Schwarz | 180-442A-KF | Horn (Small) | 3/6/2023 | Annual | 3/6/2024 | T058701-2 |
| Rohde & Schwarz | ENV216 | Two-Line V-Network | 3/30/2023 | Annual | 3/30/2024 | 101364 |
| Rohde & Schwarz | FSVA3030 | Signal Analyzer 30GHz | 11/30/2022 | Annual | 11/30/2023 | 100832 |
| Rohde & Schwarz | FSW67 | Signal and Spectrum Analyzer (2Hz-67GHz) | 4/21/2022 | Annual | 4/21/2023 | 101366 |
| Rohde & Schwarz | HFH2-Z2 | Loop Antenna | 4/3/2022 | Annual | 4/3/2023 | 100546 |
| Rohde & Schwarz | TS-PR1 | Preamplifier - Antenna System; 30MHz - 1GHz | 6/22/2023 | Annual | 6/22/2024 | 102356 |
| Rohde & Schwarz | TS-PR18 | Pre Amplifier 1-18GHz | 3/3/2023 | Annual | 3/3/2024 | 102130 |
| Rohde & Schwarz | TS-PR1840 | Pre Amplifier 18-40GHz | 6/2/2023 | Annual | 6/2/2024 | 100050 |
| Schwarzbeck | VULB9162 | Broadband Trilog Antenna | 4/17/2023 | Annual | 4/17/2024 | 00304 |

Table 6-1. Test Equipment List

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 12 of 72 |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.
 FCC ID: BCG-A3048
 FCC Classification: Unlicensed National Information Infrastructure (UNII)

| FCC Part Section(s) | Test Description | Test Limit | Test Condition | Test Result | Reference |
|----------------------------|---|--|----------------|-------------|--------------------------|
| 15.407 | 26dB Bandwidth | N/A | CONDUCTED | N/A | Section 7.2 |
| 15.407(e) | 6dB Bandwidth | >500kHz(5725-5850MHz) | | PASS | Section 7.3 |
| 2.1049 | Occupied Bandwidth | N/A | | PASS | Section 7.2, Section 7.3 |
| 15.407 (a.1.iv), (a.3) | Maximum Conducted Output Power | Maximum conducted powers must meet the limits detailed in 15.407 (a) | | PASS | Section 7.4 |
| 15.407 (a.1.iv), (a.3) | Maximum Power Spectral Density | Maximum power spectral density must meet the limits detailed in 15.407 (a) | | PASS | Section 7.5 |
| 15.407(b.1), (b.4) | Undesirable Emissions | Undesirable emissions must meet the limits detailed in 15.407(b) | RADIATED | PASS | Section 7.6 |
| 15.205, 15.407(b.1), (b.4) | General Field Strength Limits (Restricted Bands and Radiated Emission Limits) | Emissions in restricted bands must meet the radiated limits detailed in 15.209 | | PASS | Section 7.6, 7.7 |
| 15.207 | AC Conducted Emissions 150kHz – 30MHz | < FCC 15.207 limits | LINE CONDUCTED | PASS | Section 7.8 |

Table 7-1. Summary of Test Results

Notes:

- 1) The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “UNII Automation,” Version 7.0.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “Chamber Automation,” Version 2.0.0.

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 13 of 72 |

V 10.5 12/15/2021

7.2 26dB & 99% Bandwidth Measurement – HDR

\$2.1049; \$15.407

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

The 26dB bandwidth is used to determine the conducted power limits.

Test Procedure Used

ANSI C63.10-2013 – Section 12.4
KDB 789033 D02 v02r01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold

Test Setup


The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

None.

| | | | |
|---|---|------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 14 of 72 |


V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


26dB & 99% Bandwidth Measurements

| | Frequency [MHz] | Mode | Measured 99% Occupied Bandwidth [MHz] | Measured 26dB Bandwidth [MHz] |
|--------|--------------------|-------|---|-------------------------------------|
| Band 1 | 5157 | HDR4 | 2.2678 | 2.6360 |
| | 5201 | HDR4 | 2.2457 | 2.5510 |
| | 5245 | HDR4 | 2.2765 | 2.5610 |
| | 5157 | HDR8 | 4.4590 | 5.0290 |
| | 5201 | HDR8 | 4.4800 | 5.0330 |
| | 5245 | HDR8 | 4.5634 | 5.0650 |
| | 5157 | HDRp4 | 2.4306 | 2.7360 |
| | 5201 | HDRp4 | 2.4112 | 2.7210 |
| | 5245 | HDRp4 | 2.4336 | 2.7270 |
| | 5157 | HDRp8 | 4.8510 | 5.4190 |
| | 5201 | HDRp8 | 4.8347 | 5.4160 |
| | 5245 | HDRp8 | 4.8474 | 5.4260 |


Table 7-2. Conducted BW Measurements

| | | | |
|---|---|------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 15 of 72 |


V 10.5 12/15/2021

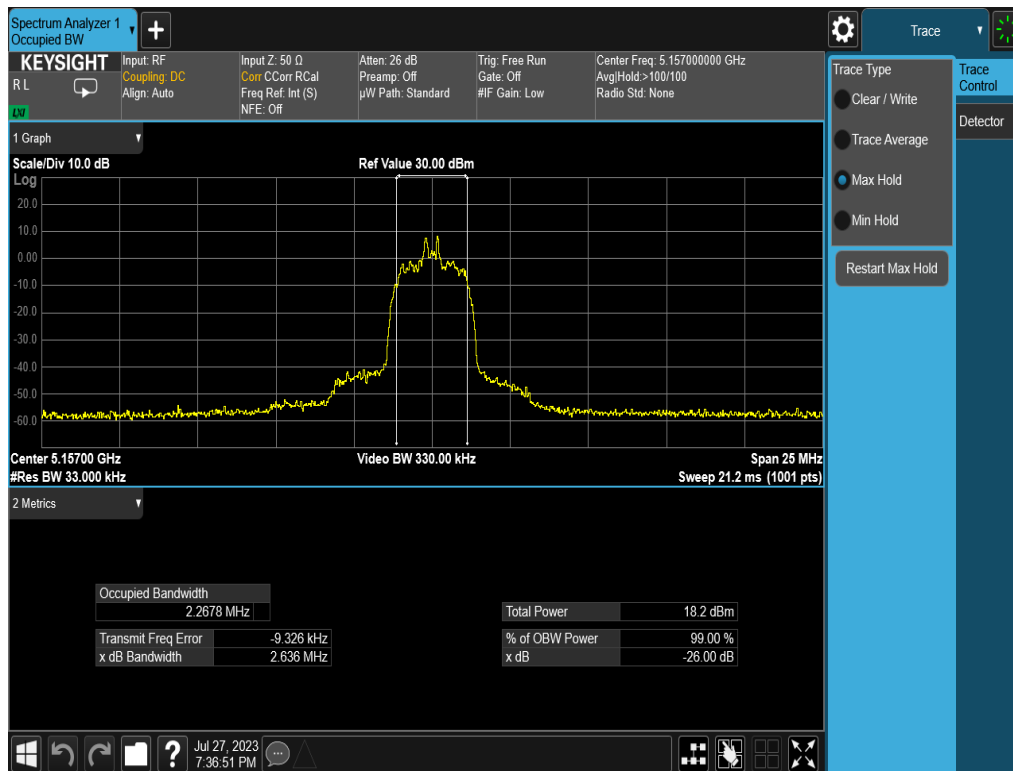

Plot 7-1. 26dB BW & 99% OBW (HDR4, 5157MHz)


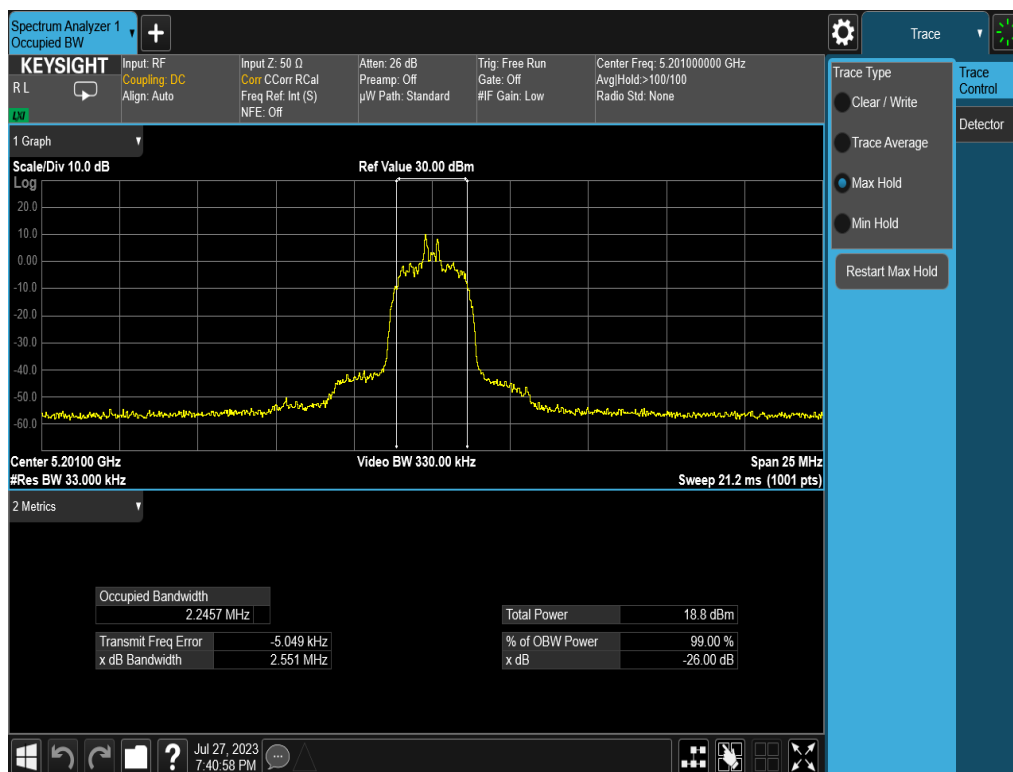



Plot 7-2. 26dB BW & 99% OBW (HDR4, 5201MHz)

| | | | |
|---|--|------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 16 of 72 |

V 10.5 12/15/2021


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

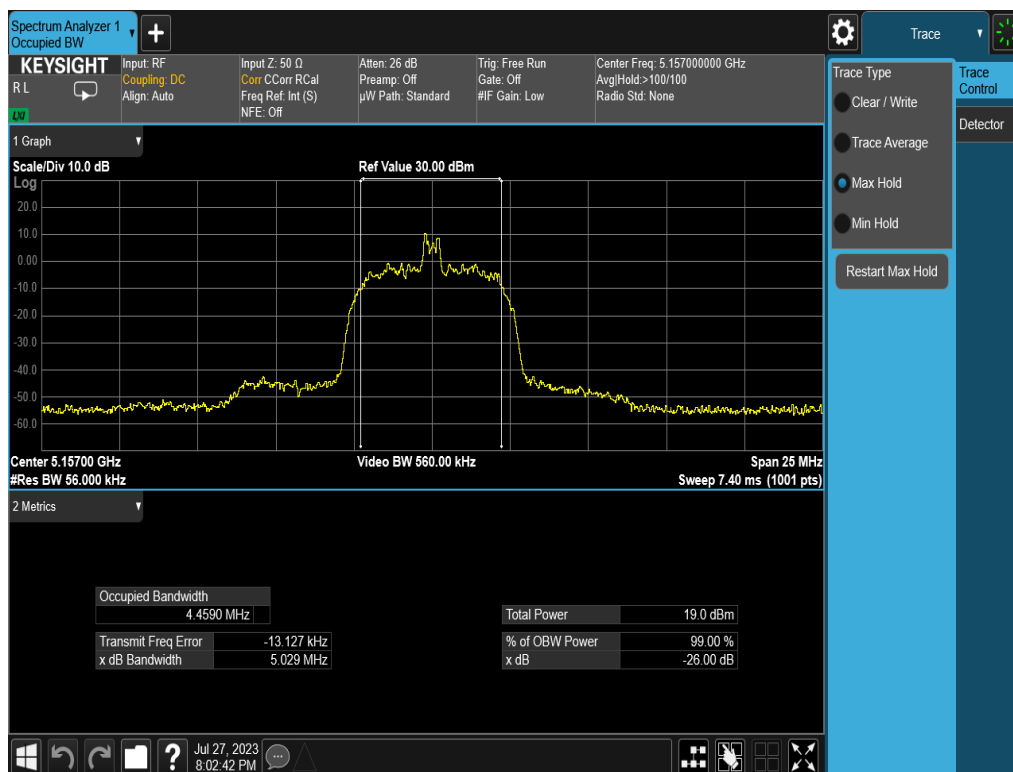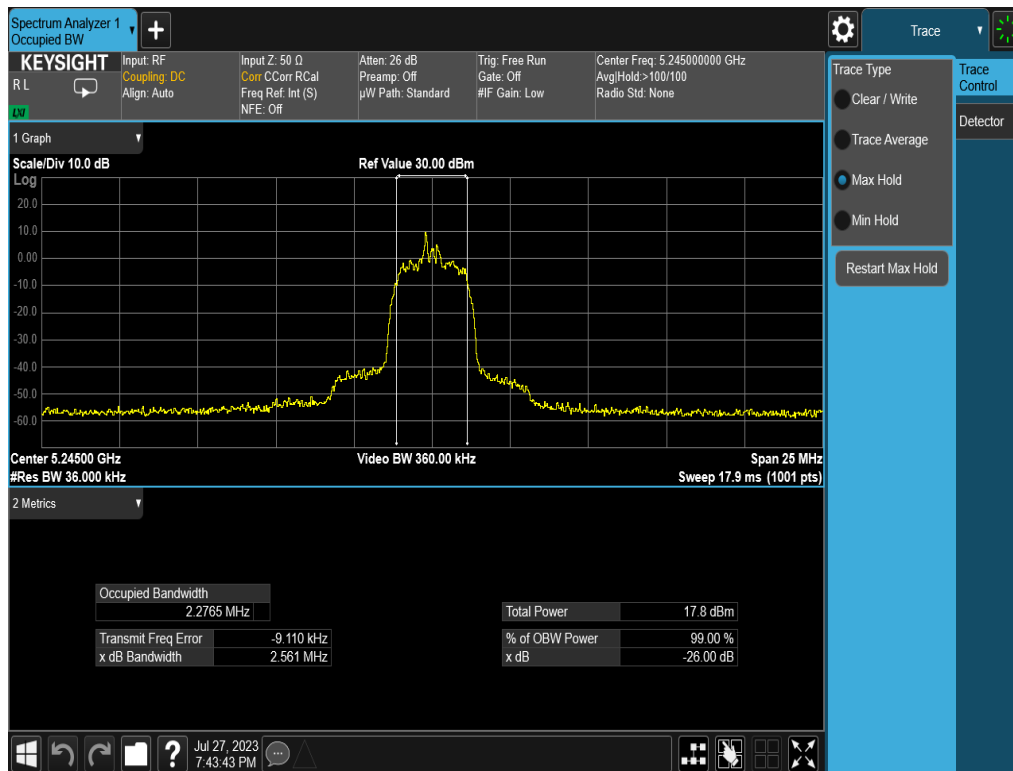


| | | | |
|---|---|------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 17 of 72 |

V 10.5 12/15/2021


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

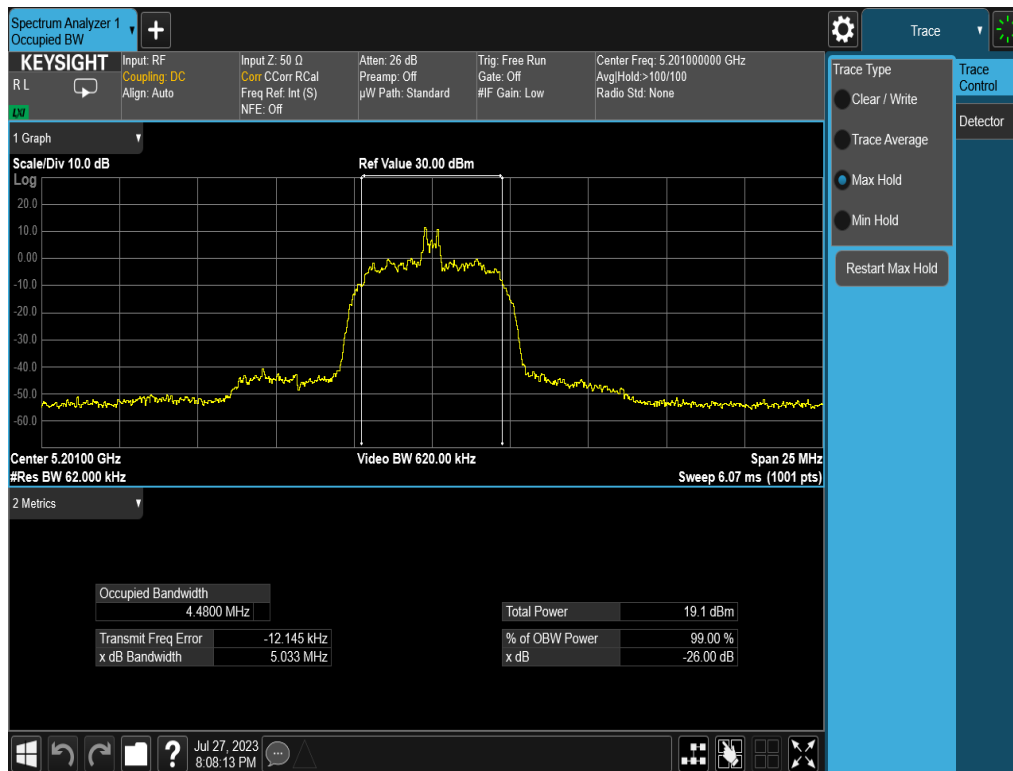

Plot 7-5. 26dB BW & 99% OBW (HDR8, 5201MHz)

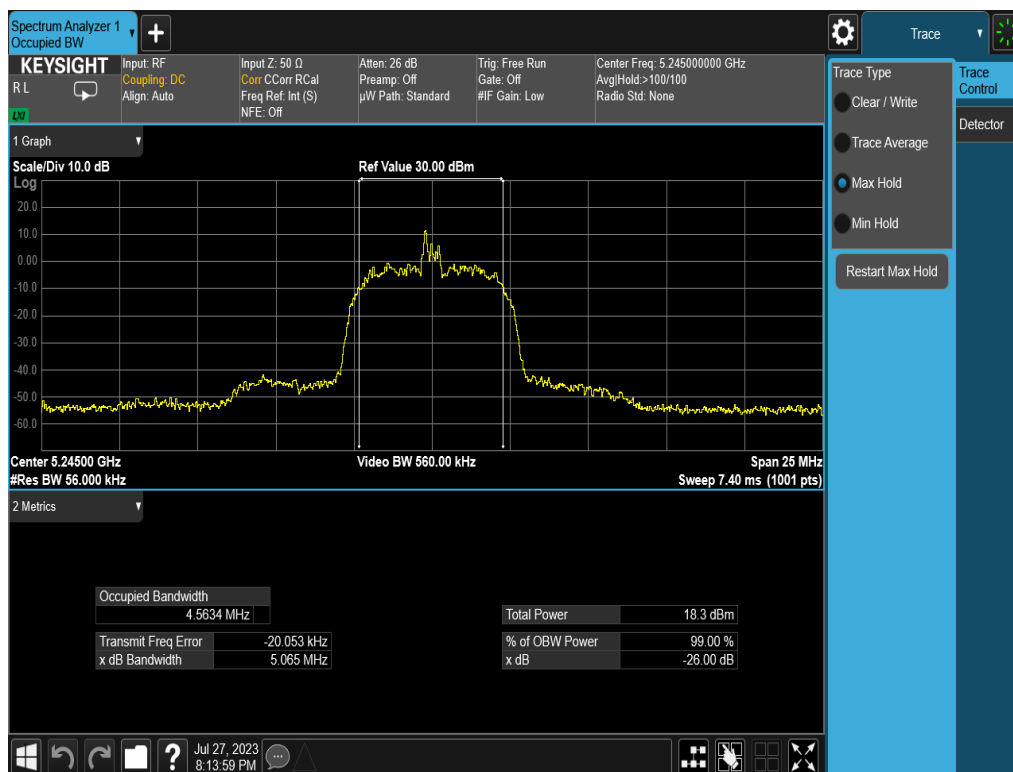


Plot 7-6. 26dB BW & 99% OBW (HDR8, 5245MHz)


| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 18 of 72 |

V 10.5 12/15/2021


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

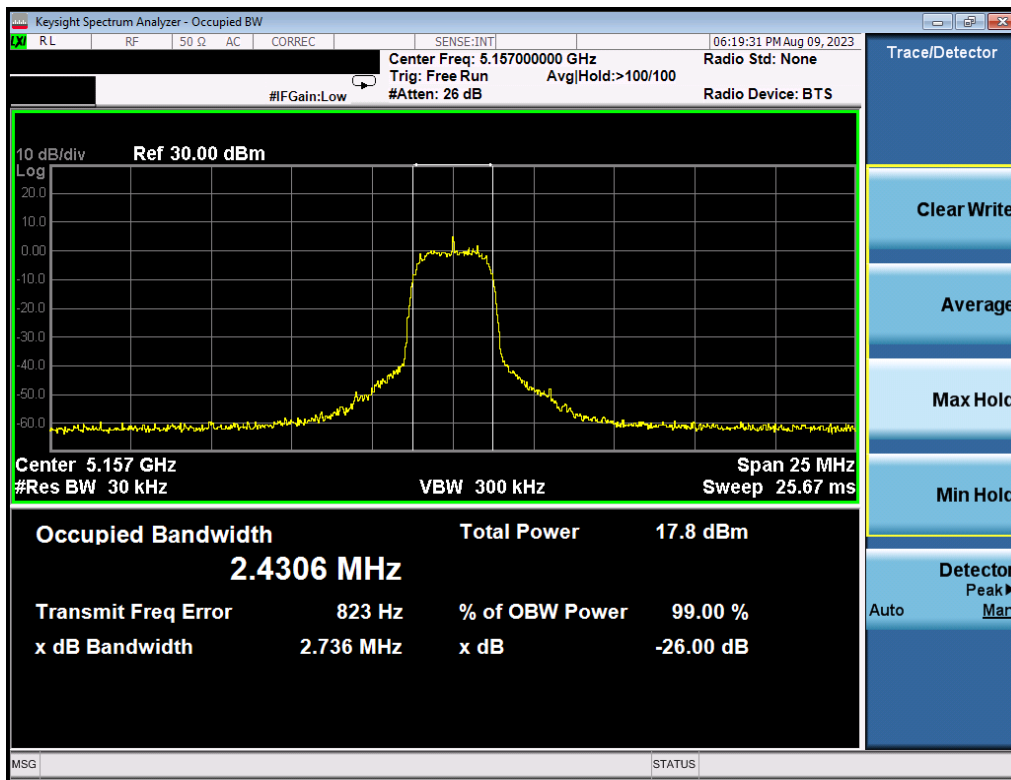


Plot 7-7. 26dB BW & 99% OBW (HDRp4, 5157MHz)

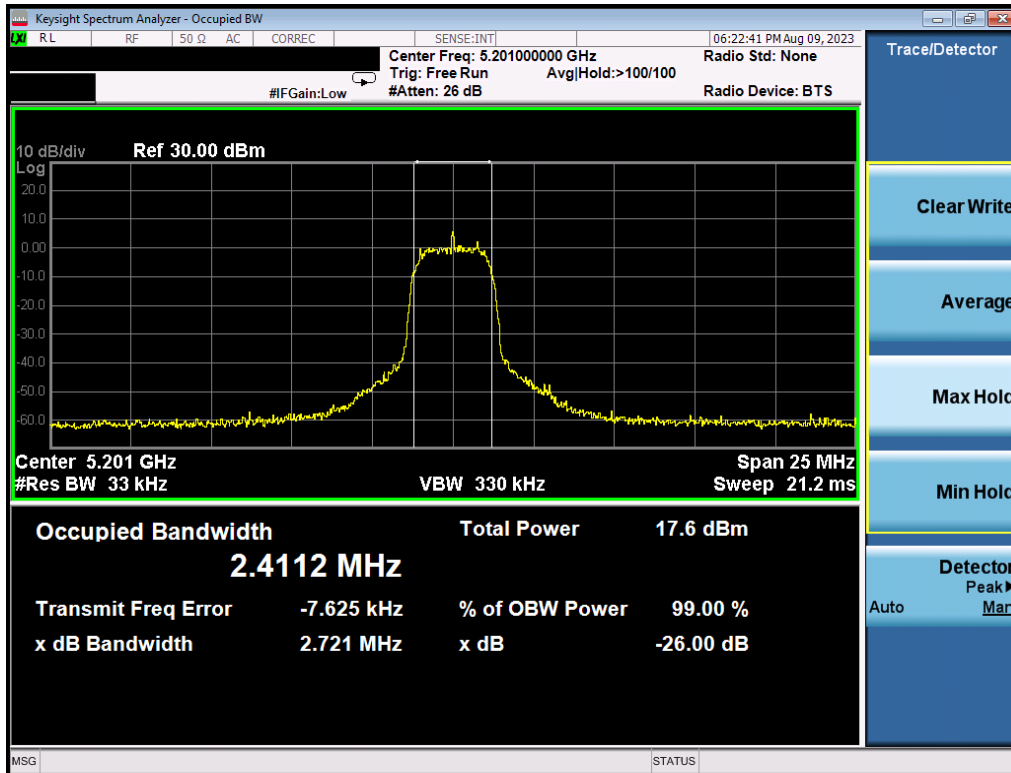


Plot 7-8. 26dB BW & 99% OBW (HDRp4, 5201MHz)

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 19 of 72 |


V 10.5 12/15/2021

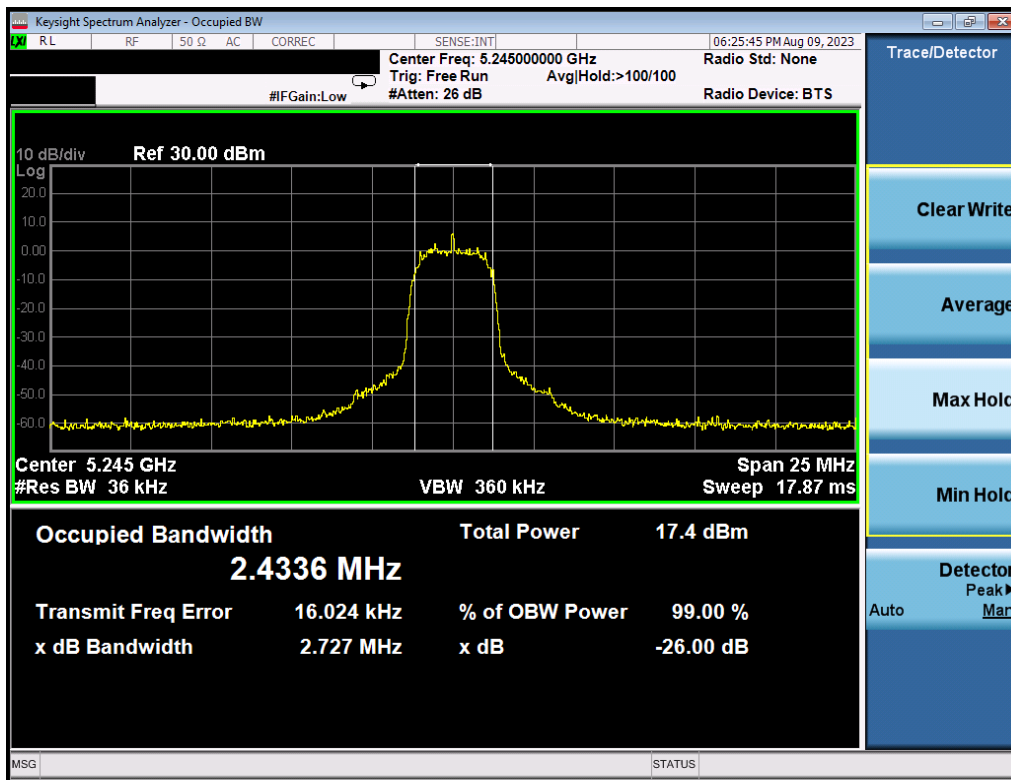


Plot 7-9. 26dB BW & 99% OBW (HDRp4, 5245MHz)

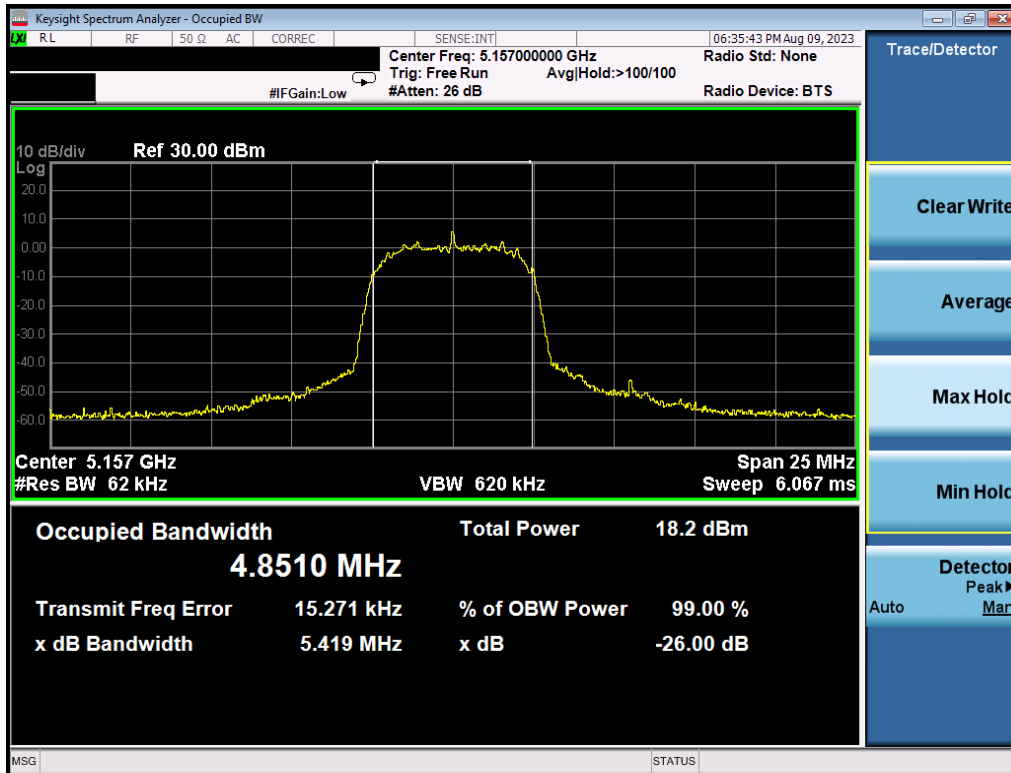


Plot 7-10. 26dB BW & 99% OBW (HDRp8, 5157MHz)

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 20 of 72 |


V 10.5 12/15/2021

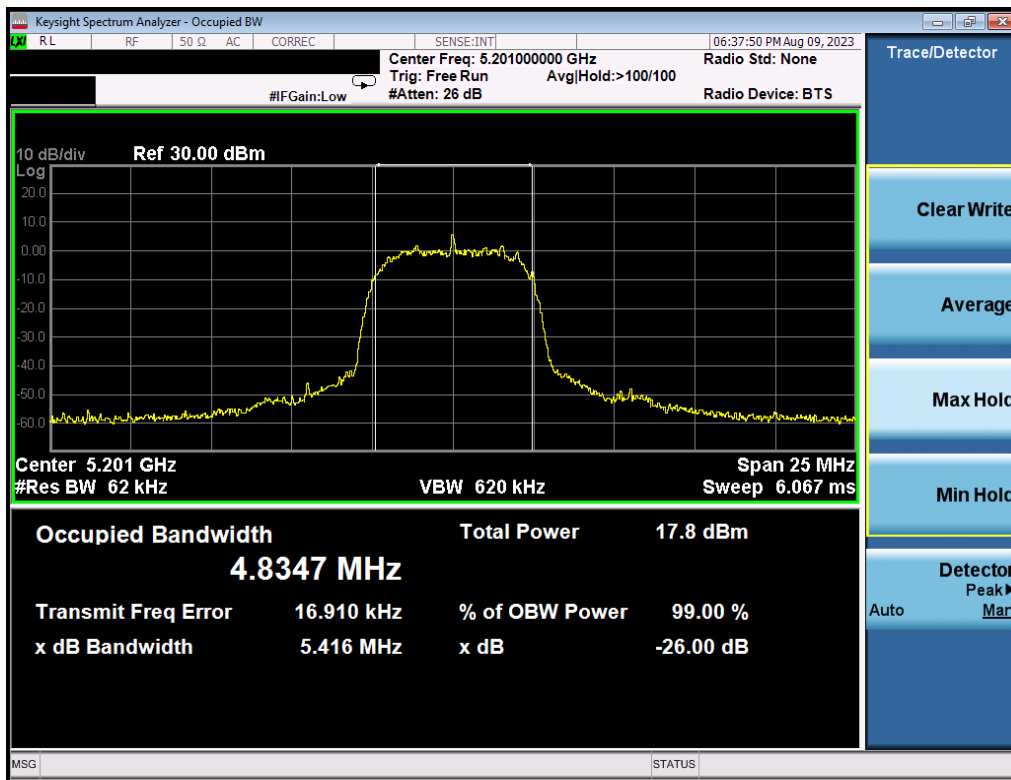

Plot 7-11. 26dB BW & 99% OBW (HDRp8, 5201MHz)

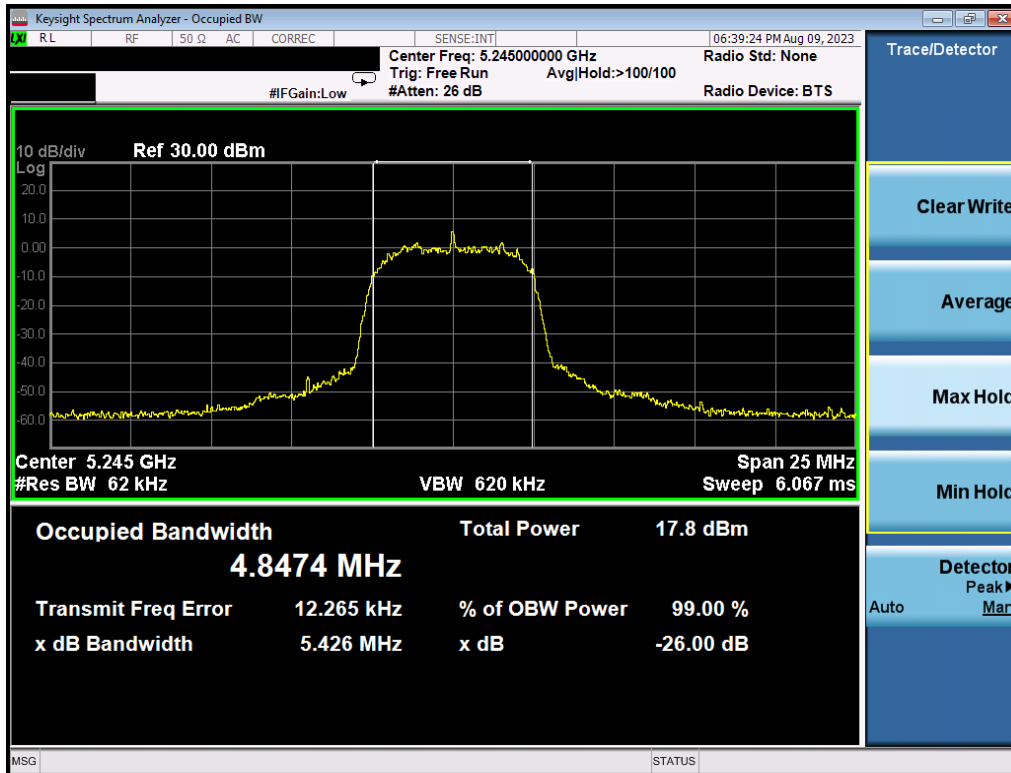

Plot 7-12. 26dB BW & 99% OBW (HDRp8, 5245MHz)

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 21 of 72 |

V 10.5 12/15/2021

7.3 6dB & 99% Bandwidth Measurement – HDR

\$2.1049; \$15.407 (e);

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 6dB bandwidth.

In the 5.725 – 5.850GHz band, the 6dB bandwidth must be ≥ 500 kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 6.9.2
KDB 789033 D02 v02r01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple

Test Setup


The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

Test Notes

None.


| | | | |
|---|---|------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 22 of 72 |

V 10.5 12/15/2021



6dB & 99% Bandwidth Measurements


| | Frequency [MHz] | Mode | Measured 99% Occupied Bandwidth [MHz] | Measured 6dB Bandwidth [MHz] | Minimum 6dB Bandwidth [MHz] | Pass / Fail |
|--------|-----------------|-------|---------------------------------------|------------------------------|-----------------------------|-------------|
| Band 3 | 5731 | HDR4 | 2.3051 | 0.5751 | 0.5000 | Pass |
| | 5788 | HDR4 | 2.3329 | 0.5462 | 0.5000 | Pass |
| | 5844 | HDR4 | 2.3052 | 0.5670 | 0.5000 | Pass |
| | 5731 | HDR8 | 4.5073 | 0.5937 | 0.5000 | Pass |
| | 5788 | HDR8 | 4.5064 | 0.6066 | 0.5000 | Pass |
| | 5844 | HDR8 | 4.5094 | 0.5851 | 0.5000 | Pass |
| | 5731 | HDRp4 | 2.4475 | 2.2290 | 0.5000 | Pass |
| | 5788 | HDRp4 | 2.4334 | 2.1340 | 0.5000 | Pass |
| | 5844 | HDRp4 | 2.4146 | 2.1490 | 0.5000 | Pass |
| | 5731 | HDRp8 | 4.8375 | 3.6440 | 0.5000 | Pass |
| | 5788 | HDRp8 | 4.7915 | 3.7990 | 0.5000 | Pass |
| | 5844 | HDRp8 | 4.8777 | 4.2740 | 0.5000 | Pass |

Table 7-3. Conducted BW Measurements

| | | | |
|---|---|------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 23 of 72 |


V 10.5 12/15/2021

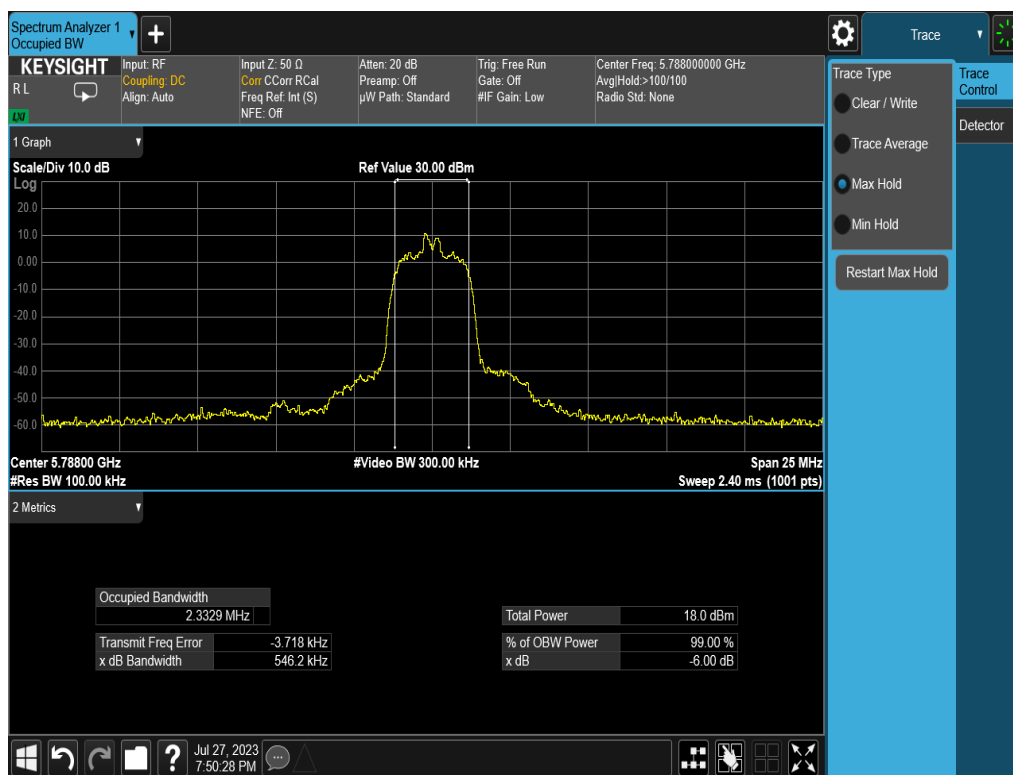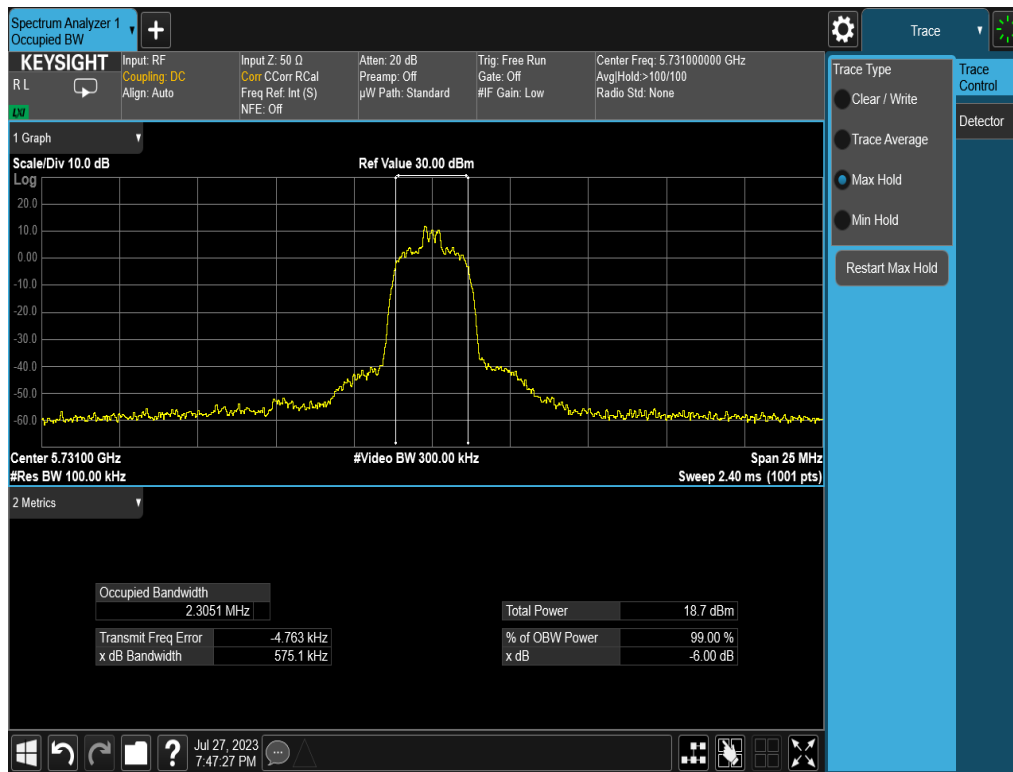


| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 24 of 72 |

V 10.5 12/15/2021


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

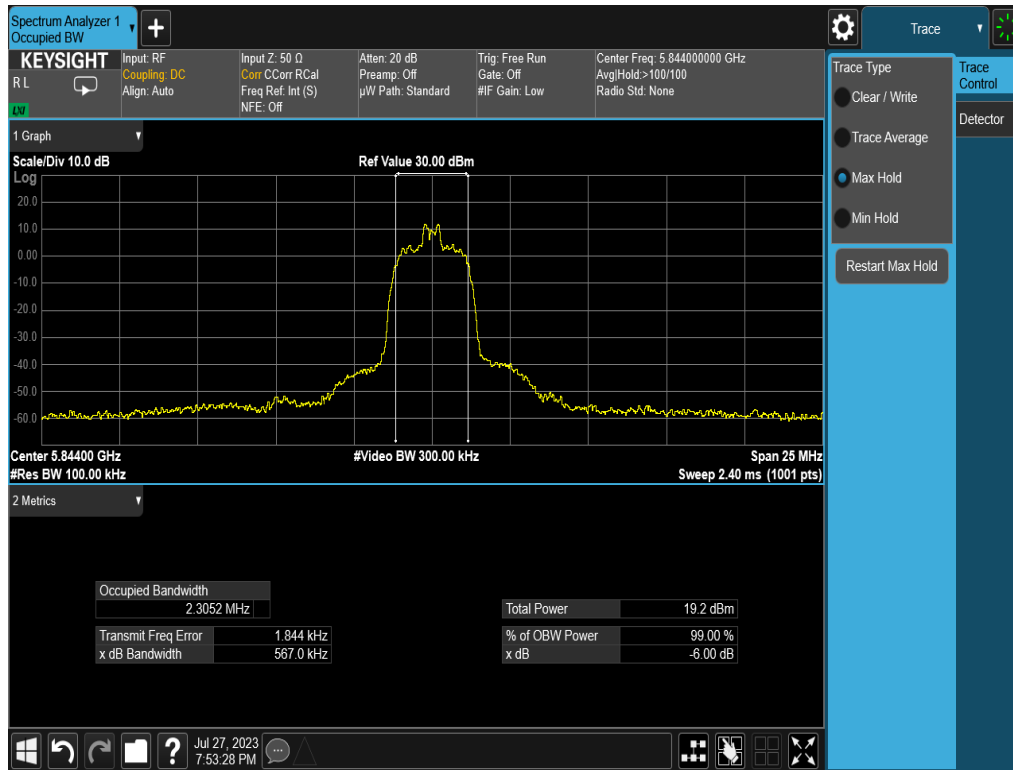

Plot 7-15. 6dB BW & 99% OBW (HDR4, 5844MHz)

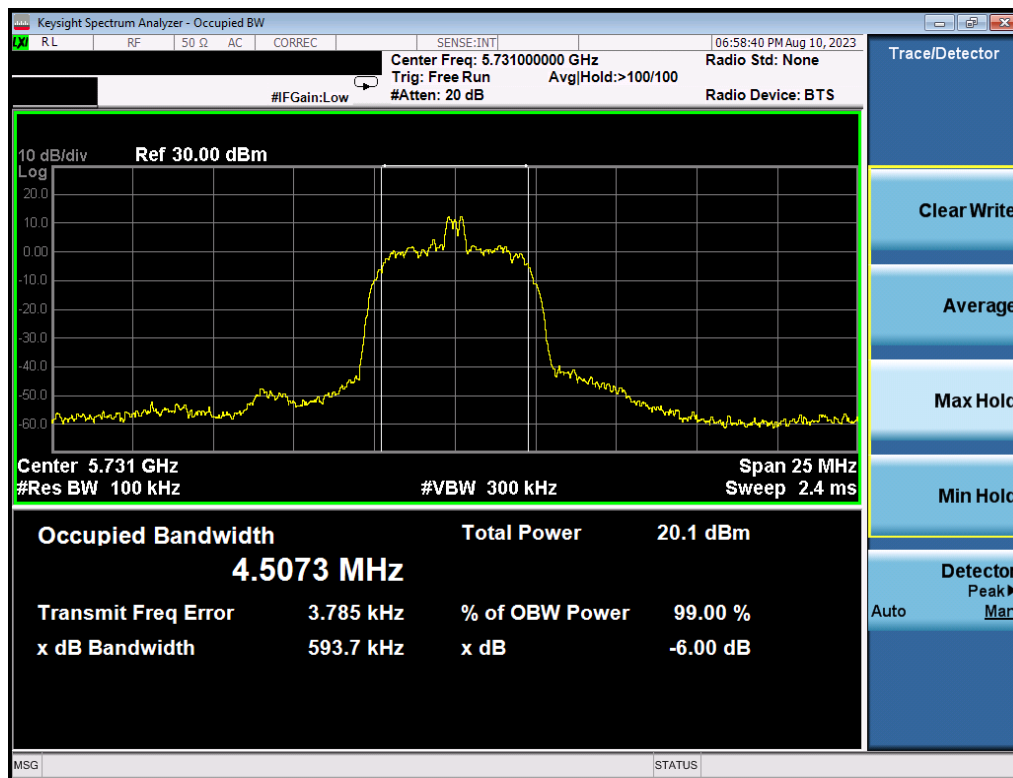


Plot 7-16. 6dB BW & 99% OBW (HDR8, 5731MHz)


| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 25 of 72 |

V 10.5 12/15/2021


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

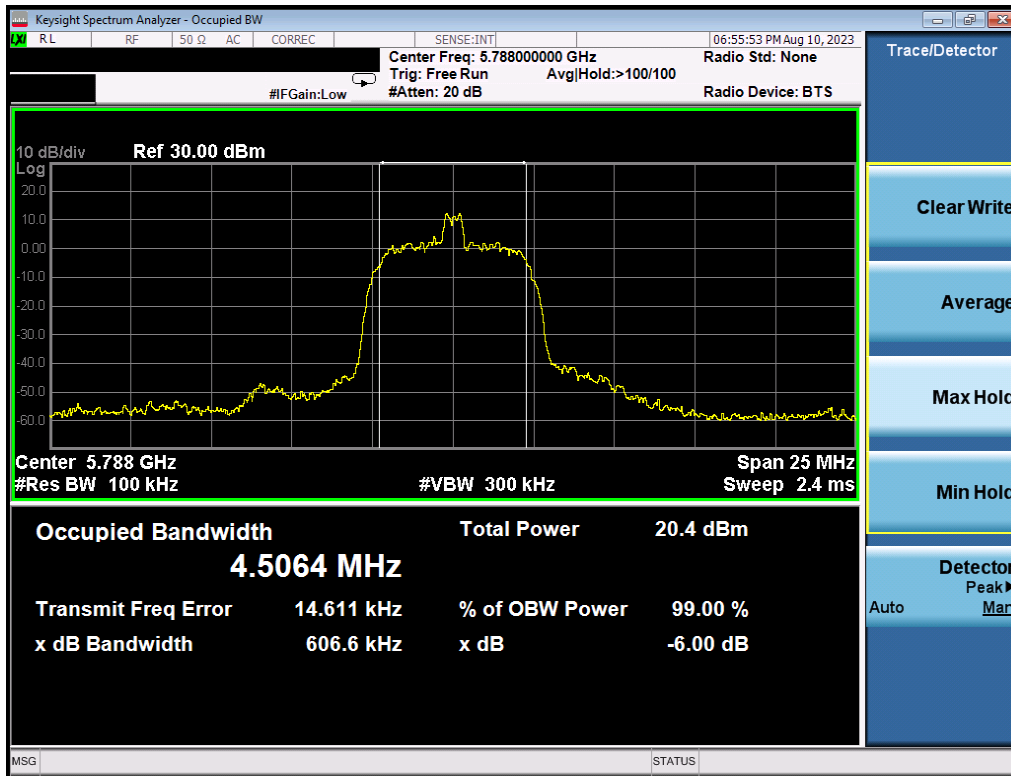


Plot 7-17. 6dB BW & 99% OBW (HDR8, 5788MHz)

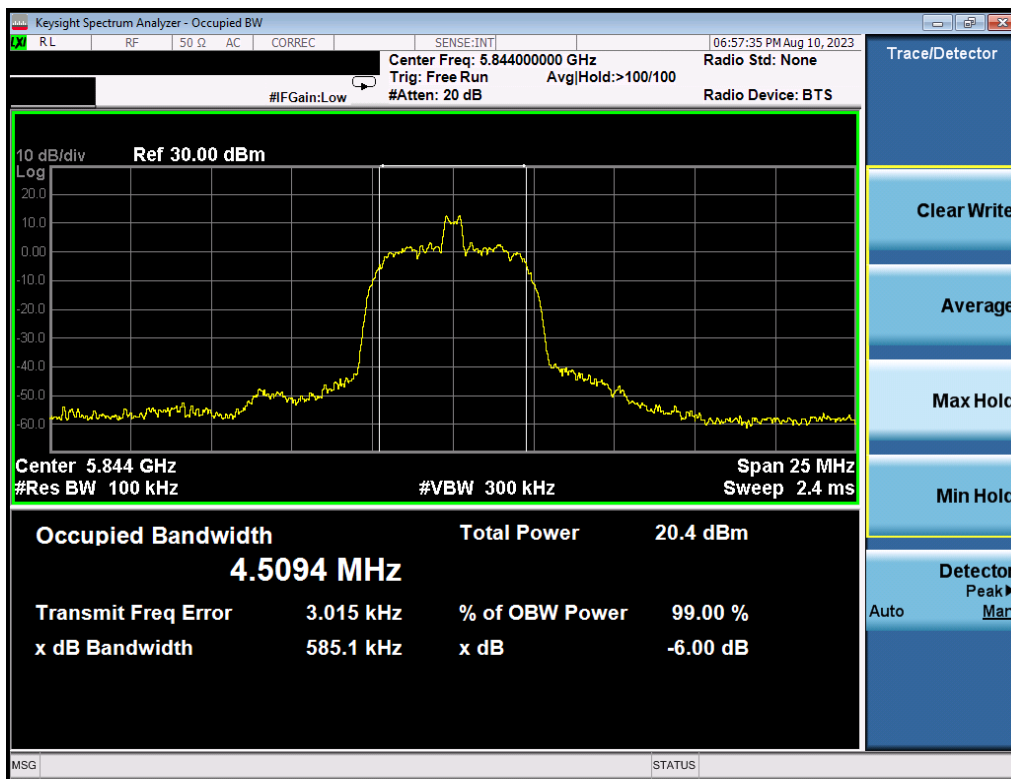


Plot 7-18. 6dB BW & 99% OBW (HDR8, 5844MHz)


| | | | |
|---|---|------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 26 of 72 |

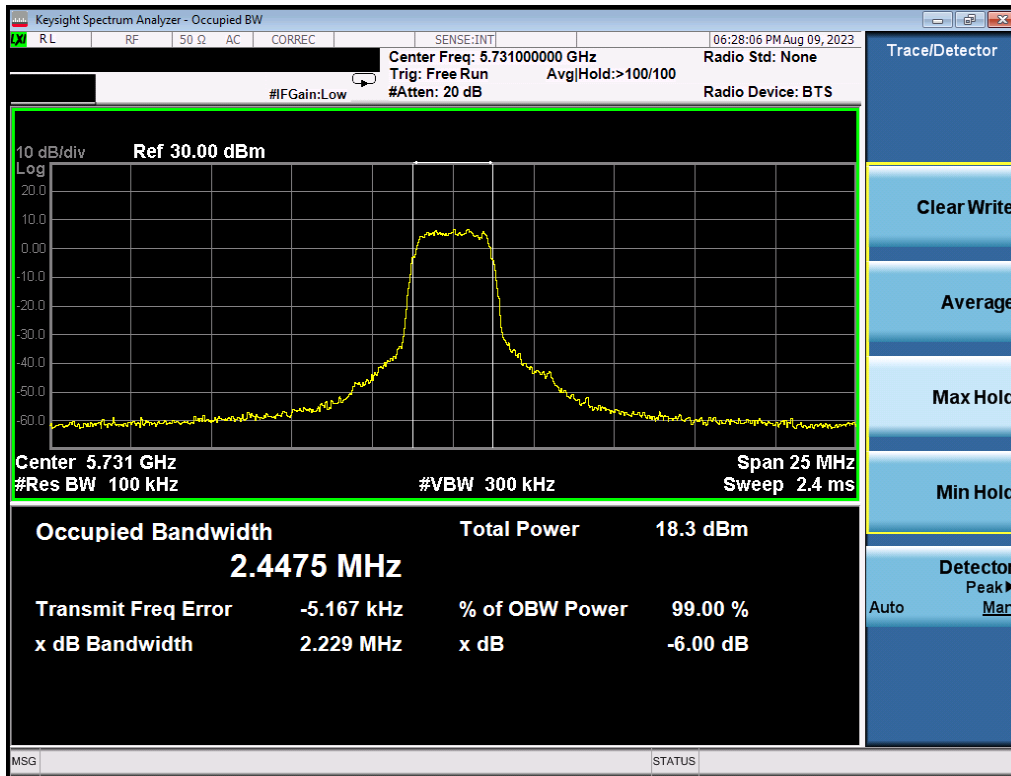

Plot 7-19. 6dB BW & 99% OBW (HDRp4, 5731MHz)

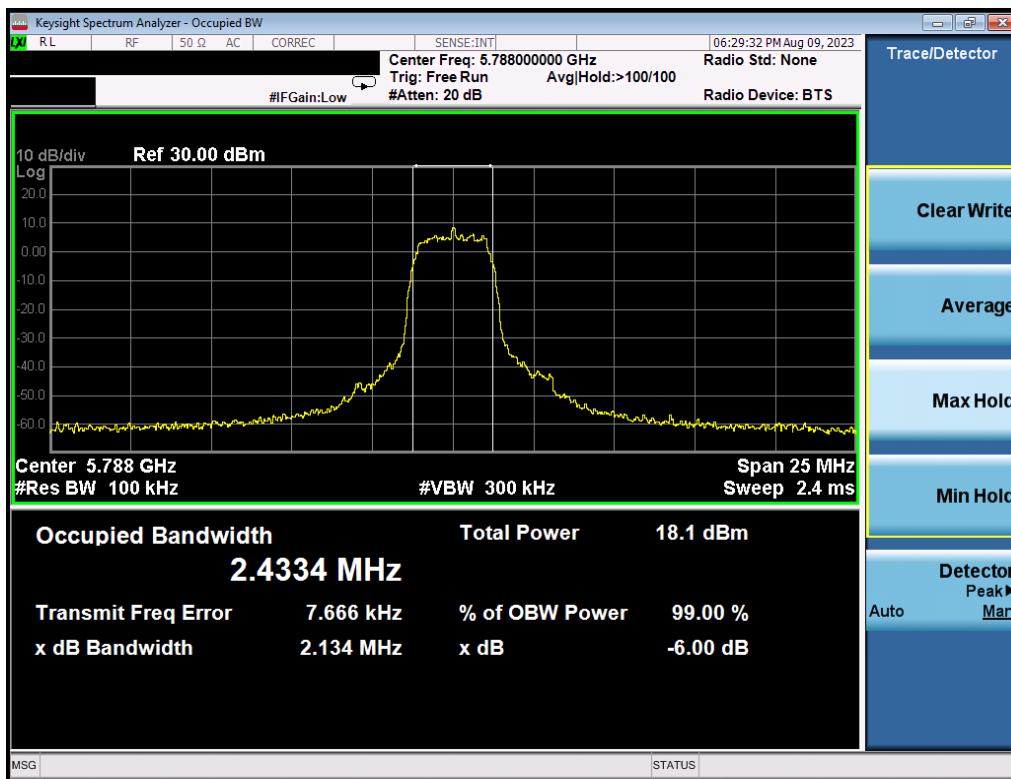


Plot 7-20. 6dB BW & 99% OBW (HDRp4, 5788MHz)


| | | | |
|---|--|------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 27 of 72 |

V 10.5 12/15/2021


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

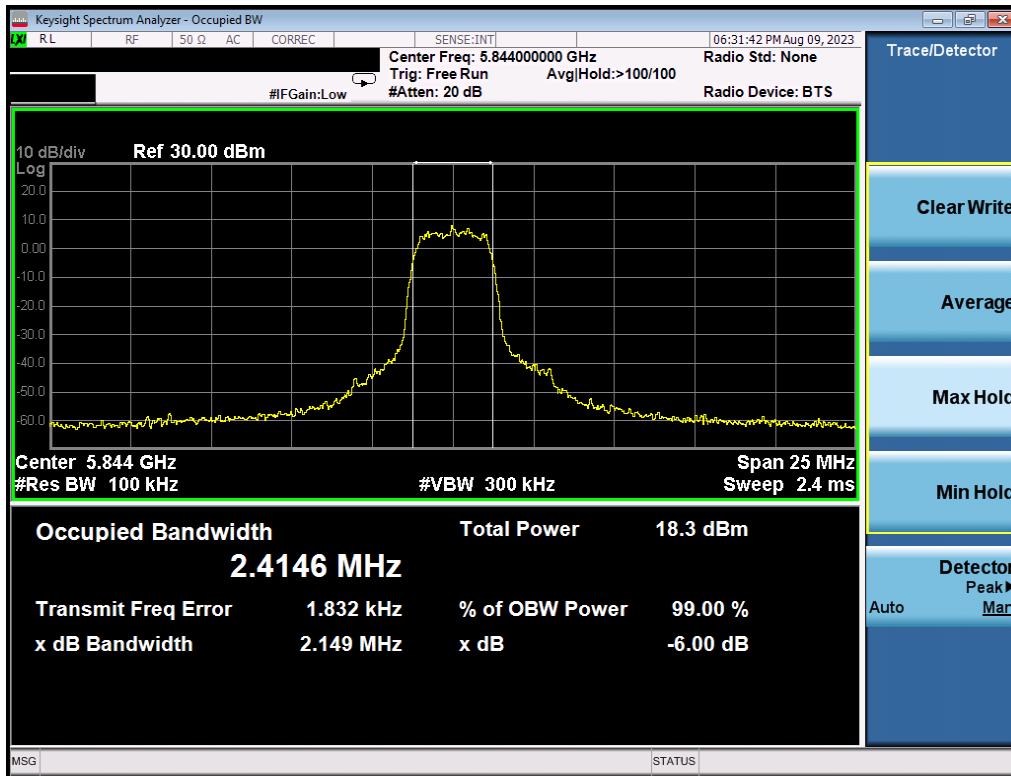


Plot 7-21. 6dB BW & 99% OBW (HDRp4, 5844MHz)

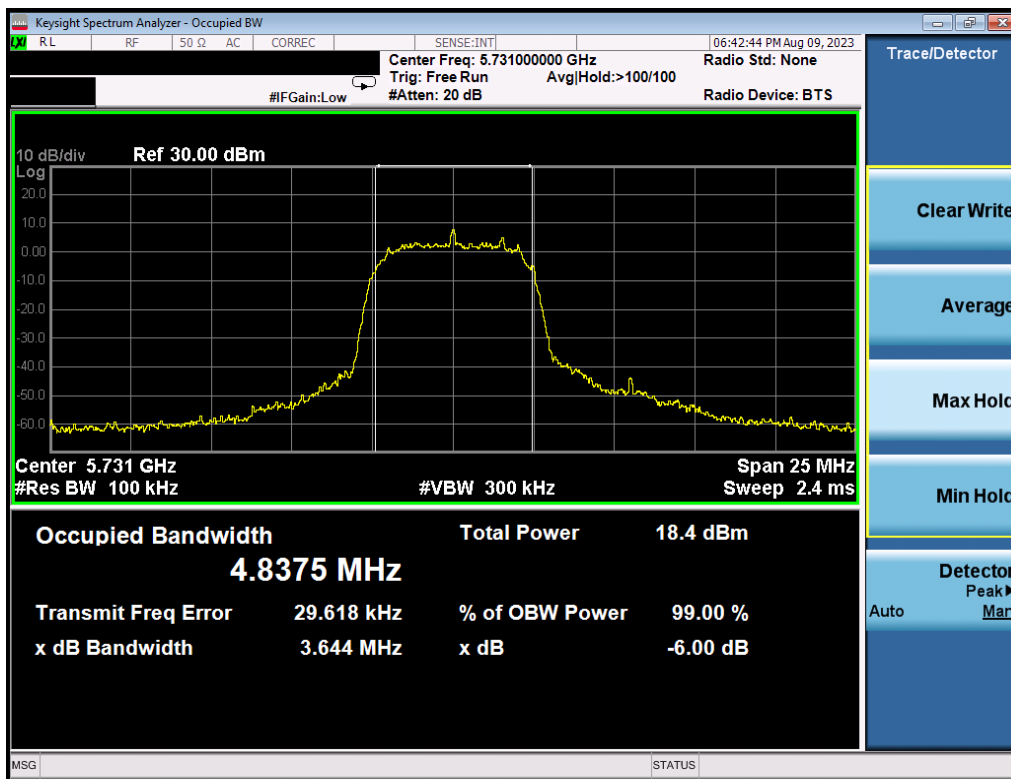


Plot 7-22. 6dB BW & 99% OBW (HDRp8, 5731MHz)


| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 28 of 72 |

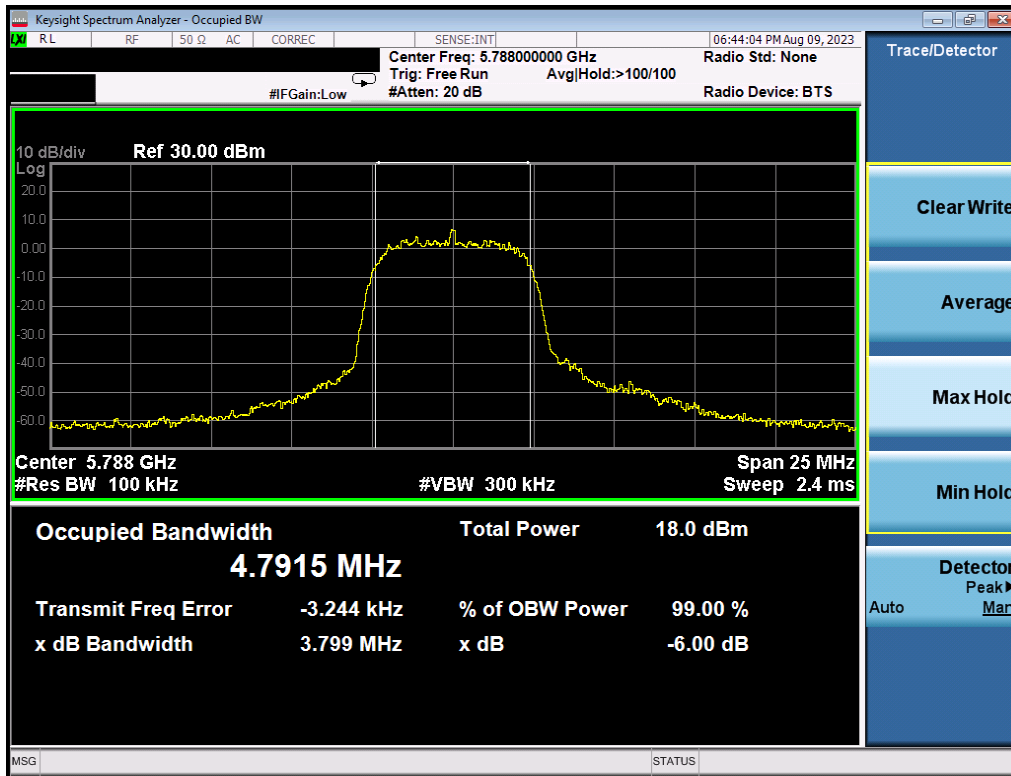

Plot 7-23. 6dB BW & 99% OBW (HDRp8, 5788MHz)

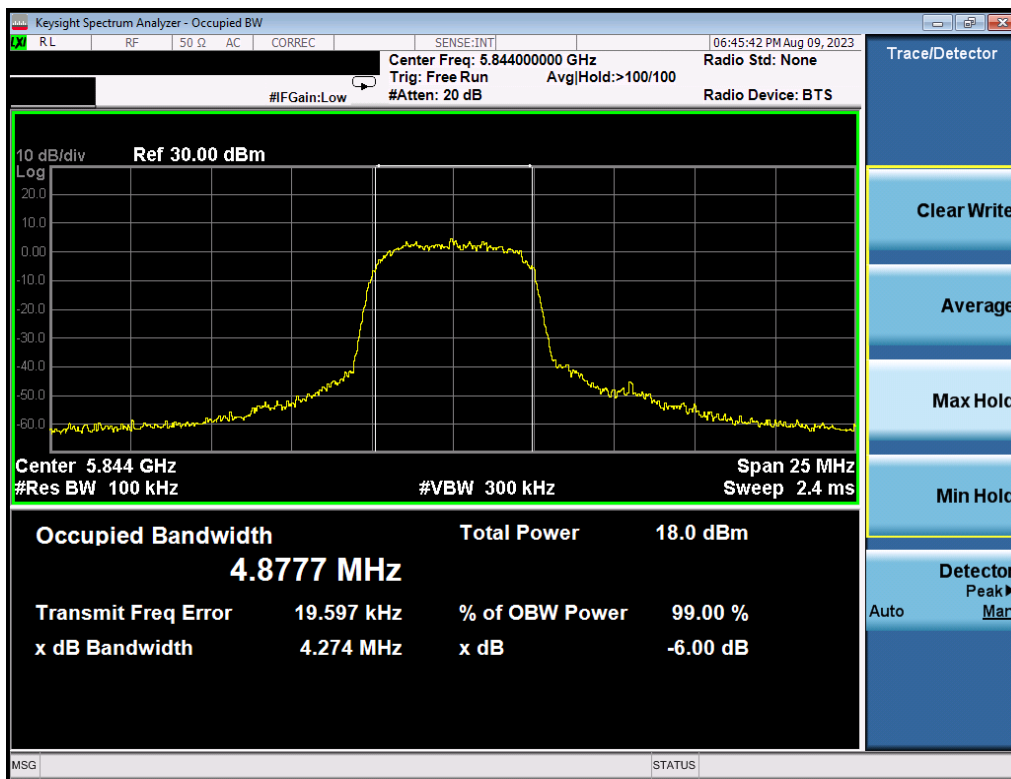

Plot 7-24. 6dB BW & 99% OBW (HDRp8, 5844MHz)

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 29 of 72 |

V 10.5 12/15/2021

7.4 Conducted Output Power - HDR

§15.407(a.1.iv), §15.407(a.3)

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies.

In the 5.15 – 5.25GHz band, the maximum permissible conducted output power is 250mW (23.98dBm).

In the 5.725 – 5.850GHz band, the maximum permissible conducted output power is 1W (30dBm).

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.3.2 Method PM-G

KDB 789033 D02 v02r01 – Section E3)b) Method PM-G

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup


The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes

None.


| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 30 of 72 |

V 10.5 12/15/2021

7.4.1 Conducted Output Power Measurements

| Freq [MHz] | Detector | Conducted Powers [dBm] | | | | Conducted Power Limit [dBm] | Conducted Power Margin [dB] |
|---------------|----------|------------------------|------|-------|-------|-----------------------------------|-----------------------------------|
| | | HDR4 | HDR8 | HDRp4 | HDRp8 | | |
| 5157 | AVG | 8.90 | 8.88 | 8.89 | 8.94 | 23.98 | -15.04 |
| 5201 | AVG | 8.96 | 8.95 | 8.78 | 8.76 | 23.98 | -15.02 |
| 5245 | AVG | 8.75 | 8.99 | 8.83 | 8.81 | 23.98 | -14.99 |
| 5731 | AVG | 9.92 | 9.88 | 9.89 | 9.86 | 30.00 | -20.08 |
| 5788 | AVG | 9.88 | 9.86 | 9.83 | 9.82 | 30.00 | -20.12 |
| 5844 | AVG | 9.86 | 9.83 | 9.83 | 9.79 | 30.00 | -20.14 |

Table 7-4. Maximum Conducted Output Power

| | | | |
|---|---|------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 31 of 72 |

V 10.5 12/15/2021

7.5 Maximum Power Spectral Density – HDR

§15.407(a.1.iv), §15.407(a.3)

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, was used to measure the power spectral density.

In the 5.15 – 5.25GHz band, the maximum permissible power spectral density is 11dBm/MHz.

In the 5.725 – 5.850GHz band, the maximum permissible power spectral density is 30dBm/500kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.2.2

KDB 789033 D02 v02r01 – Section F

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz for U-NII 1, 500kHz for U-NII 3
4. VBW \geq 3MHz for U-NII 1, \geq 3 x RBW for U-NII 3
5. Number of sweep points \geq 2 x (span/RBW)
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup


The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

Test Notes

None.


| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 32 of 72 |

V 10.5 12/15/2021

7.5.1 Power Spectral Density Measurements



| | Frequency [MHz] | Mode | Measured Power Density [dBm/MHz] | Max Power Density [dBm/MHz] | Margin [dB] |
|--------|-----------------|-------|----------------------------------|-----------------------------|-------------|
| Band 1 | 5157 | HDR4 | 6.21 | 11.0 | -4.79 |
| | 5201 | HDR4 | 6.46 | 11.0 | -4.55 |
| | 5245 | HDR4 | 5.90 | 11.0 | -5.10 |
| | 5157 | HDR8 | 4.91 | 11.0 | -6.09 |
| | 5201 | HDR8 | 4.95 | 11.0 | -6.05 |
| | 5245 | HDR8 | 4.36 | 11.0 | -6.64 |
| | 5157 | HDRp4 | 5.87 | 11.0 | -5.13 |
| | 5201 | HDRp4 | 5.50 | 11.0 | -5.50 |
| | 5245 | HDRp4 | 5.68 | 11.0 | -5.32 |
| | 5157 | HDRp8 | 3.09 | 11.0 | -7.91 |
| | 5201 | HDRp8 | 2.90 | 11.0 | -8.10 |
| | 5245 | HDRp8 | 3.35 | 11.0 | -7.65 |


Table 7-5. Power Spectral Density Measurements

| | | | |
|---|---|------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 33 of 72 |

V 10.5 12/15/2021


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

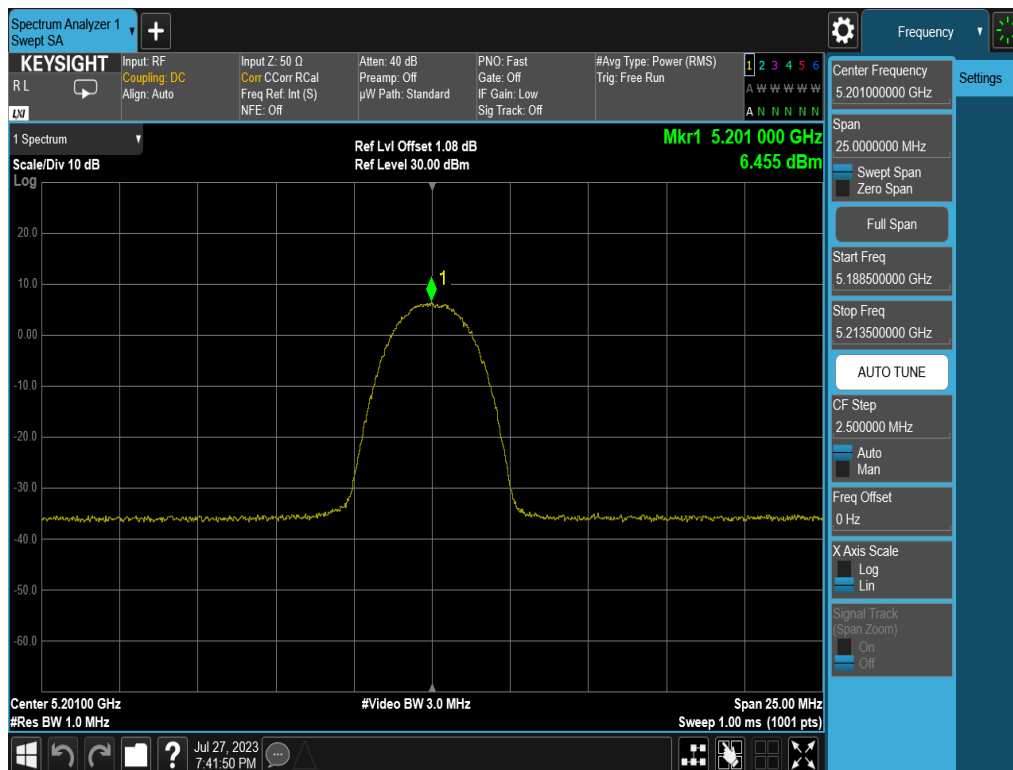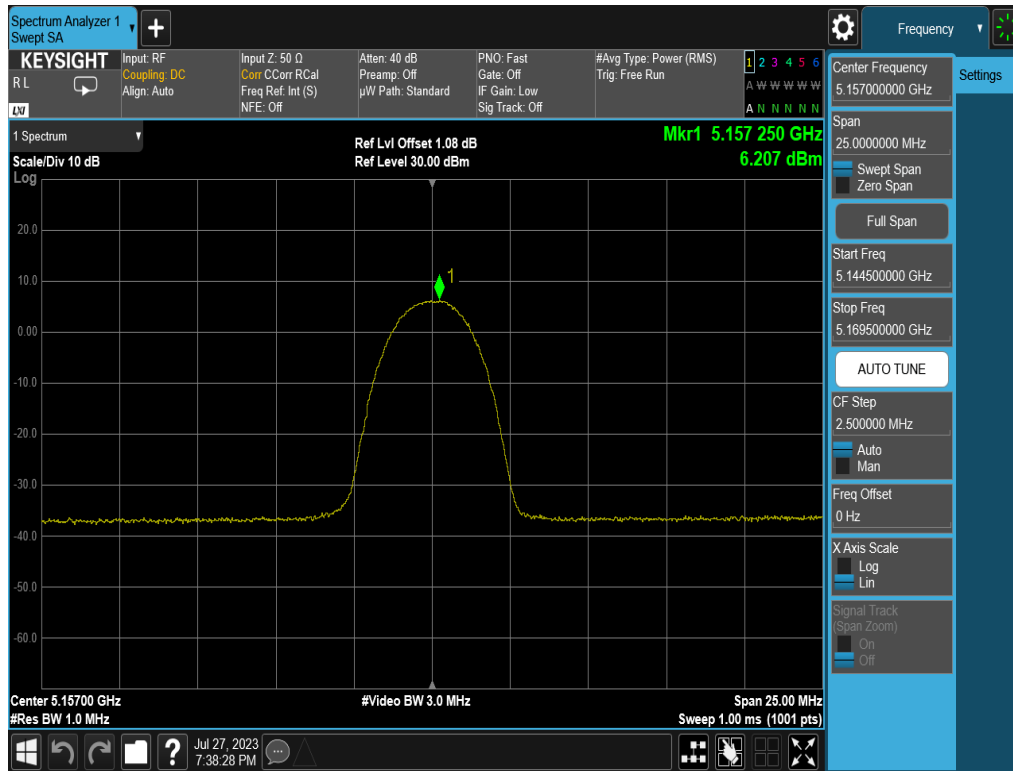


| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 34 of 72 |

V 10.5 12/15/2021


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

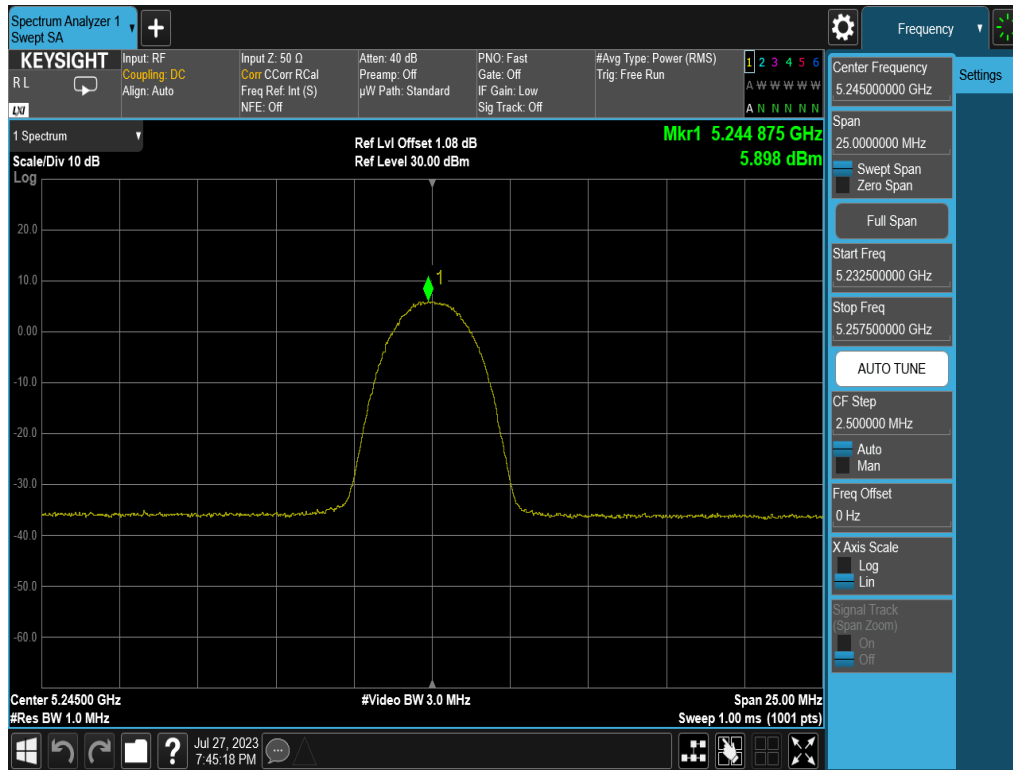


Plot 7-27. PSD (HDR4, 5245MHz)

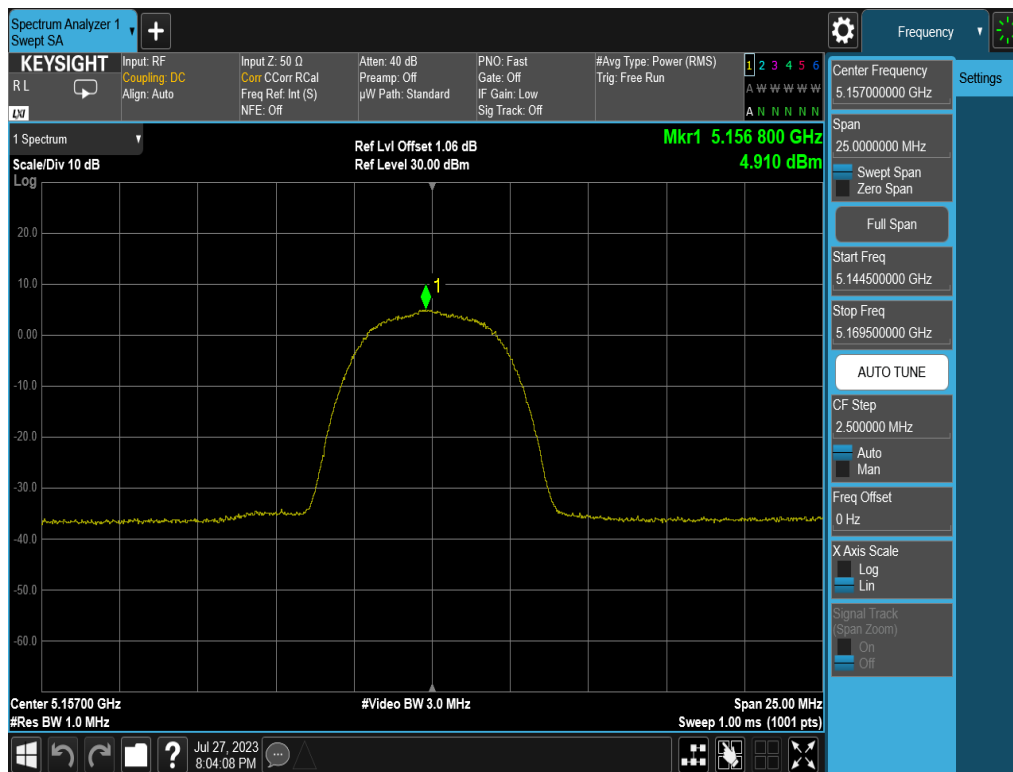


Plot 7-28. PSD (HDR8, 5157MHz)


| | | | |
|---|--|------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 35 of 72 |

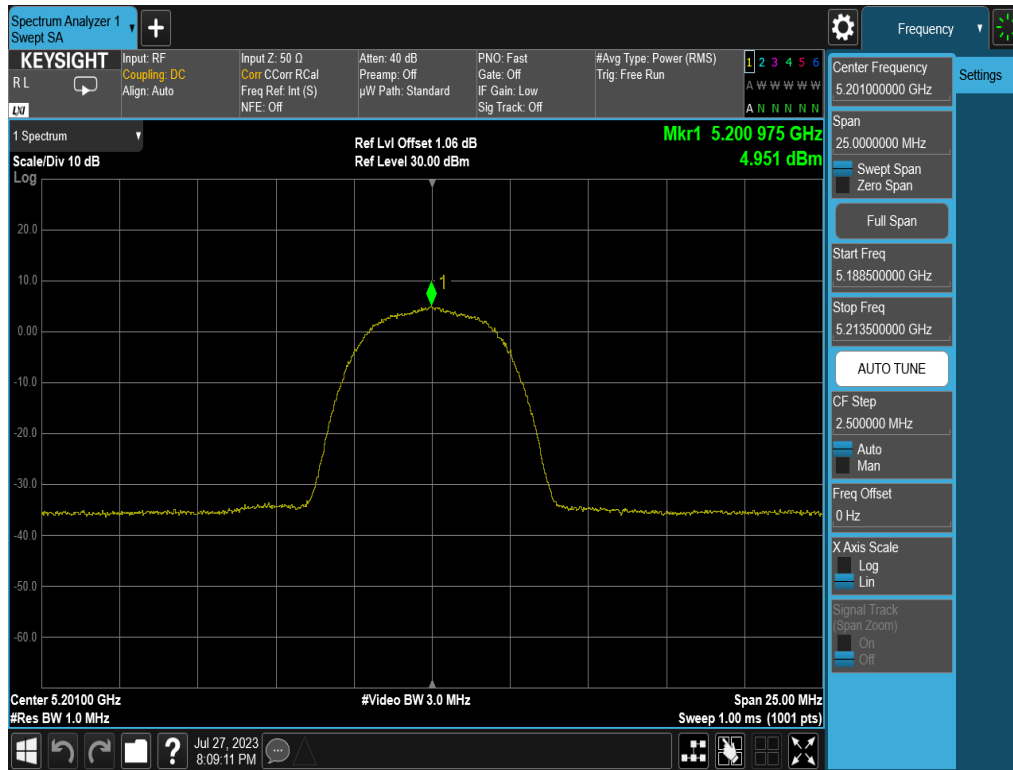

Plot 7-29. PSD (HDR8, 5201MHz)

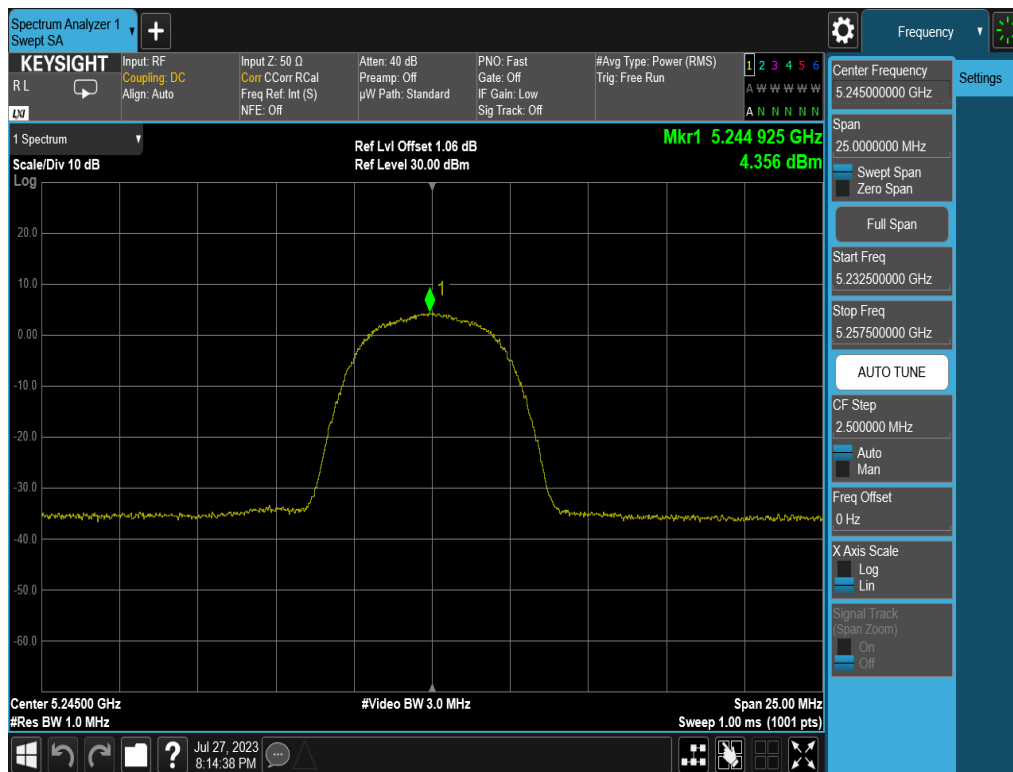


Plot 7-30. PSD (HDR8, 5245MHz)


| | | | |
|---|---|------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 36 of 72 |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

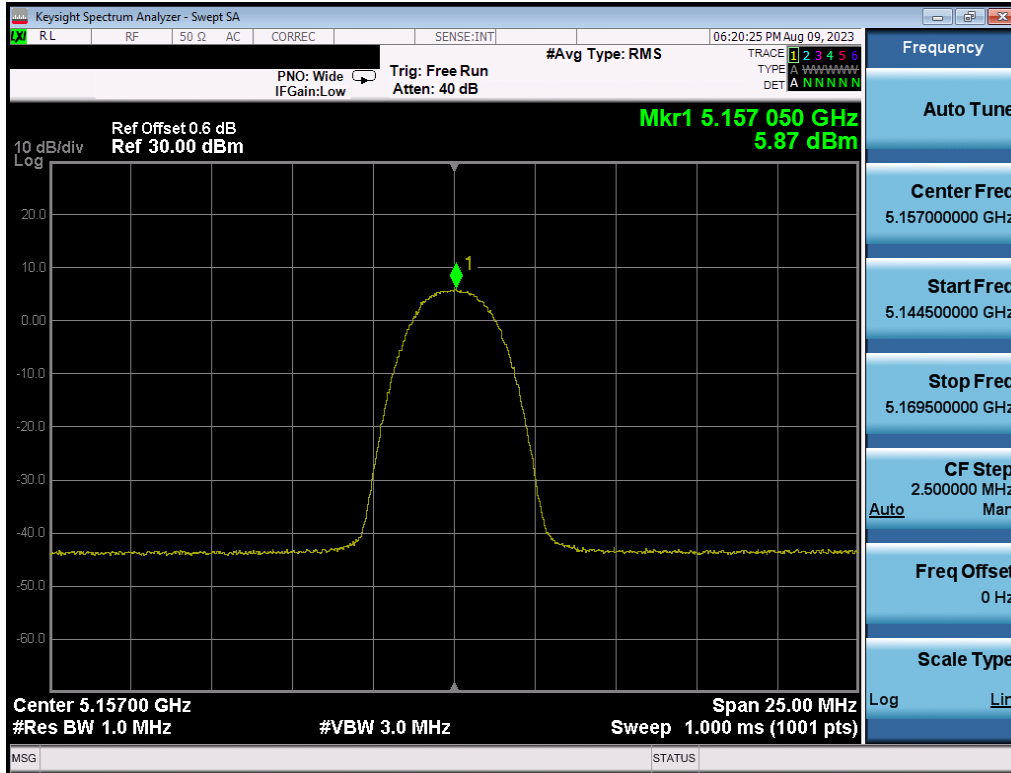


Plot 7-31. PSD (HDRp4, 5157MHz)

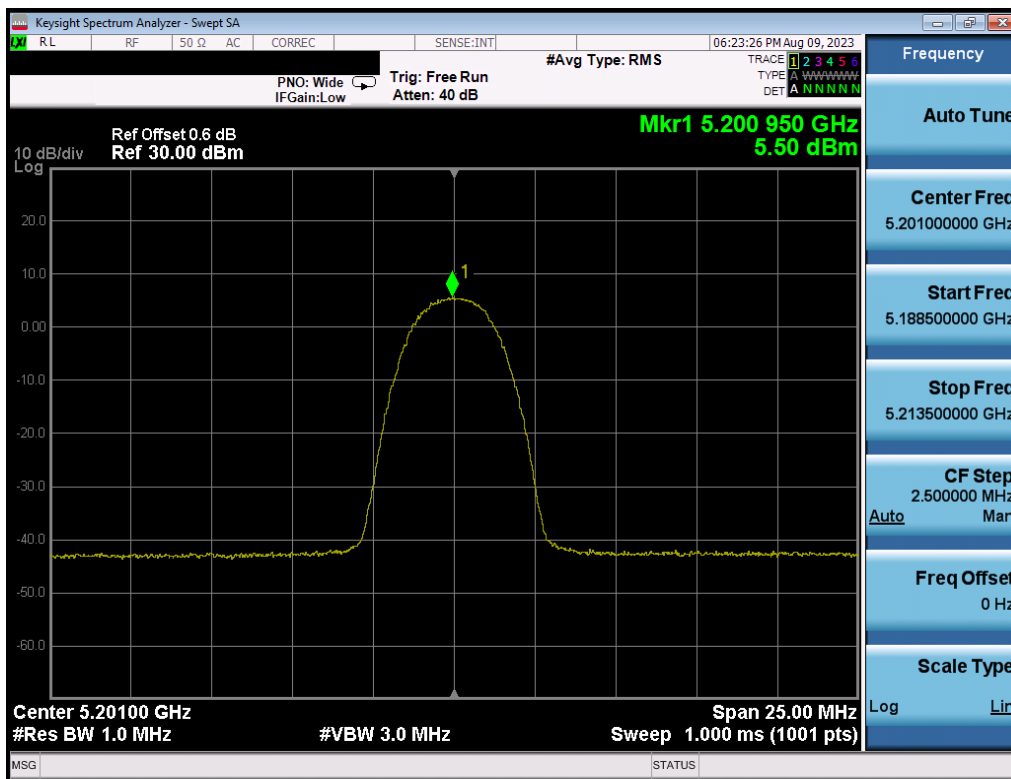


Plot 7-32. PSD (HDRp4, 5201MHz)


| | | | |
|---|-------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 | element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 37 of 72 |

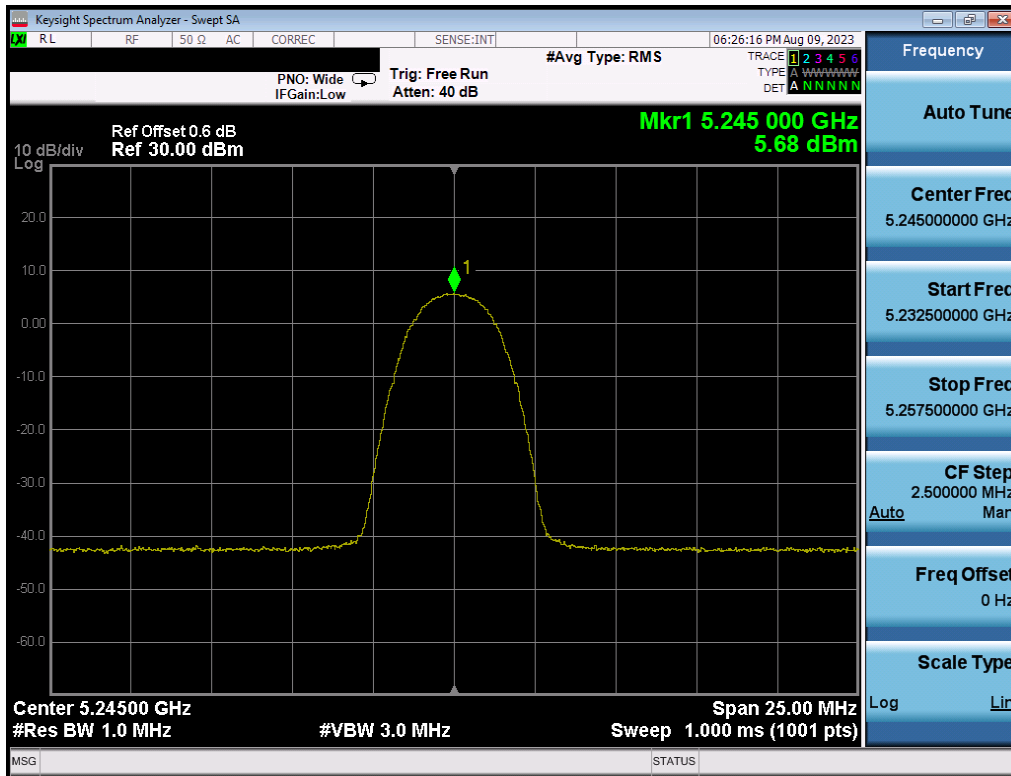


Plot 7-33. PSD (HDRp4, 5245MHz)

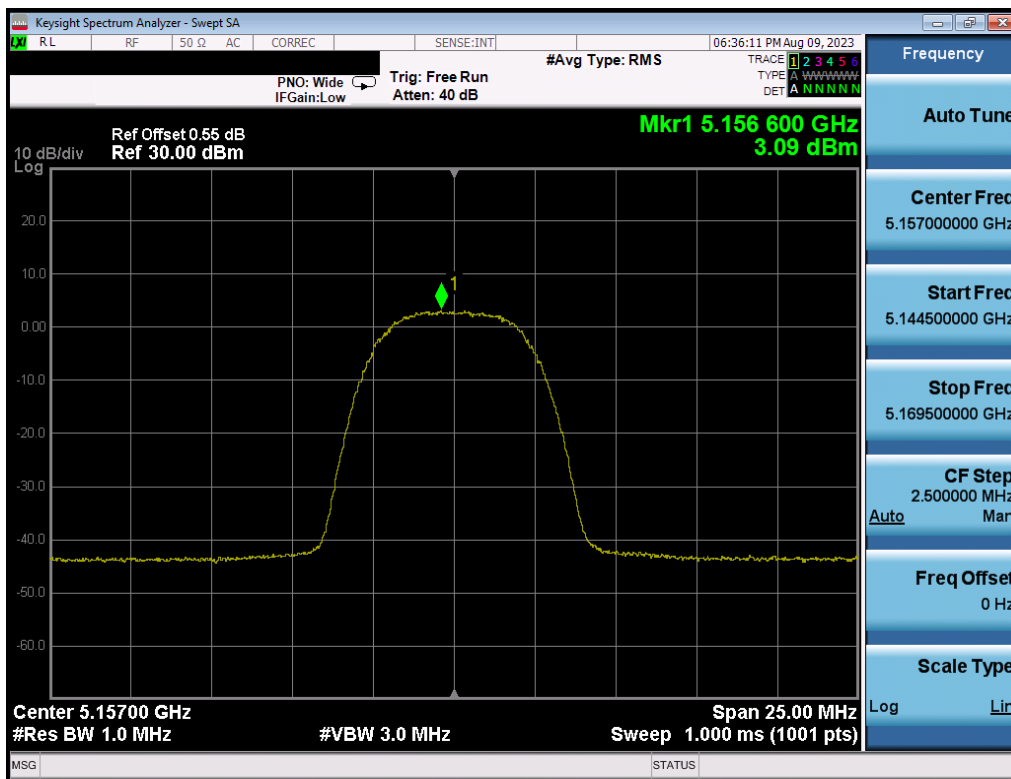


Plot 7-34. PSD (HDRp8, 5157MHz)

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 38 of 72 |

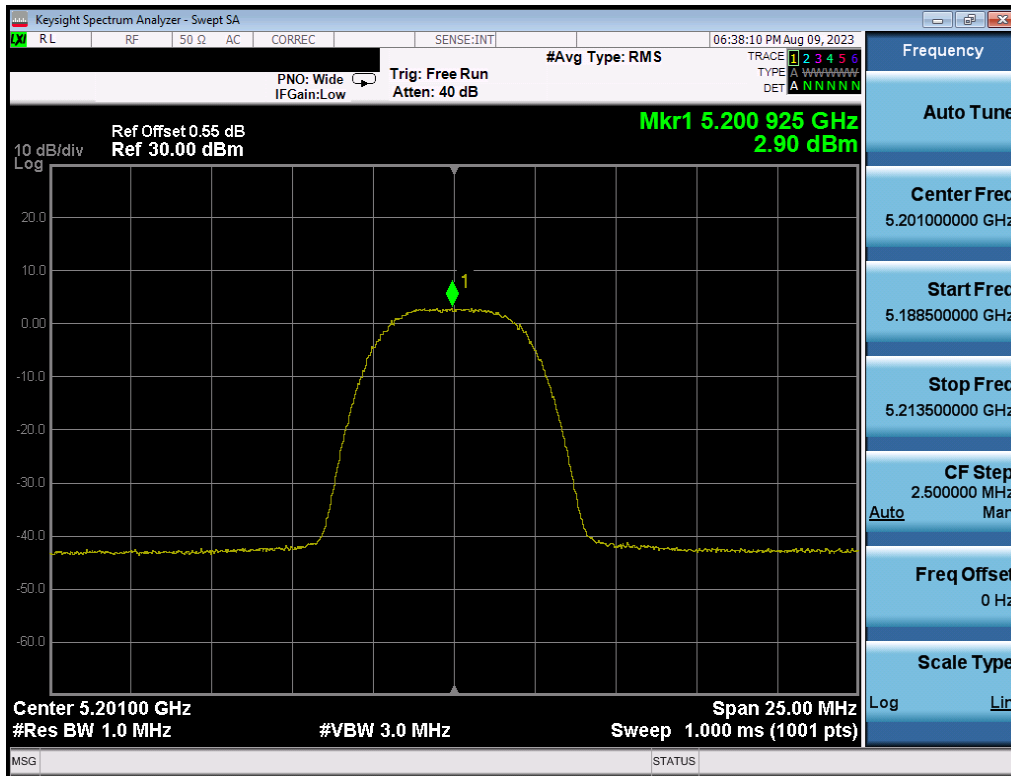

Plot 7-35. PSD (HDRp8, 5201MHz)

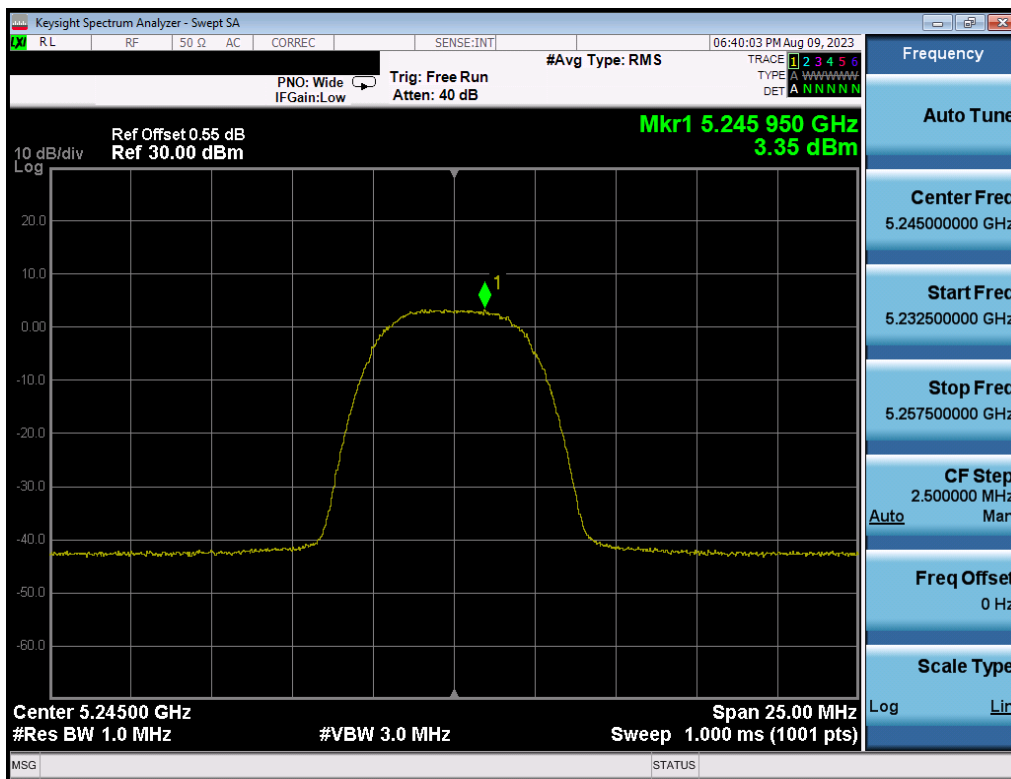


Plot 7-36. PSD (HDRp8, 5245MHz)

| | | | |
|---|-------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 | element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 39 of 72 |


V 10.5 12/15/2021

| | Frequency [MHz] | Mode | Measured Power Density [dBm/500kHz] | Max Permissible Power Density [dBm/500kHz] | Margin [dB] |
|--------|-----------------|-------|-------------------------------------|--|-------------|
| Band 3 | 5731 | HDR4 | 4.78 | 30.0 | -25.22 |
| | 5788 | HDR4 | 5.12 | 30.0 | -24.89 |
| | 5844 | HDR4 | 4.72 | 30.0 | -25.28 |
| | 5731 | HDR8 | 2.26 | 30.0 | -27.74 |
| | 5788 | HDR8 | 2.37 | 30.0 | -27.63 |
| | 5844 | HDR8 | 2.49 | 30.0 | -27.51 |
| | 5731 | HDRp4 | 4.32 | 30.0 | -25.68 |
| | 5788 | HDRp4 | 4.03 | 30.0 | -25.97 |
| | 5844 | HDRp4 | 4.15 | 30.0 | -25.85 |
| | 5731 | HDRp8 | 1.70 | 30.0 | -28.30 |
| | 5788 | HDRp8 | 1.56 | 30.0 | -28.44 |
| | 5844 | HDRp8 | 1.27 | 30.0 | -28.73 |


Table 7-6. Power Spectral Density Measurements

| | | | |
|---|---|------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 40 of 72 |


V 10.5 12/15/2021

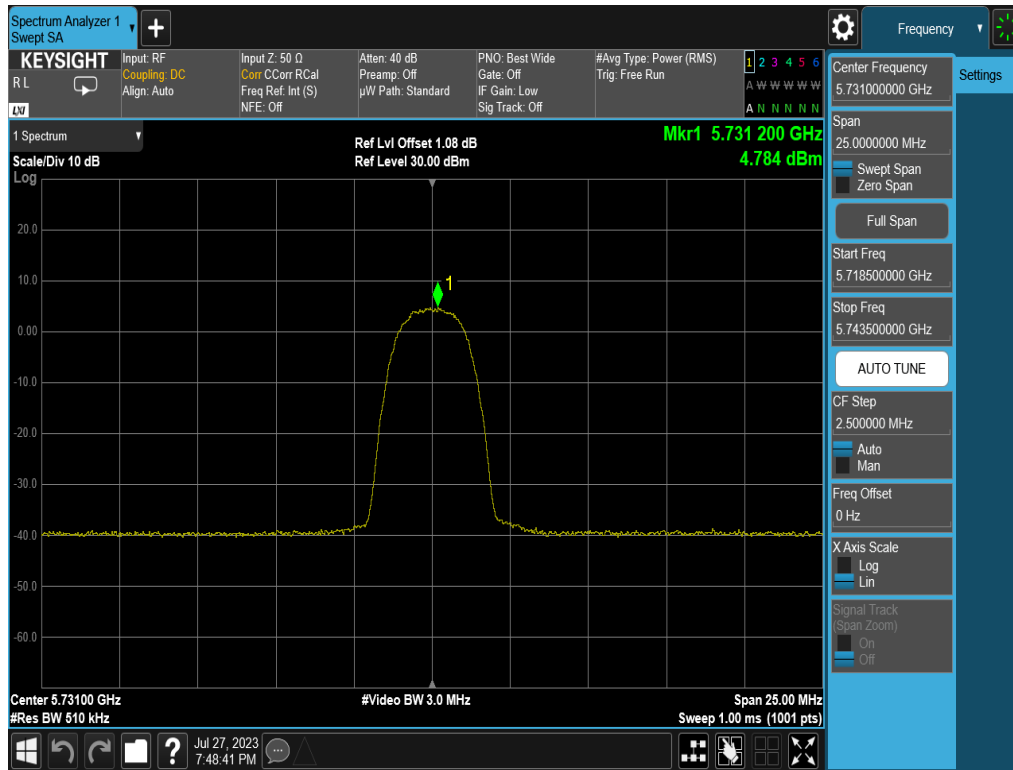

Plot 7-37. PSD (HDR4, 5731MHz)

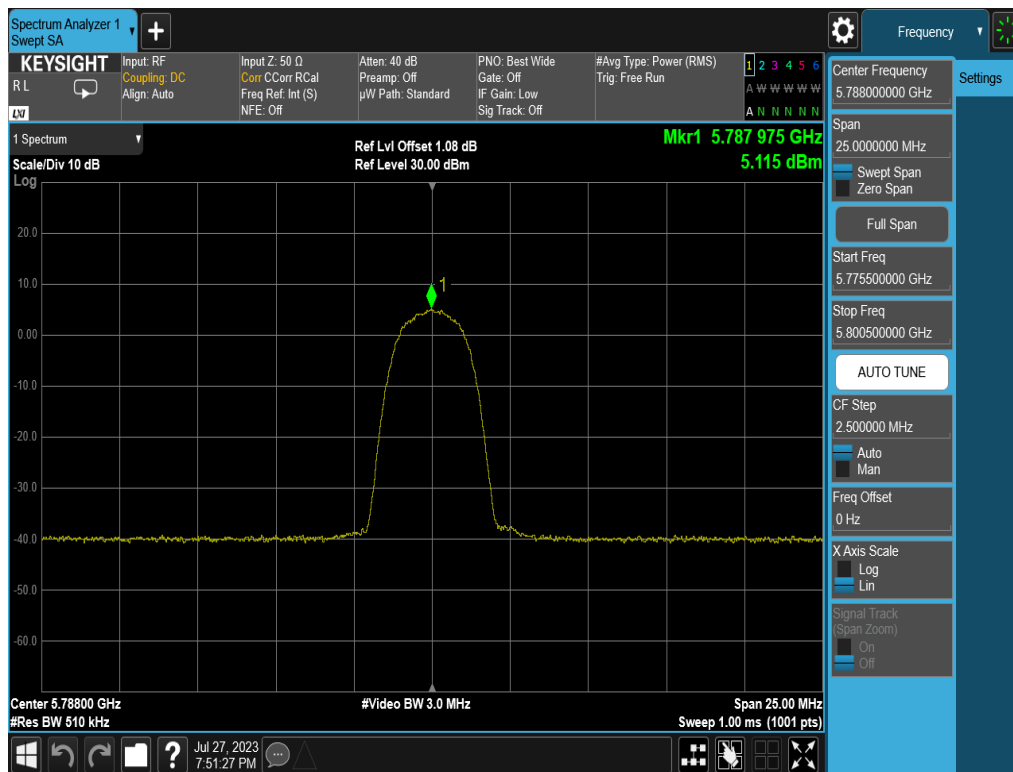


Plot 7-38. PSD (HDR4, 5788MHz)


| | | | |
|---|--|------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 41 of 72 |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

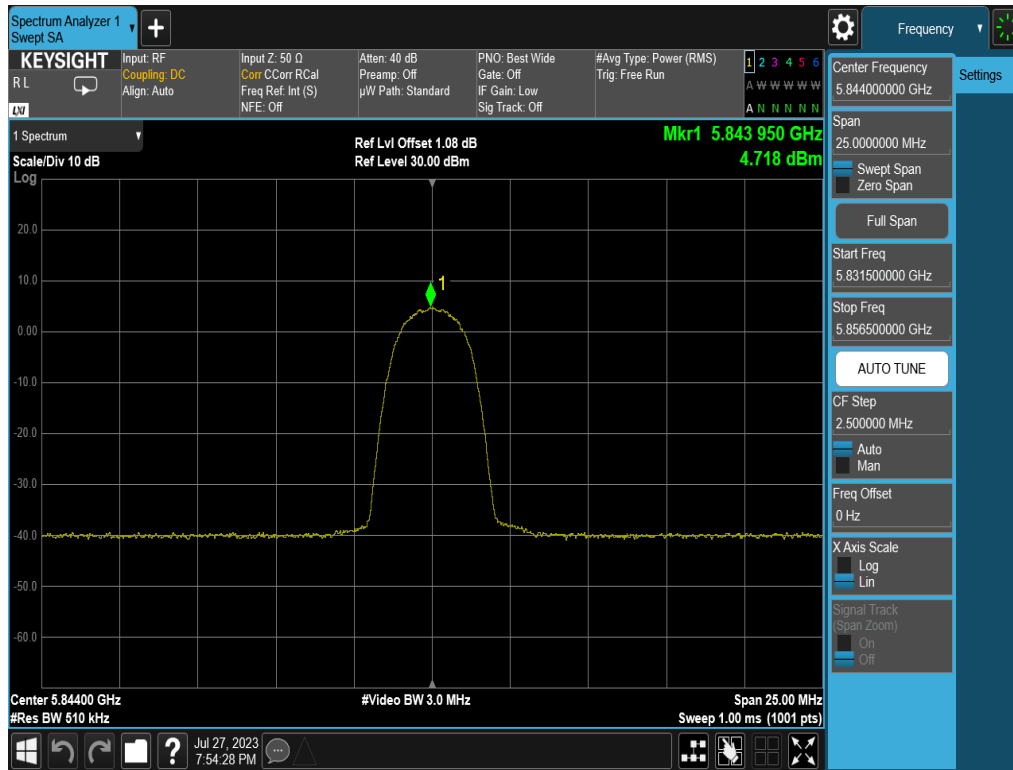

Plot 7-39. PSD (HDR4, 5844MHz)

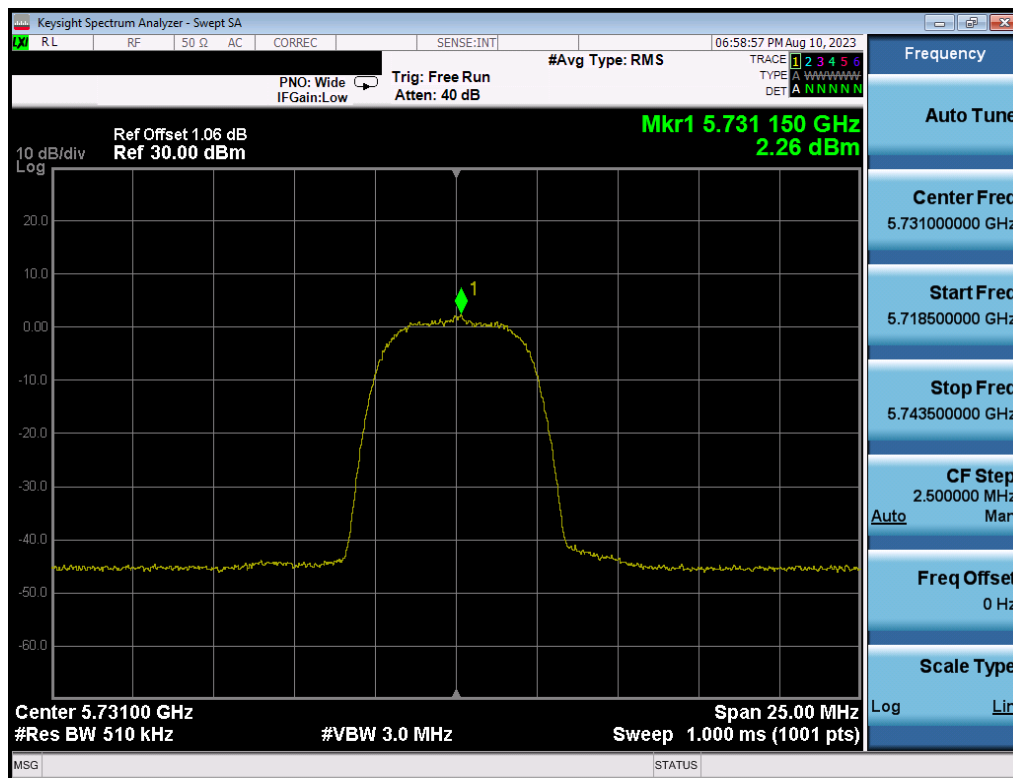


Plot 7-40. PSD (HDR8, 5731MHz)


| | | | |
|---|-------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 | element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 42 of 72 |

V 10.5 12/15/2021


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

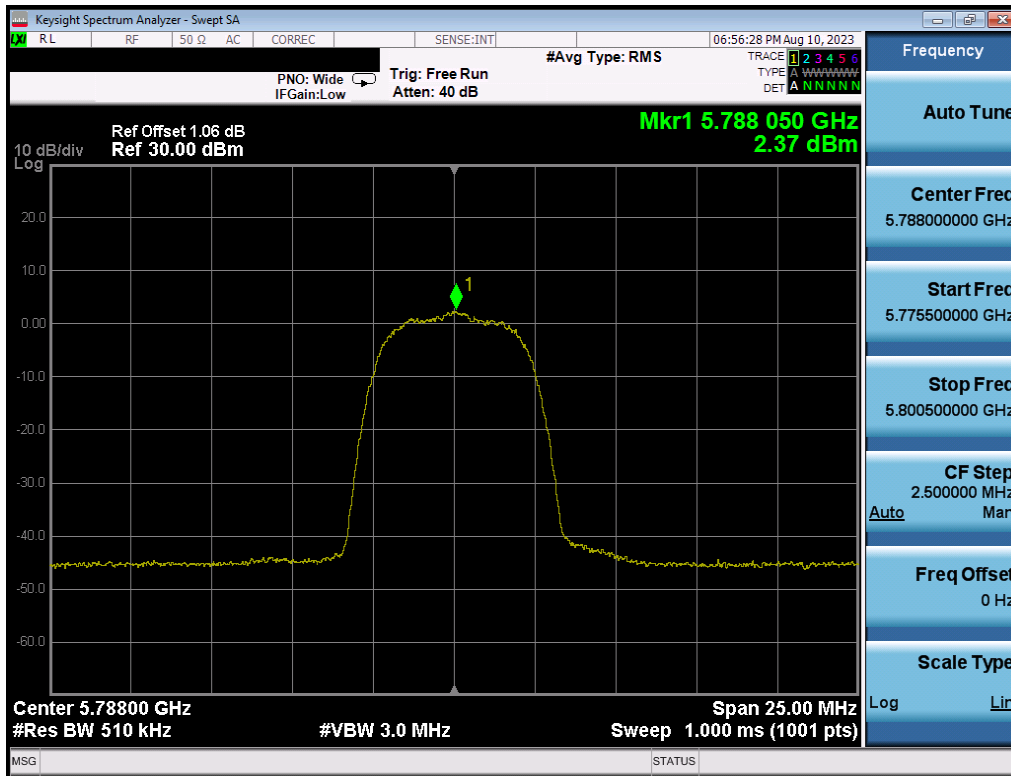


Plot 7-41. PSD (HDR8, 5788MHz)

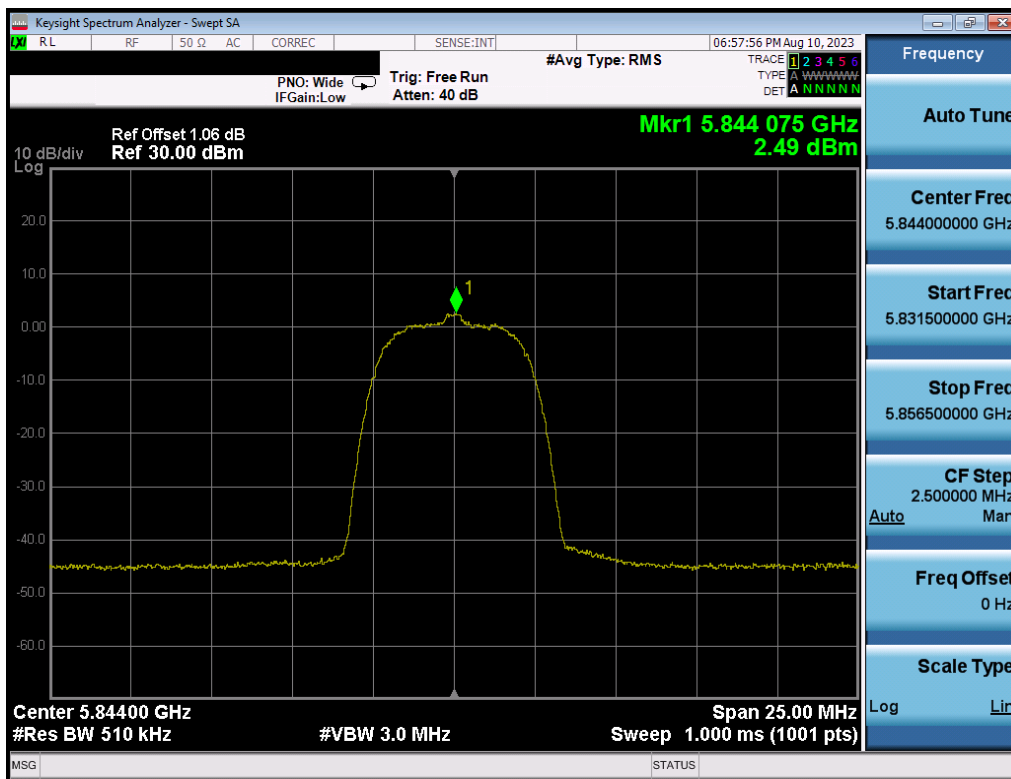


Plot 7-42. PSD (HDR8, 5844MHz)


| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 43 of 72 |

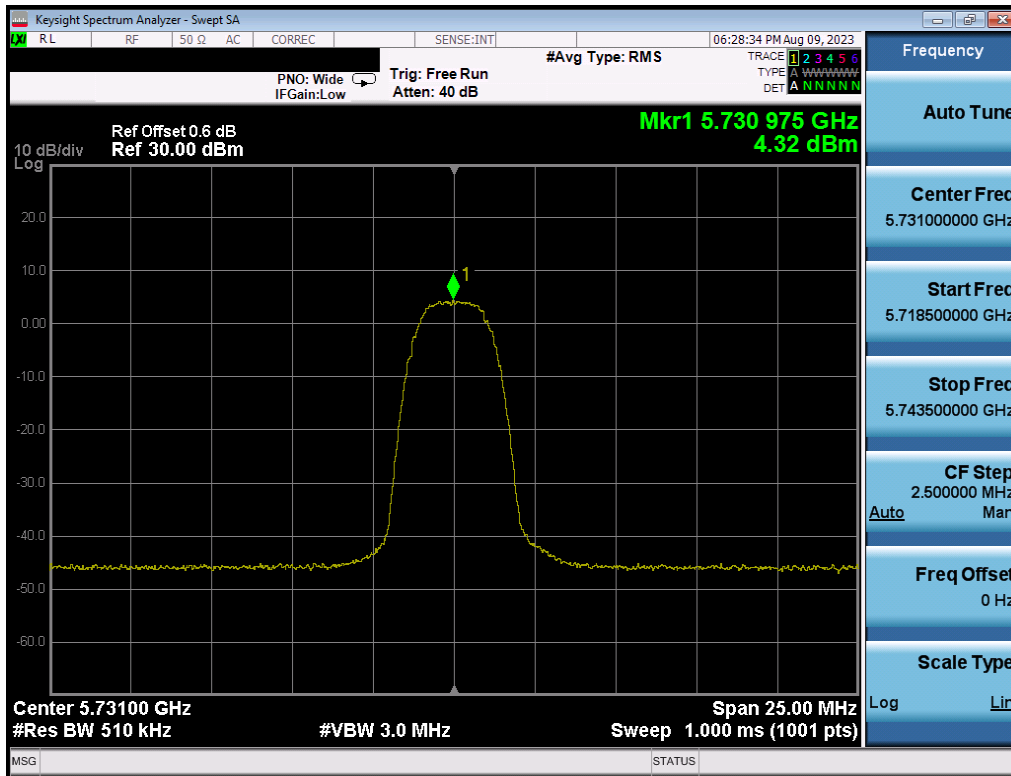


Plot 7-43. PSD (HDRp4, 5731MHz)

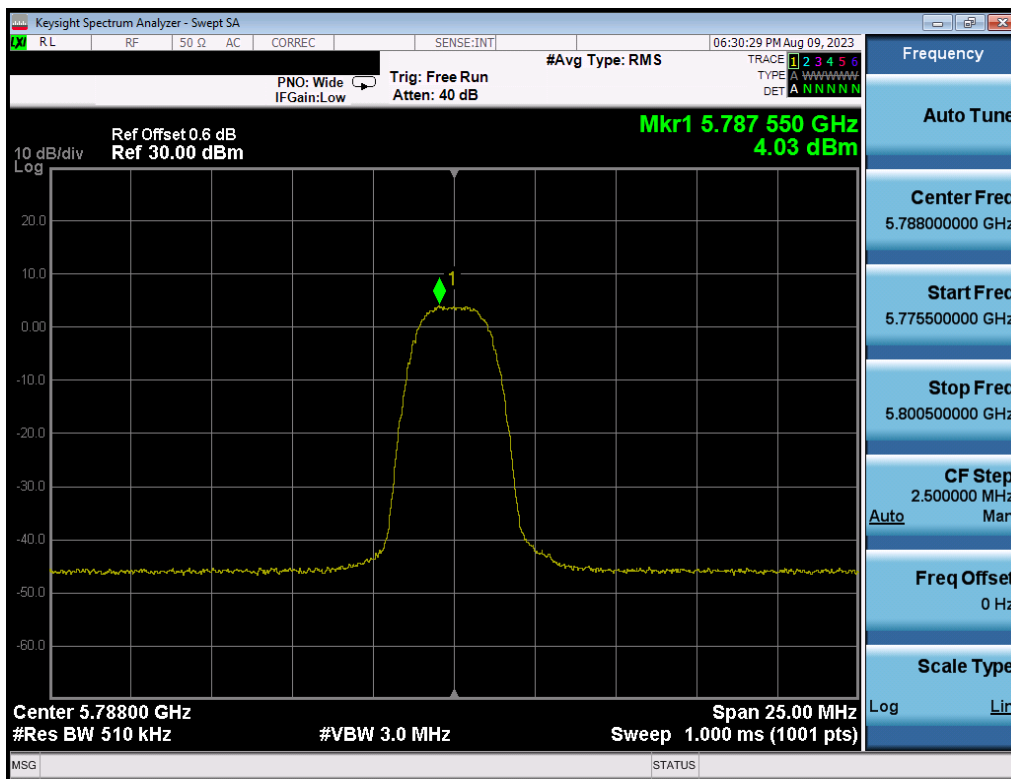


Plot 7-44. PSD (HDRp4, 5788MHz)

| | | | |
|---|---|------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 44 of 72 |

V 10.5 12/15/2021

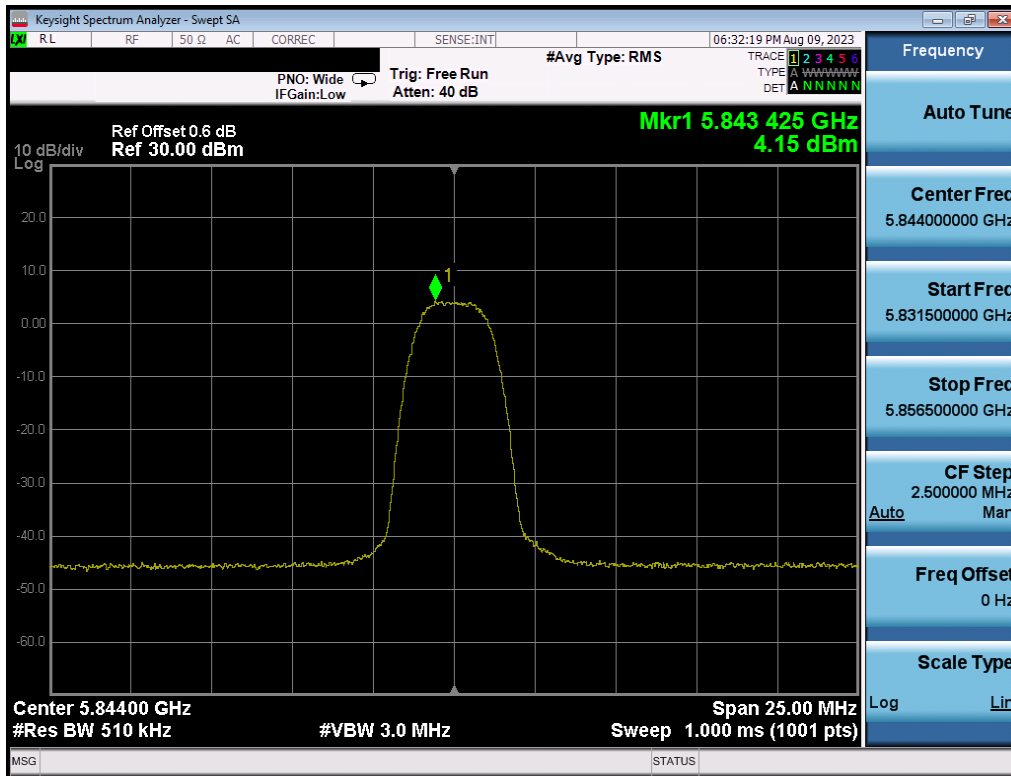


Plot 7-45. PSD (HDRp4, 5844MHz)

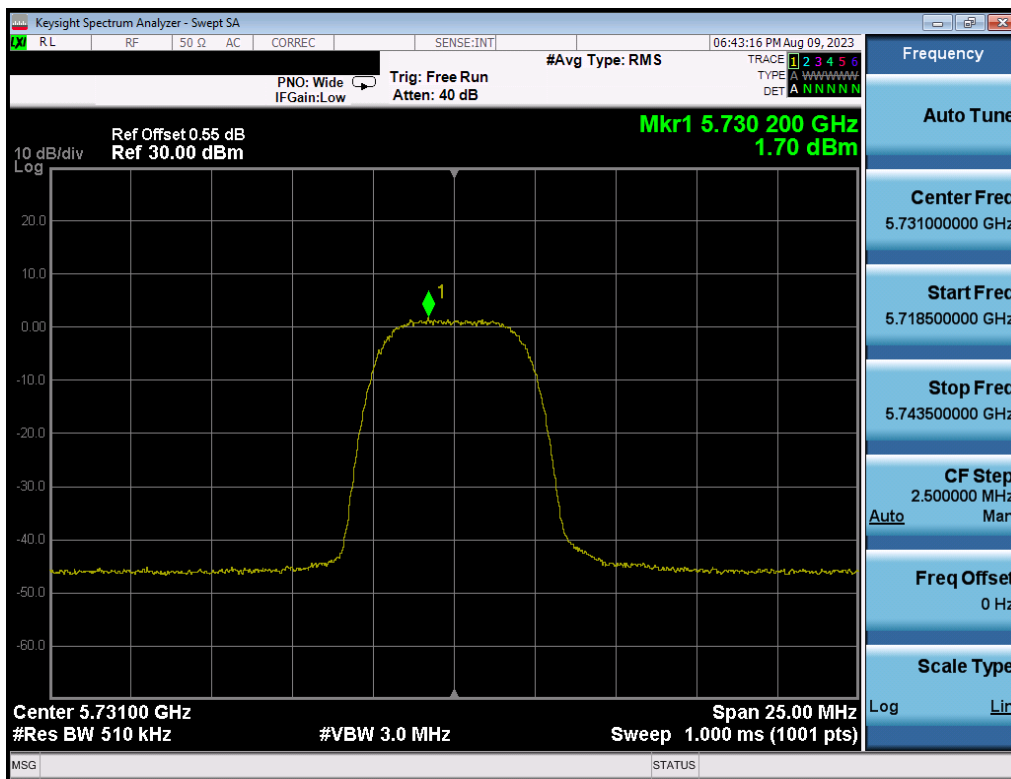


Plot 7-46. PSD (HDRp8, 5731MHz)

| | | | |
|---|---|------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 45 of 72 |


V 10.5 12/15/2021

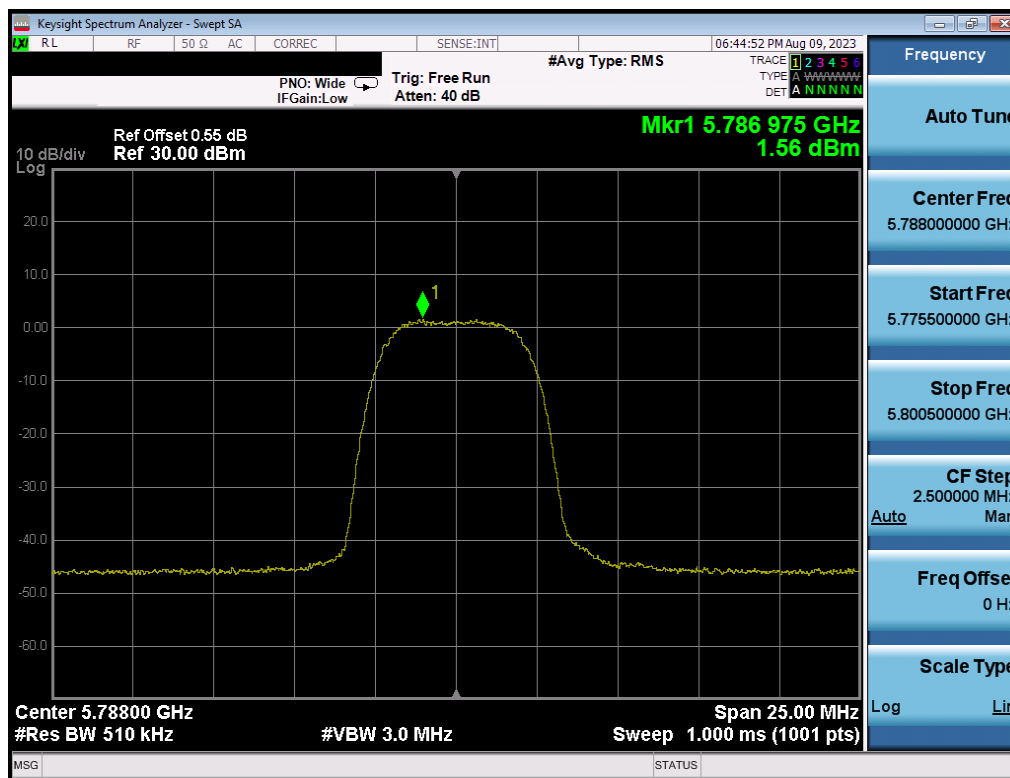

Plot 7-47. PSD (HDRp8, 5788MHz)

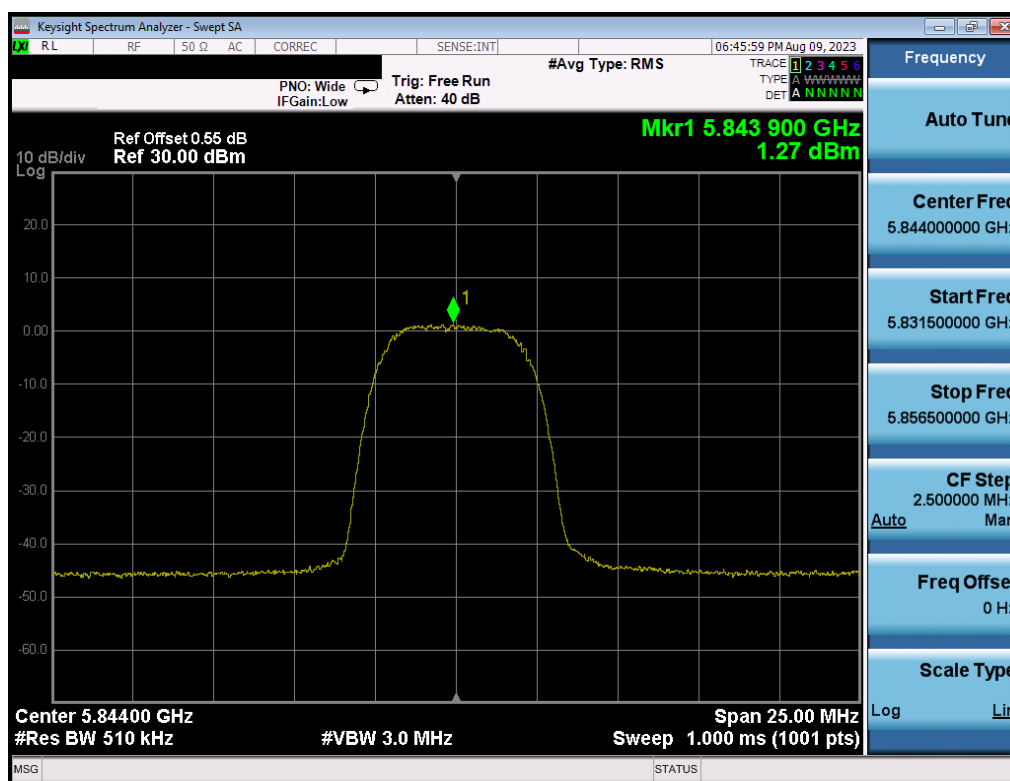

Plot 7-48. PSD (HDRp8, 5844MHz)

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 46 of 72 |

V 10.5 12/15/2021

7.6 Radiated Spurious Emissions – Above 1GHz

§15.407(b) §15.205 §15.209

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. All channels and data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 7-7 per Section 15.209.

| Frequency | Field Strength [$\mu\text{V/m}$] | Measured Distance [Meters] |
|-----------------|---------------------------------------|-------------------------------|
| Above 960.0 MHz | 500 | 3 |

Table 7-7. Radiated Limits

Test Procedures Used

ANSI C63.10-2013 – Sections 12.7.7.2, 12.7.6, 12.7.5

KDB 789033 D02 v02r01 – Section G

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 47 of 72 |

V 10.5 12/15/2021

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

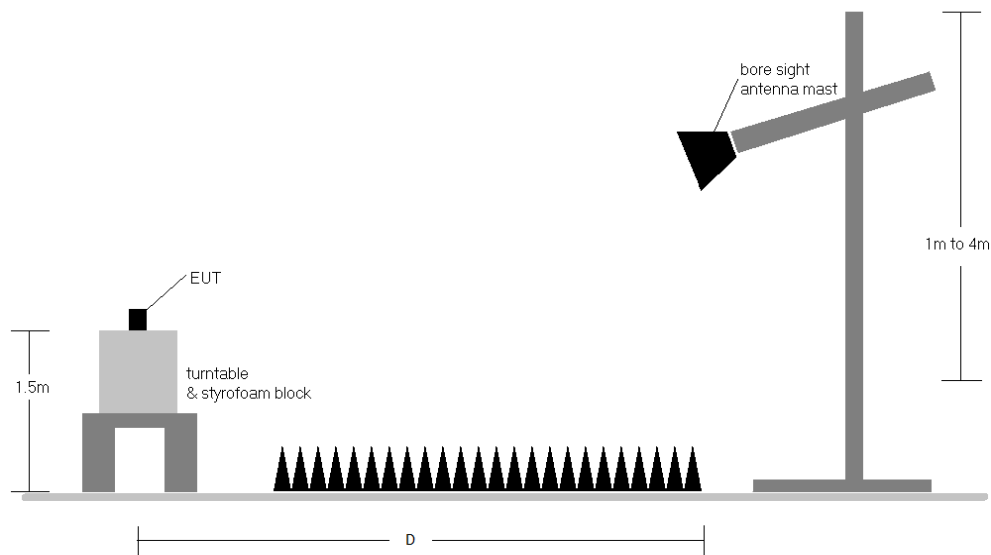



Figure 7-5. Test Instrument & Measurement Setup

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 48 of 72 |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Notes

1. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 7-7.
2. All spurious emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 7-7. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas.
6. D is the measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The unit was tested with all possible modes and only the highest emission is reported.
8. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level [dB μ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB] – Preamplifier Gain [dB]
- Margin [dB] = Field Strength Level [dB μ V/m] – Limit [dB μ V/m]

Radiated Band Edge Measurement Offset


- The amplitude offset shown in the radiated restricted band edge plots in Section 7.6.2 was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 49 of 72 |

V 10.5 12/15/2021

7.6.1 Radiated Spurious Emission (1-18GHz)

§15.407(b) §15.205 §15.209

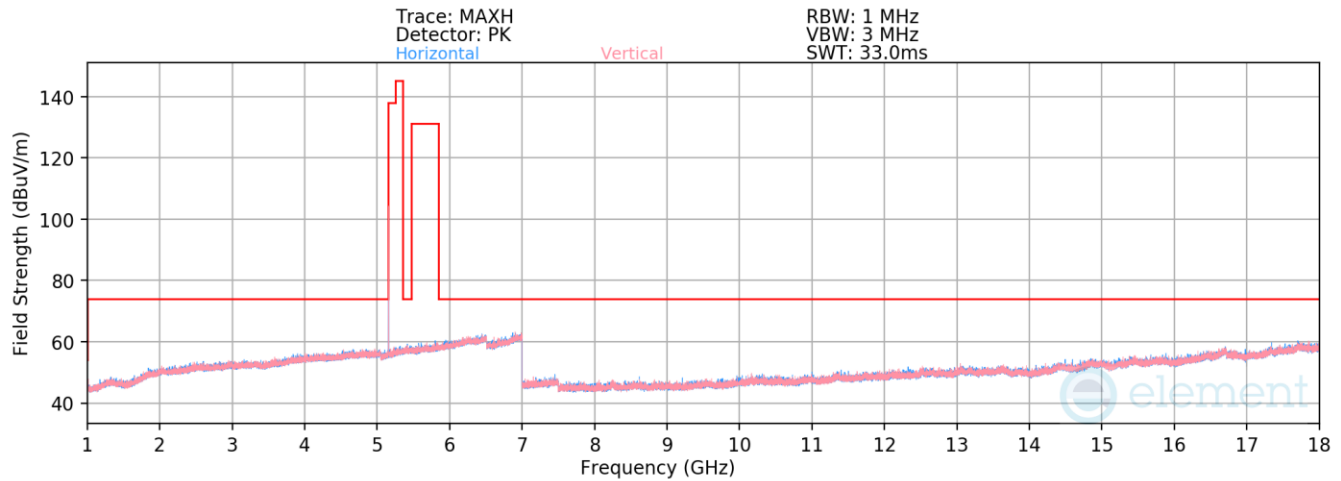

Plot 7-49. Radiated Spurious Emissions 1-18GHz (HDR4 – 5157MHz)

Mode: HDR4


Data Rate: 4Mbps

Distance of Measurements: 3 Meters


Operating Frequency: 5157MHz

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Duty Cycle Correction [dB] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|----------------------------|-------------------------|----------------|-------------|
| 10314.00 | Peak | V | 292 | 140 | -70.60 | 12.60 | 0.00 | 49.00 | 68.23 | -19.23 |
| * 15471.00 | Avg | H | 109 | 120 | -84.00 | 18.33 | 1.08 | 42.41 | 53.98 | -11.57 |
| * 15471.00 | Peak | H | 109 | 120 | -72.86 | 18.33 | 0.00 | 52.47 | 73.98 | -21.51 |

Table 7-8. Radiated Spurious Emissions Measurements

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 50 of 72 |

V 10.5 12/15/2021

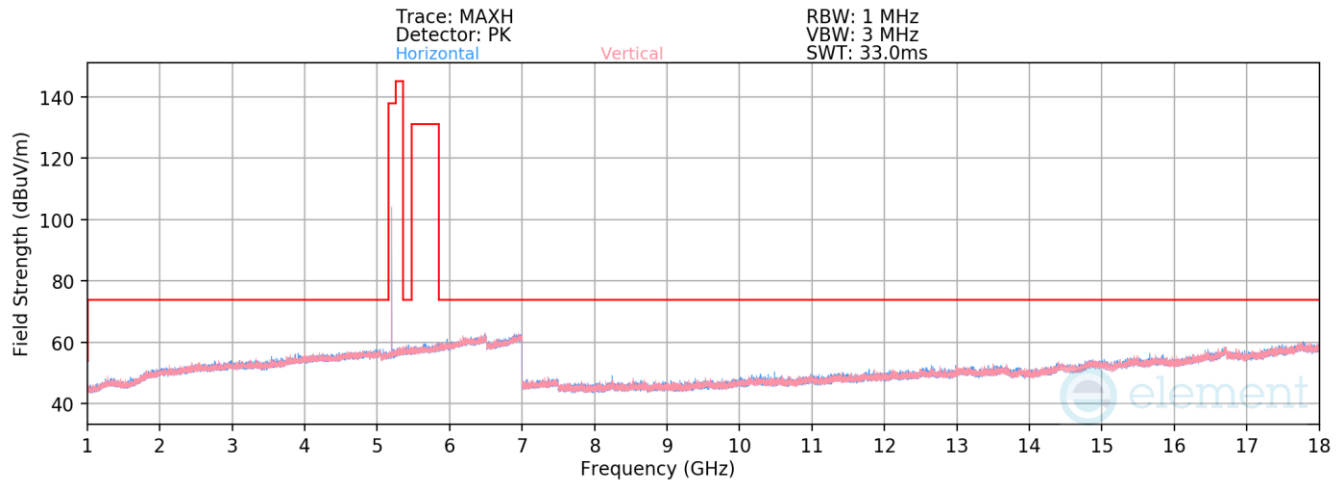


Plot 7-50. Radiated Spurious Emissions 1-18GHz (HDR4 – 5201MHz)


Mode: HDR4
Data Rate: 4Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 5201MHz

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 10402.00 | Peak | V | 123 | 217 | -70.21 | 12.49 | 49.28 | 68.23 | -18.95 |
| * 15603.00 | Avg | H | - | - | -83.85 | 18.27 | 41.42 | 53.98 | -12.56 |
| * 15603.00 | Peak | H | - | - | -72.71 | 18.27 | 52.56 | 73.98 | -21.42 |

Table 7-9. Radiated Spurious Emissions Measurements

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 51 of 72 |

V 10.5 12/15/2021

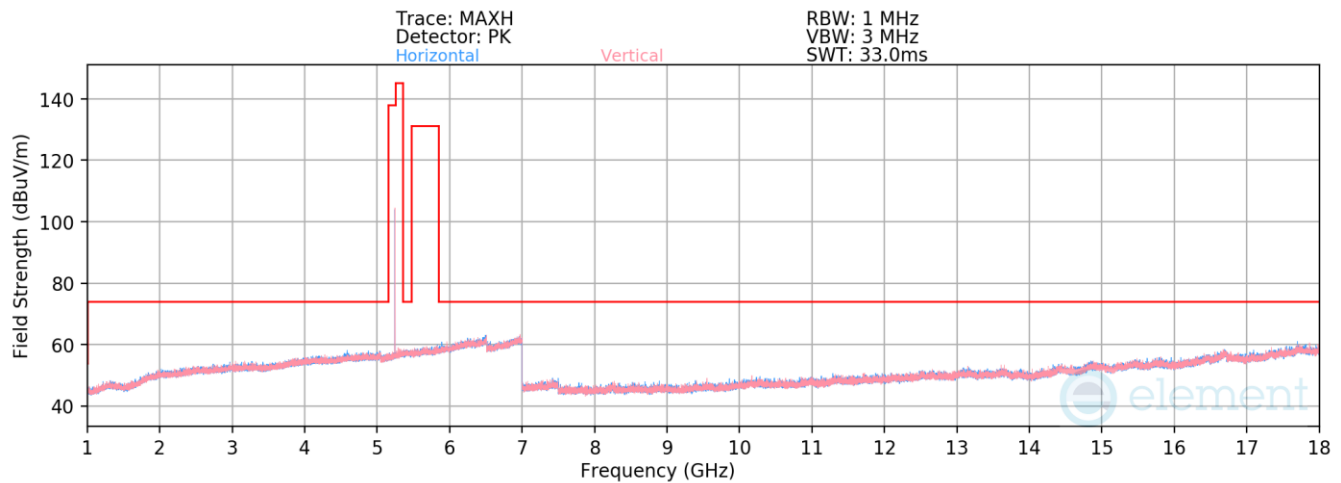


Plot 7-51. Radiated Spurious Emissions 1-18GHz (HDR4 – 5245MHz)


Mode: HDR4
Data Rate: 4Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 5245MHz

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 10490.00 | Peak | H | - | - | -70.91 | 12.68 | 48.77 | 68.23 | -19.46 |
| * 15735.00 | Avg | H | - | - | -83.88 | 18.96 | 42.08 | 53.98 | -11.90 |
| * 15735.00 | Peak | H | - | - | -71.87 | 18.96 | 54.09 | 73.98 | -19.89 |

Table 7-10. Radiated Spurious Emissions Measurements

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 52 of 72 |

V 10.5 12/15/2021

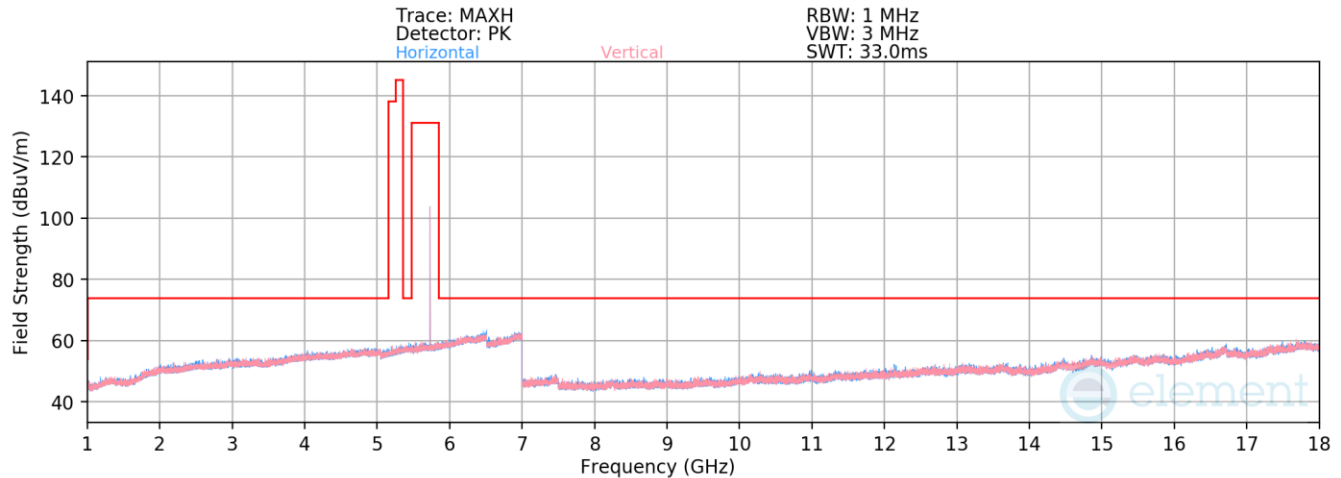


Plot 7-52. Radiated Spurious Emissions 1-18GHz (HDR4 – 5731MHz)


Mode: HDR4
Data Rate: 4Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 5731MHz

| | Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|---|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| * | 11462.00 | Avg | H | - | - | -82.87 | 13.30 | 37.43 | 53.98 | -16.55 |
| * | 11462.00 | Peak | H | - | - | -70.89 | 13.30 | 49.41 | 73.98 | -24.57 |
| | 17193.00 | Peak | H | - | - | -72.32 | 22.02 | 56.70 | 68.23 | -11.53 |

Table 7-11. Radiated Spurious Emissions Measurements

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 53 of 72 |

V 10.5 12/15/2021

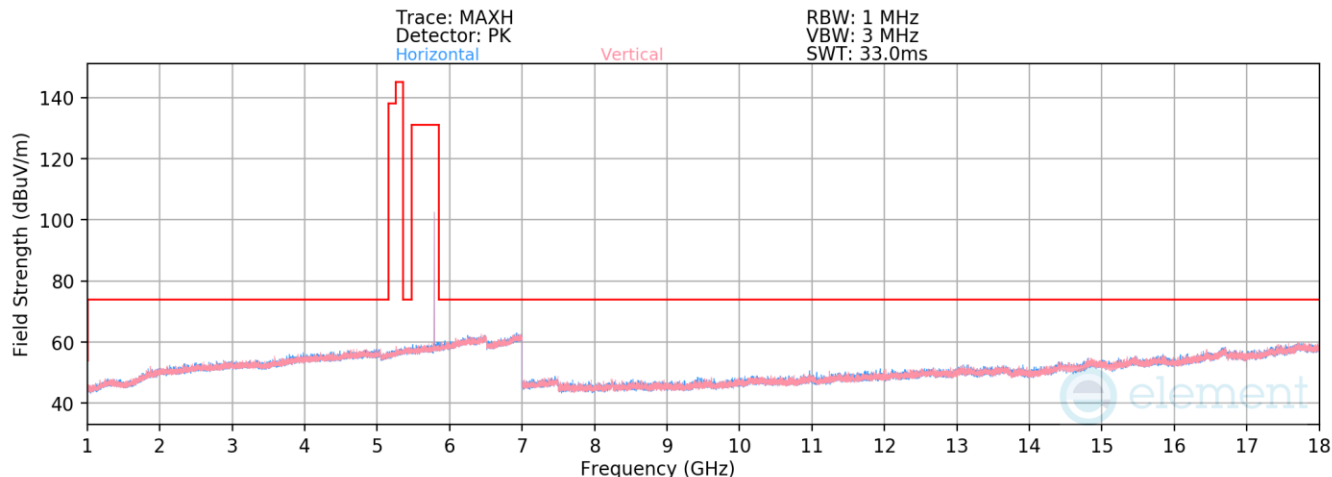


Plot 7-53. Radiated Spurious Emissions 1-18GHz (HDR4 – 5788MHz)


Mode: HDR4
Data Rate: 4Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 5788MHz

| | Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|---|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| * | 11576.00 | Avg | H | - | - | -83.21 | 13.44 | 37.23 | 53.98 | -16.75 |
| * | 11576.00 | Peak | H | - | - | -71.23 | 13.44 | 49.21 | 73.98 | -24.77 |
| | 17364.00 | Peak | H | - | - | -72.49 | 22.83 | 57.34 | 68.23 | -10.89 |

Table 7-12. Radiated Spurious Emissions Measurements

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 54 of 72 |

V 10.5 12/15/2021

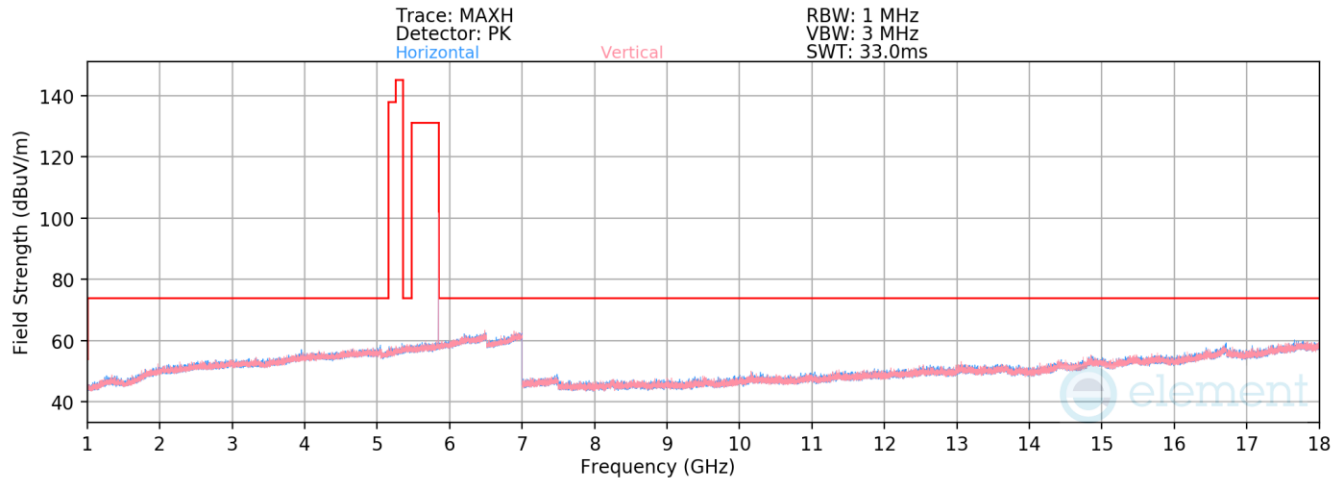

Plot 7-54. Radiated Spurious Emissions 1-18GHz (HDR4 – 5844MHz)

Mode: HDR4


Data Rate: 4Mbps

Distance of Measurements: 3 Meters


Operating Frequency: 5844MHz

| | Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|---|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| * | 11688.00 | Avg | H | - | - | -82.96 | 13.74 | 37.78 | 53.98 | -16.20 |
| * | 11688.00 | Peak | H | - | - | -71.45 | 13.74 | 49.29 | 73.98 | -24.69 |
| | 17532.00 | Peak | H | - | - | -72.60 | 23.75 | 58.15 | 68.23 | -10.08 |


Table 7-13. Radiated Spurious Emissions Measurements

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 55 of 72 |

V 10.5 12/15/2021

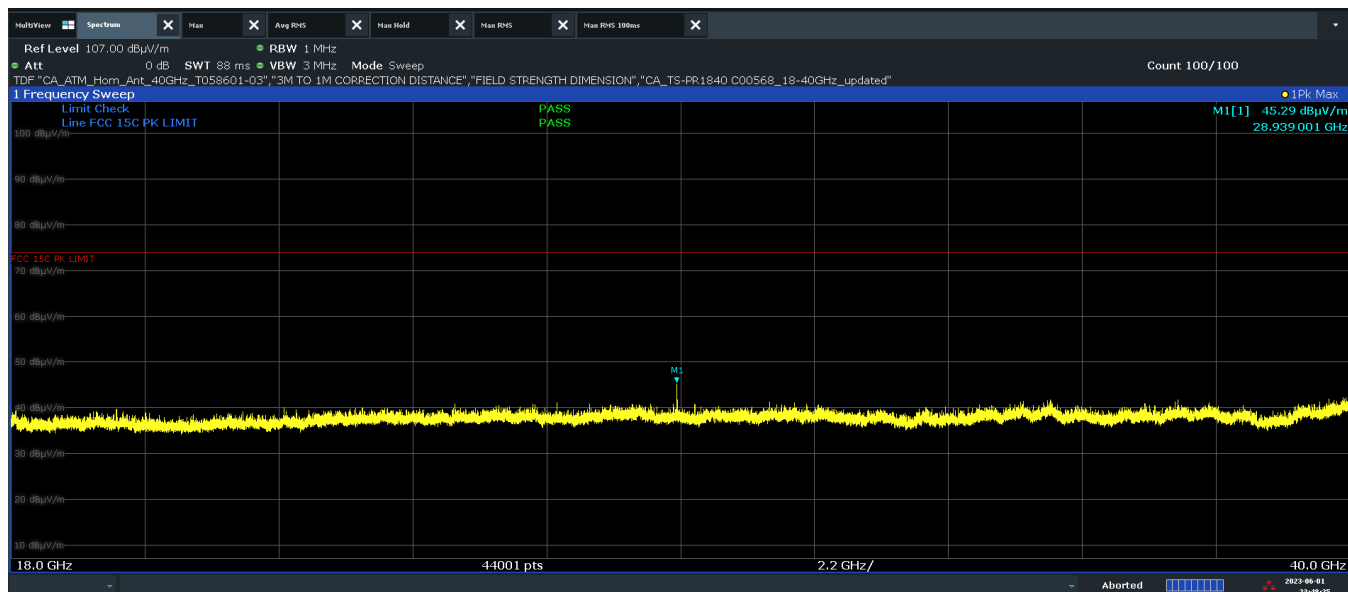


Plot 7-55. Radiated Spurious Emissions Above 18GHz (HDR4 – 5788MHz Pol. H)

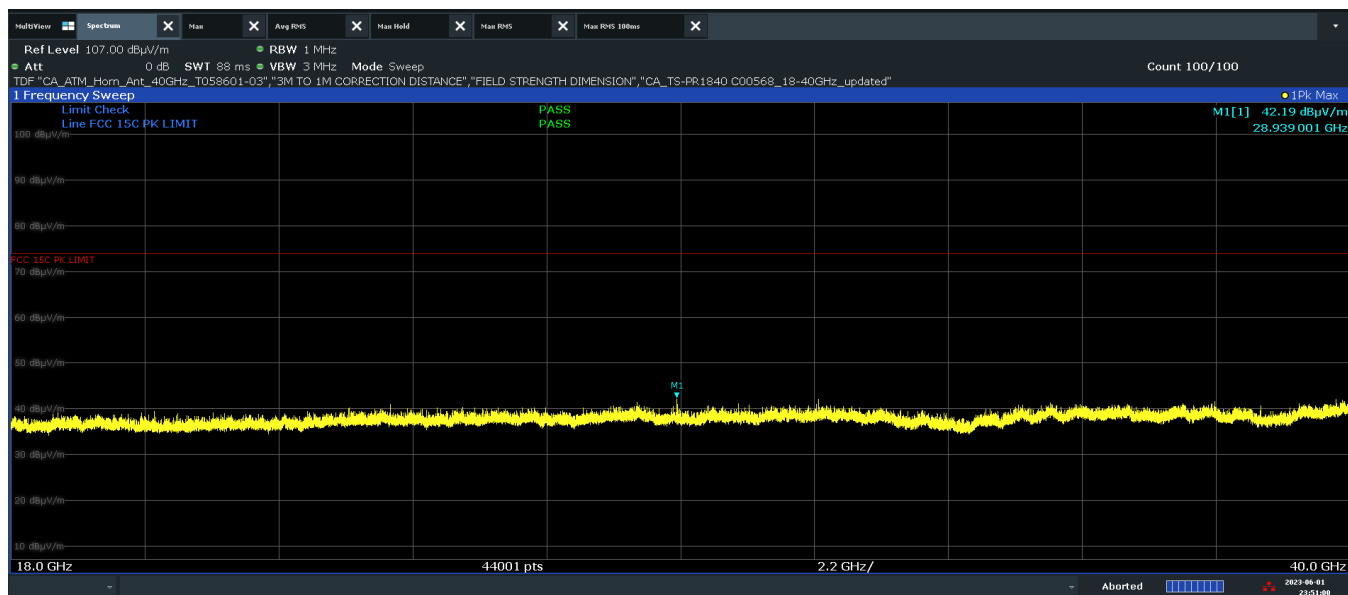

Plot 7-56. Radiated Spurious Emissions Above 18GHz (HDR4 – 5788MHz Pol. V)

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Positioner [degree] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Corr. Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|----------------------------|-------------------------|----------------|-------------|
| 28940.00 | Peak | H | 12 | 250 | -48.15 | -3.92 | -9.54 | 45.39 | 68.23 | -22.84 |

Table 7-14. Radiated Spurious Emissions Measurements

| | | | | | | | | | | |
|---|---|---------------------------------------|--|--|--|--|--|-----------------------------------|--|--|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | | | | | | Approved by: Technical Manager | | |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | | | | | | Page 56 of 72 | | |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.6.2 Radiated Band Edge Measurements

§15.407(b.1), §15.205 §15.209


The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$


Mode: HDR4

Measurement Distance: 3 Meters

Operating Frequency: 5157MHz

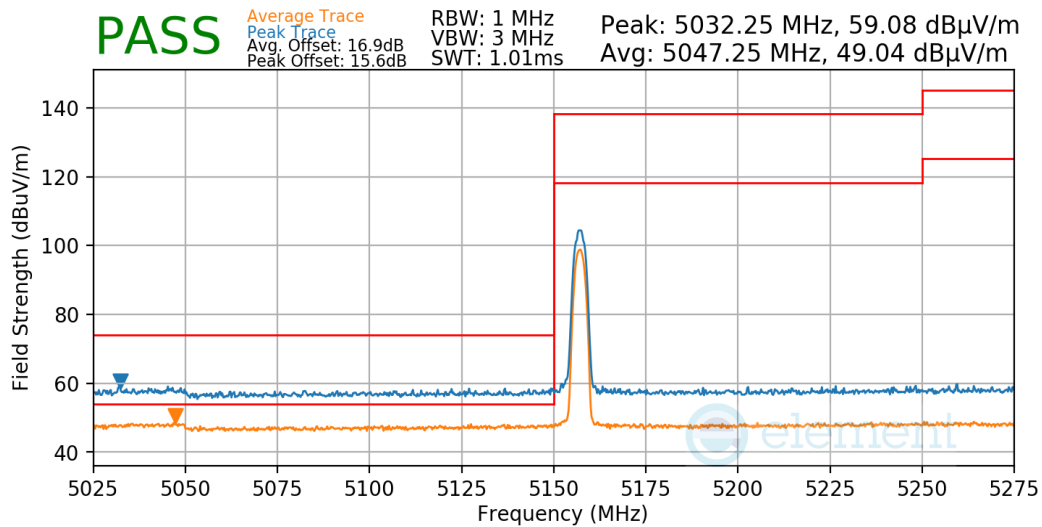

Plot 7-57. Radiated Lower Band Edge Measurement


| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 57 of 72 |

V 10.5 12/15/2021

Mode: HDR8

Measurement Distance: 3 Meters

Operating Frequency: 5157MHz

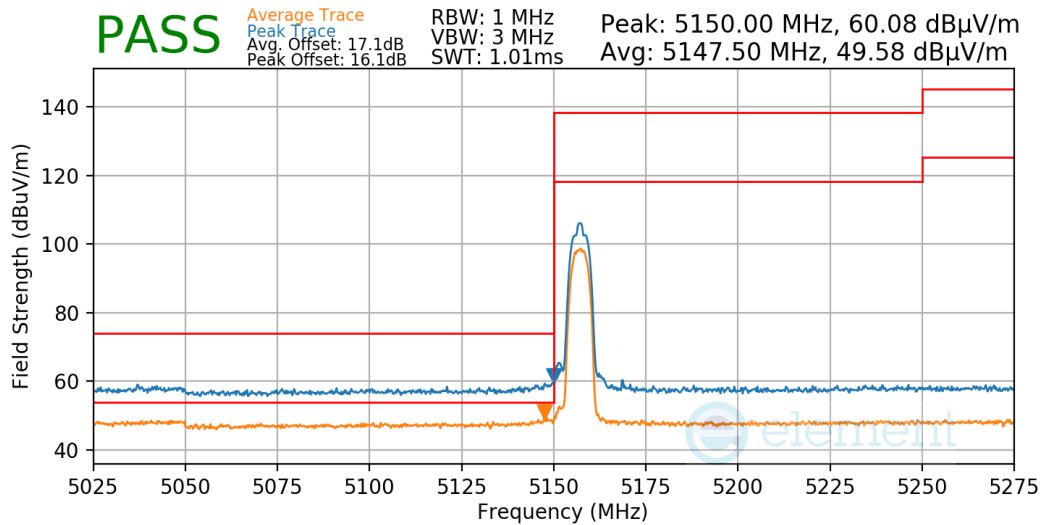


Plot 7-58. Radiated Lower Band Edge Measurement


Mode: HDRp4

Measurement Distance: 3 Meters

Operating Frequency: 5157MHz

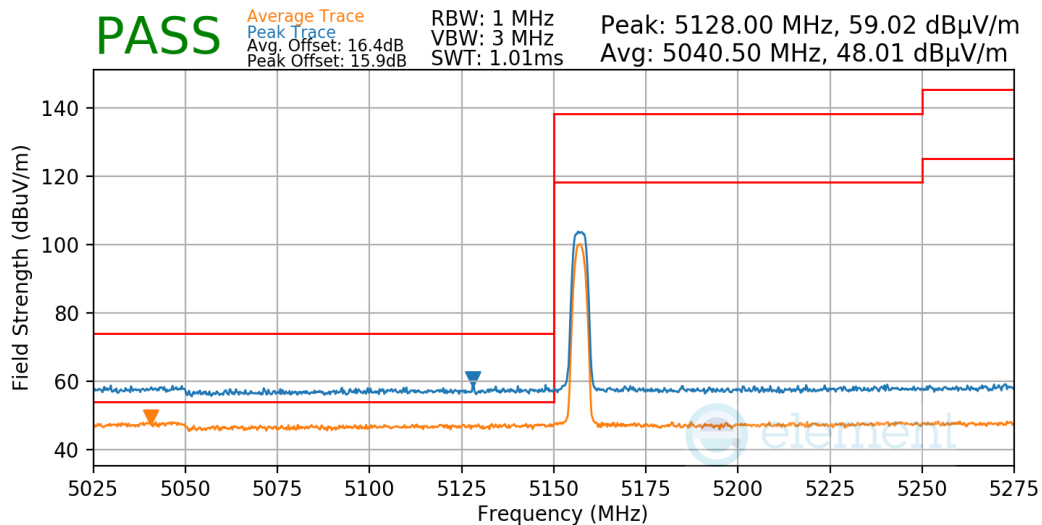

Plot 7-59. Radiated Lower Band Edge Measurement


| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 58 of 72 |

V 10.5 12/15/2021

Mode: HDRp8

Measurement Distance: 3 Meters

Operating Frequency: 5157MHz

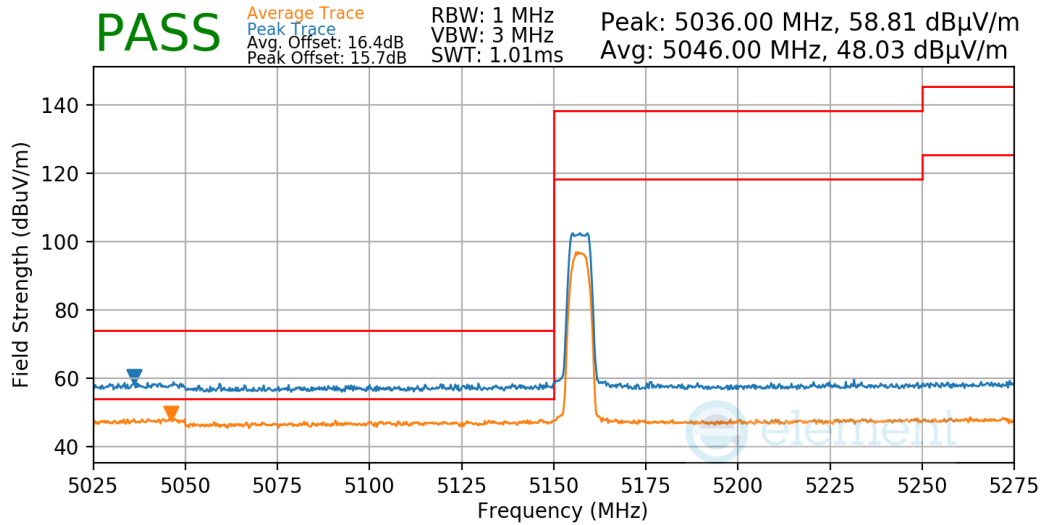


Plot 7-60. Radiated Lower Band Edge Measurement


Mode: HDR4

Measurement Distance: 3 Meters

Operating Frequency: 5731MHz

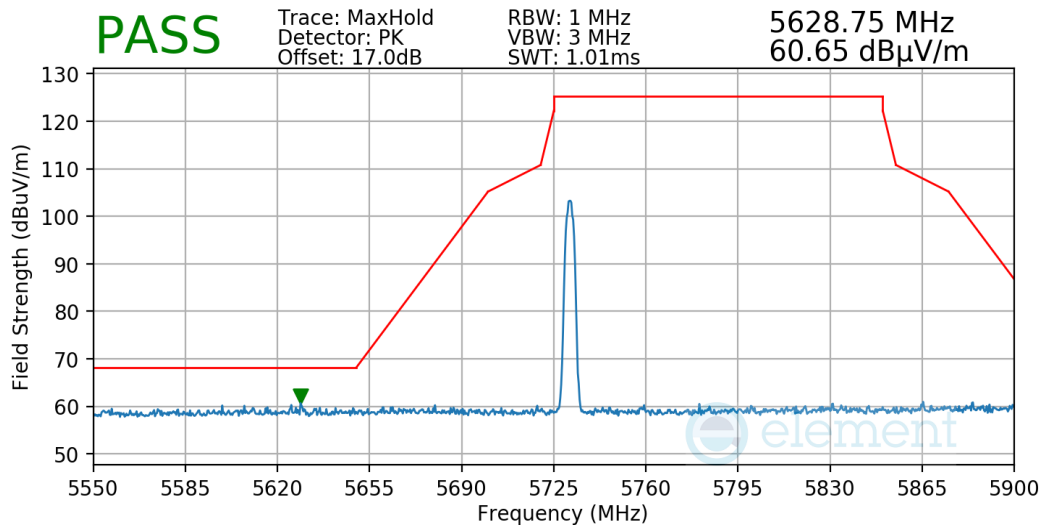

Plot 7-61. Radiated Lower Band Edge Measurement


| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 59 of 72 |

V 10.5 12/15/2021

Mode: HDR8

Measurement Distance: 3 Meters

Operating Frequency: 5731MHz

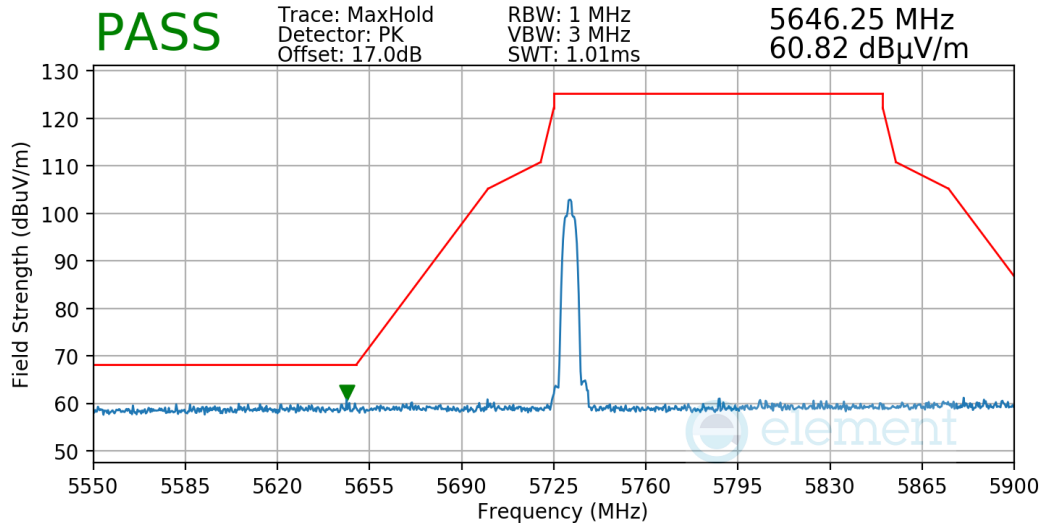


Plot 7-62. Radiated Lower Band Edge Measurement


Mode: HDRp4

Measurement Distance: 3 Meters

Operating Frequency: 5731MHz

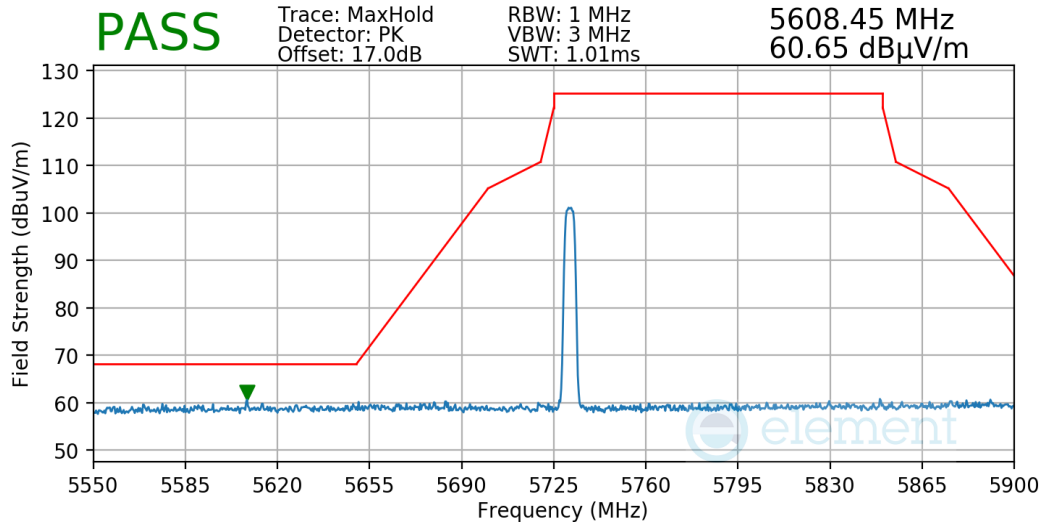

Plot 7-63. Radiated Lower Band Edge Measurement


| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 60 of 72 |

V 10.5 12/15/2021

Mode: HDRp8

Measurement Distance: 3 Meters

Operating Frequency: 5731MHz

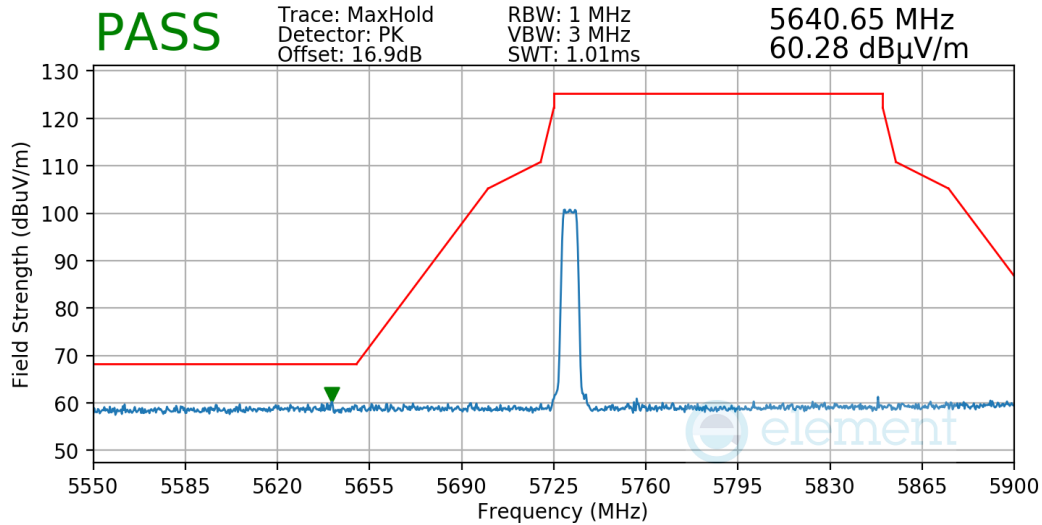


Plot 7-64. Radiated Lower Band Edge Measurement


Mode: HDR4

Measurement Distance: 3 Meters

Operating Frequency: 5844MHz

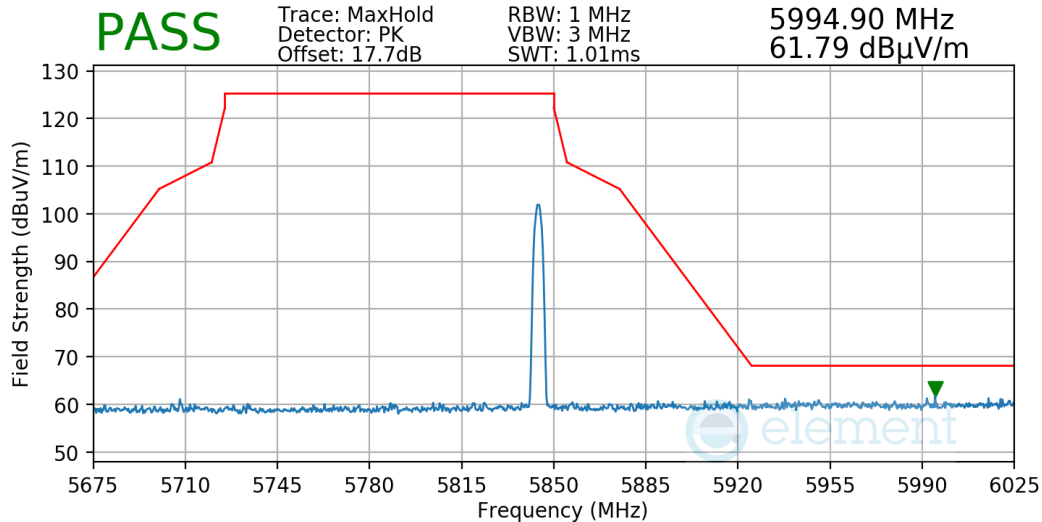

Plot 7-65. Radiated Upper Band Edge Measurement


| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 61 of 72 |

V 10.5 12/15/2021

Mode: HDR8

Measurement Distance: 3 Meters

Operating Frequency: 5844MHz

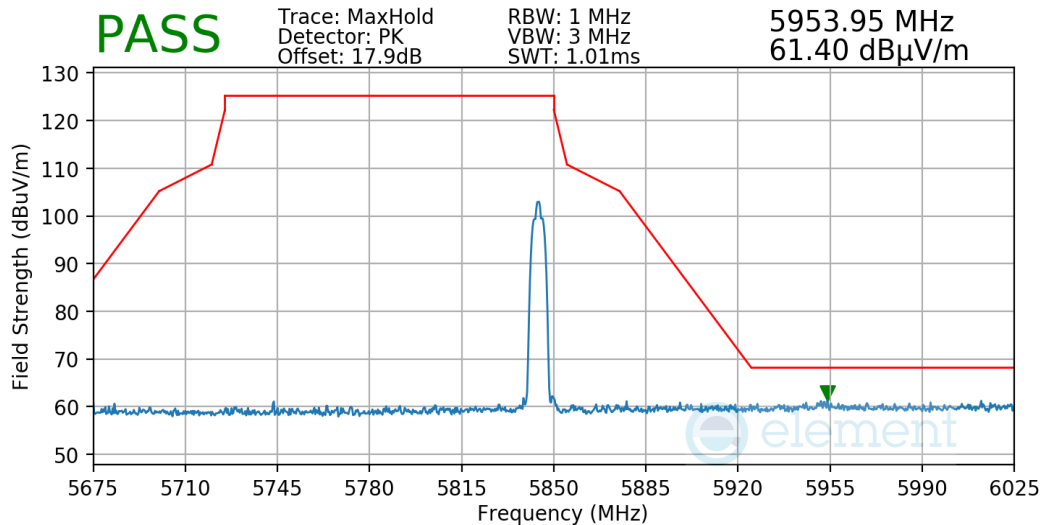


Plot 7-66. Radiated Upper Band Edge Measurement


Mode: HDRp4

Measurement Distance: 3 Meters

Operating Frequency: 5844MHz

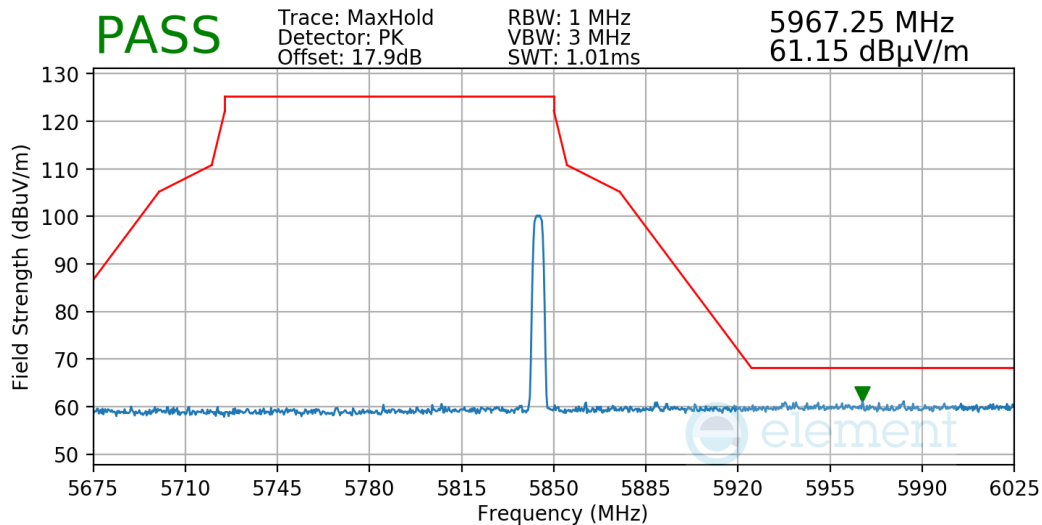

Plot 7-67. Radiated Upper Band Edge Measurement


| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 62 of 72 |

V 10.5 12/15/2021


Mode: HDRp8

Measurement Distance: 3 Meters

Operating Frequency: 5844MHz

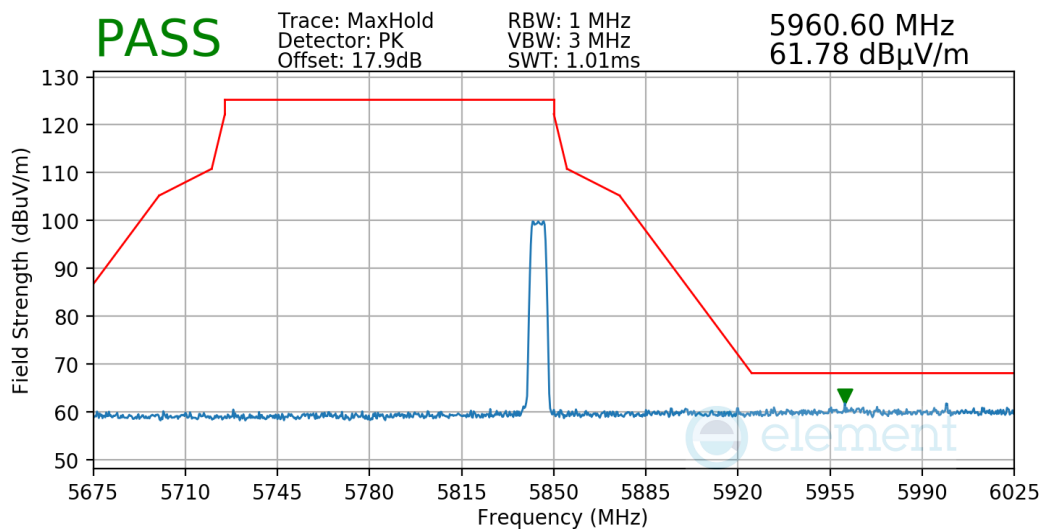

Plot 7-68. Radiated Upper Band Edge Measurement

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 63 of 72 |

V 10.5 12/15/2021

7.7 Radiated Spurious Emissions – Below 1GHz

§15.209

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 7-15 per Section 15.209.

| Frequency | Field Strength [$\mu\text{V/m}$] | Measured Distance [Meters] |
|-------------------|---------------------------------------|-------------------------------|
| 0.009 – 0.490 MHz | 2400/F (kHz) | 300 |
| 0.490 – 1.705 MHz | 24000/F (kHz) | 30 |
| 1.705 – 30.00 MHz | 30 | 30 |
| 30.00 – 88.00 MHz | 100 | 3 |
| 88.00 – 216.0 MHz | 150 | 3 |
| 216.0 – 960.0 MHz | 200 | 3 |
| Above 960.0 MHz | 500 | 3 |

Table 7-15. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = quasi-peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 64 of 72 |

V 10.5 12/15/2021

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

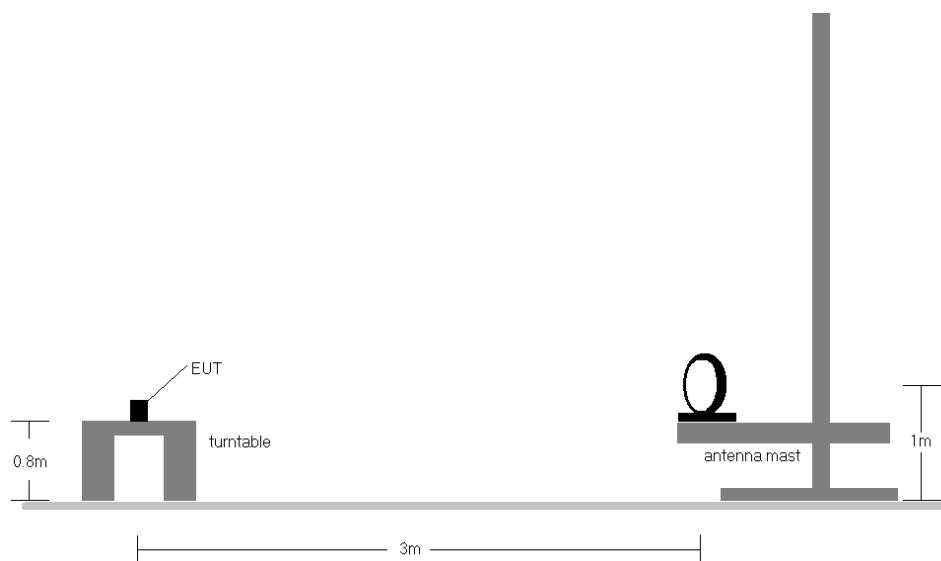


Figure 7-6. Radiated Test Setup < 30MHz

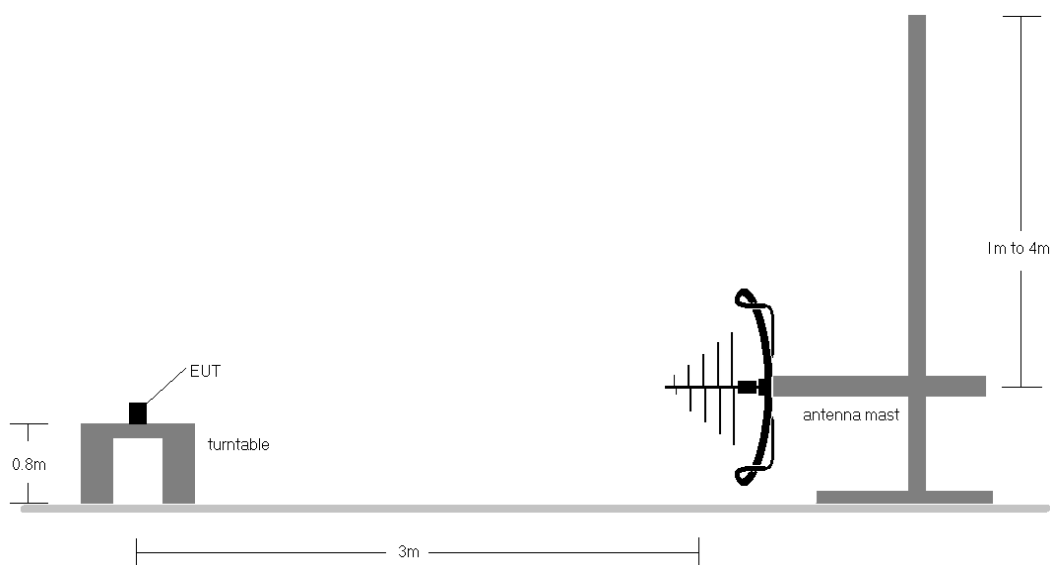



Figure 7-7. Radiated Test Setup < 1GHz

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 65 of 72 |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


Test Notes

1. All emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 7-15.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions that were within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. All supported modulation have been tested on the unit and only worst case configuration is reported.
10. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT charged by charging case and powered by AC/DC adaptor with USB-C cable.
 - b. EUT charged by charging case and powered by host PC with USB-C cable.

Sample Calculations

Determining Spurious Emissions Levels


- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]} - \text{Preamp Gain }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 66 of 72 |

V 10.5 12/15/2021

Radiated Spurious Emissions Measurements (Below 1GHz)


\$15.209

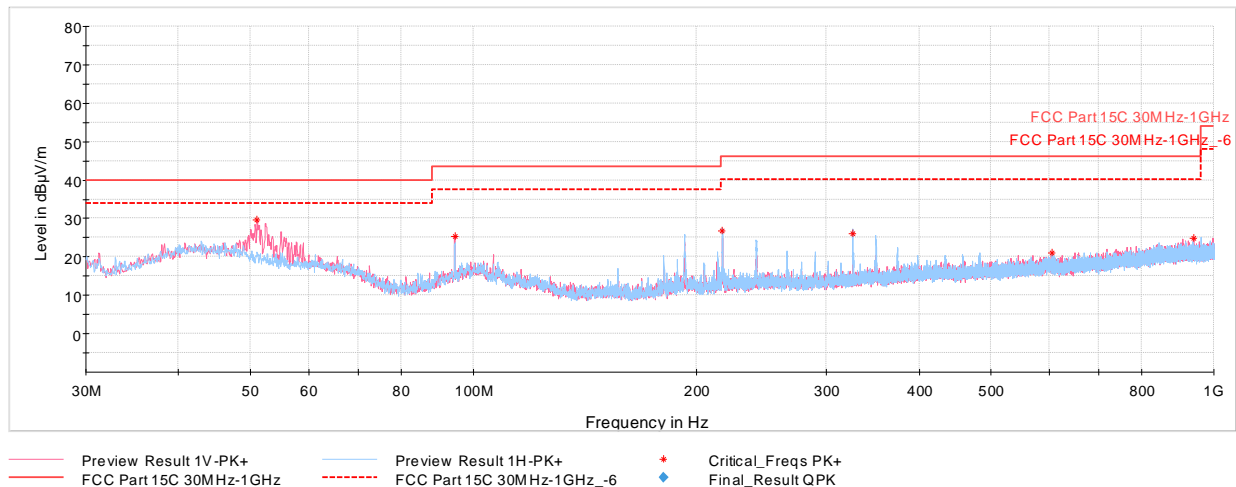

Plot 7-69. Radiated Spurious Emissions 30MHz - 1GHz (HDR4 – 5788MHz), with AC/DC Adapter and USB-C cable

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 51.10 | Max Peak | V | 100 | 263 | -61.83 | -15.64 | 29.53 | 40.00 | -10.47 |
| 94.46 | Max Peak | V | 100 | 197 | -62.71 | -18.86 | 25.43 | 43.52 | -18.09 |
| 216.97 | Max Peak | H | 100 | 97 | -62.60 | -17.71 | 26.69 | 46.02 | -19.33 |
| 325.71 | Max Peak | H | 100 | 147 | -66.27 | -14.65 | 26.08 | 46.02 | -19.94 |
| 604.24 | Max Peak | H | 100 | 92 | -77.55 | -8.50 | 20.95 | 46.02 | -25.07 |
| 939.42 | Max Peak | V | 100 | 143 | -78.12 | -4.14 | 24.74 | 46.02 | -21.28 |

Table 7-16. Radiated Spurious Emissions 30MHz – 1GHz (HDR4 – 5788MHz), with AC/DC Adapter and USB-C cable

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 67 of 72 |

V 10.5 12/15/2021

7.8 AC Line-Conducted Emissions Measurement

§15.207

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207.

| Frequency of emission (MHz) | Conducted Limit (dBμV) | |
|-----------------------------|------------------------|-----------|
| | Quasi-peak | Average |
| 0.15 – 0.5 | 66 to 56* | 56 to 46* |
| 0.5 – 5 | 56 | 46 |
| 5 – 30 | 60 | 50 |

Table 7-17. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 68 of 72 |

V 10.5 12/15/2021

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.





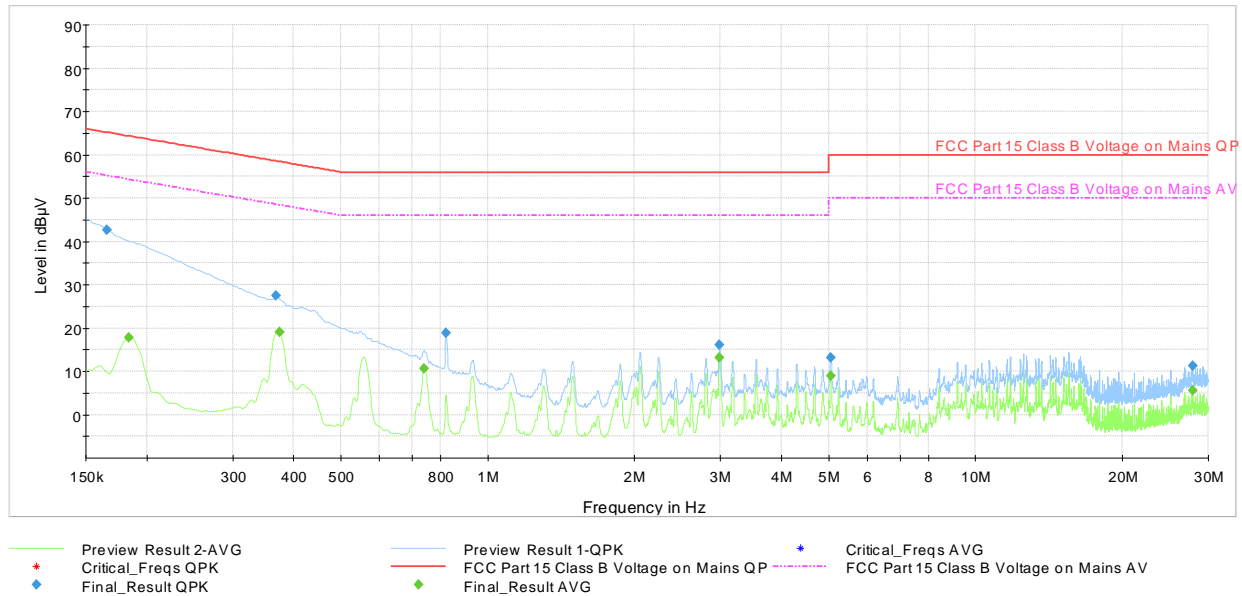
Figure 7-8. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT charged by charging case and powered by AC/DC adaptor with USB-C cable.
 - b. EUT charged by charging case and powered by host PC with USB-C cable.
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207.
4. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
5. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
6. $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
7. Traces shown in plots are made using quasi-peak and average detectors.
8. Deviations to the Specifications: None.

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 69 of 72 |

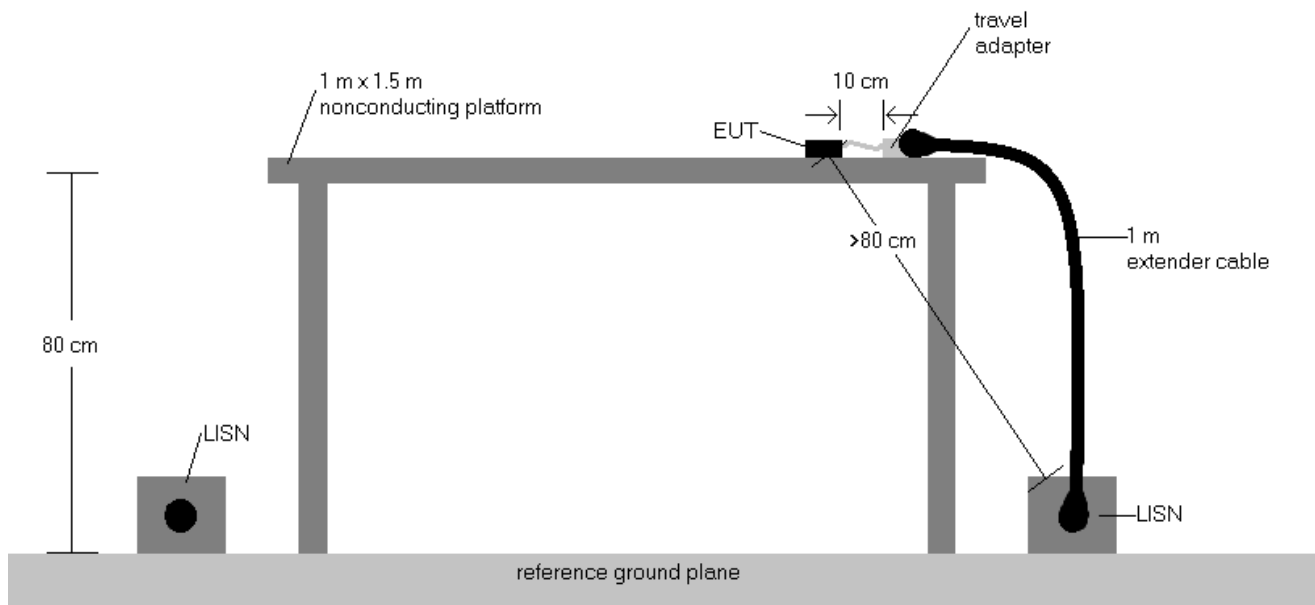
V 10.5 12/15/2021



Plot 7-70. AC Line Conducted Plot (HDR4 – 5788MHz) (L1) with host PC and USB-C cable


| Frequency [MHz] | Process State | QuasiPeak [dBµV] | Average [dBµV] | Limit [dBµV] | Margin [dB] | Line | PE |
|-----------------|---------------|------------------|----------------|--------------|-------------|------|-----|
| 0.166 | FINAL | 42.7 | — | 65.17 | -22.51 | L1 | GND |
| 0.184 | FINAL | — | 17.73 | 54.31 | -36.59 | L1 | GND |
| 0.368 | FINAL | 27.5 | — | 58.54 | -31.07 | L1 | GND |
| 0.375 | FINAL | — | 19.07 | 48.39 | -29.32 | L1 | GND |
| 0.742 | FINAL | — | 10.57 | 46.00 | -35.43 | L1 | GND |
| 0.821 | FINAL | 18.9 | — | 56.00 | -37.08 | L1 | GND |
| 2.987 | FINAL | 16.2 | — | 56.00 | -39.83 | L1 | GND |
| 2.987 | FINAL | — | 13.17 | 46.00 | -32.83 | L1 | GND |
| 5.046 | FINAL | — | 9.00 | 50.00 | -41.00 | L1 | GND |
| 5.053 | FINAL | 13.3 | — | 60.00 | -46.74 | L1 | GND |
| 27.888 | FINAL | 11.2 | — | 60.00 | -48.83 | L1 | GND |
| 27.893 | FINAL | — | 5.62 | 50.00 | -44.38 | L1 | GND |

Table 7-18. AC Line Conducted Data (HDR4 – 5788MHz) (L1) with host PC and USB-C cable

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 70 of 72 |

V 10.5 12/15/2021


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

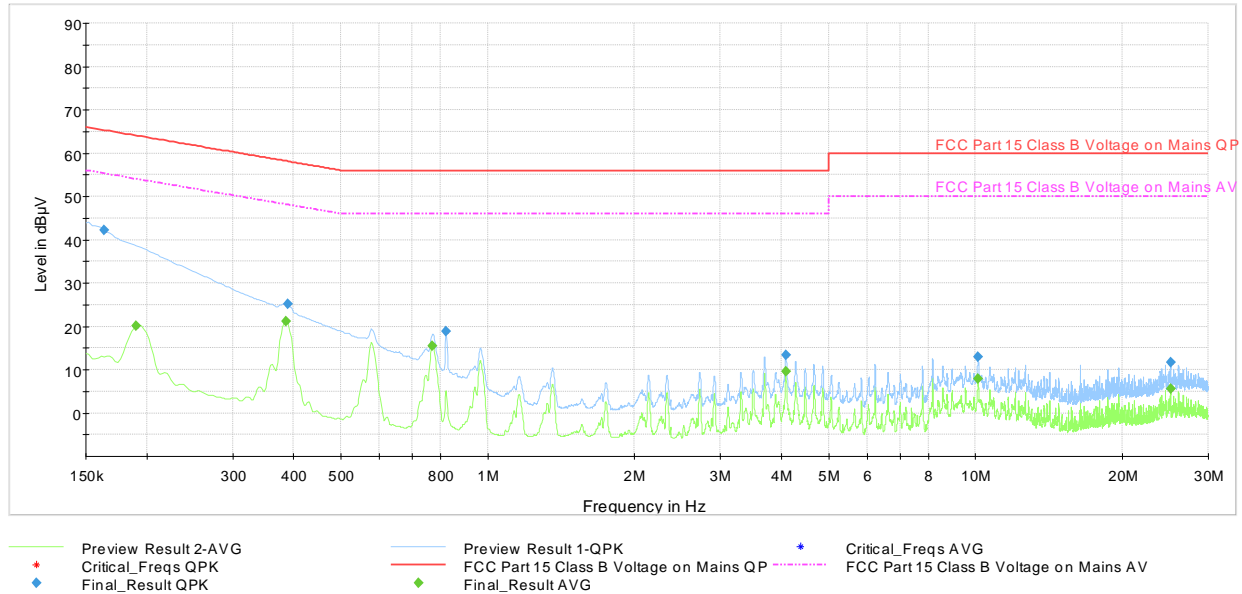

Plot 7-71. AC Line Conducted Plot (HDR4 – 5788MHz) (N) with host PC and USB-C cable

| Frequency [MHz] | Process State | QuasiPeak [dBμV] | Average [dBμV] | Limit [dBμV] | Margin [dB] | Line | PE |
|-----------------|---------------|------------------|----------------|--------------|-------------|------|-----|
| 0.164 | FINAL | 42.2 | — | 65.28 | -23.06 | N | GND |
| 0.191 | FINAL | — | 20.18 | 54.02 | -33.84 | N | GND |
| 0.386 | FINAL | — | 21.15 | 48.14 | -27.00 | N | GND |
| 0.389 | FINAL | 25.1 | — | 58.10 | -32.98 | N | GND |
| 0.771 | FINAL | — | 15.53 | 46.00 | -30.47 | N | GND |
| 0.821 | FINAL | 18.8 | — | 56.00 | -37.16 | N | GND |
| 4.081 | FINAL | — | 9.53 | 46.00 | -36.47 | N | GND |
| 4.085 | FINAL | 13.5 | — | 56.00 | -42.54 | N | GND |
| 10.115 | FINAL | 13.0 | — | 60.00 | -47.00 | N | GND |
| 10.118 | FINAL | — | 7.88 | 50.00 | -42.12 | N | GND |
| 25.087 | FINAL | — | 5.58 | 50.00 | -44.42 | N | GND |
| 25.087 | FINAL | 11.6 | — | 60.00 | -48.36 | N | GND |

Table 7-19. AC Line Conducted Data (HDR4 – 5788MHz) (N) with host PC and USB-C cable


| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 71 of 72 |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Wireless Left Earbud FCC ID: BCG-A3048** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules.

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A3048 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305020011-08.BCG | Test Dates: 5/2/2023 – 8/10/2023 | EUT Type: Wireless Earbud | Page 72 of 72 |

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.