

# FCC TEST REPORT

**REPORT NO.:** F910226A02

**MODEL NO.:** PL-800

**RECEIVED:** Feb. 26, 2002

**TESTED:** Feb. 28, 2002

**APPLICANT:** GBM Ray System Technology Inc.

**ADDRESS:** 3F-7, No. 102, Chung Shan Rd., Sec. 3,  
Chung Ho City, Taipei Hsien, Taiwan, R. O. C.

**ISSUED BY:** Advance Data Technology Corporation

**LAB LOCATION:** 47 14th Lin, Chiapau Tsun, Linko, Taipei,  
Taiwan, R.O.C.

This test report consists of 30 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample. The test results in the report only apply to the tested sample.



0528  
ILAC MRA



Lab Code: 200102-0

## Table of Contents

1	CERTIFICATION.....	3
2	SUMMARY OF TEST RESULTS .....	4
3	GENERAL INFORMATION .....	5
3.1	GENERAL DESCRIPTION OF EUT .....	5
3.2	DESCRIPTION OF TEST MODES .....	5
3.3	DESCRIPTION OF SUPPORT UNITS .....	6
4	EMISSION TEST .....	7
4.1	CONDUCTED EMISSION MEASUREMENT.....	7
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	7
4.1.2	TEST INSTRUMENTS.....	7
4.1.3	TEST PROCEDURE.....	8
4.1.4	DEVIATION FROM TEST STANDARD.....	8
4.1.5	TEST SETUP.....	8
4.1.6	EUT OPERATING CONDITIONS .....	9
4.1.7	TEST RESULTS (A).....	10
4.1.8	TEST RESULTS (B).....	12
4.2	RADIATED EMISSION MEASUREMENT.....	14
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT .....	14
4.2.2	TEST INSTRUMENTS.....	15
4.2.3	TEST PROCEDURE.....	16
4.2.4	DEVIATION FROM TEST STANDARD.....	16
4.2.5	TEST SETUP.....	17
4.2.6	EUT OPERATING CONDITIONS .....	17
4.2.7	TEST RESULTS (A).....	18
4.2.8	TEST RESULTS (B).....	22
5	PHOTOGRAPHS OF THE TEST CONFIGURATION .....	26
6	APPENDIX - INFORMATION ON THE TESTING LABORATORIES .....	30



## 1 CERTIFICATION

**PRODUCT:** 18" LCD Pen Tablet System  
**BRAND NAME:** WACOM  
**MODEL NO.:** PL-800  
**TEST ITEM:** ENGINEERING SAMPLE  
**APPLICANT:** GBM Ray System Technology, Inc.  
**STANDARDS:** FCC Part 15, Subpart B, Class B  
CISPR 22: 1997, Class B  
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility on Feb. 28, 2002. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

**TESTED BY:** John Liao, **DATE:** Mar. 5, 2002  
( John Liao )

**CHECKED BY:** Yemmy Soong, **DATE:** Mar. 5, 2002  
( Yemmy Soong )

**APPROVED BY:** Mike Su, **DATE:** Mar 5, 2002  
( Mike Su, Manager )

## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Remarks
FCC Part 15, Subpart B, Class B	Conducted Test	PASS	Meets Class B Limit Minimum passing margin is -19.09 dB at 22.568 MHz
CISPR 22: 1997, Class B	Radiated Test	PASS	Meets Class B Limit Minimum passing margin is -2.10 dB at 209.48 MHz

**NOTE:** For conducted emission test, the test limit used is according to FCC Part 15.107. In this part, conducted emission test for telecom port is not mentioned and therefore this item is not tested.

### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	18" LCD Pen Tablet System
<b>MODEL NO.</b>	PL-800
<b>POWER SUPPLY</b>	Power adapter Brand: LIEN ELECTRONICS Model: LE-2006B I/P: 100-240V, 50/60Hz, 1.5A O/P: 18V, 4A, 72W max. Power Cord: Non-shielded AC (1.8m, 3-pin) Non-shielded DC (1.5m) with a ferrite core
<b>DATA CABLE</b>	Shielded 2.0m with VGA, USB & RS232 inputs (two ferrite cores)

**NOTE:** The EUT is an 18" LCD Pen Tablet System with resolution up to 1024x768. The EUT has touch-screen function.

For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

#### 3.2 DESCRIPTION OF TEST MODES

The EUT was pre-tested with two types of VGA input with resolution and horizontal synchronization speed modes as follows:

MODE	PORT	PRE-TEST	FINAL TEST
MODE 1	D-Sub	1280X1024 (75Hz/80kHz)	1280X1024 (75Hz/80kHz)
		1024x768 (75Hz/60kHz)	
		640x480 (60Hz/31.5kHz)	
MODE 2	DVI	1280X1024 (75Hz/80kHz)	1280X1024 (75Hz/80kHz)
		1024x768 (75Hz/60kHz)	
		640x480 (60Hz/31.5kHz)	

The worse emission data was found when the EUT was tested under **1280X1024 (75Hz/80kHz)** resolution for both D-Sub and DVI modes.

### 3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Personal Computer	HP	Brio BA410	SG12106000	FCC DoC Approved
2	PRINTER	HP	2225C+	3030S79138	DSI6XU2225
3	MODEM	ACEEX	1414	980020569	IFAXDM1414
4	PS/2 KEYBOARD	BTC	5121W	A00801378	E5XKB5121WTH0110
5	PS2/MOUSE	LOGITECH	M-S61	HCA12001857	JNZ211403
6	VGA CARD	ATI	RADEON VE	1811003847	FCC DoC Approved

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core.
3	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.
4	1.6 m foil shielded wire, terminated with PS/2 connector via metallic frame, w/o core.
5	1.8 m non-shielded wire, terminated with PS/2 connector via drain wire, w/o core.
6	NA

**NOTE:** All power cords of the above support units are non-shielded (1.8m).

## 4 EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

**NOTES:** (1) The lower limit shall apply at the transition frequencies.

(2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

(3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESHS30	828109/007	July 4, 2002
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	839135/006	July 3, 2002
* ROHDE & SCHWARZ 4-wire ISN	ENY41	838119/028	Dec. 2, 2002
* ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/016	Dec. 2, 2002
EMCO-L.I.S.N. (for peripheral)	3825/2	9204-1964	July 3, 2002
Software	Cond-V2L	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C02.01	July 5, 2002
HP Terminator (For EMCO LISN)	11593A	E1-01-298	Feb. 20, 2002
HP Terminator (For EMCO LISN)	11593A	E1-01-299	Feb. 20, 2002
Shielded Room	Site 2	ADT-C02	NA
VCCI Site Registration No.	Site 2	C-240	NA

**NOTE:** 1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.

2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

3. “\*”: These equipment are used for conducted telecom port test only (if tested).


### 4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported.

### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.1.5 TEST SETUP

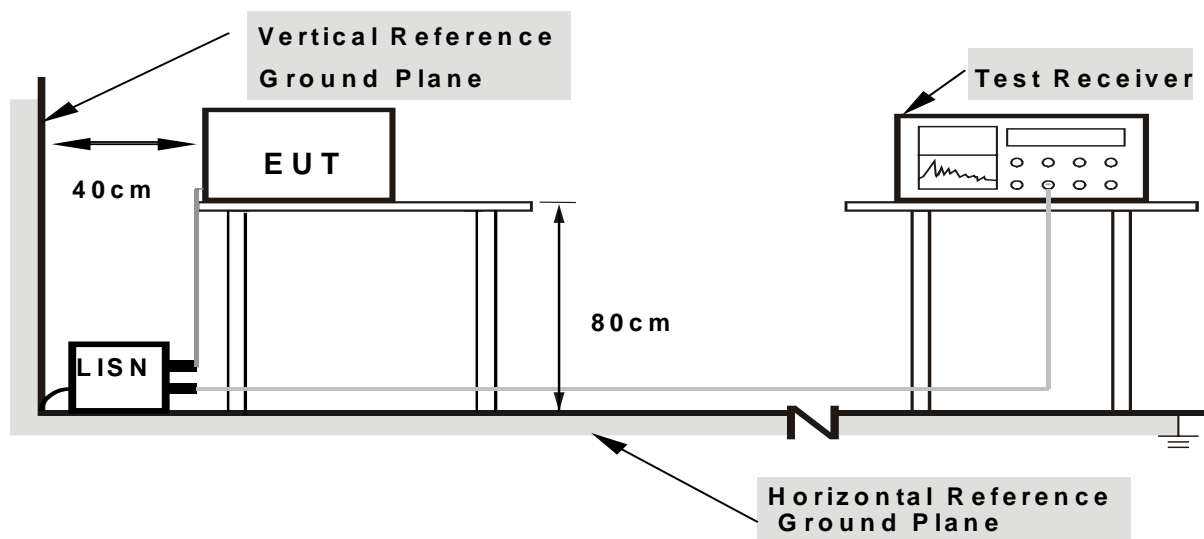

**Note: 1. Support units were connected to second LISN.**

**2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes**

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.





#### **4.1.6 EUT OPERATING CONDITIONS**


- a. Turn on the power of all equipment.
- b. PC ran a test program to enable all functions.
- c. PC read and wrote messages from FDD and HDD.
- d. PC sent "H" messages to LCD panel (EUT) and it displayed "H" patterns on screen.
- e. PC sent "H" messages to modem.
- f. PC sent "H" messages to printer, and the printer printed them on paper.
- g. Steps c-g were repeated.

#### 4.1.7 TEST RESULTS (A)

<b>EUT</b>	18" LCD Pen Tablet System	<b>MODEL NO.</b>	PL-800
<b>MODE</b>	1	<b>6dB BANDWIDTH</b>	10 kHz
<b>INPUT POWER</b>	120Vac, 60 Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	23 deg. C, 70 % RH, 1005 hPa	<b>TESTED BY:</b> John Liao	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	33.11	-	33.21	-	66.00	56.00	-32.79	-
2	0.402	0.10	35.57	-	35.67	-	57.81	47.81	-22.14	-
3	3.975	0.30	27.98	-	28.28	-	56.00	46.00	-27.72	-
4	18.807	0.95	28.85	-	29.80	-	60.00	50.00	-30.20	-
5	22.568	1.05	39.86	-	40.91	-	60.00	50.00	-19.09	-
6	27.257	1.15	26.82	-	27.97	-	60.00	50.00	-32.03	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

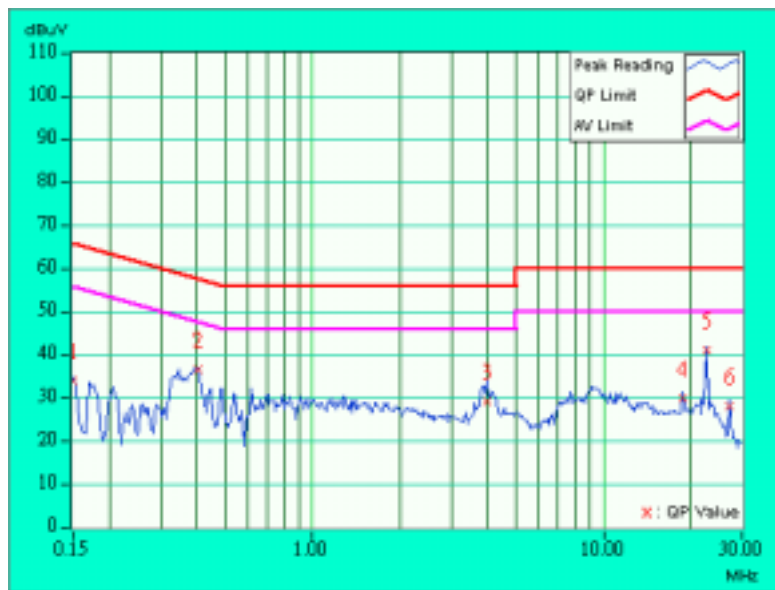

<b>EUT</b>	18" LCD Pen Tablet System	<b>MODEL NO.</b>	PL-800
<b>MODE</b>	1	<b>6dB BANDWIDTH</b>	10 kHz
<b>INPUT POWER</b>	120Vac, 60 Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	23 deg. C, 70 % RH, 1005 hPa	<b>TESTED BY:</b> John Liao	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	33.51	-	33.61	-	66.00	56.00	-32.39	-
2	0.393	0.10	34.77	-	34.87	-	58.00	48.00	-23.13	-
3	4.140	0.30	26.24	-	26.54	-	56.00	46.00	-29.46	-
4	9.403	0.39	26.20	-	26.59	-	60.00	50.00	-33.41	-
5	22.568	0.85	38.32	-	39.17	-	60.00	50.00	-20.83	-
6	27.256	0.95	26.64	-	27.59	-	60.00	50.00	-32.41	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

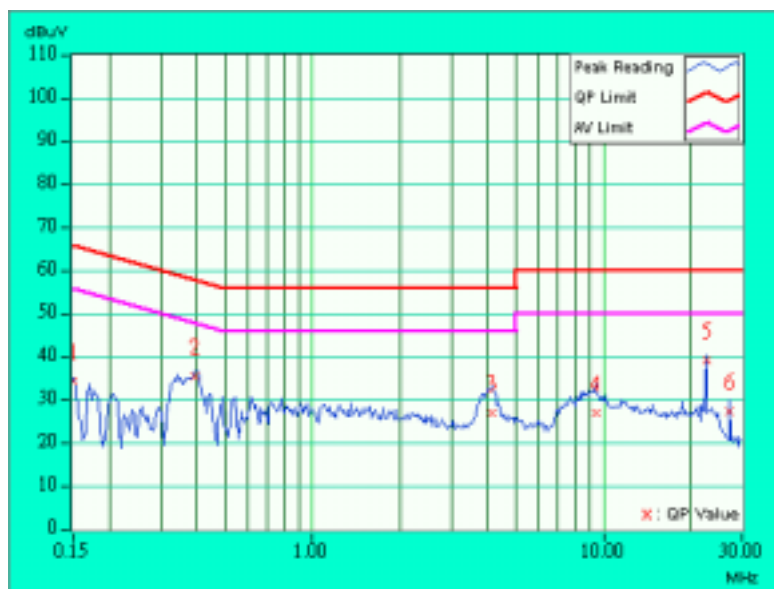


#### 4.1.8 TEST RESULTS (B)

<b>EUT</b>	18" LCD Pen Tablet System	<b>MODEL NO.</b>	PL-800
<b>MODE</b>	2	<b>6dB BANDWIDTH</b>	10 kHz
<b>INPUT POWER</b>	120Vac, 60 Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	23 deg. C, 70 % RH, 1005 hPa	<b>TESTED BY:</b> John Liao	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	33.35	-	33.45	-	66.00	56.00	-32.55	-
2	0.402	0.10	35.39	-	35.49	-	57.81	47.81	-22.32	-
3	3.969	0.30	29.05	-	29.35	-	56.00	46.00	-26.65	-
4	9.773	0.49	25.70	-	26.19	-	60.00	50.00	-33.81	-
5	22.568	1.05	39.78	-	40.83	-	60.00	50.00	-19.17	-
6	27.254	1.15	21.06	-	22.21	-	60.00	50.00	-37.79	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

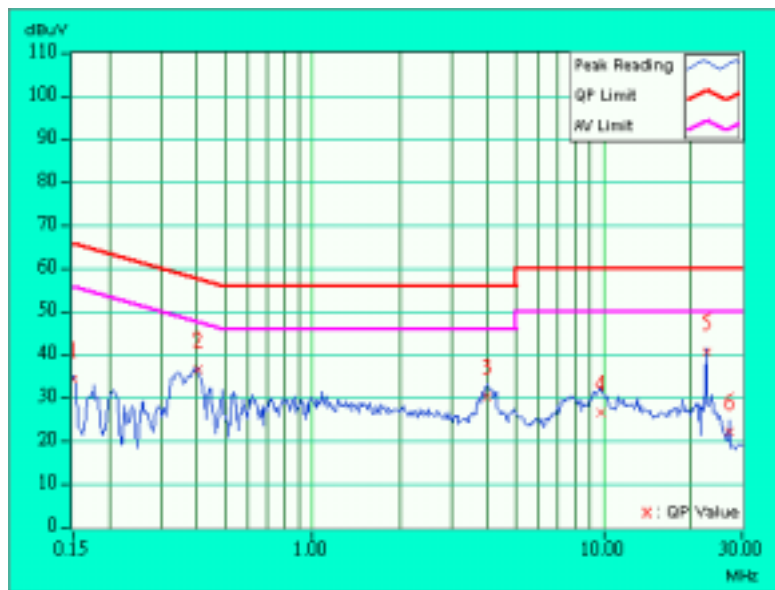

<b>EUT</b>	18" LCD Pen Tablet System	<b>MODEL NO.</b>	PL-800
<b>MODE</b>	2	<b>6dB BANDWIDTH</b>	10 kHz
<b>INPUT POWER</b>	120Vac, 60 Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	23 deg. C, 70 % RH, 1005 hPa	<b>TESTED BY:</b> John Liao	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	33.05	-	33.15	-	66.00	56.00	-32.85	-
2	0.402	0.10	34.80	-	34.90	-	57.81	47.81	-22.91	-
3	3.996	0.30	28.28	-	28.58	-	56.00	46.00	-27.42	-
4	18.806	0.75	28.48	-	29.23	-	60.00	50.00	-30.77	-
5	22.568	0.85	39.50	-	40.35	-	60.00	50.00	-19.65	-
6	27.257	0.95	21.14	-	22.09	-	60.00	50.00	-37.91	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

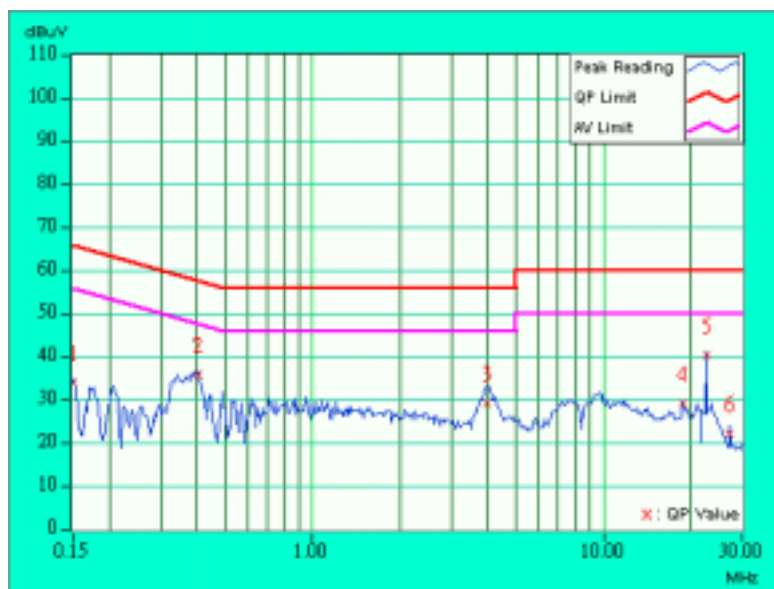

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT FOR FREQUENCY BELOW 1000 MHz

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 10m)
	dBuV/m	dBuV/m
30 – 230	40	30
230 - 1000	47	37

### LIMIT OF RADIATED EMISSION OF FCC PART 15, SUBPART B FOR FREQUENCY ABOVE 1000 MHz

FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80.0	60.0	74.0	54.0

- Note:** (1) The lower limit shall apply at the transition frequencies.  
 (2) Emission level (dBuV/m) = 20 log Emission level (uV/m).  
 (3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

## 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HP Spectrum Analyzer	8590L	3544A00941	Dec.10, 2002
HP Pre-Amplifier	8447D	2944A08312	Aug. 19, 2002
* HP Preamplifier	8449B	3008A01201	Dec. 06, 2002
* HP Preamplifier	8449B	3008A01292	Aug. 21, 2002
* R&S Receiver	ESI7	100033	May 30, 2002
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 23, 2002
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Jan. 27, 2003
* CHASE BILOG Antenna	CBL6111A	1500	Aug. 30, 2002
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	July 6, 2002
* EMCO Horn Antenna	3115	9312-4192	April 15, 2002
* EMCO Turn Table	1060-04	1196	NA
* EMCO Tower	1051	1264	NA
* Software	AS61D4	NA	NA
* ANRITSU RF Switches	MP59B	M06089	Aug. 30, 2002
* TIMES RF cable	LMR-600	CABLE-ST1-01	Aug. 30, 2002
Open Field Test Site	Site 1	ADT-R01	June 15, 2002
VCCI Site Registration No.	Site 1	R-236	NA

**NOTE:** 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.

2.The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

3. “\*” = These equipment are used for the final measurement.

4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz.

### 4.2.3 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

**NOTE:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.
3. For measurement of frequency above 1000 MHz, the EUT was set 3 meters away from the interference antenna.

### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation



#### 4.2.5 TEST SETUP

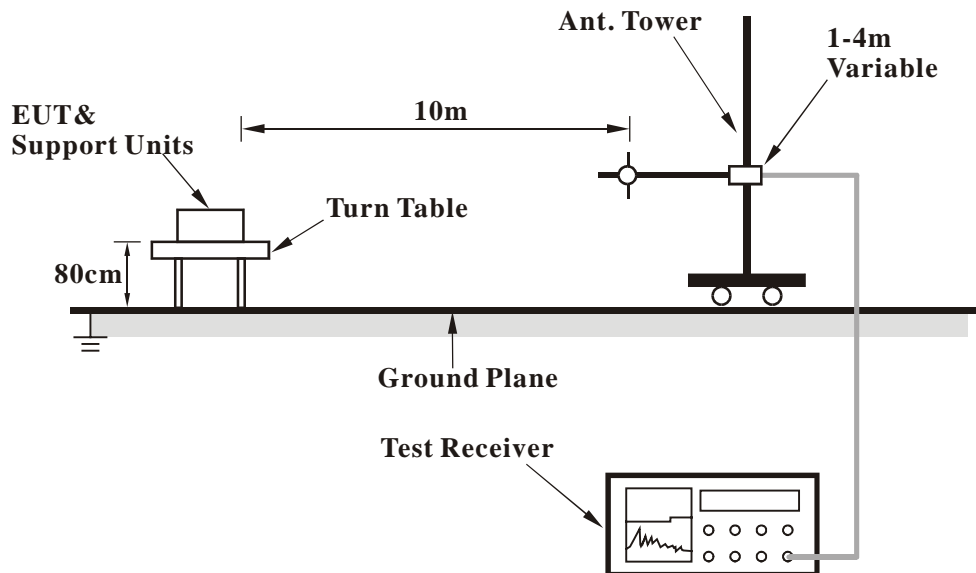

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

#### 4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.


## 4.2.7 TEST RESULTS (A)

<b>EUT</b>	18" LCD Pen Tablet System	<b>MODEL NO.</b>	PL-800
<b>MODE</b>	1	<b>FREQUENCY RANGE</b>	30-1000 MHz
<b>INPUT POWER</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Quasi-Peak, 120kHz
<b>ENVIRONMENTAL CONDITIONS</b>	25 deg. C, 65 % RH, 1005 hPa	<b>TESTED BY:</b> John Liao	

### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 10 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Gain (dB)	Correction Factor (dB/m)
1	104.74	20.1 QP	30.00	-9.90	4.01H	282	8.25	10.28	1.58	0.00	-11.85
2	115.22	20.4 QP	30.00	-9.60	4.01H	267	7.89	10.91	1.60	0.00	-12.51
3	157.12	22.3 QP	30.00	-7.70	4.01H	274	10.38	10.16	1.76	0.00	-11.92
4	188.55	19.8 QP	30.00	-10.20	4.01H	250	9.36	8.63	1.80	0.00	-10.44
5	209.48	22.3 QP	30.00	-7.70	4.01H	109	11.07	9.28	1.99	0.00	-11.27
6	366.60	28.0 QP	37.00	-9.00	2.49H	17	11.16	14.12	2.73	0.00	-16.84
7	471.33	30.2 QP	37.00	-6.80	1.59H	27	10.47	16.52	3.22	0.00	-19.73
8	650.06	30.2 QP	37.00	-6.80	1.13H	189	5.86	20.45	3.91	0.00	-24.36
9	785.57	30.1 QP	37.00	-6.90	1.00H	249	2.94	22.55	4.61	0.00	-27.16
10	910.09	30.5 QP	37.00	-6.50	1.00H	173	2.60	23.29	4.60	0.00	-27.90


- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) – Correction Factor(dB)
  2. Correction Factor(dB/m) = Pre-Amplifier Gain (dB) - Antenna Factor (dB/m) - Cable Factor (dB)
  3. Pre-Amplifier Gain (dB) = 0, when the test receiver is used to read the value and because it did not use the Pre-Amplifier.
  4. The other emission levels were very low against the limit.
  5. Margin value = Emission level – Limit value.

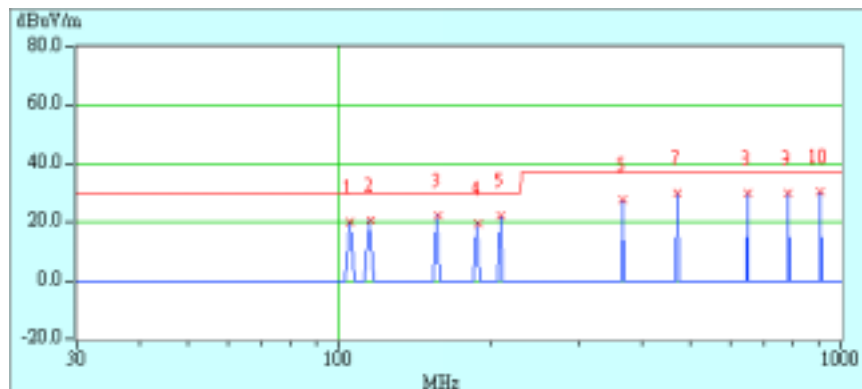

<b>EUT</b>	18" LCD Pen Tablet System	<b>MODEL NO.</b>	PL-800
<b>MODE</b>	1	<b>FREQUENCY RANGE</b>	30-1000 MHz
<b>INPUT POWER</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Quasi-Peak, 120kHz
<b>ENVIRONMENTAL CONDITIONS</b>	25 deg. C, 65 % RH, 1005 hPa	<b>TESTED BY:</b> John Liao	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 10 M											
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Gain (dB)	Correction Factor (dB/m)
1	41.88	24.0 QP	30.00	-6.00	1.01V	349	10.70	11.11	2.18	0.00	-13.29
2	73.34	23.5 QP	30.00	-6.50	1.65V	263	15.40	6.41	1.69	0.00	-8.10
3	104.74	27.0 QP	30.00	-3.00	1.00V	351	15.10	10.28	1.58	0.00	-11.85
4	115.22	24.1 QP	30.00	-5.90	1.00V	192	11.59	10.91	1.60	0.00	-12.51
5	157.11	26.7 QP	30.00	-3.30	1.00V	11	14.80	10.16	1.76	0.00	-11.92
6	209.48	27.9 QP	30.00	-2.10	1.00V	338	16.60	9.28	1.99	0.00	-11.27
7	219.96	24.8 QP	30.00	-5.20	1.00V	318	12.96	9.82	2.04	0.00	-11.86
8	366.60	31.2 QP	37.00	-5.80	1.00V	163	14.36	14.12	2.73	0.00	-16.84
9	471.33	29.3 QP	37.00	-7.70	3.82V	38	9.57	16.52	3.22	0.00	-19.74
10	680.82	30.2 QP	37.00	-6.80	2.08V	356	5.46	20.57	4.17	0.00	-24.75
11	785.57	34.2 QP	37.00	-2.80	1.68V	355	7.00	22.55	4.61	0.00	-27.17
12	910.09	32.9 QP	37.00	-4.10	1.88V	355	5.00	23.29	4.60	0.00	-27.91

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) – Correction Factor(dB)
  2. Correction Factor(dB/m) = Pre-Amplifier Gain (dB) - Antenna Factor (dB/m) - Cable Factor (dB)
  3. Pre-Amplifier Gain (dB) = 0, when the test receiver is used to read the value and because it did not use the Pre-Amplifier.
  4. The other emission levels were very low against the limit.
  5. Margin value = Emission level – Limit value.

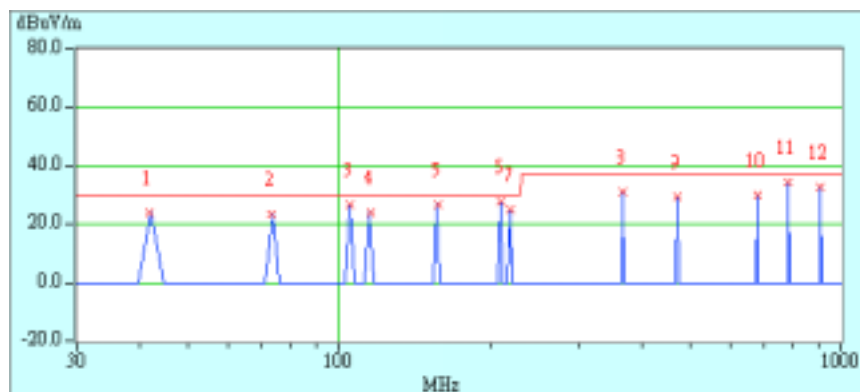


<b>EUT</b>	18" LCD Pen Tablet System	<b>MODEL NO.</b>	PL-800
<b>MODE</b>	1	<b>FREQUENCY RANGE</b>	1000 -2000 MHz
<b>INPUT POWER</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak, 1 MHz
<b>ENVIRONMENTAL CONDITIONS</b>	25 deg. C, 65 % RH, 1005 hPa	<b>TESTED BY:</b> John Liao	

### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Gain (dB)	Correction Factor (dB/m)
1	1040.10	35.1 pk	74.00	-38.90	1.26H	268	42.06	25.91	5.23	38.11	6.97
2	1092.10	42.0 pk	74.00	-32.00	1.33H	296	48.50	26.05	5.42	38.00	6.53
3	1118.10	41.8 pk	74.00	-32.20	1.24H	295	47.99	26.14	5.60	37.94	6.20
4	1170.20	41.2 pk	74.00	-32.80	1.36H	296	46.90	26.28	5.84	37.83	5.71
5	1248.30	37.2 pk	74.00	-36.80	1.36H	309	42.20	26.50	6.12	37.65	5.03
6	1466.40	39.1 pk	74.00	-34.90	1.06H	311	42.20	27.12	6.91	37.17	3.14


- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) – Correction Factor(dB)
  2. Correction Factor(dB/m) = Pre-Amplifier Gain (dB) - Antenna Factor (dB/m) - Cable Factor (dB)
  3. Pre-Amplifier Gain (dB) = 0, when the test receiver is used to read the value and because it did not use the Pre-Amplifier.
  4. The other emission levels were very low against the limit.
  5. Margin value = Emission level – Limit value.

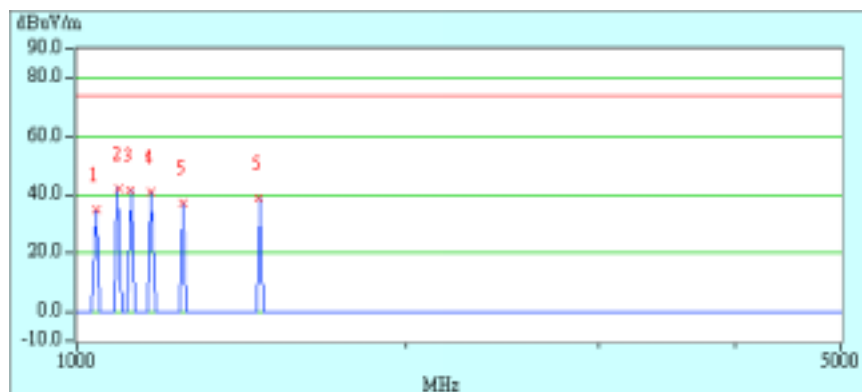

<b>EUT</b>	18" LCD Pen Tablet System	<b>MODEL NO.</b>	PL-800
<b>MODE</b>	1	<b>FREQUENCY RANGE</b>	1000 -2000 MHz
<b>INPUT POWER</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak, 1 MHz
<b>ENVIRONMENTAL CONDITIONS</b>	25 deg. C, 65 % RH, 1005 hPa	<b>TESTED BY:</b> John Liao	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M											
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Gain (dB)	Correction Factor (dB/m)
1	1040.10	38.4 pk	74.00	-35.60	1.27V	357	45.90	25.40	5.23	38.11	7.48
2	1092.10	41.2 pk	74.00	-32.80	1.27V	354	48.20	25.53	5.42	38.00	7.04
3	1118.20	44.2 pk	74.00	-29.80	1.02V	21	50.90	25.61	5.60	37.94	6.73
4	1170.10	41.8 pk	74.00	-32.20	1.02V	16	48.00	25.74	5.84	37.83	6.25
5	1248.20	36.8 pk	74.00	-37.20	1.24V	15	42.40	25.95	6.12	37.65	5.58
6	1466.40	44.0 pk	74.00	-30.00	1.24V	15	47.77	26.52	6.91	37.17	3.74

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) – Correction Factor(dB)
  2. Correction Factor(dB/m) = Pre-Amplifier Gain (dB) - Antenna Factor (dB/m) - Cable Factor (dB)
  3. Pre-Amplifier Gain (dB) = 0, when the test receiver is used to read the value and because it did not use the Pre-Amplifier.
  4. The other emission levels were very low against the limit.
  5. Margin value = Emission level – Limit value.

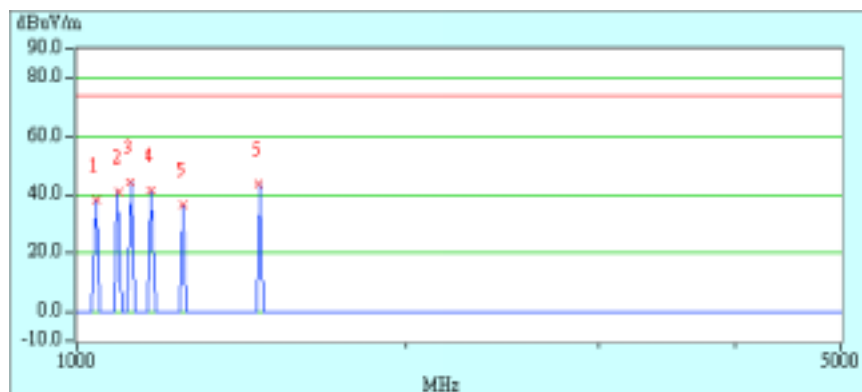


## 4.2.8 TEST RESULTS (B)

<b>EUT</b>	18" LCD Pen Tablet System	<b>MODEL NO.</b>	PL-800
<b>MODE</b>	2	<b>FREQUENCY RANGE</b>	30-1000 MHz
<b>INPUT POWER</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Quasi-Peak, 120kHz
<b>ENVIRONMENTAL CONDITIONS</b>	25 deg. C, 65 % RH, 1005 hPa	<b>TESTED BY:</b> John Liao	

### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 10 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Gain (dB)	Correction Factor (dB/m)
1	41.88	20.1 QP	30.00	-9.90	4.00H	259	6.81	11.11	2.18	0.00	-13.29
2	104.74	20.7 QP	30.00	-9.30	4.00H	291	8.85	10.28	1.58	0.00	-11.85
3	115.22	21.8 QP	30.00	-8.20	4.00H	260	9.29	10.91	1.60	0.00	-12.51
4	157.12	22.2 QP	30.00	-7.80	4.00H	271	10.28	10.16	1.76	0.00	-11.92
5	209.48	21.1 QP	30.00	-8.90	4.00H	9	9.83	9.28	1.99	0.00	-11.27
6	220.00	20.0 QP	30.00	-10.00	3.91H	356	8.14	9.82	2.04	0.00	-11.86
7	366.59	29.1 QP	37.00	-7.90	2.75H	16	12.26	14.12	2.73	0.00	-16.84
8	471.33	29.6 QP	37.00	-7.40	1.57H	38	9.88	16.52	3.22	0.00	-19.73
9	523.71	31.1 QP	37.00	-5.90	1.56H	324	8.87	18.83	3.35	0.00	-22.18
10	785.56	31.1 QP	37.00	-5.90	1.00H	252	3.94	22.55	4.61	0.00	-27.16
11	910.09	30.6 QP	37.00	-6.40	1.00H	189	2.70	23.29	4.60	0.00	-27.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) – Correction Factor(dB)
  2. Correction Factor(dB/m) = Pre-Amplifier Gain (dB) - Antenna Factor (dB/m) - Cable Factor (dB)
  3. Pre-Amplifier Gain (dB) = 0, when the test receiver is used to read the value and because it did not use the Pre-Amplifier.
  4. The other emission levels were very low against the limit.
  5. Margin value = Emission level – Limit value.

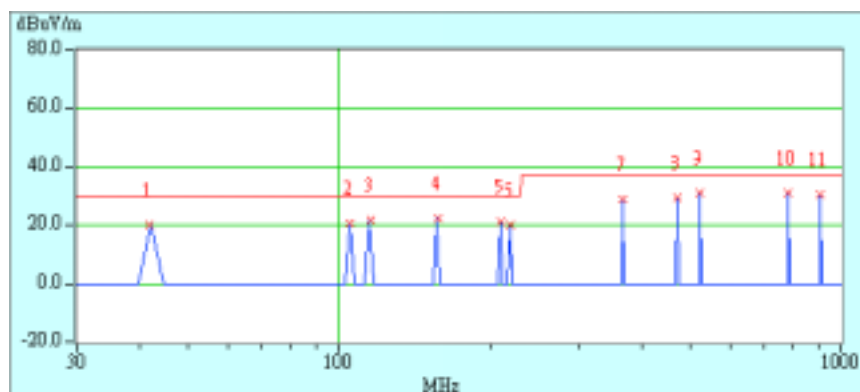


<b>EUT</b>	18" LCD Pen Tablet System	<b>MODEL NO.</b>	PL-800
<b>MODE</b>	2	<b>FREQUENCY RANGE</b>	30-1000 MHz
<b>INPUT POWER</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Quasi-Peak, 120kHz
<b>ENVIRONMENTAL CONDITIONS</b>	25 deg. C, 65 % RH, 1005 hPa	<b>TESTED BY:</b> John Liao	

### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 10 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Gain (dB)	Correction Factor (dB/m)
1	31.41	25.9 QP	30.00	-4.10	1.11V	355	6.87	16.63	2.39	0.00	-19.03
2	41.88	24.3 QP	30.00	-5.70	1.00V	4	11.01	11.11	2.18	0.00	-13.29
3	83.80	22.6 QP	30.00	-7.40	1.73V	223	13.73	7.28	1.54	0.00	-8.82
4	104.74	26.9 QP	30.00	-3.10	1.00V	191	15.00	10.28	1.58	0.00	-11.85
5	115.22	24.4 QP	30.00	-5.60	1.00V	169	11.89	10.91	1.60	0.00	-12.51
6	157.11	25.9 QP	30.00	-4.10	1.00V	169	14.00	10.16	1.76	0.00	-11.92
7	209.49	27.0 QP	30.00	-3.00	1.00V	331	15.70	9.28	1.99	0.00	-11.27
8	219.96	24.6 QP	30.00	-5.40	1.00V	319	12.71	9.82	2.04	0.00	-11.86
9	366.59	31.9 QP	37.00	-5.10	1.00V	253	15.06	14.12	2.73	0.00	-16.84
10	471.33	27.6 QP	37.00	-9.40	1.64V	46	7.87	16.52	3.22	0.00	-19.74
11	650.05	30.6 QP	37.00	-6.40	1.76V	356	6.24	20.45	3.91	0.00	-24.37
12	680.83	30.2 QP	37.00	-6.80	1.90V	6	5.46	20.57	4.17	0.00	-24.75
13	780.09	34.0 QP	37.00	-3.00	2.02V	5	6.80	22.58	4.60	0.00	-27.18
14	785.54	33.6 QP	37.00	-3.40	1.77V	357	6.40	22.55	4.61	0.00	-27.17
15	910.09	33.9 QP	37.00	-3.10	1.74V	354	6.00	23.29	4.60	0.00	-27.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) – Correction Factor(dB)
  2. Correction Factor(dB/m) = Pre-Amplifier Gain (dB) - Antenna Factor (dB/m) - Cable Factor (dB)
  3. Pre-Amplifier Gain (dB) = 0, when the test receiver is used to read the value and because it did not use the Pre-Amplifier.
  4. The other emission levels were very low against the limit.
  5. Margin value = Emission level – Limit value.

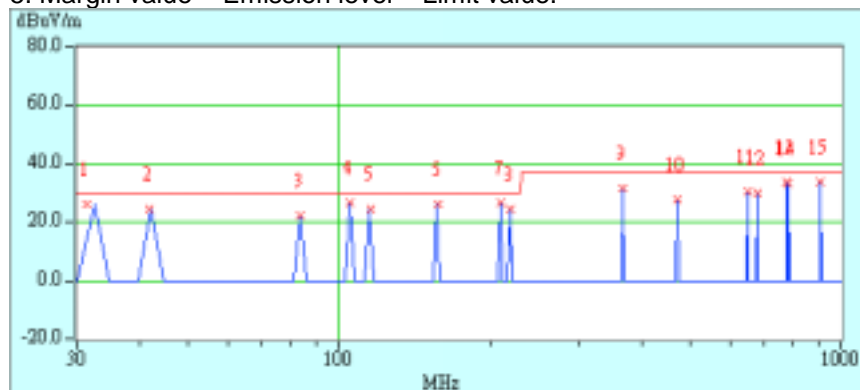


<b>EUT</b>	18" LCD Pen Tablet System	<b>MODEL NO.</b>	PL-800
<b>MODE</b>	2	<b>FREQUENCY RANGE</b>	1000 -2000 MHz
<b>INPUT POWER</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak, 1 MHz
<b>ENVIRONMENTAL CONDITIONS</b>	25 deg. C, 65 % RH, 1005 hPa	<b>TESTED BY:</b> John Liao	

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Gain (dB)	Correction Factor (dB/m)
1	1040.10	38.8 pk	74.00	-35.20	1.28H	306	45.80	25.91	5.23	38.11	6.97
2	1092.20	43.6 pk	74.00	-30.40	1.26H	307	50.10	26.05	5.42	38.00	6.53
3	1118.10	44.5 pk	74.00	-29.50	1.26H	298	50.70	26.14	5.60	37.94	6.20
4	1170.20	43.2 pk	74.00	-30.80	1.26H	310	48.90	26.28	5.84	37.83	5.71
5	1248.10	37.8 pk	74.00	-36.20	1.02H	314	42.80	26.50	6.12	37.65	5.03
6	1466.40	40.1 pk	74.00	-33.90	1.02H	322	43.22	27.12	6.91	37.17	3.14

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) – Correction Factor(dB)
  2. Correction Factor(dB/m) = Pre-Amplifier Gain (dB) - Antenna Factor (dB/m) - Cable Factor (dB)
  3. Pre-Amplifier Gain (dB) = 0, when the test receiver is used to read the value and because it did not use the Pre-Amplifier.
  4. The other emission levels were very low against the limit.
  5. Margin value = Emission level – Limit value.

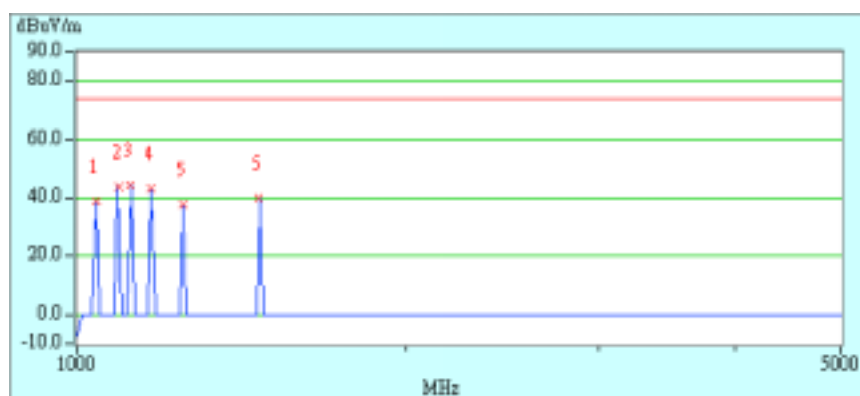




<b>EUT</b>	18" LCD Pen Tablet System	<b>MODEL NO.</b>	PL-800
<b>MODE</b>	2	<b>FREQUENCY RANGE</b>	1000 -2000 MHz
<b>INPUT POWER</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak, 1 MHz
<b>ENVIRONMENTAL CONDITIONS</b>	25 deg. C, 65 % RH, 1005 hPa	<b>TESTED BY:</b> John Liao	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M											
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Gain (dB)	Correction Factor (dB/m)
1	1040.10	38.5 pk	74.00	-35.50	1.21V	351	46.03	25.40	5.23	38.11	7.48
2	1092.00	43.2 pk	74.00	-30.80	1.25V	5	50.20	25.53	5.42	38.00	7.04
3	1118.20	44.7 pk	74.00	-29.30	1.16V	14	51.40	25.61	5.60	37.94	6.73
4	1170.10	42.9 pk	74.00	-31.10	1.21V	10	49.11	25.74	5.84	37.83	6.25
5	1247.60	37.4 pk	74.00	-36.60	1.25V	14	42.96	25.95	6.12	37.65	5.58
6	1466.40	45.2 pk	74.00	-28.80	1.15V	16	48.90	26.52	6.91	37.17	3.74

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) – Correction Factor(dB)
  2. Correction Factor(dB/m) = Pre-Amplifier Gain (dB) - Antenna Factor (dB/m) - Cable Factor (dB)
  3. Pre-Amplifier Gain (dB) = 0, when the test receiver is used to read the value and because it did not use the Pre-Amplifier.
  4. The other emission levels were very low against the limit.
  5. Margin value = Emission level – Limit value.

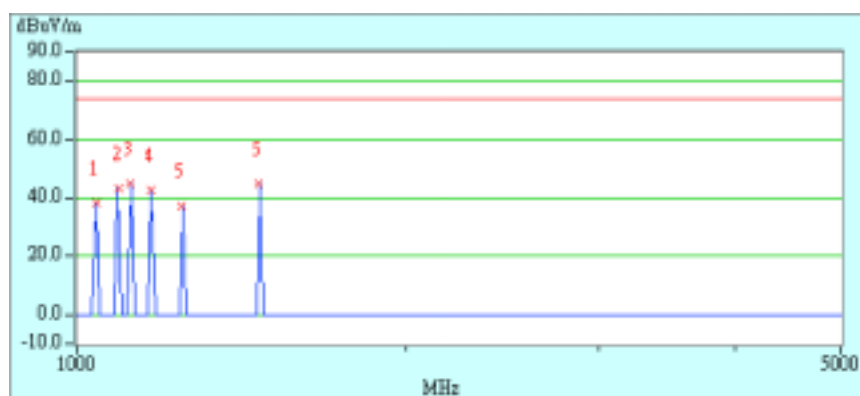

## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION

### CONDUCTED EMISSION TEST (Mode 1)



## CONDUCTED EMISSION TEST (Mode 2)



## RADIATED EMISSION TEST (Mode 1)



## RADIATED EMISSION TEST (Mode 2)







## 6 APPENDIX - INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

<b>USA</b>	FCC, NVLAP, UL
<b>Germany</b>	TUV Rheinland
<b>Japan</b>	VCCI
<b>New Zealand</b>	MoC
<b>Norway</b>	NEMKO, DNV
<b>Canada</b>	INDUSTRY CANADA
<b>R.O.C.</b>	CNLA, BSMI

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: [www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml).  
If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC Lab:**

Tel: 886-2-26052180

Fax: 886-2-26052943

**Hsin Chu EMC Lab:**

Tel: 886-35-935343

Fax: 886-35-935342

**Lin Kou Safety Lab:**

Tel: 886-2-26093195

Fax: 886-2-26093184

**Lin Kou RF & Telecom Lab.**

Tel: 886-3-3270910

Fax: 886-3-3270892

**Email:** [service@mail.adt.com.tw](mailto:service@mail.adt.com.tw)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.