

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone RHD131LW (STR100-1)		Page 1 (36)
Author Data Daoud Attayi	Dates of Test Feb. 02-17, 2015		Report No RTS-6063-1503-11	FCC ID L6ARHD130LW

Annex A: Measurement data and plots

A.1 MIF validation plots

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone RHD131LW (STR100-1)		Page 2 (36)
Author Data Daoud Attayi	Dates of Test Feb. 02-17, 2015	Report No RTS-6063-1503-11	FCC ID L6ARHD130LW	

Date/Time: 12:00:00 AM

Test Laboratory: BlackBerry RTS

MIF_measurements_02_04_15

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2FFE768F

Communication System: UID 0, CW; Frequency: 835 MHz

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: TCoil Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ER3DV6 - SN2286; ; Calibrated: 1/19/2015
- Sensor-Surface: 0mm (Fix Surface), $z = 2.5$
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/MIF Measurements/MIF_AM80%_1KHz_Measurement

Calibration Factors: 1.096, 1.095; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

Quantity	Value [log]	[linear]	Fluctuation	Remark
MIF	-1.29 dB		0.00 dB	
PMF	3.80 dB	1.549	0.00 dB	
Detector Level	4.32 dBm		0.00 dB	
RFAIP	3.03 dBm		0.00 dB	(MIF+CF+Detector Level)

Configuration/MIF Measurements/MIF_AM10%_1KHz_Measurement

Calibration Factors: 1.095, 1.095; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone RHD131LW (STR100-1)	Page 3 (36)
Author Data Daoud Attayi	Dates of Test Feb. 02-17, 2015	Report No RTS-6063-1503-11	FCC ID L6ARHD130LW

Quantity	Value [log]	[linear]	Fluctuation	Remark
MIF	-9.26 dB		0.00 dB	
PMF	0.78 dB	1.094	0.00 dB	
Detector Level	4.24 dBm		0.00 dB	
RFAIP	-5.02 dBm		0.00 dB	(MIF+CF+Detector Level)

Configuration/MIF Measurements/MIF_AM1%_1KHz_Measurement

Calibration Factors: 1.095, 1.095; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

Quantity	Value [log]	[linear]	Fluctuation	Remark
MIF	-19.22 dB		0.01 dB	
PMF	0.09 dB	1.010	0.00 dB	
Detector Level	4.21 dBm		0.00 dB	
RFAIP	-15.01 dBm		0.01 dB	(MIF+CF+Detector Level)

Configuration/MIF Measurements/MIF_GSM_Measurement

Calibration Factors: 1.095, 1.095; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

Quantity	Value [log]	[linear]	Fluctuation	Remark
MIF	3.46 dB		0.00 dB	
PMF	9.90 dB	3.124	0.01 dB	
Detector Level	-2.52 dBm		0.00 dB	
RFAIP	0.94 dBm		0.01 dB	(MIF+CF+Detector Level)

Configuration/MIF

Measurements/MIF_WCDMA_Voice_AMR12_2kps_Mute_Measurement

Calibration Factors: 1.095, 1.095; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

Quantity	Value [log]	[linear]	Fluctuation	Remark
MIF	-25.78 dB		0.08 dB	MIF Low
PMF	0.06 dB	1.007	0.00 dB	
Detector Level	-1.56 dBm		0.00 dB	
RFAIP	-27.34 dBm		0.08 dB	(MIF+CF+Detector Level)

Configuration/MIF

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone RHD131LW (STR100-1)	Page 4 (36)
Author Data Daoud Attayi	Dates of Test Feb. 02-17, 2015	Report No RTS-6063-1503-11	FCC ID L6ARHD130LW

Measurements/MIF_WCDMA_voice_AMR4_75kps_Mute_Measurement

Calibration Factors: 1.095, 1.095; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

Quantity	Value [log]	[linear]	Fluctuation	Remark
MIF	-25.41 dB		0.08 dB	MIF Low
PMF	0.07 dB	1.008	0.01 dB	
Detector Level	-1.49 dBm		0.07 dB	
RFAIP	-26.89 dBm		0.15 dB	(MIF+CF+Detector Level)

Configuration/MIF Measurements/MIF_WCDMA_RMC_Mute_Measurement

Calibration Factors: 1.095, 1.095; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

Quantity	Value [log]	[linear]	Fluctuation	Remark
MIF	-25.65 dB		0.04 dB	MIF Low
PMF	0.06 dB	1.007	0.00 dB	
Detector Level	-1.53 dBm		0.00 dB	
RFAIP	-27.18 dBm		0.05 dB	(MIF+CF+Detector Level)

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone RHD131LW (STR100-1)		Page 5 (36)
Author Data Daoud Attayi	Dates of Test Feb. 02-17, 2015	Report No RTS-6063-1503-11	FCC ID L6ARHD130LW	

Date/Time: 12:00:00 AM

Test Laboratory: BlackBerry RTS

MIF_WiFi_measurements_02_04_15

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2FFE7836

Communication System: UID 0, 802.11 b (2450) (0); Frequency: 2437 MHz

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: TCoil Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ER3DV6 - SN2286; ; Calibrated: 1/19/2015
- Sensor-Surface: 0mm (Fix Surface), $z = 2.5$
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/MIF Measurements

WiFi_VoIP/MIF_AM80%_1KHz_Measurement

Calibration Factors: 1.096, 1.095; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

Quantity	Value [log]	[linear]	Fluctuation	Remark
MIF	-1.30 dB		0.00 dB	
PMF	3.81 dB	1.550	0.00 dB	
Detector Level	8.07 dBm		0.00 dB	
RFAIP	6.78 dBm		0.00 dB	(MIF+CF+Detector Level)

Configuration/MIF Measurements

WiFi_VoIP/MIF_AM10%_1KHz_Measurement

Calibration Factors: 1.096, 1.095; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone RHD131LW (STR100-1)	Page 6 (36)
Author Data Daoud Attayi	Dates of Test Feb. 02-17, 2015	Report No RTS-6063-1503-11	FCC ID L6ARHD130LW

Quantity	Value [log]	[linear]	Fluctuation	Remark
MIF	-9.30 dB		0.00 dB	
PMF	0.77 dB	1.093	0.00 dB	
Detector Level	8.09 dBm		0.00 dB	
RFAIP	-1.20 dBm		0.01 dB	(MIF+CF+Detector Level)

Configuration/MIF Measurements

WiFi_VoIP/MIF_AM1%_1KHz_Measurement

Calibration Factors: 1.095, 1.095; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

Quantity	Value [log]	[linear]	Fluctuation	Remark
MIF	-19.26 dB		0.01 dB	
PMF	0.09 dB	1.010	0.00 dB	
Detector Level	8.06 dBm		0.00 dB	
RFAIP	-11.20 dBm		0.01 dB	(MIF+CF+Detector Level)

Configuration/MIF Measurements WiFi_VoIP/MIF_802.11b_Rate_1Mbps

Calibration Factors: 1.095, 1.095; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

Quantity	Value [log]	[linear]	Fluctuation	Remark
MIF	-13.06 dB		0.09 dB	
PMF	0.44 dB	1.052	0.04 dB	
Detector Level	5.11 dBm		0.02 dB	
RFAIP	-7.95 dBm		0.11 dB	(MIF+CF+Detector Level)

Configuration/MIF Measurements WiFi_VoIP/MIF_802.11b_Rate_2Mbps

Calibration Factors: 1.096, 1.095; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

Quantity	Value [log]	[linear]	Fluctuation	Remark
MIF	-12.28 dB		0.08 dB	
PMF	0.48 dB	1.056	0.03 dB	
Detector Level	5.22 dBm		0.01 dB	
RFAIP	-7.06 dBm		0.09 dB	(MIF+CF+Detector Level)

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone RHD131LW (STR100-1)		Page 7 (36)
Author Data Daoud Attayi	Dates of Test Feb. 02-17, 2015		Report No RTS-6063-1503-11	FCC ID L6ARHD130LW

Configuration/MIF Measurements WiFi_VoIP/MIF_802.11b_Rate_5.5Mbps

Calibration Factors: 1.095, 1.095; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

Quantity	Value [log]	[linear]	Fluctuation	Remark
MIF	-9.76 dB		0.06 dB	
PMF	0.67 dB	1.080	0.05 dB	
Detector Level	5.41 dBm		0.01 dB	
RFAIP	-4.35 dBm		0.07 dB	(MIF+CF+Detector Level)

Configuration/MIF Measurements WiFi_VoIP/MIF_802.11b_Rate_11Mbps

Calibration Factors: 1.096, 1.095; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

Quantity	Value [log]	[linear]	Fluctuation	Remark
MIF	-8.99 dB		0.11 dB	
PMF	0.80 dB	1.096	0.04 dB	
Detector Level	5.31 dBm		0.01 dB	
RFAIP	-3.68 dBm		0.12 dB	(MIF+CF+Detector Level)

Configuration/MIF Measurements WiFi_VoIP/MIF_802.11g_Rate_6Mbps

Calibration Factors: 1.095, 1.095; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

Quantity	Value [log]	[linear]	Fluctuation	Remark
MIF	-10.07 dB		0.04 dB	
PMF	0.89 dB	1.108	0.01 dB	
Detector Level	5.83 dBm		0.01 dB	
RFAIP	-4.24 dBm		0.05 dB	(MIF+CF+Detector Level)

Configuration/MIF Measurements WiFi_VoIP/MIF_802.11g_Rate_9Mbps

Calibration Factors: 1.095, 1.095; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

Quantity	Value [log]	[linear]	Fluctuation	Remark
MIF	-9.40 dB		0.08 dB	
PMF	1.05 dB	1.129	0.01 dB	
Detector Level	5.70 dBm		0.01 dB	
RFAIP	-3.70 dBm		0.09 dB	(MIF+CF+Detector Level)

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone RHD131LW (STR100-1)	Page 8 (36)
Author Data Daoud Attayi	Dates of Test Feb. 02-17, 2015	Report No RTS-6063-1503-11	FCC ID L6ARHD130LW

Configuration/MIF Measurements WiFi_VoIP/MIF_802.11g_Rate_18Mbps

Calibration Factors: 1.096, 1.095; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

Quantity	Value [log]	[linear]	Fluctuation	Remark
MIF	-8.13 dB		0.14 dB	
PMF	1.08 dB	1.132	0.03 dB	
Detector Level	5.52 dBm		0.00 dB	
RFAIP	-2.61 dBm		0.14 dB	(MIF+CF+Detector Level)

Configuration/MIF Measurements WiFi_VoIP/MIF_802.11g_Rate_54Mbps

Calibration Factors: 1.095, 1.095; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

Quantity	Value [log]	[linear]	Fluctuation	Remark
MIF	-8.62 dB		0.13 dB	
PMF	1.91 dB	1.246	0.05 dB	
Detector Level	2.40 dBm		0.01 dB	
RFAIP	-6.23 dBm		0.14 dB	(MIF+CF+Detector Level)

Configuration/MIF Measurements WiFi_VoIP/MIF_802.11n_Rate_6.5Mbps

Calibration Factors: 1.095, 1.095; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

Quantity	Value [log]	[linear]	Fluctuation	Remark
MIF	-10.94 dB		0.06 dB	
PMF	0.95 dB	1.116	0.02 dB	
Detector Level	4.13 dBm		0.01 dB	
RFAIP	-6.81 dBm		0.06 dB	(MIF+CF+Detector Level)

Configuration/MIF Measurements WiFi_VoIP/MIF_802.11n_Rate_39Mbps

Calibration Factors: 1.095, 1.095; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

Quantity	Value [log]	[linear]	Fluctuation	Remark
MIF	-7.94 dB		0.14 dB	
PMF	1.32 dB	1.164	0.01 dB	
Detector Level	2.02 dBm		0.01 dB	
RFAIP	-5.93 dBm		0.15 dB	(MIF+CF+Detector Level)

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone RHD131LW (STR100-1)		Page 9 (36)
Author Data Daoud Attayi	Dates of Test Feb. 02-17, 2015	Report No RTS-6063-1503-11	FCC ID L6ARHD130LW	

Configuration/MIF Measurements WiFi_VoIP/MIF_802.11n_Rate_65Mbps

Calibration Factors: 1.095, 1.095; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

Quantity	Value [log]	[linear]	Fluctuation	Remark
MIF	-7.91 dB		0.13 dB	
PMF	1.63 dB	1.206	0.01 dB	
Detector Level	0.90 dBm		0.01 dB	
RFAIP	-7.01 dBm		0.14 dB	(MIF+CF+Detector Level)

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone RHD131LW (STR100-1)		Page 10 (36)
Author Data Daoud Attayi	Dates of Test Feb. 02-17, 2015	Report No RTS-6063-1503-11	FCC ID L6ARHD130LW	

A.2 Dipole validation

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone RHD131LW (STR100-1)	Page 11 (36)
Author Data Daoud Attayi	Dates of Test Feb. 02-17, 2015	Report No RTS-6063-1503-11	FCC ID L6ARHD130LW

Date/Time: 2/4/2015 5:04:40 PM

Test Laboratory: BlackBerry RTS

HAC RF_E-Field_835 MHz_validation_02_04_15

DUT: HAC-Dipole 835 MHz; Type: CD835V3; Serial: 1011

Communication System: UID 0, CW For MIF; Frequency: 835 MHz

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ER3DV6 - SN2286; ConvF(1, 1, 1); Calibrated: 1/19/2015;
- Sensor-Surface: (Fix Surface), $z = 9.7$
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

CD835 Dipole E-Field measurement (E-field scan for ANSI C63.19-2011 compliance)/E Scan - measurement distance from the probe sensor center to CD835 = 15mm/Hearing Aid Compatibility Test at 15mm distance (41x361x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 103.1 V/m; Power Drift = -0.02 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 106.8 V/m

Near-field category: M4 (AWF 0 dB)

PMF scaled E-field

Grid 1 M4 102.3 V/m	Grid 2 M4 104.3 V/m	Grid 3 M4 103.6 V/m
Grid 4 M4	Grid 5 M4	Grid 6 M4

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone RHD131LW (STR100-1)		Page 12 (36)
Author Data Daoud Attayi	Dates of Test Feb. 02-17, 2015	Report No RTS-6063-1503-11	FCC ID L6ARHD130LW	


60.51 V/m	61.37 V/m	60.38 V/m
Grid 7 M4	Grid 8 M4	Grid 9 M4
104.7 V/m	106.8 V/m	105.5 V/m

Cursor:

Total = 106.8 V/m

E Category: M4

Location: -0.5, 78.5, 9.7 mm

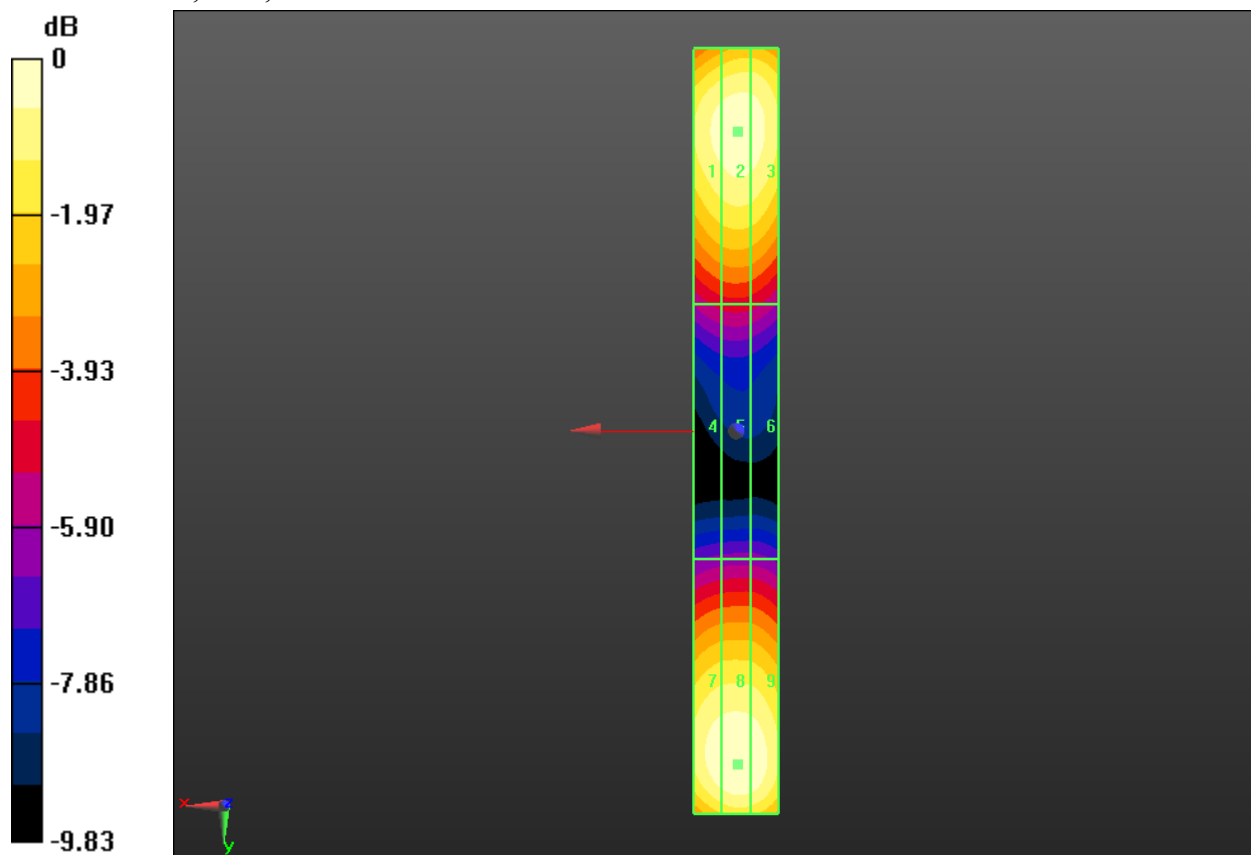

0 dB = 106.8 V/m = 40.57 dBV/m

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone RHD131LW (STR100-1)		Page 13 (36)
Author Data Daoud Attayi	Dates of Test Feb. 02-17, 2015	Report No RTS-6063-1503-11	FCC ID L6ARHD130LW	

Date/Time: 2/4/2015 5:48:21 PM

Test Laboratory: BlackBerry RTS

HAC RF_E-Field_1880 MHz_validation_02_04_15

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: 1008

Communication System: UID 0, CW For MIF; Frequency: 1880 MHz

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ER3DV6 - SN2286; ConvF(1, 1, 1); Calibrated: 1/19/2015;
- Sensor-Surface: (Fix Surface), $z = 9.7$
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

CD1880 Dipole E-Field measurement (E-field scan for ANSI C63.19-2011 compliance)/E Scan - measurement distance from the probe sensor center to CD1880 = 15mm/Hearing Aid Compatibility Test at 15mm distance (41x181x1):

Interpolated grid: $dx=0.5000$ mm, $dy=0.5000$ mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 143.7 V/m; Power Drift = -0.00 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 84.62 V/m

Near-field category: M3 (AWF 0 dB)

PMF scaled E-field

Grid 1 M3 82.45 V/m	Grid 2 M3 84.62 V/m	Grid 3 M3 84.19 V/m
Grid 4 M3 68.51 V/m	Grid 5 M3 69.18 V/m	Grid 6 M3 68.23 V/m

	Document		Page
	Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone RHD131LW (STR100-1)		14 (36)
Author Data Daoud Attayi	Dates of Test Feb. 02-17, 2015	Report No RTS-6063-1503-11	FCC ID L6ARHD130LW


Grid 7 M3	Grid 8 M3	Grid 9 M3
79.92 V/m	83.61 V/m	83.31 V/m

Cursor:

Total = 84.62 V/m


E Category: M3

Location: -0.5, -30, 9.7 mm

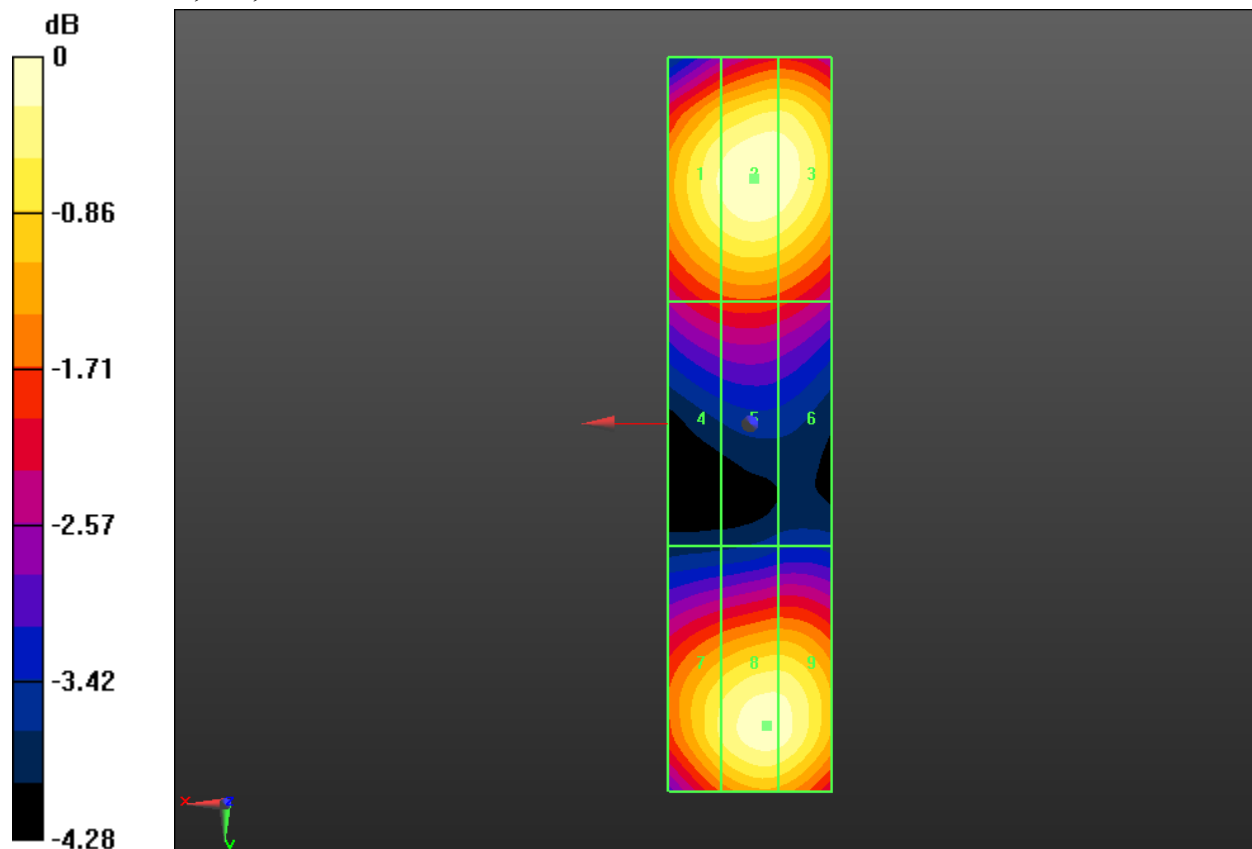

0 dB = 84.62 V/m = 38.55 dBV/m

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone RHD131LW (STR100-1)		Page 15 (36)
Author Data Daoud Attayi	Dates of Test Feb. 02-17, 2015		Report No RTS-6063-1503-11	FCC ID L6ARHD130LW

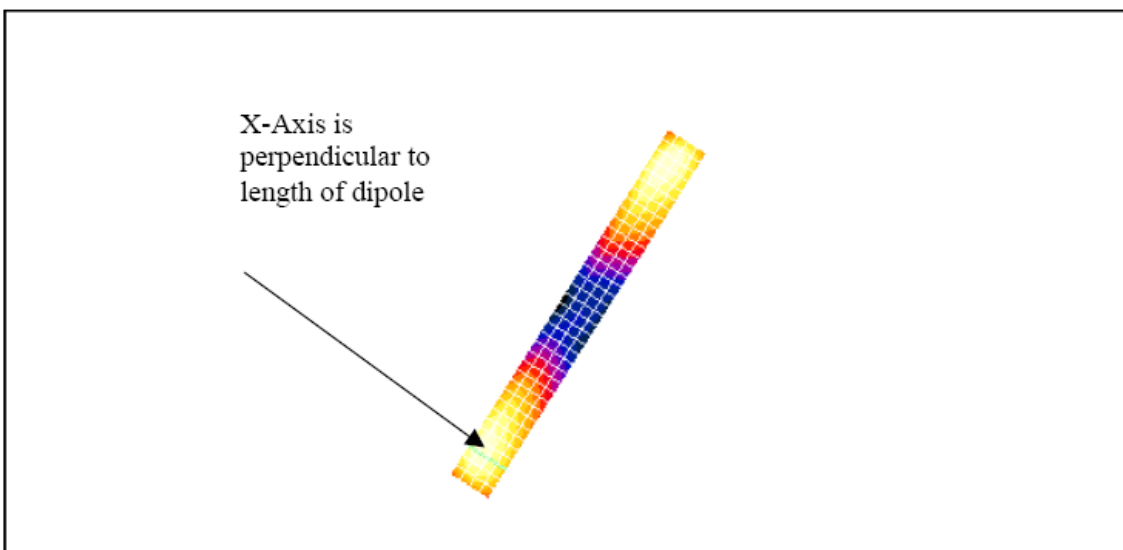

The green line in this figure shows the axis along which the points lie.

Comparison of 5mm and 2mm step sizes

An additional set of measurements was taken: dipole validations were performed using 5mm and 2mm step sizes. The delta between the two readings is insignificant for both field types ($< 0.4\%$ for E and 0% for H), demonstrating that 5mm is sufficient. The plots follow.

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone RHD131LW (STR100-1)	Page 16 (36)
Author Data Daoud Attayi	Dates of Test Feb. 02-17, 2015	Report No RTS-6063-1503-11	FCC ID L6ARHD130LW

Date/Time: 14/07/2005 11:35:24 AM

Page 1 of 2

Date/Time: 14/07/2005 11:35:24 AM

Lab: RIM Testing Services (RTS)

Dipole Validation 1880 MHz_E-Field 07_14_05

DUT: HAC Dipole 1880 MHz; Type: CD1880V3

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: H Device Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2285; ConvF(1, 1, 1); Calibrated: 10/12/2004
- Sensor-Surface: 0mm (Fix Surface) Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn472; Calibrated: 03/01/2005
- Phantom: HAC Test Arch; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

E Scan 10mm above CD 1880 MHz/Hearing Aid Compatibility Test (5x19x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of Total (measured) = 134.8 V/m

E Scan 10mm above CD 1880 MHz/Hearing Aid Compatibility Test (41x181x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of Total field (slot averaged) = 131.0 V/m

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

E in V/m (Time averaged) E in V/m (Slot averaged)

Grid 1	Grid 2	Grid 3	Grid 1	Grid 2	Grid 3
123.2	138.1	138.4	123.2	138.1	138.4
Grid 4	Grid 5	Grid 6	Grid 4	Grid 5	Grid 6
80.9	92.3	92.2	80.9	92.3	92.2
Grid 7	Grid 8	Grid 9	Grid 7	Grid 8	Grid 9
119.8	131.0	130.7	119.8	131.0	130.7

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19

file://C:\Program%20Files\DASY4\Print_Templates\Dipole%20Validation%201880%20... 14/07/2005



Document

**Annex A to Hearing Aid Compatibility RF Emissions Test Report
for the BlackBerry® Smartphone RHD131LW (STR100-1)**

Page

17 (36)

Author Data

Daoud Attayi

Dates of Test

Feb. 02-17, 2015

Report No


RTS-6063-1503-11

FCC ID

L6ARHD130LW

Date/Time: 14/07/2005 11:35:24 AM

Page 2 of 2

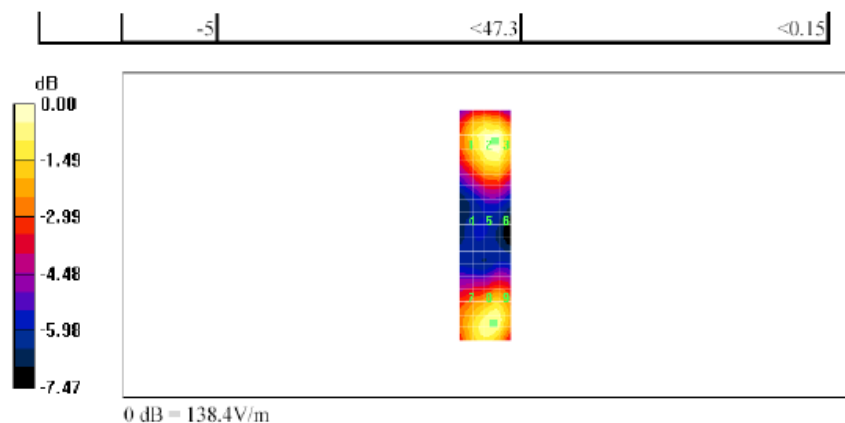

file://C:\Program%20Files\DASY4\Print_Templates\Dipole%20Validation%201880%20... 14/07/2005

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone RHD131LW (STR100-1)	Page 18 (36)
Author Data Daoud Attayi	Dates of Test Feb. 02-17, 2015	Report No RTS-6063-1503-11	FCC ID L6ARHD130LW

Date/Time: 14/07/2005 11:44:51 AM

Page 1 of 2

Date/Time: 14/07/2005 11:44:51 AM

Lab: RIM Testing Services (RTS)

Dipole Validation 1880 MHz_2mm step_E-Field 07_14_05

DUT: HAC Dipole 1880 MHz; Type: CD1880V3

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
Phantom section: H Device Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2285; ConvF(1, 1, 1); Calibrated: 10/12/2004
- Sensor-Surface: 0mm (Fix Surface) Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn472; Calibrated: 03/01/2005
- Phantom: HAC Test Arch; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

E Scan 10mm above CD 1880 MHz/Hearing Aid Compatibility Test (11x46x1):

Measurement grid: dx=2mm, dy=2mm
Maximum value of Total (measured) = 138.0 V/m

E Scan 10mm above CD 1880 MHz/Hearing Aid Compatibility Test (101x451x1):

Measurement grid: dx=2mm, dy=2mm
Maximum value of Total field (slot averaged) = 131.2 V/m

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

E in V/m (Time averaged) E in V/m (Slot averaged)

Grid 1	Grid 2	Grid 3	Grid 1	Grid 2	Grid 3
123.1	138.6	138.6	123.1	138.6	138.6
Grid 4	Grid 5	Grid 6	Grid 4	Grid 5	Grid 6
81.4	92.1	91.6	81.4	92.1	91.6
Grid 7	Grid 8	Grid 9	Grid 7	Grid 8	Grid 9
121.3	131.2	131.0	121.3	131.2	131.0


Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19

file://C:\Program%20Files\DASY4\Print_Templates\Dipole%20Validation%201880%20... 14/07/2005

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone RHD131LW (STR100-1)		Page 19 (36)
Author Data Daoud Attayi	Dates of Test Feb. 02-17, 2015	Report No RTS-6063-1503-11	FCC ID L6ARHD130LW	

Date/Time: 14/07/2005 11:44:51 AM

Page 2 of 2

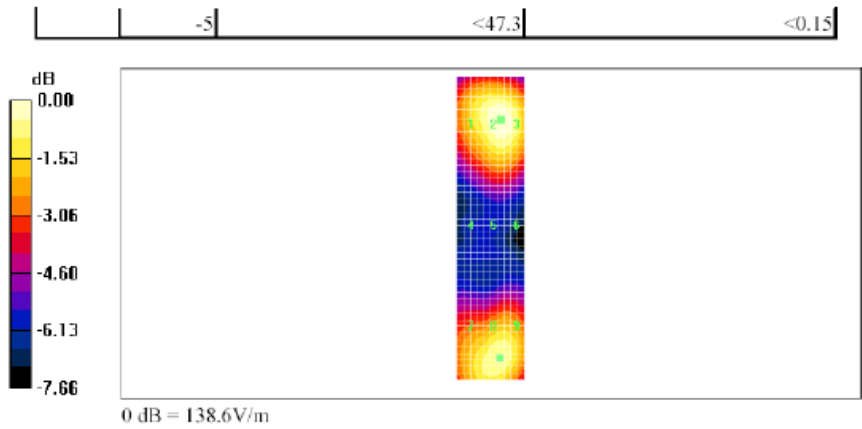

file://C:\Program%20Files\DASY4\Print_Templates\Dipole%20Validation%201880%20... 14/07/2005

		Document		Page
		Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone RHD131LW (STR100-1)		20 (36)
Author Data	Dates of Test	Report No	FCC ID	
Daoud Attayi	Feb. 02-17, 2015	RTS-6063-1503-11	L6ARHD130LW	

A.3 RF emission field plots

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone RHD131LW (STR100-1)	Page 21 (36)
Author Data Daoud Attayi	Dates of Test Feb. 02-17, 2015	Report No RTS-6063-1503-11	FCC ID L6ARHD130LW

Test Laboratory: BlackBerry RTS

HAC RF_E-Field_GSM850

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2FFE7836

Communication System: UID 0, GSM 850; Frequency: 824.2 MHz, Frequency: 836.8 MHz, Frequency: 848.8 MHz

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ER3DV6 - SN2286; ConvF(1, 1, 1); Calibrated: 1/19/2015;
- Sensor-Surface: (Fix Surface), $z = 8.7$
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: HAC RF Test Arch with AMCC;
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Device E-Field GSM850 measurement with ER probe/E Scan - ER3D - 2011: 15 mm from Probe Center to the Device_Low_Chan/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: $dx=0.5000$ mm, $dy=0.5000$ mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 75.76 V/m; Power Drift = -0.18 dB

Applied MIF = 3.46 dB

RF audio interference level = 39.45 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 37.78 dBV/m	Grid 2 M4 39 dBV/m	Grid 3 M4 38.99 dBV/m
Grid 4 M4	Grid 5 M4	Grid 6 M4

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone RHD131LW (STR100-1)		Page 22 (36)
Author Data Daoud Attayi	Dates of Test Feb. 02-17, 2015		Report No RTS-6063-1503-11	FCC ID L6ARHD130LW

38.17 dBV/m	39.45 dBV/m	39.41 dBV/m
Grid 7 M4	Grid 8 M4	Grid 9 M4
38.56 dBV/m	39.77 dBV/m	39.63 dBV/m

Category	Limits for E-Field Emissions < 960MHz	Limits for E-Field Emissions > 960MHz
M1	50 dBV/m - 55 dB V/m	40 dBV/m - 45 dB V/m
M2	45 dBV/m - 50 dB V/m	35 dBV/m - 40 dB V/m
M3	40 dBV/m - 45 dB V/m	30 dBV/m - 35 dB V/m
M4	<40 dBV/m	<30 dBV/m

Cursor:

Total = 39.77 dBV/m

E Category: M4

Location: -5, 25, 8.7 mm

Device E-Field GSM850 measurement with ER probe/E Scan - ER3D - 2011: 15 mm from Probe Center to the Device_Mid_Chan/Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 79.41 V/m; Power Drift = 0.08 dB

Applied MIF = 3.46 dB

RF audio interference level = 40.27 dBV/m

Emission category: M3

MIF scaled E-field

Grid 1 M4	Grid 2 M4	Grid 3 M4
38.15 dBV/m	39.65 dBV/m	39.65 dBV/m
Grid 4 M4	Grid 5 M3	Grid 6 M3
38.81 dBV/m	40.27 dBV/m	40.26 dBV/m
Grid 7 M4	Grid 8 M3	Grid 9 M3

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone RHD131LW (STR100-1)		Page 23 (36)
Author Data Daoud Attayi	Dates of Test Feb. 02-17, 2015		Report No RTS-6063-1503-11	FCC ID L6ARHD130LW

39.44 dBV/m	40.64 dBV/m	40.57 dBV/m
--------------------	--------------------	--------------------

Category	Limits for E-Field Emissions < 960MHz	Limits for E-Field Emissions > 960MHz
M1	50 dBV/m - 55 dB V/m	40 dBV/m - 45 dB V/m
M2	45 dBV/m - 50 dB V/m	35 dBV/m - 40 dB V/m
M3	40 dBV/m - 45 dB V/m	30 dBV/m - 35 dB V/m
M4	<40 dBV/m	<30 dBV/m

Cursor:

Total = 40.64 dBV/m

E Category: M3

Location: -5, 25, 8.7 mm

Device E-Field GSM850 measurement with ER probe/E Scan - ER3D - 2011: 15 mm from Probe Center to the Device_High_Chan/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 78.38 V/m; Power Drift = 0.04 dB

Applied MIF = 3.46 dB

RF audio interference level = 40.07 dBV/m

Emission category: M3

MIF scaled E-field

Grid 1 M4 38 dBV/m	Grid 2 M4 39.68 dBV/m	Grid 3 M4 39.67 dBV/m
Grid 4 M4 38.5 dBV/m	Grid 5 M3 40.07 dBV/m	Grid 6 M3 40.06 dBV/m
Grid 7 M4 38.96 dBV/m	Grid 8 M3 40.33 dBV/m	Grid 9 M3 40.28 dBV/m


Category	Limits for E-Field Emissions < 960MHz	Limits for E-Field Emissions > 960MHz
M1	50 dBV/m - 55 dB V/m	40 dBV/m - 45 dB V/m
M2	45 dBV/m - 50 dB V/m	35 dBV/m - 40 dB V/m
M3	40 dBV/m - 45 dB V/m	30 dBV/m - 35 dB V/m
M4	<40 dBV/m	<30 dBV/m

Cursor:

Total = 40.33 dBV/m

E Category: M3

Location: -5.5, 25, 8.7 mm

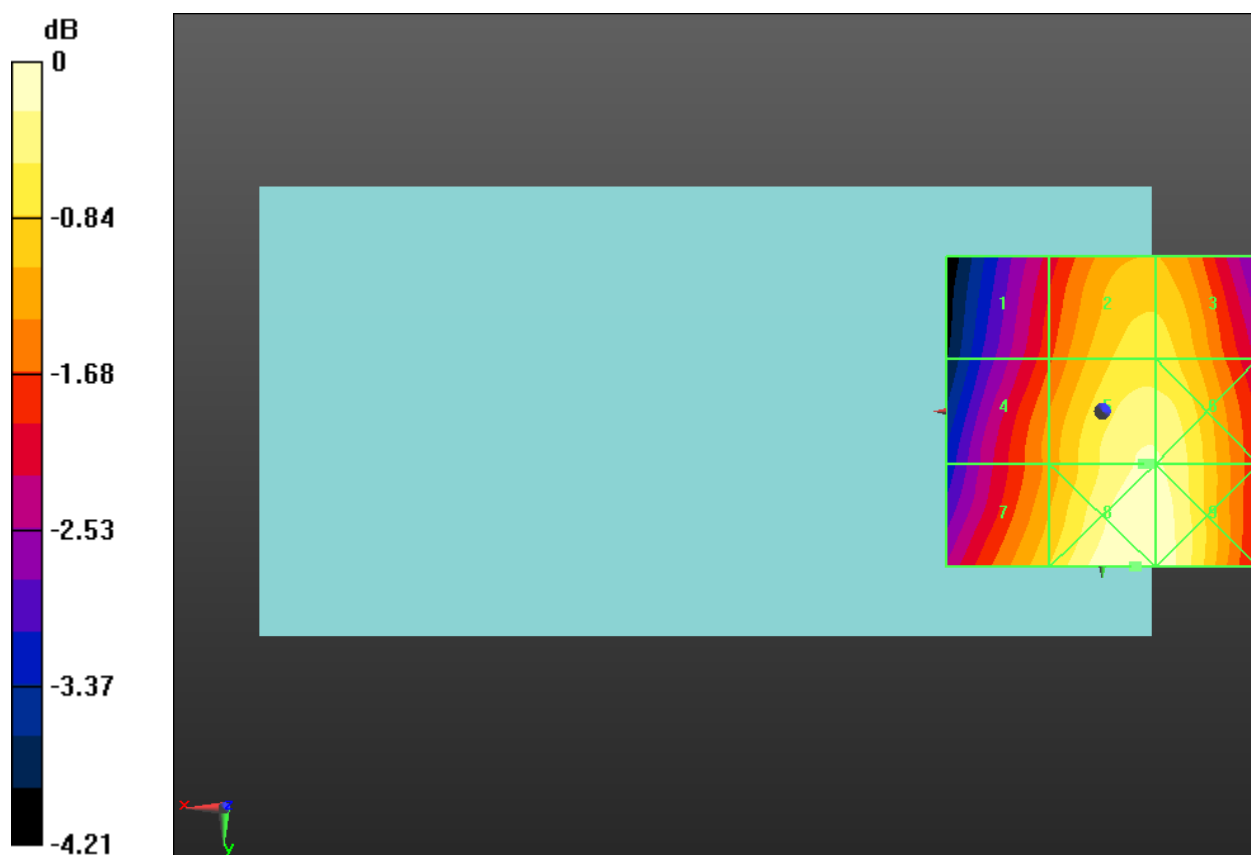

0 dB = 97.14 V/m = 39.75 dBV/m

Date/Time: 2/4/2015 6:58:49 PM

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone RHD131LW (STR100-1)		Page 25 (36)
Author Data Daoud Attayi	Dates of Test Feb. 02-17, 2015	Report No RTS-6063-1503-11	FCC ID L6ARHD130LW	

Test Laboratory: BlackBerry RTS

HAC RF_E-Field_GSM1900

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2FFE7836

Communication System: UID 0, GSM 1900; Frequency: 1850.2 MHz, Frequency: 1880 MHz, Frequency: 1909.8 MHz

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ER3DV6 - SN2286; ConvF(1, 1, 1); Calibrated: 1/19/2015;
- Sensor-Surface: (Fix Surface), $z = 8.7$
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Device E-Field GSM 1900 measurement with ER probe/E Scan - ER3D - 2011:
15 mm from Probe Center to the Device_Low_Chan/Hearing Aid Compatibility
Test (101x101x1): Interpolated grid: $dx=0.5000$ mm, $dy=0.5000$ mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 26.43 V/m; Power Drift = -0.12 dB

Applied MIF = 3.46 dB

RF audio interference level = 34.16 dBV/m

Emission category: M3

MIF scaled E-field

Grid 1 M3 33.99 dBV/m	Grid 2 M3 33.96 dBV/m	Grid 3 M3 33.05 dBV/m
Grid 4 M3 31.06 dBV/m	Grid 5 M3 31.81 dBV/m	Grid 6 M3 32.12 dBV/m
Grid 7 M4 27.69 dBV/m	Grid 8 M3 34 dBV/m	Grid 9 M3 34.16 dBV/m

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone RHD131LW (STR100-1)	Page 26 (36)
Author Data Daoud Attayi	Dates of Test Feb. 02-17, 2015	Report No RTS-6063-1503-11	FCC ID L6ARHD130LW

Category	Limits for E-Field Emissions < 960MHz	Limits for E-Field Emissions > 960MHz
M1	50 dBV/m - 55 dB V/m	40 dBV/m - 45 dB V/m
M2	45 dBV/m - 50 dB V/m	35 dBV/m - 40 dB V/m
M3	40 dBV/m - 45 dB V/m	30 dBV/m - 35 dB V/m
M4	<40 dBV/m	<30 dBV/m

Cursor:

Total = 34.16 dBV/m

E Category: M3

Location: -11.5, 25, 8.7 mm

**Device E-Field GSM 1900 measurement with ER probe/E Scan - ER3D - 2011:
15 mm from Probe Center to the Device_Mid_Chan/Hearing Aid Compatibility
Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 30.92 V/m; Power Drift = -0.07 dB

Applied MIF = 3.46 dB

RF audio interference level = 33.99 dBV/m

Emission category: M3

MIF scaled E-field

Grid 1 M3 34.46 dBV/m	Grid 2 M3 34.75 dBV/m	Grid 3 M3 34.55 dBV/m
Grid 4 M3 31.91 dBV/m	Grid 5 M3 33.14 dBV/m	Grid 6 M3 33.09 dBV/m
Grid 7 M4 28.19 dBV/m	Grid 8 M3 33.76 dBV/m	Grid 9 M3 33.99 dBV/m

Category	Limits for E-Field Emissions < 960MHz	Limits for E-Field Emissions > 960MHz
M1	50 dBV/m - 55 dB V/m	40 dBV/m - 45 dB V/m
M2	45 dBV/m - 50 dB V/m	35 dBV/m - 40 dB V/m
M3	40 dBV/m - 45 dB V/m	30 dBV/m - 35 dB V/m
M4	<40 dBV/m	<30 dBV/m

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone RHD131LW (STR100-1)	Page 27 (36)
Author Data Daoud Attayi	Dates of Test Feb. 02-17, 2015	Report No RTS-6063-1503-11	FCC ID L6ARHD130LW

Cursor:

Total = 34.75 dBV/m

E Category: M3

Location: -1.5, -25, 8.7 mm

**Device E-Field GSM 1900 measurement with ER probe/E Scan - ER3D - 2011:
15 mm from Probe Center to the Device_High_Chan/Hearing Aid Compatibility
Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 31.89 V/m; Power Drift = -0.09 dB

Applied MIF = 3.46 dB

RF audio interference level = 33.63 dBV/m

Emission category: M3

MIF scaled E-field

Grid 1 M3 34.59 dBV/m	Grid 2 M2 35.18 dBV/m	Grid 3 M3 34.98 dBV/m
Grid 4 M3 32.21 dBV/m	Grid 5 M3 33.54 dBV/m	Grid 6 M3 33.52 dBV/m
Grid 7 M4 28.62 dBV/m	Grid 8 M3 33.29 dBV/m	Grid 9 M3 33.63 dBV/m

Category	Limits for E-Field Emissions < 960MHz	Limits for E-Field Emissions > 960MHz
M1	50 dBV/m - 55 dB V/m	40 dBV/m - 45 dB V/m
M2	45 dBV/m - 50 dB V/m	35 dBV/m - 40 dB V/m
M3	40 dBV/m - 45 dB V/m	30 dBV/m - 35 dB V/m
M4	<40 dBV/m	<30 dBV/m

Cursor:

Total = 35.18 dBV/m

E Category: M2

Location: -3.5, -25, 8.7 mm



Document

**Annex A to Hearing Aid Compatibility RF Emissions Test Report
for the BlackBerry® Smartphone RHD131LW (STR100-1)**

Page

28 (36)

Author Data

Daoud Attayi


Dates of Test

Feb. 02-17, 2015

Report No

RTS-6063-1503-11

FCC ID

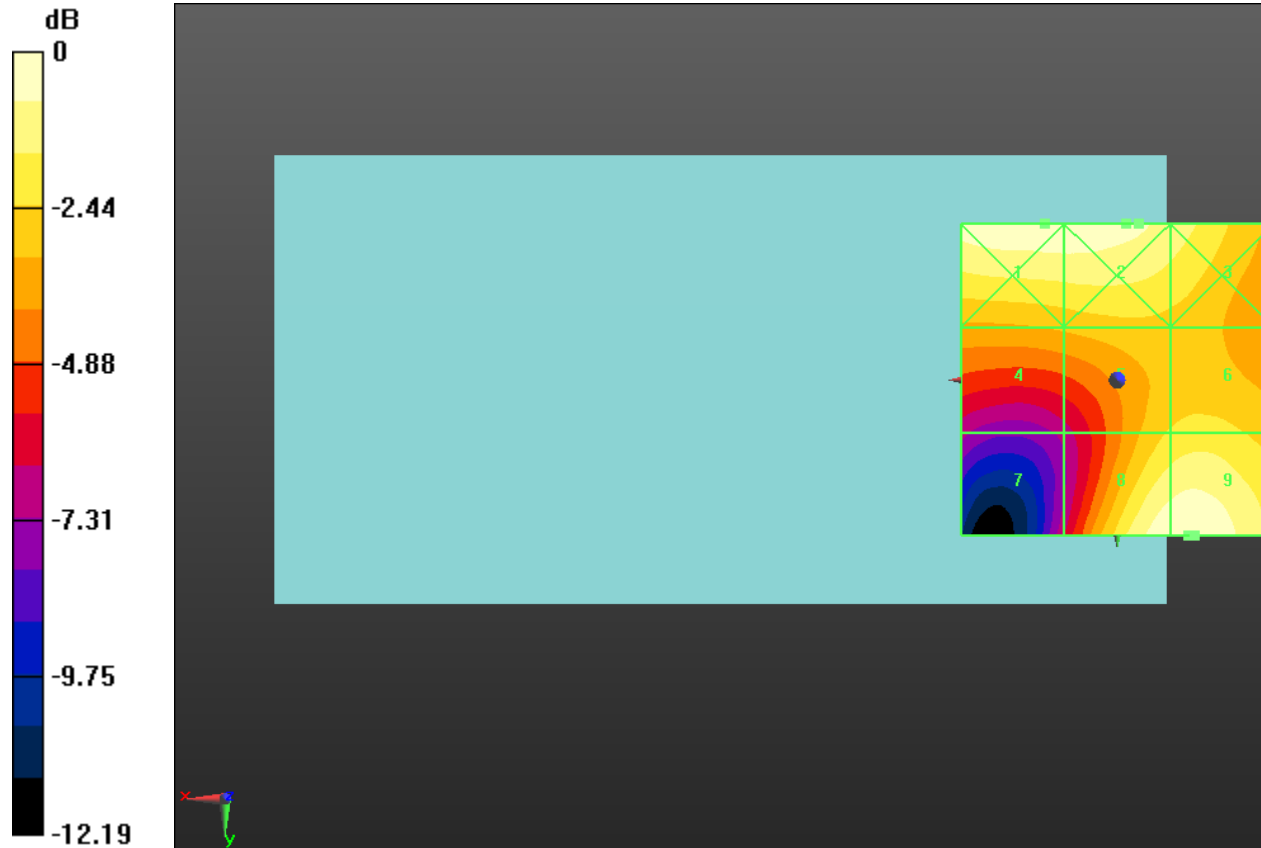L6ARHD130LW

0 dB = 50.93 V/m = 34.14 dBV/m

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone RHD131LW (STR100-1)		Page 29 (36)
Author Data Daoud Attayi	Dates of Test Feb. 02-17, 2015	Report No RTS-6063-1503-11	FCC ID L6ARHD130LW	

Date/Time: 2/4/2015 7:37:53 PM

Test Laboratory: BlackBerry RTS

HAC RF_E-Field_UMTS_V

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2FFE7836

Communication System: UID 0, WCDMA FDD V; Frequency: 826.4 MHz, Frequency: 836.4 MHz, Frequency: 846.6 MHz

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ER3DV6 - SN2286; ConvF(1, 1, 1); Calibrated: 1/19/2015;
- Sensor-Surface: (Fix Surface), $z = 8.7$
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Device E-Field UMTS band V measurement with ER probe/E Scan - ER3D - 2011: 15 mm from Probe Center to the Device_Low_Chan/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: $dx=0.5000$ mm, $dy=0.5000$ mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 54.29 V/m; Power Drift = 0.20 dB

Applied MIF = -25.78 dB

RF audio interference level = 7.89 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 5.7 dBV/m	Grid 2 M4 7.06 dBV/m	Grid 3 M4 7 dBV/m
Grid 4 M4 6.59 dBV/m	Grid 5 M4 7.89 dBV/m	Grid 6 M4 7.79 dBV/m

	Document		Page
	Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone RHD131LW (STR100-1)		30 (36)
Author Data Daoud Attayi	Dates of Test Feb. 02-17, 2015	Report No RTS-6063-1503-11	FCC ID L6ARHD130LW

Grid 7 M4 7.45 dBV/m	Grid 8 M4 8.55 dBV/m	Grid 9 M4 8.29 dBV/m
---------------------------------------	---------------------------------------	---------------------------------------

Cursor:

Total = 8.55 dBV/m

E Category: M4

Location: -4, 25, 8.7 mm

Device E-Field UMTS band V measurement with ER probe/E Scan - ER3D - 2011: 15 mm from Probe Center to the Device_Mid_Chan/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 60.92 V/m; Power Drift = -0.03 dB

Applied MIF = -25.78 dB

RF audio interference level = 8.96 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 6.15 dBV/m	Grid 2 M4 7.89 dBV/m	Grid 3 M4 7.89 dBV/m
Grid 4 M4 7.47 dBV/m	Grid 5 M4 8.96 dBV/m	Grid 6 M4 8.95 dBV/m
Grid 7 M4 8.64 dBV/m	Grid 8 M4 9.77 dBV/m	Grid 9 M4 9.66 dBV/m

Cursor:

Total = 9.77 dBV/m

E Category: M4

Location: -4.5, 25, 8.7 mm

Device E-Field UMTS band V measurement with ER probe/E Scan - ER3D - 2011: 15 mm from Probe Center to the Device_High_Chan/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone RHD131LW (STR100-1)	Page 31 (36)
Author Data Daoud Attayi	Dates of Test Feb. 02-17, 2015	Report No RTS-6063-1503-11	FCC ID L6ARHD130LW

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 55.22 V/m; Power Drift = 0.05 dB

Applied MIF = -25.78 dB

RF audio interference level = 8.08 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 5.44 dBV/m	Grid 2 M4 7.09 dBV/m	Grid 3 M4 7.08 dBV/m
Grid 4 M4 6.67 dBV/m	Grid 5 M4 8.08 dBV/m	Grid 6 M4 8.06 dBV/m
Grid 7 M4 7.75 dBV/m	Grid 8 M4 8.85 dBV/m	Grid 9 M4 8.72 dBV/m

Cursor:

Total = 8.85 dBV/m

E Category: M4

Location: -4.5, 25, 8.7 mm



Document

**Annex A to Hearing Aid Compatibility RF Emissions Test Report
for the BlackBerry® Smartphone RHD131LW (STR100-1)**

Page

32 (36)

Author Data

Daoud Attayi


Dates of Test

Feb. 02-17, 2015

Report No

RTS-6063-1503-11

FCC ID

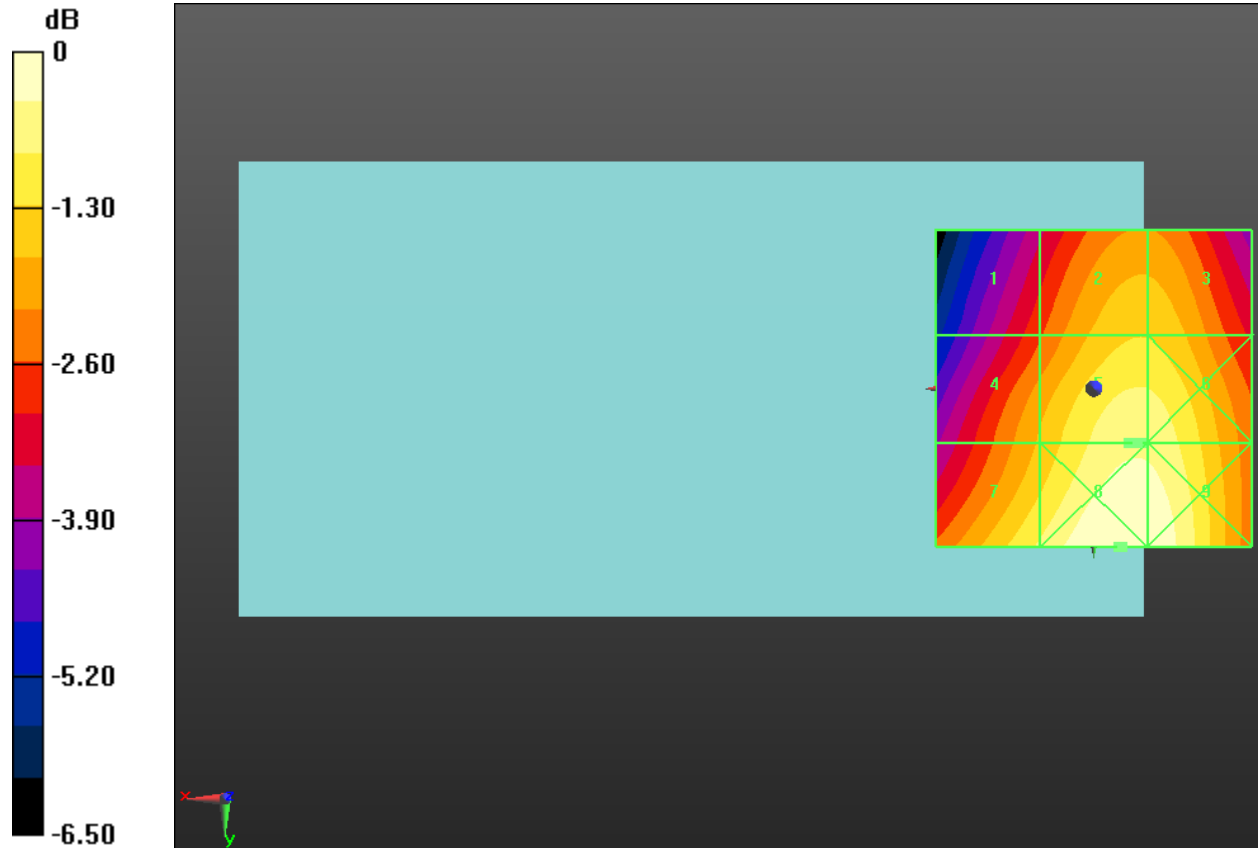L6ARHD130LW

0 dB = 2.636 V/m = 8.42 dBV/m

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone RHD131LW (STR100-1)		Page 33 (36)
Author Data Daoud Attayi	Dates of Test Feb. 02-17, 2015	Report No RTS-6063-1503-11	FCC ID L6ARHD130LW	

Date/Time: 2/4/2015 7:20:48 PM

Test Laboratory: BlackBerry RTS

HAC RF_E-Field_UMTS_II

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2FFE7836

Communication System: UID 0, WCDMA FDD II; Frequency: 1852.4 MHz, Frequency: 1880 MHz, Frequency: 1907.6 MHz

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ER3DV6 - SN2286; ConvF(1, 1, 1); Calibrated: 1/19/2015;
- Sensor-Surface: (Fix Surface), $z = 8.7$
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Device E-Field UMTS band II measurement with ER probe/E Scan - ER3D - 2011: 15 mm from Probe Center to the Device_Low_Chan/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 41.31 V/m; Power Drift = -0.02 dB

Applied MIF = -25.78 dB

RF audio interference level = 7.14 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 7.14 dBV/m	Grid 2 M4 7.04 dBV/m	Grid 3 M4 6.58 dBV/m
Grid 4 M4 4.59 dBV/m	Grid 5 M4 6.4 dBV/m	Grid 6 M4 6.63 dBV/m

	Document		Page
	Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone RHD131LW (STR100-1)		34 (36)
Author Data Daoud Attayi	Dates of Test Feb. 02-17, 2015	Report No RTS-6063-1503-11	FCC ID L6ARHD130LW

Grid 7 M4 1.71 dBV/m	Grid 8 M4 7.6 dBV/m	Grid 9 M4 7.82 dBV/m
---------------------------------------	--------------------------------------	---------------------------------------

Cursor:

Total = 7.82 dBV/m

E Category: M4

Location: -12, 25, 8.7 mm

Device E-Field UMTS band II measurement with ER probe/E Scan - ER3D - 2011: 15 mm from Probe Center to the Device_Mid_Chan/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 41.67 V/m; Power Drift = -0.11 dB

Applied MIF = -25.78 dB

RF audio interference level = 7.50 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 7.2 dBV/m	Grid 2 M4 7.5 dBV/m	Grid 3 M4 7.36 dBV/m
Grid 4 M4 4.68 dBV/m	Grid 5 M4 6.26 dBV/m	Grid 6 M4 6.28 dBV/m
Grid 7 M4 1.39 dBV/m	Grid 8 M4 7.23 dBV/m	Grid 9 M4 7.42 dBV/m

Cursor:

Total = 7.50 dBV/m

E Category: M4

Location: -3, -25, 8.7 mm

Device E-Field UMTS band II measurement with ER probe/E Scan - ER3D - 2011: 15 mm from Probe Center to the Device_High_Chan/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone RHD131LW (STR100-1)	Page 35 (36)
Author Data Daoud Attayi	Dates of Test Feb. 02-17, 2015	Report No RTS-6063-1503-11	FCC ID L6ARHD130LW

Device Reference Point: 0, 0, -6.3 mm
Reference Value = 36.55 V/m; Power Drift = -0.05 dB
Applied MIF = -25.78 dB
RF audio interference level = 6.39 dBV/m
Emission category: M4

MIF scaled E-field

Grid 1 M4 6 dBV/m	Grid 2 M4 6.39 dBV/m	Grid 3 M4 6.26 dBV/m
Grid 4 M4 3.47 dBV/m	Grid 5 M4 5.29 dBV/m	Grid 6 M4 5.59 dBV/m
Grid 7 M4 0.78 dBV/m	Grid 8 M4 6.18 dBV/m	Grid 9 M4 6.47 dBV/m

Cursor:
Total = 6.47 dBV/m
E Category: M4
Location: -12, 25, 8.7 mm



Document

**Annex A to Hearing Aid Compatibility RF Emissions Test Report
for the BlackBerry® Smartphone RHD131LW (STR100-1)**

Page

36 (36)

Author Data

Daoud Attayi


Dates of Test

Feb. 02-17, 2015

Report No

RTS-6063-1503-11

FCC ID

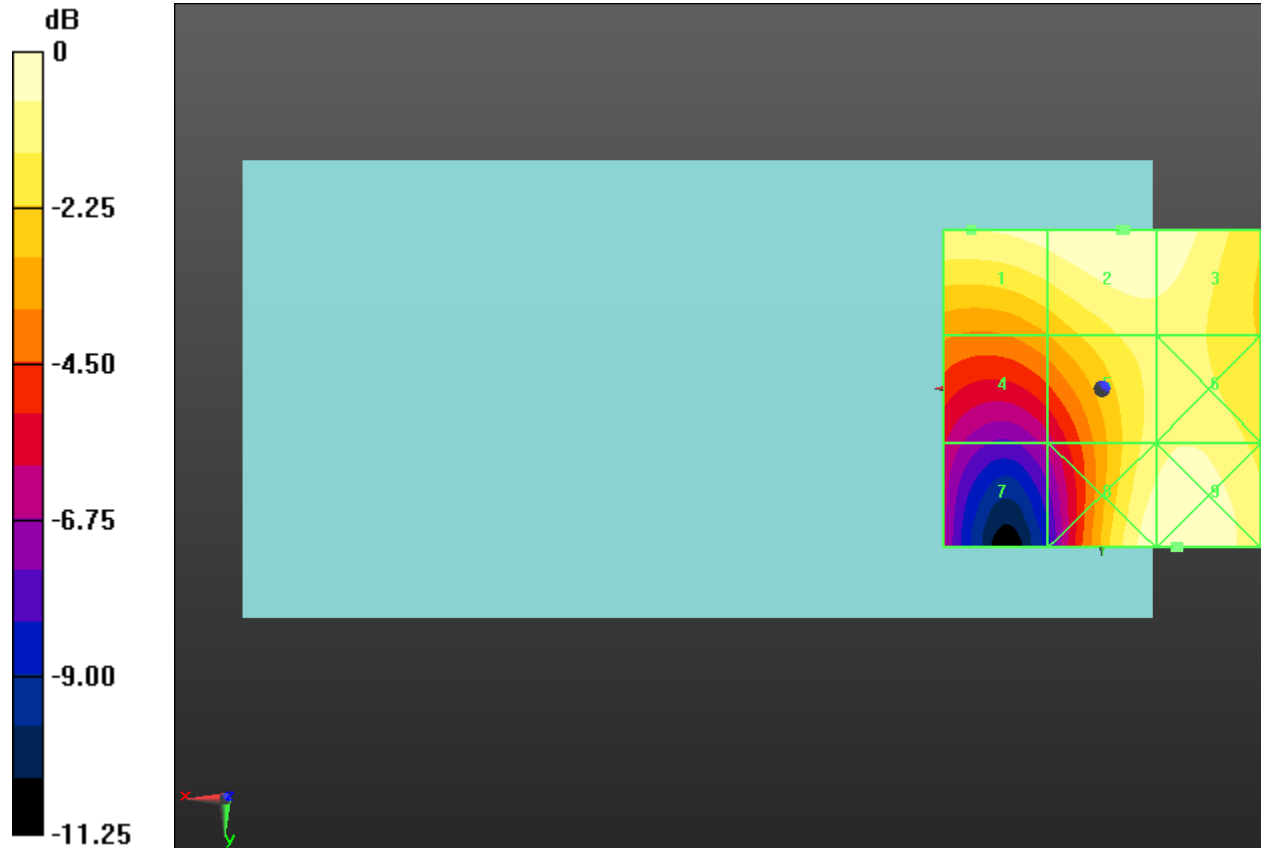L6ARHD130LW

0 dB = 2.423 V/m = 7.69 dBV/m