

FCC Test Report

Report No.: AGC01110240804FR02A

FCC ID : 2AOKB-A3331L

APPLICATION PURPOSE: Class II Permissive Change

PRODUCT DESIGNATION: Wireless Headphone

BRAND NAME : soundcore

MODEL NAME : A3331L

APPLICANT: Anker Innovations Limited

DATE OF ISSUE : Apr. 21, 2025

STANDARD(S) : FCC Part 15 Subpart C §15.247

REPORT VERSION: V1.0

Attestation Of Global Concilance (Shenzhen) Co., Ltd



Page 2 of 27

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Apr. 21, 2025	Valid	Initial Release

Note: The original test report AGC01110240804FR02 (dated Aug. 28, 2024 and tested from Aug. 05, 2024 to Aug. 27, 2024) was modified on Apr. 21, 2025, including the following changes and additions:

Changed the earphone battery, the batteries are the same except for the model name and manufacturer;

For the above described change(s) the following tests was considered to be necessary:

Clause	Testing
§15.209	Radiated Emission







Table of Contents

1. General Information	4
2. Product Information	5
2.1 Product Technical Description	5
2.2 Test Frequency List	6
2.3 Related Submittal(S) / Grant (S)	7
2.4 Test Methodology	7
2.5 Special Accessories	7
2.6 Equipment Modifications	7
2.7 Antenna Requirement	7
3. Test Environment	8
3.1 Address of the Test Laboratory	8
3.2 Test Facility	8
3.3 Environmental Conditions	9
3.4 Measurement Uncertainty	9
3.5 List of Equipment Use	10
4.System Test Configuration	11
4.1 EUT Configuration	11
4.2 EUT Exercise	11
4.3 Configuration of Tested System	11
4.4 Equipment Used In Tested System	11
4.5 Summary of Test Results	12
5. Description of Test Modes	13
6. Radiated Spurious Emission	14
6.1 Measurement Limit	14
6.2 Measurement Procedure	14
6.3 Measurement Setup (Block Diagram of Configuration)	17
6.4 Measurement Result	
Appendix I: Photographs of Test Setup	26
Appendix II: Photographs of Test EUT	26





1. General Information

Applicant	Anker Innovations Limited		
Address	Unit 56, 8th Floor, Tower 2, Admiralty Centre, 18 Harcourt Road, Hong Kong		
Manufacturer Anker Innovations Limited			
Address	Unit 56, 8th Floor, Tower 2, Admiralty Centre, 18 Harcourt Road, Hong Kong		
Factory	N/A		
Address	N/A		
Product Designation Wireless Headphone			
Brand Name	soundcore		
Test Model A3331L			
Date of receipt of test item	Mar. 26, 2025		
Date of Test Apr. 08, 2025~ Apr. 21, 2025			
Deviation from Standard No any deviation from the test method			
Condition of Test Sample	dition of Test Sample Normal		
Test Result	Pass		
Test Report Form No AGCER-FCC-BLE-V1			

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Coli	
	Cici Li (Project Engineer)	Apr. 21, 2025
Reviewed By	Colvin Lin	
	Calvin Liu (Reviewer)	Apr. 21, 2025
Approved By	Angole Li	
	Angela Li (Authorized Officer)	Apr. 21, 2025



Page 5 of 27

2. Product Information

2.1 Product Technical Description

Frequency Band	2400MHz-2483.5MHz		
Operation Frequency Range	2402MHz-2480MHz		
Bluetooth Version	V5.4		
Modulation Type	BLE ⊠GFSK 1Mbps ⊠GFSK 2Mbps		
Number of channels	40		
Carrier Frequency of Each Channel	40 Channels (37 Data channels + 3 advertising channels)		
Channel Separation	2 MHz		
Maximum Transmitter Power	Bluetooth LE (1Mbps): 1.456dBm Bluetooth LE (2Mbps): 1.518dBm		
Hardware Version	V1.2		
Software Version	V1.0		
Antenna Designation	FPC Antenna		
Antenna Gain	-2.6dBi		
Power Supply	DC 3.85V, 70mAh by battery		



Page 6 of 27

2.2 Test Frequency List

Frequency Band	Channel Number	Frequency	
	0	2402 MHz	
	1	2404 MHz	
	:	:	
2400~2483.5MHz	19	2440MHz	
	:	:	
	38	2478 MHz	
	39	2480 MHz	

Note: f = 2402 + 2*k MHz, k = 0, ..., 39 f is the operating frequency (MHz); k is the operating channel.



Page 7 of 27

2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2AOKB-A3331L**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2 FCC 47 CFR Part 15 Radi		Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules

2.5 Special Accessories

Not available for this EUT intended for grant.

2.6 Equipment Modifications

Not available for this EUT intended for grant.

2.7 Antenna Requirement

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is -2.6dBi.



Page 8 of 27

3. Test Environment

3.1 Address of the Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 9 of 27

3.3 Environmental Conditions

	Normal Conditions	
Temperature range (℃)	15 - 35	
Relative humidity range	20 % - 75 %	
Pressure range (kPa)	86 - 106	
Power supply	DC 3.85V	

3.4 Measurement Uncertainty

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%

uncertainty multiplied by a coverage factor of k=2, pro	viding a level of confidence of approximately 95%.		
Item	Measurement Uncertainty		
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$		
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$		
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$		
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$		
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$		
Uncertainty of spurious emissions, conducted	U _c = ±2 %		
Uncertainty of Occupied Channel Bandwidth	U _c = ±2 %		



Page 10 of 27

3.5 List of Equipment Use

• F	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\boxtimes	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2025-01-14	2026-01-13	
\boxtimes	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23	
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27	
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04	
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2025-03-27	2026-03-26	
	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23	
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-07-24	2026-07-23	
\boxtimes	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22	
\boxtimes	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	

● Test Software							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information		
\boxtimes	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A		
\boxtimes	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0		



Page 11 of 27

4. System Test Configuration

4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

Radiate	d Emission Configu	re:
	EUT	

4.4 Equipment Used In Tested System

The following peripheral devices and interface cables were connected during the measurement:

☐ Test Accessories Come From The Laboratory

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable	
1						

☐ Test Accessories Come From The Manufacturer

No.	Equipment	Manufacturer Model No.		Specification Information	Cable	
1						



Page 12 of 27

4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.209	Radiated Emission	Pass




5. Description of Test Modes

Summary Table of Test Cases							
T4 14	Data Rate / Modulation						
Test Item	Bluetooth – LE(1Mbps/2Mbps) / GFSK						
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps(Battery powered)						
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps(Battery powered)						
Radiated & Conducted	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps(Battery powered)						
Test Cases	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps(Battery powered)						
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps(Battery powered)						
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps(Battery powered)						
AC Conducted Emission	Not applicable						

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- The battery is full-charged during the test.
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 4. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

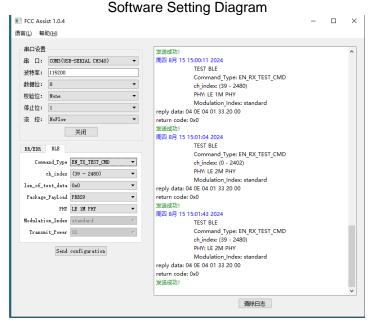



Page 14 of 27

6. Radiated Spurious Emission

6.1 Measurement Limit

FCC Part 15.209 Limit in the below table to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

6.2 Measurement Procedure

- The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one



Report No.: AGC01110240804FR02A Page 15 of 27

complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting				
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP				
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP				
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP				
Start ~Stop Frequency	1GHz~26.5GHz				
Start ~Stop i requerity	1MHz/3MHz for Peak, 1MHz/3MHz for Average				

Receiver Parameter	Setting				
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP				
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP				
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP				



Report No.: AGC01110240804FR02A Page 16 of 27

Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

Peak Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize


Average Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. $VBW \ge [3 \times RBW]$
- 4. Detector = Power averaging (rms)
- 5. Averaging type = power (i.e., rms)
- 6. Sweep time = auto
- 7. Perform a trace average of at least 100 traces.
- 8. The applicable correction factor is [10*log (1 / D)], where D is the duty cycle. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.




6.3 Measurement Setup (Block Diagram of Configuration)


Radiated Emission Test Setup 9kHz-30MHz

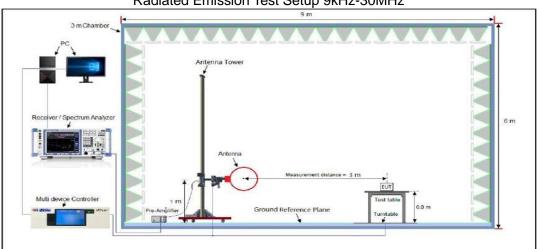

Radiated Emission Test Setup 30MHz-1000MHz

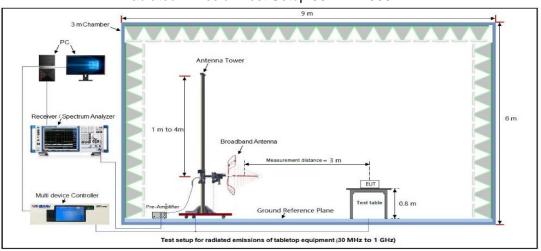

Radiated Emission Test Setup Above 1000MHz

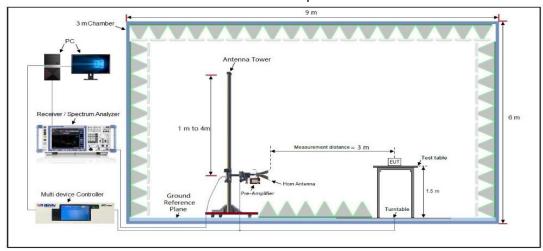

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



6.4 Measurement Result

Radiated Emission Below 30MHz


The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

Radiated Emission Test Results at 30MHz-1GHz																			
EUT Name	Wi	Wireless Headphone										me		Д	A3331L				
Temperature	19.	.2°	C							Relative Humidity			5	51.3%					
Pressure	96	0hF	⊃a							Test	Volta	age		D	C 3.	85V I	by ba	attery	•
Test Mode	Мс	de	5							Antenna Polarity			F	loriza	ontal				
72.0	dBuV/n	n													mit: argin:	_			
-8	half water as I would	1	Mortuna		70	Jane Vardo	and the last section of th	Z And Marchaelland March March 190	Markham	3 ************************************	300	400	500		700	1000	M.		
30.0				60	F	Read		(MHz) Correct		asure	_				700		.000		
	lo. N	1K.		req.		Leve		Factor		ent		imit	Ov		Dete				
_	1		44.1	MHz		dBu		dB 13.61		uV/m).95		.00	-20.			ector eak			
_	2		119.8			6.5		16.40		2.95		.50	-20.			ak			
_	3		238.3			5.2		15.32).53		.00	-20.			ak			
_	4		457.5			6.0		24.49).53		.00	-15.			ak			
_	5		545.1			7.4		23.98		.39		.00	-14.			ak			
_	6 *		881.4			7.4		29.48		3.97		.00	-9.0			ak			

RESULT: Pass



Radiated Emission Test Results at 30MHz-1GHz								
EUT Name	Wireless Headphone	Model Name	A3331L					
Temperature	19.2℃	Relative Humidity	51.3%					
Pressure	960hPa	Test Voltage	DC 3.85V by battery					
Test Mode	Mode 5	Antenna Polarity	Vertical					

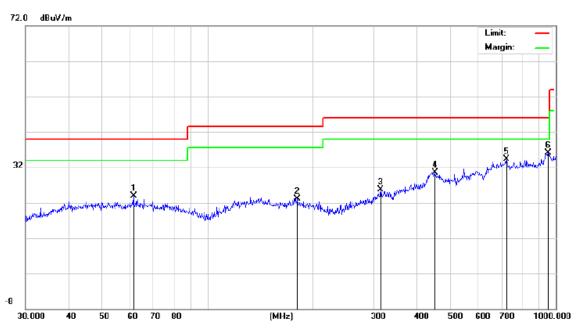

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		61.3463	6.87	17.09	23.96	40.00	-16.04	peak
2	1	81.2834	4.73	18.46	23.19	43.50	-20.31	peak
3	3	14.3765	5.79	19.91	25.70	46.00	-20.30	peak
4	4	49.5558	4.88	25.67	30.55	46.00	-15.45	peak
5	7	21.7259	5.71	28.64	34.35	46.00	-11.65	peak
6	* 9	52.0937	5.60	30.52	36.12	46.00	-9.88	peak

RESULT: Pass


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Limit-Level.

2. All test modes had been pre-tested. The mode 5 is the worst case and recorded in the report.



Radiated Emissions Test Results for Above 1GHz


EUT Name	Wireless Headphone	Model Name	A3331L
Temperature	18.4℃	Relative Humidity	58.2%
Pressure	960hPa	Test Voltage	DC 3.85V by battery
Test Mode	Mode 4	Antenna Polarity	Horizontal

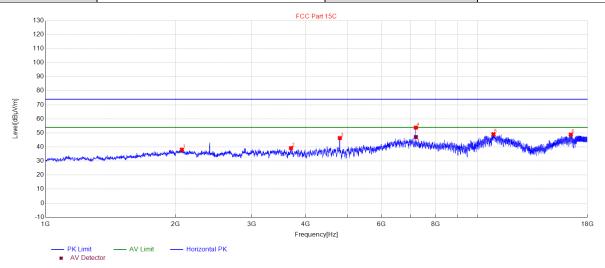

PK D	PK Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	
1	2068.804587	38.12	-13.25	74.00	35.88	150	126	Horizontal	
2	3702.046803	39.20	-10.37	74.00	34.80	150	18	Horizontal	
3	4803.720248	46.36	-7.81	74.00	27.64	150	172	Horizontal	
4	7206.547103	53.79	-3.65	74.00	20.21	150	5	Horizontal	
5	10896.926462	49.08	2.32	74.00	24.92	150	172	Horizontal	
6	16464.230949	48.79	5.57	74.00	25.21	150	352	Horizontal	


AV F	AV Final Data List										
NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity			
1	7205.9706	-3.65	47.07	54.00	6.93	150	5	Horizontal			

RESULT: Pass





EUT Name	JT Name Wireless Headphone Mode		A3331L
Temperature	18.4℃	Relative Humidity	58.2%
Pressure	960hPa	Test Voltage	DC 3.85V by battery
Test Mode	Mode 4	Antenna Polarity	Vertical

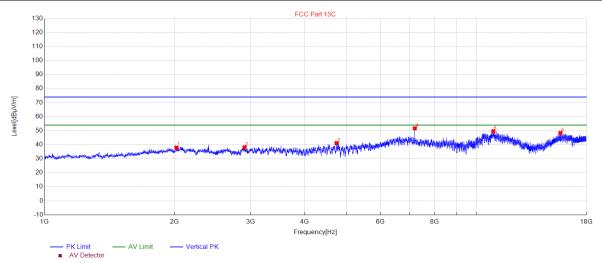


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2020.068005	37.97	-13.36	74.00	36.03	150	159	Vertical
2	2905.260351	38.17	-12.02	74.00	35.83	150	208	Vertical
3	4745.916394	41.17	-7.83	74.00	32.83	150	192	Vertical
4	7205.413694	51.70	-3.65	74.00	22.30	150	303	Vertical
5	10945.663044	49.63	2.48	74.00	24.37	150	319	Vertical
6	15662.910861	48.41	4.13	74.00	25.59	150	267	Vertical

RESULT: Pass




Radiated Emissions Test Results for Above 1GHz

EUT Name	EUT Name Wireless Headphone		A3331L
Temperature	18.4℃	Relative Humidity	58.2%
Pressure	960hPa	Test Voltage	DC 3.85V by battery
Test Mode	Mode 5	Antenna Polarity	Horizontal

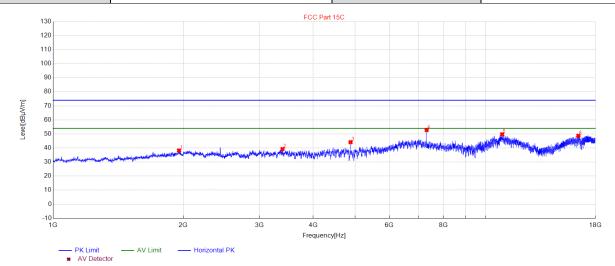


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1956.597107	38.23	-13.77	74.00	35.77	150	201	Horizontal
2	3396.026402	39.23	-10.91	74.00	34.77	150	296	Horizontal
3	4879.658644	44.15	-7.80	74.00	29.85	150	178	Horizontal
4	7321.021401	52.74	-3.68	74.00	21.26	150	21	Horizontal
5	10945.663044	49.75	2.48	74.00	24.25	150	166	Horizontal
6	16432.4955	48.67	5.52	74.00	25.33	150	70	Horizontal

RESULT: Pass






EUT Name	Wireless Headphone	Model Name	A3331L
Temperature	18.4℃	Relative Humidity	58.2%
Pressure	960hPa	Test Voltage	DC 3.85V by battery
Test Mode	Mode 5	Antenna Polarity	Vertical

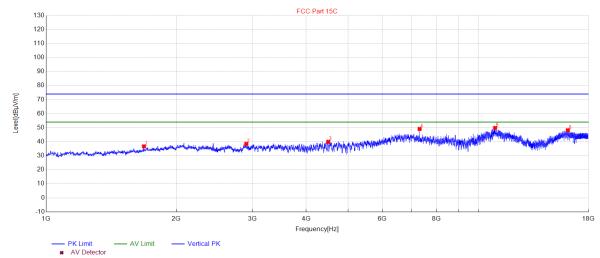

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1684.578972	36.71	-16.02	74.00	37.29	150	358	Vertical
2	2905.260351	38.44	-12.02	74.00	35.56	150	50	Vertical
3	4497.699847	39.91	-7.89	74.00	34.09	150	67	Vertical
4	7319.887993	49.10	-3.68	74.00	24.90	150	300	Vertical
5	10942.262818	49.80	2.47	74.00	24.20	150	11	Vertical
6	16126.475098	48.17	5.09	74.00	25.83	150	80	Vertical


RESULT: Pass





Radiated Emissions Test Results for Above 1GHz


EUT Name	Wireless Headphone Model Name		A3331L
Temperature	18.4℃	Relative Humidity	58.2%
Pressure	960hPa	Test Voltage	DC 3.85V by battery
Test Mode	Mode 6	Antenna Polarity	Horizontal

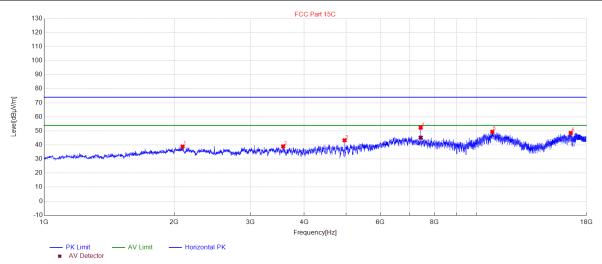

PK D	Data List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2091.472765	38.85	-13.19	74.00	35.15	150	283	Horizontal
2	3573.971598	39.00	-10.54	74.00	35.00	150	293	Horizontal
3	4960.130675	43.32	-7.78	74.00	30.68	150	169	Horizontal
4	7440.029335	52.31	-3.71	74.00	21.69	150	21	Horizontal
5	10895.793053	49.40	2.32	74.00	24.60	150	110	Horizontal
6	16553.770251	48.55	5.68	74.00	25.45	150	74	Horizontal


AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	
1	7439.9549	-3.71	45.21	54.00	8.79	150	21	Horizontal	

RESULT: Pass





EUT Name	Wireless Headphone		A3331L	
Temperature	18.4℃	Relative Humidity	58.2%	
Pressure	960hPa	Test Voltage	DC 3.85V by battery	
Test Mode	Mode 6	Antenna Polarity	Vertical	

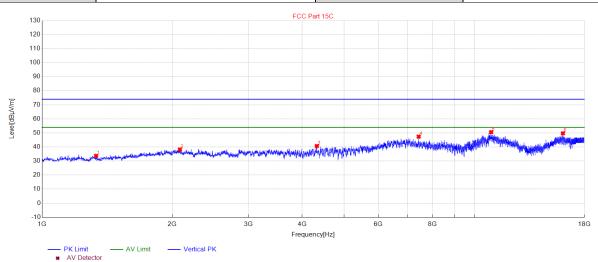

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1333.222215	33.72	-17.80	74.00	40.28	150	313	Vertical
2	2083.538903	38.19	-13.21	74.00	35.81	150	329	Vertical
3	4323.154877	40.65	-8.62	74.00	33.35	150	310	Vertical
4	7440.029335	47.38	-3.71	74.00	26.62	150	165	Vertical
5	10945.663044	50.54	2.48	74.00	23.46	150	358	Vertical
6	16044.869658	49.72	4.97	74.00	24.28	150	240	Vertical

RESULT: Pass

Note:

- 1. The amplitude of other spurious emissions from 18G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.
- 4. All test modes had been tested. The BLE GFSK 2Mbps modulation is the worst case and recorded in the report.



Page 26 of 27

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC01110240804AP01A

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC01110240804AP02A



Page 27 of 27

Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

 3.The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations. 7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.

----End of Report----