





The graph displays two metrics: Efficiency (%) and Max-Min. The Efficiency (%) series is represented by a red line with circular markers, showing values that fluctuate slightly around 80%. The Max-Min series is represented by a purple line with circular markers, with two specific data points labeled: 82.15 at alpha=2470.0 and 76.52 at alpha=2490.0. The x-axis represents alpha values from 2400.0 to 2500.0, and the y-axis represents values from 0.00 to 100.00.

alpha	Efficiency (%)	Max-Min
2400.0	80.5	
2410.0	78.5	
2420.0	78.5	
2430.0	80.5	
2440.0	79.5	
2450.0	80.5	
2460.0	81.5	
2470.0	82.15	82.15
2480.0	79.5	
2490.0	76.52	76.52
2500.0	78.5	

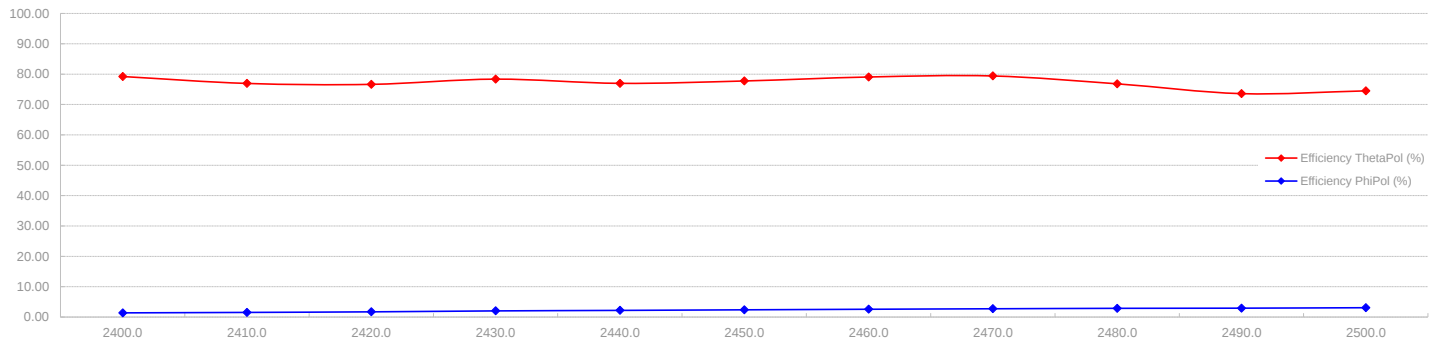

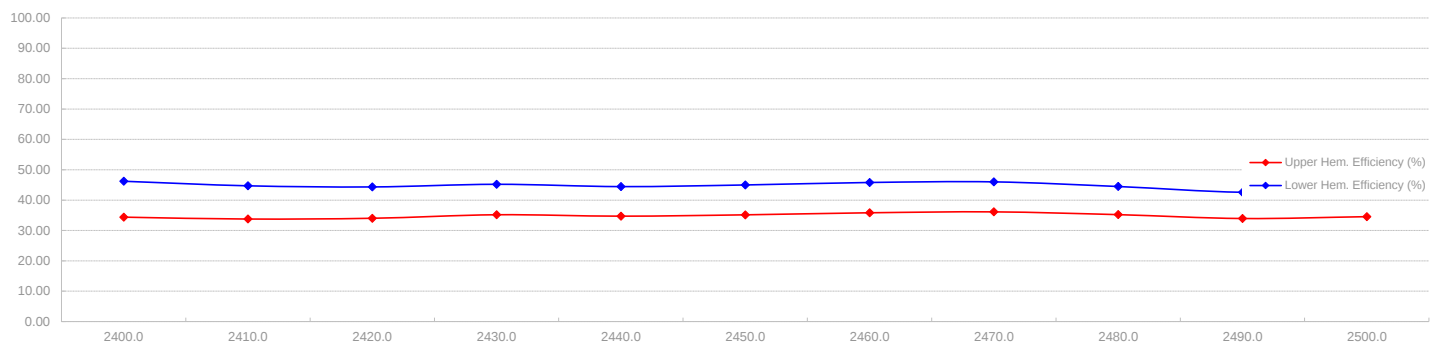

4



3

2

1

修 订 栏

版本	修订符号	说明	变更编号	审核	日期
V0.1		发行			20210913
V0.2		增加端子线色注释			20211025
V1.0		修改尺寸公差			20220120

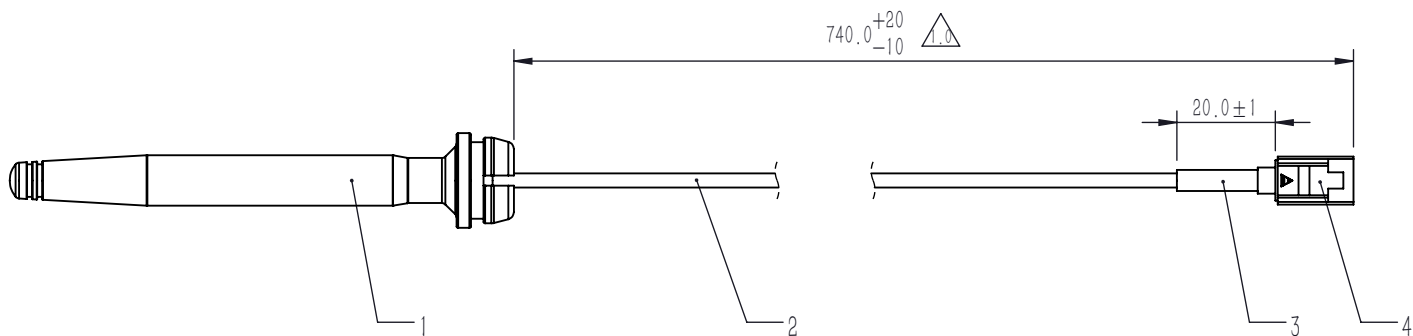

紫红

技术要求:

- 1.注意裁剪长度,不可有长短不齐、切口歪斜等现象;
- 2.线身光滑整洁、不可有划伤、压痕等现象;
- 3.橡胶天线罩与天线固定牢靠,不可脱出;

序号	规格	用量	备注
1	橡胶天线罩	1	
2	RQ316	1	101.006.0012
3	黑色热缩管	1	印白字:JSJ-1
4	FARKA SMB-C-K1.5-7	1	SHM.900.0003-46 Port Type:D 紫红

材料	设计 任乐乐	料名	料号
表面处理	校核 李罕超		M-T3X-OXS-JSJ-058
未注公差按如下指定公差 .X±0.3 .XX±0.1 .XXX±0.05 角度:±°	工艺	拓攻(TopGun)机器人有限公司	版本 V1.0
第一视角	批准 周宁波		项目 TG3X
单位 mm	图纸规格 A4	比例 1: 1.5	页码 1—1

