

# INTERMEC Technologies Corporation

## BTM311

November 12, 2004

Report No. INMC0167 Rev 01

Report Prepared By



[www.nwemc.com](http://www.nwemc.com)  
1-888-EMI-CERT

© 2004 Northwest EMC, Inc

EMC Test Report



22975 NW Evergreen Parkway  
Suite 400  
Hillsboro, Oregon 97124

**Certificate of Test**  
**Issue Date: November 12, 2004**  
**INTERMEC Technologies Corporation**  
**Model: BTM311**

Emissions			
Specification	Test Method	Pass	Fail
FCC 15.207 AC Powerline Conducted Emissions:2003	ANSI C63.4:2001	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FCC 15.247(a) Occupied Bandwidth:2003	ANSI C63.4:2001	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FCC 15.247(b) Output Power:2003	ANSI C63.4:2001	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FCC 15.247(d) Band Edge Compliance:2003	ANSI C63.4:2001	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FCC 15.247(c) Spurious Conducted Emissions:2003	ANSI C63.4:2001	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FCC 15.247(d) Spurious Radiated Emissions:2003	ANSI C63.4:2001	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FCC 15.247(e) Power Spectral Density:2003	ANSI C63.4:2001	<input checked="" type="checkbox"/>	<input type="checkbox"/>

**Modifications made to the product**

**See the Modifications section of this report**

**Test Facility**

The measurement facility used to collect the data is located at:

Northwest EMC, Inc.  
22975 NW Evergreen Parkway, Suite 400; Hillsboro, OR 97124  
Phone: (503) 844-4066  
Fax: 844-3826

This site has been fully described in a report filed with and accepted by the FCC (Federal Communications Commission) and Industry Canada.

**Approved By:**

Don Facteau, IS Manager

*This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America.*

*Product compliance is the responsibility of the client, therefore the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. This Report may only be duplicated in its entirety. The results of this test pertain only to the sample(s) tested, the specific description is noted in each of the individual sections of the test report supporting this certificate of test.*

Revision Number	Description	Date	Page Number
-----------------	-------------	------	-------------

01	Spec limit info corrected	11/21/04	2
01	ANSI C63.4 date corrected	11/21/04	49,66
01	Added Bluetooth Approvals information	11/21/04	75

**FCC:** Accredited by NVLAP for performance of FCC radio, digital, and ISM device testing. Our Open Area Test Sites, certification chambers, and conducted measurement facilities, have been fully described in reports filed with the FCC and accepted by the FCC in letters maintained in our files. Northwest EMC has been accredited by ANSI to ISO / IEC Guide 65 as a product certifier. We have been designated by the FCC as a Telecommunications Certification Body (TCB). This allows Northwest EMC to certify transmitters to FCC specifications in accordance with 47 CFR 2.960 and 2.962.



**NVLAP:** Northwest EMC, Inc. is recognized under the United States Department of Commerce, National Institute of Standards and Technology, National Voluntary Laboratory Accreditation Program for satisfactory compliance with the requirements of ISO/IEC 17025 for Testing Laboratories. The NVLAP accreditation encompasses Electromagnetic Compatibility Testing in accordance with the European Union EMC Directive 89/336/EEC, ANSI C63.4, MIL-STD 461E, DO-160D and SAE J1113. Additionally, Northwest EMC is accredited by NVLAP to perform radio testing in accordance with the European Union R&TTE Directive 1999/5/EEC, the requirements of FCC, and the RSS radio standards for Industry Canada. Accreditation has been granted to Northwest EMC, Inc. under Certificate Numbers: 200629-0, 200630-0, and 200676-0.



**Industry Canada:** Accredited by NVLAP for performance of Industry Canada RSS and ICES testing. Our Open Area Test Sites and certification chambers comply with RSS 212, Issue 1 (Provisional) and have been filed with Industry Canada and accepted. Northwest EMC has been accredited by ANSI to ISO / IEC Guide 65 as a product certifier. We have been designated by NIST and recognized by Industry Canada as a Certification Body (CB) per the APEC Mutual Recognition Arrangement (MRA). This allows Northwest EMC to certify transmitters to Industry Canada technical requirements.



**CAB:** Designated by NIST and validated by the European Commission as a Conformity Assessment Body (CAB) to conduct tests and approve products to the EMC directive and transmitters to the R&TTE directive, as described in the U.S. - EU Mutual Recognition Agreement



**TÜV Product Service:** Included in TÜV Product Service Group's Listing of Recognized Laboratories. It qualifies in connection with the TÜV Certification after Recognition of Agent's Testing Program for the product categories and/or standards shown in TÜV's current Listing of CARAT Laboratories available from TÜV. A certificate was issued to represent that this laboratory continues to meet TÜV's CARAT Program requirements. Certificate No. USA0401C



**TÜV Rheinland:** Authorized to carryout EMC tests by order and under supervision of TÜV Rheinland. This authorization is based on "Conditions for EMC-Subcontractors" of November 1992.



**NEMKO:** Assessed and accredited by NEMKO (Norwegian testing and certification body) for European emissions and immunity testing. As a result of NEMKO's laboratory assessment, they will accept test results from Northwest EMC, Inc. for product certification (Authorization No. ELA 119).



**Technology International:** Assessed in accordance with ISO Guide 25 defining the general international requirements for the competence of calibration and testing laboratories and with ITI assessment criteria LACO196. Based upon that assessment Interference Technology International, Ltd., has granted approval for specifications implementing the EU Directive on EMC (89/336/EEC and amendments). The scope of the approval was provided on a Schedule of Assessment supplied with the certificate and is available upon request.



**Australia/New Zealand:** The National Association of Testing Authorities (NATA), Australia has been appointed by the ACA as an accreditation body to accredit test laboratories and competent bodies for EMC standards. Accredited test reports or assessments by competent bodies must carry the NATA logo. Test reports made by an overseas laboratory that has been accredited for the relevant standards by an overseas accreditation body that has a Mutual Recognition Agreement (MRA) with NATA are also accepted as technical grounds for product conformity. The report should be endorsed with the respective logo of the accreditation body. (NVLAP)



**VCCI:** Accepted as an Associate Member to the VCCI, Acceptance No. 564. Conducted and radiated measurement facilities have been registered in accordance with Regulations for Voluntary Control Measures, Article 8. (*Registration Nos. - Hillsboro: C-1071 and R-1025, Irvine: C-2094 and R-1943, Newberg: C-1877 and R-1760, Sultan: R-871, C-1784 and R-1761*)



**BSMI:** Northwest EMC has been designated by NIST and validated by C-Taipei (BSMI) as a CAB to conduct tests as described in the APEC Mutual Recognition Agreement. License No.SL2-IN-E-1017.



**GOST:** Northwest EMC, Inc. has been assessed and accredited by the Russian Certification bodies Certinform VNIINMASH, CERTINFO, SAMTES, and Federal CHEC, to perform EMC and Hygienic testing for Information Technology Products. As a result of their laboratory assessment, they will accept test results from Northwest EMC, Inc. for product certification



## SCOPE

For details on the Scopes of our Accreditations, please visit:

<http://www.nwemc.com/scope.asp>

### What is measurement uncertainty?


When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. The following statement of measurement uncertainty is used to reflect the accuracy of the measured result as compared with its “true” value. In the case of transient tests (ESD, EFT, Surge, Voltage Dips and Interruptions), the test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements.

The following documents were the basis for determining the uncertainty levels of our measurements:

- “ISO Guide to the Expression of Uncertainty in Measurements”, October 1993
- “NIS81: The Treatment of Uncertainty in EMC Measurements”, May 1994
- “IEC CISPR 16-3 A1 f1 Ed.1: Radio-interference measurements and statistical techniques”, December 2000

### How might measurement uncertainty be applied to test results?

If the diamond marks the measured value for the test and the vertical bars bracket the range of + and – measurement uncertainty, then test results can be interpreted from the diagram below.

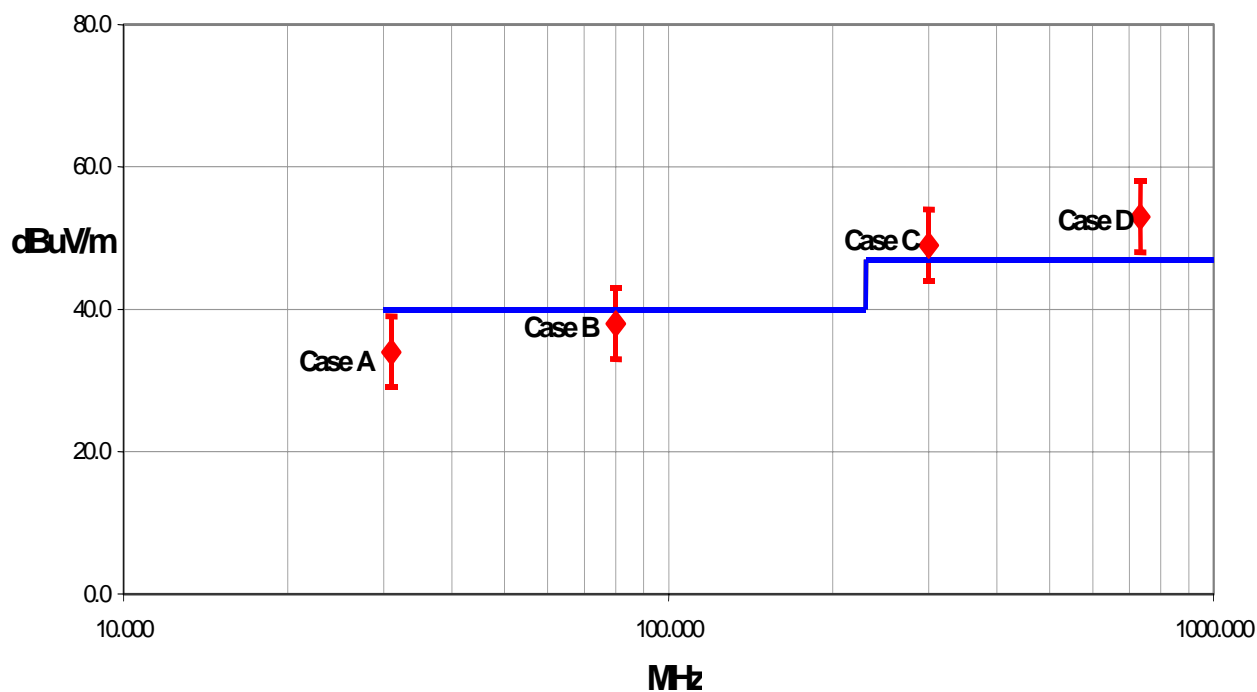

#### Test Result Scenarios:

**Case A:** Product complies.

**Case B:** Product conditionally complies. It is not possible to say with 95% confidence that the product complies.

**Case C:** Product conditionally does not comply. It is not possible to say with 95% confidence that the product does not comply.

**Case D:** Product does not comply.

**Radiated Emissions  $\leq 1$  GHz**

Value (dB)

Test Distance	Probability Distribution	Biconical Antenna		Log Periodic Antenna		Dipole Antenna	
		3m	10m	3m	10m	3m	10m
Combined standard uncertainty $u_c(y)$	normal	+ 1.86 - 1.88	+ 1.82 - 1.87	+ 2.23 - 1.41	+ 1.29 - 1.26	+ 1.31 - 1.27	+ 1.25 - 1.25
Expanded uncertainty $U$ (level of confidence $\approx 95\%$ )	normal (k=2)	+ 3.72 - 3.77	+ 3.64 - 3.73	+ 4.46 - 2.81	+ 2.59 - 2.52	+ 2.61 - 2.55	+ 2.49 - 2.49

**Radiated Emissions  $> 1$  GHz**

Value (dB)

Test Distance	Probability Distribution	Without High Pass Filter		With High Pass Filter	
		3m	10m	3m	10m
Combined standard uncertainty $u_c(y)$	normal	+ 1.29 - 1.25	+ 1.38 - 1.35	+ 1.29 - 1.25	+ 1.38 - 1.35
Expanded uncertainty $U$ (level of confidence $\approx 95\%$ )	normal (k=2)	+ 2.57 - 2.51	+ 2.76 - 2.70	+ 2.57 - 2.51	+ 2.76 - 2.70

**Conducted Emissions**

Test Distance	Probability Distribution	Value (+/- dB)	
		3m	10m
Combined standard uncertainty $u_c(y)$	normal	1.48	1.48
Expanded uncertainty $U$ (level of confidence $\approx 95\%$ )	normal (k = 2)	2.97	2.97

**Radiated Immunity**

Test Distance	Probability Distribution	Value (+/- dB)	
		3m	10m
Combined standard uncertainty $u_c(y)$	normal	1.05	1.05
Expanded uncertainty $U$ (level of confidence $\approx 95\%$ )	normal (k = 2)	2.11	2.11

**Conducted Immunity**

Test Distance	Probability Distribution	Value (+/- dB)	
		3m	10m
Combined standard uncertainty $u_c(y)$	normal	1.05	1.05
Expanded uncertainty $U$ (level of confidence $\approx 95\%$ )	normal (k = 2)	2.10	2.10

**Legend**

$u_c(y)$  = square root of the sum of squares of the individual standard uncertainties

$U$  = combined standard uncertainty multiplied by the coverage factor:  $k$ . This defines an interval about the measured result that will encompass the true value with a confidence level of approximately 95%. If a higher level of confidence is required, then  $k=3$  (CL of 99.7%) can be used. Please note that with a coverage factor of one,  $u_c(y)$  yields a confidence level of only 68%.



**California****Orange County Facility**

41 Tesla Ave.  
Irvine, CA 92618  
(888) 364-2378  
FAX (503) 844-3826

**Oregon****Evergreen Facility**

22975 NW Evergreen Pkwy.,  
Suite 400  
Hillsboro, OR 97124  
(503) 844-4066  
FAX (503) 844-3826

**Oregon****Trails End Facility**

30475 NE Trails End Lane  
Newberg, OR 97132  
(503) 844-4066  
FAX (503) 537-0735

**Washington****Sultan Facility**

14128 339<sup>th</sup> Ave. SE  
Sultan, WA 98294  
(888) 364-2378  
FAX (360) 793-2536



**Party Requesting the Test**

<b>Company Name:</b>	INTERMEC Technologies Corporation
<b>Address:</b>	6001 36th Avenue West
<b>City, State, Zip:</b>	Everett, WA 98203-1264
<b>Test Requested By:</b>	Katie Molina
<b>Model:</b>	BTM311
<b>First Date of Test:</b>	10-11-2004
<b>Last Date of Test:</b>	11-5-2004
<b>Receipt Date of Samples:</b>	10-11-2004
<b>Equipment Design Stage:</b>	Production
<b>Equipment Condition:</b>	No visual damage.

**Information Provided by the Party Requesting the Test**

<b>Clocks/Oscillators:</b>	Not Provided
<b>I/O Ports:</b>	Not Provided.

**Functional Description of the EUT (Equipment Under Test):**

The EUT is a Bluetooth radio. It is intended for use in handheld scanners and terminals. It allows the user to transmit data obtained via the handheld unit to a host device.

**Client Justification for EUT Selection:**

The product is a representative production sample.

**Client Justification for Test Selection:**

These tests satisfy the requirements for both US and European markets. Modular approval is sought.

<b>Equipment modifications</b>					
<b>Item</b>	<b>Test</b>	<b>Date</b>	<b>Modification</b>	<b>Note</b>	<b>Disposition of EUT</b>
1	Spurious Radiated Emissions	10/12/2004	No EMI suppression devices were added or modified during this test.	Same configuration as delivered.	EUT remained at Northwest EMC.
2	Output Power	11/01/2004	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.
3	Spurious Conducted Emissions	11/01/2004	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.
4	Band Edge Compliance	11/01/2004	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.
5	Occupied Bandwidth	11/01/2004	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.
6	Power Spectral Density	11/01/2004	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.
7	AC Powerline Conducted Emissions	11/05/2004	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.

**Justification**

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

**Channels in Specified Band Investigated:**

High
Mid
Low

**Operating Modes Investigated:**

No Hop
--------

**Data Rates Investigated:**

Maximum
---------

**Output Power Setting(s) Investigated:**

Maximum
---------

**Power Input Settings Investigated:**

120 VAC, 60 Hz.
-----------------

**Software\Firmware Applied During Test**

<b>Exercise software</b>	BlueTest	<b>Version</b>	11/18/03
<b>Description</b>			
The system was tested using special test software on the 700C that controlled channel and operating mode of the Bluetooth radio.			

**EUT and Peripherals**

<b>Description</b>	<b>Manufacturer</b>	<b>Model/Part Number</b>	<b>Serial Number</b>
EUT- Bluetooth Radio	Actiontec	BTM311 (P/N 855-052-001)	43600013
Host - Handheld Computer	Intermec Technologies Corporation	700C	33500300001
Power Adapter	Elpac Power Systems	FW1812	014868

**Cables**

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Power	No	2m	No	Host - Handheld Computer	Power Adapter
AC Power	No	1.5m	No	AC Mains	Power Adapter

**Measurement Equipment**

Description	Manufacturer	Model	Identifier	Last Cal	Interval
Spectrum Analyzer	Tektronix	2784	AAO	02/26/2003	24 mo

**Test Description**


**Requirement:** Per an FCC Interpretation # 20021209-001, "Bluetooth devices may apply under the rules in 15.247 as either a Digital Transmission System (DTS), a Frequency Hopping System (FHSS), or a Hybrid System whichever provides an advantage to the grantee as long as all the requirements are met... The hopping function (*of a hybrid*) must be a true hopping system, as described in Section 15.247(a)(1)."


As a DTS system, the minimum 6 dB bandwidth is 500 kHz.


As a FHSS, the maximum 20dB bandwidth of the hopping channel is equal to 1.5 times the channel separation (see 47 CFR 15.247(a)(1)). For example, channel separation for Bluetooth is 1 MHz, therefore the maximum 20 dB bandwidth is 1.5 MHz.

As a Hybrid, it must meet the FHSS requirement as described above.

**Configuration:** The occupied bandwidth was measured with the EUT set to low, medium, and high transmit frequencies. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at its maximum data rate in a no hop mode.

**Completed by:**


NORTHWEST EMC		EMISSIONS DATA SHEET		Rev BETA 01/30/01	
EUT: BTM311		Work Order: INMC0167			
Serial Number: 43600013		Date: 11/01/01			
Customer: INTERMEC Technologies Corporation		Temperature: 70 °F			
Attendees: None		Tested by: Greg Kiemel		Humidity: 47% RH	
Customer Ref. No.:		Power: 120VAC/60Hz		Job Site: EV06	
TEST SPECIFICATIONS					
Specification: 47 CFR 15.247(a)		Year: 2004		Method: DA 00-705, ANSI C63.4	
				Year: 2003	
SAMPLE CALCULATIONS					
COMMENTS					
EUT OPERATING MODES					
Modulated by PRBS at maximum data rate					
DEVIATIONS FROM TEST STANDARD					
None					
REQUIREMENTS					
Bluetooth can be authorized as either a Frequency Hopping System (FHSS), a Digital Transmission System (DTS), or a Hybrid System.					
As a FHSS, the maximum 20dB bandwidth of the hopping channel is equal to 1.5 times the channel separation. For example, channel separation for Bluetooth is 1 MHz, therefore the maximum 20 dB bandwidth is 1.5 MHz.					
As a DTS system, the minimum 6 dB bandwidth is 500 kHz. As a Hybrid, it must meet the FHSS requirement as described above.					
RESULTS		BANDWIDTH			
Pass		0.846 MHz			
SIGNATURE					
<div style="display: flex; justify-content: space-between; align-items: center;"> <div>Tested By: _____</div> <div></div> </div>					
DESCRIPTION OF TEST					
20dB Bandwidth - Low Channel					

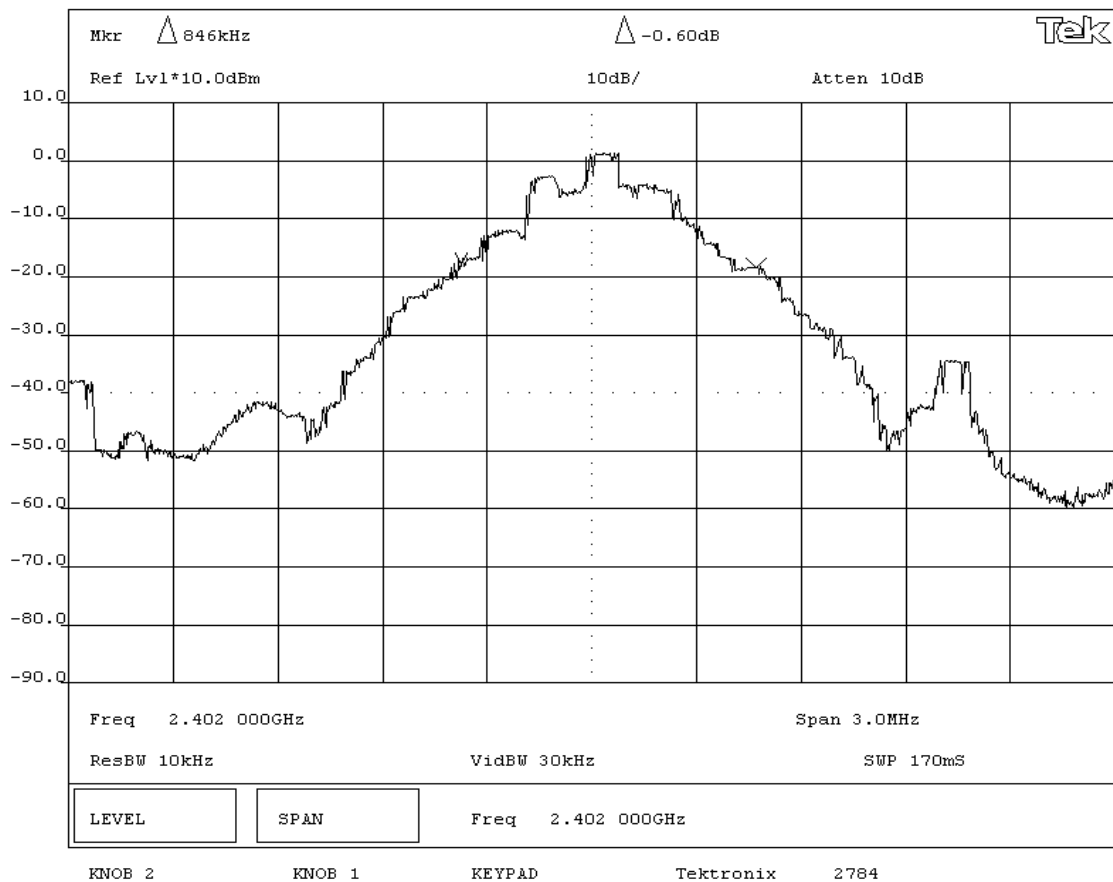

NORTHWEST  
**EMC****EMISSIONS DATA SHEET**Rev BETA  
01/30/01

EUT: BTM311	Work Order: INMC0167
Serial Number: 43600013	Date: 11/01/01
Customer: INTERMEC Technologies Corporation	Temperature: 70 °F
Attendees: None	Tested by: Greg Kiemel
Customer Ref. No.:	Power: 120VAC/60Hz
	Humidity: 47% RH
	Job Site: EV06

**TEST SPECIFICATIONS**

Specification: 47 CFR 15.247(a)	Year: 2004	Method: DA 00-705, ANSI C63.4	Year: 2003
---------------------------------	------------	-------------------------------	------------

**SAMPLE CALCULATIONS****COMMENTS****EUT OPERATING MODES**

Modulated by PRBS at maximum data rate

**DEVIATIONS FROM TEST STANDARD**

None

**REQUIREMENTS**

Bluetooth can be authorized as either a Frequency Hopping System (FHSS), a Digital Transmission System (DTS), or a Hybrid System.


As a FHSS, the maximum 20dB bandwidth of the hopping channel is equal to 1.5 times the channel separation. For example, channel separation for Bluetooth is 1 MHz, therefore the maximum 20 dB bandwidth is 1.5 MHz.

As a DTS system, the minimum 6 dB bandwidth is 500 kHz. As a Hybrid, it must meet the FHSS requirement as described above.

**RESULTS****BANDWIDTH**

Pass

1.017 MHz

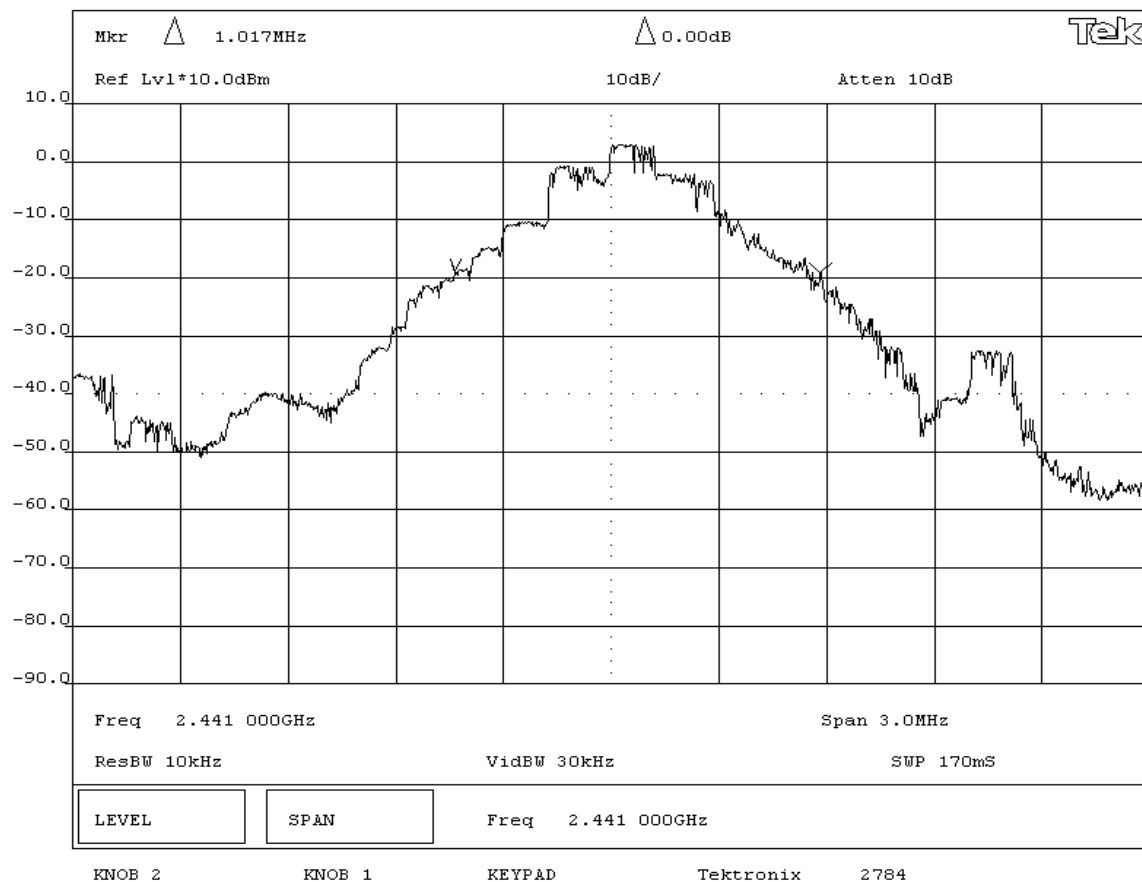**SIGNATURE**Tested By: **DESCRIPTION OF TEST****20dB Bandwidth - Mid Channel**

## EMISSIONS DATA SHEET

Rev BETA  
01/30/01

EUT: BTM311	Work Order: INMC0167
Serial Number: 43600013	Date: 11/01/01
Customer: INTERMEC Technologies Corporation	Temperature: 70 °F
Attendees: None	Tested by: Greg Kiemel
Customer Ref. No.:	Power: 120VAC/60Hz
	Humidity: 47% RH
	Job Site: EV06

## TEST SPECIFICATIONS

Specification: 47 CFR 15.247(a)	Year: 2004	Method: DA 00-705, ANSI C63.4	Year: 2003
---------------------------------	------------	-------------------------------	------------

## SAMPLE CALCULATIONS

## COMMENTS

## EUT OPERATING MODES

Modulated by PRBS at maximum data rate

## DEVIATIONS FROM TEST STANDARD

None

## REQUIREMENTS

Bluetooth can be authorized as either a Frequency Hopping System (FHSS), a Digital Transmission System (DTS), or a Hybrid System.

As a FHSS, the maximum 20dB bandwidth of the hopping channel is equal to 1.5 times the channel separation. For example, channel separation for Bluetooth is 1 MHz, therefore the maximum 20 dB bandwidth is 1.5 MHz.

As a DTS system, the minimum 6 dB bandwidth is 500 kHz. As a Hybrid, it must meet the FHSS requirement as described above.

## RESULTS

## BANDWIDTH

Pass


0.936 MHz

## SIGNATURE


Tested By: 

## DESCRIPTION OF TEST

20dB Bandwidth - High Channel

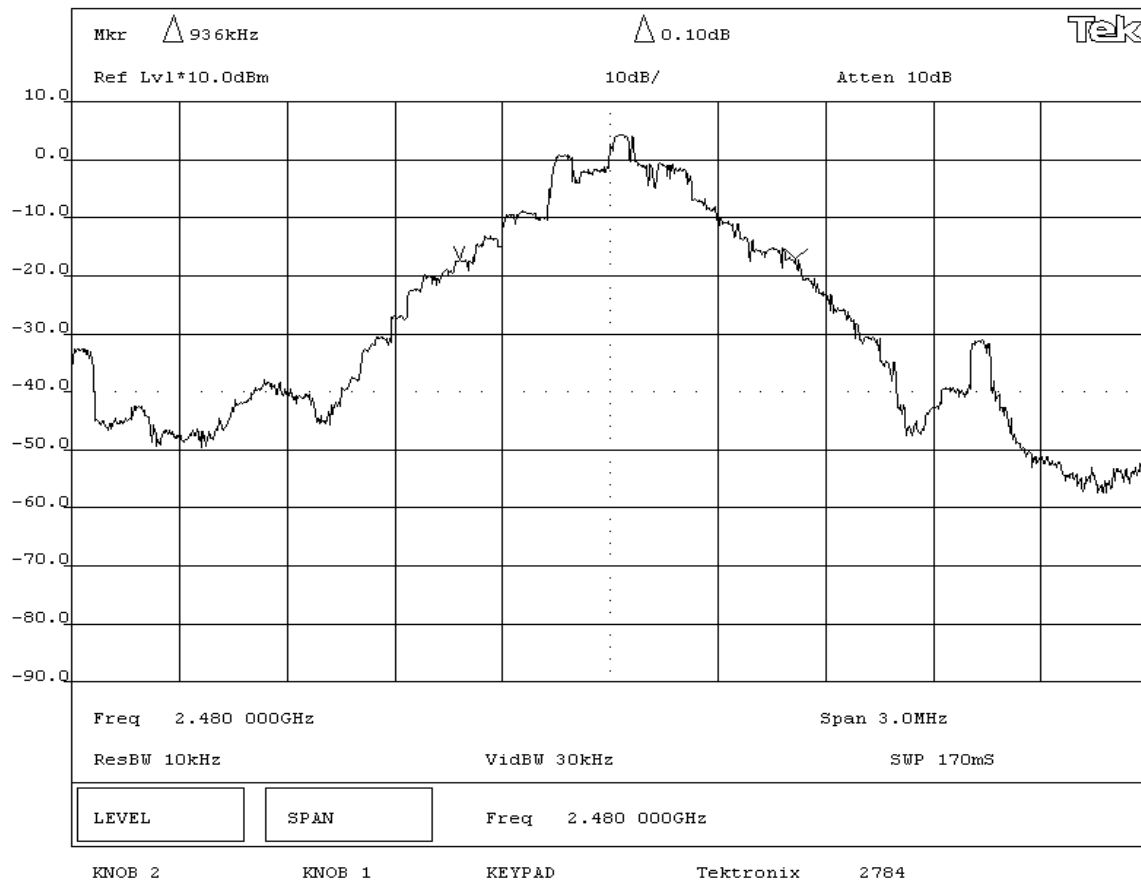



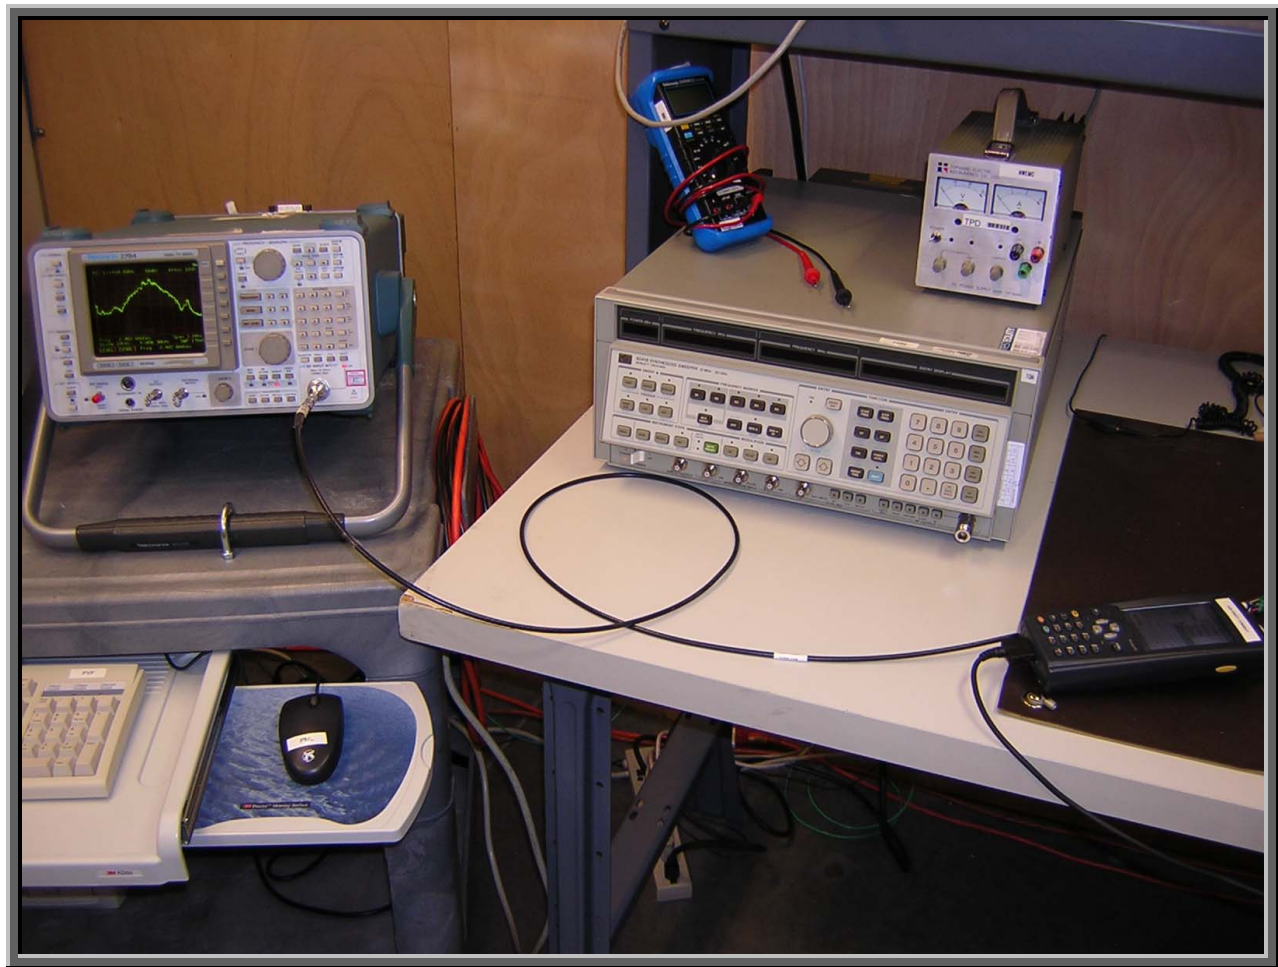

**Justification**

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

**Channels in Specified Band Investigated:**

High
Mid
Low

**Operating Modes Investigated:**

No Hop
--------

**Data Rates Investigated:**

Maximum
---------

**Output Power Setting(s) Investigated:**

Maximum
---------

**Power Input Settings Investigated:**

120 VAC, 60 Hz.
-----------------

**Software\Firmware Applied During Test**

<b>Exercise software</b>	BlueTest	<b>Version</b>	11/18/03
<b>Description</b>			
The system was tested using special test software on the 700C that controlled channel and operating mode of the Bluetooth radio.			

**EUT and Peripherals**

<b>Description</b>	<b>Manufacturer</b>	<b>Model/Part Number</b>	<b>Serial Number</b>
EUT- Bluetooth Radio	Actiontec	BTM311 (P/N 855-052-001)	43600013
Host - Handheld Computer	Intermec Technologies Corporation	700C	33500300001
Power Adapter	Elpac Power Systems	FW1812	014868

**Cables**

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Power	No	2m	No	Host - Handheld Computer	Power Adapter
AC Power	No	1.5m	No	AC Mains	Power Adapter

**Measurement Equipment**

Description	Manufacturer	Model	Identifier	Last Cal	Interval
Power Meter	Hewlett Packard	E4418A	SPA	07/23/2004	24 mo
Power Sensor	Hewlett-Packard	8481H	SPB	07/23/2004	24 mo
RF Detector	RLC Electronics	CR-133-R	ZZA	NCR	NA
Oscilloscope	Tektronix	TDS 3052	TOF	07/21/2004	12 mo
Signal Generator	Hewlett Packard	8341B	TGN	01/23/2004	13 mo

**Test Description**

**Requirement:** Per 47 CFR 15.247(b), the maximum peak output power must not exceed 1 Watt.

**Configuration:** The peak output power was measured with the EUT set to low, medium, and high transmit frequencies. The EUT was transmitting at its maximum output power. The data rate of the radio was varied to determine the level that produced the highest output power.

The measurement was made using a direct connection between the RF output of the EUT and a RF detector diode. The DC output of the diode was measured with the oscilloscope. The signal generator, tuned to the transmit frequency, was then substituted for the EUT. The CW output of the signal generator was adjusted until the DC output of the RF detector diode match the peak level produced when connected to the EUT. To further reduce measurement error, the power meter and sensor were then used to measure the output power level of the signal generator.


**De Facto EIRP Limit:** Per 47 CFR 15.247 (b)(1-3), the EUT meets the de facto EIRP limit of +36dBm.

Completed by:




NORTHWEST

**EMC****EMISSIONS DATA SHEET**Rev BETA  
01/30/01

EUT:	BTM311		Work Order:	INMC0167	
Serial Number:	43600013		Date:	11/01/01	
Customer:	INTERMEC Technologies Corporation		Temperature:	70 °F	
Attendees:	None	Tested by:	Greg Kiemel	Humidity:	47% RH
Customer Ref. No.:		Power:	120VAC/60Hz	Job Site:	EV06
<b>TEST SPECIFICATIONS</b>					
Specification:	47 CFR 15.247(b)	Year:	2004	Method:	DA 00-705, ANSI C63.4
				Year:	2003
<b>SAMPLE CALCULATIONS</b>					
<b>COMMENTS</b>					
<b>EUT OPERATING MODES</b>					
Modulated by PRBS at maximum data rate					
<b>DEVIATIONS FROM TEST STANDARD</b>					
None					
<b>REQUIREMENTS</b>					
Maximum peak conducted output power does not exceed 1 Watt					
<b>RESULTS</b>		<b>AMPLITUDE</b>			
Pass		8.69 mW			
<b>SIGNATURE</b>					
<div style="display: flex; justify-content: space-between;"> <div>Tested By: _____</div> <div></div> </div>					
<b>DESCRIPTION OF TEST</b>					
<b>Output Power</b>					

Frequency (MHz)	Peak Power Measured w/ Diode Detector (dBm)	Peak Power (mW)	Spec (mW)
2402.0	5.63	3.66	1000.0
2441.0	7.58	5.73	1000.0
2480.0	9.39	8.69	1000.0

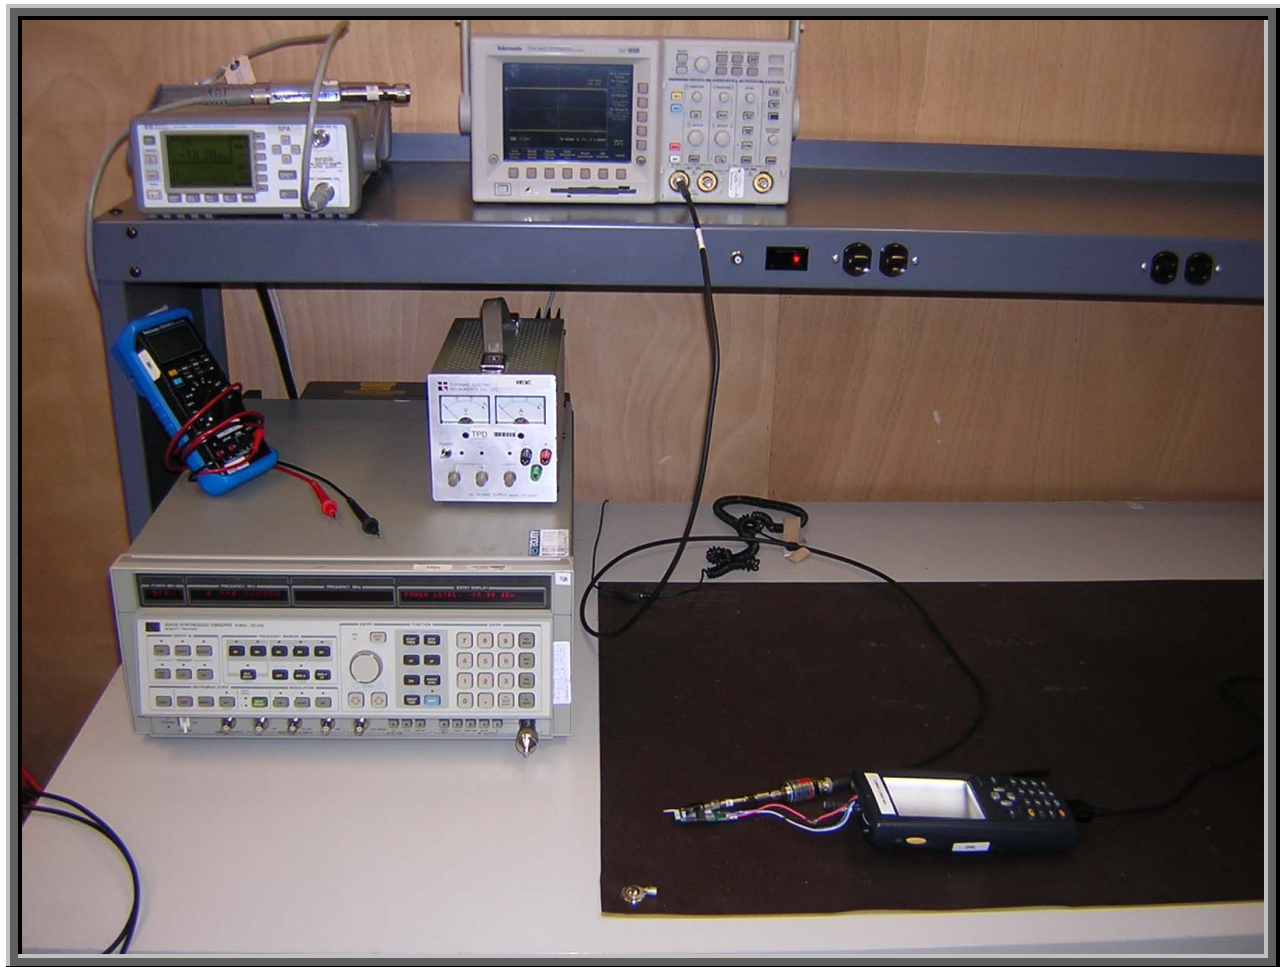

**Justification**

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

**Channels in Specified Band Investigated:**

High
Mid
Low

**Operating Modes Investigated:**

No Hop
--------

**Data Rates Investigated:**

Maximum
---------

**Output Power Setting(s) Investigated:**

Maximum
---------

**Power Input Settings Investigated:**

120 VAC, 60 Hz.
-----------------

**Software\Firmware Applied During Test**

<b>Exercise software</b>	BlueTest	<b>Version</b>	11/18/03
<b>Description</b>			
The system was tested using special test software on the 700C that controlled channel and operating mode of the Bluetooth radio.			

**EUT and Peripherals**

<b>Description</b>	<b>Manufacturer</b>	<b>Model/Part Number</b>	<b>Serial Number</b>
EUT- Bluetooth Radio	Actiontec	BTM311 (P/N 855-052-001)	43600013
Host - Handheld Computer	Intermec Technologies Corporation	700C	33500300001
Power Adapter	Elpac Power Systems	FW1812	014868

**Cables**

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Power	No	2m	No	Host - Handheld Computer	Power Adapter
AC Power	No	1.5m	No	AC Mains	Power Adapter


**Measurement Equipment**

Description	Manufacturer	Model	Identifier	Last Cal	Interval
Spectrum Analyzer	Tektronix	2784	AAO	02/26/2003	24 mo

**Test Description**

**Requirement:** Per 47 CFR 15.247(d), in any 100 kHz bandwidth outside the authorized band, the maximum level of radio frequency power must be at least 20dB down from the highest emission level within the authorized band. The measurement is made with the spectrum analyzer's resolution bandwidth set to 100 kHz, and the video bandwidth set to greater than or equal to the resolution bandwidth.

**Configuration:** The spurious RF conducted emissions at the edges of the authorized band were measured with the EUT set to low and high transmit frequencies. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at its maximum data rate in a no hop mode. The channels closest to the band edges were selected. The spectrum was scanned across each band edge from 5 MHz below the band edge to 5 MHz above the band edge.

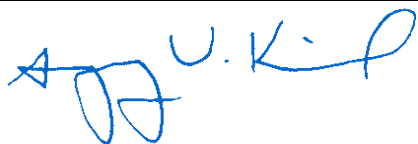**Completed by:**




NORTHWEST  
**EMC****EMISSIONS DATA SHEET**Rev BETA  
01/30/01

EUT: BTM311			Work Order: INMC0167		
Serial Number: 43600013			Date: 11/01/01		
Customer: INTERMEC Technologies Corporation			Temperature: 70 °F		
Attendees: None			Humidity: 47% RH		
Customer Ref. No.:		Tested by: Greg Kiemel	Job Site: EV06		
		Power: 120VAC/60Hz			

**TEST SPECIFICATIONS**

Specification: 47 CFR 15.247(d)	Year: 2004	Method: DA 00-705, ANSI C63.4	Year: 2003
---------------------------------	------------	-------------------------------	------------

**SAMPLE CALCULATIONS****COMMENTS****EUT OPERATING MODES**

Modulated by PRBS at maximum data rate

**DEVIATIONS FROM TEST STANDARD**


None

**REQUIREMENTS**

Maximum level of any spurious emission at the edge of the authorized band is 20 dB down from the fundamental

**RESULTS****AMPLITUDE**

Pass -39.9 dB

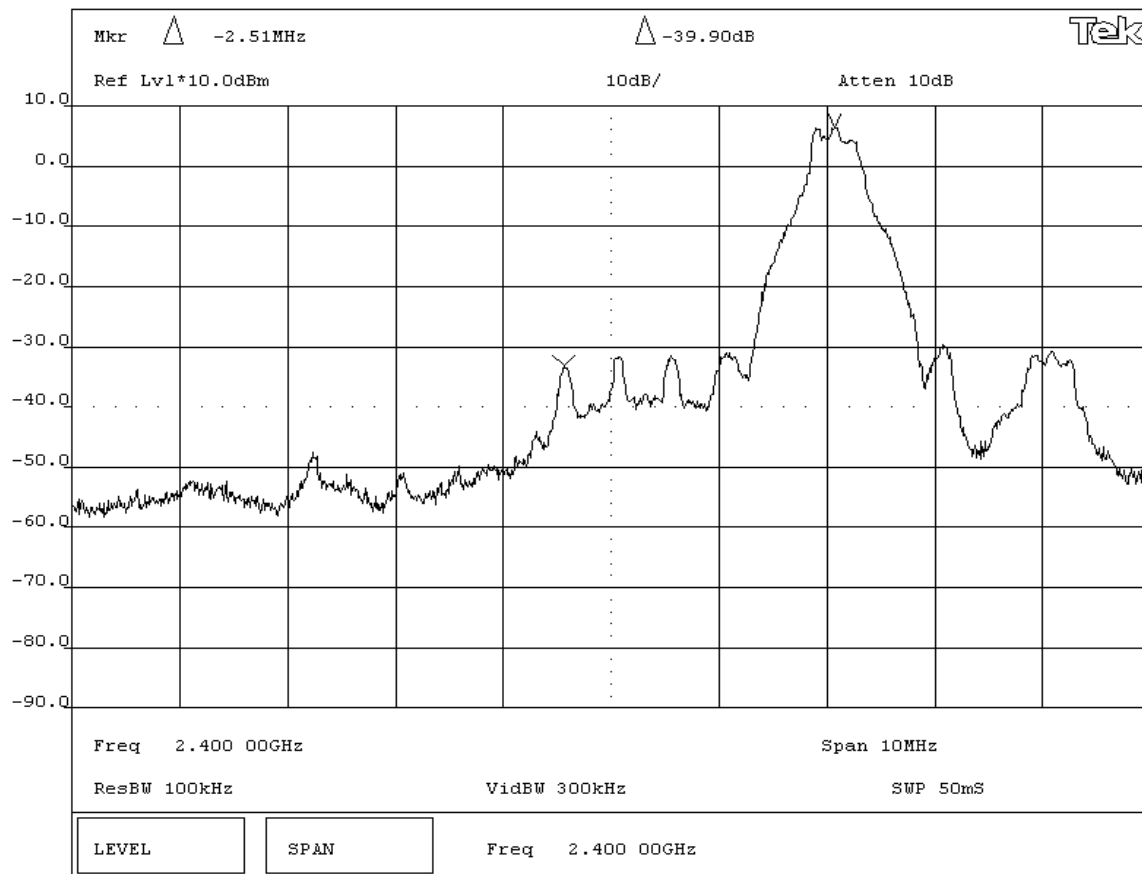**SIGNATURE**Tested By: **DESCRIPTION OF TEST****Band Edge Compliance - Low Channel**


KNOB 2


KNOB 1


KEYPAD

Tektronix

2784

NORTHWEST EMC		EMISSIONS DATA SHEET		Rev BETA 01/30/01	
EUT: BTM311		Work Order: INMC0167			
Serial Number: 43600013		Date: 11/01/01			
Customer: INTERMEC Technologies Corporation		Temperature: 70 °F			
Attendees: None		Tested by: Greg Kiemel		Humidity: 47% RH	
Customer Ref. No.:		Power: 120VAC/60Hz		Job Site: EV06	
TEST SPECIFICATIONS					
Specification: 47 CFR 15.247(d)		Year: 2004		Method: DA 00-705, ANSI C63.4	
				Year: 2003	
SAMPLE CALCULATIONS					
COMMENTS					
EUT OPERATING MODES					
Modulated by PRBS at maximum data rate					
DEVIATIONS FROM TEST STANDARD					
None					
REQUIREMENTS					
Maximum level of any spurious emission at the edge of the authorized band is 20 dB down from the fundamental					
RESULTS					
AMPLITUDE					
Pass -48.7 dB					
SIGNATURE					
					
Tested By: _____					
DESCRIPTION OF TEST					
Band Edge Compliance - High Channel					

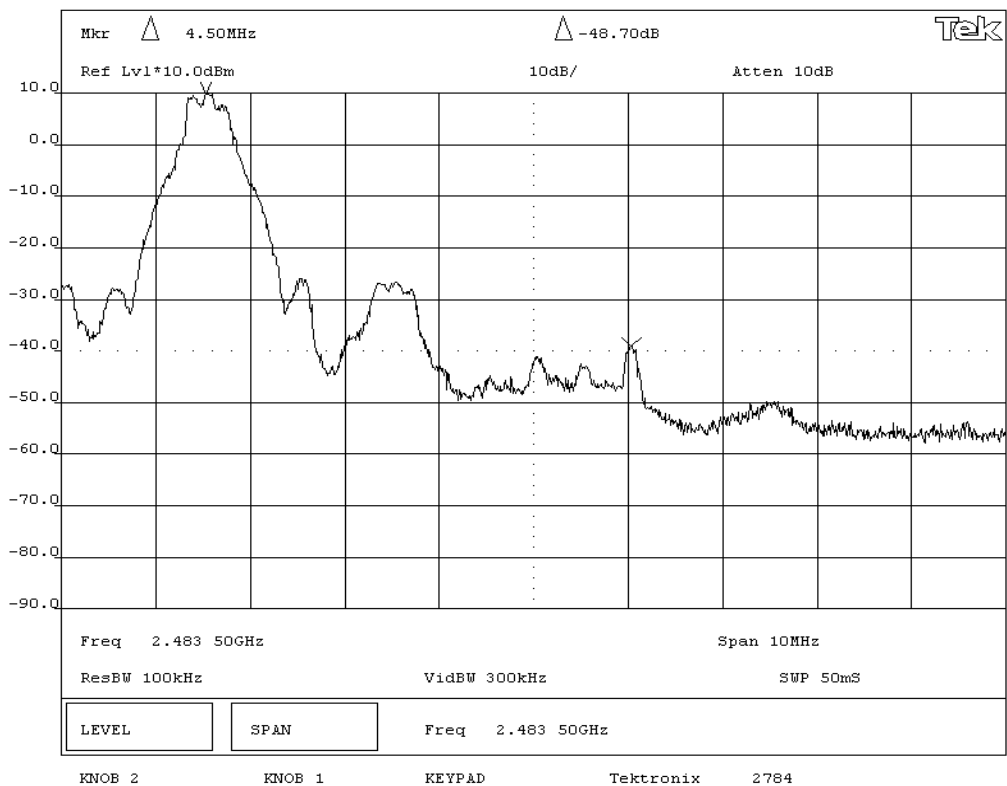

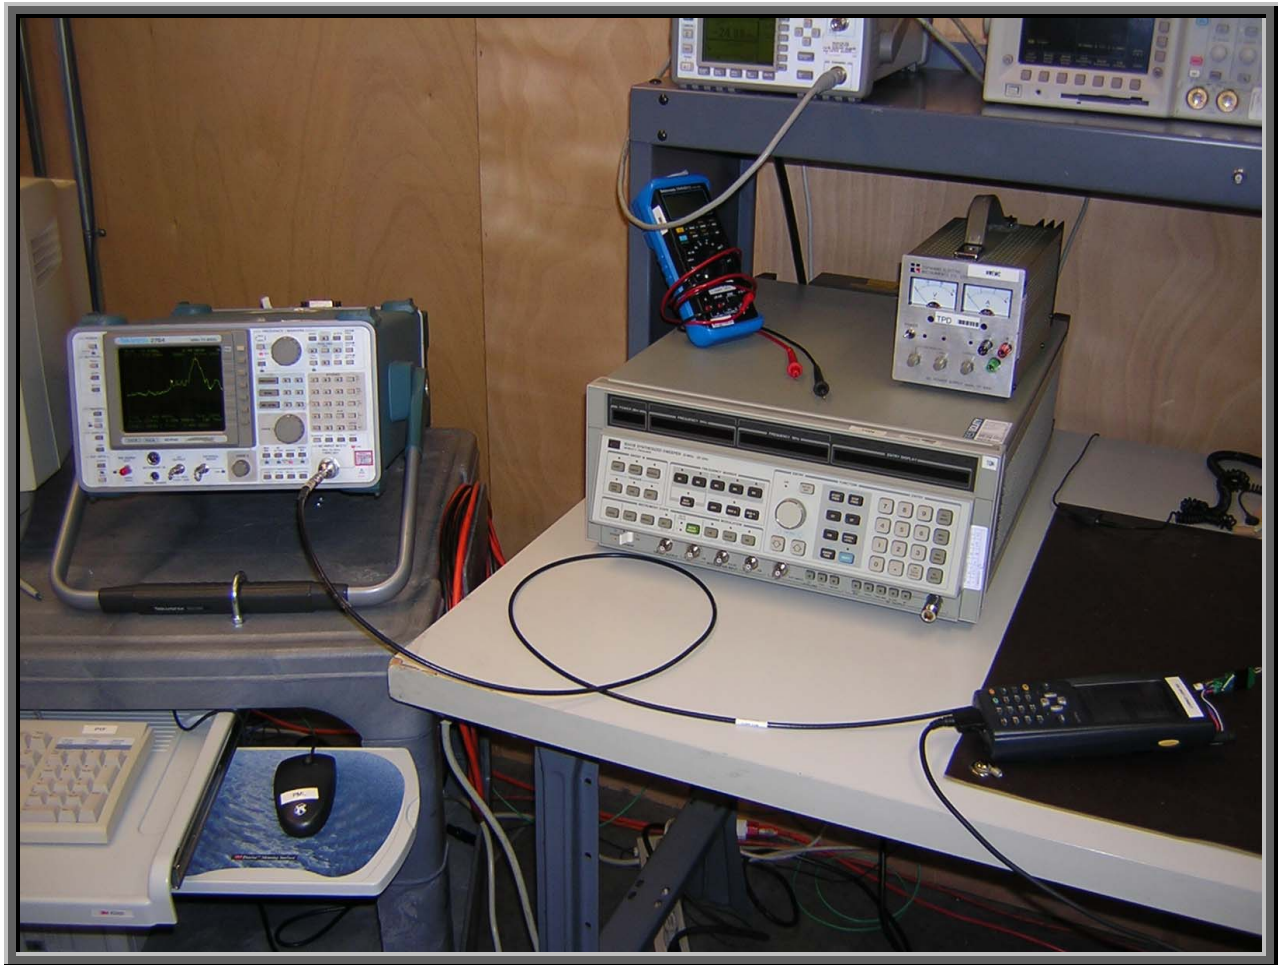

**Justification**

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

**Channels in Specified Band Investigated:**

High
Mid
Low

**Operating Modes Investigated:**

No Hop
--------

**Data Rates Investigated:**

Maximum
---------

**Output Power Setting(s) Investigated:**

Maximum
---------

**Power Input Settings Investigated:**

120 VAC, 60 Hz.
-----------------

**Software\Firmware Applied During Test**

<b>Exercise software</b>	BlueTest	<b>Version</b>	11/18/03
<b>Description</b>			
The system was tested using special test software on the 700C that controlled channel and operating mode of the Bluetooth radio.			

**EUT and Peripherals**

Description	Manufacturer	Model/Part Number	Serial Number
EUT- Bluetooth Radio	Actiontec	BTM311 (P/N 855-052-001)	43600013
Host - Handheld Computer	Intermec Technologies Corporation	700C	33500300001
Power Adapter	Elpac Power Systems	FW1812	014868

**Cables**

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Power	No	2m	No	Host - Handheld Computer	Power Adapter
AC Power	No	1.5m	No	AC Mains	Power Adapter


**Measurement Equipment**

Description	Manufacturer	Model	Identifier	Last Cal	Interval
Spectrum Analyzer	Tektronix	2784	AAO	02/26/2003	24 mo

**Test Description**

**Requirement:** Per 47 CFR 15.247(d), in any 100 kHz bandwidth outside the authorized band, the maximum level of radio frequency power must be at least 20dB down from the highest emission level within the authorized band. The measurement is made with the spectrum analyzer's resolution bandwidth set to 100 kHz, and the video bandwidth set to greater than or equal to the resolution bandwidth.

**Configuration:** The spurious RF conducted emissions were measured with the EUT set to low, medium, and high transmit frequencies. The measurements were made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at its maximum data rate in a no hop mode. For each transmit frequency, the spectrum was scanned throughout the specified frequency.

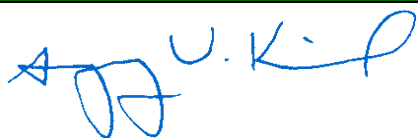**Completed by:**


NORTHWEST  
EMC

## EMISSIONS DATA SHEET

Rev BETA  
01/30/01

EUT: BTM311		Work Order: INMC0167
Serial Number: 43600013		Date: 11/01/01
Customer: INTERMEC Technologies Corporation		Temperature: 70 °F
Attendees: None	Tested by: Greg Kiemel	Humidity: 47% RH
Customer Ref. No.:	Power: 120VAC/60Hz	Job Site: EV06

## TEST SPECIFICATIONS

Specification: 47 CFR 15.247(d)	Year: 2004	Method: DA 00-705, ANSI C63.4	Year: 2003
---------------------------------	------------	-------------------------------	------------

## SAMPLE CALCULATIONS

## COMMENTS

## EUT OPERATING MODES

Modulated by PRBS at maximum data rate

## DEVIATIONS FROM TEST STANDARD

None

## REQUIREMENTS

Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental

## RESULTS


Pass


## SIGNATURE


Tested By: 

## DESCRIPTION OF TEST


Antenna Conducted Spurious Emissions - Low Channel 0MHz-3GHz

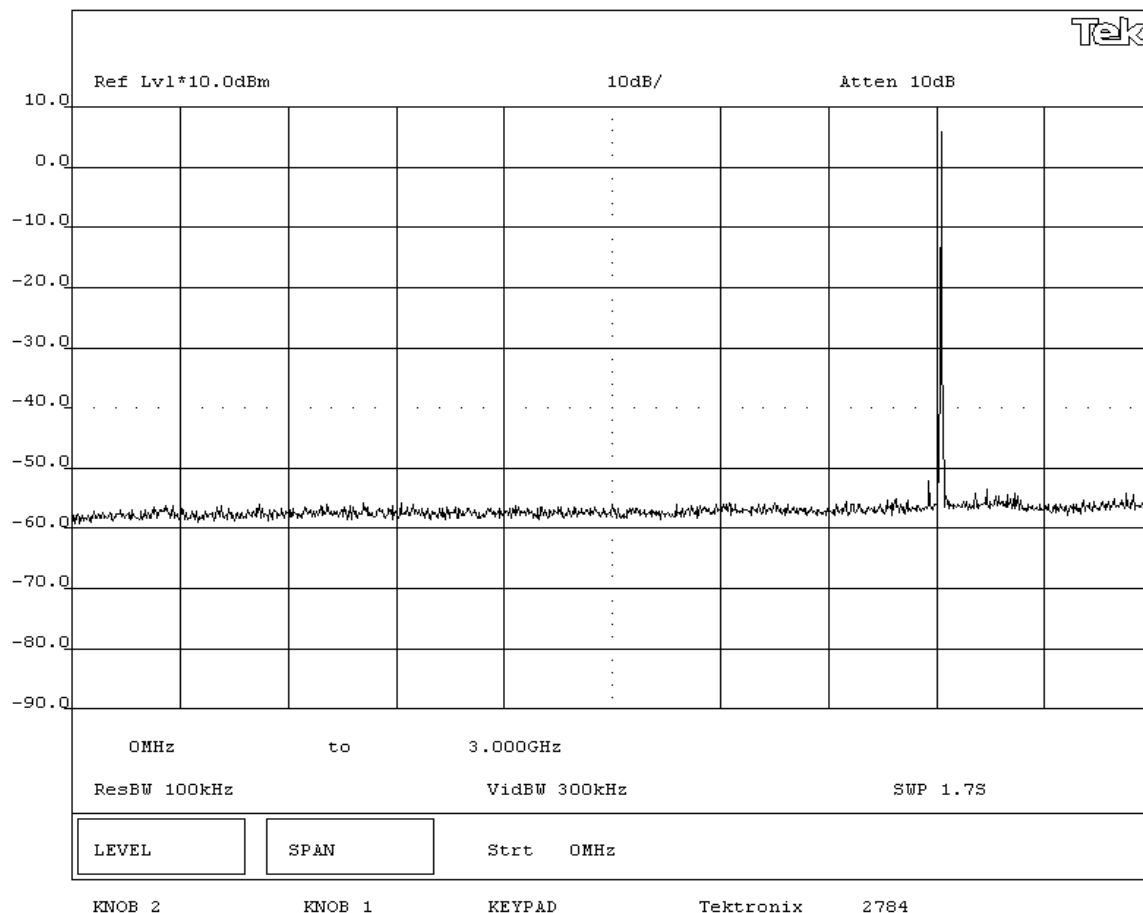



NORTHWEST <b>EMC</b>		<b>EMISSIONS DATA SHEET</b>		Rev BETA 01/30/01	
EUT: BTM311				Work Order: INMC0167	
Serial Number: 43600013				Date: 11/01/01	
Customer: INTERMEC Technologies Corporation				Temperature: 70 °F	
Attendees: None		Tested by: Greg Kiemel		Humidity: 47% RH	
Customer Ref. No.:		Power: 120VAC/60Hz		Job Site: EV06	
<b>TEST SPECIFICATIONS</b>					
Specification: 47 CFR 15.247(d)		Year: 2004		Method: DA 00-705, ANSI C63.4	
				Year: 2003	
<b>SAMPLE CALCULATIONS</b>					
<b>COMMENTS</b>					
<b>EUT OPERATING MODES</b>					
Modulated by PRBS at maximum data rate					
<b>DEVIATIONS FROM TEST STANDARD</b>					
None					
<b>REQUIREMENTS</b>					
Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental					
<b>RESULTS</b>					
Pass					
<b>SIGNATURE</b>					
<div style="display: flex; justify-content: space-between; align-items: center;"> <div>Tested By: _____</div> <div></div> </div>					
<b>DESCRIPTION OF TEST</b>					
<b>Antenna Conducted Spurious Emissions - Low Channel 3GHz-6.5GHz</b>					

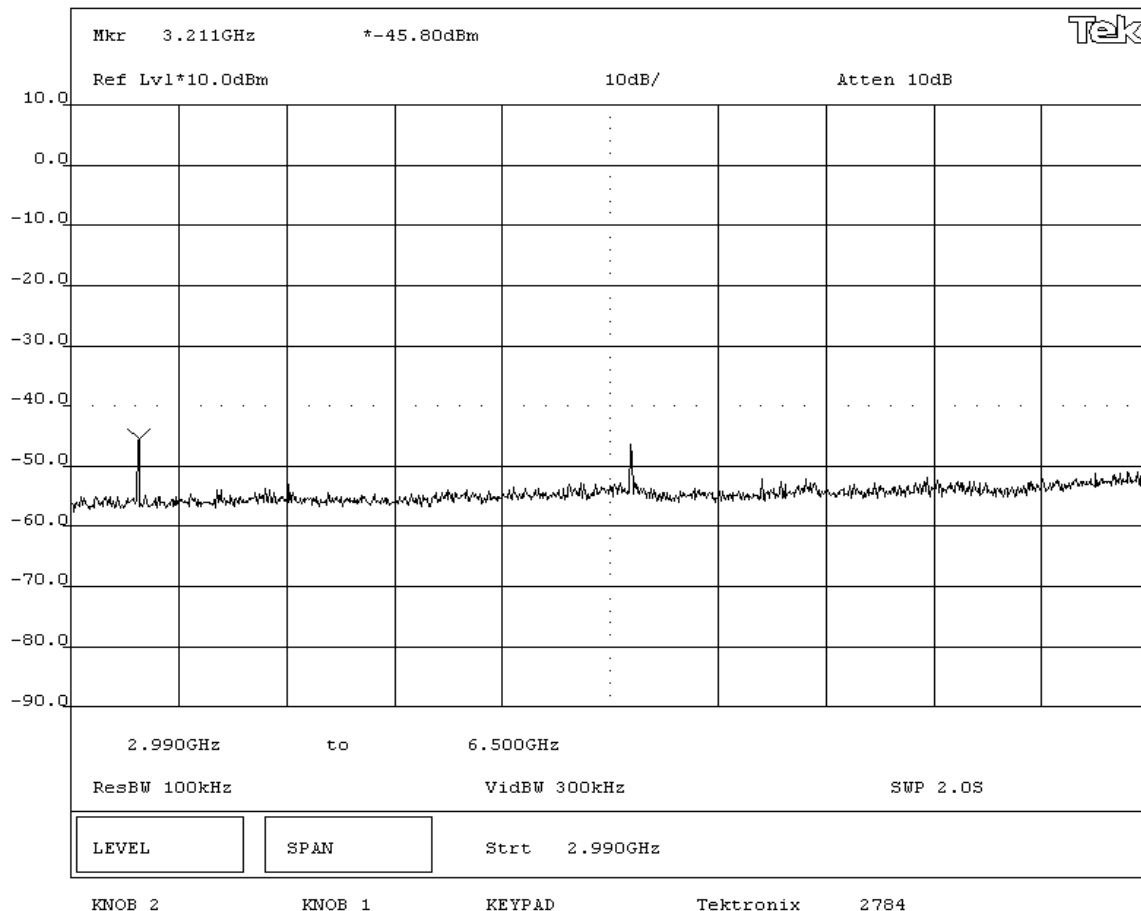




NORTHWEST EMC		EMISSIONS DATA SHEET		Rev BETA 01/30/01	
EUT: BTM311		Work Order: INMC0167			
Serial Number: 43600013		Date: 11/01/01			
Customer: INTERMEC Technologies Corporation		Temperature: 70 °F			
Attendees: None		Tested by: Greg Kiemel		Humidity: 47% RH	
Customer Ref. No.:		Power: 120VAC/60Hz		Job Site: EV06	
TEST SPECIFICATIONS					
Specification: 47 CFR 15.247(d)		Year: 2004		Method: DA 00-705, ANSI C63.4	
				Year: 2003	
SAMPLE CALCULATIONS					
COMMENTS					
EUT OPERATING MODES					
Modulated by PRBS at maximum data rate					
DEVIATIONS FROM TEST STANDARD					
None					
REQUIREMENTS					
Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental					
RESULTS					
Pass					
SIGNATURE					
<div style="text-align: center;">             Tested By: _____         </div>					
DESCRIPTION OF TEST					
<b>Antenna Conducted Spurious Emissions - Low Channel 6.5GHz-15GHz</b>					

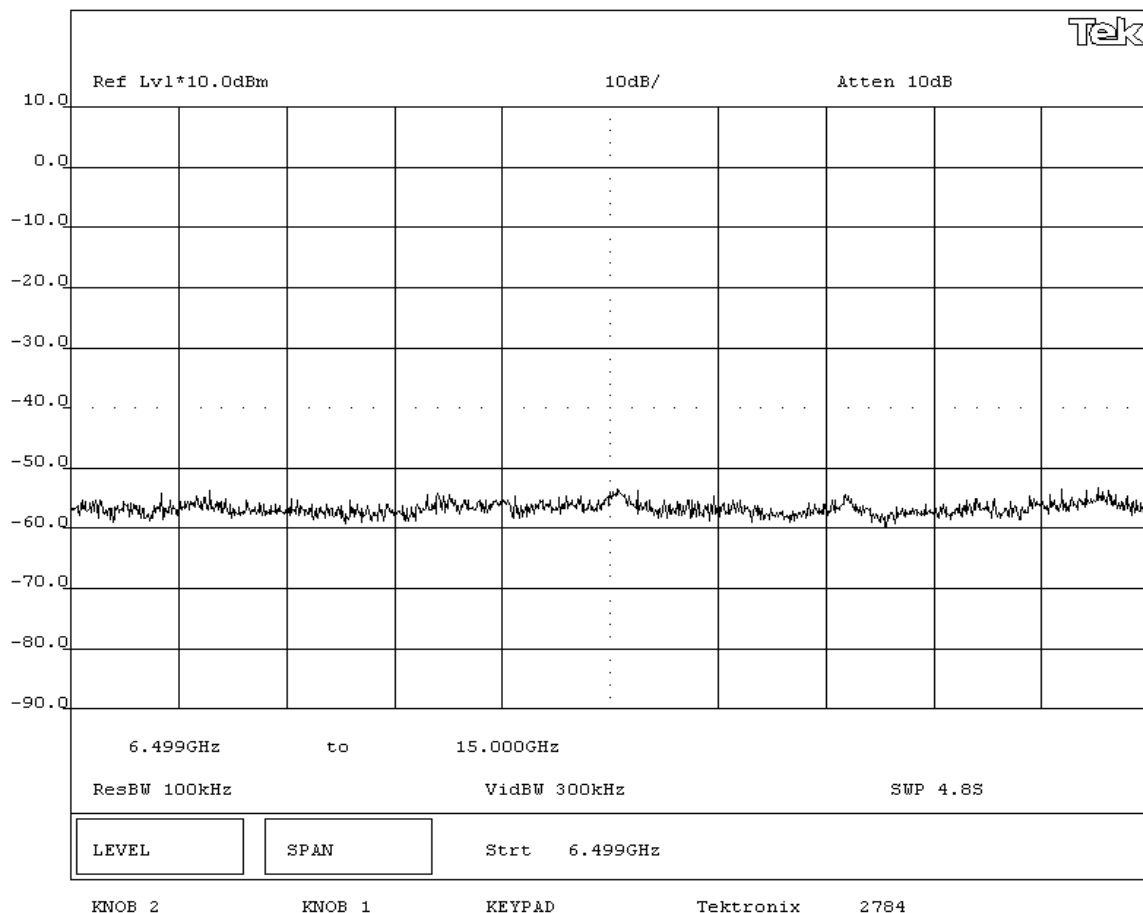

NORTHWEST <b>EMC</b>		<b>EMISSIONS DATA SHEET</b>		Rev BETA 01/30/01	
EUT: BTM311			Work Order: INMC0167		
Serial Number: 43600013			Date: 11/01/01		
Customer: INTERMEC Technologies Corporation			Temperature: 70 °F		
Attendees: None		Tested by: Greg Kiemel		Humidity: 47% RH	
Customer Ref. No.:		Power: 120VAC/60Hz		Job Site: EV06	
<b>TEST SPECIFICATIONS</b>					
Specification: 47 CFR 15.247(d)		Year: 2004		Method: DA 00-705, ANSI C63.4	
				Year: 2003	
<b>SAMPLE CALCULATIONS</b>					
<b>COMMENTS</b>					
<b>EUT OPERATING MODES</b>					
Modulated by PRBS at maximum data rate					
<b>DEVIATIONS FROM TEST STANDARD</b>					
None					
<b>REQUIREMENTS</b>					
Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental					
<b>RESULTS</b>					
Pass					
<b>SIGNATURE</b>					
<div style="text-align: center;">   Tested By: _____ </div>					
<b>DESCRIPTION OF TEST</b>					
<b>Antenna Conducted Spurious Emissions - Low Channel 15GHz - 25GHz</b>					

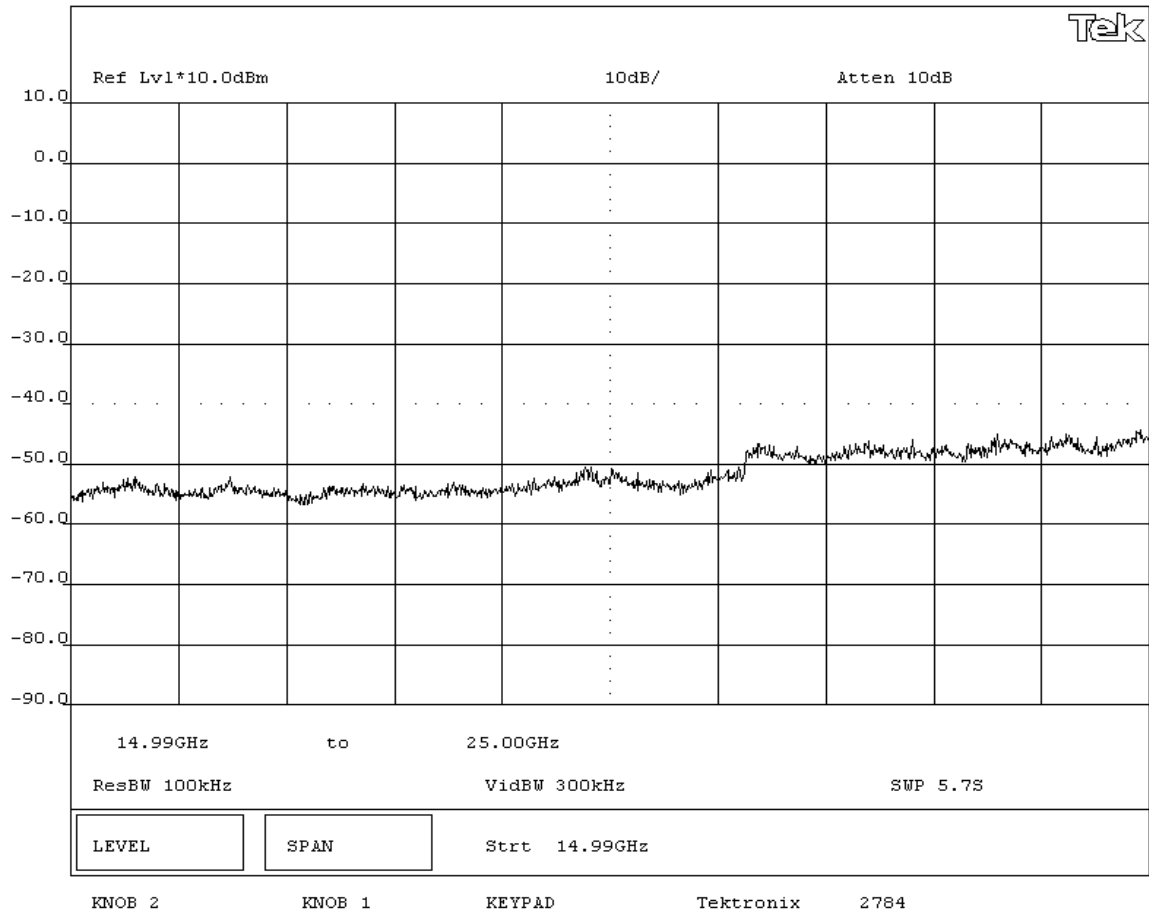

NORTHWEST  
**EMC****EMISSIONS DATA SHEET**Rev BETA  
01/30/01

EUT: BTM311			Work Order: INMC0167		
Serial Number: 43600013			Date: 11/01/01		
Customer: INTERMEC Technologies Corporation			Temperature: 70 °F		
Attendees: None			Humidity: 47% RH		
Customer Ref. No.:			Job Site: EV06		
Tested by: Greg Kiemel			Power: 120VAC/60Hz		

**TEST SPECIFICATIONS**

Specification: 47 CFR 15.247(d)	Year: 2004	Method: DA 00-705, ANSI C63.4	Year: 2003
---------------------------------	------------	-------------------------------	------------

**SAMPLE CALCULATIONS****COMMENTS****EUT OPERATING MODES**

Modulated by PRBS at maximum data rate

**DEVIATIONS FROM TEST STANDARD**


None


**REQUIREMENTS**


Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental

**RESULTS**

Pass

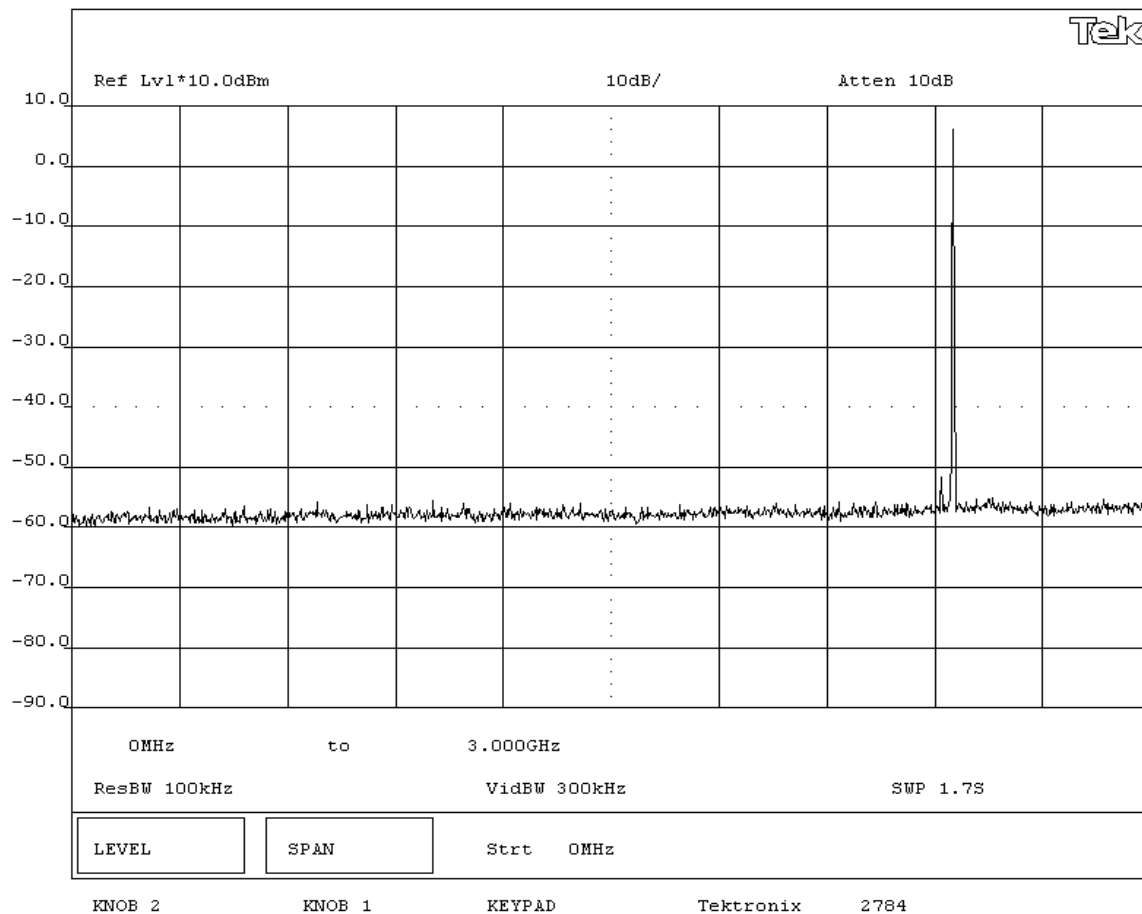**SIGNATURE**Tested By: **DESCRIPTION OF TEST****Antenna Conducted Spurious Emissions - Mid Channel 0MHz-3GHz**

NORTHWEST <b>EMC</b>		<b>EMISSIONS DATA SHEET</b>		Rev BETA 01/30/01	
EUT: BTM311			Work Order: INMC0167		
Serial Number: 43600013			Date: 11/01/01		
Customer: INTERMEC Technologies Corporation			Temperature: 70 °F		
Attendees: None		Tested by: Greg Kiemel		Humidity: 47% RH	
Customer Ref. No.:		Power: 120VAC/60Hz		Job Site: EV06	
<b>TEST SPECIFICATIONS</b>					
Specification: 47 CFR 15.247(d)		Year: 2004		Method: DA 00-705, ANSI C63.4	
				Year: 2003	
<b>SAMPLE CALCULATIONS</b>					
<b>COMMENTS</b>					
<b>EUT OPERATING MODES</b>					
Modulated by PRBS at maximum data rate					
<b>DEVIATIONS FROM TEST STANDARD</b>					
None					
<b>REQUIREMENTS</b>					
Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental					
<b>RESULTS</b>					
Pass					
<b>SIGNATURE</b>					
<div style="display: flex; justify-content: space-between; align-items: center;"> <div>Tested By: _____</div> <div></div> </div>					
<b>DESCRIPTION OF TEST</b>					
<b>Antenna Conducted Spurious Emissions - Mid Channel 3GHz-6.5GHz</b>					

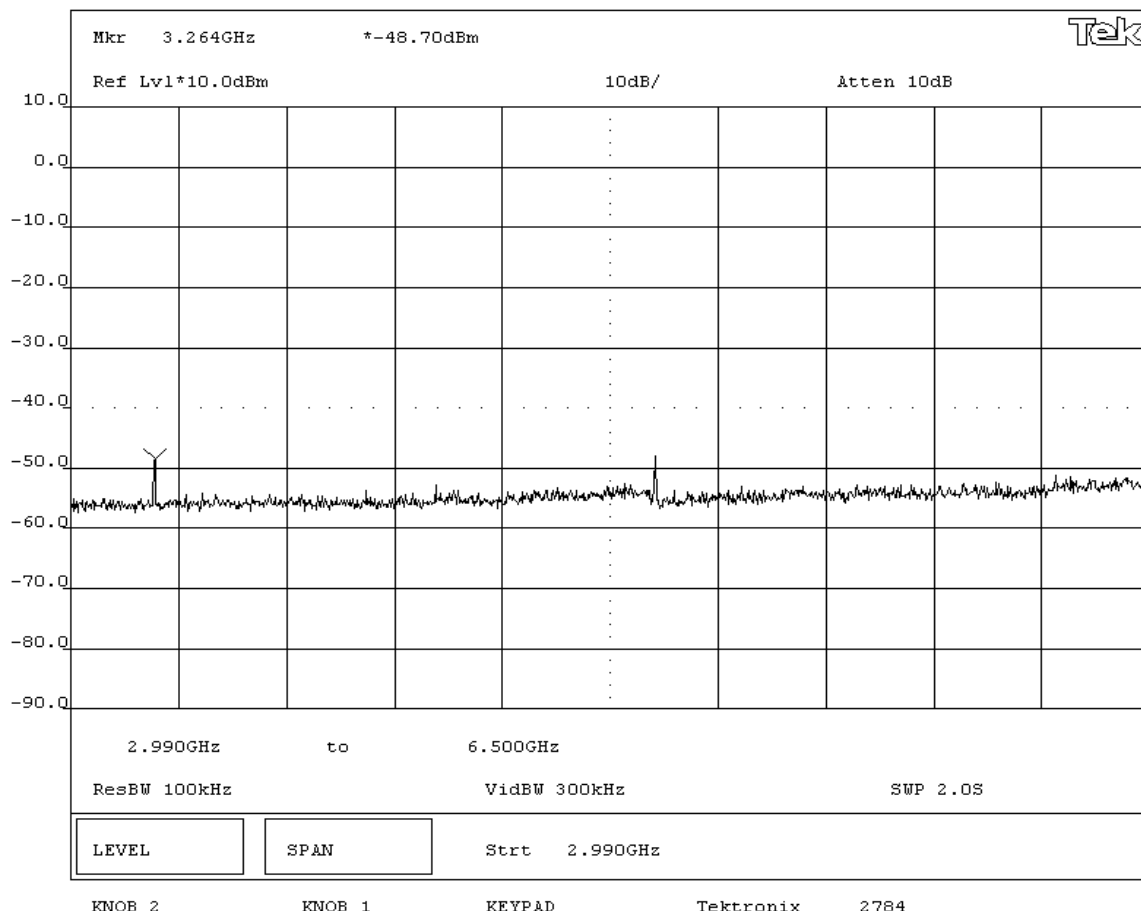

NORTHWEST  
**EMC****EMISSIONS DATA SHEET**Rev BETA  
01/30/01

EUT: BTM311			Work Order: INMC0167		
Serial Number: 43600013			Date: 11/01/01		
Customer: INTERMEC Technologies Corporation			Temperature: 70 °F		
Attendees: None			Humidity: 47% RH		
Customer Ref. No.:			Job Site: EV06		
			Tested by: Greg Kiemel		
			Power: 120VAC/60Hz		

**TEST SPECIFICATIONS**

Specification: 47 CFR 15.247(d)	Year: 2004	Method: DA 00-705, ANSI C63.4	Year: 2003
---------------------------------	------------	-------------------------------	------------

**SAMPLE CALCULATIONS****COMMENTS****EUT OPERATING MODES**

Modulated by PRBS at maximum data rate

**DEVIATIONS FROM TEST STANDARD**


None

**REQUIREMENTS**

Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental

**RESULTS**

Pass

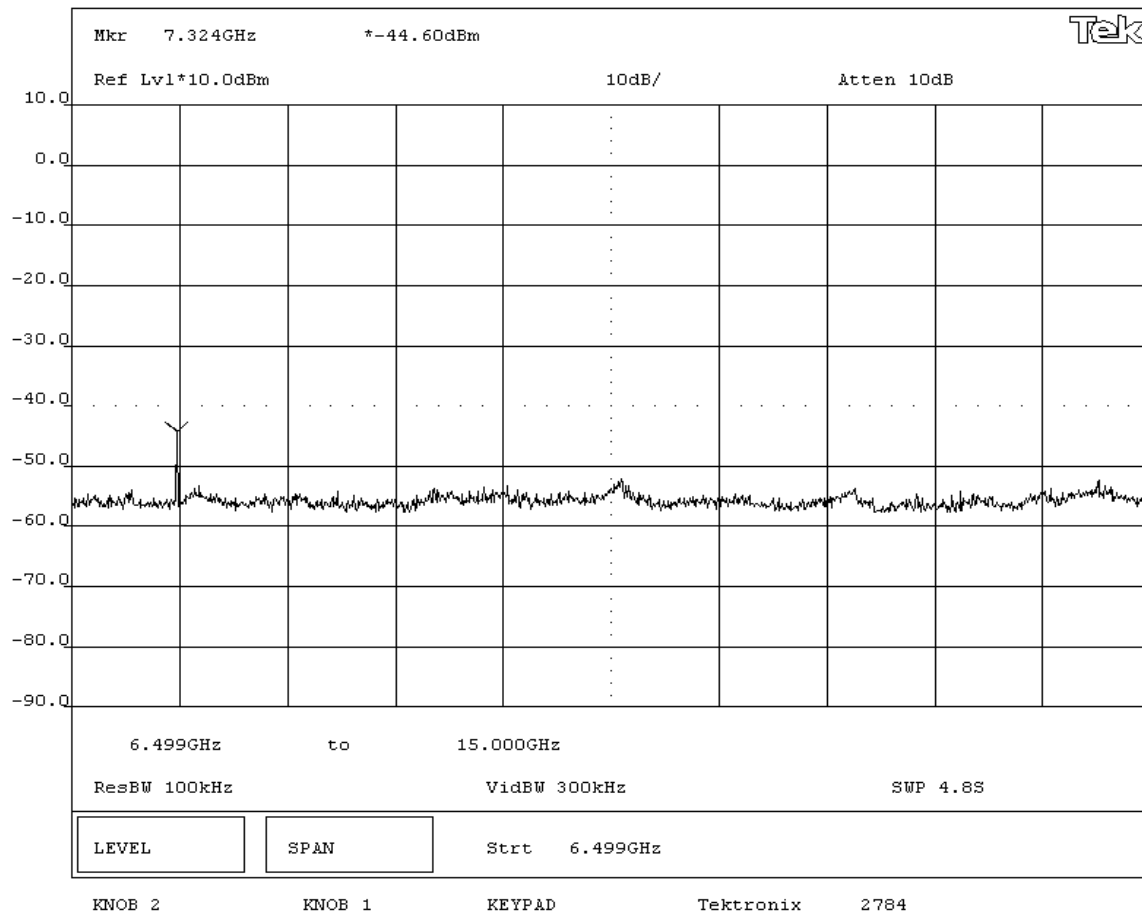**SIGNATURE**Tested By: **DESCRIPTION OF TEST****Antenna Conducted Spurious Emissions - Mid Channel 6.5GHz-15GHz**

NORTHWEST  
**EMC****EMISSIONS DATA SHEET**Rev BETA  
01/30/01

EUT: BTM311				Work Order: INMC0167	
Serial Number: 43600013				Date: 11/01/01	
Customer: INTERMEC Technologies Corporation				Temperature: 70 °F	
Attendees: None		Tested by: Greg Kiemel		Humidity: 47% RH	
Customer Ref. No.:		Power: 120VAC/60Hz		Job Site: EV06	

**TEST SPECIFICATIONS**

Specification: 47 CFR 15.247(d)	Year: 2004	Method: DA 00-705, ANSI C63.4	Year: 2003
---------------------------------	------------	-------------------------------	------------

**SAMPLE CALCULATIONS****COMMENTS****EUT OPERATING MODES**

Modulated by PRBS at maximum data rate

**DEVIATIONS FROM TEST STANDARD**


None

**REQUIREMENTS**

Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental

**RESULTS**

Pass

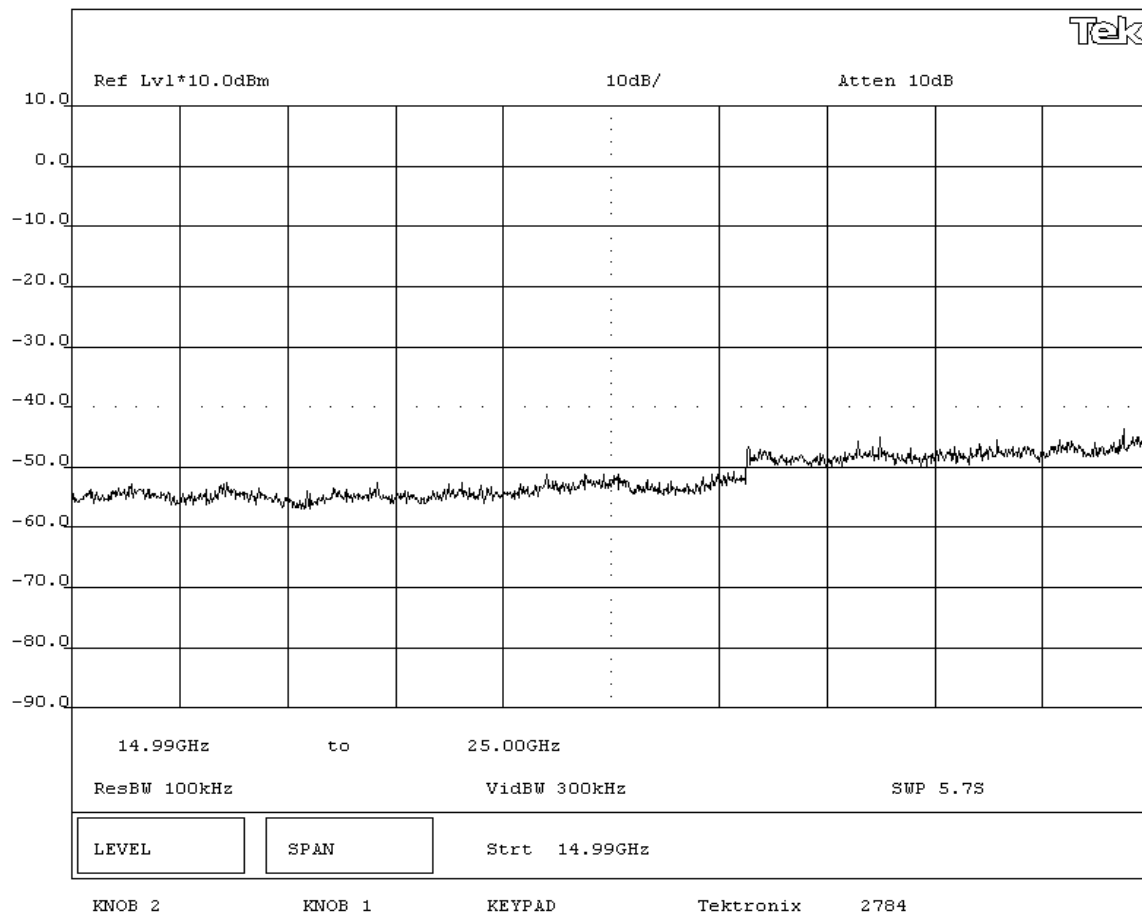**SIGNATURE**Tested By: **DESCRIPTION OF TEST****Antenna Conducted Spurious Emissions - Mid Channel 15GHz-25GHz**

NORTHWEST  
**EMC****EMISSIONS DATA SHEET**Rev BETA  
01/30/01

EUT: BTM311			Work Order: INMC0167		
Serial Number: 43600013			Date: 11/01/01		
Customer: INTERMEC Technologies Corporation			Temperature: 70 °F		
Attendees: None			Humidity: 47% RH		
Customer Ref. No.:			Job Site: EV06		
Tested by: Greg Kiemel			Power: 120VAC/60Hz		

**TEST SPECIFICATIONS**

Specification: 47 CFR 15.247(d)	Year: 2004	Method: DA 00-705, ANSI C63.4	Year: 2003
---------------------------------	------------	-------------------------------	------------

**SAMPLE CALCULATIONS****COMMENTS****EUT OPERATING MODES**

Modulated by PRBS at maximum data rate

**DEVIATIONS FROM TEST STANDARD**


None

**REQUIREMENTS**

Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental

**RESULTS**

Pass

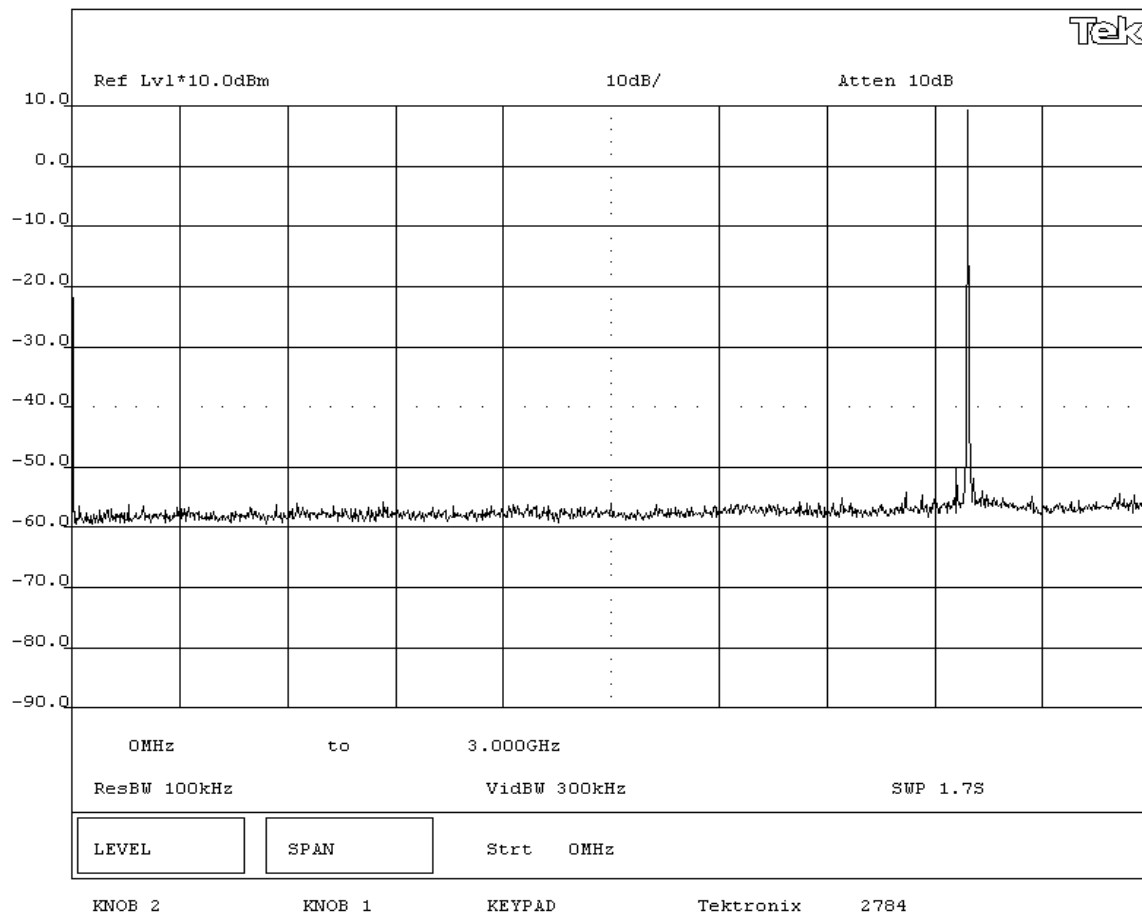**SIGNATURE**Tested By: **DESCRIPTION OF TEST****Antenna Conducted Spurious Emissions - High Channel 0MHz-3GHz**



NORTHWEST  
**EMC****EMISSIONS DATA SHEET**Rev BETA  
01/30/01

EUT: BTM311				Work Order: INMC0167	
Serial Number: 43600013				Date: 11/01/01	
Customer: INTERMEC Technologies Corporation				Temperature: 70 °F	
Attendees: None		Tested by: Greg Kiemel		Humidity: 47% RH	
Customer Ref. No.:		Power: 120VAC/60Hz		Job Site: EV06	

**TEST SPECIFICATIONS**

Specification: 47 CFR 15.247(d)	Year: 2004	Method: DA 00-705, ANSI C63.4	Year: 2003
---------------------------------	------------	-------------------------------	------------

**SAMPLE CALCULATIONS****COMMENTS****EUT OPERATING MODES**

Modulated by PRBS at maximum data rate

**DEVIATIONS FROM TEST STANDARD**


None

**REQUIREMENTS**

Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental

**RESULTS**

Pass

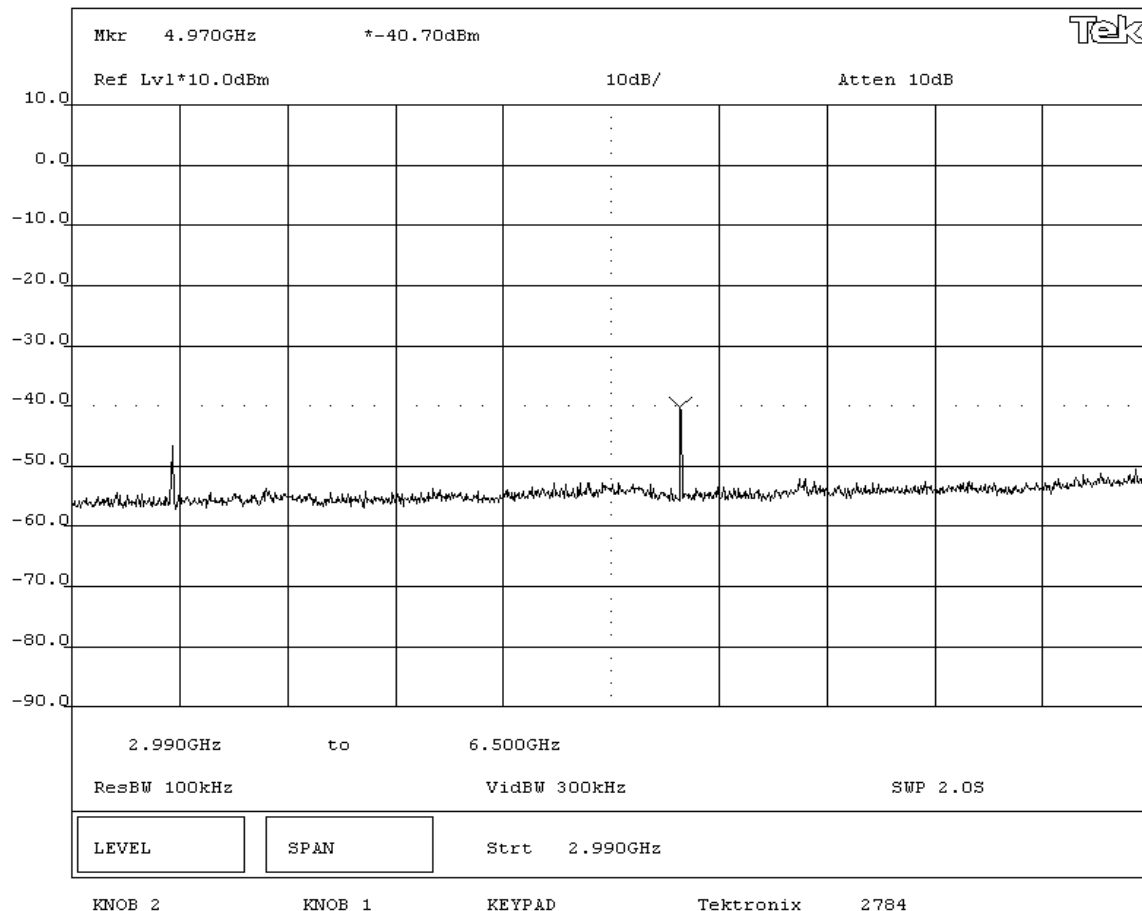**SIGNATURE**Tested By: **DESCRIPTION OF TEST****Antenna Conducted Spurious Emissions - High Channel 3GHz-6.5GHz**

NORTHWEST  
**EMC**

# EMISSIONS DATA SHEET

Rev BETA  
01/30/01

EUT: BTM311		Work Order: INMC0167	
Serial Number: 43600013		Date: 11/01/01	
Customer: INTERMEC Technologies Corporation		Temperature: 70 °F	
Attendees: None		Humidity: 47% RH	
Tested by: Greg Kiemel		Job Site: EV06	
Customer Ref. No.:	Power: 120VAC/60Hz		

## TEST SPECIFICATIONS

Specification: 47 CFR 15.247(d)	Year: 2004	Method: DA 00-705, ANSI C63.4	Year: 2003
---------------------------------	------------	-------------------------------	------------

## SAMPLE CALCULATIONS

## COMMENTS

## EUT OPERATING MODES

Modulated by PRBS at maximum data rate

## DEVIATIONS FROM TEST STANDARD

None

## REQUIREMENTS

Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental

## RESULTS


Pass

## SIGNATURE

Tested By: 

## DESCRIPTION OF TEST

**Antenna Conducted Spurious Emissions - High Channel 6.5GHz-15GHz**

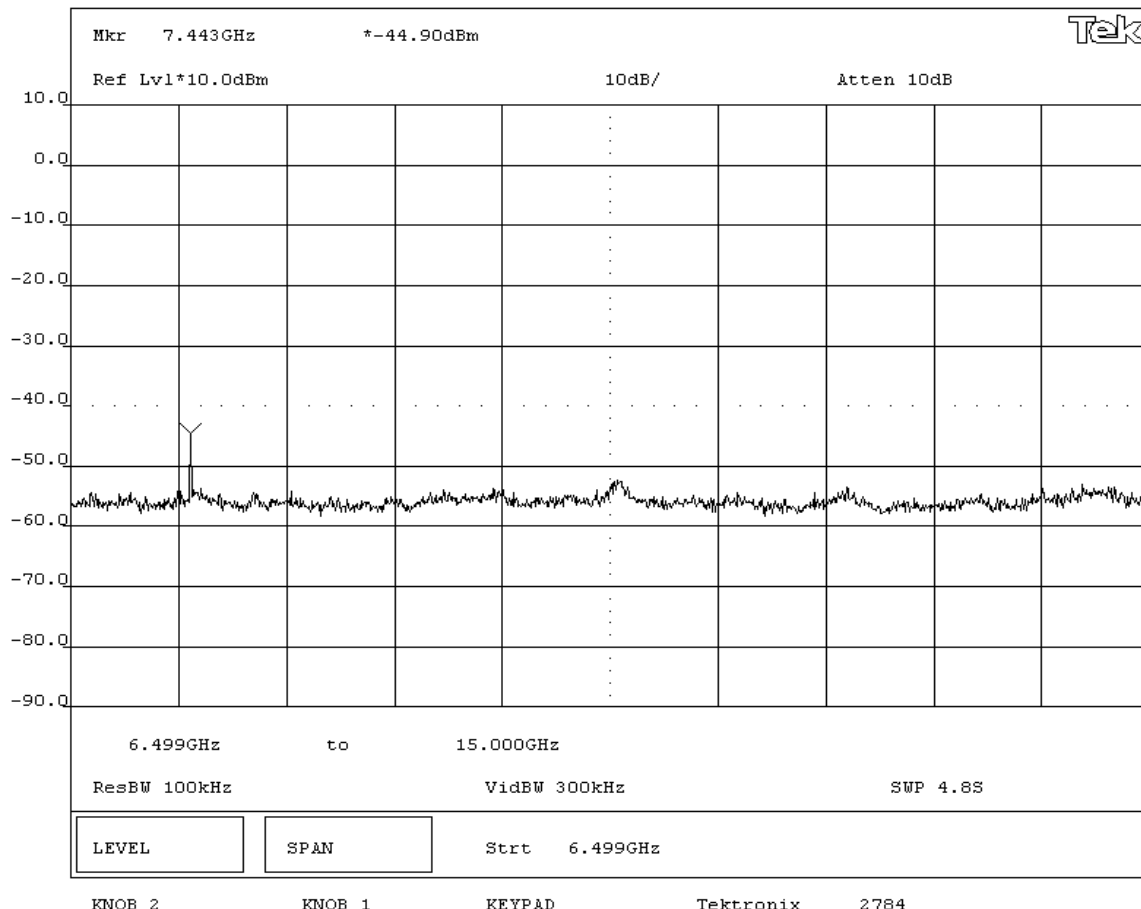

NORTHWEST  
**EMC****EMISSIONS DATA SHEET**Rev BETA  
01/30/01

EUT: BTM311			Work Order: INMC0167		
Serial Number: 43600013			Date: 11/01/01		
Customer: INTERMEC Technologies Corporation			Temperature: 70 °F		
Attendees: None			Humidity: 47% RH		
Customer Ref. No.:			Tested by: Greg Kiemel		
			Power: 120VAC/60Hz		
			Job Site: EV06		

**TEST SPECIFICATIONS**

Specification: 47 CFR 15.247(d)	Year: 2004	Method: DA 00-705, ANSI C63.4	Year: 2003
---------------------------------	------------	-------------------------------	------------

**SAMPLE CALCULATIONS****COMMENTS****EUT OPERATING MODES**

Modulated by PRBS at maximum data rate

**DEVIATIONS FROM TEST STANDARD**


None


**REQUIREMENTS**

Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental

**RESULTS**

Pass

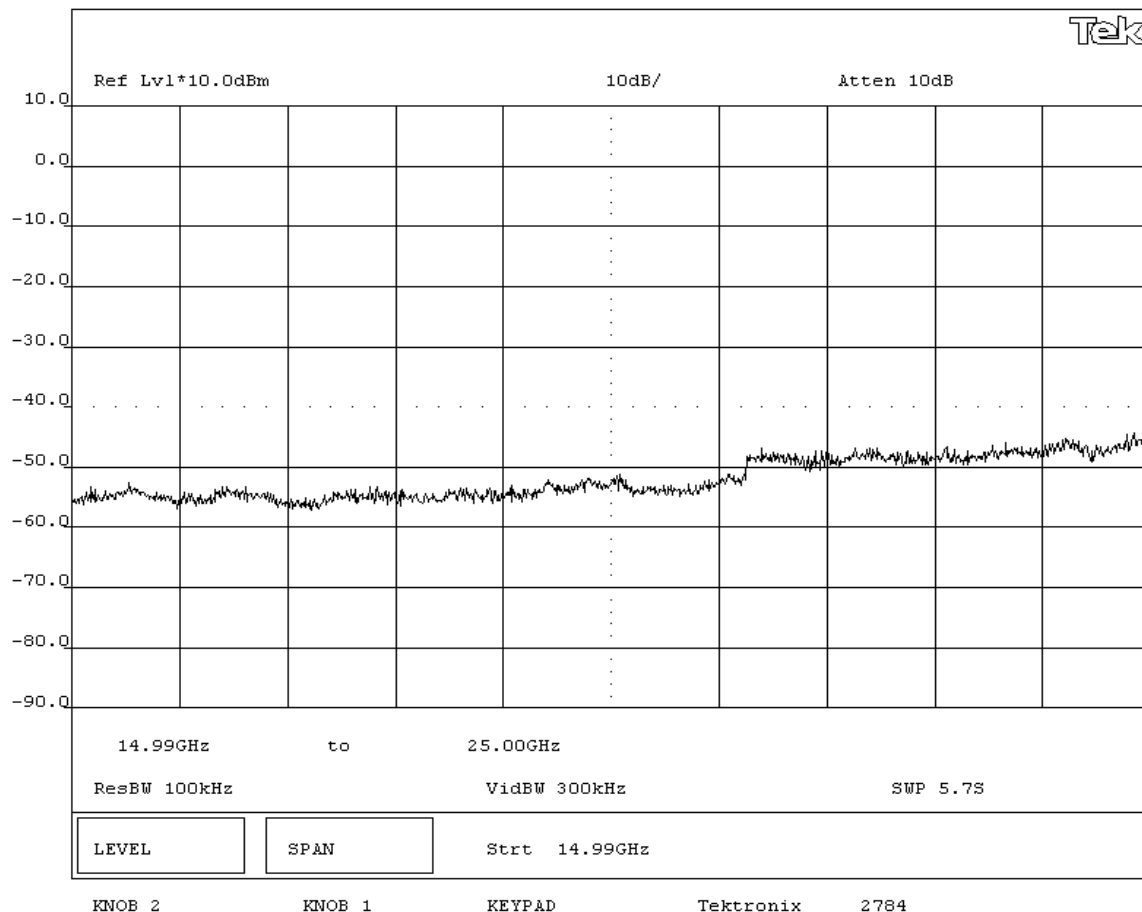**SIGNATURE**Tested By: **DESCRIPTION OF TEST****Antenna Conducted Spurious Emissions - High Channel 15GHz-25GHz**

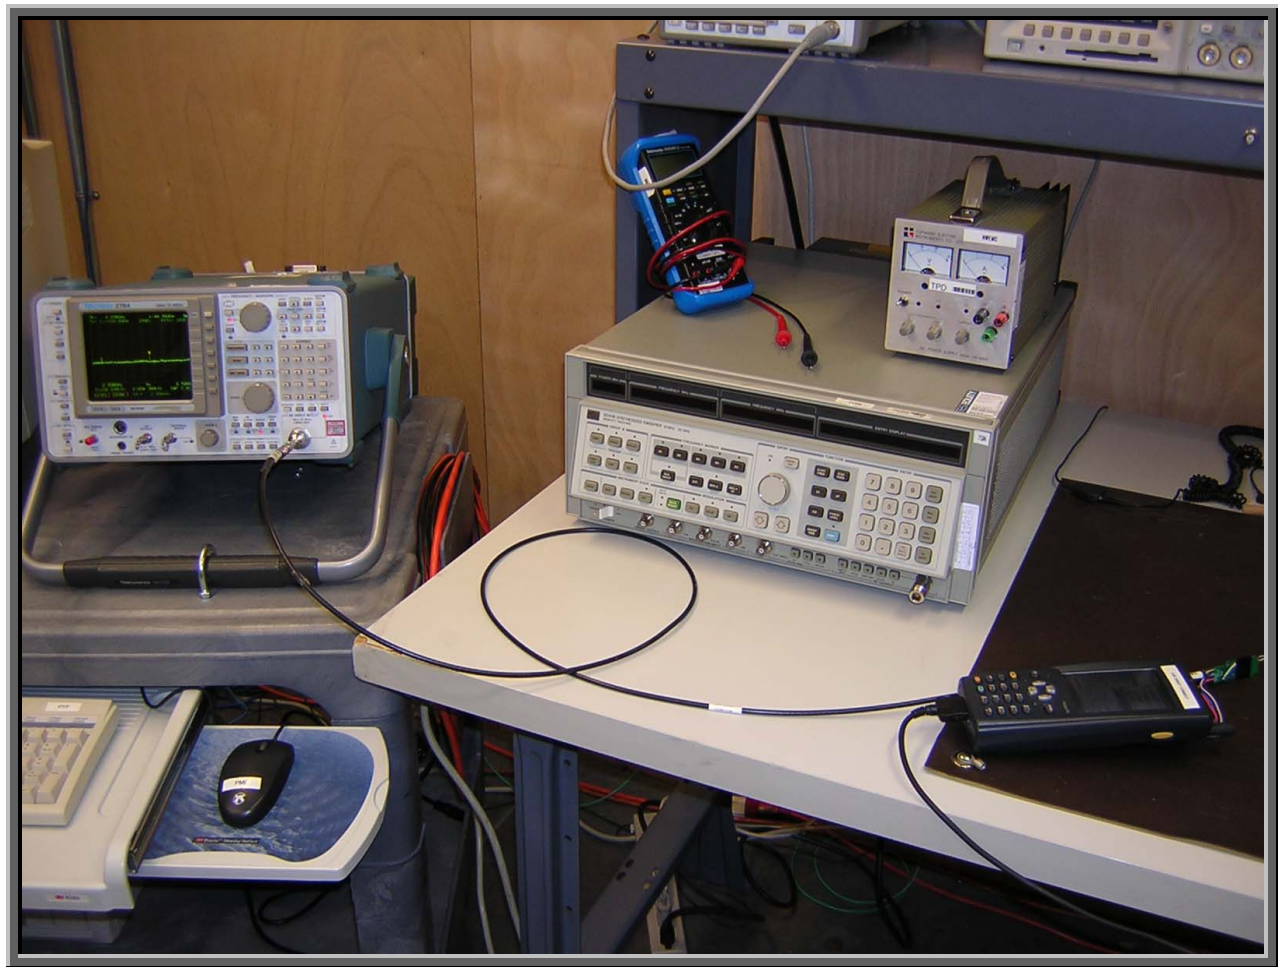

**Justification**

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

**Channels in Specified Band Investigated:**

High
Mid
Low

**Operating Modes Investigated:**

No Hop
--------

**Data Rates Investigated:**

Maximum
---------

**Output Power Setting(s) Investigated:**

Maximum
---------

**Power Input Settings Investigated:**

120 VAC, 60 Hz.
-----------------

**Software\Firmware Applied During Test**

<b>Exercise software</b>	BlueTest	<b>Version</b>	11/18/03
<b>Description</b>			
The system was tested using special test software on the 700C that controlled channel and operating mode of the Bluetooth radio.			

**EUT and Peripherals**

Description	Manufacturer	Model/Part Number	Serial Number
EUT- Bluetooth Radio	Actiontec	BTM311 (P/N 855-052-001)	43600013
Host - Handheld Computer	Intermec Technologies Corporation	700C	33500300001
Power Adapter	Elpac Power Systems	FW1812	014868

**Cables**

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Power	No	2m	No	Host - Handheld Computer	Power Adapter
AC Power	No	1.5m	No	AC Mains	Power Adapter

**Measurement Equipment**

Description	Manufacturer	Model	Identifier	Last Cal	Interval
Spectrum Analyzer	Tektronix	2784	AAO	02/26/2003	24 mo


**Test Description**

**Requirement:** Per 47 CFR 15.247(e), the peak power spectral density conducted from the antenna port of a direct sequence transmitter must not be greater than +8 dBm in any 3 kHz band during any time interval of continuous transmission.

**Configuration:** The peak power spectral density measurements were measured with the EUT set to low, mid, and high transmit frequencies. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at its maximum data rate using direct sequence modulation. Per the procedure outlined in FCC 97-114, the spectrum analyzer was used as follows:

The emission peak(s) were located and zoom in on within the passband. The resolution bandwidth was set to 3 kHz, the video bandwidth was set to greater than or equal to the resolution bandwidth. The sweep speed was set equal to the span divided by 3 kHz (sweep =  $(SPAN/3 \text{ kHz})$ ). For example, given a span of 1.5 MHz, the sweep should be  $1.5 \times 10^6 \div 3 \times 10^3 = 500$  seconds. External attenuation was used and added to the reading. The following FCC procedure was used for modifying the power spectral density measurements:

*"If the spectrum line spacing cannot be resolved on the available spectrum analyzer, the noise density function on most modern conventional spectrum analyzers will directly measure the noise power density normalized to a 1 Hz noise power bandwidth. Add 34.8 dB for correction to 3 kHz."*

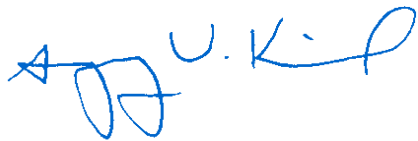**Completed by:**


NORTHWEST  
**EMC****EMISSIONS DATA SHEET**Rev BETA  
01/30/01

EUT: BTM311			Work Order: INMC0167		
Serial Number: 43600013			Date: 11/01/01		
Customer: INTERMEC Technologies Corporation			Temperature: 70 °F		
Attendees: None			Humidity: 47% RH		
Customer Ref. No.:		Tested by: Greg Kiemel	Job Site: EV06		
		Power: 120VAC/60Hz			

**TEST SPECIFICATIONS**

Specification: 47 CFR 15.247(e)	Year: 2004	Method: FCC 97-114, ANSI C63.4	Year: 2003
---------------------------------	------------	--------------------------------	------------

**SAMPLE CALCULATIONS**

Meter reading on spectrum analyzer is internally compensated for cable loss and external attenuation.

Power Spectral Density per 3kHz bandwidth = Power Spectral Density per 1 Hz bandwidth + Bandwidth Correction Factor.

Bandwidth Correction Factor =  $10 \cdot \log(3\text{kHz}/1\text{Hz}) = 34.8 \text{ dB}$ **COMMENTS****EUT OPERATING MODES**

Modulated by PRBS at maximum data rate

**DEVIATIONS FROM TEST STANDARD**

None


**REQUIREMENTS**

Maximum peak power spectral density conducted from a DSSS transmitter does not exceed 8 dBm in any 3 kHz band

**RESULTS****AMPLITUDE**

Pass

Power Spectral Density = -3.2 dBm / 3kHz

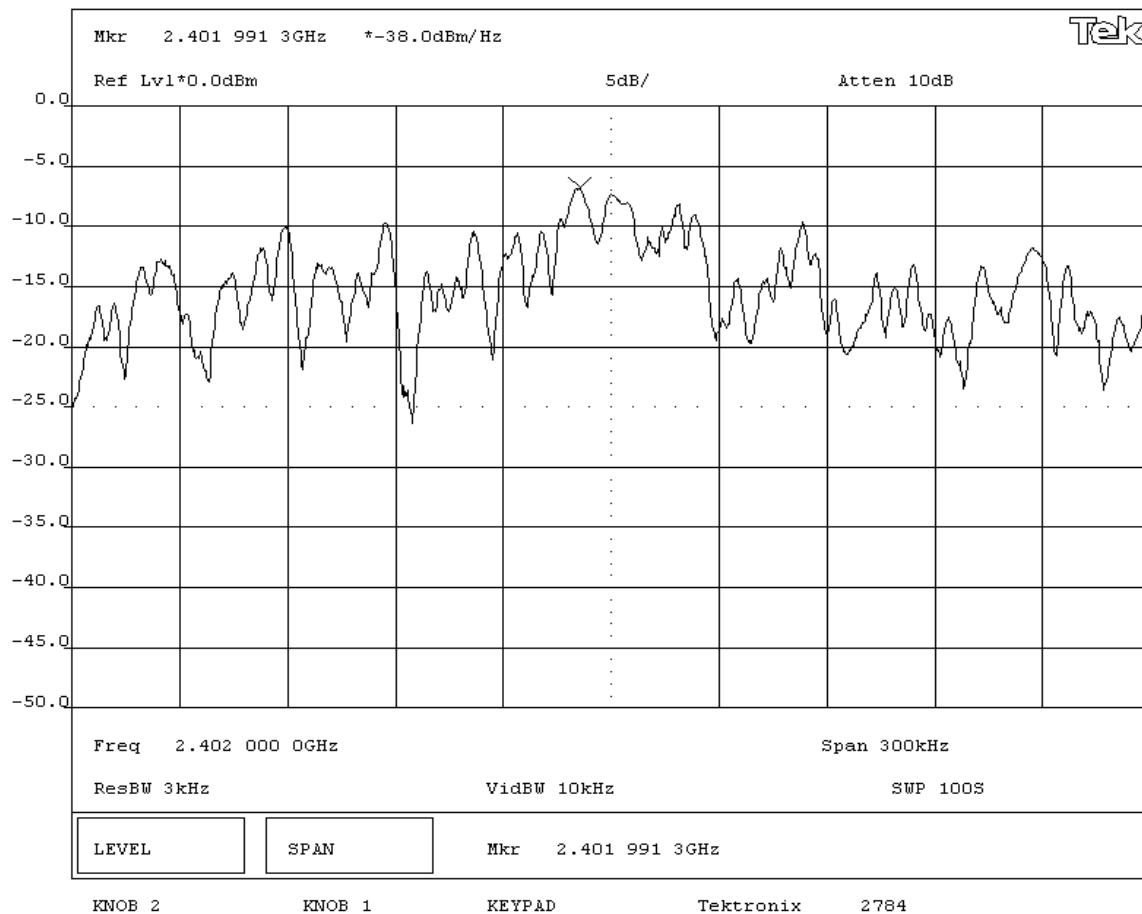**SIGNATURE**Tested By: **DESCRIPTION OF TEST****Power Spectral Density - Low Channel**

NORTHWEST  
**EMC****EMISSIONS DATA SHEET**Rev BETA  
01/30/01

EUT: BTM311			Work Order: INMC0167		
Serial Number: 43600013			Date: 11/01/01		
Customer: INTERMEC Technologies Corporation			Temperature: 70 °F		
Attendees: None			Humidity: 47% RH		
Customer Ref. No.:			Job Site: EV06		
Tested by: Greg Kiemel			Power: 120VAC/60Hz		

**TEST SPECIFICATIONS**

Specification: 47 CFR 15.247(e)	Year: 2004	Method: FCC 97-114, ANSI C63.4	Year: 2003
---------------------------------	------------	--------------------------------	------------

**SAMPLE CALCULATIONS**

Meter reading on spectrum analyzer is internally compensated for cable loss and external attenuation

Power Spectral Density per 3kHz bandwidth = Power Spectral Density per 1 Hz bandwidth + Bandwidth Correction Factor.

Bandwidth Correction Factor =  $10 \cdot \log(3\text{kHz}/1\text{Hz}) = 34.8 \text{ dB}$ **COMMENTS****EUT OPERATING MODES**

Modulated by PRBS at maximum data rate

**DEVIATIONS FROM TEST STANDARD**

None


**REQUIREMENTS**

Maximum peak power spectral density conducted from a DSSS transmitter does not exceed 8 dBm in any 3 kHz band

**RESULTS****AMPLITUDE**

Pass

Power Spectral Density = -1.4 dBm / 3kHz

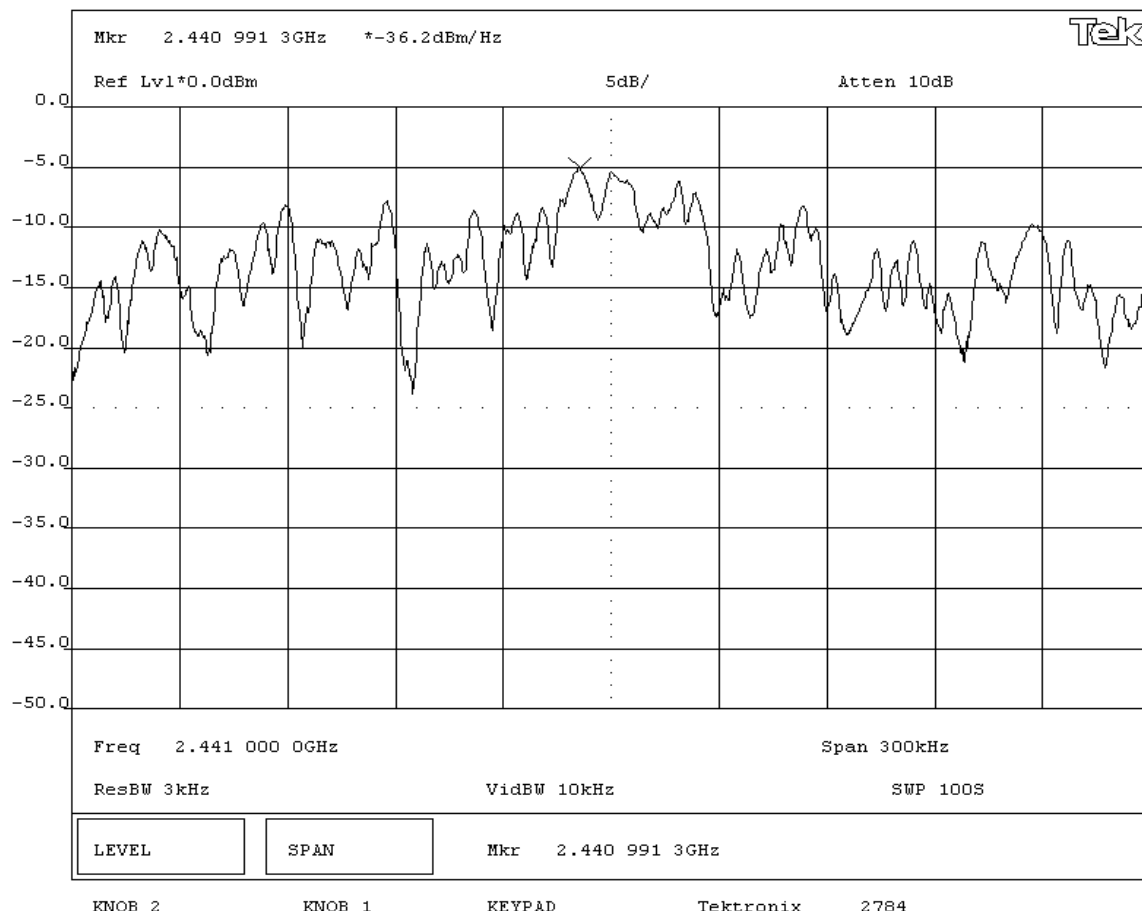**SIGNATURE**Tested By: **DESCRIPTION OF TEST****Power Spectral Density - Mid Channel**



NORTHWEST  
**EMC****EMISSIONS DATA SHEET**Rev BETA  
01/30/01

EUT: BTM311			Work Order: INMC0167		
Serial Number: 43600013			Date: 11/01/01		
Customer: INTERMEC Technologies Corporation			Temperature: 70 °F		
Attendees: None			Humidity: 47% RH		
Customer Ref. No.:			Job Site: EV06		
			Tested by: Greg Kiemel		
			Power: 120VAC/60Hz		

**TEST SPECIFICATIONS**

Specification: 47 CFR 15.247(e)	Year: 2004	Method: FCC 97-114, ANSI C63.4	Year: 2003
---------------------------------	------------	--------------------------------	------------

**SAMPLE CALCULATIONS**

Meter reading on spectrum analyzer is internally compensated for cable loss and external attenuation

Power Spectral Density per 3kHz bandwidth = Power Spectral Density per 1 Hz bandwidth + Bandwidth Correction Factor.

Bandwidth Correction Factor =  $10 \cdot \log(3\text{kHz}/1\text{Hz}) = 34.8 \text{ dB}$ **COMMENTS****EUT OPERATING MODES**

Modulated by PRBS at maximum data rate

**DEVIATIONS FROM TEST STANDARD**

None


**REQUIREMENTS**


Maximum peak power spectral density conducted from a DSSS transmitter does not exceed 8 dBm in any 3 kHz band

**RESULTS****AMPLITUDE**

Pass

Power Spectral Density = +0.3 dBm / 3kHz

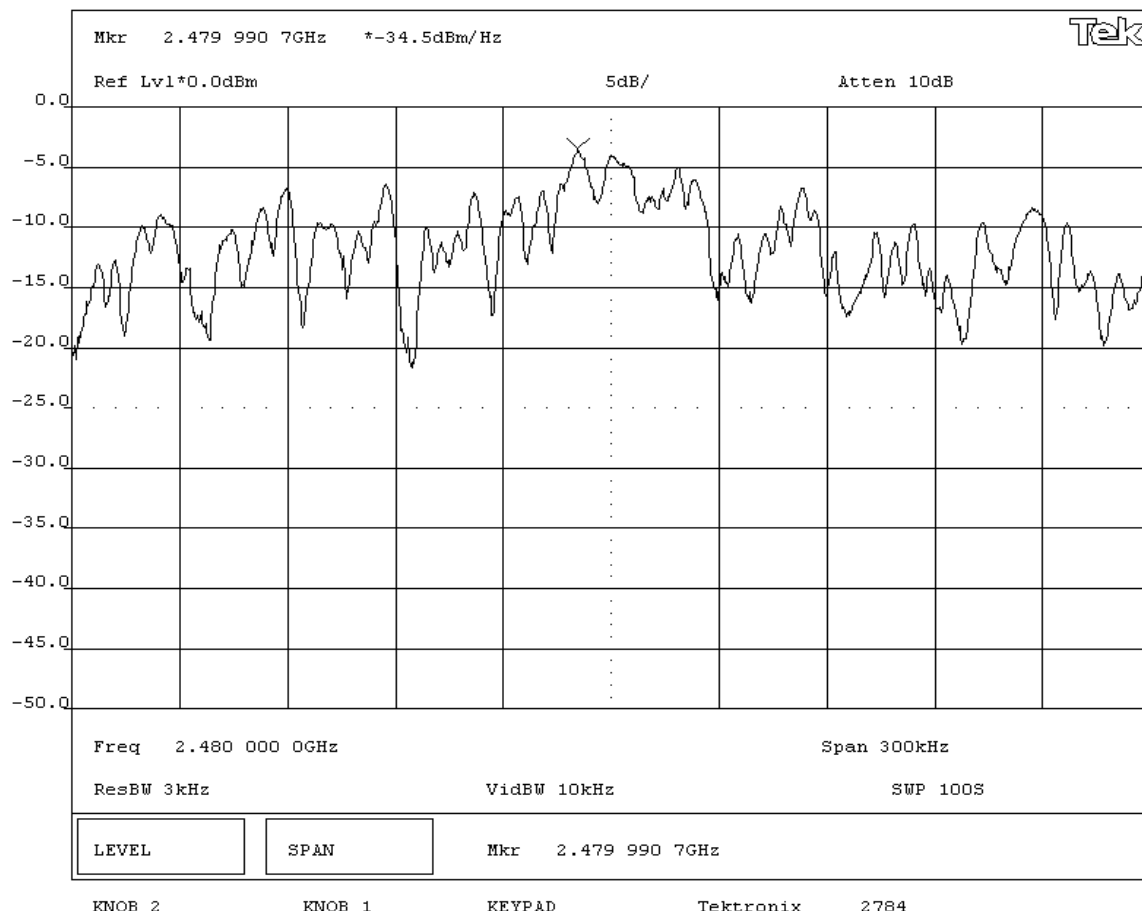**SIGNATURE**Tested By: **DESCRIPTION OF TEST****Power Spectral Density - High Channel**

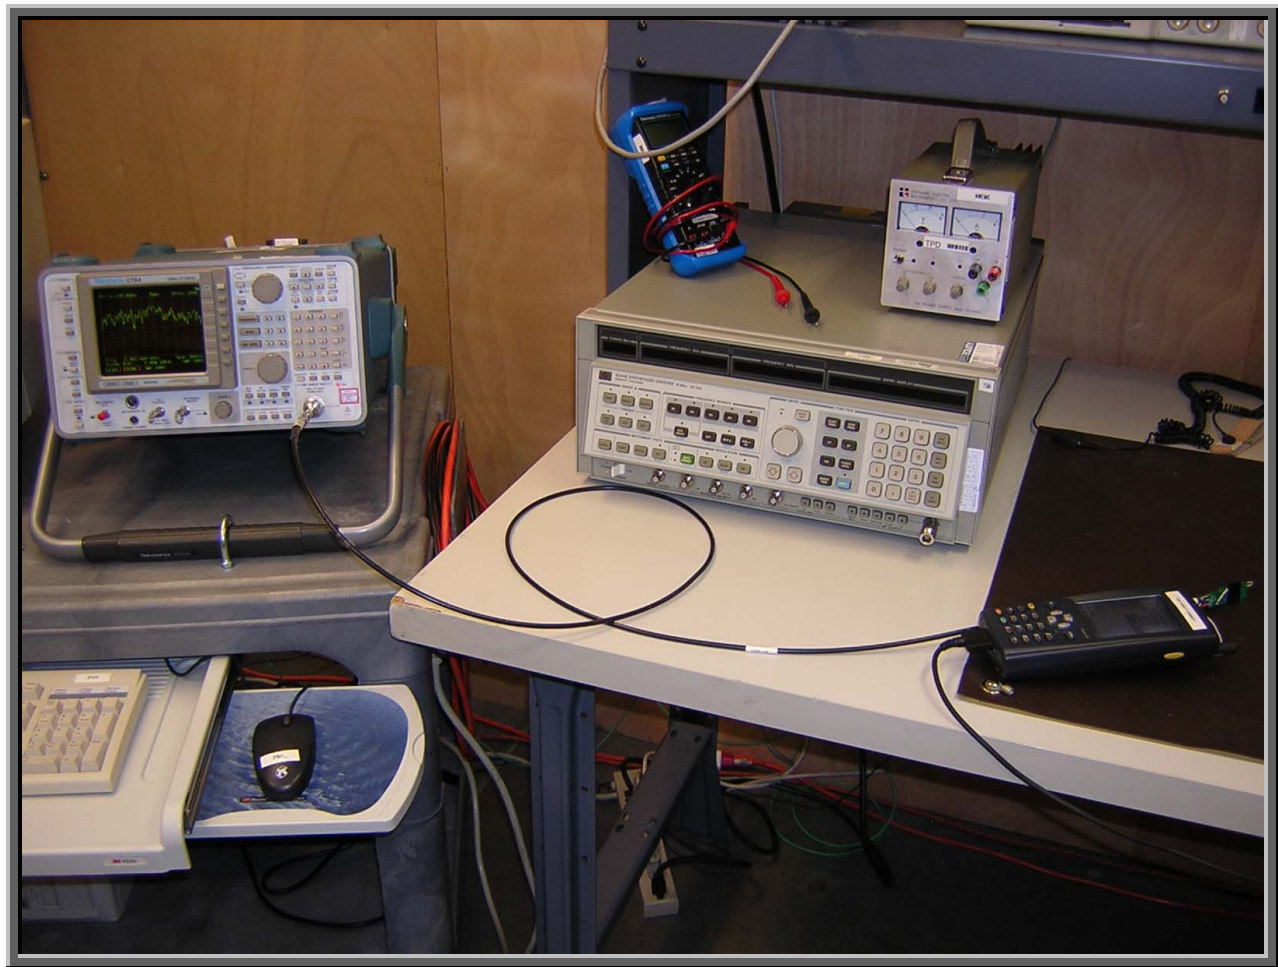

**Justification**

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

**Channels in Specified Band Investigated:**

High
Mid
Low

**Operating Modes Investigated:**

No Hop
--------

**Antennas Investigated:**

BTM311 (P/N 855-052-001)
BTM311 (P/N 855-052-002)

**Data Rates Investigated:**

Maximum
---------

**Power Input Settings Investigated:**

120 VAC, 60 Hz.
-----------------

**Additional Setting(s) Investigated:**

Stand alone configuration
---------------------------

**Frequency Range Investigated**

<b>Start Frequency</b>	30 MHz	<b>Stop Frequency</b>	26 GHz
------------------------	--------	-----------------------	--------

**Software\Firmware Applied During Test**

<b>Exercise software</b>	BlueTest	<b>Version</b>	11/18/03
<b>Description</b>			
The system was tested using special test software on the 700C that controlled channel and operating mode on the Bluetooth antenna.			

**EUT and Peripherals**

Description	Manufacturer	Model/Part Number	Serial Number
EUT- Bluetooth Radio	Actiontec	BTM311 (P/N 855-052-001)	43600006
EUT- Bluetooth Radio	Actiontec	BTM311 (P/N 855-052-002)	43600004
EUT- Extra - Bluetooth Radio	Actiontec	BTM311 (855-052-002)	43600003
EUT- Extra - Bluetooth Radio	Actiontec	BTM311 (855-052-001)	43600005
Host - Handheld Computer	Intermec Technologies Corporation	730	33810300057
Power Adapter	Elpac Power Systems	FW1812	006042

**Cables**

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Power	No	2m	No	Host - Handheld Computer	Power Adapter
AC Power	No	1.5m	No	AC Mains	Power Adapter

**Measurement Equipment**


Description	Manufacturer	Model	Identifier	Last Cal	Interval
Quasi-Peak Adapter	Hewlett-Packard	85650A	AQF	12/23/2003	13 mo
Spectrum Analyzer Display	Hewlett Packard	85662A	AALD	12/23/2003	13 mo
Spectrum Analyzer	Hewlett-Packard	8566B	AAL	12/23/2003	13 mo
Antenna, Horn	EMCO	3160-09	AHG	NCR	NA
Pre-Amplifier	Miteq	JSD4-18002600-26-8P	APU	10/08/2003	12 mo
Antenna, Horn	EMCO	3115	AHC	09/07/2004	12 mo
Pre-Amplifier	Miteq	AMF-4D-005180-24-10P	APJ	01/05/2004	13 mo
Pre-Amplifier	Amplifier Research	LN1000A	APS	02/05/2004	13 mo
Antenna, Biconilog	EMCO	3141	AXE	12/03/2003	24 mo
Antenna, Horn	EMCO	3160-08	AHK	NCR	NA
Pre-Amplifier	Miteq	AMF-4D-005180-24-10P	APC	10/08/2003	12 mo
Attenuator		2082-6148-20	ATE	02/03/2004	13 mo
High Pass Filter	Micro-Tronics	HPM50111	HFO	04/13/2004	13 mo
Spectrum Analyzer	Tektronix	2784	AAO	02/26/2003	24 mo



**Test Description**


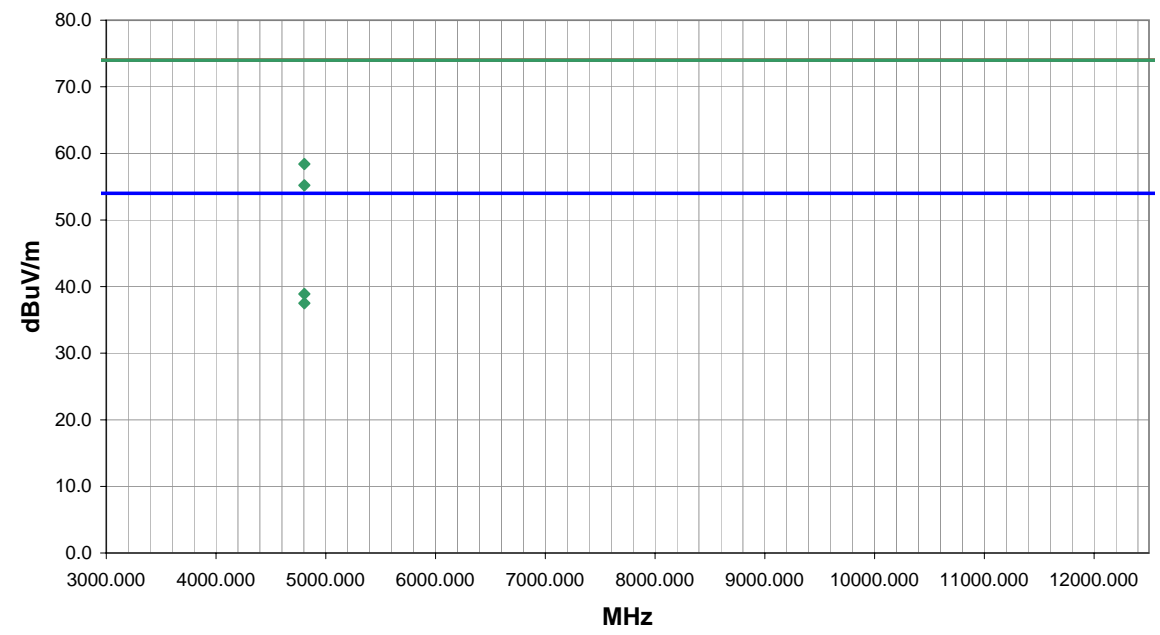
**Requirement:** The field strength of any spurious emissions or modulation products that fall in a restricted band, as defined in 47 CFR 15.205, is measured. The peak level must comply with the limits specified in 47 CFR 15.35(b). The average level (taken with a 10Hz VBW) must comply with the limits specified in 15.209.


**Configuration:** The highest gain of each type of antenna to be used with the EUT was tested. The EUT was configured for low, mid, and high band transmit frequencies. For each configuration, the spectrum was scanned throughout the specified range. In addition, measurements were made in the restricted bands to verify compliance. While scanning, emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and the EUT antenna in three orthogonal axis, and adjusting measurement antenna height and polarization, and manipulating the EUT antenna in 3 orthogonal planes (per ANSI C63.4:2003). A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

Bandwidths Used for Measurements			
Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 – 0.15	1.0	0.2	0.2
0.15 – 30.0	10.0	9.0	9.0
30.0 – 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0
<i>Measurements were made using the bandwidths and detectors specified. No video filter was used.</i>			


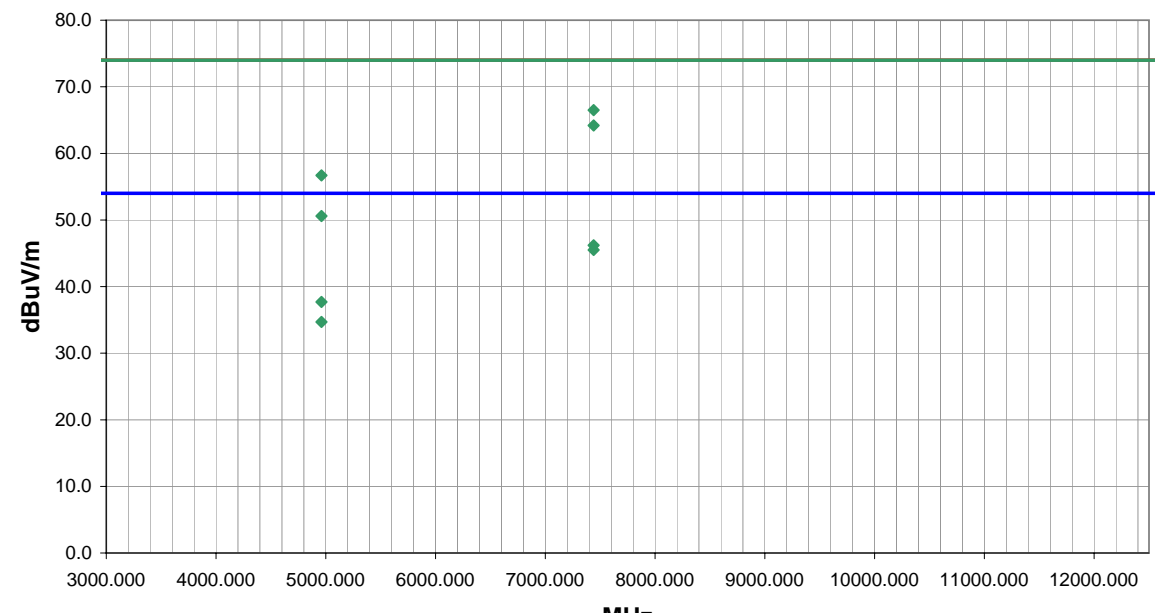
**Completed by:**

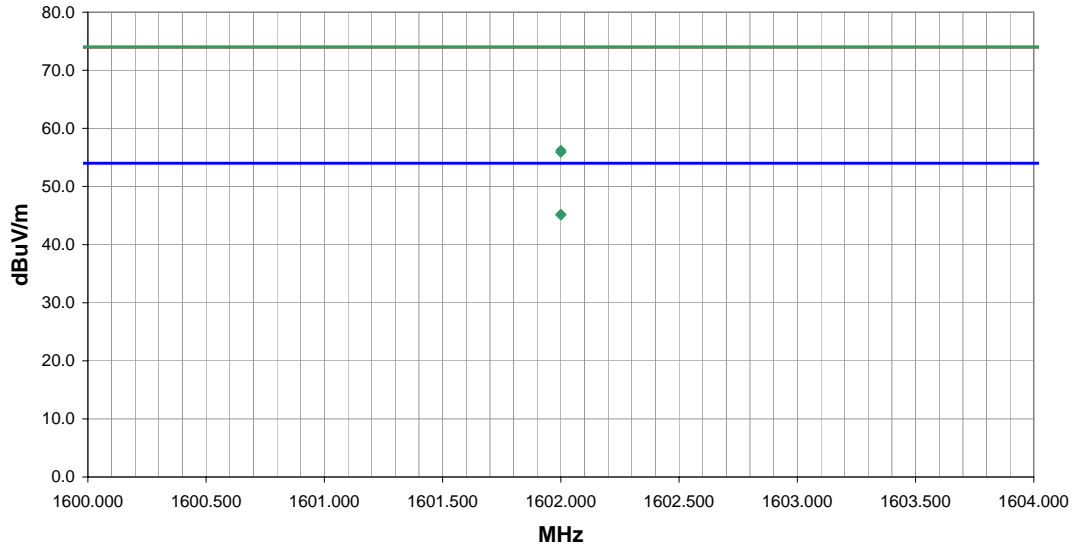
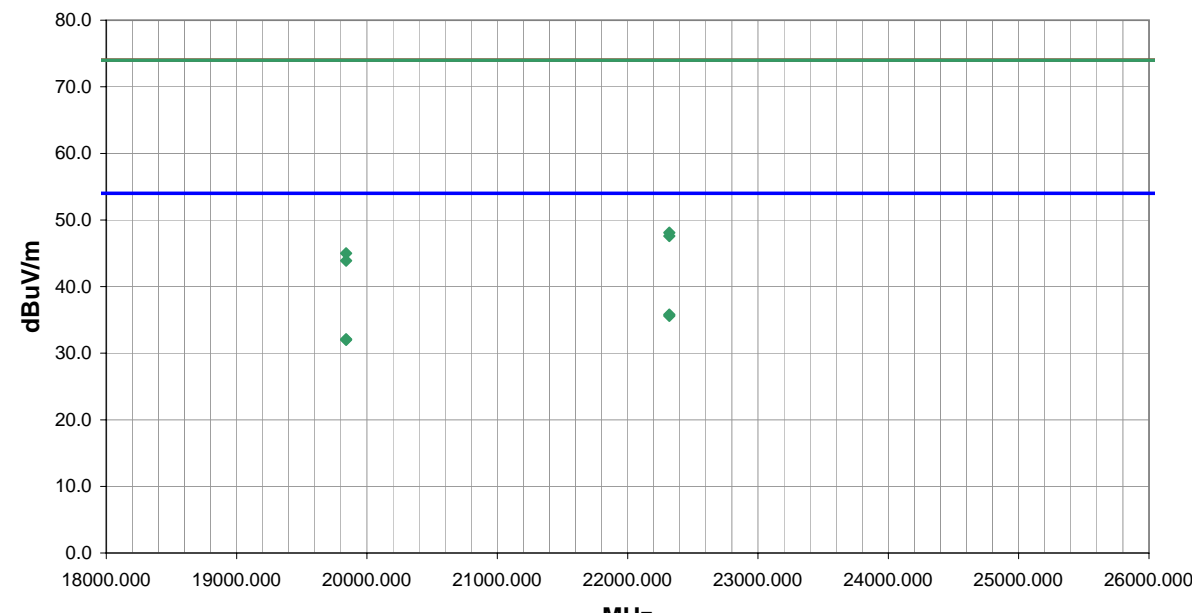
NORTHWEST <b>EMC</b>										<b>RADIATED EMISSIONS DATA SHEET</b>					REV d14.3 09/20/2004																																																																					
EUT: <b>BTM311</b>										Work Order: <b>INMC0167</b>																																																																										
Serial Number: <b>43600006</b>										Date: <b>10/12/04</b>																																																																										
Customer: <b>INTERMEC Technologies Corporation</b>										Temperature: <b>70</b>																																																																										
Attendees: <b>None</b>										Humidity: <b>44%</b>																																																																										
Cust. Ref. No.: <b></b>										Barometric Pressure: <b>30.27</b>																																																																										
Tested by: <b>Holly Ashkannejhad</b>										Power: <b>120VAC/60Hz</b>					Job Site: <b>EV01</b>																																																																					
<b>TEST SPECIFICATIONS</b>																																																																																				
Specification: <b>FCC 15.247(c) Spurious Radiated Emissions</b>										Year: <b>2003</b>																																																																										
Method: <b>ANSI C63.4</b>										Year: <b>2001</b>																																																																										
<b>SAMPLE CALCULATIONS</b>																																																																																				
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation																																																																																				
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator																																																																																				
<b>COMMENTS</b>																																																																																				
-001 model																																																																																				
<b>EUT OPERATING MODES</b>																																																																																				
No hop, low channel																																																																																				
<b>DEVIATIONS FROM TEST STANDARD</b>																																																																																				
No deviations.																																																																																				
<b>RESULTS</b>																																																																																				
Pass										Run #																																																																										
															4																																																																					
Other																																																																																				
										 Tested By:																																																																										
																																																																																				
<table border="1" style="width:100%; border-collapse: collapse; font-size: 0.8em;"> <thead> <tr> <th>Freq (MHz)</th> <th>Amplitude (dBuV)</th> <th>Factor (dB)</th> <th>Azimuth (degrees)</th> <th>Height (meters)</th> <th>Distance (meters)</th> <th>External Attenuation (dB)</th> <th>Polarity</th> <th>Detector</th> <th>Distance Adjustment (dB)</th> <th>Adjusted dBuV/m</th> <th>Spec. Limit dBuV/m</th> <th>Compared to Spec. (dB)</th> <th>Comments</th> </tr> </thead> <tbody> <tr> <td>1602.000</td> <td>31.4</td> <td>-6.2</td> <td>99.0</td> <td>1.7</td> <td>3.0</td> <td>20.0</td> <td>V-Horn</td> <td>AV</td> <td>0.0</td> <td>45.2</td> <td>54.0</td> <td>-8.8</td> <td>EUT Vertical</td> </tr> <tr> <td>1602.000</td> <td>31.3</td> <td>-6.2</td> <td>160.0</td> <td>1.7</td> <td>3.0</td> <td>20.0</td> <td>H-Horn</td> <td>AV</td> <td>0.0</td> <td>45.1</td> <td>54.0</td> <td>-8.9</td> <td>EUT Horizontal</td> </tr> <tr> <td>1602.000</td> <td>42.4</td> <td>-6.2</td> <td>160.0</td> <td>1.7</td> <td>3.0</td> <td>20.0</td> <td>H-Horn</td> <td>PK</td> <td>0.0</td> <td>56.2</td> <td>74.0</td> <td>-17.8</td> <td>EUT Horizontal</td> </tr> <tr> <td>1602.000</td> <td>42.1</td> <td>-6.2</td> <td>99.0</td> <td>1.7</td> <td>3.0</td> <td>20.0</td> <td>V-Horn</td> <td>PK</td> <td>0.0</td> <td>55.9</td> <td>74.0</td> <td>-18.1</td> <td>EUT Vertical</td> </tr> </tbody> </table>															Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments	1602.000	31.4	-6.2	99.0	1.7	3.0	20.0	V-Horn	AV	0.0	45.2	54.0	-8.8	EUT Vertical	1602.000	31.3	-6.2	160.0	1.7	3.0	20.0	H-Horn	AV	0.0	45.1	54.0	-8.9	EUT Horizontal	1602.000	42.4	-6.2	160.0	1.7	3.0	20.0	H-Horn	PK	0.0	56.2	74.0	-17.8	EUT Horizontal	1602.000	42.1	-6.2	99.0	1.7	3.0	20.0	V-Horn	PK	0.0	55.9	74.0	-18.1	EUT Vertical
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments																																																																							
1602.000	31.4	-6.2	99.0	1.7	3.0	20.0	V-Horn	AV	0.0	45.2	54.0	-8.8	EUT Vertical																																																																							
1602.000	31.3	-6.2	160.0	1.7	3.0	20.0	H-Horn	AV	0.0	45.1	54.0	-8.9	EUT Horizontal																																																																							
1602.000	42.4	-6.2	160.0	1.7	3.0	20.0	H-Horn	PK	0.0	56.2	74.0	-17.8	EUT Horizontal																																																																							
1602.000	42.1	-6.2	99.0	1.7	3.0	20.0	V-Horn	PK	0.0	55.9	74.0	-18.1	EUT Vertical																																																																							


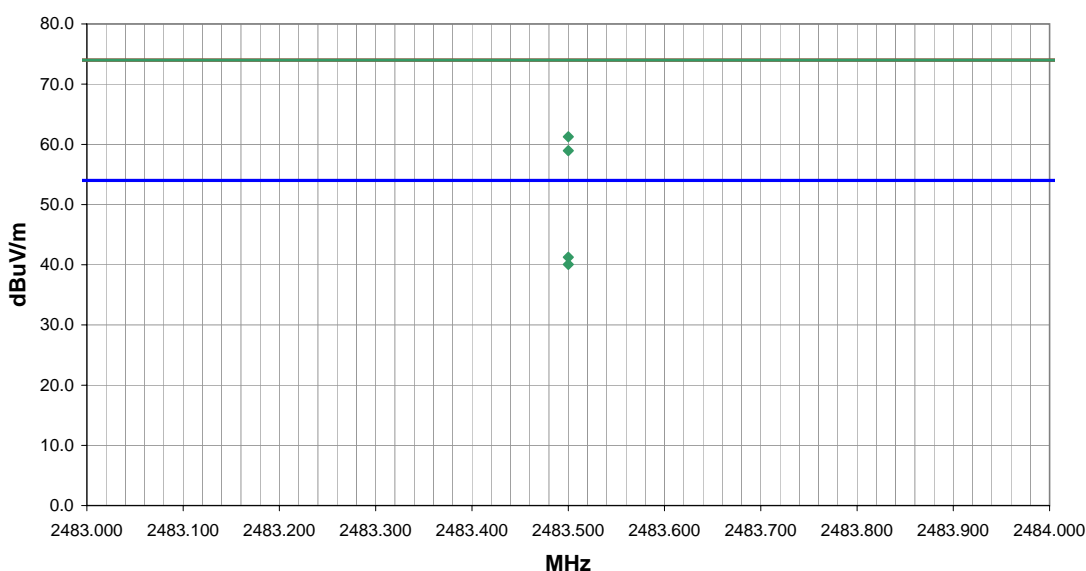
NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.3 09/20/2004	
EUT: BTM311						Work Order: INMC0167									
Serial Number: 43600006						Date: 10/12/04									
Customer: INTERMEC Technologies Corporation						Temperature: 70									
Attendees: None						Humidity: 44%									
Cust. Ref. No.:						Barometric Pressure: 30.27									
Tested by: Holly Ashkannejhad				Power: 120VAC/60Hz		Job Site: EV01									
TEST SPECIFICATIONS															
Specification: FCC 15.247(c) Spurious Radiated Emissions						Year: 2003									
Method: ANSI C63.4						Year: 2001									
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
-001 model															
EUT OPERATING MODES															
No hop, low channel															
DEVIATIONS FROM TEST STANDARD															
No deviations.															
RESULTS															
Pass										Run #					
										6					
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
4803.989	35.6	3.3	303.0	1.2	3.0	0.0	H-Horn	AV	0.0	38.9	54.0	-15.1			
4803.989	55.1	3.3	303.0	1.2	3.0	0.0	H-Horn	PK	0.0	58.4	74.0	-15.6			
4803.989	34.2	3.3	64.0	2.7	3.0	0.0	V-Horn	AV	0.0	37.5	54.0	-16.5			
4803.989	51.9	3.3	64.0	2.7	3.0	0.0	V-Horn	PK	0.0	55.2	74.0	-18.8			


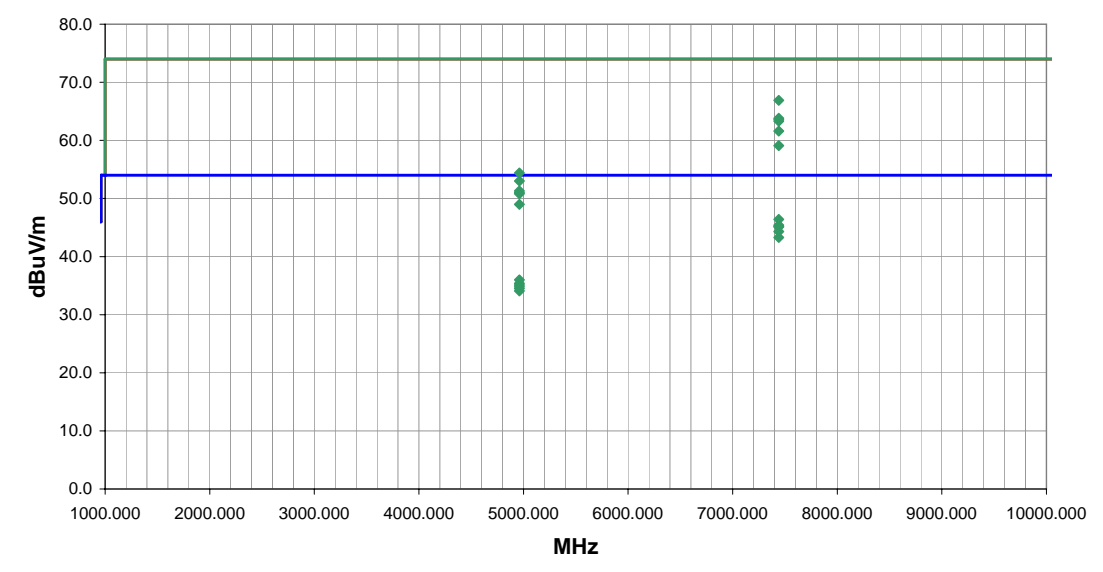
NORTHWEST EMC		RADIATED EMISSIONS DATA SHEET		REV df4.3 09/20/2004								
EUT: BTM311		Work Order: INMC0167										
Serial Number: 43600006		Date: 10/12/04										
Customer: INTERMEC Technologies Corporation		Temperature: 70										
Attendees: None		Humidity: 44%										
Cust. Ref. No.:		Barometric Pressure: 30.27										
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz		Job Site: EV01								
TEST SPECIFICATIONS												
Specification: FCC 15.247(c) Spurious Radiated Emissions				Year: 2003								
Method: ANSI C63.4				Year: 2001								
SAMPLE CALCULATIONS												
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation												
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator												
COMMENTS												
-001 model												
EUT OPERATING MODES												
No hop, mid channel												
DEVIATIONS FROM TEST STANDARD												
No deviations.												
RESULTS					Run #							
Pass					7							
Other												
					 Tested By:							
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
7325.993	34.4	10.5	34.0	1.3	3.0	0.0	H-Horn	AV	0.0	44.9	54.0	-9.1
7325.993	53.8	10.5	34.0	1.3	3.0	0.0	H-Horn	PK	0.0	64.3	74.0	-9.7
7325.993	33.1	10.5	23.0	1.6	3.0	0.0	V-Horn	AV	0.0	43.6	54.0	-10.4
7325.993	50.1	10.5	23.0	1.6	3.0	0.0	V-Horn	PK	0.0	60.6	74.0	-13.4
4883.989	33.4	3.6	85.0	1.2	3.0	0.0	V-Horn	AV	0.0	37.0	54.0	-17.0
4883.989	33.2	3.6	137.0	1.6	3.0	0.0	H-Horn	AV	0.0	36.8	54.0	-17.2
4883.989	51.8	3.6	137.0	1.6	3.0	0.0	H-Horn	PK	0.0	55.4	74.0	-18.6
4883.989	51.6	3.6	85.0	1.2	3.0	0.0	V-Horn	PK	0.0	55.2	74.0	-18.8




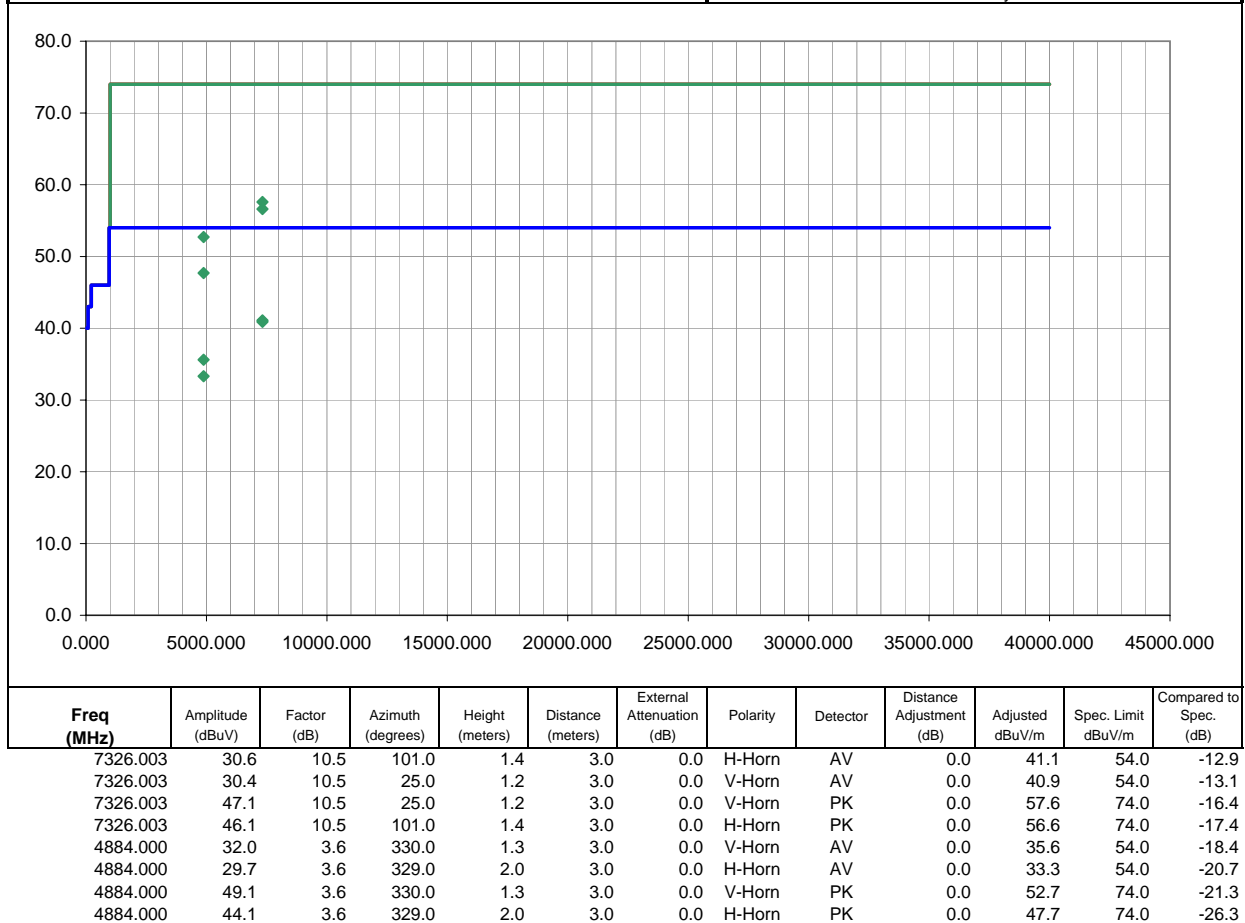
NORTHWEST EMC		RADIATED EMISSIONS DATA SHEET		REV df4.3 09/20/2004								
EUT: BTM311		Work Order: INMC0167										
Serial Number: 43600006		Date: 10/12/04										
Customer: INTERMEC Technologies Corporation		Temperature: 70										
Attendees: None		Humidity: 44%										
Cust. Ref. No.:		Barometric Pressure: 30.27										
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz		Job Site: EV01								
TEST SPECIFICATIONS												
Specification: FCC 15.247(c) Spurious Radiated Emissions				Year: 2003								
Method: ANSI C63.4				Year: 2001								
SAMPLE CALCULATIONS												
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation												
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator												
COMMENTS												
-001 model												
EUT OPERATING MODES												
No hop, high channel												
DEVIATIONS FROM TEST STANDARD												
No deviations.												
RESULTS				Run #								
Pass				8								
Other				 Tested By:								
												
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
7439.979	55.4	11.1	33.0	1.5	3.0	0.0	H-Horn	PK	0.0	66.5	74.0	-7.5
7439.979	35.1	11.1	33.0	1.5	3.0	0.0	H-Horn	AV	0.0	46.2	54.0	-7.8
7439.979	34.4	11.1	90.0	1.3	3.0	0.0	V-Horn	AV	0.0	45.5	54.0	-8.5
7439.979	53.1	11.1	90.0	1.3	3.0	0.0	V-Horn	PK	0.0	64.2	74.0	-9.8
4959.980	34.1	3.6	0.0	1.2	3.0	0.0	H-Horn	AV	0.0	37.7	54.0	-16.3
4959.980	53.1	3.6	0.0	1.2	3.0	0.0	H-Horn	PK	0.0	56.7	74.0	-17.3
4959.980	31.1	3.6	80.0	1.2	3.0	0.0	V-Horn	AV	0.0	34.7	54.0	-19.3
4959.980	47.0	3.6	80.0	1.2	3.0	0.0	V-Horn	PK	0.0	50.6	74.0	-23.4


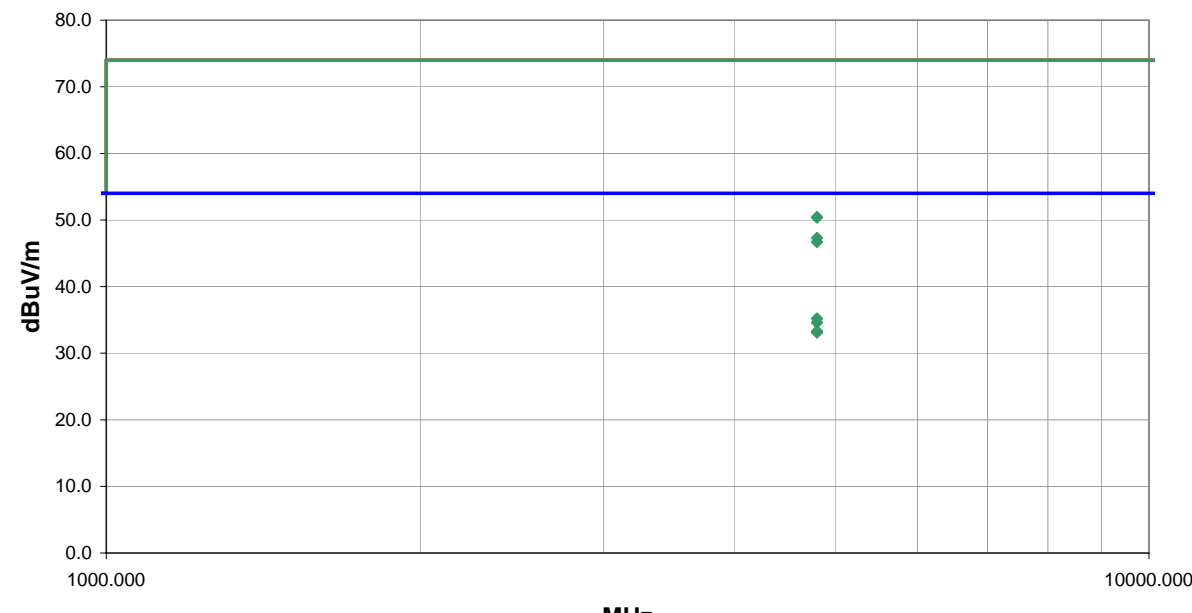
NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.3 09/20/2004	
EUT: BTM311										Work Order: INMC0167					
Serial Number: 43600006										Date: 10/12/04					
Customer: INTERMEC Technologies Corporation										Temperature: 70					
Attendees: None										Humidity: 44%					
Cust. Ref. No.:										Barometric Pressure: 30.27					
Tested by: Holly Ashkannejhad						Power: 120VAC/60Hz		Job Site: EV01							
TEST SPECIFICATIONS															
Specification: FCC 15.247(c) Spurious Radiated Emissions										Year: 2003					
Method: ANSI C63.4										Year: 2001					
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
-001 model															
EUT OPERATING MODES															
No hop, high channel															
DEVIATIONS FROM TEST STANDARD															
No deviations.															
RESULTS												Run #			
Pass												10			
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
22320.000	26.6	9.2	352.0	1.0	3.0	0.0	V-High Horr	AV	0.0	35.8	54.0	-18.2			
22320.000	26.4	9.2	-3.0	1.0	3.0	0.0	I-High Horr	AV	0.0	35.6	54.0	-18.4			
19840.000	23.2	8.9	7.0	1.0	3.0	0.0	I-High Horr	AV	0.0	32.1	54.0	-21.9			
19840.000	23.1	8.9	363.0	1.0	3.0	0.0	V-High Horr	AV	0.0	32.0	54.0	-22.0			
22320.000	38.9	9.2	-3.0	1.0	3.0	0.0	I-High Horr	PK	0.0	48.1	74.0	-25.9			
22320.000	38.4	9.2	352.0	1.0	3.0	0.0	V-High Horr	PK	0.0	47.6	74.0	-26.4			
19840.000	36.1	8.9	7.0	1.0	3.0	0.0	I-High Horr	PK	0.0	45.0	74.0	-29.0			
19840.000	35.0	8.9	363.0	1.0	3.0	0.0	V-High Horr	PK	0.0	43.9	74.0	-30.1			


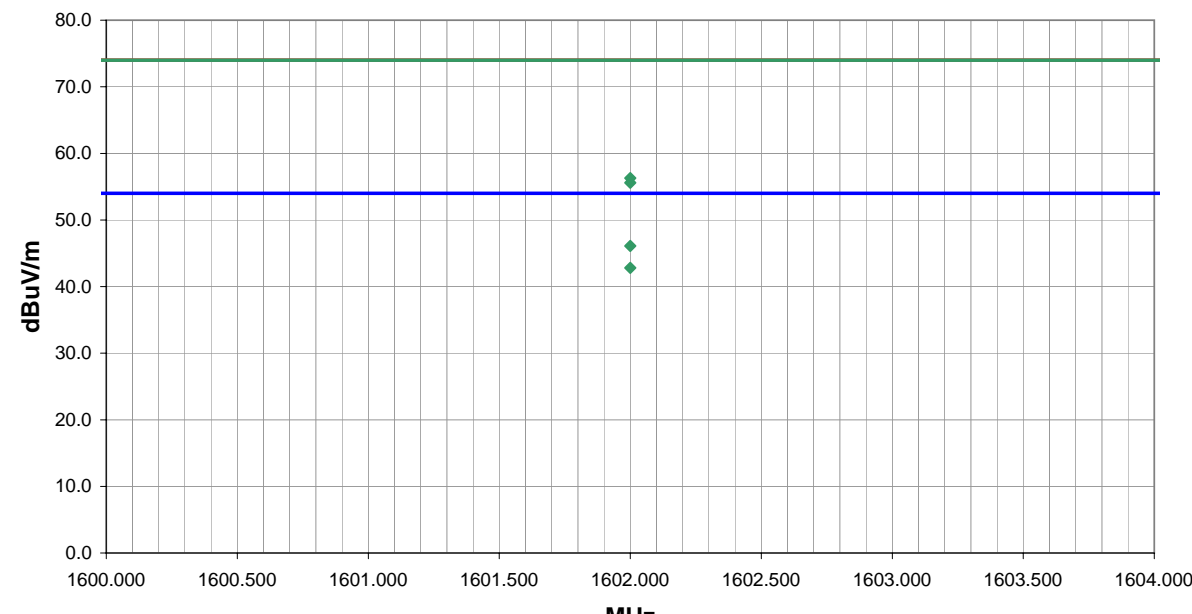
NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET										REV d4.3 09/20/2004	
EUT: BTM311										Work Order: INMC0167											
Serial Number: 43600006										Date: 10/12/04											
Customer: INTERMEC Technologies Corporation										Temperature: 70											
Attendees: None										Humidity: 44%											
Cust. Ref. No.:										Barometric Pressure: 30.27											
Tested by: Holly Ashkannejhad										Power: 120VAC/60Hz										Job Site: EV01	
TEST SPECIFICATIONS																					
Specification: FCC 15.247(c) Spurious Radiated Emissions															Year: 2003						
Method: ANSI C63.4															Year: 2001						
SAMPLE CALCULATIONS																					
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation																					
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator																					
COMMENTS																					
-001 model																					
EUT OPERATING MODES																					
No hop, high channel																					
DEVIATIONS FROM TEST STANDARD																					
No deviations.																					
RESULTS															Run #						
Pass															11						
Other										 Tested By:											
																					
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments								
2483.500	18.8	32.0	159.0	1.0	1.0	0.0	V-Horn	AV	-9.5	41.3	54.0	-12.7	EUT Vertical								
2483.500	38.8	32.0	159.0	1.0	1.0	0.0	V-Horn	PK	-9.5	61.3	74.0	-12.7	EUT Vertical								
2483.500	17.6	32.0	163.0	1.1	1.0	0.0	H-Horn	AV	-9.5	40.1	54.0	-13.9	EUT on side								
2483.500	36.5	32.0	163.0	1.1	1.0	0.0	H-Horn	PK	-9.5	59.0	74.0	-15.0	EUT on side								


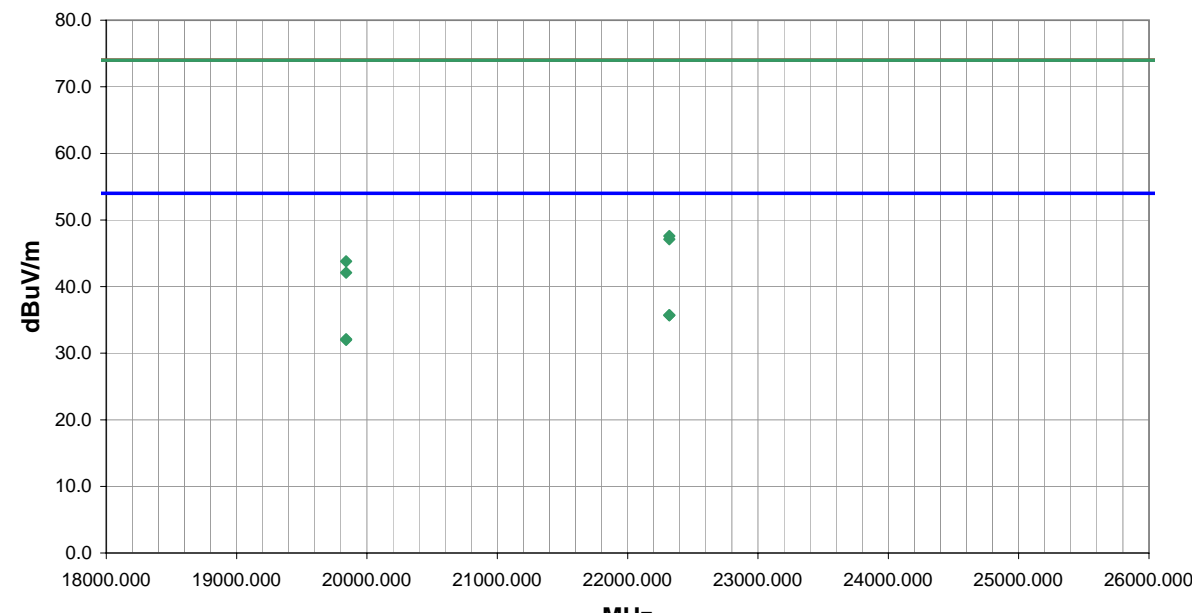
NORTHWEST		REV											
EMC		d4.3											
RADIATED EMISSIONS DATA SHEET		09/20/2004											
EUT: BTM311		Work Order: INMC0167											
Serial Number: 43600004		Date: 10/11/04											
Customer: INTERMEC Technologies Corporation		Temperature: 70											
Attendees: None		Humidity: 44%											
Cust. Ref. No.:		Barometric Pressure: 30.27											
Tested by: Rod Peloquin		Power: 120VAC/60Hz											
		Job Site: EV01											
TEST SPECIFICATIONS													
Specification: FCC 15.247(c) Spurious Radiated Emissions		Year: 2003											
Method: ANSI C63.4		Year: 2001											
SAMPLE CALCULATIONS													
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation													
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator													
COMMENTS													
-002 model													
EUT OPERATING MODES													
No hop, high channel													
DEVIATIONS FROM TEST STANDARD													
No deviations.													
RESULTS		Run #											
Pass		1											
Other		Tested By: 											
													
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments
7440.000	55.8	11.1	328.0	1.1	3.0	0.0	V-Horn	PK	0.0	66.9	74.0	-7.1	EUT Vertical
7440.000	35.3	11.1	328.0	1.1	3.0	0.0	V-Horn	AV	0.0	46.4	54.0	-7.6	EUT Vertical
7440.000	34.3	11.1	292.0	1.6	3.0	0.0	H-Horn	AV	0.0	45.4	54.0	-8.6	EUT horizontal
7440.000	34.1	11.1	45.0	1.4	3.0	0.0	H-Horn	AV	0.0	45.2	54.0	-8.8	EUT on side
7440.000	34.0	11.1	105.0	1.8	3.0	0.0	V-Horn	AV	0.0	45.1	54.0	-8.9	EUT on side
7440.000	33.2	11.1	96.0	1.2	3.0	0.0	V-Horn	AV	0.0	44.3	54.0	-9.7	EUT horizontal
7440.000	52.7	11.1	292.0	1.6	3.0	0.0	H-Horn	PK	0.0	63.8	74.0	-10.2	EUT horizontal
7440.000	52.5	11.1	45.0	1.4	3.0	0.0	H-Horn	PK	0.0	63.6	74.0	-10.4	EUT on side
7440.000	32.2	11.1	190.0	1.2	3.0	0.0	H-Horn	AV	0.0	43.3	54.0	-10.7	EUT Vertical
7440.000	52.2	11.1	105.0	1.8	3.0	0.0	V-Horn	PK	0.0	63.3	74.0	-10.7	EUT on side
7440.000	50.5	11.1	96.0	1.2	3.0	0.0	V-Horn	PK	0.0	61.6	74.0	-12.4	EUT horizontal
7440.000	48.0	11.1	190.0	1.2	3.0	0.0	H-Horn	PK	0.0	59.1	74.0	-14.9	EUT Vertical
4960.001	32.4	3.6	343.0	1.3	3.0	0.0	V-Horn	AV	0.0	36.0	54.0	-18.0	EUT Vertical
4960.001	31.8	3.6	24.0	1.4	3.0	0.0	H-Horn	AV	0.0	35.4	54.0	-18.6	EUT on side
4960.001	31.5	3.6	222.0	1.2	3.0	0.0	H-Horn	AV	0.0	35.1	54.0	-18.9	EUT horizontal
4960.001	31.2	3.6	255.0	1.2	3.0	0.0	V-Horn	AV	0.0	34.8	54.0	-19.2	EUT horizontal
4960.001	30.9	3.6	184.0	1.2	3.0	0.0	V-Horn	AV	0.0	34.5	54.0	-19.5	EUT on side
4960.001	50.8	3.6	343.0	1.3	3.0	0.0	V-Horn	PK	0.0	54.4	74.0	-19.6	EUT Vertical
4960.001	30.5	3.6	201.0	1.3	3.0	0.0	H-Horn	AV	0.0	34.1	54.0	-19.9	EUT Vertical
4960.001	49.4	3.6	24.0	1.4	3.0	0.0	H-Horn	PK	0.0	53.0	74.0	-21.0	EUT on side

NORTHWEST EMC		RADIATED EMISSIONS DATA SHEET		REV df4.3 09/20/2004	
EUT: BTM311		Work Order: INMC0167			
Serial Number: 43600004		Date: 10/11/04			
Customer: INTERMEC Technologies Corporation		Temperature: 70			
Attendees: None		Humidity: 44%			
Cust. Ref. No.:		Barometric Pressure: 30.27			
Tested by: Rod Peloquin		Power: 120VAC/60Hz		Job Site: EV01	
<b>TEST SPECIFICATIONS</b>					
Specification: FCC 15.247(c) Spurious Radiated Emissions				Year: 2003	
Method: ANSI C63.4				Year: 2001	
<b>SAMPLE CALCULATIONS</b>					
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation					
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator					
<b>COMMENTS</b>					
-002 model					
<b>EUT OPERATING MODES</b>					
No hop, mid channel					
<b>DEVIATIONS FROM TEST STANDARD</b>					
No deviations.					
<b>RESULTS</b>				<b>Run #</b>	
Pass				2	
Other					
				 Tested By:	







NORTHWEST EMC		RADIATED EMISSIONS DATA SHEET										REV df4.3 09/20/2004	
EUT: BTM311		Work Order: INMC0167											
Serial Number: 43600004		Date: 10/11/04											
Customer: INTERMEC Technologies Corporation		Temperature: 70											
Attendees: None		Humidity: 44%											
Cust. Ref. No.:		Barometric Pressure: 30.27											
Tested by: Rod Peloquin		Power: 120VAC/60Hz		Job Site: EV01									
TEST SPECIFICATIONS													
Specification: FCC 15.247(c) Spurious Radiated Emissions										Year: 2003			
Method: ANSI C63.4										Year: 2001			
SAMPLE CALCULATIONS													
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation													
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator													
COMMENTS													
-002 model													
EUT OPERATING MODES													
No hop, low channel													
DEVIATIONS FROM TEST STANDARD													
No deviations.													
RESULTS												Run #	
Pass												3	
Other													
										 Tested By:			
													
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	
4804.000	31.9	3.3	326.0	1.3	3.0	0.0	V-Horn	AV	0.0	35.2	54.0	-18.8	
4804.000	31.3	3.3	5.0	1.4	3.0	0.0	H-Horn	AV	0.0	34.6	54.0	-19.4	
4804.168	30.0	3.3	132.0	1.2	3.0	0.0	H-Horn	AV	0.0	33.3	54.0	-20.7	
4804.000	29.8	3.3	88.0	1.5	3.0	0.0	V-Horn	AV	0.0	33.1	54.0	-20.9	
4804.000	47.1	3.3	326.0	1.3	3.0	0.0	V-Horn	PK	0.0	50.4	74.0	-23.6	
4804.000	47.1	3.3	5.0	1.4	3.0	0.0	H-Horn	PK	0.0	50.4	74.0	-23.6	
4804.000	44.0	3.3	88.0	1.5	3.0	0.0	V-Horn	PK	0.0	47.3	74.0	-26.7	
4804.000	43.4	3.3	132.0	1.2	3.0	0.0	H-Horn	PK	0.0	46.7	74.0	-27.3	


NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.3 09/20/2004	
EUT: BTM311						Work Order: INMC0167									
Serial Number: 43600004						Date: 10/12/04									
Customer: INTERMEC Technologies Corporation						Temperature: 70									
Attendees: None						Humidity: 44%									
Cust. Ref. No.:						Barometric Pressure: 30.27									
Tested by: Holly Ashkannejhad				Power: 120VAC/60Hz		Job Site: EV01									
TEST SPECIFICATIONS															
Specification: FCC 15.247(c) Spurious Radiated Emissions						Year: 2003									
Method: ANSI C63.4						Year: 2001									
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
-002 model															
EUT OPERATING MODES															
No hop, low channel															
DEVIATIONS FROM TEST STANDARD															
No deviations.															
RESULTS										Run #					
Pass										5					
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
1602.000	32.3	-6.2	136.0	1.2	3.0	20.0	V-Horn	AV	0.0	46.1	54.0	-7.9			
1602.000	29.0	-6.2	148.0	1.1	3.0	20.0	H-Horn	AV	0.0	42.8	54.0	-11.2			
1602.000	42.5	-6.2	148.0	1.1	3.0	20.0	H-Horn	PK	0.0	56.3	74.0	-17.7			
1602.000	41.8	-6.2	136.0	1.2	3.0	20.0	V-Horn	PK	0.0	55.6	74.0	-18.4			

NORTHWEST EMC		RADIATED EMISSIONS DATA SHEET		REV df4.3 09/20/2004								
EUT: BTM311		Work Order: INMC0167										
Serial Number: 43600004		Date: 10/12/04										
Customer: INTERMEC Technologies Corporation		Temperature: 70										
Attendees: None		Humidity: 44%										
Cust. Ref. No.:		Barometric Pressure: 30.27										
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz		Job Site: EV01								
TEST SPECIFICATIONS												
Specification: FCC 15.247(c) Spurious Radiated Emissions				Year: 2003								
Method: ANSI C63.4				Year: 2001								
SAMPLE CALCULATIONS												
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation												
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator												
COMMENTS												
-002 model												
EUT OPERATING MODES												
No hop, high channel												
DEVIATIONS FROM TEST STANDARD												
No deviations.												
RESULTS				Run #								
Pass				9								
Other				 Tested By:								
												
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
22320.000	26.5	9.2	-3.0	1.0	3.0	0.0	V-High Horr	AV	0.0	35.7	54.0	-18.3
22320.000	26.5	9.2	344.0	1.0	3.0	0.0	I-High Horr	AV	0.0	35.7	54.0	-18.3
19840.000	23.2	8.9	-3.0	1.0	3.0	0.0	V-High Horr	AV	0.0	32.1	54.0	-21.9
19840.000	23.1	8.9	363.0	1.0	3.0	0.0	I-High Horr	AV	0.0	32.0	54.0	-22.0
22320.000	38.4	9.2	344.0	1.0	3.0	0.0	I-High Horr	PK	0.0	47.6	74.0	-26.4
22320.000	37.9	9.2	-3.0	1.0	3.0	0.0	V-High Horr	PK	0.0	47.1	74.0	-26.9
19840.000	34.9	8.9	363.0	1.0	3.0	0.0	I-High Horr	PK	0.0	43.8	74.0	-30.2
19840.000	33.2	8.9	-3.0	1.0	3.0	0.0	V-High Horr	PK	0.0	42.1	74.0	-31.9

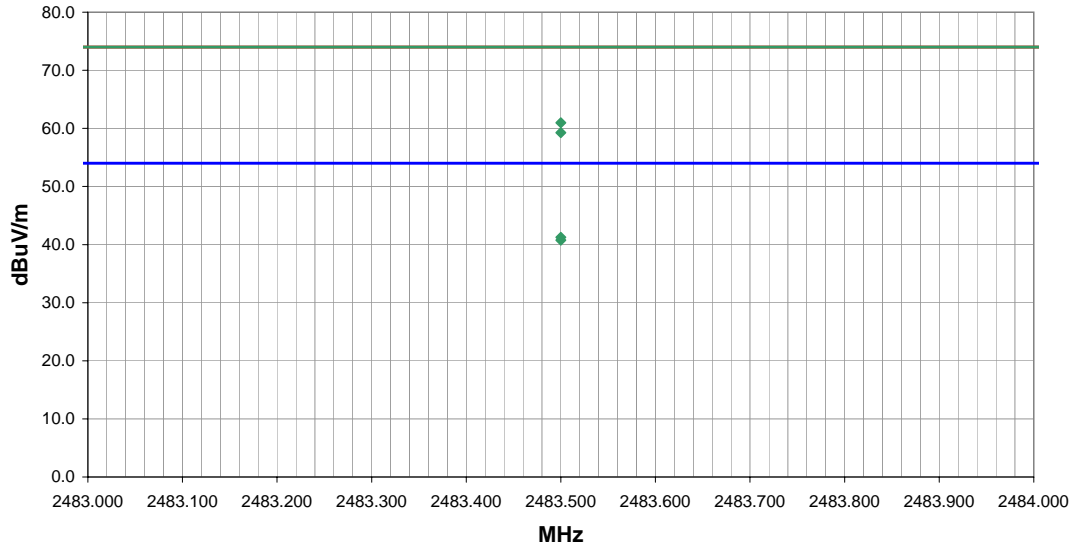

NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV d14.3 09/20/2004	
EUT: BTM311					Work Order: INMC0167										
Serial Number: 43600004					Date: 10/12/04										
Customer: INTERMEC Technologies Corporation					Temperature: 70										
Attendees: None					Humidity: 44%										
Cust. Ref. No.:					Barometric Pressure: 30.27										
Tested by: Holly Ashkannejhad					Power: 120VAC/60Hz					Job Site: EV01					
TEST SPECIFICATIONS															
Specification: FCC 15.247(c) Spurious Radiated Emissions										Year: 2003					
Method: ANSI C63.4										Year: 2001					
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
-002 model															
EUT OPERATING MODES															
No hop, high channel															
DEVIATIONS FROM TEST STANDARD															
No deviations.															
RESULTS										Run #					
Pass										12					
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments		
2483.500	18.8	32.0	254.0	1.1	1.0	0.0	V-Horn	AV	-9.5	41.3	54.0	-12.7	EUT Vertical		
2483.500	38.5	32.0	254.0	1.1	1.0	0.0	V-Horn	PK	-9.5	61.0	74.0	-13.0	EUT Vertical		
2483.500	18.3	32.0	19.0	1.0	1.0	0.0	H-Horn	AV	-9.5	40.8	54.0	-13.2	EUT Horizontal		
2483.500	36.8	32.0	19.0	1.0	1.0	0.0	H-Horn	PK	-9.5	59.3	74.0	-14.7	EUT Horizontal		

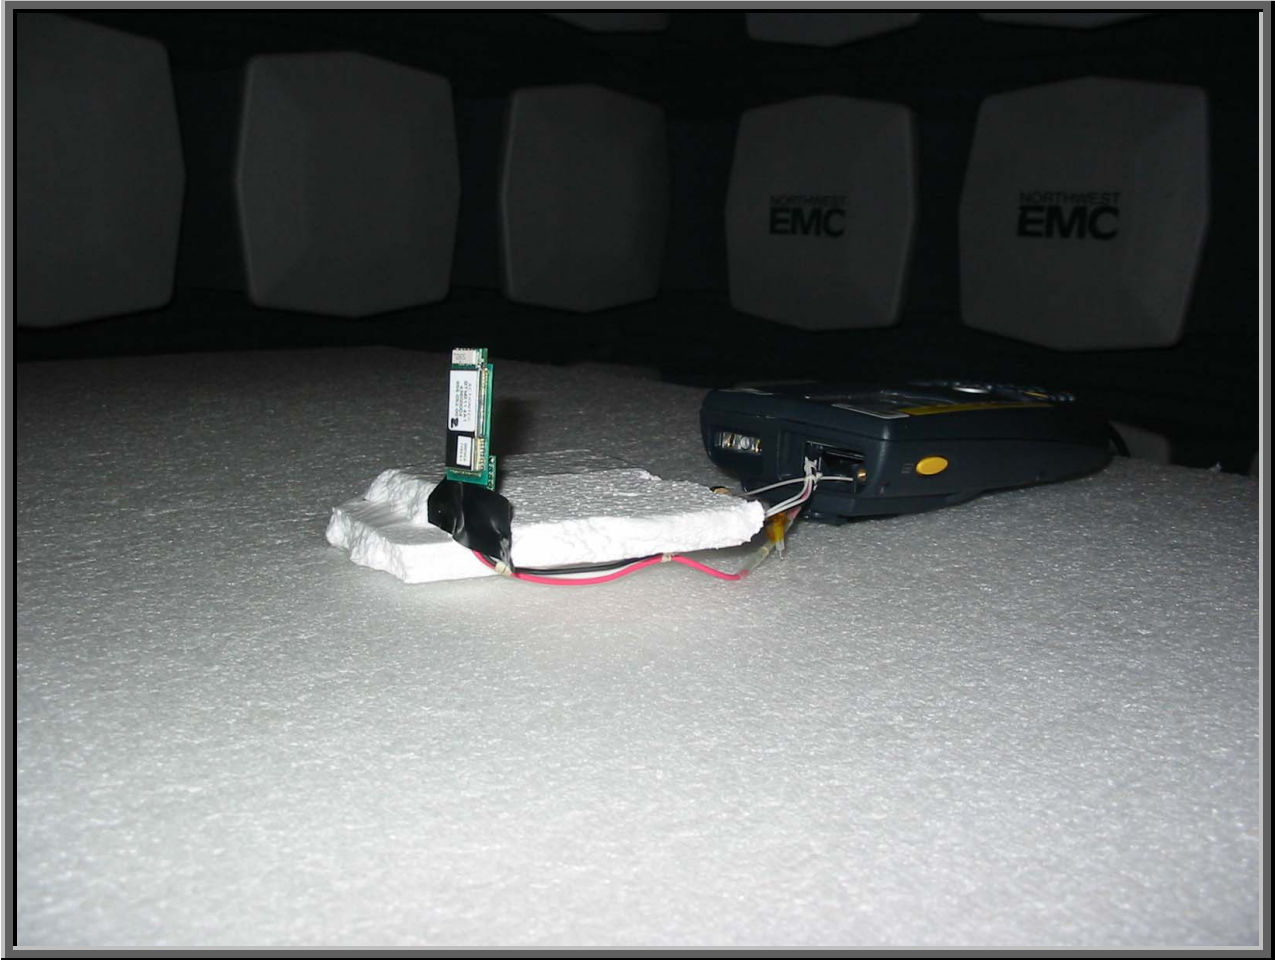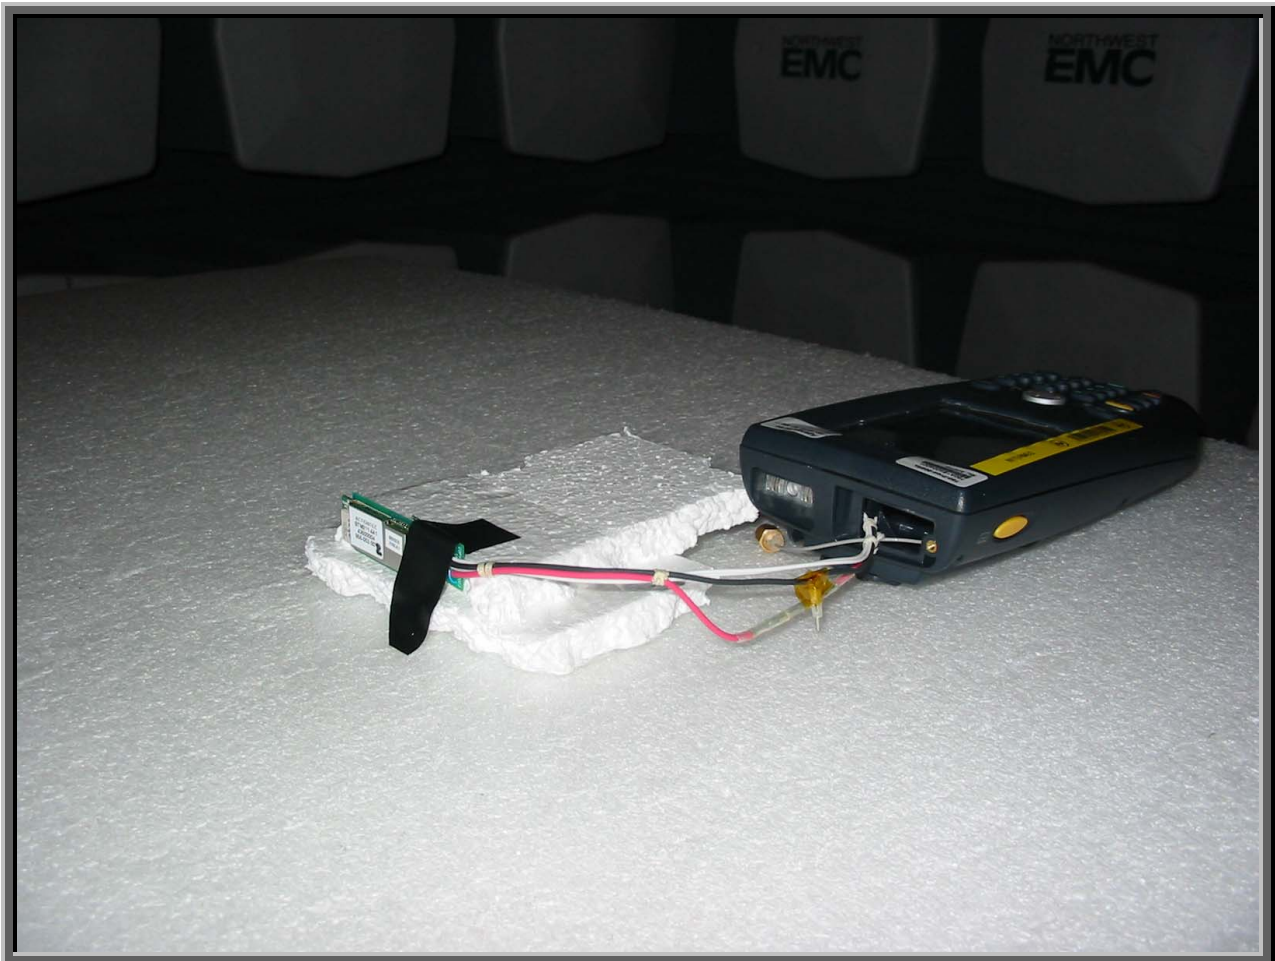

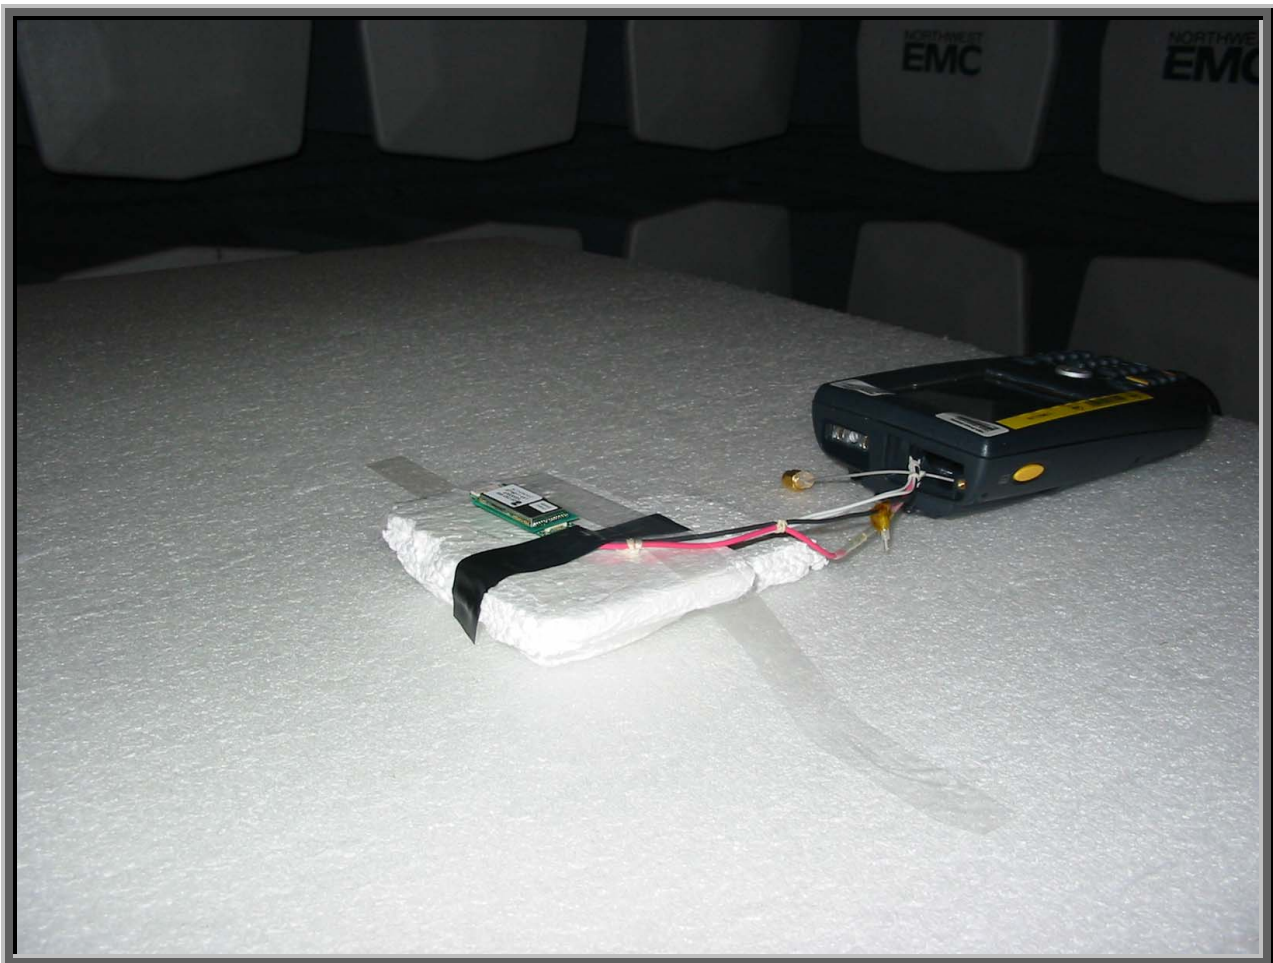





**Justification**

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

**Channels in Specified Band Investigated:**

High
Mid
Low

**Operating Modes Investigated:**

No Hop
--------

**Data Rates Investigated:**

Maximum
---------

**Output Power Setting(s) Investigated:**

Maximum
---------

**Power Input Settings Investigated:**

120 VAC, 60 Hz.
-----------------

**Software\Firmware Applied During Test**

<b>Exercise software</b>	BlueTest	<b>Version</b>	11/18/03
<b>Description</b>			
The system was tested using special test software on the 700C that controlled channel and operating mode of the Bluetooth radio.			

**EUT and Peripherals**

<b>Description</b>	<b>Manufacturer</b>	<b>Model/Part Number</b>	<b>Serial Number</b>
Power Adapter	Elpac Power Systems	FW1812	014868
EUT- Bluetooth Radio	Actiontec	BTM311 (P/N 855-052-002)	43600004
Host - Handheld Computer	Intermec Technologies Corporation	700C	05400400868
Power Adapter	Cui Stack	DV-51AAT	Unknown

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Leads	No	1.0	No	EUT- Bluetooth Radio	Power Adapter (CUI Stack)
AC Power	No	1.2	No	Power Adapter (CUI Stack)	AC Mains
DC Power	No	2m	No	Host - Handheld Computer	Power Adapter (Elpac)
AC Power	No	1.5	No	AC Mains	Power Adapter (Elpac)

Measurement Equipment					
Description	Manufacturer	Model	Identifier	Last Cal	Interval
High Pass Filter	TTE	H97-100k-50-720B	HFC	02/01/2004	13 mo
LISN	Solar	9252-50-R-24-BNC	LIN	12/16/2003	13 mo
LISN	Solar	9252-50-R-24-BNC	LIO	04/30/2004	12 mo
Quasi-Peak Adapter	Hewlett-Packard	85650A	AQF	12/23/2003	13 mo
Spectrum Analyzer	Hewlett-Packard	8566B	AAL	12/23/2003	13 mo
Spectrum Analyzer Display	Hewlett Packard	85662A	AALD	12/23/2003	13 mo


### Test Description

**Requirement:** Per 47 15.207(c), if the EUT is connected to the AC power line indirectly, obtaining its power from another device that is connected to the AC power line, then it should be tested to demonstrate compliance with the conducted limits of 15.207.

**Configuration:** The EUT will be powered from a device that could be connected to the AC power line. Therefore, the measurements were made on the device used to power the EUT. The AC power line conducted emissions were measured with the EUT operating at the lowest, the highest, and a middle channel in the operational band. The EUT was transmitting at its maximum data rate. For each mode, the spectrum was scanned from 150 kHz to 30 MHz. The test setup and procedures were in accordance with ANSI C63.4-2003.


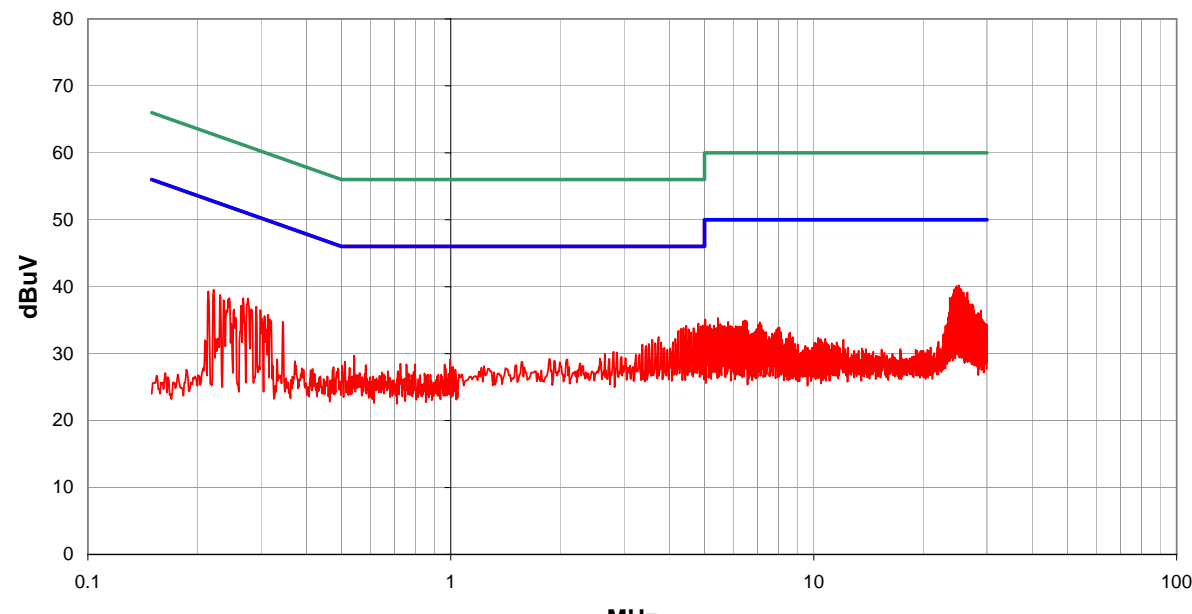
Completed by:


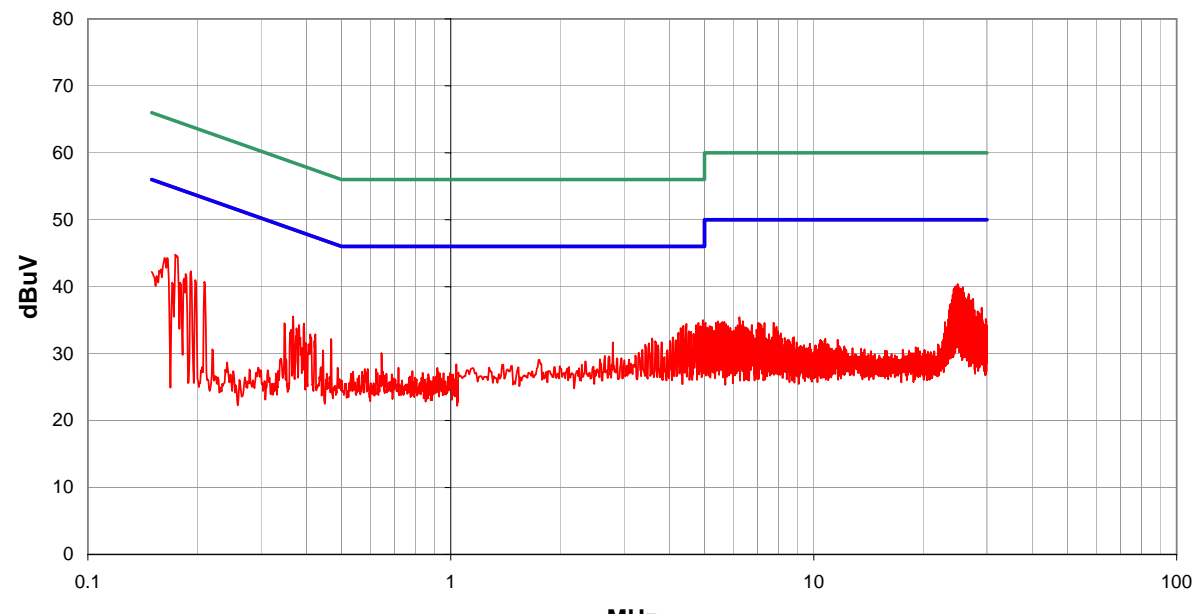
*Holly Anting*

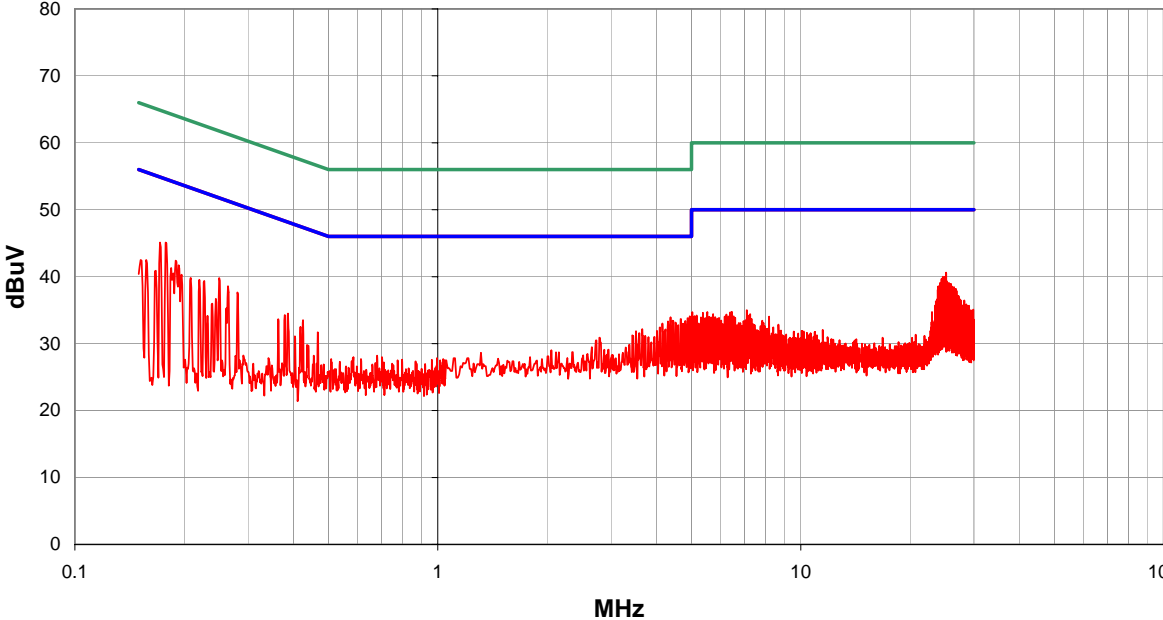
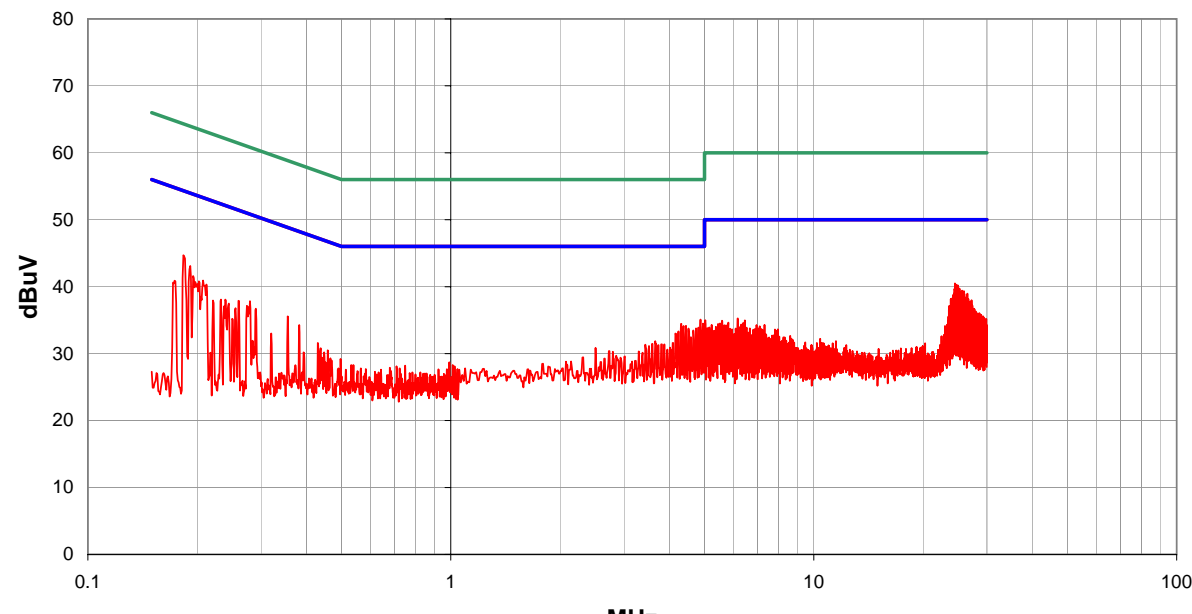
NORTHWEST		CONDUCTED EMISSIONS DATA SHEET				REV df4.4 10/22/2004			
EMC									
EUT: BTM311		Work Order: INMC0167							
Serial Number: 43600004		Date: 11/05/04							
Customer: INTERMEC Technologies Corporation		Temperature: 70							
Attendees: None		Humidity: 34%							
Cust. Ref. No.:		Barometric Pressure: 30.18							
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz		Job Site: EV01					
TEST SPECIFICATIONS									
Specification: FCC 15.207 AC Powerline Conducted Emissions				Year: 2004					
Method: ANSI C63.4				Year: 2003					
SAMPLE CALCULATIONS									
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation									
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator									
COMMENTS									
EUT OPERATING MODES									
No hop, low channel									
DEVIATIONS FROM TEST STANDARD									
No deviations.									
RESULTS				Line		Run #			
Pass				N		1			
Other									
				Holly Ashkannejhad Tested By:					
									
Freq (MHz)	Amplitude (dBuV)		Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks [PK] from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
25.138	19.1		0.0	1.5	20.0		40.6	50.0	-9.4
0.178	25.0		0.0	0.1	20.0		45.1	54.6	-9.5
0.172	25.0		0.0	0.1	20.0		45.1	54.9	-9.8
24.940	18.5		0.0	1.5	20.0		40.0	50.0	-10.0
24.654	18.5		0.0	1.5	20.0		40.0	50.0	-10.0
24.720	18.3		0.0	1.5	20.0		39.8	50.0	-10.2
24.566	18.3		0.0	1.5	20.0		39.8	50.0	-10.2
24.995	18.2		0.0	1.5	20.0		39.7	50.0	-10.3
24.434	18.2		0.0	1.5	20.0		39.7	50.0	-10.3
24.500	18.1		0.0	1.5	20.0		39.6	50.0	-10.4
24.852	18.0		0.0	1.5	20.0		39.5	50.0	-10.5
24.786	18.0		0.0	1.5	20.0		39.5	50.0	-10.5
25.072	17.9		0.0	1.5	20.0		39.4	50.0	-10.6
25.281	17.8		0.0	1.5	20.0		39.3	50.0	-10.7
25.358	17.6		0.0	1.5	20.0		39.1	50.0	-10.9
25.226	17.6		0.0	1.5	20.0		39.1	50.0	-10.9
24.357	17.6		0.0	1.5	20.0		39.1	50.0	-10.9
24.214	17.6		0.0	1.5	20.0		39.1	50.0	-10.9
25.644	17.5		0.0	1.5	20.0		39.0	50.0	-11.0


NORTHWEST		EMC				CONDUCTED EMISSIONS DATA SHEET				REV df4.4 10/22/2004		
EUT: BTM311		Serial Number: 43600004				Customer: INTERMEC Technologies Corporation		Attendees: None		Cust. Ref. No.:		
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz		Work Order: INMC0167		Date: 11/05/04		Temperature: 70		Humidity: 34%		
				Barometric Pressure: 30.18		Job Site: EV01						
TEST SPECIFICATIONS												
Specification: FCC 15.207 AC Powerline Conducted Emissions						Year: 2004						
Method: ANSI C63.4						Year: 2003						
SAMPLE CALCULATIONS												
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation												
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator												
COMMENTS												
EUT OPERATING MODES												
No hop, low channel												
DEVIATIONS FROM TEST STANDARD												
No deviations.												
RESULTS												
Pass						Line L1		Run # 2				
Other												
						<div>Holly Ashkannejhad</div> <div>Tested By:</div>						
<div><div>80</div><div>70</div><div>60</div><div>50</div><div>40</div><div>30</div><div>20</div><div>10</div><div>0</div><div>0.1</div><div>1</div><div>10</div><div>100</div><div>MHz</div><div>dBuV</div></div>												
Freq (MHz)	Amplitude (dBuV)			Transducer (dB)	Cable (dB)	External Attenuation (dB)		Detector (blank equal peaks [PK] from scan)		Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
24.929	18.8			0.0	1.5	20.0				40.3	50.0	-9.7
24.852	18.8			0.0	1.5	20.0				40.3	50.0	-9.7
24.588	18.6			0.0	1.5	20.0				40.1	50.0	-9.9
24.995	18.5			0.0	1.5	20.0				40.0	50.0	-10.0
24.786	18.4			0.0	1.5	20.0				39.9	50.0	-10.1
24.643	18.3			0.0	1.5	20.0				39.8	50.0	-10.2
25.204	18.2			0.0	1.5	20.0				39.7	50.0	-10.3
25.072	18.2			0.0	1.5	20.0				39.7	50.0	-10.3
24.709	18.2			0.0	1.5	20.0				39.7	50.0	-10.3
24.500	17.9			0.0	1.5	20.0				39.4	50.0	-10.6
24.423	17.9			0.0	1.5	20.0				39.4	50.0	-10.6
24.368	17.9			0.0	1.5	20.0				39.4	50.0	-10.6
25.721	17.8			0.0	1.5	20.0				39.3	50.0	-10.7
25.787	17.7			0.0	1.5	20.0				39.2	50.0	-10.8
25.149	17.6			0.0	1.5	20.0				39.1	50.0	-10.9
4.947	14.4			0.0	0.7	20.0				35.1	46.0	-10.9
25.501	17.5			0.0	1.5	20.0				39.0	50.0	-11.0
25.358	17.5			0.0	1.5	20.0				39.0	50.0	-11.0
25.864	17.4			0.0	1.5	20.0				38.9	50.0	-11.1



NORTHWEST EMC		CONDUCTED EMISSIONS DATA SHEET				REV df4.4 10/22/2004						
EUT: BTM311		Work Order: INMC0167										
Serial Number: 43600004		Date: 11/05/04										
Customer: INTERMEC Technologies Corporation		Temperature: 70										
Attendees: None		Humidity: 34%										
Cust. Ref. No.:		Barometric Pressure: 30.18										
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz		Job Site: EV01								
TEST SPECIFICATIONS												
Specification: FCC 15.207 AC Powerline Conducted Emissions				Year: 2004								
Method: ANSI C63.4				Year: 2003								
SAMPLE CALCULATIONS												
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation												
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator												
COMMENTS												
EUT OPERATING MODES												
No hop, mid channel												
DEVIATIONS FROM TEST STANDARD												
No deviations.												
RESULTS												
Pass		Line L1		Run # 3								
Other		 Tested By:										
												
Freq (MHz)	Amplitude (dBuV)			Transducer (dB)	Cable (dB)	External Attenuation (dB)		Detector (blank equal peaks [PK] from scan)		Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
25.149	18.7			0.0	1.5	20.0				40.2	50.0	-9.8
25.006	18.6			0.0	1.5	20.0				40.1	50.0	-9.9
24.786	18.6			0.0	1.5	20.0				40.1	50.0	-9.9
24.643	18.5			0.0	1.5	20.0				40.0	50.0	-10.0
24.929	18.3			0.0	1.5	20.0				39.8	50.0	-10.2
24.874	18.3			0.0	1.5	20.0				39.8	50.0	-10.2
25.358	18.2			0.0	1.5	20.0				39.7	50.0	-10.3
25.215	18.2			0.0	1.5	20.0				39.7	50.0	-10.3
24.720	18.2			0.0	1.5	20.0				39.7	50.0	-10.3
24.566	18.2			0.0	1.5	20.0				39.7	50.0	-10.3
24.500	18.1			0.0	1.5	20.0				39.6	50.0	-10.4
24.368	18.1			0.0	1.5	20.0				39.6	50.0	-10.4
25.501	18.0			0.0	1.5	20.0				39.5	50.0	-10.5
25.072	18.0			0.0	1.5	20.0				39.5	50.0	-10.5
25.435	17.7			0.0	1.5	20.0				39.2	50.0	-10.8
24.434	17.7			0.0	1.5	20.0				39.2	50.0	-10.8
26.502	17.6			0.0	1.6	20.0				39.2	50.0	-10.8
25.864	17.6			0.0	1.5	20.0				39.1	50.0	-10.9
24.280	17.6			0.0	1.5	20.0				39.1	50.0	-10.9


NORTHWEST EMC		CONDUCTED EMISSIONS DATA SHEET				REV df4.4 10/22/2004						
EUT: BTM311		Work Order: INMC0167										
Serial Number: 43600004		Date: 11/05/04										
Customer: INTERMEC Technologies Corporation		Temperature: 70										
Attendees: None		Humidity: 34%										
Cust. Ref. No.:		Barometric Pressure: 30.18										
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz		Job Site: EV01								
TEST SPECIFICATIONS												
Specification: FCC 15.207 AC Powerline Conducted Emissions				Year: 2004								
Method: ANSI C63.4				Year: 2003								
SAMPLE CALCULATIONS												
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation												
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator												
COMMENTS												
EUT OPERATING MODES												
No hop, mid channel												
DEVIATIONS FROM TEST STANDARD												
No deviations.												
RESULTS												
Pass		Line N		Run # 4								
Other		 Tested By:										
												
Freq (MHz)	Amplitude (dBuV)			Transducer (dB)	Cable (dB)	External Attenuation (dB)		Detector (blank equal peaks [PK] from scan)		Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
24.918	18.9			0.0	1.5	20.0				40.4	50.0	-9.6
24.995	18.8			0.0	1.5	20.0				40.3	50.0	-9.7
24.643	18.6			0.0	1.5	20.0				40.1	50.0	-9.9
0.174	24.7			0.0	0.1	20.0				44.8	54.8	-10.0
24.500	18.5			0.0	1.5	20.0				40.0	50.0	-10.0
25.798	18.4			0.0	1.5	20.0				39.9	50.0	-10.1
25.160	18.3			0.0	1.5	20.0				39.8	50.0	-10.2
24.423	18.3			0.0	1.5	20.0				39.8	50.0	-10.2
25.424	18.2			0.0	1.5	20.0				39.7	50.0	-10.3
24.852	18.2			0.0	1.5	20.0				39.7	50.0	-10.3
24.786	18.2			0.0	1.5	20.0				39.7	50.0	-10.3
24.720	18.2			0.0	1.5	20.0				39.7	50.0	-10.3
24.566	18.2			0.0	1.5	20.0				39.7	50.0	-10.3
25.215	18.1			0.0	1.5	20.0				39.6	50.0	-10.4
24.302	18.1			0.0	1.5	20.0				39.6	50.0	-10.4
25.072	18.0			0.0	1.5	20.0				39.5	50.0	-10.5
24.368	18.0			0.0	1.5	20.0				39.5	50.0	-10.5
25.710	17.8			0.0	1.5	20.0				39.3	50.0	-10.7
25.292	17.8			0.0	1.5	20.0				39.3	50.0	-10.7

NORTHWEST EMC		CONDUCTED EMISSIONS DATA SHEET				REV df4.4 10/22/2004				
EUT: BTM311		Work Order: INMC0167								
Serial Number: 43600004		Date: 11/05/04								
Customer: INTERMEC Technologies Corporation		Temperature: 70								
Attendees: None		Humidity: 34%								
Cust. Ref. No.:		Barometric Pressure: 30.18								
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz		Job Site: EV01						
TEST SPECIFICATIONS										
Specification: FCC 15.207 AC Powerline Conducted Emissions				Year: 2004						
Method: ANSI C63.4				Year: 2003						
SAMPLE CALCULATIONS										
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation										
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator										
COMMENTS										
EUT OPERATING MODES										
No hop, high channel										
DEVIATIONS FROM TEST STANDARD										
No deviations.										
RESULTS										
Pass		Line N		Run # 5						
Other		 Tested By:								
										
Freq (MHz)	Amplitude (dBuV)			Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks [PK] from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
24.500	19.0			0.0	1.5	20.0		40.5	50.0	-9.5
0.183	24.6			0.0	0.1	20.0		44.7	54.3	-9.6
24.720	18.8			0.0	1.5	20.0		40.3	50.0	-9.7
24.929	18.7			0.0	1.5	20.0		40.2	50.0	-9.8
24.577	18.7			0.0	1.5	20.0		40.2	50.0	-9.8
24.852	18.5			0.0	1.5	20.0		40.0	50.0	-10.0
24.786	18.4			0.0	1.5	20.0		39.9	50.0	-10.1
25.072	18.3			0.0	1.5	20.0		39.8	50.0	-10.2
24.643	18.3			0.0	1.5	20.0		39.8	50.0	-10.2
25.226	18.2			0.0	1.5	20.0		39.7	50.0	-10.3
25.149	18.2			0.0	1.5	20.0		39.7	50.0	-10.3
24.423	18.2			0.0	1.5	20.0		39.7	50.0	-10.3
25.006	18.0			0.0	1.5	20.0		39.5	50.0	-10.5
25.644	17.9			0.0	1.5	20.0		39.4	50.0	-10.6
25.930	17.8			0.0	1.5	20.0		39.3	50.0	-10.7
25.578	17.7			0.0	1.5	20.0		39.2	50.0	-10.8
25.446	17.7			0.0	1.5	20.0		39.2	50.0	-10.8
25.281	17.7			0.0	1.5	20.0		39.2	50.0	-10.8
0.191	23.0			0.0	0.1	20.0		43.1	54.0	-10.9

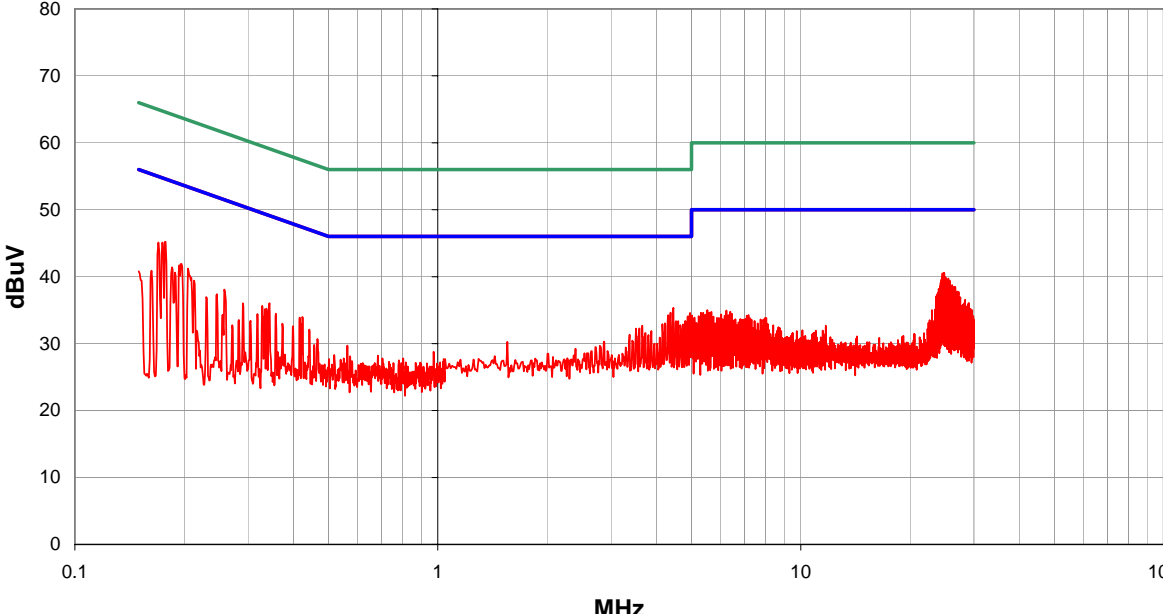NORTHWEST		CONDUCTED EMISSIONS DATA SHEET				REV df4.4 10/22/2004						
EMC												
EUT: BTM311		Work Order: INMC0167										
Serial Number: 43600004		Date: 11/05/04										
Customer: INTERMEC Technologies Corporation		Temperature: 70										
Attendees: None		Humidity: 34%										
Cust. Ref. No.:		Barometric Pressure: 30.18										
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz		Job Site: EV01								
TEST SPECIFICATIONS												
Specification: FCC 15.207 AC Powerline Conducted Emissions				Year: 2004								
Method: ANSI C63.4				Year: 2003								
SAMPLE CALCULATIONS												
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation												
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator												
COMMENTS												
EUT OPERATING MODES												
No hop, high channel												
DEVIATIONS FROM TEST STANDARD												
No deviations.												
RESULTS				Line		Run #						
Pass				L1		6						
Other												
				Holly Ashkannejhad Tested By:								
												
Freq (MHz)	Amplitude (dBuV)			Transducer (dB)	Cable (dB)	External Attenuation (dB)		Detector (blank equal peaks [PK] from scan)		Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
24.786	19.1			0.0	1.5	20.0				40.6	50.0	-9.4
0.177	25.1			0.0	0.1	20.0				45.2	54.6	-9.4
24.863	19.0			0.0	1.5	20.0				40.5	50.0	-9.5
24.566	19.0			0.0	1.5	20.0				40.5	50.0	-9.5
0.174	25.0			0.0	0.1	20.0				45.1	54.8	-9.7
24.643	18.8			0.0	1.5	20.0				40.3	50.0	-9.7
0.170	25.0			0.0	0.1	20.0				45.1	55.0	-9.9
24.940	18.5			0.0	1.5	20.0				40.0	50.0	-10.0
24.500	18.5			0.0	1.5	20.0				40.0	50.0	-10.0
25.072	18.4			0.0	1.5	20.0				39.9	50.0	-10.1
24.709	18.4			0.0	1.5	20.0				39.9	50.0	-10.1
25.512	18.2			0.0	1.5	20.0				39.7	50.0	-10.3
25.006	18.1			0.0	1.5	20.0				39.6	50.0	-10.4
24.423	18.1			0.0	1.5	20.0				39.6	50.0	-10.4
25.138	18.0			0.0	1.5	20.0				39.5	50.0	-10.5
25.721	17.9			0.0	1.5	20.0				39.4	50.0	-10.6
4.457	14.7			0.0	0.6	20.0				35.3	46.0	-10.7
25.644	17.8			0.0	1.5	20.0				39.3	50.0	-10.7
25.424	17.8			0.0	1.5	20.0				39.3	50.0	-10.7





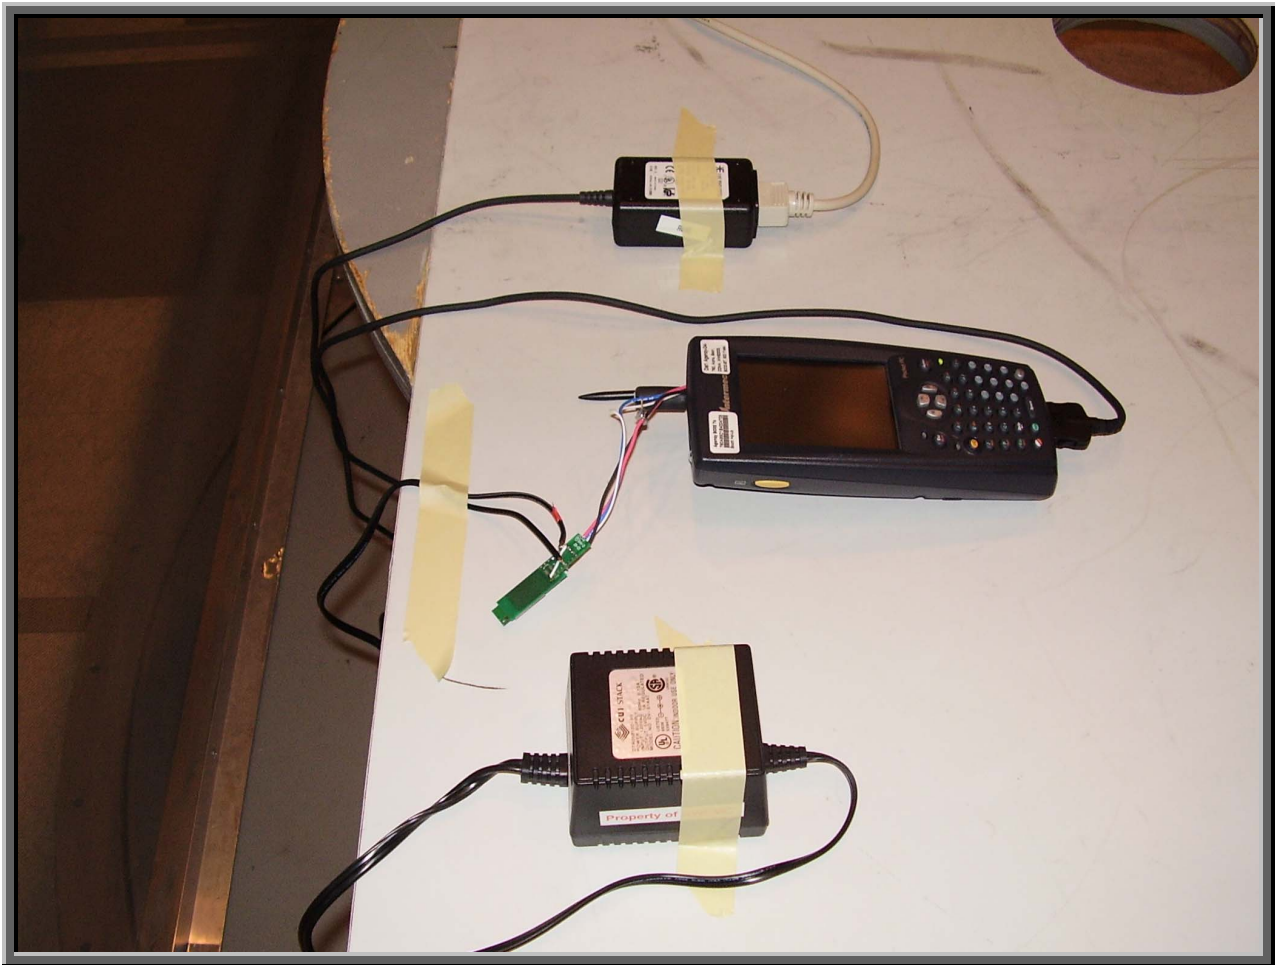

**BLUETOOTH APPROVALS**  
FCC Procedure Received from Joe Dichoso on 2-15-02

The following exhibit indicates the FCC Spread Spectrum requirements in Section 15.247 for devices meeting the Bluetooth Specifications in the 2.4 GHz band as of February 2001 operating in the USA. The purpose of this exhibit is to help expedite the approval process for Bluetooth devices. This exhibit provides items that vary for each device and also provides a list of items that are common to Bluetooth devices that explains the remaining requirements. The list of common items can be submitted for each application for equipment authorization. This exhibit only specifies requirements in Section 15.247, requirements in other rule Sections for intentional radiators such as in Section 15.203 or 15.207 must be also be addressed. A Bluetooth device is a FHSS transmitter in the data mode and applies as a Hybrid spread spectrum device in the acquisition mode.

For each individual device, the following items, 1-7 will vary from one device to another and must be submitted.

- 1) The occupied bandwidth in Section 15.247(a)(1)(ii).
- 2) Conducted output power specified in Section 15.247(b)(1).
- 3) EIRP limit in Section 15.247(b)(3).
- 4) RF safety requirement in Section 15.247(b)(4)
- 5) Spurious emission limits in Section 15.247(c).
- 6) Processing gain and requirements for Hybrids in Section 15.247(f) in the acquisition mode.
- 7) Power spectral density requirement in Section 15.247(f) in the acquisition mode.

For all devices, the following items, 1-12, are common to all Bluetooth devices and will not vary from one device to another. This list can be copied into the filing.

**1 Output power and channel separation of a Bluetooth device in the different operating modes:**

The different operating modes (data-mode, acquisition-mode) of a Bluetooth device don't influence the output power and the channel spacing. There is only one transmitter which is driven by identical input parameters concerning these two parameters.

Only a different hopping sequence will be used. For this reason, the RF parameters in one op-mode is sufficient.

**2 Frequency range of a Bluetooth device:**

The maximum frequency of the device is: **2402 – 2480 MHz**.

This is according the Bluetooth Core Specification V 1.0B (+ critical errata) for devices which will be operated in the USA. Other frequency ranges ( e.g. for Spain, France, Japan) which are allowed according the Core Specification must **not be** supported by the device.

**3 Co-ordination of the hopping sequence in data mode to avoid simultaneous occupancy by multiple transmitters:**

Bluetooth units which want to communicate with other units must be organized in a structure called piconet. This piconet consist of max. 8 Bluetooth units. One unit is the master the other seven are the slaves. The master co-ordinates frequency occupation in this piconet for all units. As the master hop sequence is derived from it's BD address which is unique for every Bluetooth device, additional masters intending to establish new piconets will always use different hop sequences.

**4 Example of a hopping sequence in data mode:**

Example of a 79 hopping sequence in data mode:

40, 21, 44, 23, 42, 53, 46, 55, 48, 33, 52, 35, 50, 65, 54, 67,  
56, 37, 60, 39, 58, 69, 62, 71, 64, 25, 68, 27, 66, 57, 70, 59,  
72, 29, 76, 31, 74, 61, 78, 63, 01, 41, 05, 43, 03, 73, 07, 75,  
09, 45, 13, 47, 11, 77, 15, 00, 64, 49, 66, 53, 68, 02, 70, 06,  
01, 51, 03, 55, 05, 04

### **5 Equally average use of frequencies in data mode and short transmissions:**

The generation of the hopping sequence in connection mode depends essentially on two input values:

1. LAP/UAP of the master of the connection
2. Internal master clock

The LAP (lower address part) are the 24 LSB's of the 48 BD\_ADDRESS. The BD\_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24 MSB's of the 48 BD\_ADDRESS. The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For synchronization with other units, only the offsets are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5  $\mu$ s. The clock has a cycle of about one day (23h30). In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire LAP (24 bits), 4 LSB's (4 bits) (Input 1) and the 27 MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions, the Bluetooth system has the following behavior:

The first connection between the two devices is established, a hopping sequence is generated. For transmitting the wanted data, the complete hopping sequence is not used and the connection ends. The second connection will be established. A new hopping sequence is generated. Due to the fact that the Bluetooth clock has a different value, because the period between the two transmission is longer (and it cannot be shorter) than the minimum resolution of the clock (312.5  $\mu$ s). The hopping sequence will always differ from the first one.

### **6 Receiver input bandwidth, synchronization and repeated single or multiple packets:**

The input bandwidth of the receiver is 1 MHz.

In every connection, one Bluetooth device is the master and the other one is the slave. The master determines the hopping sequence (see chapter 5). The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection (e.g. single or multi-slot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing is according to the packet type of the connection. Also, the slave of the connection uses these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence

### **7 Dwell time in data mode**

The dwell time of 0.3797s within a 30 second period in data mode is independent from the packet type (packet length). The calculation for a 30 second period is as follows:

Dwell time = time slot length \* hop rate / number of hopping channels \* 30s

Example for a DH1 packet (with a maximum length of one time slot)

Dwell time = 625  $\mu$ s \* 1600 1/s / 79 \* 30s = 0.3797s (in a 30s period)



For multi-slot packet the hopping is reduced according to the length of the packet.

Example for a DH5 packet (with a maximum length of five time slots)

Dwell time =  $5 * 625 \mu s * 1600 * 1/5 * 1/s / 79 * 30s = 0.3797s$  (in a 30s period)

This is according the Bluetooth Core Specification V 1.0B (+ critical errata) for all Bluetooth devices. Therefore, all Bluetooth devices **comply** with the FCC dwell time requirement in the data mode.

This was checked during the Bluetooth Qualification tests.

The Dwell time in hybrid mode is approximately 2.6 mS (in a 12.8s period)

### **8 Channel Separation in hybrid mode**

The nominal channel spacing of the Bluetooth system is 1Mhz independent of the operating mode.

The maximum "initial carrier frequency tolerance" which is allowed for Bluetooth is  $f_{center} = 75 \text{ kHz}$ .

This was checked during the Bluetooth Qualification tests (Test Case: TRM/CA/07-E) for three frequencies (2402, 2441, 2480 MHz).

### **9 Derivation and examples for a hopping sequence in hybrid mode**

For the generation of the inquiry and page hop sequences the same procedures as described for the data mode are used (see item 5), but this time with different input vectors:

**\*\*For the inquiry hop sequence, a predefined fixed address is always used. This results in the same 32 frequencies used by all devices doing an inquiry but every time with a different start frequency and phase in this sequence.**

**\*\*For the page hop sequence, the device address of the paged unit is used as the input vector. This results in the use of a subset of 32 frequencies which is specific for that initial state of the connection establishment between the two units. A page to different devices would result in a different subset of 32 frequencies.**

So it is ensured that also in hybrid mode, the frequency is used equally on average.

Example of a hopping sequence in inquiry mode:

48, 50, 09, 13, 52, 54, 41, 45, 56, 58, 11, 15, 60, 62, 43, 47, 00, 02, 64, 68, 04, 06, 17, 21, 08, 10, 66, 70, 12, 14, 19, 23

Example of a hopping sequence in paging mode:

08, 57, 68, 70, 51, 02, 42, 40, 04, 61, 44, 46, 63, 14, 50, 48, 16, 65, 52, 54, 67, 18, 58, 56, 20, 53, 60, 62, 55, 06, 66, 64

### **10 Receiver input bandwidth and synchronization in hybrid mode:**

The receiver input bandwidth is the same as in the data mode (1 MHz). When two Bluetooth devices establish contact for the first time, one device sends an inquiry access code and the other device is scanning for this inquiry access code. If two devices have been connected previously and want to start a new transmission, a similar procedure takes place. The only difference is, instead of the inquiry access code, a special access code, derived from the BD\_ADDRESS of the paged device will be, will be sent by the master of this connection. Due to the fact that both units have been connected before (in the inquiry procedure) the paging unit has timing and frequency information about the page scan of the paged unit. For this reason the time to establish the connection is reduced.

### **11 Spread rate / data rate of the direct sequence signal**

The Spread rate / Data rate in inquiry and paging mode can be defined via the access code. The access code is the only criterion for the system to check if there is a valid transmission or not. If you regard the presence of a valid access code as one bit of information, and compare it with the length of the access code of 68 bits, the Spread rate / Data rate will be 68/1.

### **12 Spurious emission in hybrid mode**

The Dwell in hybrid mode is shorter than in data mode. For this reason the spurious emissions average level in data mode is worst case. The spurious emissions peak level is the same for both modes.