



FCC RF Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : Xiaomi
MODEL NAME : 2406APNFAG
FCC ID : 2AFZZPNFAG
STANDARD : 47 CFR Part 2, 96
CLASSIFICATION : Citizens Band End User Devices (CBE)
EQUIPMENT TYPE : End User Equipment
TEST DATE(S) : May 12, 2024 ~ Jun. 06, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI / TIA / EIA-603-C-2004 and shown compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (Shenzhen)

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test.....	5
1.4 Maximum EIRP Power and Emission Designator	6
1.5 Testing Site.....	6
1.6 Test Software	7
1.7 Applied Standards	7
2 Test Configuration of Equipment Under Test	8
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System	9
2.3 Support Unit used in test configuration	9
2.4 Measurement Results Explanation Example	9
2.5 Frequency List of Low/Middle/High Channels.....	10
3 Conducted Test Items.....	11
3.1 Measuring Instruments.....	11
3.2 Test Setup	11
3.3 Conducted Output Power	12
3.4 EIRP	13
3.5 Occupied Bandwidth	14
3.6 Conducted Band Edge	15
3.7 Conducted Spurious Emission	16
3.8 Frequency Stability	17
4 Radiated Test Items	18
4.1 Measuring Instruments.....	18
4.2 Test Setup	18
4.3 Test Result of Radiated Test.....	19
4.4 Radiated Spurious Emission	20
5 List of Measuring Equipment.....	21
6 Measurement Uncertainty	22
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FG442515L	01	Initial issue of report	Jun. 11, 2024



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.3	§2.1046	Conducted Output Power	Reporting only	-
-	§96.41	Peak-to-Average Ratio	Not Applicable	Not applicable for End User Devices
3.4	§96.41	Maximum E.I.R.P	Pass	-
		Maximum Power Spectral Density	Not Applicable	Not applicable for End User Devices
3.5	§2.1049 §96.41	Occupied Bandwidth	Reporting only	-
3.6	§2.1051 §96.41	Conducted Band Edge Measurement Adjacent Channel Leakage Ratio	Pass	-
3.7	§2.1051 §96.41	Conducted Spurious Emission	Pass	
3.8	§2.1055	Frequency Stability for Temperature & Voltage	Pass	-
4.4	§2.1051 §96.41	Radiated Spurious Emission	Pass	Under limit 6.90 dB at 14425.60 MHz

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.2 Manufacturer

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	Xiaomi
Model Name	2406APNFAG
FCC ID	2AFZZPNFAG
Tx Frequency	5G NR n48: 3550 MHz ~ 3700 MHz
Rx Frequency	5G NR n48: 3550 MHz ~ 3700 MHz
SCS	15 kHz, 30kHz
Bandwidth	SCS 15/30kHz: 10MHz / 15MHz / 20MHz / 40MHz
Antenna Gain	<Ant. 6>: 5G NR Band 48: -2.7 dBi <Ant. 7>: 5G NR Band 48: -3.5 dBi <Ant. 8>: 5G NR Band 48: -2.0 dBi <Ant. 9>: 5G NR Band 48: -2.0 dBi
Type of Modulation	DFT-s-OFDM (PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM) CP-OFDM (QPSK / 16QAM / 64QAM / 256QAM)
IMEI Code	Conducted: 868329070074947/868329070074954 Radiation: 868329070126986/868329070126994
HW Version	1351N12A
SW Version	Xiaomi HyperOS 1.0
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. The maximum EIRP is calculated from max output power and antenna gain, only the maximum EIRP of Ant. 8 is shown in the report.
3. The device supports n48(1T4R) SRS resources on Ant.6/7/8/9, only the test data of worst Ant.6 is showed in the report according to the maximum power.
4. 5G NR n48 only supports SA mode for SCS 15kHz/30kHz. According to the maximum power, SCS 15kHz covers SCS 30kHz.



1.4 Maximum EIRP Power and Emission Designator

5G NR n48		PI/2 BPSK / QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	3555.00~3694.98	0.1589	9M27G7D	0.1268	9M31W7D
15	3557.52~3692.49	0.1622	14M1G7D	0.1274	14M1W7D
20	3560.01~3690.00	0.1611	18M8G7D	0.1268	19M0W7D
40	3570.00~3679.98	0.1637	38M5G7D	0.1265	38M6W7D

Note: All modulations have been tested, only the worst test results of PSK & QAM are shown in the report.

1.5 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-KS	CN1257	314309

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH03-SZ	CN1256	421272

Test data subcontracted: Radiated test case in section 4 of this report.

1.6 Test Software

Item	Site	Manufacture	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH03-SZ	AUDIX	E3	6.2009-8-24

1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ 47 CFR Part 2, 96
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 940660 D01 Part 96 CBRS v03
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

Test Items	Band	Bandwidth (MHz)						Modulation					RB #		Test Channel		
		5	10	15	20	30	40	PI/2 BPSK	QPSK	16 QAM	64 QAM	256 QAM	1	Full	L	M	H
Max. Output Power	n48	-	v	v	v	-	v	v	v	v	v	v	v	v	v	v	v
26dB and 99% Bandwidth	n48	-	v	v	v	-	v		v	v	v	v		v		v	
Adjacent Channel Leakage Ratio	n48	-	v		v	-	v	v	v				v	v	v	v	v
Conducted Band Edge	n48	-	v		v	-	v	v	v				v	v	v	v	v
Conducted Spurious Emission	n48	-	v		v	-	v	v	v				v		v	v	v
E.I.R.P	n48	-	v	v	v	-	v	v	v	v	v	v	v	v	v	v	v
Frequency Stability	n48	-			v	-		v						v		v	
Radiated Spurious Emission	n48	Worst Case														v	
Remark	1. The mark “v “ means that this configuration is chosen for testing 2. The mark “-“ means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. All test items are based on engineering evaluation. 5. Frequency Stability: Normal Voltage = 3.89V ; Low Voltage =3.6V; High Voltage =4.3V																

2.2 Connection Diagram of Test System

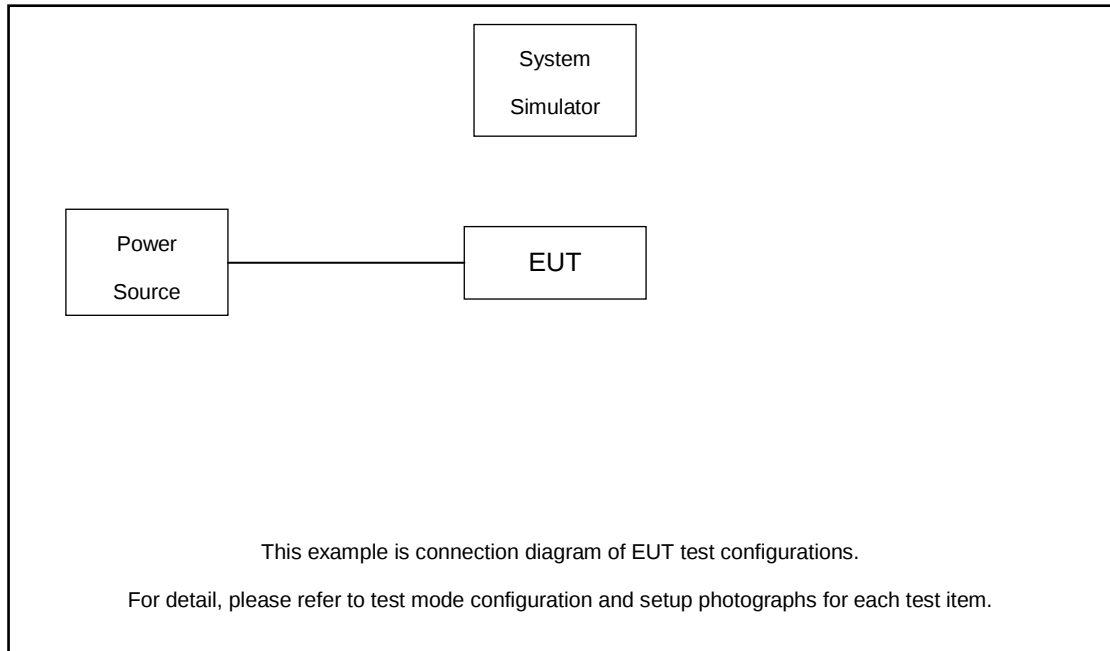

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	Fixture	INTEL	NGFF Card Carrier	N/A	N/A	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 6.5 dB and 20dB attenuator.

Example :

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\
 &= 6.5 + 20 = 26.5 \text{ (dB)}
 \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

5G NR n48 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	638000	641666	645332
	Frequency	3570	3624.99	3679.98
20	Channel	637334	641666	646000
	Frequency	3560.01	3624.99	3690
15	Channel	637168	641666	646166
	Frequency	3557.52	3624.99	3692.49
10	Channel	637000	641666	646332
	Frequency	3555	3624.99	3694.98

3 Conducted Test Items

3.1 Measuring Instruments

See list of measuring instruments of this test report.

3.2 Test Setup

3.2.1 Conducted Output Power / ACLR



3.2.2 26dB & 99% Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission



3.2.3 Frequency Stability



3.2.4 Test Result of Conducted Test

Please refer to Appendix A.



3.3 Conducted Output Power

3.3.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.3.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

3.4 EIRP

3.4.1 Description of the EIRP Measurement

EIRP limits for CBRS equipment as below table:

Device		Maximum EIRP (dBm/10 MHz)	Maximum PSD (dBm/MHz)
Applied	End User Device	23	n/a
☐	Category A CBSD	30	20
☐	Category B CBSD	47	37

Remark: The worst case EIRP shown in this section is found with LTE operating only using 1RB. As such, the EIRP/10MHz and full channel EIRP values will be identical since 1RB is fully contained within all available channel bandwidths for LTE Band 48 (i.e. 5, 10, 15, 20MHz)

3.4.2 Test Procedures for EIRP

1. Establishing a communications link with the call box (Base station) to measure the Maximum conducted power, the parameters were set to force the EUT transmitting at maximum output power level. Use the average power measurement function to measure total channel power of each channel bandwidth (per ANSI C63.26-2015 Section 5.2.1)
2. Determining ERP and/or EIRP from conducted RF output power measurements (Per ANSI C63.26-2015 Section 5.2.5.5)

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where
 P_T = transmitter output power in dBm
 G_T = gain of the transmitting antenna in dBi
 L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.5 Occupied Bandwidth

3.5.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.5.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.6 Conducted Band Edge

3.6.1 Description of Conducted Band Edge Measurement

Part 96.41 (e) (1) (i)

For CBSD the emission limits outside the fundamental are as follows:

Within 0 MHz to 10 MHz above and below the assigned channel ≤ -13 dBm/MHz

Greater than 10 MHz above and below the assigned channel ≤ -25 dBm/MHz

Part 96.41 (e) (1) (ii)

For End User Devices the emission limits outside the fundamental are as follows:

Within 0 MHz to B MHz above and below the assigned channel ≤ -13 dBm/MHz

Greater than B MHz above and below the assigned channel ≤ -25 dBm/MHz

where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device.

Notwithstanding the emission limits in this paragraph, the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.

Part 96.41 (e) (2)

For CBSDs and End User Devices, the conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed -25 dBm/MHz, and the conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used
5. Offset has included the duty factor for LTE Band 48. Duty factor $=10 \log (1/x)$, where x is the measured duty cycle.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.7 Conducted Spurious Emission

3.7.1 Description of Conducted Spurious Emission Measurement

96.41 (e)(2)

The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.

3.7.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
6. Set spectrum analyzer with RMS detector.
7. Taking the record of maximum spurious emission.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is -40dBm/MHz.



3.8 Frequency Stability

3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.8.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.8.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at 25±5° C and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

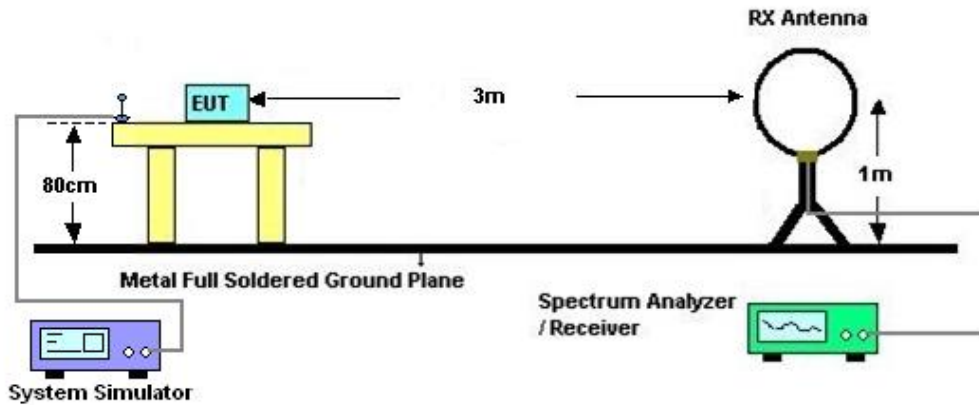

4.2.2 For radiated test from 30MHz to 1GHz

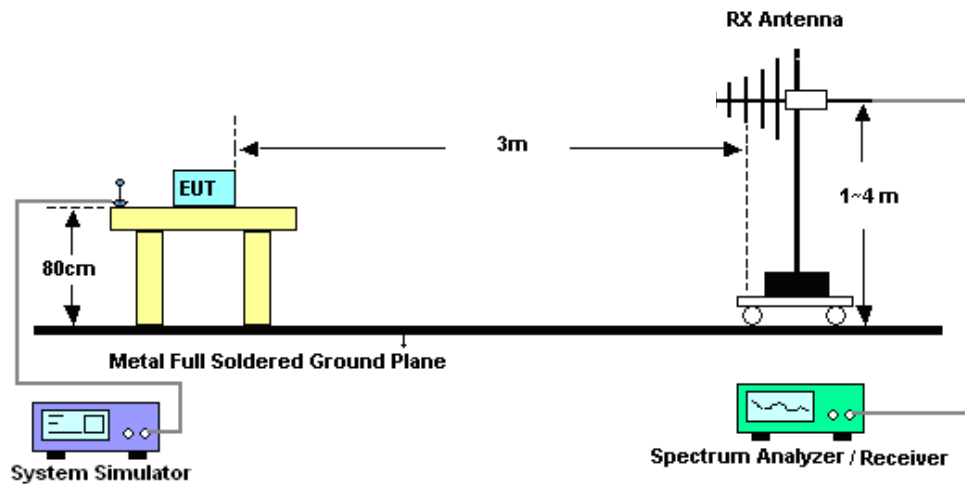

4.2.3 For radiated test above 1GHz

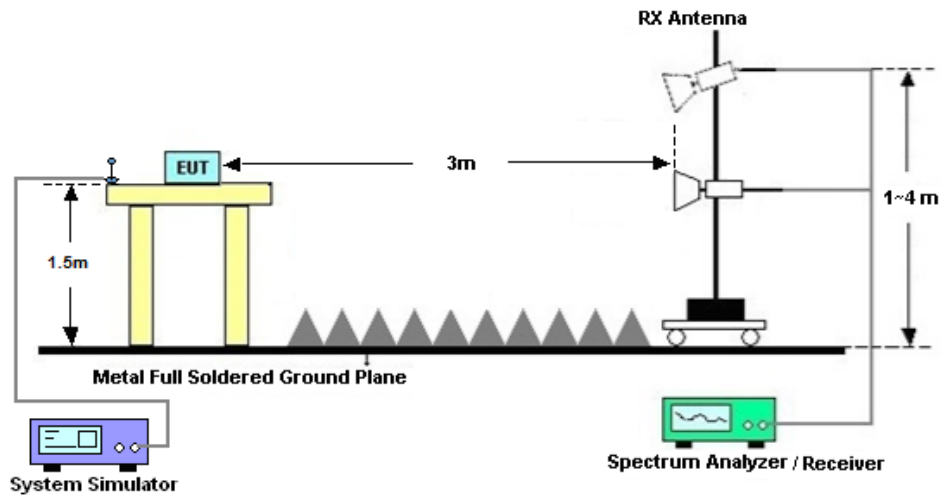

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.



4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI C63.26-2015.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least -40dBm / MHz.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
5. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
The limit line is -40dBm/MHz



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz-44GHz	Oct. 11, 2023	May 12, 2024~Jun. 06, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	May 12, 2024~Jun. 06, 2024	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 06, 2023	May 12, 2024~Jun. 06, 2024	Jul. 05, 2024	Conducted (TH01-KS)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 09, 2024	May 30, 2024	Apr. 08, 2025	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 28, 2022	May 30, 2024	Jun. 27, 2024	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz	Apr. 09, 2024	May 30, 2024	Apr. 08, 2025	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz-2GHz	Aug. 20, 2023	May 30, 2024	Aug. 19, 2025	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1355	1GHz~18GHz	Apr. 09, 2024	May 30, 2024	Apr. 08, 2025	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz~3000MHz	Oct. 18, 2023	May 30, 2024	Oct. 17, 2024	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 07, 2023	May 30, 2024	Jul. 06, 2024	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz-40GHz	Apr. 09, 2024	May 30, 2024	Apr. 08, 2025	Radiation (03CH03-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5GHz	Dec. 27, 2023	May 30, 2024	Dec. 26, 2024	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010002729	N/A	Oct. 18, 2023	May 30, 2024	Oct. 17, 2024	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	May 30, 2024	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	May 30, 2024	NCR	Radiation (03CH03-SZ)

NCR: No Calibration Required



6 Measurement Uncertainty

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	± 2.26 dB
Occupied Channel Bandwidth	$\pm 0.1\%$
Conducted Power	± 0.46 dB
Conducted Power Density	± 0.88 dB
Frequency Stability	± 0.4 Hz

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.6 dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.8 dB
---	--------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Smile Wang	Temperature :	22~23°C
		Relative Humidity :	40~42%

FR1 N48(ANT8)-SCS 15K

Transmitter Conducted Output Power And EIRP, ($G_T - L_C$)=-2.0dB

NR Band	SCS	BandWidth	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power (dBm)	EIRP (dBm)	EIRP (W)
48	15	40	638000	3570	DFT-s-OFDM PI/2 BPSK	108@54	13.43	11.43	0.0139
48	15	40	638000	3570	DFT-s-OFDM PI/2 BPSK	1@1	13.27	11.27	0.0134
48	15	40	638000	3570	DFT-s-OFDM PI/2 BPSK	1@214	13.2	11.2	0.0132
48	15	40	638000	3570	DFT-s-OFDM QPSK	108@54	13.43	11.43	0.0139
48	15	40	638000	3570	DFT-s-OFDM QPSK	1@1	13.31	11.31	0.0135
48	15	40	638000	3570	DFT-s-OFDM QPSK	1@214	13.25	11.25	0.0133
48	15	40	638000	3570	DFT-s-OFDM 16 QAM	108@54	12.94	10.94	0.0124
48	15	40	638000	3570	DFT-s-OFDM 16 QAM	1@1	12.92	10.92	0.0124
48	15	40	638000	3570	DFT-s-OFDM 16 QAM	1@214	12.89	10.89	0.0123
48	15	40	638000	3570	DFT-s-OFDM 64 QAM	108@54	12.9	10.9	0.0123
48	15	40	638000	3570	DFT-s-OFDM 64 QAM	1@1	12.62	10.62	0.0115
48	15	40	638000	3570	DFT-s-OFDM 64 QAM	1@214	12.53	10.53	0.0113
48	15	40	638000	3570	DFT-s-OFDM 256 QAM	108@54	12.91	10.91	0.0123
48	15	40	638000	3570	DFT-s-OFDM 256 QAM	1@1	12.7	10.7	0.0117
48	15	40	638000	3570	DFT-s-OFDM 256 QAM	1@214	12.59	10.59	0.0115
48	15	40	638000	3570	CP-OFDM QPSK	108@54	12.34	10.34	0.0108
48	15	40	638000	3570	CP-OFDM QPSK	1@1	12.3	10.3	0.0107
48	15	40	638000	3570	CP-OFDM QPSK	1@214	12.21	10.21	0.0105
48	15	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	108@54	24.14	22.14	0.1637
48	15	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@1	19.77	17.77	0.0598
48	15	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@214	19.77	17.77	0.0598
48	15	40	641666	3624.99	DFT-s-OFDM QPSK	108@54	23.99	21.99	0.1581
48	15	40	641666	3624.99	DFT-s-OFDM QPSK	1@1	19.82	17.82	0.0605
48	15	40	641666	3624.99	DFT-s-OFDM QPSK	1@214	19.81	17.81	0.0604
48	15	40	641666	3624.99	DFT-s-OFDM 16 QAM	108@54	23.02	21.02	0.1265
48	15	40	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	19.95	17.95	0.0624
48	15	40	641666	3624.99	DFT-s-OFDM 16 QAM	1@214	19.86	17.86	0.0611
48	15	40	641666	3624.99	DFT-s-OFDM 64 QAM	108@54	21.52	19.52	0.0895
48	15	40	641666	3624.99	DFT-s-OFDM 64 QAM	1@1	19.64	17.64	0.0581
48	15	40	641666	3624.99	DFT-s-OFDM 64 QAM	1@214	19.57	17.57	0.0571
48	15	40	641666	3624.99	DFT-s-OFDM 256 QAM	108@54	19.48	17.48	0.0560
48	15	40	641666	3624.99	DFT-s-OFDM 256 QAM	1@1	19.24	17.24	0.0530
48	15	40	641666	3624.99	DFT-s-OFDM 256 QAM	1@214	19.22	17.22	0.0527
48	15	40	641666	3624.99	CP-OFDM QPSK	108@54	20.49	18.49	0.0706
48	15	40	641666	3624.99	CP-OFDM QPSK	1@1	19.77	17.77	0.0598
48	15	40	641666	3624.99	CP-OFDM QPSK	1@214	19.86	17.86	0.0611
48	15	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	108@54	13.55	11.55	0.0143
48	15	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	1@1	13.28	11.28	0.0134

48	15	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	1@214	13.33	11.33	0.0136
48	15	40	645332	3679.98	DFT-s-OFDM QPSK	108@54	13.45	11.45	0.0140
48	15	40	645332	3679.98	DFT-s-OFDM QPSK	1@1	13.35	11.35	0.0136
48	15	40	645332	3679.98	DFT-s-OFDM QPSK	1@214	13.35	11.35	0.0136
48	15	40	645332	3679.98	DFT-s-OFDM 16 QAM	108@54	12.98	10.98	0.0125
48	15	40	645332	3679.98	DFT-s-OFDM 16 QAM	1@1	12.99	10.99	0.0126
48	15	40	645332	3679.98	DFT-s-OFDM 16 QAM	1@214	12.79	10.79	0.0120
48	15	40	645332	3679.98	DFT-s-OFDM 64 QAM	108@54	13.03	11.03	0.0127
48	15	40	645332	3679.98	DFT-s-OFDM 64 QAM	1@1	12.66	10.66	0.0116
48	15	40	645332	3679.98	DFT-s-OFDM 64 QAM	1@214	12.7	10.7	0.0117
48	15	40	645332	3679.98	DFT-s-OFDM 256 QAM	108@54	12.97	10.97	0.0125
48	15	40	645332	3679.98	DFT-s-OFDM 256 QAM	1@1	12.78	10.78	0.0120
48	15	40	645332	3679.98	DFT-s-OFDM 256 QAM	1@214	12.79	10.79	0.0120
48	15	40	645332	3679.98	CP-OFDM QPSK	108@54	12.48	10.48	0.0112
48	15	40	645332	3679.98	CP-OFDM QPSK	1@1	12.43	10.43	0.0110
48	15	40	645332	3679.98	CP-OFDM QPSK	1@214	12.38	10.38	0.0109
48	15	10	637000	3555	DFT-s-OFDM PI/2 BPSK	1@1	23.24	21.24	0.1330
48	15	10	637000	3555	DFT-s-OFDM QPSK	1@1	23.32	21.32	0.1355
48	15	10	637000	3555	DFT-s-OFDM 16 QAM	1@1	22.91	20.91	0.1233
48	15	10	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@1	23.87	21.87	0.1538
48	15	10	641666	3624.99	DFT-s-OFDM QPSK	1@1	24.01	22.01	0.1589
48	15	10	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	23.03	21.03	0.1268
48	15	10	646332	3694.98	DFT-s-OFDM PI/2 BPSK	1@1	23.81	21.81	0.1517
48	15	10	646332	3694.98	DFT-s-OFDM QPSK	1@1	23.98	21.98	0.1578
48	15	10	646332	3694.98	DFT-s-OFDM 16 QAM	1@1	22.98	20.98	0.1253
48	15	15	637168	3557.52	DFT-s-OFDM PI/2 BPSK	1@1	19.43	17.43	0.0553
48	15	15	637168	3557.52	DFT-s-OFDM QPSK	1@1	19.48	17.48	0.0560
48	15	15	637168	3557.52	DFT-s-OFDM 16 QAM	1@1	18.64	16.64	0.0461
48	15	15	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@1	23.94	21.94	0.1563
48	15	15	641666	3624.99	DFT-s-OFDM QPSK	1@1	24.1	22.1	0.1622
48	15	15	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	23.05	21.05	0.1274
48	15	15	646166	3692.49	DFT-s-OFDM PI/2 BPSK	1@1	23.89	21.89	0.1545
48	15	15	646166	3692.49	DFT-s-OFDM QPSK	1@1	23.41	21.41	0.1384
48	15	15	646166	3692.49	DFT-s-OFDM 16 QAM	1@1	22.42	20.42	0.1102
48	15	20	637334	3560.01	DFT-s-OFDM PI/2 BPSK	1@1	19.85	17.85	0.0610
48	15	20	637334	3560.01	DFT-s-OFDM QPSK	1@1	19.92	17.92	0.0619
48	15	20	637334	3560.01	DFT-s-OFDM 16 QAM	1@1	19.08	17.08	0.0511
48	15	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@1	23.9	21.9	0.1549
48	15	20	641666	3624.99	DFT-s-OFDM QPSK	1@1	24.07	22.07	0.1611
48	15	20	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	23.03	21.03	0.1268
48	15	20	646000	3690	DFT-s-OFDM PI/2 BPSK	1@1	23.82	21.82	0.1521
48	15	20	646000	3690	DFT-s-OFDM QPSK	1@1	24.03	22.03	0.1596
48	15	20	646000	3690	DFT-s-OFDM 16 QAM	1@1	23	21	0.1259

FR1 N48(ANT6)-SCS 15K


Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
48	15	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	100@0	-0.0077	PASS	NV
48	15	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	100@0	-0.0064	PASS	LV
48	15	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	100@0	0.0042	PASS	HV
48	15	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	100@0	0.0079	PASS	-30°C
48	15	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	100@0	0.0085	PASS	-20°C
48	15	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	100@0	0.0092	PASS	-10°C
48	15	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	100@0	-0.0063	PASS	0°C
48	15	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	100@0	-0.0051	PASS	10°C
48	15	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	100@0	-0.0126	PASS	20°C
48	15	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	100@0	-0.0091	PASS	30°C
48	15	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	100@0	-0.0083	PASS	40°C
48	15	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	100@0	-0.0093	PASS	50°C


Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
48	15	10	641666	3624.99	CP-OFDM QPSK	52@0	9.2698	9.755
48	15	10	641666	3624.99	CP-OFDM 16 QAM	52@0	9.3061	9.662
48	15	10	641666	3624.99	CP-OFDM 64 QAM	52@0	9.2884	9.688
48	15	10	641666	3624.99	CP-OFDM 256 QAM	52@0	9.2699	9.645
48	15	15	641666	3624.99	CP-OFDM QPSK	79@0	14.074	14.74
48	15	15	641666	3624.99	CP-OFDM 16 QAM	79@0	14.113	14.57
48	15	15	641666	3624.99	CP-OFDM 64 QAM	79@0	14.124	14.66
48	15	15	641666	3624.99	CP-OFDM 256 QAM	79@0	14.072	14.58
48	15	20	641666	3624.99	CP-OFDM QPSK	106@0	18.84	19.55
48	15	20	641666	3624.99	CP-OFDM 16 QAM	106@0	18.956	19.74
48	15	20	641666	3624.99	CP-OFDM 64 QAM	106@0	18.876	19.57
48	15	20	641666	3624.99	CP-OFDM 256 QAM	106@0	18.893	19.58
48	15	40	641666	3624.99	CP-OFDM QPSK	216@0	38.491	39.99
48	15	40	641666	3624.99	CP-OFDM 16 QAM	216@0	38.51	39.8
48	15	40	641666	3624.99	CP-OFDM 64 QAM	216@0	38.459	39.8
48	15	40	641666	3624.99	CP-OFDM 256 QAM	216@0	38.609	39.95


N48(10M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

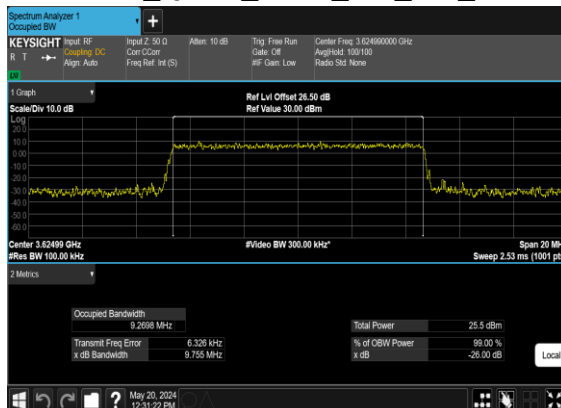


N48(10M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

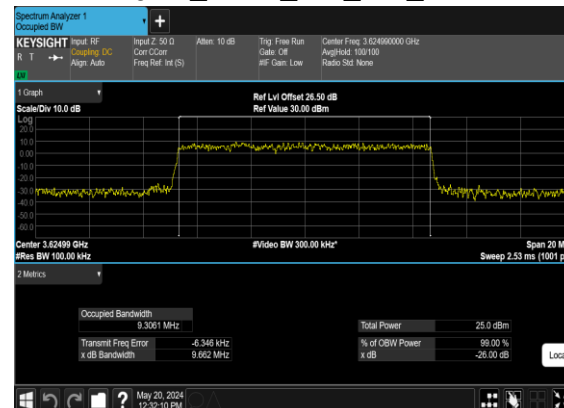


N48(10M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

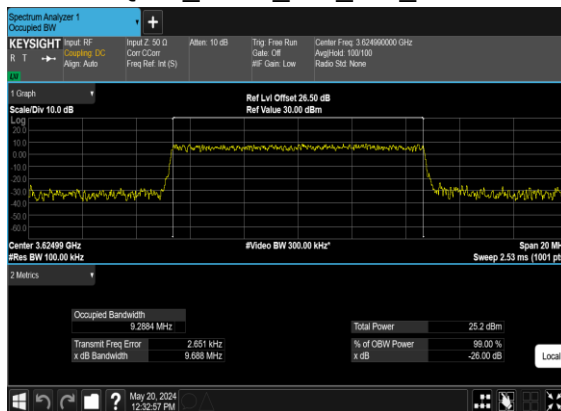


N48(10M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

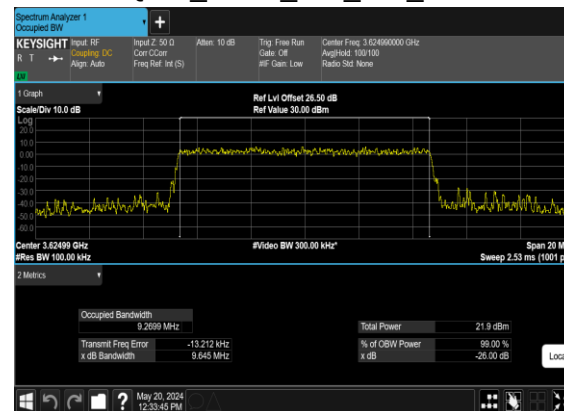


N48(15M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

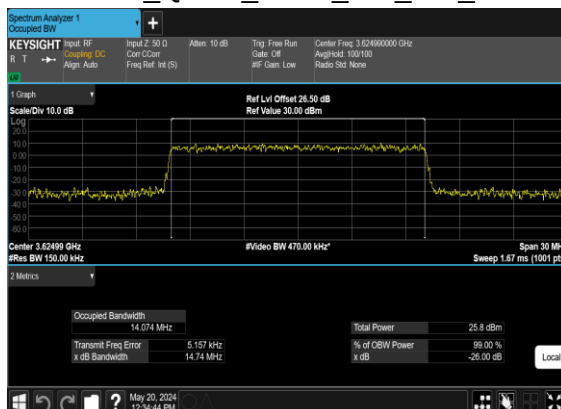


N48(15M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

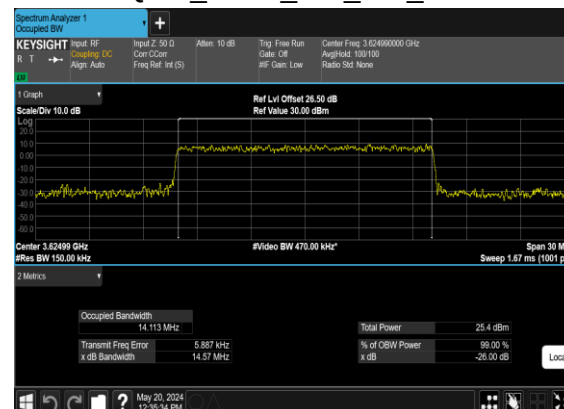

N48(15M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

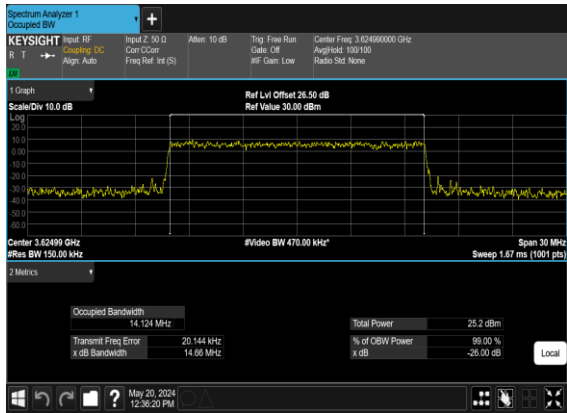


N48(15M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

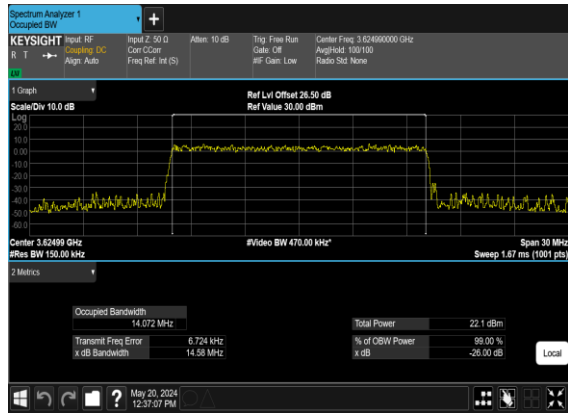


N48(20M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH




N48(20M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

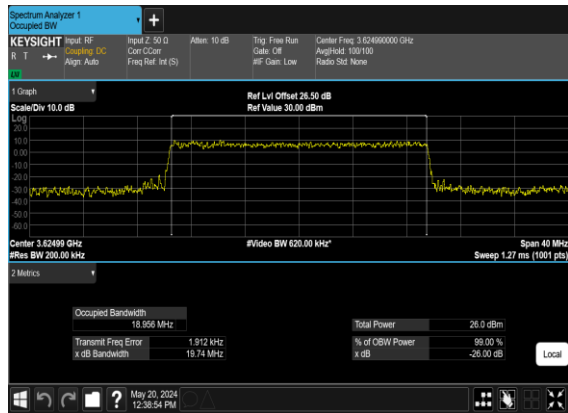


N48(20M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

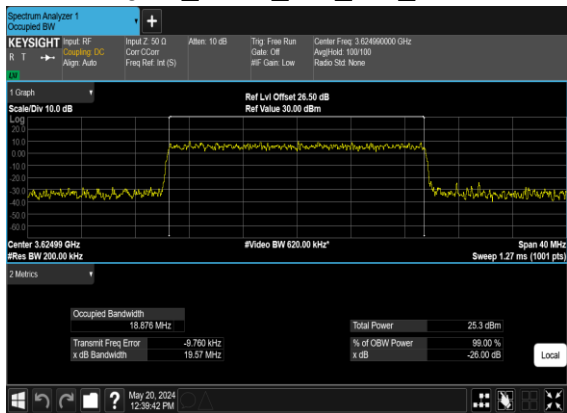


N48(20M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

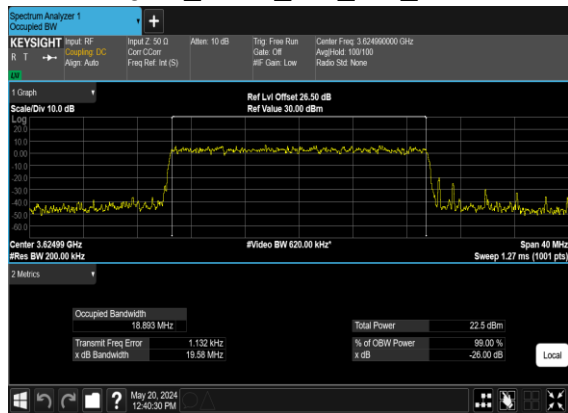


N48(40M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

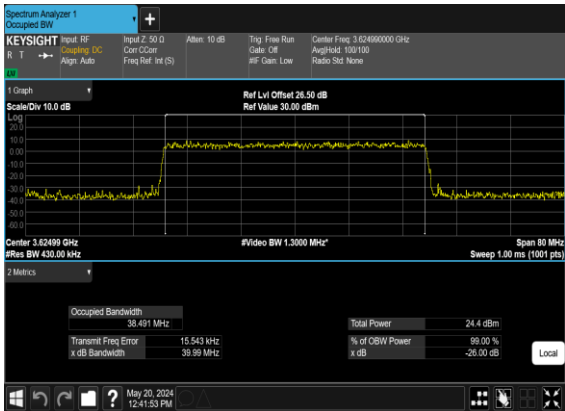

N48(40M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

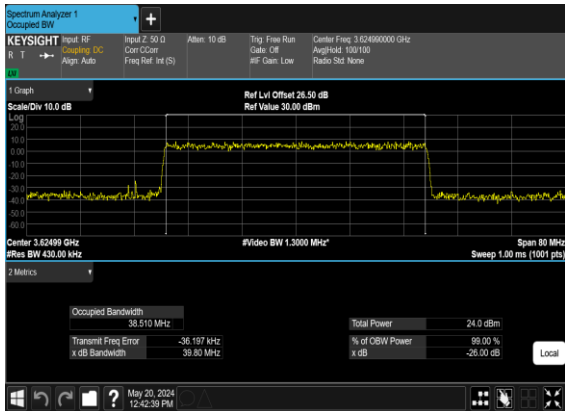

N48(40M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

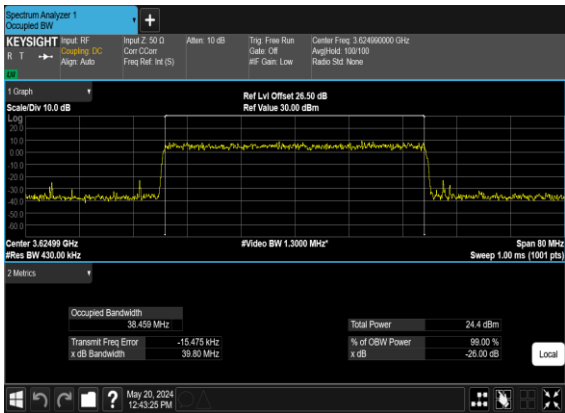

N48(40M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH




Adjacent Channel Leakage Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Lower Margin	Upper Margin	Result	Verdict
48	15	10	637000	3555.0	DFT-s-OFDM PI/2 BPSK	50@0	-11.81	-13.0	see graph	PASS
48	15	10	637000	3555.0	DFT-s-OFDM PI/2 BPSK	1@0	-12.57	-24.45	see graph	PASS
48	15	10	637000	3555.0	DFT-s-OFDM PI/2 BPSK	1@51	-24.29	-13.42	see graph	PASS
48	15	10	637000	3555.0	DFT-s-OFDM QPSK	50@0	-10.03	-10.67	see graph	PASS
48	15	10	637000	3555.0	DFT-s-OFDM QPSK	1@0	-11.25	-24.03	see graph	PASS
48	15	10	637000	3555.0	DFT-s-OFDM QPSK	1@51	-23.76	-13.53	see graph	PASS
48	15	10	641666	3624.99	DFT-s-OFDM PI/2 BPSK	50@0	-14.17	-14.95	see graph	PASS
48	15	10	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@0	-11.74	-21.48	see graph	PASS
48	15	10	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@51	-24.94	-14.81	see graph	PASS
48	15	10	641666	3624.99	DFT-s-OFDM QPSK	50@0	-10.57	-11.8	see graph	PASS
48	15	10	641666	3624.99	DFT-s-OFDM QPSK	1@0	-11.62	-22.99	see graph	PASS
48	15	10	641666	3624.99	DFT-s-OFDM QPSK	1@51	-23.48	-15.02	see graph	PASS
48	15	10	646332	3694.98	DFT-s-OFDM PI/2 BPSK	50@0	-15.75	-16.76	see graph	PASS
48	15	10	646332	3694.98	DFT-s-OFDM PI/2 BPSK	1@0	-12.04	-23.65	see graph	PASS
48	15	10	646332	3694.98	DFT-s-OFDM PI/2 BPSK	1@51	-23.99	-13.75	see graph	PASS
48	15	10	646332	3694.98	DFT-s-OFDM QPSK	50@0	-12.89	-13.45	see graph	PASS
48	15	10	646332	3694.98	DFT-s-OFDM QPSK	1@0	-11.53	-23.42	see graph	PASS
48	15	10	646332	3694.98	DFT-s-OFDM QPSK	1@51	-23.09	-13.22	see graph	PASS
48	15	20	637334	3560.01	DFT-s-OFDM PI/2 BPSK	100@0	-14.18	-14.7	see graph	PASS
48	15	20	637334	3560.01	DFT-s-OFDM PI/2 BPSK	1@0	-14.02	-24.92	see graph	PASS


48	15	20	637334	3560.01	DFT-s-OFDM PI/2 BPSK	1@105	-24.45	-14.32	see graph	PASS
48	15	20	637334	3560.01	DFT-s-OFDM QPSK	100@0	-19.13	-19.07	see graph	PASS
48	15	20	637334	3560.01	DFT-s-OFDM QPSK	1@0	-12.56	-24.07	see graph	PASS
48	15	20	637334	3560.01	DFT-s-OFDM QPSK	1@105	-23.79	-16.08	see graph	PASS
48	15	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	100@0	-13.85	-14.98	see graph	PASS
48	15	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@0	-14.38	-20.44	see graph	PASS
48	15	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@105	-22.41	-14.75	see graph	PASS
48	15	20	641666	3624.99	DFT-s-OFDM QPSK	100@0	-10.34	-10.78	see graph	PASS
48	15	20	641666	3624.99	DFT-s-OFDM QPSK	1@0	-13.68	-23.14	see graph	PASS
48	15	20	641666	3624.99	DFT-s-OFDM QPSK	1@105	-22.15	-13.2	see graph	PASS
48	15	20	646000	3690.0	DFT-s-OFDM PI/2 BPSK	100@0	-16.26	-17.45	see graph	PASS
48	15	20	646000	3690.0	DFT-s-OFDM PI/2 BPSK	1@0	-14.06	-22.87	see graph	PASS
48	15	20	646000	3690.0	DFT-s-OFDM PI/2 BPSK	1@105	-22.76	-14.35	see graph	PASS
48	15	20	646000	3690.0	DFT-s-OFDM QPSK	100@0	-17.86	-17.85	see graph	PASS
48	15	20	646000	3690.0	DFT-s-OFDM QPSK	1@0	-13.3	-21.63	see graph	PASS
48	15	20	646000	3690.0	DFT-s-OFDM QPSK	1@105	-22.38	-14.57	see graph	PASS
48	15	40	638000	3570.0	DFT-s-OFDM PI/2 BPSK	216@0	-2.76	-2.25	see graph	PASS
48	15	40	638000	3570.0	DFT-s-OFDM PI/2 BPSK	1@0	-12.62	-21.81	see graph	PASS
48	15	40	638000	3570.0	DFT-s-OFDM PI/2 BPSK	1@215	-20.4	-11.39	see graph	PASS
48	15	40	638000	3570.0	DFT-s-OFDM QPSK	216@0	-11.75	-11.27	see graph	PASS
48	15	40	638000	3570.0	DFT-s-OFDM QPSK	1@0	-11.35	-21.1	see graph	PASS

48	15	40	638000	3570.0	DFT-s-OFDM QPSK	1@215	-20.44	-12.49	see graph	PASS
48	15	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	216@0	-15.36	-15.52	see graph	PASS
48	15	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@0	-11.98	-21.01	see graph	PASS
48	15	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@215	-19.23	-10.9	see graph	PASS
48	15	40	641666	3624.99	DFT-s-OFDM QPSK	216@0	-15.33	-15.5	see graph	PASS
48	15	40	641666	3624.99	DFT-s-OFDM QPSK	1@0	-10.67	-17.66	see graph	PASS
48	15	40	641666	3624.99	DFT-s-OFDM QPSK	1@215	-20.68	-12.04	see graph	PASS
48	15	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	216@0	-2.24	-1.25	see graph	PASS
48	15	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	1@0	-11.78	-20.48	see graph	PASS
48	15	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	1@215	-21.22	-12.98	see graph	PASS
48	15	40	645332	3679.98	DFT-s-OFDM QPSK	216@0	-2.26	-1.26	see graph	PASS
48	15	40	645332	3679.98	DFT-s-OFDM QPSK	1@0	-10.73	-19.48	see graph	PASS
48	15	40	645332	3679.98	DFT-s-OFDM QPSK	1@215	-20.29	-12.75	see graph	PASS


N48(10M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Low_CH

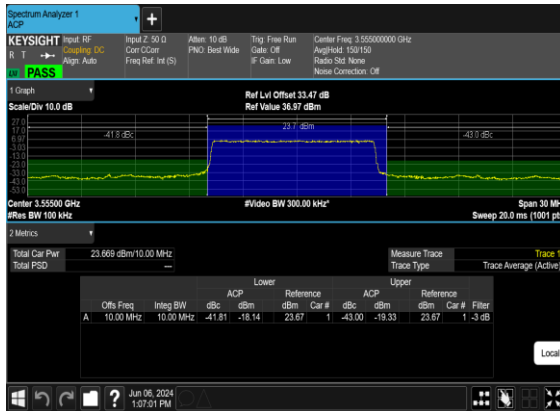


N48(10M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Low_CH

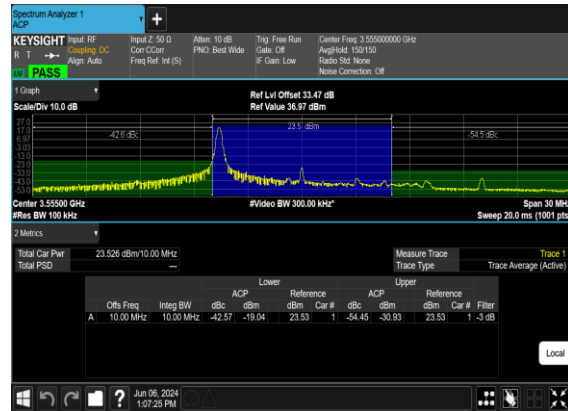


N48(10M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Right_Low_CH

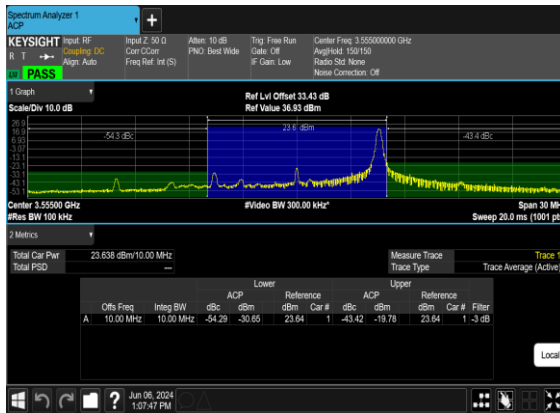


N48(10M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

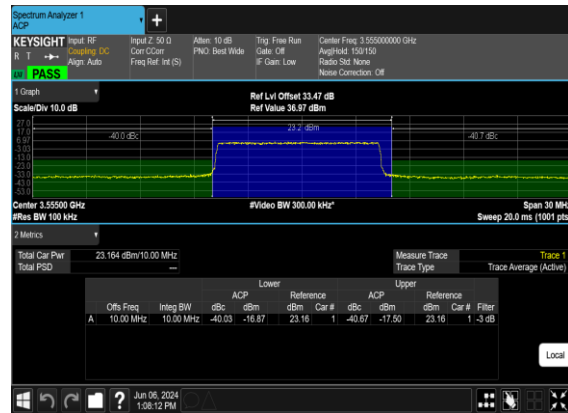


N48(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

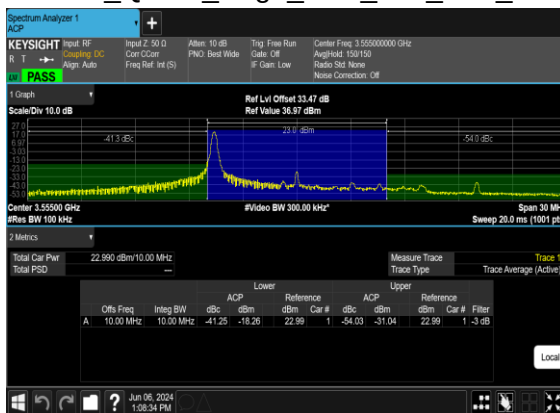


N48(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_Low_CH

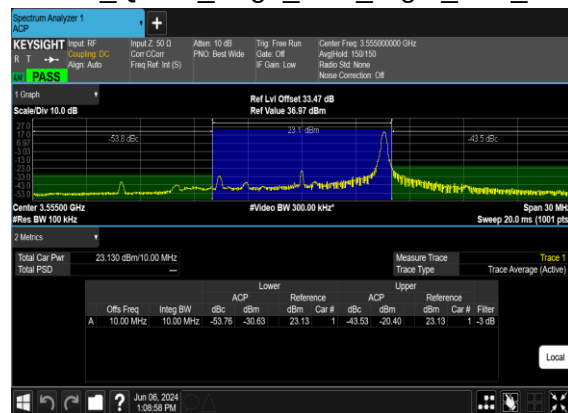


N48(10M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

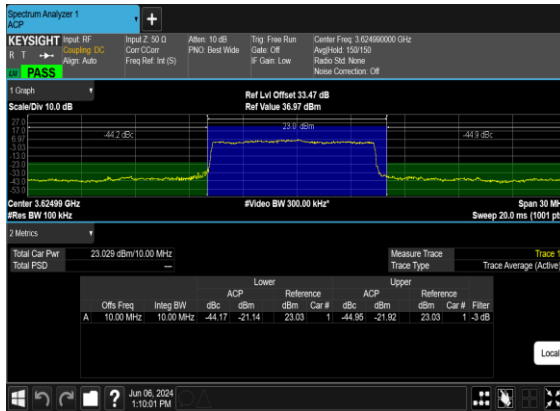


N48(10M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Mid_CH

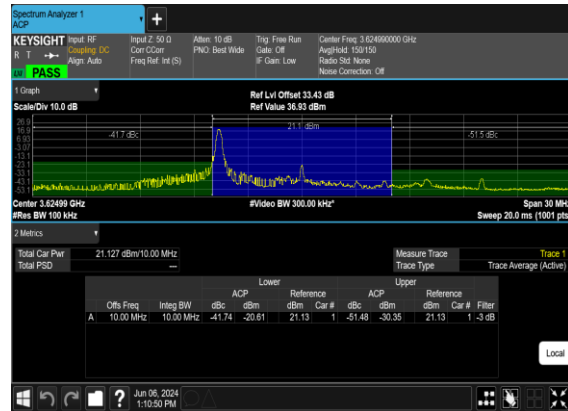


N48(10M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Right_Mid_CH

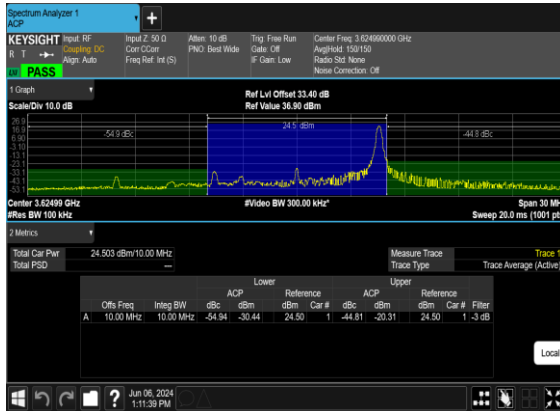


N48(10M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

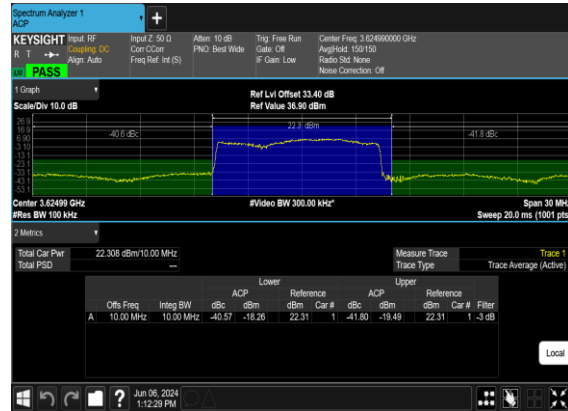

N48(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

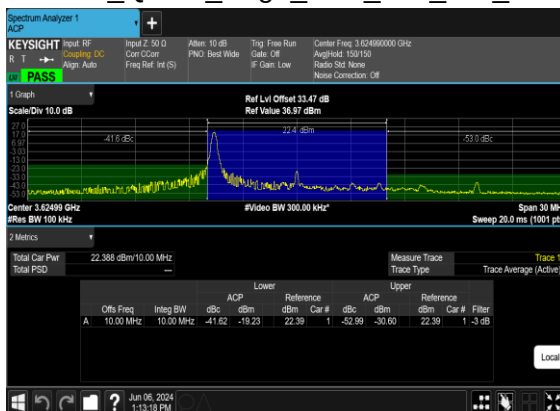

N48(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_Mid_CH

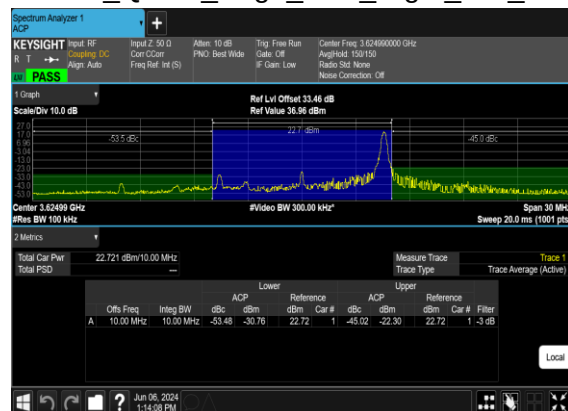

Spectrum Analyzer 1
ACUP

KEYSIGHT
R T → Input RF
Coupling DC
Align Auto

Input Z: 50 Ω
Port CCW
Freq Ref: (s)

Att: 10 dB
P/N: Best Wide

Trig: Free Run
Gate: Off
IF Gain: Low

Center Freq: 3.69498000 GHz
AmpHz: 150.150
Ratio: Std None
Noise Correction: Off

1 Graph
Scale/Div 10 dB
Ref Lvl Offset: 23.44 dBm
Ref Value 36.94 dBm

Center: 3.69498 GHz
#Res BW 100 kHz
Span 30 MHz
Sweep 20.0 ms (1001 pt)

2 Metrics

Total Car Pwr	23.139 dBm/100 MHz
Total PSD	-

		Lower		Reference		ACP		Upper			
Offs Freq	Integ BW	dBc	dBm	dBm	Car #	dBc	dBm	dBm	Car #	Filter	
A	10.00 MHz	10.00 MHz	-45.75	-22.61	23.14	1	-46.76	-23.62	23.14	1	-3 dB

Measure Trace
Trace Type
Trace Average (Active)

Spectrum Analyzer 1
ACP

KEYSIGHT Input: RF, Output: RF, Input 2: 50.0, Core: C-Cor, Freq Ref: 1st (S), Att: 10.0 dB, PNO: Best Wide, Trig: Free Run, Gate: Off, I: Gain: Low, Center Freq: 3.694950000 GHz, Aligned: 153150, Ratio Set: None, Noise Correction: Off

1 Graph
Scale Div: 10.0 dB

Ref Lvl Offset: 23.47 dB
Ref Value: 36.97 dBm

23.5 dBm

53.7 dBc

Center: 3.69495 GHz
IF Res BW: 100 MHz
Video BW: 300.00 MHz

Sweep: 20.0 ms (1001 pts)

2 Metrics

Total Car Pair	23.473 dBm/10.00 MHz	Measure Trace	Trace Type	Trace Average (Active)
Total PSD				

Lower				Upper			
Offs Freq	Integ BW	dBc	dBm	Reference	dBm	Reference	dBm
A: 10.00 MHz	10.00 MHz	-42.04	-16.57	23.47	1	-53.65	-30.18
				23.47	1	-3	dB

Local

Spectrum Analyzer 1
ACP

KEYSIGHT Input RF
R T → Align Auto
Input 2: 50.0
Cen C-Corr
Freq Ref Int (S)
Alttn: 10 dB
PNO Best Wide
Trig Free Run
Gate: Off
IF Gain: Low
Center Freq: 3.68480000 GHz
AmpHz48: 131150
Ratio Set None
Noise Correction: Off

1 Graph
Scale/Div 10.0 dB
Ref Lvl Offset: 33.47 dB
Ref Value 36.97 dBm
Span 30 MHz
Sweep 20.0 ms (1001 pts)
2 Metrics
Total Car Power: 23.770 dBm/10.0 MHz
Total PSD: —
Measure Trace
Trace Type: —
Trace Average (Ave): —

Offs Freq	Integ BW	dBc	dBm	Reference	ACP	Lower	Reference	ACP	Upper	Reference	ACP	Filter
Car #				dBm			dBm			dBm		
1	10.00 MHz	10.00 MHz	-53.99	-30.22	23.77	1	-43.75	-19.98	23.77	1	-3	dB

Local

Spectrum Analyzer 1
ACP

KEYSIGHT Input RF: **Channeling DC**
R T → **Align Auto**

Input Z: 50 Ω
Corr C/Corr
Freq Ref: 1st (S)

Atten: 10 dB
PNO: Best Wide

Trig: Free Run
Gate: Off
S: Gain Low

Center Freq: 3.694990000 GHz
Assigned: 101115
Ratio: Std: None
Noise Correction: Off

PASS

1 Graph
Scale/Div: 10.0 dB

Ref Lvl Offset: 23.40 dB
Ref Value: 36.90 dBm

20.0
10.0
0.0
-10.0
-20.0
-30.0
-40.0
-50.0

-42.9 (dB)

22 F, 95%

-43.4 (dB)

Center 3.69499 GHz
#Res BW 100 kHz

#Video BW 300.00 kHz

Sweep 20.0 ms 1001 pts

2 Metrics

Total Cn Pwr	22.94 dBm/10.00 MHz
Total PSD	-

ACP		Lower		Reference		Upper		ACB		Reference		Filter	
Offs Freq	Integ BW	dBc	dBm	dBm	Car #	dBc	dBm	dBm	Car #	dBc	dBm	dBm	Car #
0	10.00 MHz	-42.89	-20.31	22.58	1	-43.45	-20.86	22.50	1	-3	dB		


Local

The screenshot displays the Keysight Spectrum Analyzer 1 ACP interface. The main display shows a signal spectrum with a prominent peak at 23.14 dBm. The frequency is 10.00 MHz, and the bandwidth is 100 MHz. The scale is 10 dB. The interface includes various control panels for settings like Input Z, Attenuation, and Resolution Bandwidth. A table at the bottom provides detailed measurement data for the signal.


Lower				Upper			
Offs Freq	Integ BW	ACP	Reference	ACP	Reference	Car #	Filter
		dBc	dBm	dBm	dBm		
A	10.00 MHz	10.00 MHz	-41.53	-18.39	23.14	1	-53.42
					-30.28		
					23.14	1	-3

[illegible]


N48(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Low_CH

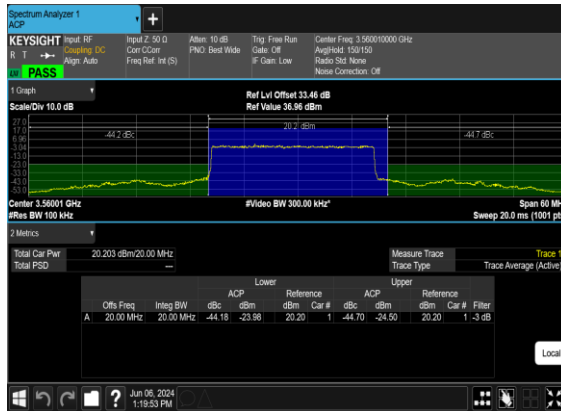


N48(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Low_CH

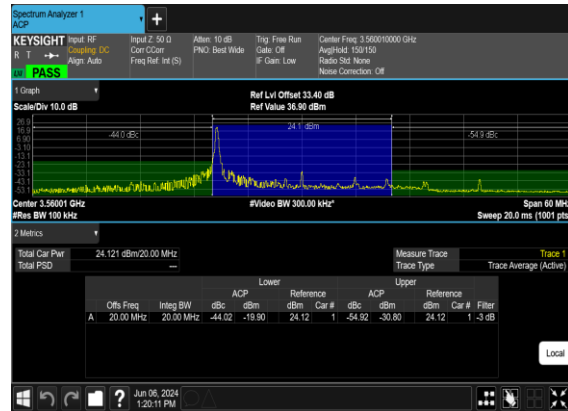


N48(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Right_Low_CH

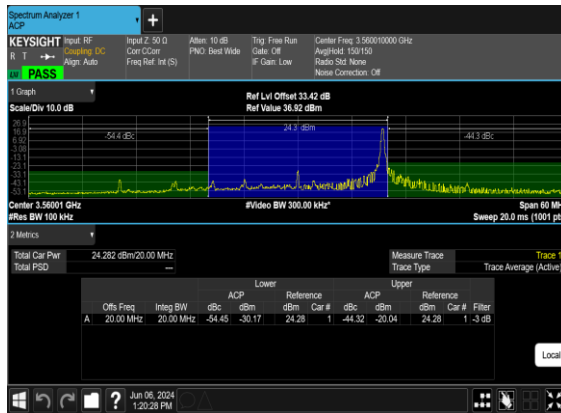


N48(20M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

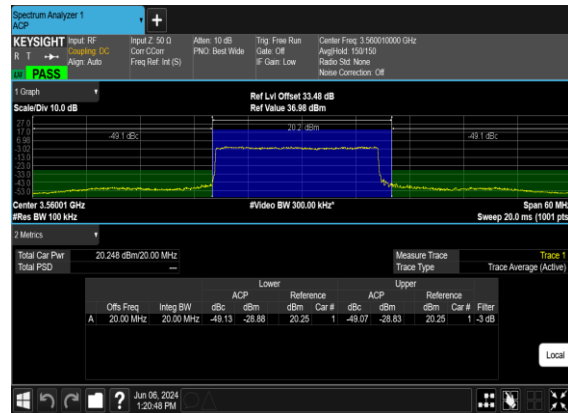

N48(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

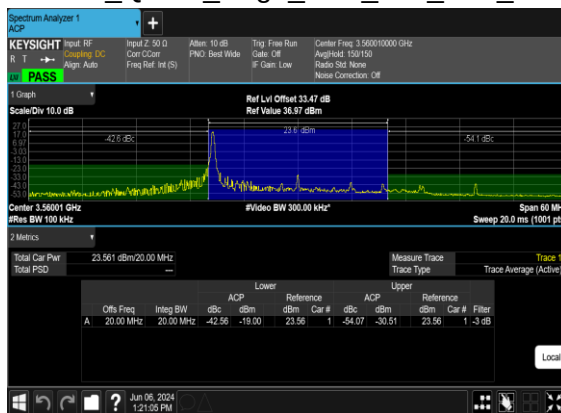

N48(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_Low_CH

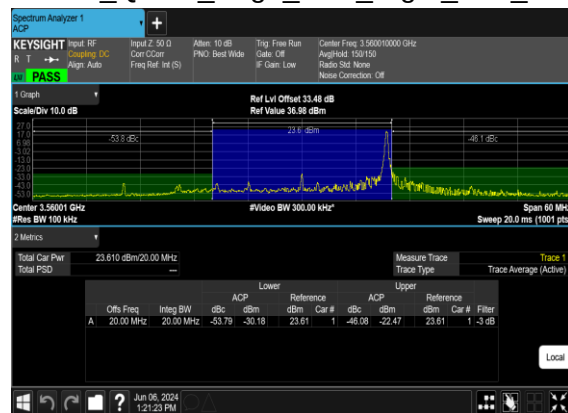

Spectrum Analyzer 1
ACP

KEYSIGHT Input: RF Input: Z 50 Ω Input Att: 10 dB Center Freq: 3.62490000 GHz
 R T →→→ Coupling: DC Corr: CCW PNO: Best Wide Trig: Free Run Gate: Off Ref: 1501 Hz
 Align: Auto Freq Ref: Int (s) IF Gain: Low Noise: Off Noise Correction: Off

1 Graph
 Scale/Div 10.0 dB
 Ref Lvl Offset 23.47 dBm
 Ref Value 36.97 dBm

Span 60 MHz
 Sweep 20.0 ms (1001 pts)

2 Metrics

Total Car Power	23.146 dBm/20 MHz
Total PSD	—

		ACP		Lower		Reference		ACP		Upper		Reference			
Offs Freq	Integ BW	dBc	dBm	dBc	dBm	dBc	Car #	dBc	dBm	dBc	Car #	dBc	dBm	Car #	Filter
A	20.00 MHz	20.00 MHz	-43.85	-20.70	23.15	1	-44.98	-21.84	23.15	1	-3	dB			

Local

Spectrum Analyzer 1
ACQP

KEYSTROKES Input: RF, Output: Analog, Auto, Align: Auto, R: T, Freq Ref: 1st (S)

Att: 10 dB, PNO: Best Wide, Trig: Free Run, Gate: Off, I: Gain: Low, Center Freq: 3.624490000 GHz, Assigned: 153150, Ratio Set: None, Noise Correction: Off

1 Graph
Scale Div: 10.0 dB

Ref Lvl Offset: 33.47 dB
Ref Value: 36.87 dBm

21.1 dBm
50.4 dBc
50.4 dBc

Center: 3.62449 GHz
IF Res: BW 100 kHz
Video BW: 300.00 MHz

Span: 60 MHz
Sweep: 20.0 ms (1001 pts)

3 Metrics

Total Car Pair	21.100 dBm/20.00 MHz	Trace Type	Trace Average (Active)
Total PSD	---		

Lower				Upper			
Offs Freq	Integ BW	dBc	dBm	ACP	Reference	ACP	Reference
				dBm	Car #	dBm	Car #
A: 20.00 MHz	20.00 MHz	-44.38	-23.28	21.10	1	-50.44	-29.34
						21.10	1 -3 dB

Local

Keysight Spectrum Analyzer 1

KEYSIGHT Input RF
 R T → DC
 Align Auto

Input Z: 50 Ω
 Corr: CCW
 Freq Ref: Int (S)

Att: 10 dB
 PNO: Best Wide

Trig: Free Run
 Gate: Off
 IF: Clean: Low

Center Freq: 3.62499000 GHz
 ARefHz: 101150
 Ratio Set: None
 Noise Correction: Off

1 Graph
 Scale/Div 10.0 dB
 17.0 dB
 16.0 dB
 15.0 dB
 14.0 dB
 13.0 dB
 12.0 dB
 11.0 dB
 10.0 dB
 9.0 dB
 8.0 dB
 7.0 dB
 6.0 dB
 5.0 dB
 4.0 dB
 3.0 dB
 2.0 dB
 1.0 dB
 0.0 dB
 -1.0 dB
 -2.0 dB
 -3.0 dB
 -4.0 dB
 -5.0 dB
 -6.0 dB
 -7.0 dB
 -8.0 dB
 -9.0 dB
 -10.0 dB
 -11.0 dB
 -12.0 dB
 -13.0 dB
 -14.0 dB
 -15.0 dB
 -16.0 dB
 -17.0 dB
 -18.0 dB
 -19.0 dB
 -20.0 dB

Ref Lvl Offset: 33.47 dB
 Ref Value: 36.97 dBm

52.4 dBc
 22.8 dBm
 44.7 dBc

Center: 3.62499 GHz
 #Res BW 100 kHz

#Video BW 300.0 kHz*

Span 60 MHz
 Sweep 20.0 ms (100% pt)

2 Metrics

Total Car Power: 22.763 dBm/20.0 MHz
 Total PSD: --

Measure Trace
 Trace Type: Trace Average (Ave)

		ACP		Lower	Reference	ACP		Upper		Reference		
Offs Freq	Integ BW	dBc	dBm	dBm	Car #	dBc	dBm	dBm	Car #	Filter		
A 20.00 MHz	20.00 MHz	-52.41	-29.65	22.76	1	-44.75	-21.99	22.76	1	-3 dB		

Local

Spectrum Analyzer 1 ACP

KEYSIG Input RF **Center Freq 3.63499 GHz** **Span 60 MHz**
R T **Align Auto** **Cont C/Ctr** **Ref Ref (S)** **PNV Best Wide** **Trig Freq Run** **Gate Off** **Assigned 101150**
dB PASS **F Gain Low** **Ratio Set None** **Name Correction Off**

1 Graph
Scale/Div 10.0 dB **Ref Lvl Offset 23.46 dB** **Ref Value 36.96 dBm**

Center 3.63499 GHz **#Res BW 100 kHz** **Span 60 MHz**
#Res 20.0 MHz **Sweep 20.0 ms 10001 pts**

2 Metrics

Total Ctr Pair	22.514 dBm/20.00 MHz	Measure Trace	Trace Type	Trace Average (Aver)
Total PSD				

ACP				Lower				Reference				ACP				Upper			
Offs Freq	Integ BW	dBc	dBm	dBc	dBm	dBm	Car #	dBc	dBm	dBm	Car #	dBc	dBm	dBm	Car #	Filter			
A	20.00 MHz	20.00 MHz	-40.34	-17.82	22.51	1	-40.78	-18.26	22.51	1	-3 dB								

Local

Spectrum Analyzer 1
ACP

KEYSIGHT Input RF
R T → Creating DC
Align Auto

PASS

1 Graph
Scale/Div 10.0 dB

Center Freq 2.5349 GHz
Span 50 MHz
Sweep 20.0 ms (1001 pts)

Ref Lvl Offset 33.47 dB
Ref Value 36.87 dBm

IVideo BW 300.0 kHz

2 Metrics


Total	Car	Pwr	Trace Type	Trace Average (Active)
23.349	-	-	-	-

Lower				Upper			
Offs Freq	Integ BW	ACP	Reference	ACP	Reference	Car #	Filter
		dBc	dBm	dBm	dBm		
A 20.00 MHz	20.00 MHz	-43.68	-20.33	23.35	-53.14	-29.79	1 -3 dB


Local

[illegible]


N48(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_High_CH

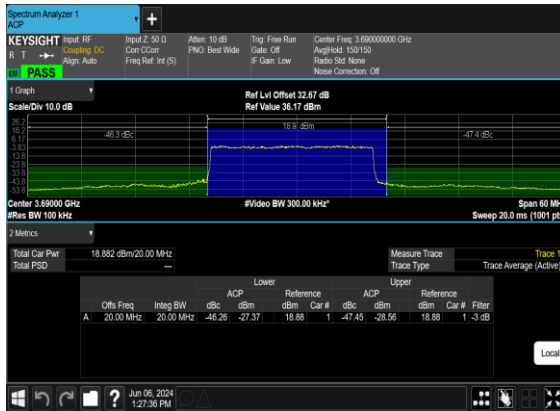


N48(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_High_CH

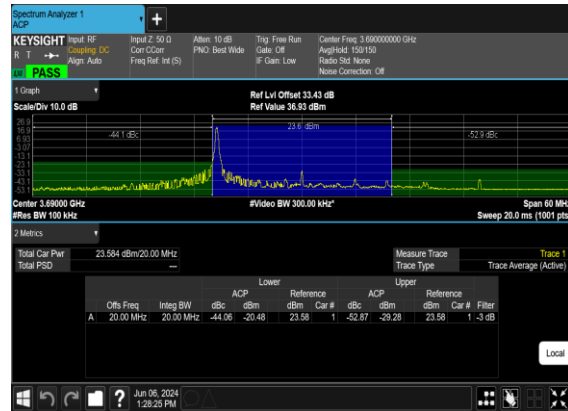


N48(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Right_High_CH

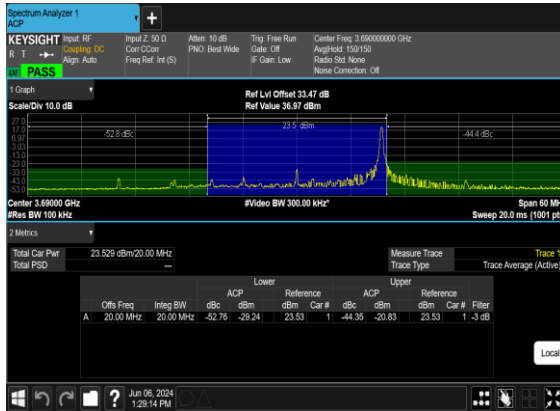


N48(20M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH

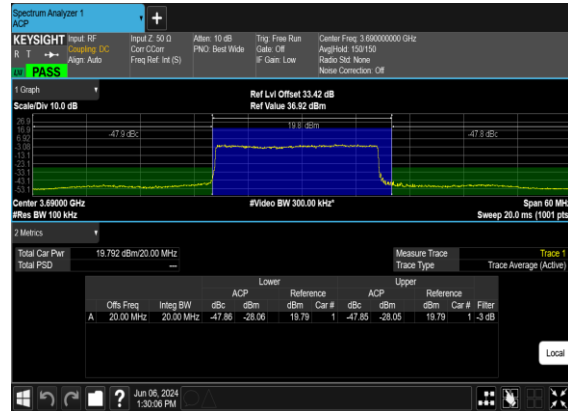


N48(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

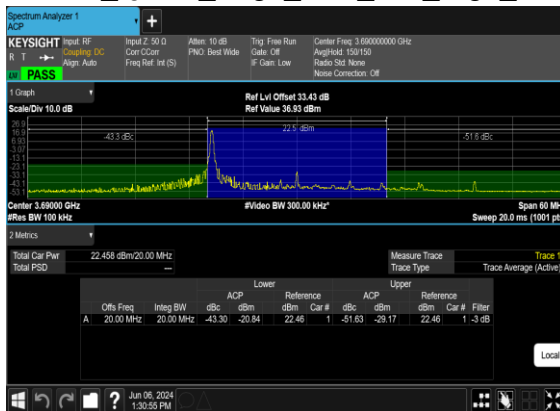


N48(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_High_CH

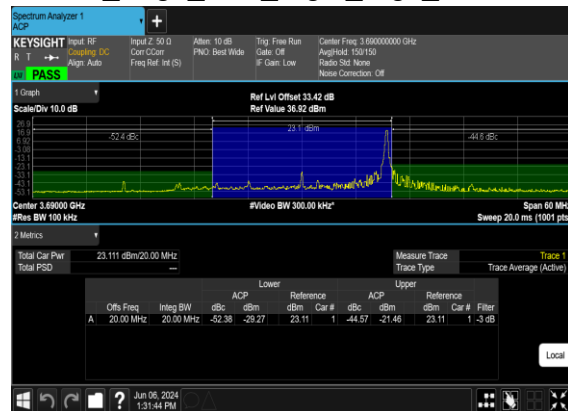


N48(40M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Low_CH

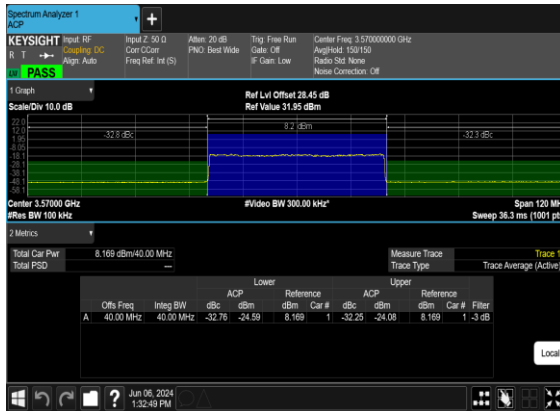

N48(40M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Low_CH

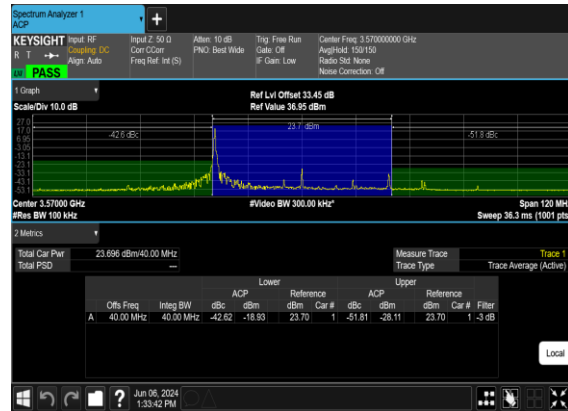


N48(40M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Right_Low_CH

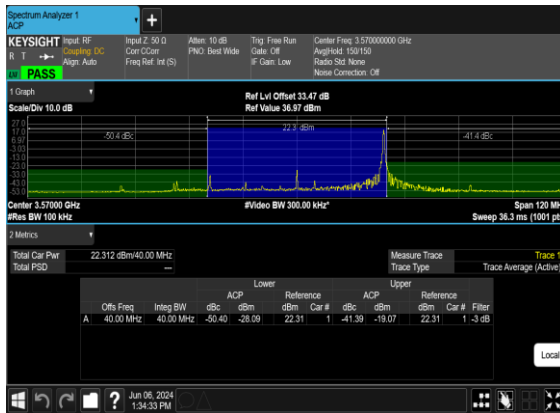


N48(40M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH




N48(40M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

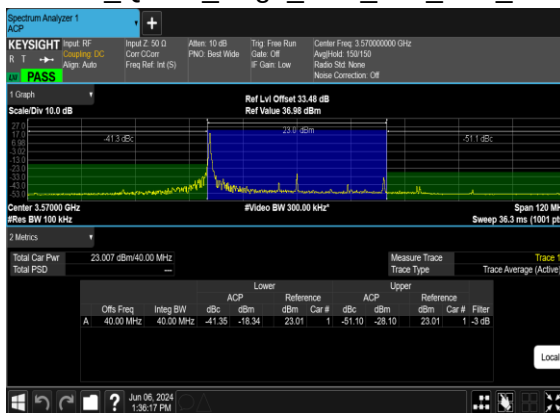


N48(40M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_Low_CH

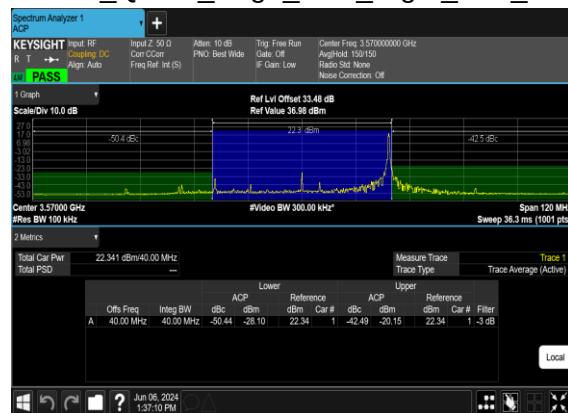


N48(40M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

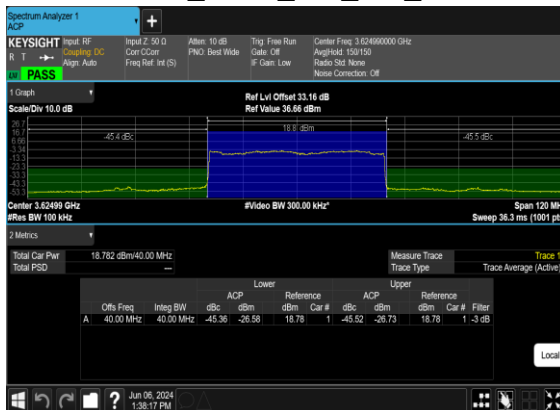


N48(40M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Mid_CH

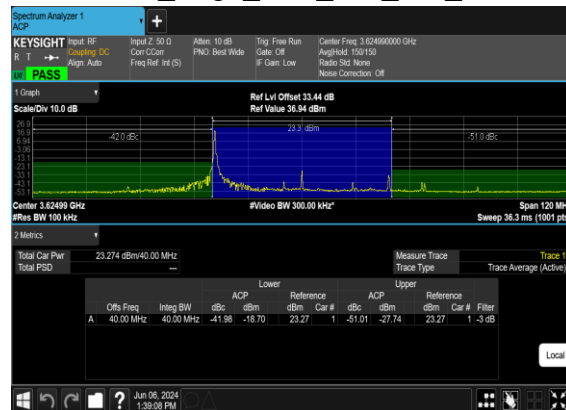


N48(40M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Right_Mid_CH

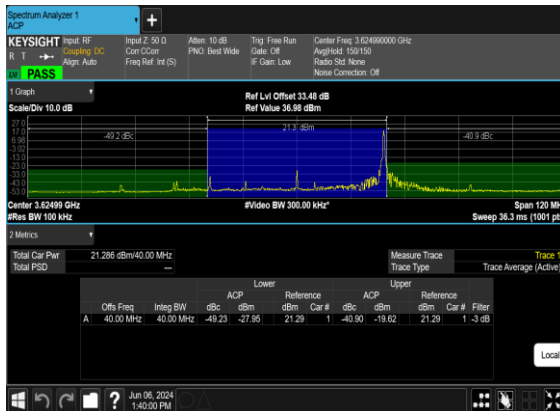


N48(40M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

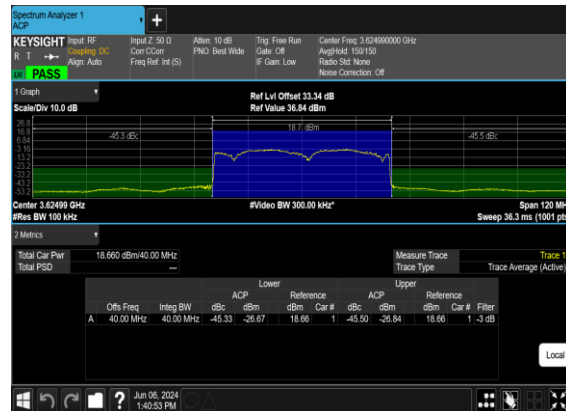

N48(40M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

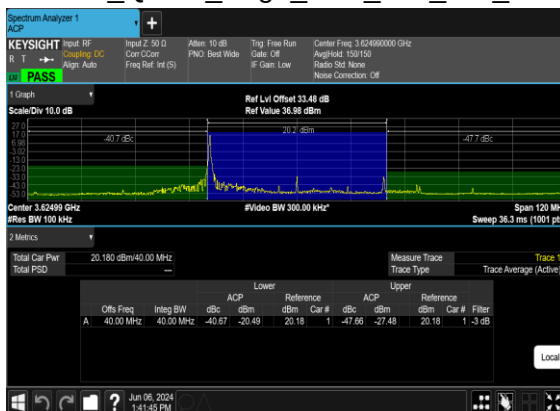

N48(40M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_Mid_CH

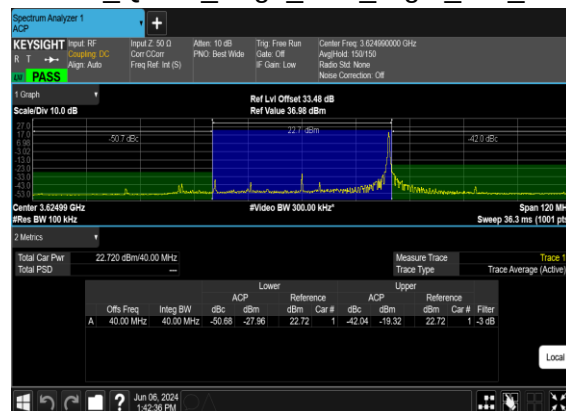

Spectrum Analyzer 1 ACP

KEYSTRT Input Ref:
 R T → Channel OC
 Align Auto

Input 2: 50.0
 Corr: Corr
 Freq Ref: Int (S)

Atten: 20 dB
 PWD: Best Wld

Trig: Free Run
 Gate: Off
 IF: Gain Low

Center Freq: 3.679890000 GHz
 Agran'dw: 101100
 Radio Set: None
 Noise Correction: Off

1 Graph
 Scale/Div 10.0 dB
 Ref Lvl Offset: 26.50 dB
 Ref Value 30.00 dBm

Center: 3.57989 GHz
 #Res BW 100 kHz
 #Video BW 300.00 kHz*
 Span 120 MHz
 Sweep 36.3 ms (1001 pts)

2 Metrics
 Total Car Pwr: 6.291 dBm(40.00 MHz)
 Total PSD: —

Lower				Upper			
Offs Freq	Integ BW	ACP	Reference	ACP	Reference	Car #	Filter
dBm	dBm	dBm	dBm	dBm	dBm		
A 40.00 MHz	40.00 MHz	-32.24	-25.95	6.291	1	-31.25	-24.96
				6.291	1	-3	dB

Trace Type: Trace Average (Active)

Spectrum Analyzer 1 ACAP

KEYSIGHT Input Ref: **ACAP** | Input 2: 50.0 | Core LCCar | Freq Ref: 1st (S) | Attm: 10.0 dB | PNO: Best Wide | Trig: Free Run | Gate: Off | Center Freq: 3.67998000 GHz | Agranhd: 103150 | Radio Set: None | Noise Correction: Off

1 Graph | Scale/Div: 10.0 dB | Ref Lvl Offset: 33.45 dBm | Ref Value: 36.95 dBm

Center: 3.67998 GHz | #Res BW: 100 kHz | #Video BW: 300.00 kHz* | Span: 120 MHz | Sweep: 36.3 ms (1001 pts)

2 Metrics

Total Cal Peak		Measure Trace		Trace 1	
Total PSD		Trace Type		Trace Average (Active)	
23.273 dBm	40.00 MHz	Lower	Reference	Upper	Reference
		Offs Freq	Integ BW	ACP	Reference
		dBc	dBm	dBm	Car #
40.00 MHz	40.00 MHz	-41.78	-18.51	23.27	1
				-50.48	-27.21
				23.27	1
				-3.68	

Windows taskbar: Jun 06, 2024 1:44:33 PM

Spectrum Analyzer 1

KEYSIGHT Input RF
 R T → Align Auto
PASS

Input Z: 50 Ω
 Corr CC: Off
 Freq Ref: Int (S)

Athen: 10 dB
 PNO Best Wide

Trig Free Run
 Gate: Off
 IF Gain: Low

Center Freq: 3.67998000 GHz
 Arg#44: 131150
 Ratio Set None
 Noise Correction: Off

1 Graph
 Scale/Div 10.0 dB

Ref Lvl Offset: 33.47 dB
 Ref Value 36.97 dBm

-51.2 dBc
 23.4 dBm
 -43.1 dBc

Center: 3.67998 GHz
 #Res BW 100 kHz
 #Video BW 300.00 kHz*

Span 120 MHz
 Sweep 36.3 ms (1001 pts)

2 Metrics

Total C/Pd	Trace Type	Trace Average (Active)
23.401 dBm/40.00 MHz		

Lower				Upper			
Offs Freq	Integ BW	dBc	ACP	Reference	ACP	Reference	Filter
CW	dBm		dBm	Car #	dBm	Car #	
40.00 MHz	40.00 MHz	-51.22	-27.82	23.40	1	-42.88	-19.58
				23.40	1	-3	dB

Local

Spectrum Analyzer 1
ACP

KEYSIGHT Input Ref: **Channel DC** ImpEd: 50 Ω Corr C/Corr: **None** Attm: 20 dB Trig: Free Run Gate: Off Center Freq: 3.679990 GHz
 R T $\rightarrow$ **Align: Auto** PNO: Best Wld Avg4444: 101110 Range Std: None
IN PASS **dBm** **dBm** Noise Correction: Off

1 Graph
 Scale/Div: 10.0 dB
 20.0
 10.0
 0.0
 -10.0
 -20.0
 -30.0
 -40.0
 -50.0
 -60.0

Ref Lvl Offset: 26.51 dBm
 Ref Value: 30.01 dBm

32.3 dBc
 31.3 dBc

Center: 3.67999 GHz
 #Res BW: 100 kHz
 #Video BW: 300.00 kHz

Span: 120 MHz
 Sweep: 36.3 ms (1001 pts)

2 Metrics

Total Car Power: 6.325 dBm @ 40.0 MHz
 Total PSD: ---

Measure Trace: Trace 1
 Trace Type: Trace Average (Active)

Lower				Upper			
Offs Freq	Integ BW	ACP	Reference	ACP	Reference	Car #	Filter
dBc	dBm	dBm	dBm	dBm	dBm		
A 40.00 MHz	40.00 MHz	-32.28	-25.93	6.325	1	-31.25	-24.93
				6.325	1	-3	-3

Windows taskbar: Jun 06, 2024 1:46:18 PM

Spectrum Analyzer 1 ACP

KEYSIGHT Input: RF Input: 2.50 G Core: C-Cor Freq Ref: (s) Att: 10 dB P/N: Best Wide Trig: Free Run Gate: Off Center Freq: 3.67989000 GHz Arg: 142 153150 Noise: Stat: None Noise Correction: Off

1 Graph

Scale/Div 100 dB

Ref Lvl Offset: 33.47 dB Ref Value: 38.97 dBm

Span 120 MHz

Center: 3.67989 GHz #Res BW 100 kHz #Video BW 300.0 kHz Sweep: 36.3 ms (1000 pt)

2 Metrics

Total Car Power	22.418 dBm/40.00 MHz	Measure Trace	Trace Type	Trace Average (Ac)
Total PSD	-			

Offs Freq	Integ BW	Lower				Upper			
		ACP	Reference	ACP	Reference				
		dBm	dBm	Car #	dBm	dBm	Car #	Filter	
A 40.00 MHz	40.00 MHz	-40.73	-18.32	22.42	1	-49.48	-27.06	22.42 1 -3 dB	

Spectrum Analyzer 1
ACP

KEYSIGHT Input: RF, Output: DC, ACP: Auto, Ref Level Offset: 33.45 dBm, Ref Value: 36.95 dBm

1 Graph
Scale Div: 10.0 dB

Center 3.67998 GHz
#Res BW 100 kHz

Span 120 MHz
Sweep 36.3 ms 1000 pts

2 Metrics

Total Cnr Pwr	22.616 dBm/40.00 MHz	Measure Trace	Trace Type	Trace Average (Active)
Total PSD	...			

Lower				Upper			
Offs Freq	Integ BW	ACP	Reference	ACP	Reference	Car #	Filter
dBc	dBm	dBm	dBm	dBm	dBm		
A: 40.00 MHz	40.00 MHz	-50.29	-27.67	22.62	-42.75	-20.14	22.62, 1 -3 dB

Local


Conducted Spurious Emissions

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
48	15	10	637000	3555.0	DFT-s-OFDM BPSK	1@0	see graph	---
48	15	10	637000	3555.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	15	10	637000	3555.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	15	10	637000	3555.0	DFT-s-OFDM QPSK	1@0	see graph	---
48	15	10	637000	3555.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	15	10	637000	3555.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	15	10	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	---
48	15	10	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	15	10	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	15	10	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	---
48	15	10	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	15	10	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	15	10	646332	3694.98	DFT-s-OFDM BPSK	1@0	see graph	---
48	15	10	646332	3694.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	15	10	646332	3694.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	15	10	646332	3694.98	DFT-s-OFDM QPSK	1@0	see graph	---
48	15	10	646332	3694.98	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	15	10	646332	3694.98	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	15	20	637334	3560.01	DFT-s-OFDM BPSK	1@0	see graph	---
48	15	20	637334	3560.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	15	20	637334	3560.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	15	20	637334	3560.01	DFT-s-OFDM QPSK	1@0	see graph	---
48	15	20	637334	3560.01	DFT-s-OFDM QPSK	1@0	see graph	PASS

48	15	20	637334	3560.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	15	20	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	---
48	15	20	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	15	20	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	15	20	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	---
48	15	20	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	15	20	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	15	20	646000	3690.0	DFT-s-OFDM BPSK	1@0	see graph	---
48	15	20	646000	3690.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	15	20	646000	3690.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	15	20	646000	3690.0	DFT-s-OFDM QPSK	1@0	see graph	---
48	15	20	646000	3690.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	15	20	646000	3690.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	15	40	638000	3570.0	DFT-s-OFDM BPSK	1@0	see graph	---
48	15	40	638000	3570.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	15	40	638000	3570.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	15	40	638000	3570.0	DFT-s-OFDM QPSK	1@0	see graph	---
48	15	40	638000	3570.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	15	40	638000	3570.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	15	40	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	---
48	15	40	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	15	40	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	15	40	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	---
48	15	40	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	15	40	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS

48	15	40	645332	3679.98	DFT-s-OFDM BPSK	1@0	see graph	---
48	15	40	645332	3679.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	15	40	645332	3679.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	15	40	645332	3679.98	DFT-s-OFDM QPSK	1@0	see graph	---
48	15	40	645332	3679.98	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	15	40	645332	3679.98	DFT-s-OFDM QPSK	1@0	see graph	PASS


N48(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

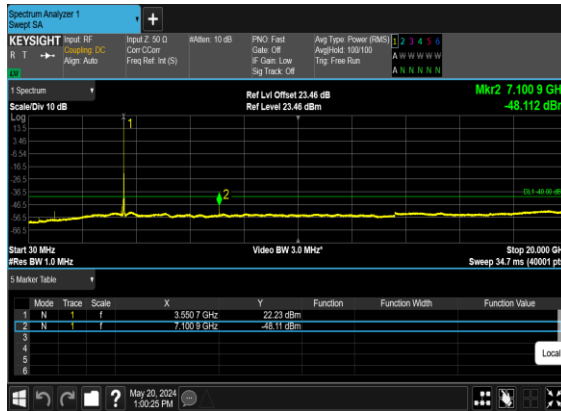


N48(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH




N48(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

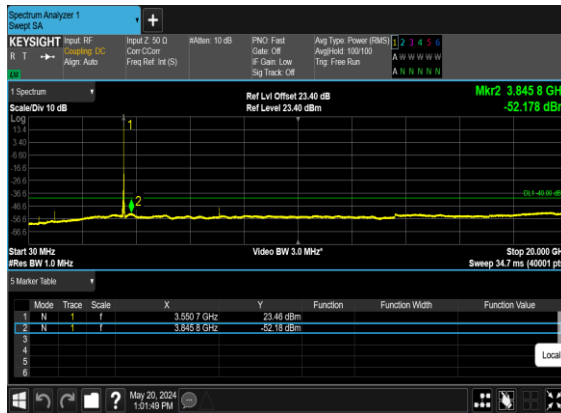


N48(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

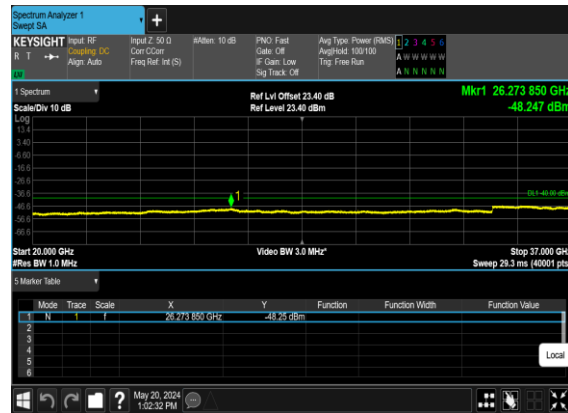


N48(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

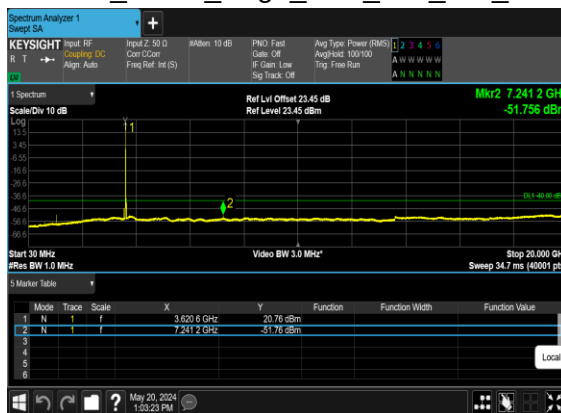

N48(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

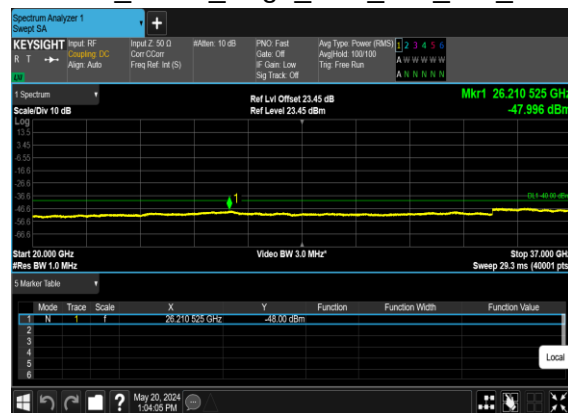


N48(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

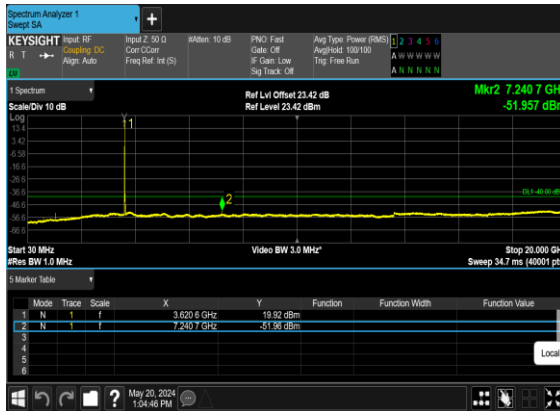

N48(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH




N48(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

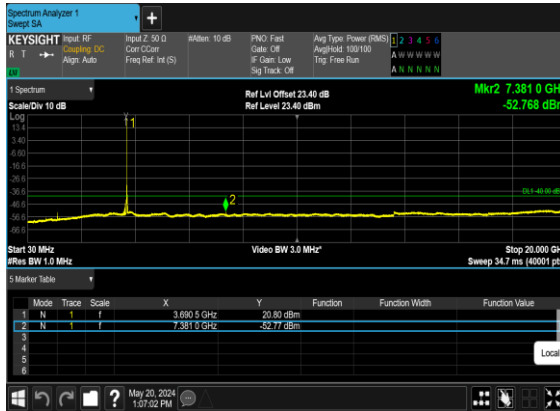


N48(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH




N48(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

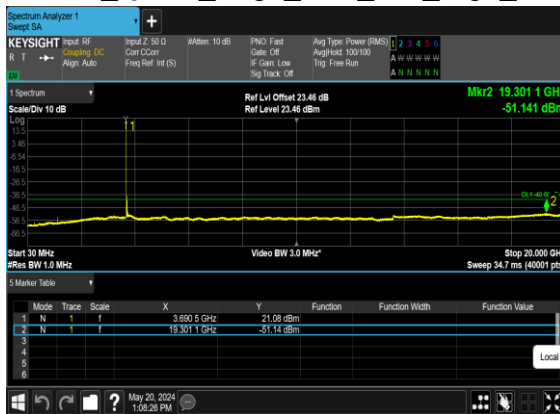

N48(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

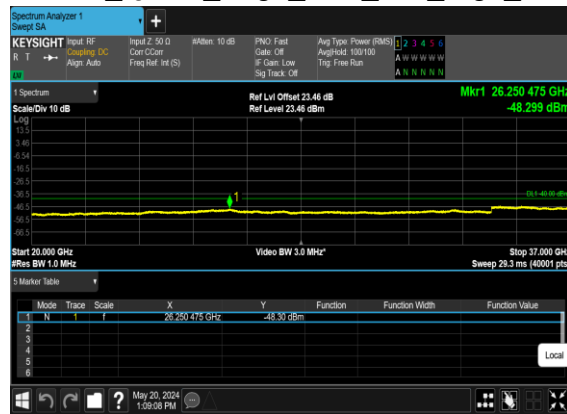


N48(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

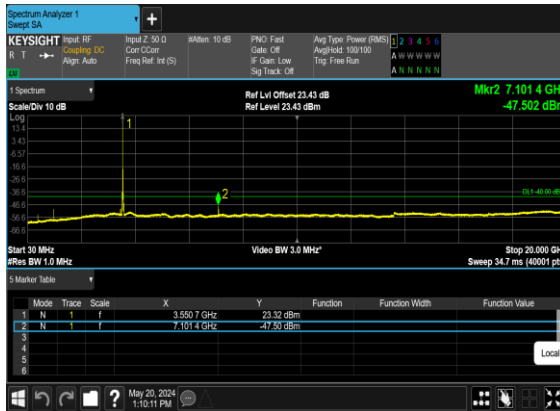


N48(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH




N48(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

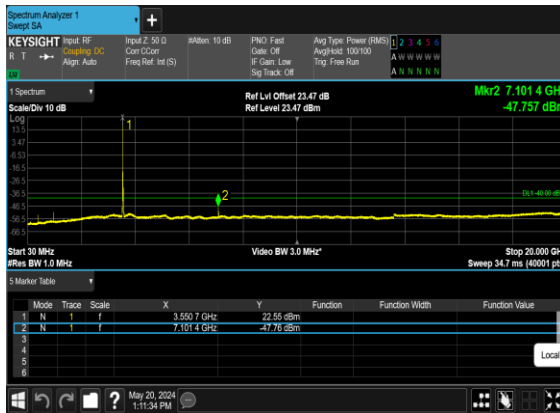

N48(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

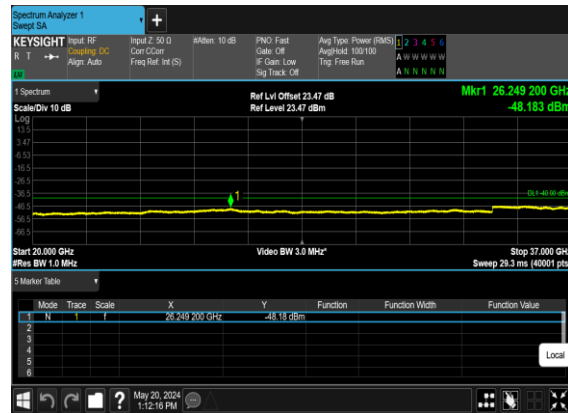

N48(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

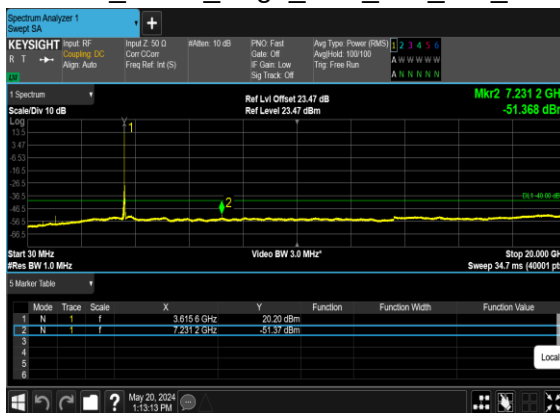

N48(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

