

Shenzhen DBT Telecommunication Technology CO.,LTD


Antenna specifications

Customer : EIOT


Project : H652

Antenna standard: BT

1. Test equipment

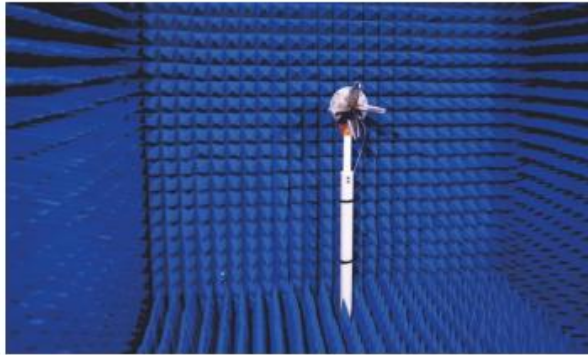

OTA-800
Model : ETS

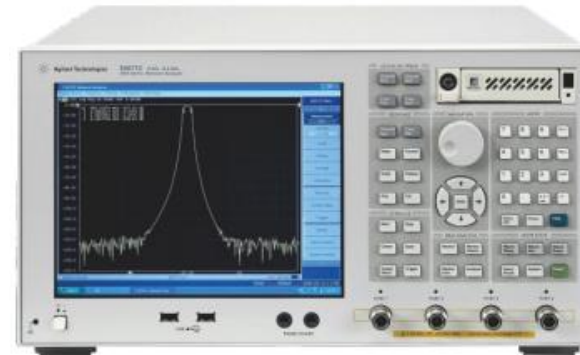

5071C
Model : Agilent




8960
Model : Agilent



CMW500
Model : ROHDE&SCHWAR

2. Antenna Drawing

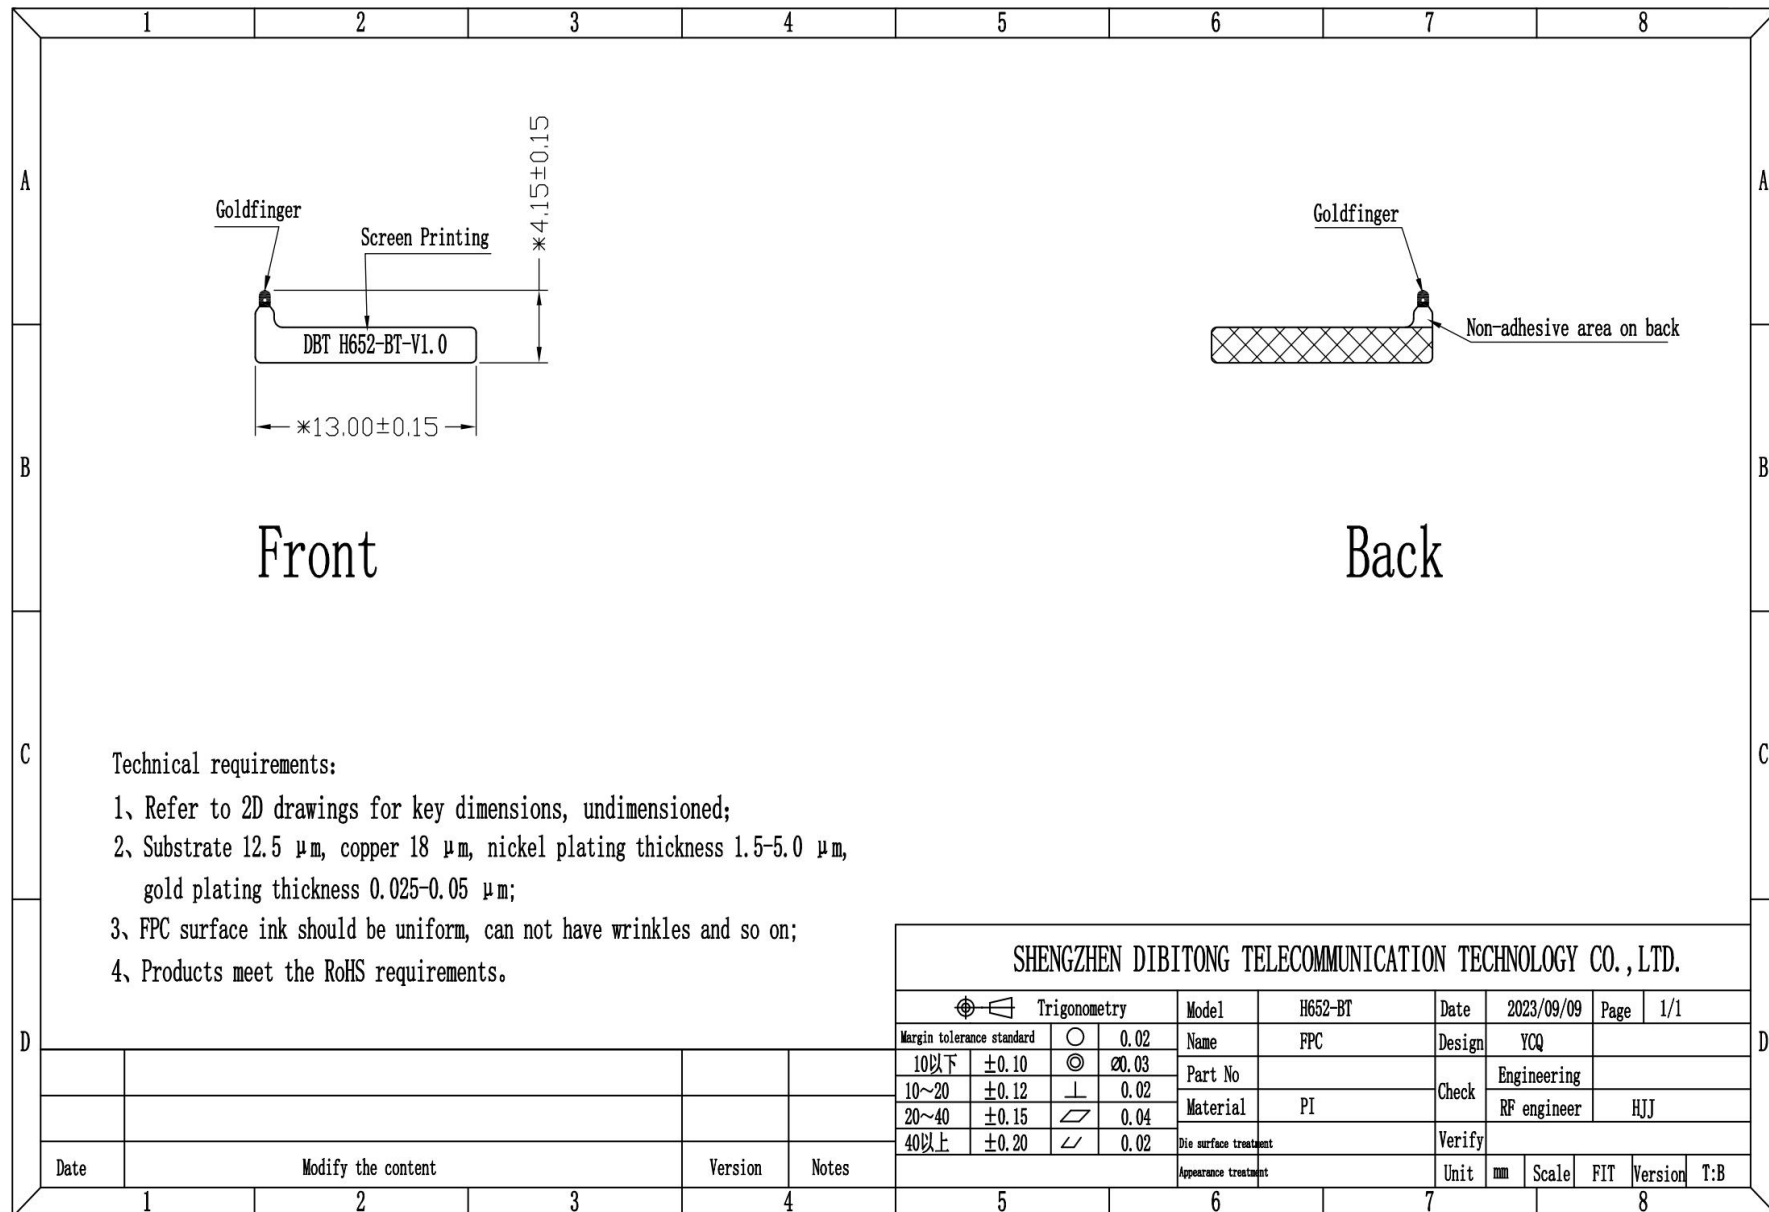


3.Electrical Performance Index

Electrical Parameter	
Frequency Range (MHz)	2400~2500
VSWR	≤2.9
Input Impedance(Ω)	50
Gain(dBi)	-11.83
Radiation efficiency(%)	1.8%
Max power(W)	10
Antenna Type	monopole
Working Temperature(℃)	-40~+80

4. Antenna S11 data


BT

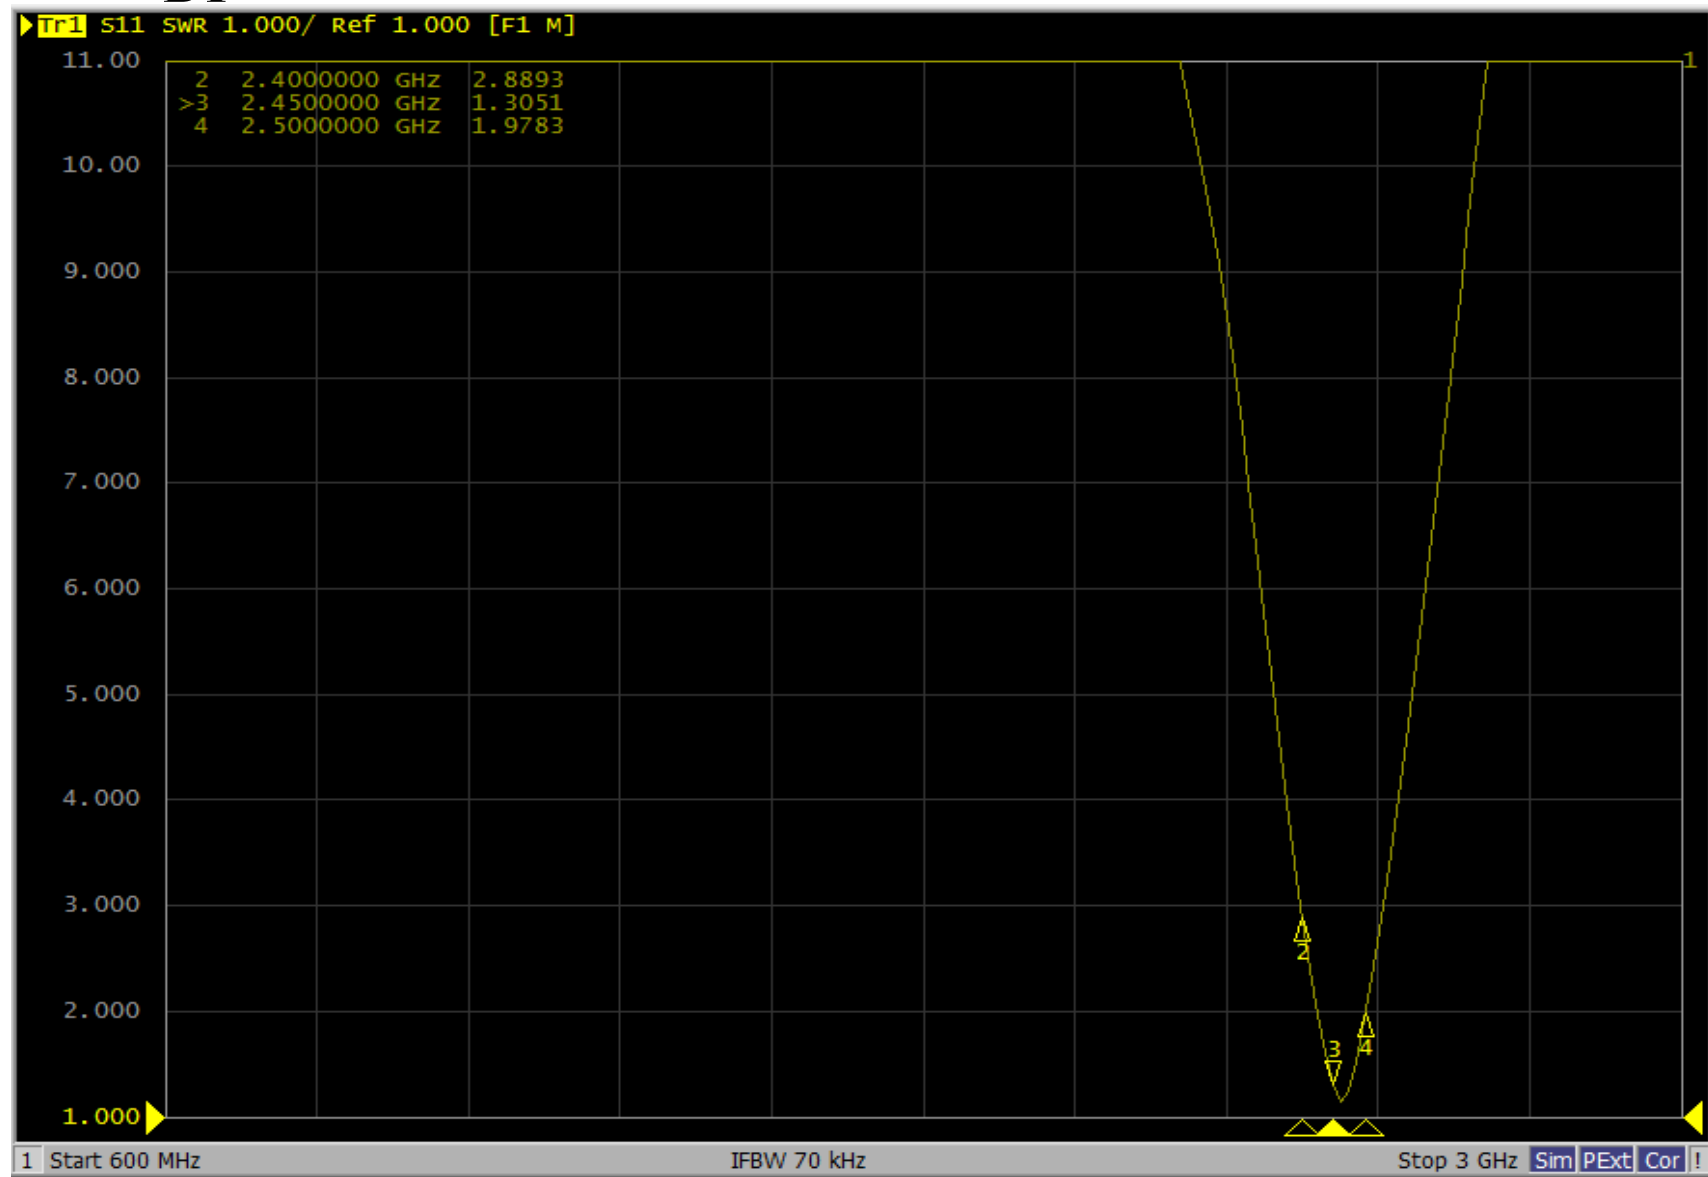


5. Antenna Efficiency/Gain (free space)

BT		
Freq	Effi	Gain
(MHz)	(%)	(dBi)
2400	1.63	-12.21
2410	1.71	-11.83
2420	1.55	-12.21
2430	1.52	-12.34
2440	1.72	-12.1
2450	1.52	-12.92
2460	1.87	-12.41
2470	1.83	-12.85
2480	2.33	-11.85
2490	1.73	-12.97
2500	2.05	-11.9


2450.000MHz

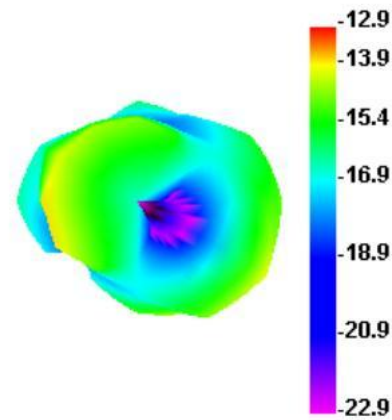


2450.000MHz H

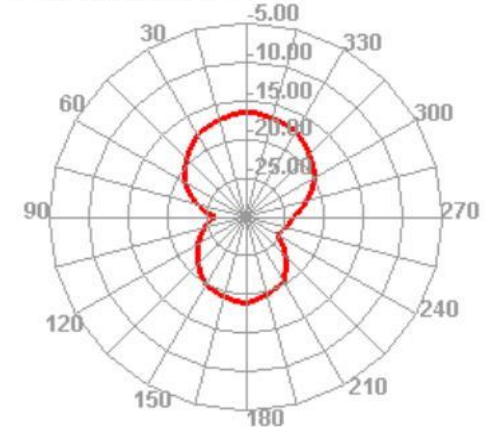

2450.000MHz E1

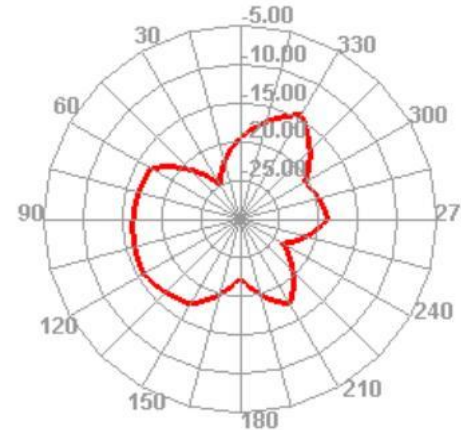

2450.000MHz E2

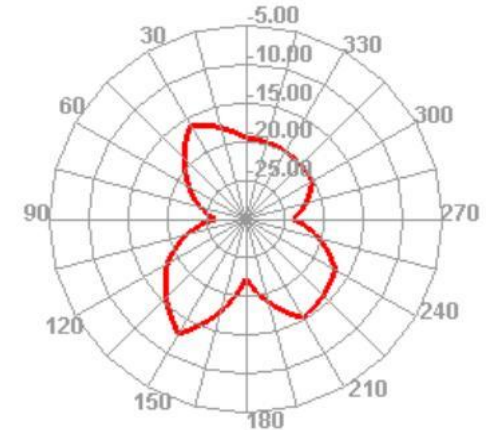

6.Products to be tested

