

## 6. Spurious Emissions at Antenna Terminals PCS

### 6.1 Test Specification

FCC, Part 24, Subpart E Section 238, FCC Part 2.1051

### 6.2 Test Procedure

(Temperature (22°C)/ Humidity (38%RH))

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator and an appropriate coaxial cable (max loss =10.8 dB). The spectrum analyzer was set to 300Hz RBW for the frequency range 9.0-150.0 kHz, 10kHz for the frequency range 150.0kHz–30.0MHz, 100kHz for the frequency range 30.0–1000.0MHz, and 1MHz for the frequency range 1.0- 22.0 GHz.

### 6.3 Test Limit

The power of any emission outside of the authorized operating frequency ranges (1930-1995MHz) must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \cdot \log(P)$  dB, yielding -13dBm.

### 6.4 Test Results

JUDGEMENT: Passed

See additional information in *Figure 126* to *Figure 161*.

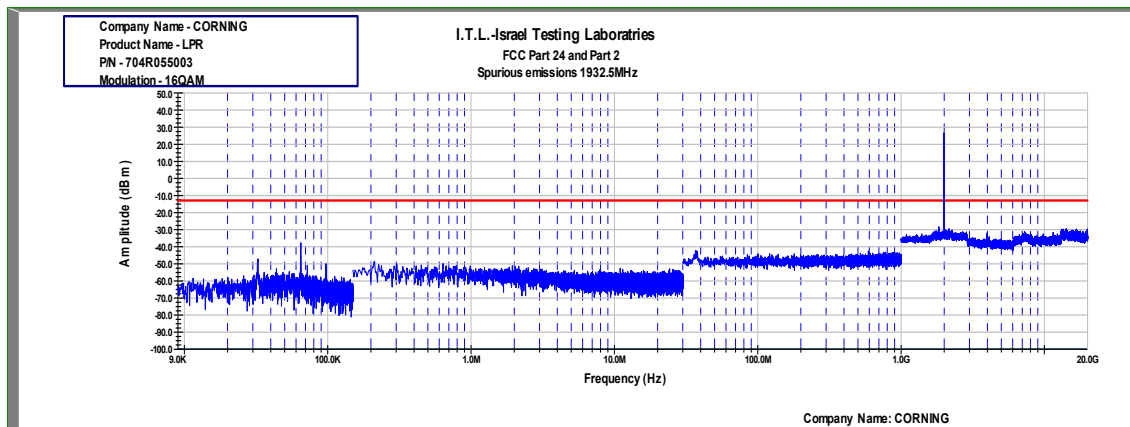


Figure 126 Spurious Emissions at Antenna Terminals 16QAM, MIMO, 5 MHz (Low)

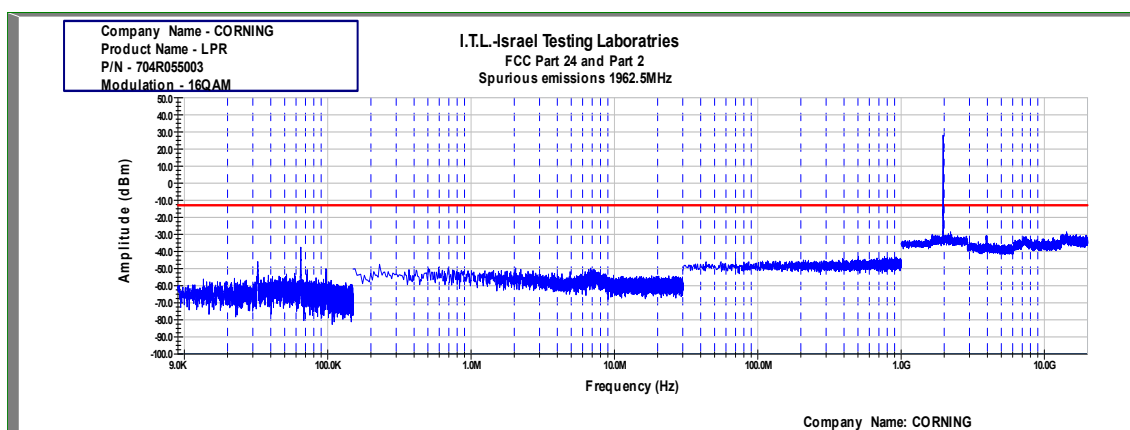


Figure 127 Spurious Emissions at Antenna Terminals 16QAM, MIMO, 5 MHz (Mid)

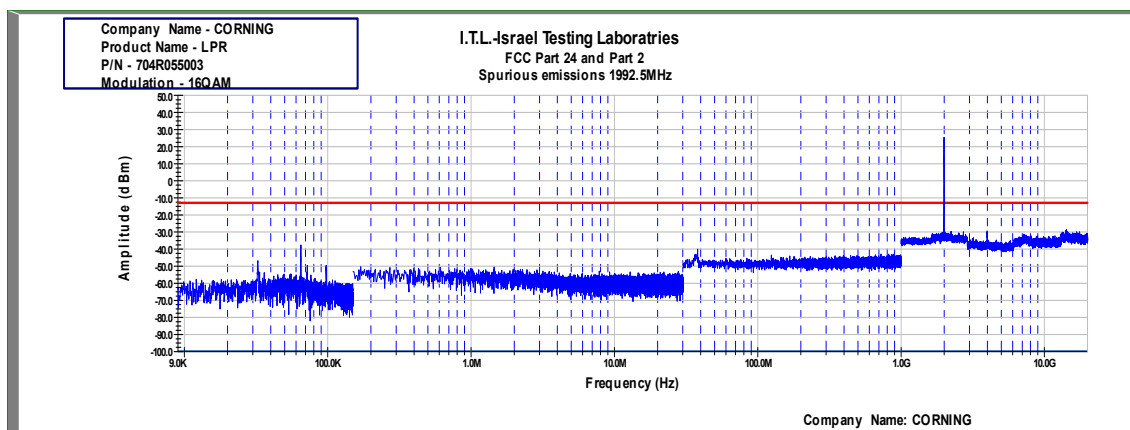


Figure 128 Spurious Emissions at Antenna Terminals 16QAM, MIMO, 5 MHz (High)

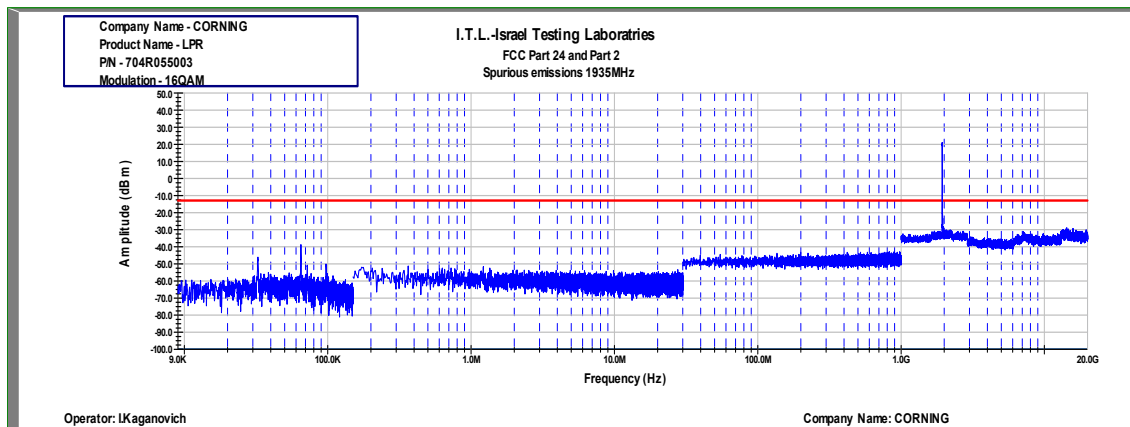


Figure 129 Spurious Emissions at Antenna Terminals 16QAM, MIMO, 10 MHz (Low)

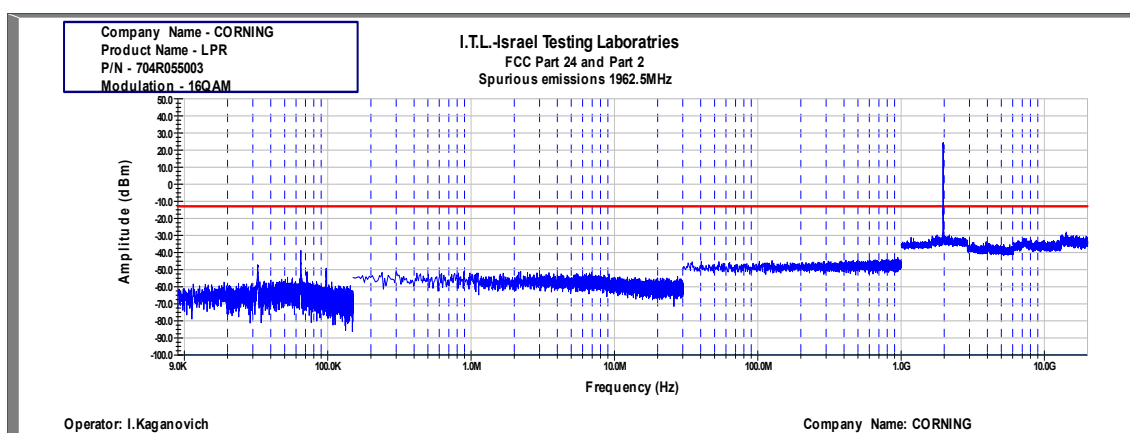


Figure 130 Spurious Emissions at Antenna Terminals 16QAM, MIMO, 10 MHz (Mid)

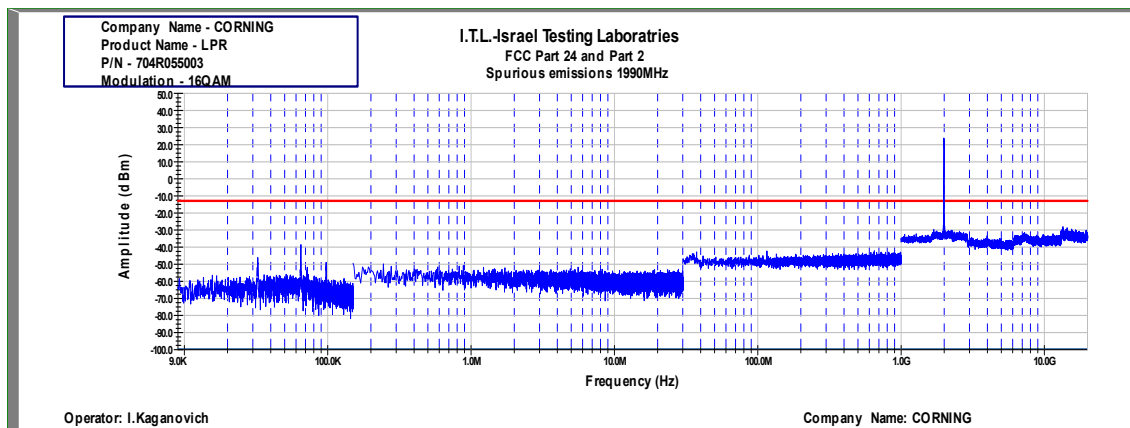


Figure 131 Spurious Emissions at Antenna Terminals 16QAM, MIMO, 10 MHz (High)

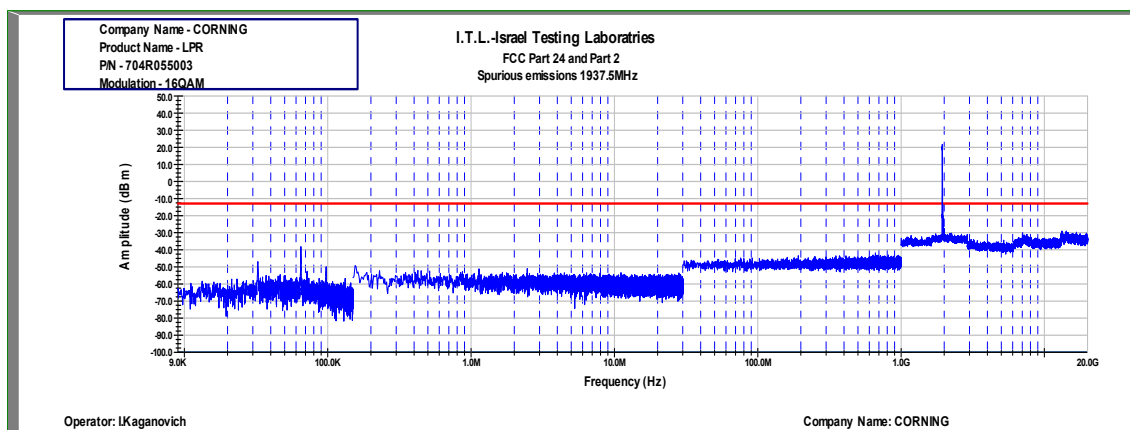


Figure 132 Spurious Emissions at Antenna Terminals 16QAM, MIMO, 15 MHz (Low)

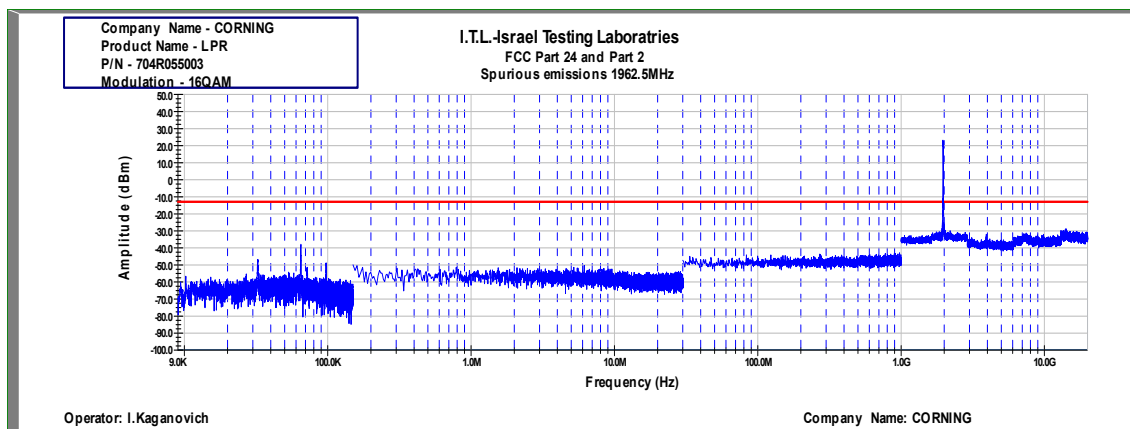


Figure 133 Spurious Emissions at Antenna Terminals 16QAM, MIMO, 15 MHz (Mid)

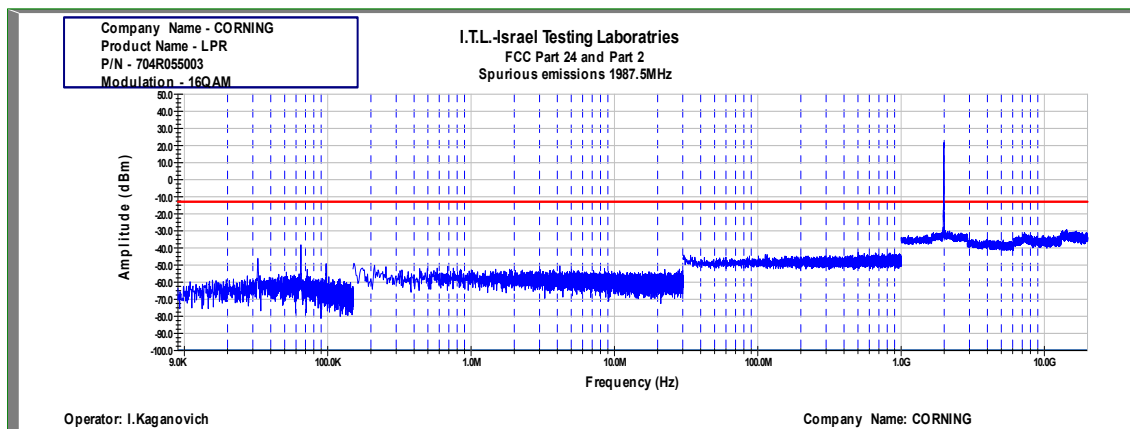


Figure 134 Spurious Emissions at Antenna Terminals 16QAM, MIMO, 15 MHz (High)

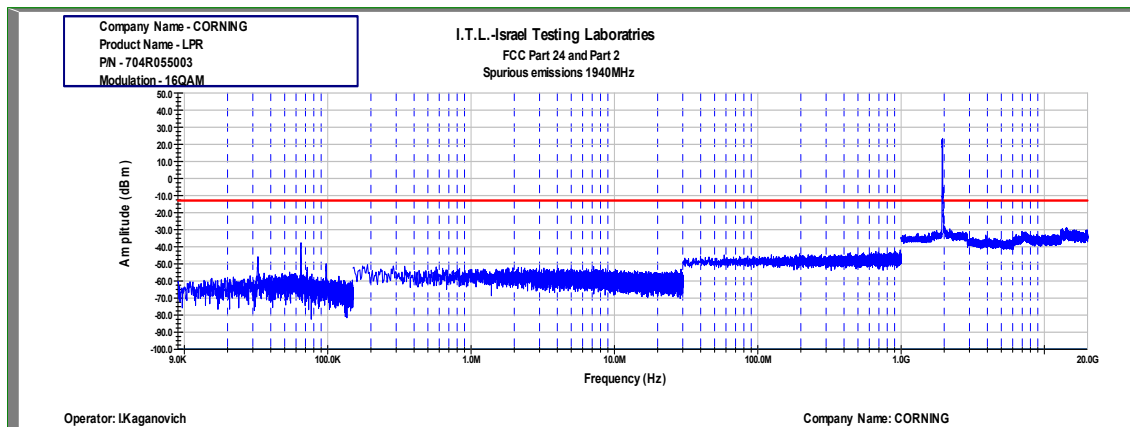


Figure 135 Spurious Emissions at Antenna Terminals 16QAM, MIMO, 20 MHz (Low)

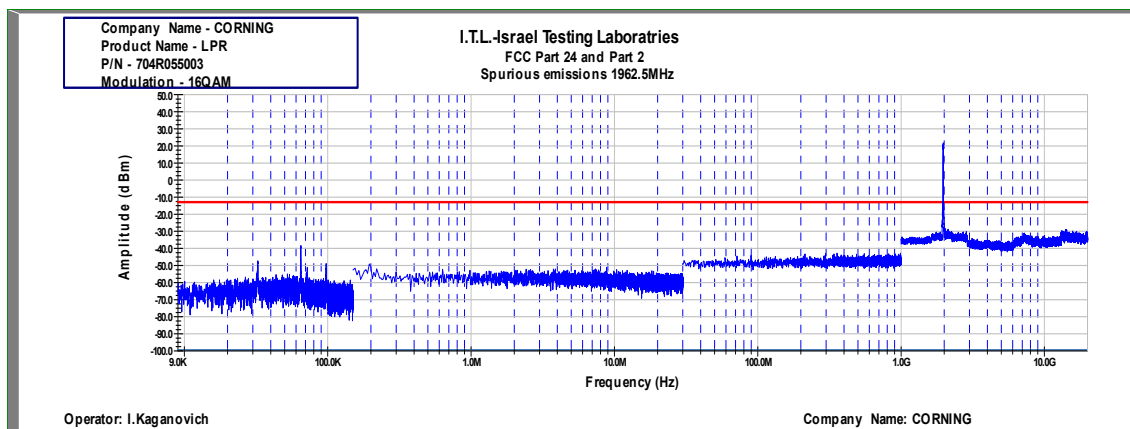


Figure 136 Spurious Emissions at Antenna Terminals 16QAM, MIMO, 20 MHz (Mid)

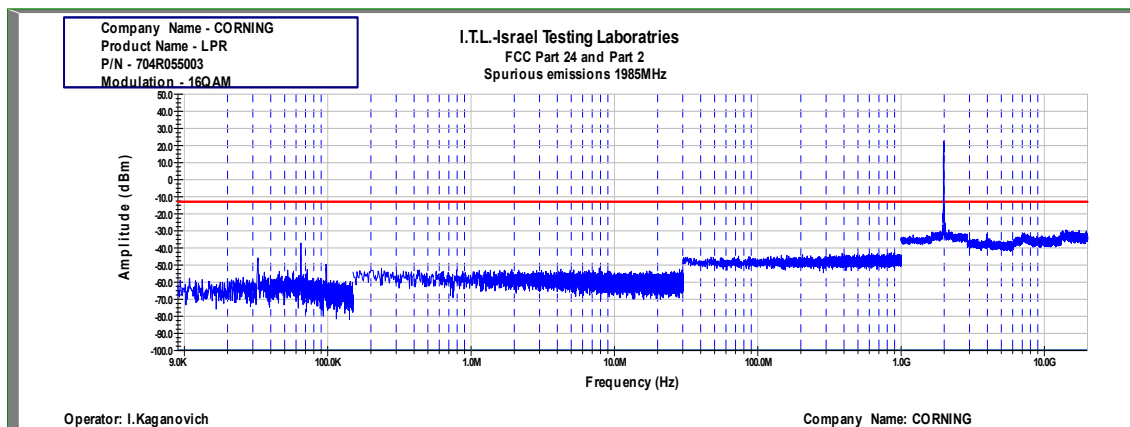


Figure 137 Spurious Emissions at Antenna Terminals 16QAM, MIMO, 20 MHz (High)

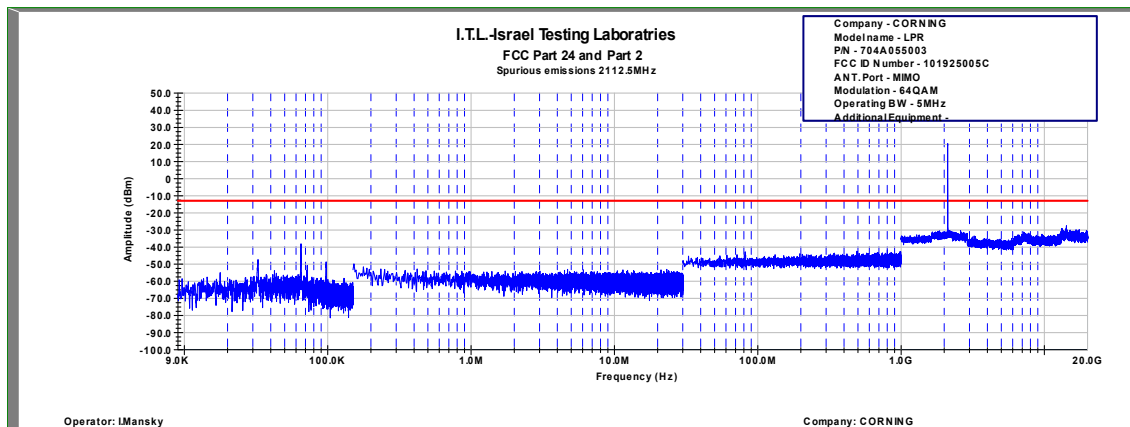


Figure 138 Spurious Emissions at Antenna Terminals 64QAM, MIMO, 5 MHz (Low)

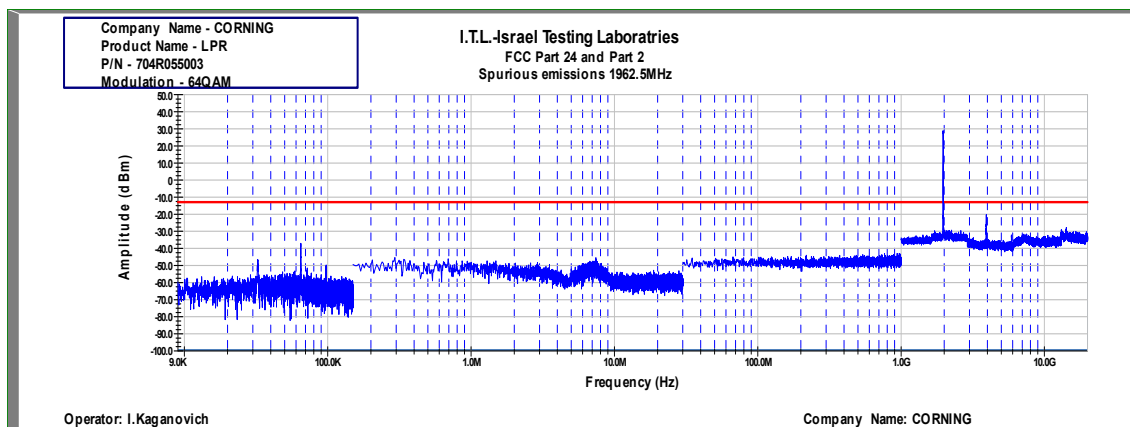


Figure 139 Spurious Emissions at Antenna Terminals 64QAM, MIMO, 5 MHz (Mid)

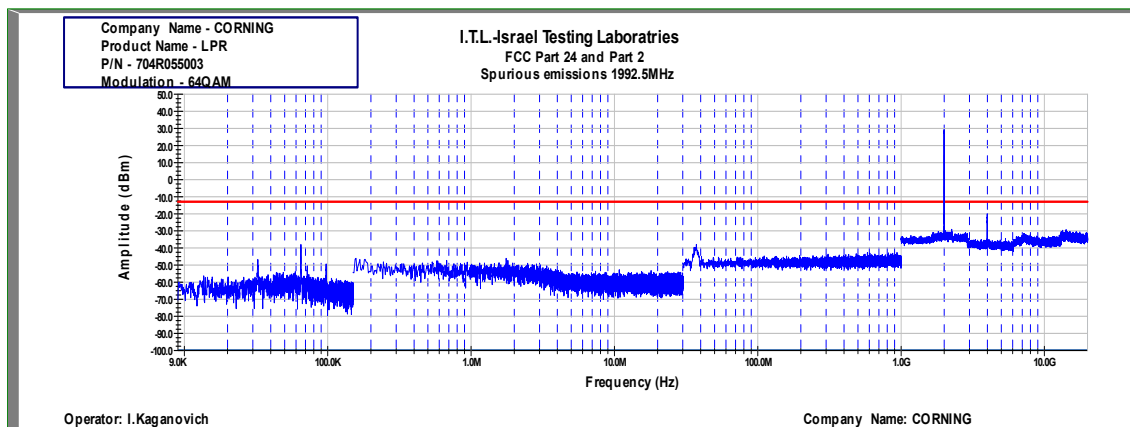


Figure 140 Spurious Emissions at Antenna Terminals 64QAM, MIMO, 5 MHz (High)

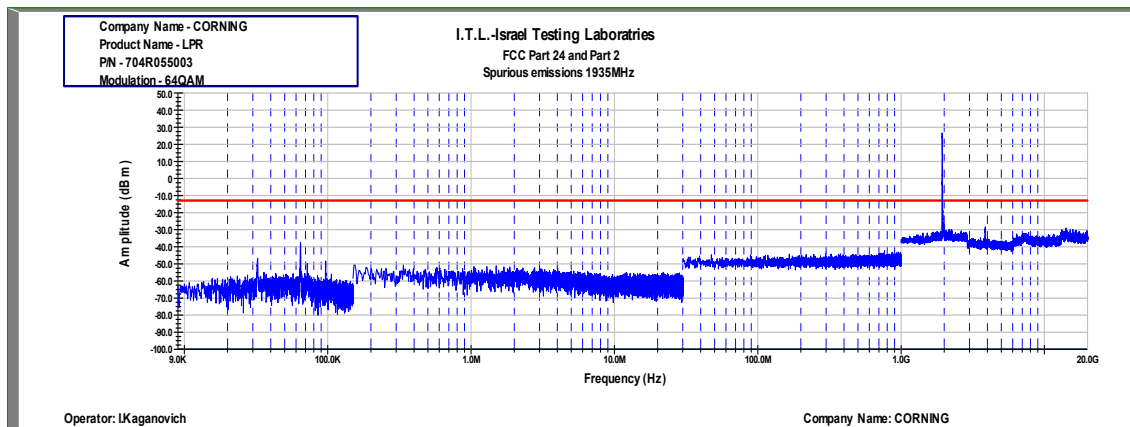


Figure 141 Spurious Emissions at Antenna Terminals 64QAM, MIMO, 10 MHz (Low)

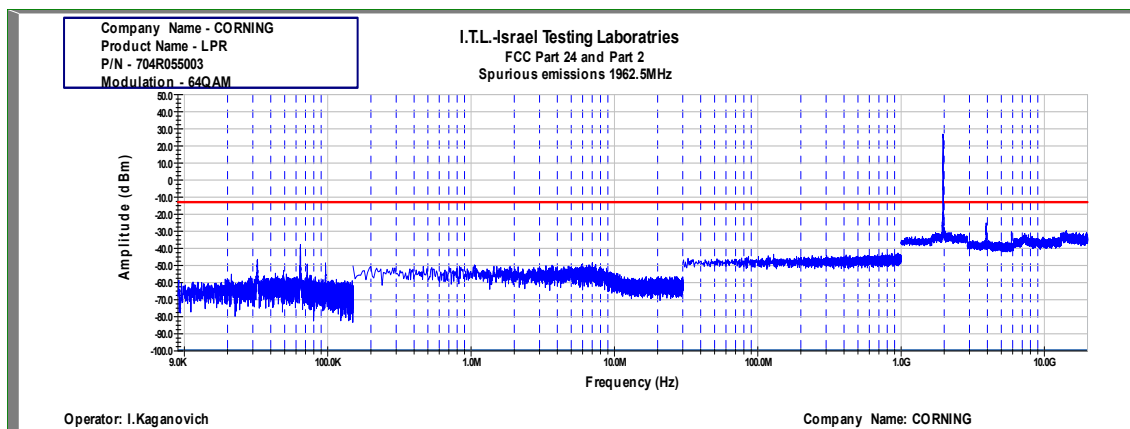


Figure 142 Spurious Emissions at Antenna Terminals 64QAM, MIMO, 10 MHz (Mid)

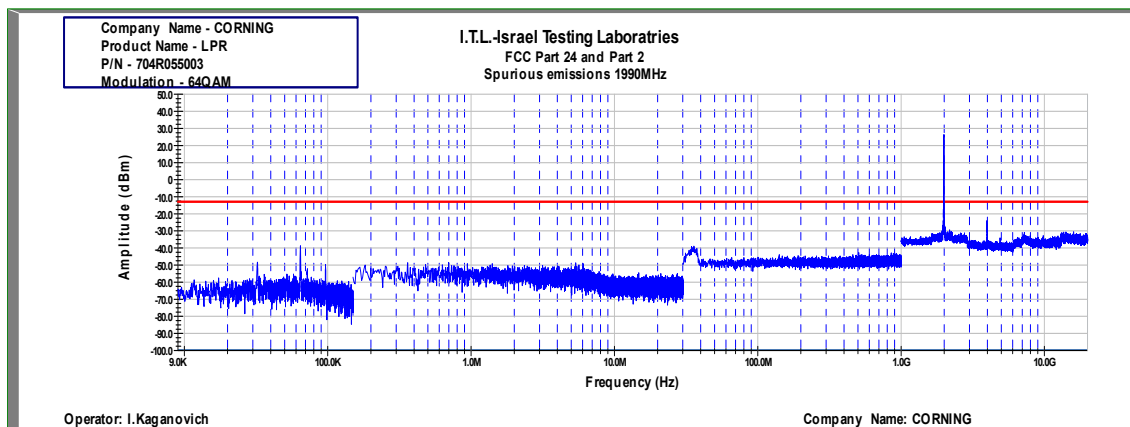


Figure 143 Spurious Emissions at Antenna Terminals 64QAM, MIMO, 10 MHz (High)

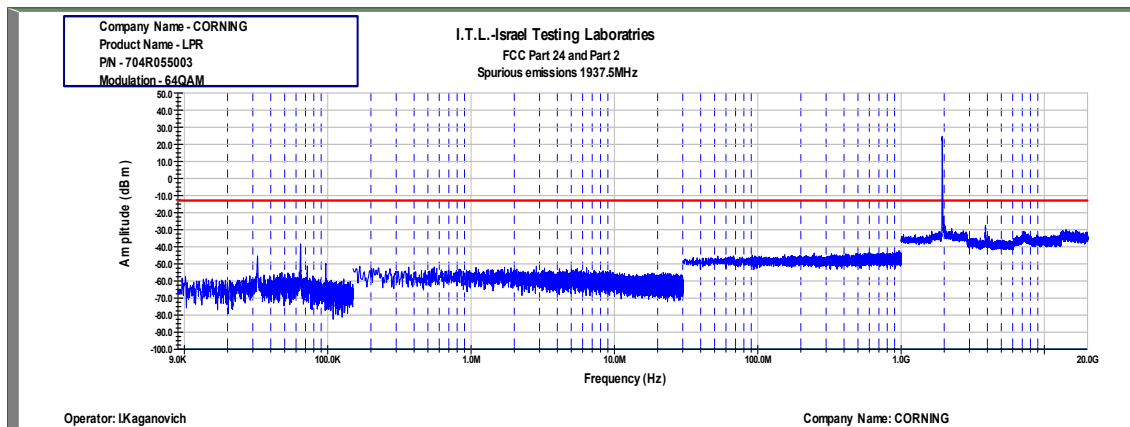


Figure 144 Spurious Emissions at Antenna Terminals 64QAM, MIMO, 15 MHz (Low)

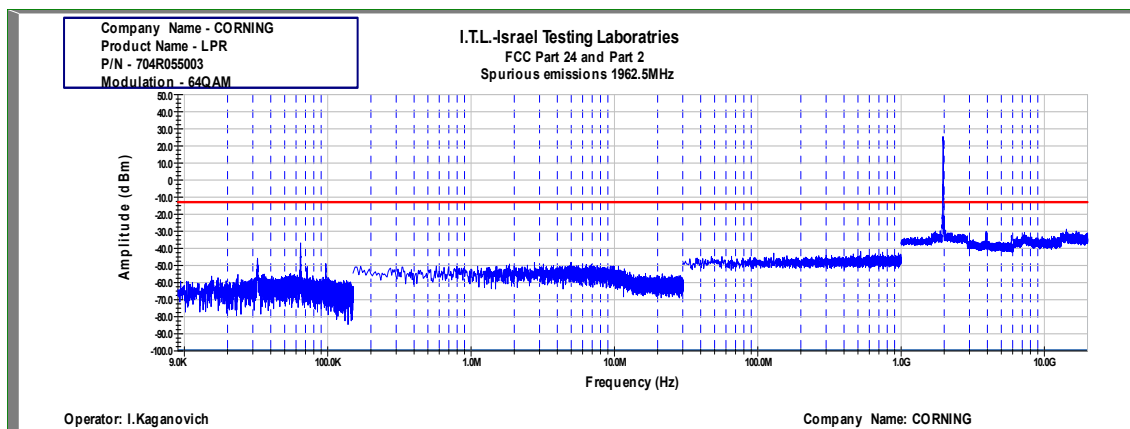


Figure 145 Spurious Emissions at Antenna Terminals 64QAM, MIMO, 15 MHz (Mid)

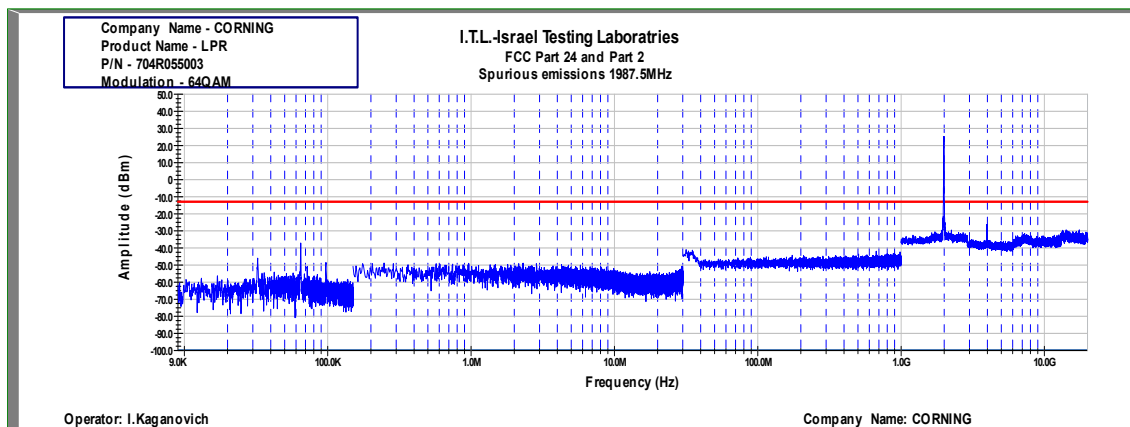


Figure 146 Spurious Emissions at Antenna Terminals 64QAM, MIMO, 15 MHz (High)



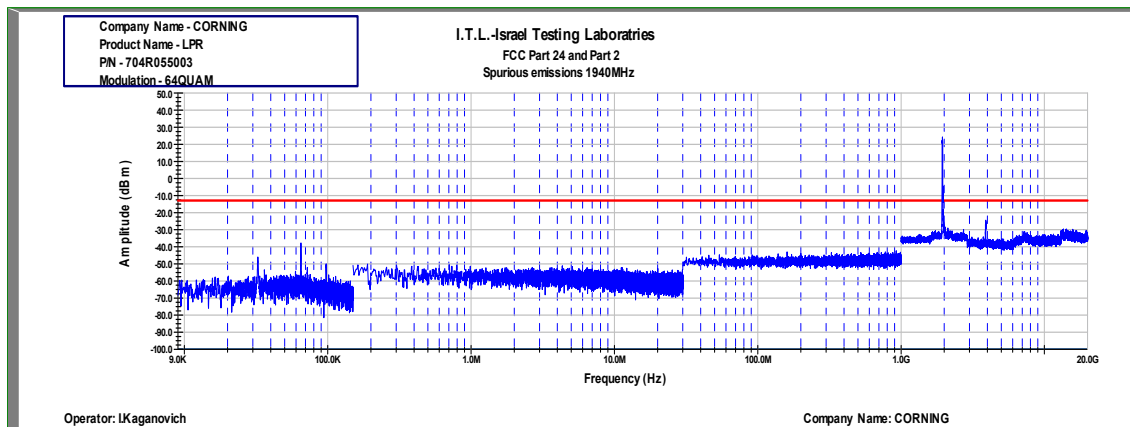


Figure 147 Spurious Emissions at Antenna Terminals 64QAM, MIMO, 20 MHz (Low)

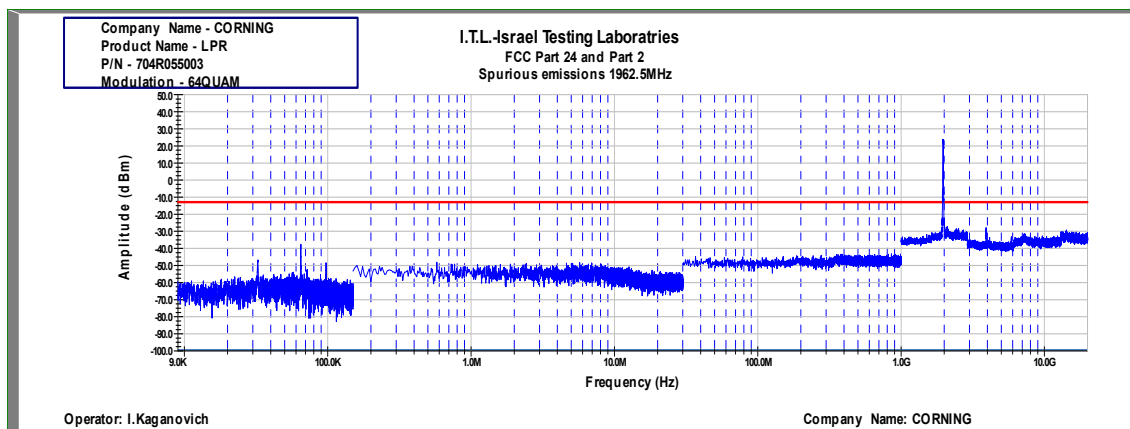


Figure 148 Spurious Emissions at Antenna Terminals 64QAM, MIMO, 20 MHz (Mid)

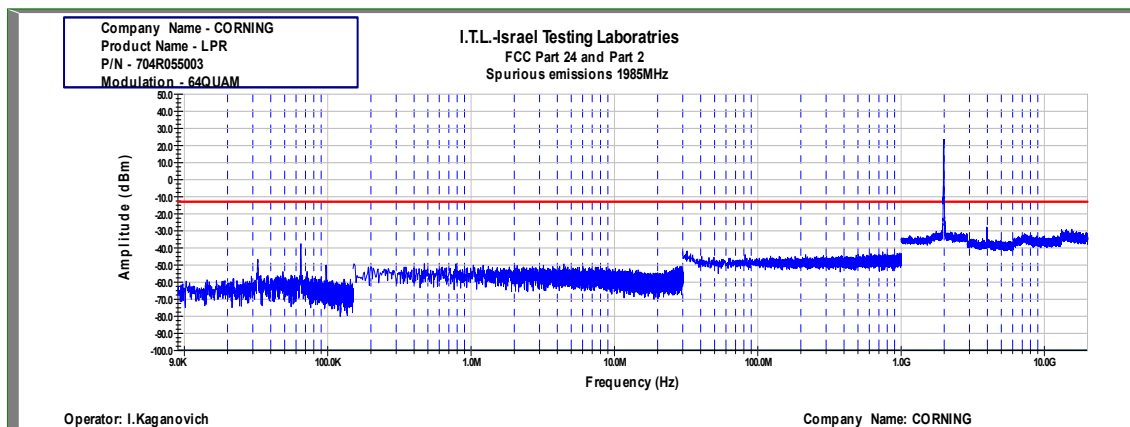


Figure 149 Spurious Emissions at Antenna Terminals 64QAM, MIMO, 20 MHz (High)

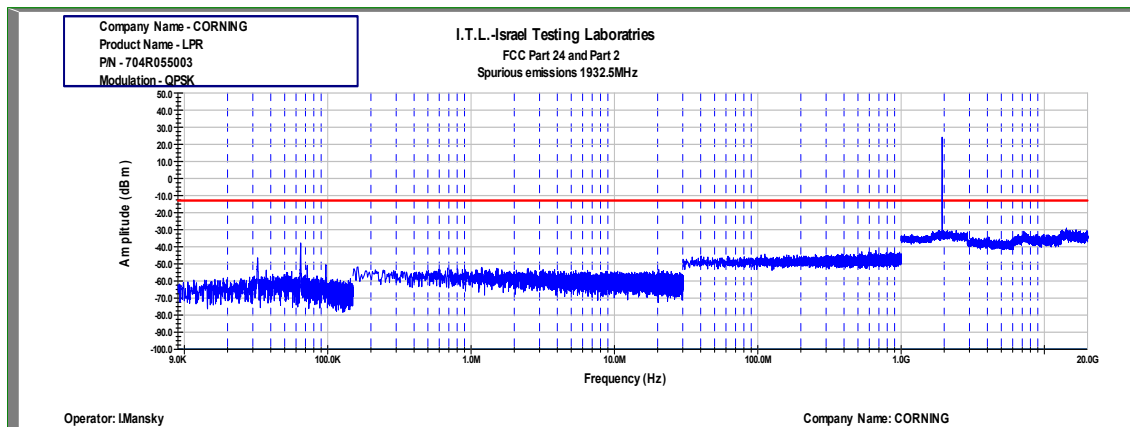


Figure 150 Spurious Emissions at Antenna Terminals QPSK, MIMO, 5 MHz (Low)

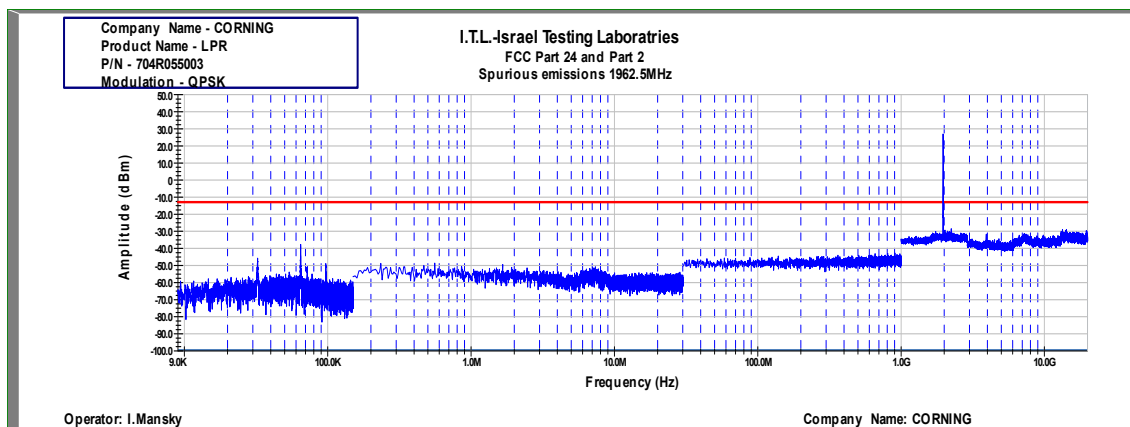


Figure 151 Spurious Emissions at Antenna Terminals QPSK, MIMO, 5 MHz (Mid)

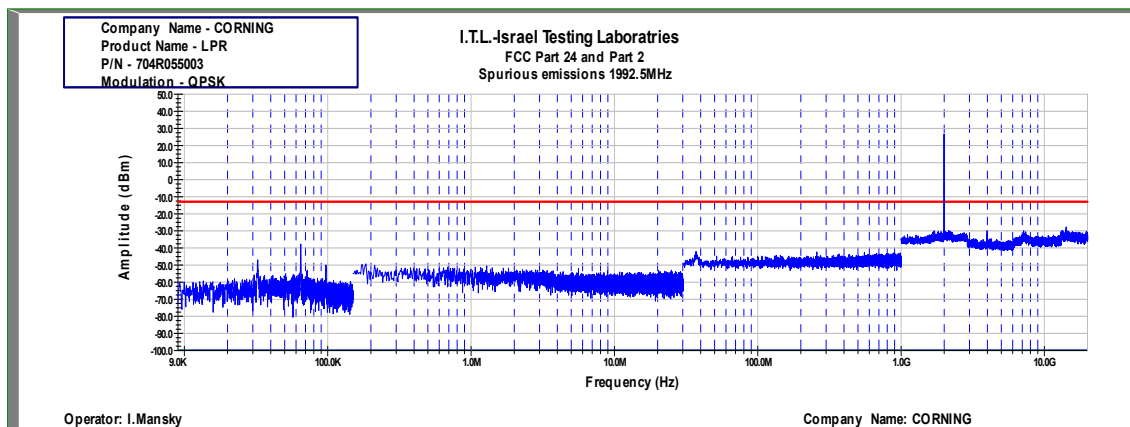


Figure 152 Spurious Emissions at Antenna Terminals QPSK, MIMO, 5 MHz (High)

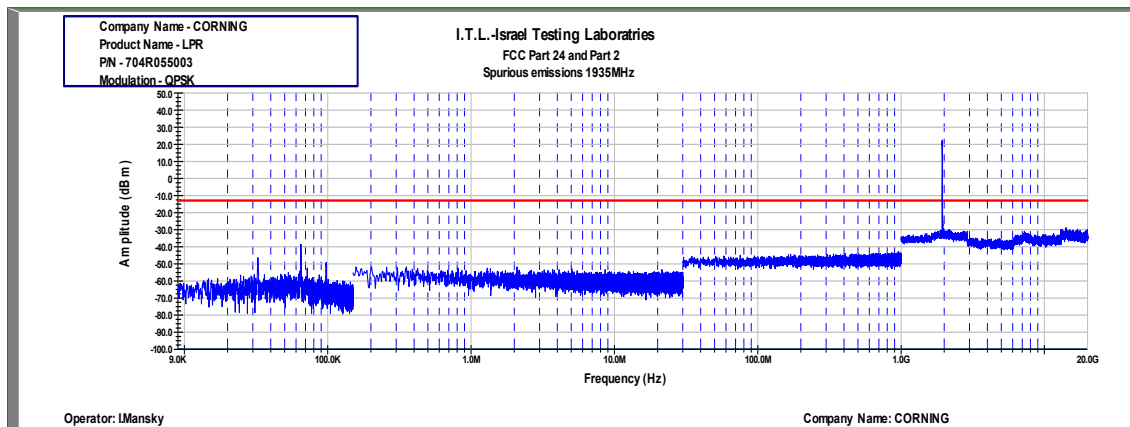


Figure 153 Spurious Emissions at Antenna Terminals QPSK, MIMO, 10 MHz (Low)

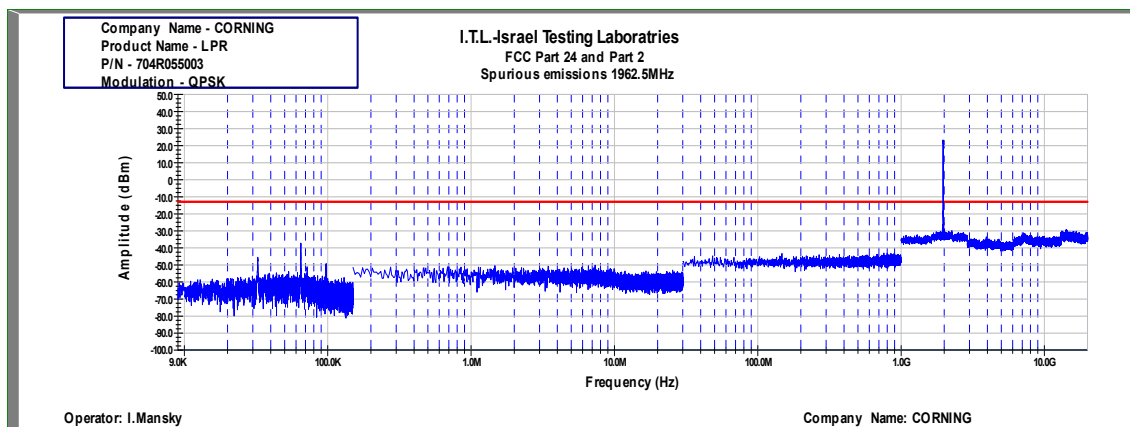


Figure 154 Spurious Emissions at Antenna Terminals QPSK, MIMO, 10 MHz (Mid)

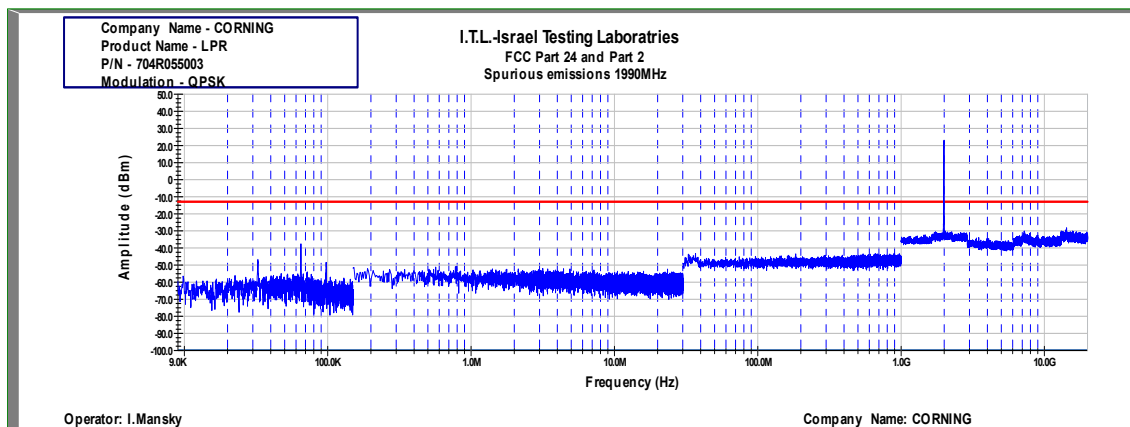


Figure 155 Spurious Emissions at Antenna Terminals QPSK, MIMO, 10 MHz (High)

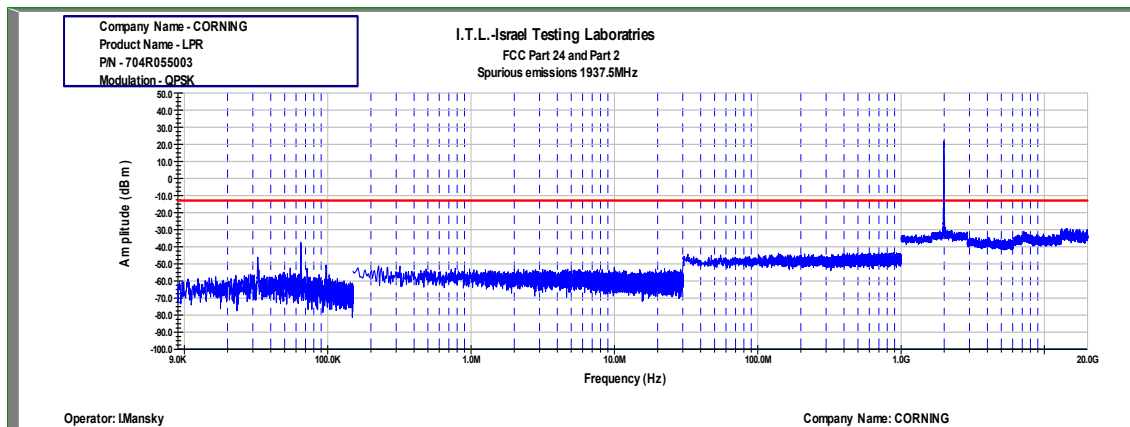


Figure 156 Spurious Emissions at Antenna Terminals QPSK, MIMO, 15 MHz (Low)

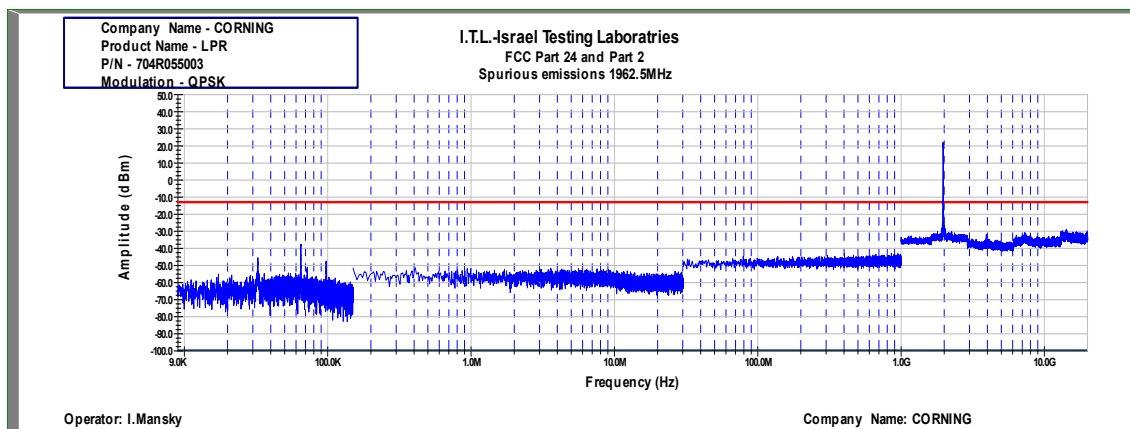


Figure 157 Spurious Emissions at Antenna Terminals QPSK, MIMO, 15 MHz (Mid)

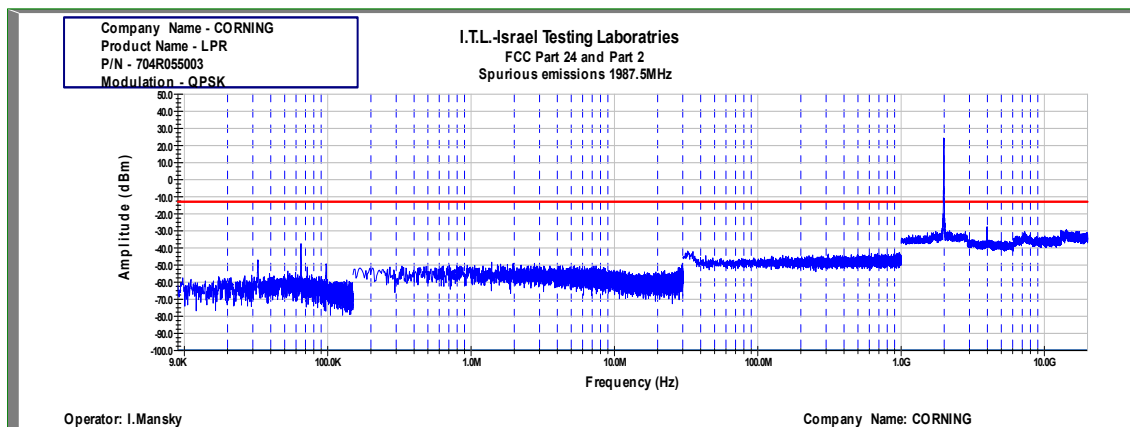


Figure 158 Spurious Emissions at Antenna Terminals QPSK, MIMO, 15 MHz (High)

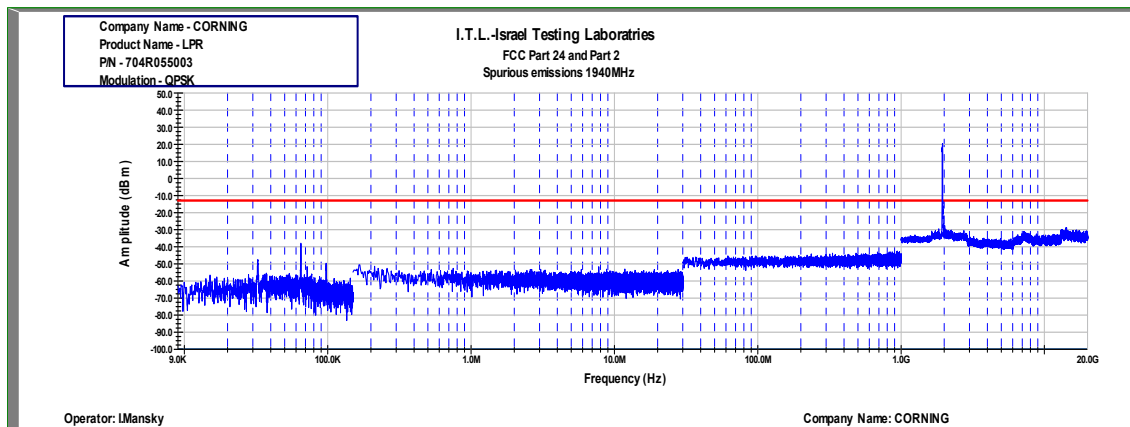


Figure 159 Spurious Emissions at Antenna Terminals QPSK, MIMO, 20 MHz (Low)

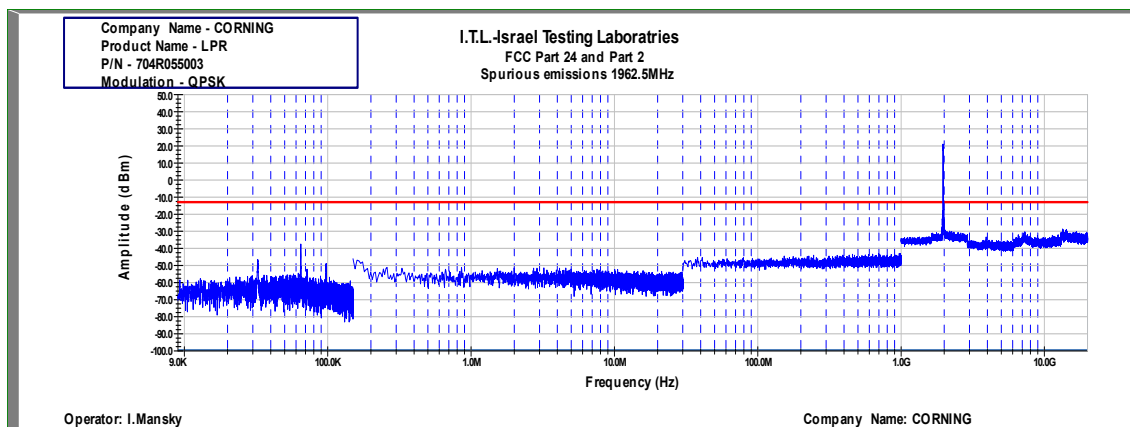


Figure 160 Spurious Emissions at Antenna Terminals QPSK, MIMO, 20 MHz (Mid)

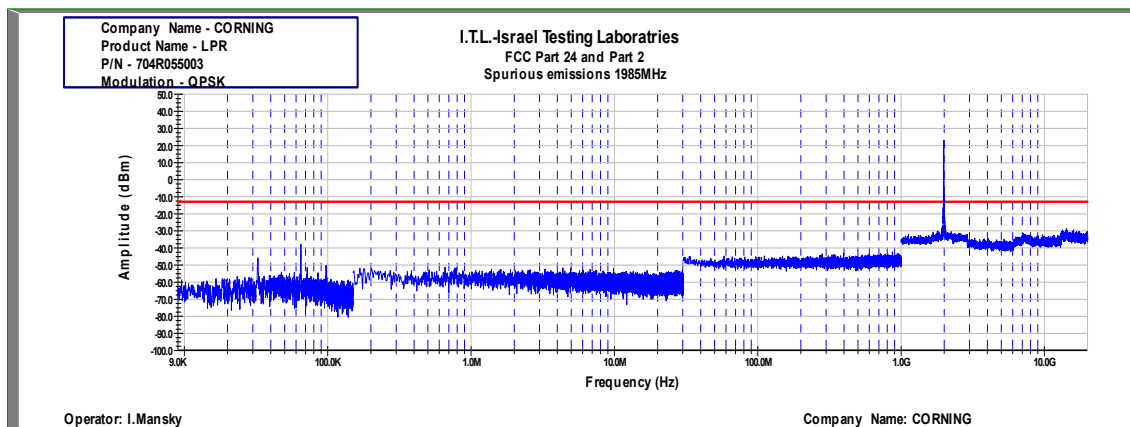


Figure 161 Spurious Emissions at Antenna Terminals QPSK, MIMO, 20 MHz (High)



### 6.5 Test Equipment Used; Spurious Emissions at Antenna Terminals PCS

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration Date	Next Calibration Due
Spectrum Analyzer	HP	8564E	3442A00275	September 1, 2019	September 30, 2019
Vector Signal Generator	VIAVI	MTS 5800	WMNK00716 90263	July 1, 2018	July 1, 2021
Attenuator 10dB	Bird	8304-N10DB	N/A	December 24, 2018	December 24, 2019

Figure 162 Test Equipment Used



## 7. Band Edge Spectrum PCS

### 7.1 Test Specification

FCC Part 24, Subpart E, Section 238; FCC Part 2.1051

### 7.2 Test Procedure

(Temperature (22°C)/ Humidity (36%RH))

The E.U.T. antenna terminal was connected to the spectrum analyzer through an appropriate coaxial cable (loss = 0.8 dB).

RBW was set to 1% of OBW.

### 7.3 Test Limit

The power of any emission outside of the authorized operating frequency range (1930.0-1995.0MHz) must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \cdot \log(P)$  dB, yielding -13dBm.

#### 7.4 Test Results

Band	Modulation	Operation Frequency	Reading	Margin	Limit
		(MHz)	(dBm)	(dB)	(dBm)
PCS	QPSK	1932.5	-41.3	-28.3	-13.0
		1992.5	-41.0	-28.0	-13.0
	16QAM	1932.5	-42.1	-29.1	-13.0
		1992.5	-40.4	-27.4	-13.0
	64QAM	1932.5	-41.3	-28.3	-13.0
		1992.5	-41.4	-28.4	-13.0

Table 2 RF Power Output, 5MHz BW

Band	Modulation	Operation Frequency	Reading	Margin	Limit
		(MHz)	(dBm)	(dB)	(dBm)
PCS	QPSK	1935.0	-42.5	-29.5	-13.0
		1990.0	-41.7	-28.7	-13.0
	16QAM	1935.0	-43.0	-30.0	-13.0
		1990.0	-43.0	-30.0	-13.0
	64QAM	1935.0	-38.9	-25.9	-13.0
		1990.0	-43.6	-30.6	-13.0

Table 3 RF Power Output, 10MHz BW

Band	Modulation	Operation Frequency	Reading	Margin	Limit
		(MHz)	(dBm)	(dB)	(dBm)
PCS	QPSK	1937.5	-42.5	-29.5	-13.0
		1987.5	-43.7	-30.7	-13.0
	16QAM	1937.5	-43.0	-30.0	-13.0
		1987.5	-43.6	-30.6	-13.0
	64QAM	1937.5	-42.0	-29.0	-13.0
		1987.5	-44.3	-31.3	-13.0

Table 4 RF Power Output, 15MHz BW

Band	Modulation	Operation Frequency	Reading	Margin	Limit
		(MHz)	(dBm)	(dB)	(dBm)
PCS	QPSK	1940.0	-41.6	-28.6	-13.0
		1985.0	-44.1	-31.1	-13.0
	16QAM	1940.0	-41.6	-28.6	-13.0
		1985.0	-43.7	-30.7	-13.0
	64QAM	1940.0	-41.6	-28.6	-13.0
		1985.0	-43.8	-30.8	-13.0

Table 5 RF Power Output, 20MHz BW





ISRAEL TESTING LABORATORIES  
Global Certifications You Can Trust



JUDGEMENT:           Passed

See additional information in *Figure 163* to *Figure 186*.



Antenna PORT	1
Modulation	16QAM
Figure 163 5MHz BW, 1932.5MHz	Figure 164 5MHz BW, 1992.5MHz
Figure 165 10MHz BW, 1935MHz	Figure 166 10MHz BW, 1990MHz

Antenna PORT

1

Modulation

16QAM

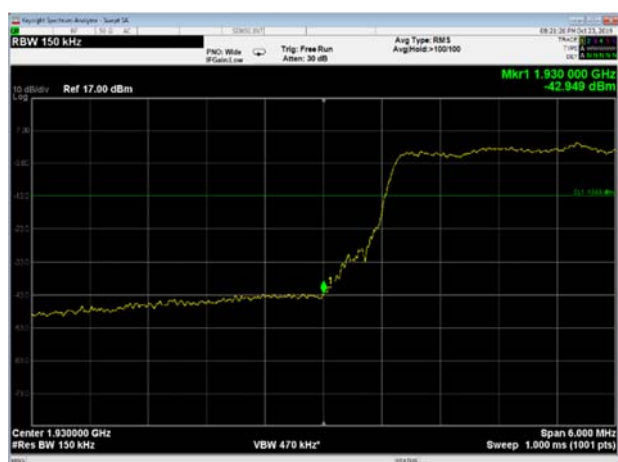


Figure 167 15MHz BW, 1937.5MHz



Figure 168 15MHz BW, 1987.5MHz

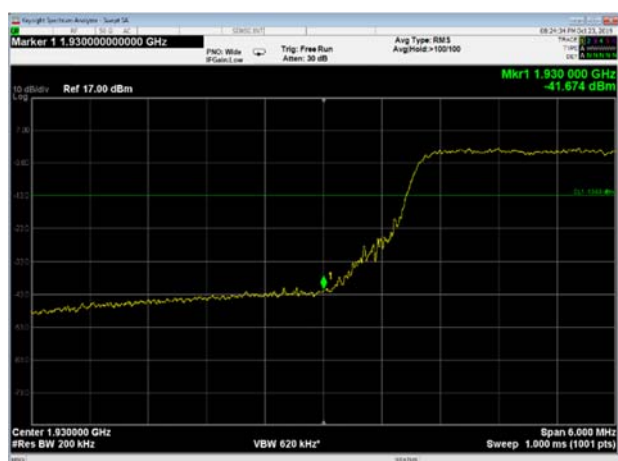


Figure 169 20MHz BW, 1940MHz








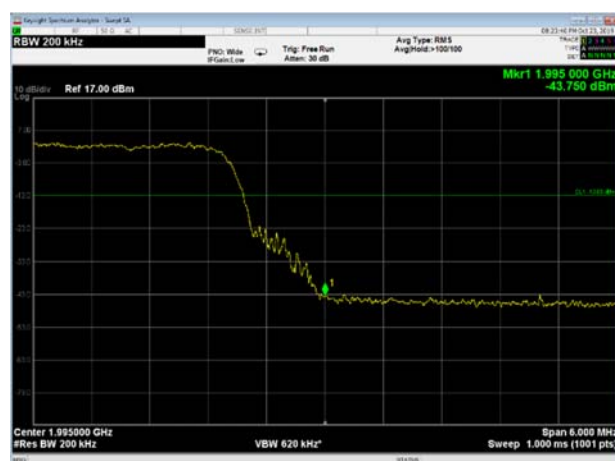



Figure 170 20MHz BW, 1985MHz

Antenna PORT	1
Modulation	64QAM
	
Figure 171 5MHz BW, 1932.5MHz	Figure 172 5MHz BW, 1992.5MHz
	
Figure 173 10MHz BW, 1935MHz	Figure 174 10MHz BW, 1990MHz

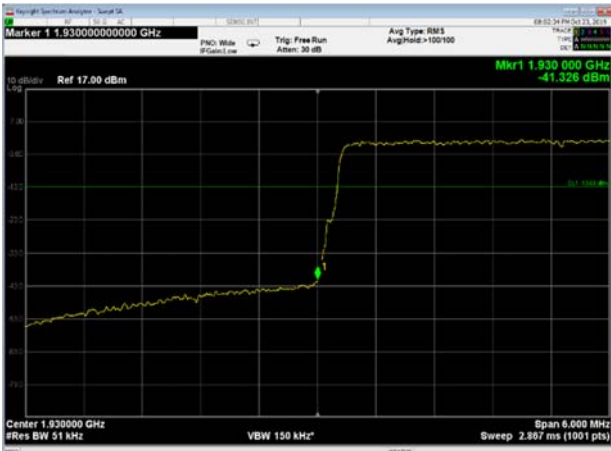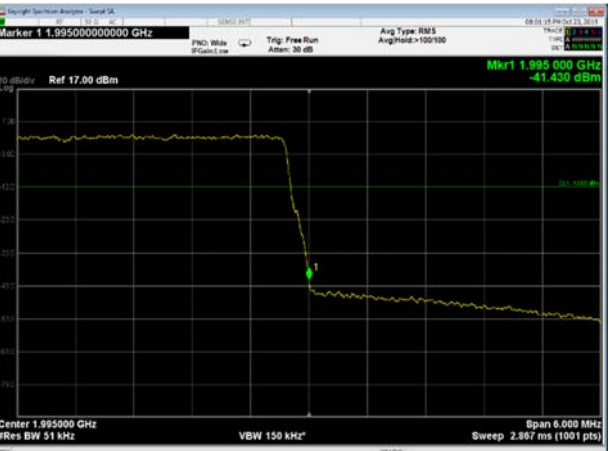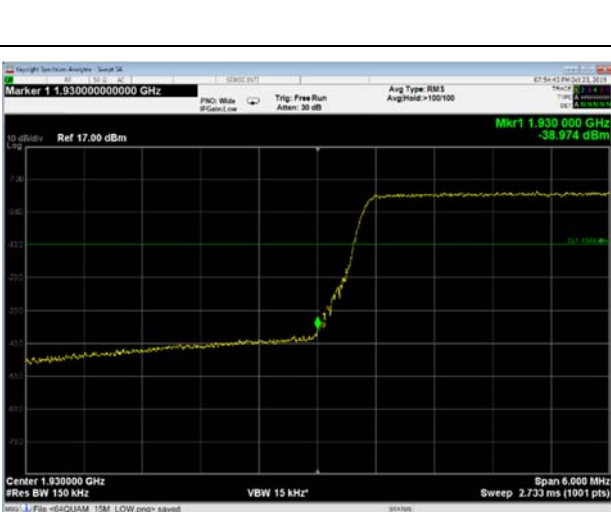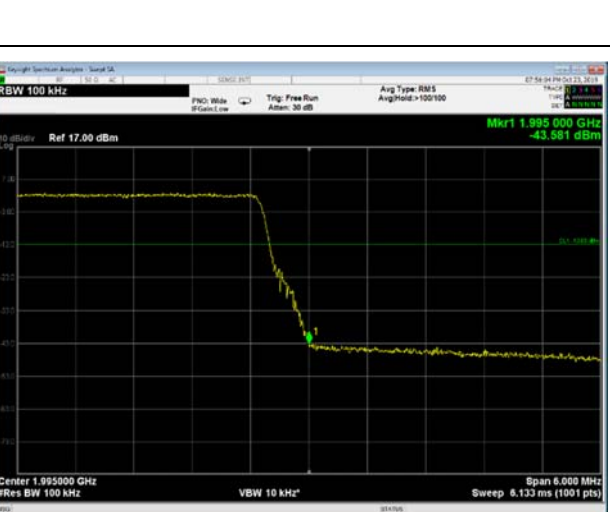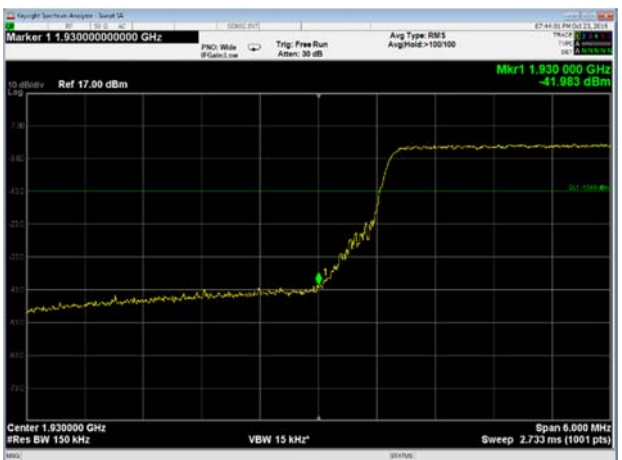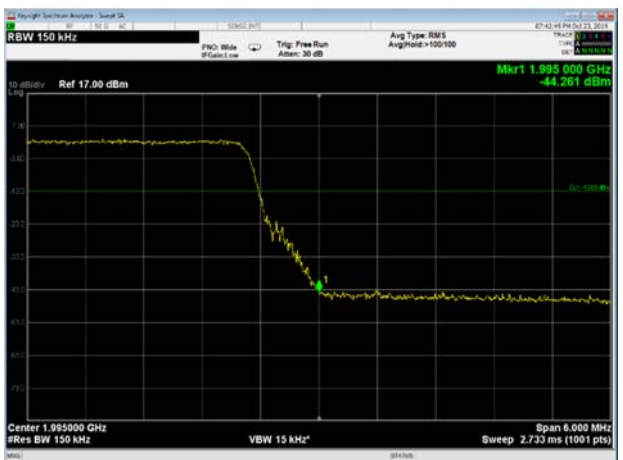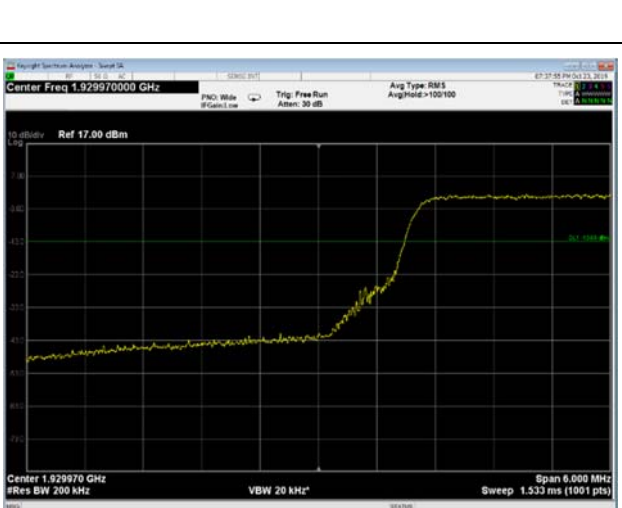

Antenna PORT	1
Modulation	64QAM
	
Figure 175 15MHz BW, 1937.5MHz	Figure 176 15MHz BW, 1987.5MHz
	
Figure 177 20MHz BW, 1940MHz	Figure 178 20MHz BW, 1985MHz

Antenna PORT

1

Modulation

QPSK

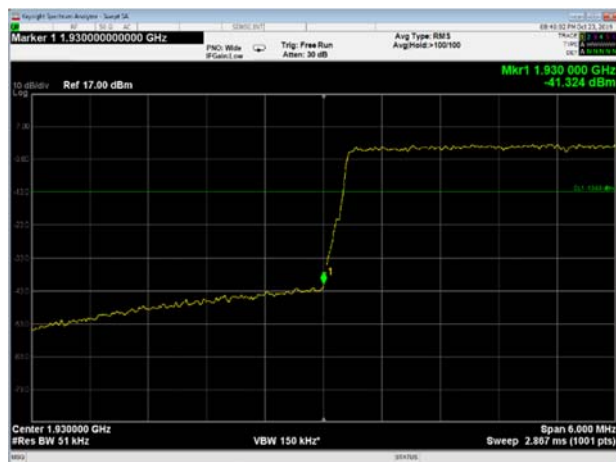


Figure 179 5MHz BW, 1932.5MHz



Figure 180 5MHz BW, 1992.5MHz

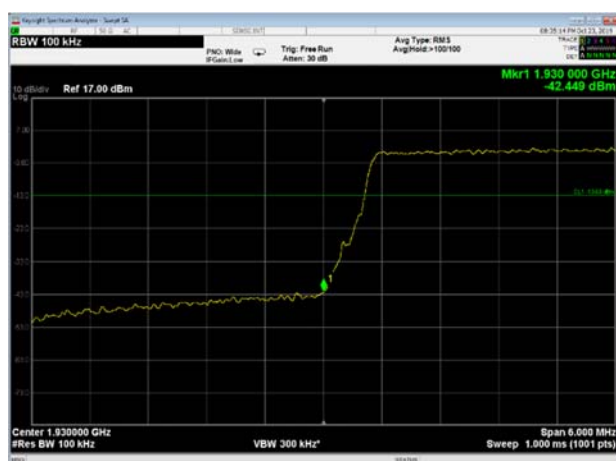


Figure 181 10MHz BW, 1935MHz



Figure 182 10MHz BW, 1990MHz

Antenna PORT

1

Modulation

QPSK

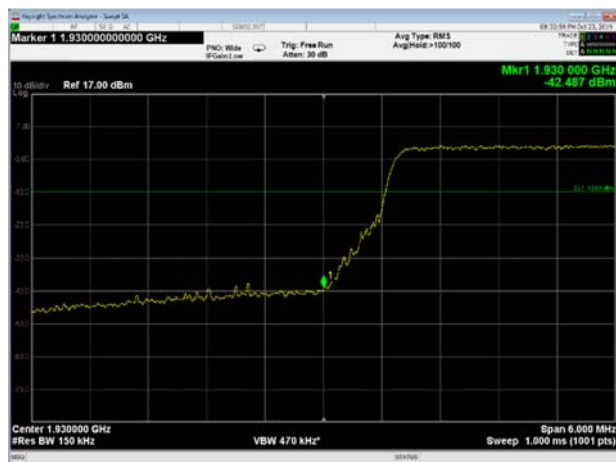


Figure 183 15MHz BW, 1937.5MHz



Figure 184 15MHz BW, 1987.5MHz

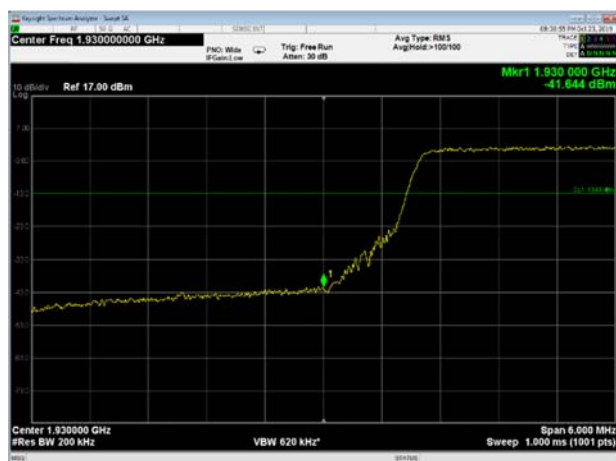


Figure 185 20MHz BW, 1940MHz

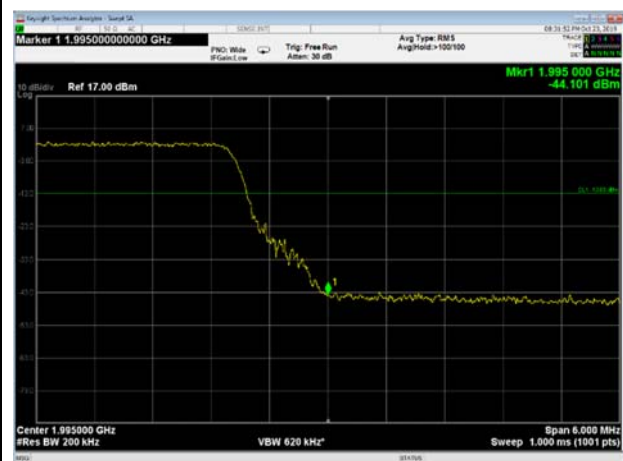


Figure 186 20MHz BW, 1985MHz





### 7.5 Test Equipment Used; Band Edge Spectrum PCS

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration Date	Next Calibration Due
Spectrum Analyzer	Agilent	N9010A	MY52220686	November 28, 2018	November 28, 2020
Vector Signal Generator	VIAVI	MTS 5800	WMNK0071690 263	July 1, 2018	July 1, 2021

Figure 187 Test Equipment Used



## 8. Spurious Radiated Emission PCS

### 8.1 Test Specification

FCC, Part 24, Subpart E Section 238, FCC Part 2.1053

### 8.2 Test Procedure

(Temperature (22°C)/ Humidity (47%RH))

The test method was based on ANSI/TIA-603-E: 2016, Section 2.2.12 Unwanted Emissions: Radiated Spurious.

The E.U.T. operation mode and test set-up are as described in Section 2 of this report.

#### **For measurements between 0.009MHz-30.0MHz:**

The E.U.T was tested inside the shielded room and placed on a non-metallic table, 0.8 meters above the ground. The readings were maximized by the turntable azimuth between 0-360°, and the antenna polarization. The emissions were measured at a distance of 3 meters.

The frequency range 0.009MHz-30MHz was scanned.

#### **For measurements between 30.0MHz-1.0GHz:**

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground, at a distance of 3 meters. The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

The frequency range 30.0MHz -1.0GHz was scanned and the list of the highest emissions was verified and updated accordingly.

#### **For measurements between 1.0GHz-24.0GHz:**

The E.U.T was tested inside the shielded room and placed on a non-metallic table, 1.5 meters above the ground. The readings were maximized by the turntable azimuth between 0-360°, and the antenna polarization. The emissions were measured at a distance of 3 meters.

The frequency range 1.0GHz -24.0GHz was scanned.

The E.U.T. was replaced by a substitution antenna driven by a signal generator. The height was readjusted for maximum reading. The signal generator level was adjusted to obtain the same reading on the EMI receiver

The signals observed were converted to radiated power using:

$$P_d(\text{dBm}) = P_g(\text{dBm}) - \text{Cable Loss (dB)} + \text{Substitution Antenna Gain (dBd)}$$

$P_d$  = Dipole equivalent power (result).

$P_g$  = Signal generator output level.

A Peak detector was using for this test.



The test was performed in 3 operation frequency (low, mid and high) with all the modulations and operational bandwidths.

Testing was performed when the RF port was connected to antenna port.

### **8.3 Test Limit**

The power of any emission outside of the authorized operating frequency ranges (1930-1995.0MHz) must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \cdot \log(P)$  dB, yielding  $-13\text{dBm}$ .

### **8.4 Test Results**

No emissions were detected above the EMI Receiver noise level which is at least 10dB margin below the limit.

JUDGEMENT: Passed

The E.U.T met the requirements of the FCC, Part 24, Subpart E, Section 238; FCC Part 2.1053 specifications.

### 8.5 Test Instrumentation Used, Radiated Measurements PCS

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration Date	Next Calibration Due
EMI Receiver	HP	8542E	3906A00276	February 28, 2019	February 28, 2020
RF Filter Section	HP	85420E	3705A00248	February 28, 2019	February 28, 2020
EMI Receiver	R&S	ESCI7	100724	February 27, 2019	February 28, 2020
Spectrum Analyzer	HP	8593EM	3536A00120ADI	February 26, 2019	February 28, 2020
Active Loop Antenna	EMCO	6502	9506-2950	February 5, 2019	February 28, 2021
Antenna Biconical	EMCO	3110B	9912-3337	May 21, 2019	May 31, 2020
Antenna Log Periodic	EMCO	3146	9505-4081	May 31, 2018	May 31, 2020
Horn Antenna 1G-18G	ETS	3115	29845	May 31, 2018	May 31, 2021
Horn Antenna 18G-26G	ARA	SWH-28	1007	December 13, 2017	December 31, 2020
Low Noise Amplifier	Narda	LNA-DBS-0411N313	013	December 24, 2018	December 31, 2019
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	December 24, 2018	December 31, 2019
Vector Signal Generator	VIAVI	MTS 5800	WMNK0071690263	July 1, 2018	July 1, 2021
Semi Anechoic Civil Chamber	ETS	S81	SL 11643	NCR	NCR
Antenna Mast	ETS	2070-2	-	NCR	NCR
Turntable	ETS	2087	-	NCR	NCR
Mast & Table Controller	ETS/EMCO	2090	9608-1456	NCR	NCR

Figure 188 Test Equipment Used

## 9. Out-of-Band Rejection (PCS)

### 9.1 Test Specification

KDB 935210 D05 v01r01, Section 3.3

### 9.2 Test Procedure

(Temperature (21°C)/ Humidity (35%RH))

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator and an appropriate coaxial cable .

The signal and spectrum analyzer frequency range were set to  $\pm 250\%$  of the passband, Dwell time set to approximately 10msec.

RBW was set between 1% to 5% of the EUT passband and VBW set to  $\geq 3 \times \text{RBW}$ .

### 9.3 Test Limit

N/A

### 9.4 Test Results

JUDGEMENT: Passed

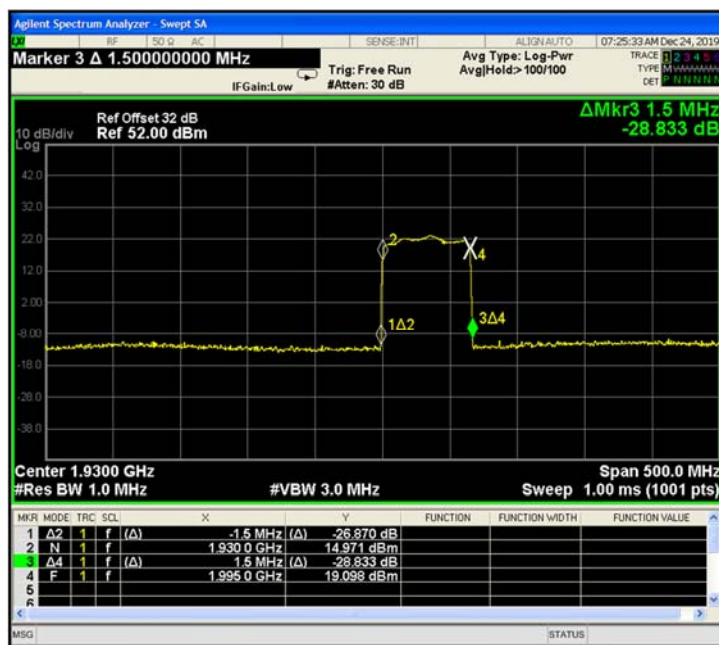


Figure 189 Out-of-Band Rejection Plot 20MHz



**9.5 Test Equipment Used; Out-of-Band Rejection**

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration Date	Next Calibration Date
Spectrum Analyzer	Agilent	N9010A	MY52220686	November 28, 2018	November 28, 2020
Vector Signal Generator	VIAVI	MTS 5800	WMNK0071690263	July 1, 2018	July 1, 2021

**Figure 190 Test Equipment Used**



## 10. APPENDIX A - CORRECTION FACTORS

### 10.1 *Correction factors for RF OATS Cable 35m* *ITL #1911*

Frequency (MHz)	loss (dB)
30.0	1.3
50.0	1.7
100.0	2.6
200.0	3.7
300.0	4.7
400.0	5.5
500.0	6.3
600.0	7.0
700.0	7.6
800.0	8.4
900.0	9.0
1000.0	9.6



**10.2 Correction Factors for RF Cable for Anechoic Chamber**  
**ITL #1840**

FREQ (MHz)	LOSS (dB)
1000.0	1.5
2000.0	2.1
3000.0	2.7
4000.0	3.1
5000.0	3.5
6000.0	4.1
7000.0	4.6
8000.0	4.9
9000.0	5.7
10000.0	5.7
11000.0	6.1
12000.0	6.1
13000.0	6.2
14000.0	6.7
15000.0	7.4
16000.0	7.5
17000.0	7.9
18000.0	8.1
19000.0	8.8
20000.0	9.1

**NOTES:**

- 1. The cable is manufactured by Commscope*
- 2. The cable type is 0623 WBC-400, serial # G020132 and 10m long*



**10.3 Correction Factors for Active Loop Antenna**  
**ITL # 1075**

F(MHz)	AF(dB/m)
0.01	18.4
0.02	14.3
0.03	13.3
0.05	11.7
0.1	11.4
0.2	11.2
0.3	11.2
0.5	11.2
0.7	11.2
1	11.4
2	11.5
3	11.5
4	11.4
5	11.3
6	11.1
7	11.1
8	11.1
9	11
10	11
20	10
30	8





**10.4 Correction Factors for Biconical Antenna**  
**ITL #1356, EMCO 3110B 9912-3337**

Frequency	AF
[MHz]	[dB/m]
30	13.00
35	10.89
40	10.59
45	10.63
50	10.12
60	9.26
70	7.74
80	6.63
90	8.23
100	11.12
120	13.16
140	13.07
160	14.80
180	16.95
200	17.17



**10.5 Correction Factors for Log Periodic Antenna**  
**ITL # 1349, EMCO 3146 s/n 9505-4081**

Frequency	AF
[MHz]	[dB/m]
200	11.58
250	12.04
300	14.76
400	15.55
500	17.85
600	18.66
700	20.87
800	21.15
900	22.32
1000	24.22

**10.6 Correction Factors for Double – Ridged Waveguide Horn  
ANTENNA 3 meter range;**

**ITL # 1352, ETS 3115 s/n 29845**

FREQUENCY	AFE	FREQUENCY	AFE
(GHz)	(dB/m)	(GHz)	(dB/m)
0.75	25.0	9.5	38.0
1.0	23.5	10.0	38.5
1.5	26.0	10.5	38.5
2.0	29.0	11.0	38.5
2.5	27.5	11.5	38.5
3.0	30.0	12.0	38.0
3.5	31.5	12.5	38.5
4.0	32.5	13.0	40.0
4.5	32.5	13.5	41.0
5.0	33.0	14.0	40.0
5.5	35.0	14.5	39.0
6.0	36.5	15.0	38.0
6.5	36.5	15.5	37.5
7.0	37.5	16.0	37.5
7.5	37.5	16.5	39.0
8.0	37.5	17.0	40.0
8.5	38.0	17.5	42.0
9.0	37.5	18.0	42.5



## 10.7 Correction Factors for Horn Antenna Model SWH-28 ITL # 1353

### CALIBRATION DATA

3 m distance

Frequency, MHz	Measured antenna factor, dB/m <sup>1)</sup>
18000	32.4
18500	32.0
19000	32.3
19500	32.4
20000	32.3
20500	32.8
21000	32.8
21500	32.7
22000	33.1
22500	33.0
23000	33.1
23500	33.8
24000	33.5
24500	33.5
25000	33.8
25500	33.9
26000	34.2
26500	34.7


<sup>1)</sup> The antenna factor shall be added to receiver reading in dB $\mu$ V to obtain field strength in dB $\mu$ V/m.



**10.8 Correction factors for Horn Antenna Ka Band**

**Model: PE9850R-20**

**Serial No: J202021732; ITL #:1777**

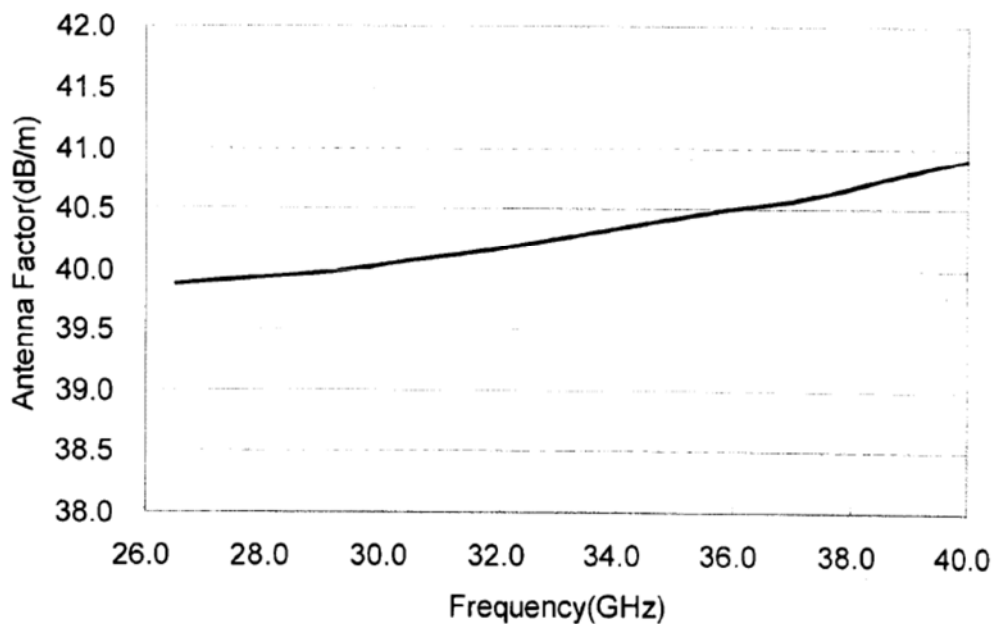

Frequency(GHz)	Gain(dB)	Antenna Factor(dB/m)
26.50	18.80	39.87
27.85	19.18	39.93
29.20	19.53	39.99
30.55	19.83	40.08
31.90	20.12	40.17
33.25	20.37	40.28
34.60	20.60	40.39
35.95	20.82	40.50
37.30	21.05	40.59
38.65	21.20	40.75
40.00	21.34	40.91



Frequency	Low Signal Gain (dB)	Noise Figure	Supply Current
20.0 GHz	47.7	2.9 dB	0.37A
20.5 GHz	50.1	2.9 dB	0.37A
21.0 GHz	50.5	2.9 dB	0.37A
21.5 GHz	51.2	2.9 dB	0.37A
22.0 GHz	50.8	2.9 dB	0.37A
22.5 GHz	50.4	2.9 dB	0.37A
23.0 GHz	50.0	2.9 dB	0.37A
23.5 GHz	50.0	2.9 dB	0.37A
24.0 GHz	50.0	2.9 dB	0.37A
24.5 GHz	50.6	2.9 dB	0.37A
25.0 GHz	51.3	2.9 dB	0.37A
25.5 GHz	51.5	2.9 dB	0.37A
26.0 GHz	52.0	2.9 dB	0.37A
26.5 GHz	51.5	2.9 dB	0.37A
27.0 GHz	52.2	2.9 dB	0.37A
27.5 GHz	52.5	2.9 dB	0.37A
28.0 GHz	52.1	2.9 dB	0.37A
28.5 GHz	51.8	2.9 dB	0.37A
29.0 GHz	52.0	2.9 dB	0.37A
29.5 GHz	52.2	2.9 dB	0.37A
30.0 GHz	52.0	2.9 dB	0.37A
30.5 GHz	51.5	2.9 dB	0.37A
31.0 GHz	51.3	2.9 dB	0.37A
31.5 GHz	50.5	2.9 dB	0.37A
32.0 GHz	49.3	2.9 dB	0.37A
32.5 GHz	49.2	2.9 dB	0.37A
33.0 GHz	48.2	2.9 dB	0.37A
33.5 GHz	48.5	2.9 dB	0.37A
34.0 GHz	47.7	2.9 dB	0.37A
34.5 GHz	48.1	2.9 dB	0.37A
35.0 GHz	47.9	2.9 dB	0.37A
35.5 GHz	48.2	2.9 dB	0.37A
36.0 GHz	47.8	2.9 dB	0.37A
36.5 GHz	48.4	2.9 dB	0.37A
37.0 GHz	48.3	2.9 dB	0.37A
37.5 GHz	48.6	2.9 dB	0.37A
38.0 GHz	47.8	2.9 dB	0.37A
38.5 GHz	47.0	2.9 dB	0.37A
39.0 GHz	47.1	2.9 dB	0.37A
39.5 GHz	47.1	2.9 dB	0.37A
40.0 GHz	48.3	2.9 dB	0.37A