

APPENDIX D: SAR TISSUE SPECIFICATIONS

Measurement Procedure for Tissue verification:

- 1) The network analyzer and probe system was configured and calibrated.
- 2) The probe was immersed in the tissue. The tissue was placed in a nonmetallic container. Trapped air bubbles beneath the flange were minimized by placing the probe at a slight angle.
- 3) The complex admittance with respect to the probe aperture was measured
- 4) The complex relative permittivity ϵ' can be calculated from the below equation (Pournaropoulos and Misra):

$$Y = \frac{j2\omega\epsilon_r\epsilon_0}{[\ln(b/a)]^2} \int_a^b \int_a^b \int_0^\pi \cos\phi' \frac{\exp[-j\omega r(\mu_0\epsilon_r'\epsilon_0)^{1/2}]}{r} d\phi' d\rho' d\rho$$

where Y is the admittance of the probe in contact with the sample, the primed and unprimed coordinates refer to source and observation points, respectively, $r^2 = \rho^2 + \rho'^2 - 2\rho\rho'\cos\phi'$, ω is the angular frequency, and $j = \sqrt{-1}$.

3 Composition / Information on ingredients

3.2 Mixtures

Description: Aqueous solution with surfactants and inhibitors

Declarable, or hazardous components:

| | | |
|--|---|-----------|
| CAS: 107-21-1 EINECS: 203-473-3 Reg.nr.: 01-2119456816-28-0000 | Ethanediol STOT RE 2, H373; Acute Tox. 4, H302 | >1.0-4.9% |
| CAS: 68608-26-4 EINECS: 271-781-5 Reg.nr.: 01-2119527859-22-0000 | Sodium petroleum sulfonate Eye Irrit. 2, H319 | < 2.9% |
| CAS: 107-41-5 EINECS: 203-489-0 Reg.nr.: 01-2119539582-35-0000 | Hexylene Glycol / 2-Methyl-pentane-2,4-diol Skin Irrit. 2, H315; Eye Irrit. 2, H319 | < 2.9% |
| CAS: 68920-66-1 NLP: 500-236-9 Reg.nr.: 01-2119489407-26-0000 | Alkoxyated alcohol, > C₁₆ Aquatic Chronic 2, H411; Skin Irrit. 2, H315; Eye Irrit. 2, H319 | < 2.0% |

Additional information:

For the wording of the listed risk phrases refer to section 16.

Not mentioned CAS-, EINECS- or registration numbers are to be regarded as Proprietary/Confidential.

The specific chemical identity and/or exact percentage concentration of proprietary components is withheld as a trade secret.

Figure J-1

Note: Liquid recipes are proprietary SPEAG. Since the composition is approximate to the actual liquids utilized, the manufacturer tissue-equivalent liquid data sheets are provided below.

| | | |
|-------------------------------|--------------------------------|-----------------------------------|
| FCC ID A3LSMS938U | RF EXPOSURE PART 1 TEST REPORT | Approved by: Technical Manager |
| DUT Type: Portable Handset | | APPENDIX D: Page 1 of 4 |

Measurement Certificate / Material Test

| | |
|--------------|--|
| Item Name | Body Tissue Simulating Liquid (MBBL600-6000V6) |
| Product No. | SL AAM U16 BC (Batch: 230308-3) |
| Manufacturer | SPEAG |

Measurement Method

TSL dielectric parameters measured using calibrated DAK probe.

Target Parameters

Target parameters as defined in the KDB 865664 compliance standard.

Test Condition



Ambient Condition 22°C ; 30% humidity
TSL Temperature 22°C
Test Date 9-Mar-23
Operator WM

Additional Information

TSL Density
TSL Heat-capacity

Results

| f [MHz] | Measured | | | Target | | Diff.to Target [%] | |
|---------|----------|------|-------|--------|-------|--------------------|---------|
| | e' | e'' | sigma | eps | sigma | Δ-eps | Δ-sigma |
| 600 | 56.3 | 26.4 | 0.88 | 56.1 | 0.95 | 0.3 | -7.4 |
| 750 | 55.8 | 22.3 | 0.93 | 55.5 | 0.96 | 0.5 | -3.1 |
| 800 | 55.6 | 21.4 | 0.95 | 55.3 | 0.97 | 0.5 | -2.1 |
| 825 | 55.6 | 21.0 | 0.96 | 55.2 | 0.98 | 0.6 | -2.0 |
| 835 | 55.6 | 20.8 | 0.97 | 55.1 | 0.99 | 0.9 | -1.5 |
| 850 | 55.5 | 20.5 | 0.97 | 55.2 | 0.99 | 0.6 | -2.0 |
| 900 | 55.4 | 19.8 | 0.99 | 55.0 | 1.05 | 0.7 | -5.7 |
| 1400 | 54.4 | 15.8 | 1.23 | 54.1 | 1.28 | 0.6 | -3.9 |
| 1450 | 54.3 | 15.6 | 1.25 | 54.0 | 1.30 | 0.6 | -3.8 |
| 1600 | 54.1 | 15.1 | 1.34 | 53.8 | 1.39 | 0.5 | -3.6 |
| 1625 | 54.1 | 15.0 | 1.36 | 53.8 | 1.41 | 0.7 | -3.5 |
| 1640 | 54.1 | 15.0 | 1.37 | 53.7 | 1.42 | 0.7 | -3.5 |
| 1650 | 54.1 | 14.9 | 1.37 | 53.7 | 1.43 | 0.8 | -4.2 |
| 1700 | 54.0 | 14.8 | 1.40 | 53.6 | 1.46 | 0.8 | -4.1 |
| 1750 | 53.9 | 14.8 | 1.44 | 53.4 | 1.49 | 0.9 | -3.4 |
| 1800 | 53.9 | 14.7 | 1.47 | 53.3 | 1.52 | 1.1 | -3.3 |
| 1810 | 53.9 | 14.7 | 1.48 | 53.3 | 1.52 | 1.1 | -2.6 |
| 1825 | 53.9 | 14.6 | 1.49 | 53.3 | 1.52 | 1.1 | -2.0 |
| 1850 | 53.8 | 14.6 | 1.50 | 53.3 | 1.52 | 0.9 | -1.3 |
| 1900 | 53.8 | 14.6 | 1.54 | 53.3 | 1.52 | 0.9 | 1.3 |
| 1950 | 53.7 | 14.5 | 1.57 | 53.3 | 1.52 | 0.8 | 3.3 |
| 2000 | 53.7 | 14.5 | 1.61 | 53.3 | 1.52 | 0.8 | 5.9 |
| 2050 | 53.6 | 14.5 | 1.65 | 53.2 | 1.57 | 0.7 | 5.1 |
| 2100 | 53.5 | 14.4 | 1.69 | 53.2 | 1.62 | 0.6 | 4.3 |
| 2150 | 53.5 | 14.4 | 1.73 | 53.1 | 1.66 | 0.8 | 4.2 |
| 2200 | 53.4 | 14.5 | 1.77 | 53.0 | 1.71 | 0.7 | 3.5 |
| 2250 | 53.4 | 14.5 | 1.81 | 53.0 | 1.76 | 0.8 | 2.8 |
| 2300 | 53.3 | 14.5 | 1.86 | 52.9 | 1.81 | 0.8 | 2.8 |
| 2350 | 53.2 | 14.6 | 1.91 | 52.8 | 1.85 | 0.7 | 3.2 |
| 2400 | 53.2 | 14.6 | 1.95 | 52.8 | 1.90 | 0.8 | 2.6 |
| 2450 | 53.1 | 14.6 | 1.99 | 52.7 | 1.95 | 0.8 | 2.1 |
| 2500 | 53.1 | 14.7 | 2.04 | 52.6 | 2.02 | 0.9 | 1.0 |
| 2550 | 53.0 | 14.7 | 2.09 | 52.6 | 2.09 | 0.8 | 0.0 |
| 2600 | 52.9 | 14.8 | 2.13 | 52.5 | 2.16 | 0.7 | -1.4 |

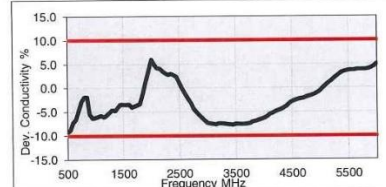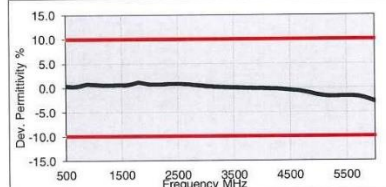

| | | | | | | | |
|-------|------|------|------|------|------|------|------|
| 3500 | 51.3 | 15.7 | 3.06 | 51.3 | 3.31 | 0.0 | -7.6 |
| 3700 | 51.0 | 15.9 | 3.28 | 51.1 | 3.55 | -0.1 | -7.6 |
| 5200 | 48.1 | 18.6 | 5.38 | 49.0 | 5.30 | -1.8 | 1.6 |
| 5250 | 48.1 | 18.7 | 5.47 | 49.0 | 5.36 | -1.8 | 2.0 |
| 5300 | 48.0 | 18.8 | 5.55 | 48.9 | 5.42 | -1.8 | 2.5 |
| 5500 | 47.8 | 19.1 | 5.86 | 48.6 | 5.65 | -1.7 | 3.6 |
| 5600 | 47.6 | 19.2 | 5.98 | 48.5 | 5.77 | -1.7 | 3.7 |
| 5700 | 47.5 | 19.3 | 6.11 | 48.3 | 5.88 | -1.8 | 3.8 |
| 5800 | 47.2 | 19.3 | 6.23 | 48.2 | 6.00 | -2.1 | 3.8 |
| 6000 | 46.6 | 19.6 | 6.55 | 47.9 | 6.23 | -2.9 | 5.1 |
| 6500 | | | | | | | |
| 7000 | | | | | | | |
| 7500 | | | | | | | |
| 8000 | | | | | | | |
| 8500 | | | | | | | |
| 9000 | | | | | | | |
| 9500 | | | | | | | |
| 10000 | | | | | | | |

Figure J-2
600 – 6000 MHz Body Tissue Equivalent Matter

| | | |
|-------------------------------|--------------------------------|-----------------------------------|
| FCC ID A3LSMS938U | RF EXPOSURE PART 1 TEST REPORT | Approved by: Technical Manager |
| DUT Type: Portable Handset | | APPENDIX D: Page 2 of 4 |

Measurement Certificate / Material Test

| | |
|--------------|---|
| Item Name | Head Tissue Simulating Liquid (HBBL600-10000V6) |
| Product No. | SL AAH U16 BC (Batch: 230313-2) |
| Manufacturer | SPEAG |

Measurement Method

TSL dielectric parameters measured using calibrated DAK probe.

Target Parameters

Target parameters as defined in the IEEE 1528 and IEC 62209 compliance standards.

Test Condition



Ambient Condition 22°C ; 30% humidity
TSL Temperature 22°C
Test Date 17-Mar-23
Operator WM

Additional Information

TSL Density
TSL Heat-capacity

Results

| f [MHz] | Measured | | | Target | | Diff.to Target [%] | |
|---------|----------|------|-------|--------|-------|--------------------|---------|
| | e' | e'' | sigma | eps | sigma | Δ-eps | Δ-sigma |
| 600 | 44.9 | 24.8 | 0.83 | 42.7 | 0.88 | 5.1 | -5.9 |
| 750 | 44.2 | 21.0 | 0.88 | 41.9 | 0.89 | 5.4 | -1.5 |
| 800 | 44.0 | 20.1 | 0.90 | 41.7 | 0.90 | 5.6 | 0.3 |
| 825 | 44.0 | 19.8 | 0.91 | 41.6 | 0.91 | 5.8 | 0.4 |
| 835 | 44.0 | 19.6 | 0.92 | 41.5 | 0.91 | 5.9 | 0.9 |
| 850 | 43.9 | 19.4 | 0.92 | 41.5 | 0.92 | 5.8 | 0.4 |
| 900 | 43.7 | 18.7 | 0.94 | 41.5 | 0.97 | 5.3 | -3.1 |
| 1400 | 42.6 | 14.7 | 1.15 | 40.6 | 1.18 | 4.9 | -2.5 |
| 1450 | 42.5 | 14.5 | 1.17 | 40.5 | 1.20 | 4.9 | -2.5 |
| 1600 | 42.3 | 14.0 | 1.25 | 40.3 | 1.28 | 4.9 | -2.7 |
| 1625 | 42.3 | 13.9 | 1.26 | 40.3 | 1.30 | 5.0 | -3.0 |
| 1640 | 42.3 | 13.9 | 1.27 | 40.3 | 1.31 | 5.1 | -2.8 |
| 1650 | 42.2 | 13.9 | 1.27 | 40.2 | 1.31 | 4.9 | -3.3 |
| 1700 | 42.1 | 13.8 | 1.30 | 40.2 | 1.34 | 4.8 | -3.1 |
| 1750 | 42.1 | 13.7 | 1.33 | 40.1 | 1.37 | 5.0 | -3.0 |
| 1800 | 42.0 | 13.6 | 1.36 | 40.0 | 1.40 | 5.0 | -2.9 |
| 1810 | 42.0 | 13.6 | 1.37 | 40.0 | 1.40 | 5.0 | -2.1 |
| 1825 | 42.0 | 13.5 | 1.38 | 40.0 | 1.40 | 5.0 | -1.4 |
| 1850 | 42.0 | 13.5 | 1.39 | 40.0 | 1.40 | 5.0 | -0.7 |
| 1900 | 41.9 | 13.4 | 1.42 | 40.0 | 1.40 | 4.7 | 1.4 |
| 1950 | 41.8 | 13.4 | 1.45 | 40.0 | 1.40 | 4.5 | 3.6 |
| 2000 | 41.8 | 13.3 | 1.48 | 40.0 | 1.40 | 4.5 | 5.7 |
| 2050 | 41.7 | 13.3 | 1.51 | 39.9 | 1.44 | 4.5 | 4.5 |
| 2100 | 41.7 | 13.2 | 1.55 | 39.8 | 1.49 | 4.7 | 4.1 |
| 2150 | 41.6 | 13.2 | 1.58 | 39.7 | 1.53 | 4.7 | 3.0 |
| 2200 | 41.5 | 13.2 | 1.62 | 39.6 | 1.58 | 4.7 | 2.7 |
| 2250 | 41.4 | 13.2 | 1.65 | 39.6 | 1.62 | 4.7 | 1.7 |
| 2300 | 41.3 | 13.2 | 1.69 | 39.5 | 1.67 | 4.6 | 1.4 |
| 2350 | 41.3 | 13.3 | 1.73 | 39.4 | 1.71 | 4.9 | 1.1 |
| 2400 | 41.2 | 13.3 | 1.77 | 39.3 | 1.76 | 4.9 | 0.8 |
| 2450 | 41.1 | 13.3 | 1.81 | 39.2 | 1.80 | 4.8 | 0.6 |
| 2500 | 41.1 | 13.3 | 1.85 | 39.1 | 1.85 | 5.0 | -0.2 |
| 2550 | 41.0 | 13.3 | 1.89 | 39.1 | 1.91 | 4.9 | -1.0 |
| 2600 | 40.9 | 13.4 | 1.93 | 39.0 | 1.96 | 4.8 | -1.7 |

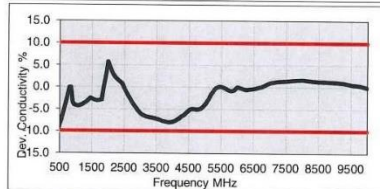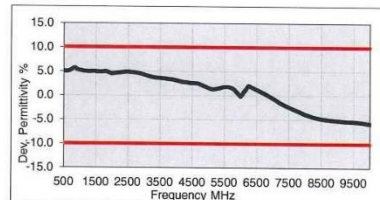

| | | | | | | | |
|-------|------|------|-------|------|-------|------|------|
| 3500 | 39.3 | 13.9 | 2.70 | 37.9 | 2.91 | 3.6 | -7.2 |
| 3700 | 39.0 | 14.0 | 2.88 | 37.7 | 3.12 | 3.4 | -7.7 |
| 5200 | 36.5 | 15.8 | 4.58 | 36.0 | 4.66 | 1.3 | -1.5 |
| 5250 | 36.4 | 16.0 | 4.66 | 35.9 | 4.71 | 1.4 | -1.0 |
| 5300 | 36.4 | 16.1 | 4.73 | 35.9 | 4.76 | 1.5 | -0.5 |
| 5500 | 36.3 | 16.2 | 4.97 | 35.6 | 4.96 | 1.8 | 0.1 |
| 5600 | 36.2 | 16.2 | 5.06 | 35.5 | 5.07 | 1.8 | -0.2 |
| 5700 | 36.0 | 16.2 | 5.14 | 35.4 | 5.17 | 1.6 | -0.6 |
| 5800 | 35.7 | 16.2 | 5.22 | 35.3 | 5.27 | 1.2 | -0.9 |
| 6000 | 35.0 | 16.4 | 5.48 | 35.1 | 5.48 | -0.2 | 0.1 |
| 6500 | 34.9 | 16.7 | 6.05 | 34.5 | 6.07 | 1.2 | -0.4 |
| 7000 | 33.7 | 17.2 | 6.72 | 33.9 | 6.65 | -0.6 | 1.0 |
| 7500 | 32.5 | 17.6 | 7.34 | 33.3 | 7.24 | -2.5 | 1.4 |
| 8000 | 31.4 | 17.9 | 7.97 | 32.7 | 7.84 | -3.9 | 1.7 |
| 8500 | 30.6 | 18.1 | 8.57 | 32.1 | 8.45 | -4.8 | 1.3 |
| 9000 | 29.9 | 18.3 | 9.18 | 31.5 | 9.08 | -5.2 | 1.2 |
| 9500 | 29.3 | 18.5 | 9.77 | 31.0 | 9.71 | -5.4 | 0.6 |
| 10000 | 28.6 | 18.6 | 10.35 | 30.4 | 10.36 | -5.9 | -0.1 |

Figure J-3
600 – 10000 MHz Head Tissue Equivalent Matter

| | | |
|-------------------------------|---------------------------------------|-----------------------------------|
| FCC ID A3LSMS938U | RF EXPOSURE PART 1 TEST REPORT | Approved by: Technical Manager |
| DUT Type: Portable Handset | | APPENDIX D: Page 3 of 4 |

Measurement Certificate / Material Test

| | |
|--------------|---|
| Item Name | Head Tissue Simulating Liquid (HBBL4-250V3) |
| Product No. | SL AAH 005 AD (Batch: 230324-2) |
| Manufacturer | SPEAG |

Measurement Method

TSL dielectric parameters measured using calibrated DAK probe.

Setup Validation

Validation results were within $\pm 2.5\%$ towards the target values of Methanol.

Target Parameters

Target parameters as defined in the IEEE 1528 and IEC 62209 compliance standards.

Test Condition

| | |
|-----------------|---|
| Ambient | Environment temperatur (22 ± 3)°C and humidity < 70%. |
| TSL Temperature | 22°C |
| Test Date | 27-Mar-23 |
| Operator | WM |

Additional Information

| | |
|-------------------|-----------------|
| TSL Density | 1.042 g/cm3 |
| TSL Heat-capacity | 3.574 kJ/(kg*K) |

| f [MHz] | Measured | | | | Target | | | | Diff. to Target (%) | |
|---------|-------------|--------------|-------|------|--------|------|-------|-----|---------------------|--------------------|
| | ϵ' | ϵ'' | sigma | eps | sigma | eps | sigma | eps | $\Delta\epsilon'$ | $\Delta\epsilon''$ |
| 5 | 52.9 | 2636.98 | 0.73 | 55.5 | 0.75 | -4.6 | -2.7 | | | |
| 10 | 53.3 | 1318.71 | 0.73 | 55.5 | 0.75 | -3.9 | -2.7 | | | |
| 15 | 53.2 | 879.92 | 0.73 | 55.3 | 0.75 | -3.9 | -2.7 | | | |
| 20 | 53.1 | 660.54 | 0.73 | 55.1 | 0.75 | -3.6 | -2.7 | | | |
| 25 | 53.0 | 528.94 | 0.74 | 55.0 | 0.75 | -3.6 | -1.3 | | | |
| 30 | 52.9 | 441.24 | 0.74 | 55.0 | 0.75 | -3.8 | -1.3 | | | |
| 35 | 52.8 | 379.63 | 0.74 | 54.9 | 0.75 | -3.8 | -1.3 | | | |
| 40 | 52.7 | 331.71 | 0.74 | 54.8 | 0.75 | -3.8 | -1.3 | | | |
| 45 | 52.6 | 295.25 | 0.74 | 54.7 | 0.75 | -3.8 | -1.4 | | | |
| 50 | 52.5 | 266.12 | 0.74 | 54.6 | 0.75 | -3.8 | -1.4 | | | |
| 55 | 52.4 | 242.31 | 0.74 | 54.4 | 0.75 | -3.7 | -1.5 | | | |
| 60 | 52.3 | 222.50 | 0.74 | 54.3 | 0.75 | -3.7 | -1.5 | | | |
| 65 | 52.2 | 205.74 | 0.74 | 54.2 | 0.75 | -3.7 | -1.6 | | | |
| 70 | 52.0 | 191.40 | 0.75 | 54.1 | 0.75 | -3.9 | -0.3 | | | |
| 75 | 51.9 | 178.98 | 0.75 | 54.0 | 0.75 | -3.9 | -0.4 | | | |
| 80 | 51.8 | 168.13 | 0.75 | 53.9 | 0.75 | -3.9 | -0.4 | | | |
| 85 | 51.7 | 158.56 | 0.75 | 53.8 | 0.75 | -3.8 | -0.5 | | | |
| 90 | 51.6 | 150.06 | 0.75 | 53.7 | 0.75 | -3.8 | -0.5 | | | |
| 95 | 51.5 | 142.46 | 0.75 | 53.5 | 0.75 | -3.8 | -0.6 | | | |
| 100 | 51.4 | 135.63 | 0.75 | 53.4 | 0.75 | -3.8 | -0.6 | | | |
| 105 | 51.3 | 129.46 | 0.76 | 53.3 | 0.76 | -3.8 | 0.6 | | | |
| 110 | 51.1 | 123.86 | 0.76 | 53.2 | 0.76 | -3.9 | 0.6 | | | |
| 115 | 51.0 | 118.75 | 0.76 | 53.1 | 0.76 | -3.9 | 0.5 | | | |
| 120 | 50.9 | 114.07 | 0.76 | 53.0 | 0.76 | -3.9 | 0.5 | | | |
| 125 | 50.8 | 109.77 | 0.76 | 52.9 | 0.76 | -3.9 | 0.4 | | | |
| 130 | 50.7 | 105.80 | 0.77 | 52.8 | 0.76 | -3.9 | 1.7 | | | |
| 135 | 50.6 | 102.13 | 0.77 | 52.6 | 0.76 | -3.9 | 1.6 | | | |
| 140 | 50.5 | 98.73 | 0.77 | 52.5 | 0.76 | -3.9 | 1.6 | | | |
| 145 | 50.4 | 95.56 | 0.77 | 52.4 | 0.76 | -3.8 | 1.5 | | | |
| 150 | 50.3 | 92.61 | 0.77 | 52.3 | 0.76 | -3.8 | 1.5 | | | |
| 155 | 50.3 | 89.86 | 0.77 | 52.1 | 0.76 | -3.4 | 1.0 | | | |
| 160 | 50.2 | 87.27 | 0.78 | 51.8 | 0.77 | -3.1 | 1.8 | | | |
| 165 | 50.1 | 84.85 | 0.78 | 51.6 | 0.77 | -2.9 | 1.3 | | | |
| 170 | 50.0 | 82.57 | 0.78 | 51.4 | 0.77 | -2.7 | 0.8 | | | |
| 175 | 49.9 | 80.42 | 0.78 | 51.1 | 0.78 | -2.4 | 0.4 | | | |
| 180 | 49.8 | 78.39 | 0.78 | 50.9 | 0.78 | -2.2 | -0.1 | | | |
| 185 | 49.7 | 76.48 | 0.79 | 50.7 | 0.78 | -1.9 | 0.7 | | | |
| 190 | 49.6 | 74.67 | 0.79 | 50.4 | 0.79 | -1.6 | 0.2 | | | |
| 195 | 49.5 | 72.95 | 0.79 | 50.2 | 0.79 | -1.4 | -0.2 | | | |
| 200 | 49.4 | 71.32 | 0.79 | 50.0 | 0.80 | -1.1 | -0.7 | | | |
| 205 | 49.3 | 69.77 | 0.80 | 49.7 | 0.80 | -0.9 | 0.1 | | | |
| 210 | 49.3 | 68.30 | 0.80 | 49.5 | 0.80 | -0.4 | -0.4 | | | |
| 215 | 49.2 | 66.90 | 0.80 | 49.3 | 0.81 | -0.1 | -0.8 | | | |
| 220 | 49.1 | 65.56 | 0.80 | 49.0 | 0.81 | 0.1 | -1.3 | | | |
| 225 | 49.0 | 64.29 | 0.80 | 48.8 | 0.81 | 0.4 | -1.7 | | | |
| 230 | 48.9 | 63.07 | 0.81 | 48.6 | 0.82 | 0.7 | -0.9 | | | |
| 235 | 48.9 | 61.90 | 0.81 | 48.3 | 0.82 | 1.2 | -1.4 | | | |
| 240 | 48.8 | 60.78 | 0.81 | 48.1 | 0.82 | 1.5 | -1.8 | | | |
| 245 | 48.7 | 59.71 | 0.81 | 47.9 | 0.83 | 1.7 | -2.2 | | | |
| 250 | 48.6 | 58.69 | 0.82 | 47.6 | 0.83 | 2.0 | -1.5 | | | |

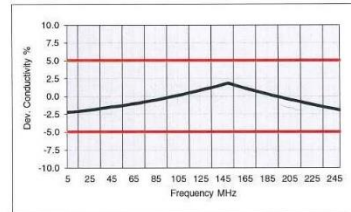
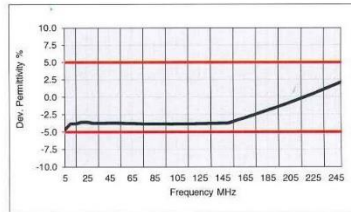


Figure J-4
5– 250 MHz Head Tissue Equivalent Matter

| | | |
|-------------------------------|--------------------------------|-----------------------------------|
| FCC ID A3LSMS938U | RF EXPOSURE PART 1 TEST REPORT | Approved by: Technical Manager |
| DUT Type: Portable Handset | | APPENDIX D: Page 4 of 4 |