

RF Test Data for 5G Wi-Fi (Conducted Measurements)

General Description of EUT	
Product Name:	AI>Note
Test Model:	S6
Sample ID:	HC-C-202311-0266-02-01-2#
Environmental Conditions	
Temperature:	23.8℃
Relative Humidity:	48%
Test Voltage:	DC 3.8V
Test Engineer:	Zhou Zhen
Note: For a more detailed features description, please refer to the report TBR-C-202311-0266-33	

Contents

1. Emission Bandwidth.....	3
1.1. Test Result.....	3
1.2. Test Graphs	4
2. Occupied channel bandwidth	9
2.1. Test Result.....	9
2.2. Test Graphs	10
3. Maximum conducted output power.....	15
3.1. Test Result.....	15
4. Maximum power spectral density	16
4.1. Test Result.....	16
4.2. Test Graphs	17
5. Band edge measurements	22
5.1. Test Result.....	22
5.2. Test Graphs	23
6. Emissions in Restricted Bands.....	27
6.1. Test Result.....	27
6.2. Test Graphs	29
7. Conducted Spurious Emission.....	36
7.1. Test Result.....	36
7.2. Test Graphs	37
8. Frequency Stability	46
8.1. Test Result.....	46
9. Duty Cycle	50
9.1. Test Result.....	50
9.2. Test Graphs	51


1. Emission Bandwidth

1.1. Test Result


TestMode	Antenna	Channel	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	20.00	5170.00	5190.00	---	---
		5200	19.76	5190.16	5209.92	---	---
		5240	19.88	5230.12	5250.00	---	---
11N20SISO	Ant1	5180	20.24	5169.92	5190.16	---	---
		5200	20.12	5189.88	5210.00	---	---
		5240	20.12	5230.00	5250.12	---	---
11N40SISO	Ant1	5190	41.52	5169.12	5210.64	---	---
		5230	40.40	5209.76	5250.16	---	---
11AC20SISO	Ant1	5180	20.16	5169.88	5190.04	---	---
		5200	20.24	5189.92	5210.16	---	---
		5240	20.08	5229.96	5250.04	---	---
11AC40SISO	Ant1	5190	40.96	5169.76	5210.72	---	---
		5230	41.12	5209.36	5250.48	---	---

1.2. Test Graphs




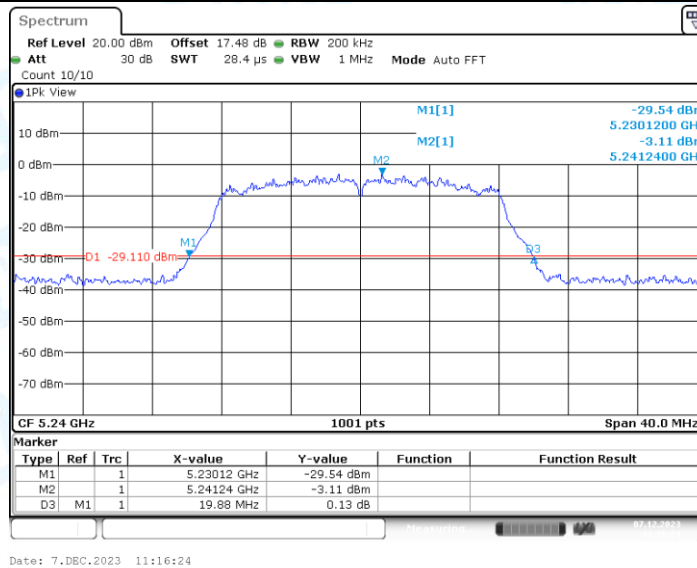


11N20SISO_Ant1_5180

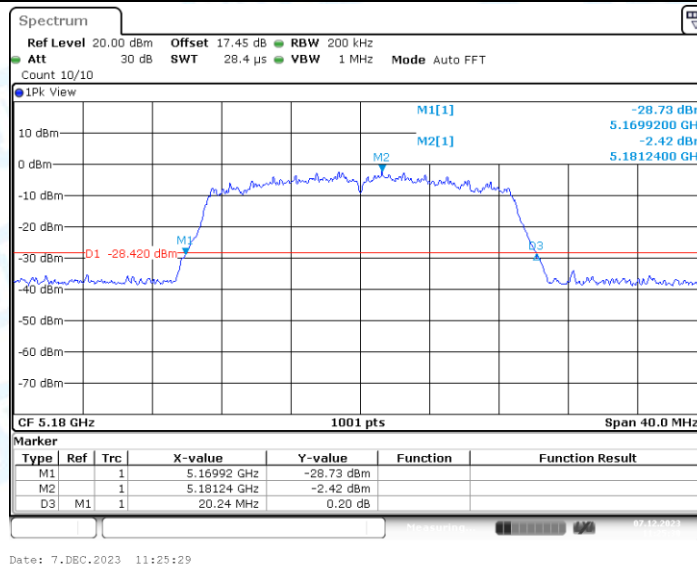


11N20SISO_Ant1_5200

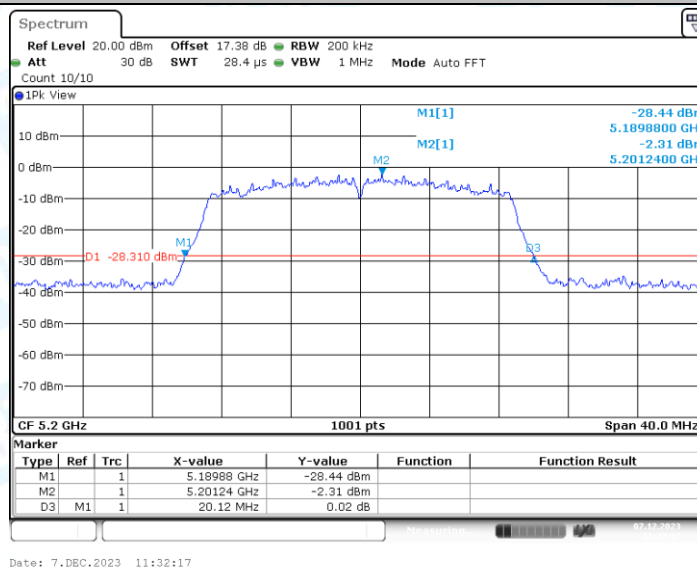


11N20SISO_Ant1_5240

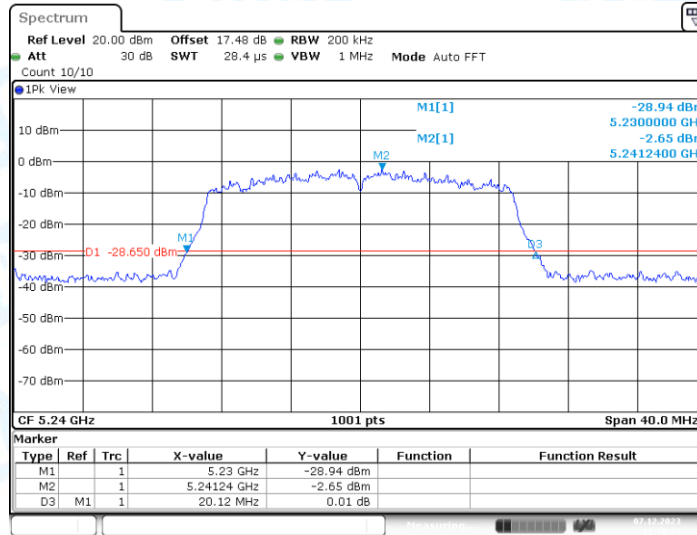


11N40SISO_Ant1_5190

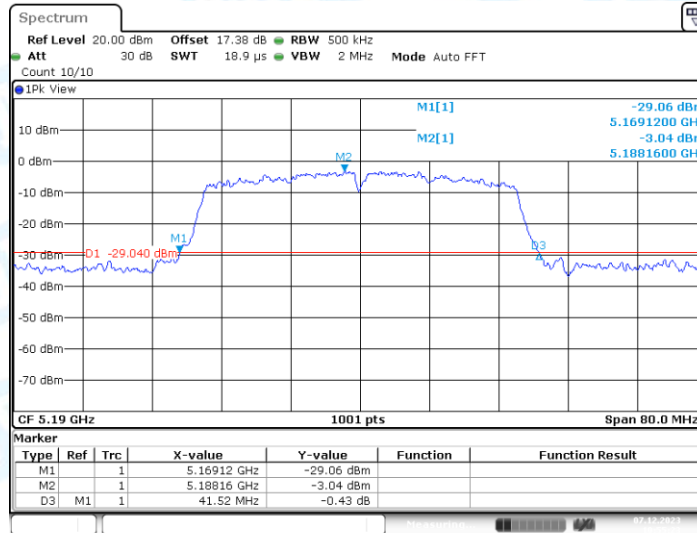


11N40SISO_Ant1_5230

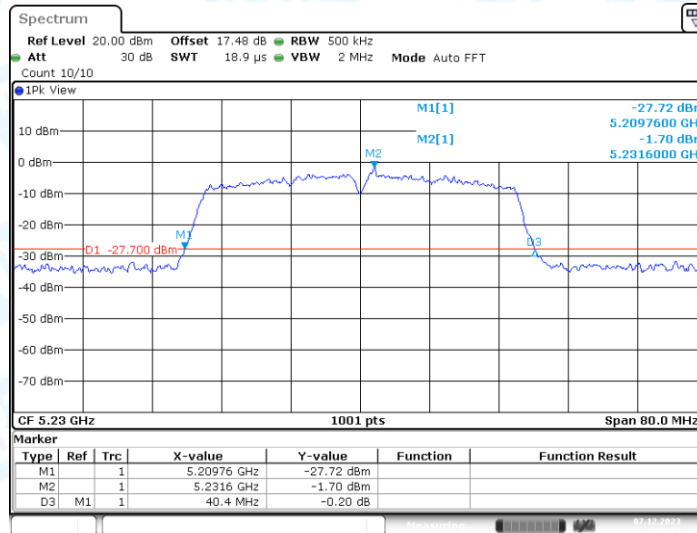


11AC20SISO_Ant1_5180

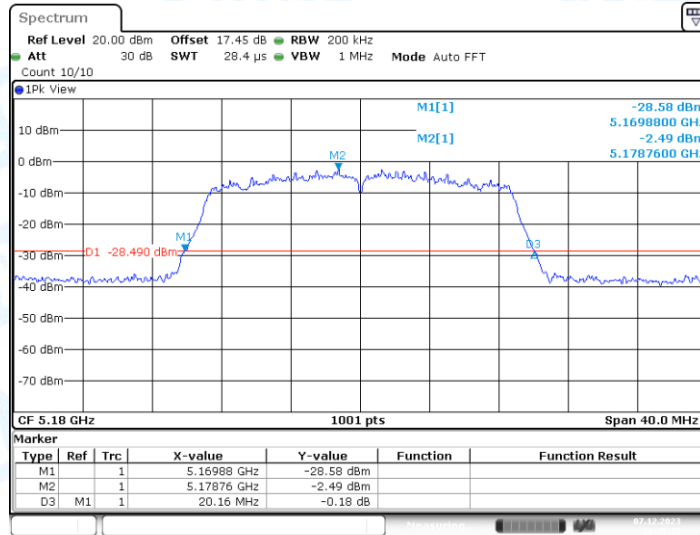


11AC20SISO_Ant1_5200

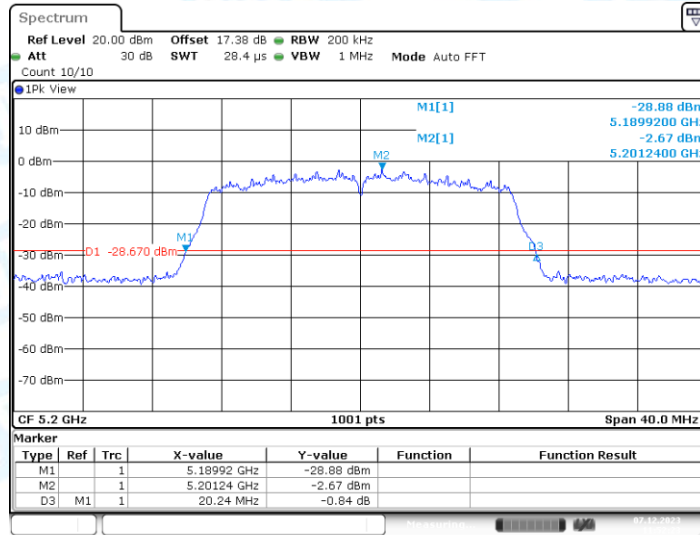


11AC20SISO_Ant1_5240

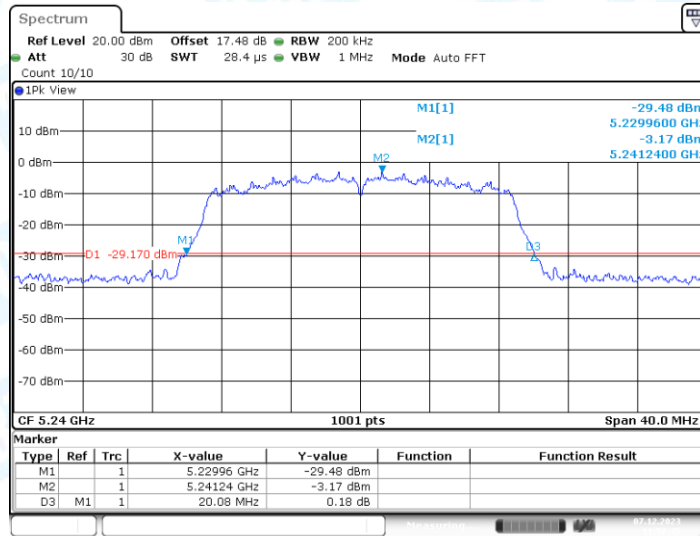

11AC40SISO_Ant1_5190

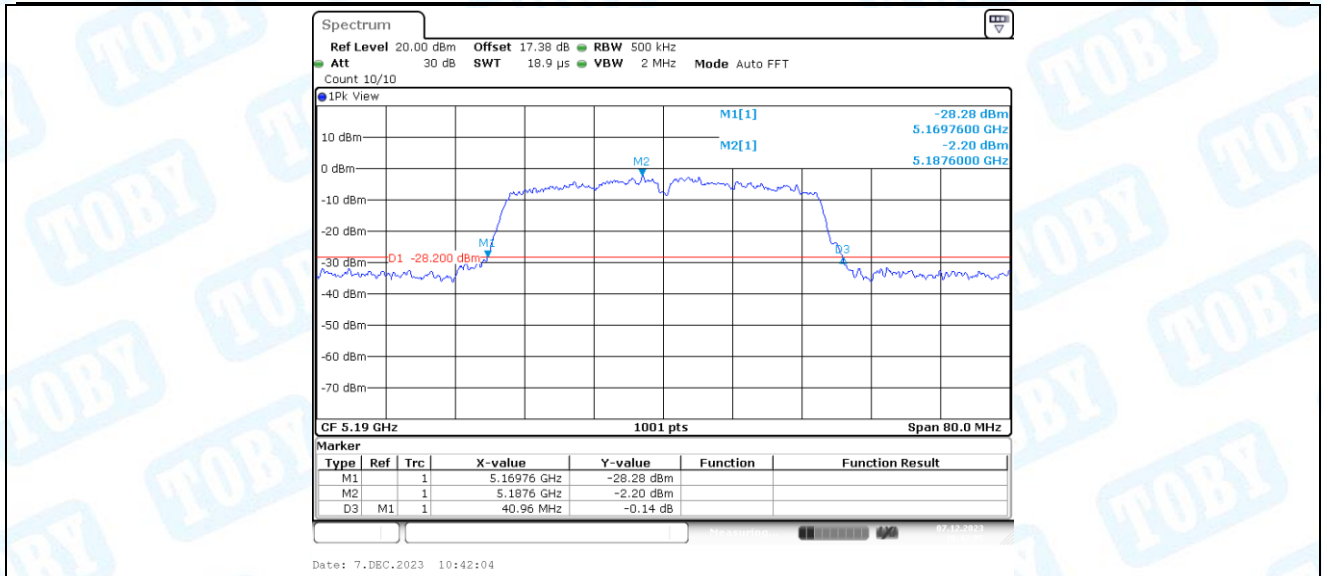

11AC40SISO_Ant1_5230

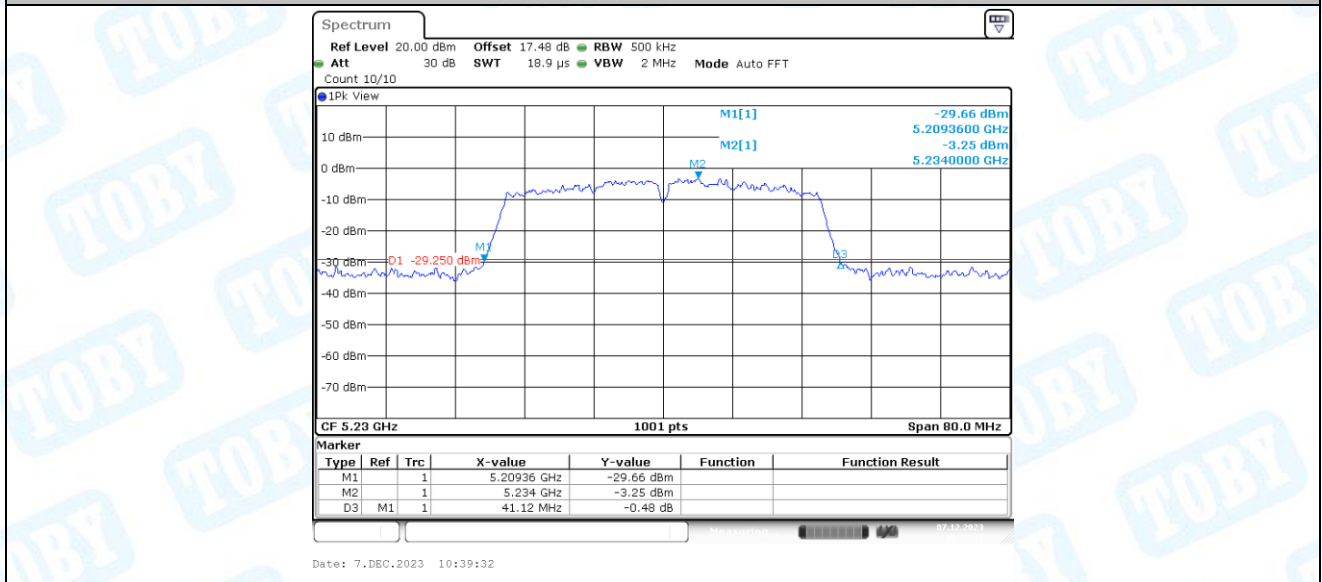


2. Occupied channel bandwidth

2.1. Test Result

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	16.743	5171.6084	5188.3516	---	---
		5200	16.623	5191.7682	5208.3916	---	---
		5240	16.943	5231.4885	5248.4316	---	---
11N20SISO	Ant1	5180	17.782	5171.0889	5188.8711	---	---
		5200	18.022	5190.8891	5208.9111	---	---
		5240	17.902	5231.1289	5249.0310	---	---
11N40SISO	Ant1	5190	36.204	5171.7782	5207.9820	---	---
		5230	36.364	5211.8581	5248.2218	---	---
11AC20SISO	Ant1	5180	17.902	5171.0490	5188.9510	---	---
		5200	17.982	5191.0490	5209.0310	---	---
		5240	17.662	5231.1289	5248.7912	---	---
11AC40SISO	Ant1	5190	36.763	5171.6184	5208.3816	---	---
		5230	36.124	5211.9381	5248.0619	---	---


2.2. Test Graphs



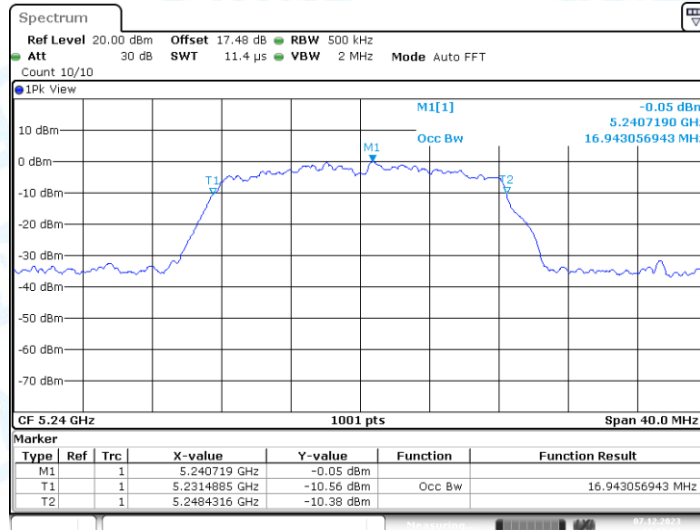


Date: 7.DEC.2023 11:16:31

11N20SISO_Ant1_5180

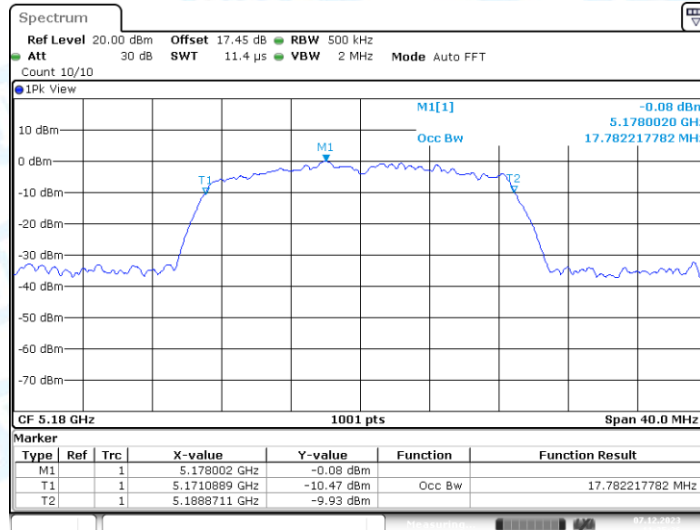


Date: 7.DEC.2023 11:25:36

11N20SISO_Ant1_5200

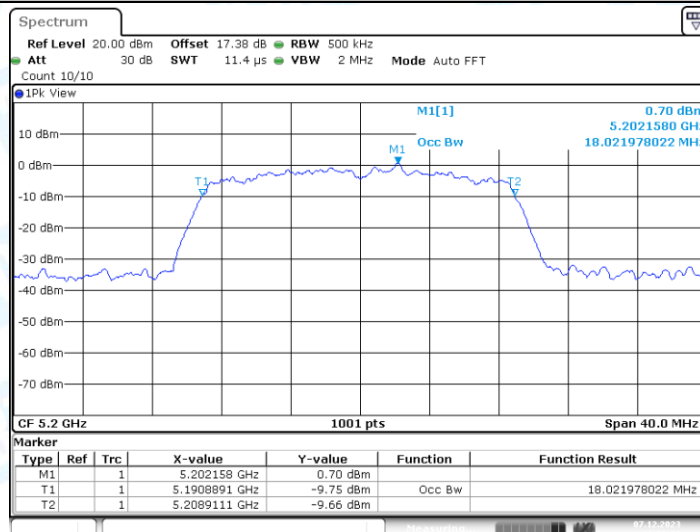


Date: 7.DEC.2023 11:32:24

11N20SISO_Ant1_5240

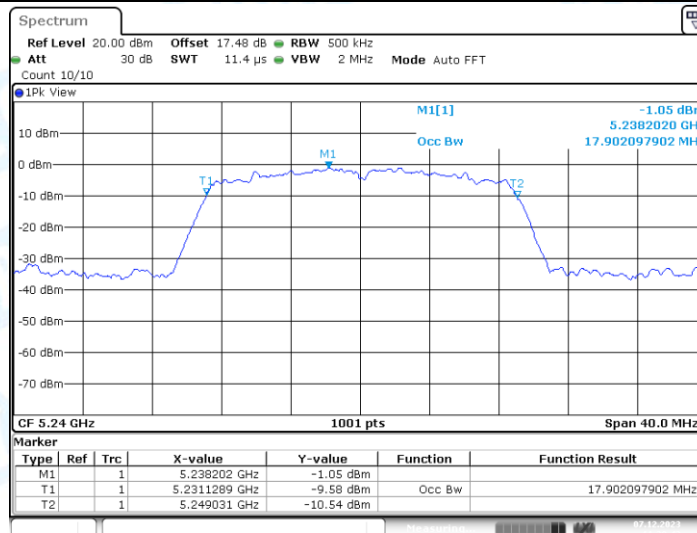


Date: 7.DEC.2023 11:38:41

11N40SISO_Ant1_5190

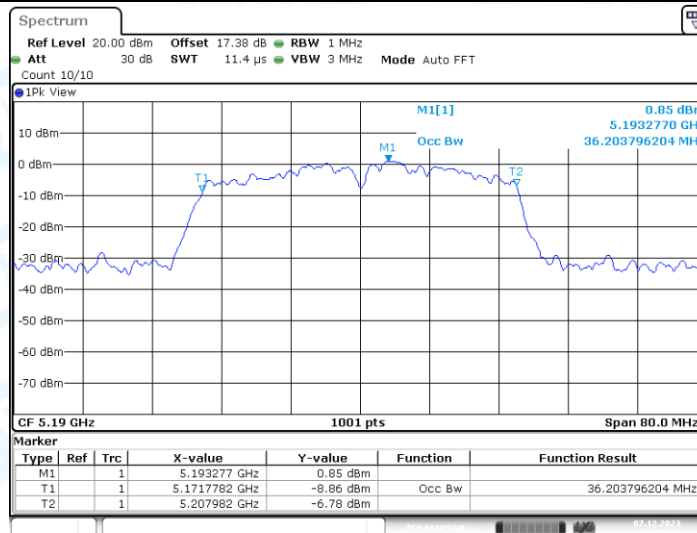


Date: 7.DEC.2023 10:55:29

11N40SISO_Ant1_5230

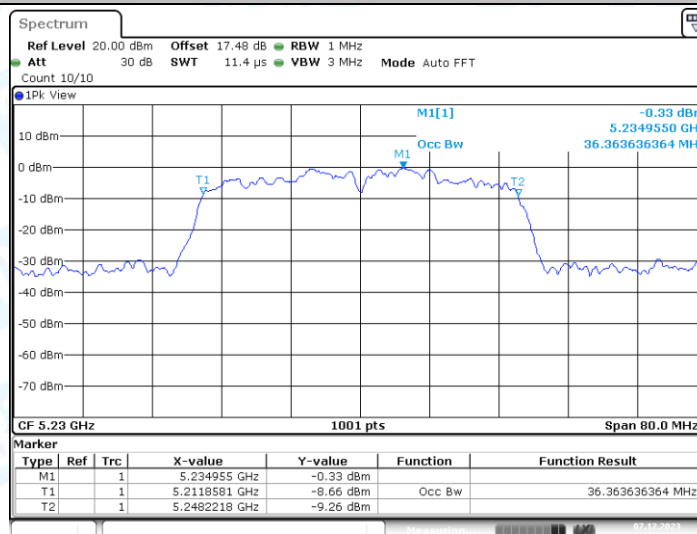


Date: 7.DEC.2023 11:02:31

11AC20SISO_Ant1_5180

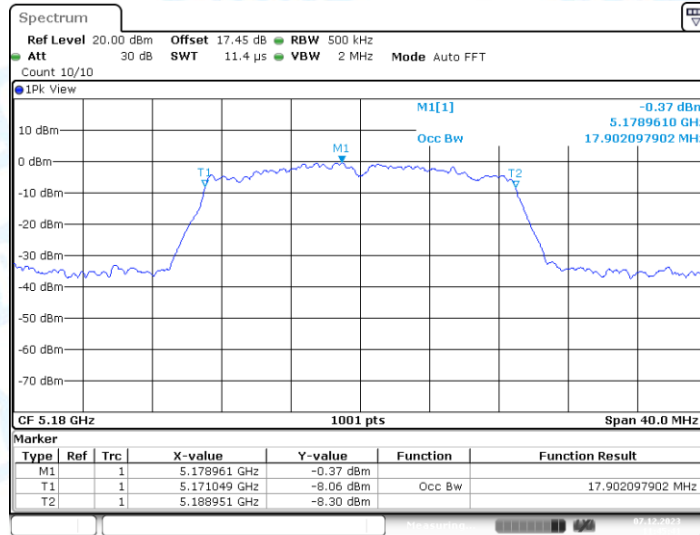


Date: 7.DEC.2023 11:45:42

11AC20SISO_Ant1_5200

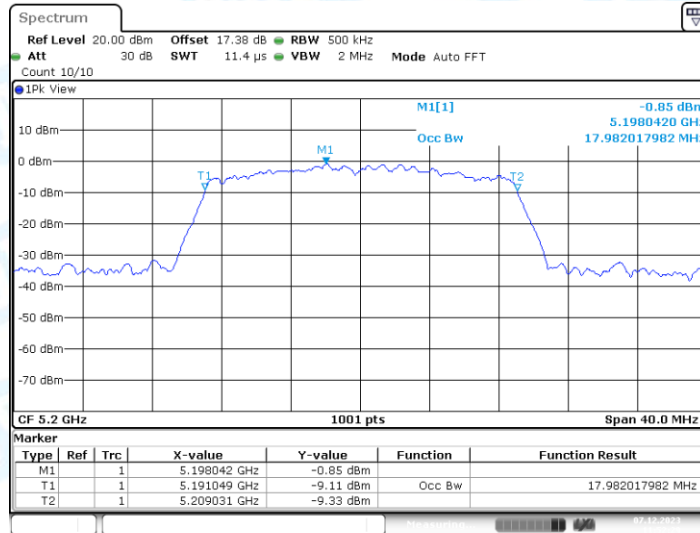


Date: 7.DEC.2023 11:52:29

11AC20SISO_Ant1_5240

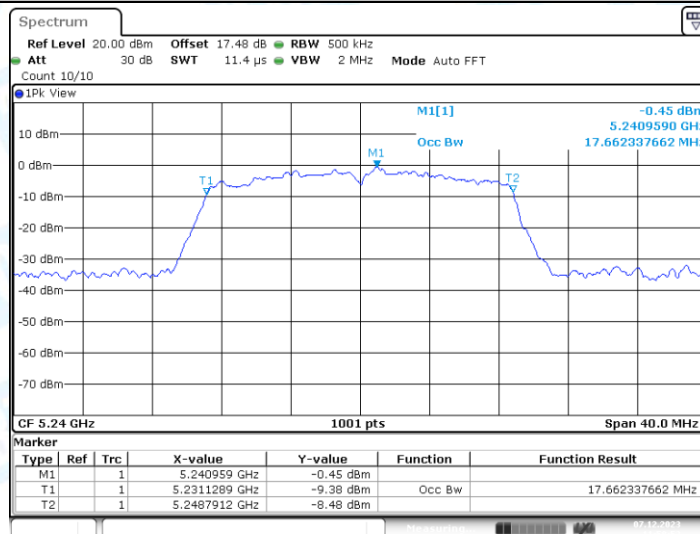


Date: 7.DEC.2023 11:58:52

11AC40SISO_Ant1_5190

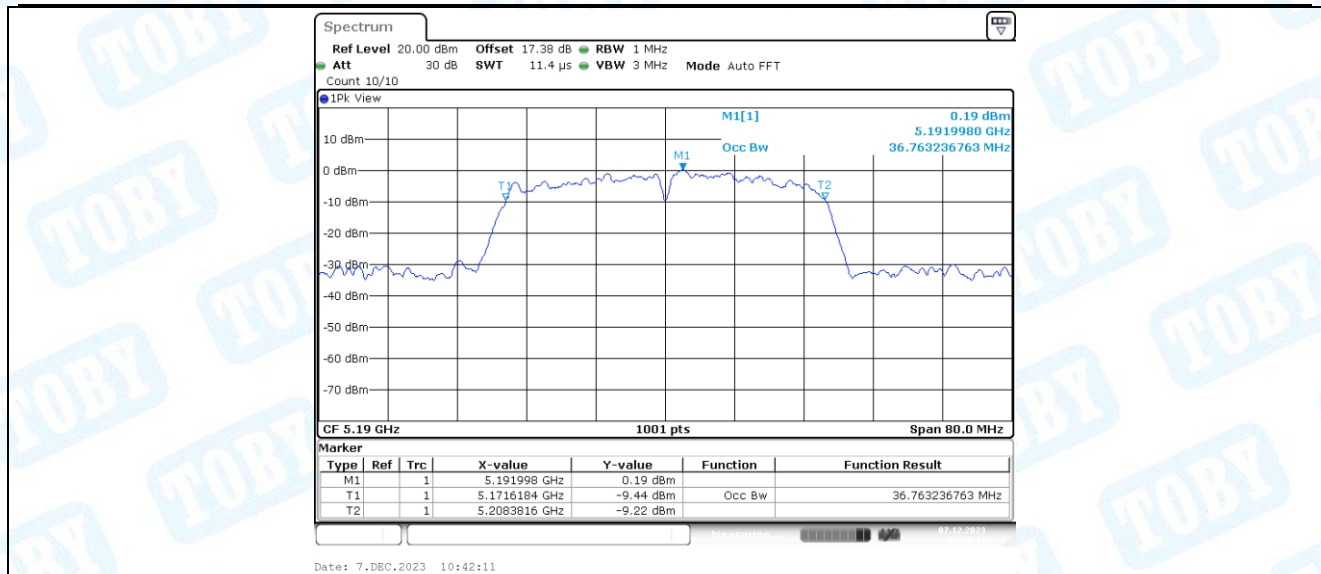

11A40SISO_Ant1_5230

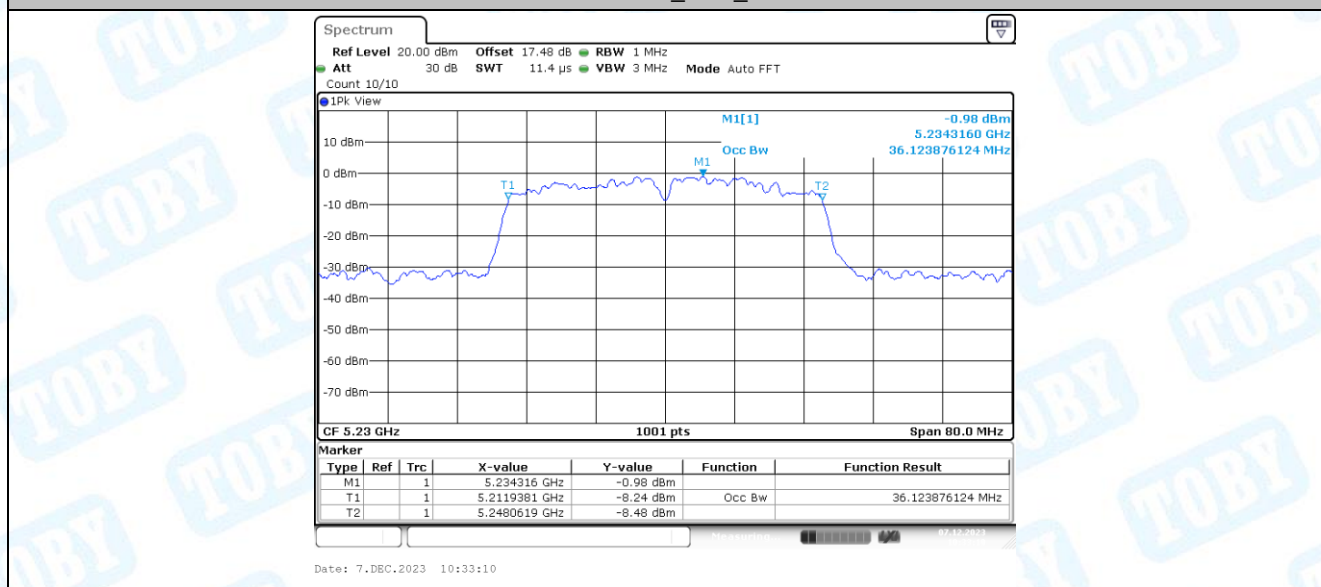

3. Maximum conducted output power

3.1. Test Result

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11A	Ant1	5180	5.51	≤23.98	PASS
		5200	5.78	≤23.98	PASS
		5240	5.88	≤23.98	PASS
11N20SISO	Ant1	5180	6.12	≤23.98	PASS
		5200	5.84	≤23.98	PASS
		5240	6.17	≤23.98	PASS
11N40SISO	Ant1	5190	6.07	≤23.98	PASS
		5230	5.62	≤23.98	PASS
11AC20SISO	Ant1	5180	6.15	≤23.98	PASS
		5200	5.92	≤23.98	PASS
		5240	5.63	≤23.98	PASS
11AC40SISO	Ant1	5190	5.98	≤23.98	PASS
		5230	5.66	≤23.98	PASS

Note: The Duty Cycle Factor is compensated in the graph.


4. Maximum power spectral density


4.1. Test Result

TestMode	Antenna	Channel	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11A	Ant1	5180	-4.09	≤11.00	PASS
		5200	-4.33	≤11.00	PASS
		5240	-4.08	≤11.00	PASS
11N20SISO	Ant1	5180	-3.55	≤11.00	PASS
		5200	-3.58	≤11.00	PASS
		5240	-4.06	≤11.00	PASS
11N40SISO	Ant1	5190	-6.13	≤11.00	PASS
		5230	-6.77	≤11.00	PASS
11AC20SISO	Ant1	5180	-3.29	≤11.00	PASS
		5200	-3.79	≤11.00	PASS
		5240	-4.17	≤11.00	PASS
11AC40SISO	Ant1	5190	-6.86	≤11.00	PASS
		5230	-6.96	≤11.00	PASS


Note: The Duty Cycle Factor and RBW Factor is compensated in the graph.

4.2. Test Graphs

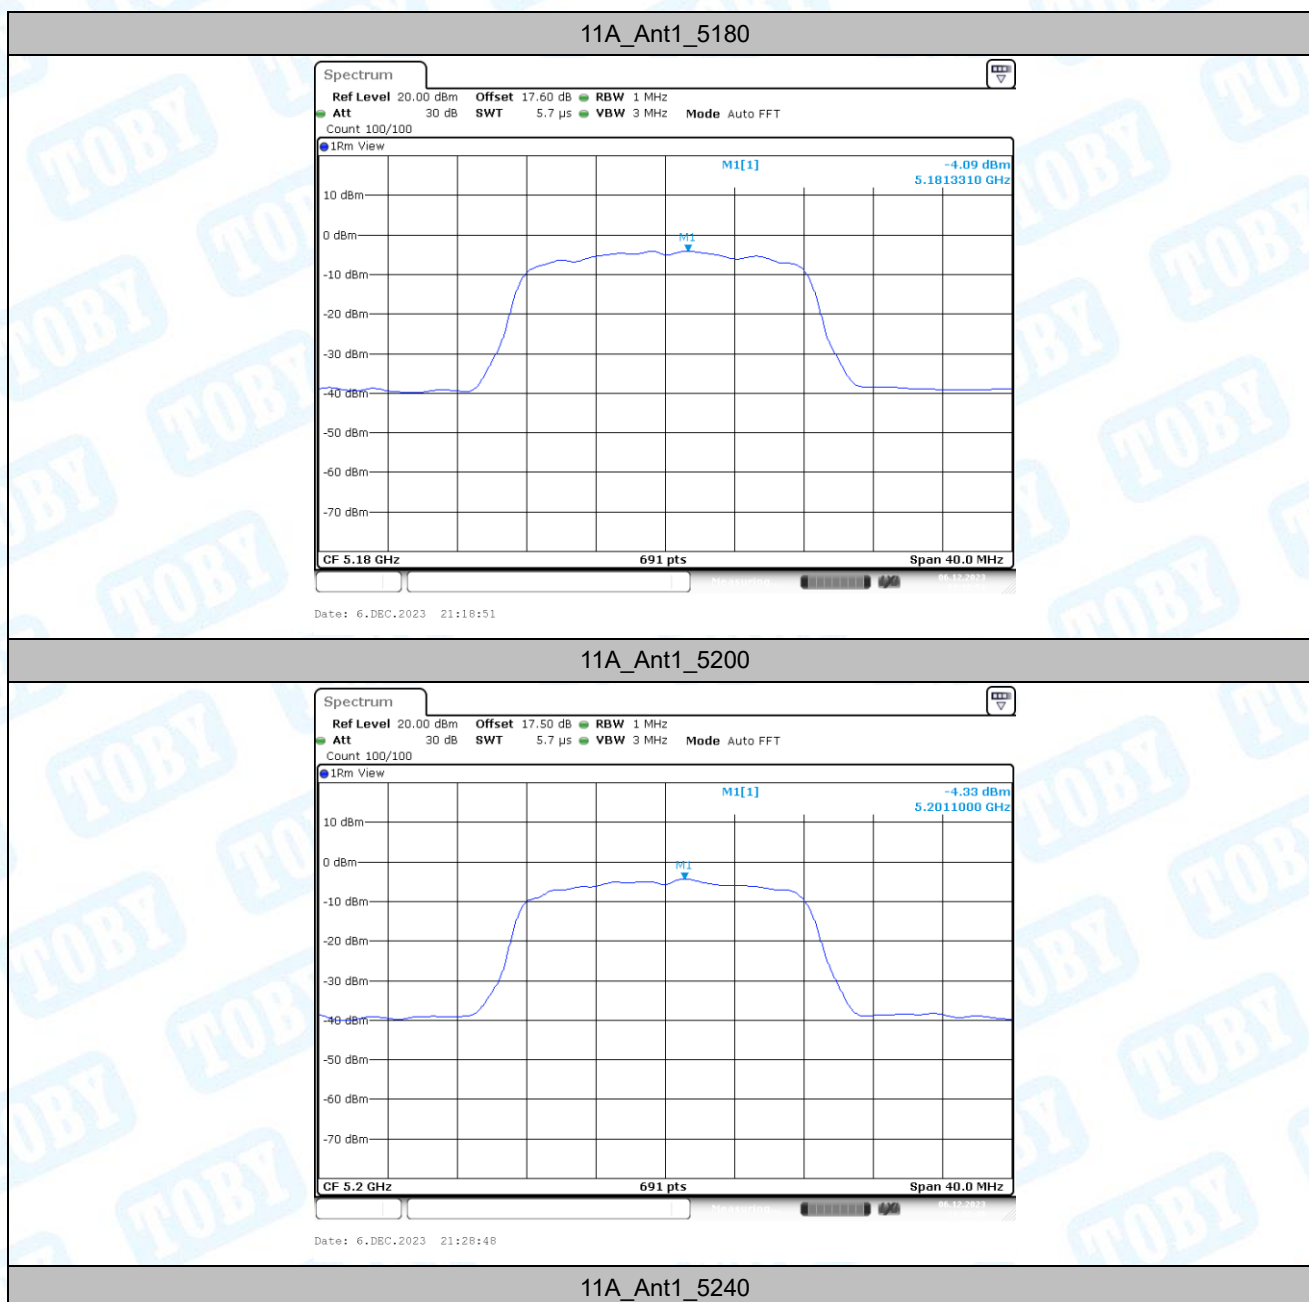


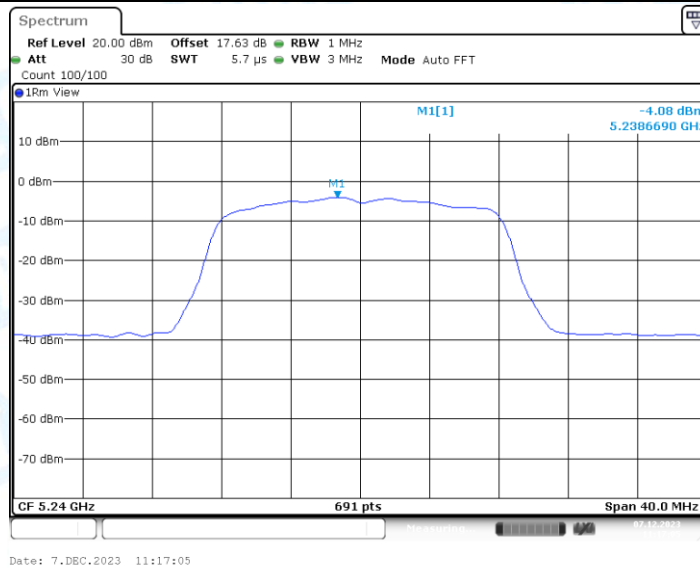


11N20SISO_Ant1_5180

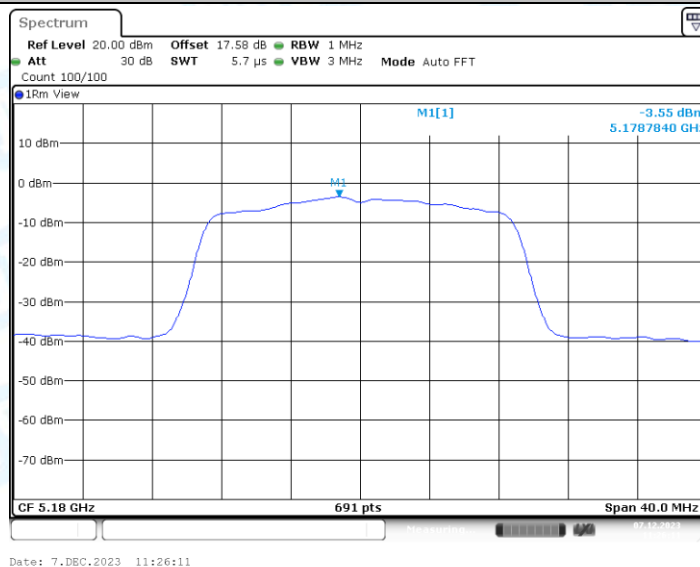


11N20SISO_Ant1_5200

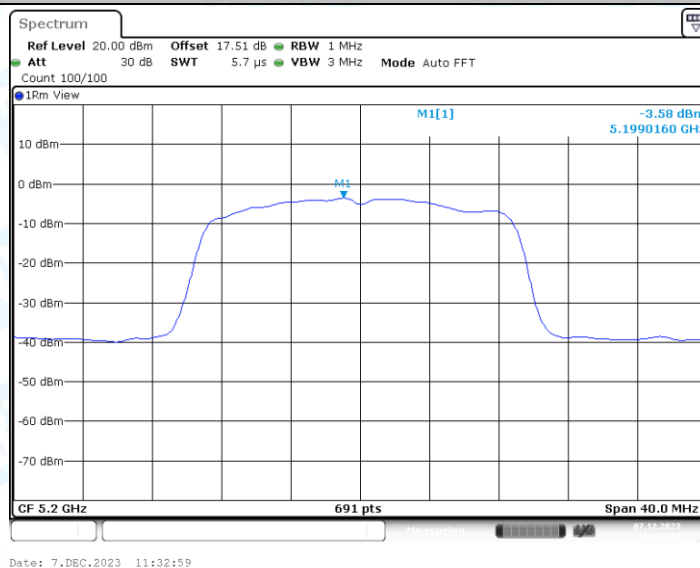


11N20SISO_Ant1_5240

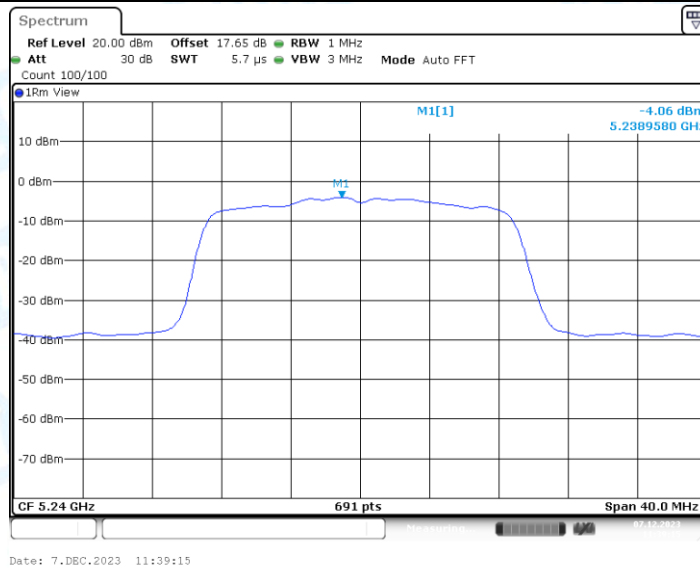


11N40SISO_Ant1_5190

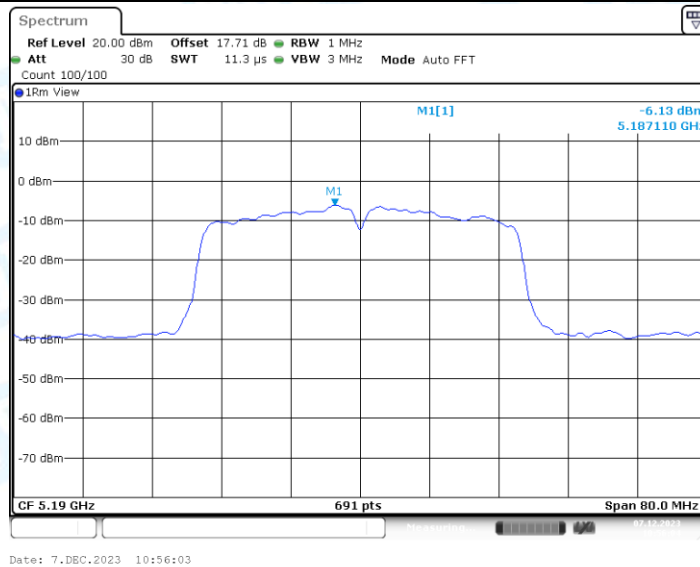


11N40SISO_Ant1_5230

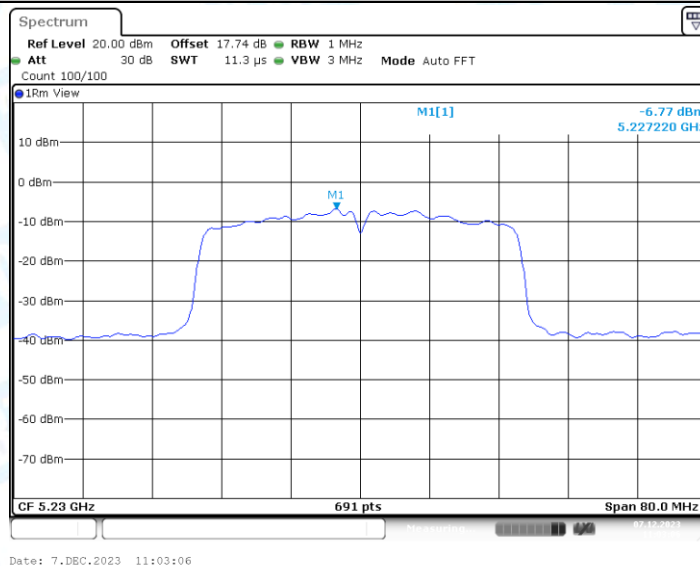


11AC20SISO_Ant1_5180

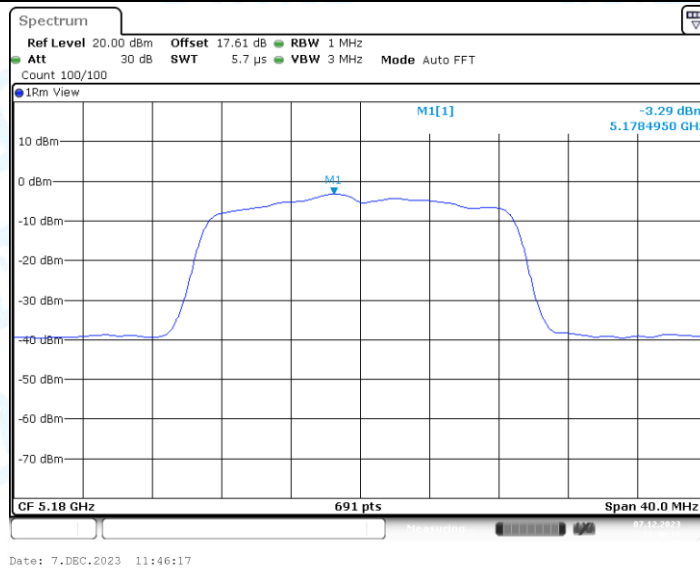


11AC20SISO_Ant1_5200

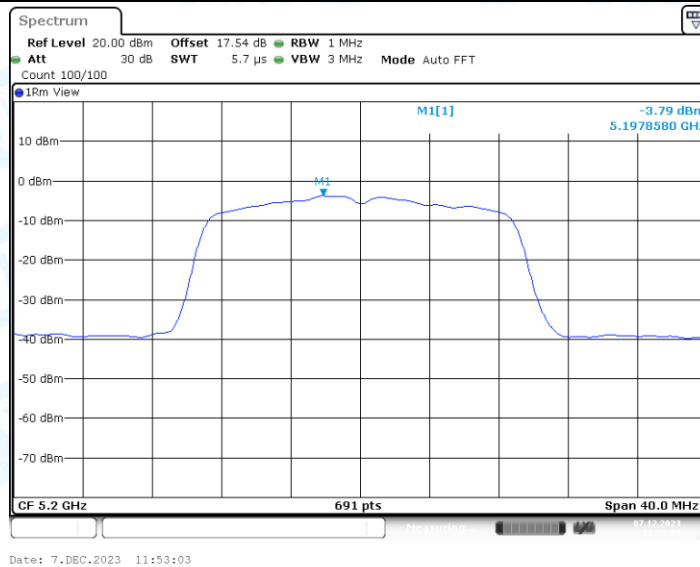

11AC20SISO_Ant1_5240

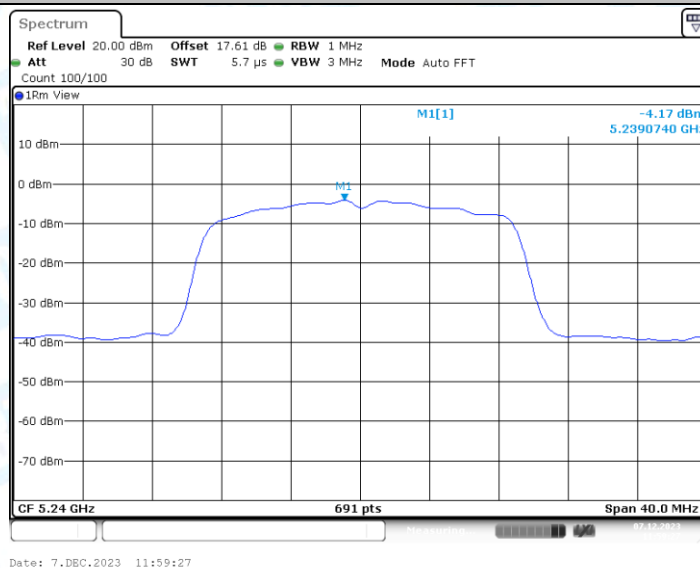

11AC40SISO_Ant1_5190

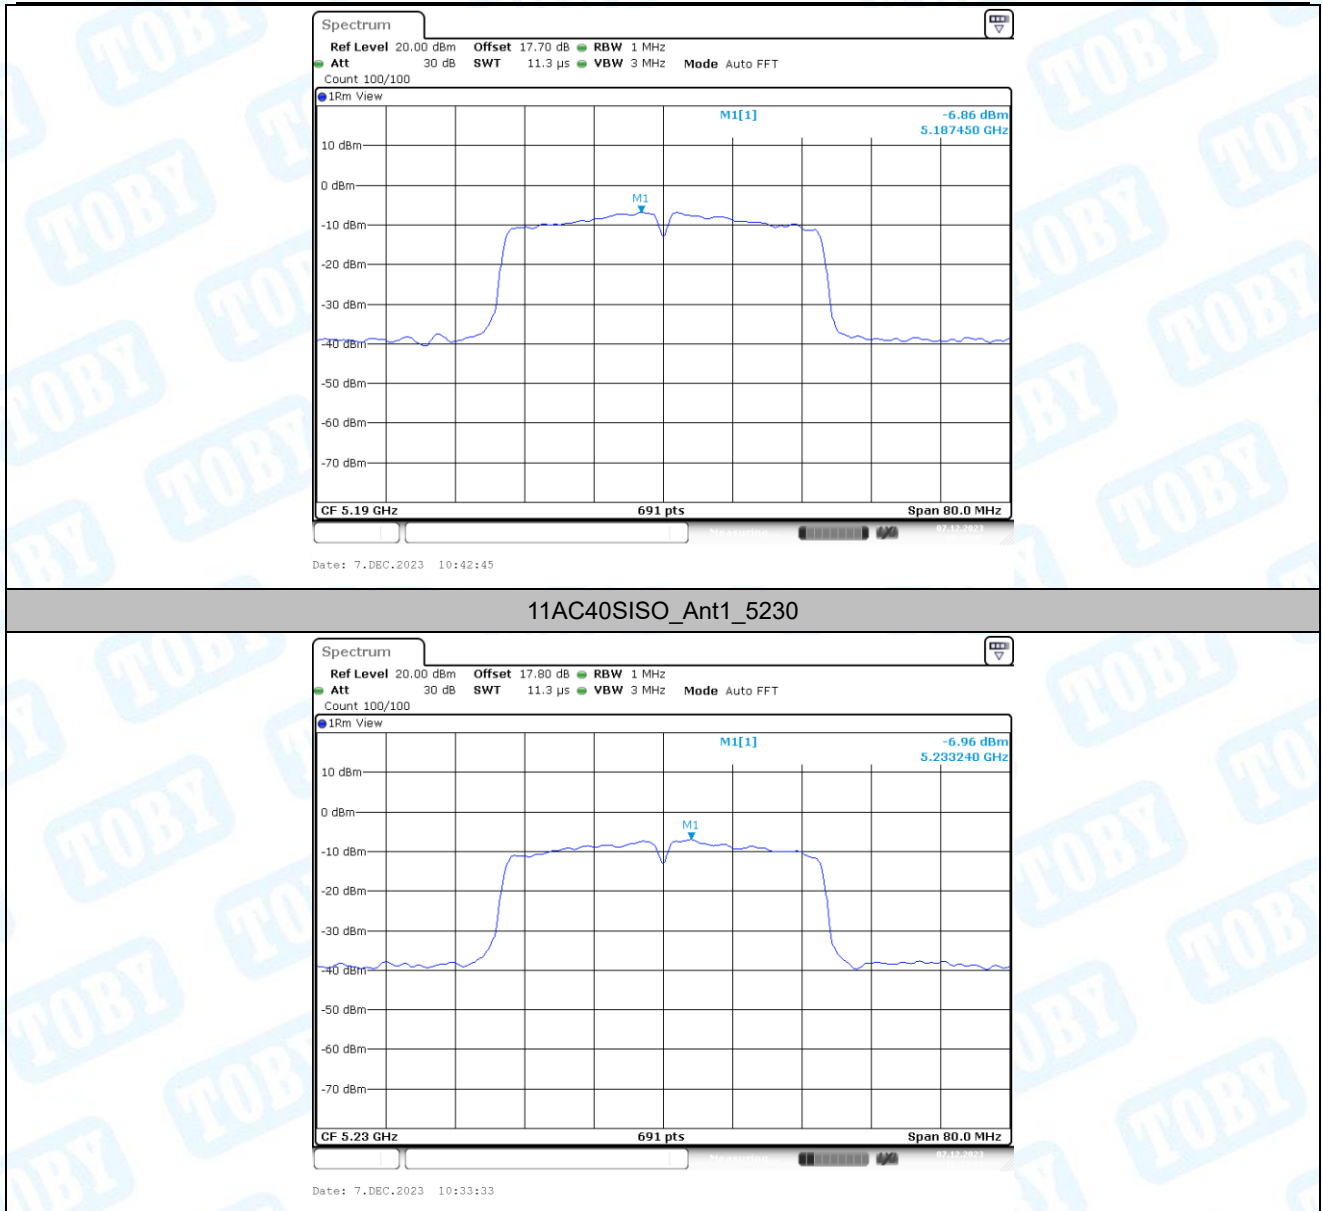


5. Band edge measurements

5.1. Test Result


TestMode	Antenna	ChName	Channel	Result[dBm]	Limit[dBm]	Verdict
11A	Ant1	Low	5180	-32.36	≤-27	PASS
		High	5240	-36.82	≤-27	PASS
11N20SISO	Ant1	Low	5180	-32.85	≤-27	PASS
		High	5240	-36.25	≤-27	PASS
11N40SISO	Ant1	Low	5190	-32.46	≤-27	PASS
		High	5230	-35.15	≤-27	PASS
11AC20SISO	Ant1	Low	5180	-32.55	≤-27	PASS
		High	5240	-34.89	≤-27	PASS
11AC40SISO	Ant1	Low	5190	-32.57	≤-27	PASS
		High	5230	-35.78	≤-27	PASS

5.2. Test Graphs




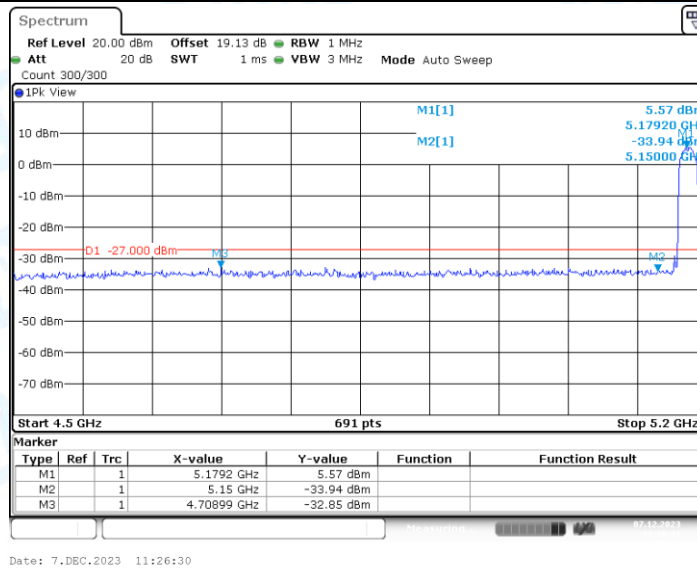


11N20SISO_Ant1_High_5240

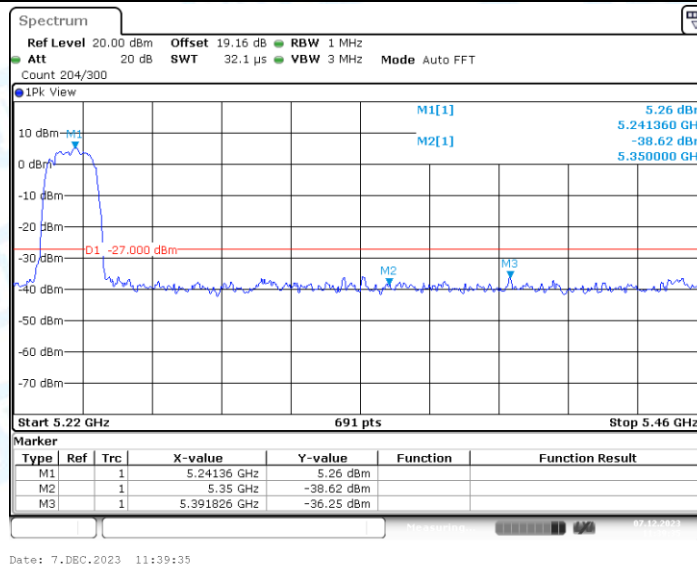


11N40SISO_Ant1_Low_5190

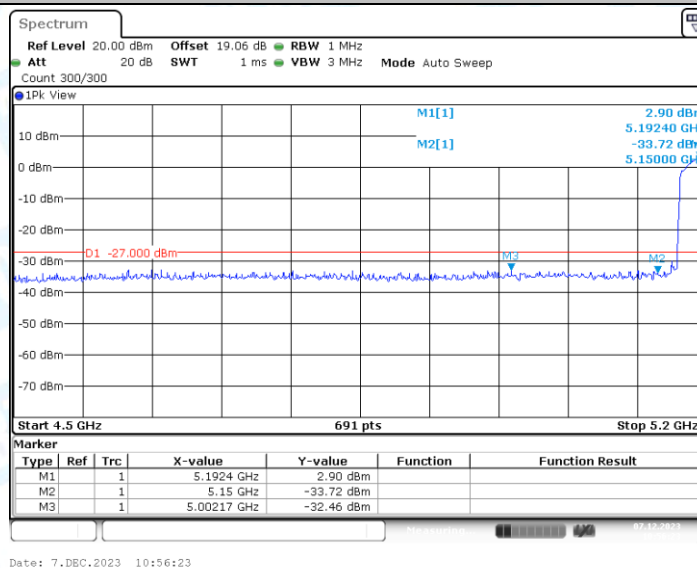


11N40SISO_Ant1_High_5230

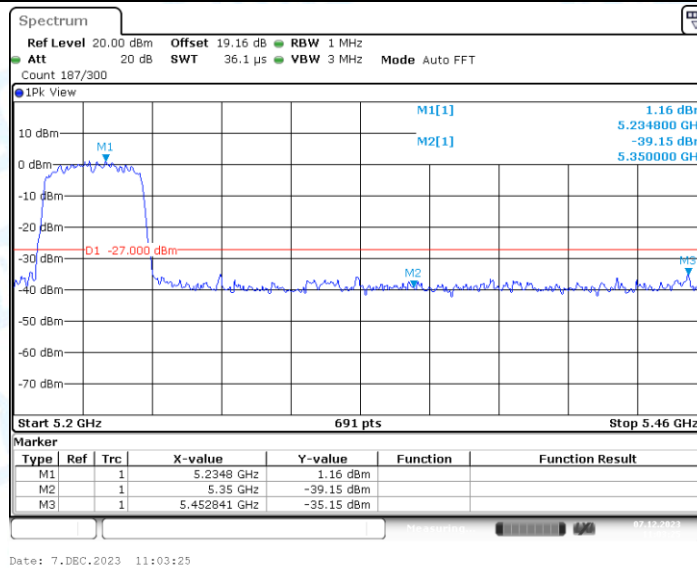


11AC20SISO_Ant1_Low_5180

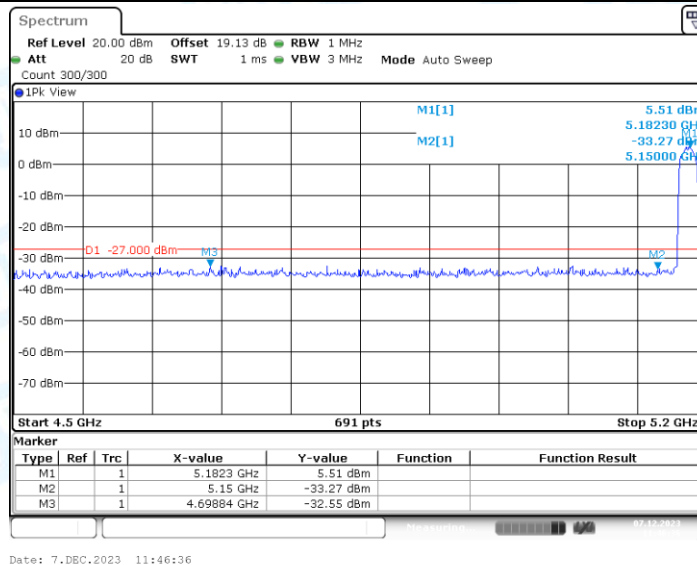


11AC20SISO_Ant1_High_5240

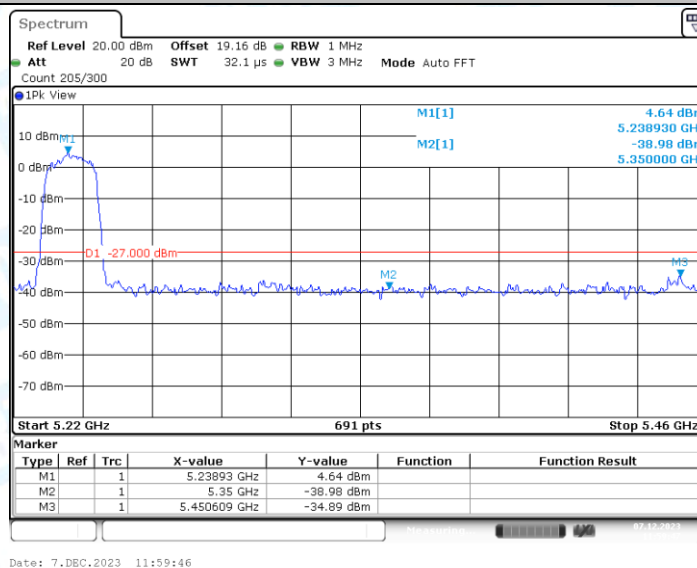

11AC40SISO_Ant1_Low_5190

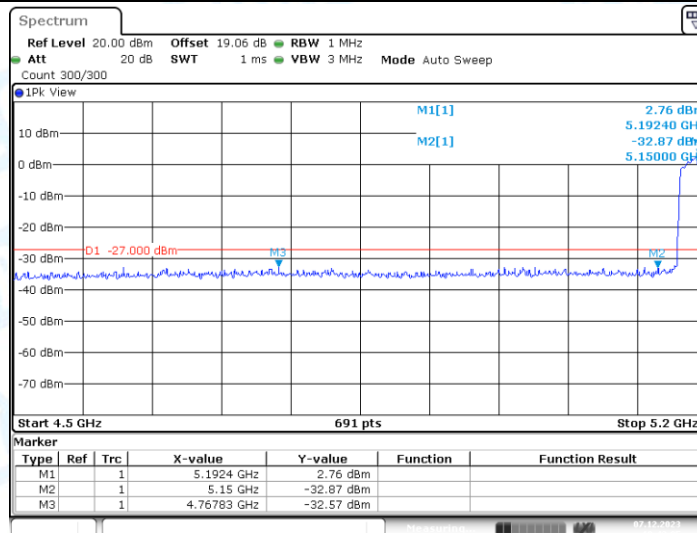

11AC40SISO_Ant1_High_5230

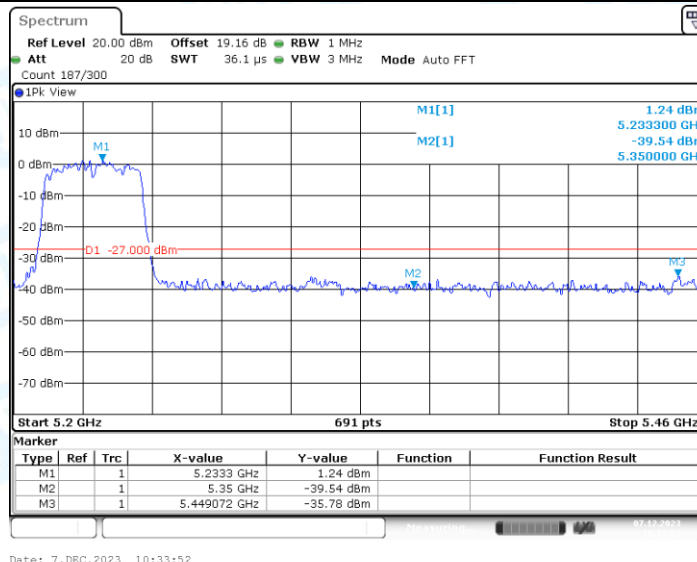

6. Emissions in Restricted Bands

6.1. Test Result

TestMode	Antenna	ChName	Channel	Detector	Freq [MHz]	EIRP [dBm]	Limit [dBm]	Verdict
11A	Ant1	Low	5180	AV	4500.000	-50.07	≤-41.20	PASS
				AV	5032.609	-46.4	≤-41.20	PASS
				AV	5150.000	-49.02	≤-41.20	PASS
				Peak	4500.000	-34.53	≤-21.20	PASS
				Peak	4767.826	-32.06	≤-21.20	PASS
				Peak	5150.000	-34.13	≤-21.20	PASS
		High	5240	AV	5350.000	-48.29	≤-41.20	PASS
				AV	5447.130	-46.32	≤-41.20	PASS
				AV	5460.000	-47.93	≤-41.20	PASS
				Peak	5350.000	-36.34	≤-21.20	PASS
				Peak	5448.522	-34.79	≤-21.20	PASS
				Peak	5460.000	-37.52	≤-21.20	PASS
11N20SISO	Ant1	Low	5180	AV	4500.000	-50	≤-41.20	PASS
				AV	5032.609	-46.51	≤-41.20	PASS
				AV	5150.000	-48.89	≤-41.20	PASS
				Peak	4500.000	-34.73	≤-21.20	PASS
				Peak	5108.696	-31.64	≤-21.20	PASS
				Peak	5150.000	-33.39	≤-21.20	PASS
		High	5240	AV	5350.000	-48.26	≤-41.20	PASS
				AV	5447.478	-46.26	≤-41.20	PASS
				AV	5460.000	-48.16	≤-41.20	PASS
				Peak	5350.000	-38.84	≤-21.20	PASS
				Peak	5443.304	-34.82	≤-21.20	PASS
				Peak	5460.000	-38.54	≤-21.20	PASS
11N40SISO	Ant1	Low	5190	AV	4500.000	-49.46	≤-41.20	PASS
				AV	4962.609	-46.53	≤-41.20	PASS
				AV	5150.000	-48.38	≤-41.20	PASS
				Peak	4500.000	-35.43	≤-21.20	PASS
				Peak	5084.348	-31.7	≤-21.20	PASS
				Peak	5150.000	-33.99	≤-21.20	PASS
		High	5230	AV	5350.000	-48.1	≤-41.20	PASS
				AV	5447.942	-46	≤-41.20	PASS
				AV	5460.000	-47.67	≤-41.20	PASS
				Peak	5350.000	-36.93	≤-21.20	PASS
				Peak	5452.087	-34.4	≤-21.20	PASS
				Peak	5460.000	-36.58	≤-21.20	PASS
11AC20SISO	Ant1	Low	5180	AV	4500.000	-50.41	≤-41.20	PASS
				AV	5032.609	-46.37	≤-41.20	PASS


11AC40SIS O	Ant1			AV	5150.000	-49.05	≤ -41.20	PASS
				Peak	4500.000	-34.53	≤ -21.20	PASS
				Peak	4682.609	-32.15	≤ -21.20	PASS
				Peak	5150.000	-33.69	≤ -21.20	PASS
		High	5240	AV	5350.000	-48.26	≤ -41.20	PASS
				AV	5448.174	-46.18	≤ -41.20	PASS
				AV	5460.000	-48.09	≤ -41.20	PASS
				Peak	5350.000	-36.25	≤ -21.20	PASS
				Peak	5377.565	-35.87	≤ -21.20	PASS
				Peak	5460.000	-39.27	≤ -21.20	PASS
		Low	5190	AV	4500.000	-49.73	≤ -41.20	PASS
				AV	5032.609	-46.14	≤ -41.20	PASS
				AV	5150.000	-48.6	≤ -41.20	PASS
				Peak	4500.000	-35.47	≤ -21.20	PASS
				Peak	5092.464	-30.59	≤ -21.20	PASS
				Peak	5150.000	-34.72	≤ -21.20	PASS
		High	5230	AV	5350.000	-48.19	≤ -41.20	PASS
				AV	5448.319	-45.97	≤ -41.20	PASS
				AV	5460.000	-47.77	≤ -41.20	PASS
				Peak	5350.000	-37.14	≤ -21.20	PASS
				Peak	5420.435	-35.3	≤ -21.20	PASS
				Peak	5460.000	-37.84	≤ -21.20	PASS

Note:

1. The Antenna Gain is compensated in the graph.
2. For transmitters operating in 5150-5350 GHz band: The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.


6.2. Test Graphs



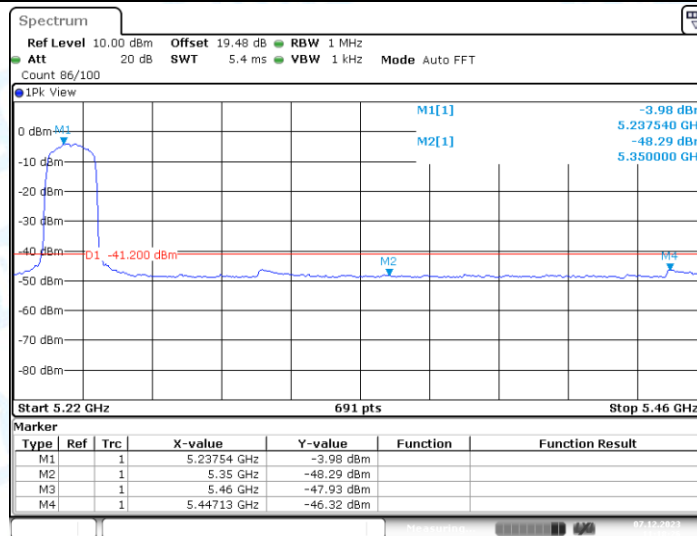


Date: 7.DEC.2023 11:18:26

11A_Ant1_High_5240_Peak

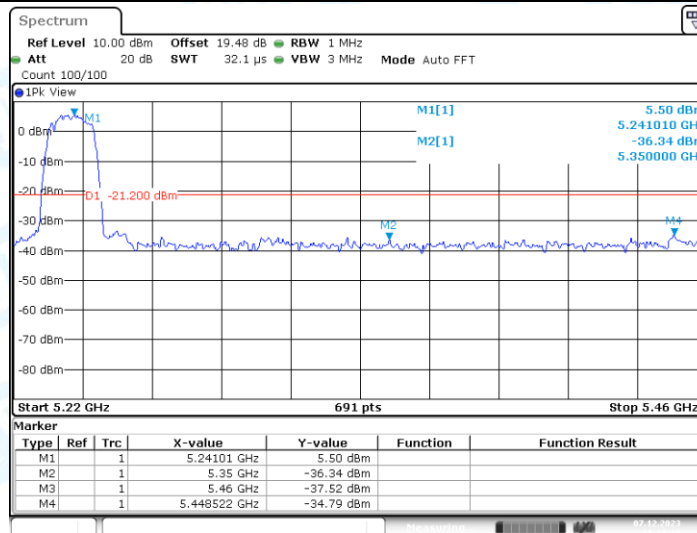


Date: 7.DEC.2023 11:18:11

11N20SISO_Ant1_Low_5180_AV

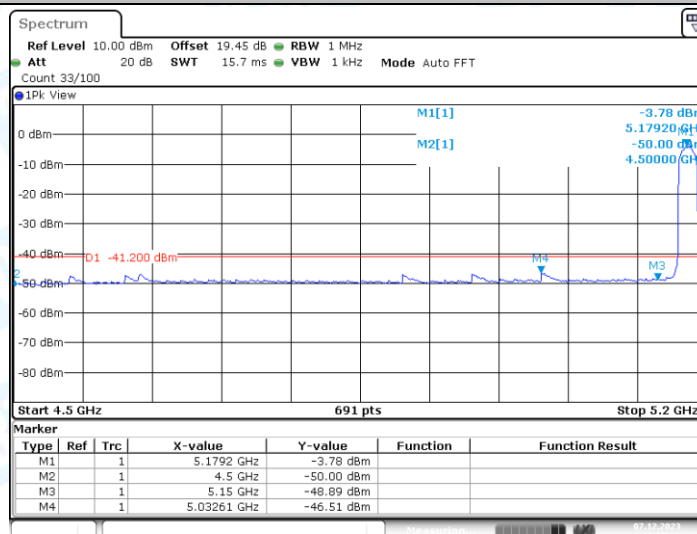


Date: 7.DEC.2023 11:27:32


11N20SISO_Ant1_Low_5180_Peak

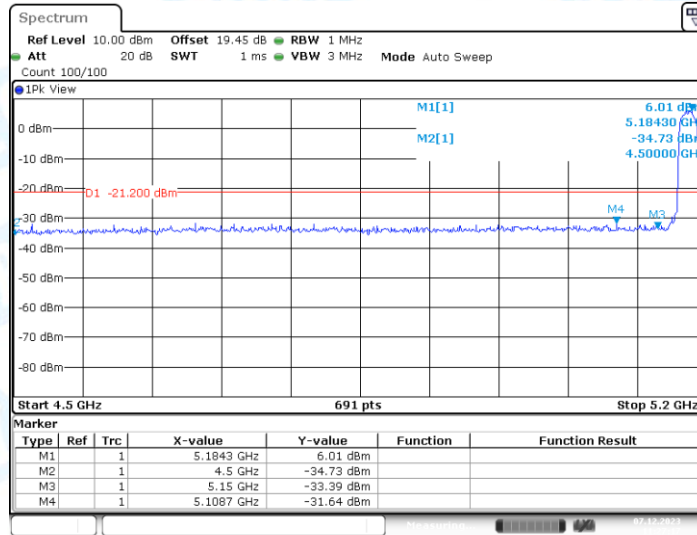


11N20SISO_Ant1_High_5240_AV

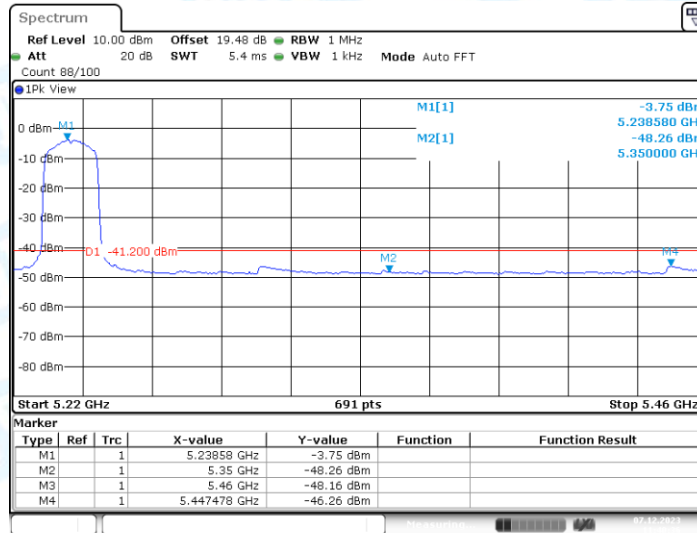


11N20SISO_Ant1_High_5240_Peak

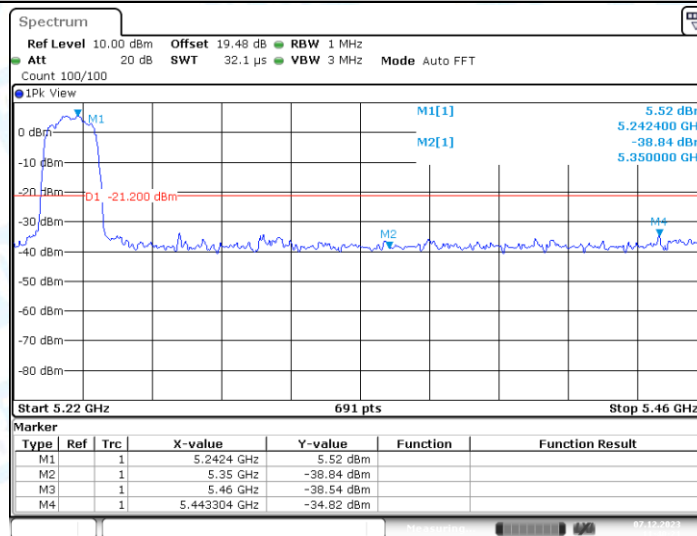


11N40SISO_Ant1_Low_5190_AV

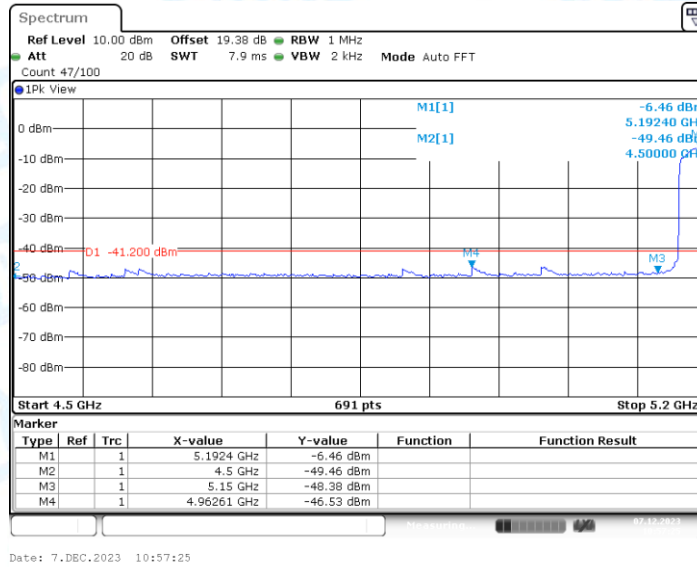


11N40SISO_Ant1_Low_5190_Peak

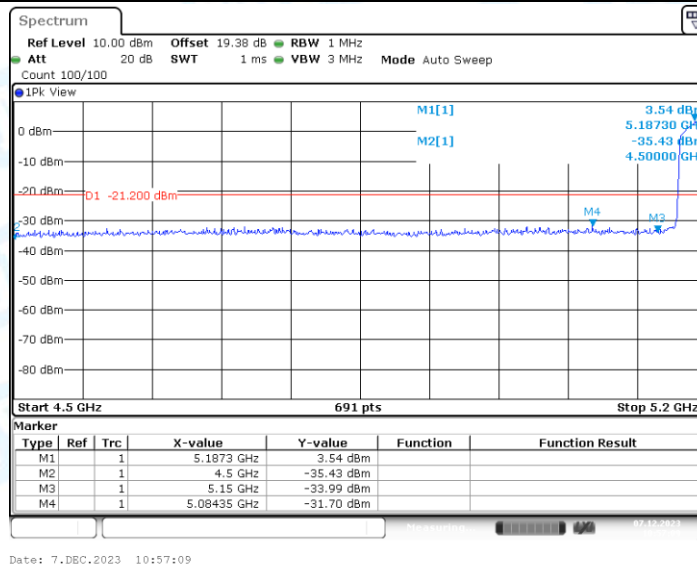


11N40SISO_Ant1_High_5230_AV

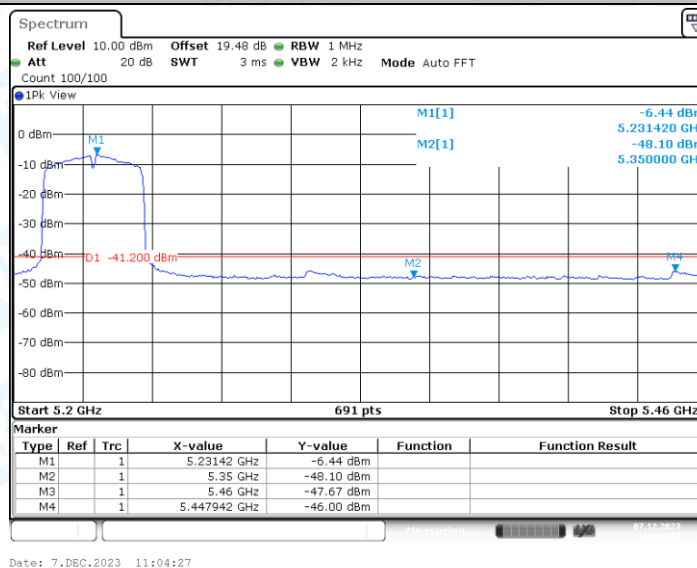


11N40SISO_Ant1_High_5230_Peak

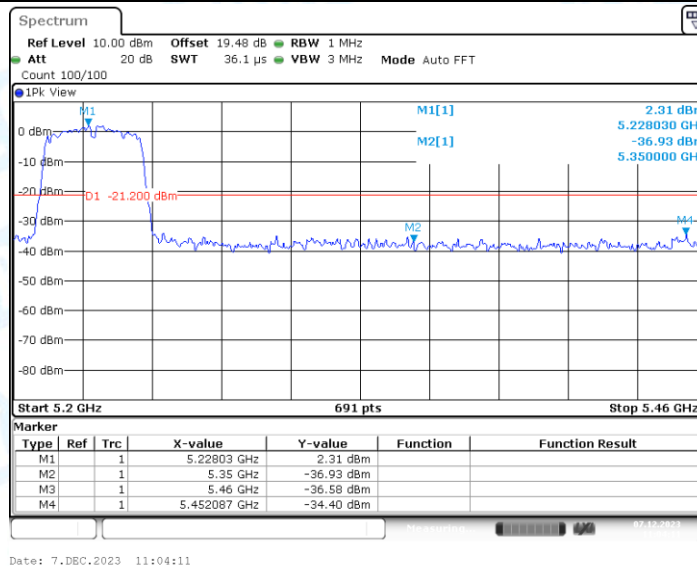

11AC20SISO_Ant1_Low_5180_AV

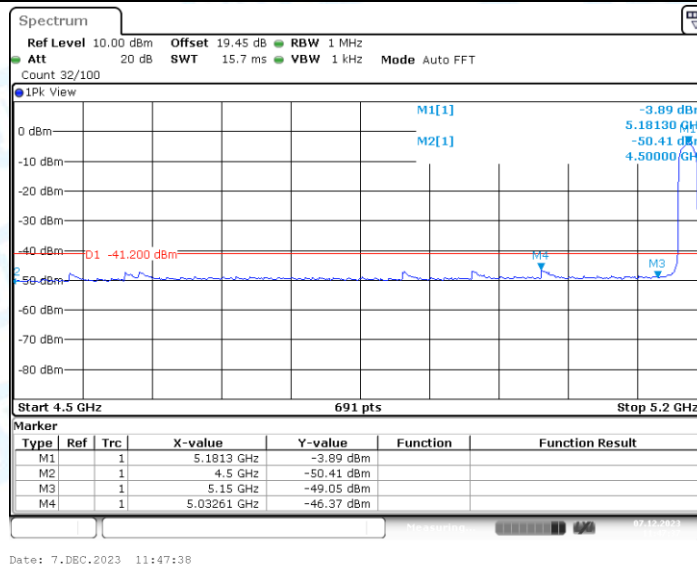

11AC20SISO_Ant1_Low_5180_Peak

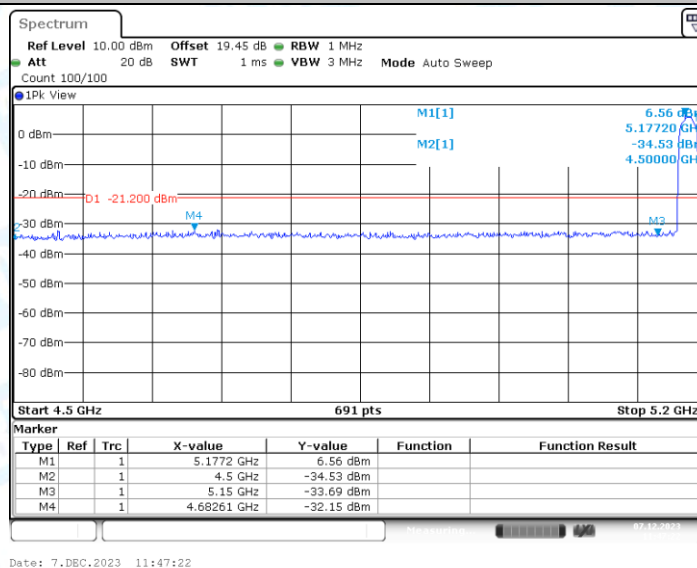

11AC20SISO_Ant1_High_5240_AV