

SPECIFICATION FOR APPROVAL

(CUSTOMER) Shenzhen Tengsai Technology Co., Ltd

(CUSTOMER P/N) : T15

(DESCRIPTION) : DATE:2023-9-11

(SPECIFICATION) : G43.5 slotting+adhesive backing 140mm7.2uH REV.NO.:A0

Hongri Shengwei Technology acknowledges, signs and seals

Department	Confirmation/Date	Review/Date	Approved/date	(Stamped with the company seal)
Quality	Dong Wanhong ₂₀₂₃₋₉₋₁₁	Lv Hui ₂₀₂₃₋₉₋₁₁	Wei Hanman ₂₀₂₃₋₉₋₁₁	
Engineering	He Weihua ₂₀₂₃₋₉₋₁₁	Wei Lihong ₂₀₂₃₋₉₋₁₁	Wei Lihong ₂₀₂₃₋₉₋₁₁	

Notes

Hongri Shengwei Technology acknowledges, signs and seals

Department	Confirmation/Date	Review/Date	Approved/date	(Stamped with the company seal)
Engineering				
Procure				
Quality				

Notes

HRSW ELECTRONICS CO.,LTD

ADD: 2nd Floor, Building 1, No. 48 Guanlan Huanguan


Middle Road, Longhua New District, Shenzhen

TEL: +86-755-23461055 **FAX:** +86-0755-28015170

page:1/3

SPECIFICATION FOR APPROVAL

1.MECHANICAL DIMENSION (UNIT:mm)

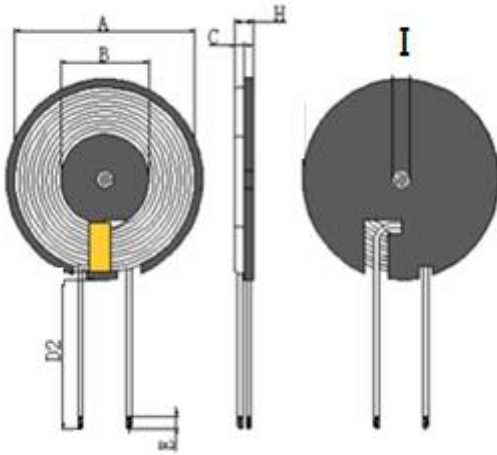


2. SCHEMATICS:

1. Coil mounting magnetic sheet, magnetic sheet size $43.5 \pm 1\text{mm}$,
Open the L slot.

2. Coil outlet position
Wrap adhesive paper
1-2Ts;

3. The bottom of the magnetic separator should be pasted with adhesive backing

4. The lead needs to be marked with ink



A	B	C	D2	E	H	I			I
43.5 ± 1.0	16 ± 1.5	0.8 ± 0.1	140 ± 3	4 ± 2	2.8MAX	5 ± 0.5			

3.WINDING:

STEP	START-FINISH	WIRE TYPE	TURNS	TAPE	REMARK
N1	S-F	silk covered wire $\phi 0.08 \times 105\text{mm}$ 2UEW	12TS (Ref)		

4. ELECTRICAL SPECIFICATION:

ITEM	L	DCR		Q value	HI-POT
TEST	Coil and magnetic plate	S-F			
CON	100KHz, 0.25V	AT 25°C			
SPEC	$7.2\mu\text{H} \pm 10\%$	100mΩ Max			

5.BILF OF MATERIAL:

NO.	ITEM	MATERIAL SPECIFICATION	MANUFACTURER	SGS NO.
1	0.08 * 105 strands of silk wire	Acetone silk wrap 0.08×105	NANJINGJINNINGCO,LTD	
2	Solder Bar	Solder Bar	QIAODO	
3	Magnetic sheet	$\phi 43.5 \times 0.8$ Manganese zinc hard magnetic sheet with L-slot	TAIYI CO.,LTD	
4	glue	Yellow Glue 9999	LIANCHENG CO.,LTD	
5	High-temperature adhesive paper	7mm Wide high-temperature adhesive paper	CUDAK CO.,LTD	
6	Adhesive backing	$\phi 41.5 \times 0.1$	CUDAK CO.,LTD	

HRSW ELECTRONICS CO.,LTD		PART NO	
		TITLE	G43.5Slotting+adhesive backing 140mm 7.2uH
DRAWN BY	CHECKED BY		APPROVED BY
He Weihua	Wei Lihong		Wei Lihong

SPECIFICATION FOR APPROVAL

6. SAMPLE TEST DATA									
6. 1DIMENSION TEST (UNIT:mm)									
TEST ITEM	A	B	C	D	E	H	I		
SPEC	43.5±1.0	16±1.5	0.8±0.1	140±3	4±2	2.8MAX	5±0.5		
1	43.38	16	0.76	142	3.50	2.35	5.03		
2	43.51	15.9	0.78	139	3.60	2.34	5.02		
3	43.42	16.2	0.76	140	3.70	2.41	4.99		
4	43.62	15.8	0.86	141	3.80	2.38	5.01		
5	43.97	16.05	0.83	139	4.00	2.45	5		
6									
7									
8									
9									
10									
MAX	43.97	16.20	0.86	142.00	4.00	2.45	5.03		
MIN	43.38	15.80	0.76	139.00	3.50	2.34	4.99		
AVERAGE	43.58	15.99	0.80	140.20	3.72	2.39	5.01		
6. 2ELECTRICAL TEST									
TEST ITEM	L		DCR	IDC		Q	HI-POT		
	S-F		S-F						
TEST COND	100KHz/0.25v		AT 25℃						
SPEC	7.2uH ±10%		100mΩ (Max)						
1	7.21		58.00						
2	7.20		59.00						
3	7.19		58.60						
4	7.23		57.20						
5	7.25		58.90						
6									
7									
8									
9									
10									
MAX	7.25		59.00						
MIN	7.19		57.20						
AVERAGE	7.22		58.34						
HRSW ELECTRONICS CO.,LTD					PART NO		G43.5Slotting+adhesive backing 140mm7.2uH		
					TITLE				
DRAWN BY			CHECKED BY			APPROVED BY			
He Weihua			Wei Lihong			Wei Lihong			