

FCC Test Report

Report No.: AGC06662230301FR02

FCC ID : 2ANTC-C518

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: Wireless IP Camera

BRAND NAME : N/A

C518, C516, C519, C528, C519M, C528M, life-131,

MODEL NAME : ZND5183Y, ZND5185Y, ZND5194Y, ZND5195Y, ZND5196Y,

ZND5284Y, ZND5286Y, ZND5288Y

APPLICANT : Ansjer Electronics Co., Ltd

DATE OF ISSUE : Sep. 05, 2025

STANDARD(S) : FCC Part 15 Subpart E §15.407

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 102


REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Sep. 05, 2025	Valid	Initial Release




TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	7
2.3. RELATED SUBMITTAL(S) / GRANT (S)	8
2.4. TEST METHODOLOGY	8
2.5. SPECIAL ACCESSORIES	8
2.6. EQUIPMENT MODIFICATIONS	8
2.7. ANTENNA REQUIREMENT	8
3. TEST ENVIRONMENT	9
3.1 ADDRESS OF THE TEST LABORATORY	9
3.2 TEST FACILITY	9
3.3 ENVIRONMENTAL CONDITIONS	10
3.4 MEASUREMENT UNCERTAINTY	10
3.5 LIST OF EQUIPMENTS USED	11
4. DESCRIPTION OF TEST MODES	12
5. SYSTEM TEST CONFIGURATION	13
5.1. CONFIGURATION OF EUT SYSTEM	13
5.2. EQUIPMENT USED IN EUT SYSTEM	13
5.3. SUMMARY OF TEST RESULTS	13
6. DUTY CYCLE MEASUREMENT	
7. RF OUTPUT POWER MEASUREMENT	16
7.1 MEASUREMENT LIMITS	
7.2 MEASUREMENT PROCEDURE	
7.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	16
7.4 MEASUREMENT RESULT	17
8. 6DB&26DB BANDWIDTH MEASUREMENT	19
7.1 MEASUREMENT LIMITS	19
8.2 MEASUREMENT PROCEDURE	19
8.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	19
8.4 MEASUREMENT RESULTS	20
9. POWER SPECTRAL DENSITY MEASUREMENT	37
9.1 MEASUREMENT LIMITS	37
9.2 MEASUREMENT PROCEDURE	37
9.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	37
9.4 MEASUREMENT RESULT	38





10. CONDUCTED SPURIOUS EMISSION	52
10.1 MEASUREMENT LIMIT	52
10.2 MEASUREMENT PROCEDURE	52
10.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	52
10.4 MEASUREMENT RESULTS	53
11. RADIATED EMISSION	73
11.1 LIMITS OF RADIATED EMISSION TEST	73
11.2 MEASUREMENT PROCEDURE	74
11.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	76
11.4 MEASUREMENT RESULT	77
12. AC POWER LINE CONDUCTED EMISSION TEST	98
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	98
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	99
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	99
APPENDIX I: PHOTOGRAPHS OF TEST SETUP	102
APPENDIX II: PHOTOGRAPHS OF EUT	102






1. VERIFICATION OF CONFORMITY

Applicant	Ansjer Electronics Co., Ltd	
Address	301, 1st Building, No.21 Yongtian Road, Xiangzhou, Zhuhai, Guangdong, China	
Manufacturer	Ansjer Electronics Co., Ltd	
Address	No.5 WanLi Road, SanXiang, ZhongShan 528463, Guangdong, China	
Factory	Ansjer Electronics Co., Ltd	
Address	No.5 WanLi Road, SanXiang, ZhongShan 528463, Guangdong, China	
Product Designation	Wireless IP Camera	
Brand Name	N/A	
Test Model	C518	
Series Model	C516, C519, C528, C519M, C528M, life-131, ZND5183Y, ZND5185Y, ZND5194Y, ZND5195Y, ZND5196Y, ZND5284Y, ZND5286Y, ZND5288Y	
Declaration of Difference All the same except the model name		
Date of receipt of test item Jul. 14, 2023		
Date of Test	Jul. 14, 2023 to Sep. 05, 2025	
Deviation	No any deviation from the test method	
Condition of Test Sample Normal		
Test Result	Pass	
Report Template AGCRT-US-BGN/RF		

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with requirement of FCC Part 15 Rules requirement.

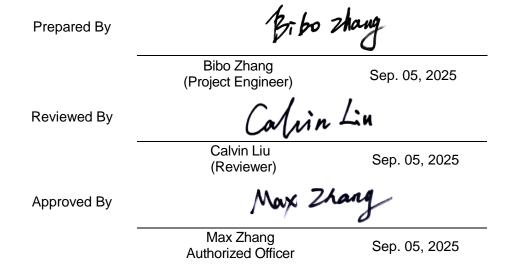



Page 6 of 102

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

Equipment Type	Outdoor access points Indoor access points		
1010000000	Fixed P2P access points		
Operation Frequency	□ □		
Operation requestcy	☑ U-NII 2C:5470MHz~5725MHz ☑ U-NII 3: 5725MHz~5850MHz		
DFS Design Type	☐ Master ☐ Slave with radar detection ☐ Slave without radar detection		
TPC Function	☐ Yes ☐ No		
Hardware Version	XS7302+Q03P		
Software Version	V4.1.9.730201350AA		
Toot Fraguency Donge	For 802.11a/n-HT20-VHT20: 5180~5240MHz, 5260~5320MHz, 5500~5700MHz,		
Test Frequency Range:	5745~5825MHz		
Output Power	IEEE 802.11a:10.77dBm; IEEE 802.11n-HT20:10.42dBm		
Modulation	802.11a: OFDM (BPSK, QPSK, 16QAM, 64QAM)		
Wodulation	802.11n: OFDM (BPSK, QPSK, 16QAM, 64QAM,128QAM)		
Data Data	802.11a: 6/9/12/18/24/36/48/54Mbps;		
Data Rate 802.11n: up to 300Mbps;			
	4 channels of U-NII-1 Band		
No colored all accorda	4 channels of U-NII-2A Band		
Number of channels	8 channels of U-NII-2C Band		
	5 channels of U-NII-3 Band		
Antenna Designation	Bipolar Antenna (Comply with requirements of the FCC part 15.203)		
Antenna Gain	-8.49dBi		
Power Supply	DC 5.0V by adapter.		



Page 7 of 102

2.2. TABLE OF CARRIER FREQUENCYS

For 5180~5240MHz:

4 channels are provided for 802.11a, 802.11n (HT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

For 5260~5320MHz:

4 channels are provided for 802.11a, 802.11n (HT20):

Channel	Frequency	Channel	Frequency
52	5260 MHz	60	5300 MHz
56	5280 MHz	64	5320 MHz

For 5500~5720MHz:

12 channels are provided for 802.11a, 802.11n (HT20):

Channel	Frequency	Channel	Frequency
100	5500 MHz	124	5620 MHz
104	5520 MHz	128	5640 MHz
108	5540 MHz	132	5660 MHz
112	5560 MHz	136	5680 MHz
116	5580 MHz	140	5700 MHz
120	5600 MHz	144	5720 MHz

For 5745~5825MHz:

5 channels are provided for 802.11a, 802.11n (HT20):

Channel	Frequency	Channel	Frequency
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		



Page 8 of 102

2.3. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2ANTC-C518** filing to comply with the FCC Part 15 requirements.

2.4. TEST METHODOLOGY

No.	Identity	Document Title	
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations	
2	FCC 47 CFR Part 15	Radio Frequency Devices	
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices	
4	KDB 662911	662911 D01 Multiple Transmitter Output v02r01	
5	KDB 789033	789033 D02 General U-NII Test Procedures New Rules v02r01	

2.5. SPECIAL ACCESSORIES

Refer to section 5.2.

2.6. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.7. ANTENNA REQUIREMENT

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antennathat uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a brokenantenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is -8.49dBi



Page 9 of 102

3. TEST ENVIRONMENT

3.1 ADDRESS OF THE TEST LABORATORY

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 10 of 102

3.3 ENVIRONMENTAL CONDITIONS

	NORMAL CONDITIONS	EXTREME CONDITIONS	
Temperature range (°ℂ)	15 - 35	-20 - 50	
Relative humidty range	20 % - 75 %	20 % - 75 %	
Pressure range (kPa)	86 - 106	86 - 106	
Power supply	DC 5.0V	DC 4.5V- DC 5.5V	
Note: The Cytrome Temporature and Cytrome Voltages declared by the manufacturer			

Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.

3.4 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 3.1 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.8 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	U _c = ±2 %
Uncertainty of Occupied Channel Bandwidth	U _c = ±2.7 %



Page 11 of 102

3.5 LIST OF EQUIPMENTS USED

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Jun. 03, 2023	Jun. 02, 2024
LISN	R&S	ESH2-Z5	100086	Jun. 03, 2023	Jun. 02, 2024
Attenuator	Dongfang Xupu	LM-XX-6-5W	N/A	Jun. 09, 2023	Jun. 08, 2024
Test software	R&S	Ver.V1.71	N/A	N/A	N/A

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Feb. 18, 2023	Feb. 17, 2024
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Jun. 01, 2023	May 31, 2024
Power sensor	Aglient	U2021XA	MY54110007	Mar. 18, 2022	Mar. 19, 2024
5GHz Fliter	EM Electronics	5150-5880MHz	N/A	Mar. 18, 2022	Mar. 19, 2024
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Oct. 31, 2021	Oct. 30, 2023
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2023	Apr. 22, 2024
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Sep. 01, 2022	Sep. 02, 2024
ANTENNA	SCHWARZBECK	VULB9168	VULB9168-494	Jan. 05, 2023	Jan. 04, 2025
Test software	FARA	Ver.RA-03A	N/A	N/A	N/A




4. DESCRIPTION OF TEST MODES

Mode	Available channel	Tested channel	Modulation	Date rate (Mbps)
802.11a/n	36,40,44,48,52, 56, 60, 64,100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140, 144, 149, 153, 157,	36,40,48,52, 64, 100, 120, 140, 149, 157, 165	OFDM/OFDMA	6Mbps/MCS0
	161, 165			

Note:

- 1. The EUT has been set to operate continuously on tested channel individually, and the EUT is operating at its maximum duty cycle>or equal 98%.
- 2. All modes under which configure applicable have been tested and the worst mode test data recording in the test report, if no other mode data.

Software Setting

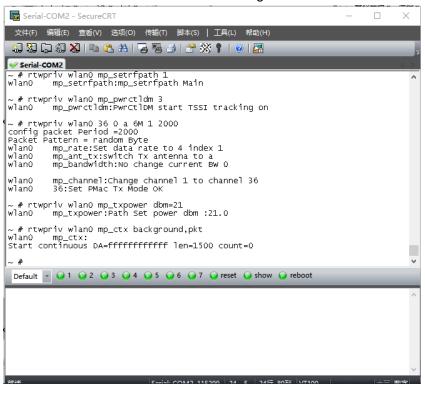




Page 13 of 102

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

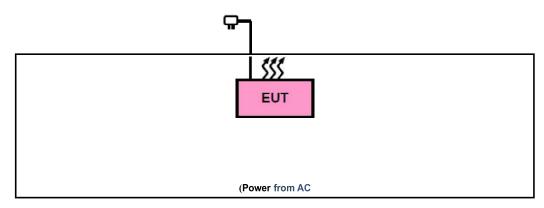

5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Wireless IP Camera	C518	2ANTC-C518	EUT
2	Adapter	HW-050200C01	Input: AC 100-240V 50/60Hz, 0.5A Output: DC 5.0V 2A	AE
3	Xiaomi phone	Mi 10	N/A	AE
4	USB Cable	N/A	N/A	AE

5.3. SUMMARY OF TEST RESULTS

Item	FCC Rules	Description Of Test	Result
1	§15.203	Antenna Equipment	Pass
2	§15.407(a/1/2/3)	RF Output Power	Pass
3	§15.407(e)	6dB Bandwidth Measurement	Pass
4	§2.1049	26dB bandwidth Measurement	Pass
5	§15.407(a/1/2/3)	Power Spectral Density	Pass
6	§15.407(b)(1/2/3/4)	Conducted Spurious Emission	Pass
7	§15.209,§15.407(b)(1/2/3/4)	Radiated Emission& Band Edge	Pass
8	§15.207	AC Power Line Conducted Emission	Pass



Page 14 of 102


6. DUTY CYCLE MEASUREMENT

5GHz WLAN (NII) operation is possible in 20MHz, 40MHz and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Peak. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Operating mode	Data rates (Mbps)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)	Average Factor (dB)			
	For band 5.150-5.250 GHz:							
IEEE 802.11a	6	80	0.97	0.49	-1.94			
IEEE 802.11n-HT20	MCS0	79	1.02	0.53	-2.05			
		For band 5.25	-5.35 GHz:					
IEEE 802.11a	6	80	0.97	0.49	-1.94			
IEEE 802.11n-HT20	MCS0	79	1.02	0.53	-2.05			
		For band 5.47-	5.725 GHz:					
IEEE 802.11a	6	80	0.97	0.49	-1.94			
IEEE 802.11n-HT20	MCS0	79	1.02	0.53	-2.05			
For band 5.725-5.850 GHz:								
IEEE 802.11a	6	80	0.97	0.49	-1.94			
IEEE 802.11n-HT20	MCS0	79	1.02	0.53	-2.05			

Remark:


- 1. Duty Cycle factor = 10 * log (1/ Duty cycle) 2. Average factor = 20 log10 Duty Cycle
- 2. The duty cycle of each frequency band mode reflects the determination requirements of the low channel measurement value.
- 3. The measurement results involving the above compensation parameters have been compensated by soft ware to reflect the final results.





The test plots as follows:







7. RF OUTPUT POWER MEASUREMENT

7.1 MEASUREMENT LIMITS

Operation Band		EUT Category	LIMIT		
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p < 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)		
0 11 1		Fixed point-to-point Access Point	1 Watt (30 dBm)		
		Indoor Access Point	1 Watt (30 dBm)		
	\boxtimes	Client devices	250mW (23.98 dBm)		
U-NII-2A		/	250mW (23.98 dBm) or 11 dBm+10 log B*		
U-NII-2C	/		/ 250		250mW (23.98 dBm) or 11 dBm+10 log B*
U-NII-3	•	/	1 Watt (30 dBm)		

Note: Where B is the 26dB emission bandwidth in MHz.

7.2 MEASUREMENT PROCEDURE

Method PM is Measurement using an RF average power meter. The procedure for this method is as follows:

- 1. The testing follows the ANSI C63.10 Section 12.3.3.1
- 2. Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
- 3. The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
- 4. At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 5. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- 6. Determine according to the duty cycle of the equipment: when it is less than 98%, follow the steps below.
- 7. Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- 8. Adjust the measurement in dBm by adding [10 log (1 / D)], where D is the duty cycle {e.g., [10 log (1 / 0.25)], if the duty cycle is 25%}.
- 9. Record the test results in the report.

7.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)






7.4 MEASUREMENT RESULT

Test Data of Conducted Output Power for band 5.15-5.25 GHz					
Test Mode	Test Channel (MHz)	Average Power (dBm)	Limits (dBm)	Pass or Fail	
	5180	10.77	23.98	Pass	
802.11a	5200	9.93	23.98	Pass	
	5240	9.08	23.98	Pass	
	5180	10.42	23.98	Pass	
802.11n20	5200	9.57	23.98	Pass	
	5240	8.86	23.98	Pass	

	Test Data of Conducted Output Power for band 5.25-5.35 GHz					
Test Mode	Test Channel (MHz)	Average Power (dBm)	Limits (dBm)	Pass or Fail		
	5260	7.72	23.98	Pass		
802.11a	5300	7.60	23.98	Pass		
	5320	7.20	23.98	Pass		
	5260	7.57	23.98	Pass		
802.11n20	5300	7.73	23.98	Pass		
	5320	7.35	23.98	Pass		

Test Data of Conducted Output Power for band 5.47-5.725 GHz						
Test Mode	Test Channel (MHz)	Average Power (dBm)	Limits (dBm)	Pass or Fail		
	5500	7.80	23.98	Pass		
802.11a	5600	9.84	23.98	Pass		
	5700	5.50	23.98	Pass		
	5500	7.53	23.98	Pass		
802.11n20	5600	9.55	23.98	Pass		
	5700	5.43	23.98	Pass		





	Test Data of Conducted Output Power for band 5.725-5.85 GHz						
Test Mode	Test Channel (MHz)	Average Power (dBm)	Limits (dBm)	Pass or Fail			
	5745	5.61	30	Pass			
802.11a	5785	5.19	30	Pass			
	5825	4.28	30	Pass			
	5745	5.52	30	Pass			
802.11n20	5785	5.18	30	Pass			
	5825	4.53	30	Pass			



Page 19 of 102

8. 6DB&26DB BANDWIDTH MEASUREMENT

7.1 MEASUREMENT LIMITS


The minimum 6dB bandwidth shall be at least 500 kHz.

8.2 MEASUREMENT PROCEDURE

- 7.2.1 -6dB bandwidth (DTS bandwidth) Test setting:
 - 1. Connect EUT RF output port to the Spectrum Analyzer.
 - 2. Set the EUT Work on operation frequency individually.
 - 3. Set RBW = 100kHz.
 - 4. Set the VBW ≥3*RBW. Detector = Peak. Trace mode = max hold.
 - 5. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
- 7.2.2 99% occupied bandwidth test setting:
 - 1. Connect EUT RF output port to the Spectrum Analyzer.
 - 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
 - 3. Set Span = approximately 1.5 to 5 times the OBW, centered on a nominal channel
 The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video
 bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
 - 4. Set SPA Trace 1 Max hold, then View.
- 7.2.3 -26dB Bandwidth test setting:
 - 1. Set RBW = approximately 1% of the emission bandwidth.
 - 2. Set the VBW > RBW.
 - 3. Detector = Peak.
 - 4. Trace mode = max hold.
 - 5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

Note: The EUT was tested according to KDB 789033 for compliance to FCC 47CFR 15.407 requirements.

8.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

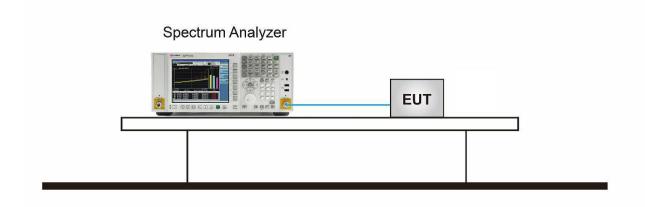




Page 20 of 102

8.4 MEASUREMENT RESULTS

Test	Test Data of Occupied Bandwidth and -26dB Bandwidth for band 5.15-5.25 GHz						
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-26dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail		
	5180	16.623	29.763	N/A	Pass		
802.11a	5200	16.533	29.403	N/A	Pass		
	5240	16.975	30.000	N/A	Pass		
	5180	17.626	29.028	N/A	Pass		
802.11n20	5200	17.581	29.134	N/A	Pass		
	5240	17.915	30.000	N/A	Pass		


Test Data of Occupied Bandwidth and -26dB Bandwidth for band 5.25-5.35 GHz						
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-26dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail	
802.11a	5260	16.621	29.840	N/A	Pass	
	5300	16.832	29.978	N/A	Pass	
	5320	16.939	30.000	N/A	Pass	
802.11n20	5260	17.691	29.950	N/A	Pass	
	5300	17.928	30.000	N/A	Pass	
	5320	17.948	30.000	N/A	Pass	

Test Data of Occupied Bandwidth and -26dB Bandwidth for band 5.47-5.725 GHz							
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-26dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail		
802.11a	5500	16.890	28.804	N/A	Pass		
	5600	16.562	27.615	N/A	Pass		
	5700	16.891	29.104	N/A	Pass		
802.11n20	5500	17.762	28.597	N/A	Pass		
	5600	17.575	24.766	N/A	Pass		
	5700	17.768	28.199	N/A	Pass		







Test Data of Occupied Bandwidth and DTS Bandwidth for band 5.725-5.85 GHz							
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	DTS Bandwidth (MHz)	DTS Limits (MHz)	Pass or Fail		
802.11a	5745	16.840	15.073	0.5	Pass		
	5785	16.869	15.015	0.5	Pass		
	5825	16.813	13.809	0.5	Pass		
802.11n20	5745	17.879	15.094	0.5	Pass		
	5785	17.883	15.028	0.5	Pass		
	5825	17.957	15.118	0.5	Pass		







Test Graphs of Occupied Bandwidth and -26dB Bandwidth for band 5.15-5.25 GHz

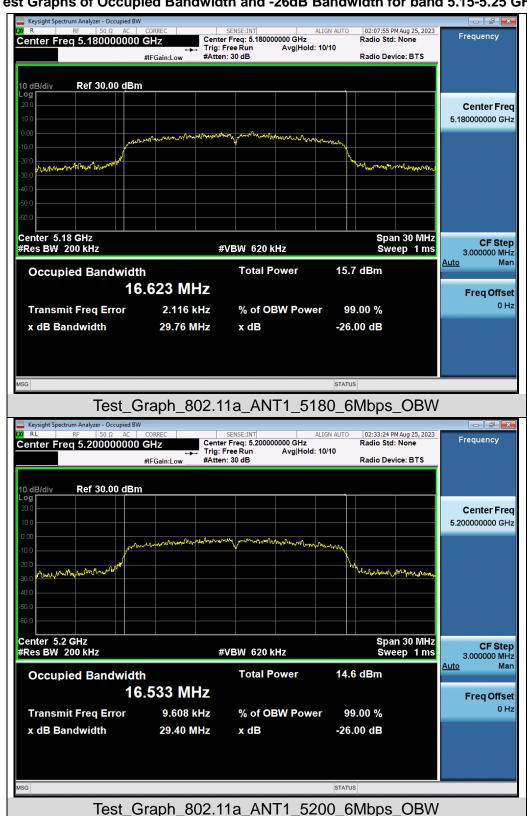







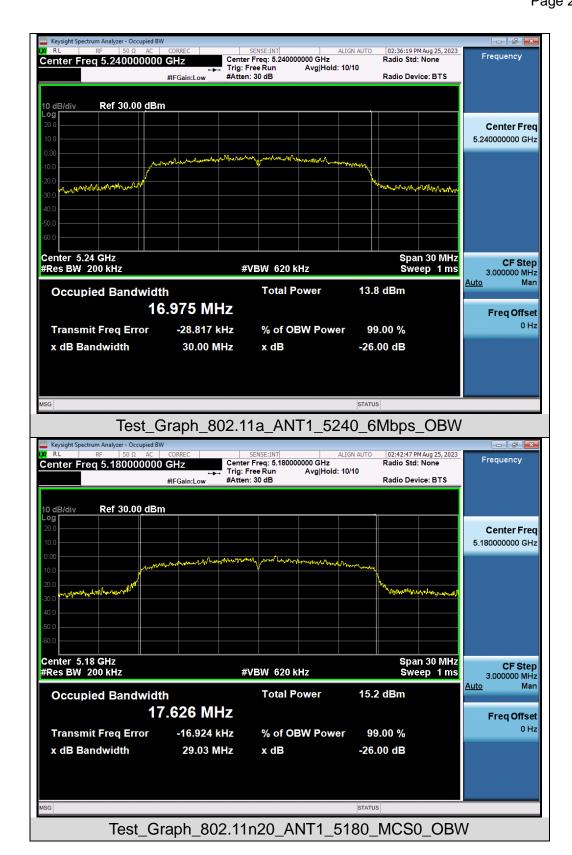






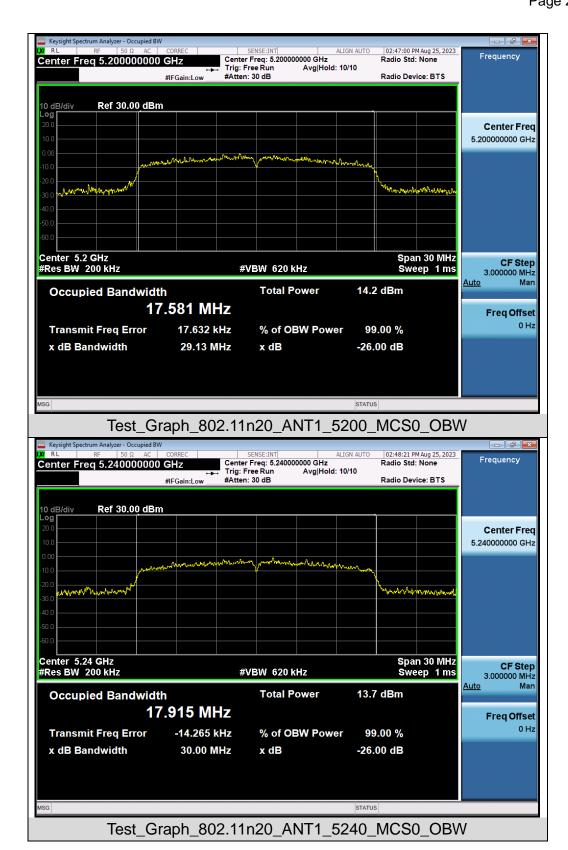








Test Graphs of Occupied Bandwidth and -26dB Bandwidth for band 5.25-5.35 GHz

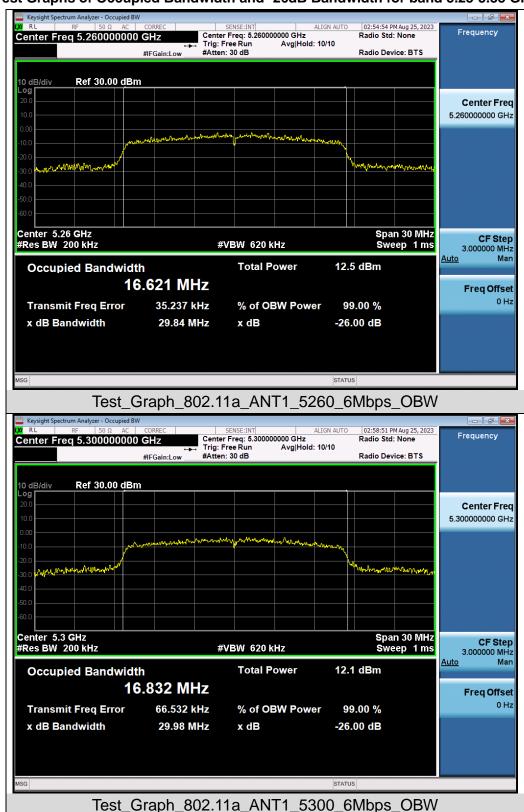






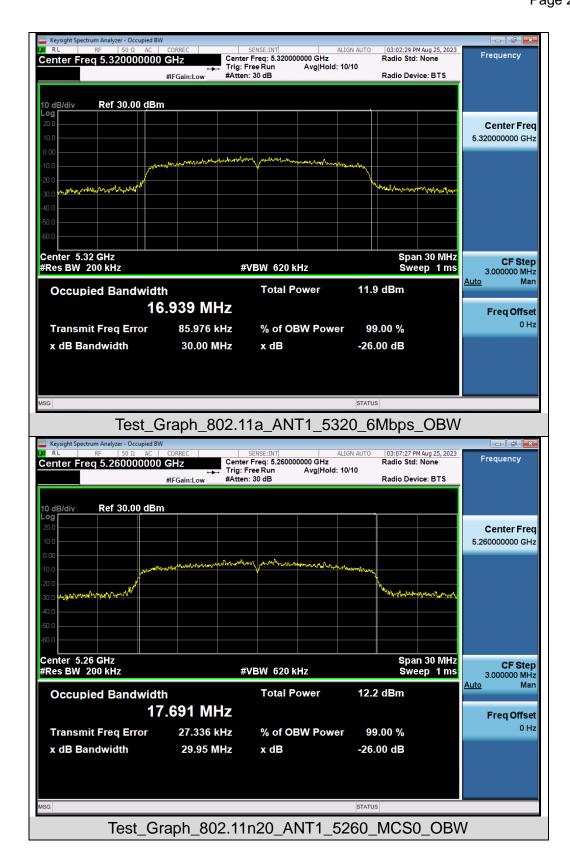






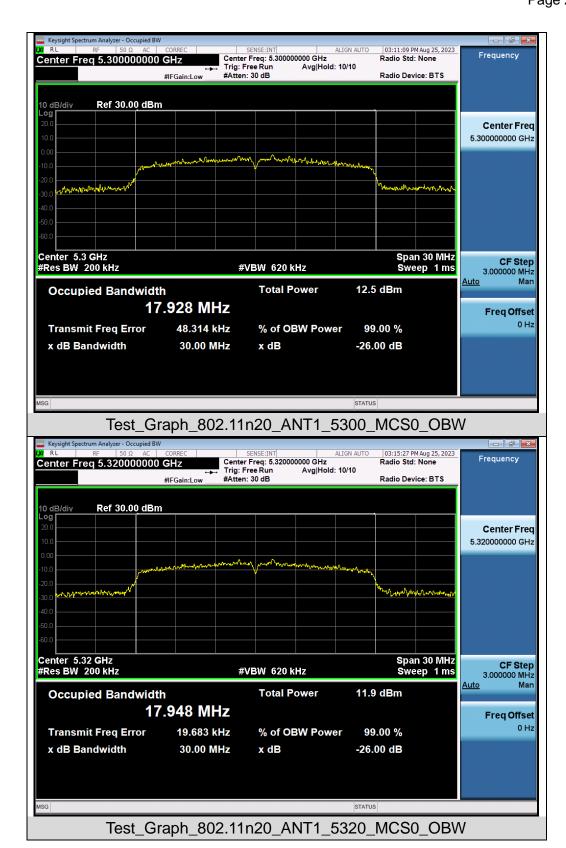



Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/






Test Graphs of Occupied Bandwidth and -26dB Bandwidth for band 5.47-5.725 GHz

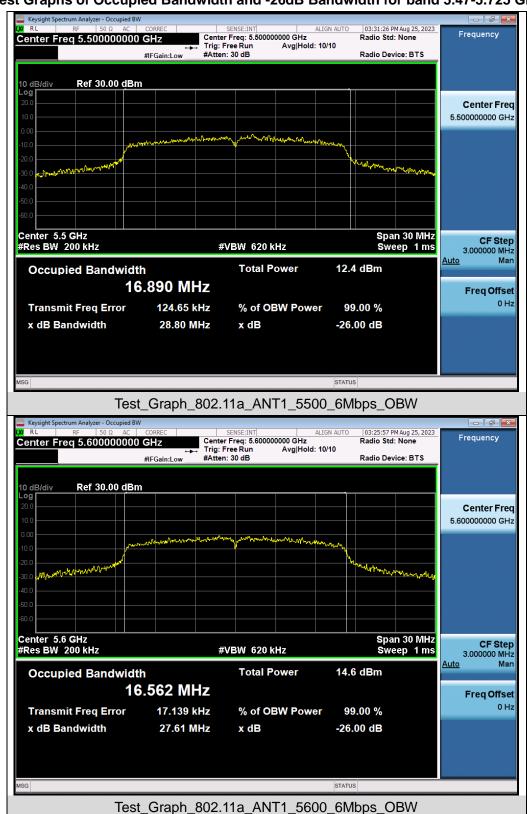







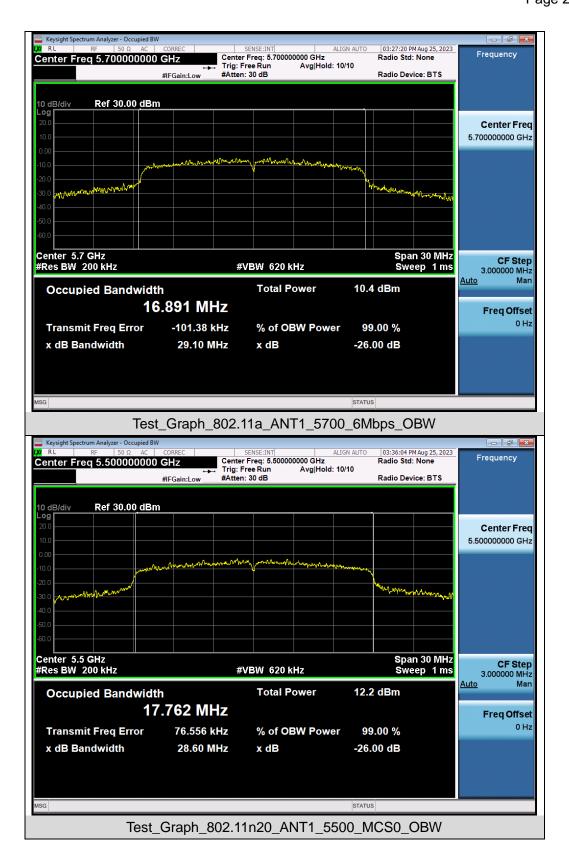


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





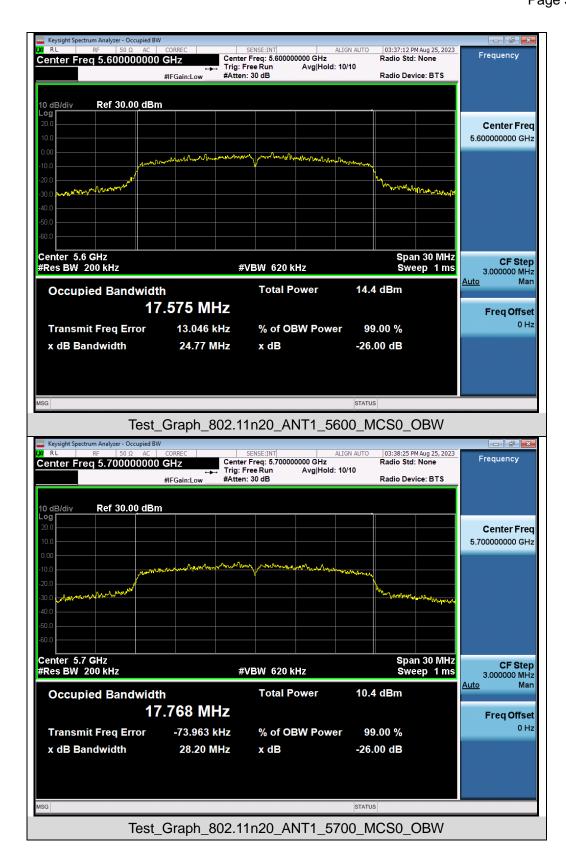



Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/






Test Graphs of Occupied Bandwidth for band 5.725-5.85 GHz

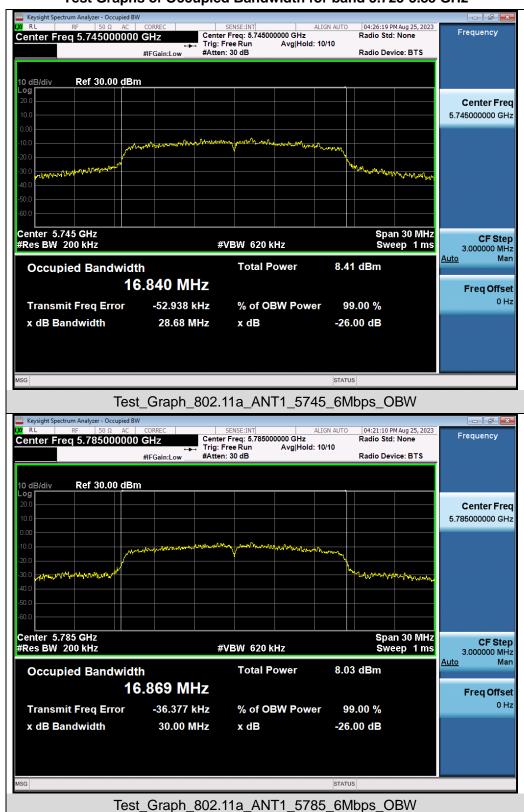







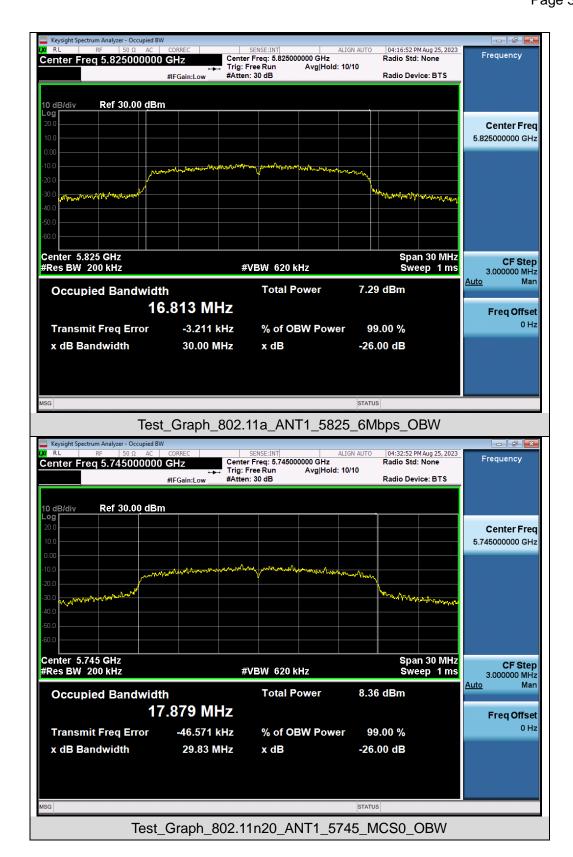


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





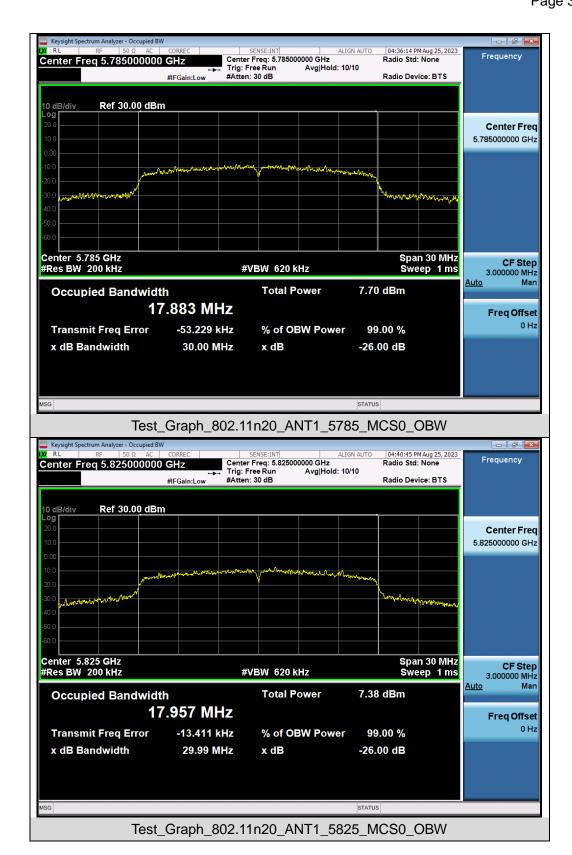



Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/






Test Graphs of DTS Bandwidth for band 5.725-5.85 GHz

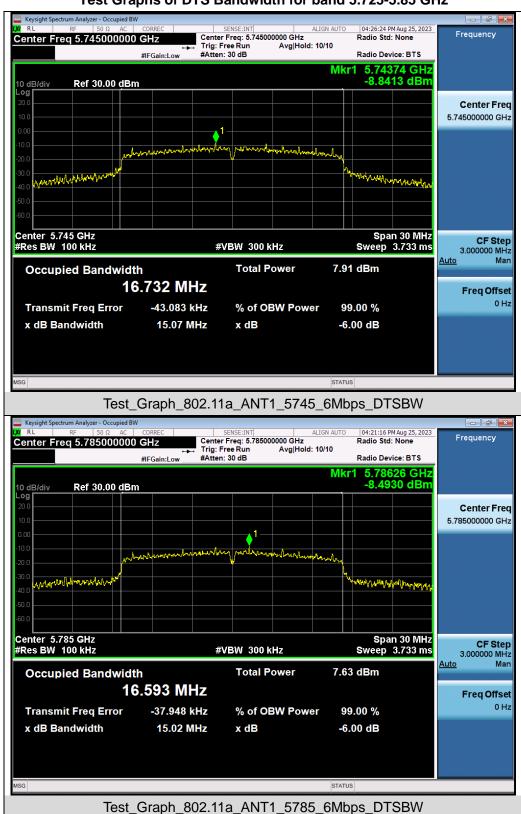







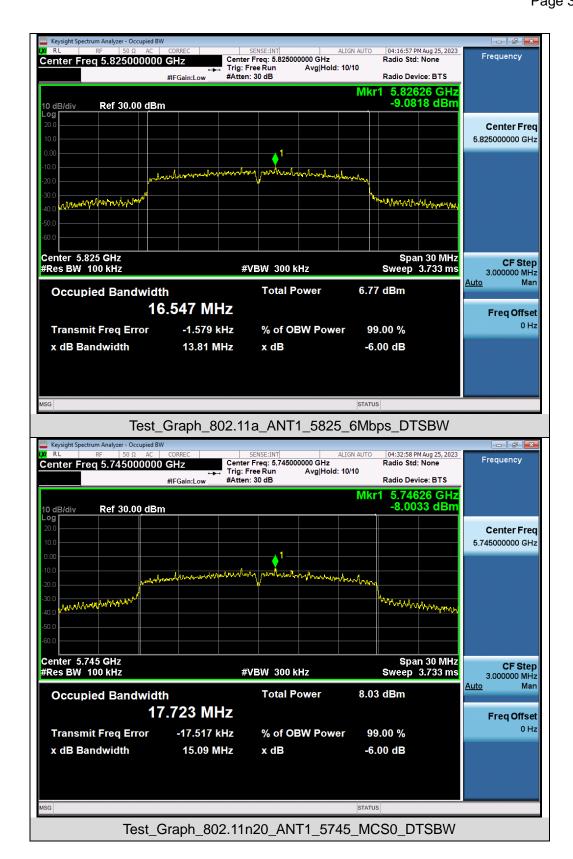

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





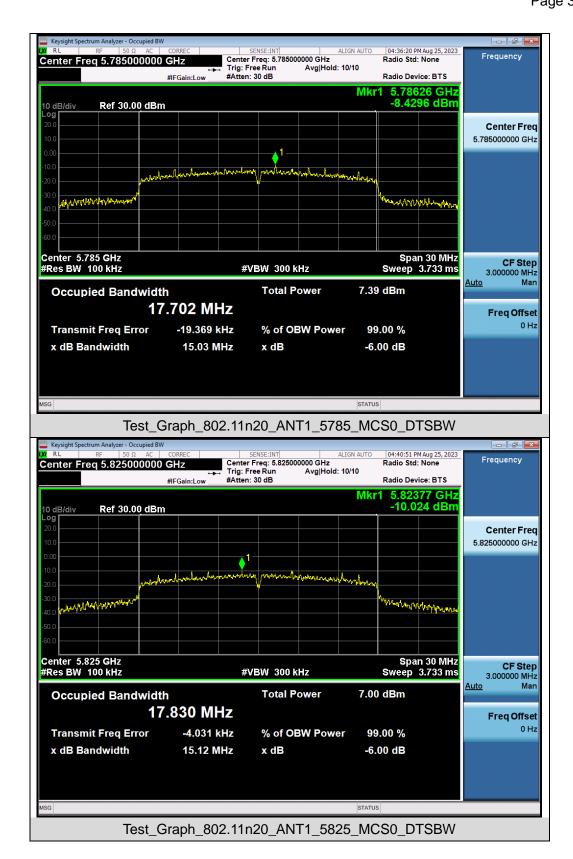

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



9. POWER SPECTRAL DENSITY MEASUREMENT


9.1 MEASUREMENT LIMITS

Operation Band	EUT Category		LIMIT
		Outdoor Access Point	17dBm/ MHz
U-NII-1		Fixed point-to-point Access Point	17dBm/ MHz
O-IVII-1		Indoor Access Point	17dBm/ MHz
		Client devices	11dBm/ MHz
U-NII-2A	/		11dBm/ MHz
U-NII-2C	/		11dBm/ MHz
U-NII-3	1		30 dBm/500kHz

9.2 MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyze.
- 2. Span was set to encompass the entire 26dB EBW of the signal.
- 3. RBW = 1MHz.
- 4. If measurement bandwidth of Maximum PSD is specified in 500 kHz, RBW = 100KHz
- 5. Set VBW≥[3×RBW].
- 6. Sweep Time=Auto couple.
- 7. Detector function=RMS (i.e., power averaging).
- 8. Trace average at least 100 traces in power averaging (rms) mode.
- 9. When the measurement bandwidth of Maximum PSD is specified in 100 kHz, add a constant factor 10*log(500kHz/100kHz) = 6.99 dB to the measured result.
- 10. Determine according to the duty cycle of the equipment: when it is less than 98%, follow the steps below.
- 11. Add [10 log (1/D)], where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add [10 log (1/0.25)] = 6 dB if the duty cycle is 25%.
- 12. Record the test results in the report.

9.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

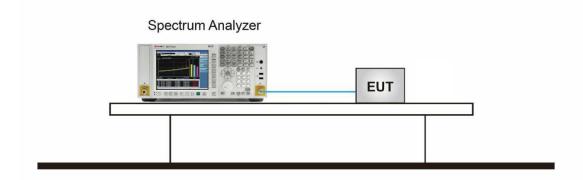



Report No.: AGC06662230301FR02

Page 38 of 102

9.4 MEASUREMENT RESULT

J <u></u>	A MILAGOREMENT REGGET					
Test Data of Conducted Output Power Density for band 5.15-5.25 GHz						
Test Mode	Test Channel (MHz)	Average Power Density (dBm/MHz)	Limits (dBm/MHz)	Pass or Fail		
802.11a	5180	1.133	11	Pass		
	5200	0.365	11	Pass		
	5240	-0.670	11	Pass		
802.11n20	5180	0.286	11	Pass		
	5200	-0.090	11	Pass		
	5240	-1.373	11	Pass		

Test Data of Conducted Output Power Density for band 5.25-5.35 GHz					
Test Mode	Test Channel (MHz)	Average Power Density (dBm/MHz)	Limits (dBm/MHz)	Pass or Fail	
	5260	-2.154	11	Pass	
802.11a	5300	-2.266	11	Pass	
	5320	-2.411	11	Pass	
802.11n20	5260	-2.102	11	Pass	
	5300	-2.284	11	Pass	
	5320	-2.756	11	Pass	

Test Data of Conducted Output Power Density for band 5.47-5.725 GHz					
Test Mode	Test Channel (MHz)	Average Power Density (dBm/MHz)	Limits (dBm/MHz)	Pass or Fail	
	5500	-2.082	11	Pass	
802.11a	5600	-1.979	11	Pass	
	5700	-4.389	11	Pass	
802.11n20	5500	-2.321	11	Pass	
	5600	-0.478	11	Pass	
	5700	-4.553	11	Pass	




Report No.: AGC06662230301FR02

Page 39 of 102


Test Data of Conducted Output Power Density for band 5.725-5.85 GHz					
Test Mode	Test Channel (MHz)	Average Power Density (dBm/100kHz)	Average Power Density (dBm/500kHz)	Limits (dBm/500kHz)	Pass or Fail
	5745	-15.010	-8.020	30	Pass
802.11a	5785	-15.415	-8.425	30	Pass
	5825	-16.446	-9.456	30	Pass
	5745	-15.086	-8.096	30	Pass
802.11n20	5785	-14.722	-7.732	30	Pass
	5825	-14.122	-7.132	30	Pass


Note:1. Power density(dBm/500kHz) = Power density(dBm/100kHz) +10*log(500/100).






Test Graphs of Conducted Output Power Spectral Density for band 5.15-5.25 GHz

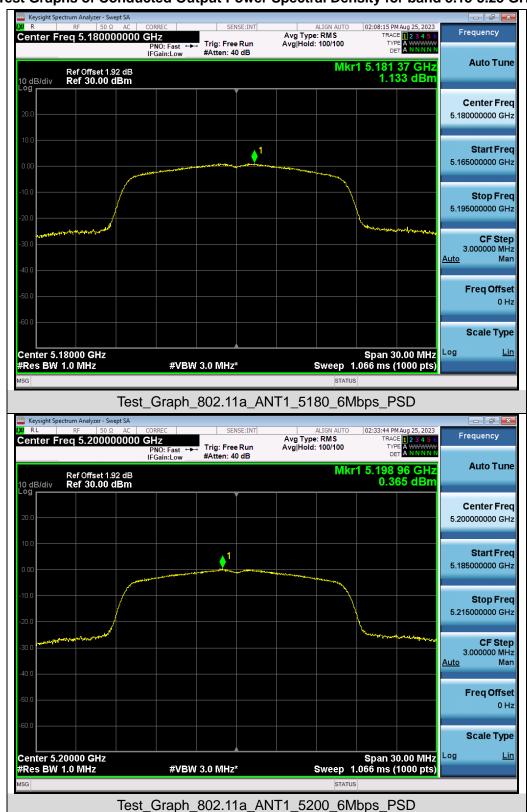














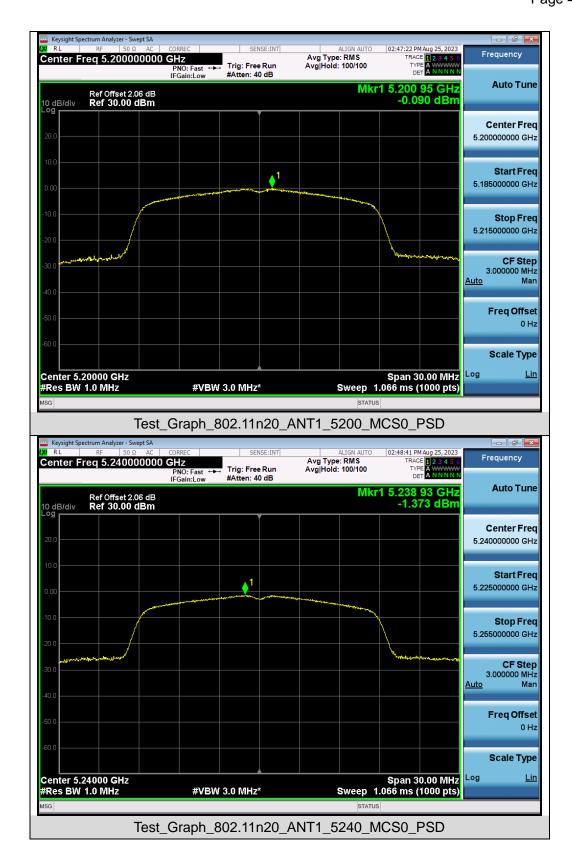







Test Graphs of Conducted Output Power Spectral Density for band 5.25-5.35 GHz

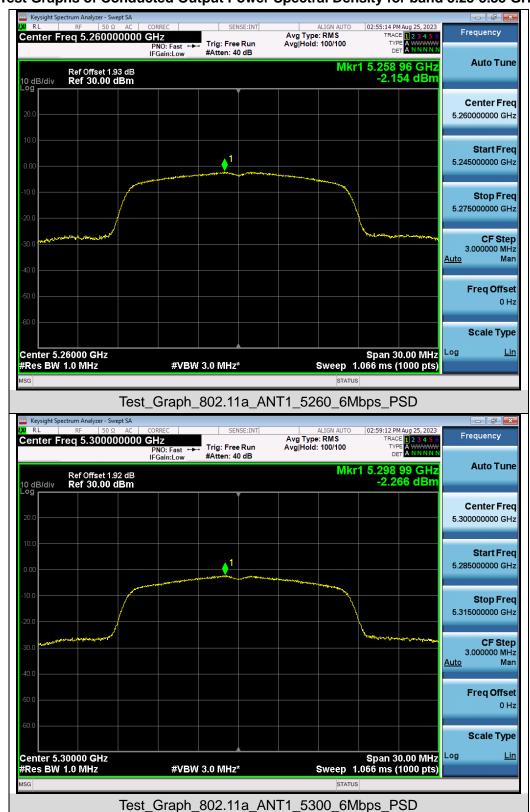






















Test Graphs of Conducted Output Power Spectral Density for band 5.47-5.725 GHz

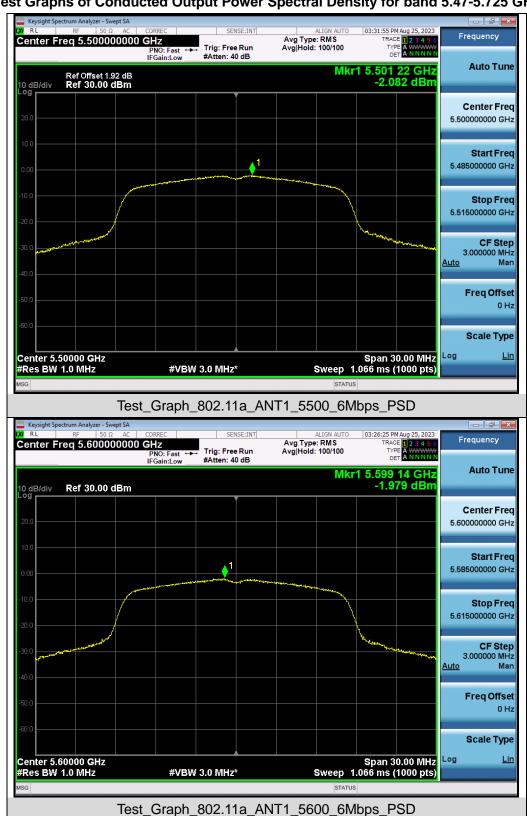







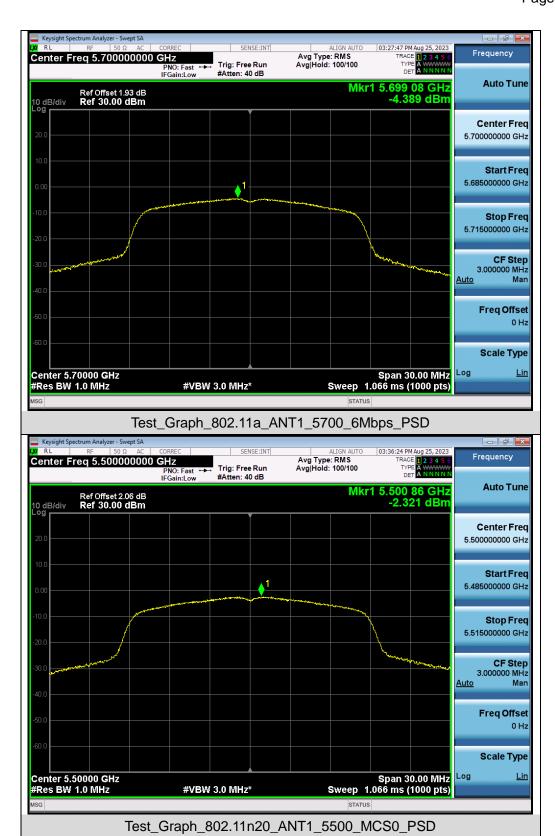






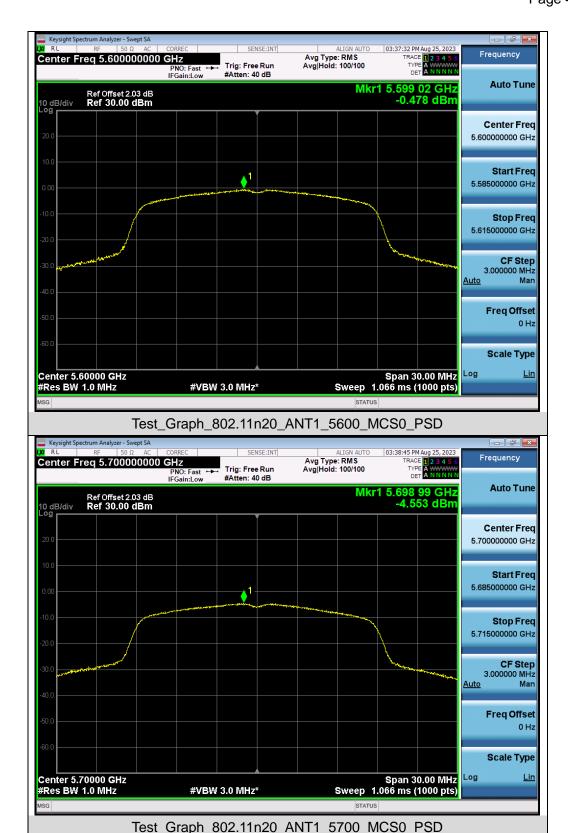








Test Graphs of Conducted Output Power Spectral Density for band 5.725-5.85 GHz

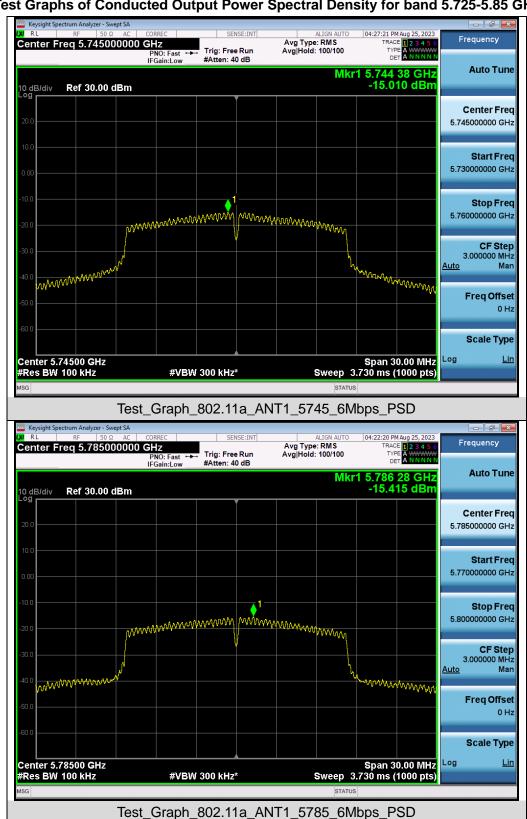






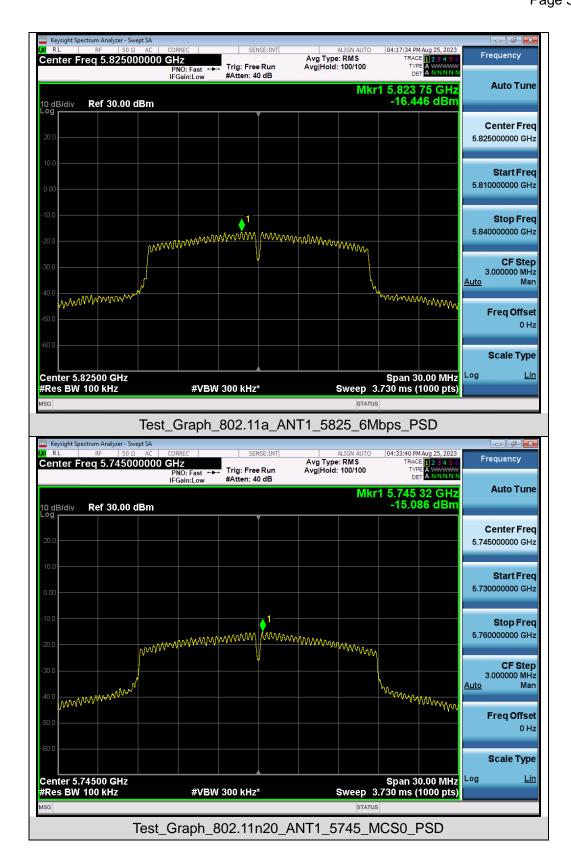





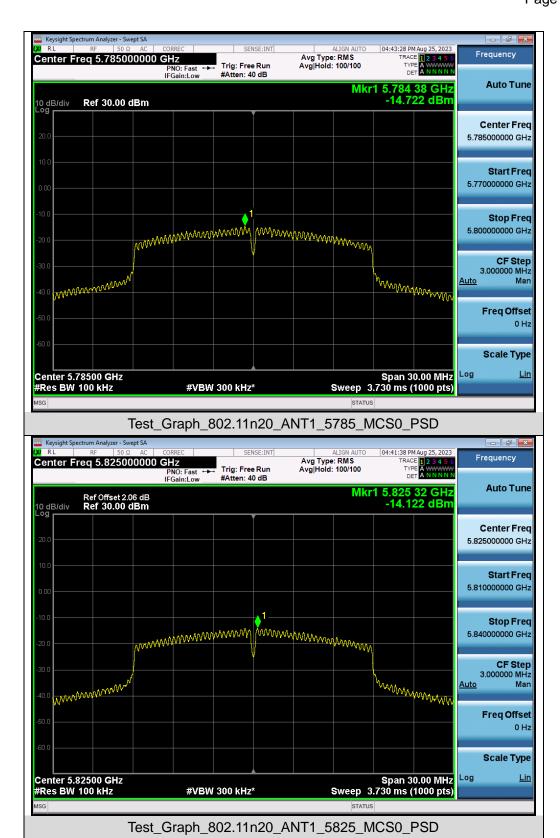



10. CONDUCTED SPURIOUS EMISSION

10.1 MEASUREMENT LIMIT

	Applicable to	Limit		
Restricted bands	789033 D02 General UNII Test	Field strength at 3m (dBuV/m)		
	Procedures New Rules v02r01	PK: 74	AV: 54	
	Applicable to	EIRP Limit (dBm/MHz)	Equivalent field Strength at 3m (dBuV/m)	
Out of the	FCC 15.407(b)(1)		PK: 68.2	
restricted bands	15.407(b)(2)	PK: -27		
	15.407(b)(3)			
	15.407(b)(4)	See Note 2		

Note 1: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:


E =
$$\frac{1000000 \sqrt{30 P}}{2}$$
 µV/m, where P is the eirp (Watts).

Note 2: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

10.2 MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer.
- 2. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
- 3. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.
- 4. RBW = 100 kHz; VBW= 300 kHz; Sweep = auto; Detector function = peak.(Test frequency below 1GHz)
- 5. RBW = 1 MHz; VBW= 3 MHz; Sweep = auto; Detector function = peak.(Test frequency Above 1GHz)
- 6. Set SPA Trace 1 Max hold, then View.
- 7. Mark the maximum useless stray point and compare it with the limit value to record the result.


10.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

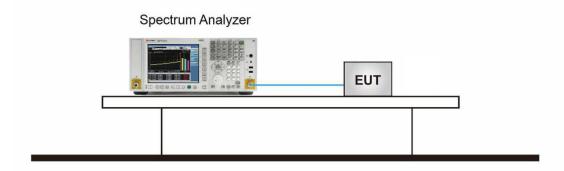




10.4 MEASUREMENT RESULTS

Test Graphs of Spurious Emissions outside of the 5.15-5.35 GHz band for transmitters operating in the 5.15-5.25 GHz band

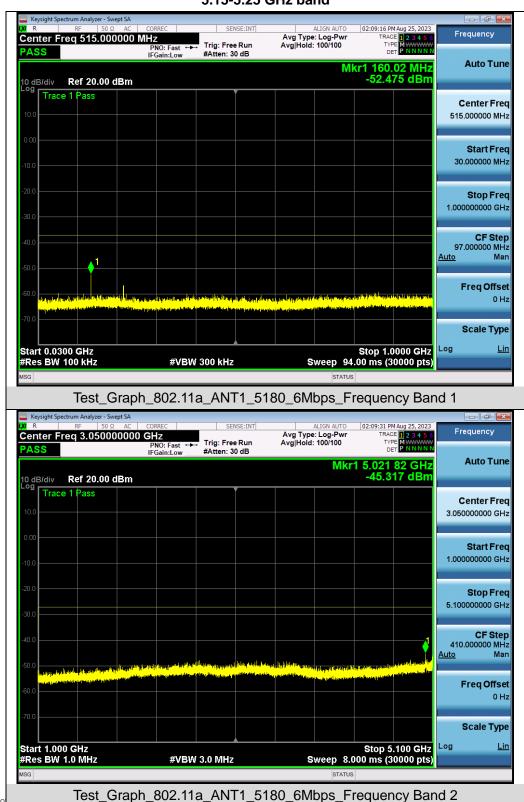


Any report having no stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





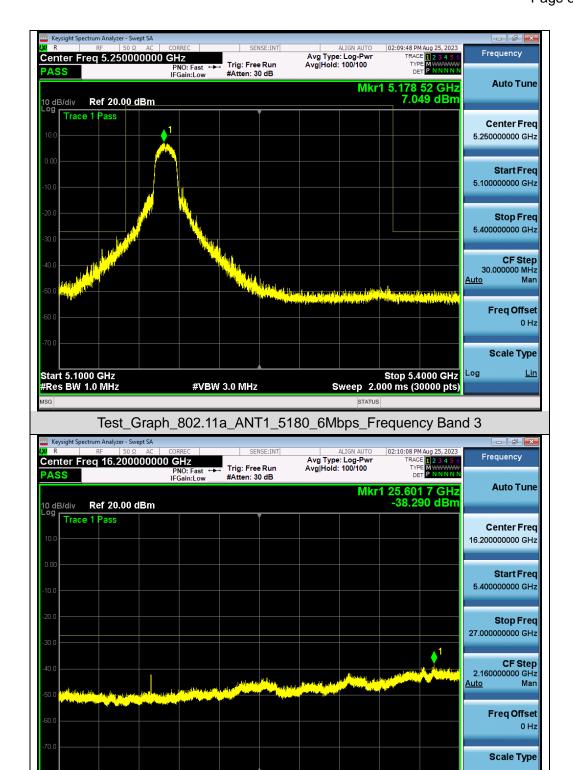


Test_Graph_802.11a_ANT1_5180_6Mbps_Frequency Band 4

#VBW 3.0 MHz


Stop 27.00 GHz Sweep 56.00 ms (30000 pts)


Log

Start 5.40 GHz #Res BW 1.0 MHz







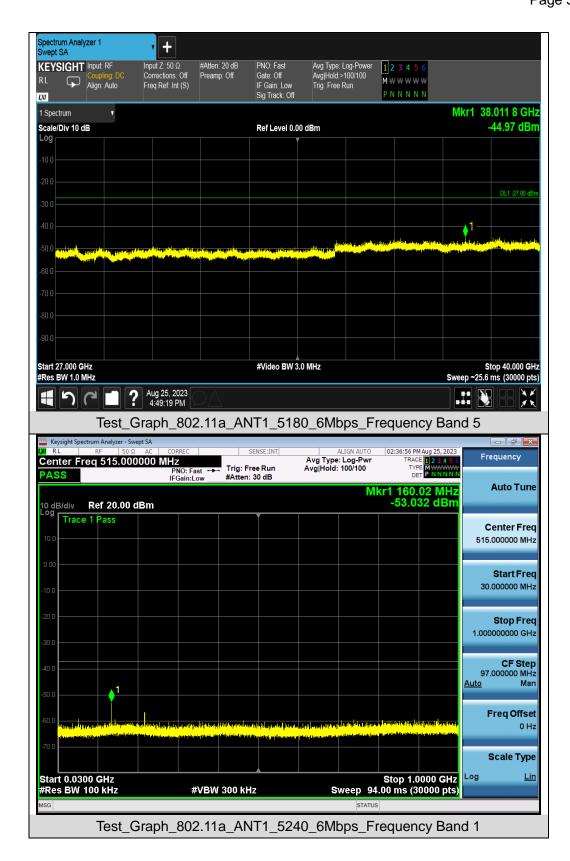







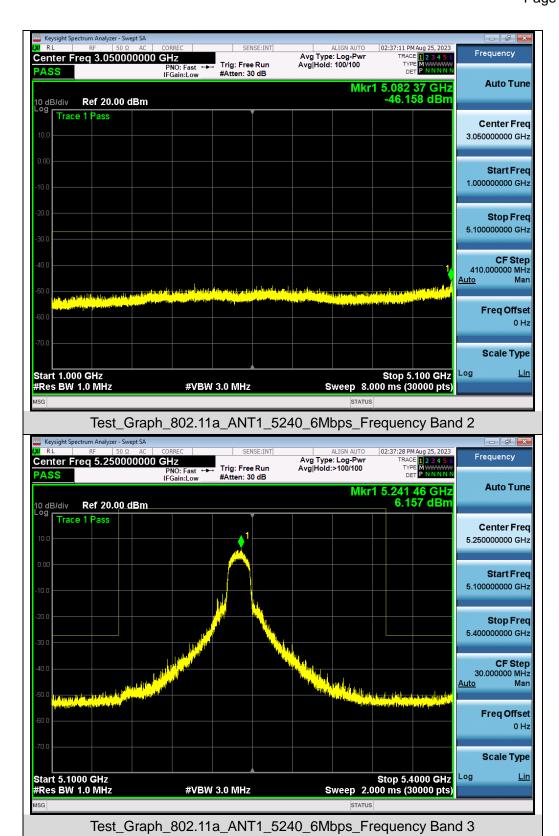





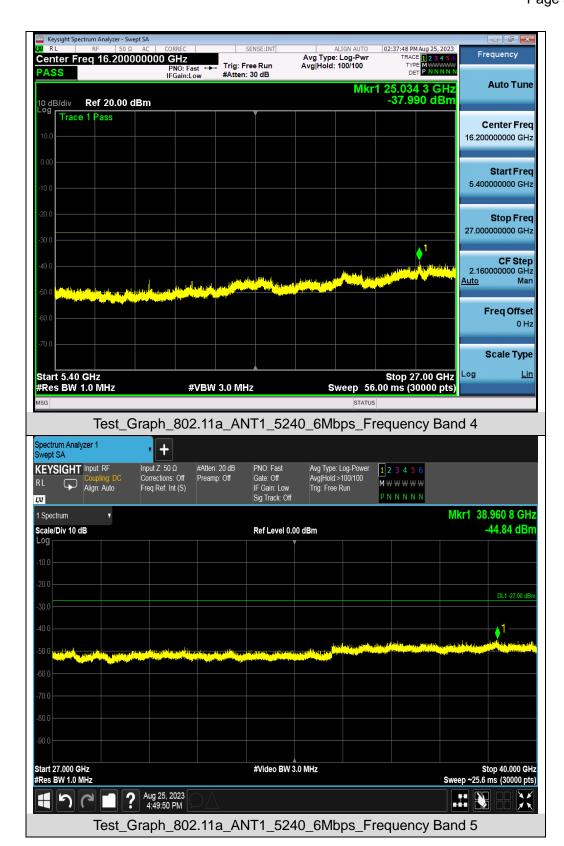





Test Graphs of Spurious Emissions outside of the 5.15-5.35 GHz band for transmitters operating in the 5.25-5.35 GHz band

