


103.5

18

3

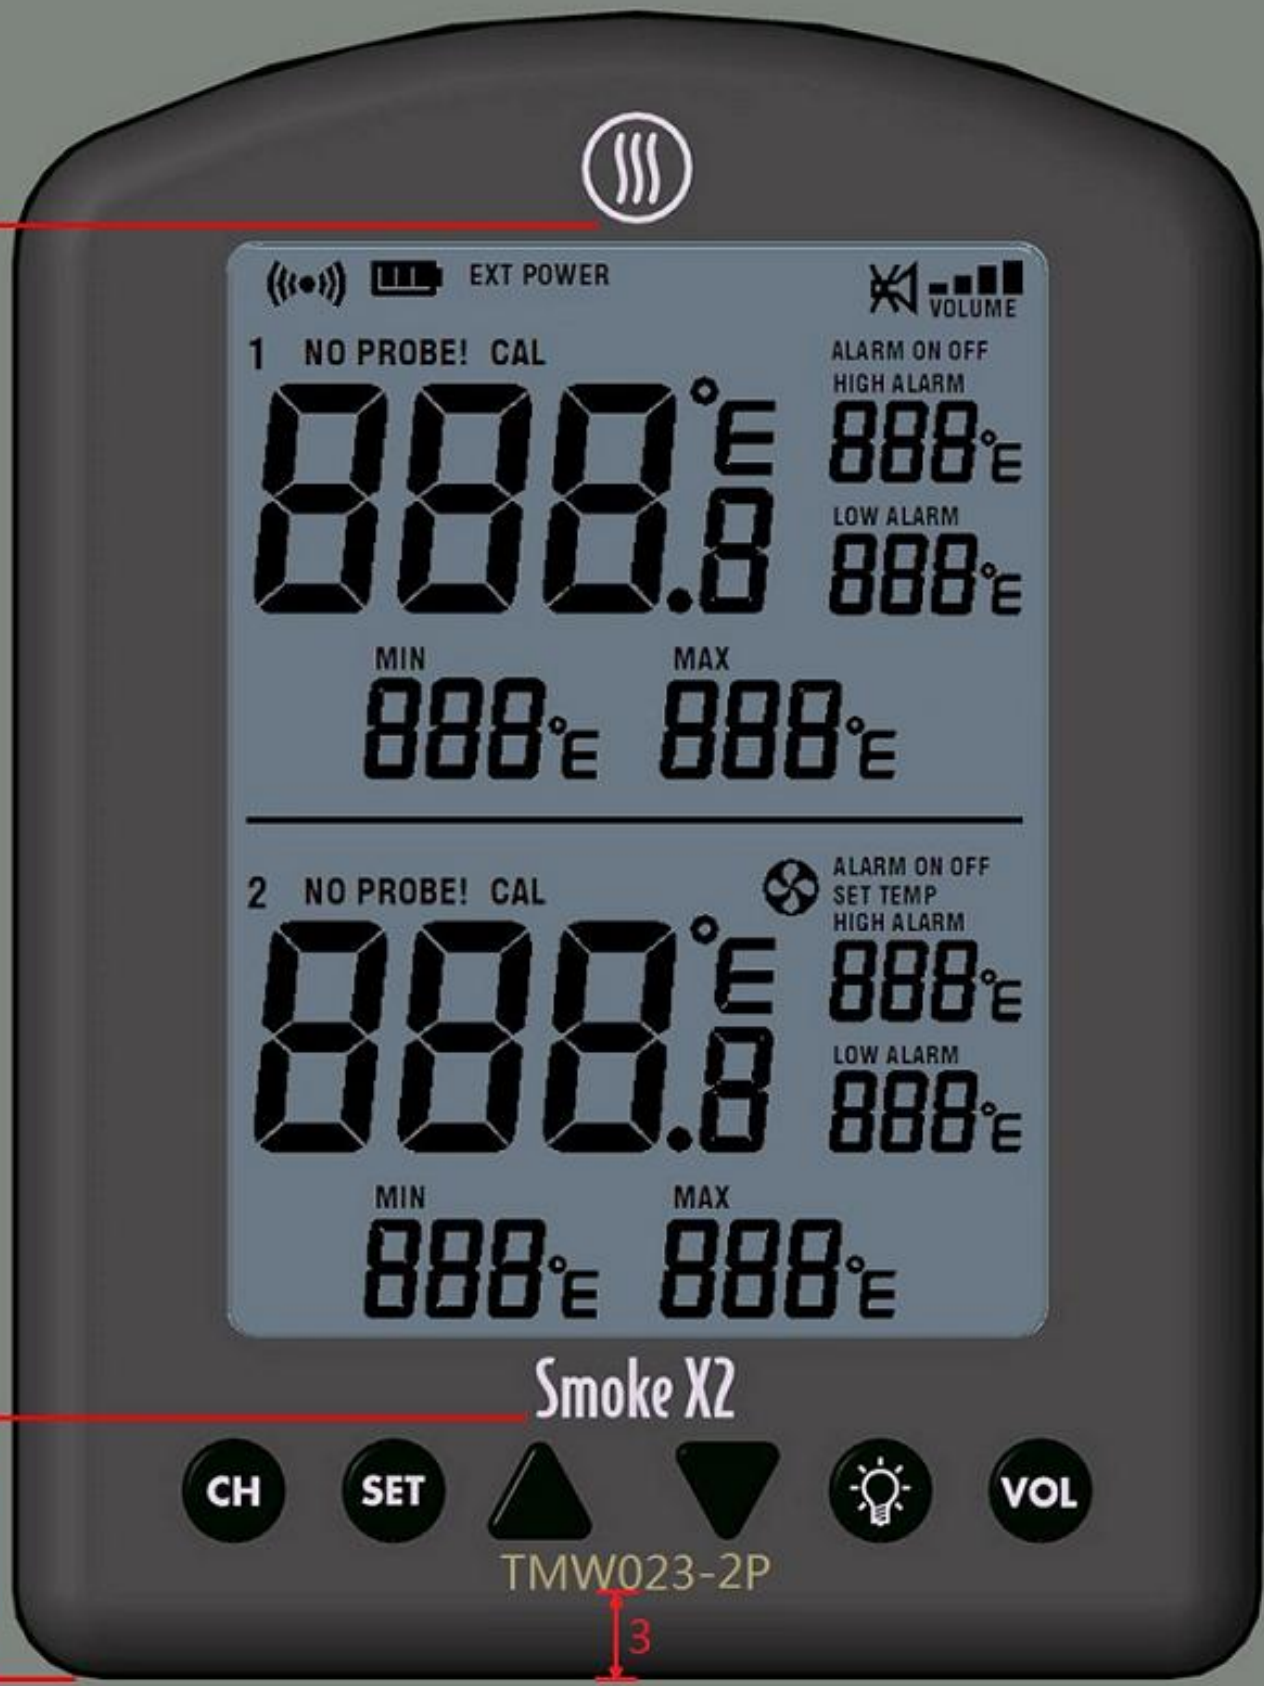

EXT POWER



VOLUME

1 NO PROBE! CAL

ALARM ON OFF
HIGH ALARM

88.8°C

88.8°C

LOW ALARM
88.8°C

MIN

MAX

88.8°C

88.8°C

2 NO PROBE! CAL



ALARM ON OFF
SET TEMP

88.8°C

88.8°C

LOW ALARM
88.8°C

MIN

MAX

88.8°C

88.8°C

Smoke X2

CH

SET



VOL

TMW023-2P



ON
OFF

°C/°F

CAL

(((•)))

1919L090001

FCC ID: 2A167-S2T
IC: 22116-S2T



ThermoWorks

www.thermoworks.com

Designed in Utah. Assembled in China.



93

68.5