



FCC RADIO TEST REPORT

FCC ID : N7NEM75T
Equipment : Radio Module
Brand Name : AirPrime
Model Name : EM7590
Applicant : Sierra Wireless, Inc.
13811 Wireless Way, Richmond, BC V6V 3A4 Canada
Manufacturer : Sierra Wireless, Inc.
13811 Wireless Way, Richmond, BC V6V 3A4 Canada
Standard : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)

The product was received on Apr. 25, 2022 and testing was performed from May 04, 2022 to May 11, 2022. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

| | |
|--|-----------|
| History of this test report..... | 3 |
| Summary of Test Result..... | 4 |
| 1 General Description | 5 |
| 1.1 Product Feature of Equipment Under Test | 5 |
| 1.2 Modification of EUT | 5 |
| 1.3 Testing Location | 6 |
| 1.4 Applicable Standards | 6 |
| 2 Test Configuration of Equipment Under Test | 7 |
| 2.1 Test Mode..... | 7 |
| 2.2 Connection Diagram of Test System | 7 |
| 2.3 Support Unit used in test configuration | 8 |
| 2.4 Measurement Results Explanation Example | 8 |
| 2.5 Frequency List of Low/Middle/High Channels | 8 |
| 3 Conducted Test Result | 9 |
| 3.1 Measuring Instruments..... | 9 |
| 3.2 Conducted Output Power | 10 |
| 3.3 Peak-to-Average Ratio | 11 |
| 3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement..... | 12 |
| 3.5 Conducted Band Edge | 13 |
| 3.6 Conducted Spurious Emission | 14 |
| 3.7 Frequency Stability | 15 |
| 4 Radiated Test Items | 16 |
| 4.1 Measuring Instruments..... | 16 |
| 4.2 Test Setup | 16 |
| 4.3 Test Result of Radiated Test..... | 17 |
| 4.4 Field Strength of Spurious Radiation Measurement | 18 |
| 5 List of Measuring Equipment..... | 19 |
| 6 Uncertainty of Evaluation | 21 |
| Appendix A. Test Results of Conducted Test | |
| Appendix B. Test Results of Radiated Test | |
| Appendix C. Test Setup Photographs | |



History of this test report

| Report No. | Version | Description | Issue Date |
|------------|---------|-------------------------|---------------|
| FG242018A | 01 | Initial issue of report | Aug. 09, 2022 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

Summary of Test Result

| Report Clause | Ref Std. Clause | Test Items | Result (PASS/FAIL) | Remark |
|---------------|---|---|--------------------|--|
| 3.2 | §2.1046 | Conducted Output Power | Pass | - |
| 3.3 | §24.232 (d) | Peak-to-Average Ratio | Pass | - |
| 3.4 | §2.1049 §22.917 (b) §24.238 (b) §27.53 (g) | Occupied Bandwidth (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV) | Pass | - |
| 3.5 | §2.1051 §22.917 (a) §24.238 (a) §27.53 (g) | Band Edge Measurement (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV) | Pass | - |
| 3.6 | §2.1051 §22.917 (a) §24.238 (a) §27.53 (g) | Conducted Emission (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV) | Pass | - |
| 3.7 | §2.1055 §22.355 §24.235 §27.54 | Frequency Stability Temperature & Voltage | Pass | - |
| 4.4 | §2.1053 §22.917 (a) §24.238 (a) §27.53 (h) | Field Strength of Spurious Radiation (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV) | Pass | 36.83 dB under the limit at 2480.000 MHz |

Declaration of Conformity:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
- The measurement uncertainty please refer to this report "Uncertainty of Evaluation".

Comments and Explanations:

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Avis Chuang

Report Producer: Yimin Ho



1 General Description

1.1 Product Feature of Equipment Under Test

WCDMA/LTE, and GNSS.

Remark:

1. The EUT's information above is declared by manufacturer. Please refer to Comments and Explanations in report summary.
2. Maximum allow antenna Gain : refer MPE Report FA242018.

1.2 Modification of EUT

No modifications made to the EUT during the testing.



1.3 Testing Location

| | | |
|------------------------------|--|--------------------------------|
| Test Site | Sporton International Inc. EMC & Wireless Communications Laboratory | |
| Test Site Location | No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978 | |
| Test Site No. | Sporton Site No. | |
| | TH03-HY | 03CH07-HY |
| Test Engineer | Nina Cheng | Jesse Wang, Stan Hsieh, Ken Wu |
| Temperature (°C) | 21~22 | 23.6~25.7 |
| Relative Humidity (%) | 51~52 | 56.3~62.5 |

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in two angle (Ant. Horizontal and Ant. Vertical), and adjusting the measurement antenna orientation, following C63.26 exploratory test procedures and find Ant. Vertical as worst plane.

Radiated emissions were investigated as following frequency range:


1. 30 MHz to 9000 MHz for WCDMA Band V
2. 30 MHz to 18000 MHz for WCDMA Band IV
3. 30 MHz to 19100 MHz for WCDMA Band II

All modes, data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

| Test Modes | | |
|---------------|---------------------|---------------------|
| Band | Radiated TCs | Conducted TCs |
| WCDMA Band V | ■ RMC 12.2Kbps Link | ■ RMC 12.2Kbps Link |
| WCDMA Band II | ■ RMC 12.2Kbps Link | ■ RMC 12.2Kbps Link |
| WCDMA Band IV | ■ RMC 12.2Kbps Link | ■ RMC 12.2Kbps Link |

2.2 Connection Diagram of Test System

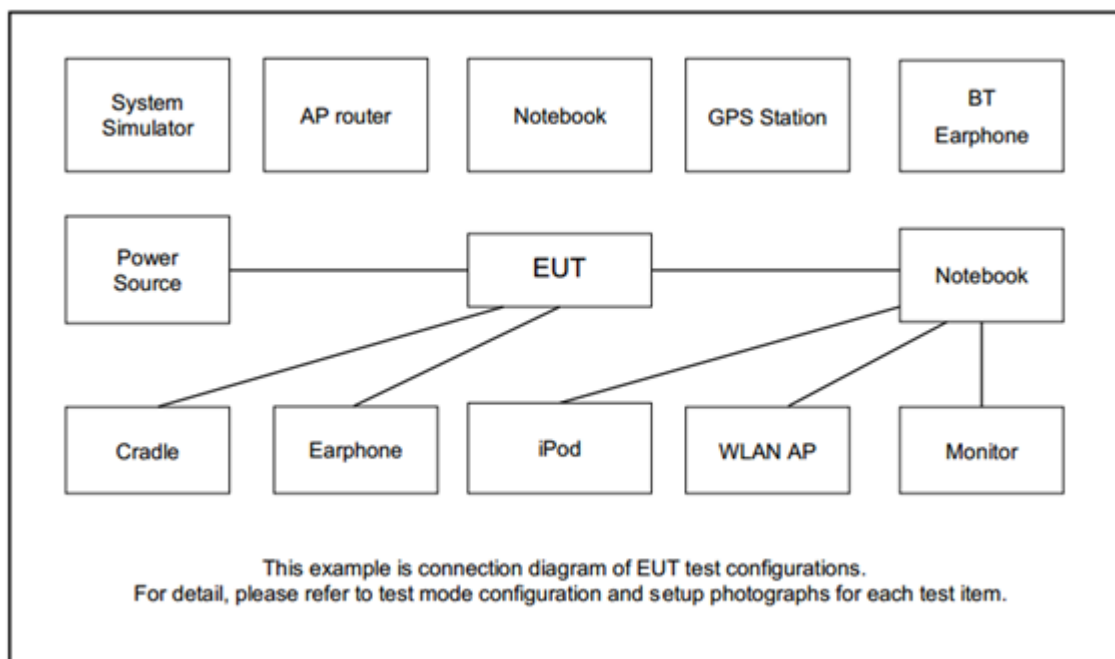



2.3 Support Unit used in test configuration

| Item | Equipment | Brand Name | Model No. | FCC ID | Data Cable | Power Cord |
|------|------------------|----------------------|----------------|--------|------------|-------------------|
| 1. | System Simulator | R&S | CMU 200 | N/A | N/A | Unshielded, 1.8 m |
| 2. | Antenna | PulseLarsen Antennas | SPDA24617/3900 | N/A | N/A | N/A |
| 3. | Fixture | Sierra Wireless | EM DevKit | N/A | N/A | N/A |

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10 dB attenuator.

Example:

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

| Frequency List | | | | |
|----------------|------------------------|--------|--------|---------|
| Band | Channel/Frequency(MHz) | Lowest | Middle | Highest |
| WCDMA Band V | Channel | 4132 | 4182 | 4233 |
| | Frequency | 826.4 | 836.4 | 846.6 |
| WCDMA Band II | Channel | 9262 | 9400 | 9538 |
| | Frequency | 1852.4 | 1880.0 | 1907.6 |
| WCDMA Band IV | Channel | 1312 | 1413 | 1513 |
| | Frequency | 1712.4 | 1732.6 | 1752.6 |

3 Conducted Test Result

3.1 Measuring Instruments


Please refer to the measuring equipment list in this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power



3.1.3 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

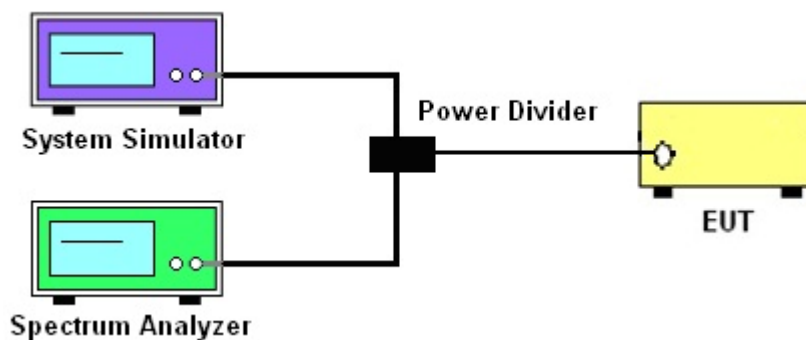

3.1.4 Frequency Stability

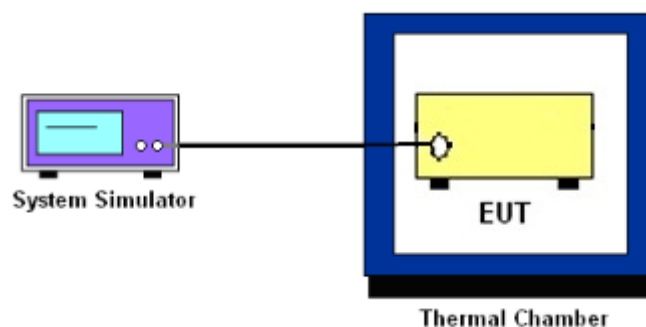

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power

3.2.1 Description of the Conducted Output Power

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.2.2 Test Procedures

1. The transmitter output port is connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select the lowest, middle, and the highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT is connected to spectrum analyzer and system simulator via a power divider.
2. Set EUT to transmit at maximum output power.
3. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
4. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer.
5. Record the maximum PAPR level associated with a probability of 0.1%.

3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT is connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency.
The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(This is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT is connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT is connected to the spectrum analyzer by an RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. The band edges of low and high channels for the highest RF powers are measured.
4. The RF fundamental frequency shall be excluded against the limit line in the operating frequency band.
5. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT is connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT is connected to the spectrum analyzer by an RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency is measured.
4. The conducted spurious emission for the whole frequency range is taken.
5. The RF fundamental frequency shall be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

22.355

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

24.235 & 27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT is set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature is decreased to -30°C and the EUT is stabilized before testing. Power is applied and the maximum change in frequency is recorded within one minute.
3. With power OFF, the temperature is raised in 10°C steps up to 50°C . The EUT is stabilized at each step for at least half an hour. Power is applied and the maximum frequency change is recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT is placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT is varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency is measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


Please refer to the measuring equipment list in this test report.

4.2 Test Setup


For radiated test below 30MHz

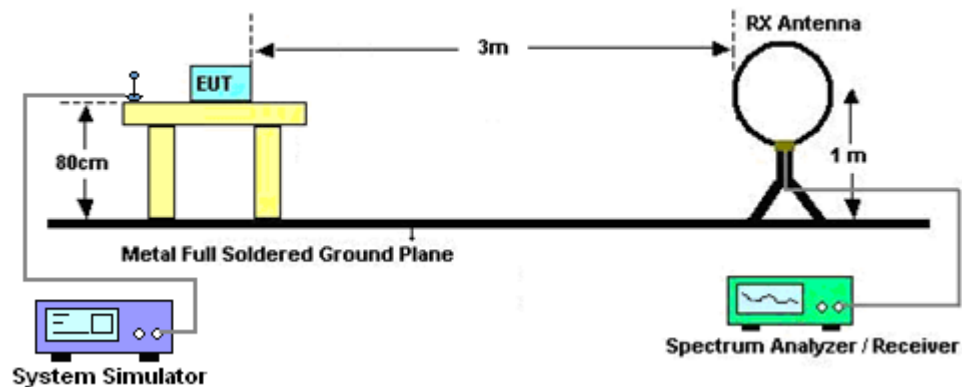


For radiated test from 30MHz to 1GHz

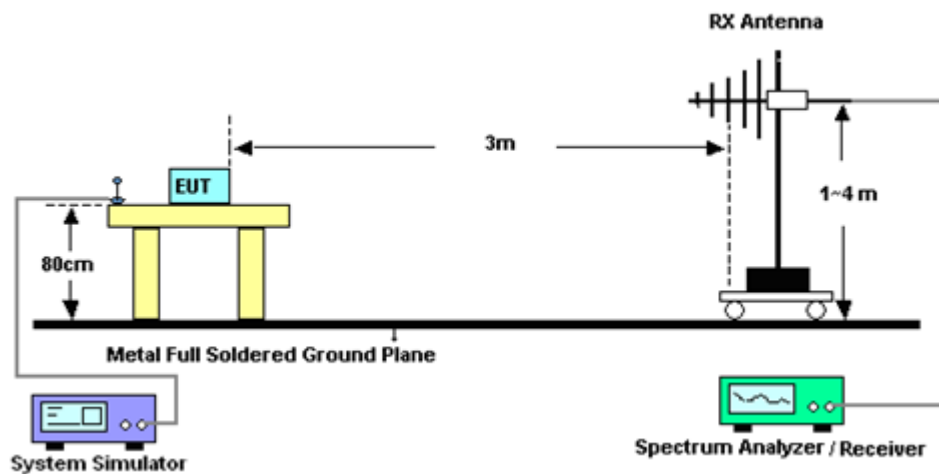

For radiated test from 1GHz to 18GHz

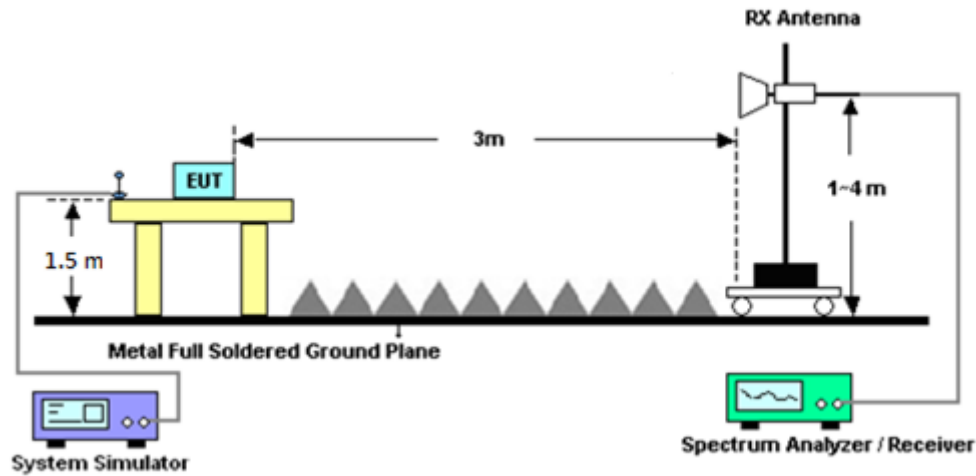

For radiated test above 18GHz

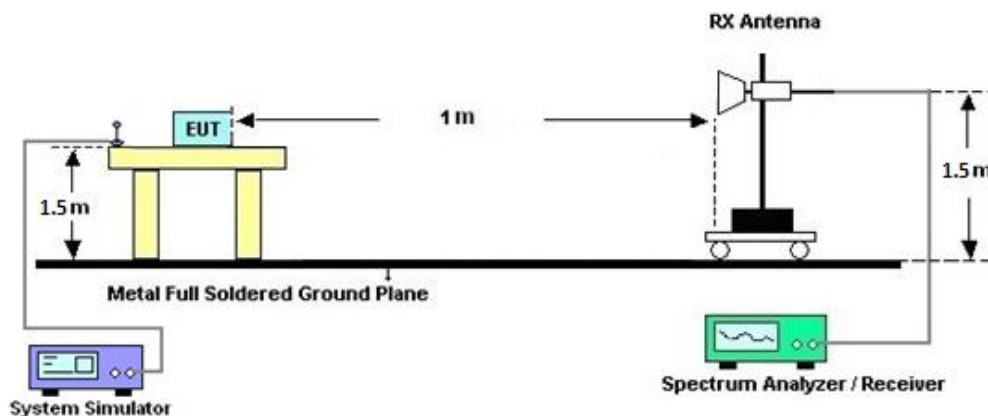

4.3 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

4.4 Field Strength of Spurious Radiation Measurement

4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT is placed on a rotatable wooden table 0.8 meters for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz above the ground.
2. The EUT is set 3 meters away from the receiving antenna, which is mounted on the antenna tower.
3. The table is rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1 MHz, VBW = 3 MHz, taking record of maximum spurious emission.
6. A horn antenna is substituted in place of the EUT and is driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Take the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency shall be excluded against the limit line in the operating frequency band.
13. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

| Instrument | Brand Name | Model No. | Serial No. | Characteristics | Calibration Date | Test Date | Due Date | Remark |
|---------------------------|-----------------|----------------------------|-------------|----------------------|------------------|----------------------------|---------------|-----------------------|
| Bilog Antenna | TESEQ | CBL 6111D & 00800N1D01N-06 | 35419 & 03 | 30MHz~1GHz | Apr. 24, 2022 | May 04, 2022~ May 11, 2022 | Apr. 23, 2023 | Radiation (03CH07-HY) |
| Double Ridge Horn Antenna | ESCO | 3117 | 00075962 | 1GHz ~ 18GHz | Dec. 03, 2021 | May 04, 2022~ May 11, 2022 | Dec. 02, 2022 | Radiation (03CH07-HY) |
| Loop Antenna | Rohde & Schwarz | HFH2-Z2 | 100315 | 9 kHz~30 MHz | Jan. 07, 2022 | May 04, 2022~ May 11, 2022 | Jan. 06, 2023 | Radiation (03CH07-HY) |
| Preamplifier | MITEQ | AMF-7D-0010 1800-30-10P | 1590075 | 1GHz~18GHz | Apr. 21, 2022 | May 04, 2022~ May 11, 2022 | Apr. 20, 2023 | Radiation (03CH07-HY) |
| Preamplifier | COM-POWER | PA-103A | 161241 | 10MHz~1GHz | Oct. 04, 2021 | May 04, 2022~ May 11, 2022 | Oct. 03, 2022 | Radiation (03CH07-HY) |
| Preamplifier | Agilent | 8449B | 3008A02362 | 1GHz~26.5GHz | Oct. 04, 2021 | May 04, 2022~ May 11, 2022 | Oct. 03, 2022 | Radiation (03CH07-HY) |
| Preamplifier | EMEC | EM18G40G | 0600789 | 18-40GHz | Jul. 23, 2021 | May 04, 2022~ May 11, 2022 | Jul. 22, 2022 | Radiation (03CH07-HY) |
| Spectrum Analyzer | Agilent | N9030A | MY52350276 | 3Hz~44GHz | Jul. 22, 2021 | May 04, 2022~ May 11, 2022 | Jul. 21, 2022 | Radiation (03CH07-HY) |
| RF Cable | HUBER + SUHNER | SUCOFLEX 104 | MY15682/4 | 30MHz to 18GHz | Feb. 23, 2022 | May 04, 2022~ May 11, 2022 | Feb. 22, 2023 | Radiation (03CH07-HY) |
| RF Cable | HUBER + SUHNER | SUCOFLEX 104 | MY24971/4 | 9kHz to 18GHz | Feb. 23, 2022 | May 04, 2022~ May 11, 2022 | Feb. 22, 2023 | Radiation (03CH07-HY) |
| RF Cable | HUBER + SUHNER | SUCOFLEX 104 | MY28655/4 | 9kHz to 18GHz | Feb. 23, 2022 | May 04, 2022~ May 11, 2022 | Feb. 22, 2023 | Radiation (03CH07-HY) |
| RF Cable | HUBER + SUHNER | SUCOFLEX 126 | 532078/126E | 30MHz~18GHz | Sep. 17, 2021 | May 04, 2022~ May 11, 2022 | Sep. 16, 2022 | Radiation (03CH07-HY) |
| RF Cable | HUBER + SUHNER | SUCOFLEX 102 | MY2858/2 | 18GHz~40GHz | Feb. 23, 2022 | May 04, 2022~ May 11, 2022 | Feb. 22, 2023 | Radiation (03CH07-HY) |
| Controller | EMEC | EM1000 | N/A | Control Ant Mast | N/A | May 04, 2022~ May 11, 2022 | N/A | Radiation (03CH07-HY) |
| Controller | MF | MF-7802 | N/A | Control Turn table | N/A | May 04, 2022~ May 11, 2022 | N/A | Radiation (03CH07-HY) |
| Antenna Mast | EMEC | AM-BS-4500E | N/A | Boresight mast 1M~4M | N/A | May 04, 2022~ May 11, 2022 | N/A | Radiation (03CH07-HY) |
| Turn Table | ChainTek | Chaintek 3000 | N/A | 0~360 Degree | N/A | May 04, 2022~ May 11, 2022 | N/A | Radiation (03CH07-HY) |
| Software | Audix | E3 | N/A | N/A | N/A | May 04, 2022~ May 11, 2022 | N/A | Radiation (03CH07-HY) |
| USB Data Logger | TECPEL | TR-32 | HE17XB2495 | N/A | Mar. 07, 2022 | May 04, 2022~ May 11, 2022 | Mar. 06, 2023 | Radiation (03CH07-HY) |
| Horn Antenna | EMCO | 3117 | 00143261 | 1GHz~18GHz | Feb. 11, 2022 | May 04, 2022~ May 11, 2022 | Feb. 10, 2023 | Radiation (03CH07-HY) |
| SHF-EHF Horn Antenna | SCHWARZBECK | BBHA 9170 | BBHA9170251 | 18GHz~40GHz | Nov. 30, 2021 | May 04, 2022~ May 11, 2022 | Nov. 29, 2022 | Radiation (03CH07-HY) |
| Signal Generator | Rohde & Schwarz | SMF100A | 101107 | 100kHz~40GHz | Dec. 08, 2021 | May 04, 2022~ May 11, 2022 | Dec. 07, 2022 | Radiation (03CH07-HY) |



| Instrument | Brand Name | Model No. | Serial No. | Characteristics | Calibration Date | Test Date | Due Date | Remark |
|--|-----------------|-------------------|------------|---------------------------------|------------------|--------------|---------------|---------------------|
| Hygrometer | TECEPEL | DTM-303B | TP210073 | N/A | Nov. 16, 2021 | May 04, 2022 | Nov. 15, 2022 | Conducted (TH03-HY) |
| Spectrum Analyzer | Rohde & Schwarz | FSP30 | 101329 | 9kHz~30GHz | Sep. 30, 2021 | May 04, 2022 | Sep. 29, 2022 | Conducted (TH03-HY) |
| Temperature & Humidity Cabinet Chamber | ESPEC | LHU-113 | 1012005860 | -20°C~85°C | Dec. 09, 2021 | May 04, 2022 | Dec. 08, 2022 | Conducted (TH03-HY) |
| Programmable Power Supply | GW Instek | PSS-2005 | EL890001 | 1V~20V 0.5A~4A | Oct. 06, 2021 | May 04, 2022 | Oct. 05, 2022 | Conducted (TH03-HY) |
| Base Station (Measure) | Rohde & Schwarz | CMU200 | 117995 | GSM / GPRS / WCDMA / CDMA | Jul. 13, 2021 | May 04, 2022 | Jul. 12, 2022 | Conducted (TH03-HY) |
| Power Divider | Warison | WCOU-0.4-26.5S-20 | #A | N/A | Nov. 01, 2021 | May 04, 2022 | Oct. 31, 2022 | Conducted (TH03-HY) |

6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

| | |
|---|---------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$) | 3.16 dB |
|---|---------|

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

| | |
|---|---------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$) | 3.71 dB |
|---|---------|

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

| | |
|---|---------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$) | 4.16 dB |
|---|---------|



Appendix A. Test Results of Conducted Test

| Conducted Output Power(Average power) | | | | | |
|---|--------|--------|--------|----------------------------|--------------------------|
| WCDMA Band V Maximum Average Power [dBm] | | | | | |
| Channel | 4132 | 4182 | 4233 | Maximum Output Power (dBm) | Maximum Output Power (W) |
| Frequency | 826.4 | 836.4 | 846.6 | | |
| RMC 12.2K | 23.33 | 23.30 | 23.14 | 23.33 | 0.2153 |
| HSDPA Subtest-1 | 22.32 | 22.25 | 22.18 | | |
| HSDPA Subtest-2 | 22.26 | 22.20 | 22.03 | | |
| HSDPA Subtest-3 | 21.75 | 21.76 | 21.53 | | |
| HSDPA Subtest-4 | 21.82 | 21.71 | 21.53 | | |
| HSUPA Subtest-1 | 21.71 | 21.68 | 20.48 | | |
| HSUPA Subtest-2 | 19.74 | 17.68 | 19.22 | | |
| HSUPA Subtest-3 | 20.74 | 18.47 | 20.30 | | |
| HSUPA Subtest-4 | 19.73 | 19.73 | 19.91 | | |
| HSUPA Subtest-5 | 21.80 | 21.70 | 22.13 | | |
| | | | | | |
| WCDMA Band II Maximum Average Power [dBm] | | | | | |
| Channel | 9262 | 9400 | 9538 | Maximum Output Power (dBm) | Maximum Output Power (W) |
| Frequency | 1852.4 | 1880 | 1907.6 | | |
| RMC 12.2K | 22.90 | 23.15 | 23.28 | 23.28 | 0.2128 |
| HSDPA Subtest-1 | 21.89 | 22.05 | 22.32 | | |
| HSDPA Subtest-2 | 21.83 | 22.01 | 22.32 | | |
| HSDPA Subtest-3 | 21.36 | 21.61 | 21.80 | | |
| HSDPA Subtest-4 | 21.36 | 21.49 | 21.77 | | |
| HSUPA Subtest-1 | 21.89 | 21.84 | 22.14 | | |
| HSUPA Subtest-2 | 19.81 | 19.80 | 20.07 | | |
| HSUPA Subtest-3 | 20.84 | 20.69 | 21.10 | | |
| HSUPA Subtest-4 | 19.90 | 19.82 | 20.18 | | |
| HSUPA Subtest-5 | 21.60 | 21.80 | 21.90 | | |
| | | | | | |
| WCDMA Band IV Maximum Average Power [dBm] | | | | | |
| Channel | 1312 | 1413 | 1513 | Maximum Output Power (dBm) | Maximum Output Power (W) |
| Frequency | 1712.4 | 1732.6 | 1752.6 | | |
| RMC 12.2K | 23.30 | 23.51 | 23.66 | 23.66 | 0.2323 |
| HSDPA Subtest-1 | 22.27 | 22.53 | 22.51 | | |
| HSDPA Subtest-2 | 22.23 | 22.55 | 22.52 | | |
| HSDPA Subtest-3 | 21.75 | 22.05 | 21.78 | | |
| HSDPA Subtest-4 | 21.73 | 21.98 | 22.10 | | |
| HSUPA Subtest-1 | 22.04 | 22.23 | 22.05 | | |
| HSUPA Subtest-2 | 20.03 | 20.27 | 19.95 | | |
| HSUPA Subtest-3 | 21.03 | 21.28 | 21.00 | | |
| HSUPA Subtest-4 | 20.01 | 20.31 | 20.14 | | |
| HSUPA Subtest-5 | 21.80 | 22.20 | 22.20 | | |



A2. WCDMA

Peak-to-Average Ratio

| Mode | WCDMA Band V | WCDMA Band II | WCDMA Band IV | Limit: 13dB |
|------------|--------------|---------------|---------------|-------------|
| Mod. | RMC 12.2Kbps | RMC 12.2Kbps | RMC 12.2Kbps | Result |
| Lowest CH | 3.08 | 3.04 | 2.72 | PASS |
| Middle CH | 2.96 | 3.12 | 2.72 | |
| Highest CH | 2.92 | 3.48 | 2.80 | |




| WCDMA Band V (RMC 12.2Kbps) | WCDMA Band II (RMC 12.2Kbps) | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|------------------------------|-----------|------|-----------|-------|---------|------|---------|-----|---------|------|---------|-------|---------|---|------|-----------|------|-----------|-------|---------|------|---------|-----|---------|------|---------|-------|---------|
| Lowest Channel | Lowest Channel | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Ref: 30 dBm, Offset: 15.5 dB, Att: 30 dB, AQT: 3.125 ms, Center: 826.4 MHz, 2 dB, Mean: 23.28 dBm, Peak: 26.79 dBm, Crest: 3.52 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples)</p> <p>Trace 1</p> <table><tr><td>Mean</td><td>23.28 dBm</td></tr><tr><td>Peak</td><td>26.79 dBm</td></tr><tr><td>Crest</td><td>3.52 dB</td></tr></table> <table><tr><td>10 %</td><td>1.72 dB</td></tr><tr><td>1 %</td><td>2.60 dB</td></tr><tr><td>.1 %</td><td>3.08 dB</td></tr><tr><td>.01 %</td><td>3.28 dB</td></tr></table> | Mean | 23.28 dBm | Peak | 26.79 dBm | Crest | 3.52 dB | 10 % | 1.72 dB | 1 % | 2.60 dB | .1 % | 3.08 dB | .01 % | 3.28 dB | <p>Ref: 30 dBm, Offset: 17 dB, Att: 30 dB, AQT: 3.125 ms, Center: 1.8124 GHz, 2 dB, Mean: 22.70 dBm, Peak: 26.09 dBm, Crest: 3.39 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples)</p> <p>Trace 1</p> <table><tr><td>Mean</td><td>22.70 dBm</td></tr><tr><td>Peak</td><td>26.09 dBm</td></tr><tr><td>Crest</td><td>3.39 dB</td></tr></table> <table><tr><td>10 %</td><td>1.64 dB</td></tr><tr><td>1 %</td><td>2.52 dB</td></tr><tr><td>.1 %</td><td>3.04 dB</td></tr><tr><td>.01 %</td><td>3.28 dB</td></tr></table> | Mean | 22.70 dBm | Peak | 26.09 dBm | Crest | 3.39 dB | 10 % | 1.64 dB | 1 % | 2.52 dB | .1 % | 3.04 dB | .01 % | 3.28 dB |
| Mean | 23.28 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | 26.79 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Crest | 3.52 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 % | 1.72 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 % | 2.60 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| .1 % | 3.08 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| .01 % | 3.28 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Mean | 22.70 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | 26.09 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Crest | 3.39 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 % | 1.64 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 % | 2.52 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| .1 % | 3.04 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| .01 % | 3.28 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Date: 4.MAY.2022 11:02:54 | Date: 4.MAY.2022 10:19:06 | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Middle Channel | Middle Channel | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Ref: 30 dBm, Offset: 15.5 dB, Att: 30 dB, AQT: 3.125 ms, Center: 836.4 MHz, 2 dB, Mean: 23.28 dBm, Peak: 26.44 dBm, Crest: 3.16 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples)</p> <p>Trace 1</p> <table><tr><td>Mean</td><td>23.28 dBm</td></tr><tr><td>Peak</td><td>26.44 dBm</td></tr><tr><td>Crest</td><td>3.16 dB</td></tr></table> <table><tr><td>10 %</td><td>1.72 dB</td></tr><tr><td>1 %</td><td>2.52 dB</td></tr><tr><td>.1 %</td><td>2.96 dB</td></tr><tr><td>.01 %</td><td>3.12 dB</td></tr></table> | Mean | 23.28 dBm | Peak | 26.44 dBm | Crest | 3.16 dB | 10 % | 1.72 dB | 1 % | 2.52 dB | .1 % | 2.96 dB | .01 % | 3.12 dB | <p>Ref: 30 dBm, Offset: 17 dB, Att: 30 dB, AQT: 3.125 ms, Center: 1.88 GHz, 2 dB, Mean: 22.96 dBm, Peak: 26.44 dBm, Crest: 3.48 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples)</p> <p>Trace 1</p> <table><tr><td>Mean</td><td>22.96 dBm</td></tr><tr><td>Peak</td><td>26.44 dBm</td></tr><tr><td>Crest</td><td>3.48 dB</td></tr></table> <table><tr><td>10 %</td><td>1.64 dB</td></tr><tr><td>1 %</td><td>2.60 dB</td></tr><tr><td>.1 %</td><td>3.12 dB</td></tr><tr><td>.01 %</td><td>3.36 dB</td></tr></table> | Mean | 22.96 dBm | Peak | 26.44 dBm | Crest | 3.48 dB | 10 % | 1.64 dB | 1 % | 2.60 dB | .1 % | 3.12 dB | .01 % | 3.36 dB |
| Mean | 23.28 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | 26.44 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Crest | 3.16 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 % | 1.72 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 % | 2.52 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| .1 % | 2.96 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| .01 % | 3.12 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Mean | 22.96 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | 26.44 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Crest | 3.48 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 % | 1.64 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 % | 2.60 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| .1 % | 3.12 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| .01 % | 3.36 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Date: 4.MAY.2022 11:03:13 | Date: 4.MAY.2022 10:19:31 | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Highest Channel | Highest Channel | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Ref: 30 dBm, Offset: 15.5 dB, Att: 30 dB, AQT: 3.125 ms, Center: 846.4 MHz, 2 dB, Mean: 23.08 dBm, Peak: 26.30 dBm, Crest: 3.22 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples)</p> <p>Trace 1</p> <table><tr><td>Mean</td><td>23.08 dBm</td></tr><tr><td>Peak</td><td>26.30 dBm</td></tr><tr><td>Crest</td><td>3.22 dB</td></tr></table> <table><tr><td>10 %</td><td>1.72 dB</td></tr><tr><td>1 %</td><td>2.52 dB</td></tr><tr><td>.1 %</td><td>2.92 dB</td></tr><tr><td>.01 %</td><td>3.08 dB</td></tr></table> | Mean | 23.08 dBm | Peak | 26.30 dBm | Crest | 3.22 dB | 10 % | 1.72 dB | 1 % | 2.52 dB | .1 % | 2.92 dB | .01 % | 3.08 dB | <p>Ref: 30 dBm, Offset: 17 dB, Att: 30 dB, AQT: 3.125 ms, Center: 1.9076 GHz, 2 dB, Mean: 23.11 dBm, Peak: 27.08 dBm, Crest: 3.97 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples)</p> <p>Trace 1</p> <table><tr><td>Mean</td><td>23.11 dBm</td></tr><tr><td>Peak</td><td>27.08 dBm</td></tr><tr><td>Crest</td><td>3.97 dB</td></tr></table> <table><tr><td>10 %</td><td>1.80 dB</td></tr><tr><td>1 %</td><td>2.88 dB</td></tr><tr><td>.1 %</td><td>3.48 dB</td></tr><tr><td>.01 %</td><td>3.76 dB</td></tr></table> | Mean | 23.11 dBm | Peak | 27.08 dBm | Crest | 3.97 dB | 10 % | 1.80 dB | 1 % | 2.88 dB | .1 % | 3.48 dB | .01 % | 3.76 dB |
| Mean | 23.08 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | 26.30 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Crest | 3.22 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 % | 1.72 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 % | 2.52 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| .1 % | 2.92 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| .01 % | 3.08 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Mean | 23.11 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | 27.08 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Crest | 3.97 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 % | 1.80 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 % | 2.88 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| .1 % | 3.48 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| .01 % | 3.76 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Date: 4.MAY.2022 11:03:31 | Date: 4.MAY.2022 10:19:51 | | | | | | | | | | | | | | | | | | | | | | | | | | | | |




WCDMA Band IV (RMC 12.2Kbps)


Lowest Channel

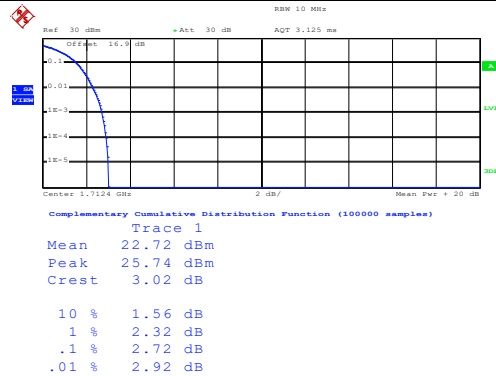

Middle Channel

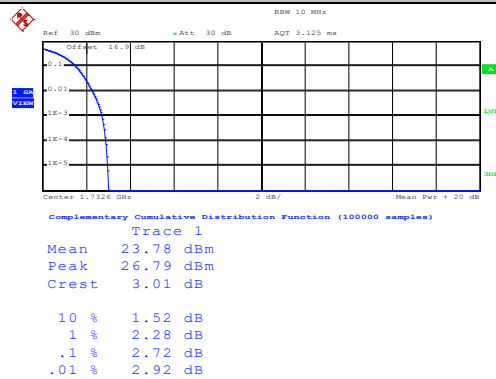

Highest Channel

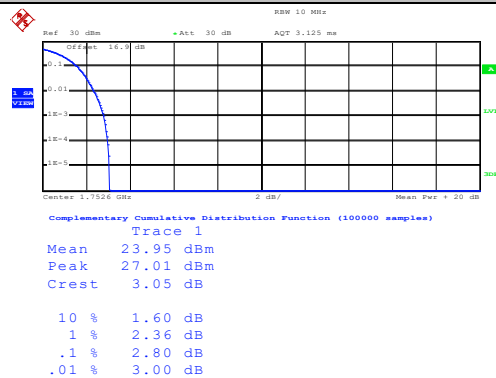

**26dB Bandwidth**

| Mode | WCDMA Band V 26dB BW (MHz) | WCDMA Band II 26dB BW (MHz) | WCDMA Band IV 26dB BW (MHz) |
|------------|-------------------------------|--------------------------------|--------------------------------|
| Mod. | RMC 12.2Kbps | RMC 12.2Kbps | RMC 12.2Kbps |
| Lowest CH | 4.69 | 4.74 | 4.75 |
| Middle CH | 4.71 | 4.72 | 4.77 |
| Highest CH | 4.71 | 4.72 | 4.76 |



WCDMA Band V (RMC 12.2Kbps)


Lowest Channel

Ref: 30 dBm
Att: 30 dB
BW: 100 kHz
VMW: 300 kHz
SWT: 5 ms
Marker 1 [T1]
825.550000000 MHz
-19.63 dBm
824.600000000 MHz
825.550000000 MHz
826.400000000 MHz
827.350000000 MHz
828.300000000 MHz
829.250000000 MHz
830.200000000 MHz
831.150000000 MHz
832.100000000 MHz
833.050000000 MHz
834.000000000 MHz
834.950000000 MHz
835.900000000 MHz
836.850000000 MHz
837.800000000 MHz
838.750000000 MHz
839.700000000 MHz
840.650000000 MHz
841.600000000 MHz
842.550000000 MHz
843.500000000 MHz
844.450000000 MHz
845.400000000 MHz
846.350000000 MHz
847.300000000 MHz
848.250000000 MHz
849.200000000 MHz
850.150000000 MHz
851.100000000 MHz
852.050000000 MHz
853.000000000 MHz
853.950000000 MHz
854.900000000 MHz
855.850000000 MHz
856.800000000 MHz
857.750000000 MHz
858.700000000 MHz
859.650000000 MHz
860.600000000 MHz
861.550000000 MHz
862.500000000 MHz
863.450000000 MHz
864.400000000 MHz
865.350000000 MHz
866.300000000 MHz
867.250000000 MHz
868.200000000 MHz
869.150000000 MHz
870.100000000 MHz
871.050000000 MHz
872.000000000 MHz
872.950000000 MHz
873.900000000 MHz
874.850000000 MHz
875.800000000 MHz
876.750000000 MHz
877.700000000 MHz
878.650000000 MHz
879.600000000 MHz
880.550000000 MHz
881.500000000 MHz
882.450000000 MHz
883.400000000 MHz
884.350000000 MHz
885.300000000 MHz
886.250000000 MHz
887.200000000 MHz
888.150000000 MHz
889.100000000 MHz
890.050000000 MHz
891.000000000 MHz
891.950000000 MHz
892.900000000 MHz
893.850000000 MHz
894.800000000 MHz
895.750000000 MHz
896.700000000 MHz
897.650000000 MHz
898.600000000 MHz
899.550000000 MHz
900.500000000 MHz
901.450000000 MHz
902.400000000 MHz
903.350000000 MHz
904.300000000 MHz
905.250000000 MHz
906.200000000 MHz
907.150000000 MHz
908.100000000 MHz
909.050000000 MHz
910.000000000 MHz
910.950000000 MHz
911.900000000 MHz
912.850000000 MHz
913.800000000 MHz
914.750000000 MHz
915.700000000 MHz
916.650000000 MHz
917.600000000 MHz
918.550000000 MHz
919.500000000 MHz
920.450000000 MHz
921.400000000 MHz
922.350000000 MHz
923.300000000 MHz
924.250000000 MHz
925.200000000 MHz
926.150000000 MHz
927.100000000 MHz
928.050000000 MHz
929.000000000 MHz
929.950000000 MHz
930.900000000 MHz
931.850000000 MHz
932.800000000 MHz
933.750000000 MHz
934.700000000 MHz
935.650000000 MHz
936.600000000 MHz
937.550000000 MHz
938.500000000 MHz
939.450000000 MHz
940.400000000 MHz
941.350000000 MHz
942.300000000 MHz
943.250000000 MHz
944.200000000 MHz
945.150000000 MHz
946.100000000 MHz
947.050000000 MHz
948.000000000 MHz
948.950000000 MHz
949.900000000 MHz
950.850000000 MHz
951.800000000 MHz
952.750000000 MHz
953.700000000 MHz
954.650000000 MHz
955.600000000 MHz
956.550000000 MHz
957.500000000 MHz
958.450000000 MHz
959.400000000 MHz
960.350000000 MHz
961.300000000 MHz
962.250000000 MHz
963.200000000 MHz
964.150000000 MHz
965.100000000 MHz
966.050000000 MHz
967.000000000 MHz
967.950000000 MHz
968.900000000 MHz
969.850000000 MHz
970.800000000 MHz
971.750000000 MHz
972.700000000 MHz
973.650000000 MHz
974.600000000 MHz
975.550000000 MHz
976.500000000 MHz
977.450000000 MHz
978.400000000 MHz
979.350000000 MHz
980.300000000 MHz
981.250000000 MHz
982.200000000 MHz
983.150000000 MHz
984.100000000 MHz
985.050000000 MHz
986.000000000 MHz
986.950000000 MHz
987.900000000 MHz
988.850000000 MHz
989.800000000 MHz
990.750000000 MHz
991.700000000 MHz
992.650000000 MHz
993.600000000 MHz
994.550000000 MHz
995.500000000 MHz
996.450000000 MHz
997.400000000 MHz
998.350000000 MHz
999.300000000 MHz
1000.250000000 MHz
1001.200000000 MHz
1002.150000000 MHz
1003.100000000 MHz
1004.050000000 MHz
1005.000000000 MHz
1005.950000000 MHz
1006.900000000 MHz
1007.850000000 MHz
1008.800000000 MHz
1009.750000000 MHz
1010.700000000 MHz
1011.650000000 MHz
1012.600000000 MHz
1013.550000000 MHz
1014.500000000 MHz
1015.450000000 MHz
1016.400000000 MHz
1017.350000000 MHz
1018.300000000 MHz
1019.250000000 MHz
1020.200000000 MHz
1021.150000000 MHz
1022.100000000 MHz
1023.050000000 MHz
1024.000000000 MHz
1024.950000000 MHz
1025.900000000 MHz
1026.850000000 MHz
1027.800000000 MHz
1028.750000000 MHz
1029.700000000 MHz
1030.650000000 MHz
1031.600000000 MHz
1032.550000000 MHz
1033.500000000 MHz
1034.450000000 MHz
1035.400000000 MHz
1036.350000000 MHz
1037.300000000 MHz
1038.250000000 MHz
1039.200000000 MHz
1040.150000000 MHz
1041.100000000 MHz
1042.050000000 MHz
1043.000000000 MHz
1043.950000000 MHz
1044.900000000 MHz
1045.850000000 MHz
1046.800000000 MHz
1047.750000000 MHz
1048.700000000 MHz
1049.650000000 MHz




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

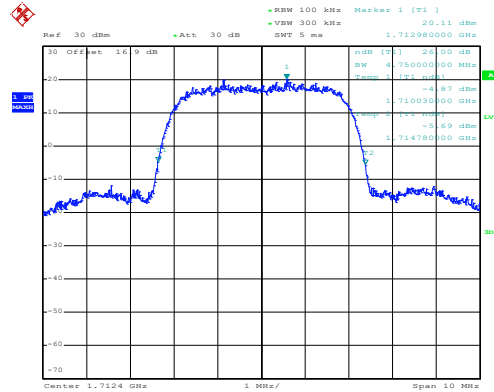


Date: 4.MAY.2022 10:21:38

Middle Channel

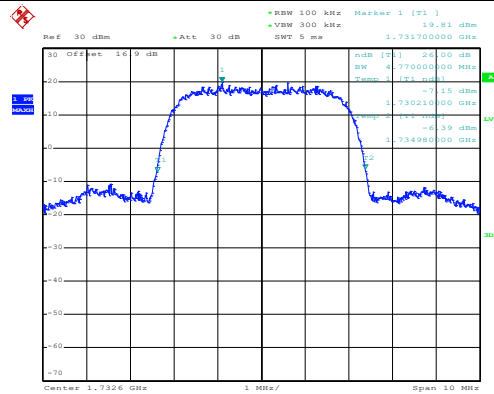

Date: 4.MAY.2022 10:22:17


Highest Channel

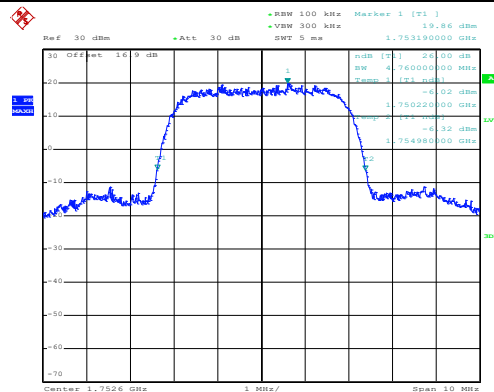

Date: 4.MAY.2022 10:22:58

**Occupied Bandwidth**


| Mode | WCDMA Band V 99% OBW (MHz) | WCDMA Band II 99% OBW (MHz) | WCDMA Band IV 99% OBW (MHz) |
|------------|-------------------------------|--------------------------------|--------------------------------|
| Mod. | RMC 12.2Kbps | RMC 12.2Kbps | RMC 12.2Kbps |
| Lowest CH | 4.13 | 4.15 | 4.15 |
| Middle CH | 4.14 | 4.14 | 4.17 |
| Highest CH | 4.13 | 4.15 | 4.17 |

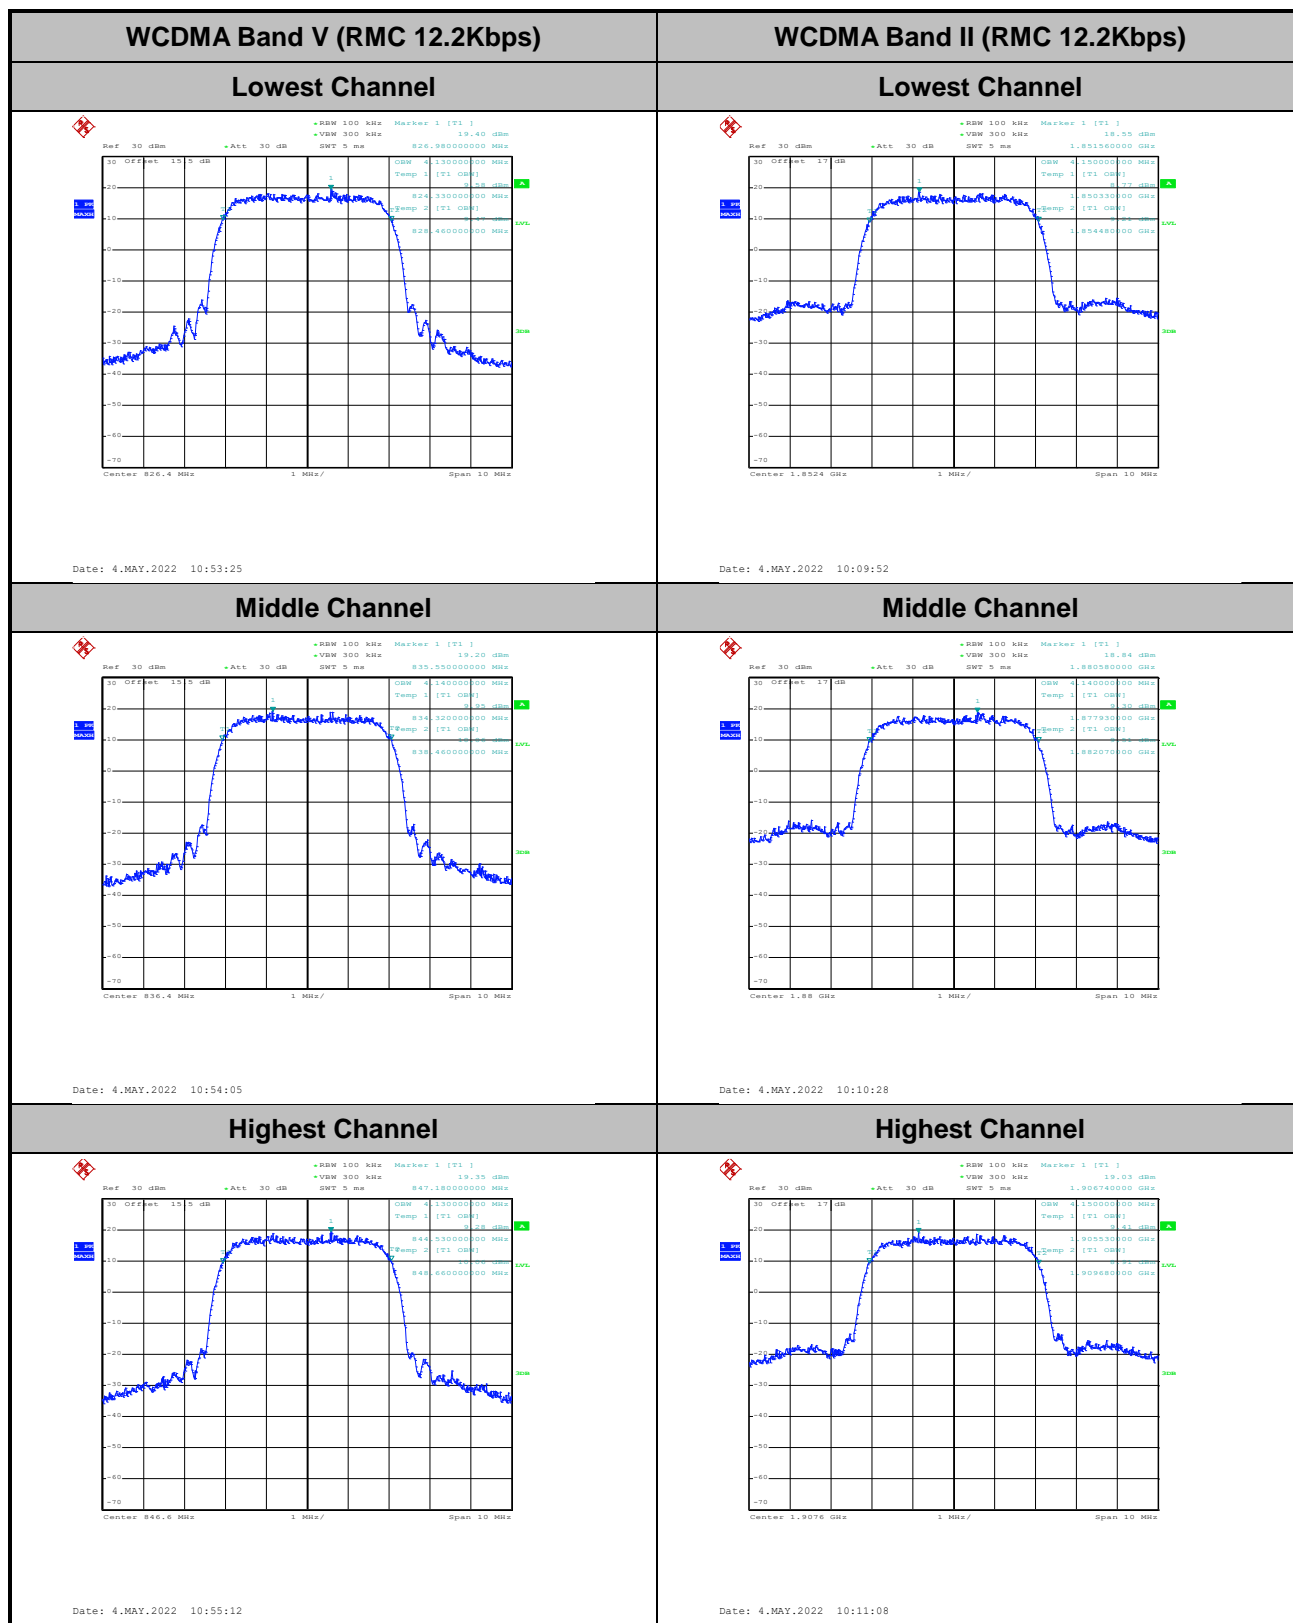




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

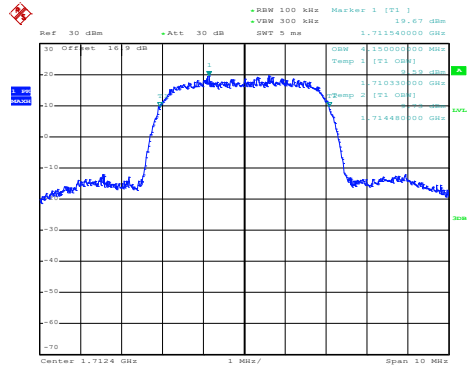


Date: 4.MAY.2022 10:28:01

Middle Channel

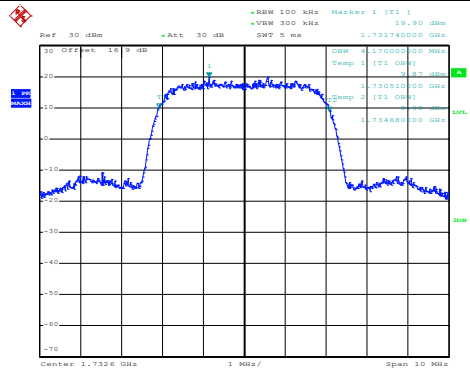

Date: 4.MAY.2022 10:28:46

Highest Channel

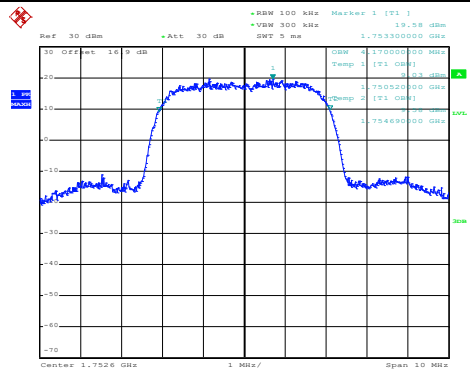


Date: 4.MAY.2022 10:30:03



Conducted Band Edge


WCDMA Band V (RMC 12.2Kbps)

Lowest Band Edge

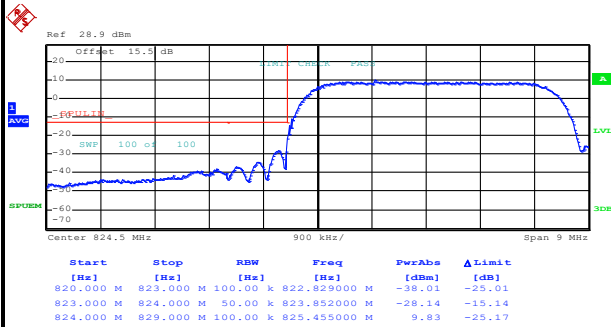

Date: 4.MAY.2022 10:58:20

Highest Band Edge

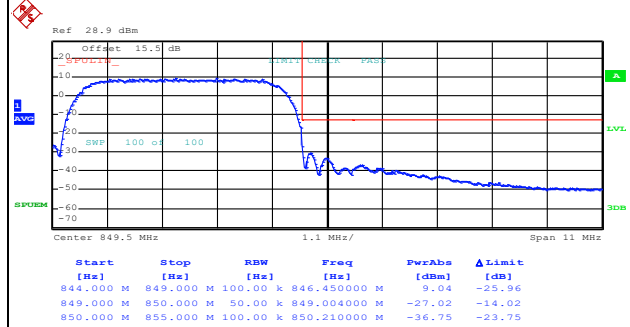


Date: 4.MAY.2022 11:01:19




WCDMA Band II (RMC 12.2Kbps)

Lowest Band Edge

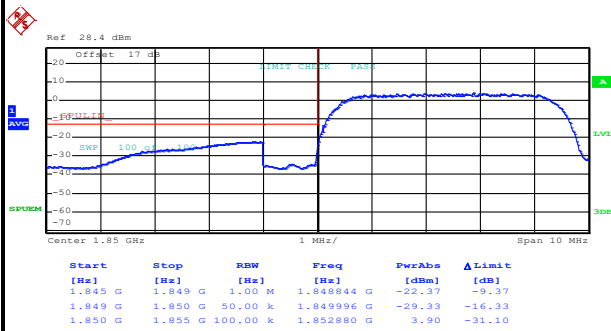

Date: 4.MAY.2022 10:41:33

Highest Band Edge

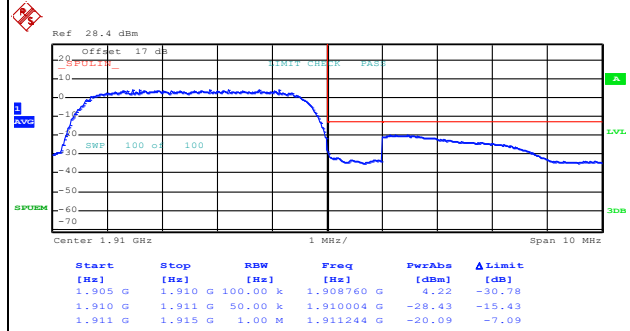


Date: 4.MAY.2022 10:44:30




WCDMA Band IV (RMC 12.2Kbps)

Lowest Band Edge

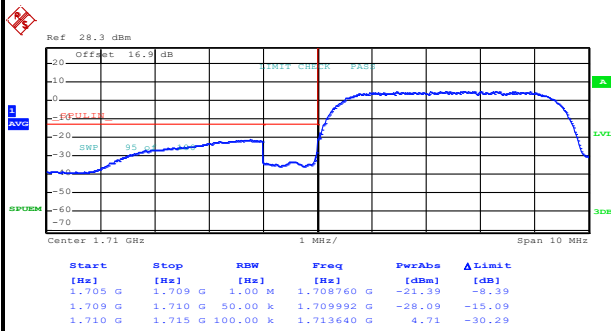

Date: 4.MAY.2022 10:33:11







Highest Band Edge

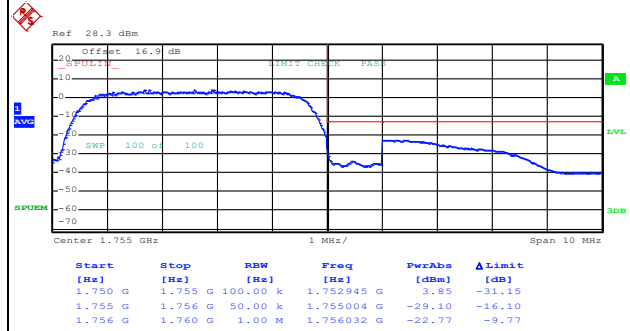

Date: 4.MAY.2022 10:36:13




Conducted Spurious Emission
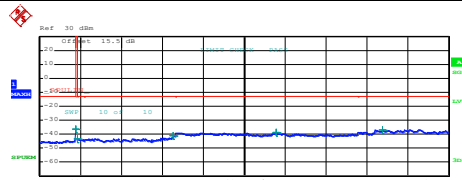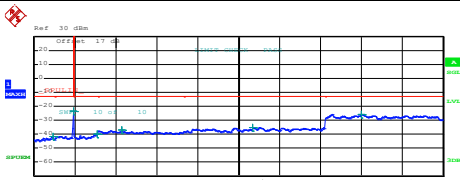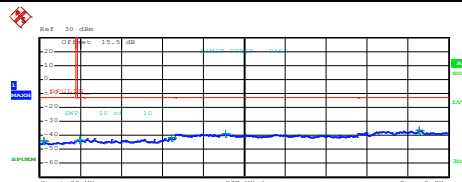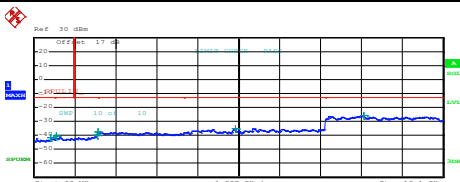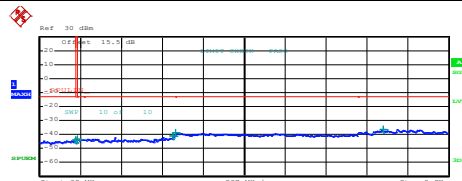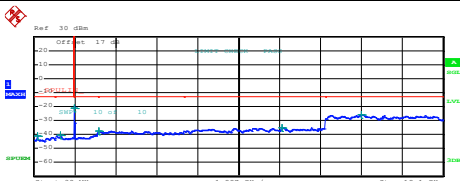
| WCDMA Band V (RMC 12.2Kbps) | WCDMA Band II (RMC 12.2Kbps) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|------------------------------|-----------|--------------|--------------|--------------|-------------|----------|-----------|--------|--------------|--------|--------|-----------|---------|--------|--------------|--------|--------|---------|---------|--------|------------|--------|--------|---------|---------|--------|------------|--------|--------|---------|---------|--------|------------|--------|--------|---|------------|-----------|----------|-----------|--------------|-------------|----------|---------|--------|--------------|--------|--------|---------|---------|--------|------------|--------|--------|---------|---------|--------|------------|--------|--------|---------|---------|--------|------------|--------|--------|---------|----------|--------|-------------|--------|--------|----------|----------|--------|-------------|--------|--------|
| Lowest Channel | Lowest Channel | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <div><table><tr><th>Start [Hz]</th><th>Stop [Hz]</th><th>RBW [Hz]</th><th>Freq [Hz]</th><th>PerAbn [dBm]</th><th>ΔLimit [dB]</th></tr><tr><td>30.000 M</td><td>820.000 M</td><td>1.00 M</td><td>818.417500 M</td><td>-36.37</td><td>-23.37</td></tr><tr><td>820.000 M</td><td>1.000 G</td><td>1.00 M</td><td>858.588750 M</td><td>-43.33</td><td>-30.33</td></tr><tr><td>1.000 G</td><td>3.000 G</td><td>1.00 M</td><td>2.963000 G</td><td>-41.12</td><td>-28.12</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>5.216000 G</td><td>-38.98</td><td>-25.98</td></tr><tr><td>7.000 G</td><td>9.000 G</td><td>1.00 M</td><td>7.341000 G</td><td>-36.73</td><td>-23.73</td></tr></table><p>Date: 4.MAY.2022 10:49:57</p></div> | Start [Hz] | Stop [Hz] | RBW [Hz] | Freq [Hz] | PerAbn [dBm] | ΔLimit [dB] | 30.000 M | 820.000 M | 1.00 M | 818.417500 M | -36.37 | -23.37 | 820.000 M | 1.000 G | 1.00 M | 858.588750 M | -43.33 | -30.33 | 1.000 G | 3.000 G | 1.00 M | 2.963000 G | -41.12 | -28.12 | 3.000 G | 7.000 G | 1.00 M | 5.216000 G | -38.98 | -25.98 | 7.000 G | 9.000 G | 1.00 M | 7.341000 G | -36.73 | -23.73 | <div><table><tr><th>Start [Hz]</th><th>Stop [Hz]</th><th>RBW [Hz]</th><th>Freq [Hz]</th><th>PerAbn [dBm]</th><th>ΔLimit [dB]</th></tr><tr><td>30.000 M</td><td>1.000 G</td><td>1.00 M</td><td>889.642500 M</td><td>-41.53</td><td>-28.53</td></tr><tr><td>1.000 G</td><td>1.845 G</td><td>1.00 M</td><td>1.844789 G</td><td>-23.65</td><td>-10.65</td></tr><tr><td>1.915 G</td><td>3.000 G</td><td>1.00 M</td><td>2.979385 G</td><td>-40.01</td><td>-27.01</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>4.093000 G</td><td>-36.87</td><td>-23.87</td></tr><tr><td>7.000 G</td><td>13.600 G</td><td>1.00 M</td><td>10.222400 G</td><td>-35.15</td><td>-22.15</td></tr><tr><td>13.600 G</td><td>19.100 G</td><td>1.00 M</td><td>15.296063 G</td><td>-25.78</td><td>-12.78</td></tr></table><p>Date: 4.MAY.2022 10:07:09</p></div> | Start [Hz] | Stop [Hz] | RBW [Hz] | Freq [Hz] | PerAbn [dBm] | ΔLimit [dB] | 30.000 M | 1.000 G | 1.00 M | 889.642500 M | -41.53 | -28.53 | 1.000 G | 1.845 G | 1.00 M | 1.844789 G | -23.65 | -10.65 | 1.915 G | 3.000 G | 1.00 M | 2.979385 G | -40.01 | -27.01 | 3.000 G | 7.000 G | 1.00 M | 4.093000 G | -36.87 | -23.87 | 7.000 G | 13.600 G | 1.00 M | 10.222400 G | -35.15 | -22.15 | 13.600 G | 19.100 G | 1.00 M | 15.296063 G | -25.78 | -12.78 |
| Start [Hz] | Stop [Hz] | RBW [Hz] | Freq [Hz] | PerAbn [dBm] | ΔLimit [dB] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 30.000 M | 820.000 M | 1.00 M | 818.417500 M | -36.37 | -23.37 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 820.000 M | 1.000 G | 1.00 M | 858.588750 M | -43.33 | -30.33 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.000 G | 3.000 G | 1.00 M | 2.963000 G | -41.12 | -28.12 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3.000 G | 7.000 G | 1.00 M | 5.216000 G | -38.98 | -25.98 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7.000 G | 9.000 G | 1.00 M | 7.341000 G | -36.73 | -23.73 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Start [Hz] | Stop [Hz] | RBW [Hz] | Freq [Hz] | PerAbn [dBm] | ΔLimit [dB] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 30.000 M | 1.000 G | 1.00 M | 889.642500 M | -41.53 | -28.53 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.000 G | 1.845 G | 1.00 M | 1.844789 G | -23.65 | -10.65 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.915 G | 3.000 G | 1.00 M | 2.979385 G | -40.01 | -27.01 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3.000 G | 7.000 G | 1.00 M | 4.093000 G | -36.87 | -23.87 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7.000 G | 13.600 G | 1.00 M | 10.222400 G | -35.15 | -22.15 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 13.600 G | 19.100 G | 1.00 M | 15.296063 G | -25.78 | -12.78 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Middle Channel | Middle Channel | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <div><table><tr><th>Start [Hz]</th><th>Stop [Hz]</th><th>RBW [Hz]</th><th>Freq [Hz]</th><th>PerAbn [dBm]</th><th>ΔLimit [dB]</th></tr><tr><td>30.000 M</td><td>820.000 M</td><td>1.00 M</td><td>116.110000 M</td><td>-43.90</td><td>-30.90</td></tr><tr><td>820.000 M</td><td>1.000 G</td><td>1.00 M</td><td>909.483754 M</td><td>-43.16</td><td>-30.16</td></tr><tr><td>1.000 G</td><td>3.000 G</td><td>1.00 M</td><td>2.928000 G</td><td>-41.78</td><td>-28.78</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>4.100000 G</td><td>-38.44</td><td>-25.44</td></tr><tr><td>7.000 G</td><td>9.000 G</td><td>1.00 M</td><td>8.357500 G</td><td>-36.56</td><td>-23.56</td></tr></table><p>Date: 4.MAY.2022 10:51:37</p></div> | Start [Hz] | Stop [Hz] | RBW [Hz] | Freq [Hz] | PerAbn [dBm] | ΔLimit [dB] | 30.000 M | 820.000 M | 1.00 M | 116.110000 M | -43.90 | -30.90 | 820.000 M | 1.000 G | 1.00 M | 909.483754 M | -43.16 | -30.16 | 1.000 G | 3.000 G | 1.00 M | 2.928000 G | -41.78 | -28.78 | 3.000 G | 7.000 G | 1.00 M | 4.100000 G | -38.44 | -25.44 | 7.000 G | 9.000 G | 1.00 M | 8.357500 G | -36.56 | -23.56 | <div><table><tr><th>Start [Hz]</th><th>Stop [Hz]</th><th>RBW [Hz]</th><th>Freq [Hz]</th><th>PerAbn [dBm]</th><th>ΔLimit [dB]</th></tr><tr><td>30.000 M</td><td>1.000 G</td><td>1.00 M</td><td>799.650000 M</td><td>-41.84</td><td>-28.84</td></tr><tr><td>1.000 G</td><td>1.845 G</td><td>1.00 M</td><td>1.047320 G</td><td>-40.67</td><td>-27.67</td></tr><tr><td>1.915 G</td><td>3.000 G</td><td>1.00 M</td><td>2.987992 G</td><td>-39.83</td><td>-26.83</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.016000 G</td><td>-37.46</td><td>-24.46</td></tr><tr><td>7.000 G</td><td>13.600 G</td><td>1.00 M</td><td>9.415600 G</td><td>-35.24</td><td>-22.24</td></tr><tr><td>13.600 G</td><td>19.100 G</td><td>1.00 M</td><td>15.390250 G</td><td>-25.65</td><td>-12.65</td></tr></table><p>Date: 4.MAY.2022 10:08:05</p></div> | Start [Hz] | Stop [Hz] | RBW [Hz] | Freq [Hz] | PerAbn [dBm] | ΔLimit [dB] | 30.000 M | 1.000 G | 1.00 M | 799.650000 M | -41.84 | -28.84 | 1.000 G | 1.845 G | 1.00 M | 1.047320 G | -40.67 | -27.67 | 1.915 G | 3.000 G | 1.00 M | 2.987992 G | -39.83 | -26.83 | 3.000 G | 7.000 G | 1.00 M | 3.016000 G | -37.46 | -24.46 | 7.000 G | 13.600 G | 1.00 M | 9.415600 G | -35.24 | -22.24 | 13.600 G | 19.100 G | 1.00 M | 15.390250 G | -25.65 | -12.65 |
| Start [Hz] | Stop [Hz] | RBW [Hz] | Freq [Hz] | PerAbn [dBm] | ΔLimit [dB] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 30.000 M | 820.000 M | 1.00 M | 116.110000 M | -43.90 | -30.90 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 820.000 M | 1.000 G | 1.00 M | 909.483754 M | -43.16 | -30.16 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.000 G | 3.000 G | 1.00 M | 2.928000 G | -41.78 | -28.78 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3.000 G | 7.000 G | 1.00 M | 4.100000 G | -38.44 | -25.44 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7.000 G | 9.000 G | 1.00 M | 8.357500 G | -36.56 | -23.56 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Start [Hz] | Stop [Hz] | RBW [Hz] | Freq [Hz] | PerAbn [dBm] | ΔLimit [dB] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 30.000 M | 1.000 G | 1.00 M | 799.650000 M | -41.84 | -28.84 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.000 G | 1.845 G | 1.00 M | 1.047320 G | -40.67 | -27.67 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.915 G | 3.000 G | 1.00 M | 2.987992 G | -39.83 | -26.83 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3.000 G | 7.000 G | 1.00 M | 3.016000 G | -37.46 | -24.46 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7.000 G | 13.600 G | 1.00 M | 9.415600 G | -35.24 | -22.24 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 13.600 G | 19.100 G | 1.00 M | 15.390250 G | -25.65 | -12.65 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Highest Channel | Highest Channel | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <div><table><tr><th>Start [Hz]</th><th>Stop [Hz]</th><th>RBW [Hz]</th><th>Freq [Hz]</th><th>PerAbn [dBm]</th><th>ΔLimit [dB]</th></tr><tr><td>30.000 M</td><td>820.000 M</td><td>1.00 M</td><td>812.492500 M</td><td>-44.06</td><td>-31.06</td></tr><tr><td>820.000 M</td><td>1.000 G</td><td>1.00 M</td><td>863.482001 M</td><td>-43.33</td><td>-30.33</td></tr><tr><td>1.000 G</td><td>3.000 G</td><td>1.00 M</td><td>2.959500 G</td><td>-40.96</td><td>-27.96</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.011000 G</td><td>-38.98</td><td>-25.98</td></tr><tr><td>7.000 G</td><td>9.000 G</td><td>1.00 M</td><td>7.340000 G</td><td>-36.45</td><td>-23.45</td></tr></table><p>Date: 4.MAY.2022 10:52:39</p></div> | Start [Hz] | Stop [Hz] | RBW [Hz] | Freq [Hz] | PerAbn [dBm] | ΔLimit [dB] | 30.000 M | 820.000 M | 1.00 M | 812.492500 M | -44.06 | -31.06 | 820.000 M | 1.000 G | 1.00 M | 863.482001 M | -43.33 | -30.33 | 1.000 G | 3.000 G | 1.00 M | 2.959500 G | -40.96 | -27.96 | 3.000 G | 7.000 G | 1.00 M | 3.011000 G | -38.98 | -25.98 | 7.000 G | 9.000 G | 1.00 M | 7.340000 G | -36.45 | -23.45 | <div><table><tr><th>Start [Hz]</th><th>Stop [Hz]</th><th>RBW [Hz]</th><th>Freq [Hz]</th><th>PerAbn [dBm]</th><th>ΔLimit [dB]</th></tr><tr><td>30.000 M</td><td>1.000 G</td><td>1.00 M</td><td>170.407500 M</td><td>-41.09</td><td>-28.09</td></tr><tr><td>1.000 G</td><td>1.845 G</td><td>1.00 M</td><td>1.248473 G</td><td>-40.33</td><td>-27.33</td></tr><tr><td>1.915 G</td><td>3.000 G</td><td>1.00 M</td><td>1.915542 G</td><td>-20.91</td><td>-7.91</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.044000 G</td><td>-37.59</td><td>-24.59</td></tr><tr><td>7.000 G</td><td>13.600 G</td><td>1.00 M</td><td>11.605300 G</td><td>-35.10</td><td>-22.10</td></tr><tr><td>13.600 G</td><td>19.100 G</td><td>1.00 M</td><td>15.300188 G</td><td>-25.58</td><td>-12.58</td></tr></table><p>Date: 4.MAY.2022 10:09:07</p></div> | Start [Hz] | Stop [Hz] | RBW [Hz] | Freq [Hz] | PerAbn [dBm] | ΔLimit [dB] | 30.000 M | 1.000 G | 1.00 M | 170.407500 M | -41.09 | -28.09 | 1.000 G | 1.845 G | 1.00 M | 1.248473 G | -40.33 | -27.33 | 1.915 G | 3.000 G | 1.00 M | 1.915542 G | -20.91 | -7.91 | 3.000 G | 7.000 G | 1.00 M | 3.044000 G | -37.59 | -24.59 | 7.000 G | 13.600 G | 1.00 M | 11.605300 G | -35.10 | -22.10 | 13.600 G | 19.100 G | 1.00 M | 15.300188 G | -25.58 | -12.58 |
| Start [Hz] | Stop [Hz] | RBW [Hz] | Freq [Hz] | PerAbn [dBm] | ΔLimit [dB] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 30.000 M | 820.000 M | 1.00 M | 812.492500 M | -44.06 | -31.06 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 820.000 M | 1.000 G | 1.00 M | 863.482001 M | -43.33 | -30.33 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.000 G | 3.000 G | 1.00 M | 2.959500 G | -40.96 | -27.96 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3.000 G | 7.000 G | 1.00 M | 3.011000 G | -38.98 | -25.98 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7.000 G | 9.000 G | 1.00 M | 7.340000 G | -36.45 | -23.45 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Start [Hz] | Stop [Hz] | RBW [Hz] | Freq [Hz] | PerAbn [dBm] | ΔLimit [dB] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 30.000 M | 1.000 G | 1.00 M | 170.407500 M | -41.09 | -28.09 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.000 G | 1.845 G | 1.00 M | 1.248473 G | -40.33 | -27.33 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.915 G | 3.000 G | 1.00 M | 1.915542 G | -20.91 | -7.91 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3.000 G | 7.000 G | 1.00 M | 3.044000 G | -37.59 | -24.59 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7.000 G | 13.600 G | 1.00 M | 11.605300 G | -35.10 | -22.10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 13.600 G | 19.100 G | 1.00 M | 15.300188 G | -25.58 | -12.58 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

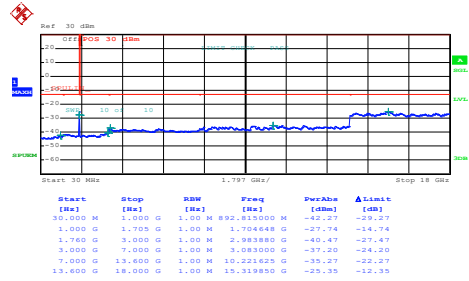


Date: 4.MAY.2022 10:24:32

Middle Channel

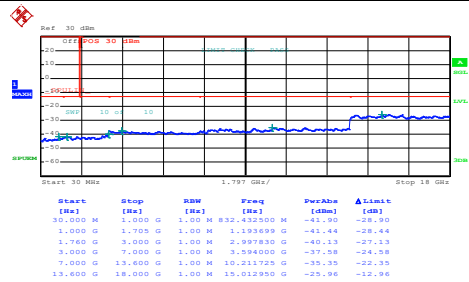

Date: 4.MAY.2022 10:25:40

Highest Channel

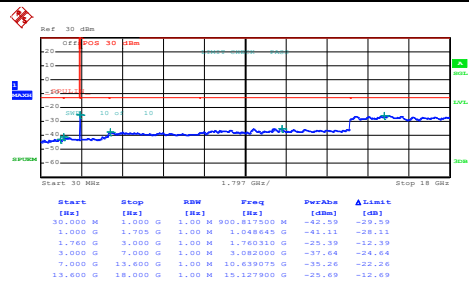

Date: 4.MAY.2022 10:26:47

**Frequency Stability**

| Test Conditions | Middle Channel | WCDMA Band V (RMC 12.2Kbps) | Limit |
|------------------|-------------------|--------------------------------|------------------|
| Temperature (°C) | Voltage (Volt) | Deviation (ppm) | 2.5ppm Result |
| 50 | Normal Voltage | 0.0108 | PASS |
| 40 | Normal Voltage | 0.0072 | |
| 30 | Normal Voltage | 0.0036 | |
| 20(Ref.) | Normal Voltage | 0.0000 | |
| 10 | Normal Voltage | 0.0036 | |
| 0 | Normal Voltage | 0.0060 | |
| -10 | Normal Voltage | 0.0084 | |
| -20 | Normal Voltage | 0.0060 | |
| -30 | Normal Voltage | 0.0024 | |
| 20 | Maximum Voltage | 0.0108 | |
| 20 | Normal Voltage | 0.0096 | |
| 20 | Battery End Point | 0.0096 | |

| Test Conditions | Middle Channel | WCDMA Band II (RMC 12.2Kbps) | Limit |
|------------------|-------------------|---------------------------------|-------------------|
| Temperature (°C) | Voltage (Volt) | Deviation (ppm) | Note 2. Result |
| 50 | Normal Voltage | 0.0021 | PASS |
| 40 | Normal Voltage | 0.0005 | |
| 30 | Normal Voltage | 0.0005 | |
| 20(Ref.) | Normal Voltage | 0.0000 | |
| 10 | Normal Voltage | 0.0016 | |
| 0 | Normal Voltage | 0.0027 | |
| -10 | Normal Voltage | 0.0000 | |
| -20 | Normal Voltage | 0.0016 | |
| -30 | Normal Voltage | 0.0032 | |
| 20 | Maximum Voltage | 0.0021 | |
| 20 | Normal Voltage | 0.0016 | |
| 20 | Battery End Point | 0.0011 | |

Note:

1. Normal Voltage = 3.3V. ; Battery End Point (BEP) = 3.135 V. ; Maximum Voltage =4.4 V
2. The frequency fundamental emissions stay within the authorized frequency block.

| Test Conditions | Middle Channel | WCDMA Band IV (RMC 12.2Kbps) | Limit |
|------------------|-------------------|---------------------------------|-------------------|
| Temperature (°C) | Voltage (Volt) | Deviation (ppm) | Note 2. Result |
| 50 | Normal Voltage | 0.0081 | PASS |
| 40 | Normal Voltage | 0.0058 | |
| 30 | Normal Voltage | 0.0023 | |
| 20(Ref.) | Normal Voltage | 0.0000 | |
| 10 | Normal Voltage | 0.0023 | |
| 0 | Normal Voltage | 0.0040 | |
| -10 | Normal Voltage | 0.0052 | |
| -20 | Normal Voltage | 0.0069 | |
| -30 | Normal Voltage | 0.0092 | |
| 20 | Maximum Voltage | 0.0087 | |
| 20 | Normal Voltage | 0.0069 | |
| 20 | Battery End Point | 0.0052 | |

Note:

1. Normal Voltage = 3.3V. ; Battery End Point (BEP) = 3.135 V. ; Maximum Voltage =4.4 V
2. The frequency fundamental emissions stay within the authorized frequency block.



Appendix B. Test Results of Radiated Test

WCDMA 850

| WCDMA 850 | | | | | | | | | |
|-----------|----------------------|----------------|------------------|------------------|-------------------------|--------------------------|----------------------------|-----------------------------|-----------------------|
| Channel | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | SPA Reading (dBm) | S.G. Power (dBm) | TX Cable loss (dB) | TX Antenna Gain (dBi) | Polarization (H/V) |
| Lowest | 1652 | -63.77 | -13 | -50.77 | -75.68 | -65.51 | 0.98 | 4.87 | H |
| | 2480 | -55.86 | -13 | -42.86 | -73.05 | -57.77 | 1.28 | 5.34 | H |
| | 3304 | -58.03 | -13 | -45.03 | -77.43 | -61.47 | 1.54 | 7.14 | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | 1652 | -61.86 | -13 | -48.86 | -74.24 | -63.6 | 0.98 | 4.87 | V |
| | 2480 | -49.83 | -13 | -36.83 | -67.46 | -51.74 | 1.28 | 5.34 | V |
| | 3304 | -57.96 | -13 | -44.96 | -77.64 | -61.4 | 1.54 | 7.14 | V |
| | | | | | | | | | V |
| | | | | | | | | | V |
| | | | | | | | | | V |
| Middle | 1672 | -62.98 | -13 | -49.98 | -75.17 | -64.66 | 0.99 | 4.82 | H |
| | 2508 | -56.68 | -13 | -43.68 | -73.93 | -58.64 | 1.29 | 5.41 | H |
| | 3344 | -58.07 | -13 | -45.07 | -77.64 | -61.68 | 1.56 | 7.31 | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | 1672 | -62.06 | -13 | -49.06 | -74.71 | -63.74 | 0.99 | 4.82 | V |
| | 2508 | -50.96 | -13 | -37.96 | -68.67 | -52.92 | 1.29 | 5.41 | V |
| | 3344 | -57.78 | -13 | -44.78 | -77.56 | -61.39 | 1.56 | 7.31 | V |
| | | | | | | | | | V |
| | | | | | | | | | V |
| | | | | | | | | | V |



| | | | | | | | | | |
|---------|------|--------|-----|--------|--------|--------|------|------|---|
| Highest | 1692 | -63.47 | -13 | -50.47 | -75.68 | -65.09 | 1.00 | 4.76 | H |
| | 2544 | -57.16 | -13 | -44.16 | -74.4 | -59.14 | 1.30 | 5.44 | H |
| | 3384 | -57.84 | -13 | -44.84 | -77.6 | -61.61 | 1.57 | 7.49 | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | 1692 | -62.54 | -13 | -49.54 | -75.34 | -64.16 | 1.00 | 4.76 | V |
| | 2544 | -52.53 | -13 | -39.53 | -70.27 | -54.51 | 1.30 | 5.44 | V |
| | 3384 | -57.54 | -13 | -44.54 | -77.43 | -61.31 | 1.57 | 7.49 | V |
| | | | | | | | | | V |
| | | | | | | | | | V |
| | | | | | | | | | V |
| | | | | | | | | | V |

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**WCDMA 1900**

| WCDMA 1900 | | | | | | | | | |
|------------|----------------------|-----------------|------------------|------------------|-------------------------|--------------------------|----------------------------|-----------------------------|-----------------------|
| Channel | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | SPA Reading (dBm) | S.G. Power (dBm) | TX Cable loss (dB) | TX Antenna Gain (dBi) | Polarization (H/V) |
| Lowest | 3708 | -57.85 | -13 | -44.85 | -78.73 | -64.43 | 1.67 | 8.25 | H |
| | 5556 | -56.01 | -13 | -43.01 | -81.45 | -63.08 | 2.66 | 9.72 | H |
| | 7410 | -55.13 | -13 | -42.13 | -82.15 | -64.29 | 2.46 | 11.62 | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | 3708 | -58.01 | -13 | -45.01 | -78.92 | -64.59 | 1.67 | 8.25 | V |
| | 5556 | -55.96 | -13 | -42.96 | -81.36 | -63.03 | 2.66 | 9.72 | V |
| | 7410 | -54.92 | -13 | -41.92 | -82.21 | -64.08 | 2.46 | 11.62 | V |
| | | | | | | | | | V |
| | | | | | | | | | V |
| | | | | | | | | | V |
| | | | | | | | | | V |
| Middle | 3762 | -58.41 | -13 | -45.41 | -79.17 | -65.04 | 1.69 | 8.31 | H |
| | 5640 | -55.78 | -13 | -42.78 | -81.41 | -62.83 | 2.71 | 9.76 | H |
| | 7518 | -54.22 | -13 | -41.22 | -81.48 | -63.61 | 2.42 | 11.81 | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | 3762 | -58.19 | -13 | -45.19 | -78.88 | -64.82 | 1.69 | 8.31 | V |
| | 5640 | -55.89 | -13 | -42.89 | -81.36 | -62.94 | 2.71 | 9.76 | V |
| | 7518 | -54.38 | -13 | -41.38 | -81.79 | -63.77 | 2.42 | 11.81 | V |
| | | | | | | | | | V |
| | | | | | | | | | V |
| | | | | | | | | | V |
| | | | | | | | | | V |



| | | | | | | | | | |
|---------|------|--------|-----|--------|--------|--------|------|-------|---|
| Highest | 3816 | -58.21 | -13 | -45.21 | -78.92 | -64.89 | 1.70 | 8.38 | H |
| | 5724 | -55.54 | -13 | -42.54 | -81.09 | -62.58 | 2.75 | 9.79 | H |
| | 7632 | -53.24 | -13 | -40.24 | -80.74 | -62.73 | 2.39 | 11.88 | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | 3816 | -57.64 | -13 | -44.64 | -78.39 | -64.32 | 1.70 | 8.38 | V |
| | 5724 | -55.41 | -13 | -42.41 | -81.07 | -62.45 | 2.75 | 9.79 | V |
| | 7632 | -53.84 | -13 | -40.84 | -81.56 | -63.33 | 2.39 | 11.88 | V |
| | | | | | | | | | V |
| | | | | | | | | | V |
| | | | | | | | | | V |
| | | | | | | | | | V |

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**WCDMA 1700**

| WCDMA 1700 | | | | | | | | | |
|------------|----------------------|-----------------|------------------|------------------|-------------------------|--------------------------|----------------------------|-----------------------------|-----------------------|
| Channel | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | SPA Reading (dBm) | S.G. Power (dBm) | TX Cable loss (dB) | TX Antenna Gain (dBi) | Polarization (H/V) |
| Lowest | 3426 | -57.26 | -13 | -44.26 | -77.92 | -63.35 | 1.58 | 7.67 | H |
| | 5136 | -56.44 | -13 | -43.44 | -80.48 | -63.72 | 2.42 | 9.70 | H |
| | 6852 | -54.67 | -13 | -41.67 | -81.67 | -62.65 | 2.64 | 10.62 | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | 3426 | -55.02 | -13 | -42.02 | -75.73 | -61.11 | 1.58 | 7.67 | V |
| | 5136 | -56.28 | -13 | -43.28 | -80.3 | -63.56 | 2.42 | 9.70 | V |
| | 6852 | -54.78 | -13 | -41.78 | -81.73 | -62.76 | 2.64 | 10.62 | V |
| | | | | | | | | | V |
| | | | | | | | | | V |
| | | | | | | | | | V |
| | | | | | | | | | V |
| Middle | 3462 | -56.77 | -13 | -43.77 | -77.55 | -63.01 | 1.59 | 7.83 | H |
| | 5196 | -56.33 | -13 | -43.33 | -80.63 | -63.58 | 2.45 | 9.70 | H |
| | 6930 | -54.84 | -13 | -41.84 | -81.66 | -62.94 | 2.61 | 10.72 | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | 3462 | -53.52 | -13 | -40.52 | -74.22 | -59.76 | 1.59 | 7.83 | V |
| | 5196 | -56.97 | -13 | -43.97 | -81.01 | -64.22 | 2.45 | 9.70 | V |
| | 6930 | -55.15 | -13 | -42.15 | -81.86 | -63.25 | 2.61 | 10.72 | V |
| | | | | | | | | | V |
| | | | | | | | | | V |
| | | | | | | | | | V |
| | | | | | | | | | V |



| | | | | | | | | | |
|---------|------|--------|-----|--------|--------|--------|------|-------|---|
| Highest | 3504 | -56.35 | -13 | -43.35 | -77.37 | -62.75 | 1.61 | 8.00 | H |
| | 5256 | -56.83 | -13 | -43.83 | -81.17 | -64.05 | 2.48 | 9.70 | H |
| | 7008 | -55.41 | -13 | -42.41 | -82 | -63.64 | 2.59 | 10.82 | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | 3504 | -55.36 | -13 | -42.36 | -76.25 | -61.76 | 1.61 | 8.00 | V |
| | 5256 | -56.33 | -13 | -43.33 | -80.58 | -63.55 | 2.48 | 9.70 | V |
| | 7008 | -54.88 | -13 | -41.88 | -81.6 | -63.11 | 2.59 | 10.82 | V |
| | | | | | | | | | V |
| | | | | | | | | | V |
| | | | | | | | | | V |
| | | | | | | | | | V |

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.