



FCC PART 27
FCC PART 22H, PART 24E
MEASUREMENT AND TEST REPORT

For

Telecell Mobile (H.K) Ltd.

RM 801 Metro Ctr II, 21 Lam Hing Street, Kln Bay, Hong Kong

FCC ID: 2ADX3X55L

Report Type: Original Report	Product Type: GRAVITY
Report Number: <u>RSZ160926005-00D</u>	
Report Date: <u>2016-12-16</u>	
Reviewed By: <u>Engineer</u> <i>Oscar.Ye</i>	
Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
MEASUREMENT UNCERTAINTY.....	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
JUSTIFICATION	5
EQUIPMENT MODIFICATIONS	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
BLOCK DIAGRAM OF TEST SETUP	5
SUMMARY OF TEST RESULTS	6
TEST EQUIPMENT LIST	7
FCC §1.1307(B) & §2.1093 - RF EXPOSURE INFORMATION.....	8
APPLICABLE STANDARD	8
TEST RESULT	8
FCC §2.1047 - MODULATION CHARACTERISTIC	9
§2.1046; § 22.913 (A); § 24.232 (C); §27.50 - RF OUTPUT POWER	10
APPLICABLE STANDARDS.....	10
TEST PROCEDURE	10
TEST DATA	10
FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53 - OCCUPIED BANDWIDTH.....	37
APPLICABLE STANDARDS.....	37
TEST PROCEDURE	37
TEST DATA	37
§ 2.1051; § 22.917 (A); § 24.238 (A); §27.53 (H) (M)	95
SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	95
APPLICABLE STANDARDS.....	95
TEST PROCEDURE	95
TEST DATA	95
FCC § 2.1053; § 22.917 (A); § 24.238 (A); §27.53 (H) (M) SPURIOUS RADIATED EMISSIONS.....	133
APPLICABLE STANDARDS.....	133
TEST PROCEDURE	133
TEST DATA	133
FCC § 22.917 (A);§ 24.238 (A); §27.53 (H)(M) - BAND EDGES	137
APPLICABLE STANDARDS.....	137
TEST PROCEDURE	137
TEST DATA	137
FCC § 2.1055; § 22.355; § 24.235; §27.54; - FREQUENCY STABILITY.....	195
APPLICABLE STANDARDS.....	195
TEST PROCEDURE	195
TEST DATA	196

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Telecell Mobile (H.K) Ltd.*'s product, model number: *X55L (FCC ID: 2ADX3X55L)* or the "EUT" in this report was a *GRAVITY*, which was measured approximately: 151mm (L) × 76mm (W) × 7.7mm (H), rated with input voltage: DC 3.8V rechargeable Li-ion battery or DC 5.0V from adapter.

Adapter Information:

Model: A88-502000

Input: AC100-240V, 50/60Hz, 0.35A

Output: 5.0V, 2.0A

Note: For the product, series model Gravity 5.5 and X55L are identical schematics, the differences between them is just the model number due to marketing purpose and different shell (front appearance). X55L was selected for fully testing, which was explained in the attached product similarity declaration letter.

**All measurement and test data in this report was gathered from production sample serial number: 1603324 (Assigned by BACL, Kunshan). The EUT supplied by the applicant was received on 2016-09-26.*

Objective

This type approval report is prepared on behalf of *Telecell Mobile (H.K) Ltd.* in accordance with Part 2, Part 22-Subpart H, Part 24-Subpart E and Part 27 of the Federal Communication Commission's rules.

The objective is to determine the compliance of EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability, and band edge.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP, Part 15.247 DSS & DTS submissions with FCC ID: 2ADX3X55L.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-Part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services

Part 24 Subpart E - Personal Communication Services

Part 27 – Miscellaneous wireless communications services

Applicable Standards: TIA/EIA 603-D.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		±3.26 dB
RF conducted test with spectrum		±0.9dB
RF Output Power with Power meter		±0.5dB
Radiated emission	30MHz~1GHz	±5.91dB
	Above 1G	±4.92dB
Occupied Bandwidth		±0.5kHz
Temperature		±1.0°C
Humidity		±6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China

Test site at Bay Area Compliance Laboratories Corp. (Kunshan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 06, 2014. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 815570. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to TIA/EIA-603-D.

The final qualification test was performed with the EUT operating at normal mode.


Equipment Modifications

No modifications were made to the EUT.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	1201.0002K50-116218-UY
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	110605

Block Diagram of Test Setup

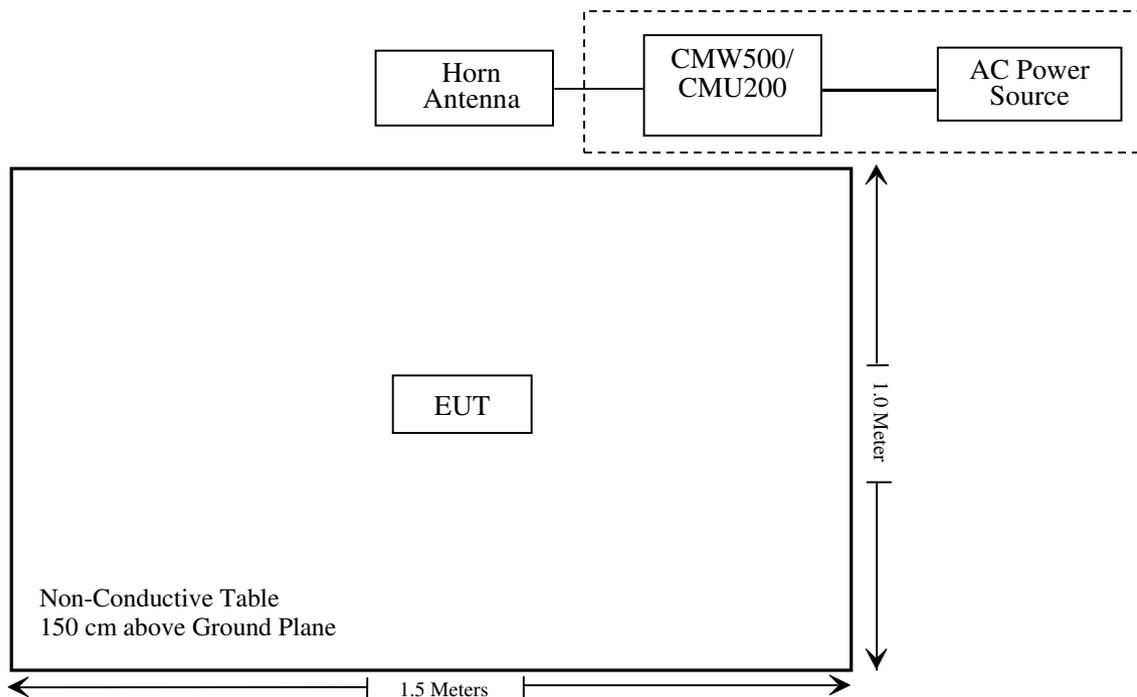

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307 (b)(1), §2.1093	RF Exposure Information	Compliance*
§2.1046; § 22.913 (a); § 24.232 (c); §27.50 (d) (h)	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905; § 22.917; § 24.238; §27.53	Occupied Bandwidth	Compliance
§ 2.1051; § 22.917 (a); § 24.238 (a); §27.53 (h)(m)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053; § 22.917 (a); § 24.238 (a); §27.53 (h)(m)	Spurious Radiated Emissions	Compliance
§ 22.917 (a); § 24.238 (a); §27.53 (h)(m)	Band Edge	Compliance
§ 2.1055; § 22.355; § 24.235; §27.54;	Frequency stability	Compliance

Compliance*: Please refer to SAR report released by BACL, report number: RSZ160926005-20.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test					
Sonoma Instrument	Amplifier	330	171377	2016-09-16	2017-09-16
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2015-11-12	2016-11-11
Sunol Sciences	Broadband Antenna	JB3	A090314-2	2016-01-09	2019-01-08
Sunol Sciences	Broadband Antenna	JB3	A090314-1	2016-01-09	2019-01-08
Narda	Pre-amplifier	AFS42-00101800	2001270	2016-09-08	2017-09-08
EMCO	Horn Antenna	3116	9510-2384	2015-11-07	2018-11-06
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2015-11-12	2016-11-11
ETS	Horn Antenna	3115	6229	2016-01-11	2017-01-10
ETS	Horn Antenna	3115	9311-4159	2016-01-11	2017-01-10
R&S	Auto test Software	EMC32	V 09.10.0	NCR	NCR
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-12-15	2016-12-15
Ducommun technologies	RF Cable	104PEA	218124002	2016-04-22	2017-04-22
HP	Signal Generator	E4421B	US38440505	2015-11-12	2016-11-11
RF Conducted test					
BACL	TS 8997 Cable-01	T-KS-EMC086	T-KS-EMC086	2015-12-10	2016-12-09
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-12-16	2016-12-15
WEINSCHL	3dB Attenuator	5326	N/A	2016-06-18	2017-06-18
Rohde & Schwarz	OSP120 BASE UNIT	OSP120	101247	2016-07-04	2017-07-03
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2016-09-21	2017-09-21
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	110605	2015-11-12	2016-11-11
R&S	Wideband Radio Communication tester	CMW500	1201.002K50-116218-UY	2016-10-08	2017-10-07
HONOVA	Power Splitter	ZFRSC-14-S+	019411452	2016-06-12	2017-06-12
WEINSCHL	10dB Attenuator	5328	N/A	2016-06-18	2017-06-18

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307(b) & §2.1093 - RF EXPOSURE INFORMATION

Applicable Standard

FCC§1.1307, §2.1093.

Test Result

Compliance, please refer to the SAR report: RSZ160926005-20.

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d) , Part 22H & 24E, Part 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

§2.1046; § 22.913 (a); § 24.232 (c); §27.50 - RF OUTPUT POWER

Applicable Standards

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications..

According to §27.50(c), Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.


According to §27.50(d), the maximum EIRP must not exceed 1Watts (30dBm) for 1710-1755MHz. The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB.

According to §27.50(h), the maximum EIRP must not exceed 2Watts (33dBm) for 2500-2570MHz.

Test Procedure

Conducted method:

The RF output of the transmitter was connected to the CMW500/CMU200 through sufficient attenuation.

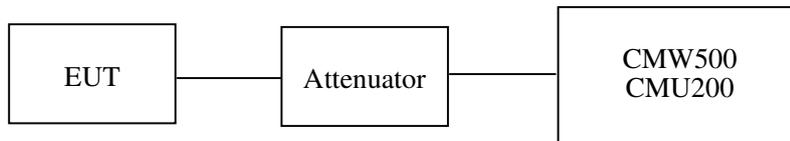

Radiated method:

TIA603-D section 2.2.17

Test Data

Environmental Conditions

Temperature:	25°C
Relative Humidity:	55 %
ATM Pressure:	101.0kPa

The testing was performed by Layne Li on 2016-10-06.

Conducted Power

Cellular Band (Part 22H)

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
GSM	128	824.2	31.70	38.45
	190	836.6	31.81	38.45
	251	848.8	31.91	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
GPRS	128	824.2	31.73	30.52	28.78	27.56	38.45
	190	836.6	31.85	30.61	28.90	27.66	38.45
	251	848.8	31.96	30.72	28.98	27.83	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
EGPRS	128	824.2	26.78	25.80	23.77	22.62	38.45
	190	836.6	26.50	25.50	23.45	22.30	38.45
	251	848.8	26.29	25.29	23.23	22.08	38.45

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band 5)	Normal	RMC		22.34	22.25	22.27
		HSDPA	1	21.24	21.23	21.19
			2	21.17	21.15	21.08
			3	21.34	21.27	21.23
			4	21.12	21.18	21.07
		HSUPA	1	21.30	21.21	21.21
			2	21.20	21.17	21.14
			3	21.39	21.32	21.24
			4	21.25	21.18	21.15
			5	21.39	21.30	21.26
		HSPA+	1	21.29	21.22	21.26

PCS Band (Part 24E)

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
GSM	512	1850.2	28.80	33
	661	1880.0	28.62	33
	810	1909.8	28.51	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
GPRS	512	1850.2	28.83	28.07	26.31	25.22	33
	661	1880.0	28.64	27.88	26.17	25.07	33
	810	1909.8	28.56	27.80	26.08	24.99	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
EGPRS	512	1850.2	26.64	25.38	23.05	21.74	33
	661	1880.0	26.30	25.08	22.73	21.41	33
	810	1909.8	26.11	24.86	22.53	21.24	33

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band 2)	Normal	RMC		22.07	22.00	21.74
		HSDPA	1	21.05	20.94	20.67
			2	21.01	20.87	20.58
			3	21.15	21.03	20.78
			4	20.98	20.82	20.60
		HSUPA	1	21.04	20.99	20.71
			2	20.96	20.93	20.62
			3	21.08	21.08	20.76
			4	20.91	20.93	20.65
			5	21.14	21.04	20.84
		HSPA+	1	21.05	20.98	20.73

AWS Band (Part 27)

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band 4)	Normal	RMC		21.93	21.92	22.01
		HSDPA	1	20.90	20.80	20.91
			2	20.83	20.69	20.81
			3	20.95	20.85	20.96
			4	20.79	20.68	20.84
		HSUPA	1	20.91	20.86	20.92
			2	20.81	20.74	20.85
			3	21.04	20.91	21.00
			4	20.79	20.83	20.81
			5	21.03	20.95	20.98
		HSPA+	1	20.90	20.85	20.92

Peak-to-average ratio (PAR)

Cellular Band

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	0.37	13
	Middle	0.23	13
	High	0.34	13

Mode	Channel	PAR (dB)	Limit (dB)
EGPRS	Low	0.43	13
	Middle	0.35	13
	High	0.22	13

Mode	Channel	PAR (dB)	Limit (dB)
RMC (BPSK)	Low	2.96	13
	Middle	2.85	13
	High	2.92	13
HSDPA (16QAM)	Low	2.91	13
	Middle	2.81	13
	High	2.93	13
HSUPA (BPSK)	Low	2.92	13
	Middle	2.87	13
	High	2.95	13

PCS Band

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	0.37	13
	Middle	0.25	13
	High	0.32	13

Mode	Channel	PAR (dB)	Limit (dB)
EGPRS	Low	0.42	13
	Middle	0.32	13
	High	0.53	13

Mode	Channel	PAR (dB)	Limit (dB)
RMC (BPSK)	Low	3.65	13
	Middle	3.52	13
	High	3.63	13
HSDPA (16QAM)	Low	3.67	13
	Middle	3.54	13
	High	3.69	13
HSUPA (BPSK)	Low	3.68	13
	Middle	3.55	13
	High	3.66	13

AWS Band

Mode	Channel	PAR (dB)	Limit (dB)
RMC (BPSK)	Low	2.84	13
	Middle	2.72	13
	High	2.89	13
HSDPA (16QAM)	Low	2.88	13
	Middle	2.74	13
	High	2.86	13
HSUPA (BPSK)	Low	2.89	13
	Middle	2.77	13
	High	2.86	13

Radiated Power**GSM Mode:**

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)			
ERP, Cellular Band (Part 22H), Middle Channel										
836.60	96.22	245	1.7	H	25.2	0.46	4.75	29.49	38.45	8.96
836.60	85.84	158	1.5	V	14.8	0.46	4.75	19.09	38.45	19.36
EIRP, PCS Band (Part 24E), Low Channel										
1850.20	78.24	93	2.4	H	17.4	0.31	10.4	27.49	33	5.51
1850.20	74.37	42	1.3	V	10.1	0.31	10.4	20.19	33	12.81

EDGE Mode:

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)			
ERP, Cellular Band (Part 22H), Low Channel										
824.20	91.15	102	1.8	H	20.1	0.46	4.75	24.39	38.45	14.06
824.20	84.76	145	1.5	V	13.7	0.46	4.75	17.99	38.45	20.46
EIRP, PCS Band (Part 24E), Low Channel										
1850.20	72.84	274	1.7	H	12.0	0.31	10.4	22.09	33	10.91
1850.20	71.07	67	2.4	V	6.8	0.31	10.4	16.89	33	16.11

WCDMA Mode:

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)			
ERP, WCDMA Band V (Part 22H), Low Channel										
826.40	88.72	125	1.7	H	17.7	0.46	4.75	21.99	38.45	16.46
826.40	86.53	272	1.5	V	15.5	0.46	4.75	19.79	38.45	18.66
EIRP, WCDMA Band II (Part 24E), Low Channel										
1852.40	72.54	209	1.4	H	11.7	0.31	10.4	21.79	33	11.21
1852.40	70.57	337	1.6	V	6.3	0.31	10.4	16.39	33	16.61
EIRP, WCDMA Band IV (Part 27), Low Channel										
1712.40	73.98	331	1.5	H	11.6	0.30	9.90	21.20	30	8.8
1712.40	72.54	120	1.5	V	7.7	0.30	9.90	17.30	30	12.7

Note:

All above data were tested with no amplifier.

Absolute Level = SG Level - Cable loss + Antenna Gain

Margin = Limit - Absolute Level

LTE Band 2:

Maximum Output Power

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4	QPSK	RB Size=1, RB Offset=0	23.24	23.46	23.17
		RB Size=1, RB Offset=2	23.14	23.39	23.12
		RB Size=1, RB Offset=5	23.34	23.56	23.30
		RB Size=3, RB Offset=0	22.75	22.91	22.63
		RB Size=3, RB Offset=1	22.65	22.79	22.50
		RB Size=3, RB Offset=2	22.80	23.02	22.73
		RB Size=6, RB Offset=0	22.24	22.48	22.14
	16QAM	RB Size=1, RB Offset=0	23.21	23.45	23.13
		RB Size=1, RB Offset=2	23.09	23.36	23.01
		RB Size=1, RB Offset=5	23.30	23.55	23.23
		RB Size=3, RB Offset=0	22.71	22.93	22.61
		RB Size=3, RB Offset=1	22.62	22.84	22.51
		RB Size=3, RB Offset=2	22.77	23.03	22.71
		RB Size=6, RB Offset=0	22.28	22.48	22.17
3.0	QPSK	RB Size=1, RB Offset=0	23.16	23.38	23.05
		RB Size=1, RB Offset=7	23.06	23.28	22.99
		RB Size=1, RB Offset=14	23.23	23.43	23.10
		RB Size=8, RB Offset=0	22.76	22.91	22.63
		RB Size=8, RB Offset=4	22.65	22.79	22.54
		RB Size=8, RB Offset=7	22.80	23.02	22.71
		RB Size=15, RB Offset=0	22.25	22.49	22.14
	16QAM	RB Size=1, RB Offset=0	23.12	23.37	23.03
		RB Size=1, RB Offset=7	23.02	23.34	23.00
		RB Size=1, RB Offset=14	23.25	23.46	23.16
		RB Size=8, RB Offset=0	22.63	22.85	22.56
		RB Size=8, RB Offset=4	22.50	22.81	22.53
		RB Size=8, RB Offset=7	22.71	22.95	22.62
		RB Size=15, RB Offset=0	22.23	22.47	22.16

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5.0	QPSK	RB Size=1, RB Offset=0	23.19	23.51	23.26
		RB Size=1, RB Offset=12	23.13	23.38	23.18
		RB Size=1, RB Offset=24	23.23	23.57	23.32
		RB Size=12, RB Offset=0	22.72	23.00	22.76
		RB Size=12, RB Offset=6	22.62	22.97	22.67
		RB Size=12, RB Offset=11	22.77	23.12	22.88
		RB Size=25, RB Offset=0	22.27	22.50	22.19
	16QAM	RB Size=1, RB Offset=0	23.14	23.54	23.22
		RB Size=1, RB Offset=12	23.01	23.44	23.10
		RB Size=1, RB Offset=24	23.26	23.62	23.33
		RB Size=12, RB Offset=0	22.71	23.03	22.82
		RB Size=12, RB Offset=6	22.68	22.92	22.73
		RB Size=12, RB Offset=11	22.79	23.10	22.92
		RB Size=25, RB Offset=0	22.24	22.51	22.13
10.0	QPSK	RB Size=1, RB Offset=0	23.24	23.40	23.13
		RB Size=1, RB Offset=24	23.17	23.33	23.07
		RB Size=1, RB Offset=49	23.28	23.49	23.18
		RB Size=25, RB Offset=0	22.7	22.94	22.65
		RB Size=25, RB Offset=12	22.61	22.95	22.61
		RB Size=25, RB Offset=24	22.77	23.05	22.78
		RB Size=50, RB Offset=0	22.27	22.52	22.16
	16QAM	RB Size=1, RB Offset=0	23.04	23.29	23.07
		RB Size=1, RB Offset=24	22.98	23.24	22.94
		RB Size=1, RB Offset=49	23.11	23.39	23.12
		RB Size=25, RB Offset=0	22.74	22.92	22.68
		RB Size=25, RB Offset=12	22.63	22.95	22.60
		RB Size=25, RB Offset=24	22.87	22.98	22.79
		RB Size=50, RB Offset=0	22.23	22.50	22.14

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15.0	QPSK	RB Size=1, RB Offset=0	23.24	23.56	23.34
		RB Size=1, RB Offset=37	23.17	23.43	23.28
		RB Size=1, RB Offset=74	23.29	23.69	23.38
		RB Size=36, RB Offset=0	22.79	23.07	22.85
		RB Size=36, RB Offset=18	22.75	22.95	22.79
		RB Size=36, RB Offset=37	22.88	23.12	22.91
		RB Size=75, RB Offset=0	22.24	22.59	22.18
	16QAM	RB Size=1, RB Offset=0	23.42	23.73	23.38
		RB Size=1, RB Offset=37	23.37	23.62	23.34
		RB Size=1, RB Offset=74	23.55	23.79	23.49
		RB Size=36, RB Offset=0	22.72	23.04	22.73
		RB Size=36, RB Offset=18	22.60	22.95	22.68
		RB Size=36, RB Offset=37	22.79	23.16	22.82
		RB Size=75, RB Offset=0	22.28	22.62	22.12
20.0	QPSK	RB Size=1, RB Offset=0	23.34	23.66	23.25
		RB Size=1, RB Offset=49	23.21	23.58	23.19
		RB Size=1, RB Offset=99	23.41	23.74	23.38
		RB Size=50, RB Offset=0	22.79	23.12	22.86
		RB Size=50, RB Offset=24	22.75	22.95	22.77
		RB Size=50, RB Offset=49	22.86	23.21	22.99
		RB Size=100, RB Offset=0	22.24	22.57	22.24
	16QAM	RB Size=1, RB Offset=0	23.39	23.73	23.43
		RB Size=1, RB Offset=49	23.28	23.68	23.35
		RB Size=1, RB Offset=99	23.45	23.84	23.50
		RB Size=50, RB Offset=0	22.73	23.19	22.81
		RB Size=50, RB Offset=24	22.68	22.95	22.70
		RB Size=50, RB Offset=49	22.85	23.31	22.88
		RB Size=100, RB Offset=0	22.29	22.57	22.12

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	4.66	13	Pass
QPSK (100%RB Size)	5.18	13	Pass
16QAM (1RB Size)	4.19	13	Pass
16QAM (100%RB Size)	5.25	13	Pass

QPSK:

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
1.4 MHz Bandwidth									
1880.00	73.44	327	1.7	H	12.6	0.31	10.40	22.69	33
1880.00	73.97	244	1.4	V	9.7	0.31	10.40	19.79	33
3 MHz Bandwidth									
1880.00	73.12	277	1.2	H	12.3	0.31	10.40	22.39	33
1880.00	73.68	33	1.3	V	9.5	0.31	10.40	19.59	33
5 MHz Bandwidth									
1880.00	72.98	132	1.2	H	12.1	0.31	10.40	22.20	33
1880.00	72.81	216	2.2	V	8.6	0.31	10.40	18.70	33
10MHz Bandwidth									
1880.00	72.54	132	1.4	H	11.7	0.31	10.40	21.79	33
1880.00	72.46	260	1.9	V	8.2	0.31	10.40	18.29	33
15 MHz Bandwidth									
1880.00	72.23	137	1.9	H	11.4	0.31	10.40	21.49	33
1880.00	71.74	12	2.3	V	7.5	0.31	10.40	17.59	33
20 MHz Bandwidth									
1880.00	71.91	186	1.8	H	11.1	0.31	10.40	21.19	33
1880.00	71.22	84	1.4	V	7.0	0.31	10.40	17.09	33

16QAM:

Frequency (MHz)	Receiver Reading (dBµV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
1.4 MHz Bandwidth									
1880.00	73.27	137	2.3	H	12.4	0.31	10.40	22.49	33
1880.00	74.41	87	2.0	V	10.2	0.31	10.40	20.29	33
3 MHz Bandwidth									
1880.00	72.83	296	2.2	H	12.0	0.31	10.40	22.09	33
1880.00	73.85	266	1.7	V	9.6	0.31	10.40	19.69	33
5 MHz Bandwidth									
1880.00	72.53	305	2.2	H	11.7	0.31	10.40	21.79	33
1880.00	73.64	79	2.4	V	9.4	0.31	10.40	19.49	33
10 MHz Bandwidth									
1880.00	72.33	11	1.3	H	11.5	0.31	10.40	21.59	33
1880.00	73.11	253	1.4	V	8.9	0.31	10.40	18.99	33
15 MHz Bandwidth									
1880.00	71.94	75	1.8	H	11.1	0.31	10.40	21.19	33
1880.00	72.96	291	2.2	V	8.7	0.31	10.40	18.79	33
20 MHz Bandwidth									
1880.00	71.61	21	2.1	H	10.8	0.31	10.40	20.89	33
1880.00	72.69	190	1.5	V	8.5	0.31	10.40	18.59	33

LTE Band 4:

Maximum Output Power

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4	QPSK	RB Size=1, RB Offset=0	23.63	23.85	23.54
		RB Size=1, RB Offset=2	23.55	23.78	23.46
		RB Size=1, RB Offset=5	23.75	23.89	23.63
		RB Size=3, RB Offset=0	23.12	23.40	23.22
		RB Size=3, RB Offset=1	23.08	23.36	23.18
		RB Size=3, RB Offset=2	23.18	23.45	23.28
		RB Size=6, RB Offset=0	22.72	22.90	22.63
	16QAM	RB Size=1, RB Offset=0	23.67	23.84	23.59
		RB Size=1, RB Offset=2	23.58	23.80	23.55
		RB Size=1, RB Offset=5	23.77	23.90	23.71
		RB Size=3, RB Offset=0	23.02	23.35	23.07
		RB Size=3, RB Offset=1	22.99	23.28	23.00
		RB Size=3, RB Offset=2	23.13	23.46	23.12
		RB Size=6, RB Offset=0	22.75	22.90	22.68
3.0	QPSK	RB Size=1, RB Offset=0	23.52	23.75	23.43
		RB Size=1, RB Offset=7	23.45	23.65	23.32
		RB Size=1, RB Offset=14	23.57	23.82	23.46
		RB Size=8, RB Offset=0	23.07	23.34	23.12
		RB Size=8, RB Offset=4	23.03	23.22	23.05
		RB Size=8, RB Offset=7	23.13	23.44	23.24
		RB Size=15, RB Offset=0	22.71	22.88	22.62
	16QAM	RB Size=1, RB Offset=0	23.54	23.77	23.46
		RB Size=1, RB Offset=7	23.43	23.67	23.37
		RB Size=1, RB Offset=14	23.62	23.81	23.56
		RB Size=8, RB Offset=0	23.04	23.35	23.14
		RB Size=8, RB Offset=4	22.99	23.31	23.04
		RB Size=8, RB Offset=7	23.17	23.46	23.25
		RB Size=15, RB Offset=0	22.53	22.87	22.67

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5.0	QPSK	RB Size=1, RB Offset=0	23.58	23.88	23.53
		RB Size=1, RB Offset=12	23.54	23.76	23.50
		RB Size=1, RB Offset=24	23.62	23.97	23.58
		RB Size=12, RB Offset=0	23.08	23.32	23.16
		RB Size=12, RB Offset=6	23.04	23.20	23.10
		RB Size=12, RB Offset=11	23.18	23.38	23.29
		RB Size=25, RB Offset=0	22.63	22.91	22.62
	16QAM	RB Size=1, RB Offset=0	23.51	23.87	23.46
		RB Size=1, RB Offset=12	23.40	23.83	23.36
		RB Size=1, RB Offset=24	23.59	24.00	23.54
		RB Size=12, RB Offset=0	23.04	23.34	23.13
		RB Size=12, RB Offset=6	23.00	23.23	23.07
		RB Size=12, RB Offset=11	23.14	23.45	23.25
		RB Size=25, RB Offset=0	22.67	22.91	22.66
10.0	QPSK	RB Size=1, RB Offset=0	23.23	23.46	23.17
		RB Size=1, RB Offset=24	23.15	23.36	23.11
		RB Size=1, RB Offset=49	23.35	23.50	23.25
		RB Size=25, RB Offset=0	22.86	23.1	22.76
		RB Size=25, RB Offset=12	22.77	22.99	22.72
		RB Size=25, RB Offset=24	22.90	23.19	22.80
		RB Size=50, RB Offset=0	22.52	22.91	22.56
	16QAM	RB Size=1, RB Offset=0	23.15	23.49	23.27
		RB Size=1, RB Offset=24	23.04	23.40	23.15
		RB Size=1, RB Offset=49	23.25	23.60	23.35
		RB Size=25, RB Offset=0	22.86	23.15	22.79
		RB Size=25, RB Offset=12	22.79	23.12	22.74
		RB Size=25, RB Offset=24	22.93	23.26	22.91
		RB Size=50, RB Offset=0	22.57	22.92	22.53

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15.0	QPSK	RB Size=1, RB Offset=0	23.15	23.34	23.19
		RB Size=1, RB Offset=37	23.02	23.29	23.10
		RB Size=1, RB Offset=74	23.19	23.46	23.25
		RB Size=36, RB Offset=0	22.81	23.12	22.73
		RB Size=36, RB Offset=18	22.76	23.04	22.68
		RB Size=36, RB Offset=37	22.86	23.22	22.78
		RB Size=75, RB Offset=0	22.43	22.82	22.57
	16QAM	RB Size=1, RB Offset=0	23.19	23.32	23.23
		RB Size=1, RB Offset=37	23.12	23.21	23.10
		RB Size=1, RB Offset=74	23.30	23.45	23.35
		RB Size=36, RB Offset=0	22.89	23.05	22.77
		RB Size=36, RB Offset=18	22.81	22.93	22.72
		RB Size=36, RB Offset=37	22.99	23.15	22.83
		RB Size=75, RB Offset=0	22.47	22.82	22.53
20.0	QPSK	RB Size=1, RB Offset=0	23.14	23.39	23.26
		RB Size=1, RB Offset=49	23.06	23.29	23.20
		RB Size=1, RB Offset=99	23.19	23.50	23.36
		RB Size=50, RB Offset=0	22.81	23.01	22.73
		RB Size=50, RB Offset=24	22.74	22.88	22.65
		RB Size=50, RB Offset=49	22.91	23.08	22.83
		RB Size=100, RB Offset=0	22.41	22.72	22.54
	16QAM	RB Size=1, RB Offset=0	23.02	23.24	23.07
		RB Size=1, RB Offset=49	22.91	23.20	22.97
		RB Size=1, RB Offset=99	23.13	23.34	23.18
		RB Size=50, RB Offset=0	22.72	22.93	22.63
		RB Size=50, RB Offset=24	22.60	22.86	22.59
		RB Size=50, RB Offset=49	22.81	22.98	22.75
		RB Size=100, RB Offset=0	22.45	22.73	22.35

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	4.28	13	Pass
QPSK (100%RB Size)	5.27	13	Pass
16QAM (1RB Size)	4.33	13	Pass
16QAM (100%RB Size)	4.89	13	Pass

QPSK:

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
1.4 MHz Bandwidth									
1732.50	75.28	93	1.8	H	12.9	0.30	9.90	22.50	30
1732.50	74.44	238	2.0	V	9.6	0.30	9.90	19.20	30
3 MHz Bandwidth									
1732.50	74.61	268	1.4	H	12.3	0.30	9.90	21.90	30
1732.50	74.39	225	1.7	V	9.5	0.30	9.90	19.10	30
5 MHz Bandwidth									
1732.50	74.55	101	2.3	H	12.2	0.30	9.90	21.80	30
1732.50	73.73	126	2.3	V	8.9	0.30	9.90	18.50	30
10MHz Bandwidth									
1732.50	74.31	181	1.5	H	12.0	0.30	9.90	21.60	30
1732.50	73.11	129	1.4	V	8.3	0.30	9.90	17.90	30
15 MHz Bandwidth									
1732.50	73.84	62	1.7	H	11.5	0.30	9.90	21.10	30
1732.50	72.86	299	1.4	V	8.0	0.30	9.90	17.60	30
20 MHz Bandwidth									
1732.50	73.59	202	1.0	H	11.2	0.30	9.90	20.80	30
1732.50	72.44	336	2.4	V	7.6	0.30	9.90	17.20	30

16QAM:

Frequency (MHz)	Receiver Reading (dBµV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
1.4 MHz Bandwidth									
1732.50	75.69	57	1.7	H	13.3	0.30	9.90	22.90	30
1732.50	75.24	58	2.4	V	10.4	0.30	9.90	20.00	30
3 MHz Bandwidth									
1732.50	75.39	79	1.1	H	13.1	0.30	9.90	22.70	30
1732.50	74.77	296	2.1	V	9.9	0.30	9.90	19.50	30
5 MHz Bandwidth									
1732.50	75.16	56	1.2	H	12.9	0.30	9.90	22.50	30
1732.50	74.08	165	2.4	V	9.2	0.30	9.90	18.80	30
10 MHz Bandwidth									
1732.50	75.01	227	2.4	H	12.7	0.30	9.90	22.30	30
1732.50	73.56	149	1.2	V	8.7	0.30	9.90	18.30	30
15 MHz Bandwidth									
1732.50	74.36	143	1.4	H	12.0	0.30	9.90	21.60	30
1732.50	73.27	317	1.4	V	8.4	0.30	9.90	18.00	30
20 MHz Bandwidth									
1732.50	74.21	96	1.9	H	11.9	0.30	9.90	21.50	30
1732.50	72.57	17	1.1	V	7.7	0.30	9.90	17.30	30

LTE Band 7

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5	QPSK	RB Size=1, RB Offset=0	22.25	22.60	22.31
		RB Size=1, RB Offset=12	22.13	22.53	22.26
		RB Size=1, RB Offset=24	22.36	22.66	22.43
		RB Size=12, RB Offset=0	21.62	21.93	21.72
		RB Size=12, RB Offset=6	21.54	21.85	21.65
		RB Size=12, RB Offset=11	21.67	21.98	21.77
		RB Size=25, RB Offset=0	21.15	21.38	20.18
	16QAM	RB Size=1, RB Offset=0	22.21	22.51	22.16
		RB Size=1, RB Offset=12	22.14	22.45	22.10
		RB Size=1, RB Offset=24	22.32	22.63	22.28
		RB Size=12, RB Offset=0	21.52	21.84	21.62
		RB Size=12, RB Offset=6	21.39	21.76	21.51
		RB Size=12, RB Offset=11	21.59	21.93	21.70
		RB Size=25, RB Offset=0	21.11	21.33	20.05
10	QPSK	RB Size=1, RB Offset=0	22.25	22.42	22.13
		RB Size=1, RB Offset=24	22.16	22.35	22.09
		RB Size=1, RB Offset=49	22.35	22.46	22.23
		RB Size=25, RB Offset=0	21.65	21.93	21.67
		RB Size=25, RB Offset=12	21.55	21.84	21.62
		RB Size=25, RB Offset=24	21.74	21.98	21.71
		RB Size=50, RB Offset=0	21.17	21.40	20.23
	16QAM	RB Size=1, RB Offset=0	22.27	22.46	22.35
		RB Size=1, RB Offset=24	22.19	22.42	22.24
		RB Size=1, RB Offset=49	22.38	22.57	22.44
		RB Size=25, RB Offset=0	21.62	21.96	21.57
		RB Size=25, RB Offset=12	21.58	21.85	21.49
		RB Size=25, RB Offset=24	21.69	22.04	21.69
		RB Size=50, RB Offset=0	21.13	21.52	20.24

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15	QPSK	RB Size=1, RB Offset=0	22.54	22.82	22.63
		RB Size=1, RB Offset=37	22.48	22.73	22.56
		RB Size=1, RB Offset=74	22.58	22.90	22.68
		RB Size=36, RB Offset=0	21.86	22.23	21.94
		RB Size=36, RB Offset=18	21.78	22.16	21.89
		RB Size=36, RB Offset=37	21.99	22.32	22.07
		RB Size=75, RB Offset=0	21.16	21.57	20.22
	16QAM	RB Size=1, RB Offset=0	22.43	22.71	22.32
		RB Size=1, RB Offset=37	22.39	22.62	22.25
		RB Size=1, RB Offset=74	22.46	22.78	22.36
		RB Size=36, RB Offset=0	22.57	22.96	22.69
		RB Size=36, RB Offset=18	22.53	22.92	22.65
		RB Size=36, RB Offset=37	22.61	23.08	22.78
		RB Size=75, RB Offset=0	21.25	21.42	20.27
20	QPSK	RB Size=1, RB Offset=0	22.53	22.95	22.62
		RB Size=1, RB Offset=49	22.47	22.86	22.51
		RB Size=1, RB Offset=99	22.63	23.03	22.68
		RB Size=50, RB Offset=0	21.83	22.21	21.76
		RB Size=50, RB Offset=24	21.73	22.15	21.67
		RB Size=50, RB Offset=49	21.90	22.31	21.80
		RB Size=100, RB Offset=0	21.28	21.42	20.24
	16QAM	RB Size=1, RB Offset=0	22.57	22.96	22.66
		RB Size=1, RB Offset=49	22.53	22.92	22.61
		RB Size=1, RB Offset=99	22.69	23.04	22.73
		RB Size=50, RB Offset=0	21.84	22.28	21.79
		RB Size=50, RB Offset=24	21.72	22.23	21.73
		RB Size=50, RB Offset=49	21.95	22.36	21.85
		RB Size=100, RB Offset=0	21.22	21.51	20.27

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	4.62	13	Pass
QPSK (100%RB Size)	5.29	13	Pass
16QAM (1RB Size)	4.72	13	Pass
16QAM (100%RB Size)	5.77	13	Pass

EIRP:

QPSK:

Frequency (MHz)	Receiver Reading (dBµV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
5 MHz Bandwidth									
2535.00	68.92	245	1.4	H	11.5	0.43	10.60	21.67	33
2535.00	64.52	91	1.0	V	5.4	0.43	10.60	15.57	33
10MHz Bandwidth									
2535.00	68.66	171	1.5	H	11.2	0.43	10.60	21.37	33
2535.00	64.26	166	2.2	V	5.1	0.43	10.60	15.27	33
15 MHz Bandwidth									
2535.00	68.27	313	1.6	H	10.8	0.43	10.60	20.97	33
2535.00	63.41	217	1.7	V	4.3	0.43	10.60	14.47	33
20 MHz Bandwidth									
2535.00	67.83	184	2.1	H	10.4	0.43	10.60	20.57	33
2535.00	63.01	289	1.3	V	3.9	0.43	10.60	14.07	33

16QAM:

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
5 MHz Bandwidth									
2535.00	69.61	302	2.0	H	12.2	0.43	10.60	22.37	33
2535.00	68.51	182	2.2	V	9.4	0.43	10.60	19.57	33
10 MHz Bandwidth									
2535.00	69.34	92	2.2	H	11.9	0.43	10.60	22.07	33
2535.00	67.89	103	1.7	V	8.8	0.43	10.60	18.97	33
15 MHz Bandwidth									
2535.00	68.81	280	2.1	H	11.4	0.43	10.60	21.57	33
2535.00	67.34	22	2.0	V	8.2	0.43	10.60	18.37	33
20 MHz Bandwidth									
2535.00	68.55	189	1.2	H	11.1	0.43	10.60	21.27	33
2535.00	66.72	200	2.1	V	7.6	0.43	10.60	17.77	33

LTE Band 12:

Maximum Output Power

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4	QPSK	RB Size=1, RB Offset=0	23.75	24.16	23.82
		RB Size=1, RB Offset=2	23.66	24.09	23.71
		RB Size=1, RB Offset=5	23.88	24.24	23.93
		RB Size=3, RB Offset=0	23.42	23.62	23.35
		RB Size=3, RB Offset=1	23.32	23.53	23.31
		RB Size=3, RB Offset=2	23.54	23.72	23.45
		RB Size=6, RB Offset=0	22.93	23.16	22.86
	16QAM	RB Size=1, RB Offset=0	23.79	24.16	23.84
		RB Size=1, RB Offset=2	23.72	24.04	23.74
		RB Size=1, RB Offset=5	23.85	24.28	23.96
		RB Size=3, RB Offset=0	23.47	23.67	23.39
		RB Size=3, RB Offset=1	23.39	23.61	23.30
		RB Size=3, RB Offset=2	23.52	23.74	23.42
		RB Size=6, RB Offset=0	22.96	23.16	22.82
3.0	QPSK	RB Size=1, RB Offset=0	23.73	24.09	23.88
		RB Size=1, RB Offset=7	23.67	24.00	23.75
		RB Size=1, RB Offset=14	23.82	24.16	24.00
		RB Size=8, RB Offset=0	23.42	23.64	23.35
		RB Size=8, RB Offset=4	23.34	23.53	23.29
		RB Size=8, RB Offset=7	23.52	23.70	23.39
		RB Size=15, RB Offset=0	22.91	23.20	22.87
	16QAM	RB Size=1, RB Offset=0	23.83	24.09	23.87
		RB Size=1, RB Offset=7	23.74	24.00	23.77
		RB Size=1, RB Offset=14	23.89	24.13	23.96
		RB Size=8, RB Offset=0	23.48	23.69	23.37
		RB Size=8, RB Offset=4	23.39	23.62	23.24
		RB Size=8, RB Offset=7	23.61	23.75	23.43
		RB Size=15, RB Offset=0	22.86	23.21	22.84

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5.0	QPSK	RB Size=1, RB Offset=0	23.89	24.21	23.82
		RB Size=1, RB Offset=12	23.77	24.15	23.77
		RB Size=1, RB Offset=24	24.00	24.26	23.93
		RB Size=12, RB Offset=0	23.44	23.72	23.34
		RB Size=12, RB Offset=6	23.37	23.67	23.23
		RB Size=12, RB Offset=11	23.50	23.79	23.42
		RB Size=25, RB Offset=0	22.89	23.24	22.87
	16QAM	RB Size=1, RB Offset=0	23.83	24.2	23.72
		RB Size=1, RB Offset=12	23.72	24.11	23.60
		RB Size=1, RB Offset=24	23.94	24.28	23.85
		RB Size=12, RB Offset=0	23.52	23.76	23.42
		RB Size=12, RB Offset=6	23.46	23.70	23.35
		RB Size=12, RB Offset=11	23.60	23.87	23.51
		RB Size=25, RB Offset=0	22.96	23.27	22.84
10.0	QPSK	RB Size=1, RB Offset=0	23.87	24.05	23.69
		RB Size=1, RB Offset=24	23.81	23.93	23.65
		RB Size=1, RB Offset=49	23.92	24.13	23.74
		RB Size=25, RB Offset=0	23.35	23.62	23.47
		RB Size=25, RB Offset=12	23.31	23.56	23.36
		RB Size=25, RB Offset=24	23.40	23.69	23.55
		RB Size=50, RB Offset=0	22.93	23.27	22.98
	16QAM	RB Size=1, RB Offset=0	23.82	24.07	23.96
		RB Size=1, RB Offset=24	23.70	23.96	23.86
		RB Size=1, RB Offset=49	23.88	24.16	24.06
		RB Size=25, RB Offset=0	23.31	23.65	23.42
		RB Size=25, RB Offset=12	23.19	23.56	23.39
		RB Size=25, RB Offset=24	23.41	23.76	23.53
		RB Size=50, RB Offset=0	22.98	23.32	22.97

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	5.36	13	Pass
QPSK (100%RB Size)	6.21	13	Pass
16QAM (1RB Size)	5.72	13	Pass
16QAM (100%RB Size)	6.12	13	Pass

ERP:

QPSK:

Frequency (MHz)	Receiver Reading (dBµV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
1.4 MHz Bandwidth									
707.00	89.66	245	1.7	H	18.6	0.36	4.25	22.49	34.77
707.00	86.54	114	1.5	V	15.5	0.36	4.25	19.39	34.77
3.0MHz Bandwidth									
707.00	88.42	132	1.4	H	17.4	0.36	4.25	21.29	34.77
707.00	86.86	75	1.7	V	15.8	0.36	4.25	19.69	34.77
5 MHz Bandwidth									
707.00	87.95	215	1.5	H	16.9	0.36	4.25	20.79	34.77
707.00	84.63	102	1.7	V	13.6	0.36	4.25	17.49	34.77
10 MHz Bandwidth									
707.00	87.48	114	1.5	H	16.5	0.36	4.25	20.39	34.77
707.00	84.27	123	1.7	V	13.3	0.36	4.25	17.19	34.77

16QAM:

Frequency (MHz)	Receiver Reading (dBµV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
1.4 MHz Bandwidth									
707.00	88.77	102	1.9	H	17.7	0.36	4.25	21.59	34.77
707.00	85.25	75	1.7	V	14.3	0.36	4.25	18.19	34.77
3.0 MHz Bandwidth									
707.00	87.54	148	1.6	H	16.5	0.36	4.25	20.39	34.77
707.00	85.04	175	1.7	V	14.0	0.36	4.25	17.89	34.77
5 MHz Bandwidth									
707.00	86.87	125	1.6	H	15.9	0.36	4.25	19.79	34.77
707.00	84.67	136	1.4	V	13.7	0.36	4.25	17.59	34.77
10 MHz Bandwidth									
707.00	86.58	63	1.8	H	15.6	0.36	4.25	19.49	34.77
707.00	84.34	258	1.7	V	13.3	0.36	4.25	17.19	34.77

LTE Band 17:

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5.0	QPSK	RB Size=1, RB Offset=0	23.45	23.97	23.63
		RB Size=1, RB Offset=12	23.33	23.94	23.55
		RB Size=1, RB Offset=24	23.50	24.07	23.69
		RB Size=12, RB Offset=0	23.24	23.57	23.15
		RB Size=12, RB Offset=6	23.15	23.54	23.07
		RB Size=12, RB Offset=11	23.30	23.65	23.18
		RB Size=25, RB Offset=0	22.94	23.18	22.84
	16QAM	RB Size=1, RB Offset=0	23.56	23.94	23.62
		RB Size=1, RB Offset=12	23.47	23.86	23.50
		RB Size=1, RB Offset=24	23.68	24.06	23.68
		RB Size=12, RB Offset=0	22.14	22.53	22.26
		RB Size=12, RB Offset=6	22.11	22.40	22.19
		RB Size=12, RB Offset=11	22.22	22.64	22.38
		RB Size=25, RB Offset=0	22.91	23.13	22.83
10.0	QPSK	RB Size=1, RB Offset=0	23.52	23.88	23.67
		RB Size=1, RB Offset=24	23.42	23.84	23.57
		RB Size=1, RB Offset=49	23.63	23.91	23.74
		RB Size=25, RB Offset=0	22.17	22.43	22.23
		RB Size=25, RB Offset=12	22.14	22.31	22.16
		RB Size=25, RB Offset=24	22.24	22.48	22.35
		RB Size=50, RB Offset=0	22.94	23.14	22.87
	16QAM	RB Size=1, RB Offset=0	23.58	23.88	23.62
		RB Size=1, RB Offset=24	23.48	23.84	23.55
		RB Size=1, RB Offset=49	23.70	23.99	23.74
		RB Size=25, RB Offset=0	22.13	22.49	22.25
		RB Size=25, RB Offset=12	22.08	22.36	22.17
		RB Size=25, RB Offset=24	22.25	22.57	22.31
		RB Size=50, RB Offset=0	22.92	23.17	22.85

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	4.33	13	Pass
QPSK (100%RB Size)	5.75	13	Pass
16QAM (1RB Size)	4.77	13	Pass
16QAM (100%RB Size)	5.93	13	Pass

ERP:

QPSK:

Frequency (MHz)	Receiver Reading (dBµV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
5 MHz Bandwidth									
710.00	87.95	58	1.9	H	16.9	0.36	4.25	20.79	34.77
710.00	85.58	175	1.5	V	14.6	0.36	4.25	18.49	34.77
10 MHz Bandwidth									
710.00	87.24	152	1.8	H	16.2	0.36	4.25	20.09	34.77
710.00	85.08	142	1.6	V	14.1	0.36	4.25	17.99	34.77

16QAM:

Frequency (MHz)	Receiver Reading (dBµV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
5 MHz Bandwidth									
710.00	87.25	158	1.5	H	16.3	0.36	4.25	20.19	34.77
710.00	84.35	107	1.5	V	13.4	0.36	4.25	17.29	34.77
10 MHz Bandwidth									
710.00	87.08	123	1.5	H	16.1	0.36	4.25	19.99	34.77
710.00	84.73	115	1.4	V	13.7	0.36	4.25	17.59	34.77

Note:

All above data were tested with no amplifier
 Absolute Level = SG Level - Cable loss + Antenna Gain
 Margin = Limit- Absolute Level

FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53 - OCCUPIED BANDWIDTH


Applicable Standards

FCC 47 §2.1049, §22.917, §22.905, §24.238 and §27.53.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 1% to 5% of the anticipated emission bandwidth and the 26 dB & 99% bandwidth was recorded.

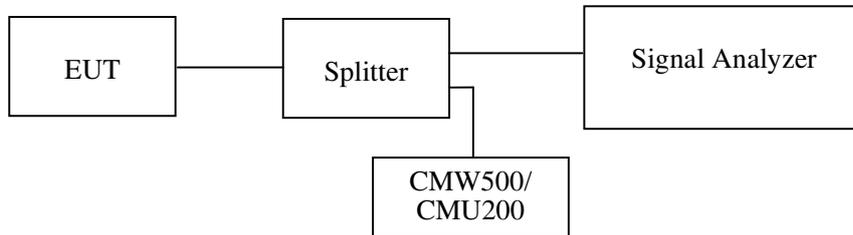

Test Data

Environmental Conditions

Temperature:	25~26°C
Relative Humidity:	55~56 %
ATM Pressure:	101.0~101.5kPa

The testing was performed by Ada Yu from 2016-10-25 to 2016-11-20.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables and plots.

Cellular Band (Part 22H)

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	836.6	244.5	316.6
EGPRS(8PSK)	836.6	248.5	320.6

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
RMC (BPSK)	836.6	4.208	4.870
HSUPA (BPSK)	836.6	4.188	4.890
HSDPA (16QAM)	836.6	4.208	4.870

PCS Band (Part 24E)

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	1880.0	245.8	313.6
EGPRS(8PSK)	1880.0	244.5	316.6


Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
RMC (BPSK)	1880.0	4.208	4.910
HSUPA (BPSK)	1880.0	4.228	4.910
HSDPA (16QAM)	1880.0	4.228	4.870

AWS Band (Part 27)


Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
RMC (BPSK)	1732.6	4.208	4.890
HSUPA (BPSK)	1732.6	4.208	4.890
HSDPA (16QAM)	1732.6	4.208	4.890

Cellular Band (Part 22H)


99% Occupied & 26 dB Emissions Bandwidth for GSM (GMSK) Mode

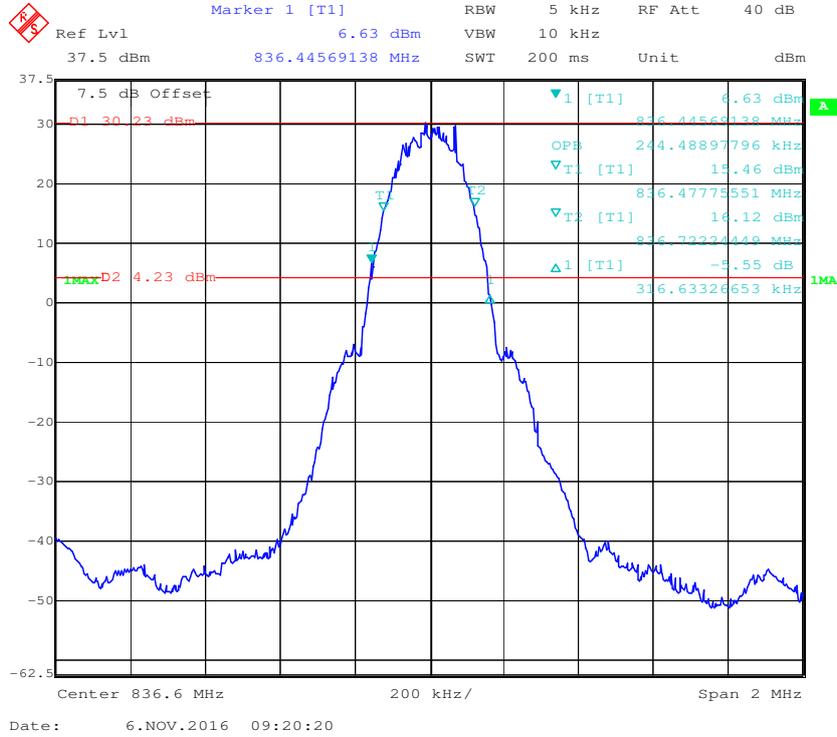


99% Occupied & 26 dB Emissions Bandwidth for EDGE Mode

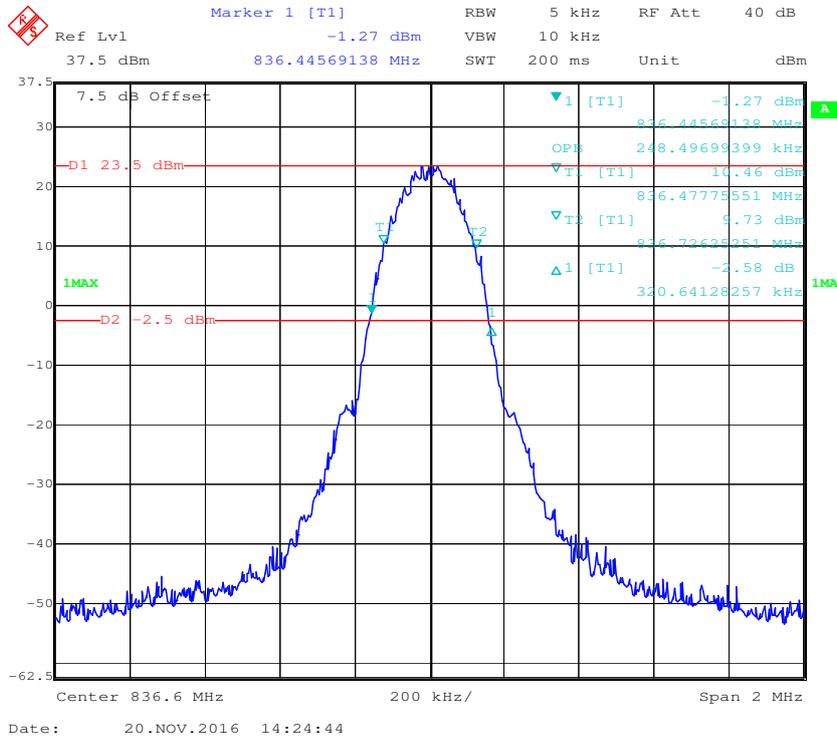


99% Occupied & 26 dB Emissions Bandwidth for RMC (BPSK) Mode

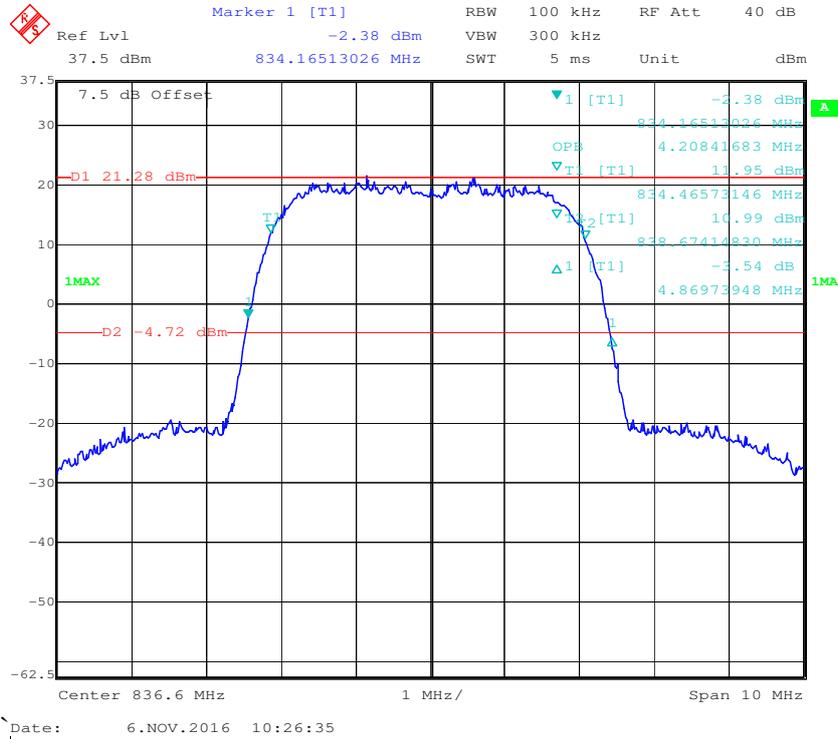

99% Occupied & 26 dB Emissions Bandwidth for HSUPA (BPSK) Mode

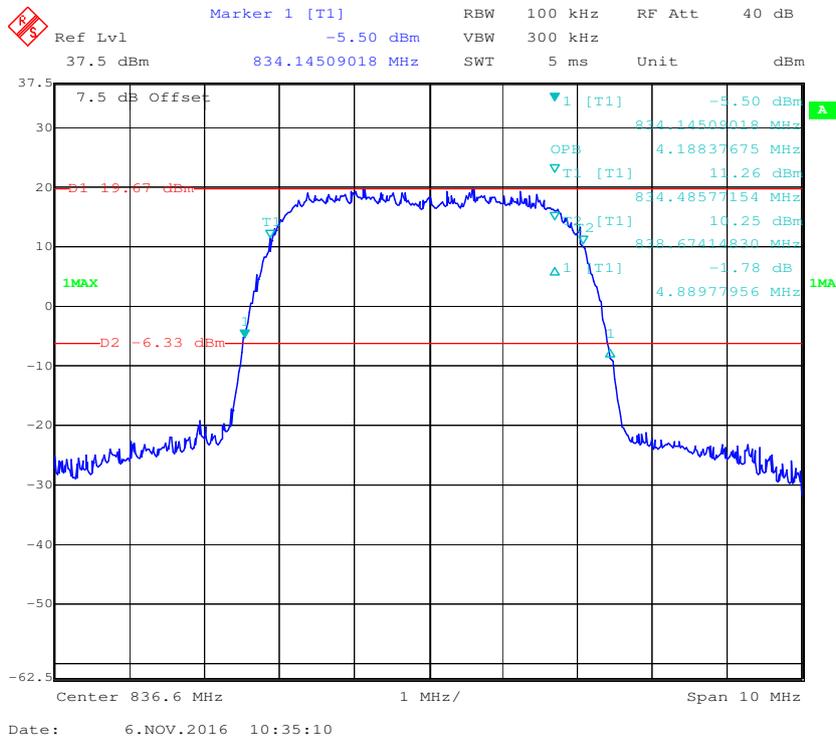


99% Occupied & 26 dB Emissions Bandwidth for HSDPA (16QAM) Mode

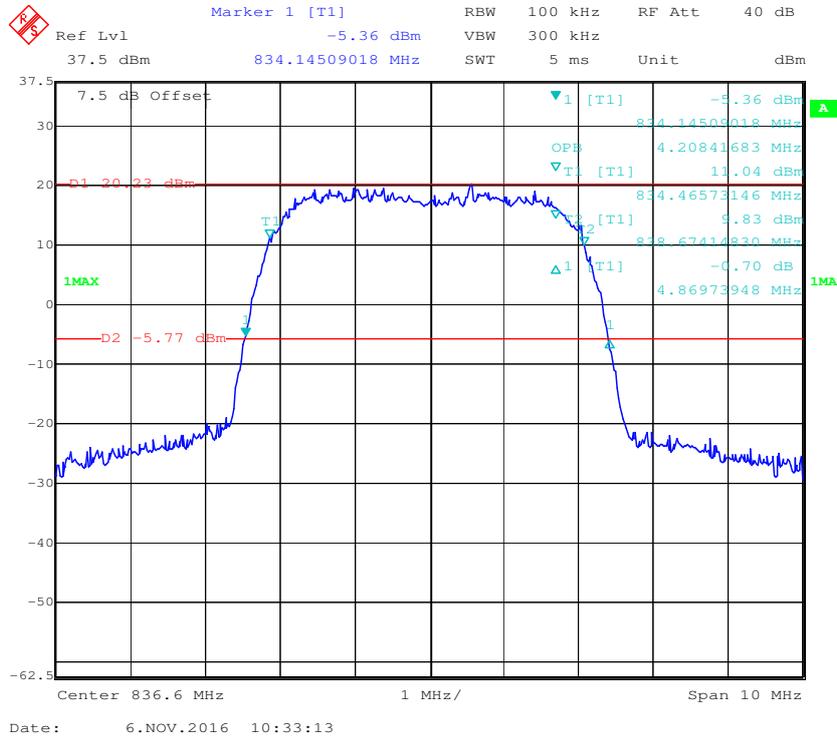


PCS Band (Part 24E)


99% Occupied & 26 dB Emissions Bandwidth for GSM (GMSK) Mode

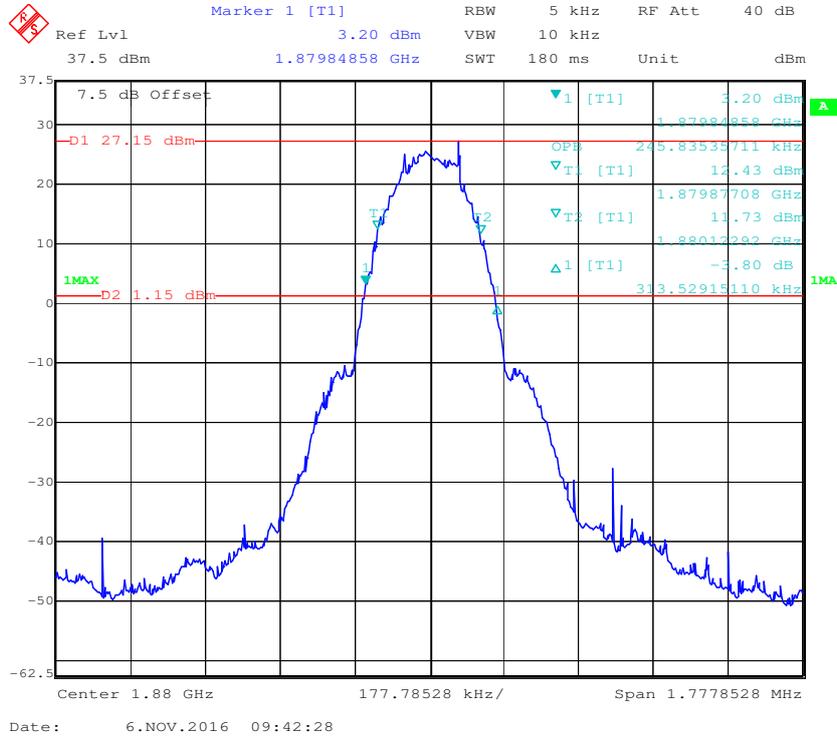


99% Occupied & 26 dB Emissions Bandwidth for EGPRS Mode

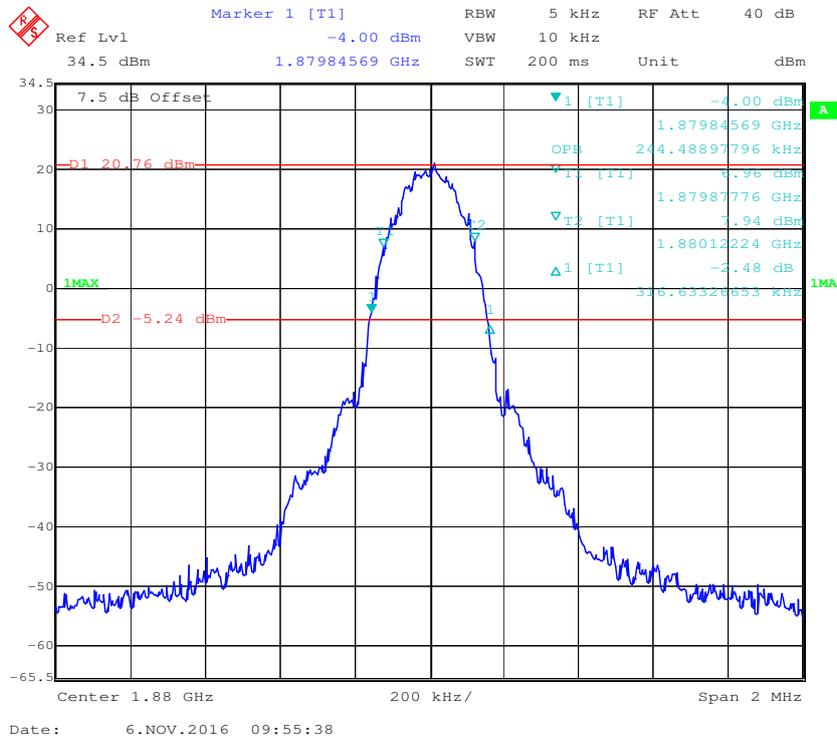


99% Occupied & 26 dB Emissions Bandwidth for RMC (BPSK) Mode

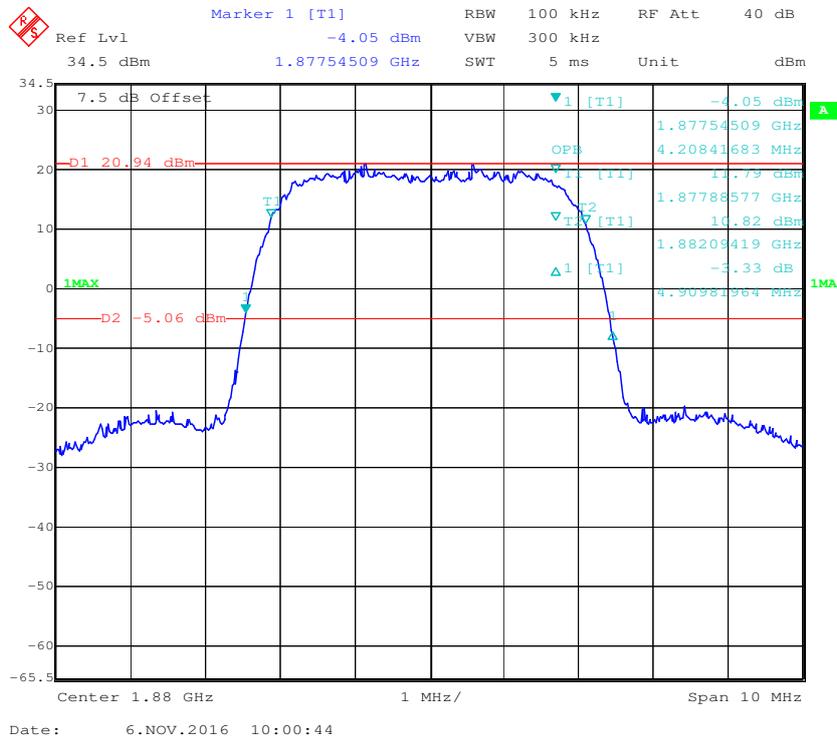

99% Occupied & 26 dB Emissions Bandwidth for HSUPA (BPSK) Mode

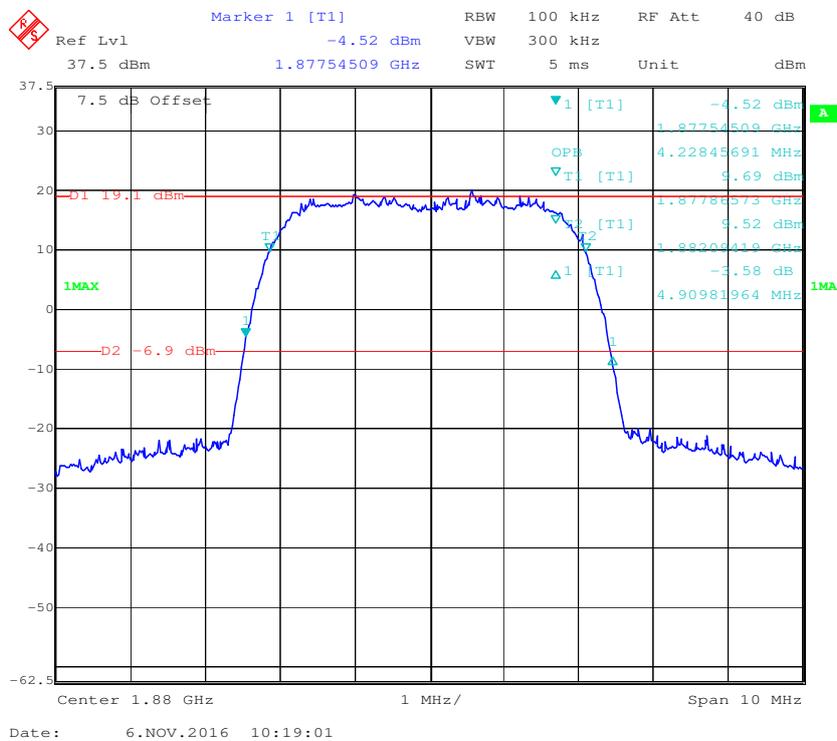


99% Occupied & 26 dB Emissions Bandwidth for HSDPA (16QAM) Mode

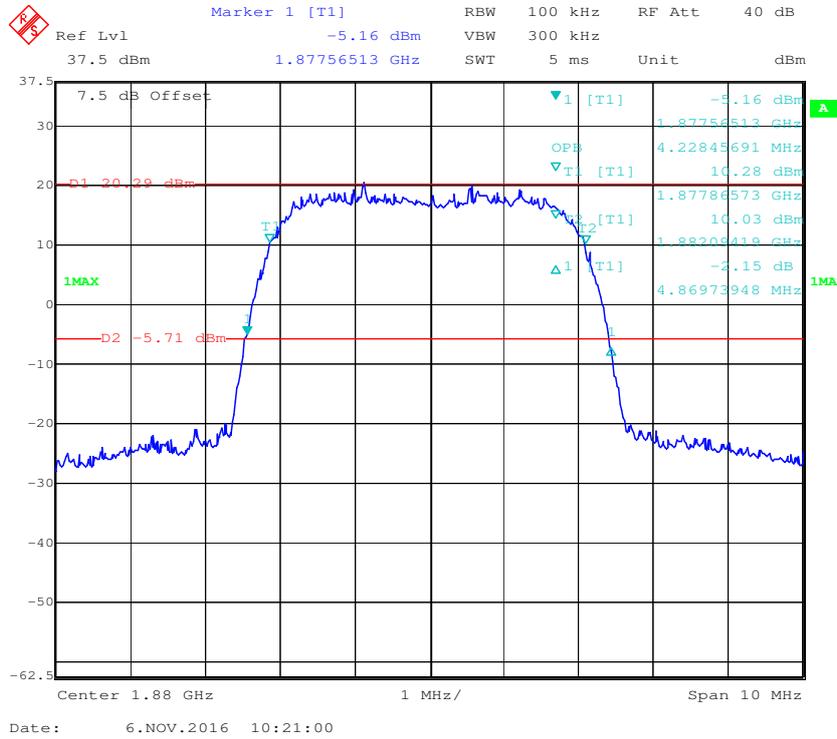


WCDMA BAND 4 (Part 27):


99% Occupied & 26 dB Emissions Bandwidth for RMC (BPSK) Mode

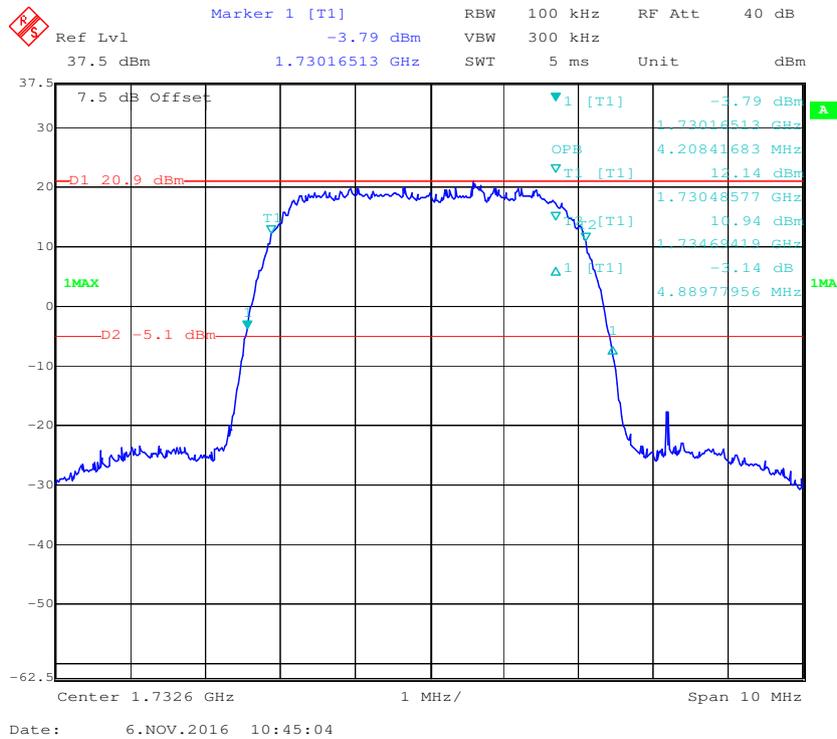

99% Occupied & 26 dB Emissions Bandwidth for HSUPA (BPSK) Mode

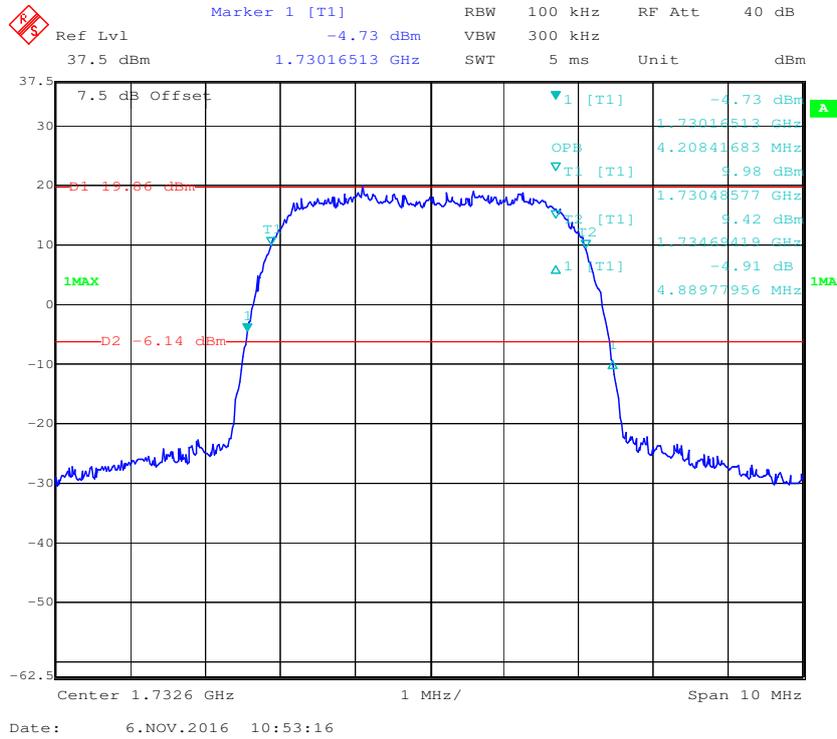


99% Occupied & 26 dB Emissions Bandwidth for HSDPA (16QAM) Mode

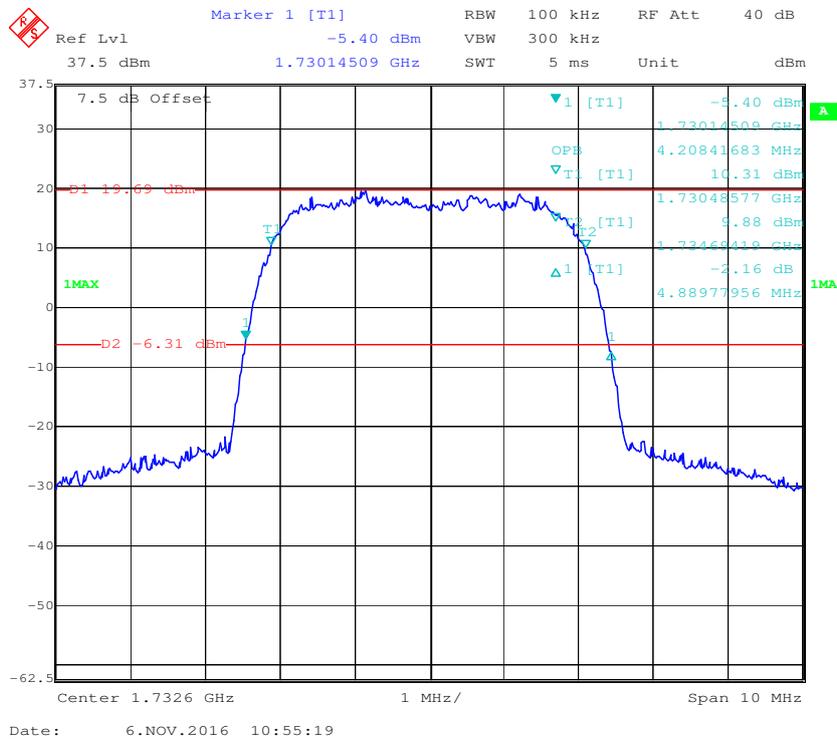


LTE Band 2: (Middle Channel)

Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
1.4	QPSK	1.094	1.291
	16QAM	1.105	1.268
3.0	QPSK	2.693	2.898
	16QAM	2.693	2.910
5.0	QPSK	4.549	5.090
	16QAM	4.549	5.090
10.0	QPSK	8.978	9.900
	16QAM	8.978	9.619
15.0	QPSK	13.587	15.030
	16QAM	13.527	15.030
20.0	QPSK	18.036	19.479
	16QAM	17.956	19.319


QPSK (1.4 MHz) - 99% Occupied Bandwidth, Middle channel

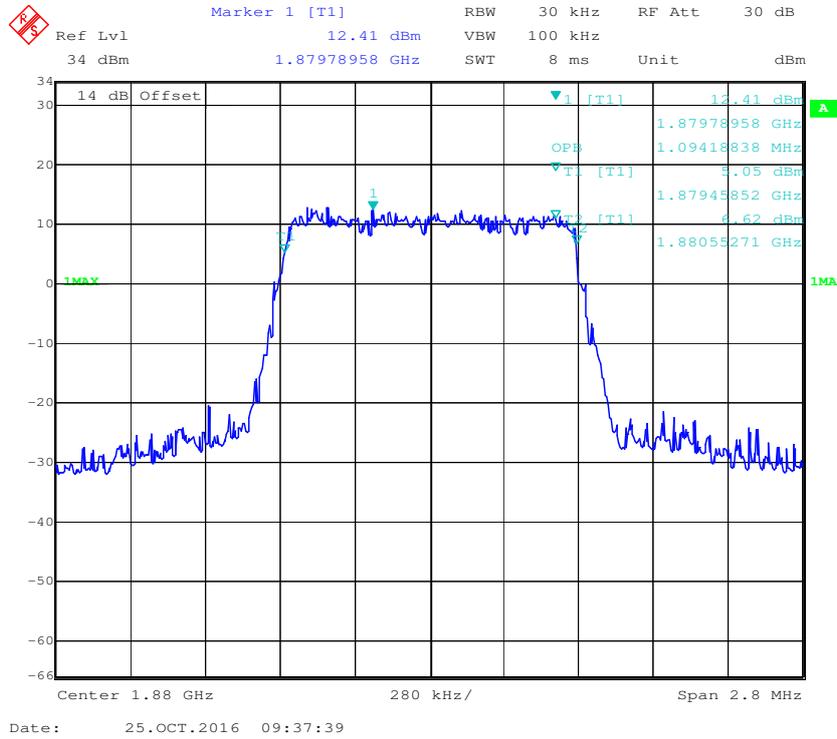


QPSK (1.4 MHz) - 26 dB Bandwidth, Middle channel

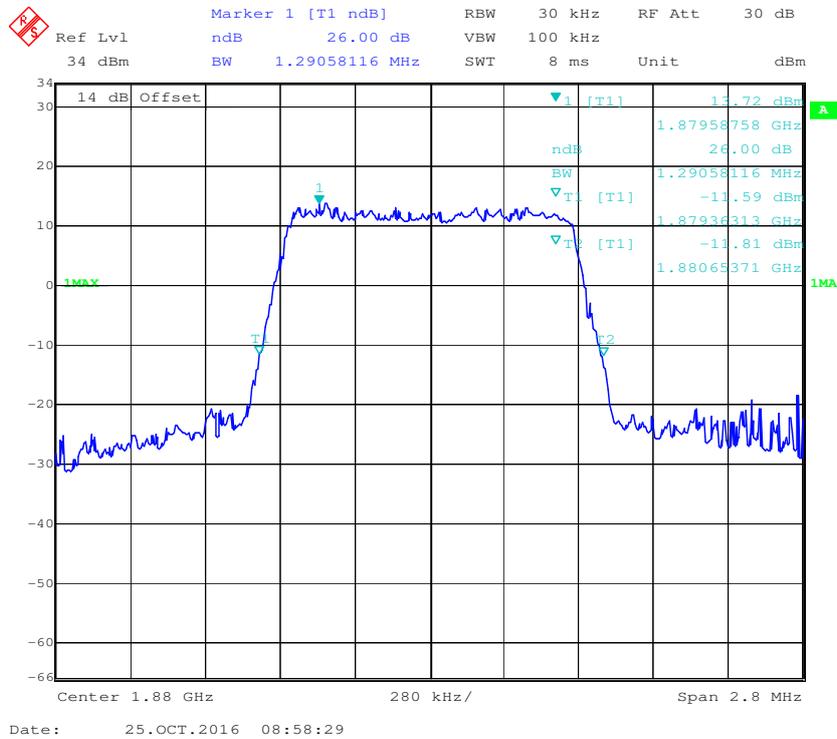


16-QAM (1.4 MHz) - 99% Occupied Bandwidth, Middle channel

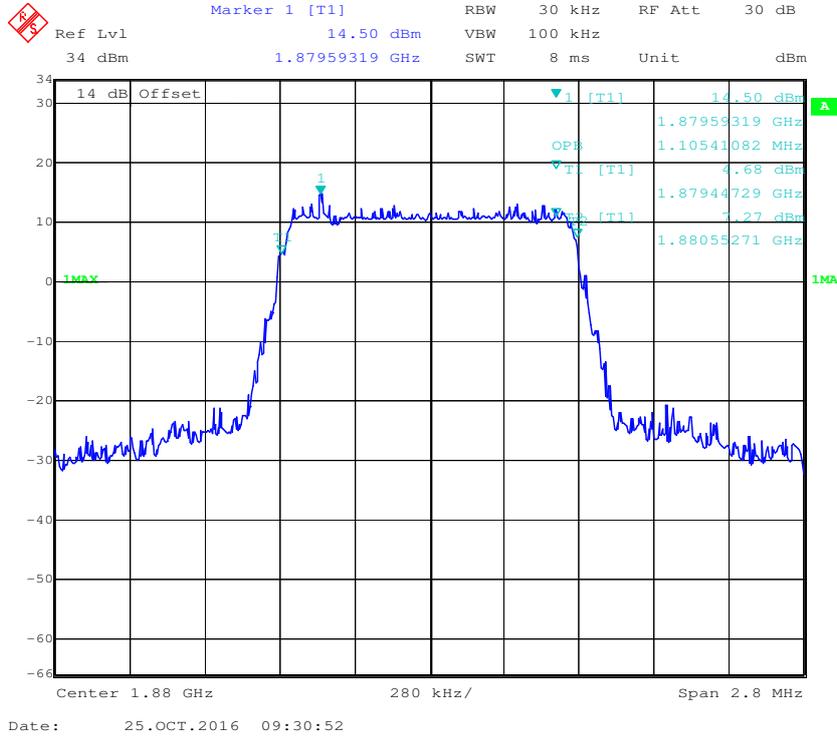


16-QAM (1.4 MHz) - 26 dB Bandwidth, Middle channel

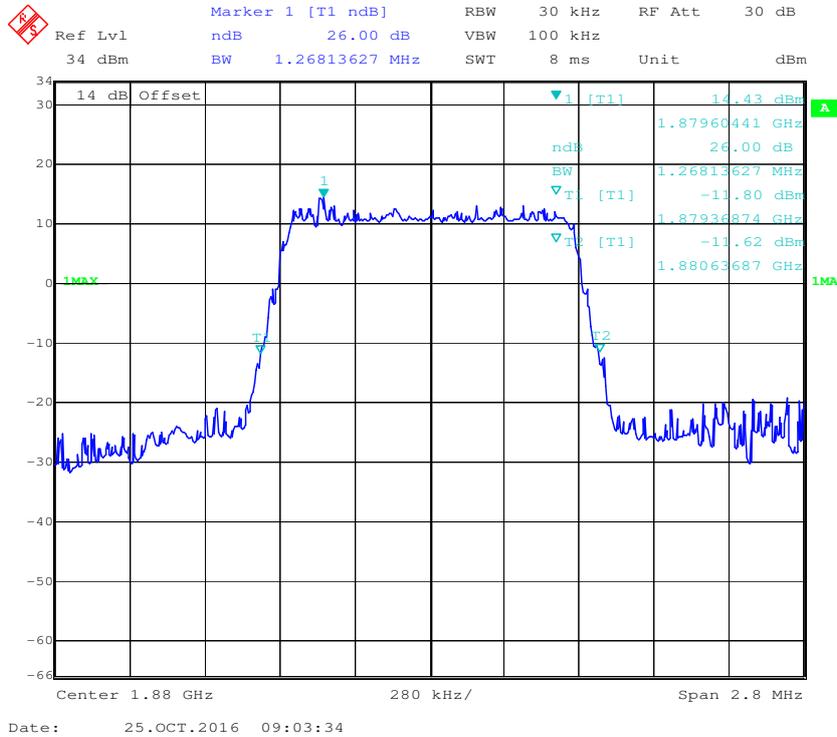


16-QAM (3.0 MHz) - 99% Occupied Bandwidth, Middle channel

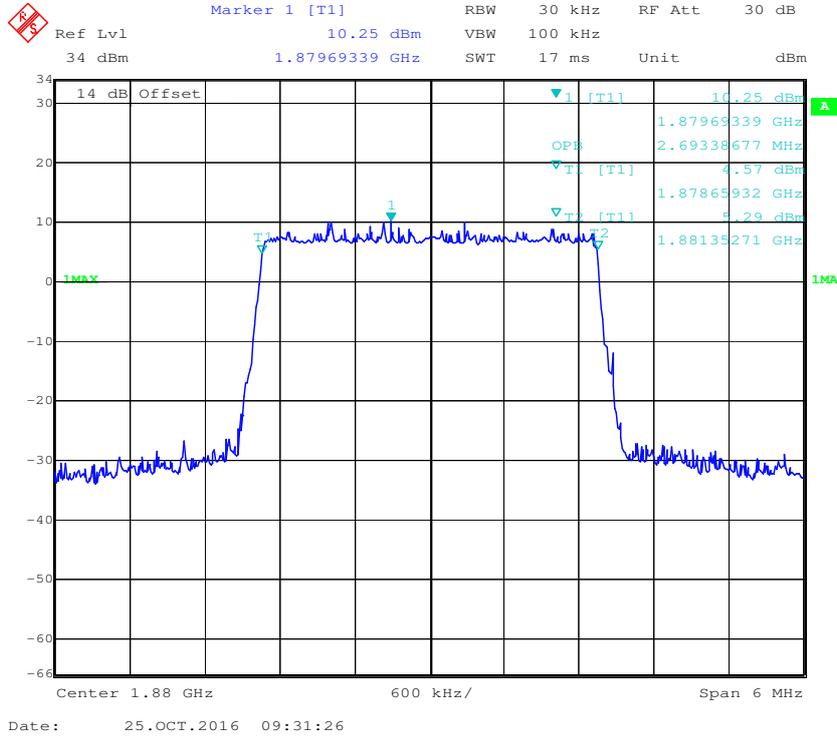


16-QAM (3.0 MHz) - 26 dB Bandwidth, Middle channel

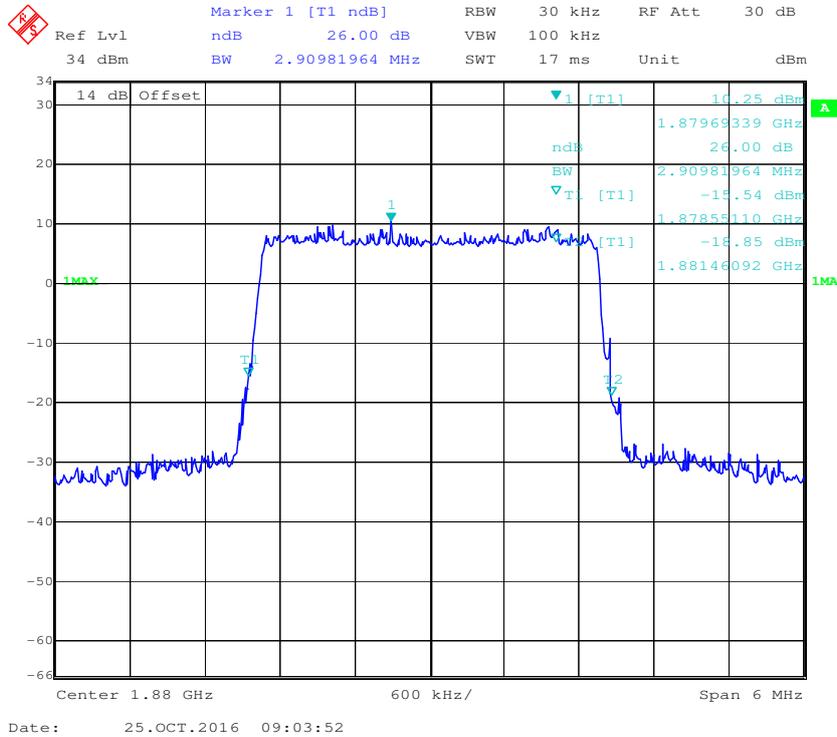


QPSK (5.0 MHz) - 99% Occupied Bandwidth, Middle channel

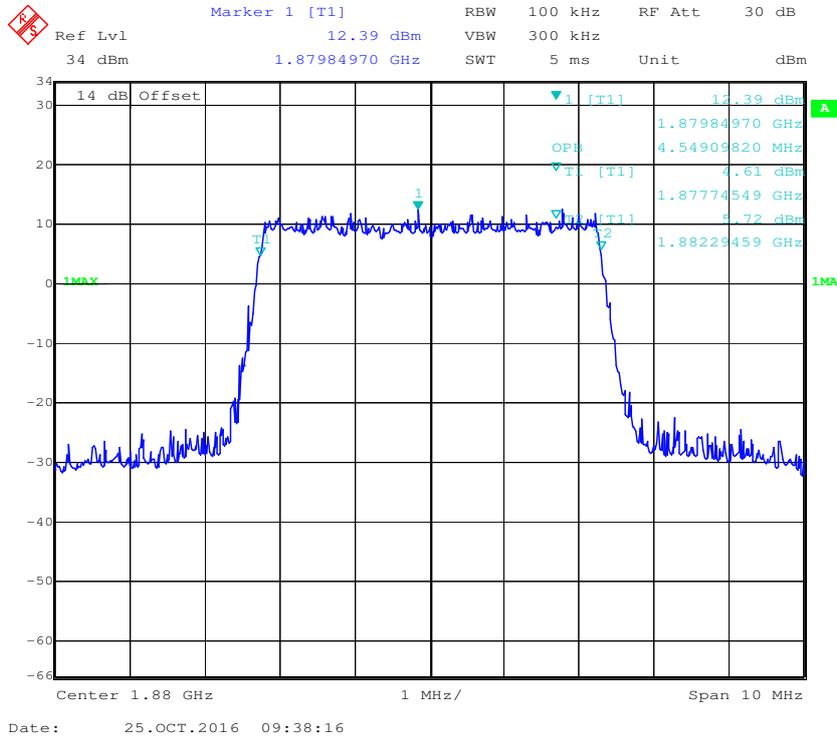


QPSK (5.0 MHz) -26 dB Bandwidth, Middle channel

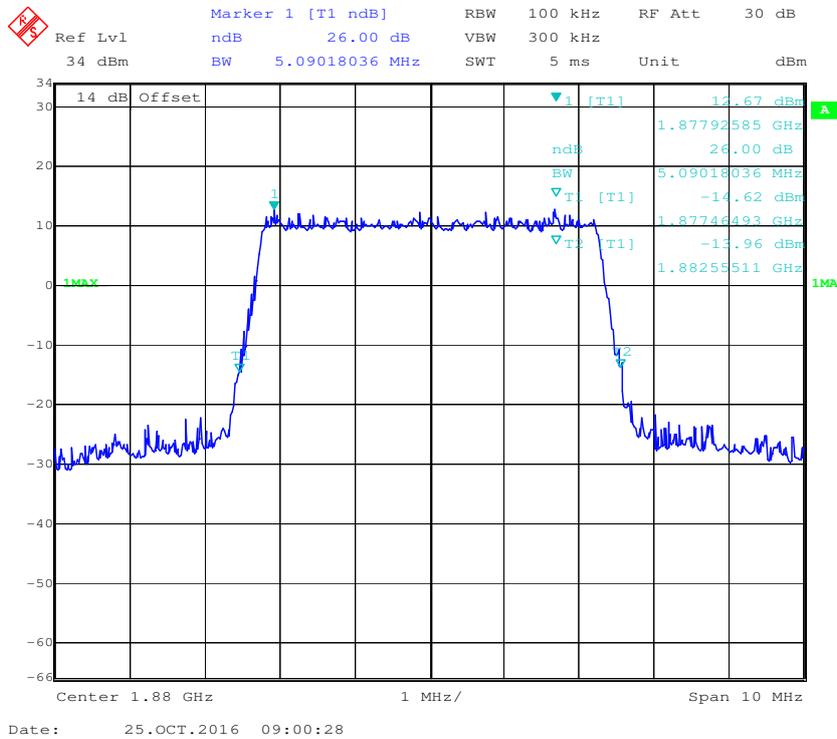


16-QAM (5.0 MHz) - 99% Occupied Bandwidth, Middle channel

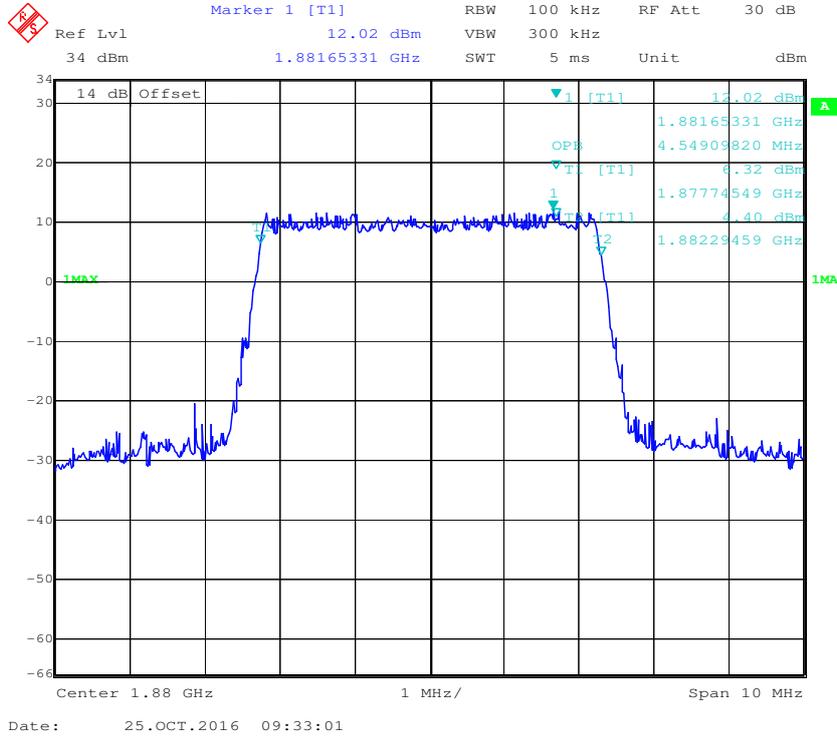


16-QAM (5.0 MHz) - 26 dB Bandwidth, Middle channel

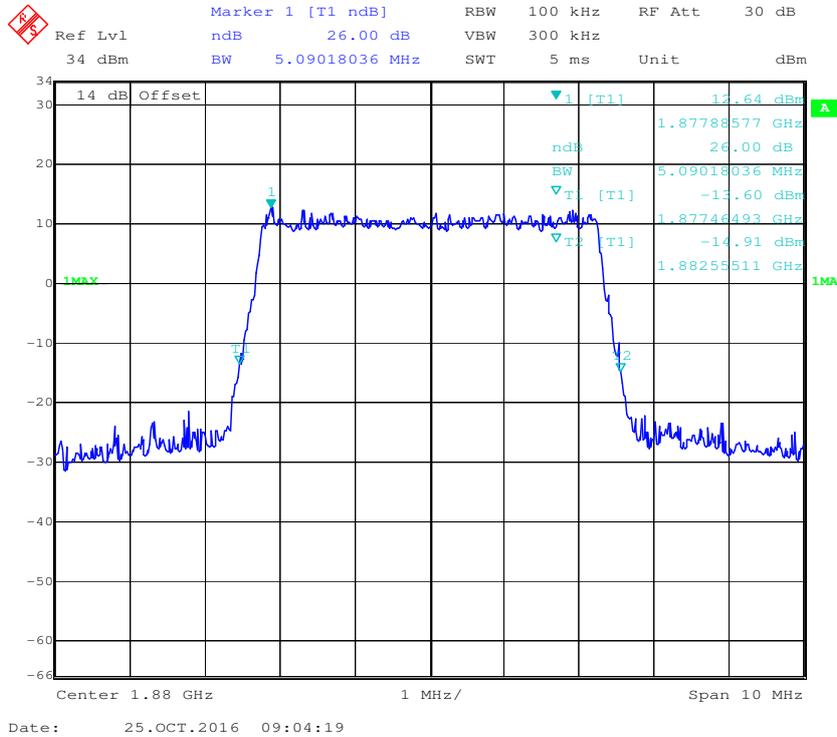


16-QAM (10.0 MHz) - 99% Occupied Bandwidth, Middle channel

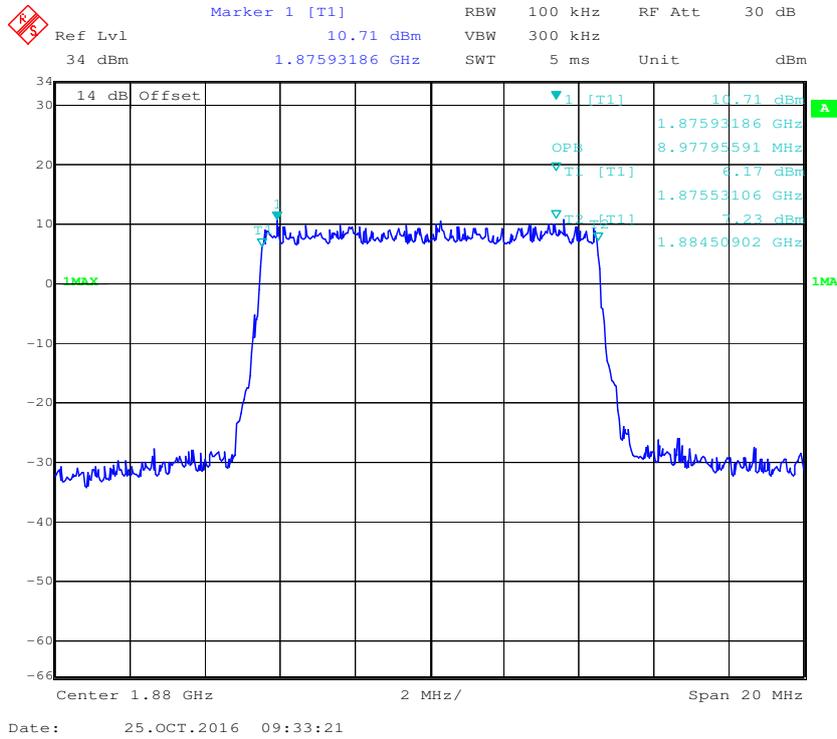


16-QAM (10.0 MHz) - 26 dB Bandwidth, Middle channel

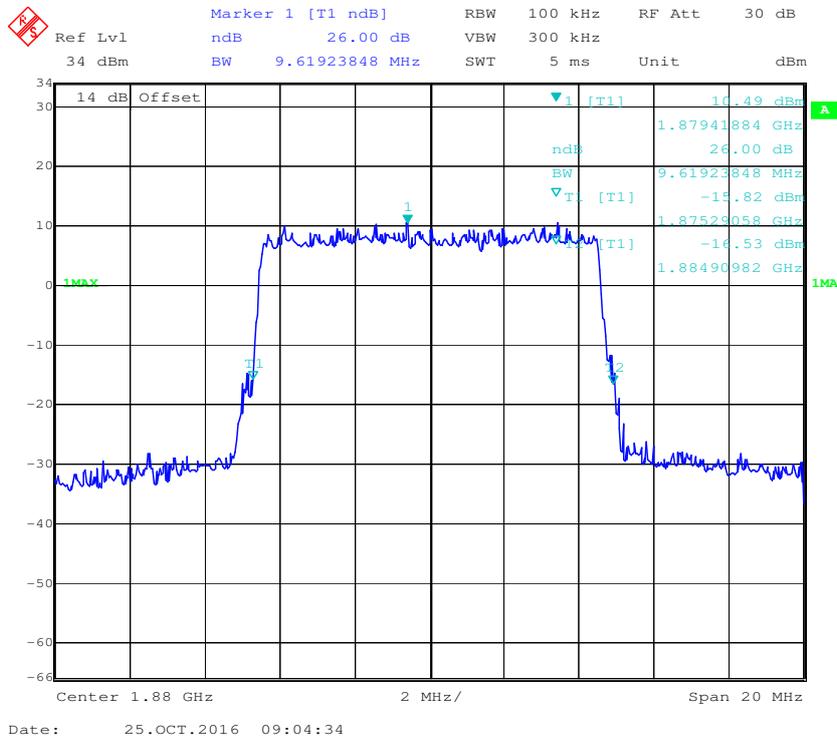


16-QAM (15.0 MHz) - 99% Occupied Bandwidth, Middle channel

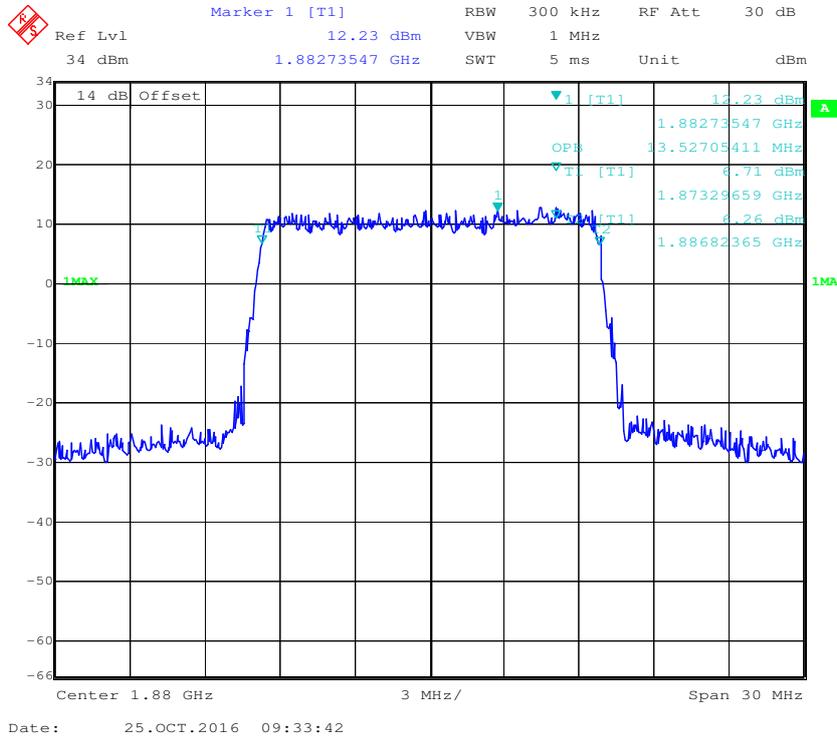


16-QAM (15.0 MHz) - 26 dB Bandwidth, Middle channel

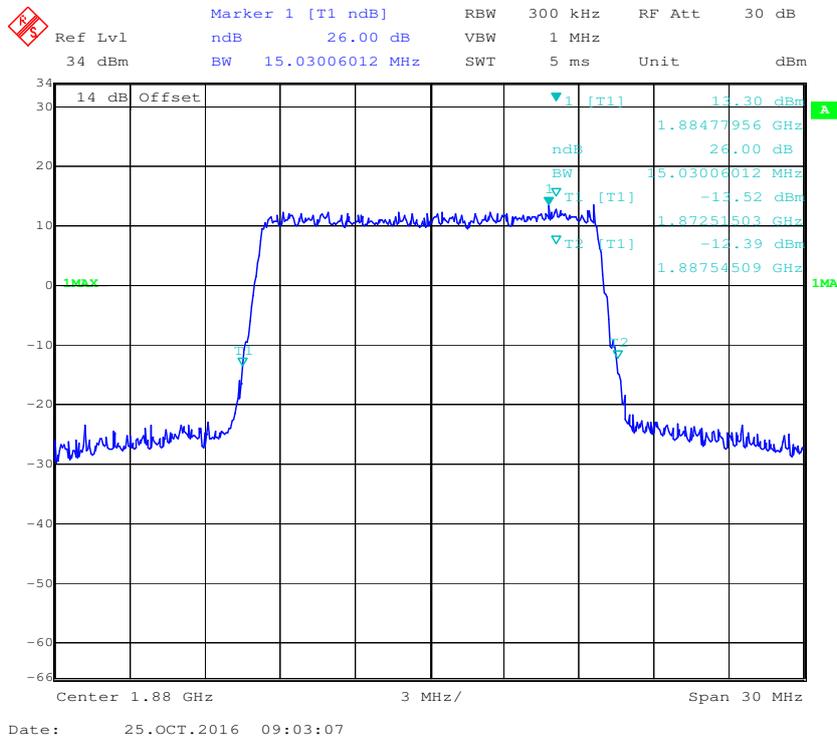

QPSK (20.0 MHz) - 99% Occupied Bandwidth, Middle channel

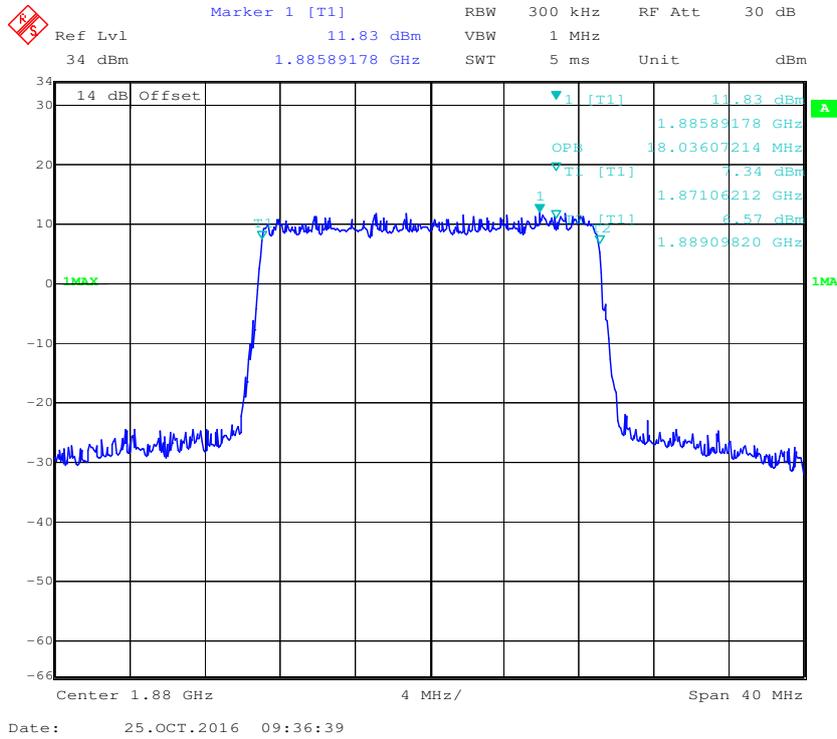


QPSK (20.0 MHz) - 26 dB Bandwidth, Middle channel

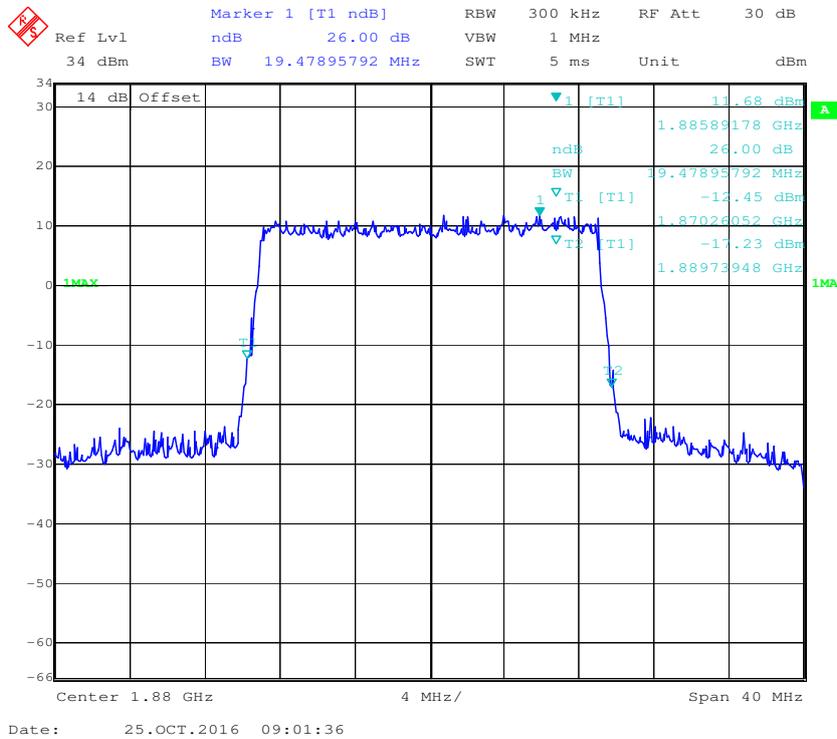


LTE Band 4: (Middle Channel)

Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
1.4	QPSK	1.105	1.285
	16QAM	1.094	1.285
3.0	QPSK	2.681	2.898
	16QAM	2.693	2.922
5.0	QPSK	4.549	5.090
	16QAM	4.549	5.110
10.0	QPSK	9.018	9.739
	16QAM	8.978	9.659
15.0	QPSK	13.527	14.849
	16QAM	13.527	14.790
20.0	QPSK	18.036	19.399
	16QAM	17.956	19.479


QPSK (5.0 MHz) - 99% Occupied Bandwidth, Middle channel

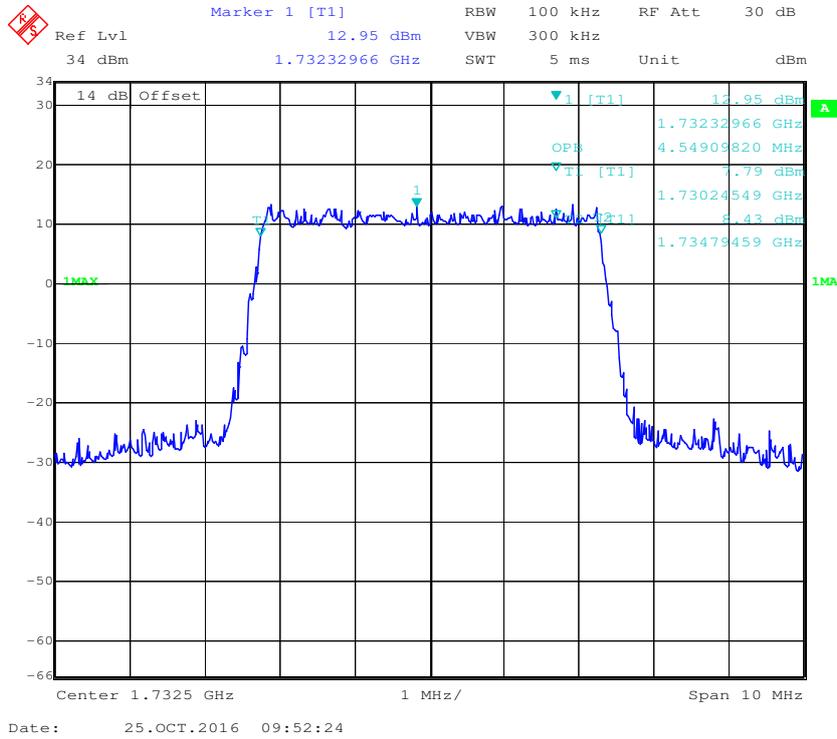


QPSK (5.0 MHz) - 26 dB Bandwidth, Middle channel

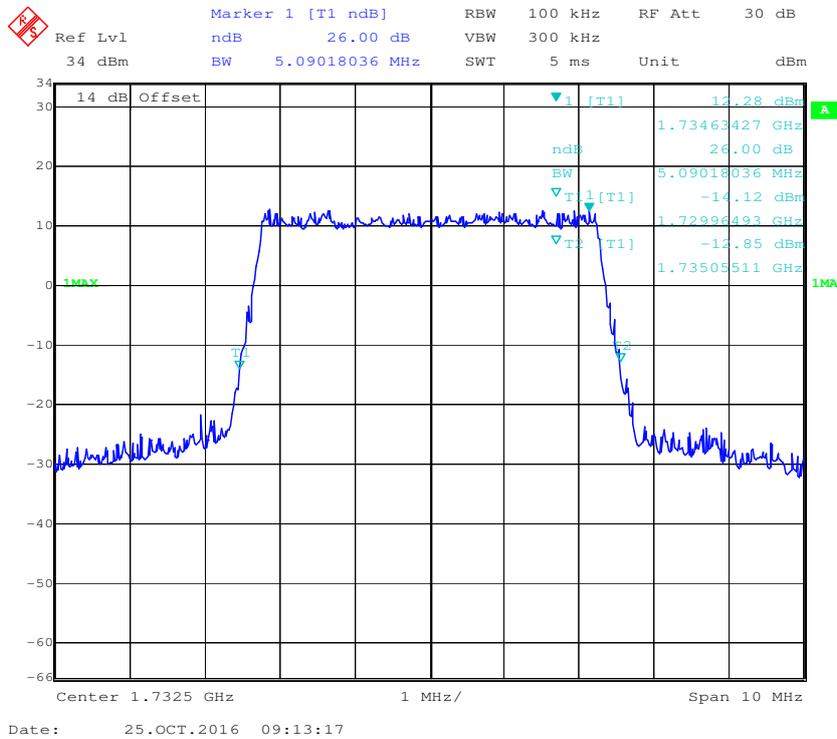


16-QAM (10.0 MHz) - 99% Occupied Bandwidth, Middle channel

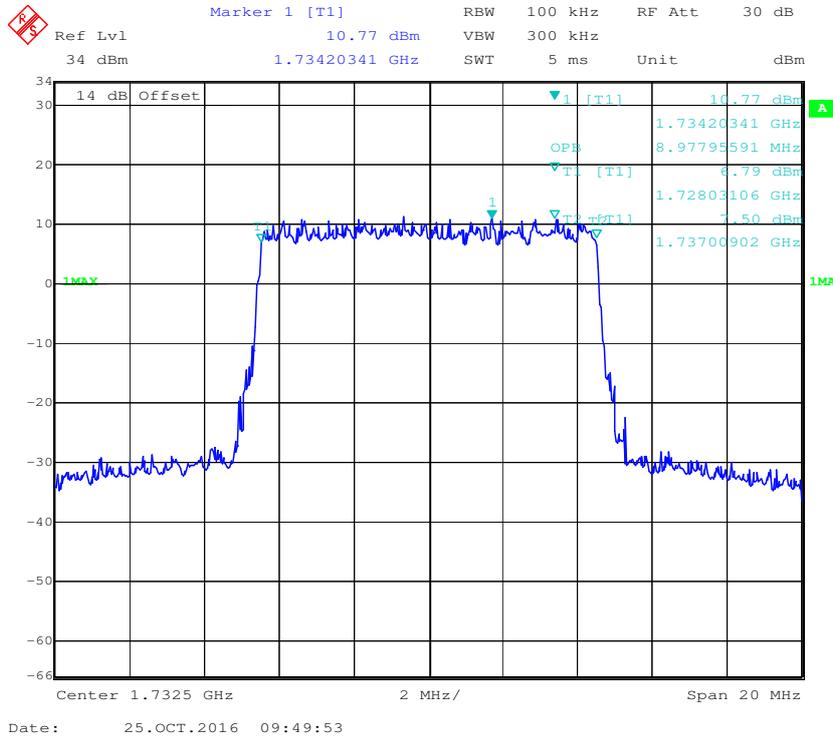


16-QAM (10.0 MHz) - 26 dB Bandwidth, Middle channel

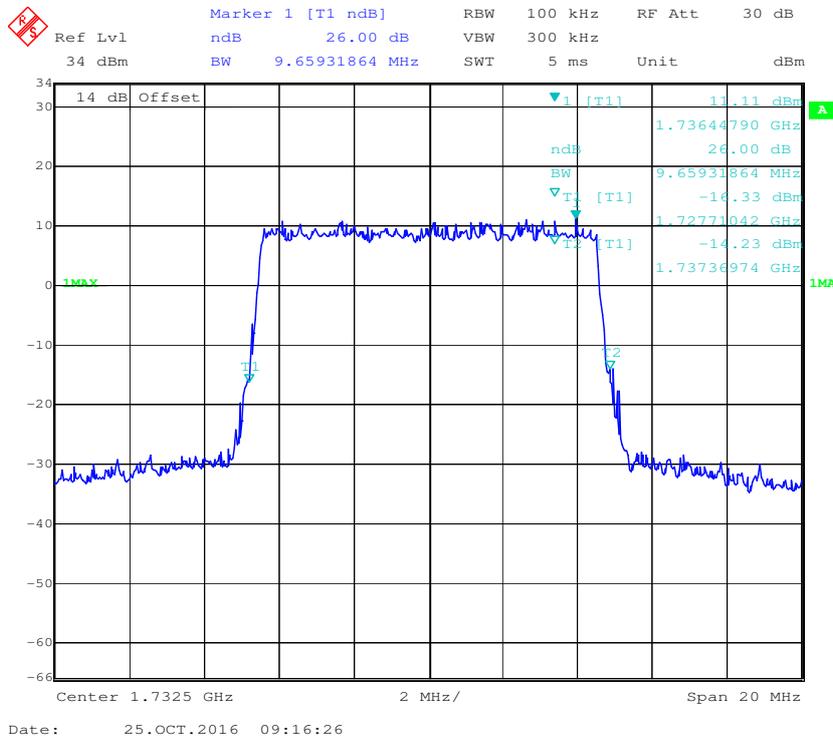

16-QAM (15.0 MHz) - 99% Occupied Bandwidth, Middle channel

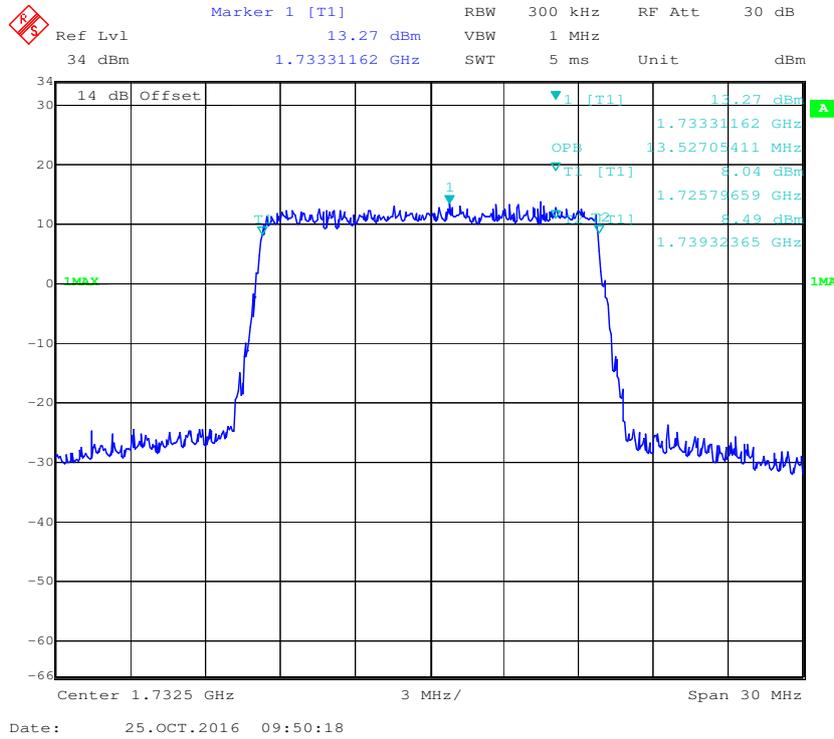


16-QAM (15.0 MHz) - 26 dB Bandwidth, Middle channel

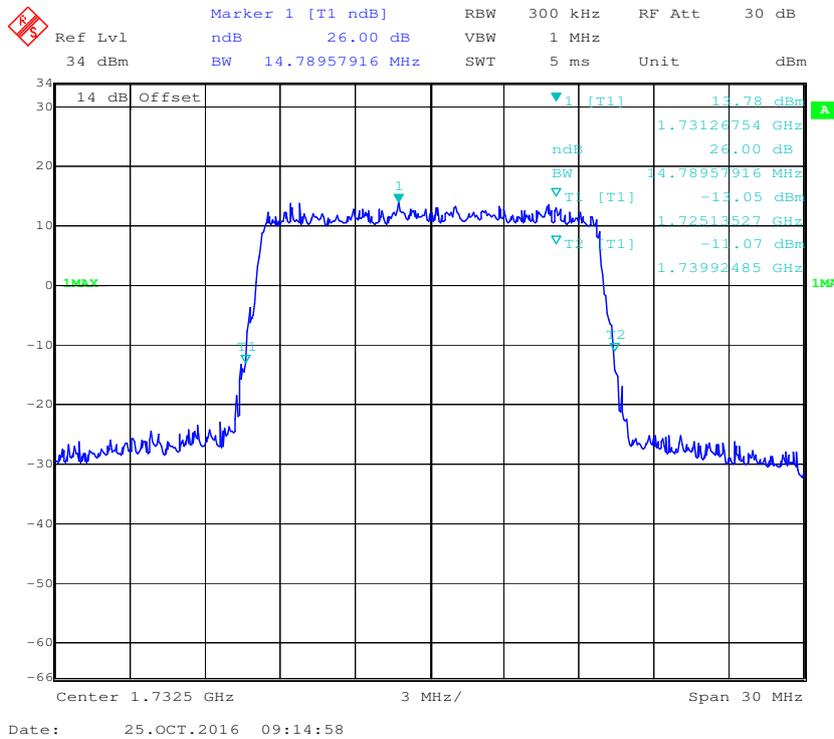


LTE Band 7: (Middle Channel)

Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
5	QPSK	4.549	5.090
	16QAM	4.549	5.050
10	QPSK	8.938	9.539
	16QAM	8.978	9.739
15	QPSK	13.527	14.970
	16QAM	13.587	14.970
20	QPSK	17.956	19.639
	16QAM	17.956	19.399


QPSK (5 MHz) - 99% Occupied Bandwidth, Middle channel

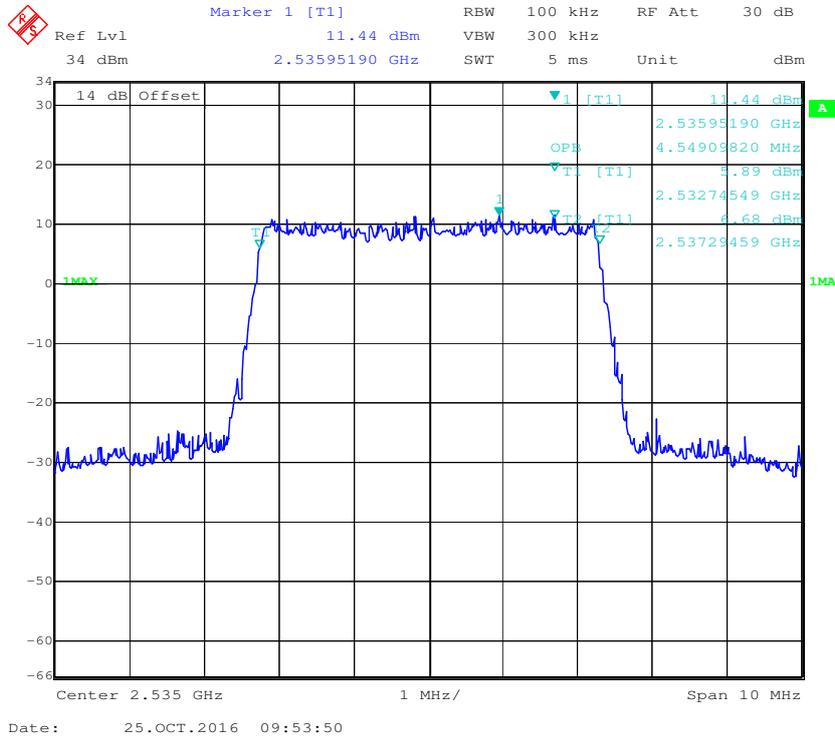


QPSK (5 MHz) - 26 dB Bandwidth, Middle channel

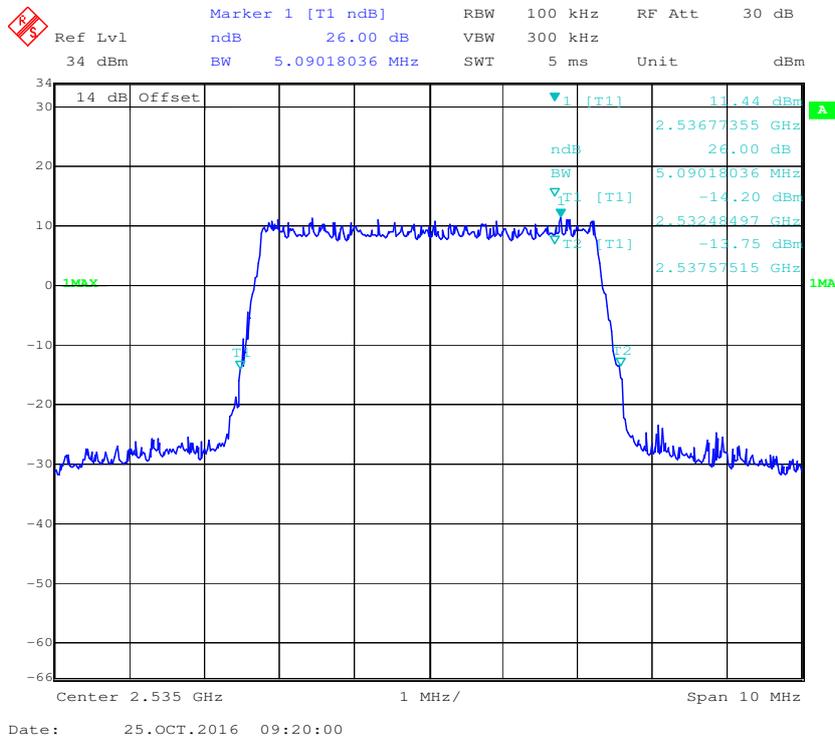


16-QAM (5 MHz) - 99% Occupied Bandwidth, Middle channel

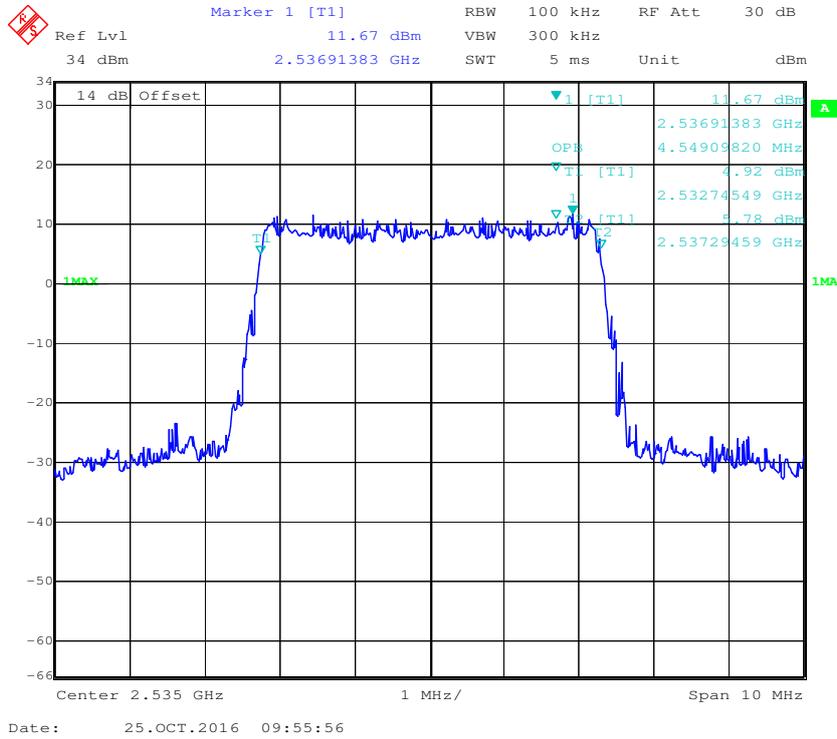


16-QAM (5MHz) - 26 dB Bandwidth, Middle channel

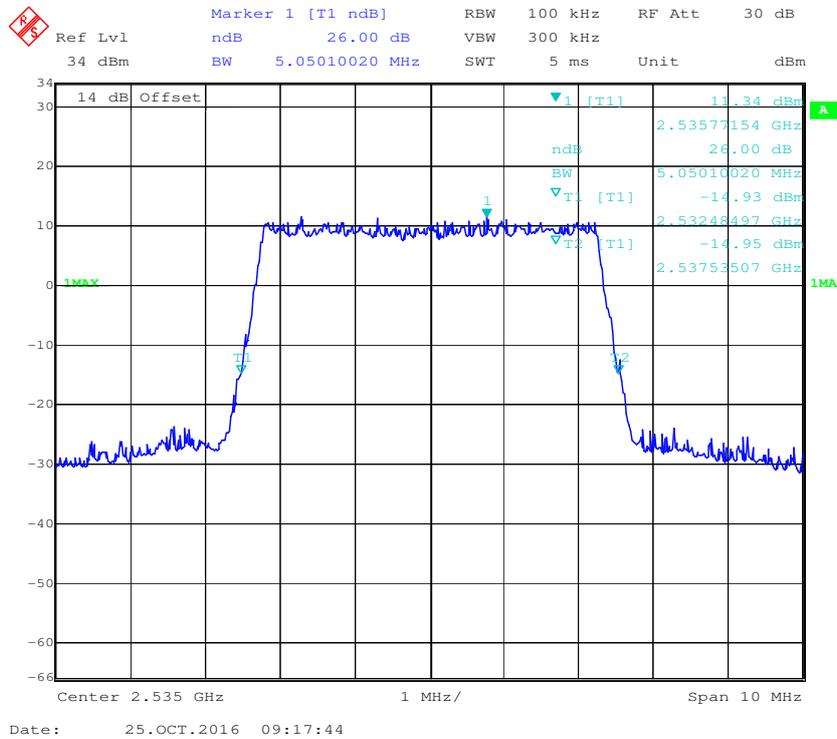


QPSK (10 MHz) - 99% Occupied Bandwidth, Middle channel

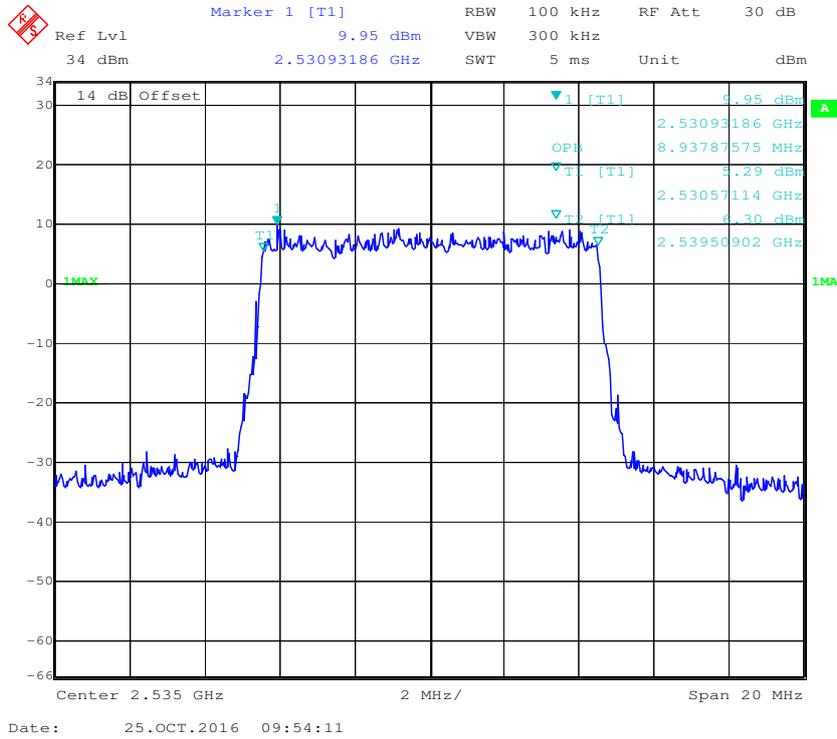


QPSK (10 MHz) - 26 dB Bandwidth, Middle channel

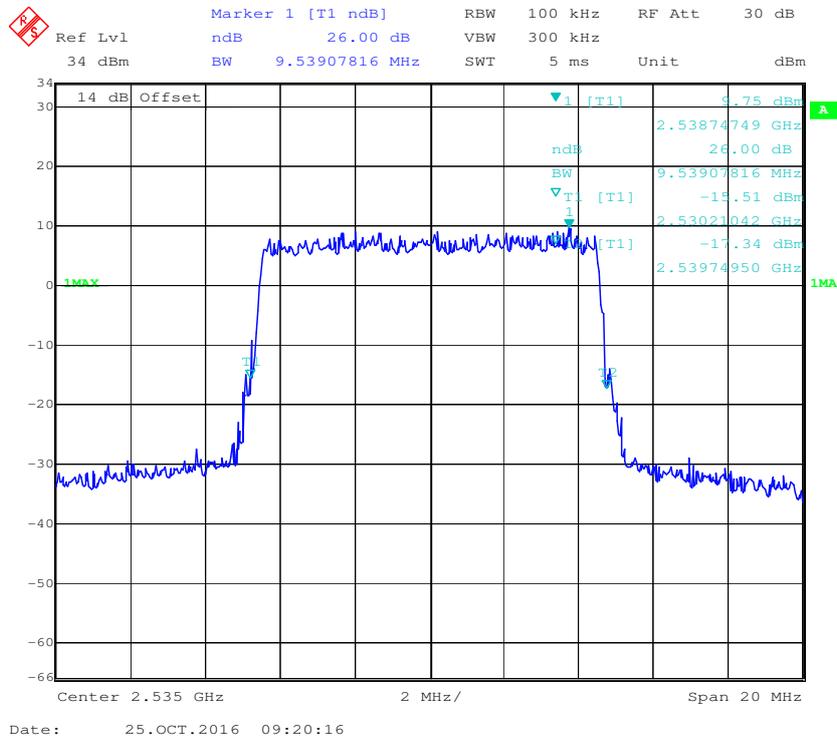


QPSK (15 MHz) - 99% Occupied Bandwidth, Middle channel

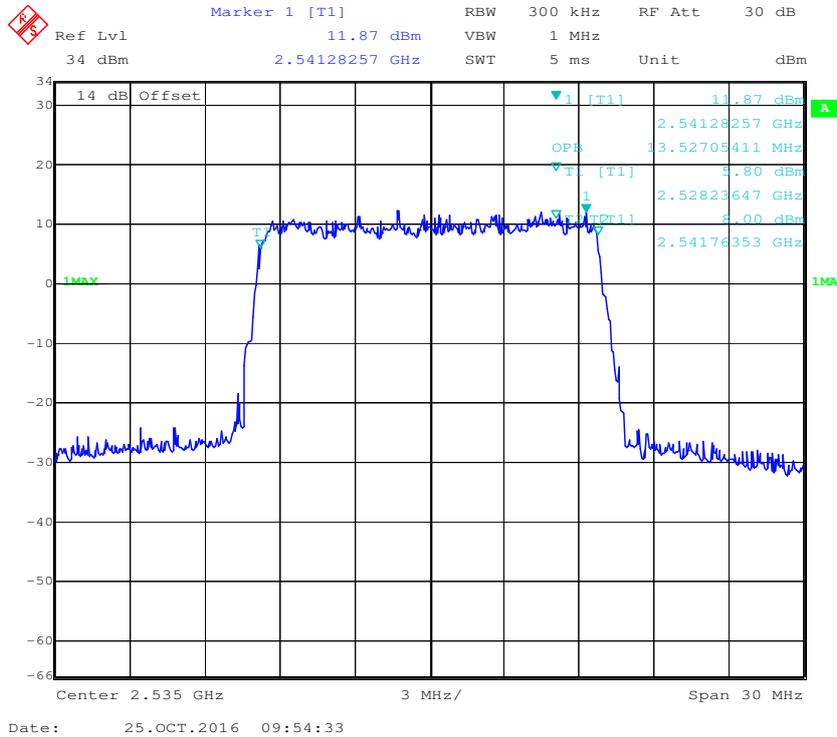


QPSK (15 MHz) -26 dB Bandwidth, Middle channel

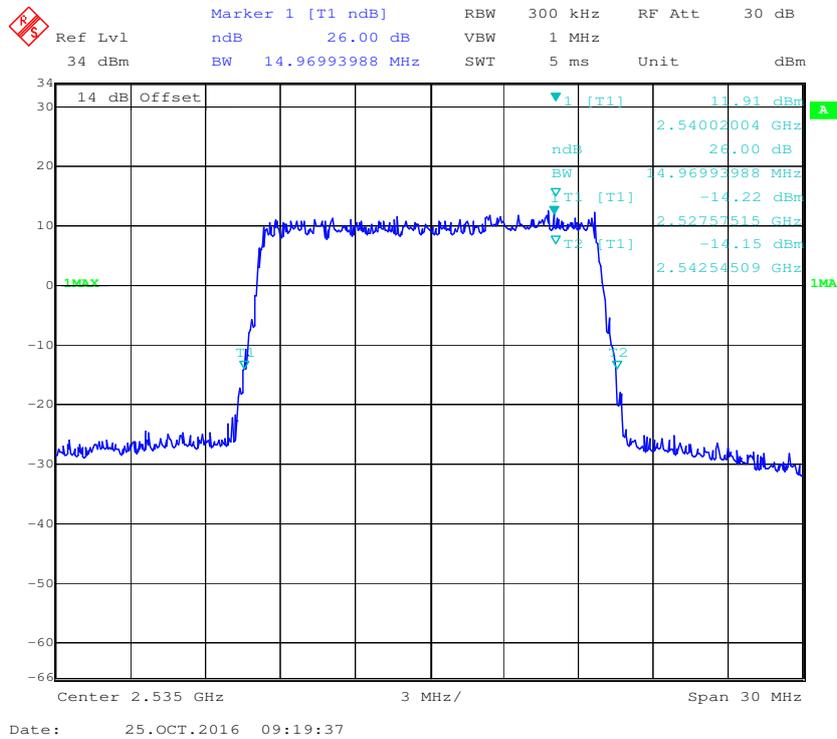


QPSK (20 MHz) - 99% Occupied Bandwidth, Middle channel

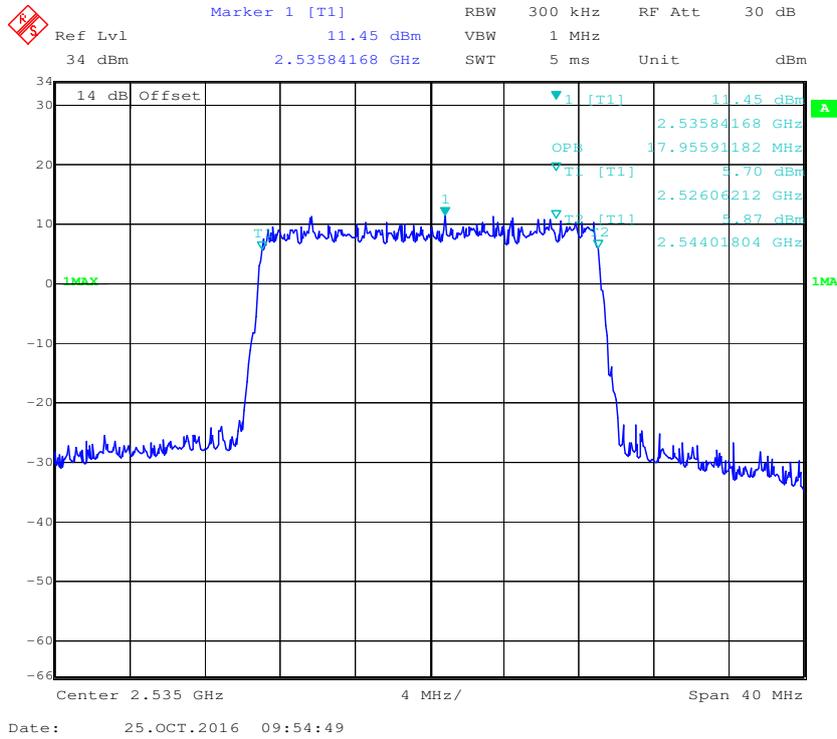


QPSK (20 MHz) - 26 dB Bandwidth, Middle channel

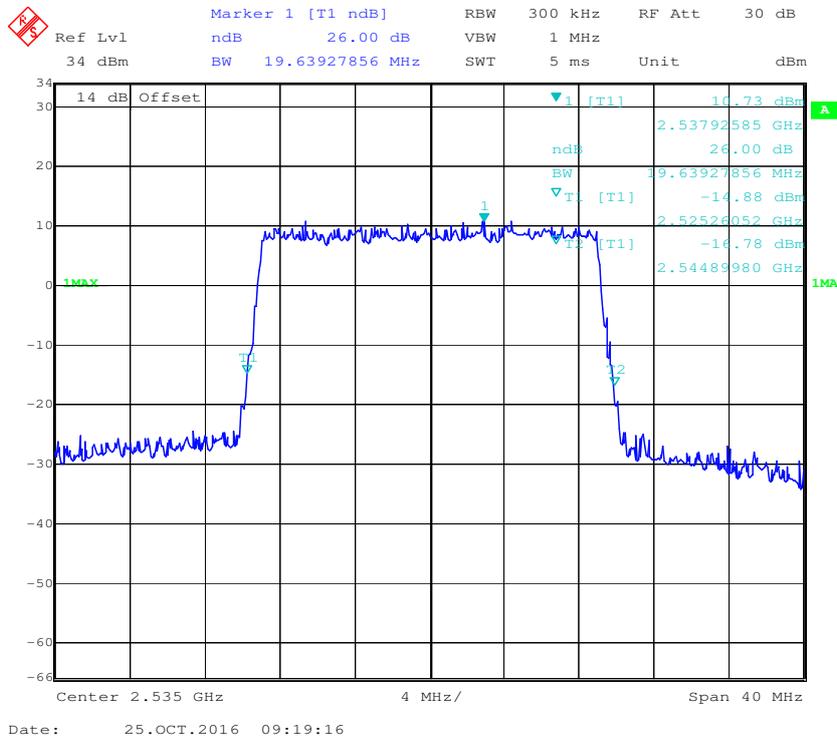

16-QAM (20 MHz) - 99% Occupied Bandwidth, Middle channel

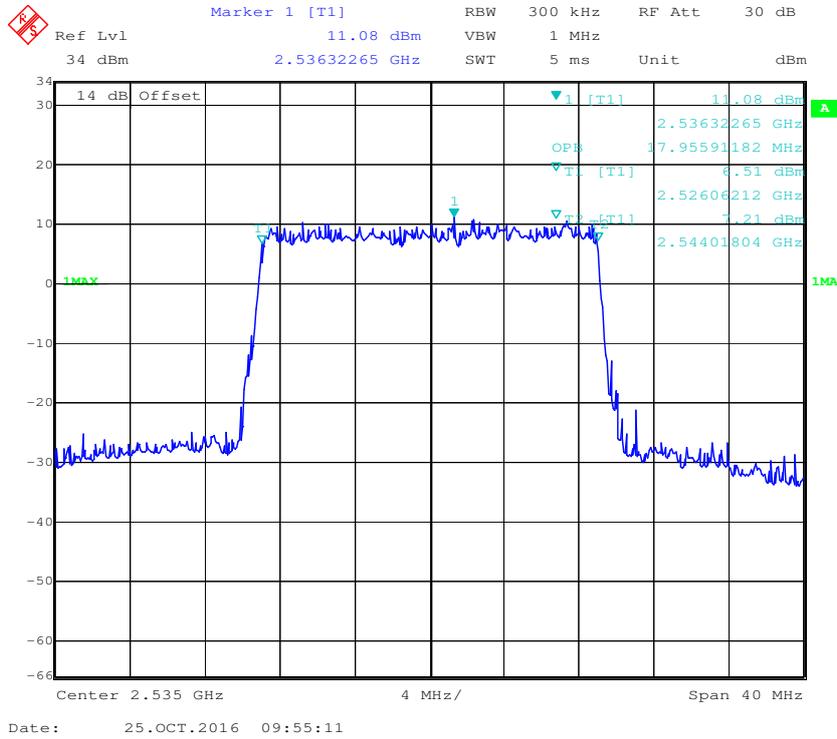


16-QAM (20 MHz) - 26 dB Bandwidth, Middle channel

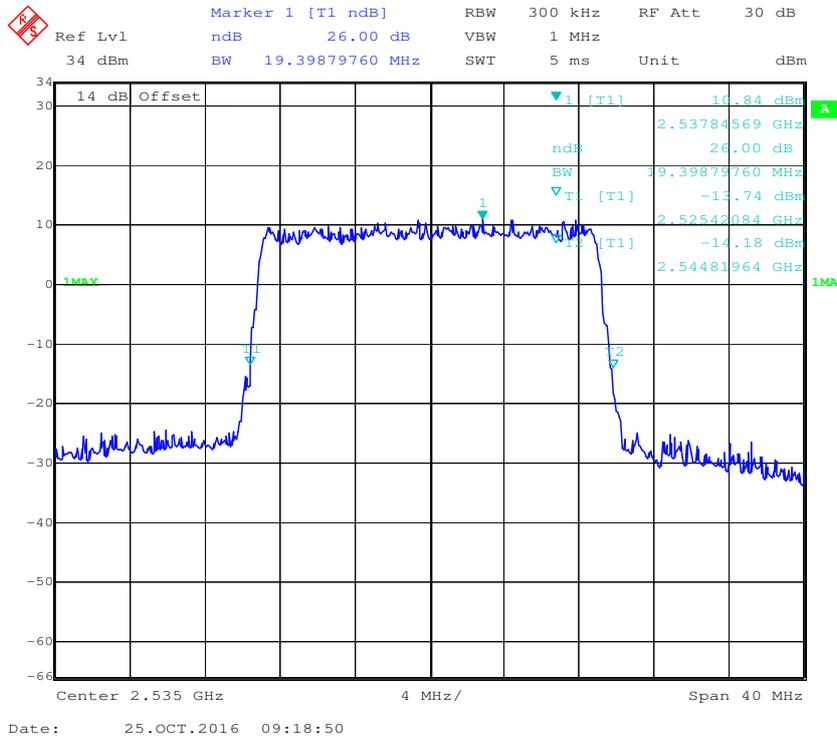


LTE Band 12: (Middle Channel)

Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
1.4	QPSK	1.100	1.257
	16QAM	1.100	1.274
3.0	QPSK	2.693	2.898
	16QAM	2.681	2.922
5.0	QPSK	4.549	5.110
	16QAM	4.569	5.070
10.0	QPSK	9.018	9.780
	16QAM	9.018	9.820


16-QAM (1.4 MHz) - 99% Occupied Bandwidth, Middle channel

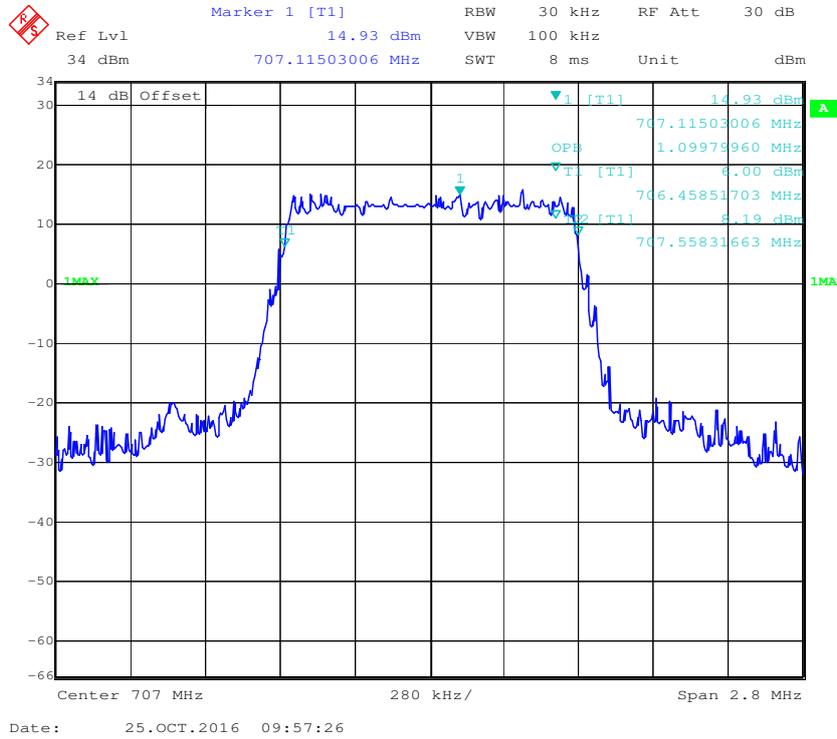


16-QAM (1.4 MHz) - 26 dB Bandwidth, Middle channel

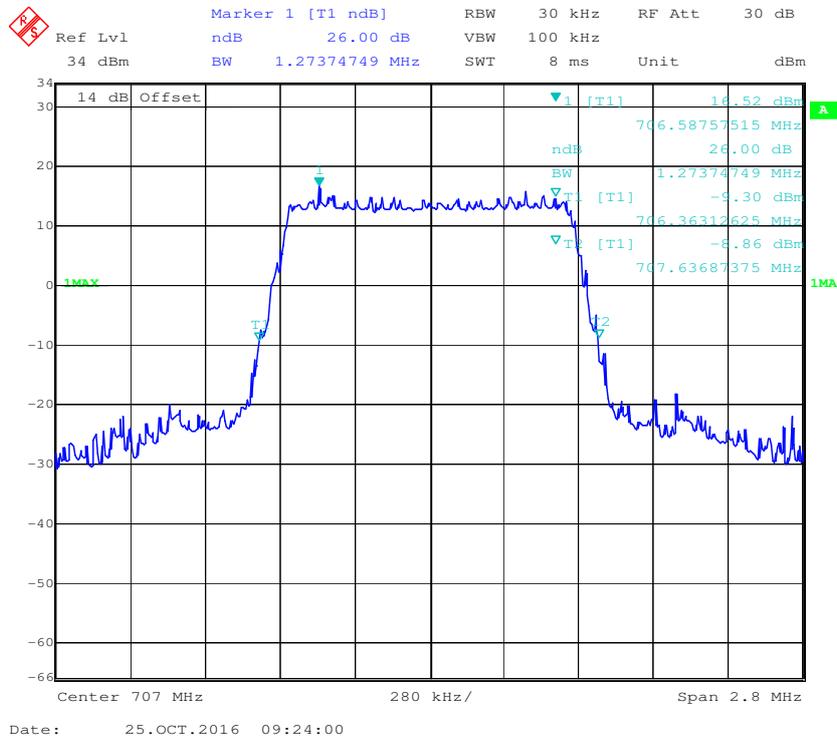


QPSK (5.0 MHz) - 99% Occupied Bandwidth, Middle channel

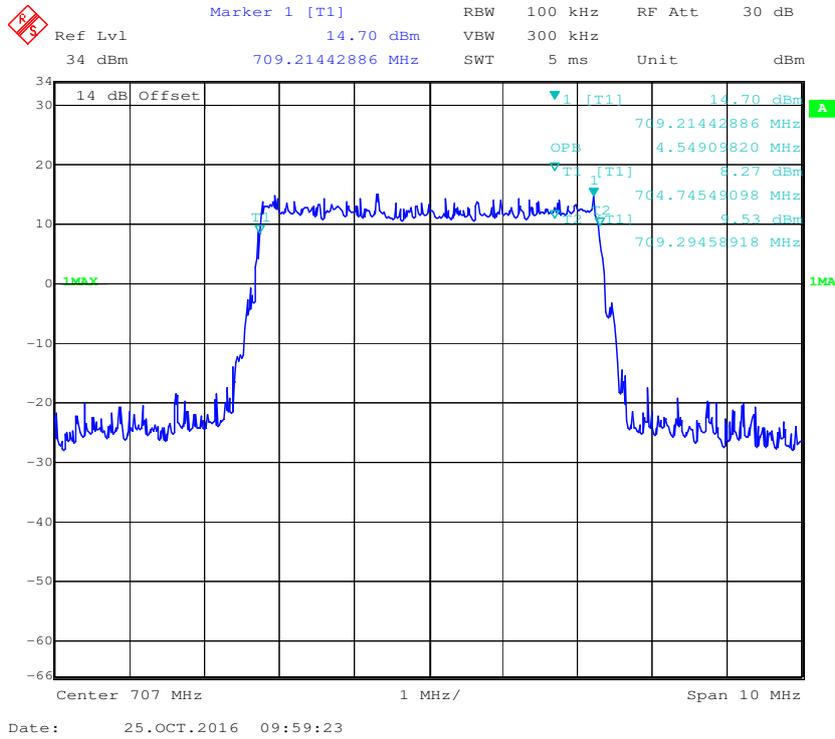


QPSK (5.0 MHz) - 26 dB Bandwidth, Middle channel

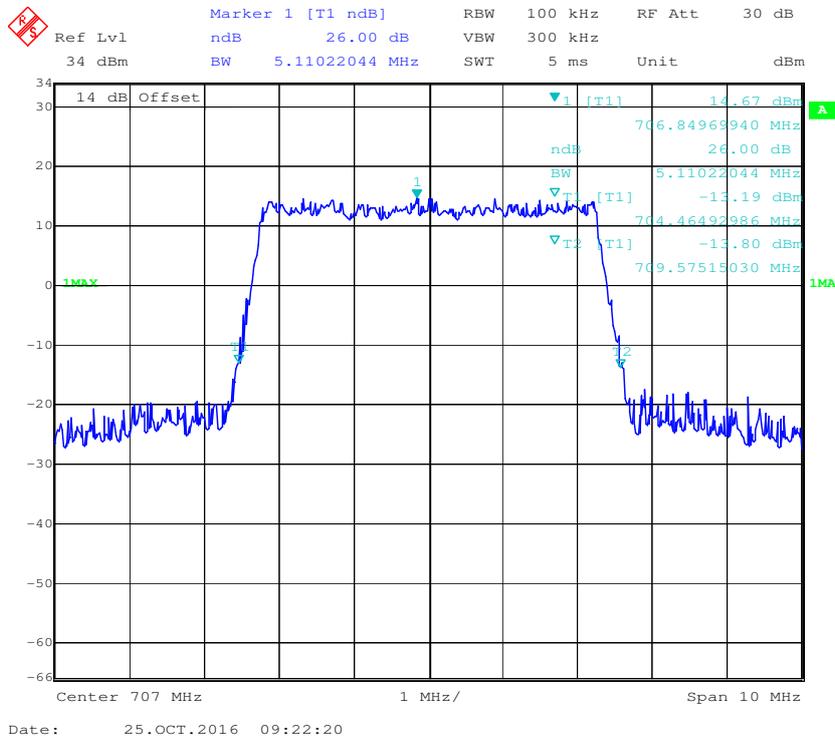


16-QAM (5.0 MHz) - 99% Occupied Bandwidth, Middle channel

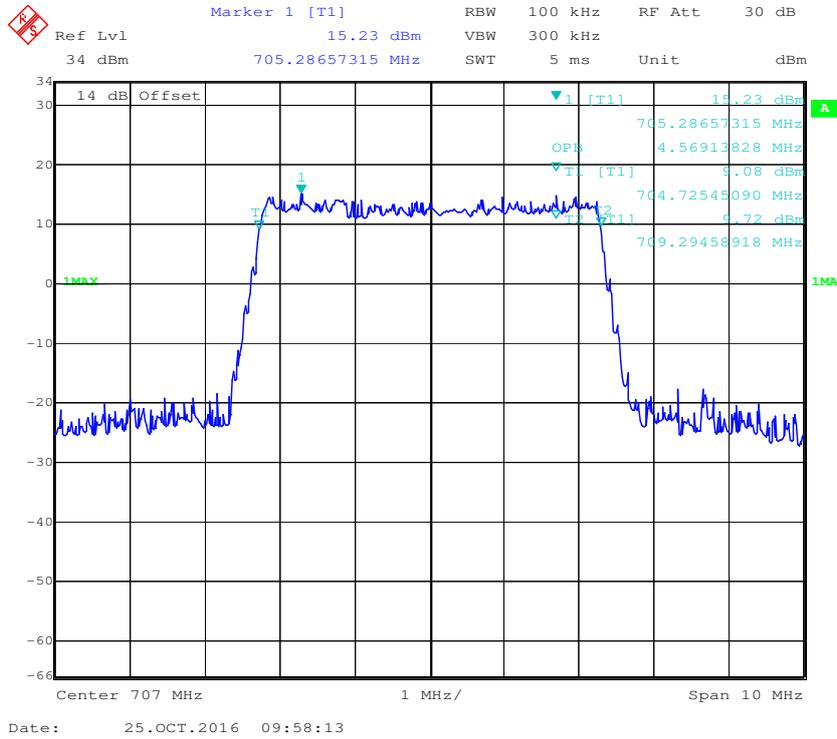


16-QAM (5.0 MHz) - 26 dB Bandwidth, Middle channel

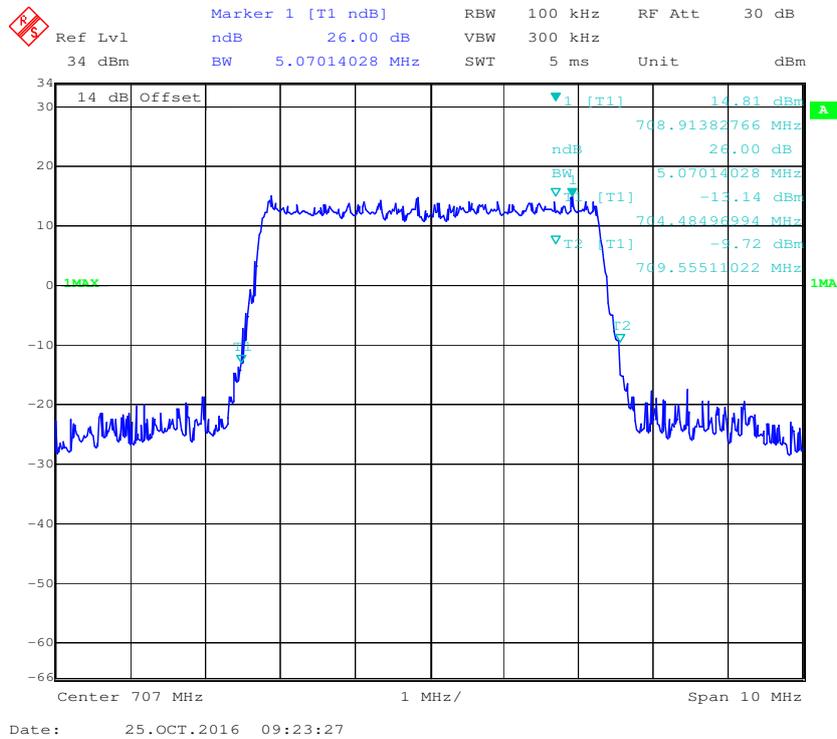


QPSK (10.0 MHz) - 99% Occupied Bandwidth, Middle channel

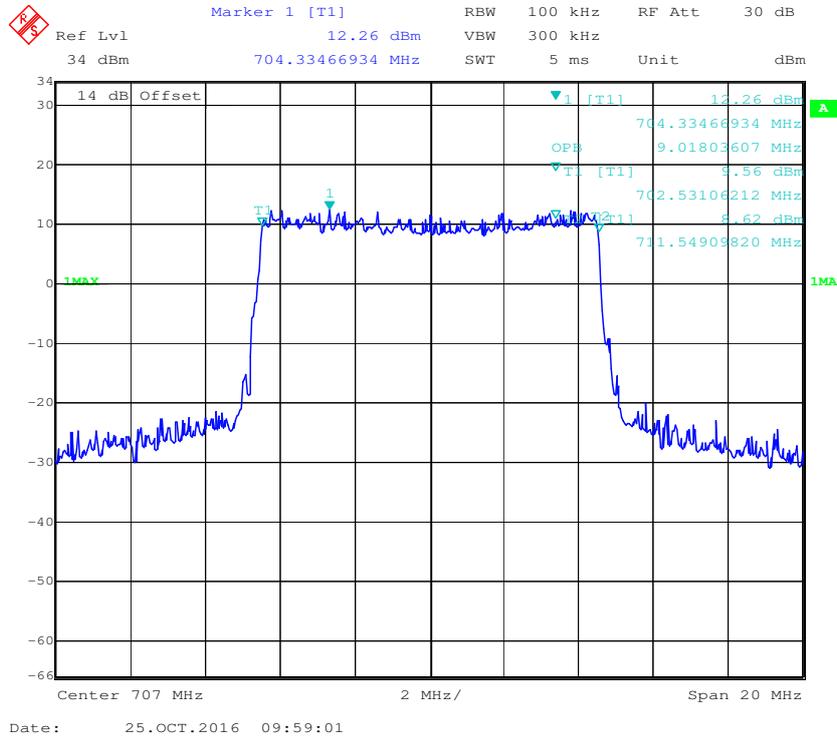


QPSK (10.0 MHz) - 26 dB Bandwidth, Middle channel

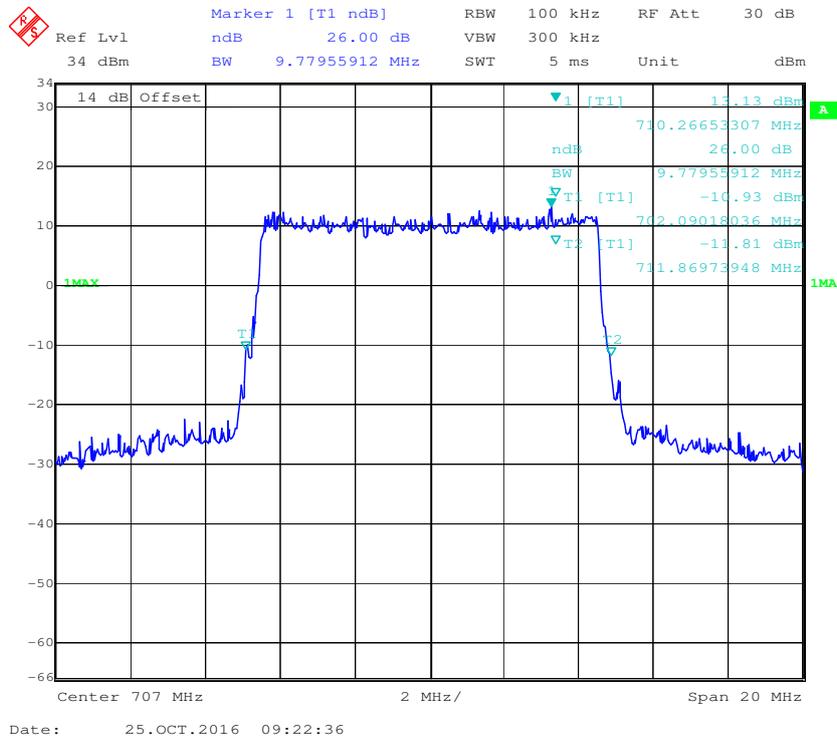

16-QAM (10.0 MHz) - 99% Occupied Bandwidth, Middle channel

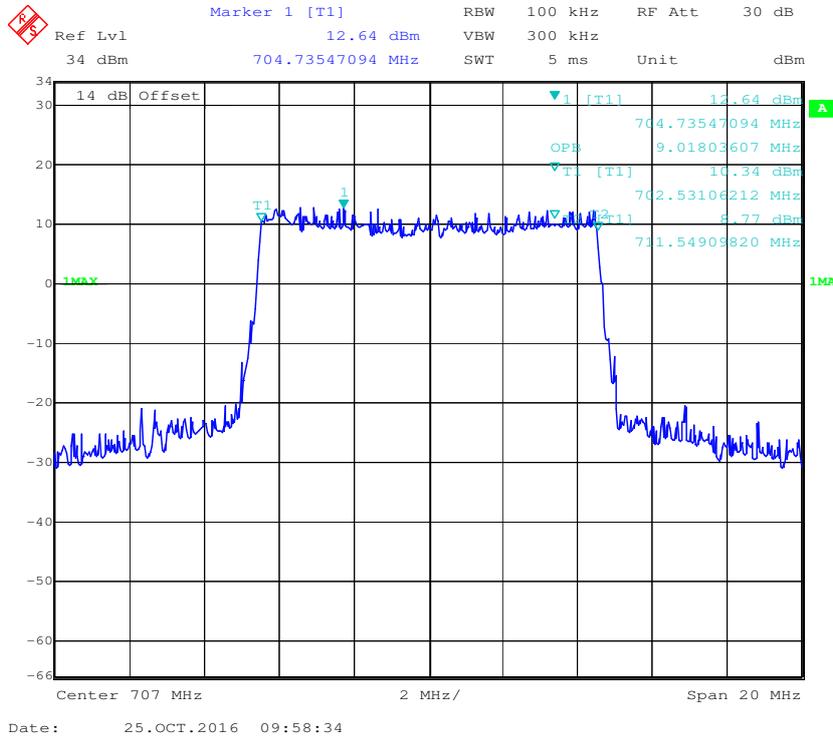


16-QAM (10.0 MHz) - 26 dB Bandwidth, Middle channel

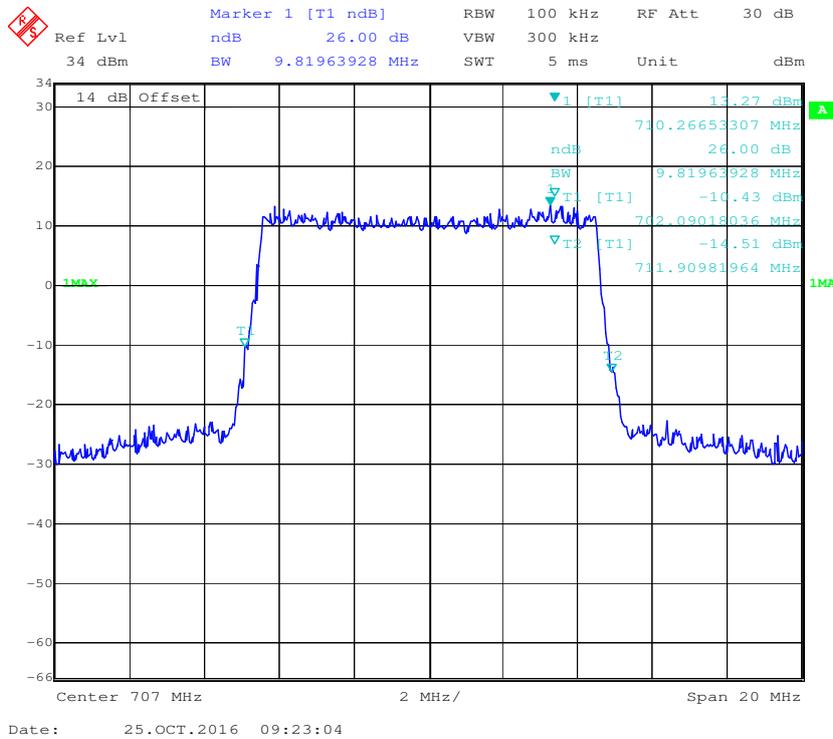


LTE Band 17: (Middle Channel)

Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
5.0	QPSK	4.549	5.030
	16QAM	4.549	5.090
10.0	QPSK	8.978	9.699
	16QAM	8.978	9.699


16-QAM (5.0 MHz) - 99% Occupied Bandwidth, Middle channel

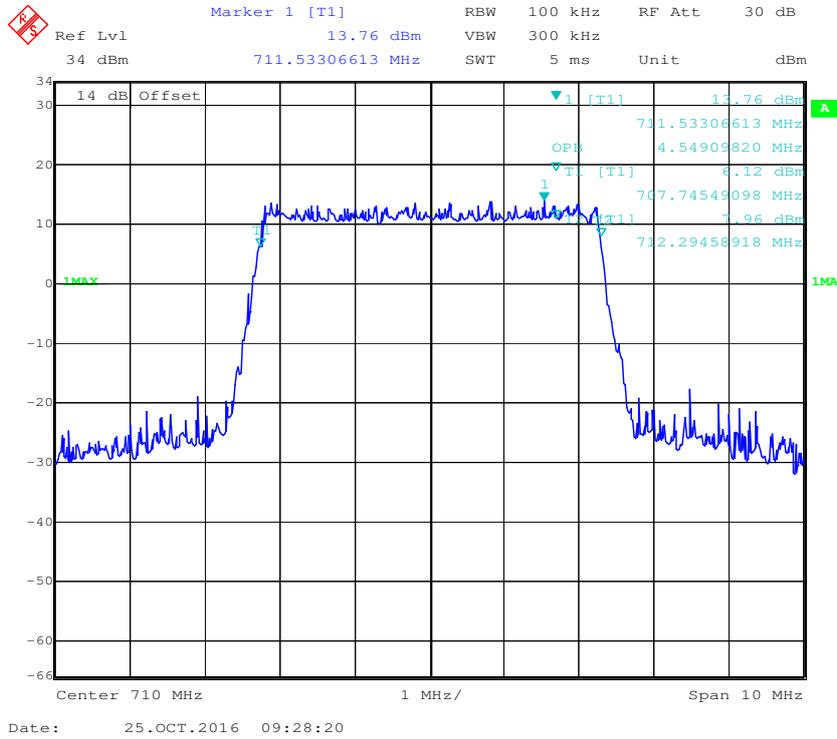


16-QAM (5.0 MHz) - 26 dB Bandwidth, Middle channel

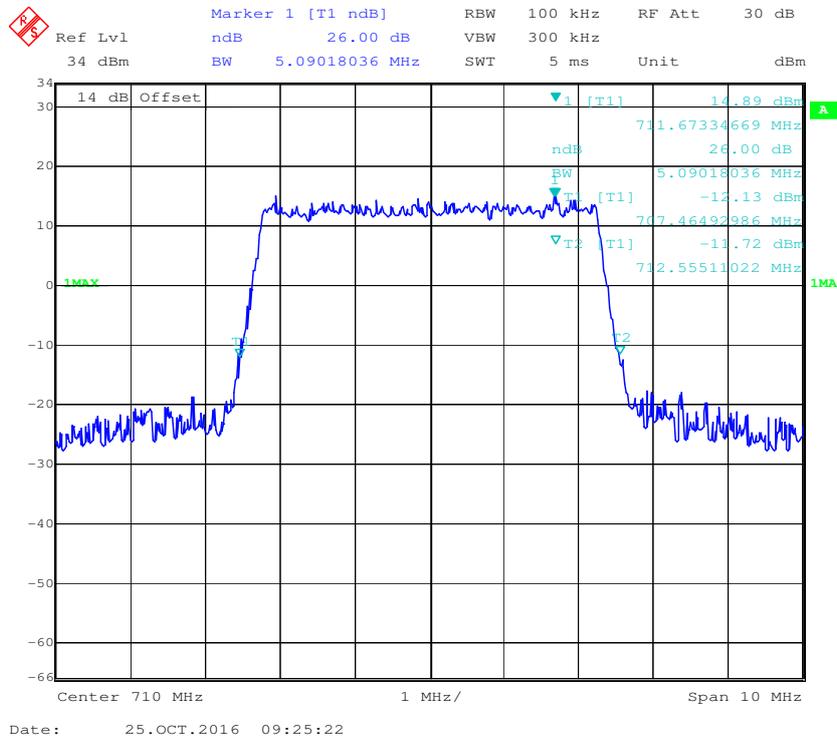

16-QAM (10.0 MHz) - 99% Occupied Bandwidth, Middle channel

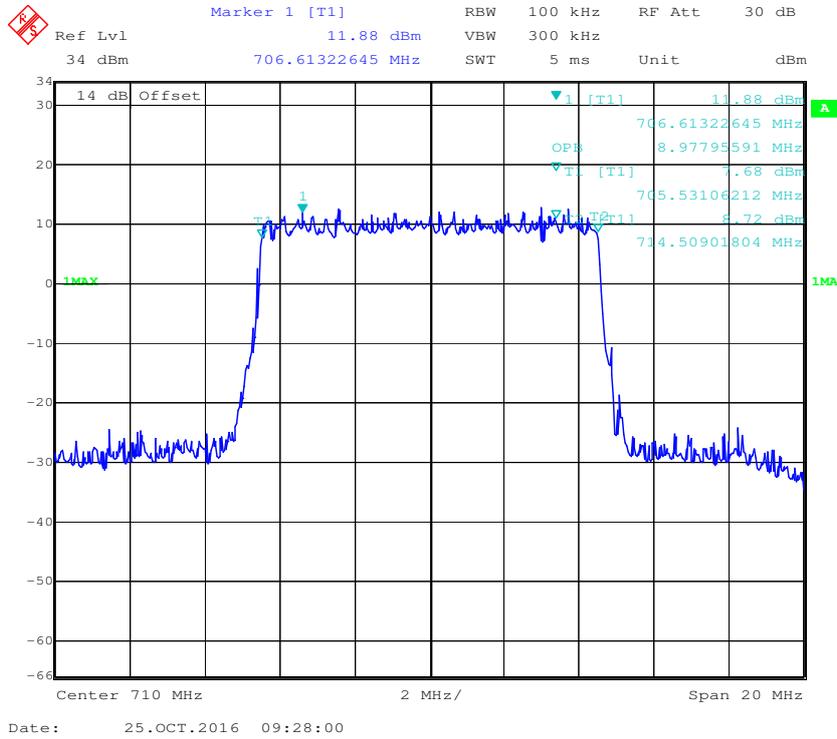

16-QAM (10.0 MHz) - 26 dB Bandwidth, Middle channel

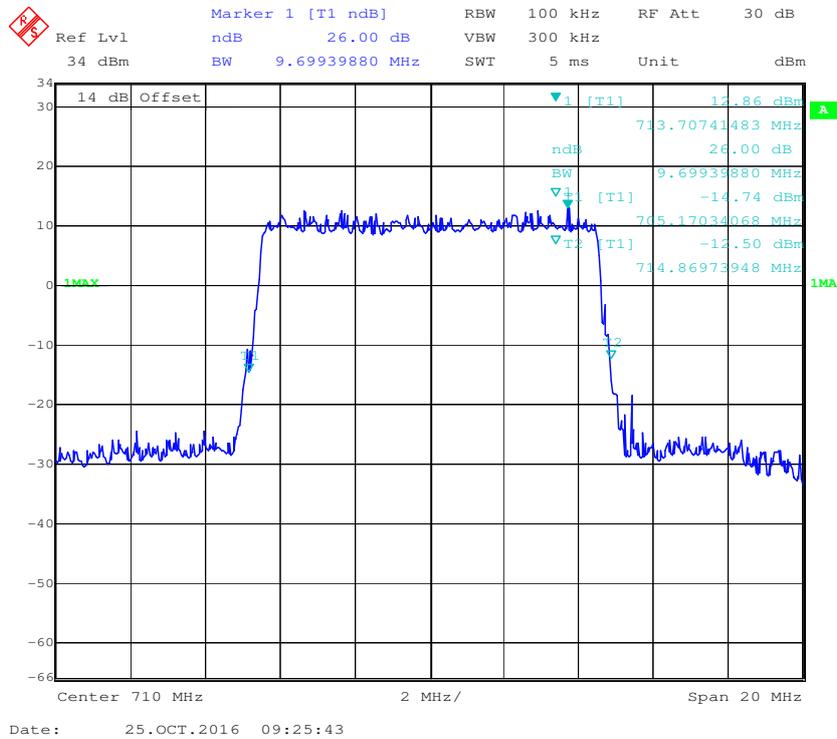

§ 2.1051; § 22.917 (a); § 24.238 (a); §27.53 (h) (m)
SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Applicable Standards

FCC §2.1051, §22.917(a) and §24.238(a) and §27.53(h) (m).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

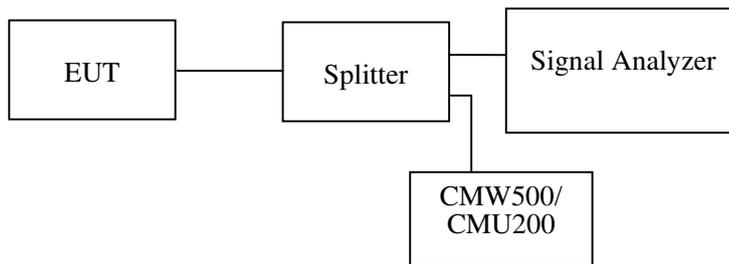

Test Data

Environmental Conditions


Temperature:	25~26°C
Relative Humidity:	55~56 %
ATM Pressure:	101.0~101.5kPa

The testing was performed by Ada Yu from 2016-10-25 to 2016-11-24.

Cellular Band (Part 22H)

30 MHz – 1 GHz (GSM Mode)

Marker 1 [T1] RBW 100 kHz RF Att 40 dB
Ref Lvl -38.68 dBm VBW 300 kHz
37.5 dBm 873.64729459 MHz SWT 245 ms Unit dBm

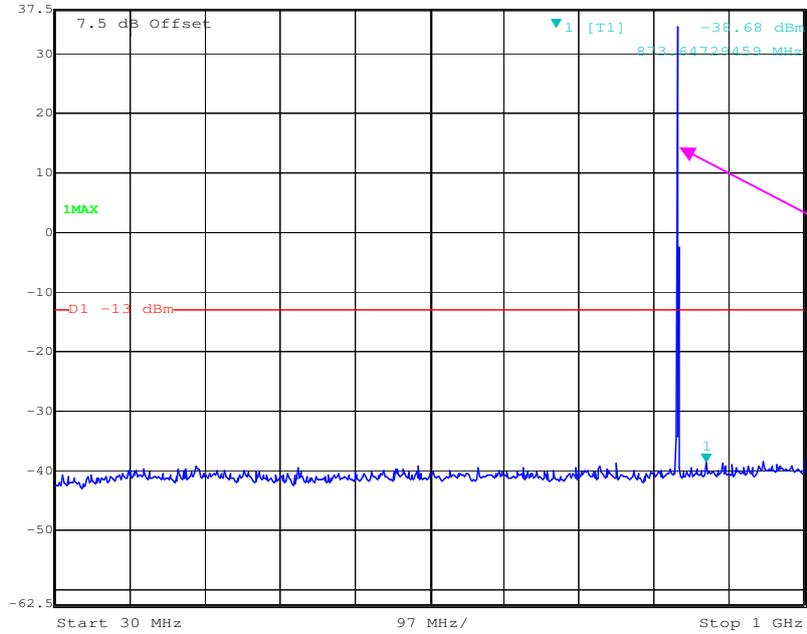


Fundamental test

Date: 6.NOV.2016 09:21:46

1 GHz – 10 GHz (GSM Mode)


Marker 1 [T1] RBW 1 MHz RF Att 10 dB
Ref Lvl -55.43 dBm VBW 3 MHz
7.5 dBm 3.32665331 GHz SWT 52 ms Unit dBm

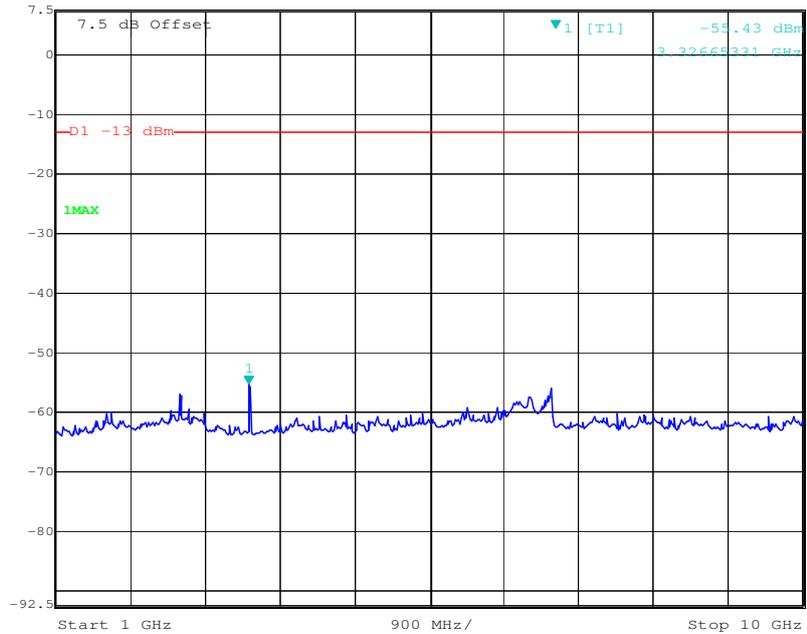

Date: 6.NOV.2016 09:23:20

30 MHz – 1 GHz (WCDMA Mode)

 Marker 1 [T1] RBW 100 kHz RF Att 40 dB
Ref Lvl -39.45 dBm VBW 300 kHz
37.5 dBm 869.75951904 MHz SWT 245 ms Unit dBm

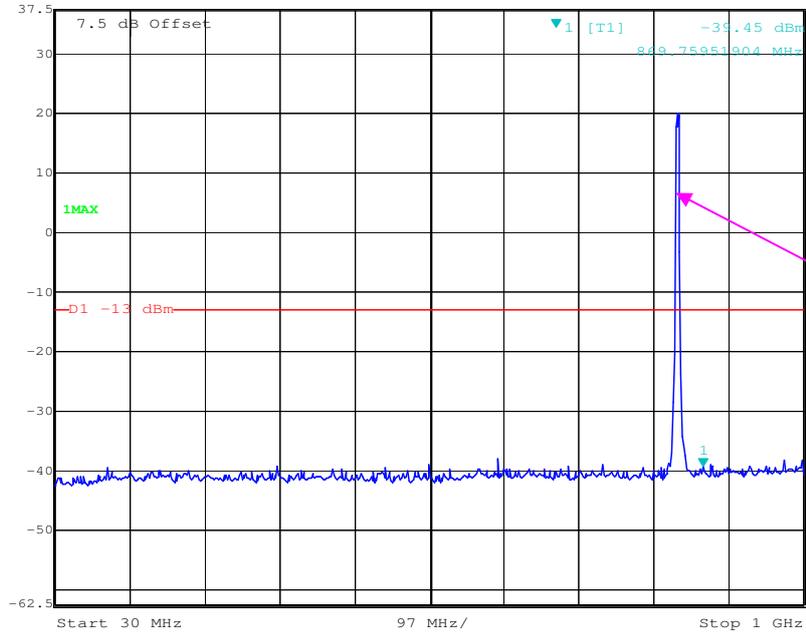


Date: 6.NOV.2016 10:27:16

Fundamental test

1 GHz – 10 GHz (WCDMA Mode)


 Marker 1 [T1] RBW 1 MHz RF Att 10 dB
Ref Lvl -47.16 dBm VBW 3 MHz
7.5 dBm 1.66733467 GHz SWT 52 ms Unit dBm

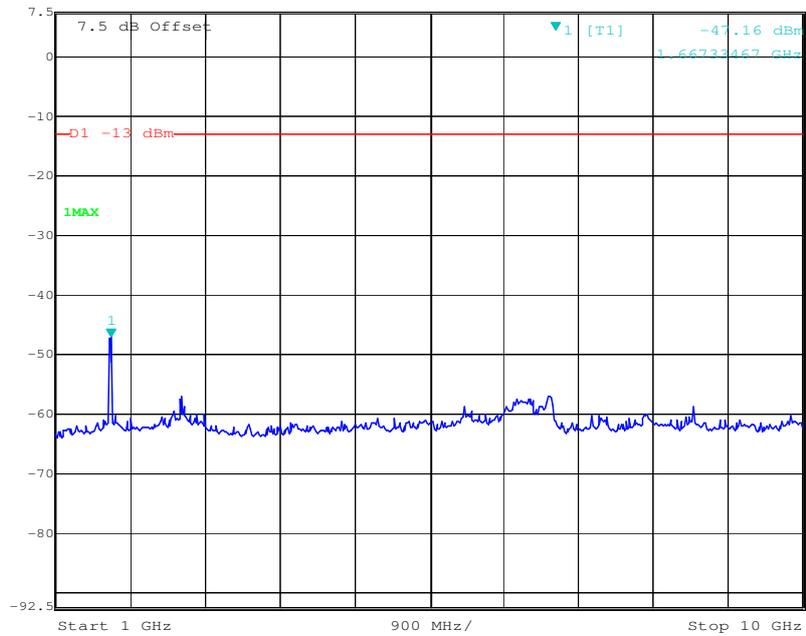


Date: 6.NOV.2016 10:28:17

PCS Band (Part 24E)


30 MHz – 1 GHz (GSM Mode)

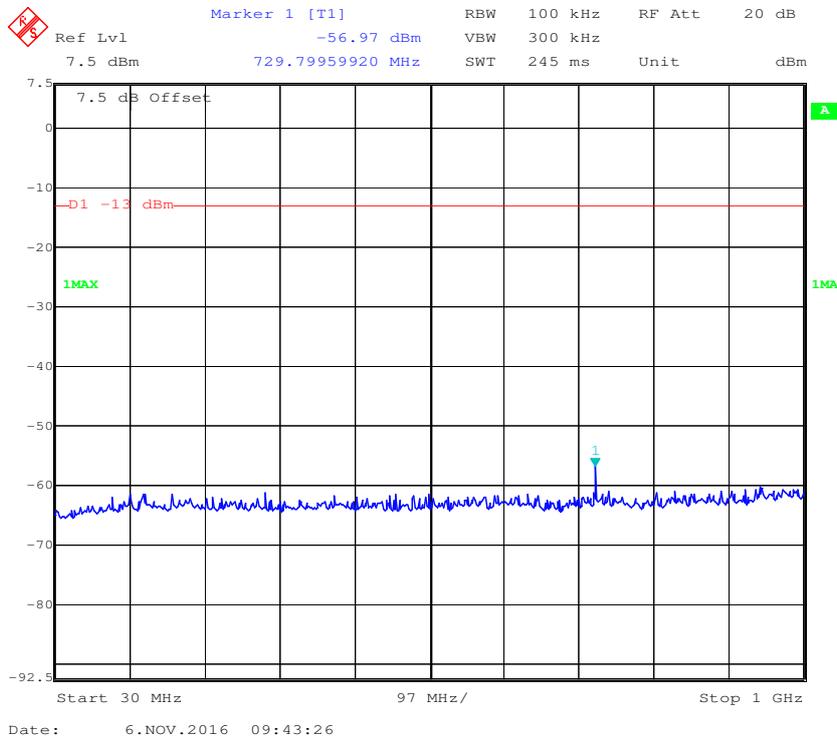


1 GHz – 2 GHz (GSM Mode)

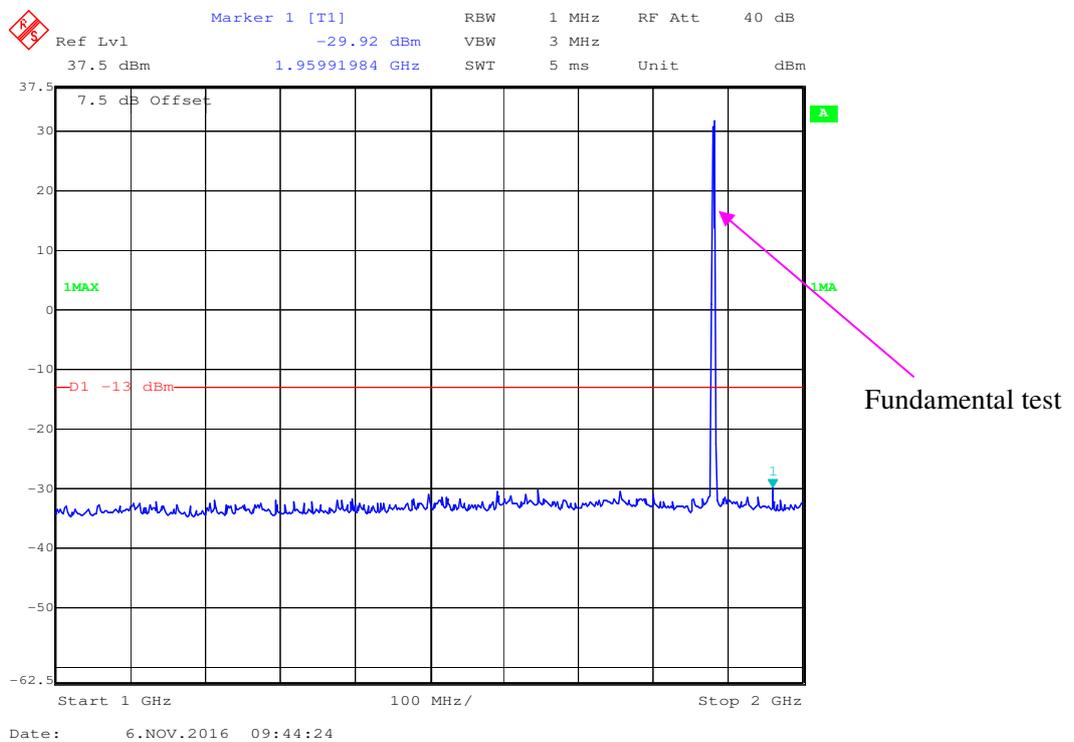


2 GHz – 20 GHz (GSM Mode)

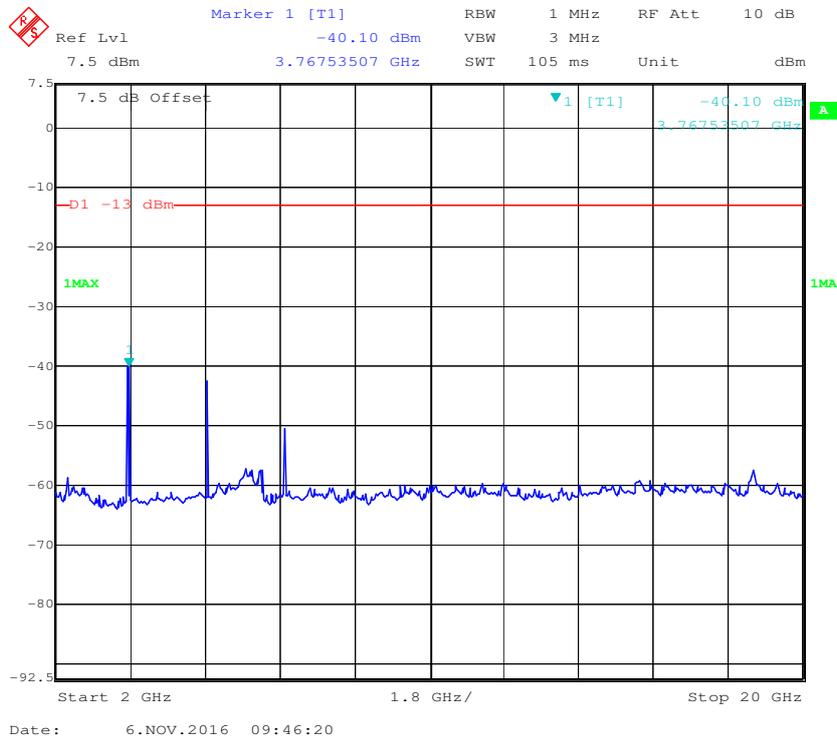


30 MHz – 1 GHz (WCDMA Mode)

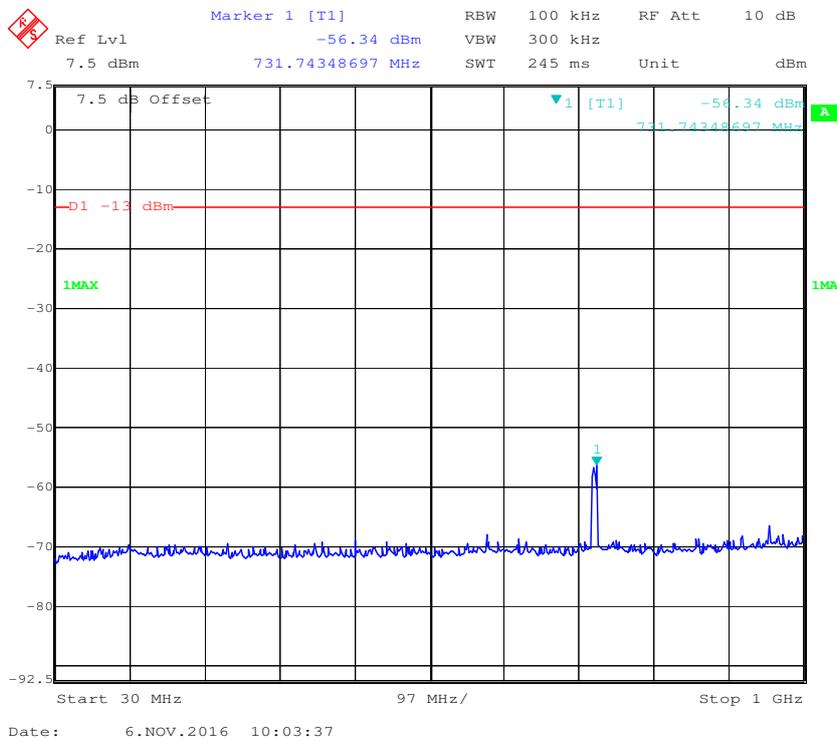

1 GHz – 2 GHz (WCDMA Mode)

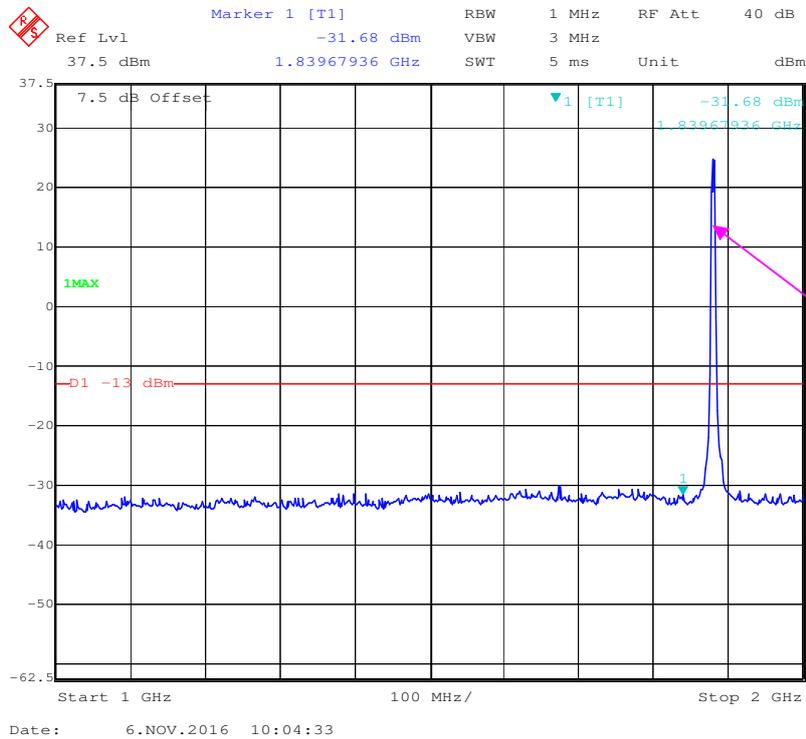


2 GHz – 20 GHz (WCDMA Mode)

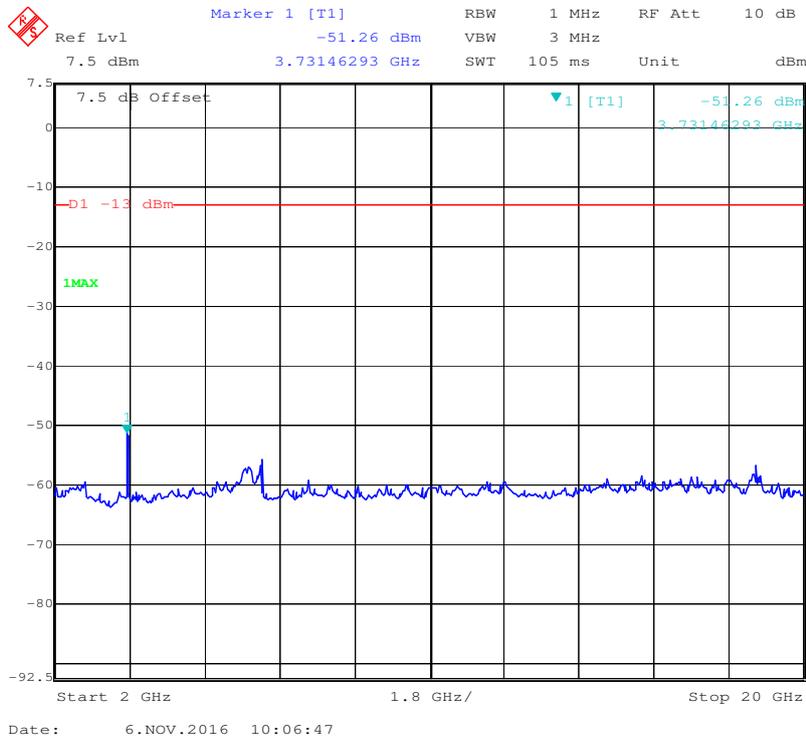


AWS Band

30 MHz – 1 GHz (Band IV, WCDMA Mode)

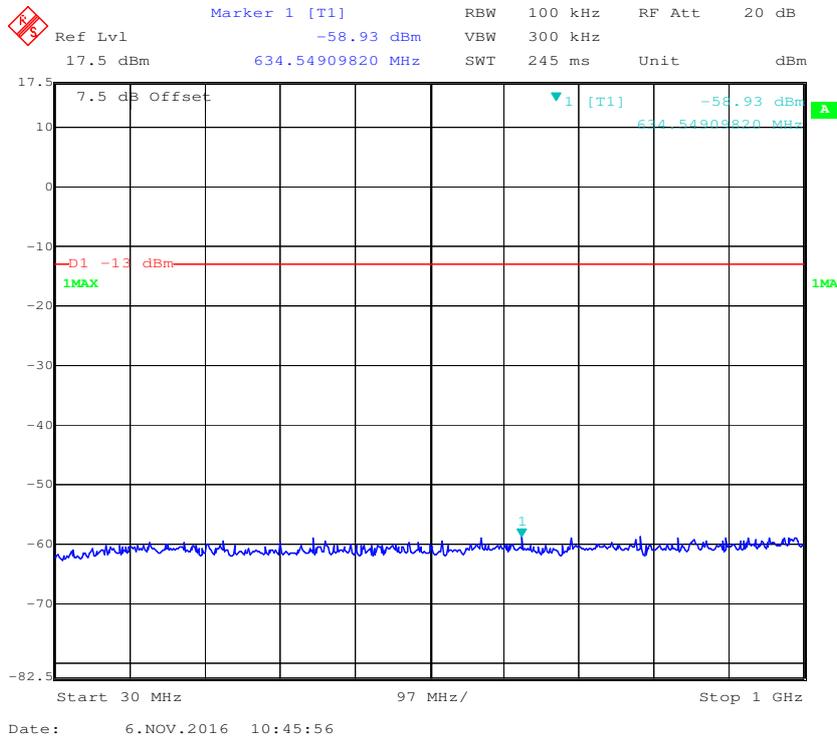


1 GHz – 2 GHz (Band IV, WCDMA Mode)

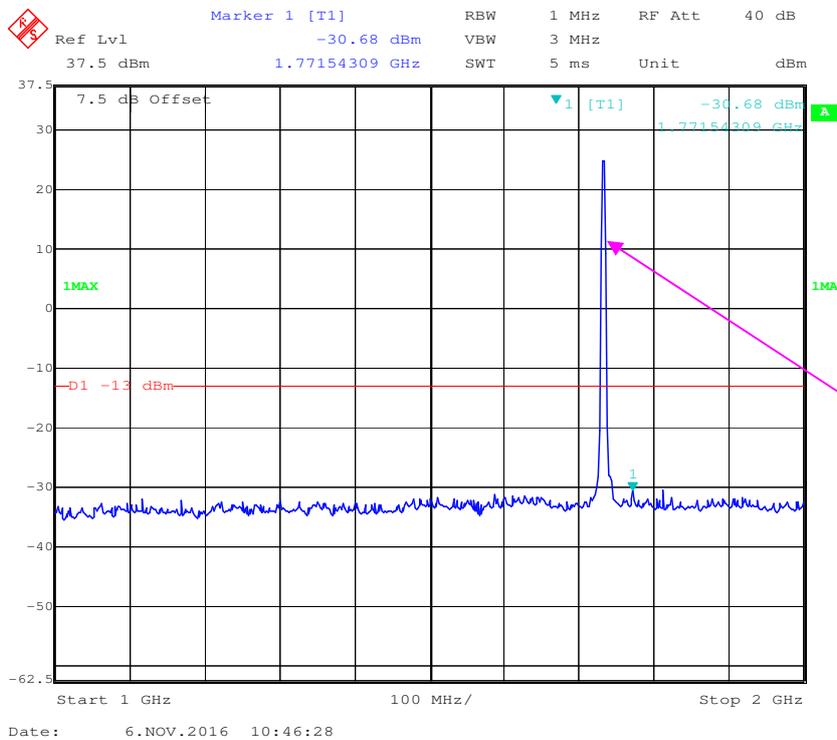


Fundamental test

2 GHz – 20 GHz (Band IV, WCDMA Mode)

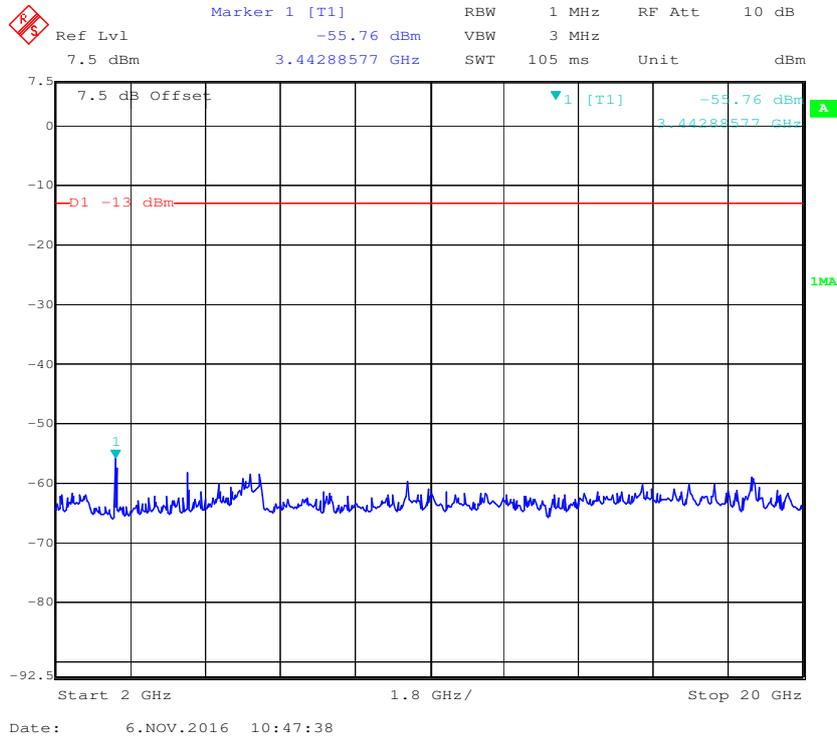


LTE Band 2:


30 MHz - 1 GHz (1.4 MHz, Middle Channel)

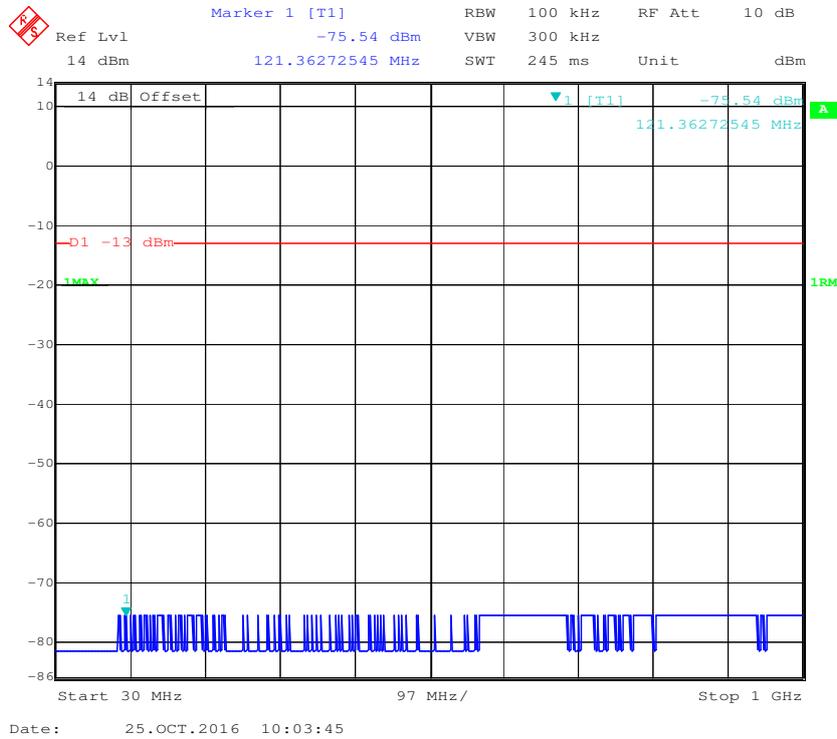


1 GHz - 2 GHz (1.4 MHz, Middle Channel)

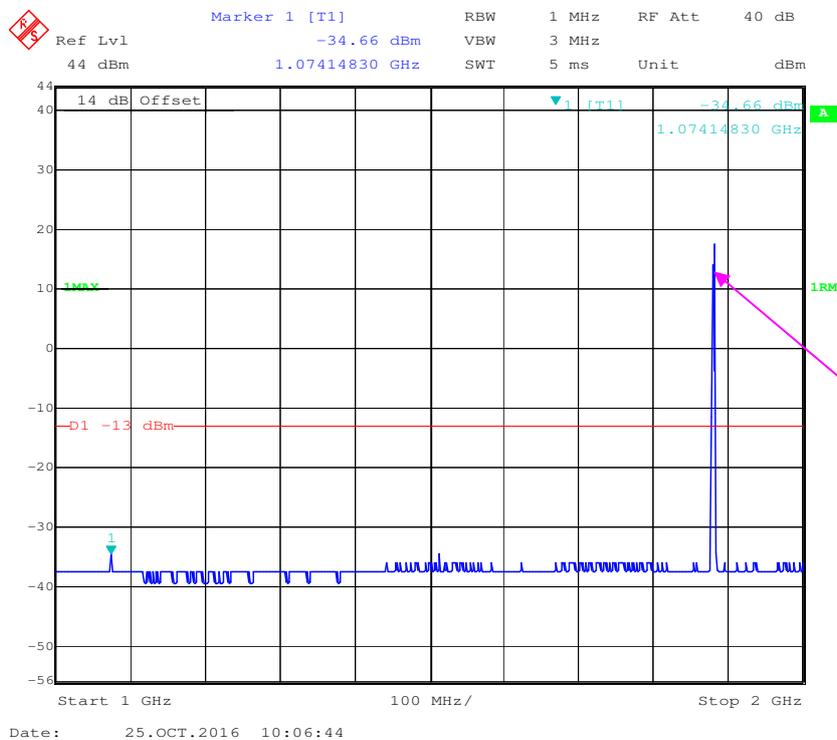


2 GHz – 20 GHz (1.4 MHz, Middle Channel)

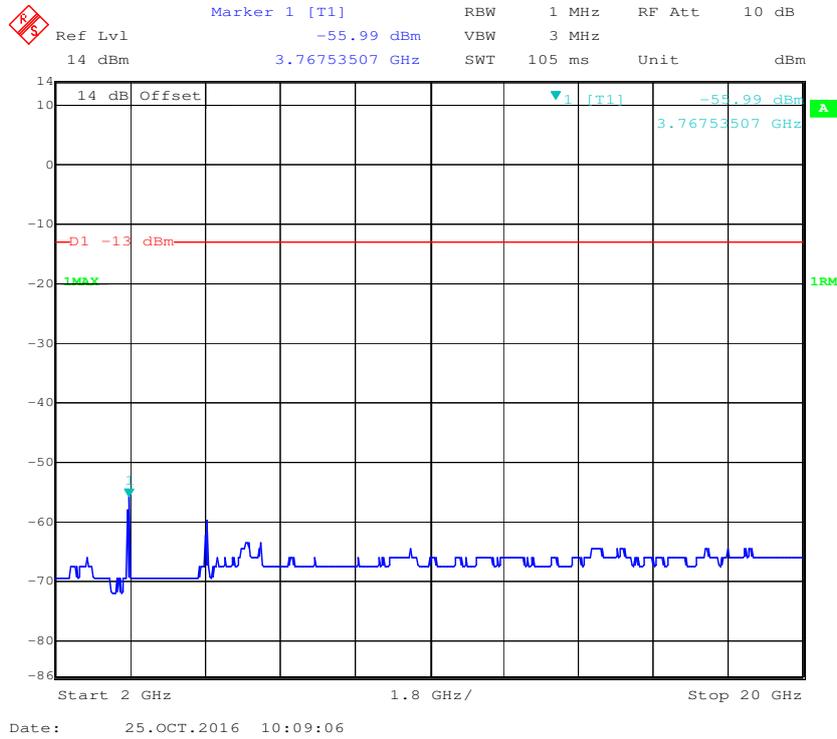


30 MHz - 1 GHz (3.0 MHz, Middle Channel)

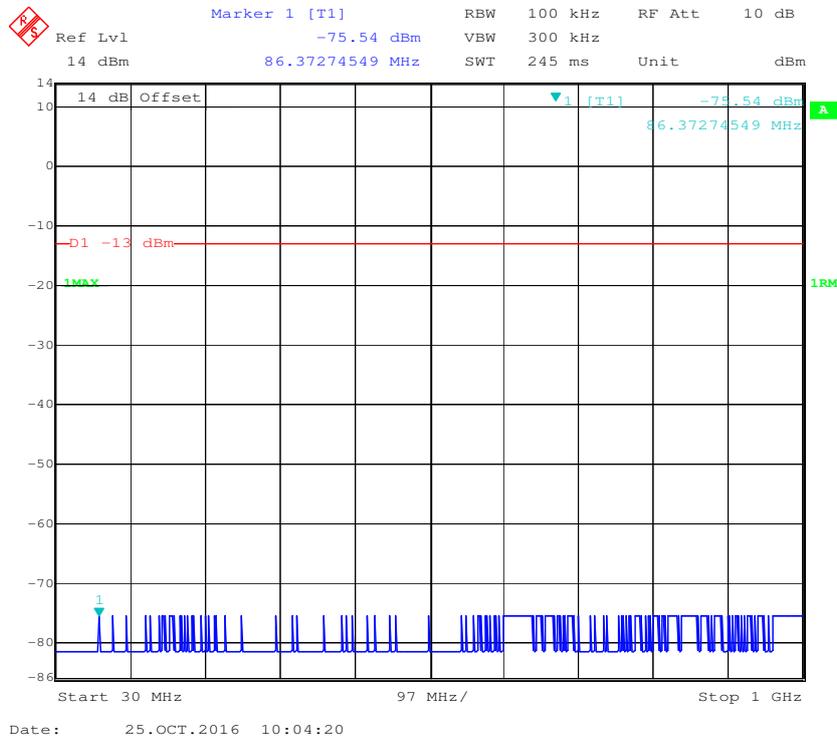


30 MHz - 1 GHz (5.0 MHz, Middle Channel)

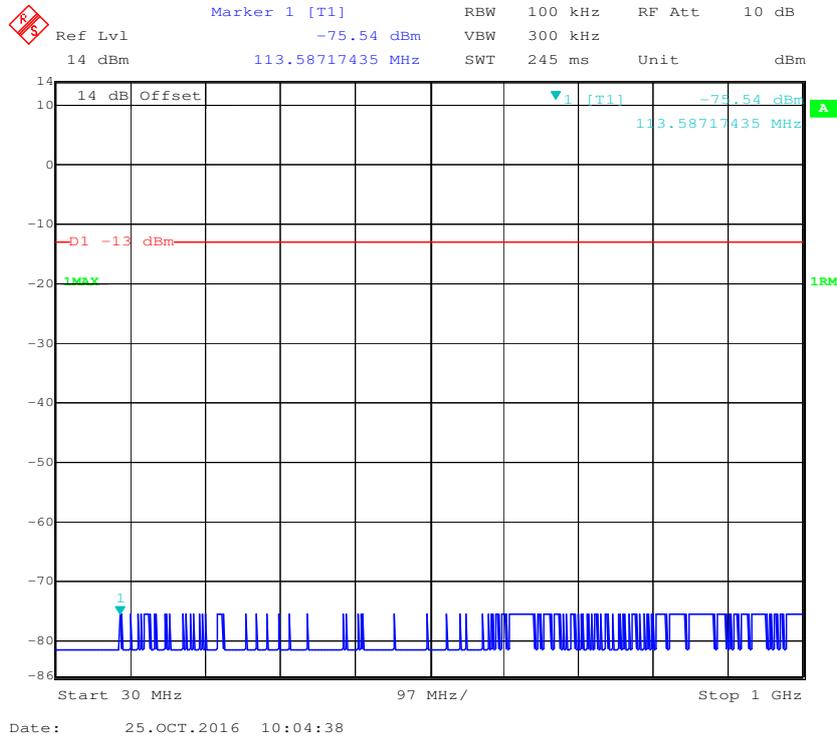


1 GHz - 2 GHz (5.0 MHz, Middle Channel)

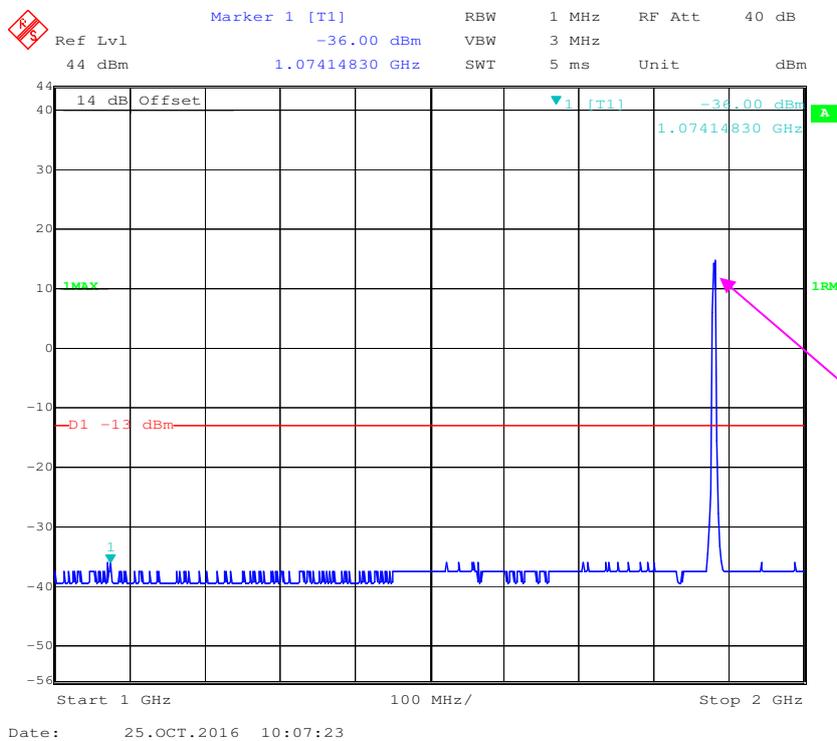

2 GHz – 20 GHz (5.0 MHz, Middle Channel)

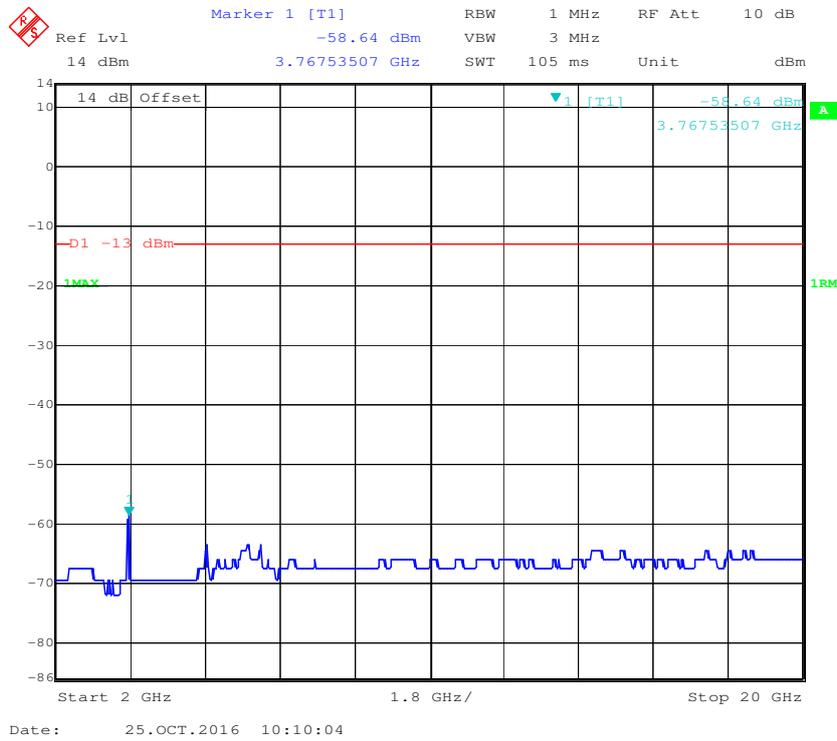


30 MHz - 1 GHz (10.0 MHz, Middle Channel)

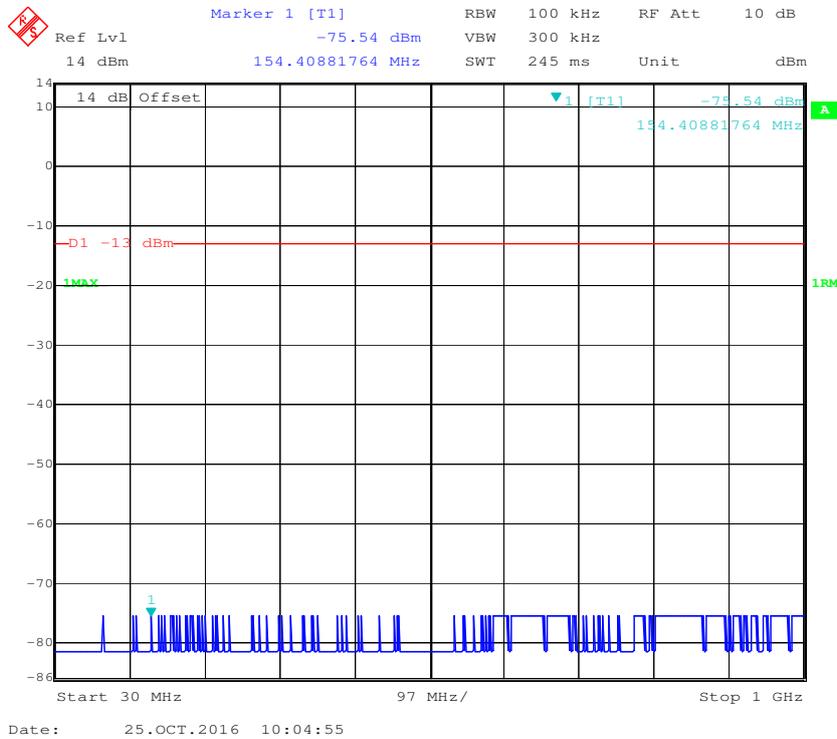

1 GHz – 2 GHz (10.0 MHz, Middle Channel)


Marker 1 [T1] RBW 1 MHz RF Att 40 dB
Ref Lvl -36.00 dBm VBW 3 MHz
44 dBm 1.07414830 GHz SWT 5 ms Unit dBm

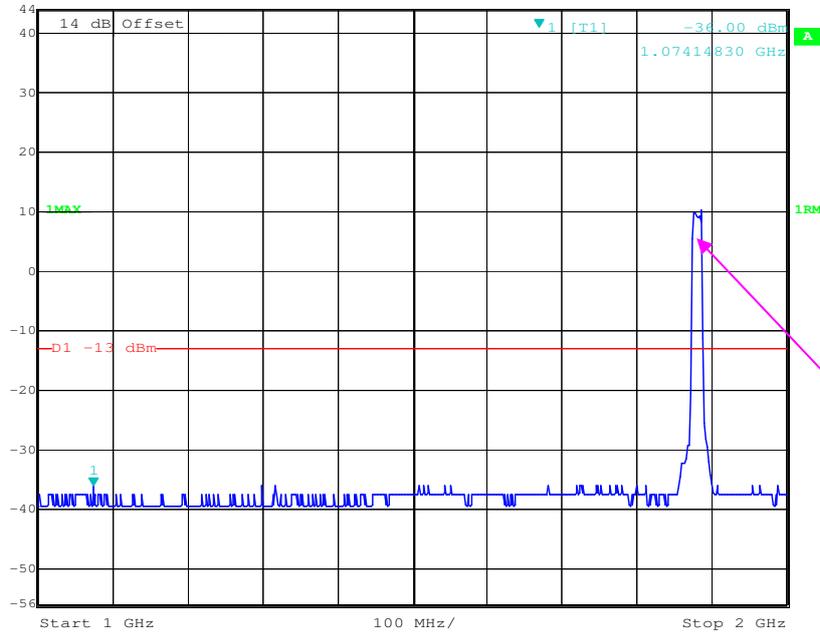

Date: 25.OCT.2016 10:07:54


2 GHz – 20 GHz (10.0 MHz, Middle Channel)

Marker 1 [T1] RBW 1 MHz RF Att 10 dB
Ref Lvl -58.64 dBm VBW 3 MHz
14 dBm 3.73146293 GHz SWT 105 ms Unit dBm

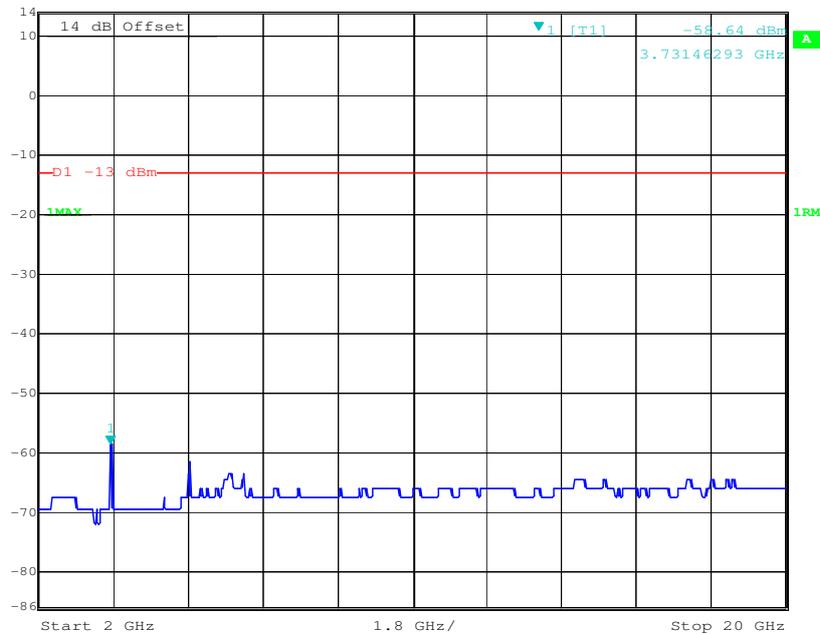


Date: 25.OCT.2016 10:10:22


30 MHz - 1 GHz (15.0 MHz, Middle Channel)

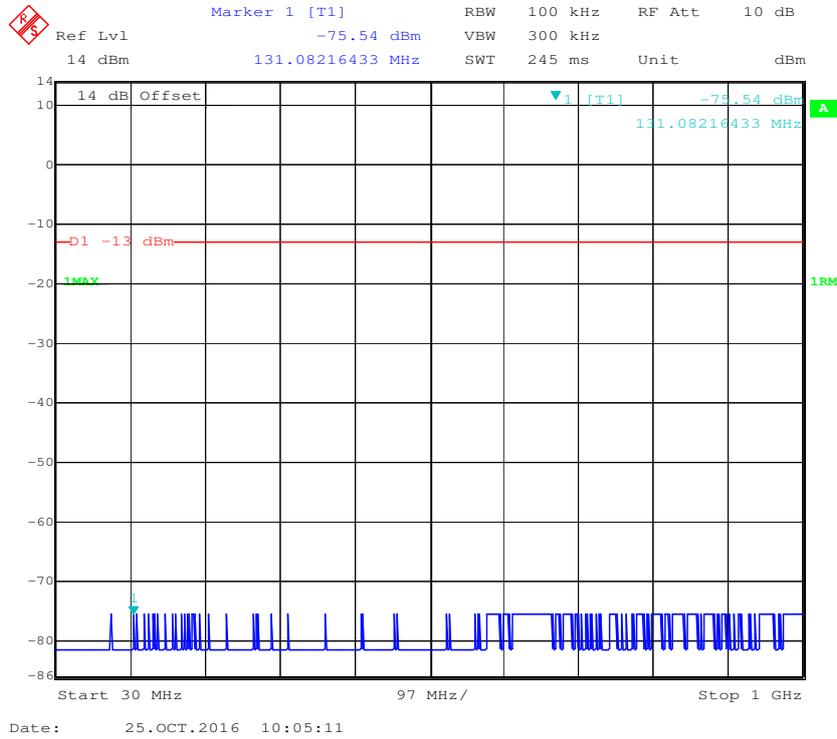


1 GHz - 2 GHz (15.0 MHz, Middle Channel)

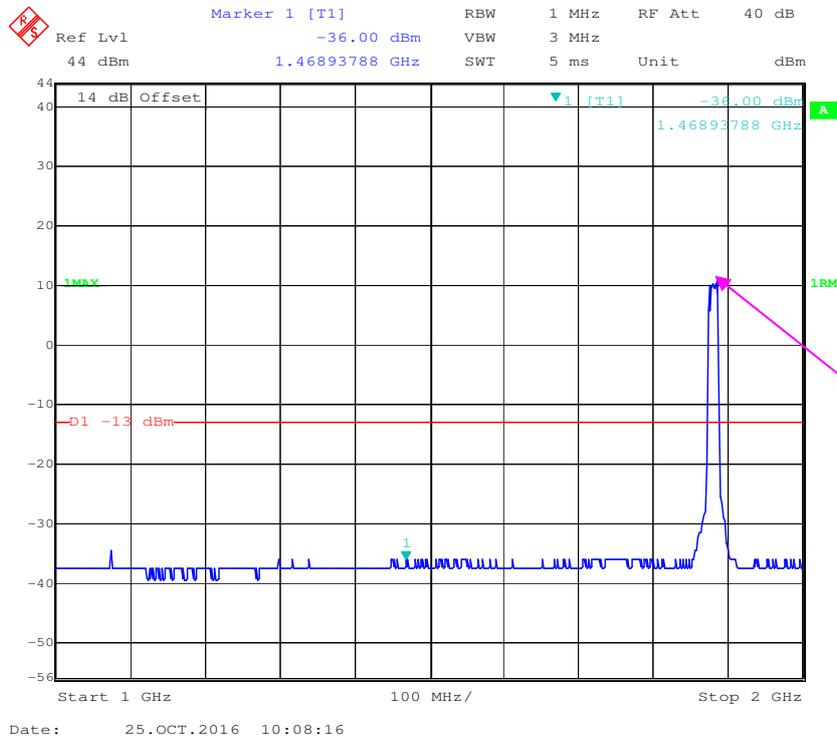


2 GHz –20 GHz (15.0 MHz, Middle Channel)

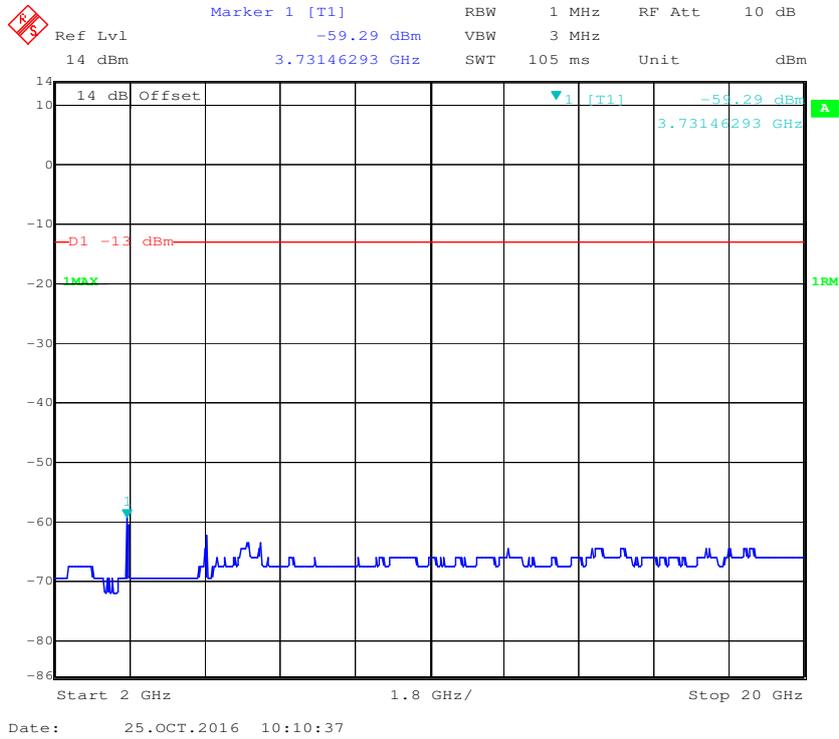


30 MHz - 1 GHz (20.0 MHz, Middle Channel)

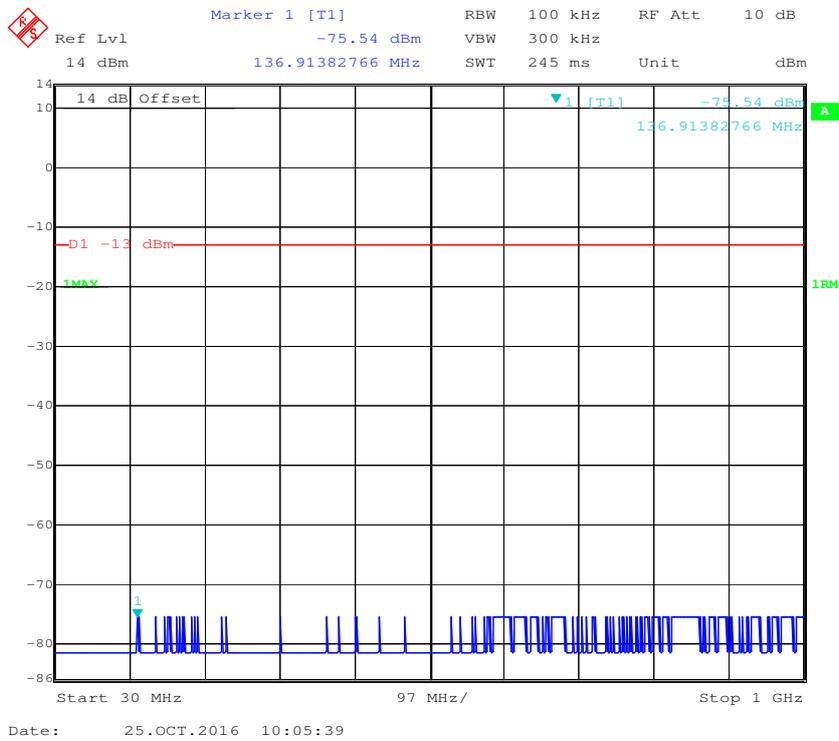

1 GHz – 2 GHz (20.0 MHz, Middle Channel)

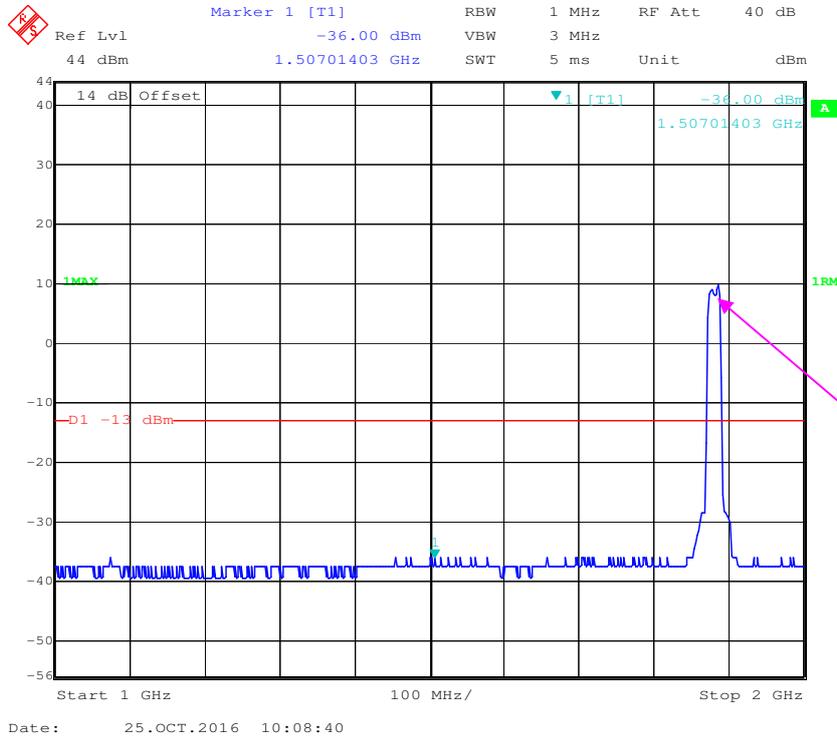


2 GHz – 20 GHz (20.0 MHz, Middle Channel)

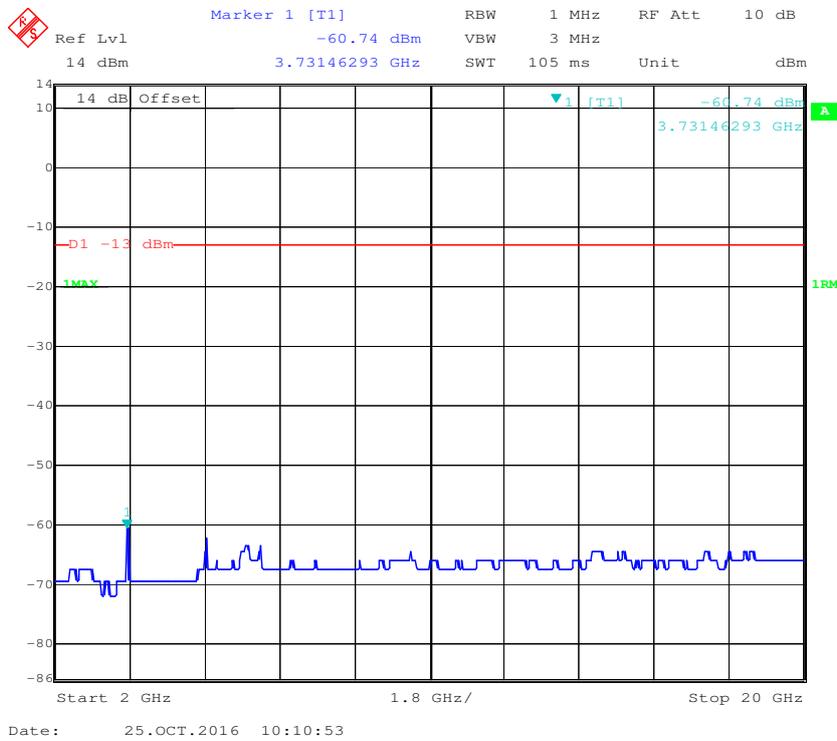


LTE Band 4:


30 MHz - 1 GHz (1.4 MHz, Middle Channel)

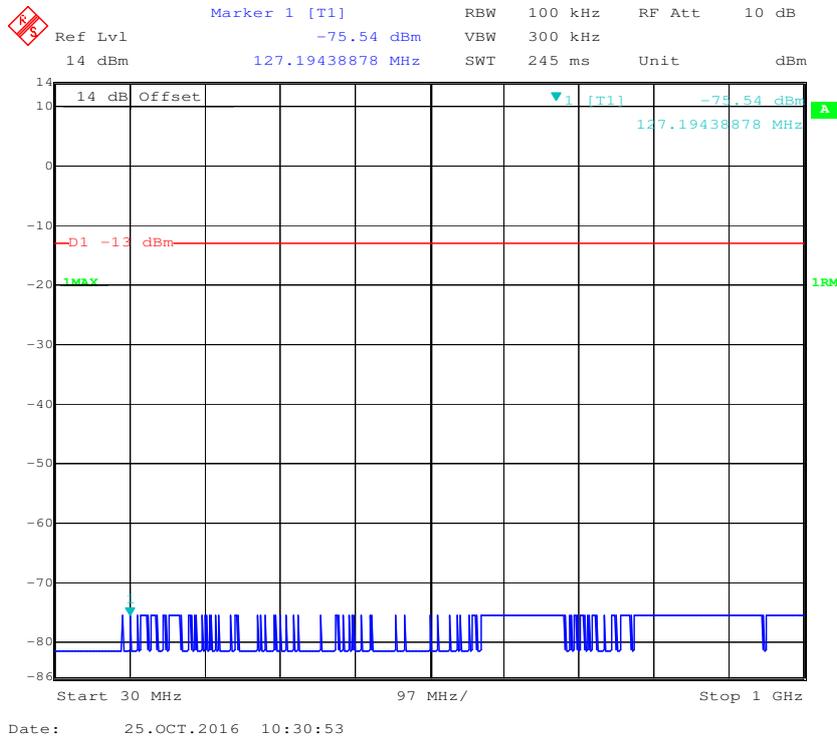


1 GHz - 2 GHz (1.4 MHz, Middle Channel)

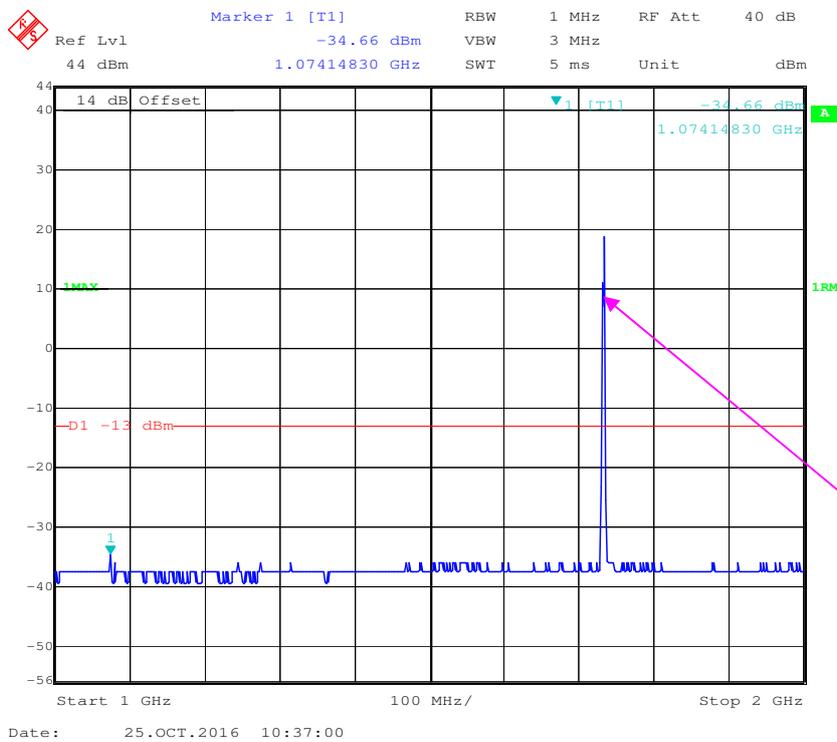


2 GHz – 20 GHz (1.4 MHz, Middle Channel)

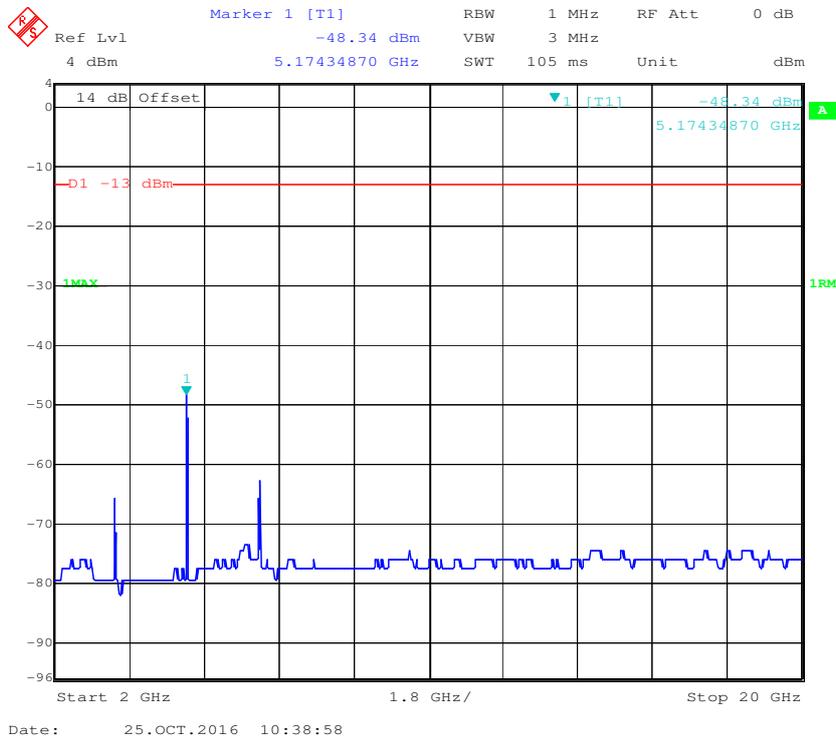


30 MHz - 1 GHz (3.0 MHz, Middle Channel)

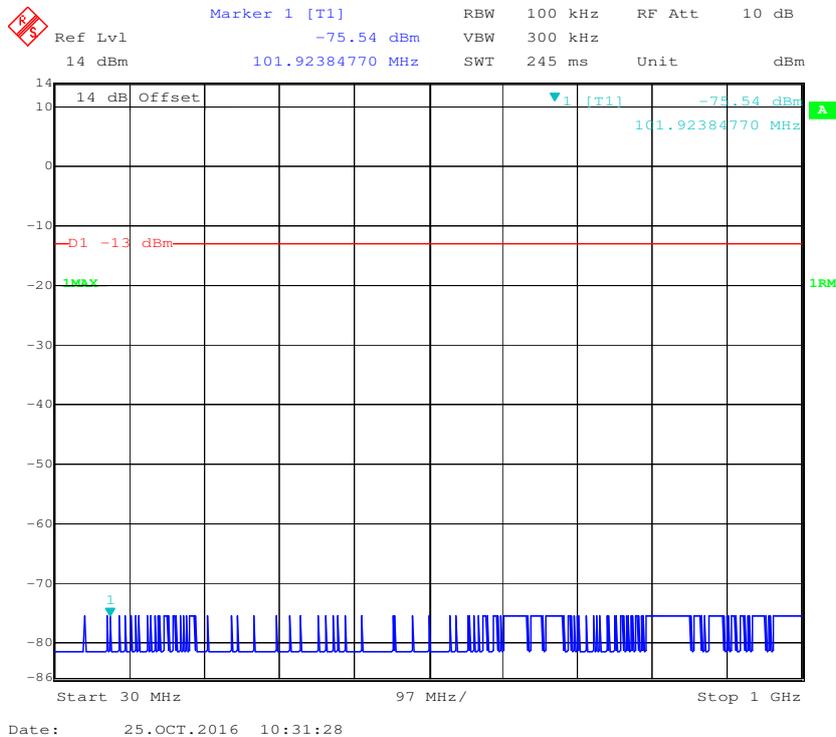


1 GHz – 2 GHz (3.0 MHz, Middle Channel)

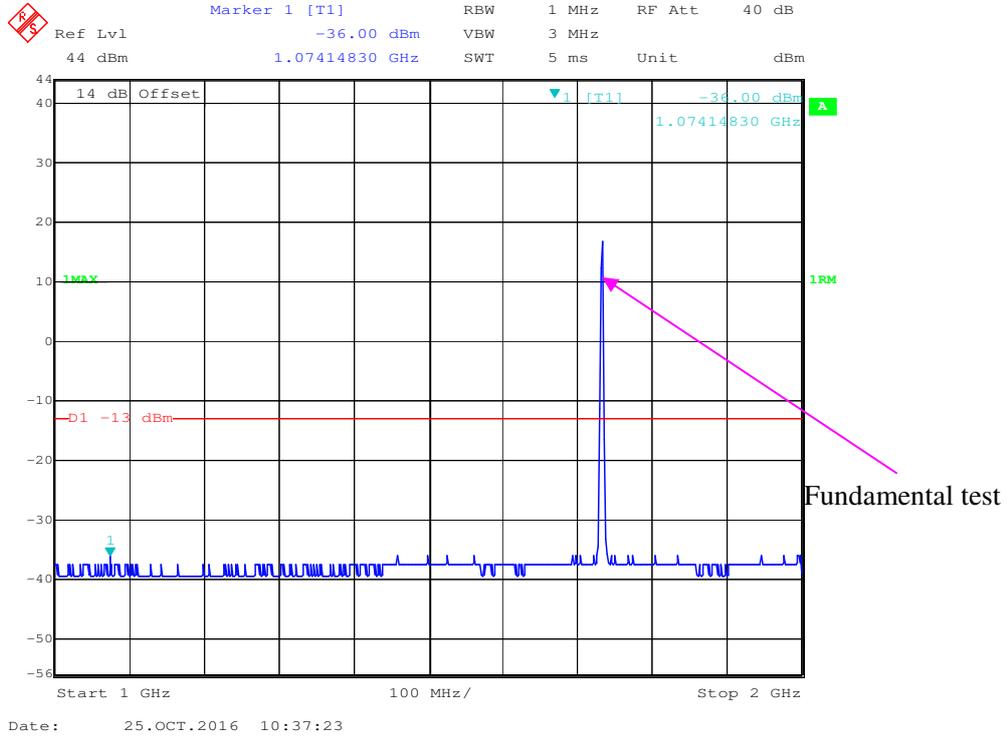


2 GHz – 20 GHz (3.0 MHz, Middle Channel)

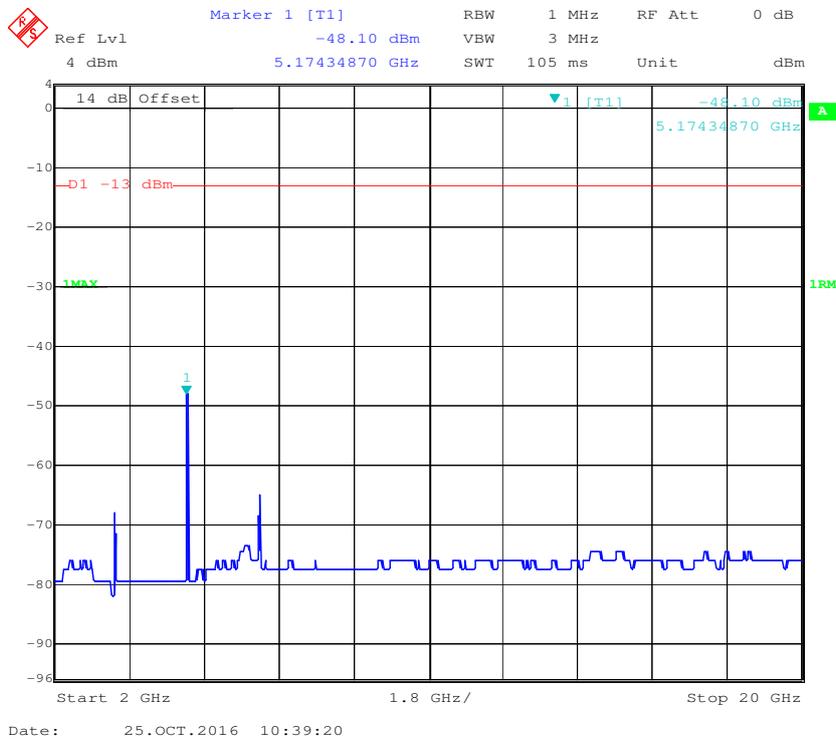


30 MHz - 1 GHz (5.0 MHz, Middle Channel)

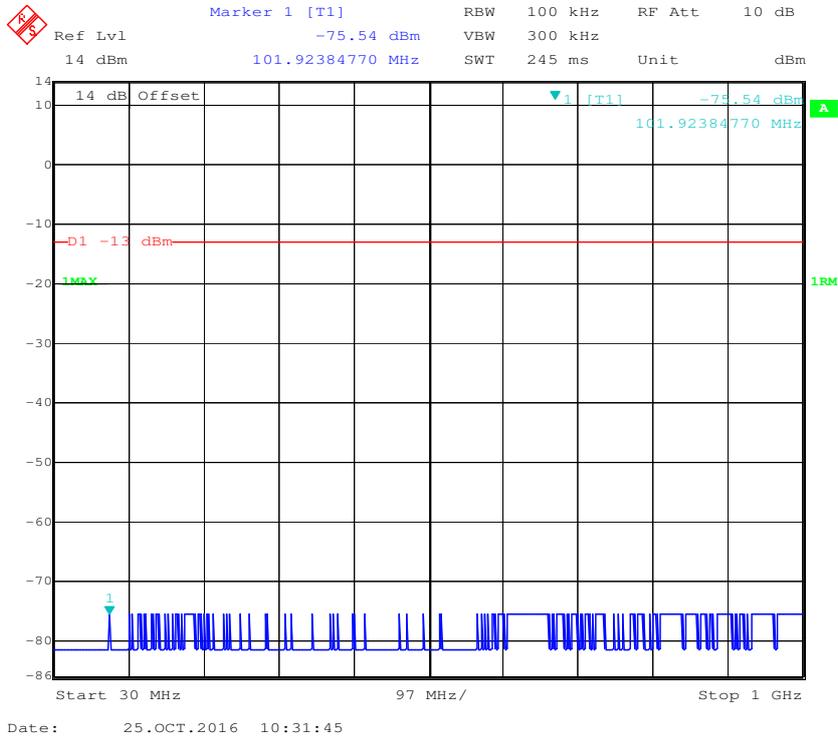


1 GHz - 2 GHz (5.0 MHz, Middle Channel)

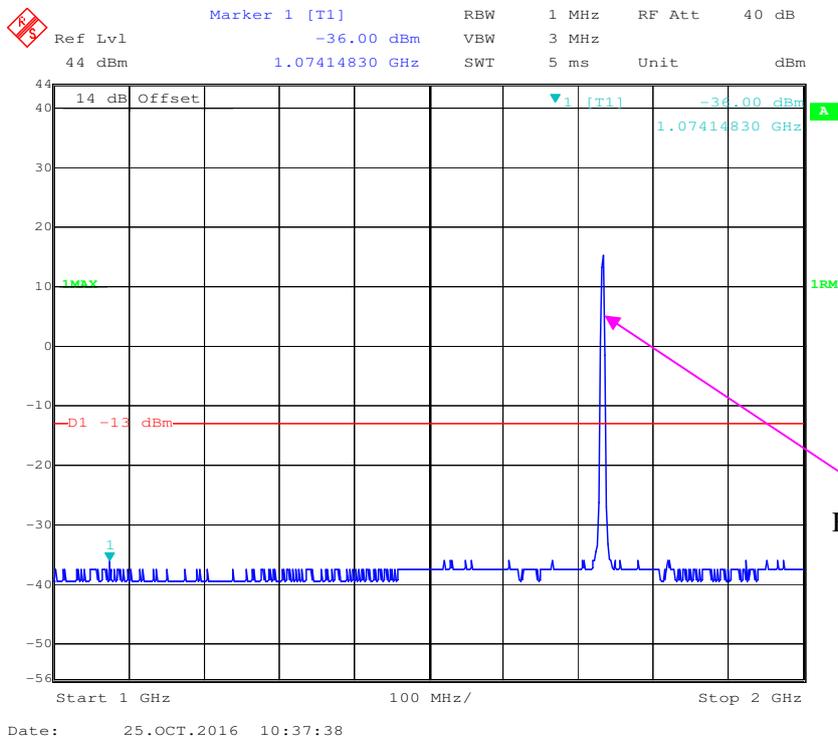


2 GHz – 20 GHz (5.0 MHz, Middle Channel)

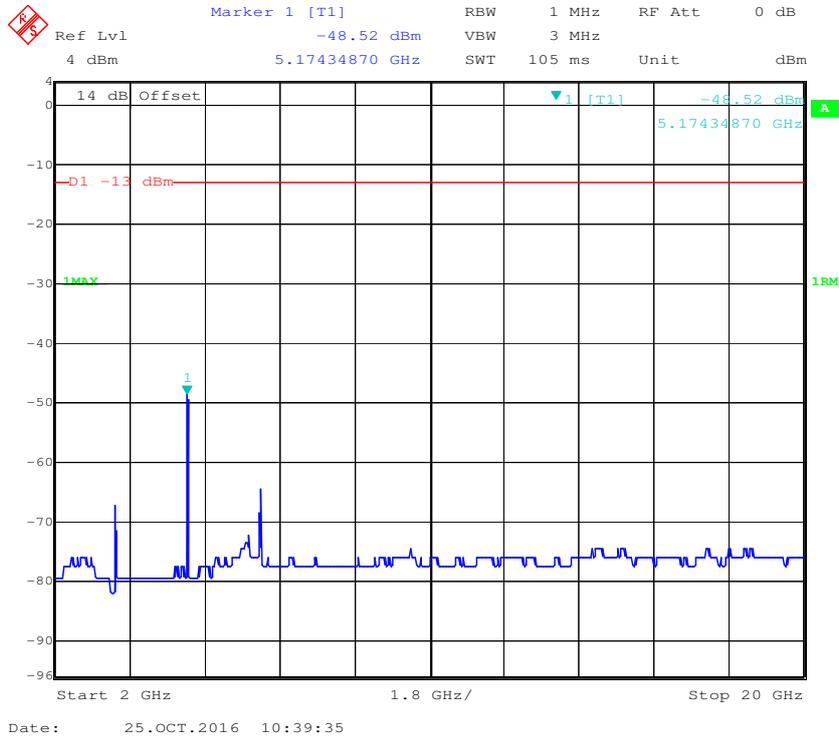


30 MHz - 1 GHz (10.0 MHz, Middle Channel)

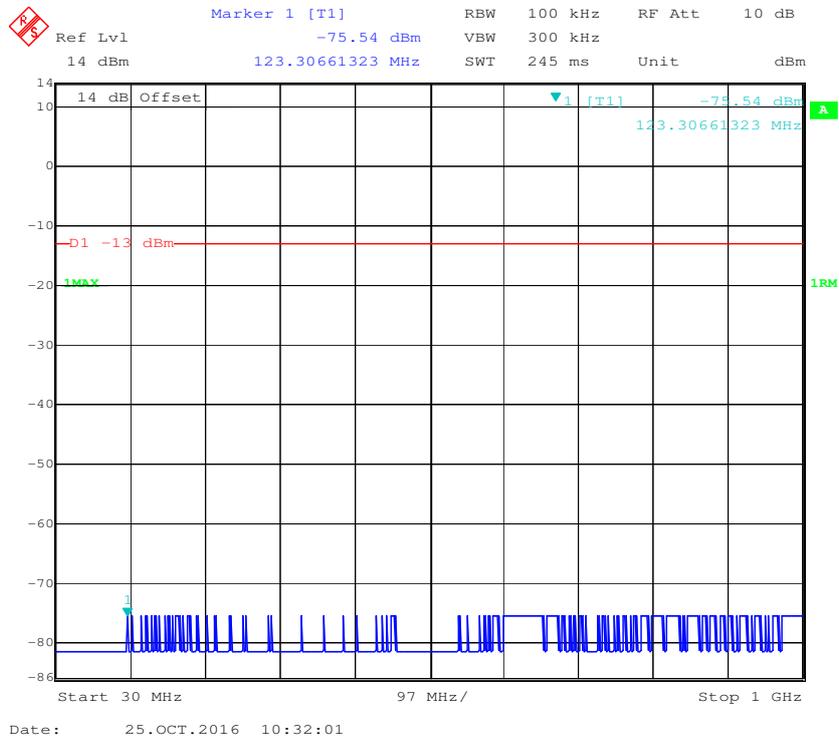


1 GHz – 2 GHz (10.0 MHz, Middle Channel)

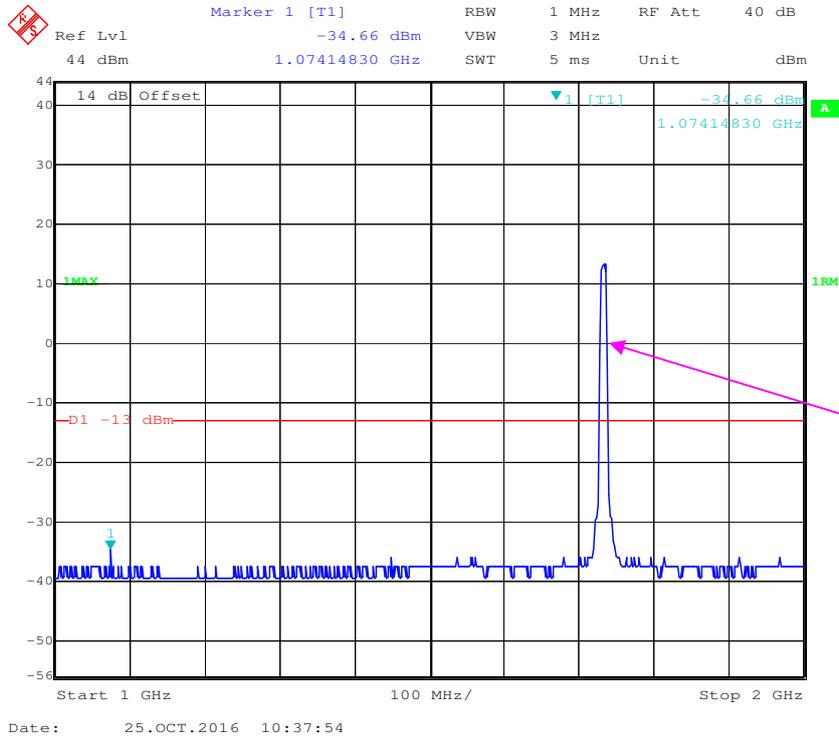


2 GHz – 20 GHz (10.0 MHz, Middle Channel)

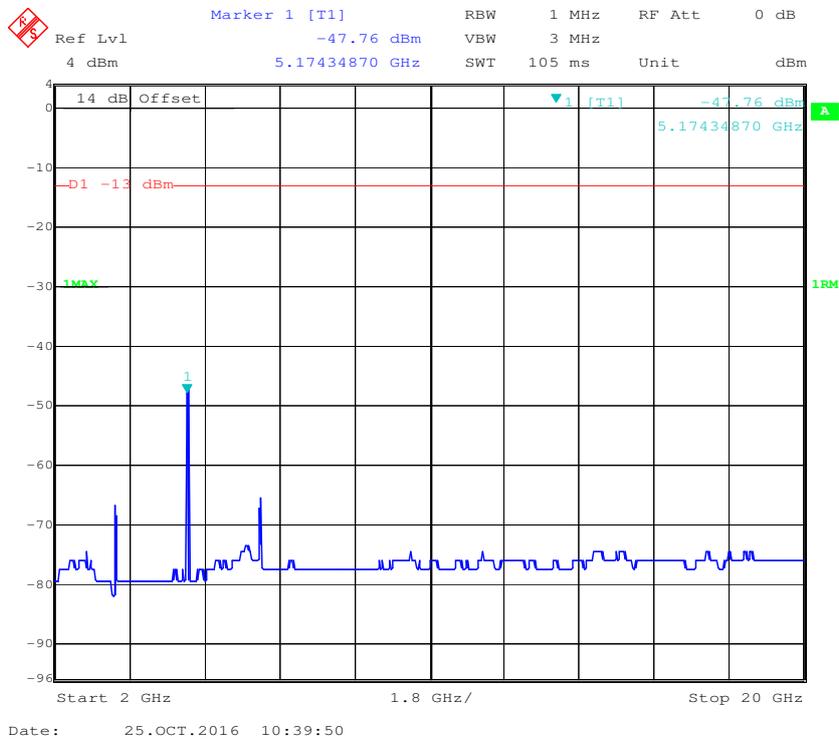

30 MHz - 1 GHz (15.0 MHz, Middle Channel)

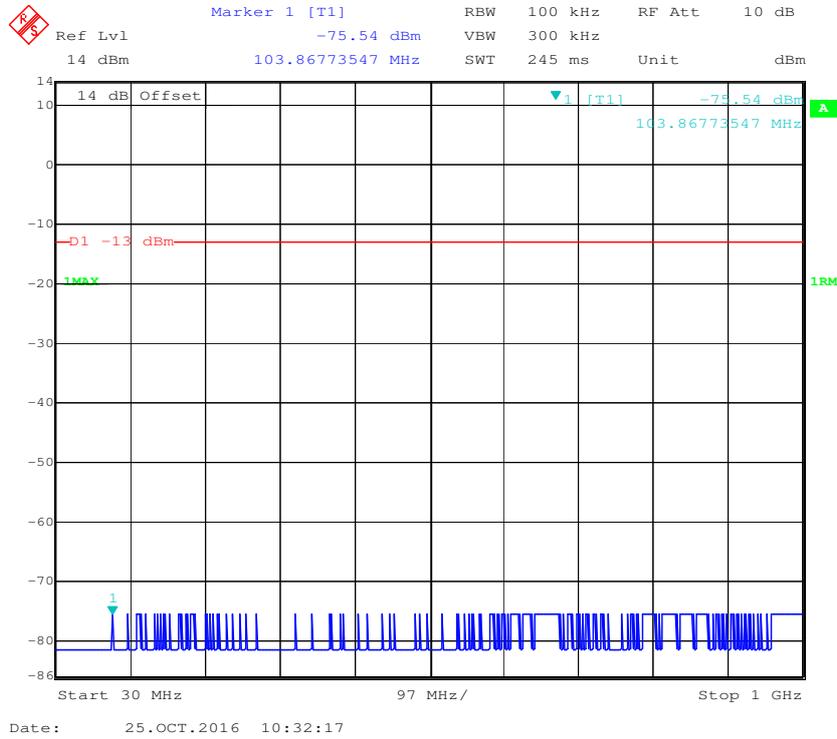


1 GHz - 2 GHz (15.0 MHz, Middle Channel)

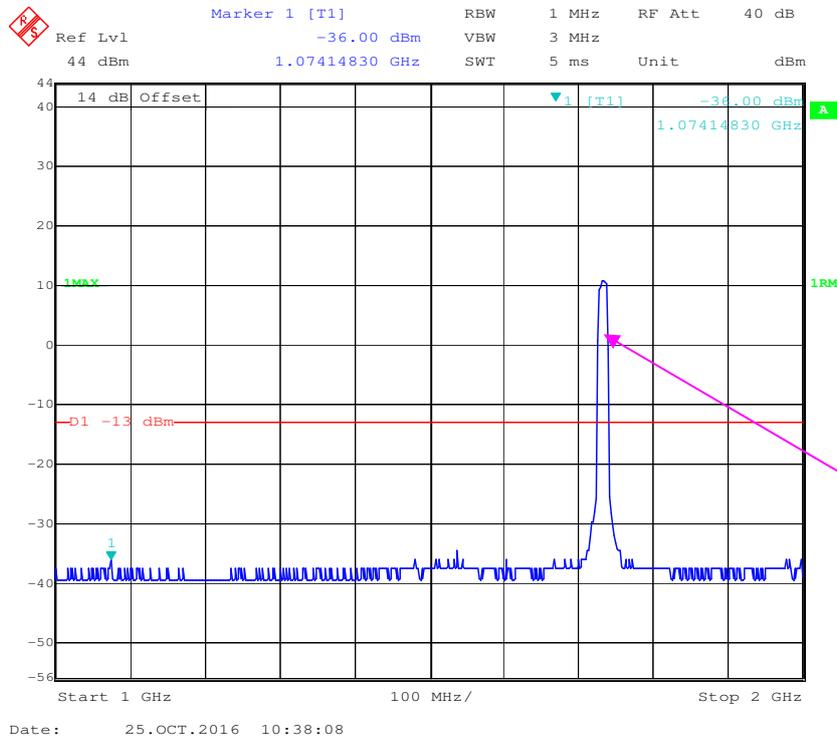


Fundamental test

LTE Band 7:

30 MHz – 1 GHz (5.0 MHz, Middle Channel)

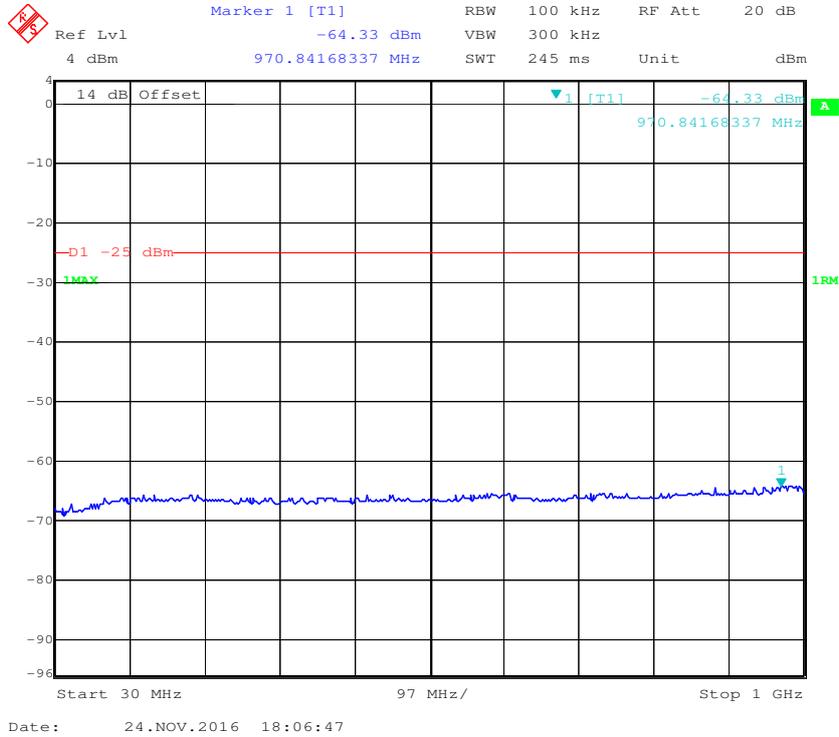

1 GHz – 3.0 GHz (5.0 MHz, Middle Channel)

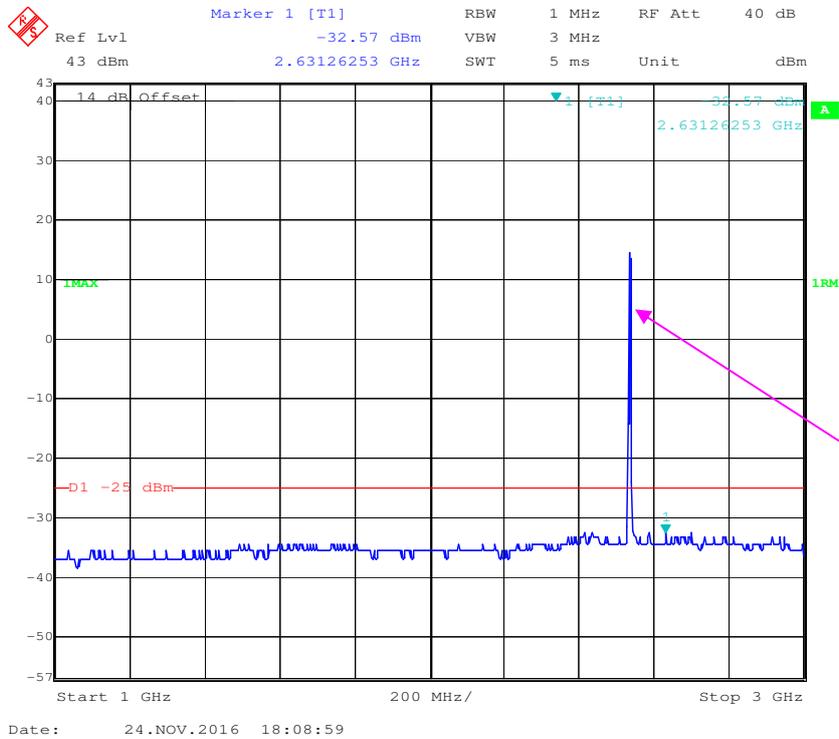

FCC § 2.1053; § 22.917 (a); § 24.238 (a); §27.53 (h) (m) SPURIOUS RADIATED EMISSIONS

Applicable Standards

FCC § 2.1053, §22.917(a) and § 24.238(a) and § 27.53(h)(m)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg (\text{TX pwr in Watts}/0.001)$ – the absolute level

Spurious attenuation limit in dB = $43 + 10 \text{Log}_{10} (\text{power out in Watts})$

Test Data

Environmental Conditions

Temperature:	25°C
Relative Humidity:	55 %
ATM Pressure:	101.0kPa

The testing was performed by Layne Li on 2016-10-06.

Test mode: Transmitting (Pre-scan with Low, Middle, High channel, and the worse case data as below)

30 MHz ~ 10 GHz:

Cellular Band (Part 22H)

Frequency (MHz)	Receiver Reading (dBµV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
GSM 850 Mode										
239.4	36.54	117	1.7	H	-60.5	0.28	3.75	-57.03	-13	44.03
239.4	35.84	0	1.8	V	-61.2	0.28	3.75	-57.73	-13	44.73
1697.60	67.63	67	1.8	H	-36.3	0.30	9.40	-27.20	-13	14.20
1697.60	63.32	133	2.4	V	-42.1	0.30	9.40	-33.00	-13	20.00
WCDMA 850 Mode										
239.4	36.59	17	1.9	H	-60.4	0.28	3.75	-56.93	-13	43.93
239.4	35.46	98	1.9	V	-61.5	0.28	3.75	-58.03	-13	45.03
1652.80	52.03	267	1.7	H	-51.9	0.30	9.40	-42.80	-13	29.80
1652.80	52.72	275	1.0	V	-52.7	0.30	9.40	-43.60	-13	30.60

30 MHz ~ 20 GHz:

PCS Band (Part 24E)

Frequency (MHz)	Receiver Reading (dBµV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
GSM 1900 Mode										
239.4	36.72	338	1.4	H	-60.3	0.28	3.75	-56.83	-13	43.83
239.4	35.32	257	1.7	V	-61.7	0.28	3.75	-58.23	-13	45.23
3700.40	46.83	205	2.0	H	-46.9	2.42	12.60	-36.72	-13	23.72
3700.40	44.03	352	2.4	V	-48.7	2.42	12.60	-38.52	-13	25.52
WCDMA 1900 Mode										
239.4	36.72	233	1.3	H	-60.3	0.28	3.75	-56.83	-13	43.83
239.4	35.53	269	1.9	V	-61.5	0.28	3.75	-58.03	-13	45.03
3704.80	44.03	15	1.5	H	-49.7	2.42	12.60	-39.52	-13	26.52
3704.80	42.63	28	2.4	V	-50.1	2.42	12.60	-39.92	-13	26.92

AWS Band

Frequency (MHz)	Receiver Reading (dBµV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
WCDMA 1700 Mode										
239.4	36.52	136	1.4	H	-60.5	0.28	3.75	-57.03	-13	44.03
239.4	35.39	198	2.5	V	-61.6	0.28	3.75	-58.13	-13	45.13
3505.20	46.07	53	2.4	H	-48.5	2.34	12.40	-38.44	-13	25.44
3505.20	42.91	128	1.9	V	-49.6	2.34	12.40	-39.54	-13	26.54

LTE Band:

Test mode: Transmitting (Pre-scan with all the bandwidth, and worse case as below)

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
Band 2										
Test frequency range:30 MHz ~ 20 GHz										
239.4	36.58	180	1.2	H	-60.4	0.28	3.75	-56.93	-13	43.93
239.4	35.42	9	2.4	V	-61.6	0.28	3.75	-58.13	-13	45.13
3760.00	42.63	324	1.4	H	-51.1	2.42	12.60	-40.92	-13	27.92
3760.00	41.43	147	1.8	V	-51.3	2.42	12.60	-41.12	-13	28.12
Band 4										
Test frequency range:30 MHz ~ 18 GHz										
239.4	36.34	181	1.6	H	-60.7	0.28	3.75	-57.23	-13	44.23
239.4	35.72	131	2.1	V	-61.3	0.28	3.75	-57.83	-13	44.83
3465.00	41.17	72	1.9	H	-53.4	2.34	12.40	-43.34	-13	30.34
3465.00	38.11	52	1.5	V	-54.4	2.34	12.40	-44.34	-13	31.34
Band 7										
Test frequency range: 30 MHz ~ 26 GHz										
239.4	36.56	279	1.3	H	-60.4	0.28	3.75	-56.93	-25	31.93
239.4	35.64	150	2.2	V	-61.4	0.28	3.75	-57.93	-25	32.93
5070.00	35.46	176	2.4	H	-53.2	2.57	12.70	-43.07	-25	18.07
5070.00	37.47	70	1.5	V	-52.0	2.57	12.70	-41.87	-25	16.87
Band 12										
Test frequency range: 30 MHz ~ 10 GHz										
239.4	36.69	65	2.1	H	-60.3	0.28	3.75	-56.83	-13	43.83
239.4	35.42	230	2.3	V	-61.6	0.28	3.75	-58.13	-13	45.13
1414.00	51.66	312	1.8	H	-51.1	0.28	8.00	-43.38	-13	30.38
1414.00	55.42	326	1.5	V	-51.4	0.28	8.00	-43.68	-13	30.68
Band 17										
Test frequency range: 30 MHz ~ 10 GHz										
239.4	36.74	143	2.1	H	-60.3	0.28	3.75	-56.83	-13	43.83
239.4	35.57	38	1.1	V	-61.4	0.28	3.75	-57.93	-13	44.93
1420.00	49.96	90	1.3	H	-52.8	0.28	8.00	-45.08	-13	32.08
1420.00	51.92	314	1.7	V	-54.9	0.28	8.00	-47.18	-13	34.18

Note:

- 1) Absolute Level = SG Level - Cable loss + Antenna Gain
- 2) Margin = Limit- Absolute Level

FCC § 22.917 (a); § 24.238 (a); § 27.53 (h)(m) - BAND EDGES

Applicable Standards

According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.


According to FCC §27.53 (h)(m), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.

For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency

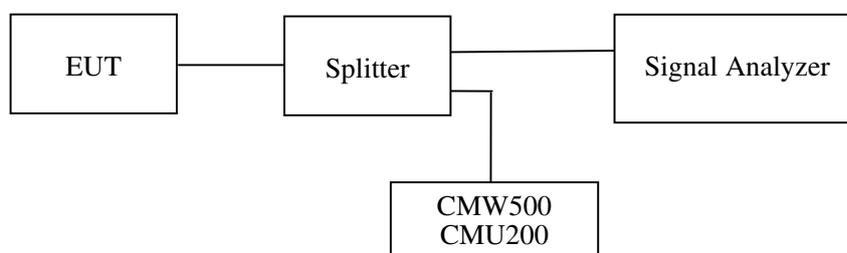

Test Data

Environmental Conditions


Temperature:	25~26°C
Relative Humidity:	55~56 %
ATM Pressure:	101.0~101.5kPa

The testing was performed by Ada Yu and Peter Jiang from 2016-11-06 to 2016-12-16.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following plots.


Cellular Band, Left Band Edge for GSM (GMSK) Mode

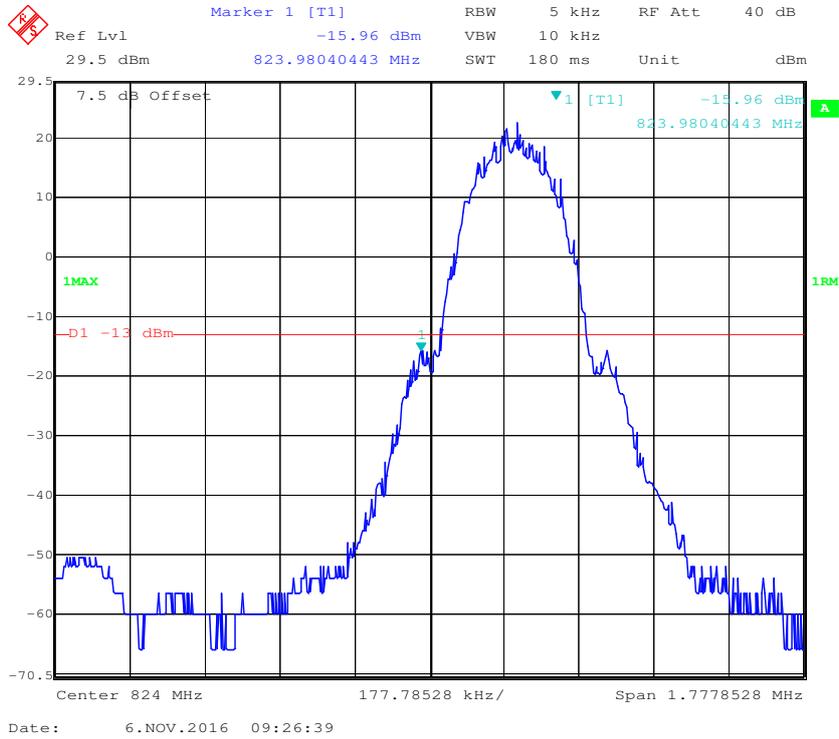


Cellular Band, Right Band Edge for GSM (GMSK) Mode

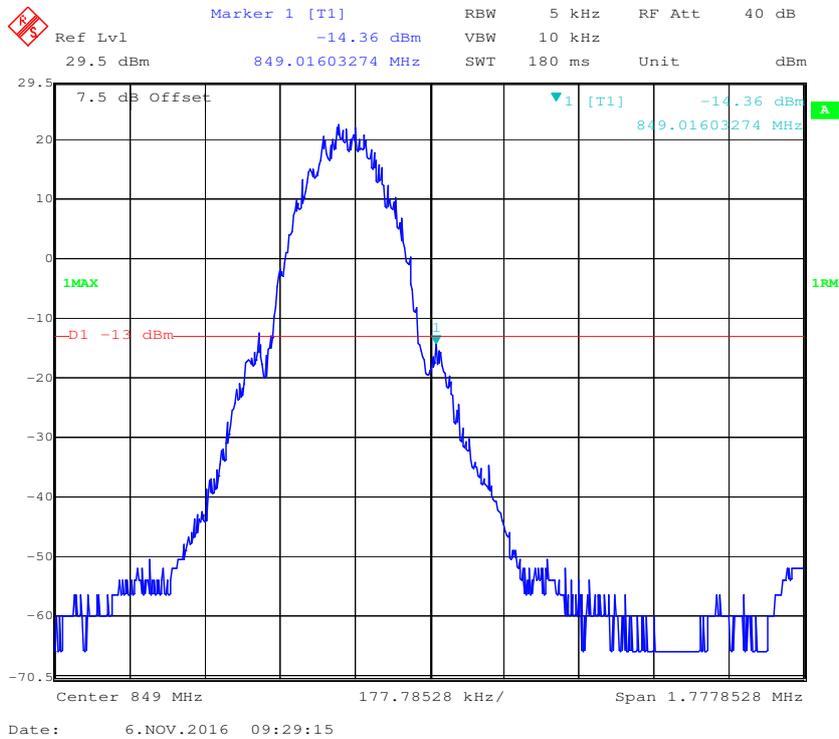


Cellular Band, Left Band Edge for EGPRS Mode

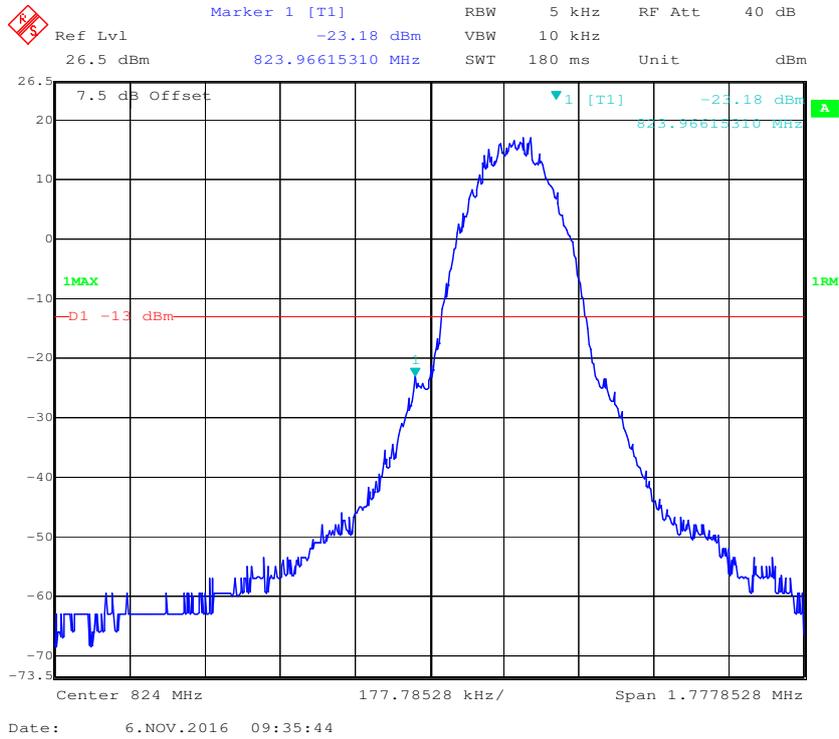


Cellular Band, Right Band Edge for EGPRS Mode

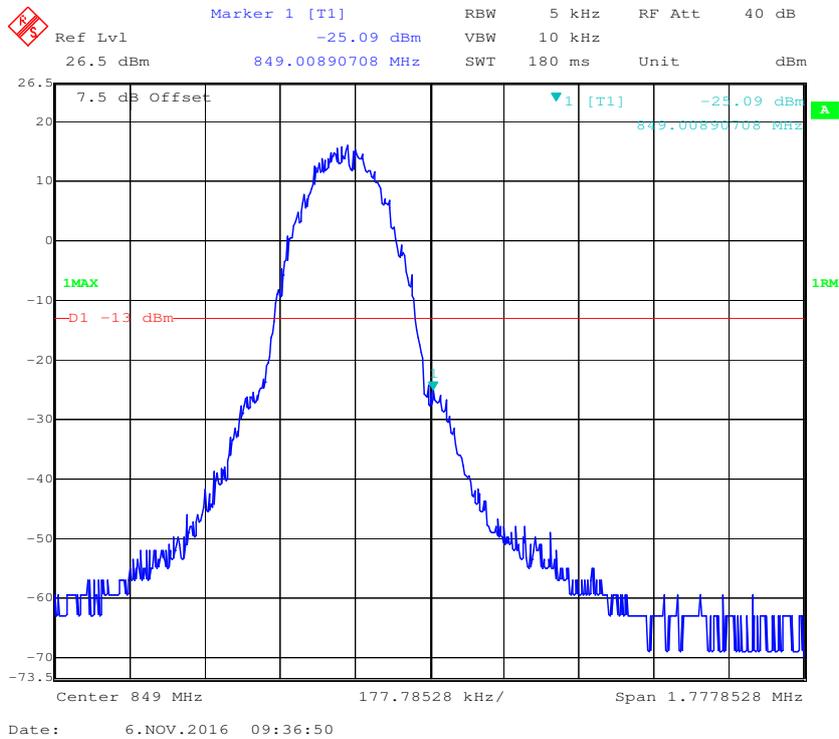


Cellular Band, Left Band Edge for RMC (BPSK) Mode

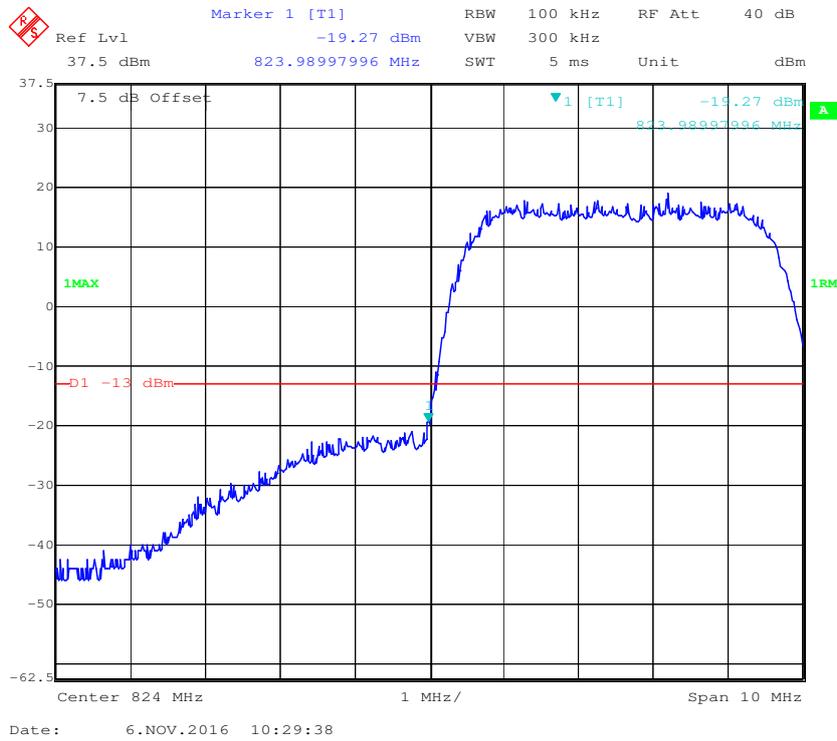


Cellular Band, Right Band Edge for RMC (BPSK) Mode

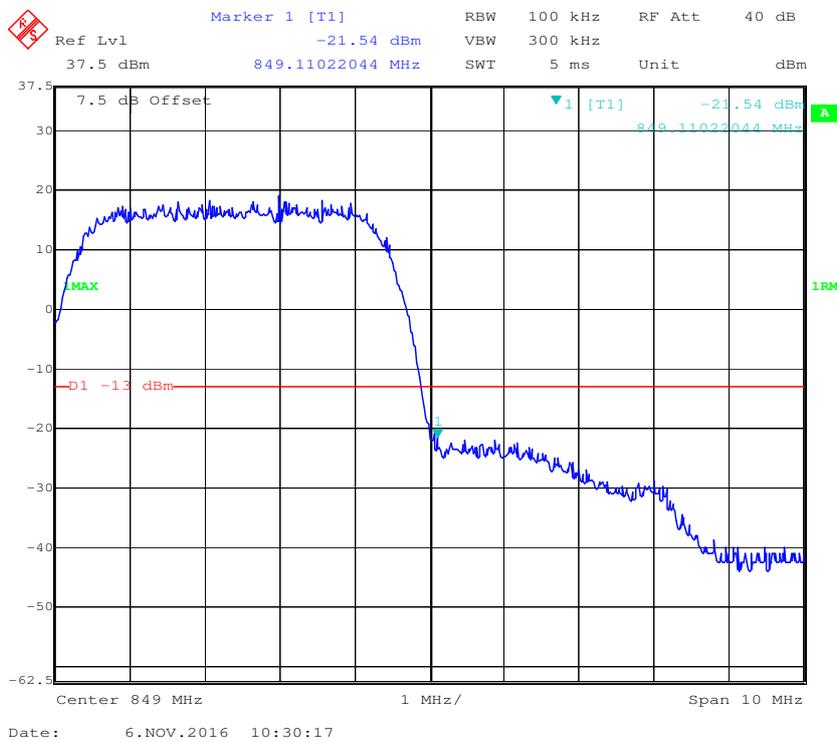


Cellular Band, Left Band Edge for HSDPA (16QAM) Mode

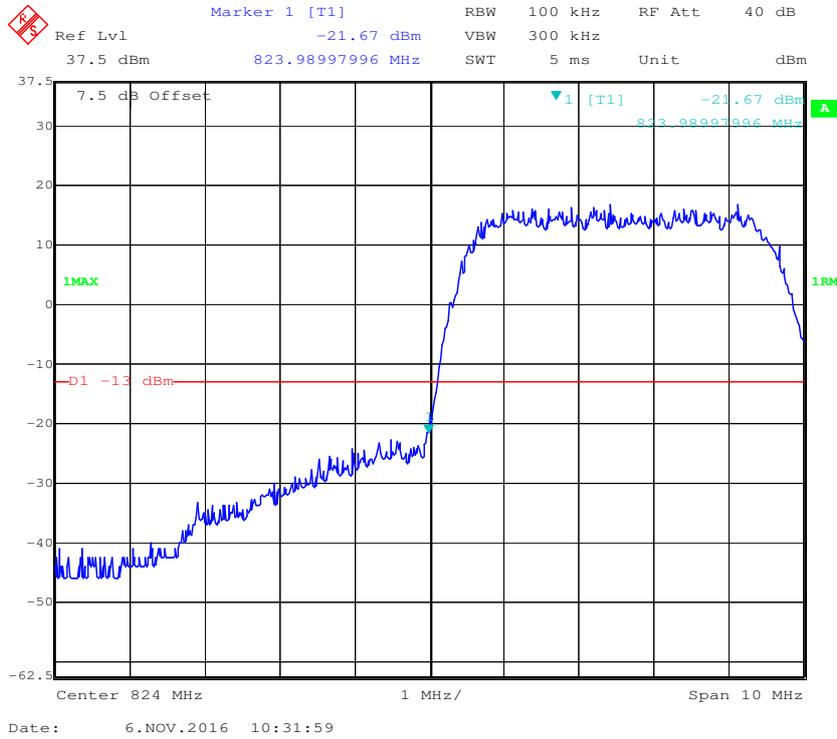


Cellular Band, Right Band Edge for HSDPA (16QAM) Mode

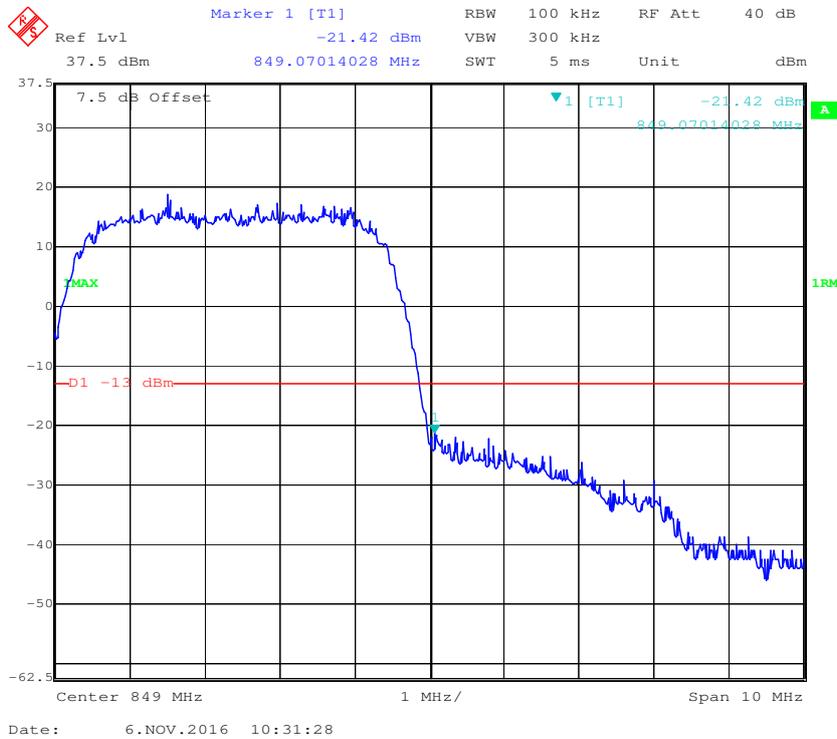


Cellular Band, Left Band Edge for HSUPA (BPSK) Mode

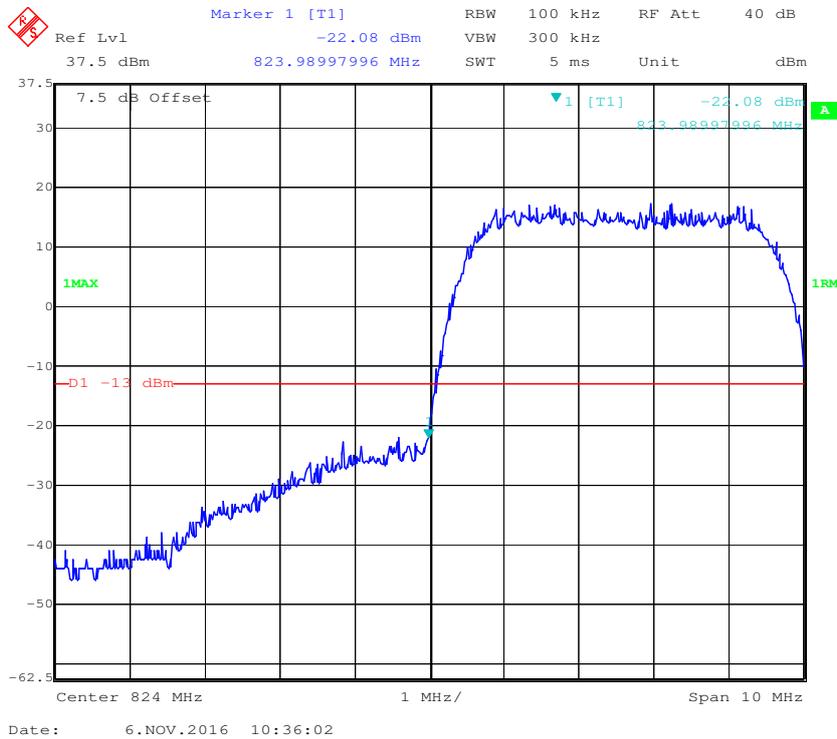


Cellular Band, Right Band Edge for HSUPA (BPSK) Mode

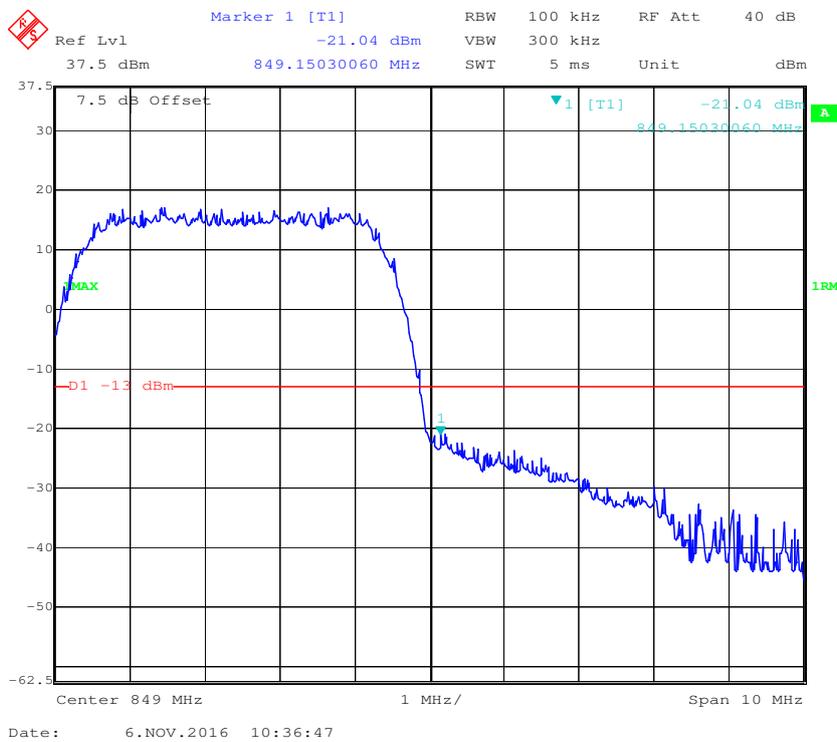


PCS Band, Left Band Edge for GSM (GMSK) Mode

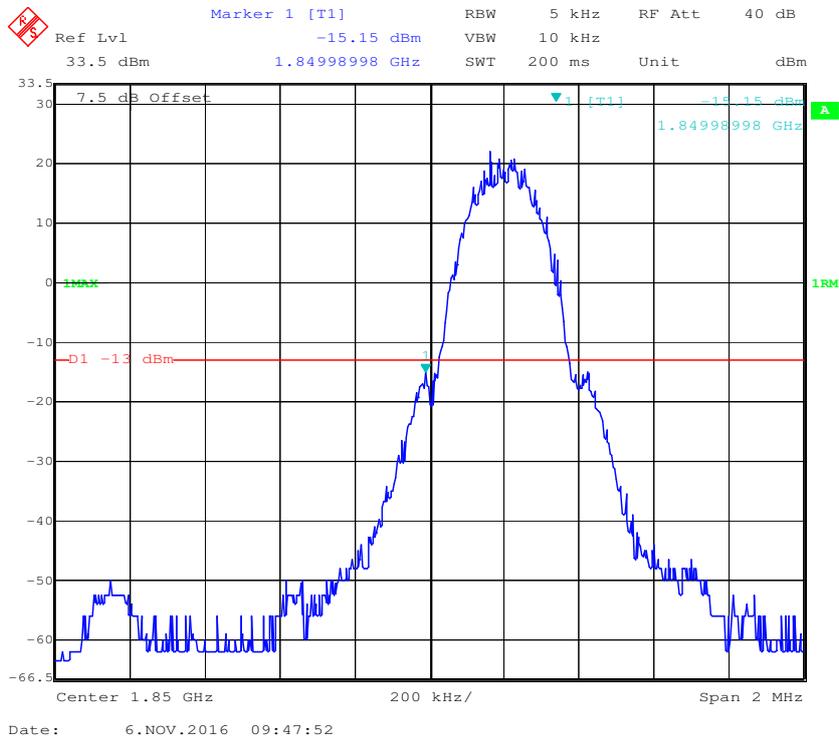


PCS Band, Right Band Edge for GSM (GMSK) Mode

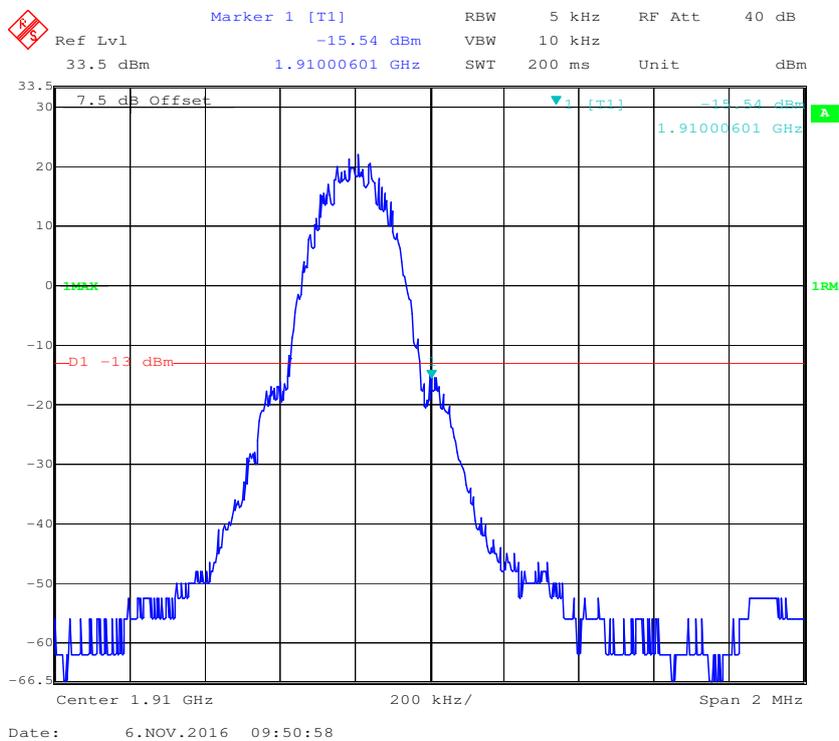


PCS Band, Left Band Edge for EGPRS Mode

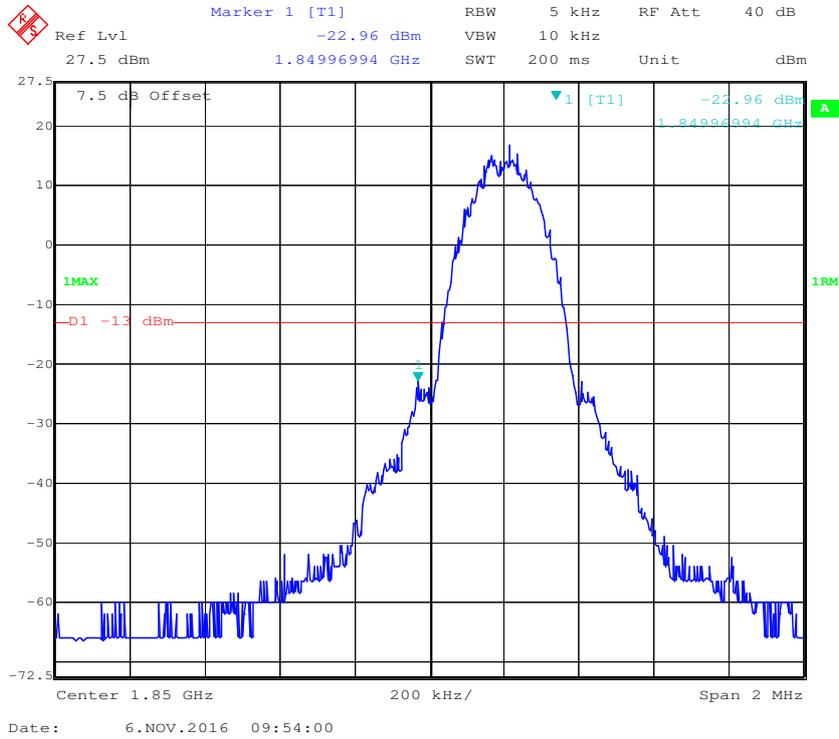


PCS Band, Right Band Edge for EGPRS Mode

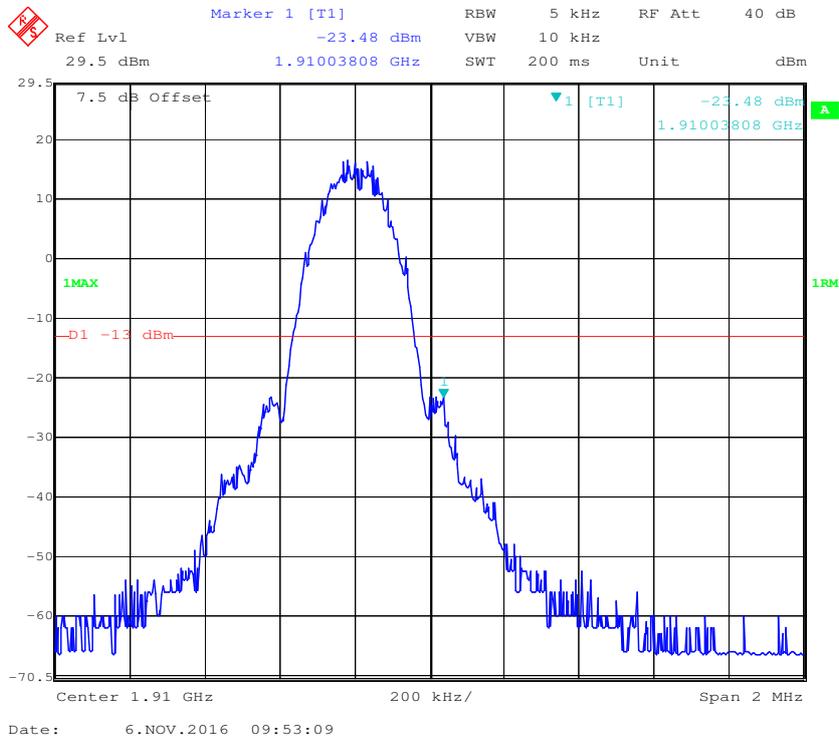


PCS Band, Left Band Edge for RMC (BPSK) Mode

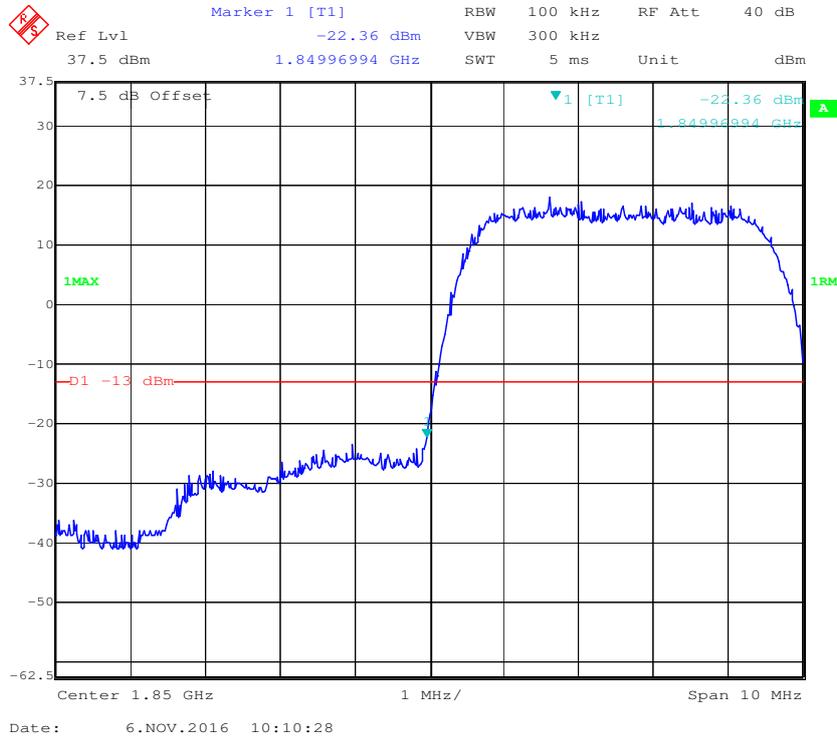


PCS Band, Right Band Edge for RMC (BPSK) Mode

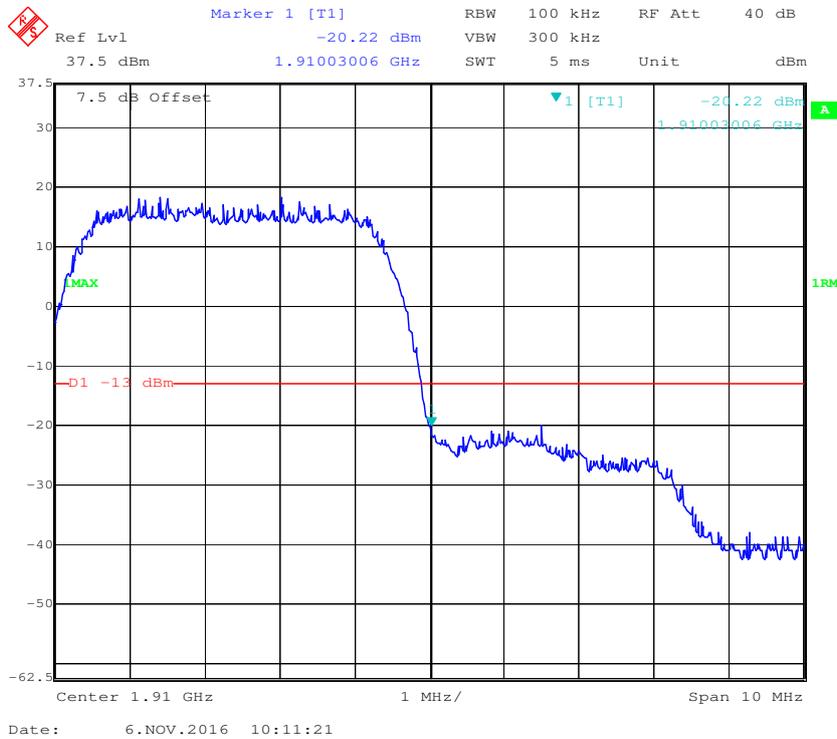


PCS Band, Left Band Edge for HSDPA (16QAM) Mode

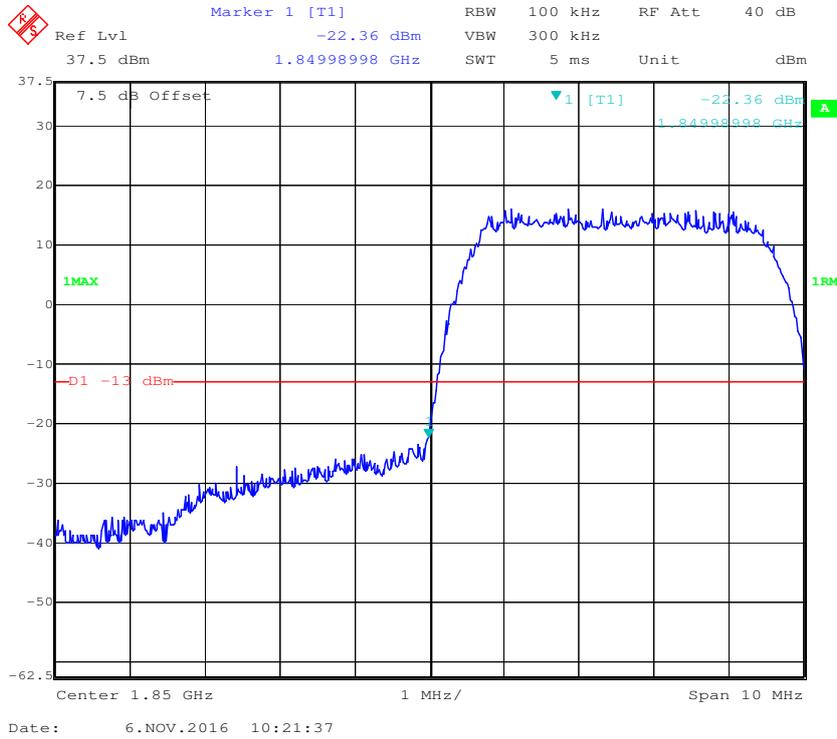


PCS Band, Right Band Edge for HSDPA (16QAM) Mode

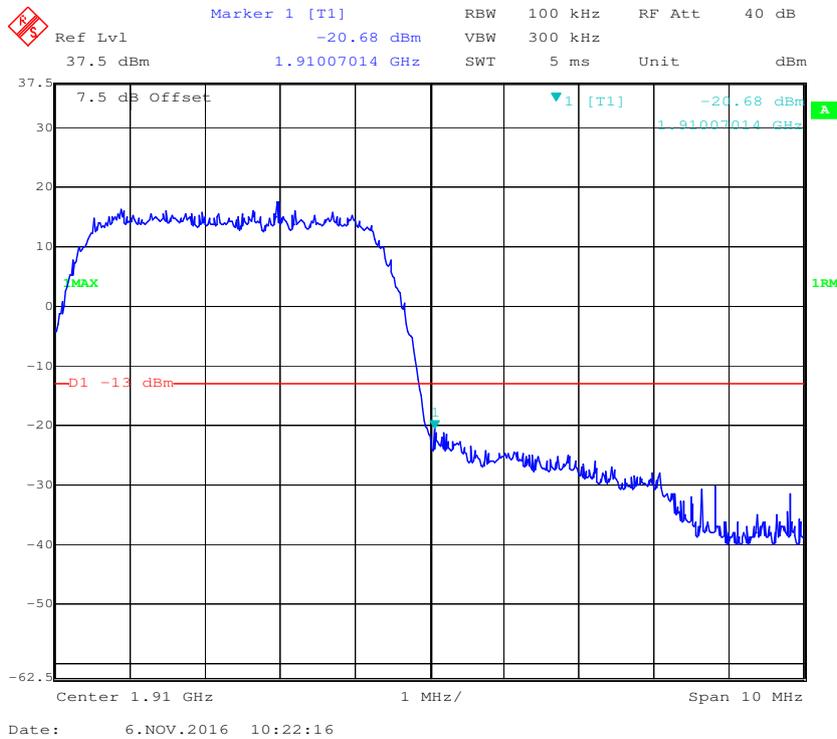


PCS Band, Left Band Edge for HSUPA (BPSK) Mode

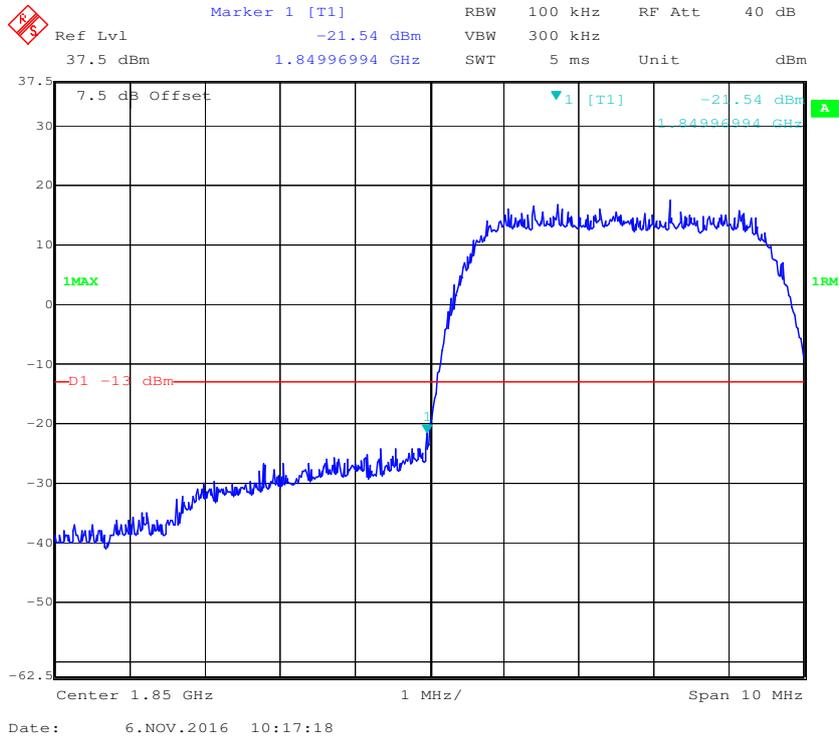


PCS Band, Right Band Edge for HSUPA (BPSK) Mode

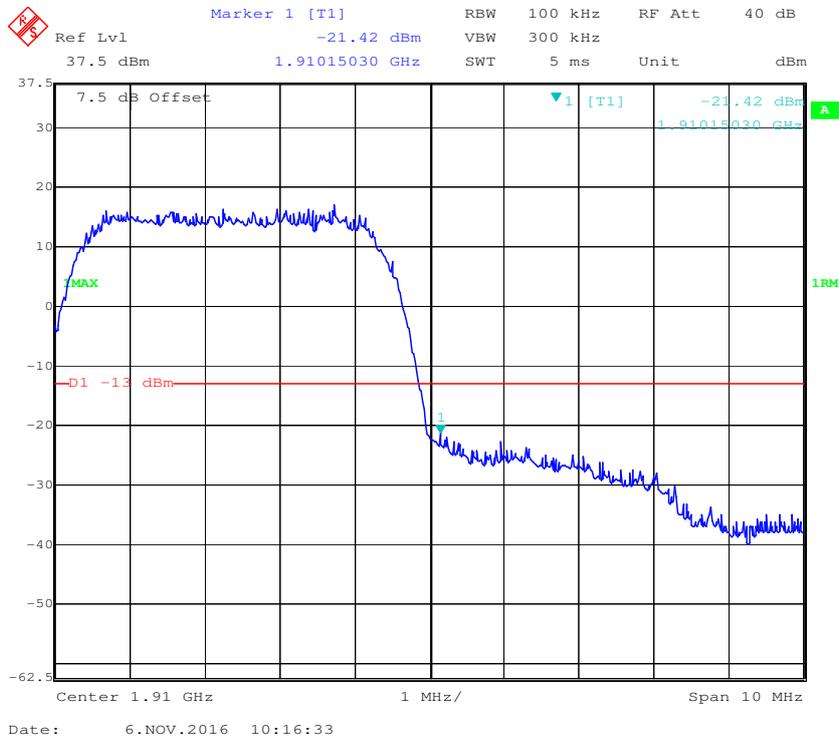


AWS Band IV, Left Band Edge for (BPSK) Mode

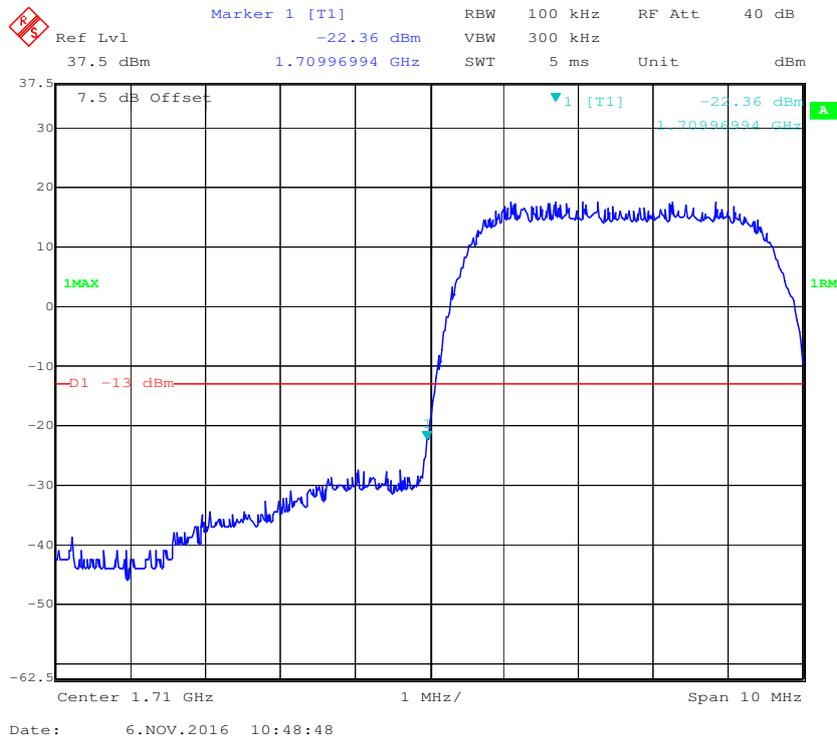


AWS Band IV, Right Band Edge for (BPSK) Mode

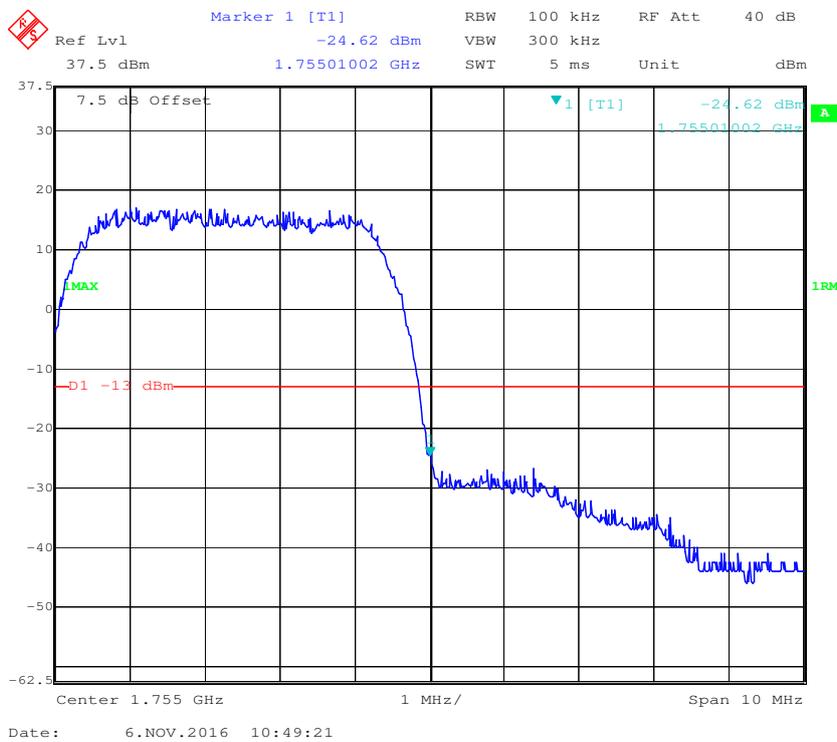


AWS Band IV, Left Band Edge for HSDPA (16QAM) Mode

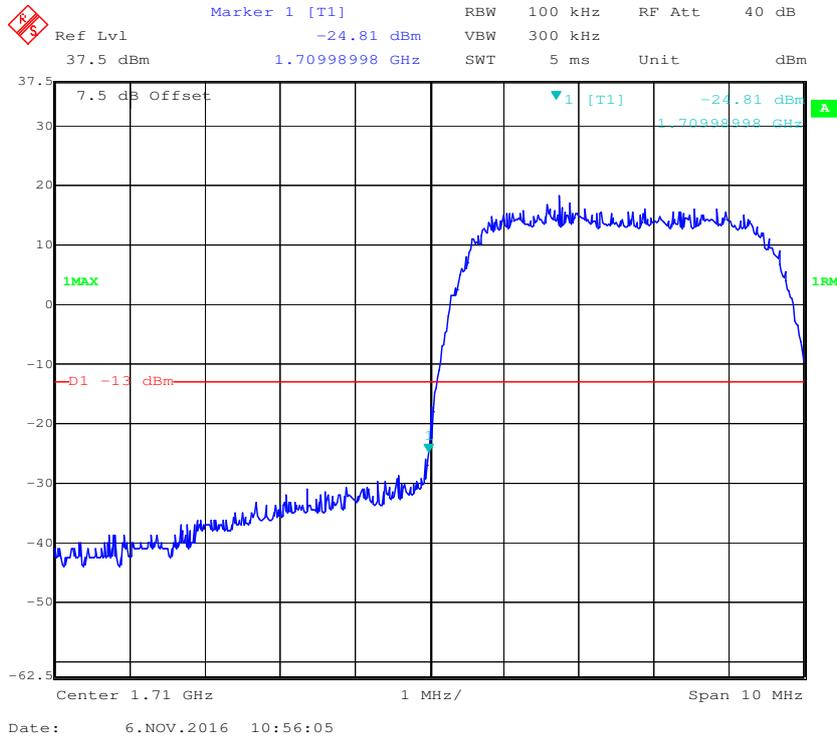


AWS Band IV, Right Band Edge for HSDPA (16QAM) Mode

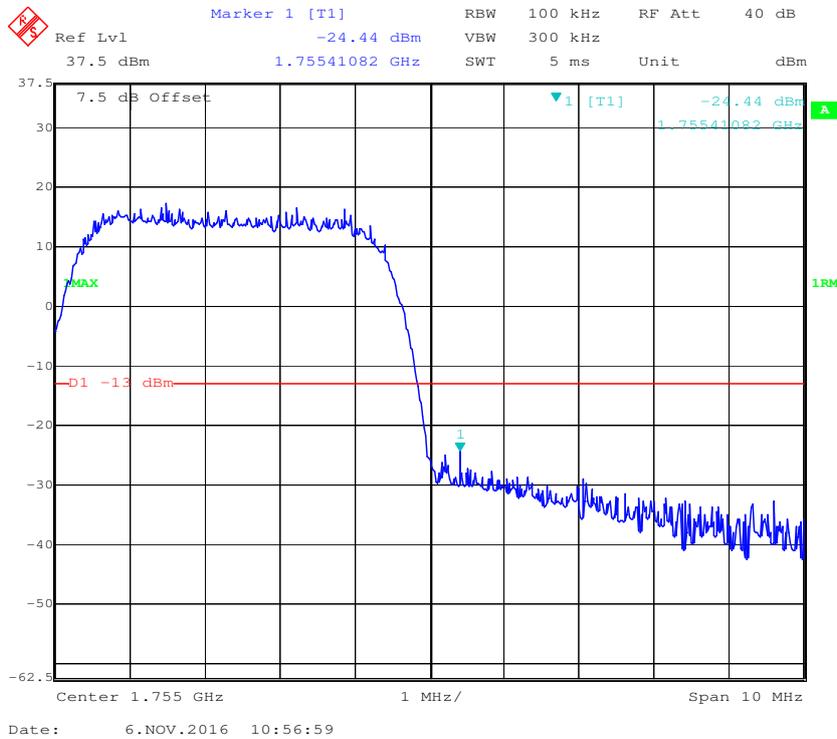

AWS Band IV, Left Band Edge for HSUPA (BPSK) Mode

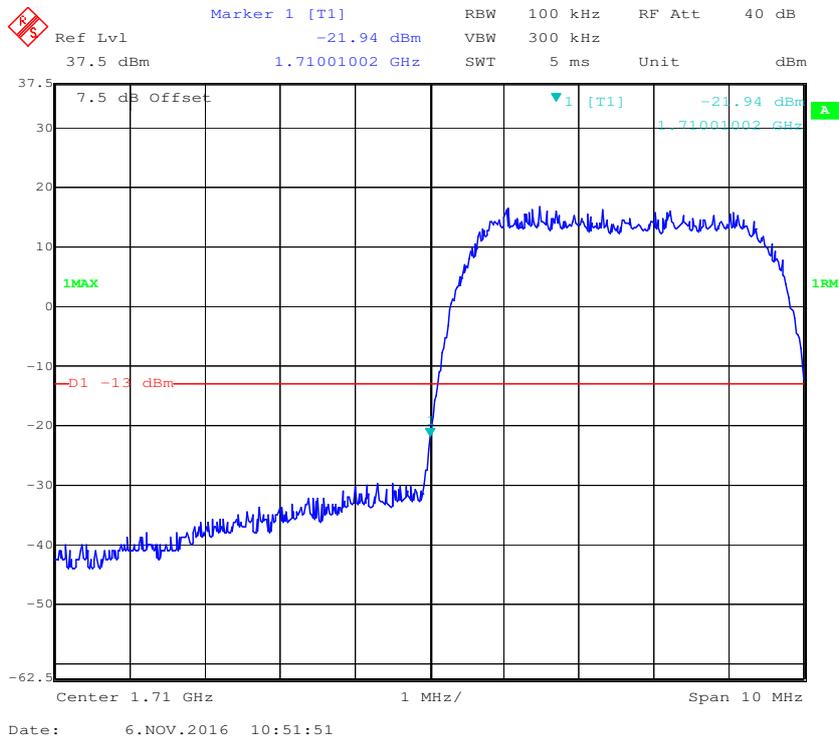


AWS Band IV, Right Band Edge for HSUPA (BPSK) Mode

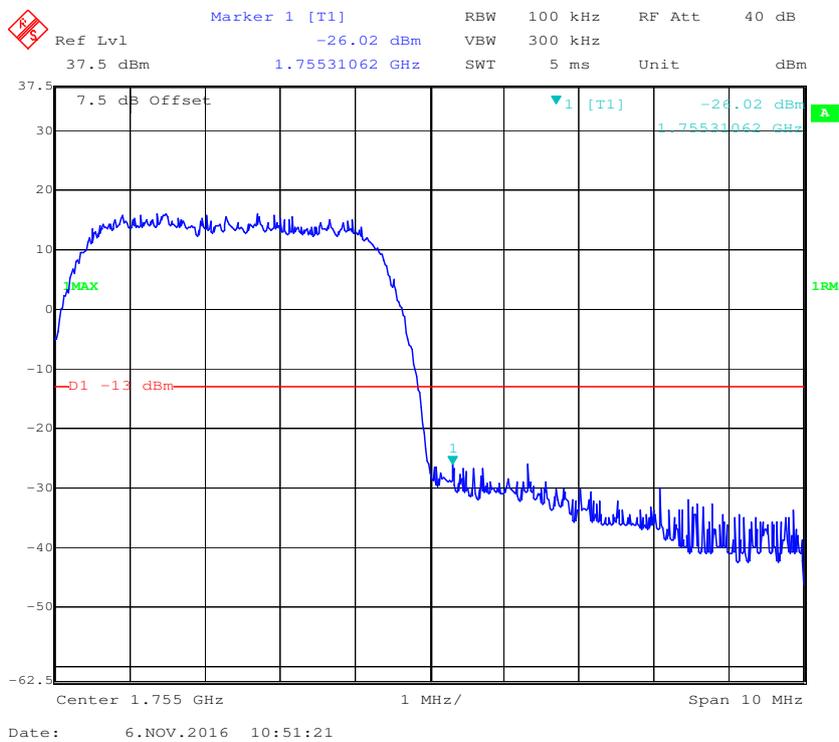


Band 2:


QPSK (1.4 MHz, FULL RB) - Left Band Edge

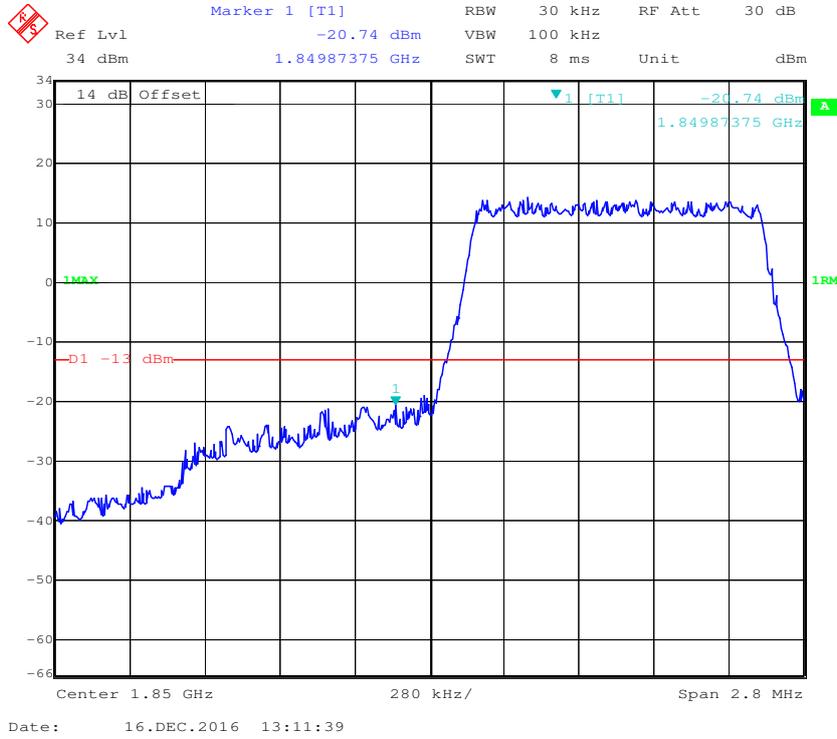


QPSK (1.4 MHz, FULL RB) - Right Band Edge

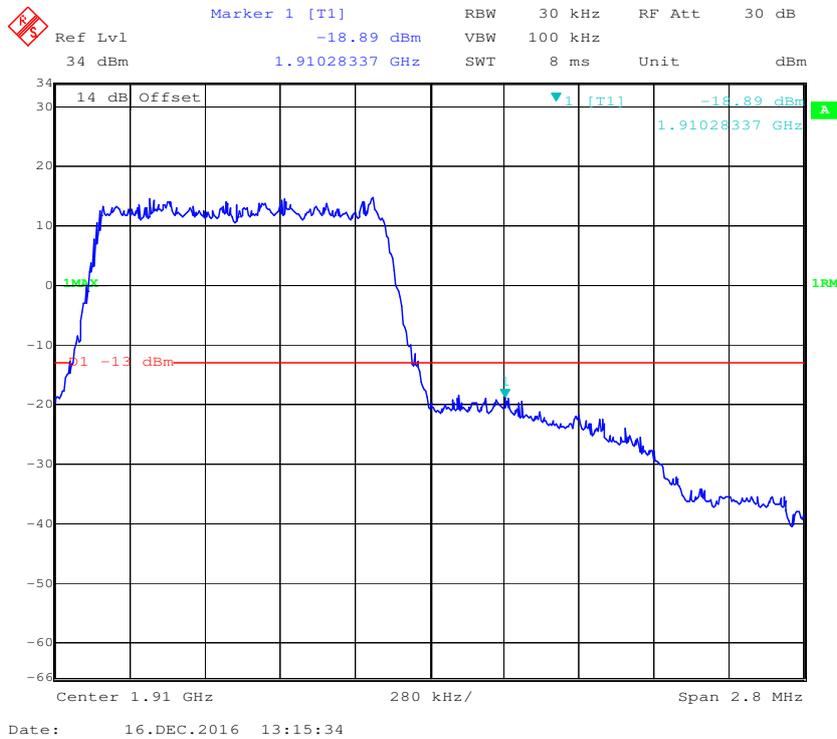


16-QAM (1.4 MHz, FULL RB) - Left Band Edge

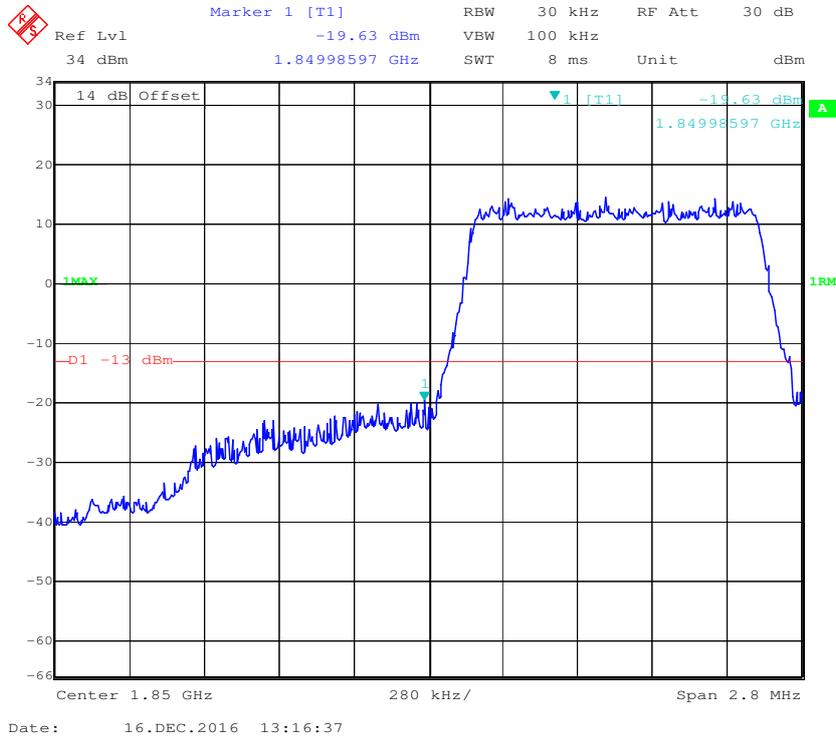


16-QAM (1.4 MHz, FULL RB) - Right Band Edge

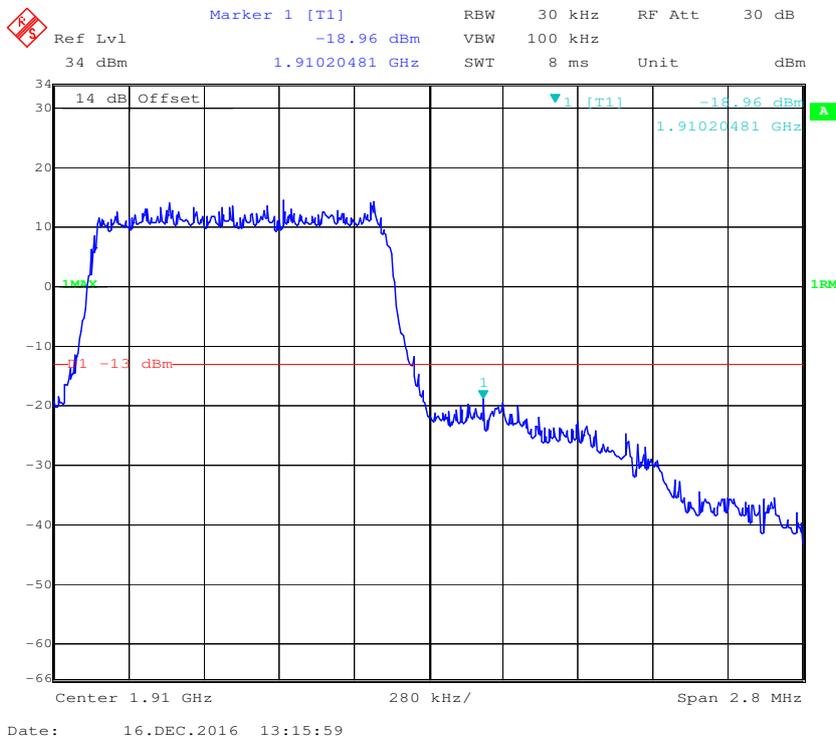


QPSK (3.0 MHz, FULL RB) - Left Band Edge

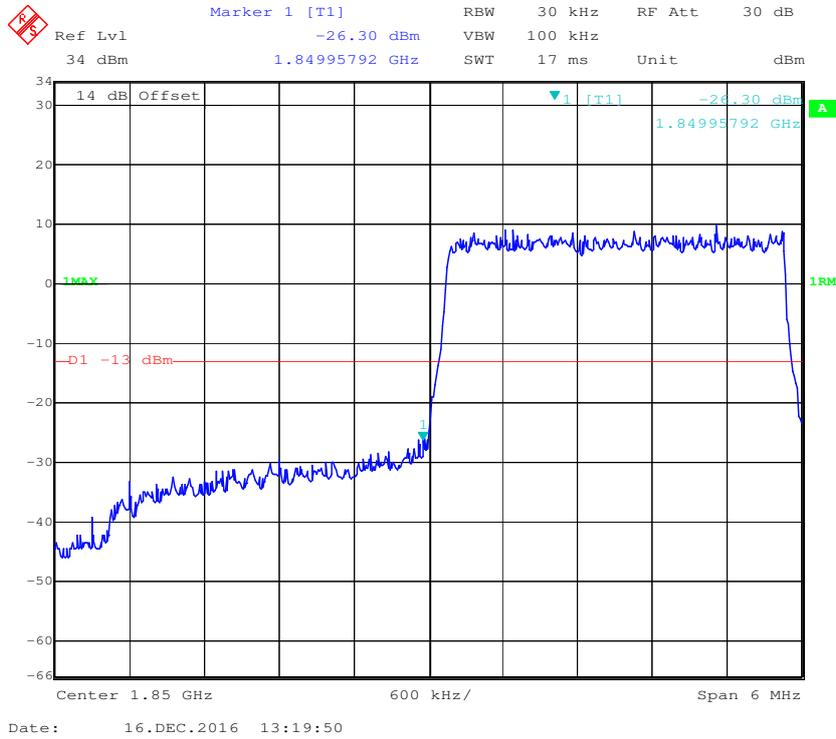


QPSK (3.0 MHz, FULL RB) - Right Band Edge

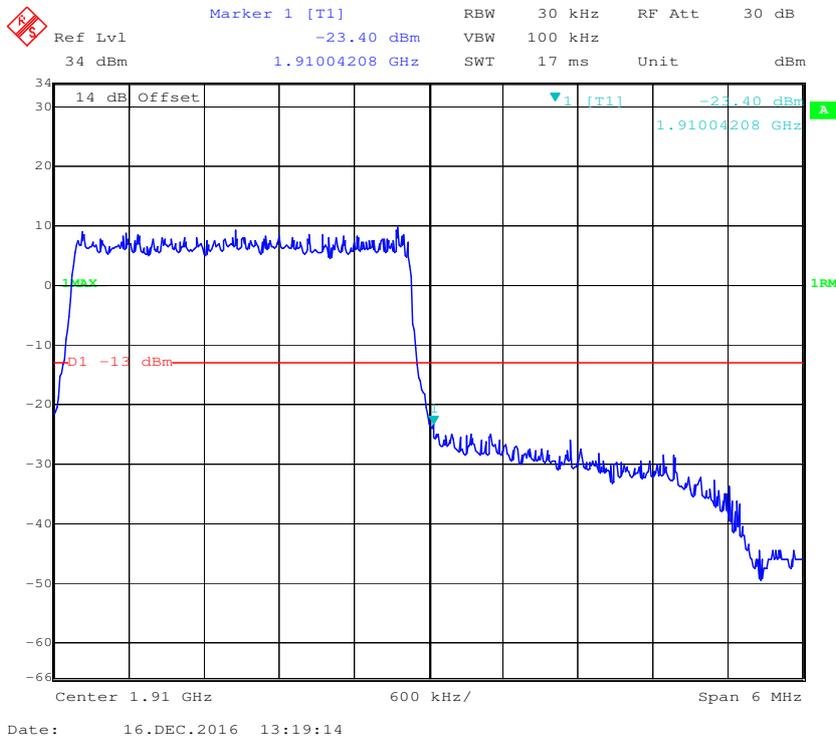


16-QAM (3.0 MHz, FULL RB) - Left Band Edge

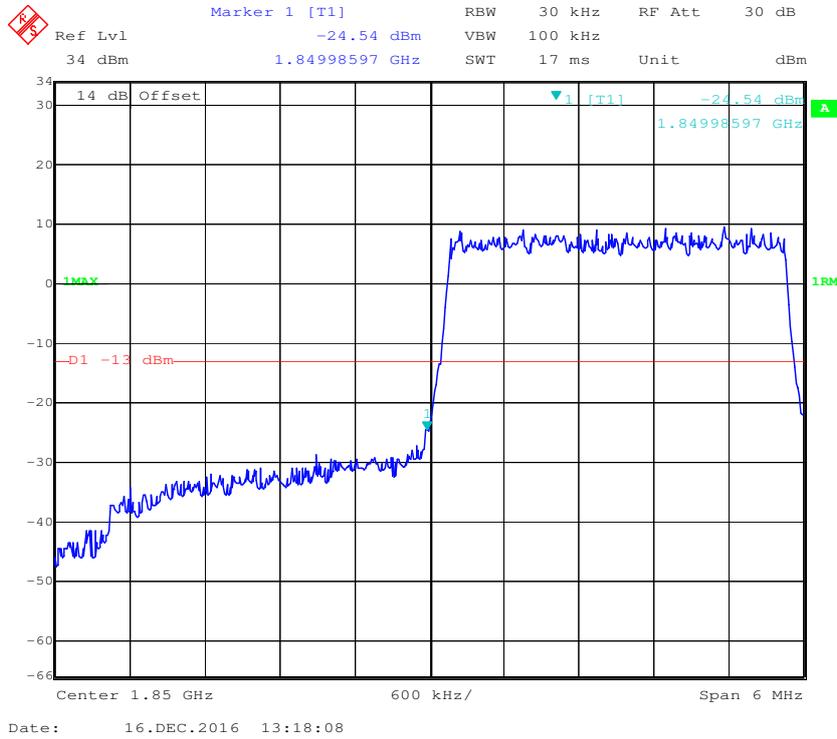


16-QAM (3.0 MHz, FULL RB) - Right Band Edge

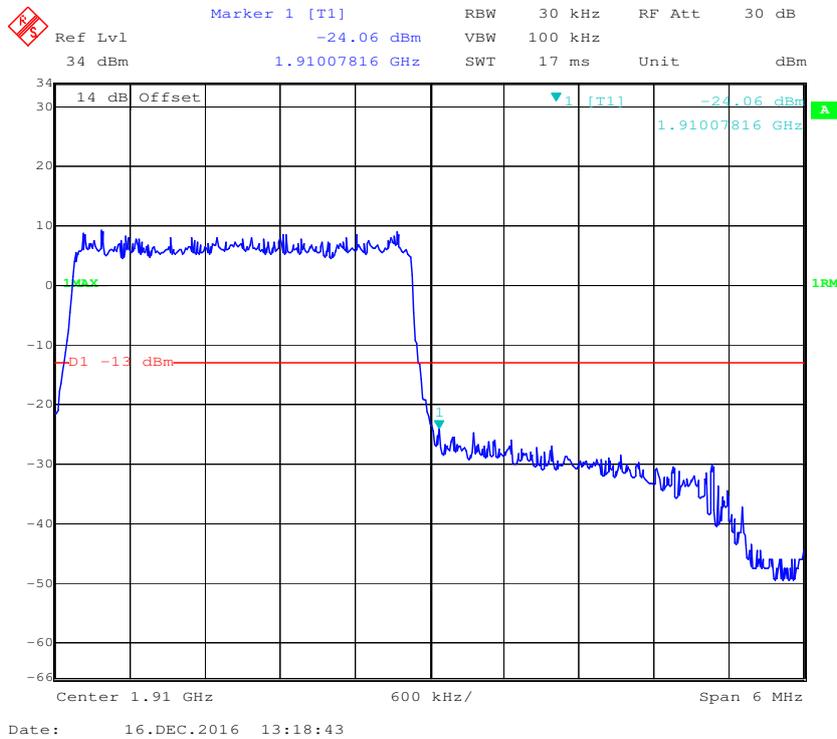


QPSK (5.0 MHz, FULL RB) - Left Band Edge

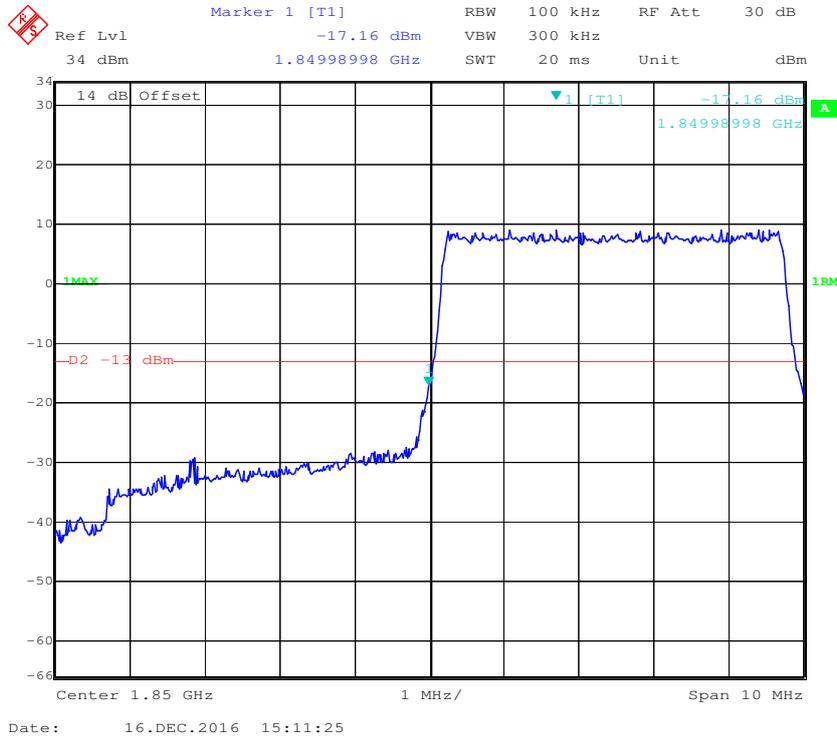


QPSK (5.0 MHz, FULL RB) - Right Band Edge

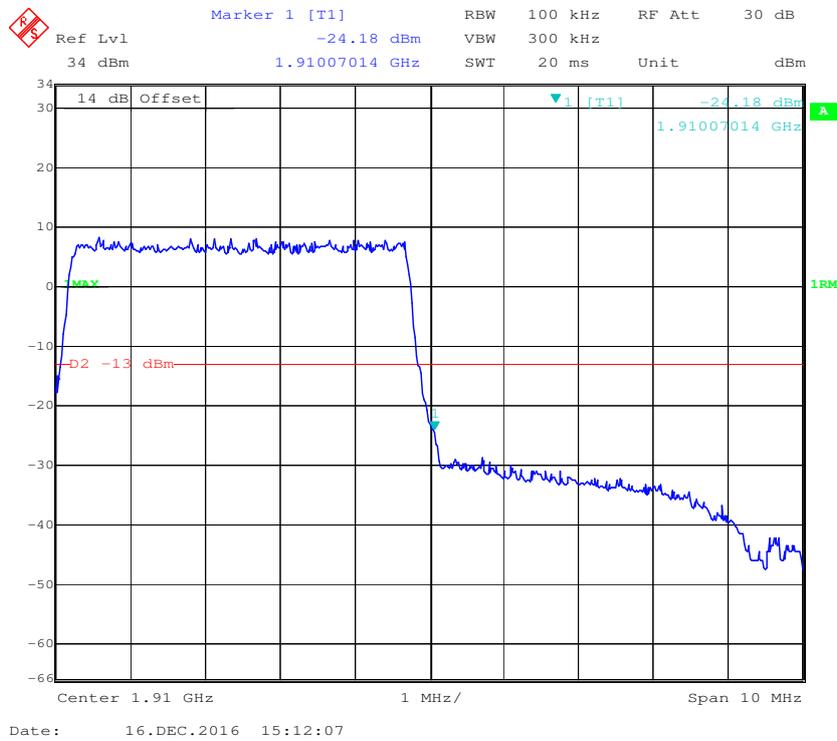


16-QAM (5.0 MHz, FULL RB) - Left Band Edge

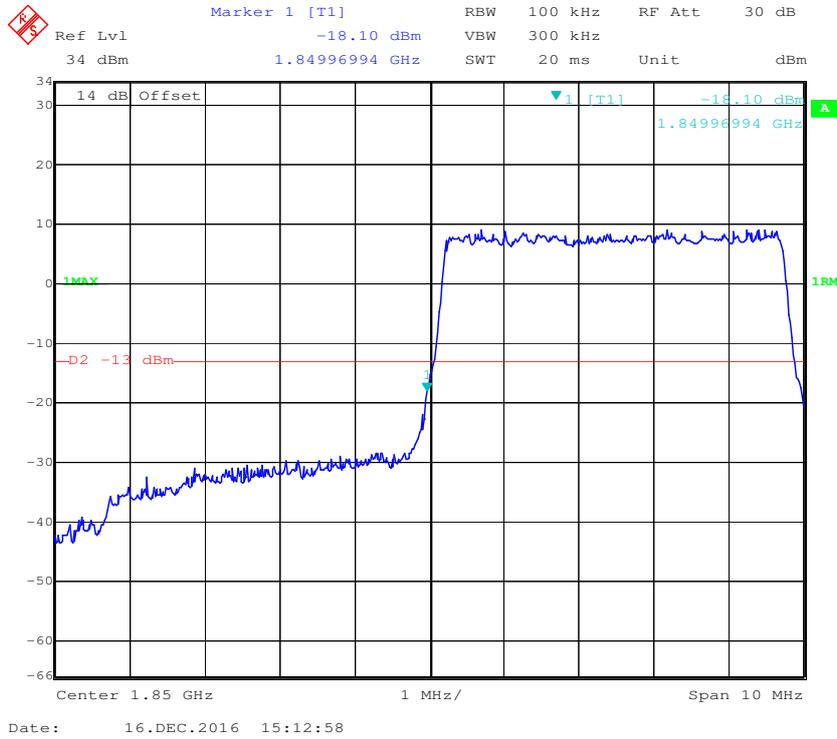


16-QAM (5.0 MHz, FULL RB) - Right Band Edge

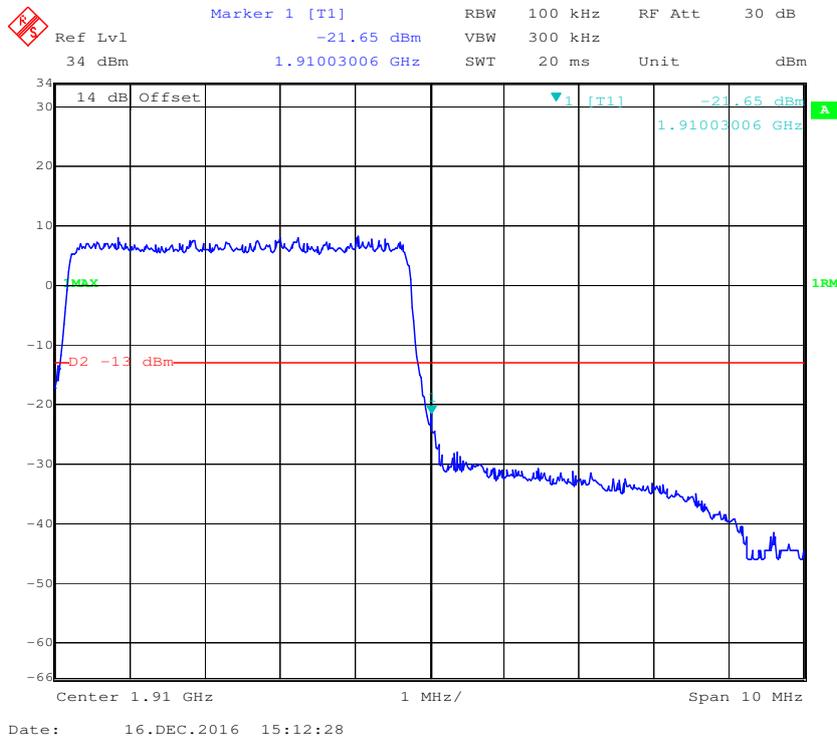


QPSK (10.0 MHz, FULL RB) - Left Band Edge

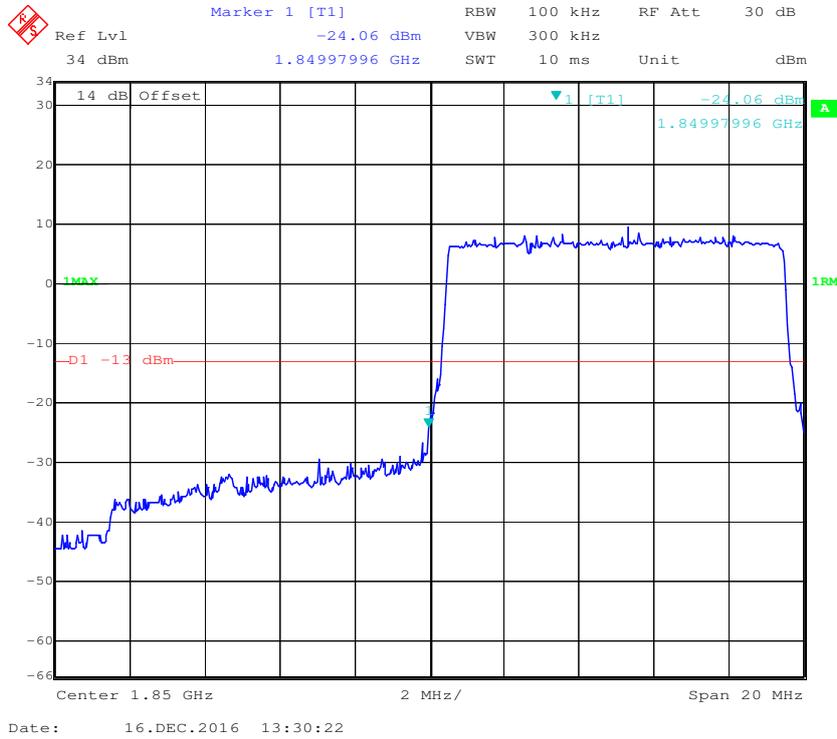


QPSK (10.0 MHz, FULL RB) - Right Band Edge

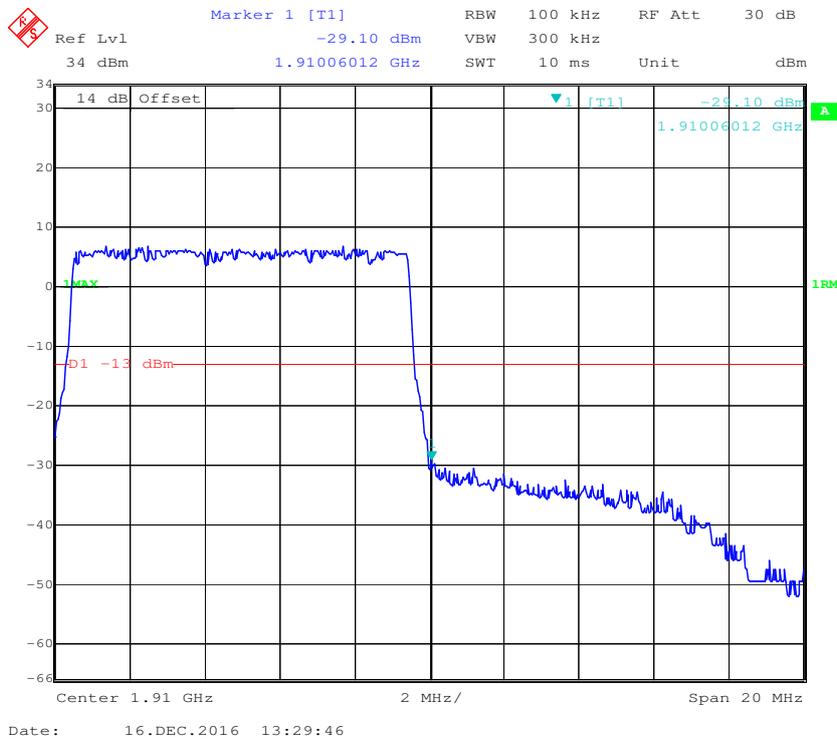


QPSK (15.0 MHz, FULL RB) - Left Band Edge

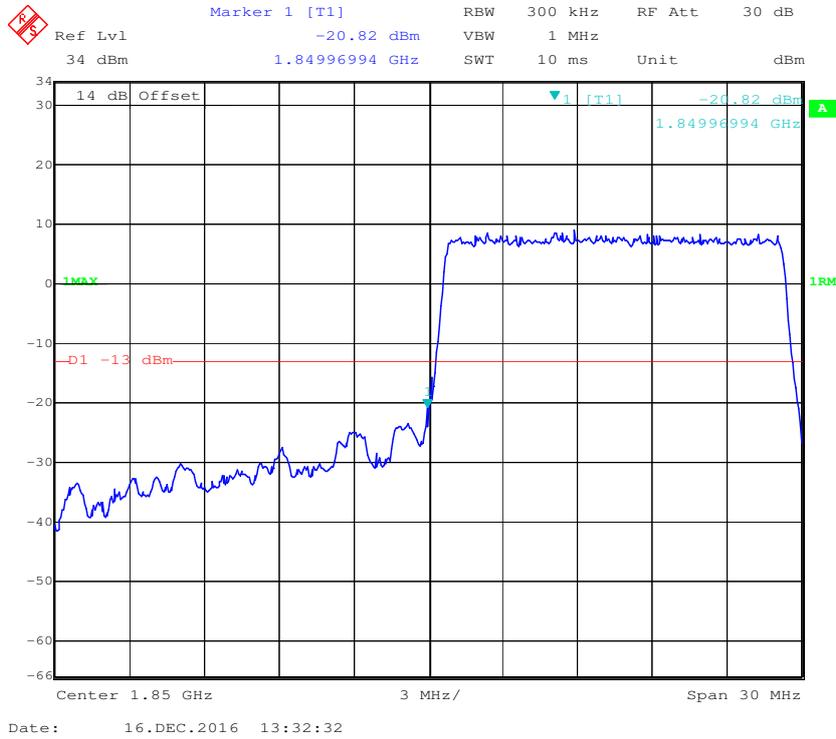


QPSK (15.0 MHz, FULL RB) - Right Band Edge

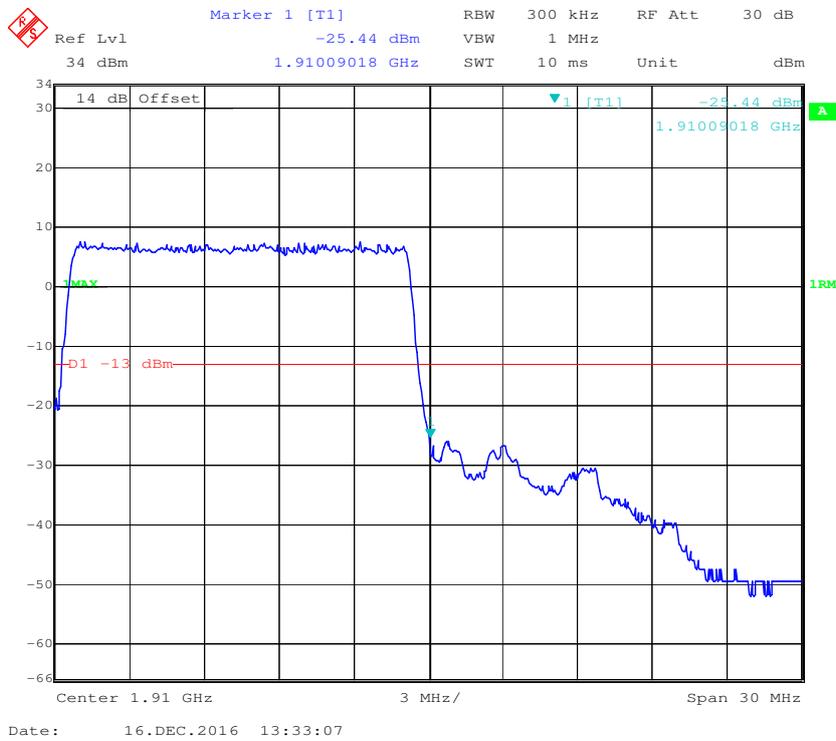


16-QAM (15.0 MHz, FULL RB) - Left Band Edge

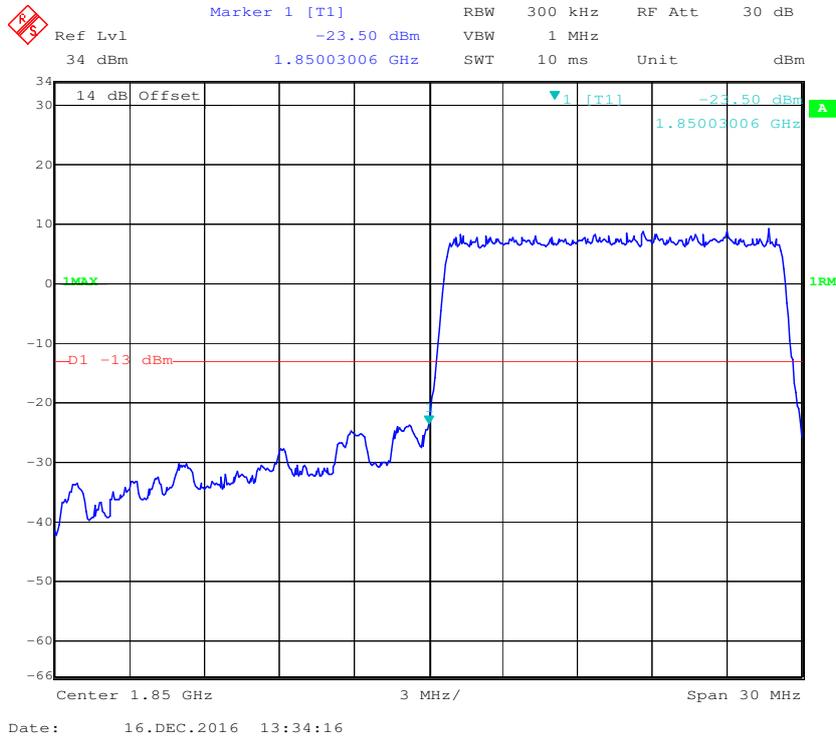


16-QAM (15.0 MHz, FULL RB) - Right Band Edge

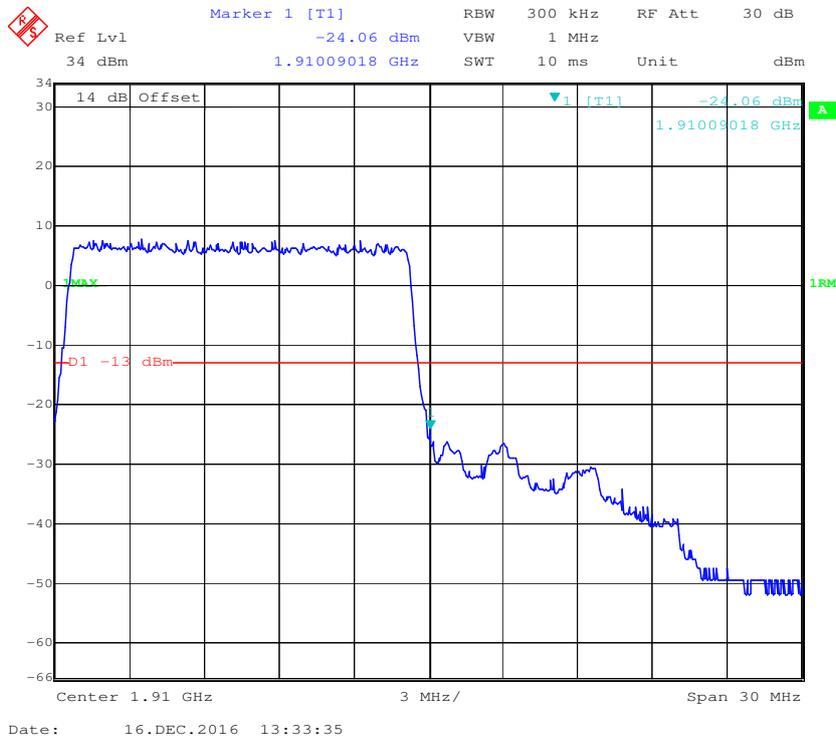


QPSK (20.0 MHz, FULL RB) - Left Band Edge

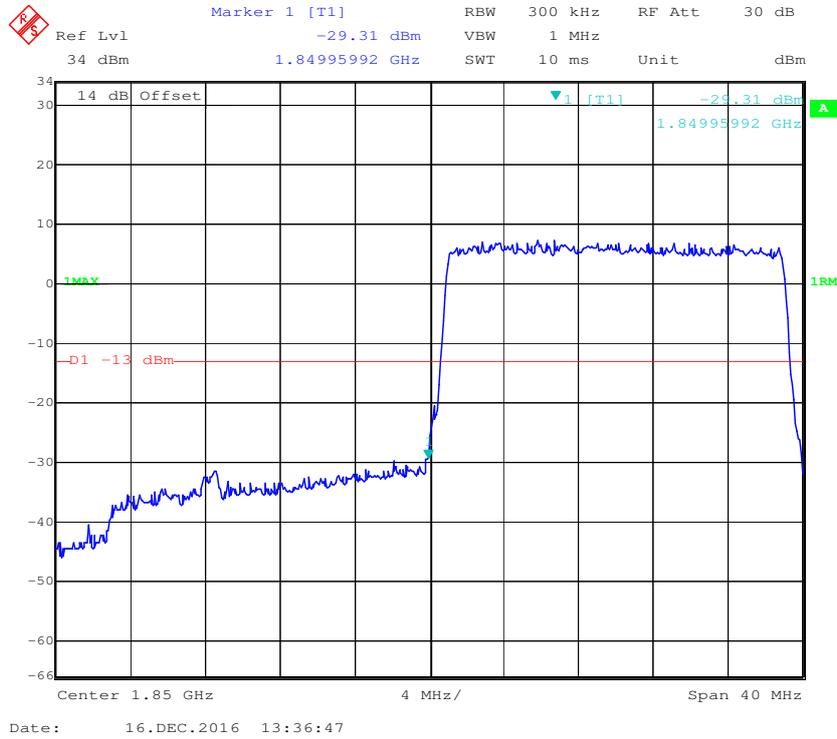


QPSK (20.0 MHz, FULL RB) - Right Band Edge

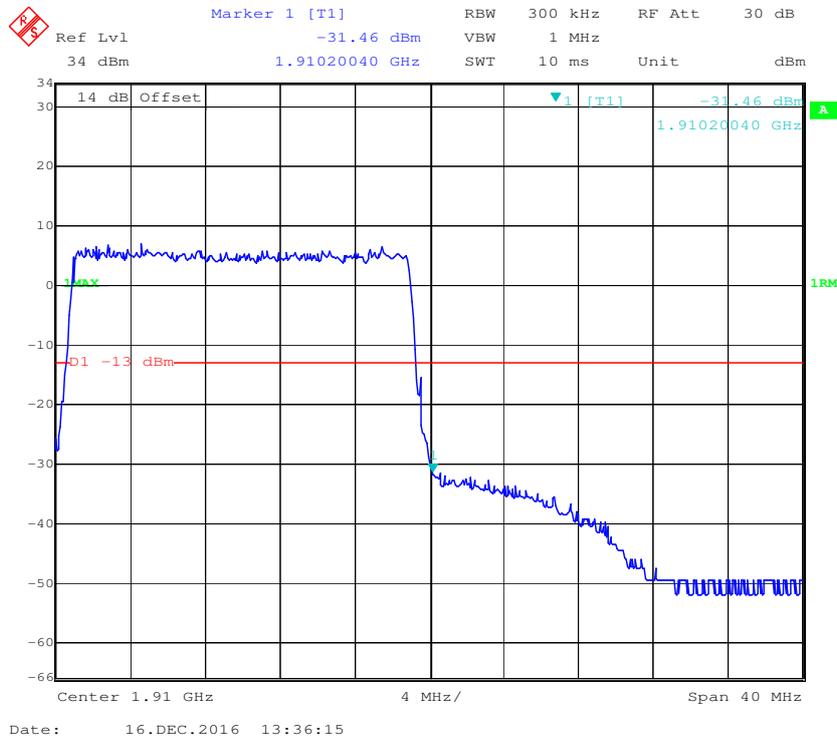

16-QAM (20.0 MHz, FULL RB) - Left Band Edge

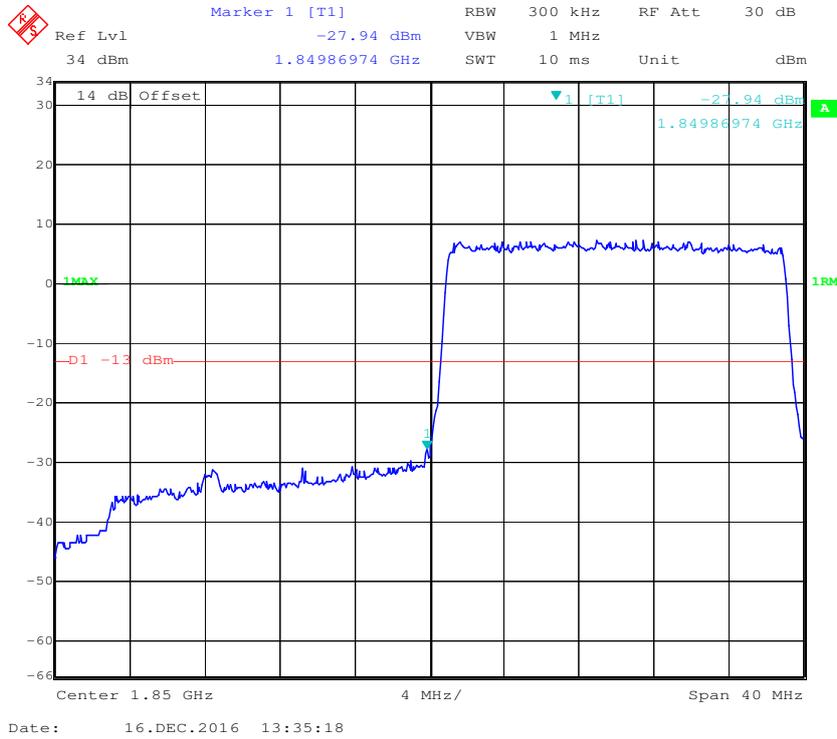


16-QAM (20.0 MHz, FULL RB) - Right Band Edge

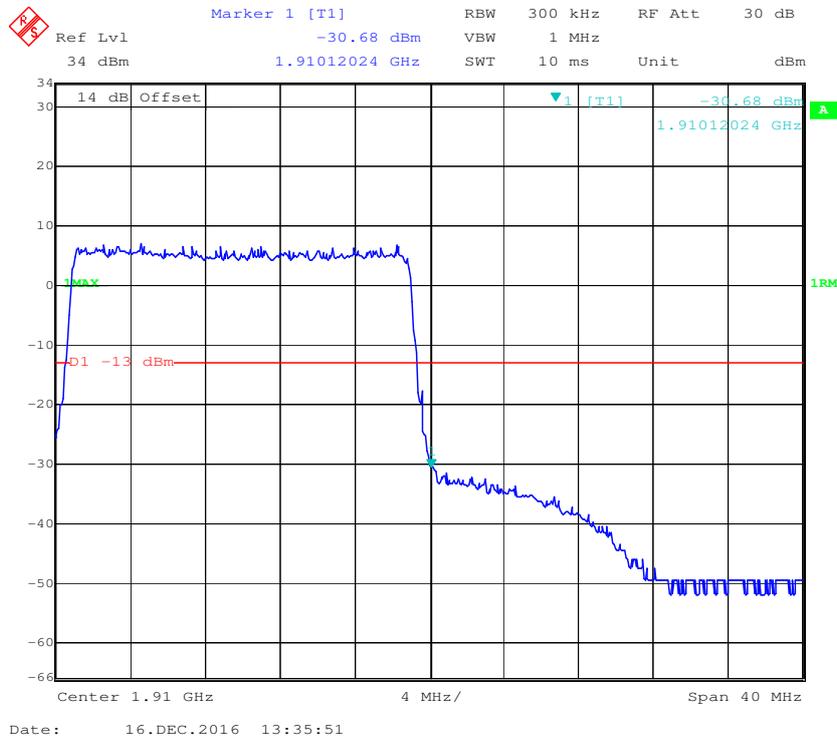


Band 4:


QPSK (1.4 MHz, FULL RB) - Left Band Edge

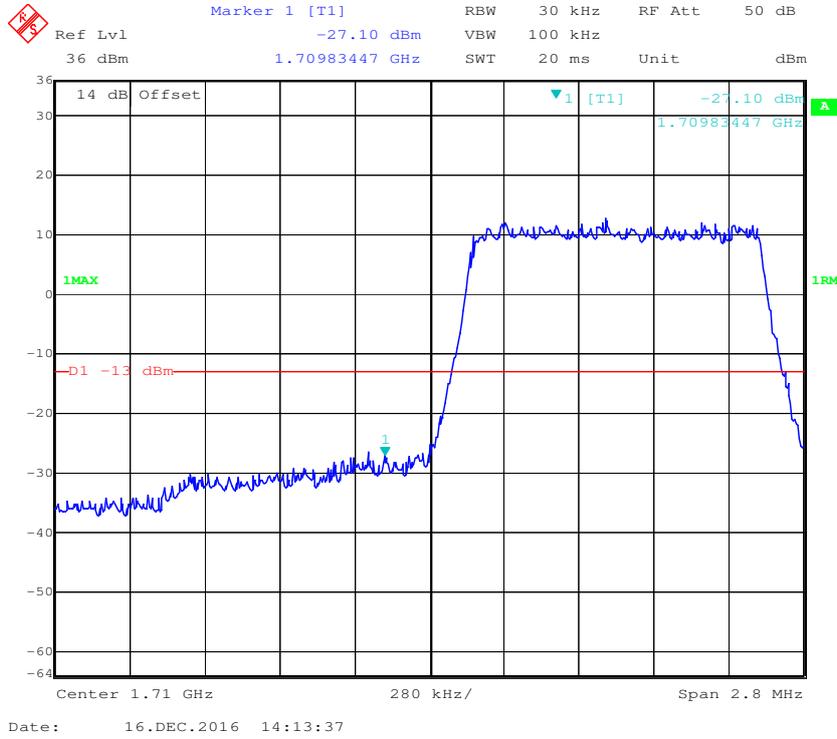


QPSK (1.4 MHz, FULL RB) - Right Band Edge

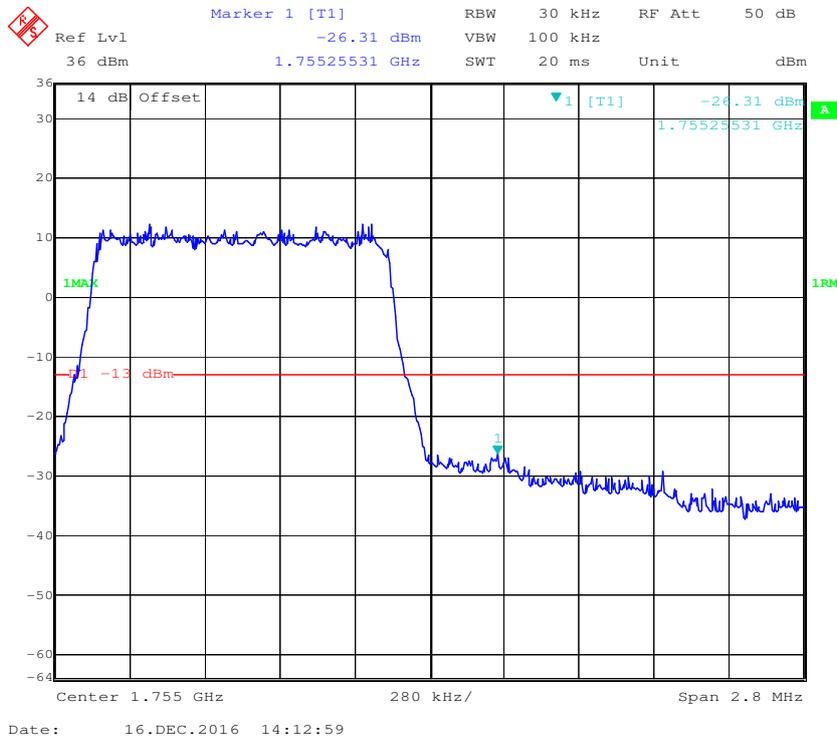


16-QAM (1.4 MHz, FULL RB) - Left Band Edge

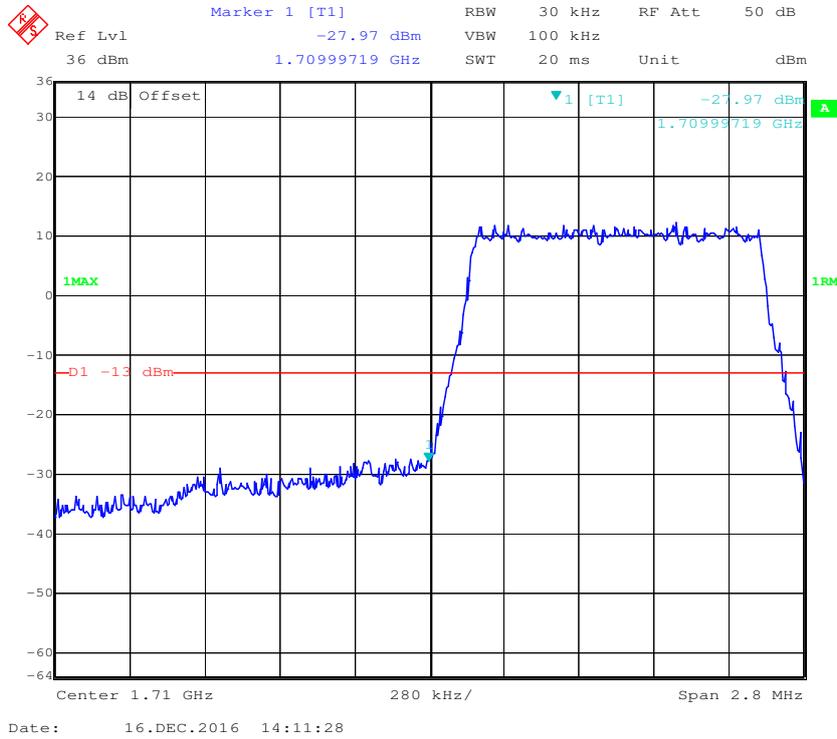


16-QAM (1.4 MHz, FULL RB) - Right Band Edge

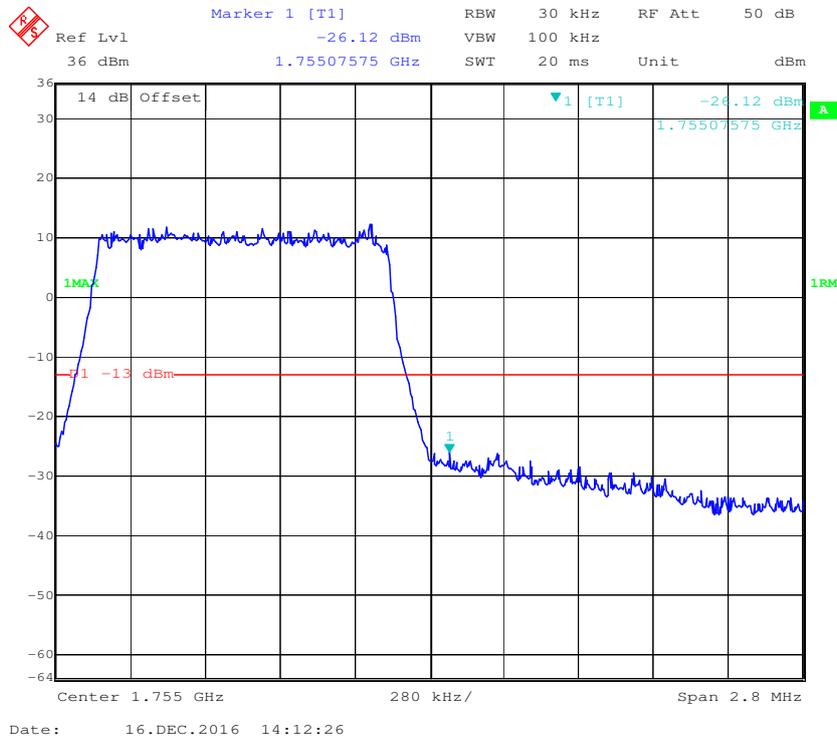


QPSK (3.0 MHz, FULL RB) - Left Band Edge

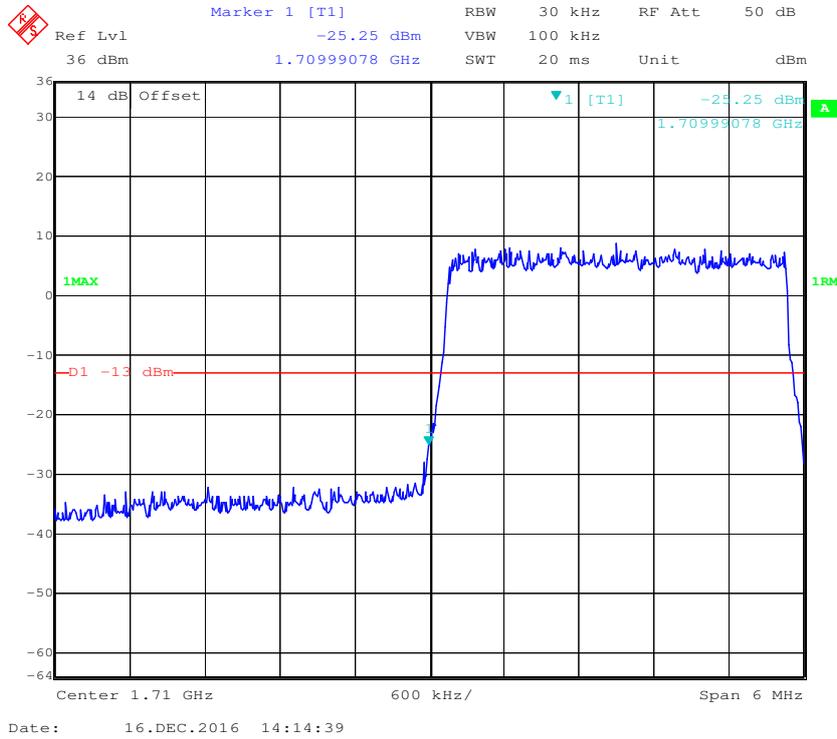


QPSK (3.0 MHz, FULL RB) - Right Band Edge

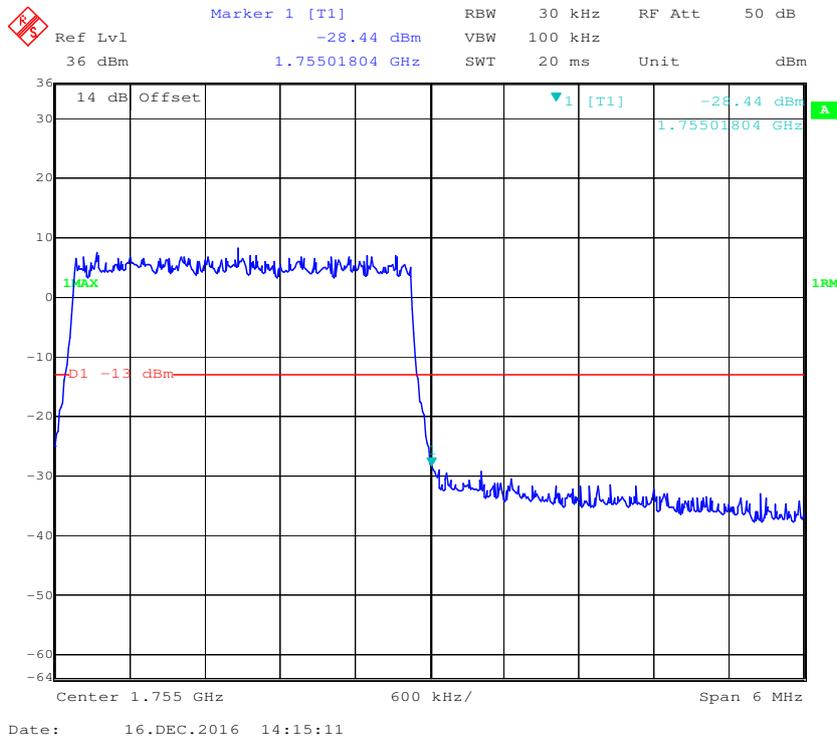


16-QAM (3.0 MHz, FULL RB) - Left Band Edge

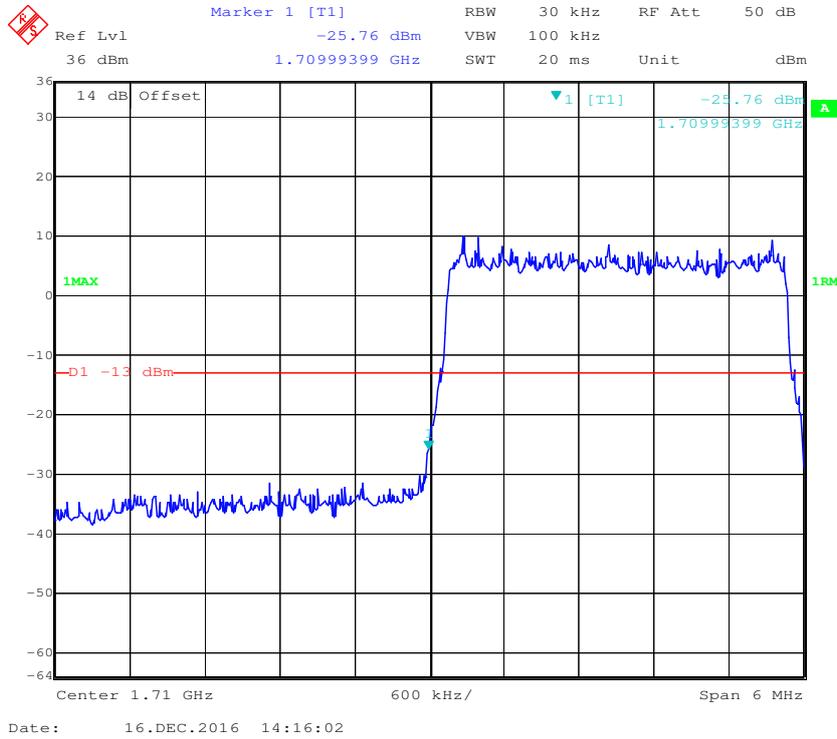


16-QAM (3.0 MHz, FULL RB) - Right Band Edge

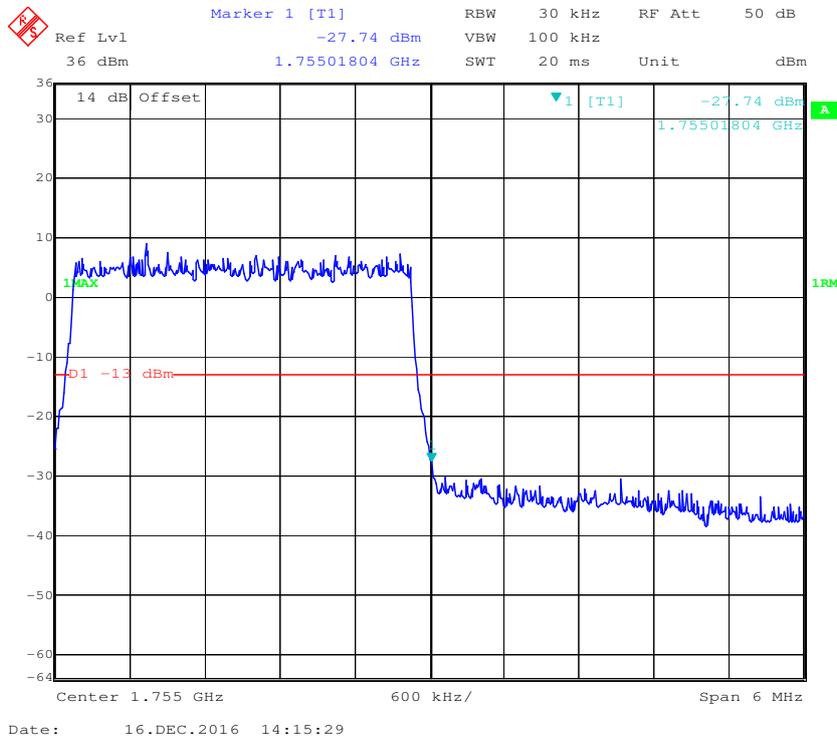


QPSK (5.0 MHz, FULL RB) - Left Band Edge

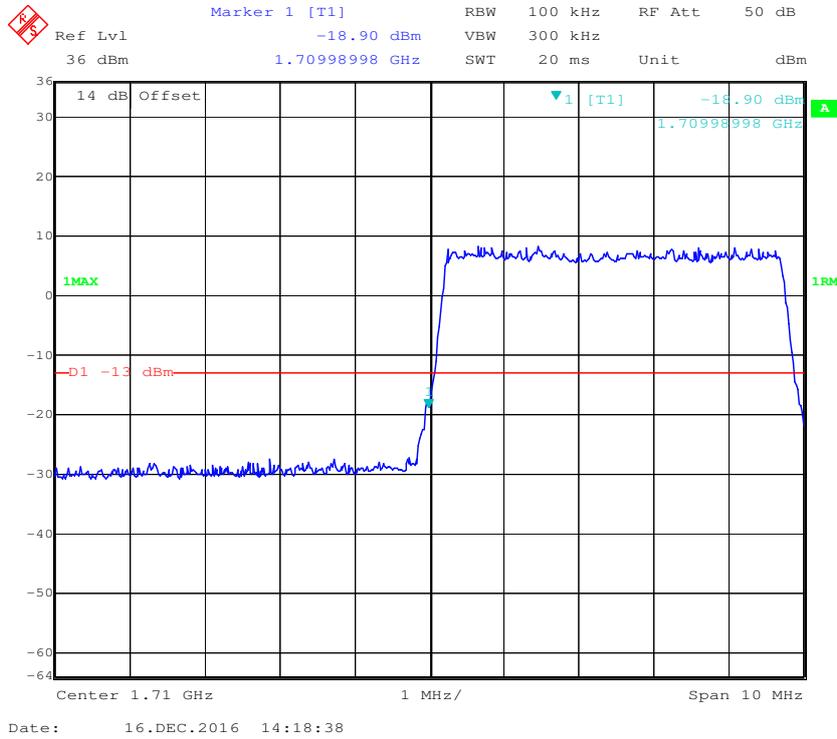


QPSK (5.0 MHz, FULL RB) - Right Band Edge

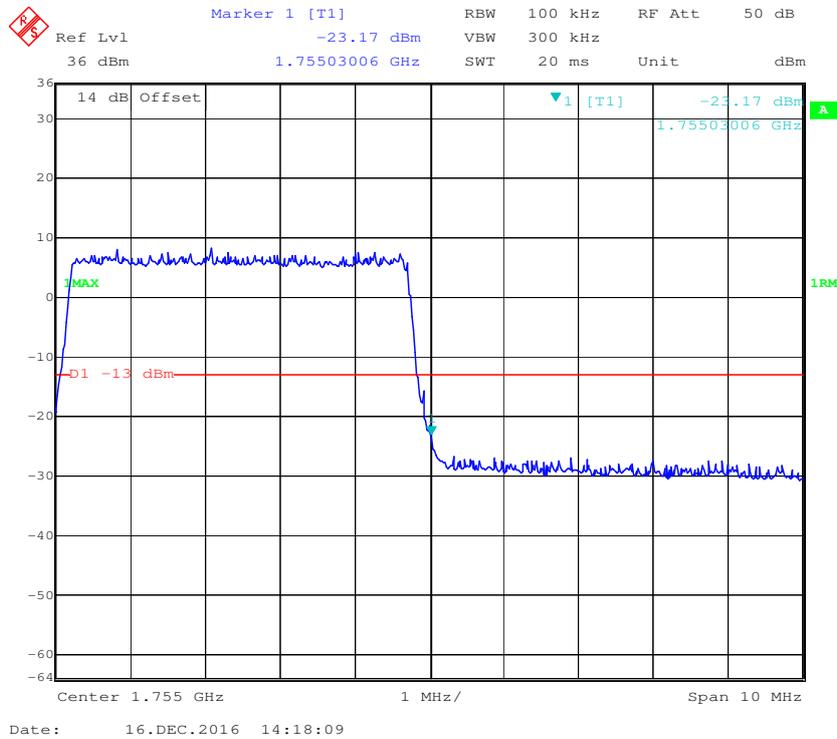


16-QAM (5.0 MHz, FULL RB) - Left Band Edge

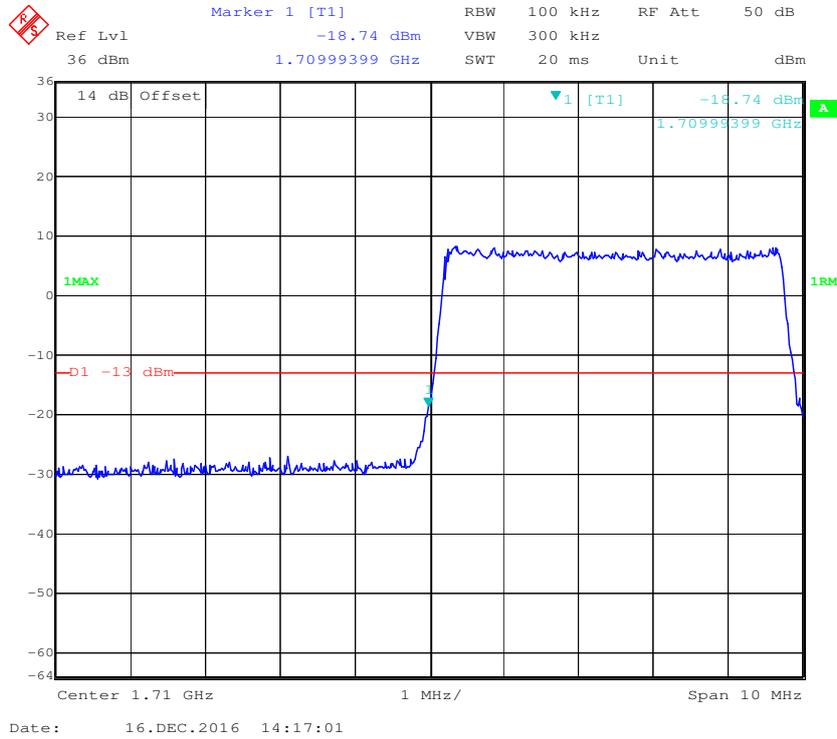


16-QAM (5.0 MHz, FULL RB) - Right Band Edge

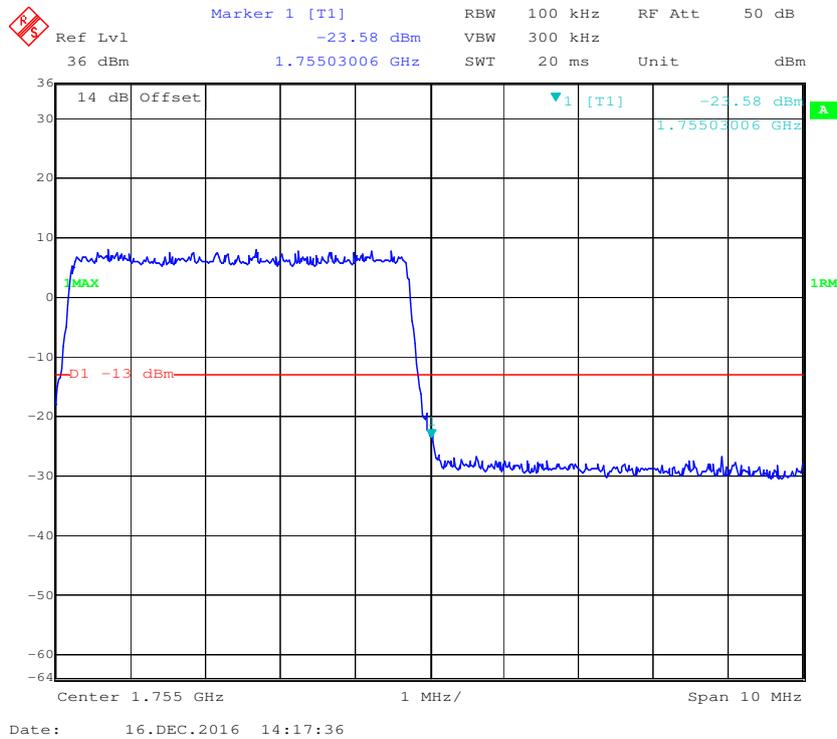


QPSK (10.0 MHz, FULL RB) - Left Band Edge

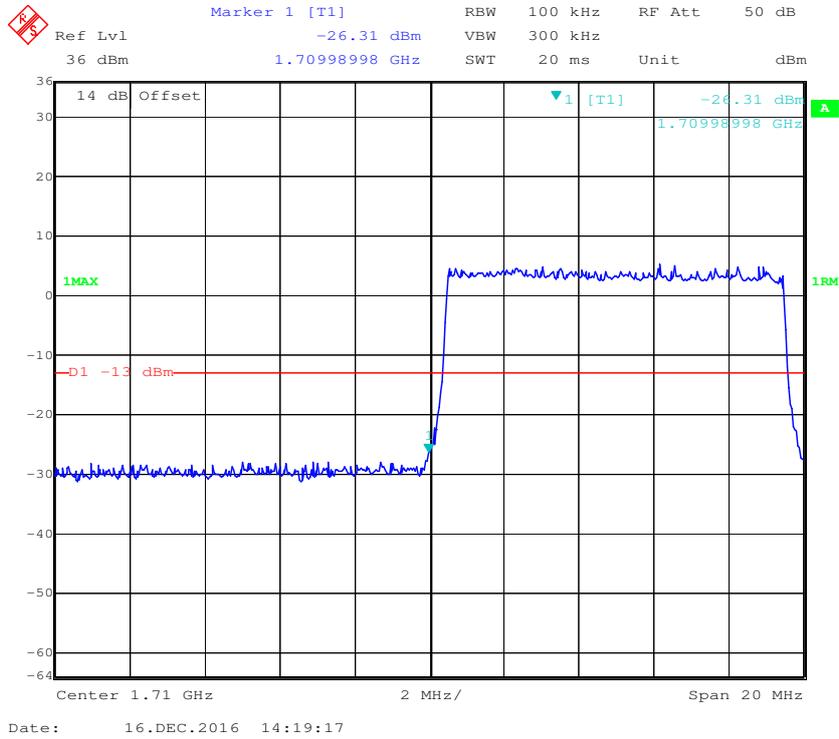


QPSK (10.0 MHz, FULL RB) - Right Band Edge

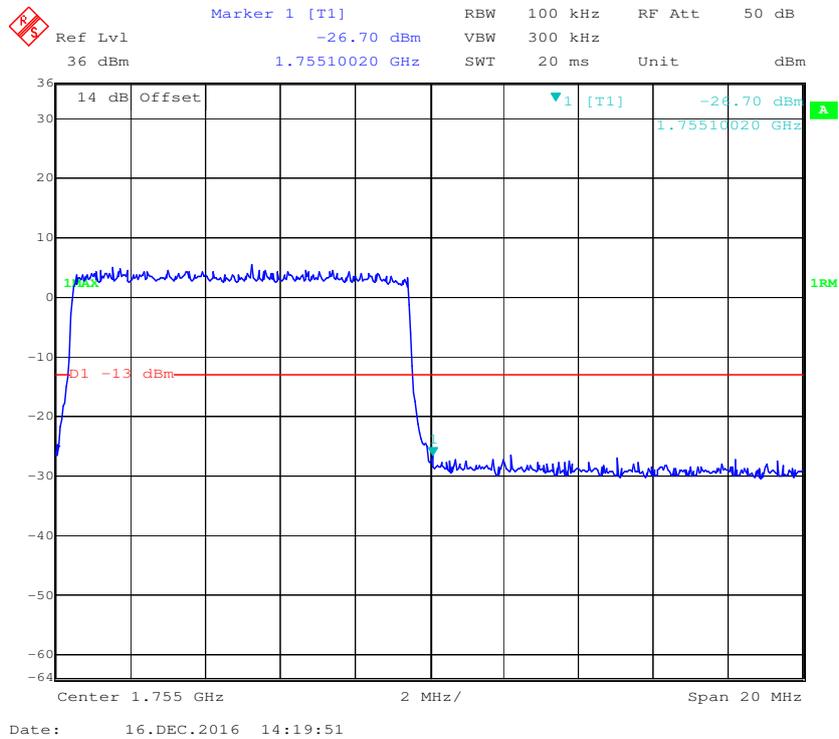


16-QAM (10.0 MHz, FULL RB) - Left Band Edge

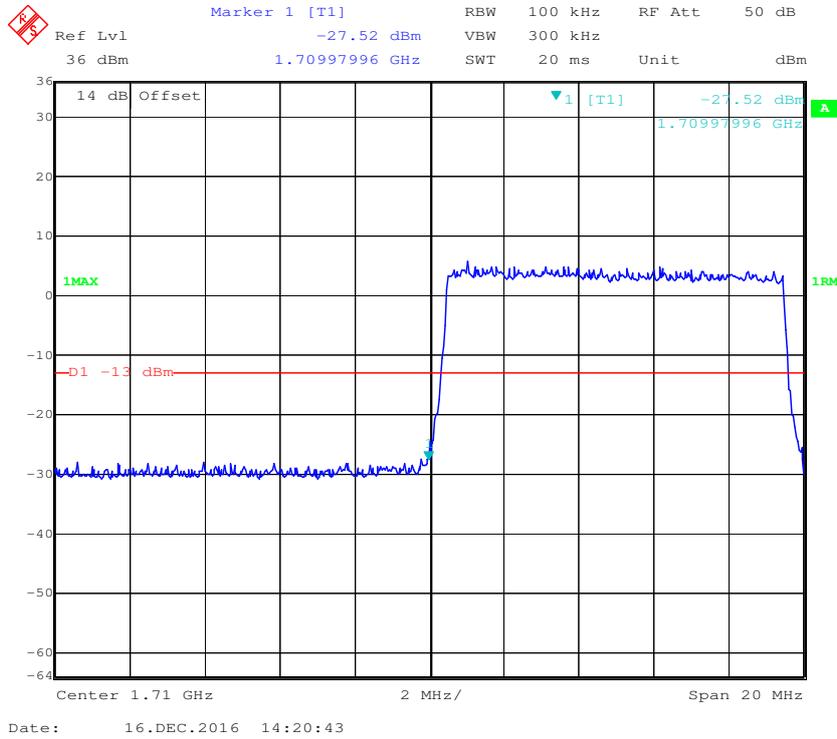


16-QAM (10.0 MHz, FULL RB) - Right Band Edge

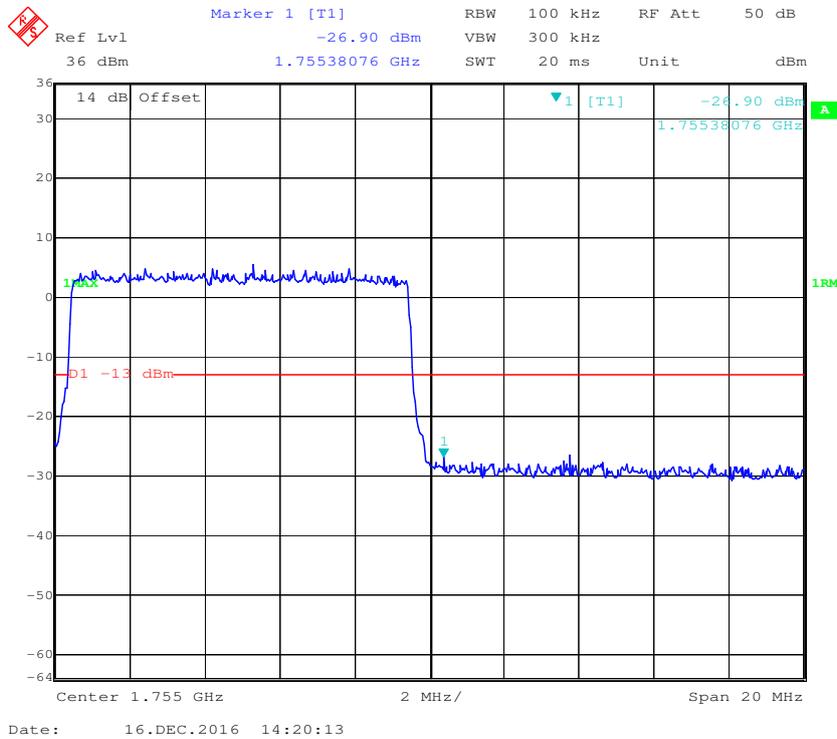


QPSK (15.0 MHz, FULL RB) - Left Band Edge

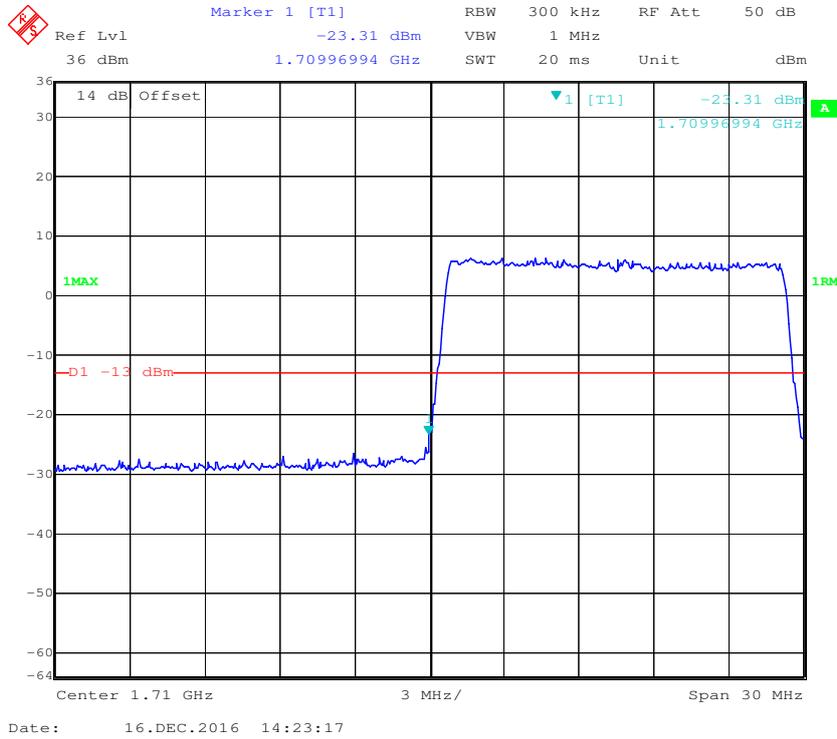


QPSK (15.0 MHz, FULL RB) - Right Band Edge

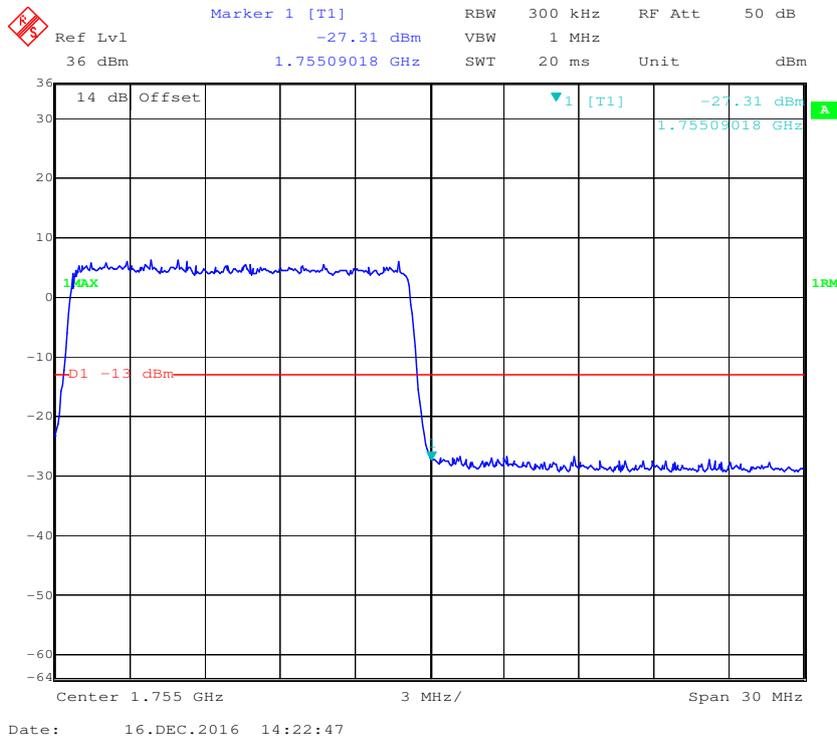


16-QAM (15.0 MHz, FULL RB) - Left Band Edge

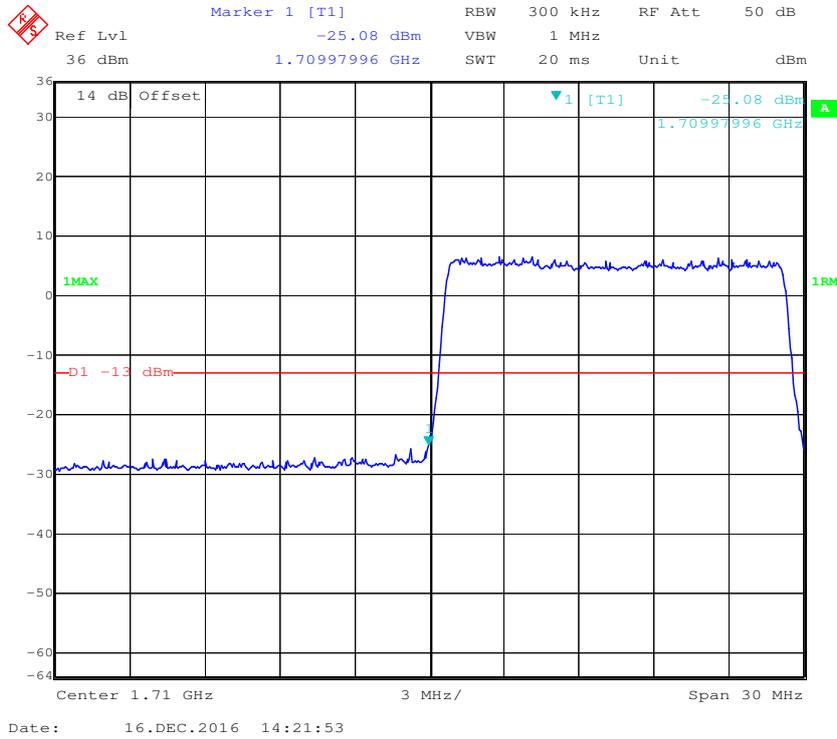


16-QAM (15.0 MHz, FULL RB) - Right Band Edge

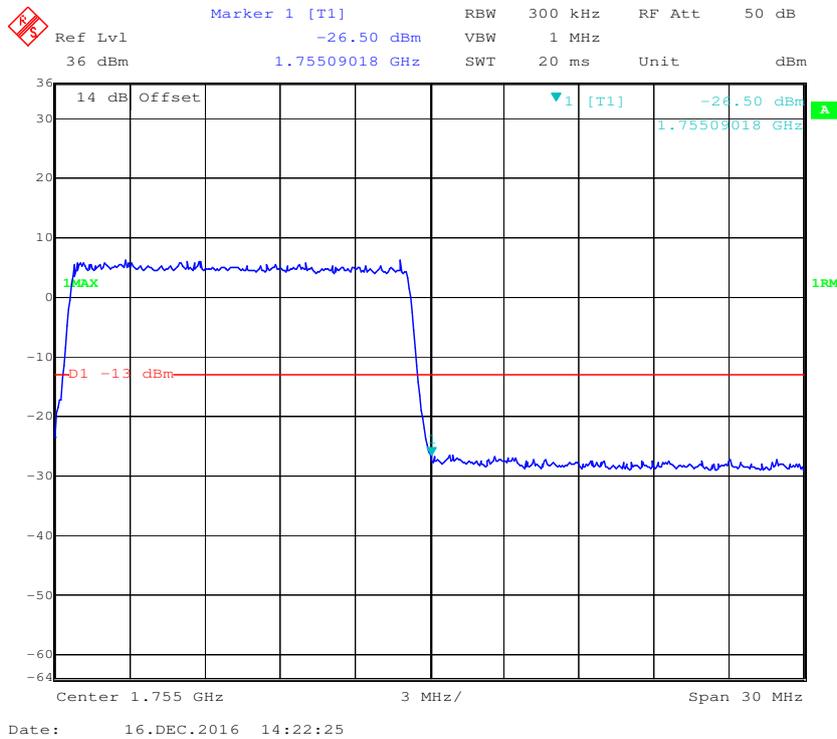


QPSK (20.0 MHz, FULL RB) - Left Band Edge

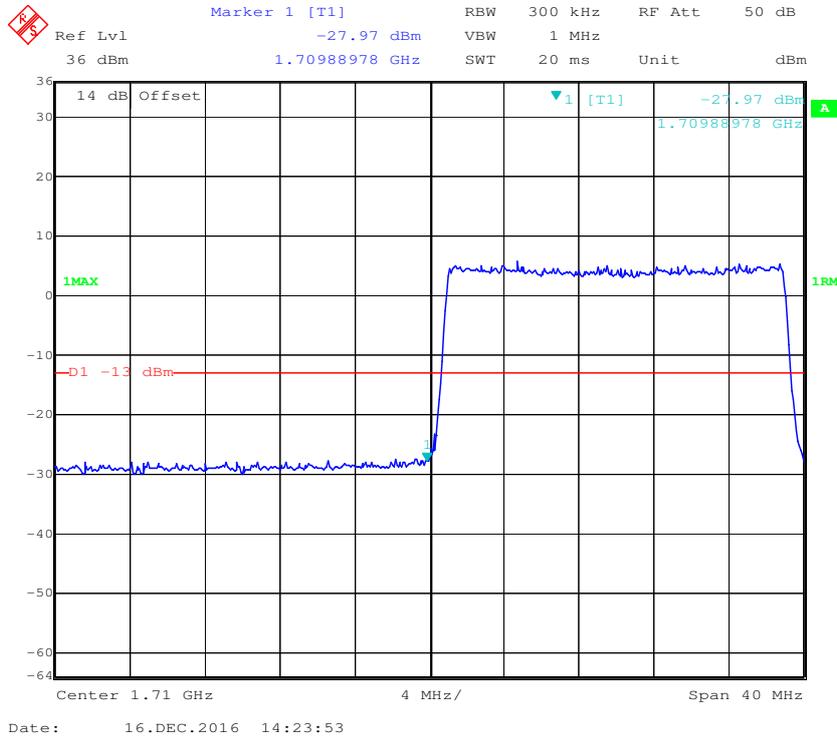


QPSK (20.0 MHz, FULL RB) - Right Band Edge

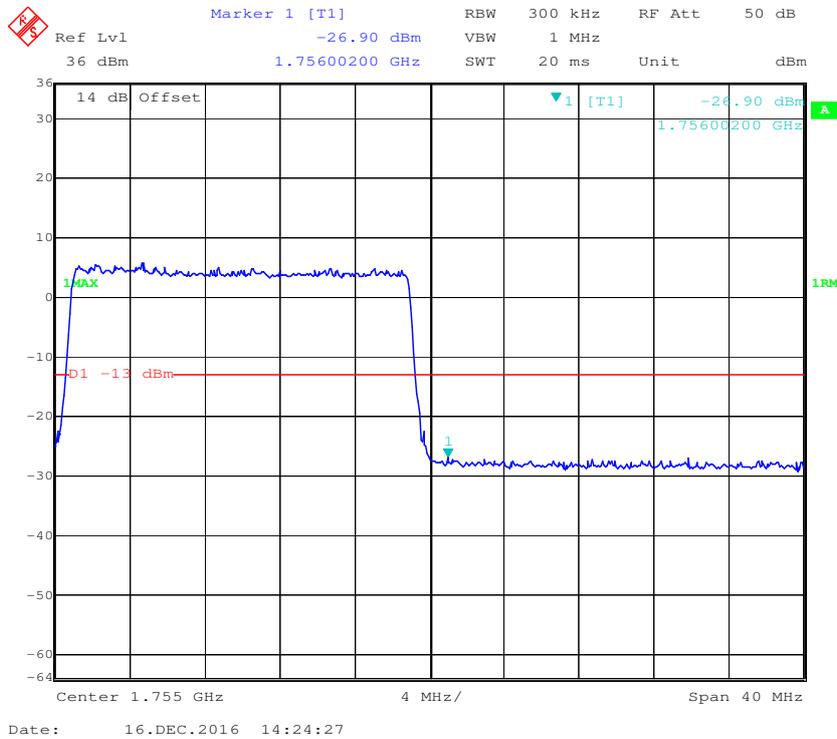

16-QAM (20.0 MHz, FULL RB) - Left Band Edge

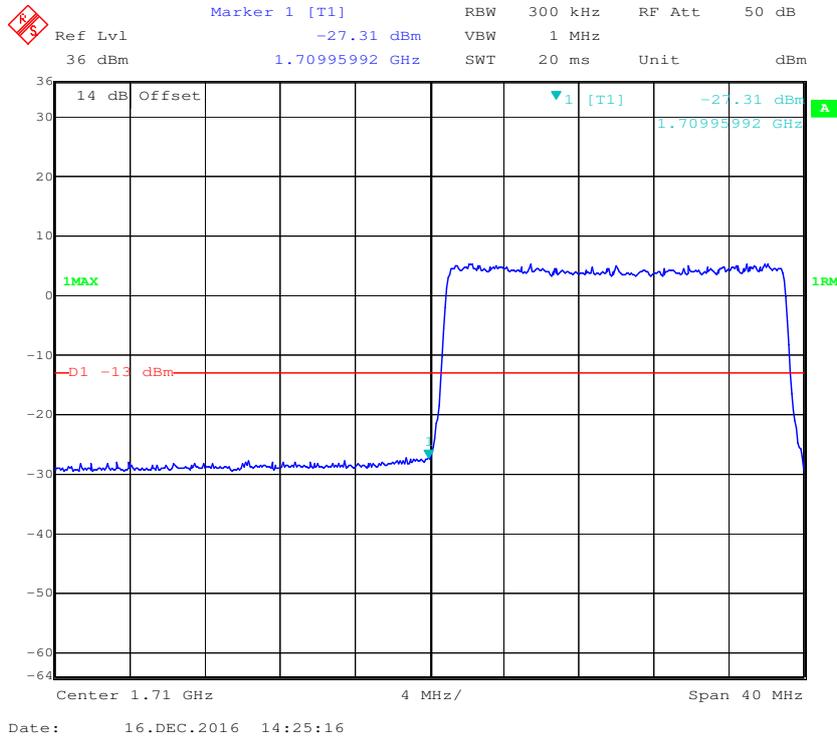


16-QAM (20.0 MHz, FULL RB) - Right Band Edge

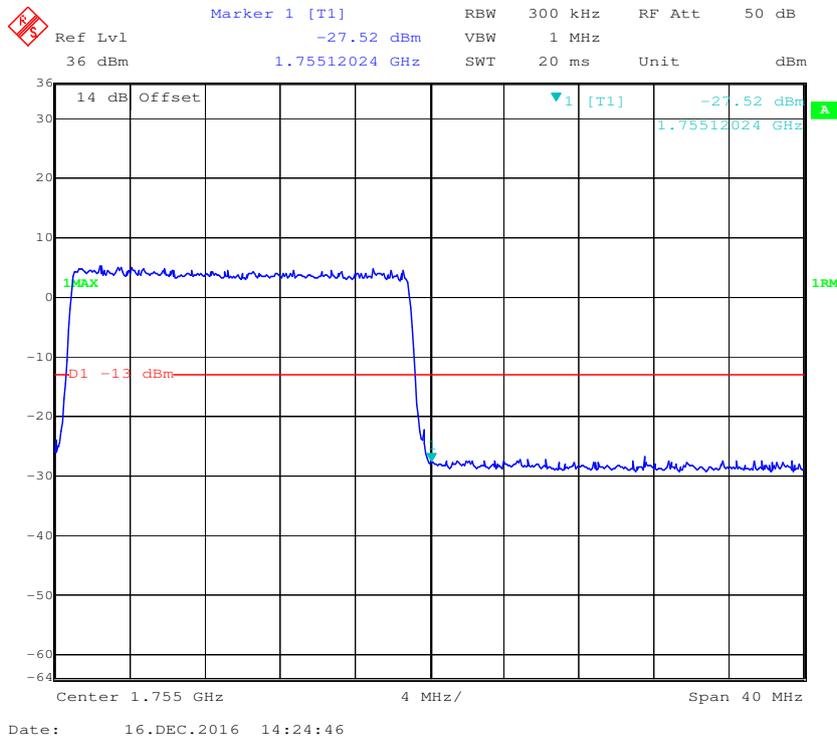


Band 7:


QPSK (5.0 MHz, FULL RB) - Left Band Edge

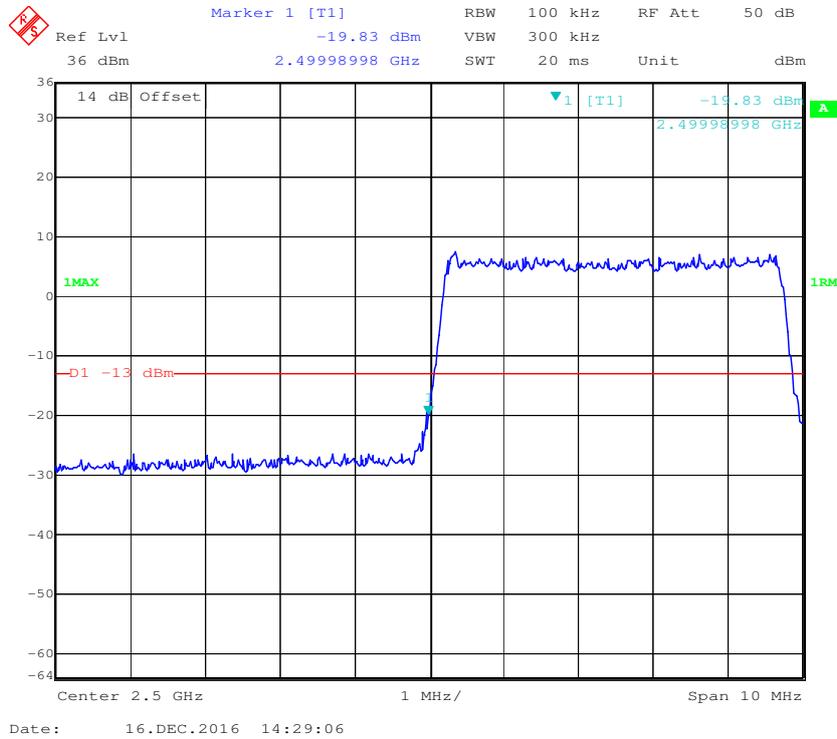


QPSK (5.0 MHz, FULL RB) - Right Band Edge

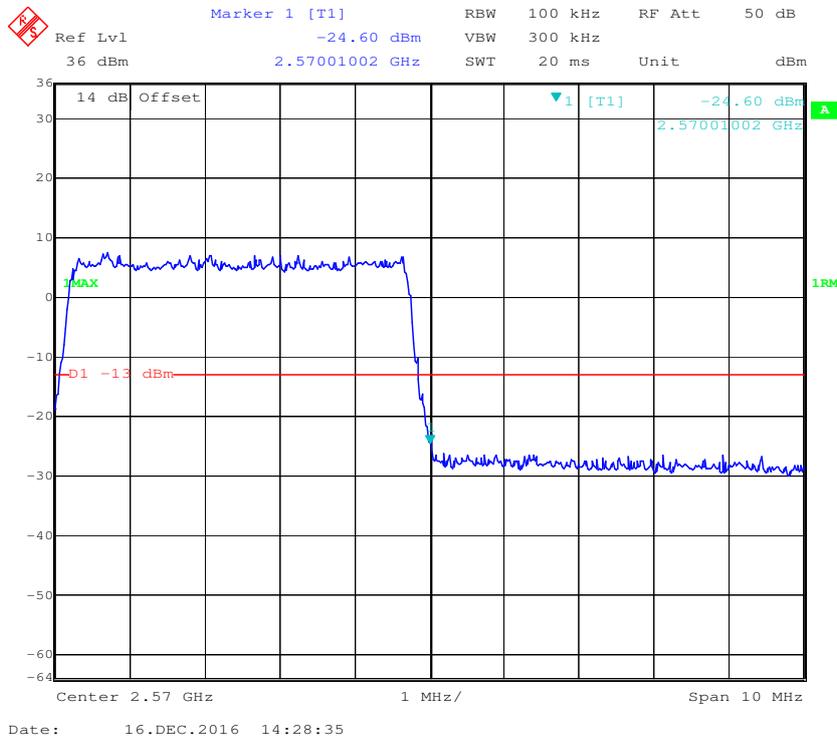


16-QAM (5.0 MHz, FULL RB) - Left Band Edge

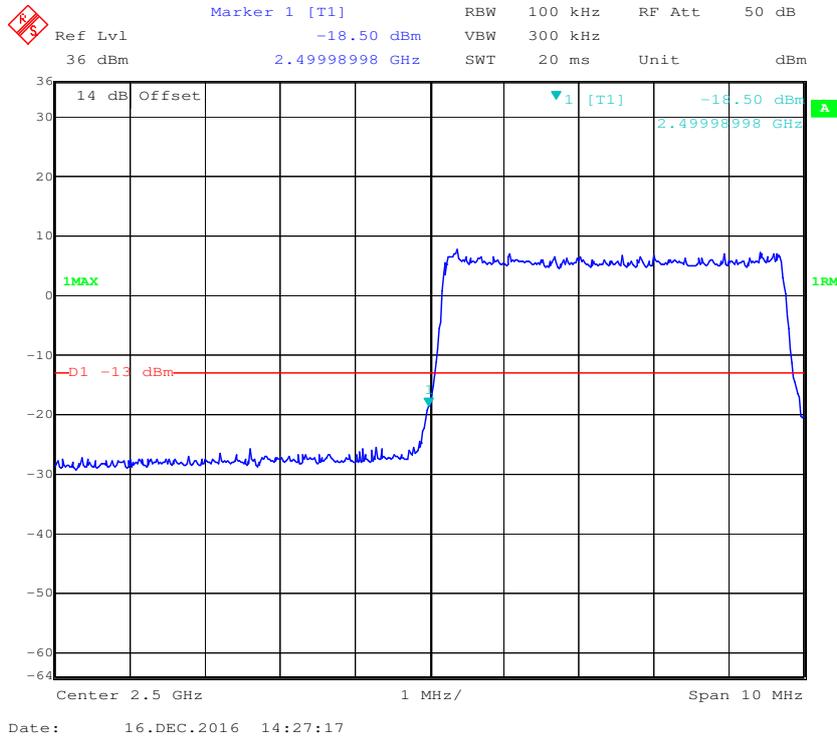


16-QAM (5.0 MHz, FULL RB) - Right Band Edge

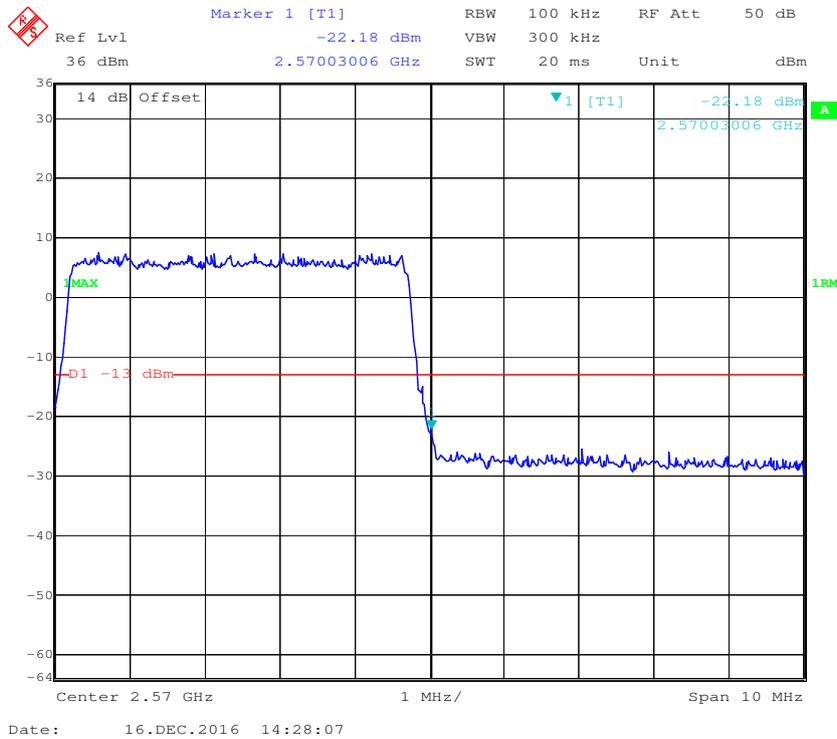


QPSK (10.0 MHz, FULL RB) - Left Band Edge

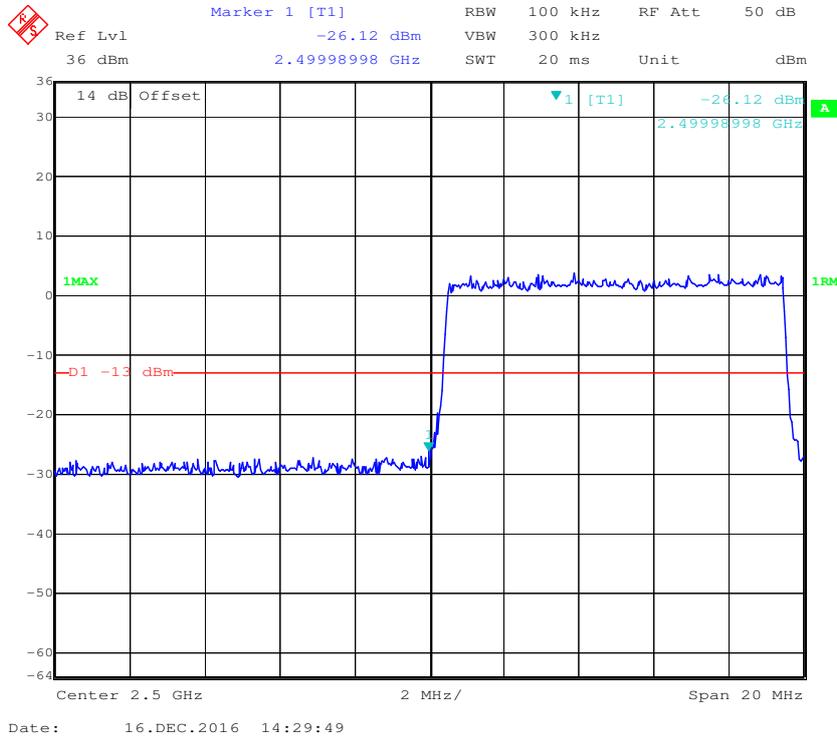


QPSK (10.0 MHz, FULL RB) - Right Band Edge

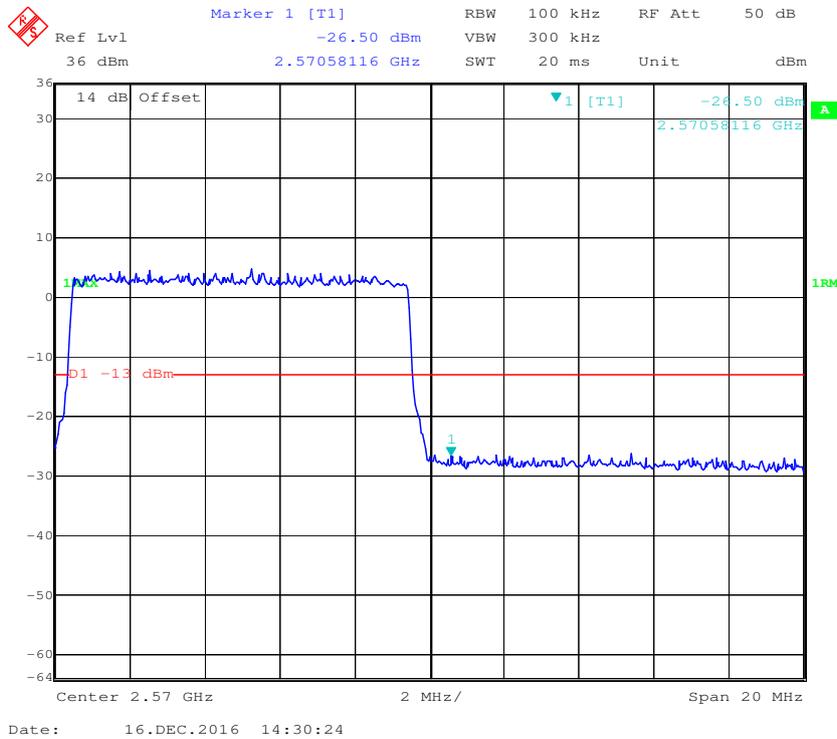


16-QAM (10.0 MHz, FULL RB) - Left Band Edge

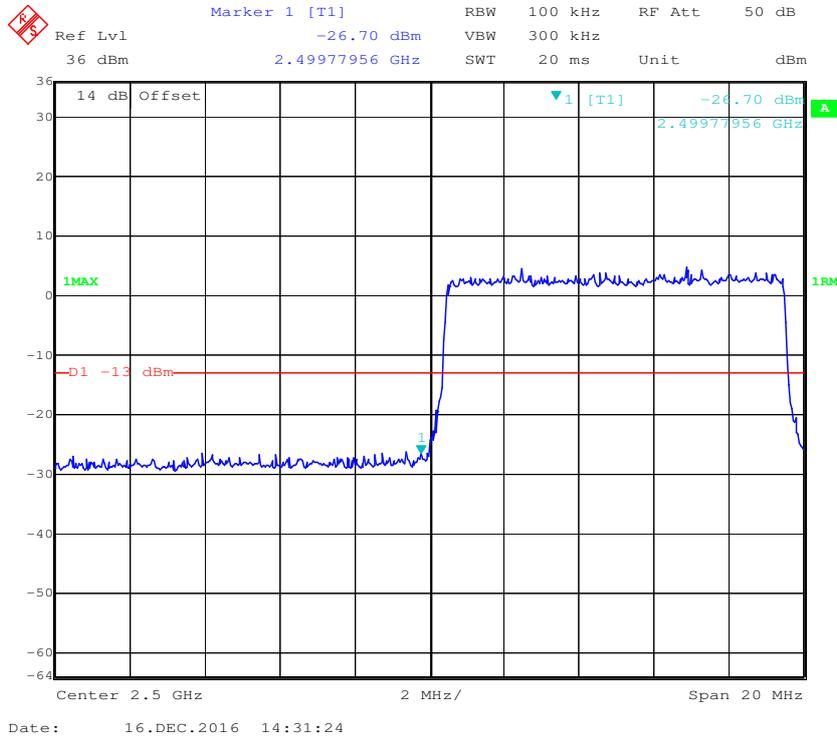


16-QAM (10.0 MHz, FULL RB) - Right Band Edge

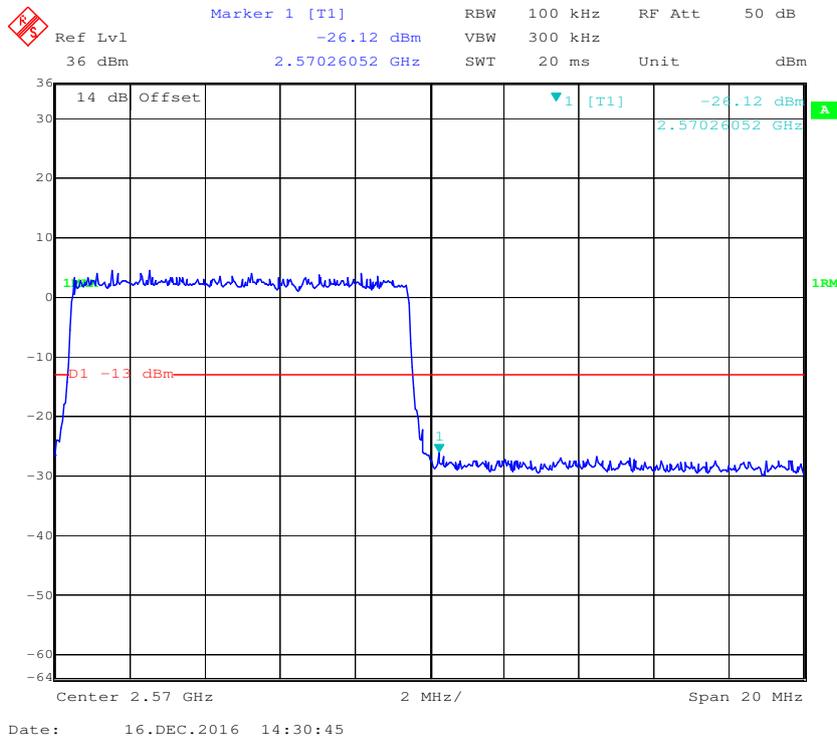


QPSK (15 MHz, FULL RB) - Left Band Edge

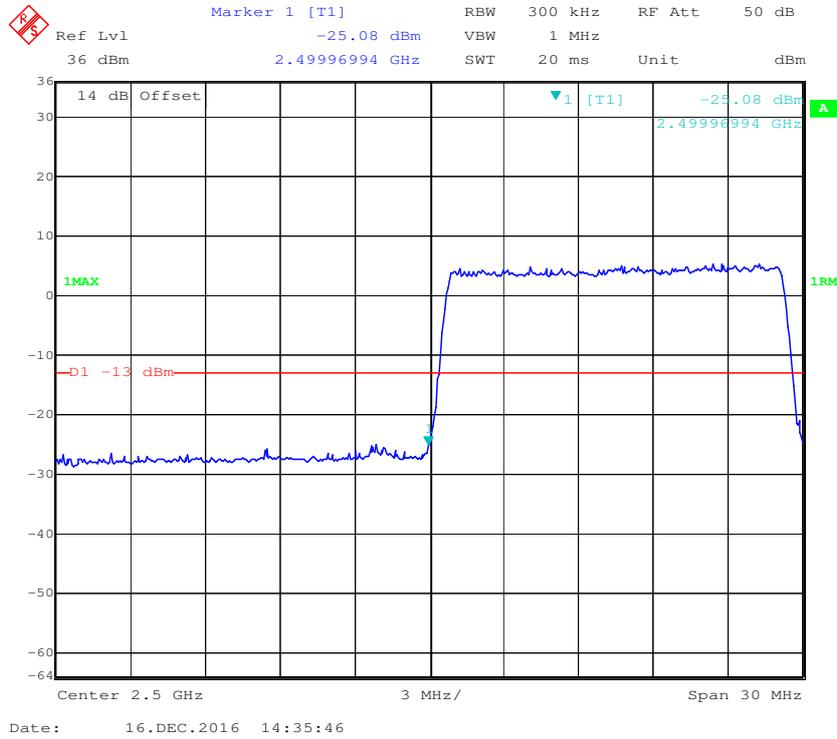


QPSK (15 MHz, FULL RB) - Right Band Edge

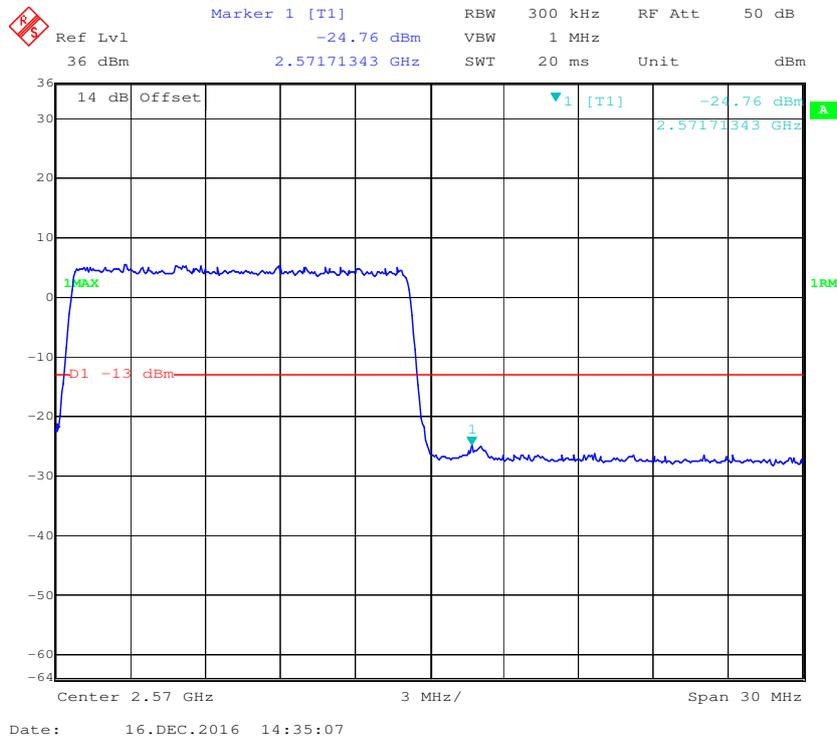


16-QAM (15 MHz, FULL RB) - Left Band Edge

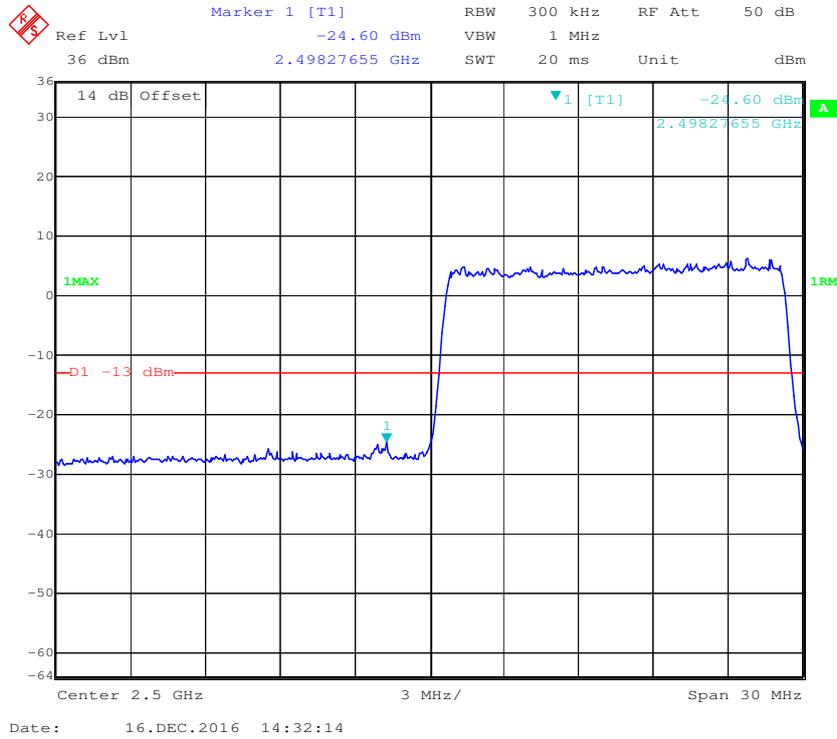


16-QAM (15 MHz, FULL RB) - Right Band Edge

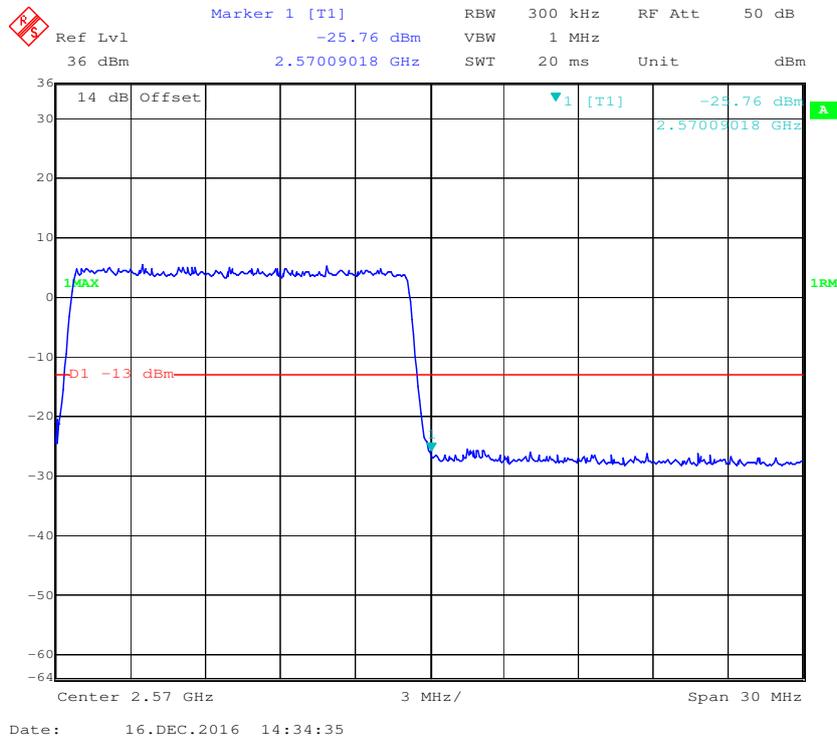


QPSK (20 MHz, FULL RB) - Left Band Edge

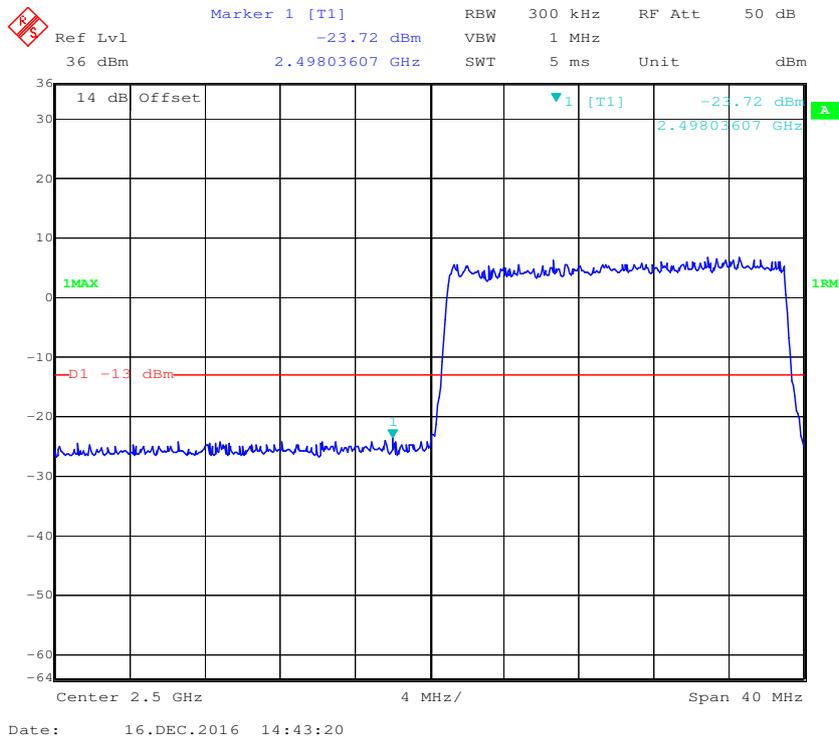


QPSK (20 MHz, FULL RB) - Right Band Edge

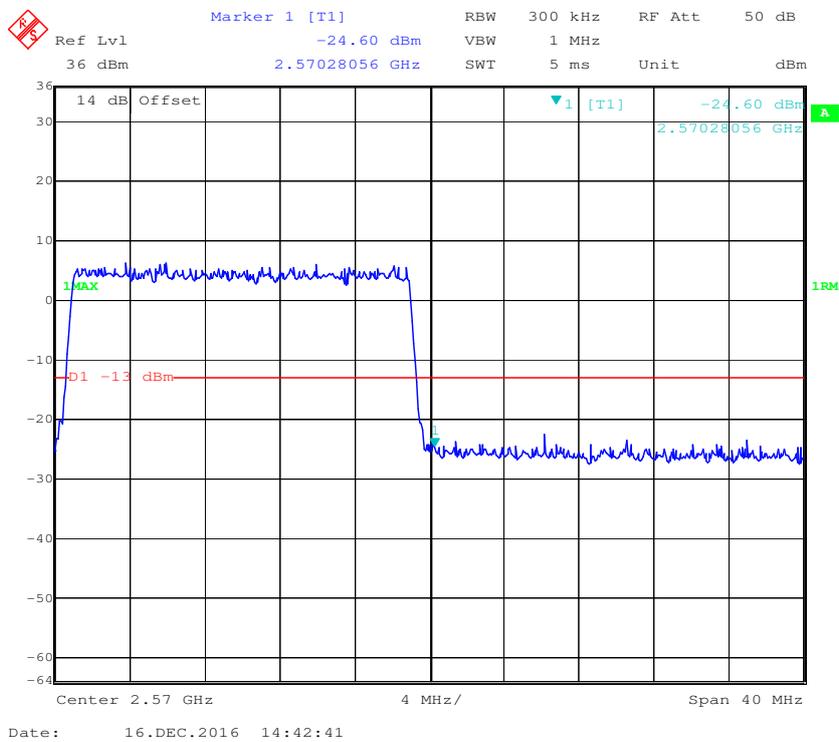

16-QAM (20 MHz, FULL RB) - Left Band Edge

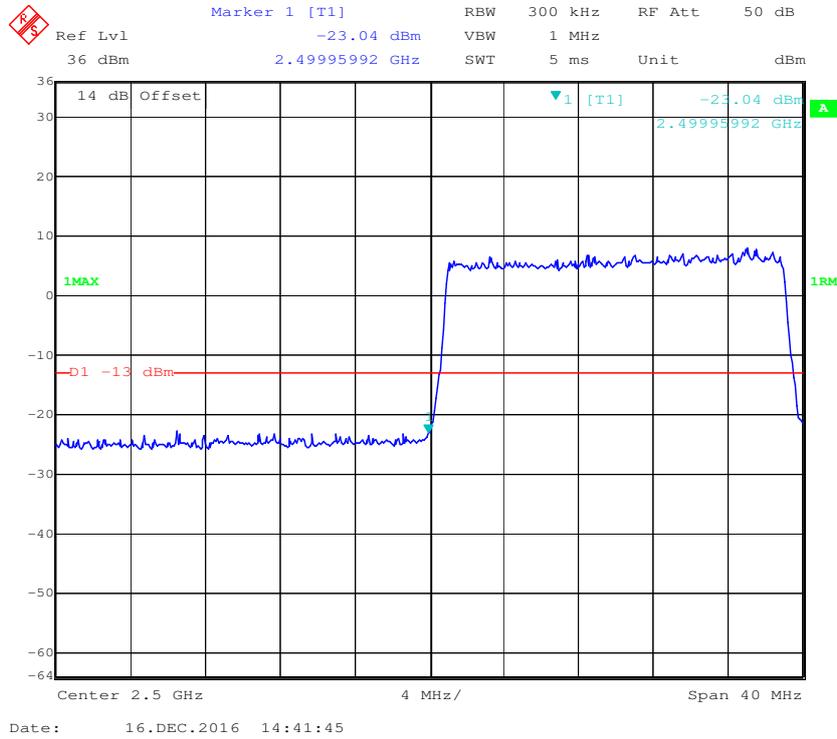


16-QAM (20 MHz, FULL RB) - Right Band Edge

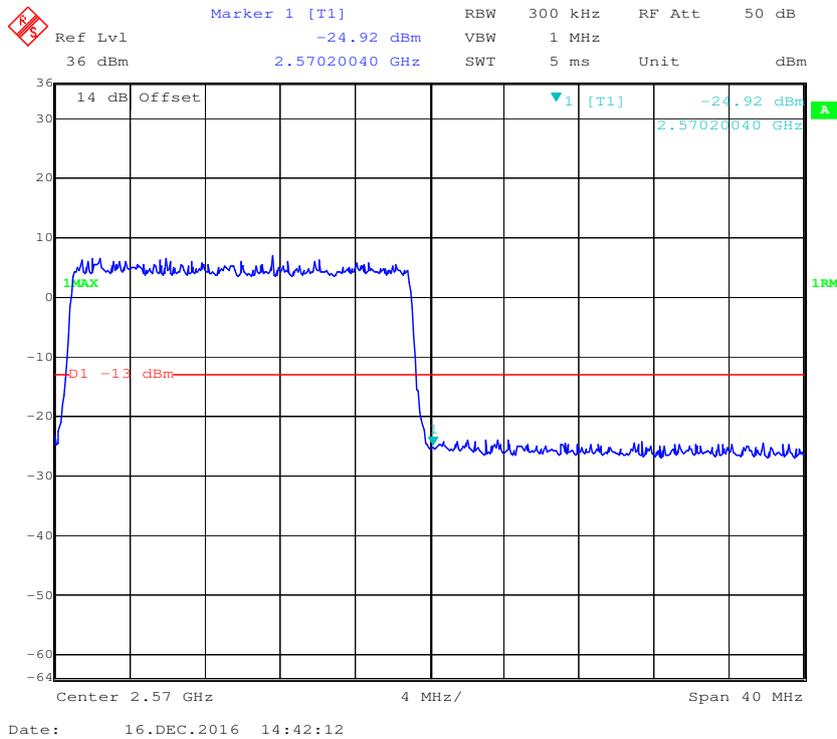


Band 12:


QPSK (1.4 MHz, FULL RB) - Left Band Edge

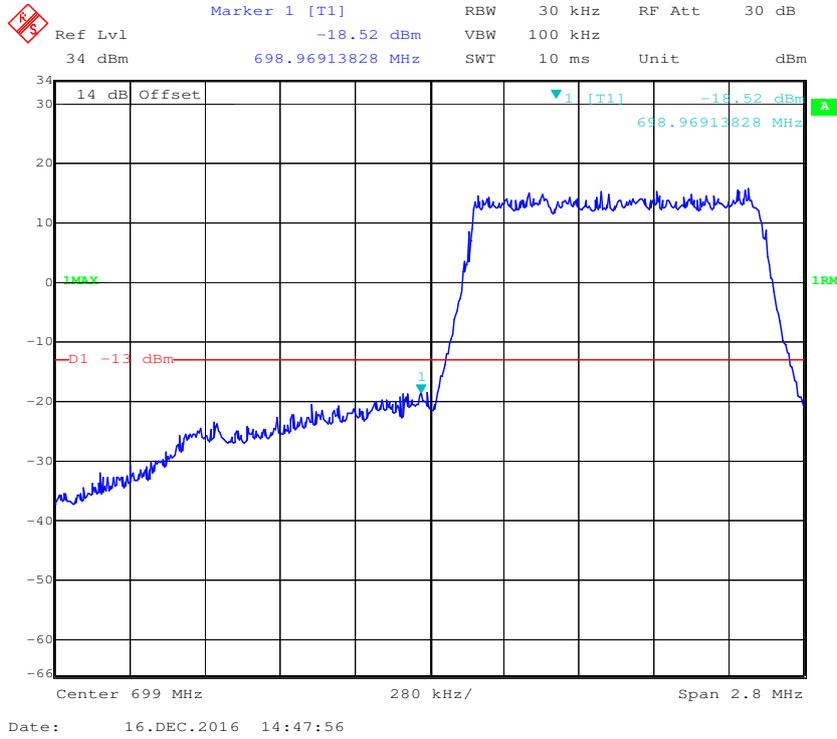


QPSK (1.4 MHz, FULL RB) - Right Band Edge

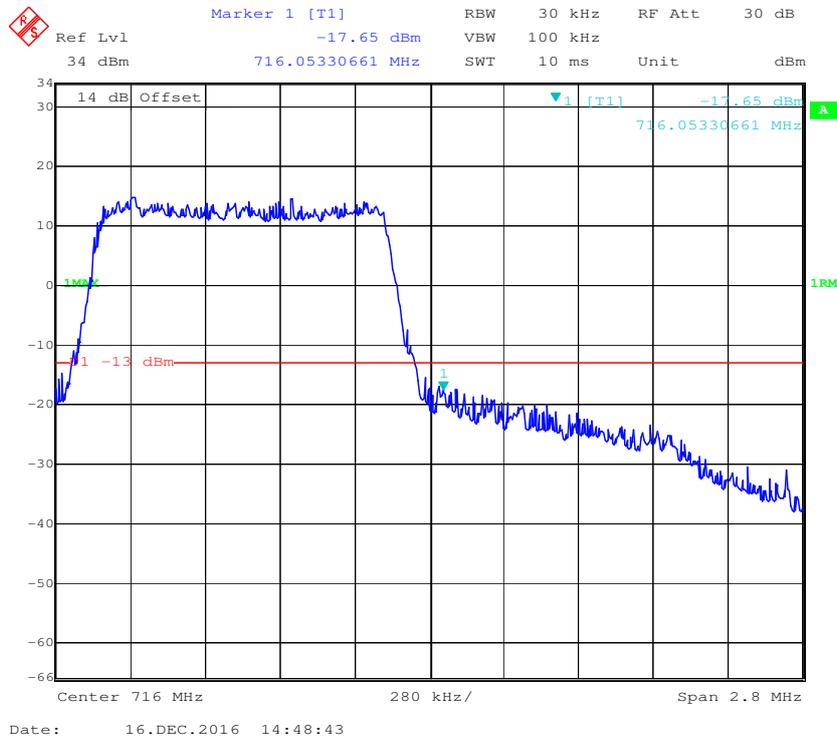


16-QAM (1.4 MHz, FULL RB) - Left Band Edge

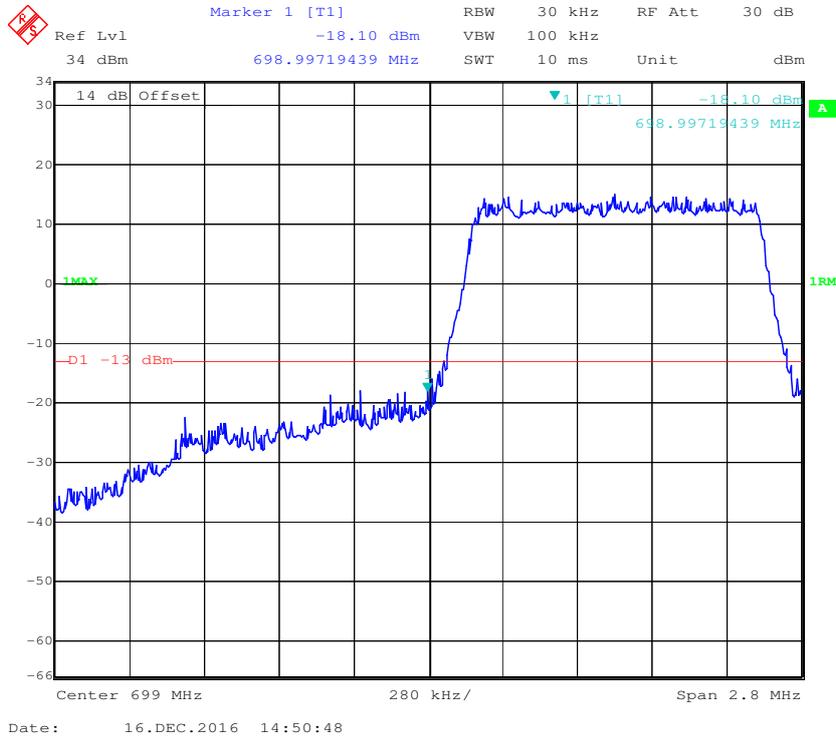


16-QAM (1.4 MHz, FULL RB) - Right Band Edge

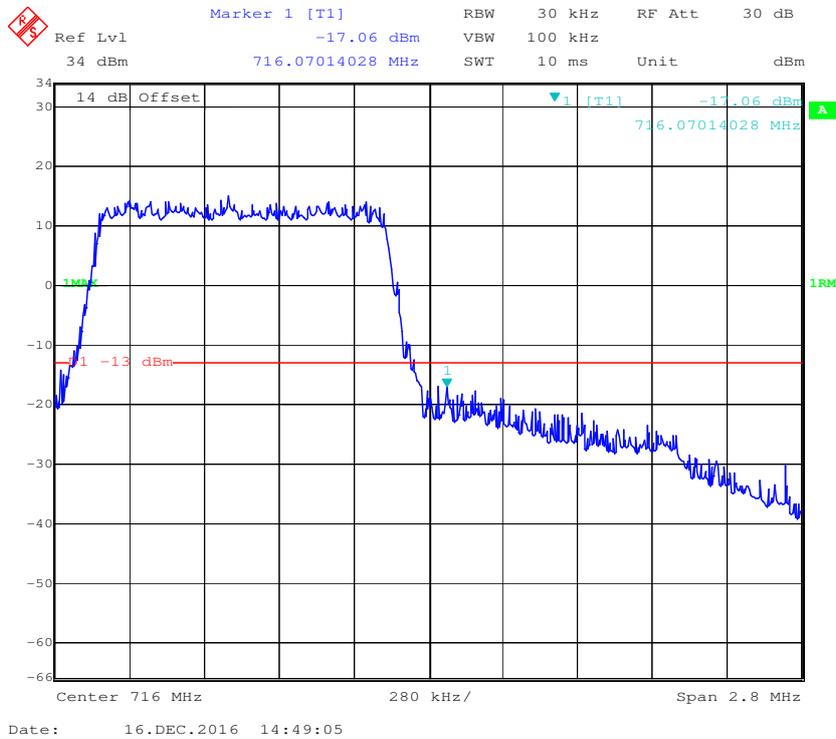


QPSK (3.0 MHz, FULL RB) - Left Band Edge

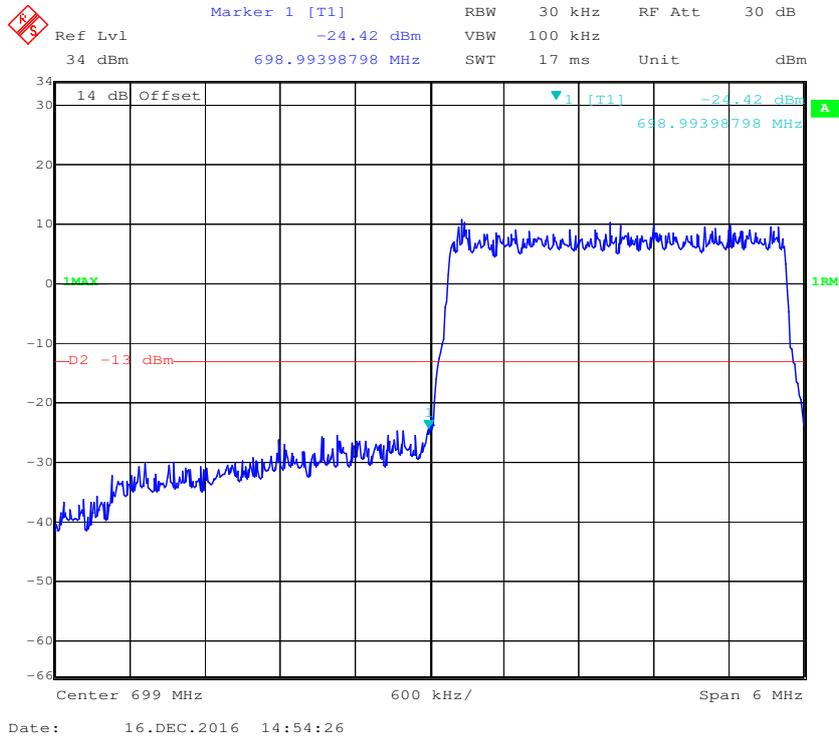


QPSK (3.0 MHz, FULL RB) - Right Band Edge

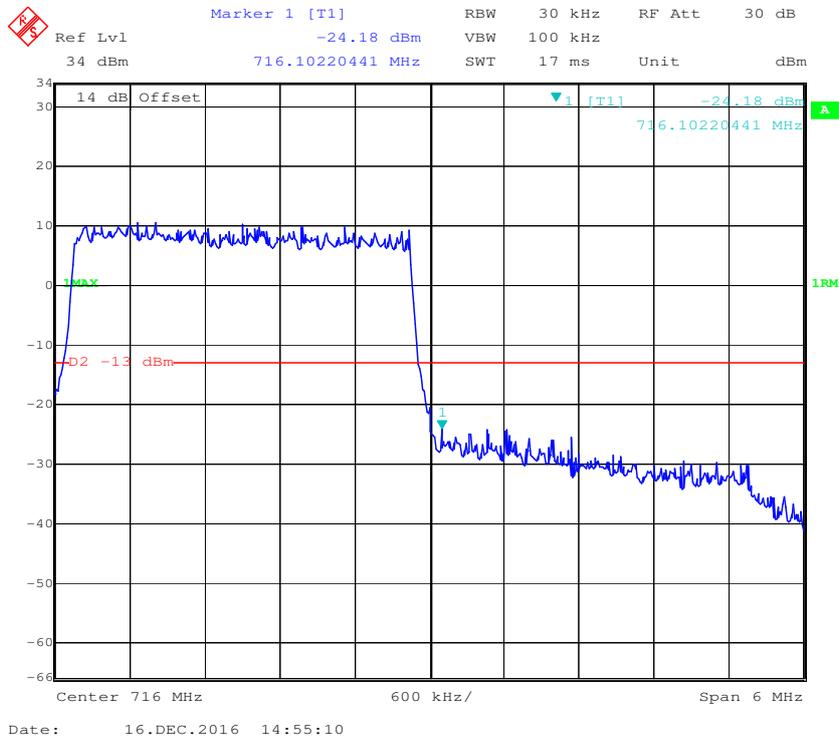


16-QAM (3.0 MHz, FULL RB) - Left Band Edge

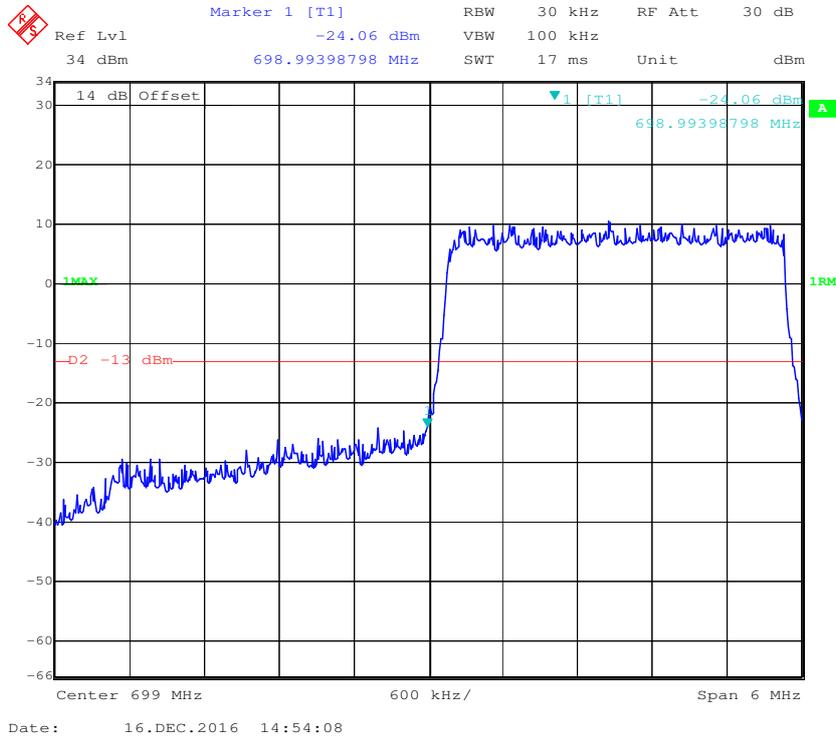


16-QAM (3.0 MHz, FULL RB) - Right Band Edge

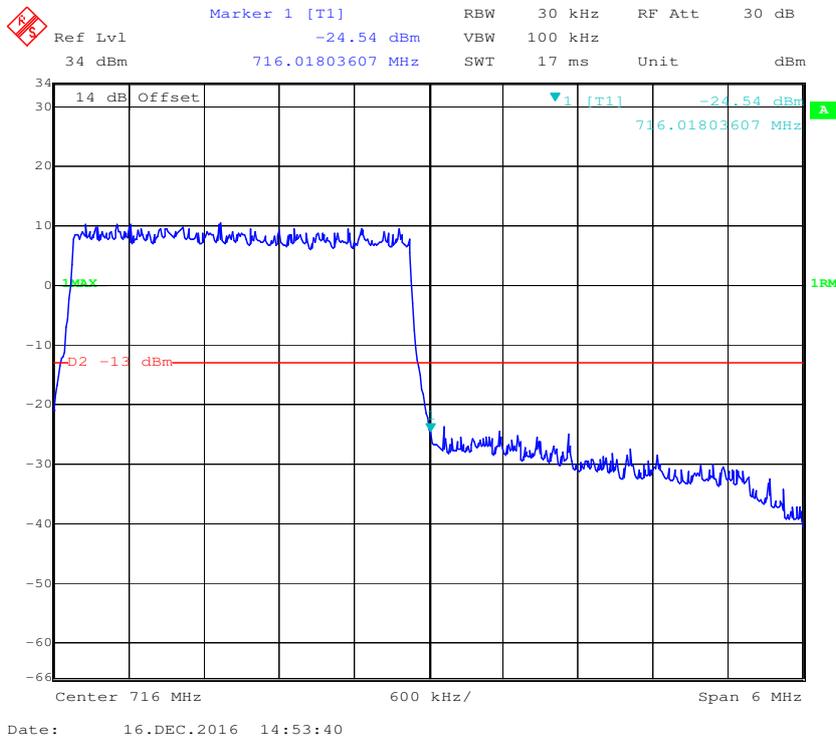


QPSK (5.0 MHz, FULL RB) - Left Band Edge

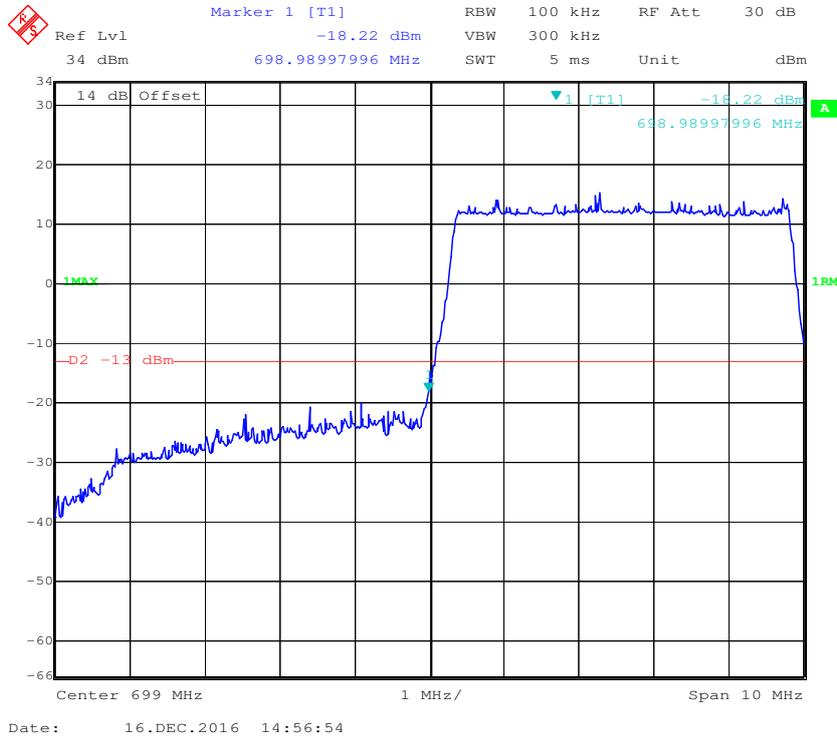


QPSK (5.0 MHz, FULL RB) - Right Band Edge

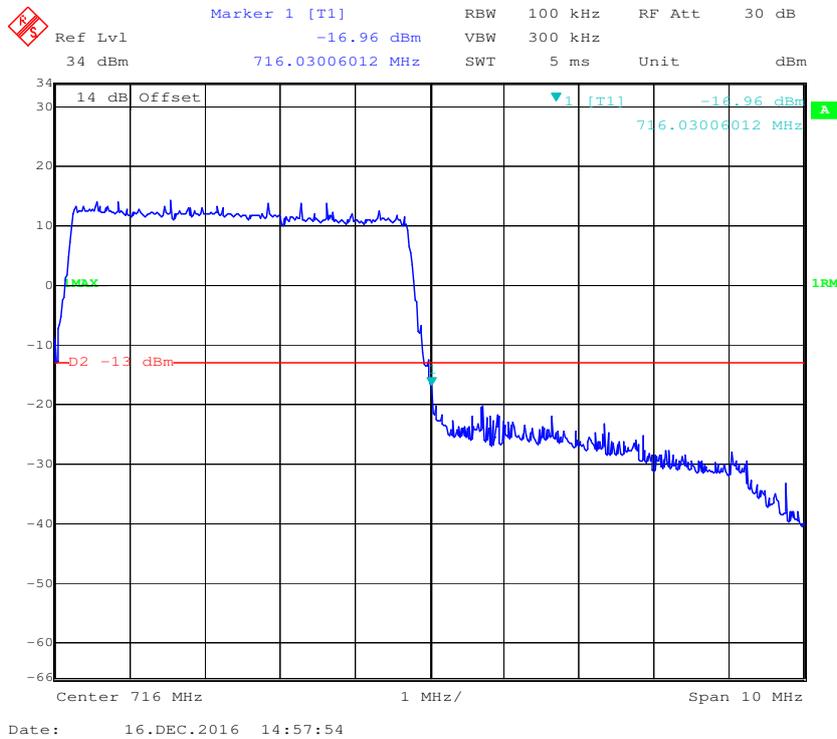


16-QAM (5.0 MHz, FULL RB) - Left Band Edge

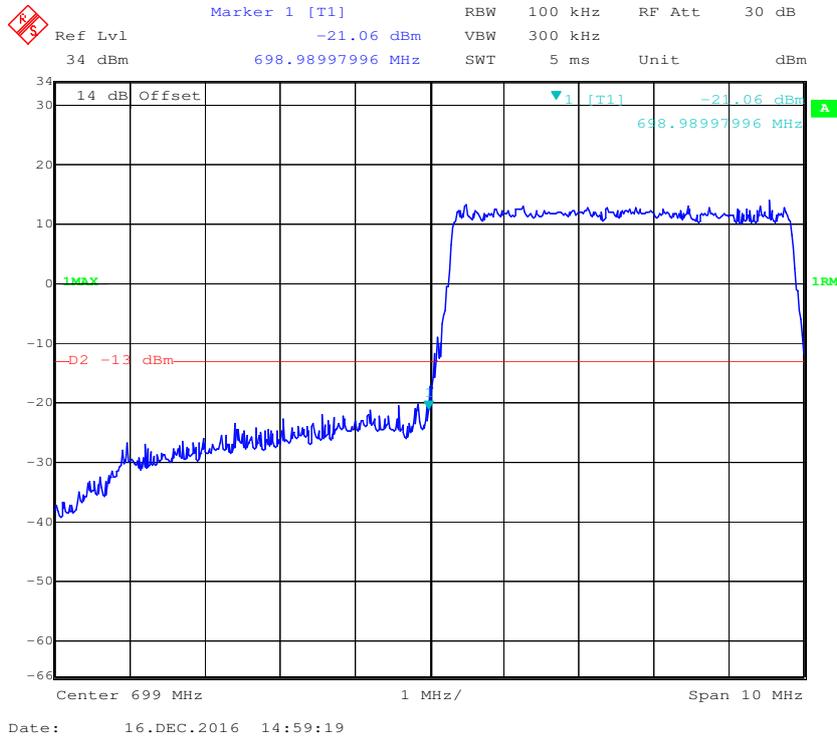


16-QAM (5.0 MHz, FULL RB) - Right Band Edge

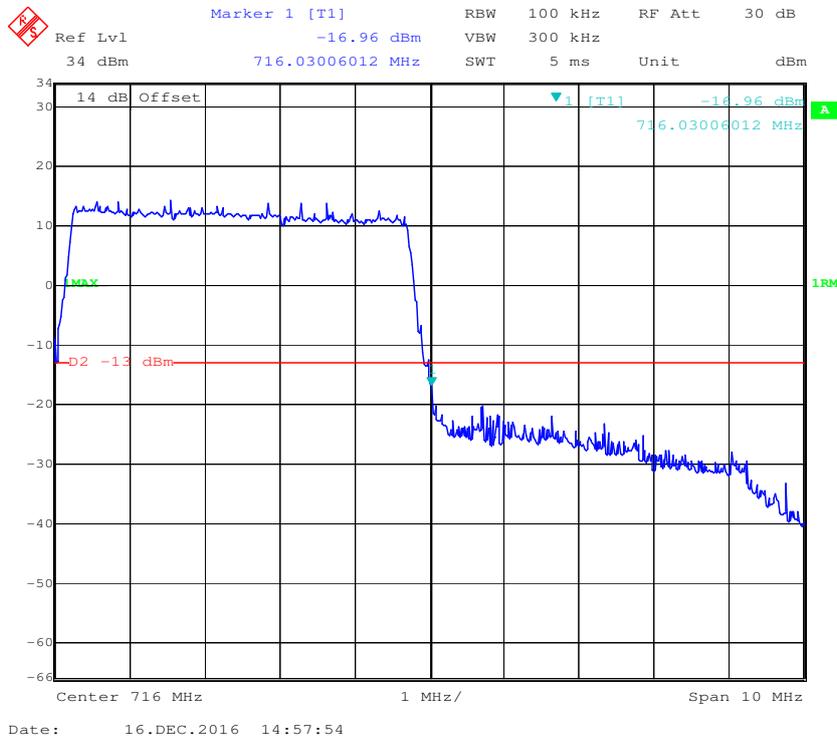


QPSK (10.0 MHz, FULL RB) - Left Band Edge

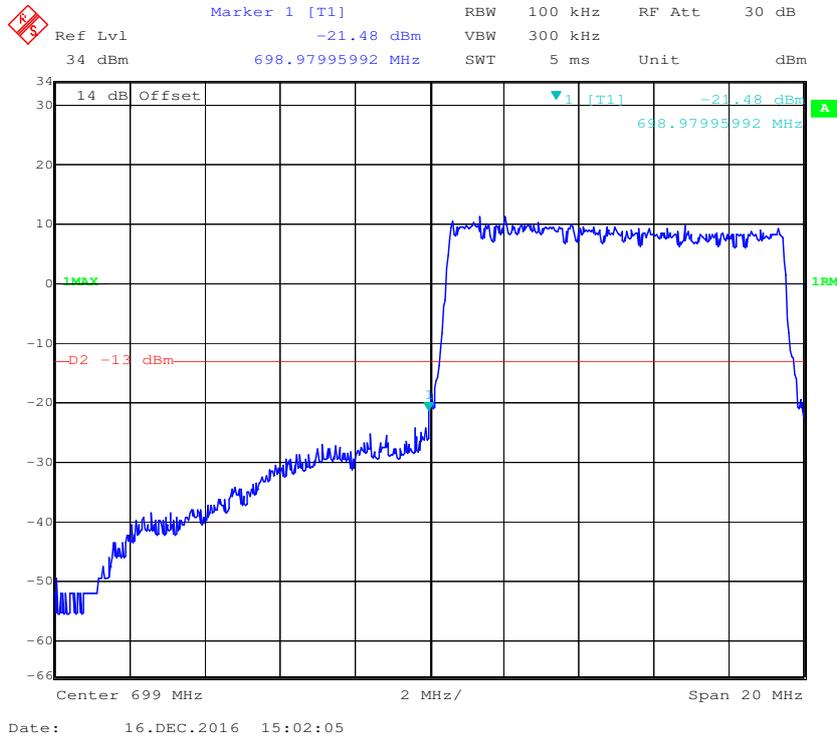


QPSK (10.0 MHz, FULL RB) - Right Band Edge

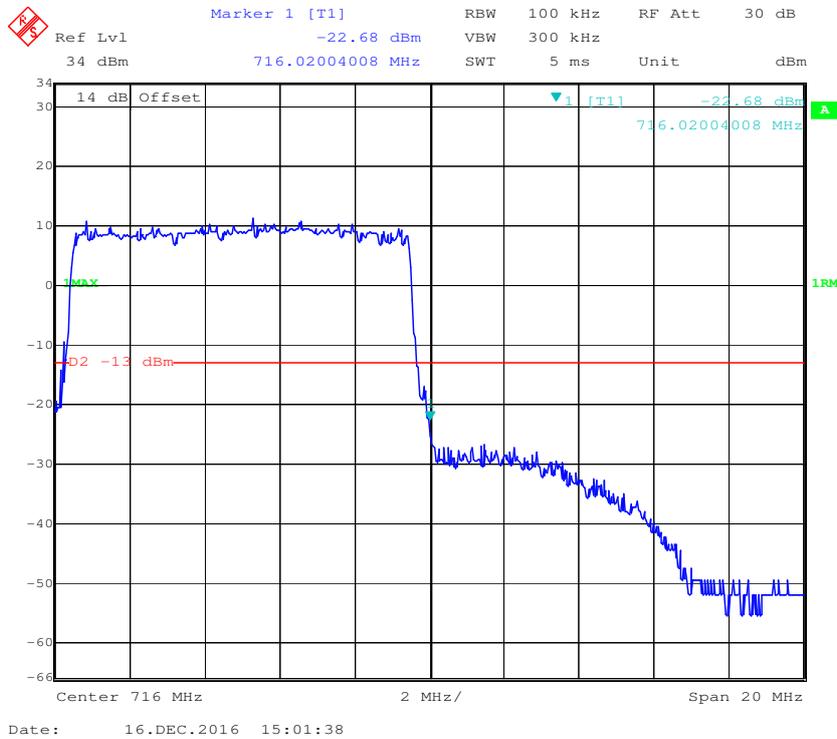

16-QAM (10.0 MHz, FULL RB) - Left Band Edge

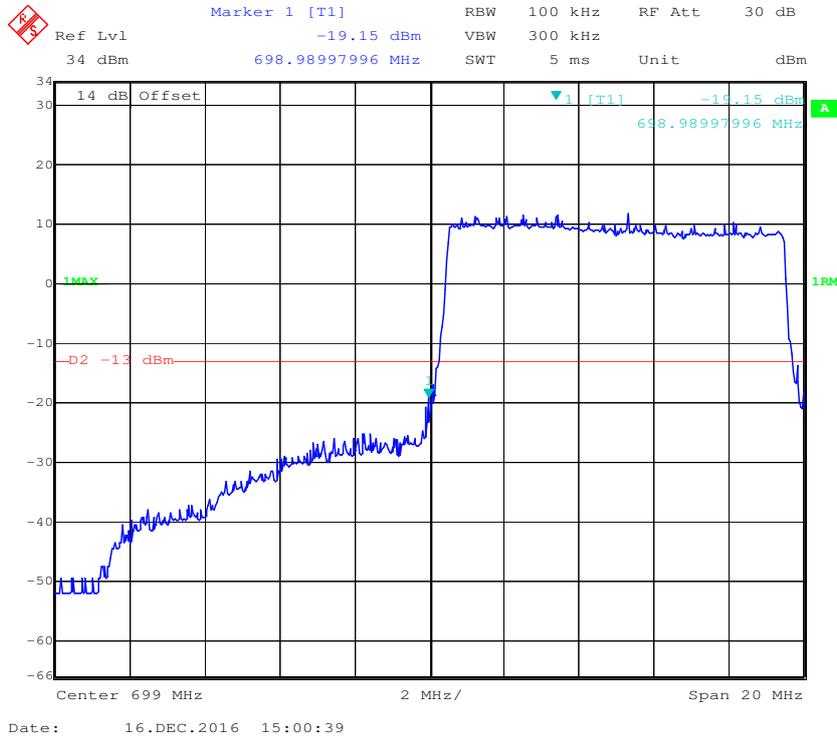


16-QAM (10.0 MHz, FULL RB) - Right Band Edge

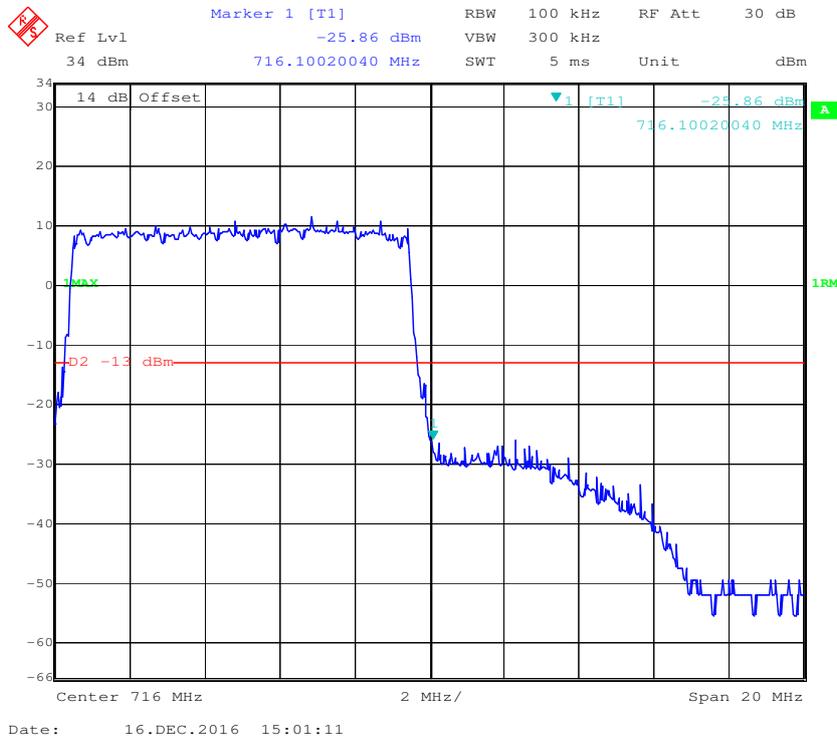


Band 17:


QPSK (5.0 MHz, FULL RB) - Left Band Edge

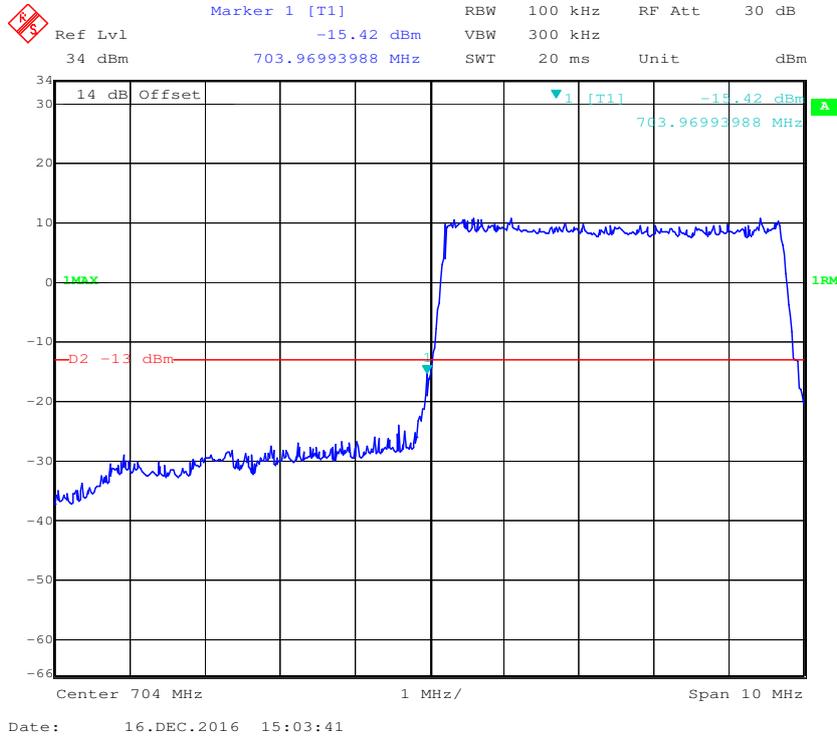


QPSK (5.0 MHz, FULL RB) - Right Band Edge

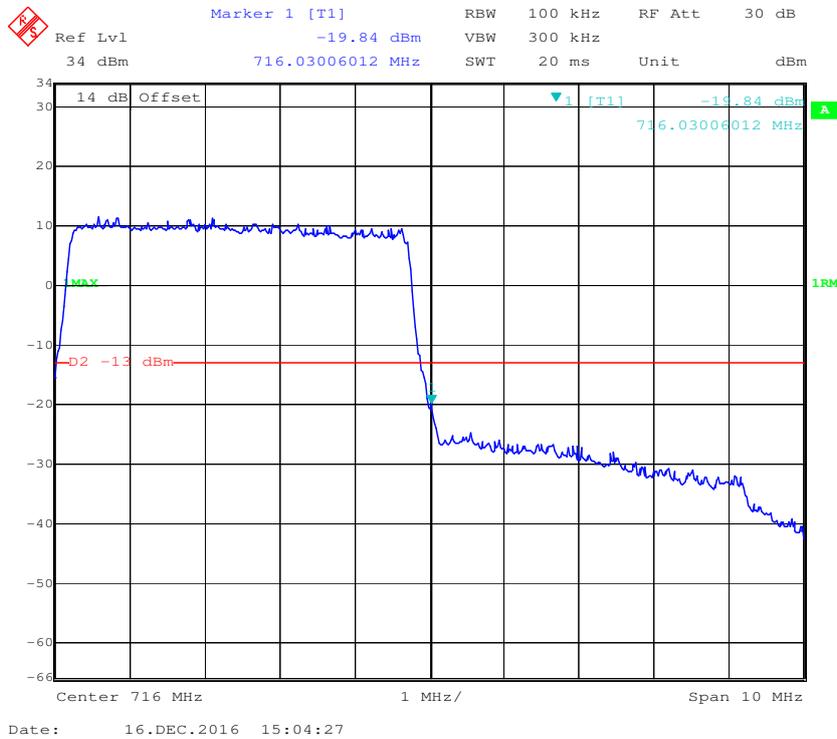


16-QAM (5.0 MHz, FULL RB) - Left Band Edge

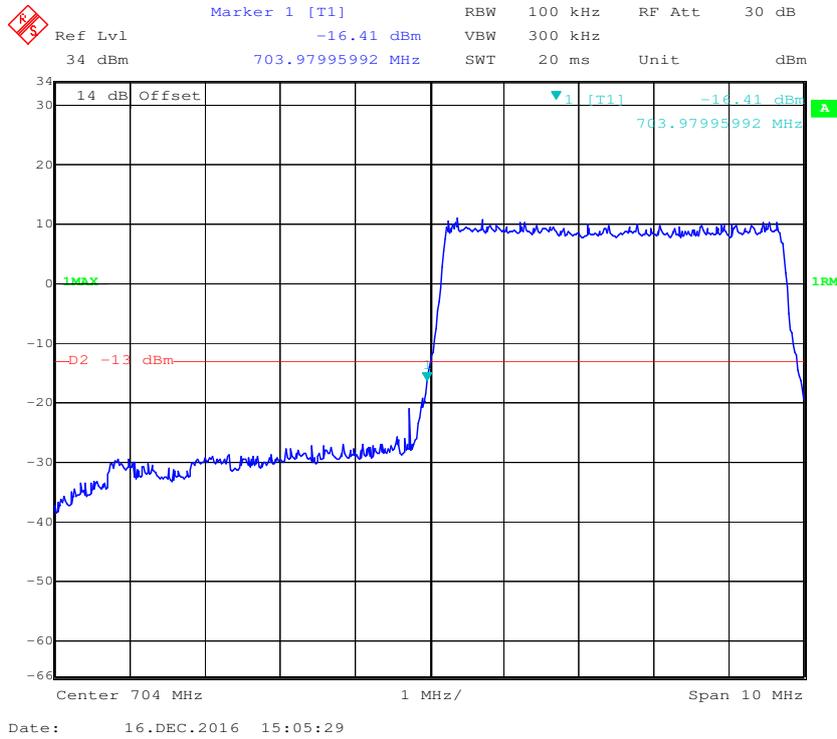


16-QAM (5.0 MHz, FULL RB) - Right Band Edge

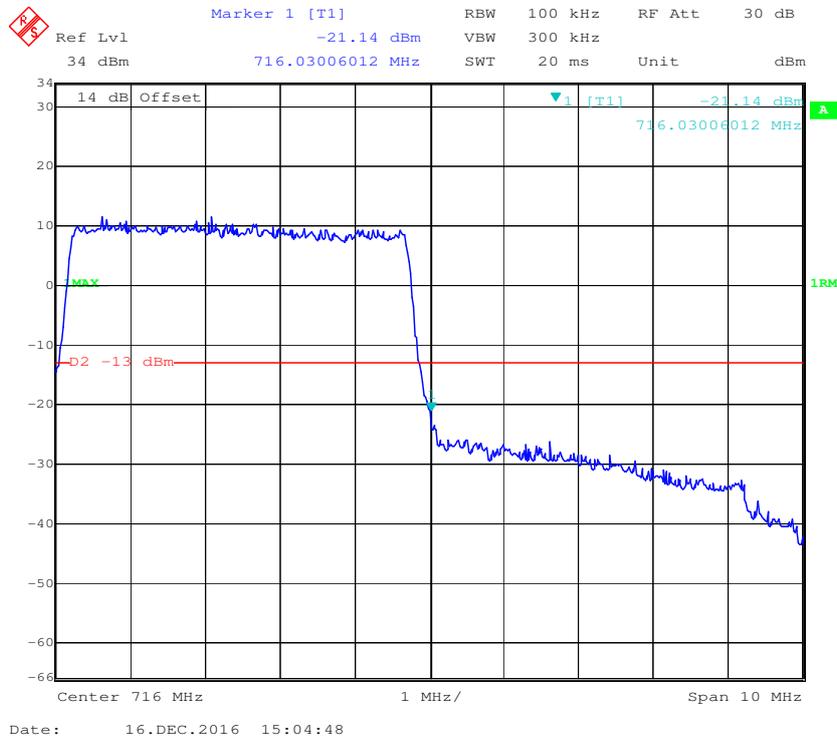

16-QAM (10.0 MHz, FULL RB) - Left Band Edge

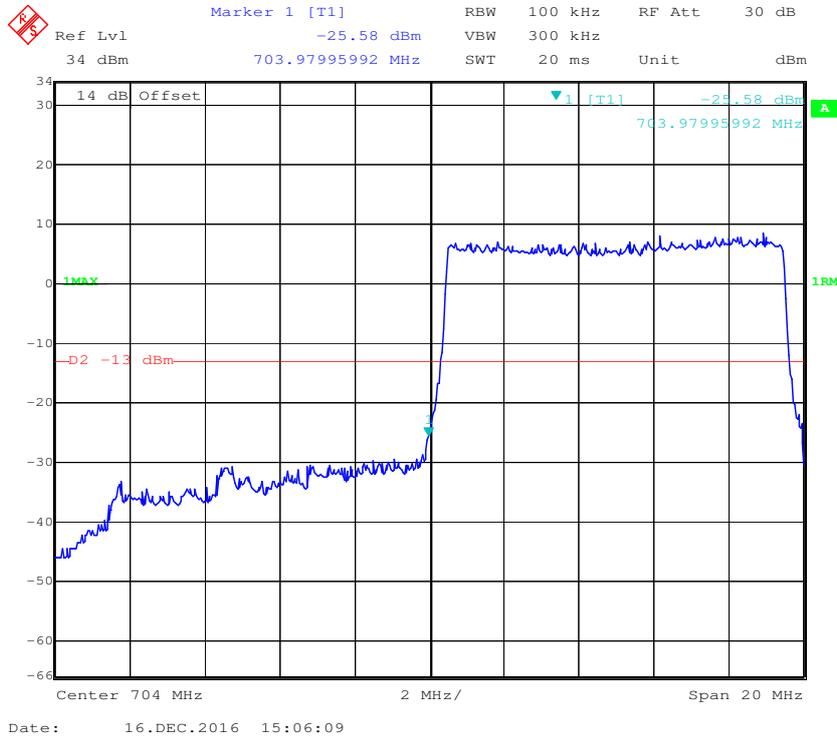

16-QAM (10.0 MHz, FULL RB) - Right Band Edge

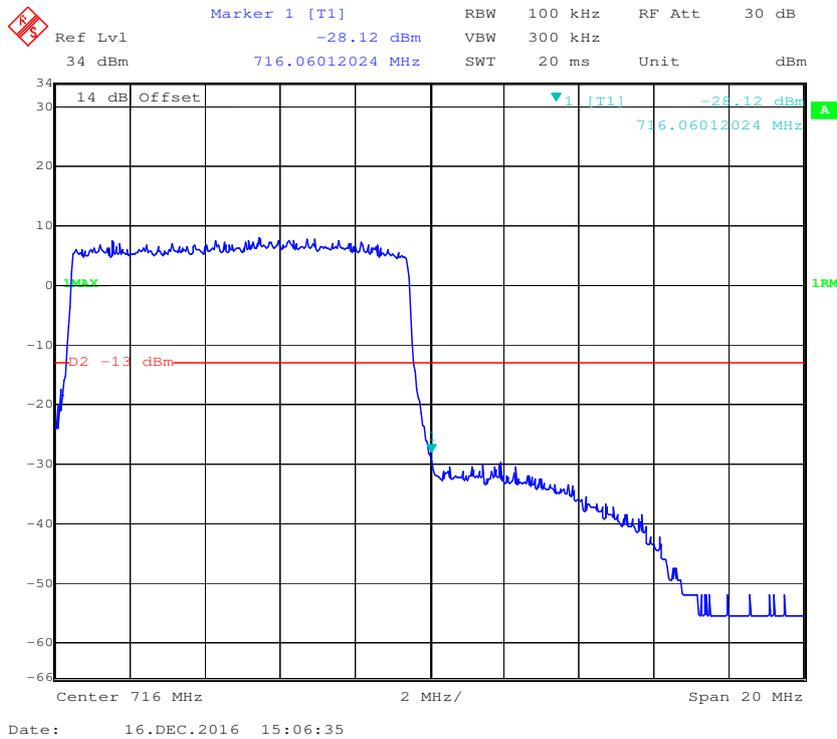

FCC § 2.1055; § 22.355; § 24.235; §27.54; - FREQUENCY STABILITY

Applicable Standards

FCC § 2.1055, §22.355, §24.235 and & §27.54.

According to FCC §2.1055, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile > 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

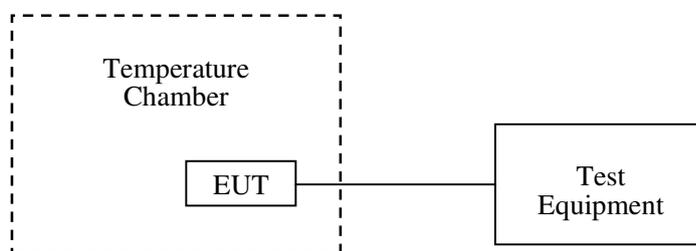

Test Data

Environmental Conditions

Temperature:	25°C
Relative Humidity:	55 %
ATM Pressure:	101.0kPa

The testing was performed by Ada Yu on 2016-10-08.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables.

Cellular Band (Part 22H)

GSM Mode

Middle Channel, $f_0 = 836.6$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.8	12	0.01434	2.5
-20		13	0.01554	2.5
-10		5	0.00598	2.5
0		3	0.00359	2.5
10		8	0.00956	2.5
20		7	0.00837	2.5
30		16	0.01913	2.5
40		18	0.02152	2.5
50		10	0.01195	2.5
20		V min.= 3.6	11	0.01315
	V max.= 4.2	16	0.01913	2.5

EDGE Mode

Middle Channel, $f_0 = 836.6$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.8	7	0.00837	2.5
-20		8	0.00956	2.5
-10		6	0.00717	2.5
0		11	0.01315	2.5
10		5	0.00598	2.5
20		9	0.01076	2.5
30		10	0.01195	2.5
40		13	0.01554	2.5
50		12	0.01434	2.5
20	V min.= 3.6	17	0.02032	2.5
	V max.= 4.2	15	0.01793	2.5

WCDMA Mode

Middle Channel, $f_0 = 836.6$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.8	15	0.01793	2.5
-20		14	0.01673	2.5
-10		10	0.01195	2.5
0		6	0.00717	2.5
10		6	0.00717	2.5
20		12	0.01434	2.5
30		22	0.02630	2.5
40		8	0.00956	2.5
50		10	0.01195	2.5
20	V min.= 3.6	12	0.01434	2.5
	V max.= 4.2	11	0.01315	2.5

PCS Band (Part 24E)

GSM Mode

Middle Channel, $f_o = 1880.0$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.8	24	0.01277	pass
-20		23	0.01223	pass
-10		22	0.01170	pass
0		21	0.01117	pass
10		20	0.01064	pass
20		19	0.01011	pass
30		24	0.01277	pass
40		27	0.01436	pass
50		29	0.01543	pass
20		V min.= 3.6	23	0.01223
	V max.= 4.2	26	0.01383	pass

EDGE Mode

Middle Channel, $f_o = 1880.0$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.8	26	0.01383	pass
-20		25	0.01330	pass
-10		21	0.01117	pass
0		23	0.01223	pass
10		26	0.01383	pass
20		31	0.01649	pass
30		22	0.01170	pass
40		27	0.01436	pass
50		24	0.01277	pass
20		V min.= 3.6	29	0.01543
	V max.= 4.2	21	0.01117	pass

WCDMA Mode

Middle Channel, $f_0=1880.0$ MHz				
Temperature (°C)	Power Supplied (V_{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.8	24	0.01277	pass
-20		22	0.01170	pass
-10		20	0.01064	pass
0		18	0.00957	pass
10		16	0.00851	pass
20		17	0.00904	pass
30		14	0.00745	pass
40		19	0.01011	pass
50		25	0.01330	pass
20		V min.= 3.6	22	0.01170
	V max.= 4.2	28	0.01489	pass

Middle Channel, $f_0=1732.6$ MHz				
Temperature (°C)	Power Supplied (V_{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.8	14	0.00808	pass
-20		13	0.00750	pass
-10		6	0.00346	pass
0		11	0.00635	pass
10		10	0.00577	pass
20		9	0.00519	pass
30		5	0.00289	pass
40		7	0.00404	pass
50		6	0.00346	pass
20		V min.= 3.6	3	0.00173
	V max.= 4.2	5	0.00289	pass

Band 2:

20.0 MHz Middle Channel, $f_0 = 1880\text{MHz}$ (QPSK)				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.8	17	0.00904	pass
-20		13	0.00691	pass
-10		11	0.00585	pass
0		10	0.00532	pass
10		9	0.00479	pass
20		16	0.00851	pass
30		18	0.00957	pass
40		20	0.01064	pass
50		21	0.01117	pass
20		V min.= 3.6	23	0.01223
	V max.= 4.2	25	0.01330	pass

Band 4:

20.0 MHz Middle Channel, $f_0 = 1732.5\text{ MHz}$ (QPSK)				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.8	26	0.01501	pass
-20		24	0.01385	pass
-10		22	0.01270	pass
0		20	0.01154	pass
10		19	0.01097	pass
20		18	0.01039	pass
30		15	0.00866	pass
40		10	0.00577	pass
50		12	0.00693	pass
20		V min.= 3.6	13	0.00750
	V max.= 4.2	16	0.00924	pass

Band 7:

20.0 MHz Middle Channel, $f_0=2535$ MHz (QPSK)				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.8	24	0.00947	pass
-20		26	0.01026	pass
-10		22	0.00868	pass
0		31	0.01223	pass
10		30	0.01183	pass
20		19	0.00750	pass
30		20	0.00789	pass
40		22	0.00868	pass
50		32	0.01262	pass
20		V min.= 3.6	34	0.01341
	V max.= 4.2	37	0.01460	pass

Band 12:

10.0 MHz Middle Channel, $f_0=707$ MHz (QPSK)				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.8	6	0.00849	pass
-20		7	0.00990	pass
-10		3	0.00424	pass
0		6	0.00849	pass
10		4	0.00566	pass
20		7	0.00990	pass
30		8	0.01132	pass
40		5	0.00707	pass
50		10	0.01414	pass
20		V min.= 3.6	12	0.01697
	V max.= 4.2	17	0.02405	pass

Band 17:

10.0 MHz Middle Channel, $f_0=710$ MHz (QPSK)				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.8	11	0.01549	pass
-20		5	0.00704	pass
-10		3	0.00423	pass
0		8	0.01127	pass
10		1	0.00141	pass
20		2	0.00282	pass
30		7	0.00986	pass
40		4	0.00563	pass
50		9	0.01268	pass
20		V min.= 3.6	4	0.00563
	V max.= 4.2	1	0.00141	pass

******* END OF REPORT *******