



TESTING LABORATORY
CERTIFICATE#4323.01



FCC PART 15.247

TEST REPORT

For

SHANGHAI WANWAY DIGITAL TECHNOLOGY CO., LTD

FLOOR 23 NO. 1999 WENCHUAN ROAD BAOSHAN DISTRICT,
SHANGHAI, China

FCC ID: 2AWBA-GS22



Report Type: Original Report	Product Type: GPS Tracker
Project Engineer:	<u>Tyrone Wang</u> 
Report Number:	<u>RSHE210118001-00C</u>
Report Date:	<u>2021-09-08</u>
Reviewed By:	<u>Kyle Xu</u> 
Prepared By:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION	5
EQUIPMENT MODIFICATIONS	5
EUT EXERCISE SOFTWARE	5
SUPPORT EQUIPMENT LIST AND DETAILS	8
EXTERNAL I/O CABLE.....	8
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	10
NOTE: The product will be used in a vehicle environment.....	10
TEST EQUIPMENT LIST	11
FCC §1.1310 & §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE)	12
FCC §15.203 - ANTENNA REQUIREMENT.....	14
APPLICABLE STANDARD	14
ANTENNA CONNECTOR CONSTRUCTION	14
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	15
APPLICABLE STANDARD	15
EUT SETUP	15
EMI TEST RECEIVER SETUP.....	16
TEST PROCEDURE	16
TEST RESULTS SUMMARY	16
TEST DATA	17
FCC §15.247(A) (2) - 6 DB EMISSION BANDWIDTH& OCCUPIED BANDWIDTH	39
APPLICABLE STANDARD	39
TEST PROCEDURE	39
TEST DATA	39
FCC §15.247(B) (3) - MAXIMUM CONDUCTED OUTPUT POWER	54
APPLICABLE STANDARD	54
TEST PROCEDURE	54
TEST DATA	54
FCC §15.247(D) – 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	56
APPLICABLE STANDARD	56
TEST PROCEDURE	56
TEST DATA	56
FCC §15.247(E) - POWER SPECTRAL DENSITY.....	61
APPLICABLE STANDARD	61
TEST PROCEDURE	61
TEST DATA	61

GENERAL INFORMATION**Product Description for Equipment under Test (EUT)**

Applicant:	SHANGHAI WANWAY DIGITAL TECHNOLOGY CO., LTD
Tested Model:	GS22
Series Model:	GS22A GS22E GS22U GS22N GS22F GS21 GS21A
Product Type:	GPS Tracker
Power Supply:	DC 3.7V from battery, DC 9~35V from external power supply
Maximum Output Power:	802.11b: 22.79dBm 802.11g: 22.40dBm; 802.11n20: 22.54dBm 802.11n40: 21.75dBm
RF Function:	2.4G Wi-Fi
Operating Band/Frequency:	2412~2462 MHz(802.11b/g/n20), 2422~2452 MHz(802.11n40)
Channel Number:	11(802.11 b/g/n20), 7(802.11n40)
Channel Separation:	5 MHz
Modulation Type:	DSSS, OFDM
Antenna Type:	FPC Antenna
*Maximum Antenna Gain:	2.47 dBi

**Note: The antenna gain was provided by the applicant.*

All measurement and test data in this report was gathered from production sample serial number: RSHE210118001-1 (Assigned by the BACL. The EUT supplied by the applicant was received on 2021-01-18)

Objective

This report is prepared on behalf of *SHANGHAI WANWAY DIGITAL TECHNOLOGY CO., LTD* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions' rules.

The tests were performed in order to determine Compliant with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 22H24E27 PCB submissions with FCC ID: 2AWBA-GS22.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliant Testing of Unlicensed Wireless Devices and FCC 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliant Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Test channel list is as below:

For 802.11b, 802.11g and 802.11n-HT20 mode, EUT was tested with Channel 1, 6 and 11.

For 802.11n-HT40 mode, EUT was tested with Channel 3, 6 and 9.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

RF test tool: QRCT 3

Pre-scan with all the data rates, and the worst case was performed as below:

Mode	Data Rate	Channel	*Power Level Setting
802.11b	1 Mbps	Low	20
		Middle	20
		High	20
802.11g	6 Mbps	Low	16
		Middle	16
		High	16
802.11n-HT20	MCS0	Low	16
		Middle	16
		High	16
802.11n-HT40	MCS0	Low	13
		Middle	13
		High	13


*Note: The power level setting was declared by the applicant.

Duty Cycle:


802.11b Mode Middle Channel




802.11g Mode Middle Channel

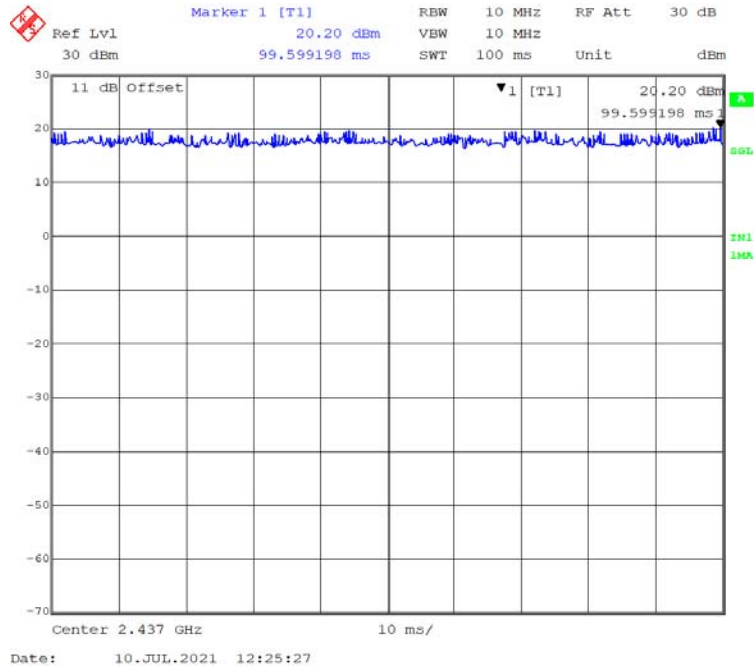

802.11n-HT20 Mode Middle Channel

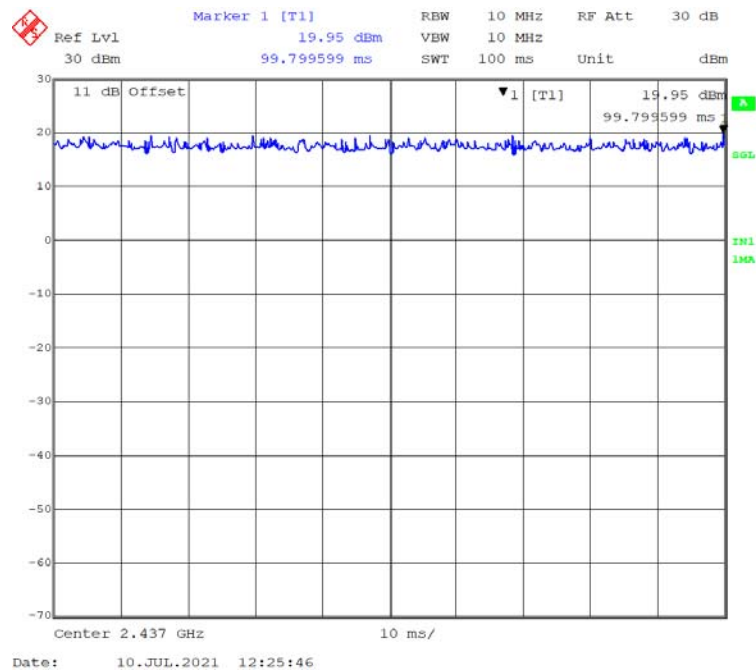

802.11n-HT40 Mode Middle Channel

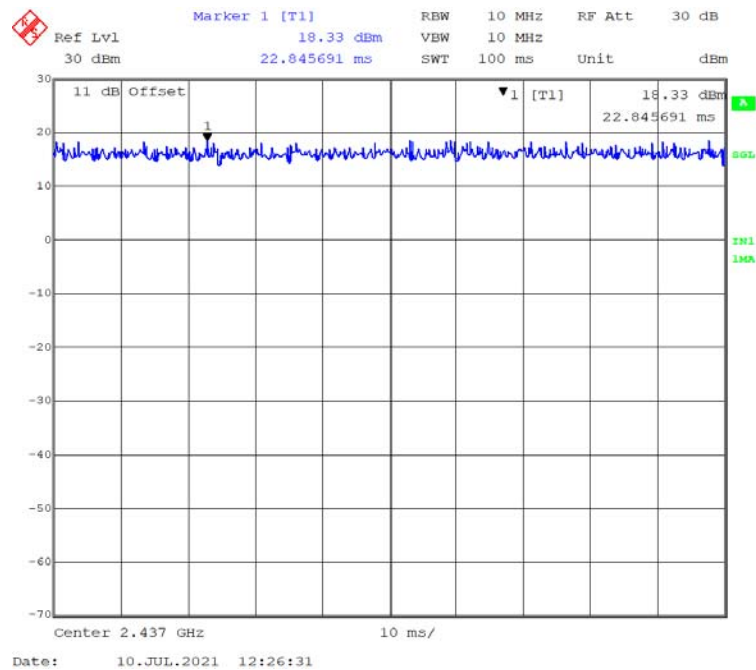

Mode	Duty Cycle (%)	T _{on} (ms)	T _{on+off} (ms)	10log(1/x)
802.11b	100	100	100	0
802.11g	100	100	100	0
802.11n-HT20	100	100	100	0
802.11n-HT40	100	100	100	0

Note: “x” means the Duty Cycle.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
MESTEK	DC Power Supply	DP3020	20190901401

External I/O Cable


Cable Description	Length(m)	From Port	To
Power Cable	1.0	EUT	DC Source
Power Cable	1.0	DC Source	AC Source

Block Diagram of Test Setup

For Radiated Emissions (Below 1GHz):

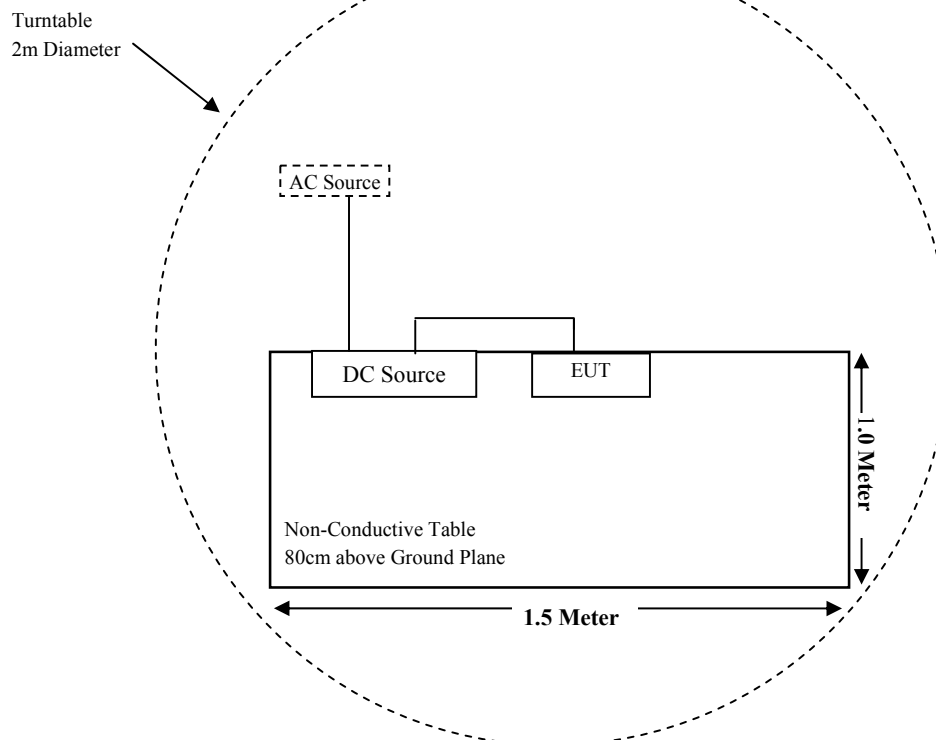

For Radiated Emissions (Above 1GHz):

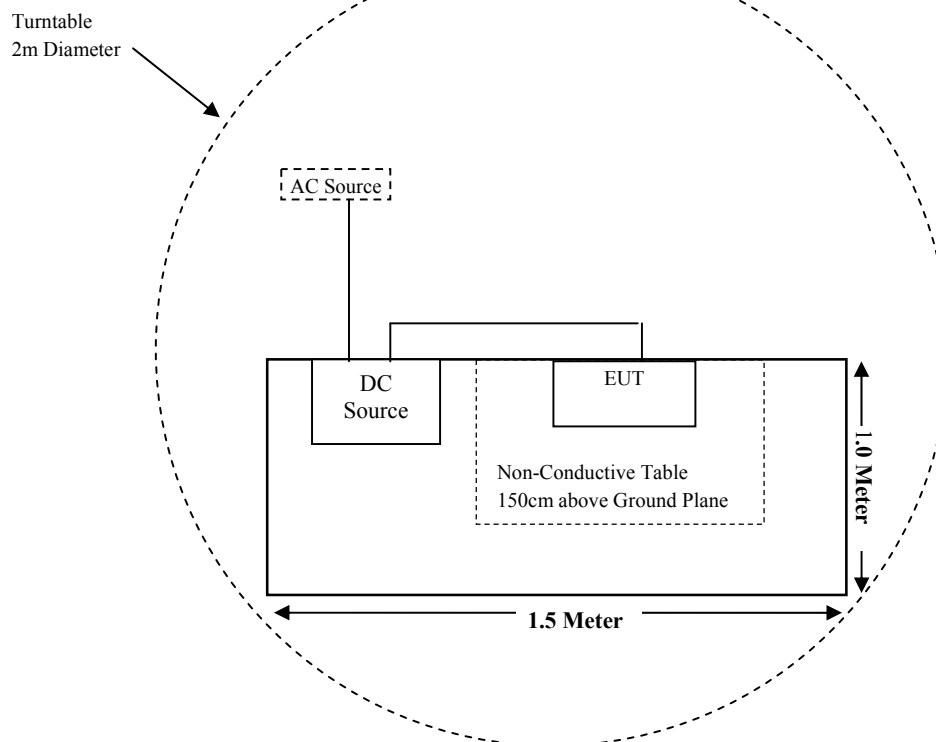

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (I), §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Not Applicable (See note)
§15.247(d)	Spurious Emissions at Antenna Port	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth & Occupied Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

NOTE: The product will be used in a vehicle environment.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2020-11-27	2021-11-26
Sunol Sciences	Broadband Antenna	JB3	A090314-2	2020-01-07	2023-01-06
Sonoma Instrument	Pre-amplifier	310N	171205	2020-08-14	2021-08-13
Rohde & Schwarz	Auto Test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-8	008	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2020-08-15	2021-08-14
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207/040	2021-04-01	2022-03-31
ETS-LINDGREN	Horn Antenna	3115	9311-4159	2020-07-15	2023-07-14
ETS-LINDGREN	Horn Antenna	3116	2516	2020-01-07	2023-01-06
A.H.Systems, inc	Amplifier	PAM-0118P	512	2020-08-14	2021-08-13
EM Electronics Corporation	Amplifier	EM18G40G	060726	2021-03-22	2022-03-21
MICRO-TRONICS	Band Reject Filter	BRM50702	G024	2020-08-05	2021-08-04
Narda	Attenuator	10dB	010	2020-08-15	2021-08-14
Rohde & Schwarz	Auto Test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-6	006	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2020-08-15	2021-08-14
RF Conducted Test					
EMI Test Receiver	Signal Analyzer	ESIB26	100146	2020-11-27	2021-11-26
Agilent	Power Sensor	N1921A	MY54210024	2020-11-18	2021-11-17
Agilent	Power meter	N1912A	MY5000492	2021-04-01	2022-03-31
Narda	Attenuator	10dB	010	2020-08-15	2021-08-14
Narda	Attenuator	10dB	010	2021-08-15	2022-08-14
WANWAY DIGITAL	RF Cable	WANWAY DIGITAL C01	C01	Each Time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1310 & §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart §2.1091 and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

2.4G WI-FI

Mode	Frequency Range (MHz)	Antenna Gain		Tune-up Output Power		Evaluation Distance (cm)	Power Density (mW/cm²)	MPE Limit (mW/cm²)
		(dBi)	(numeric)	(dBm)	(mW)			
802.11b	2412~2462	2.47	1.77	23.00	199.53	20	0.0701	1.0
802.11g		2.47	1.77	22.50	177.83	20	0.0625	1.0
802.11 n-HT20		2.47	1.77	23.00	199.53	20	0.0701	1.0
802.11 n-HT40	2422~2452	2.47	1.77	22.00	158.49	20	0.0557	1.0

WCDMA<E

Mode	Frequency Range (MHz)	Antenna Gain		Tune-up Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
WCDMA Band II	1850-1910	2.71	1.87	22.5	177.83	20	0.0661	1.0
WCDMA Band IV	1710-1755	1.85	1.53	22.5	177.83	20	0.0541	1.0
WCDMA Band V	824-849	-1.61	0.69	22.5	177.83	20	0.0244	0.55
LTE Band 2	1850-1910	2.71	1.87	22.5	177.83	20	0.0661	1.0
LTE Band 4	1710-1755	1.85	1.53	22.5	177.83	20	0.0541	1.0
LTE Band 12	699-716	0.50	1.12	22.5	177.83	20	0.0396	0.47

Note:

1. For the above tune up power were declared by the manufacturer.
2. 2.4G Wi-Fi, WCDMA / LTE can transmit simultaneously, The worst condition is as below:

$$\sum_i \frac{S_i}{S_{Limit,i}} = 0.0701/1.00 + 0.0396/0.47 = 0.1544 < 1.0$$

Result: The device meet FCC MPE at 20 cm distance.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine Compliant with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
 - b. Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has a FPC antenna and the antenna gain is 2.47dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliant.


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1 GHz:

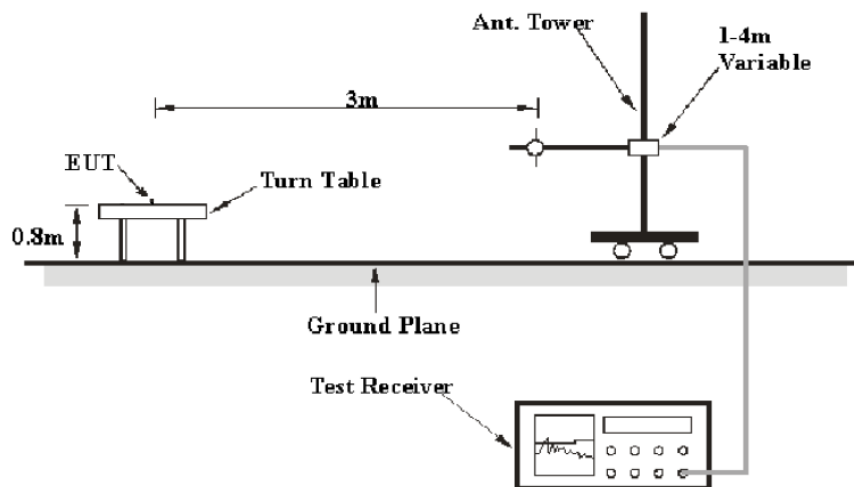

Above 1GHz:

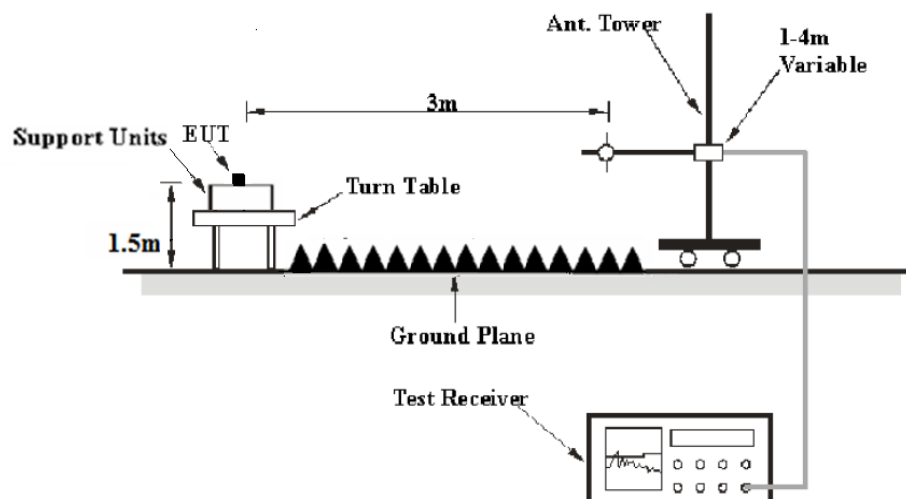

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver setup was set with the following configurations:

Frequency Range	RBW	Video B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	QP
Above 1GHz	1MHz	3 MHz	PK
	1MHz	3 MHz	Avg.

Test Procedure

According to ANSI C63.10-2013 clause 6.5, 6.6 and 6.7.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30MHz - 1GHz, peak and Average detection mode for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude (dBμV/m) = Meter Reading (dBμV) + Antenna Factor (dB/m) + Cable Loss (dB) - Amplifier Gain (dB)

The “**Margin**” column of the following data tables indicates the degree of Compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin (dB) = Limit (dBμV/m) – Corrected Amplitude (dBμV/m)

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data**Environmental Conditions**


Temperature:	23.5~25.0 °C
Relative Humidity:	48~50 %
ATM Pressure:	101~103 kPa

The testing was performed by Tyrone Wang from 2021-07-09 to 2021-07-10.

EUT operation mode: Transmitting

Spurious Emission Test:**30MHz-1GHz:**

Pre-scan with 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 modes of operation in the X,Y and Z axes of orientation, the worst case 802.11b in Y-axis of orientation was recorded.

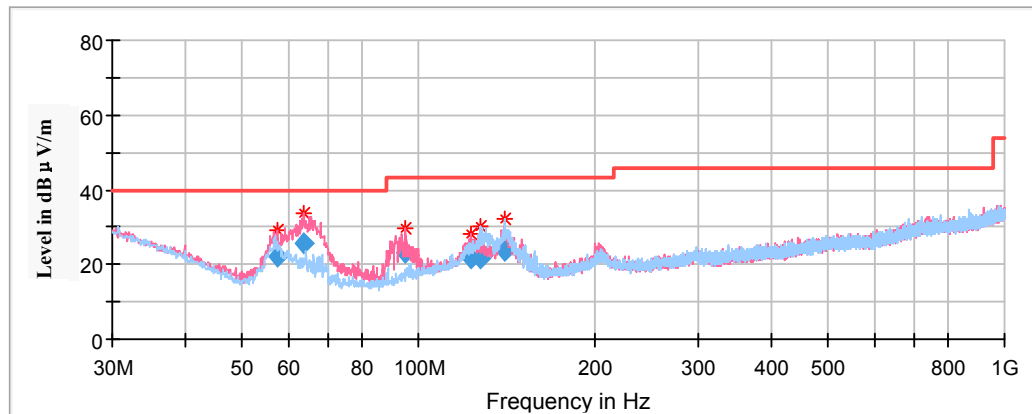

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	Quasi Peak (dBμV/m)	Height (cm)	Polar (H/V)				
57.287950	22.21	100.0	V	244.0	-15.3	40.00	17.79
63.708200	25.83	100.0	V	282.0	-15.4	40.00	14.17
94.998000	23.34	100.0	V	0.0	-15.7	43.50	20.16
122.876800	21.88	100.0	V	73.0	-11.0	43.50	21.62
127.607150	21.56	200.0	H	257.0	-11.1	43.50	21.94
140.456950	23.73	200.0	H	86.0	-11.7	43.50	19.77

1GHz-18GHz:**802.11b Mode:**


(Pre-scan in the X,Y and Z axes of orientation, the worst case **in Y-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)
 Margin (dB) = Limit (dBμV/m) – Corrected Amplitude (dBμV/m)

Low Channel: 2412 MHz


Full Spectrum

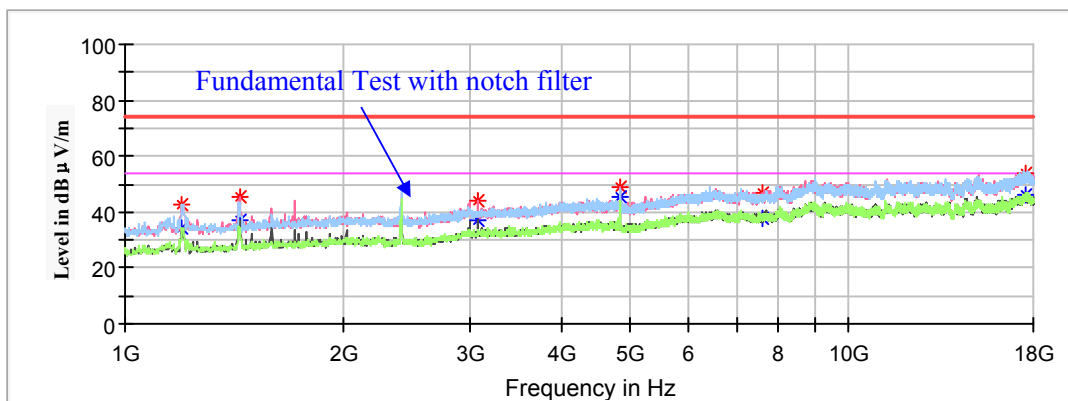

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1198.900000	---	34.25	200.0	H	311.0	-8.0	54.00	19.75
1198.900000	42.77	---	200.0	H	311.0	-8.0	74.00	31.23
1438.600000	---	37.25	200.0	V	301.0	-6.8	54.00	16.75
1438.600000	45.39	---	200.0	V	301.0	-6.8	74.00	28.61
3070.600000	---	37.07	200.0	V	192.0	-2.0	54.00	16.93
3070.600000	44.23	---	200.0	V	192.0	-2.0	74.00	29.77
4824.000000	---	45.32	150.0	V	0.0	0.6	54.00	8.68
4824.000000	48.81	---	150.0	V	0.0	0.6	74.00	25.19
7613.000000	---	37.82	150.0	H	338.0	5.1	54.00	16.18
7613.000000	47.12	---	150.0	H	338.0	5.1	74.00	26.88
17559.700000	---	46.06	200.0	V	4.0	14.3	54.00	7.94
17559.700000	54.13	---	200.0	V	4.0	14.3	74.00	19.87

Middle Channel: 2437 MHz


Full Spectrum

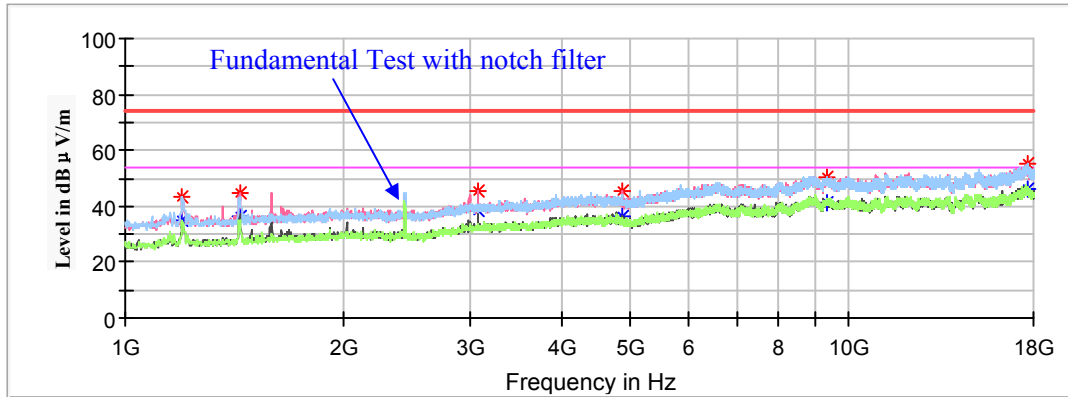

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1200.600000	---	34.65	200.0	H	310.0	-8.0	54.00	19.35
1200.600000	43.48	---	200.0	H	310.0	-8.0	74.00	30.52
1438.600000	---	36.60	200.0	V	302.0	-6.8	54.00	17.40
1438.600000	44.81	---	200.0	V	302.0	-6.8	74.00	29.19
3070.600000	---	38.30	150.0	V	192.0	-2.0	54.00	15.70
3070.600000	45.57	---	150.0	V	192.0	-2.0	74.00	28.43
4874.000000	---	36.71	150.0	V	345.0	0.5	54.00	17.29
4874.000000	45.32	---	150.0	V	345.0	0.5	74.00	28.68
9341.900000	---	40.94	200.0	H	27.0	9.3	54.00	13.06
9341.900000	50.69	---	200.0	H	27.0	9.3	74.00	23.31
17651.500000	---	46.22	200.0	H	324.0	14.1	54.00	7.78
17651.500000	55.21	---	200.0	H	324.0	14.1	74.00	18.79

High Channel: 2462 MHz

Full Spectrum

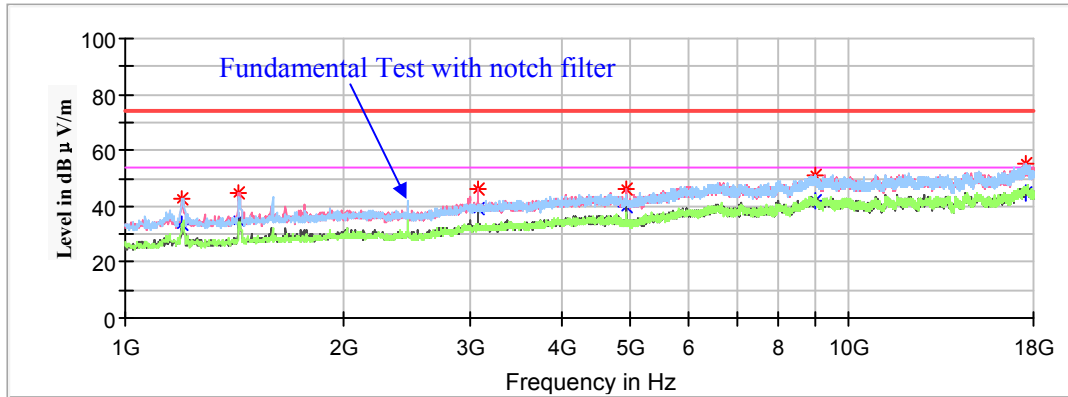

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1198.900000	---	33.70	200.0	H	311.0	-8.0	54.00	20.30
1198.900000	42.70	---	200.0	H	311.0	-8.0	74.00	31.30
1435.200000	---	34.72	150.0	V	10.0	-6.8	54.00	19.28
1435.200000	44.88	---	150.0	V	10.0	-6.8	74.00	29.12
3070.600000	---	38.99	200.0	V	176.0	-2.0	54.00	15.01
3070.600000	46.35	---	200.0	V	176.0	-2.0	74.00	27.65
4924.000000	---	39.67	200.0	V	357.0	0.4	54.00	14.33
4924.000000	45.99	---	200.0	V	357.0	0.4	74.00	28.01
9003.600000	---	42.23	150.0	H	301.0	9.5	54.00	11.77
9003.600000	51.06	---	150.0	H	301.0	9.5	74.00	22.94
17607.300000	---	45.05	150.0	H	327.0	14.2	54.00	8.95
17607.300000	55.09	---	150.0	H	327.0	14.2	74.00	18.91

802.11g Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case **in Y-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V/m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V/m)

Low Channel: 2412 MHz


Full Spectrum

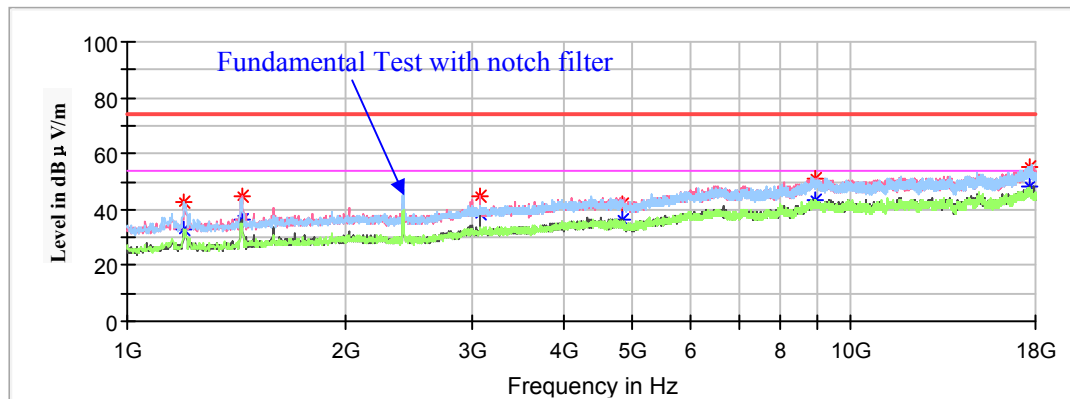

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1198.900000	42.92	---	200.0	H	302.0	-8.0	74.00	31.08
1198.900000	---	32.85	200.0	H	302.0	-8.0	54.00	21.15
1440.300000	44.86	---	200.0	V	3.0	-6.8	74.00	29.14
1440.300000	---	36.22	200.0	V	3.0	-6.8	54.00	17.78
3070.600000	44.69	---	200.0	V	178.0	-2.0	74.00	29.31
3070.600000	---	38.67	200.0	V	178.0	-2.0	54.00	15.33
4824.000000	42.08	---	150.0	H	165.0	0.6	74.00	31.92
4824.000000	---	36.13	150.0	H	359.0	0.6	54.00	17.87
8939.000000	51.39	---	200.0	V	127.0	9.3	74.00	22.61
8939.000000	---	43.23	200.0	V	127.0	9.3	54.00	10.77
17702.500000	---	48.26	200.0	H	352.0	14.0	54.00	5.74
17702.500000	55.42	---	200.0	H	350.0	14.0	74.00	18.58

Middle Channel: 2437 MHz


Full Spectrum

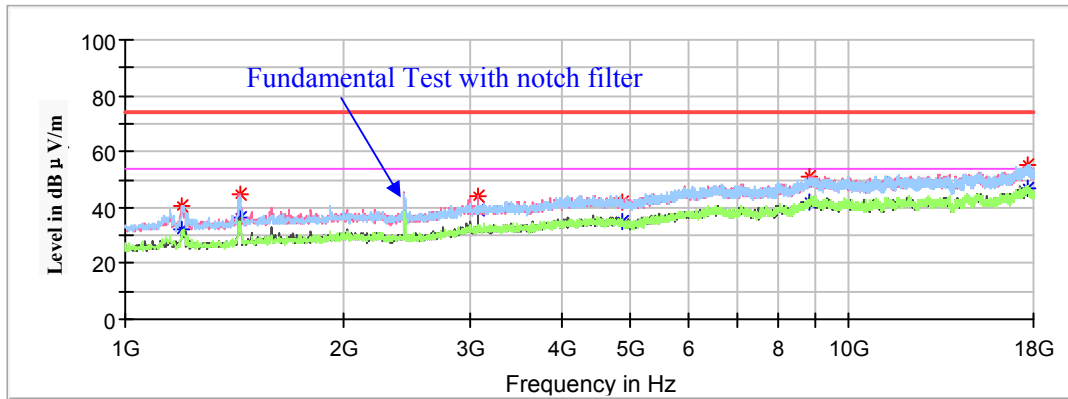

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1200.600000	---	31.98	150.0	V	316.0	-8.0	54.00	22.02
1200.600000	40.83	---	150.0	V	316.0	-8.0	74.00	33.17
1440.300000	---	36.70	200.0	V	0.0	-6.8	54.00	17.30
1440.300000	45.07	---	200.0	V	0.0	-6.8	74.00	28.93
3070.600000	---	39.26	200.0	V	177.0	-2.0	54.00	14.74
3070.600000	44.38	---	200.0	V	177.0	-2.0	74.00	29.62
4874.000000	---	34.64	200.0	V	351.0	0.5	54.00	19.36
4874.000000	41.83	---	200.0	V	351.0	0.5	74.00	32.17
8804.700000	---	41.82	150.0	V	0.0	8.7	54.00	12.18
8804.700000	51.24	---	150.0	V	0.0	8.7	74.00	22.76
17620.900000	---	46.80	150.0	V	277.0	14.2	54.00	7.20
17620.900000	55.57	---	150.0	V	277.0	14.2	74.00	18.43

High Channel: 2462 MHz

Full Spectrum

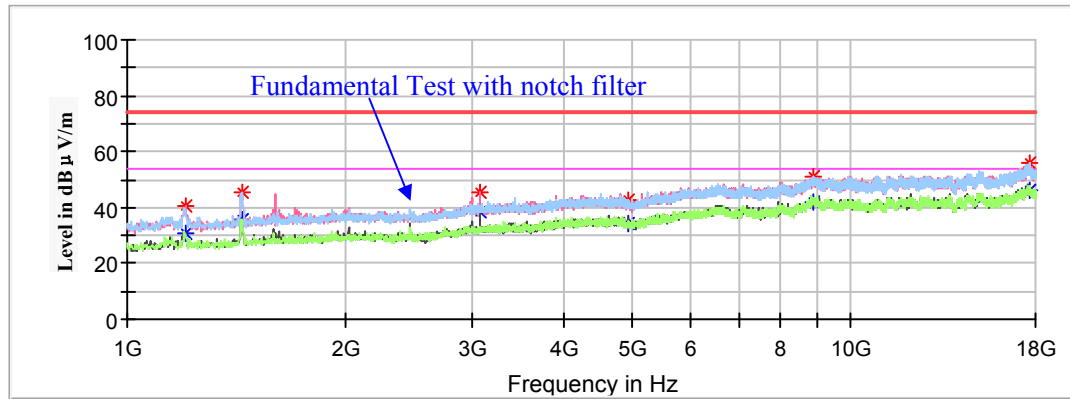

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1204.000000	---	30.65	200.0	V	0.0	-8.0	54.00	23.35
1204.000000	40.40	---	200.0	V	0.0	-8.0	74.00	33.60
1438.600000	45.59	---	200.0	H	302.0	-6.8	74.00	28.41
1438.600000	---	35.40	200.0	H	302.0	-6.8	54.00	18.60
3070.600000	45.20	---	200.0	V	179.0	-2.0	74.00	28.80
3070.600000	---	38.78	200.0	V	179.0	-2.0	54.00	15.22
4924.000000	42.83	---	150.0	H	1.0	0.4	74.00	31.17
4924.000000	---	34.49	150.0	H	1.0	0.4	54.00	19.51
8850.600000	51.14	---	150.0	V	284.0	8.9	74.00	22.86
8850.600000	---	41.88	150.0	V	284.0	8.9	54.00	12.12
17671.900000	---	46.33	200.0	V	359.0	14.0	54.00	7.67
17671.900000	56.08	---	200.0	V	359.0	14.0	74.00	17.92

802.11n-HT20 Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case **in Y-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)
 Margin (dB) = Limit (dBμV/m) – Corrected Amplitude (dBμV/m)

Low Channel : 2412 MHz


Full Spectrum

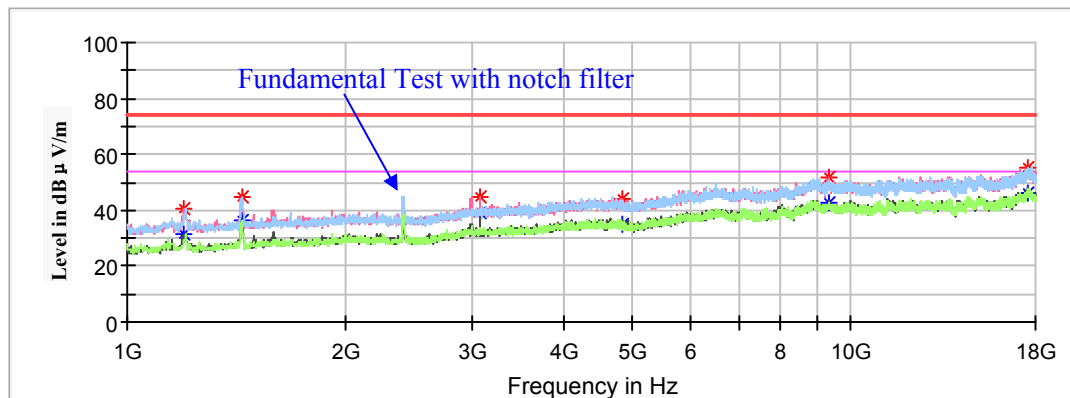

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1200.600000	40.71	---	200.0	V	4.0	-8.0	74.00	33.29
1200.600000	---	31.79	200.0	V	4.0	-8.0	54.00	22.21
1438.600000	45.04	---	200.0	H	299.0	-6.8	74.00	28.96
1438.600000	---	36.26	200.0	H	299.0	-6.8	54.00	17.74
3070.600000	44.58	---	200.0	V	185.0	-2.0	74.00	29.42
3070.600000	---	38.91	200.0	V	185.0	-2.0	54.00	15.09
4824.000000	44.00	---	200.0	V	0.0	0.6	74.00	30.00
4824.000000	---	34.78	200.0	V	0.0	0.6	54.00	19.22
9340.200000	51.51	---	150.0	V	285.0	9.3	74.00	22.49
9340.200000	---	42.70	150.0	V	285.0	9.3	54.00	11.30
17580.100000	---	46.11	200.0	H	282.0	14.3	54.00	7.89
17580.100000	55.34	---	200.0	H	282.0	14.3	74.00	18.66

Middle Channel: 2437 MHz


Full Spectrum

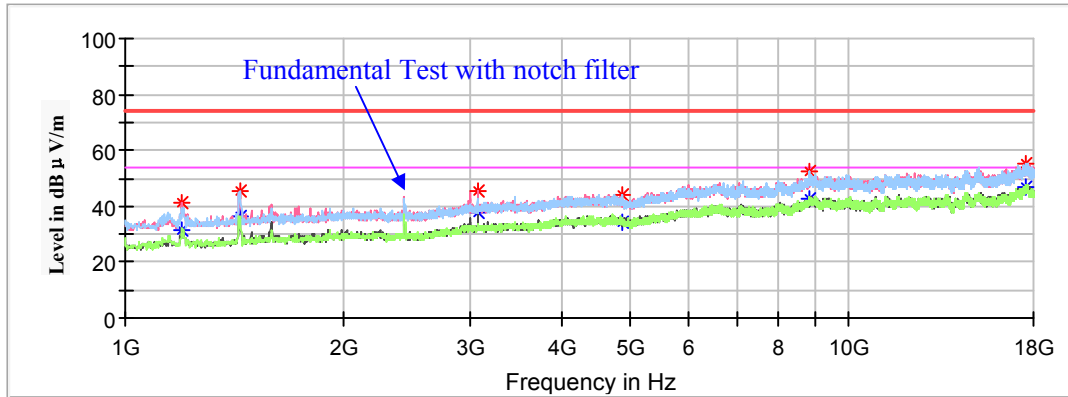

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1198.900000	---	31.63	150.0	V	29.0	-8.0	54.00	22.37
1198.900000	41.21	---	150.0	V	29.0	-8.0	74.00	32.79
1438.600000	---	36.27	200.0	H	301.0	-6.8	54.00	17.73
1438.600000	45.31	---	200.0	H	301.0	-6.8	74.00	28.69
3070.600000	---	38.00	200.0	V	178.0	-2.0	54.00	16.00
3070.600000	45.35	---	200.0	V	178.0	-2.0	74.00	28.65
4874.000000	---	34.32	150.0	H	307.0	0.5	54.00	19.68
4874.000000	44.13	---	150.0	H	307.0	0.5	74.00	29.87
8840.400000	---	42.75	200.0	V	63.0	8.9	54.00	11.25
8840.400000	52.53	---	200.0	V	63.0	8.9	74.00	21.47
17569.900000	---	47.12	150.0	H	161.0	14.3	54.00	6.88
17569.900000	55.25	---	150.0	H	161.0	14.3	74.00	18.75

High Channel : 2462 MHz

Full Spectrum

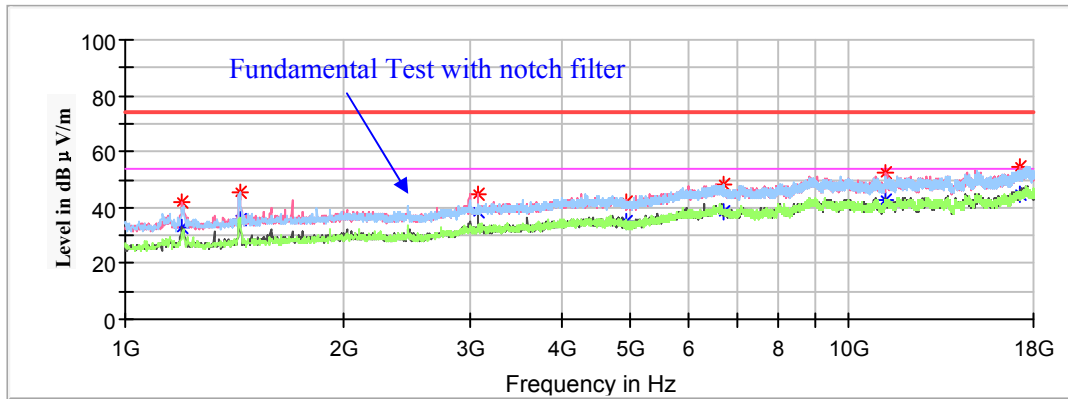

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1198.900000	---	32.75	150.0	V	33.0	-8.0	54.00	21.25
1198.900000	41.91	---	150.0	V	33.0	-8.0	74.00	32.09
1440.300000	---	35.97	200.0	V	0.0	-6.8	54.00	18.03
1440.300000	45.28	---	200.0	V	0.0	-6.8	74.00	28.72
3070.600000	---	38.58	200.0	V	170.0	-2.0	54.00	15.42
3070.600000	45.00	---	200.0	V	170.0	-2.0	74.00	29.00
4924.000000	---	35.25	150.0	H	352.0	0.4	54.00	18.75
4924.000000	42.25	---	150.0	H	352.0	0.4	74.00	31.75
6718.800000	---	38.65	200.0	H	9.0	5.5	54.00	15.35
6718.800000	48.35	---	200.0	H	9.0	5.5	74.00	25.65
11268.000000	---	42.71	200.0	V	37.0	10.2	54.00	11.29
11268.000000	52.71	---	200.0	V	37.0	10.2	74.00	21.29
17265.600000	---	44.71	200.0	V	90.0	13.7	54.00	9.29
17265.600000	54.58	---	200.0	V	90.0	13.7	74.00	19.42

802.11n-HT40 Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case **in Y-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)
 Margin (dB) = Limit (dBμV/m) – Corrected Amplitude (dBμV/m)

Low Channel : 2422 MHz


Full Spectrum

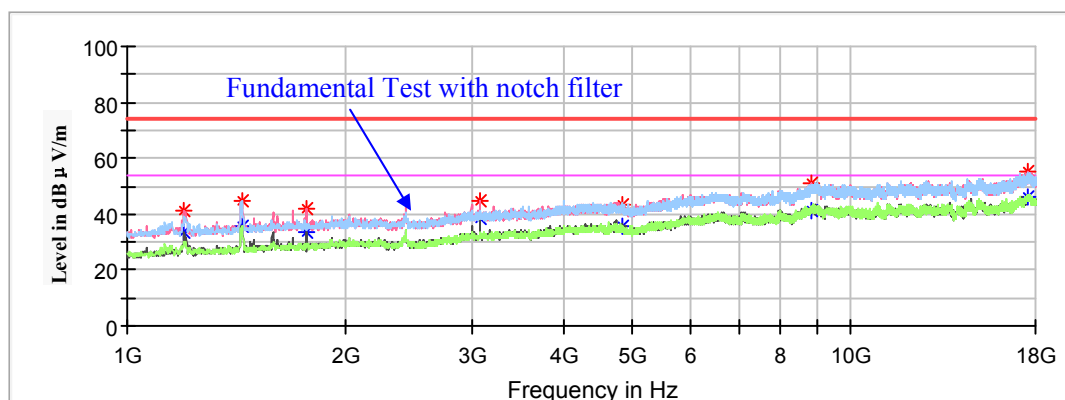

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1200.600000	---	33.23	200.0	V	15.0	-8.0	54.00	20.77
1200.600000	41.17	---	200.0	V	15.0	-8.0	74.00	32.83
1438.600000	---	35.57	150.0	V	20.0	-6.8	54.00	18.43
1438.600000	44.52	---	150.0	V	20.0	-6.8	74.00	29.48
1770.100000	42.17	---	200.0	V	195.0	-5.6	74.00	31.83
1770.100000	---	33.75	200.0	V	195.0	-5.6	54.00	20.25
3070.600000	---	38.39	200.0	V	170.0	-2.0	54.00	15.61
3070.600000	44.92	---	200.0	V	170.0	-2.0	74.00	29.08
4844.000000	---	35.83	150.0	H	355.0	0.5	54.00	18.17
4844.000000	43.13	---	150.0	H	355.0	0.5	74.00	30.87
8821.700000	---	41.30	200.0	H	0.0	8.8	54.00	12.70
8821.700000	50.93	---	200.0	H	0.0	8.8	74.00	23.07
17612.400000	---	45.87	200.0	V	322.0	14.2	54.00	8.13
17612.400000	54.94	---	200.0	V	322.0	14.2	74.00	19.06

Middle Channel: 2437 MHz


Full Spectrum

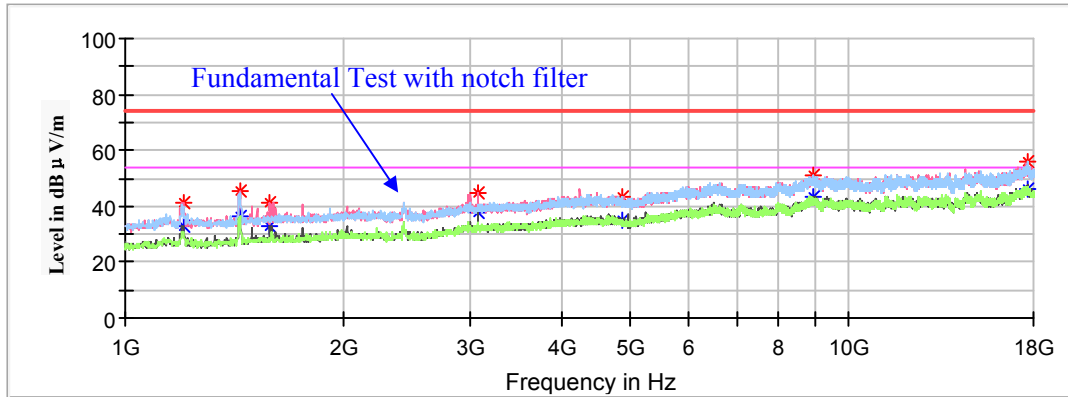

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1202.300000	---	33.01	150.0	V	33.0	-8.0	54.00	20.99
1202.300000	41.58	---	150.0	V	33.0	-8.0	74.00	32.42
1438.600000	---	36.59	150.0	V	21.0	-6.8	54.00	17.41
1438.600000	45.17	---	150.0	V	21.0	-6.8	74.00	28.83
1586.500000	---	32.75	150.0	V	265.0	-6.2	54.00	21.25
1586.500000	41.37	---	150.0	V	265.0	-6.2	74.00	32.63
3070.600000	44.72	---	200.0	V	335.0	-2.0	74.00	29.28
3070.600000	---	37.73	200.0	V	335.0	-2.0	54.00	16.27
4874.000000	---	34.83	200.0	H	33.0	0.5	54.00	19.17
4874.000000	43.02	---	200.0	H	33.0	0.5	74.00	30.98
8911.800000	---	43.43	150.0	V	323.0	9.1	54.00	10.57
8911.800000	50.80	---	150.0	V	323.0	9.1	74.00	23.20
17634.500000	---	46.47	200.0	H	0.0	14.1	54.00	7.53
17634.500000	55.78	---	200.0	H	0.0	14.1	74.00	18.22

High Channel : 2452 MHz

Full Spectrum

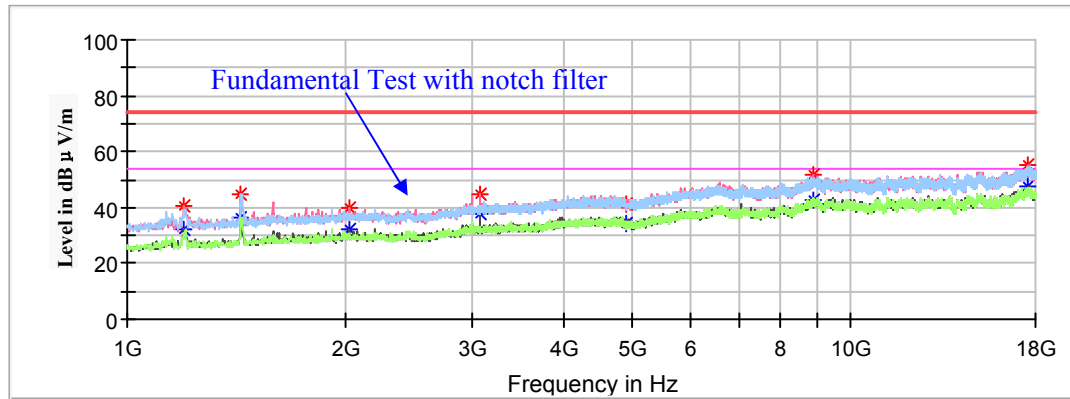


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1197.200000	40.66	---	200.0	V	15.0	-8.0	74.00	33.34
1197.200000	---	32.18	200.0	V	15.0	-8.0	54.00	21.82
1436.900000	45.01	---	150.0	H	295.0	-6.8	74.00	28.99
1436.900000	---	36.24	150.0	H	295.0	-6.8	54.00	17.76
2025.100000	---	32.09	200.0	V	263.0	-4.8	54.00	21.91
2025.100000	39.77	---	200.0	V	263.0	-4.8	74.00	34.23
3070.600000	44.62	---	200.0	V	174.0	-2.0	74.00	29.38
3070.600000	---	37.89	200.0	V	174.0	-2.0	54.00	16.11
4903.200000	41.43	---	150.0	V	345.0	0.4	74.00	32.57
4903.200000	---	34.17	150.0	V	345.0	0.4	54.00	19.83
8850.600000	---	42.37	150.0	H	127.0	8.9	54.00	11.63
8850.600000	52.03	---	150.0	H	127.0	8.9	74.00	21.97
17505.300000	54.97	---	150.0	V	33.0	14.4	74.00	19.03
17505.300000	---	47.64	150.0	V	33.0	14.4	54.00	6.36

18GHz-25GHz:


Pre-scan with 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 modes of operation in the X,Y and Z axes of orientation, the worst case 802.11b in Y-axis of orientation was recorded

Vertical

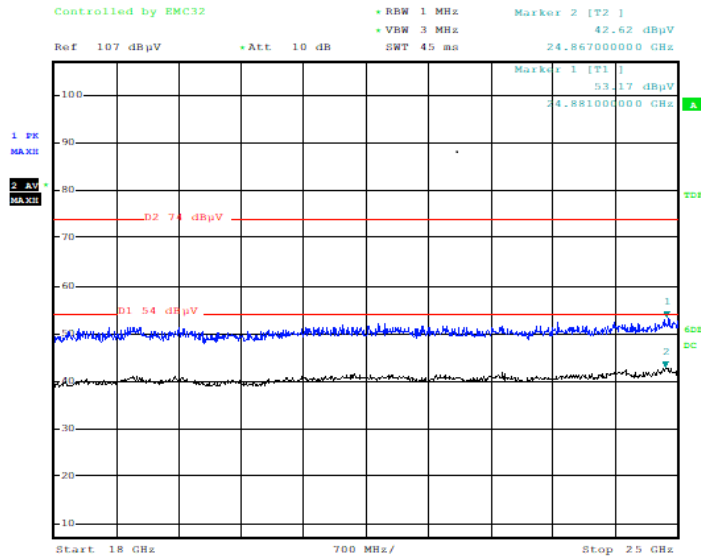

Date: 9.JUL.2021 19:13:56

Horizontal

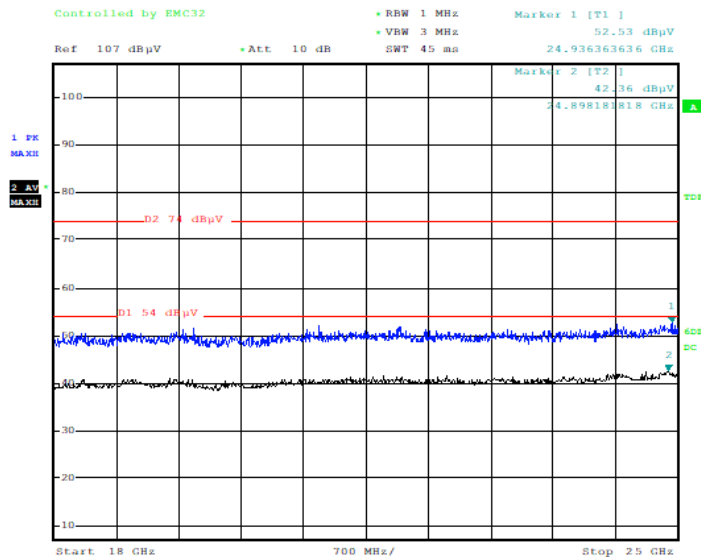

Date: 9.JUL.2021 19:21:00

Restricted Bands Emissions Test:

Note:

1. This test was performed with a 10dB attenuator.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)
 Margin (dB) = Limit (dBμV/m) – Corrected Amplitude (dBμV/m)

802.11b Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case Y-axis of orientation in vertical polarization was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2412 MHz								
2390.00	52.01	---	200.0	V	2.0	3.8	74.00	21.99
2390.00	---	48.62	200.0	V	2.0	3.8	54.00	5.38
High Channel: 2462 MHz								
2483.50	54.97	---	150.0	V	97.0	4.1	74.00	19.03
2483.50	---	51.28	150.0	V	97.0	4.1	54.00	2.72

802.11g Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case in Y-axis of orientation in vertical polarization was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2412 MHz								
2390.00	55.11	---	200.0	V	0.0	3.8	74.00	18.89
2390.00	---	49.38	200.0	V	0.0	3.8	54.00	4.62
High Channel: 2462 MHz								
2483.50	56.26	---	150.0	V	78.0	4.1	74.00	17.74
2483.50	---	51.37	150.0	V	78.0	4.1	54.00	2.63

802.11n-HT20 Mode: (Pre-scan in the X,Y and Z axes of orientation, the worst case Y-axis of orientation in vertical polarization was recorded)


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2412 MHz								
2390.00	53.21	---	200.0	V	0.0	3.8	74.00	20.79
2390.00	---	49.71	200.0	V	0.0	3.8	54.00	4.29
High Channel: 2462 MHz								
2483.50	55.84	---	150.0	V	2.0	4.1	74.00	18.16
2483.50	---	51.53	150.0	V	2.0	4.1	54.00	2.47

802.11n-HT40 Mode: (Pre-scan in the X,Y and Z axes of orientation, the worst case in Y-axis of orientation in vertical polarization was recorded)


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2422 MHz								
2390.00	49.84	---	200.0	V	196.0	3.8	74.00	24.16
2390.00	---	46.55	200.0	V	196.0	3.8	54.00	7.45
High Channel: 2452 MHz								
2483.50	53.97	---	150.0	V	63.0	4.1	74.00	20.03
2483.50	---	50.23	150.0	V	63.0	4.1	54.00	3.77

Conducted Spurious Emissions at Antenna Port


802.11b Mode Low Channel

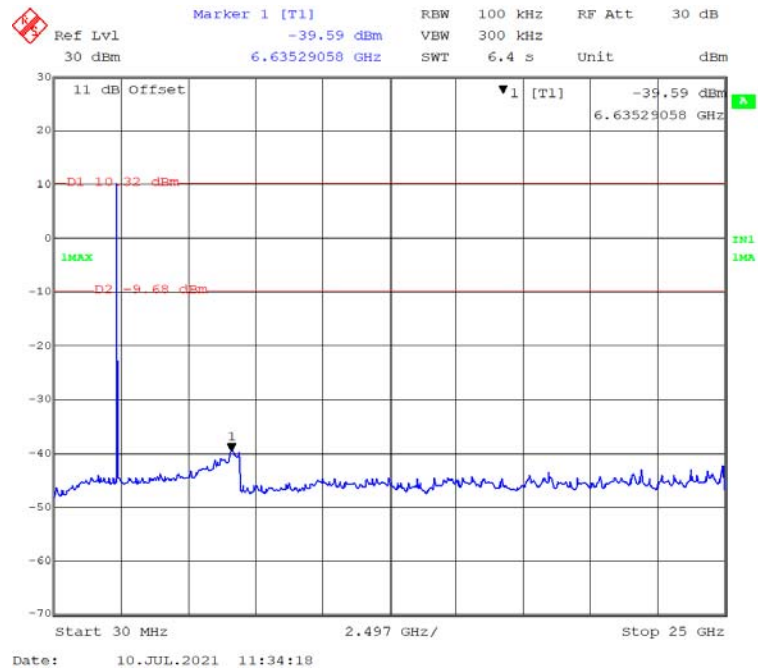


802.11b Mode Middle Channel


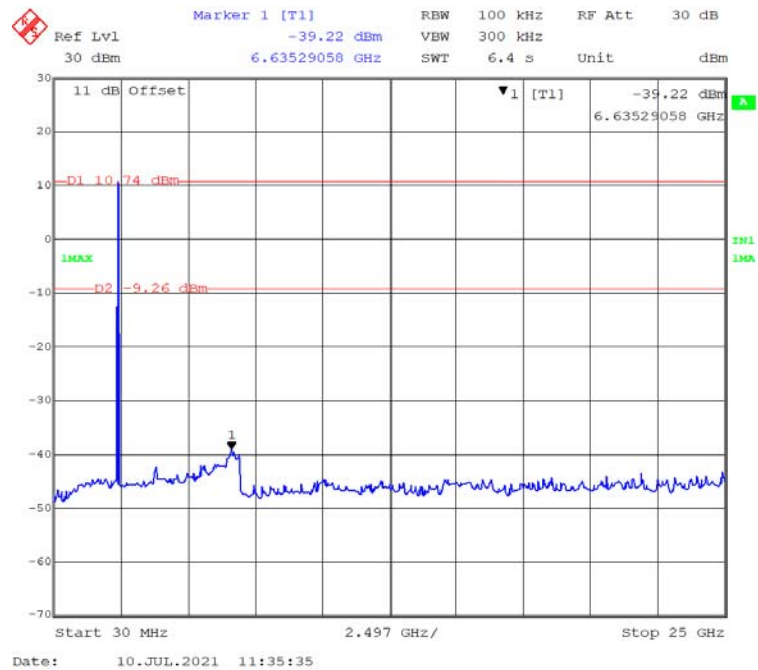


802.11b Mode High Channel

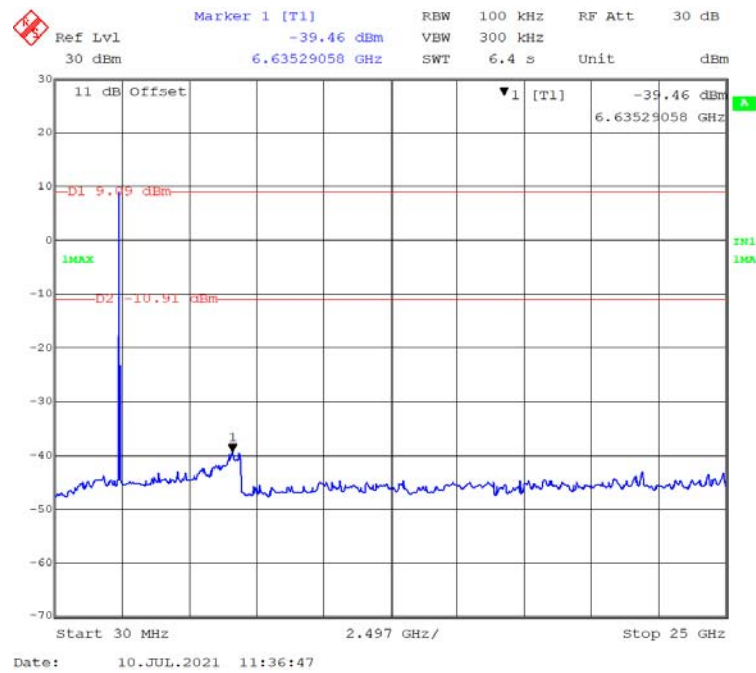


802.11g Mode Low Channel

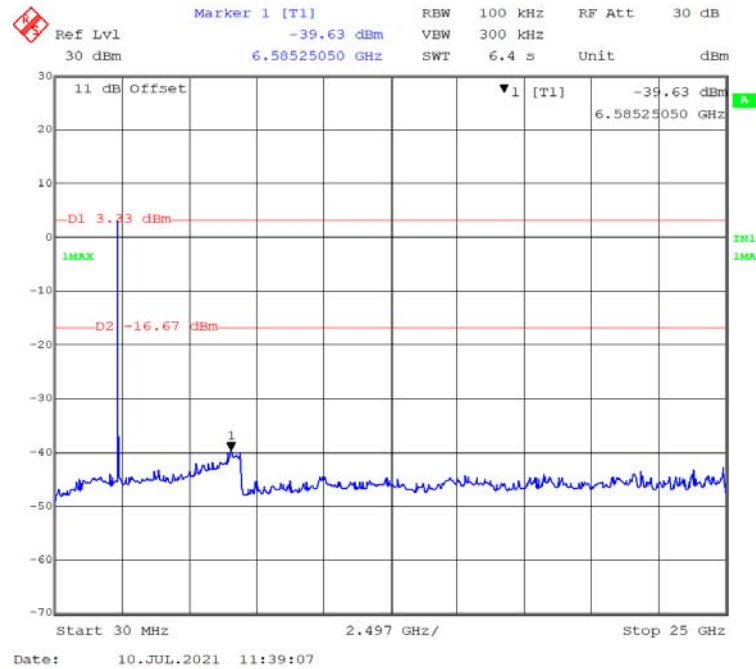


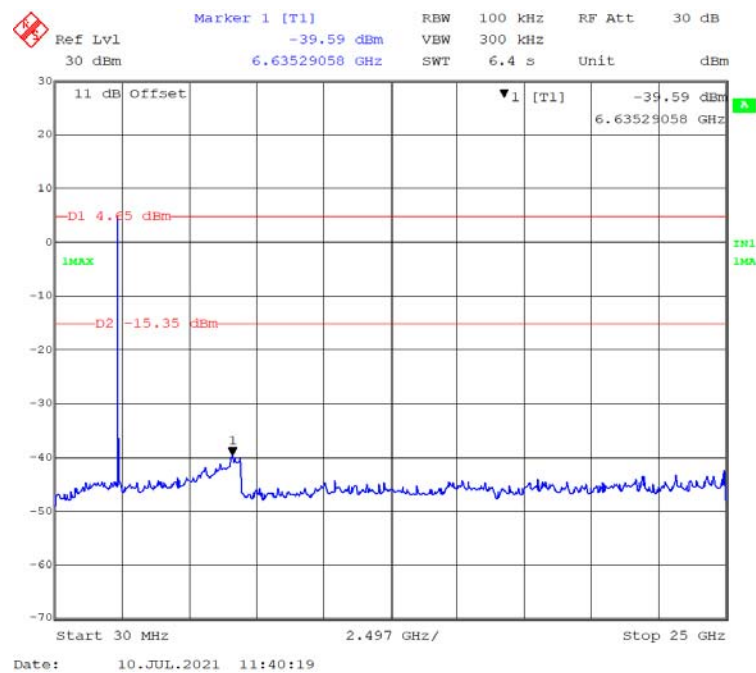
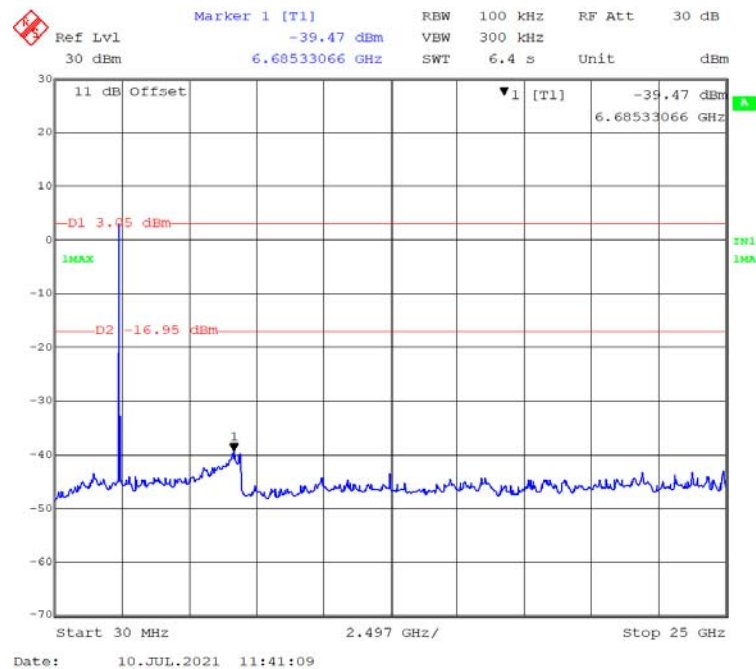
802.11g Mode Middle Channel**802.11g Mode High Channel**

802.11n-HT20 Mode Low Channel

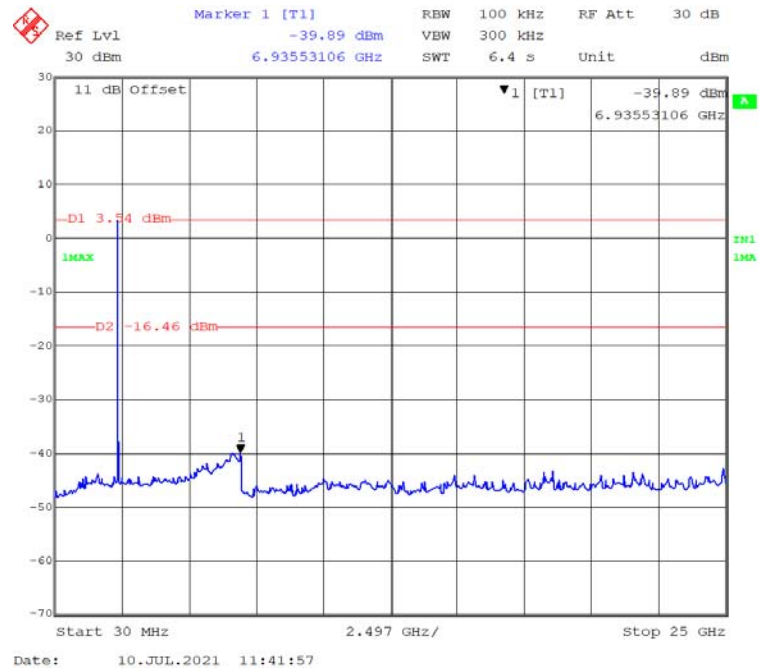


802.11n-HT20 Mode Middle Channel

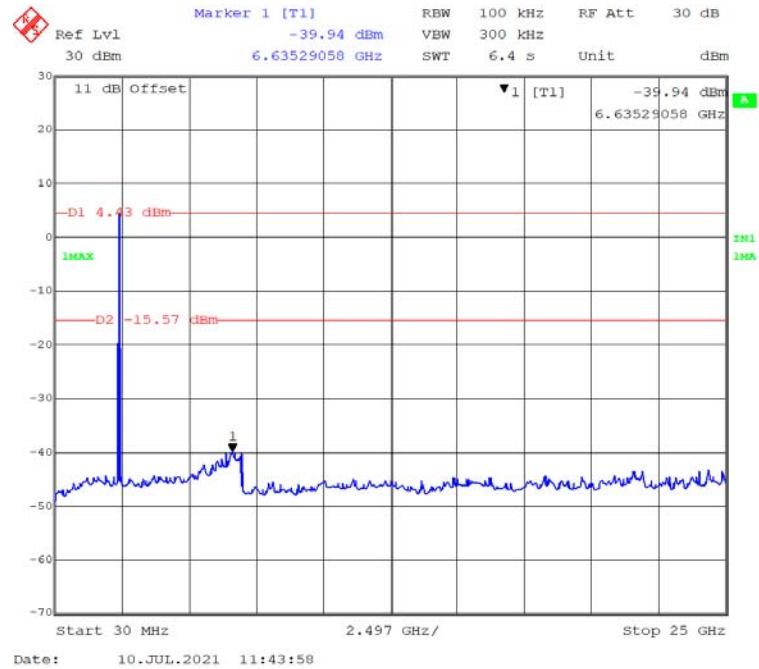


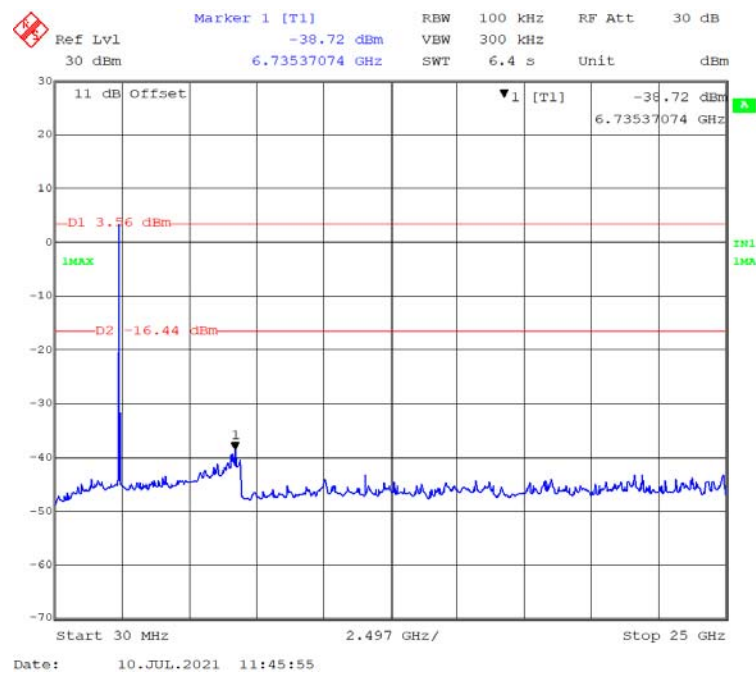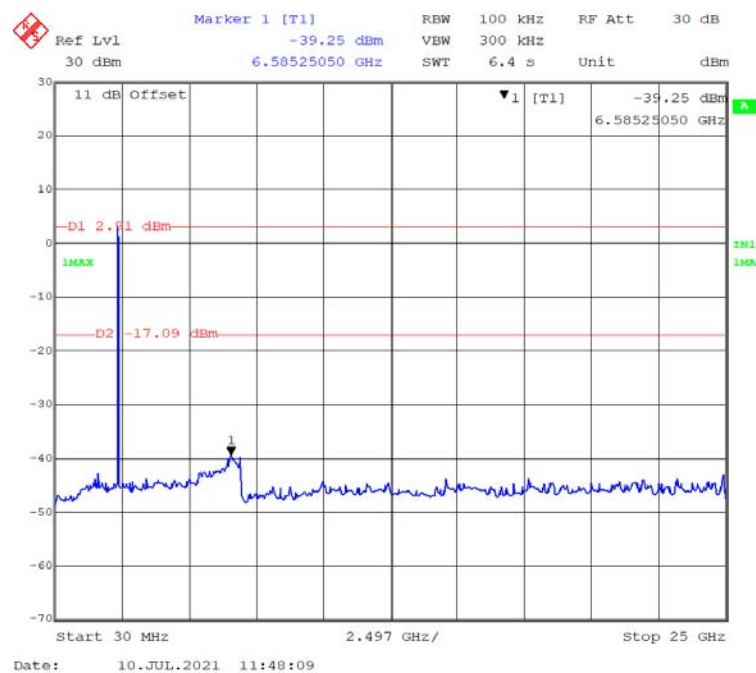802.11n-HT20 Mode High Channel**802.11n-HT40 Mode Low Channel**

802.11n-HT40 Mode Middle Channel

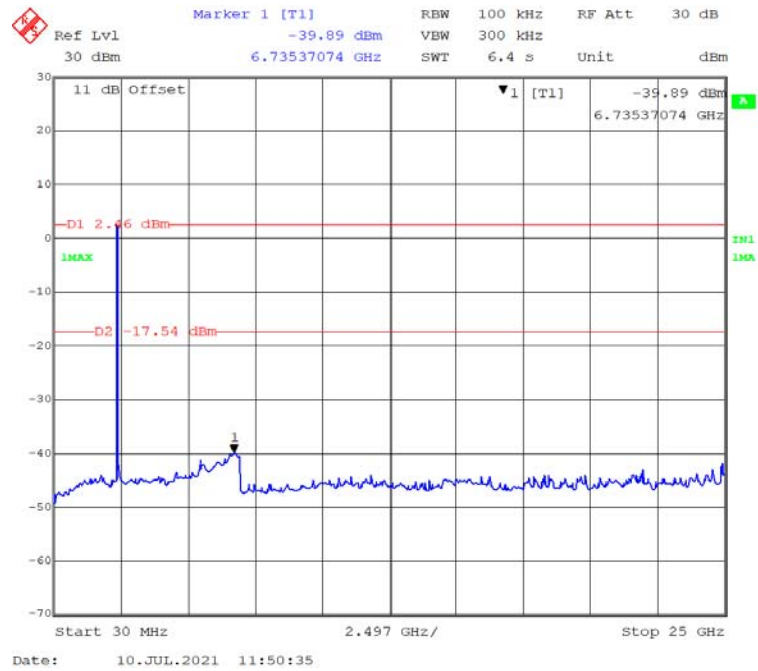

802.11n-HT40 Mode High Channel

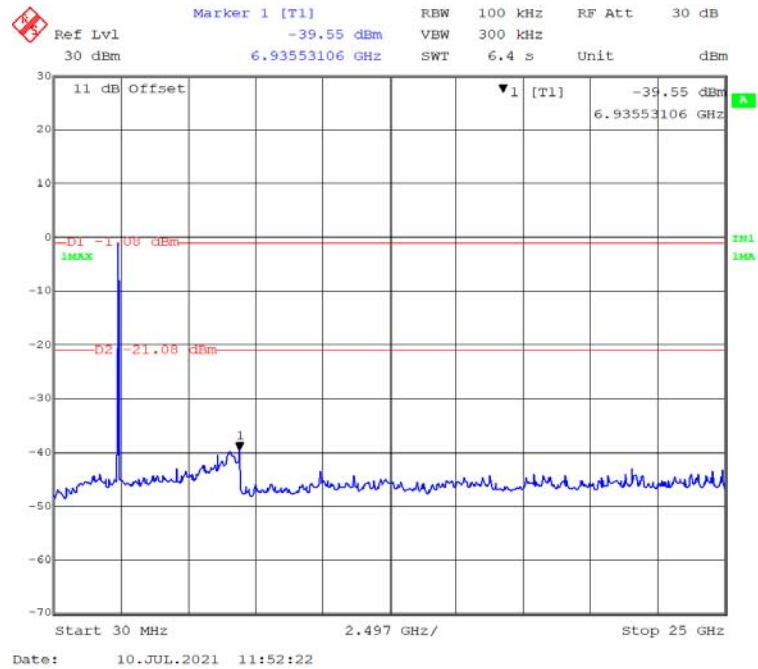

FCC §15.247(A) (2) - 6 DB EMISSION BANDWIDTH& OCCUPIED BANDWIDTH


Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 * \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Data

Environmental Conditions



Temperature:	23.1℃~23.3℃
Relative Humidity:	50%~53%
ATM Pressure:	100.0kPa~101.1 kPa



The testing was performed by Tyrone Wang on 2021-07-10 and 2021-09-08.



EUT operation mode: Transmitting

Test Result: Pass


Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
802.11b Mode			
Low	2412	9.138	≥ 0.5
Middle	2437	10.040	≥ 0.5
High	2462	9.078	≥ 0.5
802.11g Mode			
Low	2412	15.631	≥ 0.5
Middle	2437	15.752	≥ 0.5
High	2462	15.150	≥ 0.5
802.11n-HT20 Mode			
Low	2412	16.533	≥ 0.5
Middle	2437	16.353	≥ 0.5
High	2462	15.150	≥ 0.5
802.11n-HT40 Mode			
Low	2422	20.080	≥ 0.5
Middle	2437	25.401	≥ 0.5
High	2452	35.170	≥ 0.5

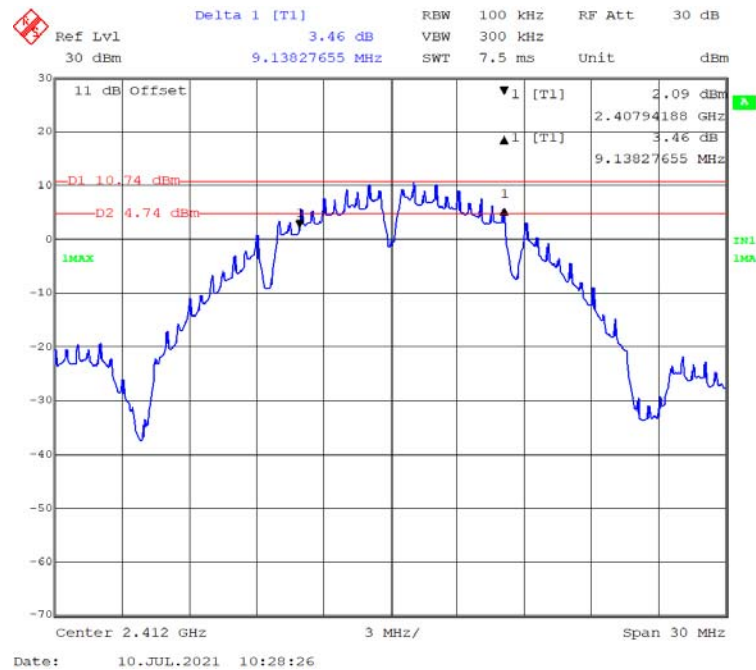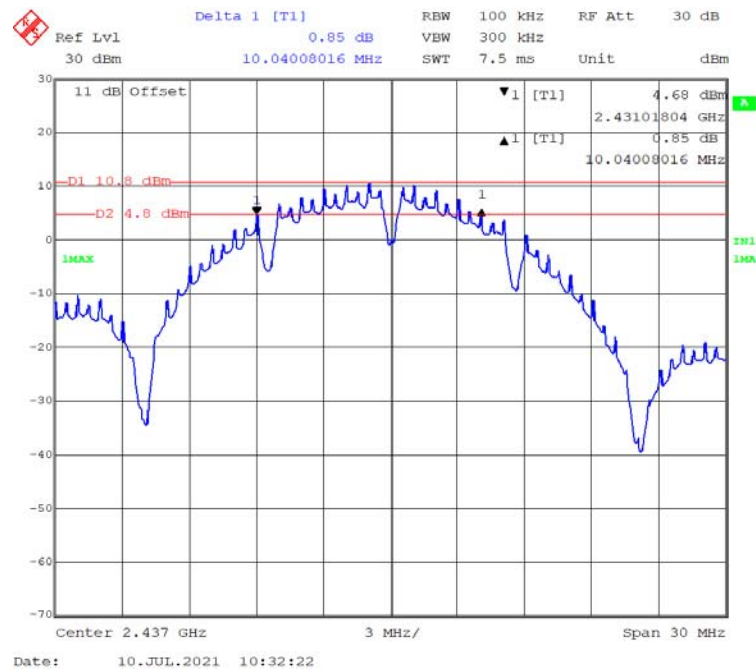802.11b Mode Low Channel**802.11b Mode Middle Channel**

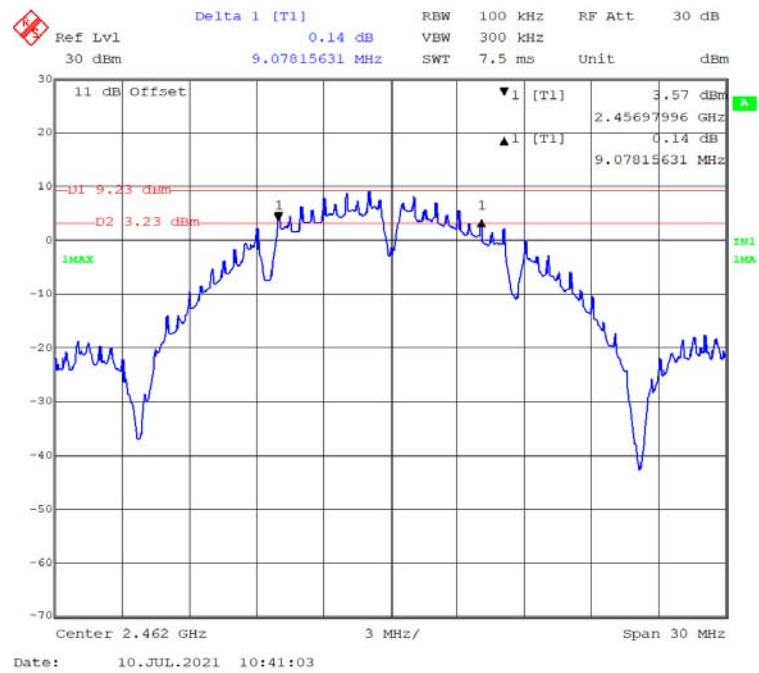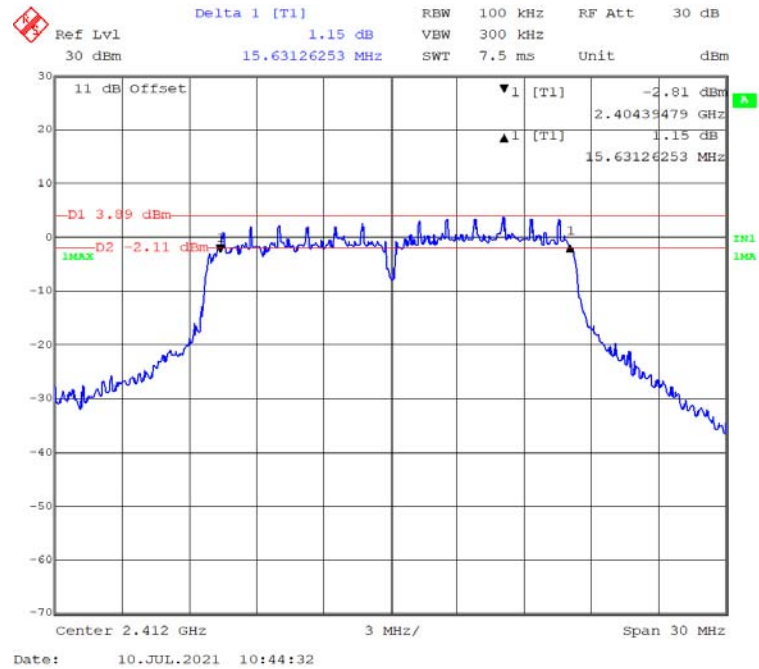
802.11b Mode High Channel**802.11g Mode Low Channel**

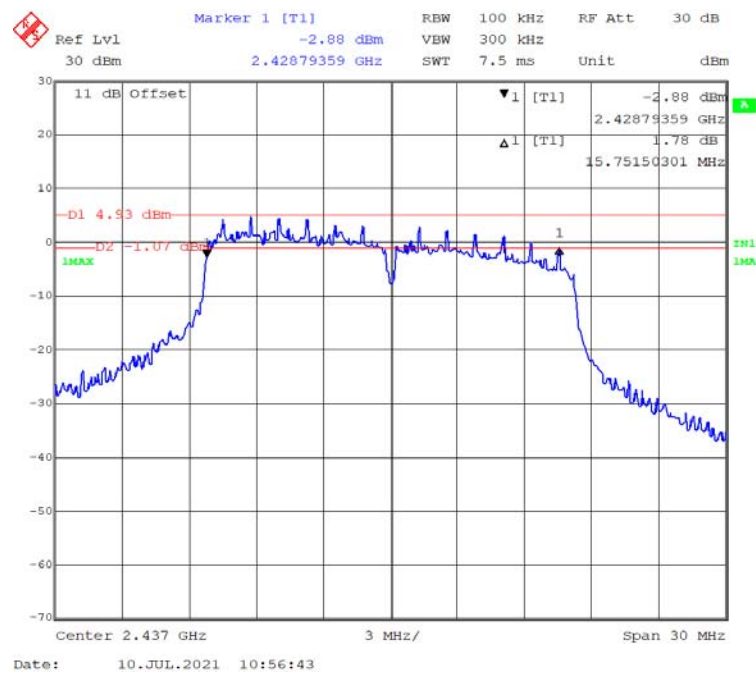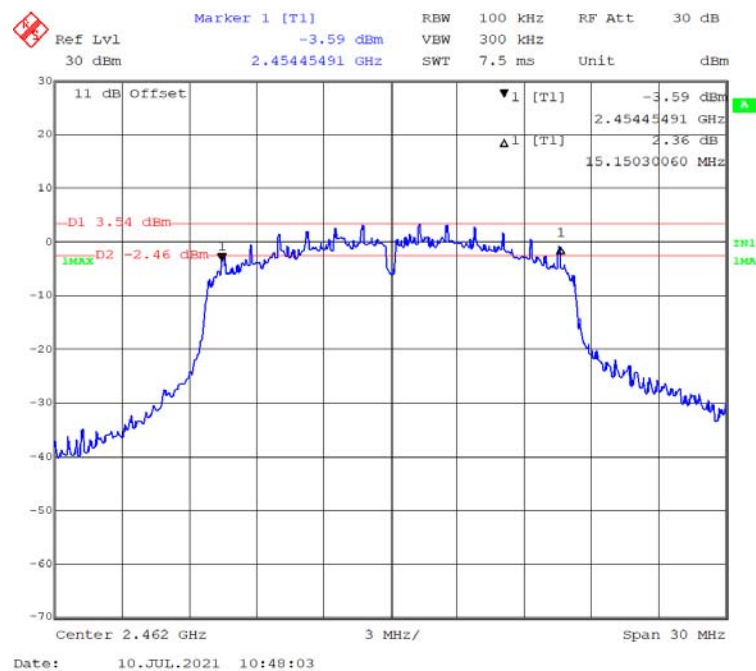802.11g Mode Middle Channel**802.11g Mode High Channel**


802.11n-HT20 Mode Low Channel

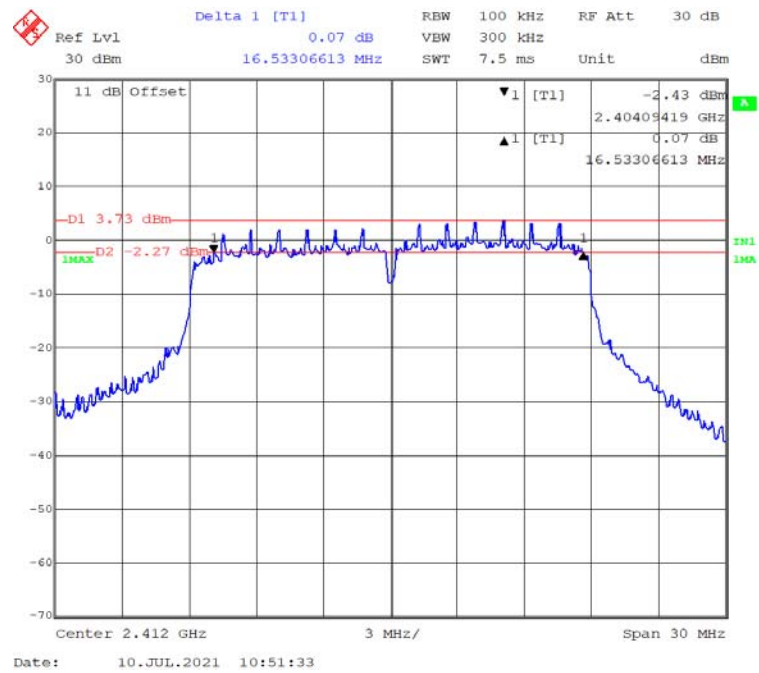


802.11n-HT20 Mode Middle Channel

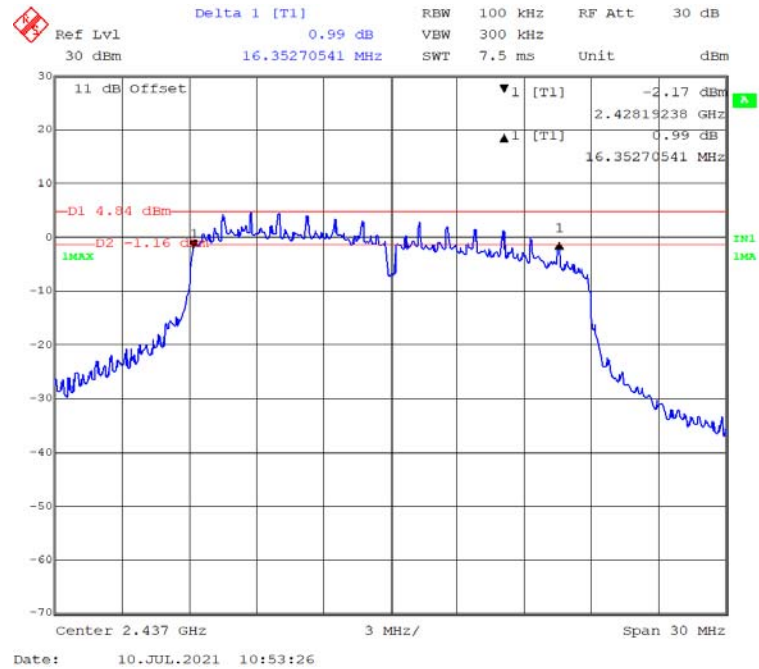

802.11n-HT20 Mode High Channel

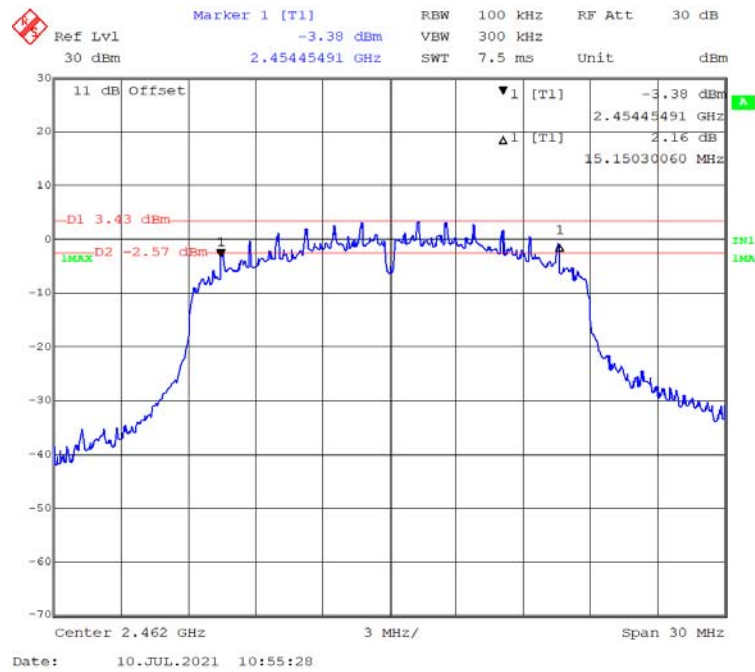

802.11n-HT40 Mode Low Channel

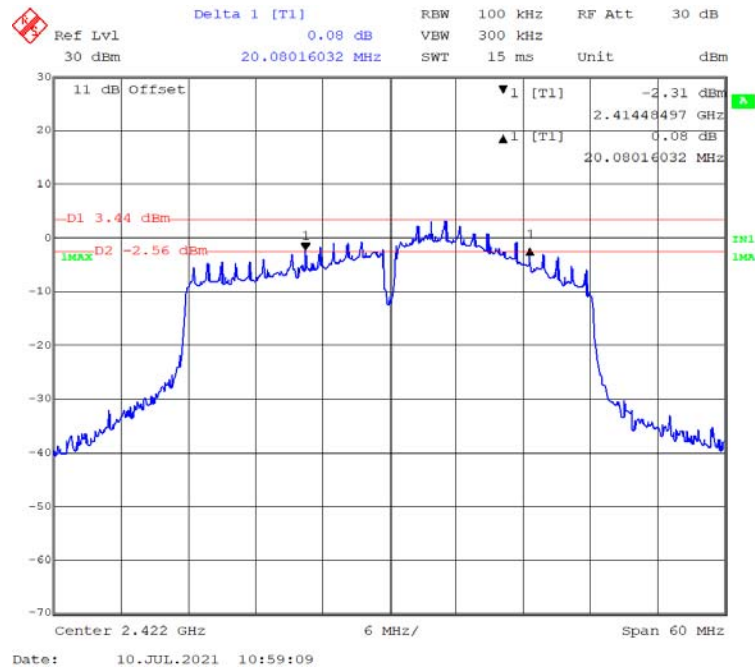

Delta 1 [T1] 1.15 dB
 Ref Lvl 30 dBm
 25.40080160 MHz
 RBW 100 kHz
 VBW 300 kHz
 SWT 15 ms
 RF Att 30 dB
 Unit dBm

11 dB Offset
 -4.62 dBm
 2.4204693 GHz
 1.15 dB
 25.40080160 MHz

-D1 2.89 dBm
 -D2 -3.11 dBm

Center 2.437 GHz
 6 MHz/
 Span 60 MHz

Date: 10.JUL.2021 11:02:07

Ref Lvl 30 dBm Delta 1 [T1] 0.74 dB RBW 100 KHz RF Att 30 dB
 30 dBm 35.17034068 MHz SWT 15 ms Unit dBm

11 dB Offset

▼ 1 [T1] -6.92 dBm
 2.43450501 GHz
 ▲ 1 [T1] 0.74 dB
 35.17034068 MHz


D1 -1.02 dBm
 1MAX
 D2 -7.02 dBm

Center 2.452 GHz 6 MHz/ Span 60 MHz


Date: 10.JUL.2021 11:05:36

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Limit (MHz)
802.11b Mode			
Low	2412	14.068	≥ 0.5
Middle	2437	14.549	≥ 0.5
High	2462	13.467	≥ 0.5
802.11g Mode			
Low	2412	16.653	≥ 0.5
Middle	2437	16.894	≥ 0.5
High	2462	16.172	≥ 0.5
802.11n-HT20 Mode			
Low	2412	17.796	≥ 0.5
Middle	2437	17.735	≥ 0.5
High	2462	17.255	≥ 0.5
802.11n-HT40 Mode			
Low	2422	35.351	≥ 0.5
Middle	2437	35.952	≥ 0.5
High	2452	36.072	≥ 0.5


802.11b Mode Low Channel

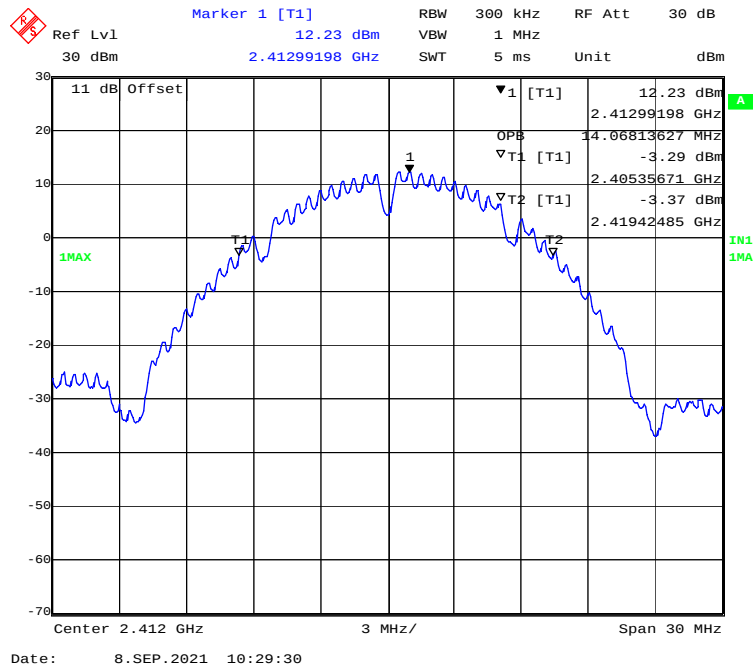


802.11b Mode Middle Channel

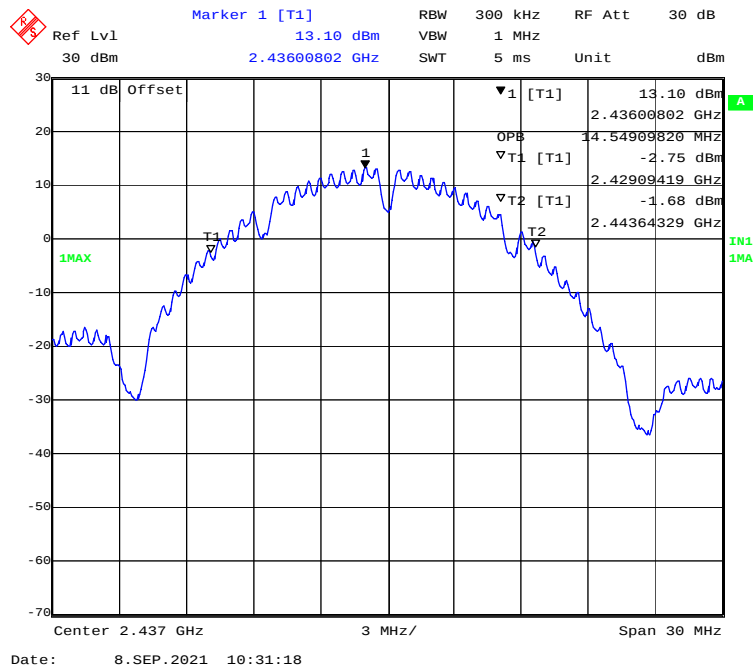


802.11b Mode High Channel

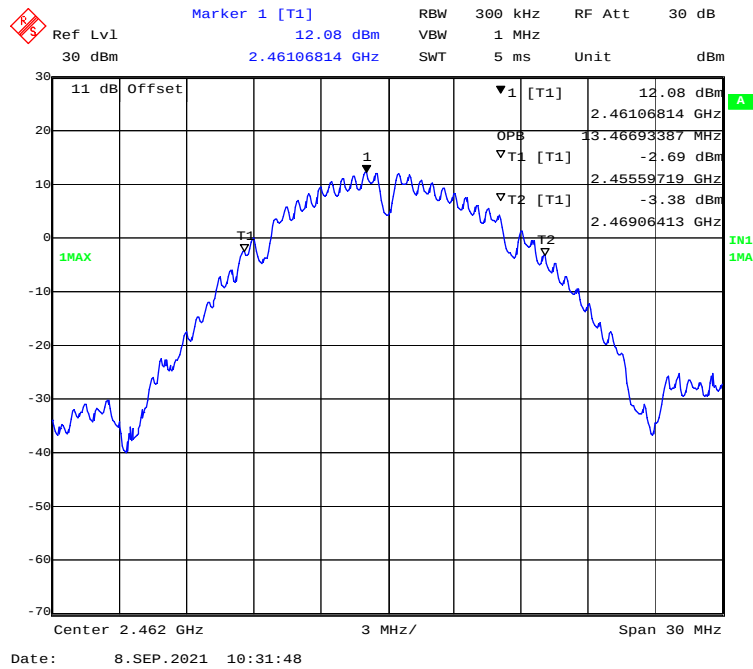


802.11g Mode Low Channel

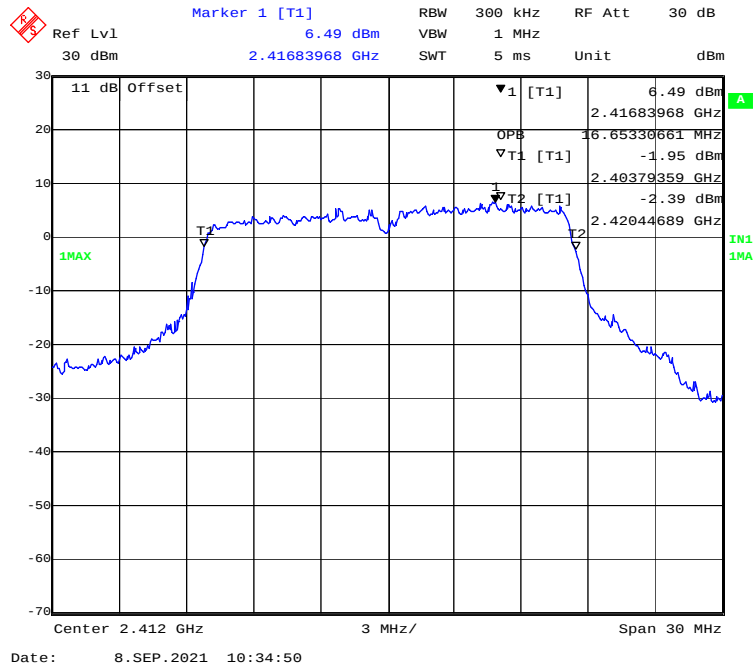


802.11g Mode Middle Channel

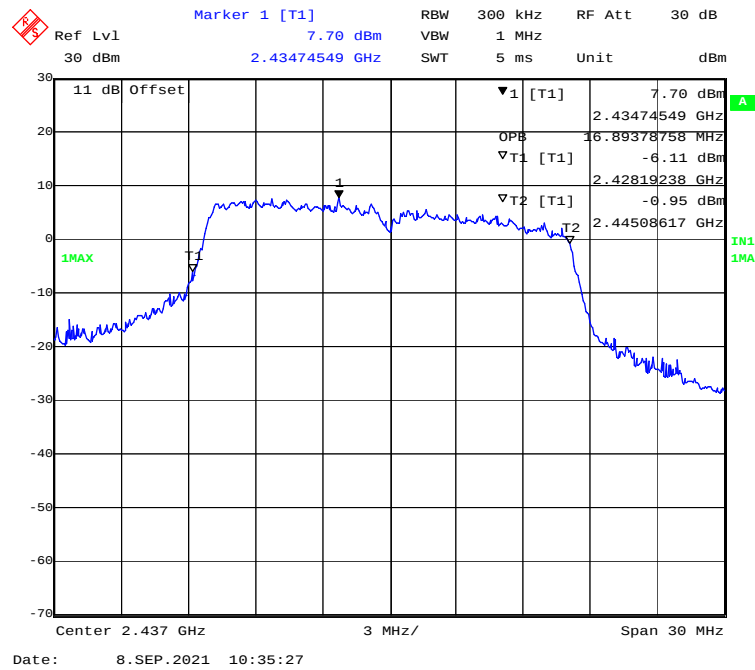


802.11g Mode High Channel

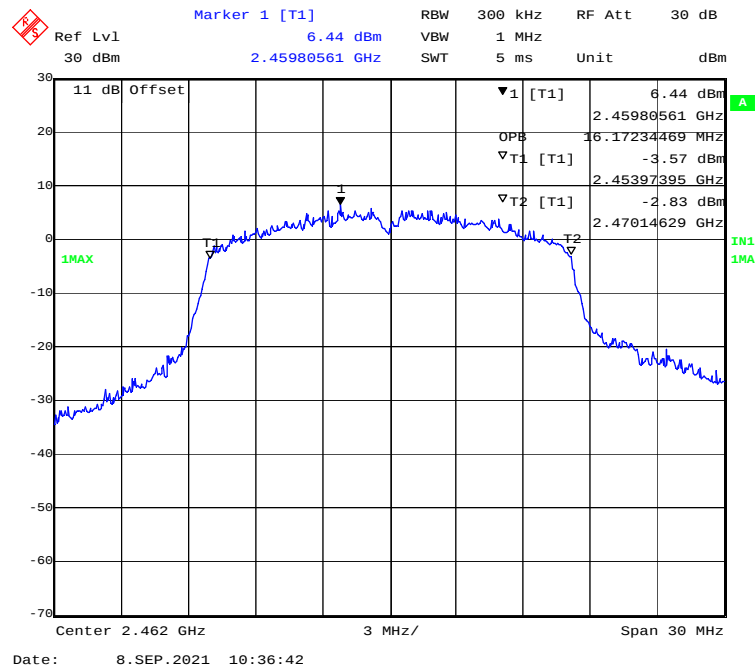


802.11n-HT20 Mode Low Channel

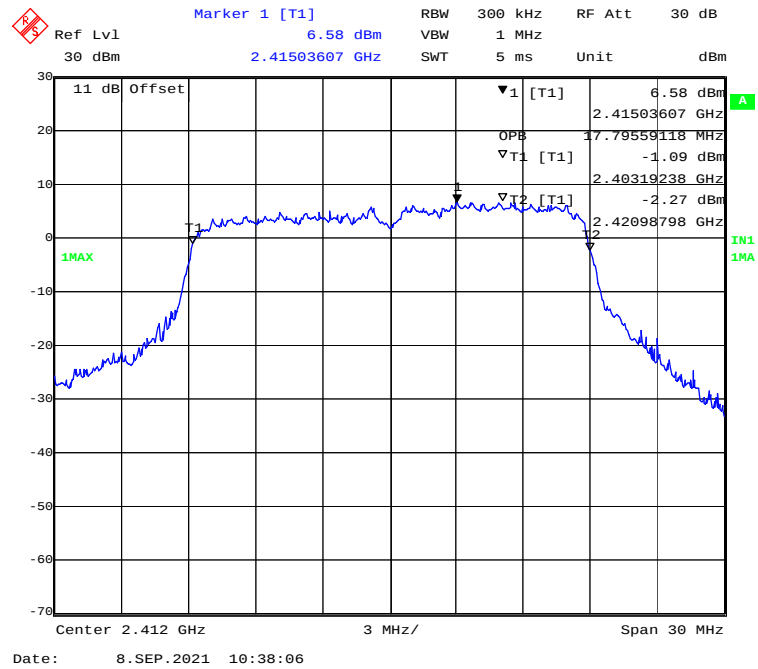


802.11n-HT20 Mode Middle Channel

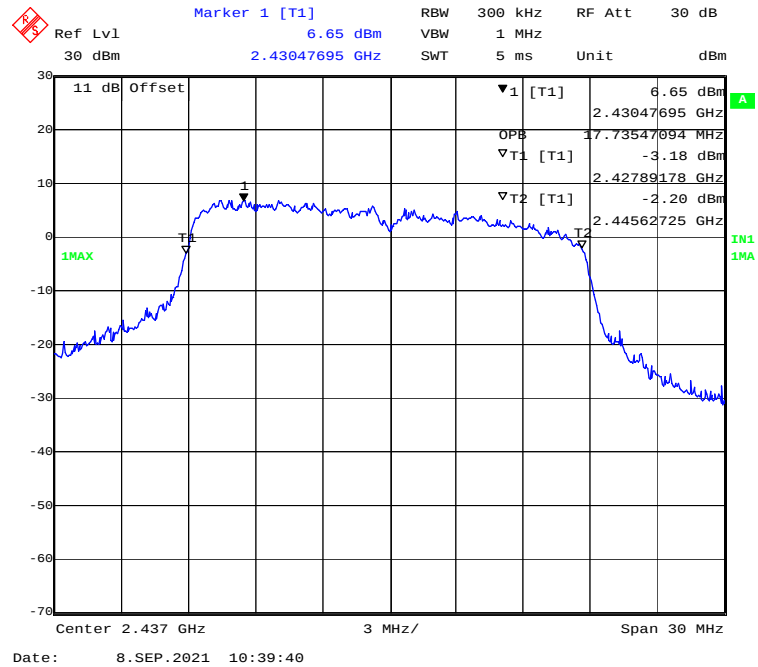


802.11n-HT20 Mode High Channel

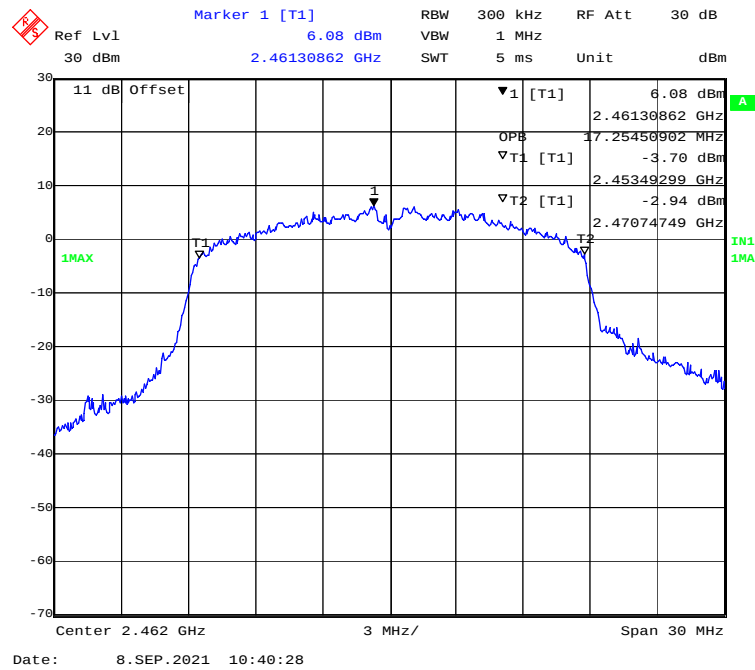


802.11n-HT40 Mode Low Channel

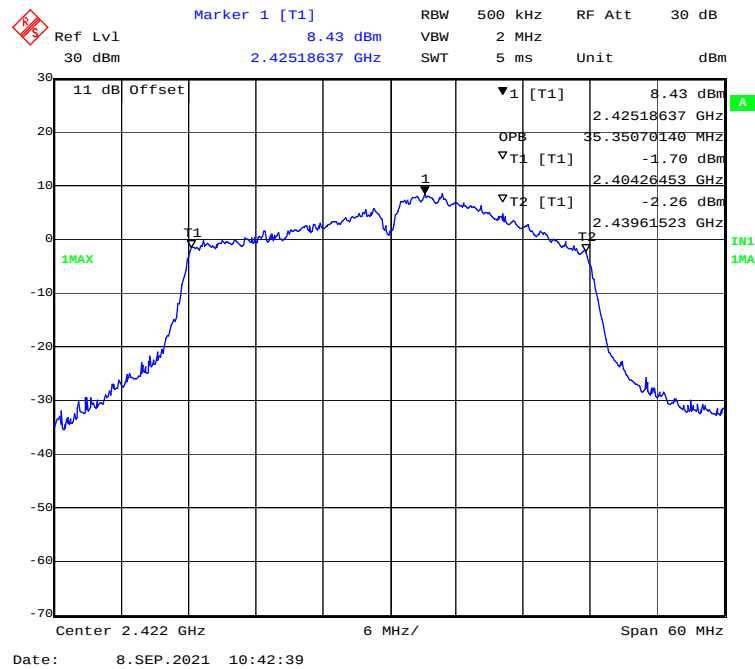

802.11n-HT40 Mode Middle Channel

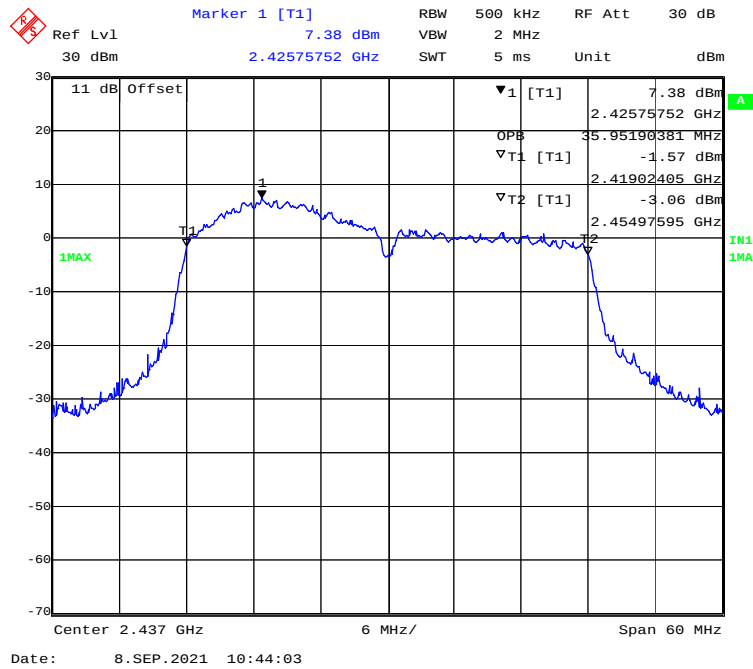

802.11n-HT40 Mode High Channel

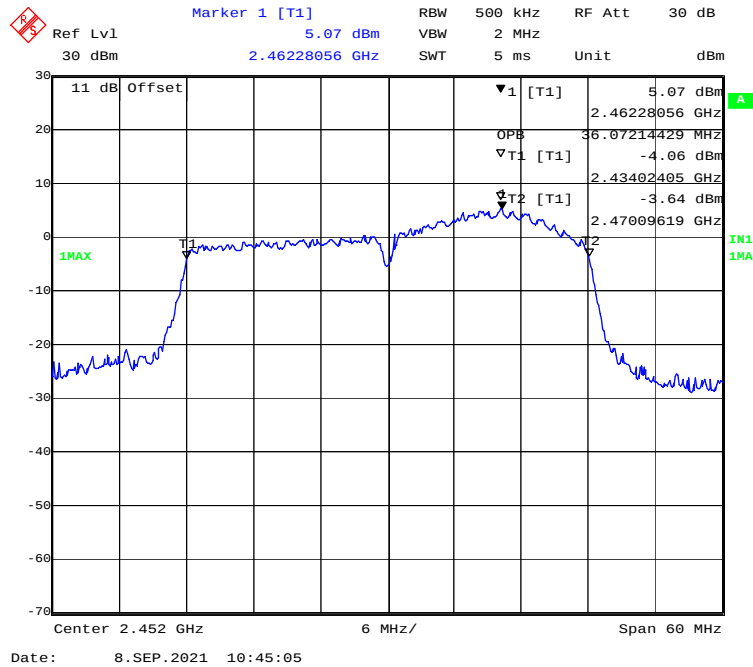

FCC §15.247(B) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard


According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, Compliant with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.9.1.3

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	23.3 °C
Relative Humidity:	53 %
ATM Pressure:	101.1 kPa

The testing was performed by Tyrone Wang on 2021-07-10.

EUT operation mode: Transmitting

Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)	Result
802.11b Mode				
Low	2412	22.49	30	Pass
Middle	2437	22.79	30	Pass
High	2462	21.11	30	Pass
802.11g Mode				
Low	2412	21.90	30	Pass
Middle	2437	22.40	30	Pass
High	2462	21.42	30	Pass
802.11n-HT20 Mode				
Low	2412	21.89	30	Pass
Middle	2437	22.54	30	Pass
High	2462	21.24	30	Pass
802.11n-HT40 Mode				
Low	2422	21.75	30	Pass
Middle	2437	20.59	30	Pass
High	2452	19.22	30	Pass

FCC §15.247(D) – 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates Compliant with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to ANSI C63.10-2013 sub-clause 6.10.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data**Environmental Conditions**

Temperature:	23.3 °C
Relative Humidity:	53 %
ATM Pressure:	101.1 kPa

The testing was performed by Tyrone Wang on 2021-07-10.

EUT operation mode: Transmitting

Test Result: Compliant

Marker 1 [T1]
 -19.06 dBm
 2.39915832 GHz

RBW 100 kHz
 VBW 300 kHz
 SWT 15 ms
 RF Att 30 dB
 Unit dBm

11 dB Offset
 -19.06 dBm
 2.39915832 GHz

D1 10.74 dBm
 D2 -9.26 dBm

1MAX
 EN1 LNA

Center 2.4 GHz
 6 MHz/
 Span 60 MHz

Date: 10.JUL.2021 11:10:14

Marker 1 [T1]

Ref Lvl 30 dBm

RBW 100 KHz

VBW 300 KHz

SWT 20 ms

RF Att 30 dB

Unit dBm

11 dB Offset

▼ 1 [T1]

-40.12 dBm

2.48606513 GHz

D1 9.27 dBm

1MAX

D2 -10.73 dBm



1



Center 2.4835 GHz

8 MHz/


Span 80 MHz

Date: 10.JUL.2021 11:21:54

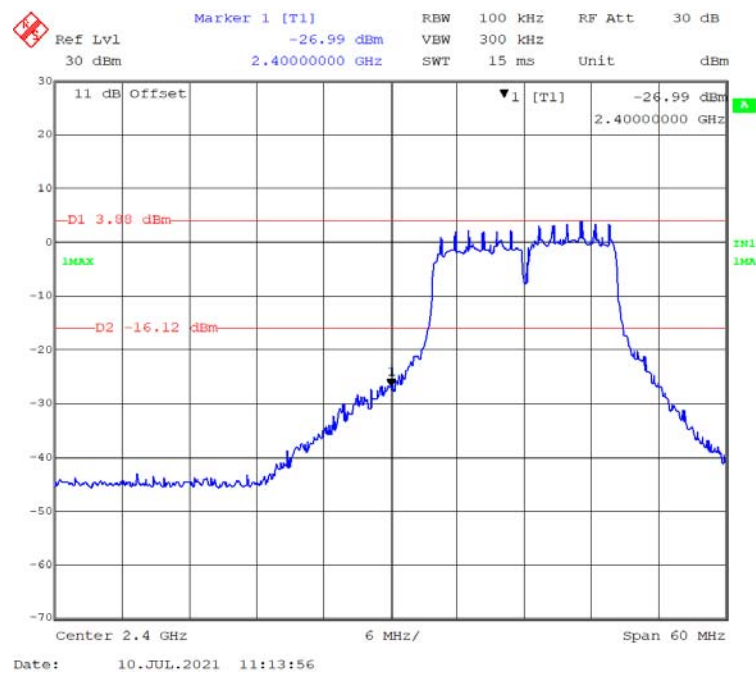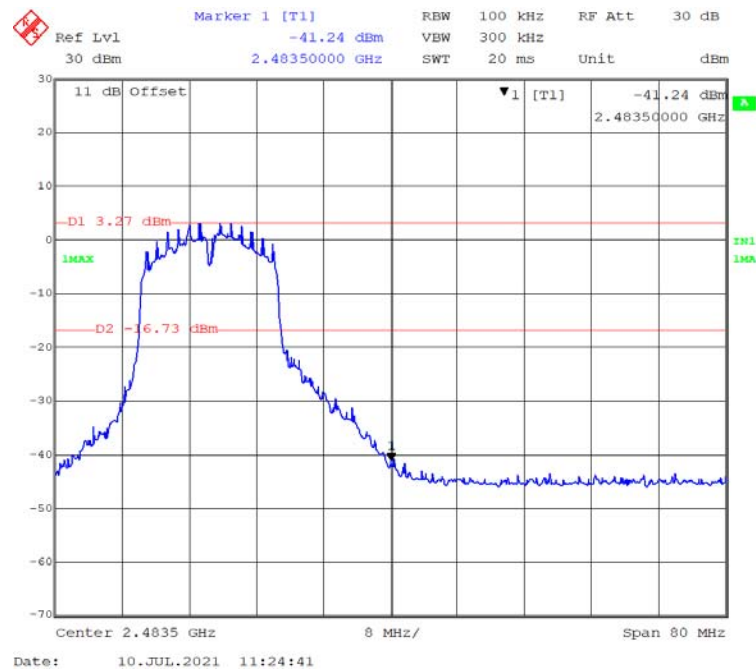
802.11g Mode Left Side**802.11g Mode Right Side**

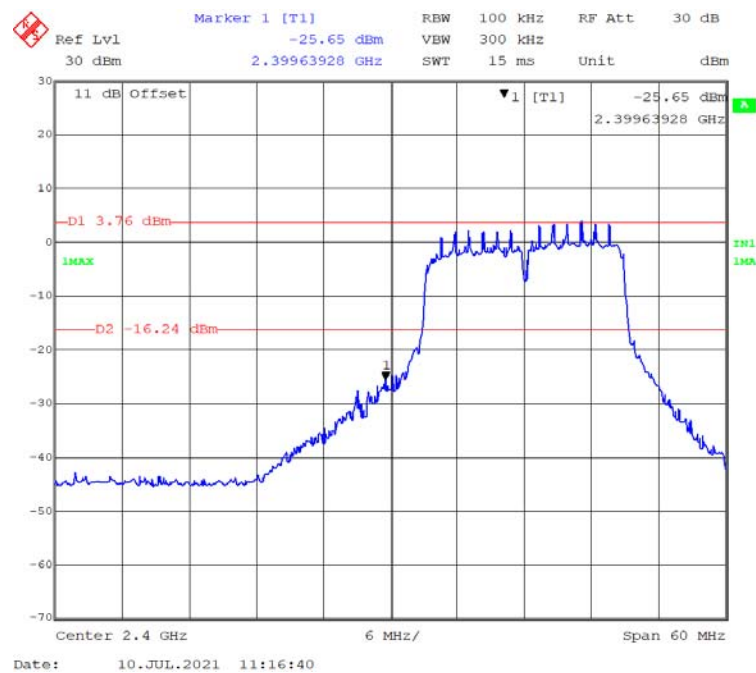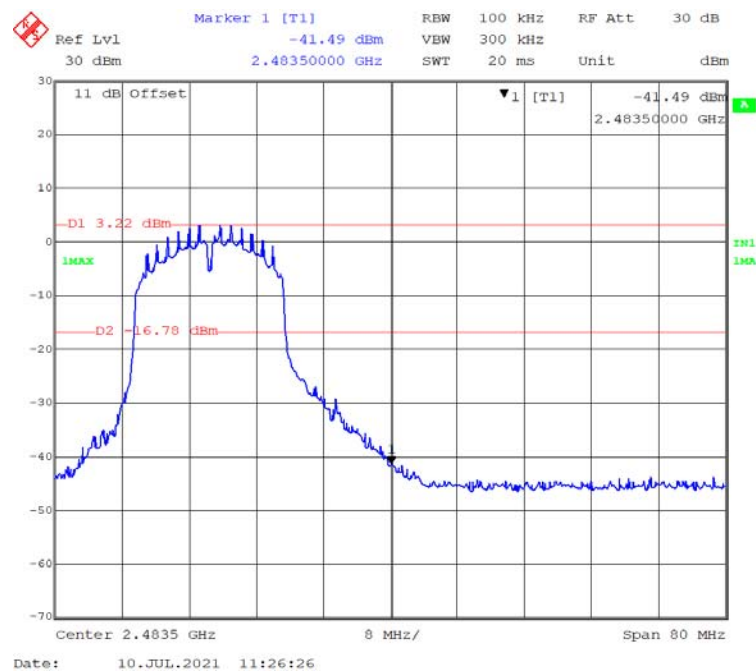802.11n-HT20 Mode Left Side**802.11n-HT20 Mode Right Side**

802.11n-HT40 Mode Left Side

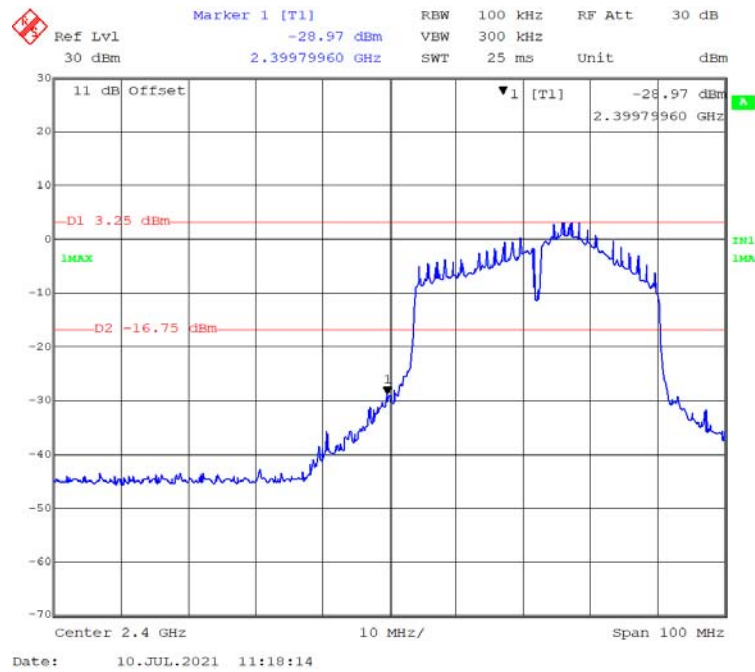

802.11n-HT40 Mode Right Side

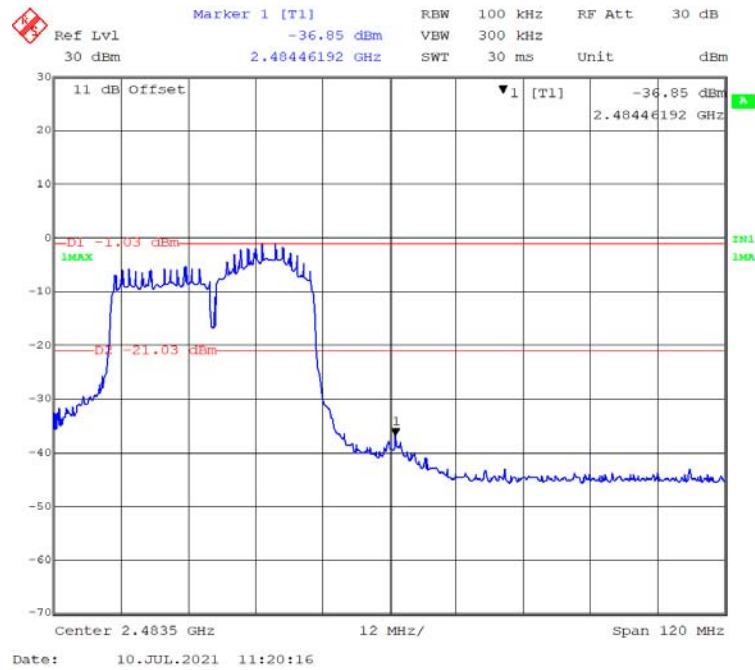

FCC §15.247(E) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.10.2

The following procedure shall be used if maximum peak conducted output power was used to determine Compliant, and it is optional if the maximum conducted (average) output power was used to determine Compliant:

1. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
2. Set the VBW $\geq 3 * \text{RBW}$.
3. Set the span to 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.
9. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Data

Environmental Conditions

Temperature:	23.3 °C
Relative Humidity:	53 %
ATM Pressure:	101.1 kPa


The testing was performed by Tyrone Wang on 2021-07-10.

EUT operation mode: Transmitting


Test Result: Pass

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
802.11b Mode			
Low	2412	-6.08	≤ 8
Middle	2437	-5.88	≤ 8
High	2462	-8.06	≤ 8
802.11g Mode			
Low	2412	-12.98	≤ 8
Middle	2437	-12.58	≤ 8
High	2462	-13.61	≤ 8
802.11n-HT20 mode			
Low	2412	-13.96	≤ 8
Middle	2437	-12.57	≤ 8
High	2462	-14.18	≤ 8
802.11n-HT40 mode			
Low	2422	-12.33	≤ 8
Middle	2437	-13.15	≤ 8
High	2452	-16.18	≤ 8


802.11b Mode Low Channel

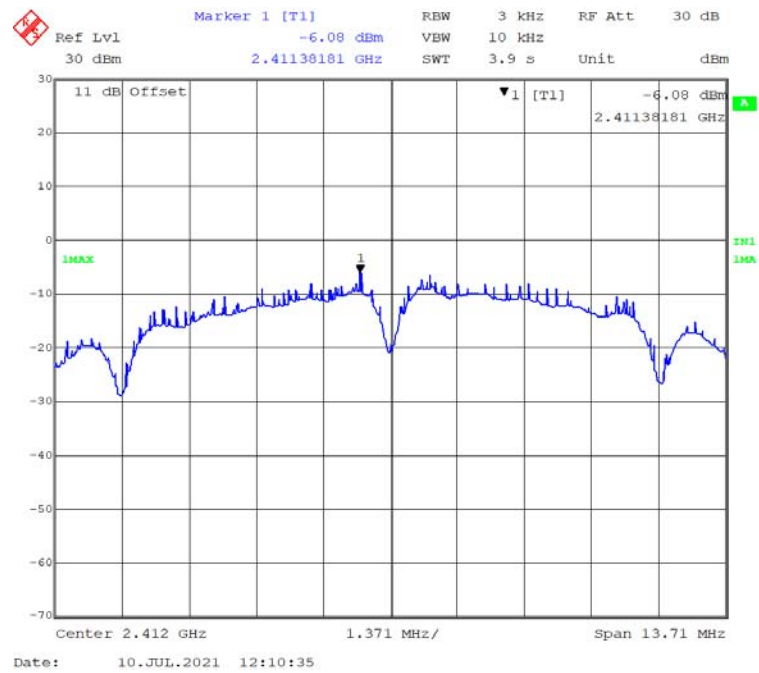


802.11b Mode Middle Channel

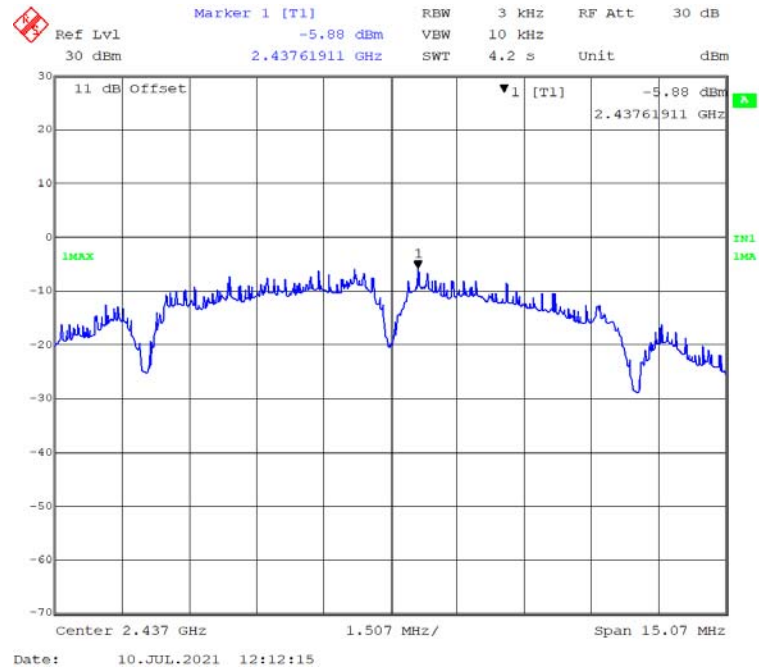


802.11b Mode High Channel

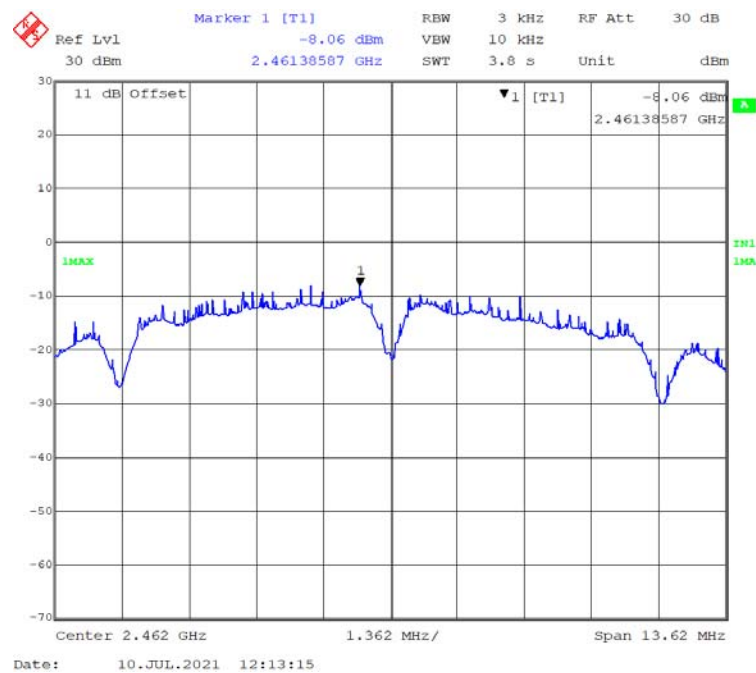


802.11g Mode Low Channel


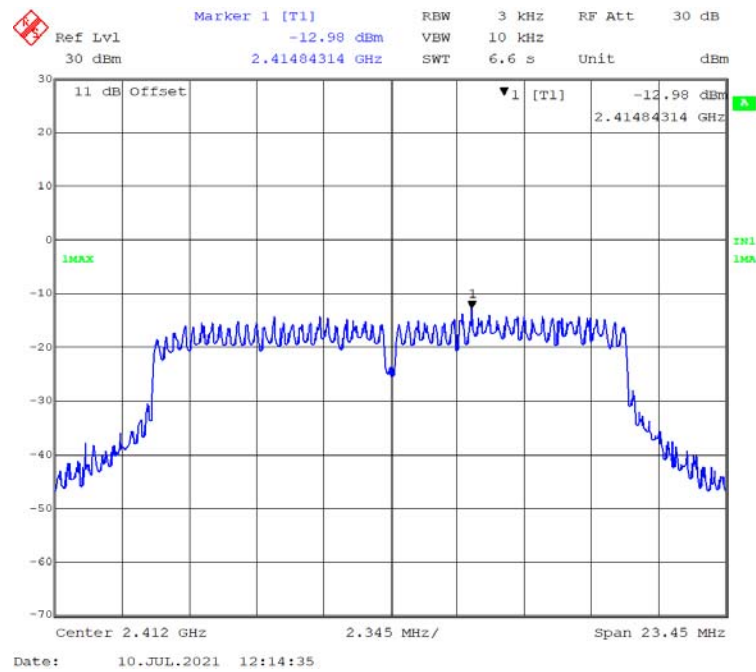


802.11g Mode Middle Channel

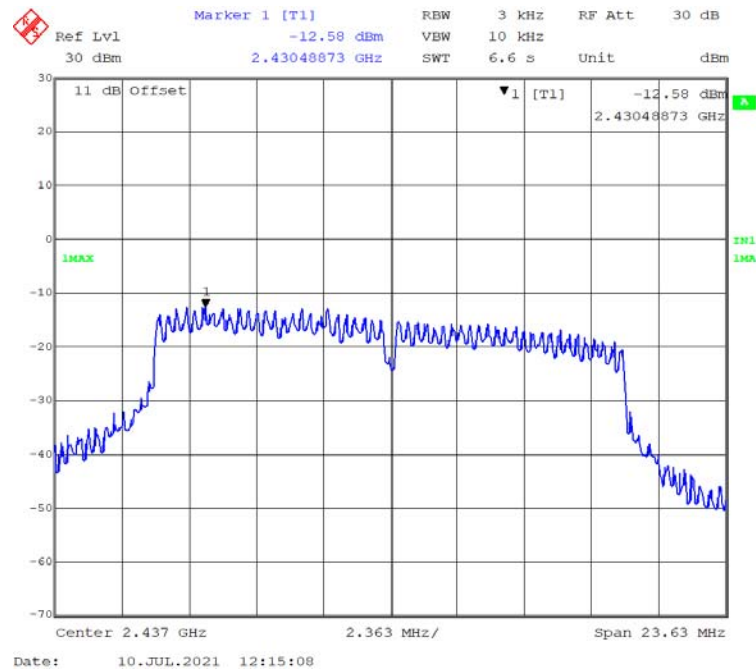


802.11g Mode High Channel

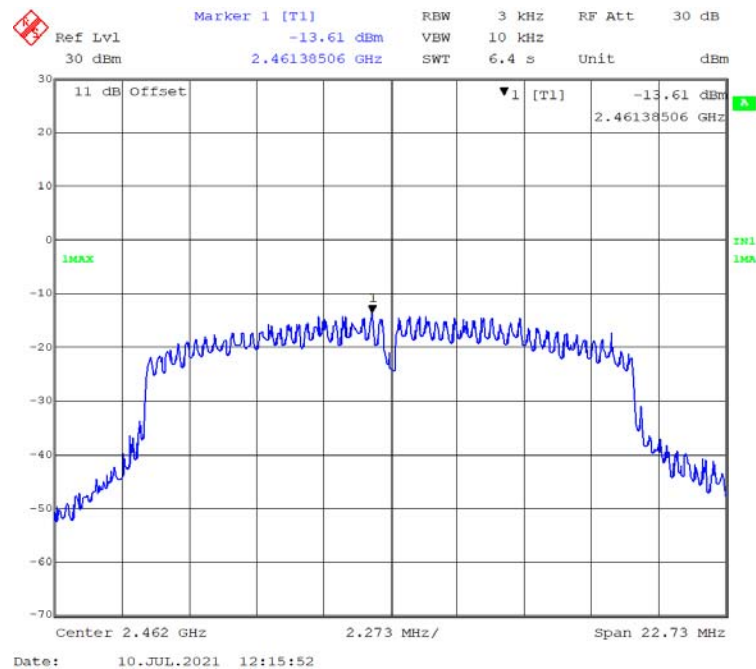


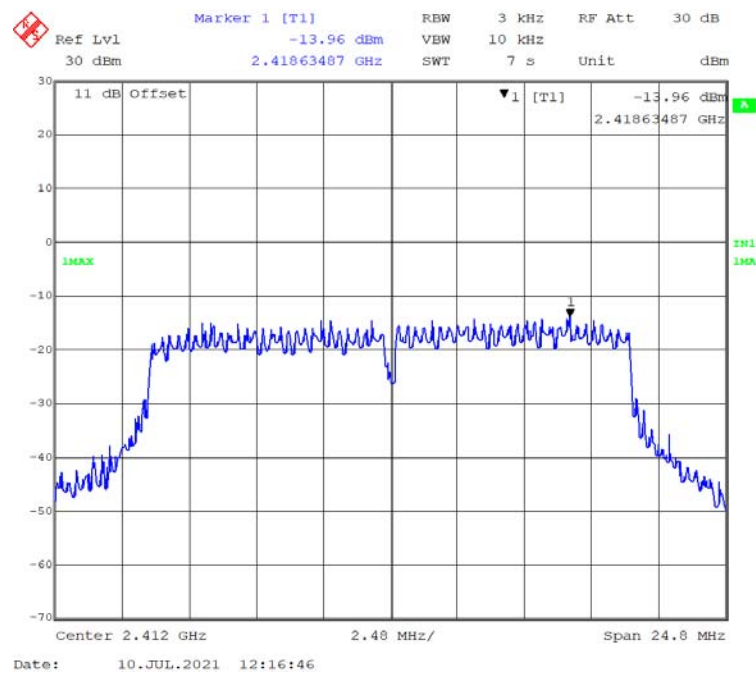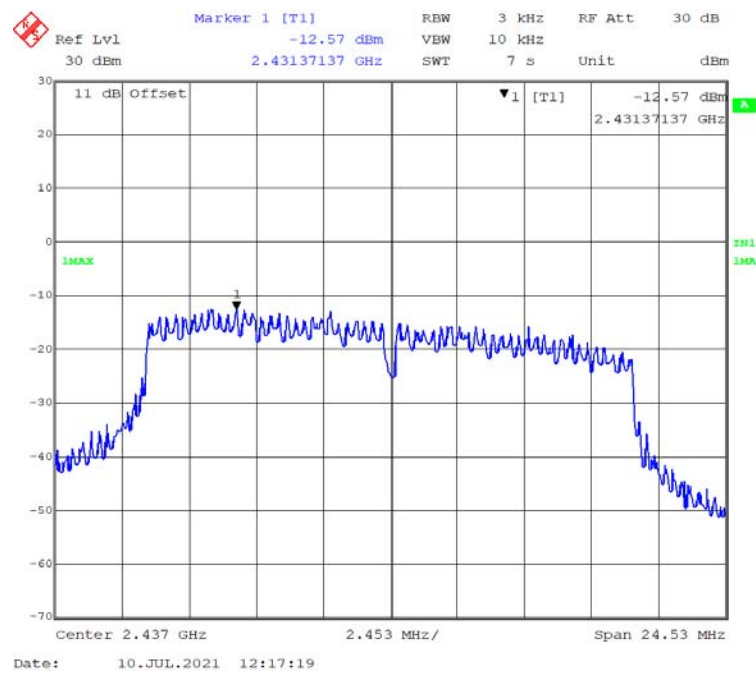802.11n-HT20 Mode Low Channel**802.11n-HT20 Mode Middle Channel**


802.11n-HT20 Mode High Channel

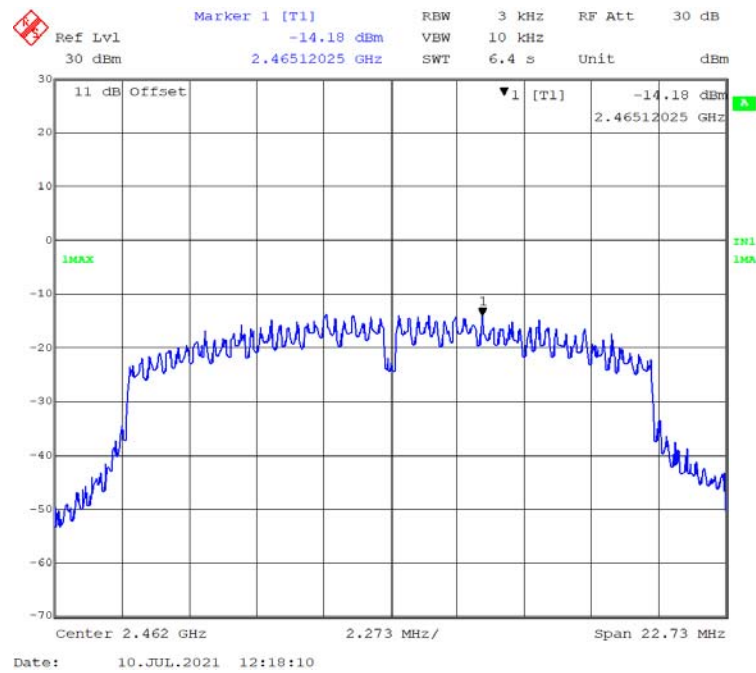


802.11n-HT40 Mode Low Channel

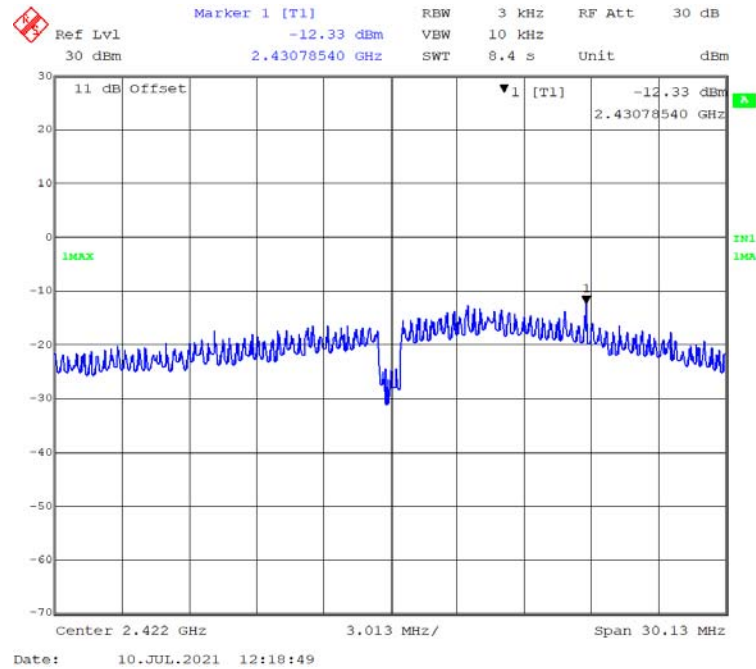

802.11n-HT40 Mode Middle Channel

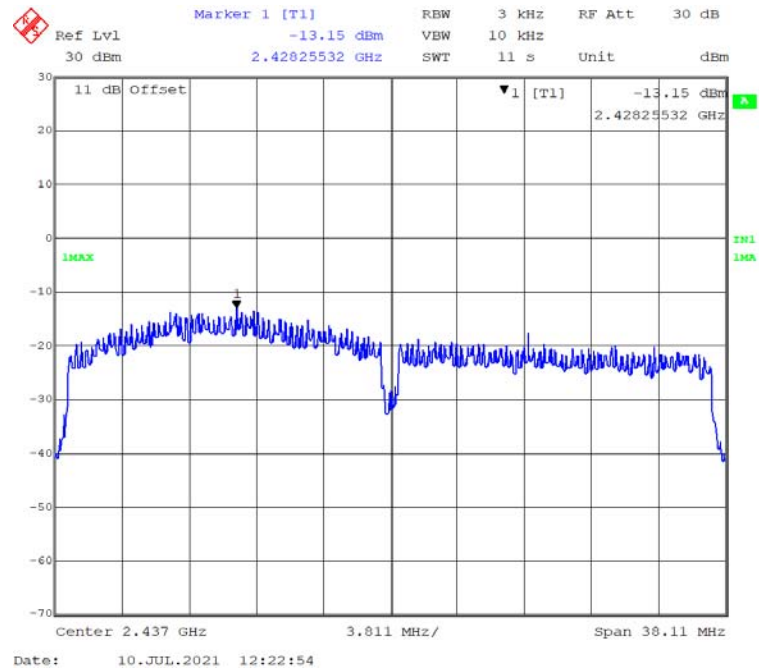

802.11n-HT40 Mode High Channel

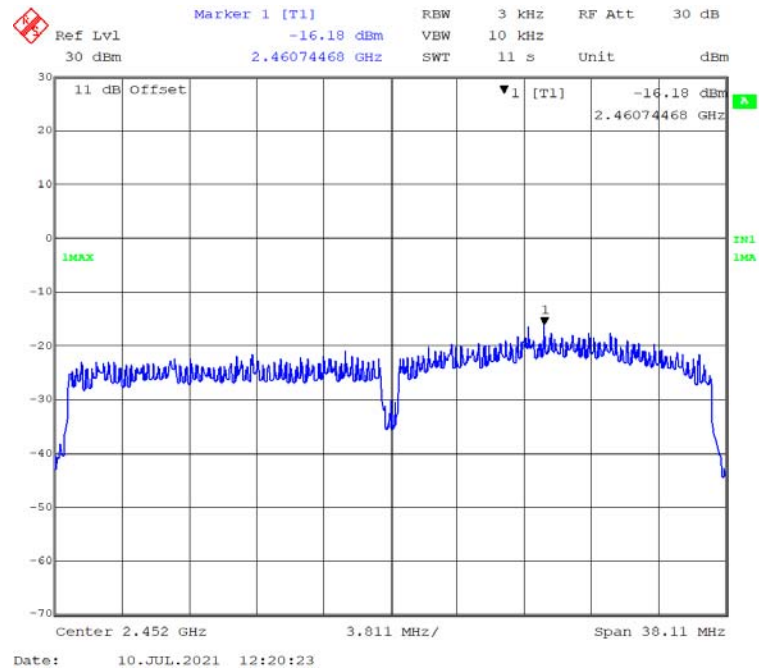

Declarations

1: BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

2: Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

3: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

4: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

5: This report cannot be reproduced except in full, without prior written approval of the Company.

6: This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

******* END OF REPORT *******