



# RF TEST REPORT

|                   |                                        |
|-------------------|----------------------------------------|
| <b>Applicant</b>  | Quectel Wireless Solutions Co., Ltd    |
| <b>FCC ID</b>     | XMR202005BG95M5                        |
| <b>Product</b>    | LTE Cat M1 & Cat NB2 & EGPRS<br>Module |
| <b>Brand</b>      | Quectel                                |
| <b>Model</b>      | BG95-M5                                |
| <b>Report No.</b> | R2005A0283-R2V1                        |
| <b>Issue Date</b> | July 23, 2020                          |

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2019)/ FCC CFR 47 Part 24E (2019)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Peng Tao

Approved by: Kai Xu

## TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



## TABLE OF CONTENT

|                                                                   |    |
|-------------------------------------------------------------------|----|
| 1. Test Laboratory .....                                          | 4  |
| 1.1. Notes of the test report .....                               | 4  |
| 1.2. Test facility .....                                          | 4  |
| 1.3. Testing Location .....                                       | 4  |
| 2. General Description of Equipment under Test .....              | 5  |
| 2.3. Applicant and Manufacturer Information .....                 | 5  |
| 2.4. General information .....                                    | 5  |
| 3. Applied Standards .....                                        | 7  |
| 4. Test Configuration .....                                       | 8  |
| 5. Test Case Results .....                                        | 10 |
| 5.1. RF Power Output and Effective Isotropic Radiated Power ..... | 10 |
| 5.2. Occupied Bandwidth .....                                     | 16 |
| 5.3. Band Edge Compliance .....                                   | 25 |
| 5.4. Peak-to-Average Power Ratio (PAPR) .....                     | 43 |
| 5.5. Frequency Stability .....                                    | 46 |
| 5.6. Spurious Emissions at Antenna Terminals .....                | 55 |
| 5.7. Radiates Spurious Emission .....                             | 71 |
| 6. Main Test Instruments .....                                    | 78 |

## Summary of measurement results

| No. | Test Case                                              | Clause in FCC rules        | Verdict |
|-----|--------------------------------------------------------|----------------------------|---------|
| 1   | RF Power Output and Effective Isotropic Radiated Power | 2.1046<br>24.232(c)        | PASS    |
| 2   | Occupied Bandwidth                                     | 2.1049                     | PASS    |
| 3   | Band Edge Compliance                                   | 2.1051 / 24.238(a)         | PASS    |
| 4   | Peak-to-Average Power Ratio                            | 24.232/KDB 971168 D01(5.7) | PASS    |
| 5   | Frequency Stability                                    | 2.1055 / 24.235            | PASS    |
| 6   | Spurious Emissions at Antenna Terminals                | 2.1051 / 24.238(a)         | PASS    |
| 7   | Radiates Spurious Emission                             | 2.1053 / 24.238(a)         | PASS    |

Date of Testing: May 23, 2020 ~ June 16, 2020

Note: PASS: The EUT complies with the essential requirements in the standard.

FAIL: The EUT does not comply with the essential requirements in the standard.

All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.

**Note: This revised report (Report No.: R2005A0283-R2V1) supersedes and replaces the previously issued report (Report No.: R2005A0283-R2). Please discard or destroy the previously issued report and dispose of it accordingly.**

## 1. Test Laboratory

### 1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

### 1.2. Test facility

#### **FCC (Designation number: CN1179, Test Firm Registration Number: 446626)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

#### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

### 1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)

## 2. General Description of Equipment under Test

### 2.3. Applicant and Manufacturer Information

|                      |                                                                                                                       |
|----------------------|-----------------------------------------------------------------------------------------------------------------------|
| Applicant            | Quectel Wireless Solutions Co., Ltd                                                                                   |
| Applicant address    | Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233 |
| Manufacturer         | Quectel Wireless Solutions Co., Ltd                                                                                   |
| Manufacturer address | Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233 |

### 2.4. General information

| EUT Description            |                                                                                                                                 |             |             |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------|-------------|-------------|
| Model                      | BG95-M5                                                                                                                         |             |             |
| IMEI                       | 866833040004456                                                                                                                 |             |             |
| Hardware Version           | R1.1                                                                                                                            |             |             |
| Software Version           | BG95M5LAR02A02                                                                                                                  |             |             |
| Power Supply               | External power supply                                                                                                           |             |             |
| Antenna Type               | The EUT don't have standard Antenna, The Antenna used for testing in this report is the after-market accessory (Dipole Antenna) |             |             |
| Antenna Gain               | Frequency(MHz)                                                                                                                  | Gain (dBi ) |             |
|                            | 1860                                                                                                                            | 1.25        |             |
|                            | 1880                                                                                                                            | 1.38        |             |
|                            | 1900                                                                                                                            | 1.59        |             |
| Test Mode(s)               | GSM1900; LTE Band 2/25;                                                                                                         |             |             |
| Test Modulation            | (GSM/GPRS)GMSK, (EGPRS) GMSK/ 8PSK; (LTE)QPSK,16QAM                                                                             |             |             |
| GPRS Multislot Class       | 33                                                                                                                              |             |             |
| EGPRS Multislot Class      | 33                                                                                                                              |             |             |
| LTE Category               | M1                                                                                                                              |             |             |
| Maximum E.I.R.P            | GSM 1900:                                                                                                                       | 31.42dBm    |             |
|                            | LTE Band 2:                                                                                                                     | 25.23dBm    |             |
|                            | LTE Band 25:                                                                                                                    | 25.03dBm    |             |
| Rated Power Supply Voltage | 3.8V                                                                                                                            |             |             |
| Extreme Voltage            | Minimum: 3.3V     Maximum: 4.3V                                                                                                 |             |             |
| Extreme Temperature        | Lowest: -40°C     Highest: +85°C                                                                                                |             |             |
| Frequency Range(s)         | Band                                                                                                                            | Tx (MHz)    | Rx (MHz)    |
|                            | GSM1900                                                                                                                         | 1850 ~ 1910 | 1930 ~ 1990 |
|                            | LTE Band 2                                                                                                                      | 1850 ~ 1910 | 1930 ~ 1990 |
|                            | LTE Band 25                                                                                                                     | 1850 ~ 1915 | 1930 ~ 1995 |



Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.

### 3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**Test standards:**

**FCC CFR 47 Part 24E (2019)**

**ANSI C63.26 (2015)**

**Reference standard:**

**FCC CFR47 Part 2 (2019)**

**KDB 971168 D01 Power Meas License Digital Systems v03r01**

## 4. Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (Z axis, horizontal polarization) and the worst case was recorded.

All mode and data rates and positions and RB size and modulations were investigated.

Subsequently, only the worst case emissions are reported.

The following testing in GSM/ LTE is set based on the maximum RF Output Power.

Test modes are chosen to be reported as the worst case configuration below:

| Test items                                             | Modes/Modulation                         |
|--------------------------------------------------------|------------------------------------------|
|                                                        | GSM 1900                                 |
| RF Power Output and Effective Isotropic Radiated Power | GSM<br>GPRS<br>EGPRS                     |
| Occupied Bandwidth                                     | GSM<br>GPRS(1Tx slot)<br>EGPRS(1Tx slot) |
| Band Edge Compliance                                   | GSM<br>GPRS(1Tx slot)<br>EGPRS(1Tx slot) |
| Peak-to-Average Power Ratio                            | GSM<br>GPRS(1Tx slot)<br>EGPRS(1Tx slot) |
| Frequency Stability                                    | GSM<br>GPRS(1Tx slot)<br>EGPRS(1Tx slot) |
| Spurious Emissions at Antenna Terminals                | GSM                                      |
| Radiates Spurious Emission                             | GSM                                      |

Test modes are chosen to be reported as the worst case configuration below for LTE Band 2/25:

| Test items                                             | Bandwidth (MHz) |   |   |    |    |    | Modulation |       | RB |     |      | Test Channel |   |   |
|--------------------------------------------------------|-----------------|---|---|----|----|----|------------|-------|----|-----|------|--------------|---|---|
|                                                        | 1.4             | 3 | 5 | 10 | 15 | 20 | QPSK       | 16QAM | 1  | 50% | 100% | L            | M | H |
| RF Power Output and Effective Isotropic Radiated Power | O               | O | O | O  | O  | O  | O          | O     | O  | O   | O    | O            | O | O |



|                              |                                                                                                                                                  |   |   |   |   |   |   |   |   |   |   |   |   |   |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Occupied Bandwidth           | O                                                                                                                                                | O | O | O | O | O | O | O | - | - | O | O | O | O |
| Band Edge Compliance         | O                                                                                                                                                | O | O | O | O | O | O | O | O | - | O | O | - | O |
| Peak-to-Average Power Ratio  | O                                                                                                                                                | O | O | O | O | O | O | O | - | - | O | O | O | O |
| Frequency Stability          | O                                                                                                                                                | O | O | O | O | O | O | O | O | O | O | O | O | O |
| Conducted Spurious Emissions | O                                                                                                                                                | O | O | O | O | O | O | - | O | - | - | O | O | O |
| Radiates Spurious Emission   | O                                                                                                                                                | - | O | - | - | O | O | - | O | - | - | - | O | - |
| Note                         | <p>1. The mark "O" means that this configuration is chosen for testing.</p> <p>2. The mark "-" means that this configuration is not testing.</p> |   |   |   |   |   |   |   |   |   |   |   |   |   |

## 5. Test Case Results

### 5.1.RF Power Output and Effective Isotropic Radiated Power

#### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

#### Methods of Measurement


During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).


- Connect the equipment as illustrated. Mount the equipment with the manufacturer specified antenna in a vertical orientation on a manufacturer specified mounting surface located on a non-conducting rotating platform of a RF anechoic chamber (preferred) or a standard radiation site.
- Key the transmitter, then rotate the EUT 360° azimuthally and record spectrum analyzer power level (LVL) measurements at angular increments that are sufficiently small to permit resolution of all peaks. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading at each angular increment. (Note: several batteries may be needed to offset the effect of battery voltage droop, which should not exceed 5% of the manufactured specified battery voltage during transmission).
- Replace the transmitter under test with a vertically polarized half-wave dipole (or an antenna whose gain is known relative to an ideal half-wave dipole). The center of the antenna should be at the same location as the center of the antenna under test.
- Connect the antenna to a signal generator with a known output power and record the path loss (in dB) as LOSS. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading.  $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$
- Determine the effective radiated output power at each angular position from the readings in steps b) and d) using the following equation:  $ERP \text{ (dBm)} = LVL \text{ (dBm)} + LOSS \text{ (dB)}$
- The maximum ERP is the maximum value determined in the preceding step.
- When calculating ERP, in addition to knowing the antenna radiation and matching characteristics, it is necessary to know the loss values of all elements (e.g.transmission line attenuation, mismatches, filters, combiners) interposed between the point where transmitter output power is measured, and the point where power is applied to the antenna. ERP can then be calculated as follows:  
 $EIRP \text{ (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBi)}$   
where:dBd refers to gain relative to an ideal dipole.  
 $EIRP \text{ (dBm)} = ERP \text{ (dBm)} + 2.15 \text{ (dB.)}$

The RB allocation refers to section 5.1, using the maximum output power configuration.

## Test Setup

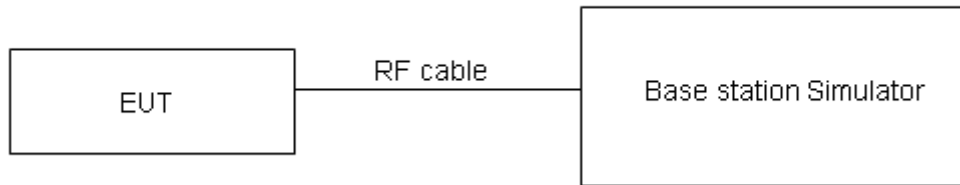

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

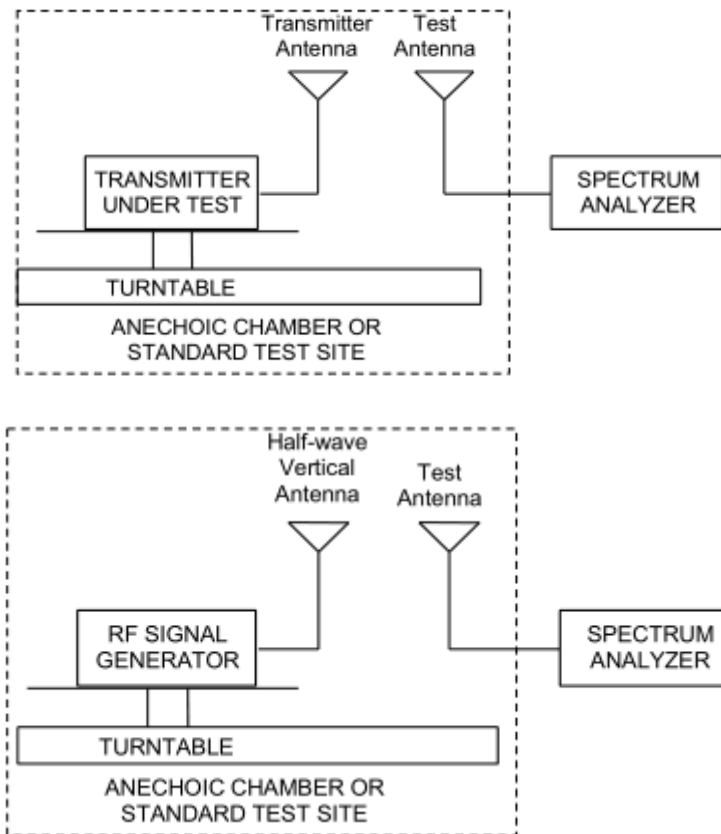

## Limits

No specific RF power output requirements in part 2.1046.

Rule Part 24.232(c) Mobile and portable stations are limited to 2 watts EIRP.

Rule Part 24.232(e) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

|       |                             |
|-------|-----------------------------|
| Limit | $\leq 2 \text{ W}$ (33 dBm) |
|-------|-----------------------------|



## Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.4$  dB for RF power output,  $k = 2$ ,  $U = 1.19$  dB for EIRP.

## Test Results

| GSM 1900     |          | Conducted Power (dBm) |             |              | EIRP (dBm)   |             |              |
|--------------|----------|-----------------------|-------------|--------------|--------------|-------------|--------------|
|              |          | Channel 512           | Channel 661 | Channel 810  | Channel 512  | Channel 661 | Channel 810  |
|              |          | 1850.2 (MHz)          | 1880 (MHz)  | 1909.8 (MHz) | 1850.2 (MHz) | 1880 (MHz)  | 1909.8 (MHz) |
| GSM(GMSK)    | Results  | 30.17                 | 30.00       | 29.82        | 31.42        | 31.38       | 31.41        |
| GPRS (GMSK)  | 1TXslot  | 29.97                 | 29.84       | 29.81        | 31.22        | 31.22       | 31.40        |
|              | 2TXslots | 28.38                 | 28.18       | 28.32        | 29.63        | 29.56       | 29.91        |
|              | 3TXslots | 26.77                 | 26.51       | 26.97        | 28.02        | 27.89       | 28.56        |
|              | 4TXslots | 26.48                 | 26.29       | 25.90        | 27.73        | 27.67       | 27.49        |
| EGPRS (8PSK) | 1TXslot  | 25.98                 | 25.71       | 25.51        | 27.23        | 27.09       | 27.10        |
|              | 2TXslots | 24.84                 | 24.65       | 24.41        | 26.09        | 26.03       | 26.00        |
|              | 3TXslots | 23.02                 | 22.82       | 22.67        | 24.27        | 24.20       | 24.26        |
|              | 4TXslots | 21.62                 | 21.55       | 21.40        | 22.87        | 22.93       | 22.99        |

| LTE<br>Band 2 | Channel/<br>Frequency(MHz) | Index | RB#<br>RBstart | Conducted Power<br>(dBm) |       | EIRP (dBm) |       |
|---------------|----------------------------|-------|----------------|--------------------------|-------|------------|-------|
|               |                            |       |                | QPSK                     | 16QAM | QPSK       | 16QAM |
| 1.4MHz        | 18607/1850.7               | 0     | 1#0            | 23.05                    | 22.25 | 24.30      | 23.50 |
|               |                            | 0     | 6#0            | 21.13                    | 21.11 | 22.38      | 22.36 |
|               | 18900/1880                 | 0     | 1#0            | 23.09                    | 22.00 | 24.47      | 23.38 |
|               |                            | 0     | 6#0            | 20.96                    | 21.02 | 22.34      | 22.40 |
|               | 19193/1909.3               | 0     | 1#5            | 23.50                    | 23.58 | 25.09      | 25.17 |
|               |                            | 0     | 6#0            | 21.57                    | 21.72 | 23.16      | 23.31 |
| 3MHz          | 18615/1851.5               | 0     | 1#0            | 23.44                    | 22.05 | 24.69      | 23.30 |
|               |                            | 0     | 6#0            | 21.12                    | 21.33 | 22.37      | 22.58 |
|               | 18900/1880                 | 0     | 1#0            | 23.32                    | 22.01 | 24.70      | 23.39 |
|               |                            | 0     | 6#0            | 20.96                    | 21.26 | 22.34      | 22.64 |
|               | 19185/1908.5               | 1     | 1#5            | 23.01                    | 21.99 | 24.60      | 23.58 |
|               |                            | 1     | 6#0            | 20.91                    | 20.88 | 22.50      | 22.47 |
| 5MHz          | 18625/1852.5               | 3     | 1#0            | 23.14                    | 23.31 | 24.39      | 24.56 |
|               |                            | 0     | 6#0            | 22.07                    | 21.11 | 23.32      | 22.36 |
|               | 18900/1880                 | 0     | 1#0            | 23.00                    | 23.14 | 24.38      | 24.52 |
|               |                            | 0     | 6#0            | 21.93                    | 21.03 | 23.31      | 22.41 |
|               | 19175/1907.5               | 0     | 1#5            | 23.37                    | 23.35 | 24.96      | 24.94 |
|               |                            | 3     | 6#0            | 22.54                    | 21.55 | 24.13      | 23.14 |
| 10MHz         | 18650/1855                 | 3     | 1#0            | 23.03                    | 23.24 | 24.28      | 24.49 |
|               |                            | 0     | 4#0            | 23.08                    | 21.81 | 24.33      | 23.06 |
|               | 18900/1880                 | 0     | 1#0            | 23.07                    | 23.23 | 24.45      | 24.61 |
|               |                            | 0     | 4#0            | 23.05                    | 21.89 | 24.43      | 23.27 |
|               | 19150/1905                 | 4     | 1#5            | 23.30                    | 23.64 | 24.89      | 25.23 |
|               |                            | 7     | 4#2            | 23.45                    | 22.51 | 25.04      | 24.10 |
| 15MHz         | 18675/1857.5               | 3     | 1#0            | 23.08                    | 23.22 | 24.33      | 24.47 |
|               |                            | 0     | 6#0            | 23.14                    | 23.24 | 24.39      | 24.49 |
|               | 18900/1880                 | 0     | 1#0            | 23.09                    | 23.17 | 24.47      | 24.55 |
|               |                            | 0     | 6#0            | 23.03                    | 23.06 | 24.41      | 24.44 |
|               | 19125/1902.5               | 8     | 1#5            | 23.01                    | 22.96 | 24.60      | 24.55 |
|               |                            | 11    | 6#0            | 23.01                    | 23.15 | 24.60      | 24.74 |
| 20MHz         | 18700/1860                 | 3     | 1#0            | 23.11                    | 23.25 | 24.36      | 24.50 |
|               |                            | 0     | 6#0            | 23.11                    | 23.17 | 24.36      | 24.42 |
|               | 18900/1880                 | 0     | 1#0            | 23.10                    | 23.24 | 24.48      | 24.62 |
|               |                            | 0     | 6#0            | 23.00                    | 23.08 | 24.38      | 24.46 |
|               | 19100/1900                 | 12    | 1#5            | 23.01                    | 22.61 | 24.60      | 24.20 |
|               |                            | 15    | 6#0            | 22.96                    | 23.07 | 24.55      | 24.66 |

| LTE<br>Band 25 | Channel/<br>Frequency(MHz) | Index | RB#<br>RBstart | Conducted Power<br>(dBm) |       | EIRP (dBm) |       |
|----------------|----------------------------|-------|----------------|--------------------------|-------|------------|-------|
|                |                            |       |                | QPSK                     | 16QAM | QPSK       | 16QAM |
| 1.4MHz         | 26047/1850.7               | 0     | 1#0            | 23.23                    | 22.67 | 24.61      | 24.05 |
|                |                            | 0     | 6#0            | 21.44                    | 21.34 | 22.82      | 22.72 |
|                | 26365/1882.5               | 0     | 1#0            | 23.08                    | 22.45 | 24.46      | 23.83 |
|                |                            | 0     | 6#0            | 21.22                    | 21.14 | 22.60      | 22.52 |
|                | 26683/1914.3               | 0     | 1#5            | 23.00                    | 22.10 | 24.36      | 23.46 |
|                |                            | 0     | 6#0            | 21.04                    | 20.81 | 22.40      | 22.17 |
| 3MHz           | 26055/1851.5               | 0     | 1#0            | 23.50                    | 22.67 | 24.88      | 24.05 |
|                |                            | 0     | 6#0            | 21.33                    | 21.34 | 22.71      | 22.72 |
|                | 26365/1882.5               | 0     | 1#0            | 23.23                    | 22.34 | 24.61      | 23.72 |
|                |                            | 0     | 6#0            | 21.23                    | 21.12 | 22.61      | 22.50 |
|                | 26675/1913.5               | 1     | 1#5            | 23.25                    | 21.84 | 24.61      | 23.20 |
|                |                            | 1     | 6#0            | 21.02                    | 21.33 | 22.38      | 22.69 |
| 5MHz           | 26065/1852.5               | 3     | 1#0            | 23.44                    | 23.63 | 24.82      | 25.01 |
|                |                            | 0     | 6#0            | 22.46                    | 21.35 | 23.84      | 22.73 |
|                | 26365/1882.5               | 0     | 1#0            | 23.39                    | 23.06 | 24.77      | 24.44 |
|                |                            | 0     | 6#0            | 22.28                    | 21.53 | 23.66      | 22.91 |
|                | 26665/1912.5               | 0     | 1#5            | 23.03                    | 22.71 | 24.39      | 24.07 |
|                |                            | 3     | 6#0            | 22.07                    | 21.20 | 23.43      | 22.56 |
| 10MHz          | 26090/1855                 | 3     | 1#0            | 23.59                    | 23.19 | 24.97      | 24.57 |
|                |                            | 0     | 4#0            | 23.60                    | 22.68 | 24.98      | 24.06 |
|                | 26365/1882.5               | 0     | 1#0            | 23.48                    | 23.04 | 24.86      | 24.42 |
|                |                            | 0     | 4#0            | 23.44                    | 22.78 | 24.82      | 24.16 |
|                | 26640/1910                 | 4     | 1#5            | 23.02                    | 23.13 | 24.38      | 24.49 |
|                |                            | 7     | 4#2            | 22.94                    | 21.83 | 24.30      | 23.19 |
| 15MHz          | 26115/1857.5               | 3     | 1#0            | 23.52                    | 23.21 | 24.90      | 24.59 |
|                |                            | 0     | 6#0            | 22.48                    | 22.59 | 23.86      | 23.97 |
|                | 26365/1882.5               | 0     | 1#0            | 23.38                    | 23.06 | 24.76      | 24.44 |
|                |                            | 0     | 6#0            | 22.27                    | 22.47 | 23.65      | 23.85 |
|                | 26615/1907.5               | 8     | 1#5            | 23.01                    | 23.22 | 24.37      | 24.58 |
|                |                            | 11    | 6#0            | 22.94                    | 23.16 | 24.30      | 24.52 |
| 20MHz          | 26140/1860                 | 3     | 1#0            | 23.36                    | 23.65 | 24.74      | 25.03 |
|                |                            | 0     | 6#0            | 23.42                    | 23.55 | 24.80      | 24.93 |
|                | 26365/1882.5               | 0     | 1#0            | 23.34                    | 23.41 | 24.72      | 24.79 |
|                |                            | 0     | 6#0            | 23.27                    | 23.39 | 24.65      | 24.77 |
|                | 26590/1905                 | 12    | 1#5            | 23.03                    | 22.71 | 24.39      | 24.07 |
|                |                            | 15    | 6#0            | 22.94                    | 23.18 | 24.30      | 24.54 |

## 5.2.Occupied Bandwidth

### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

### Method of Measurement


The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 3kHz, VBW is set to 10kHz for GSM 1900,

RBW is set to 51kHz, VBW is set to 160kHz for LTE Band 2/25

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

### Test Setup

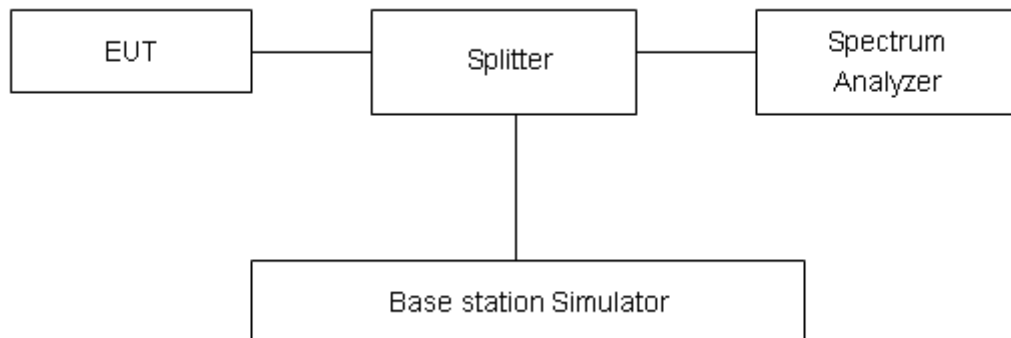

### Limits

No specific occupied bandwidth requirements in part 2.1049.

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 624\text{Hz}$ .

## Test Result

| Mode              | Channel | Frequency (MHz) | 99% Power Bandwidth (MHz) | -26dBc Bandwidth(MHz) |
|-------------------|---------|-----------------|---------------------------|-----------------------|
| GSM 1900 (GMSK)   | 512     | 1850.2          | 0.2418                    | 0.302                 |
|                   | 661     | 1880.0          | 0.2443                    | 0.296                 |
|                   | 810     | 1909.8          | 0.2439                    | 0.300                 |
| GPRS 1900 (GMSK)  | 512     | 1850.2          | 0.2423                    | 0.307                 |
|                   | 661     | 1880.0          | 0.2474                    | 0.310                 |
|                   | 810     | 1909.8          | 0.2454                    | 0.311                 |
| EGPRS 1900 (8PSK) | 512     | 1850.2          | 0.2457                    | 0.312                 |
|                   | 661     | 1880.0          | 0.2472                    | 0.318                 |
|                   | 810     | 1909.8          | 0.2478                    | 0.298                 |

| Mode          | Bandwidth | Modulation | Channel/<br>Frequency(MHz) | RB  | Bandwidth(MHz) |        |
|---------------|-----------|------------|----------------------------|-----|----------------|--------|
|               |           |            |                            |     | 99% Power      | -26dBc |
| LTE<br>Band 2 | 1.4MHz    | QPSK       | 18900/1880                 | 6#0 | 1.1081         | 1.388  |
|               |           | 16QAM      | 18900/1880                 | 6#0 | 0.9459         | 1.186  |
|               | 3MHz      | QPSK       | 18900/1880                 | 6#0 | 1.1169         | 1.375  |
|               |           | 16QAM      | 18900/1880                 | 6#0 | 0.9525         | 1.187  |
|               | 5MHz      | QPSK       | 18900/1880                 | 6#0 | 1.1134         | 1.319  |
|               |           | 16QAM      | 18900/1880                 | 6#0 | 0.9582         | 1.228  |
|               | 10MHz     | QPSK       | 18900/1880                 | 6#0 | 1.1148         | 1.332  |
|               |           | 16QAM      | 18900/1880                 | 6#0 | 0.9608         | 1.251  |
|               | 15MHz     | QPSK       | 18900/1880                 | 6#0 | 1.1384         | 1.443  |
|               |           | 16QAM      | 18900/1880                 | 6#0 | 0.9818         | 1.707  |
|               | 20MHz     | QPSK       | 18900/1880                 | 6#0 | 1.1341         | 1.702  |
|               |           | 16QAM      | 18900/1880                 | 6#0 | 0.9710         | 1.554  |

| Mode           | Bandwidth | Modulation | Channel/<br>Frequency(MHz) | RB  | Bandwidth(MHz) |        |
|----------------|-----------|------------|----------------------------|-----|----------------|--------|
|                |           |            |                            |     | 99% Power      | -26dBc |
| LTE<br>Band 25 | 1.4MHz    | QPSK       | 26365/1882.5               | 6#0 | 1.1015         | 1.331  |
|                |           | 16QAM      | 26365/1882.5               | 6#0 | 0.9414         | 1.377  |
|                | 3MHz      | QPSK       | 26365/1882.5               | 6#0 | 1.1099         | 1.378  |
|                |           | 16QAM      | 26365/1882.5               | 6#0 | 0.9537         | 1.187  |
|                | 5MHz      | QPSK       | 26365/1882.5               | 6#0 | 1.1106         | 1.352  |
|                |           | 16QAM      | 26365/1882.5               | 6#0 | 0.9580         | 1.223  |
|                | 10MHz     | QPSK       | 26365/1882.5               | 6#0 | 1.1186         | 1.332  |
|                |           | 16QAM      | 26365/1882.5               | 6#0 | 0.9750         | 1.299  |
|                | 15MHz     | QPSK       | 26365/1882.5               | 6#0 | 1.1330         | 1.634  |
|                |           | 16QAM      | 26365/1882.5               | 6#0 | 0.9914         | 1.689  |
|                | 20MHz     | QPSK       | 26365/1882.5               | 6#0 | 1.1362         | 1.730  |
|                |           | 16QAM      | 26365/1882.5               | 6#0 | 0.9688         | 1.694  |

### GSM1900 GSM CH-Low



### GSM1900 GPRS CH-Low



### GSM 1900 GSM CH-Middle



### GSM 1900 GPRS CH-Middle



### GSM 1900 GSM CH-High



### GSM 1900 GPRS CH-High



### GSM1900 EGPRS CH-Low



### GSM 1900 EGPRS CH-Middle



### GSM 1900 EGPRS CH-High



### LTE Band 2 1.4MHz QPSK CH-Middle



### LTE Band 2 3MHz QPSK CH-Middle



### LTE Band 2 5MHz QPSK CH-Middle




### LTE Band 2 10MHz QPSK CH-Middle



### LTE Band 2 15MHz QPSK CH-Middle



### LTE Band 2 20MHz QPSK CH-Middle

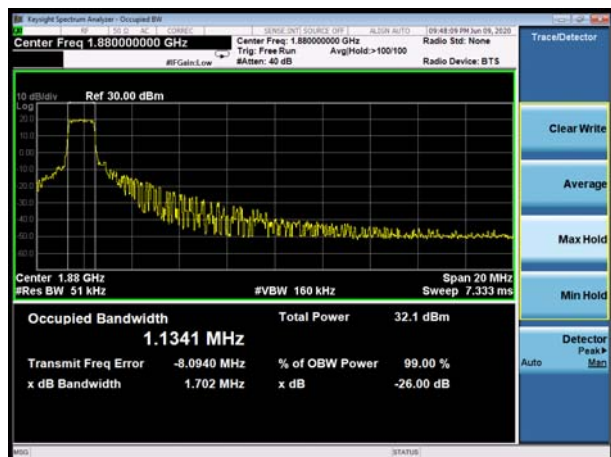

LTE Band 2 1.4MHz 16QAM CH-Middle



LTE Band 2 3MHz 16QAM CH-Middle



LTE Band 2 5MHz 16QAM CH-Middle



LTE Band 2 10MHz 16QAM CH-Middle



LTE Band 2 15MHz 16QAM CH-Middle



LTE Band 2 20MHz 16QAM CH-Middle





LTE Band 25 1.4MHz QPSK CH-Middle



LTE Band 25 3MHz QPSK CH-Middle



LTE Band 25 5MHz QPSK CH-Middle



LTE Band 25 10MHz QPSK CH-Middle



LTE Band 25 15MHz QPSK CH-Middle



LTE Band 25 20MHz QPSK CH-Middle



LTE Band 25 1.4MHz 16QAM CH-Middle



LTE Band 25 3MHz 16QAM CH-Middle



LTE Band 25 5MHz 16QAM CH-Middle



LTE Band 25 10MHz 16QAM CH-Middle



LTE Band 25 15MHz 16QAM CH-Middle



LTE Band 25 20MHz 16QAM CH-Middle



### 5.3.Band Edge Compliance

#### Ambient condition


| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

#### Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The Average detector is used and RBW is set to 3kHz, VBW is set to 10kHz for GSM 1900, RBW is set to 51kHz, VBW is set to 160kHz for LTE Band 2/25,

Spectrum analyzer plots are included on the following pages.

#### Test Setup

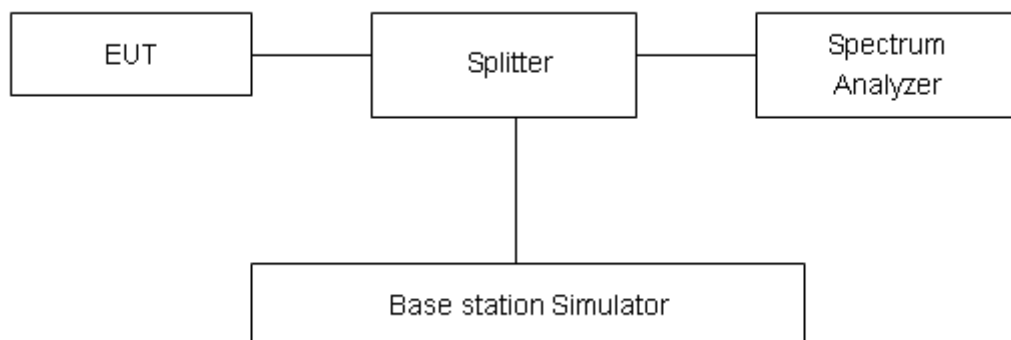

#### Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log_{10} (P)$  dB.”

| Limit | -13 dBm |
|-------|---------|
|-------|---------|


#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U=0.684\text{dB}$ .



## Test Result:


GSM1900 GSM CH-Low

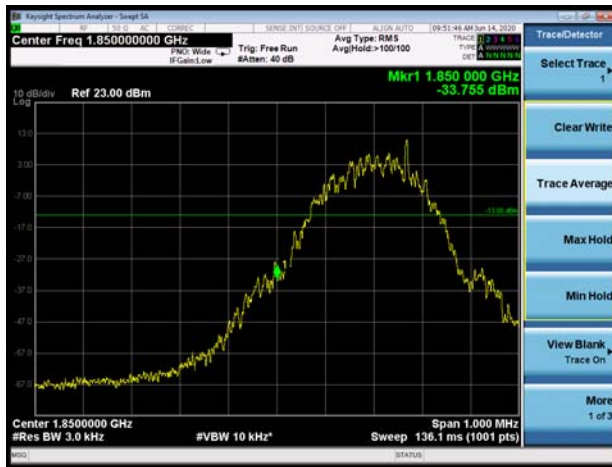

GSM 1900 GSM CH-High



GSM1900 GPRS CH-Low

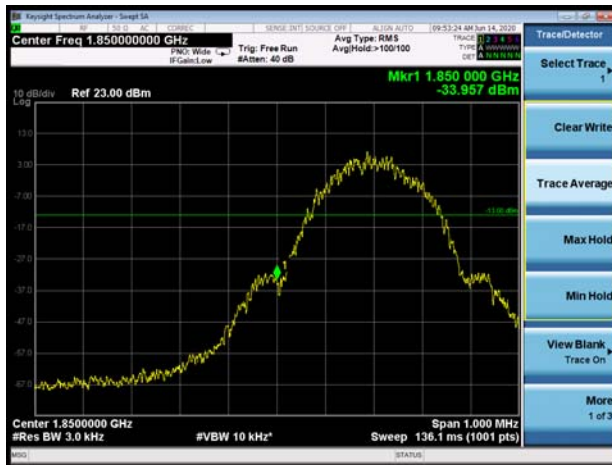


GSM 1900 GPRS CH-High



GSM1900 EGPRS CH-Low




GSM 1900 EGPRS CH-High

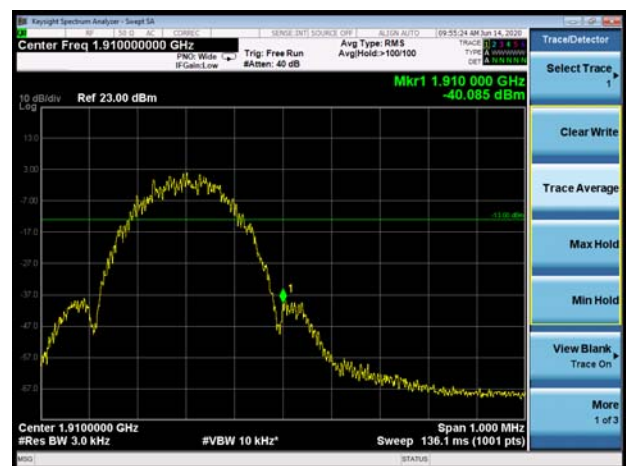





LTE Band 2 1.4MHz QPSK 1RB CH-Low

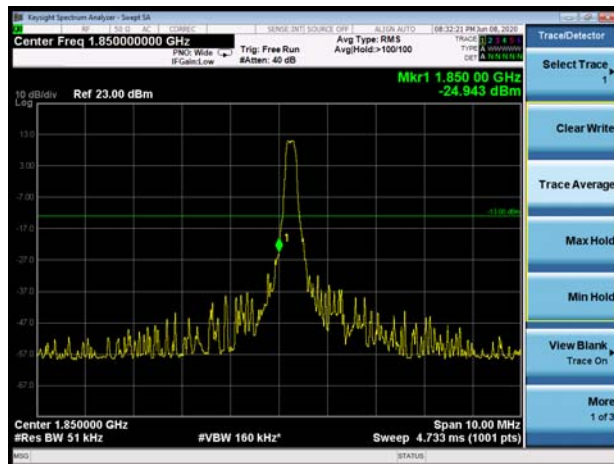


LTE Band 2 1.4MHz QPSK 1RB CH-High

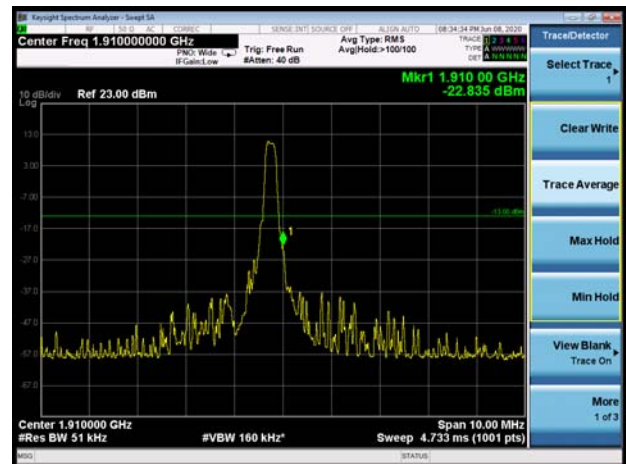


LTE Band 2 1.4MHz QPSK 100%RB CH-Low

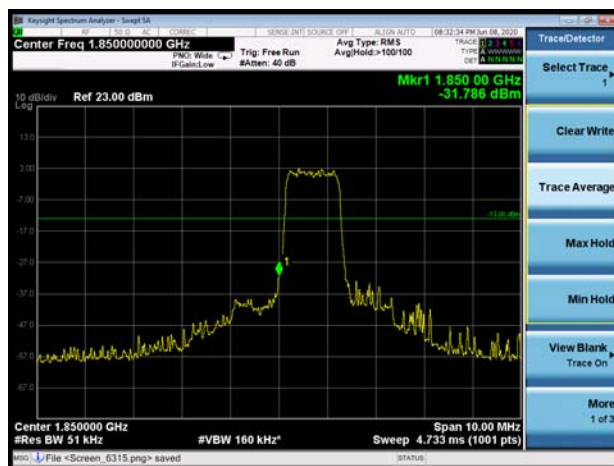


LTE Band 2 1.4MHz QPSK 100%RB CH-High

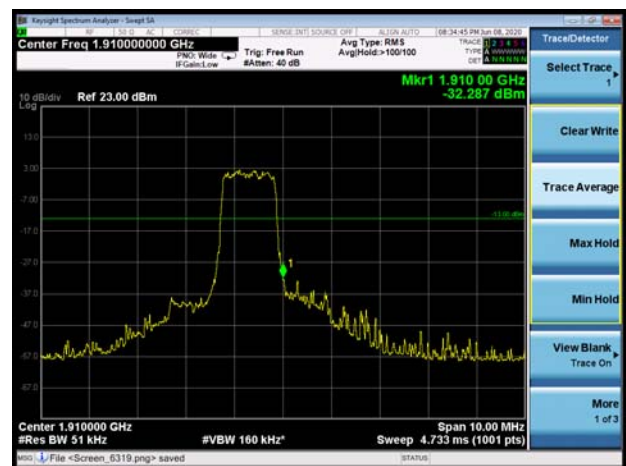

LTE Band 2 3MHz QPSK 1RB CH-Low

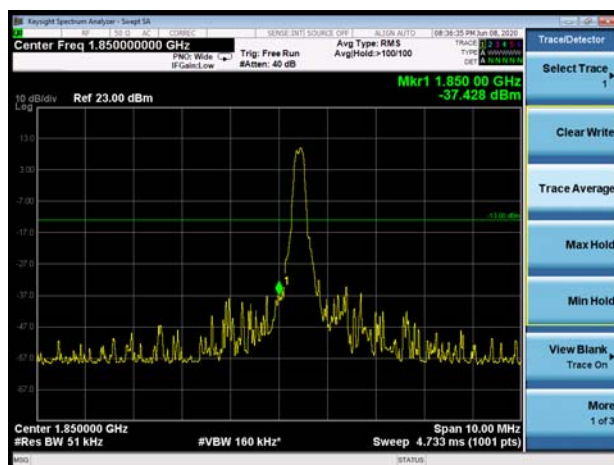


LTE Band 2 3MHz QPSK 1RB CH-High

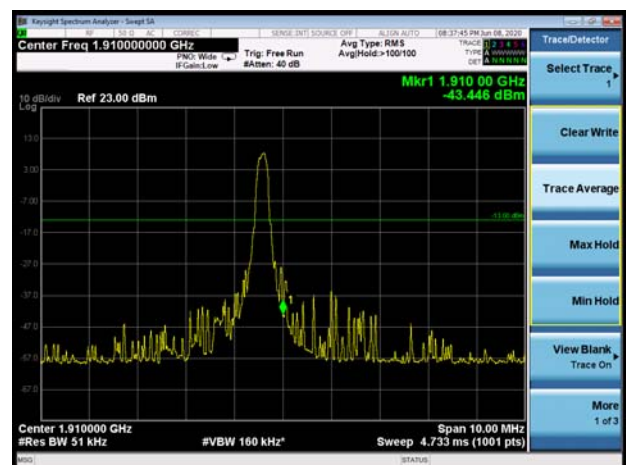





LTE Band 2 3MHz QPSK 100%RB CH-Low

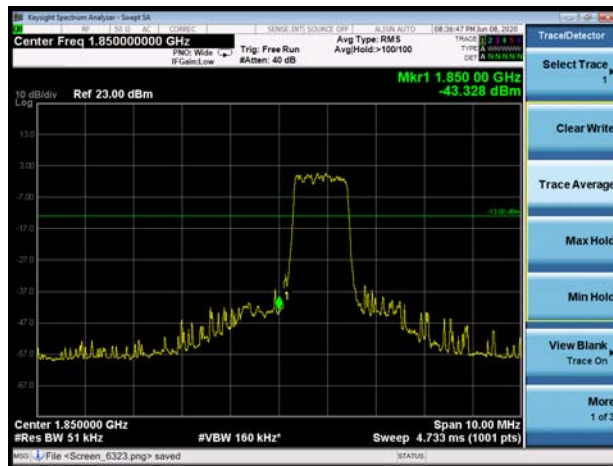


LTE Band 2 3MHz QPSK 100%RB CH-High

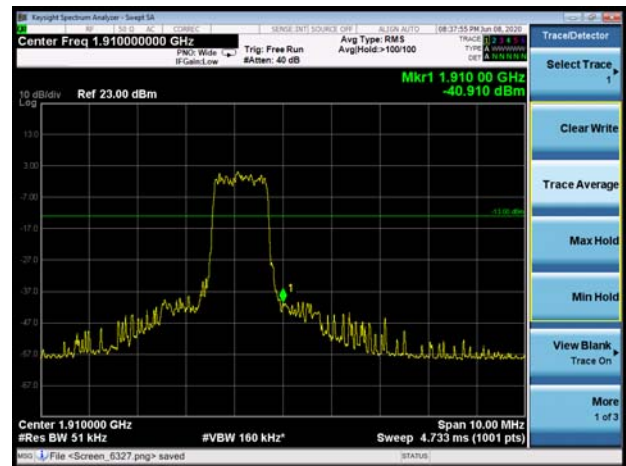


LTE Band 2 5MHz QPSK 1RB CH-Low

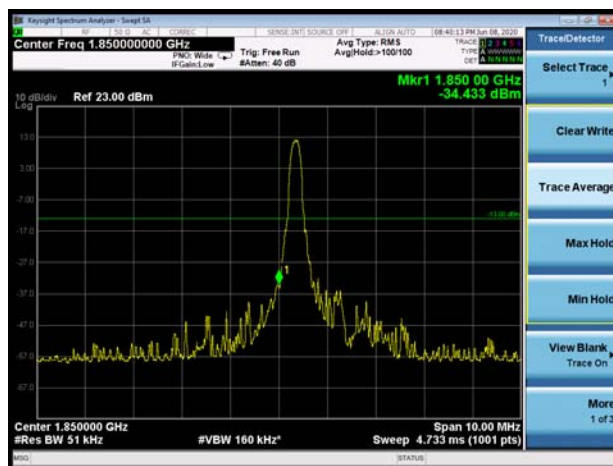


LTE Band 2 5MHz QPSK 1RB CH-High

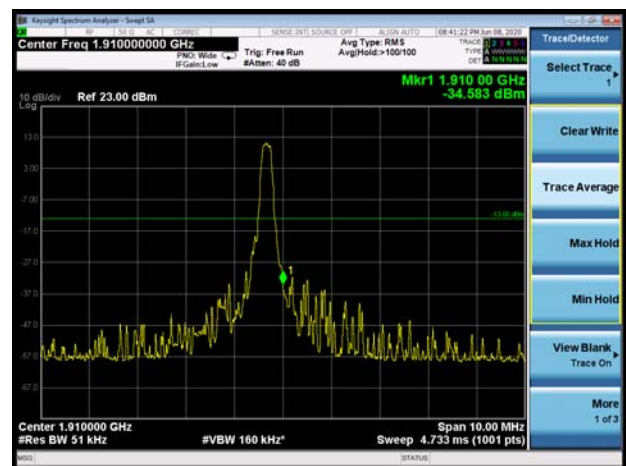

LTE Band 2 5MHz QPSK 100%RB CH-Low

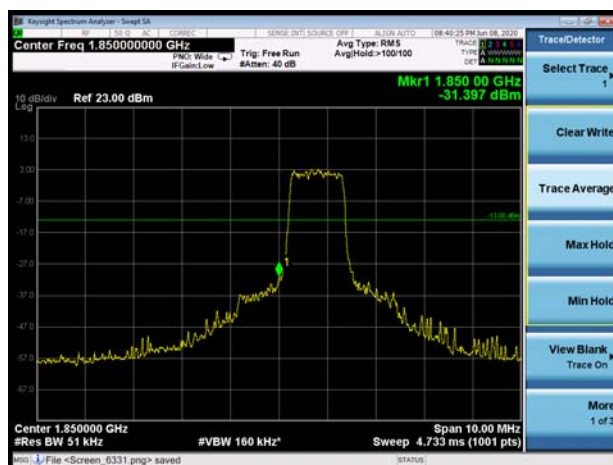


LTE Band 2 5MHz QPSK 100%RB CH-High

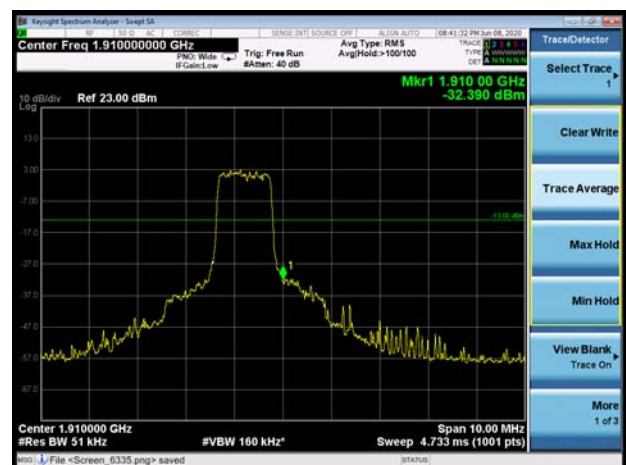





LTE Band 2 10MHz QPSK 1RB CH-Low

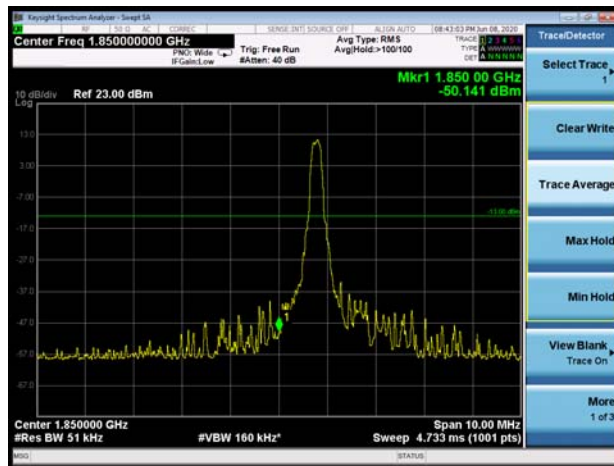


LTE Band 2 10MHz QPSK 1RB CH-High

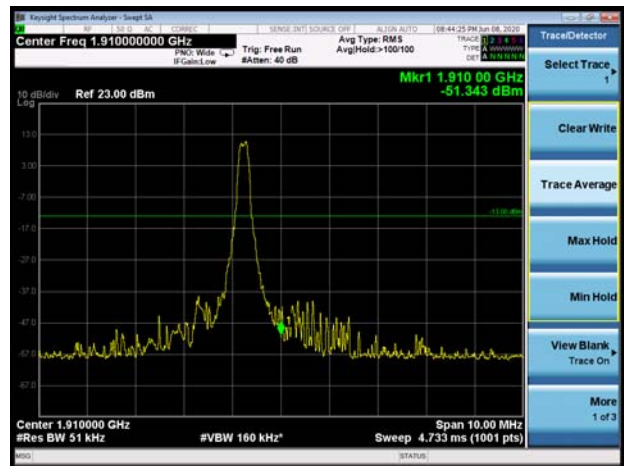


LTE Band 2 10MHz QPSK 100%RB CH-Low

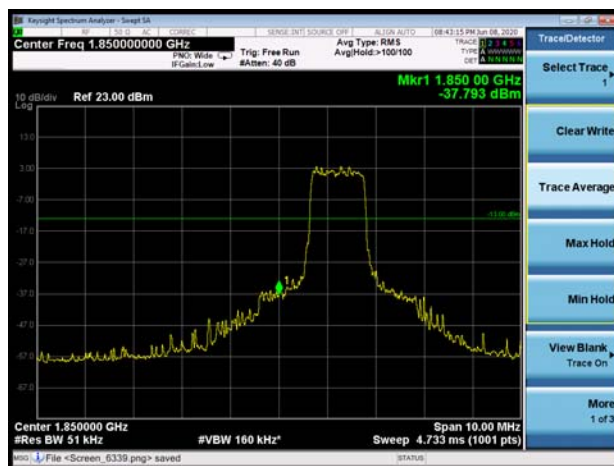


LTE Band 2 10MHz QPSK 100%RB CH-High

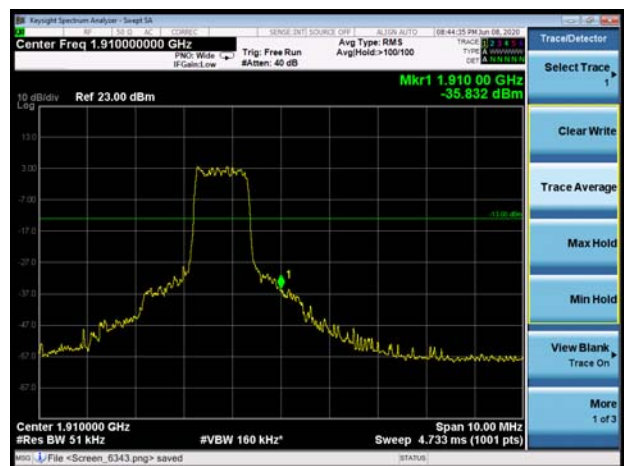


LTE Band 2 15MHz QPSK 1RB CH-Low

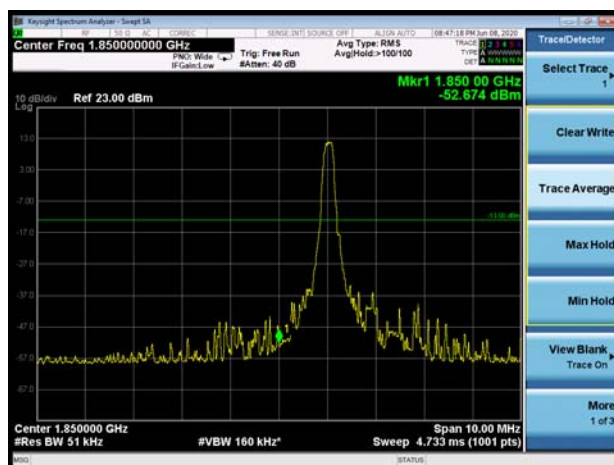


LTE Band 2 15MHz QPSK 1RB CH-High

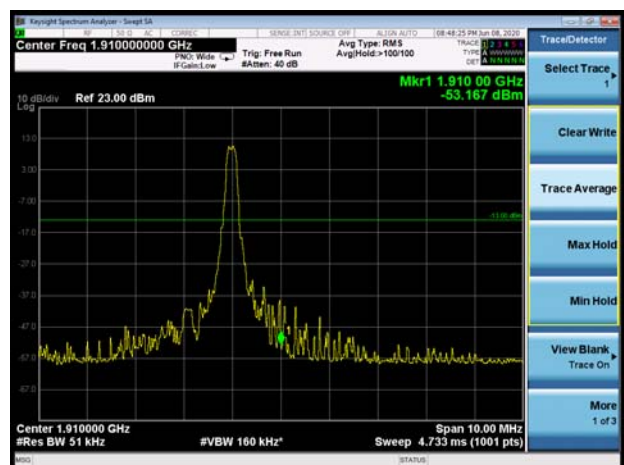


LTE Band 2 15MHz QPSK 100%RB CH-Low

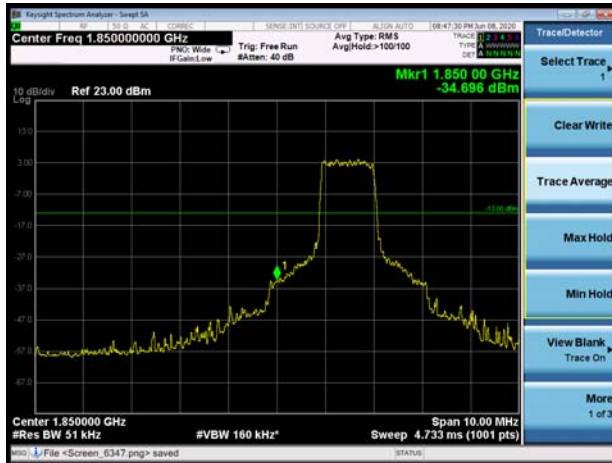


LTE Band 2 15MHz QPSK 100%RB CH-High

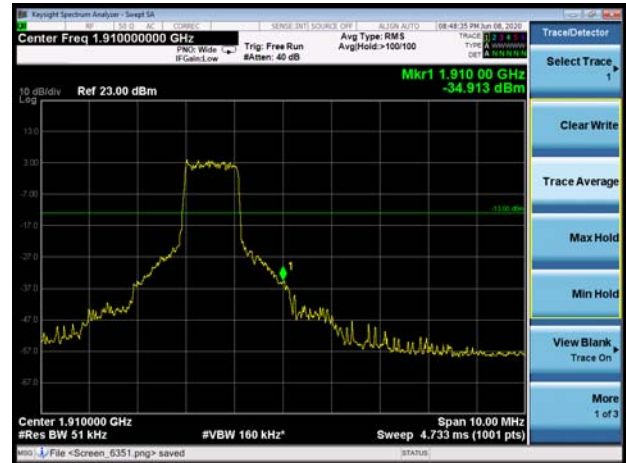


LTE Band 2 20MHz QPSK 1RB CH-Low

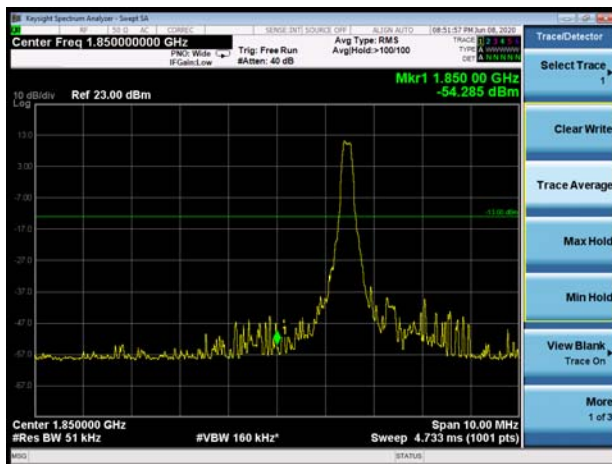


LTE Band 2 20MHz QPSK 1RB CH-High

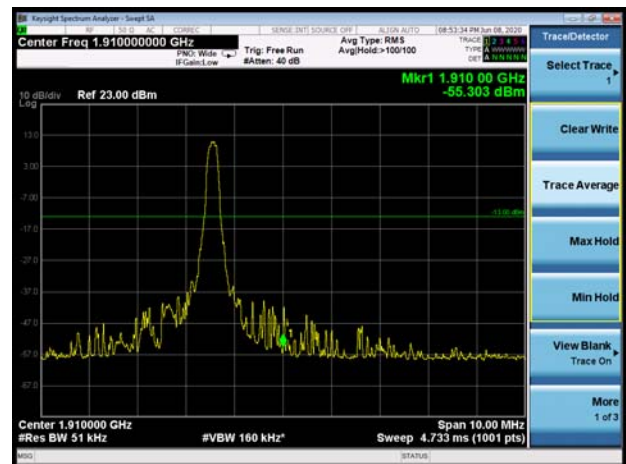


LTE Band 2 20MHz QPSK 100%RB CH-Low

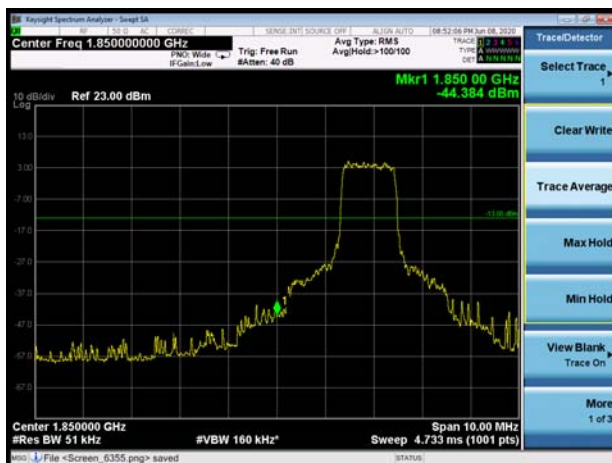

LTE Band 2 20MHz QPSK 100%RB CH-High

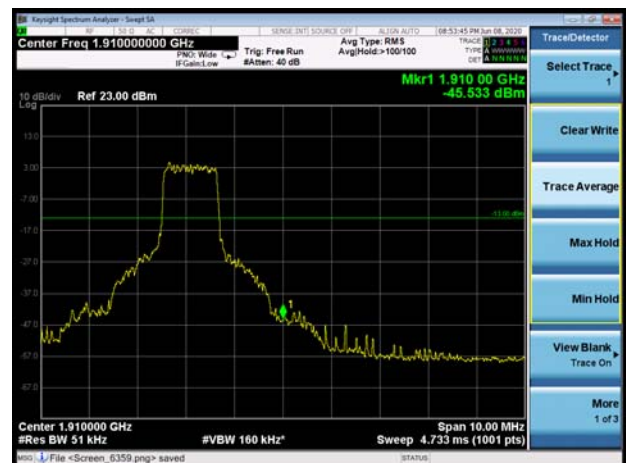


LTE Band 2 1.4MHz 16QAM 1RB CH-Low

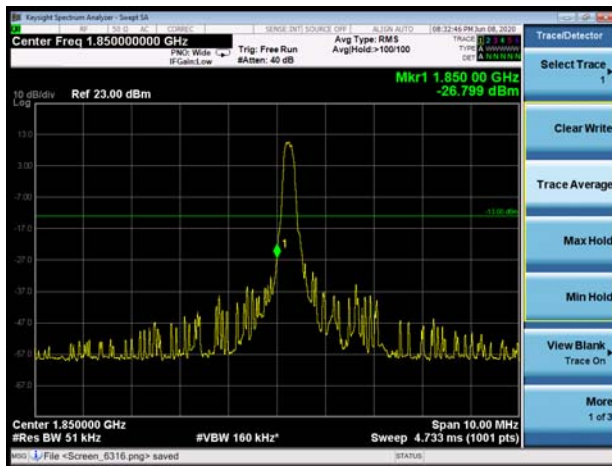


LTE Band 2 1.4MHz 16QAM 1RB CH-High




LTE Band 2 1.4MHz 16QAM 100%RB CH-Low

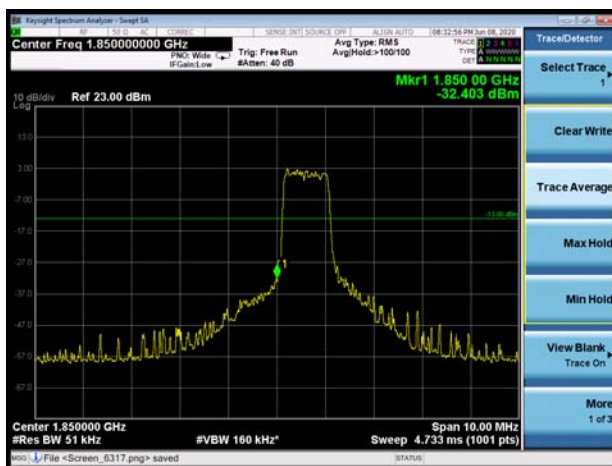


LTE Band 2 1.4MHz 16QAM 100%RB CH-High

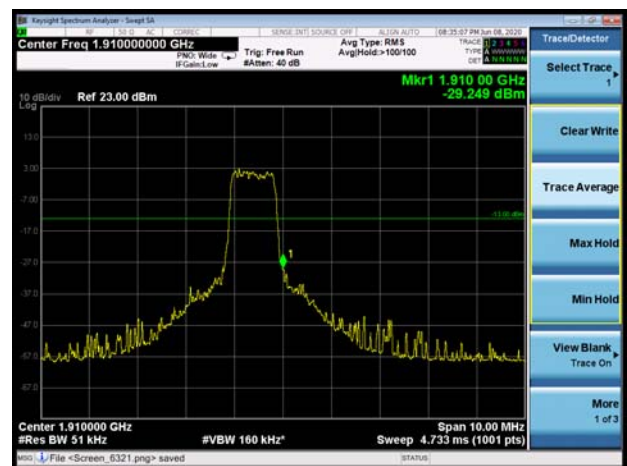


LTE Band 2 3MHz 16QAM 1RB CH-Low

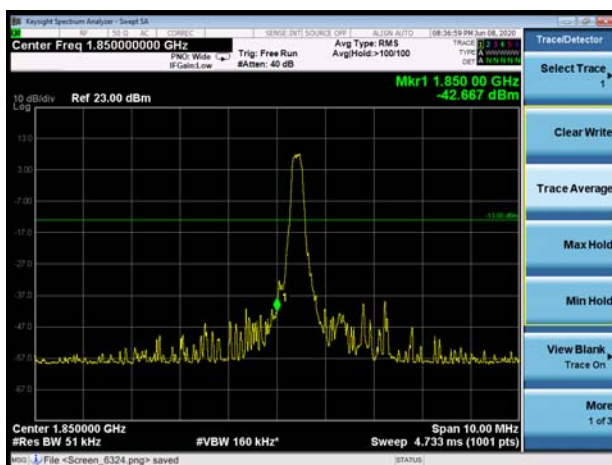


LTE Band 2 3MHz 16QAM 1RB CH-High

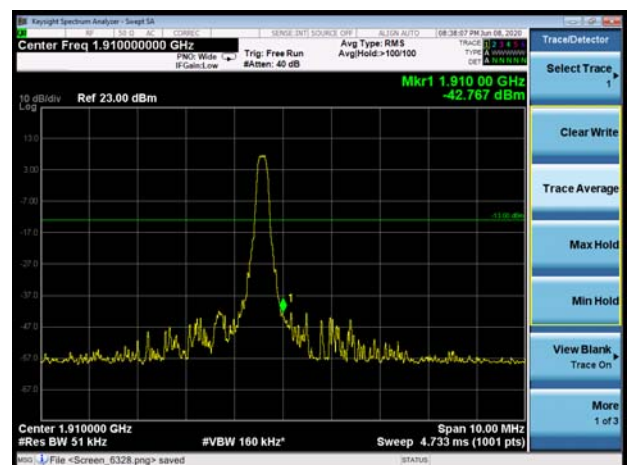


LTE Band 2 3MHz 16QAM 100%RB CH-Low

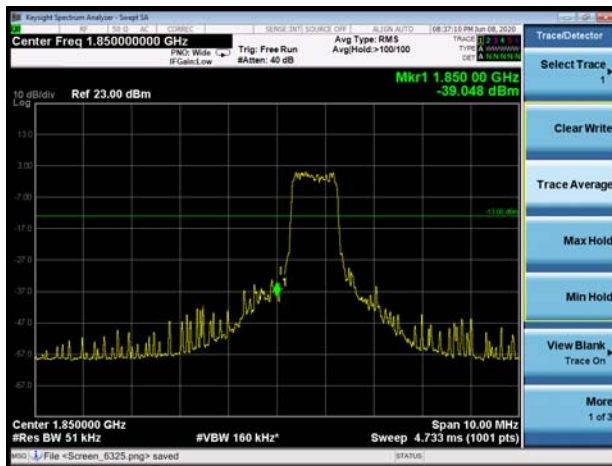


LTE Band 2 3MHz 16QAM 100%RB CH-High

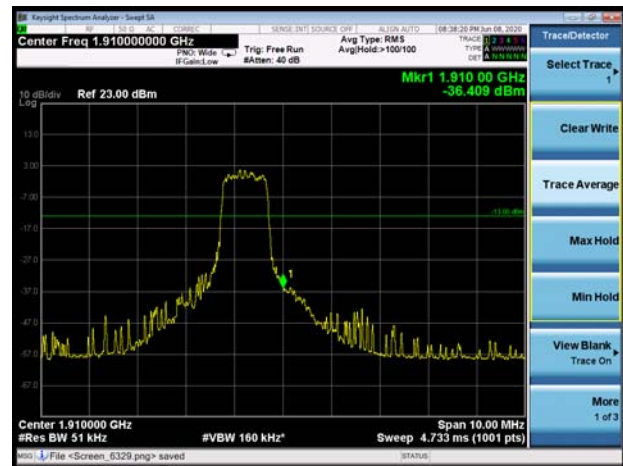


LTE Band 2 5MHz 16QAM 1RB CH-Low

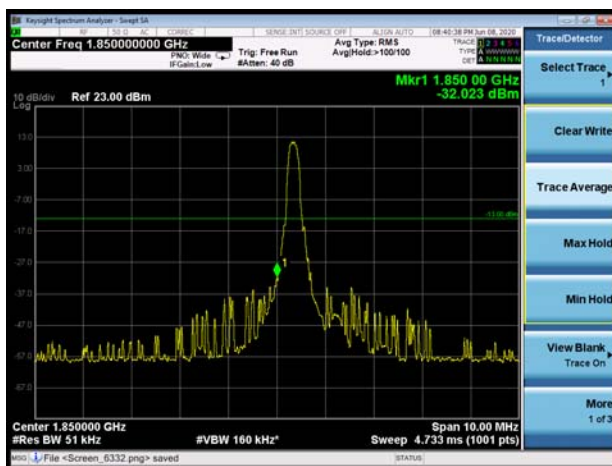


LTE Band 2 5MHz 16QAM 1RB CH-High

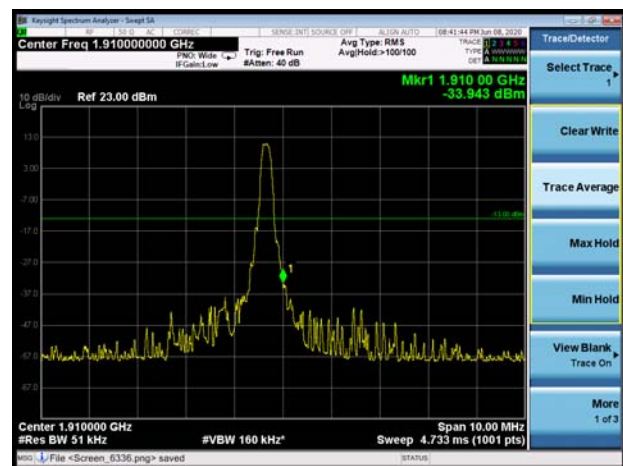

LTE Band 2 5MHz 16QAM 100%RB CH-Low

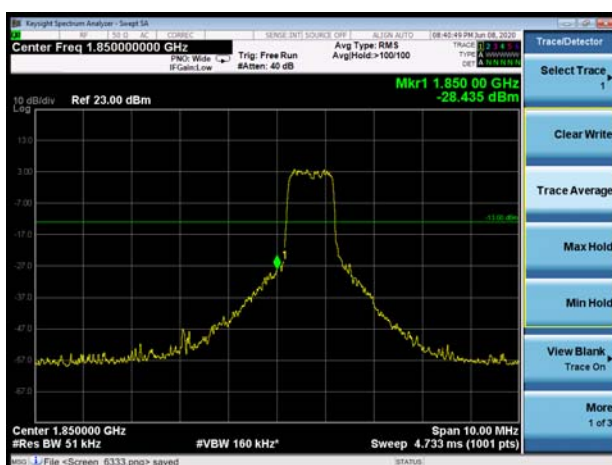


LTE Band 2 5MHz 16QAM 100%RB CH-High

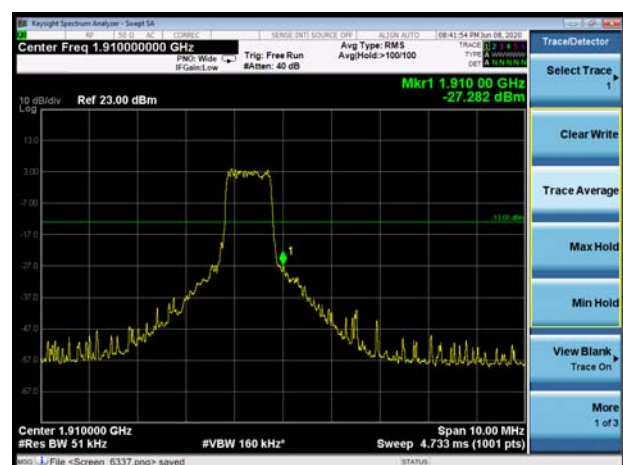





LTE Band 2 10MHz 16QAM 1RB CH-Low

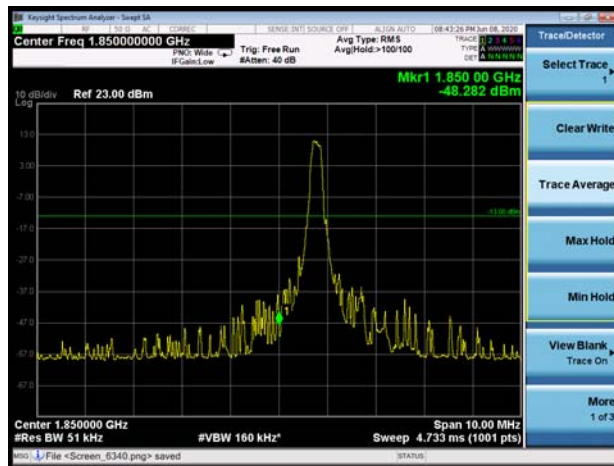


LTE Band 2 10MHz 16QAM 1RB CH-High

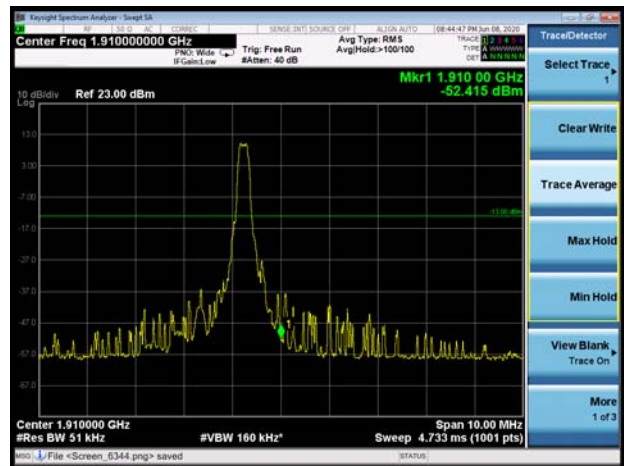


LTE Band 2 10MHz 16QAM 100%RB CH-Low

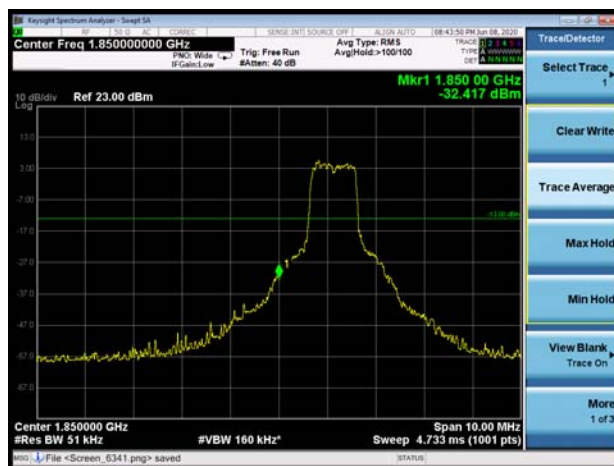


LTE Band 2 10MHz 16QAM 100%RB CH-High

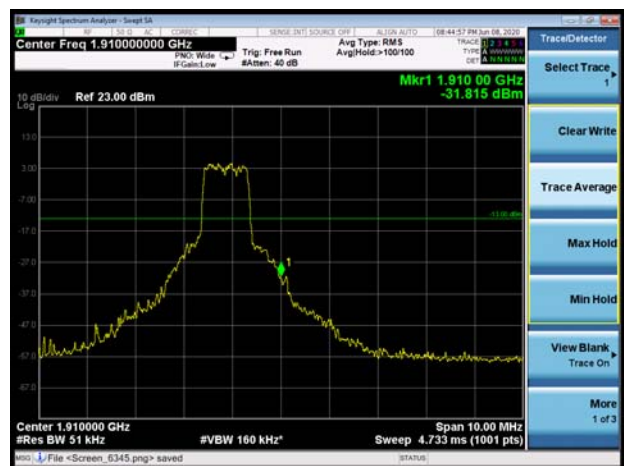

LTE Band 2 15MHz 16QAM 1RB CH-Low

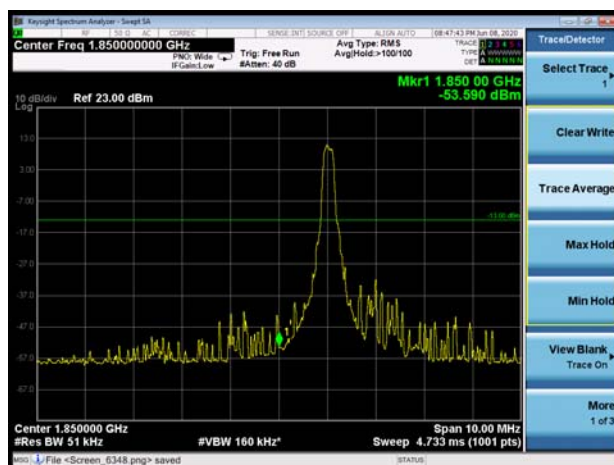


LTE Band 2 15MHz 16QAM 1RB CH-High

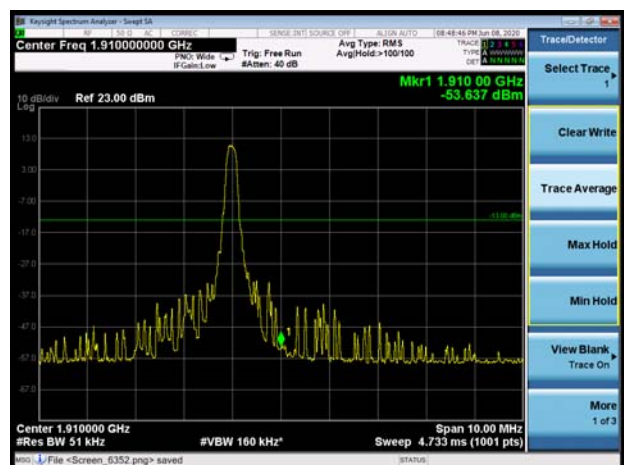




LTE Band 2 15MHz 16QAM 100%RB CH-Low

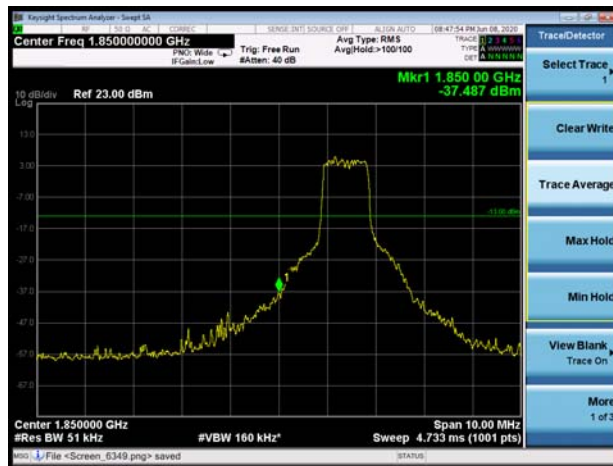


LTE Band 2 15MHz 16QAM 100%RB CH-High




LTE Band 2 20MHz 16QAM 1RB CH-Low

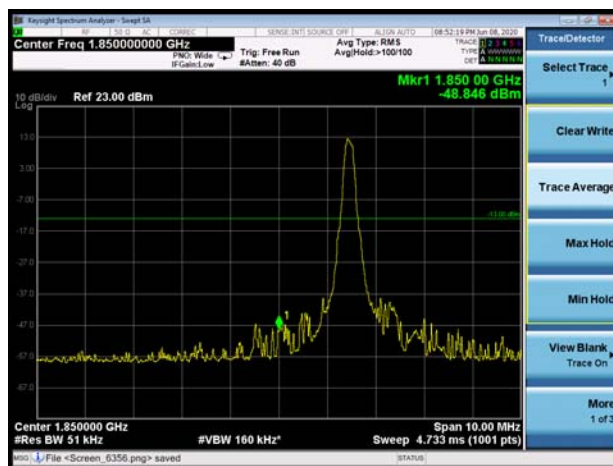


LTE Band 2 20MHz 16QAM 1RB CH-High

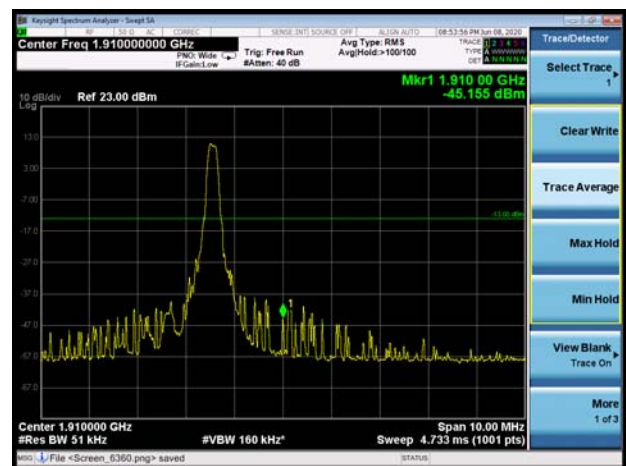

LTE Band 2 20MHz 16QAM 100%RB CH-Low

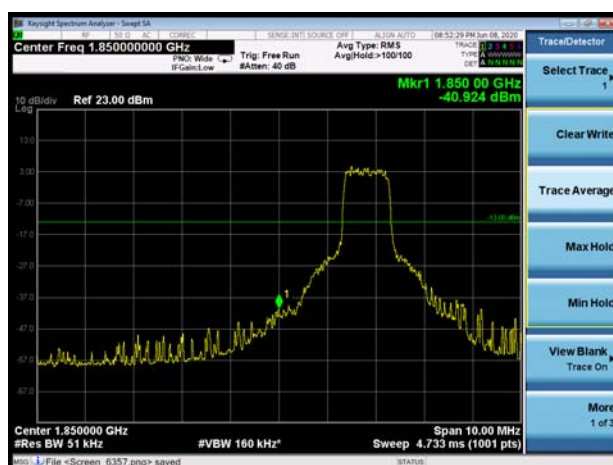


LTE Band 2 20MHz 16QAM 100%RB CH-High

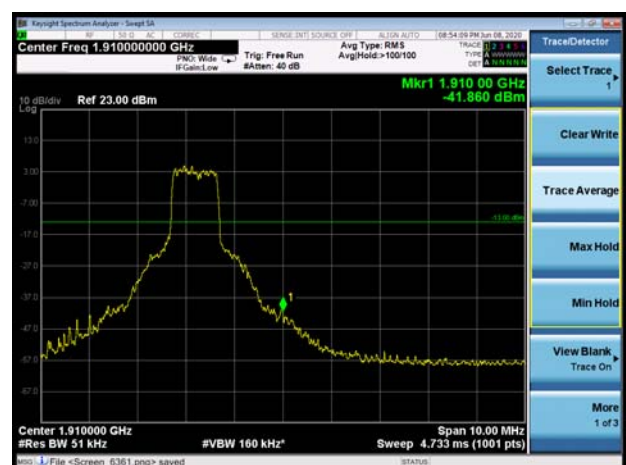





LTE Band 25 1.4MHz QPSK 1RB CH-Low

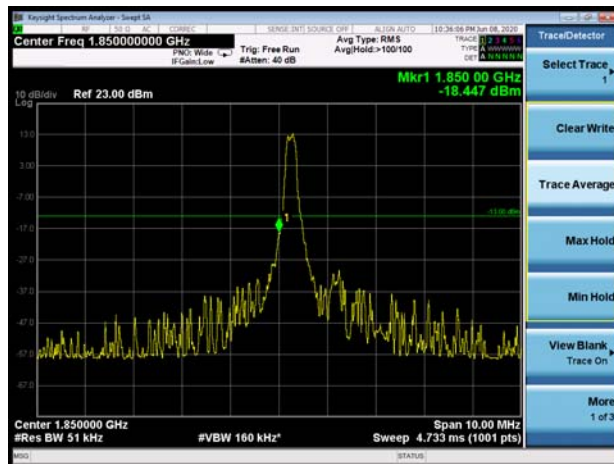


LTE Band 25 1.4MHz QPSK 1RB CH-High

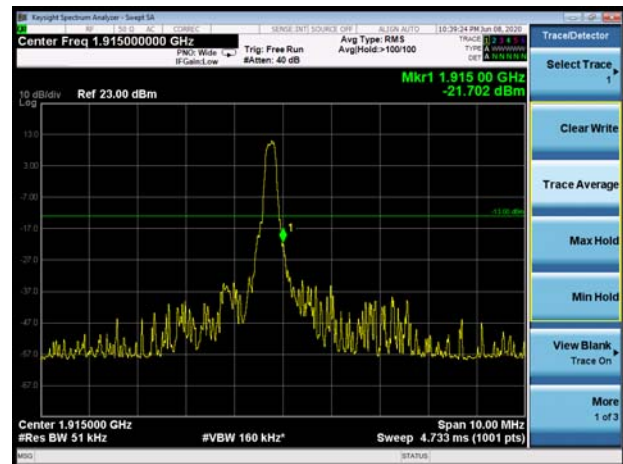


LTE Band 25 1.4MHz QPSK 100%RB CH-Low

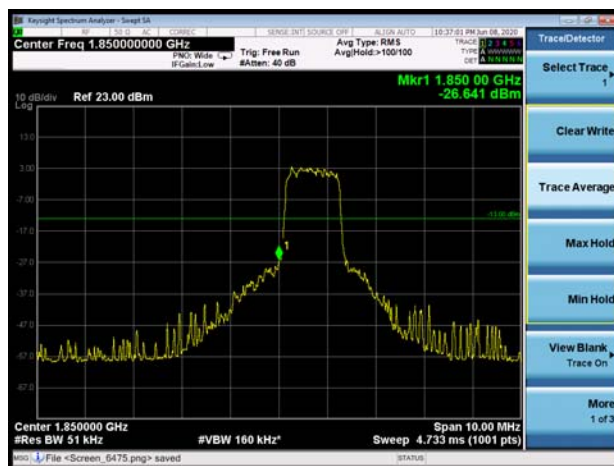


LTE Band 25 1.4MHz QPSK 100%RB CH-High

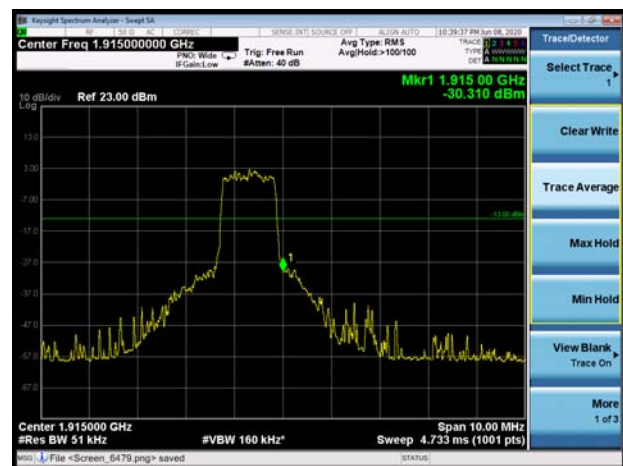

LTE Band 25 3MHz QPSK 1RB CH-Low

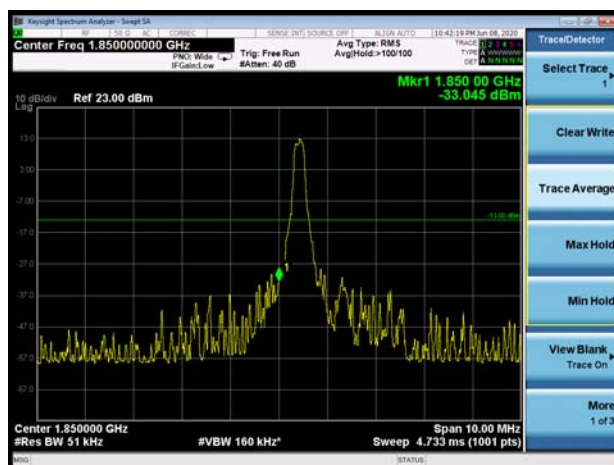


LTE Band 25 3MHz QPSK 1RB CH-High

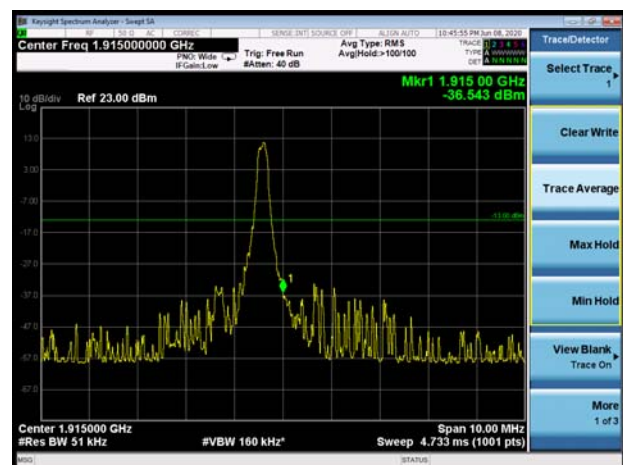





LTE Band 25 3MHz QPSK 100%RB CH-Low

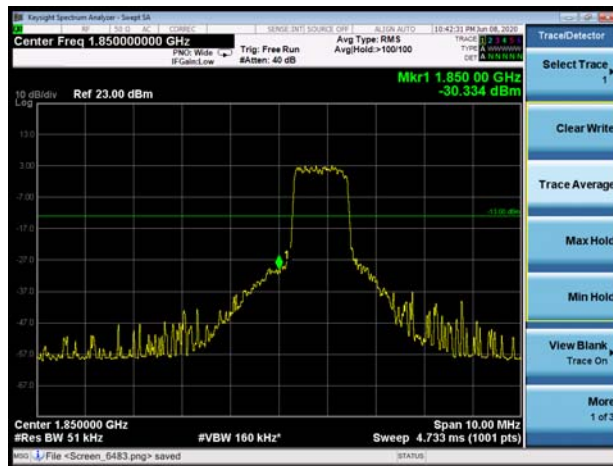


LTE Band 25 3MHz QPSK 100%RB CH-High

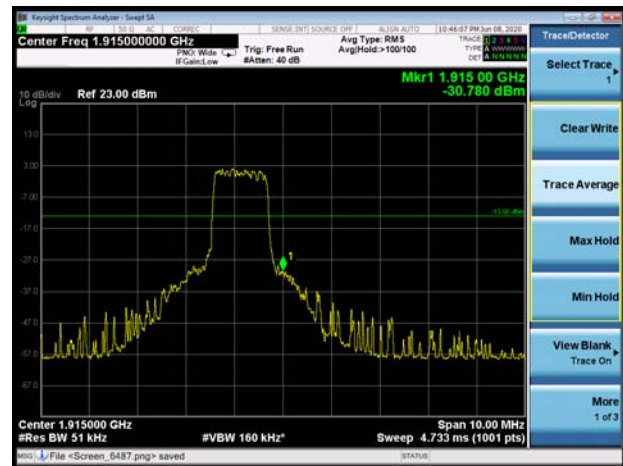


LTE Band 25 5MHz QPSK 1RB CH-Low

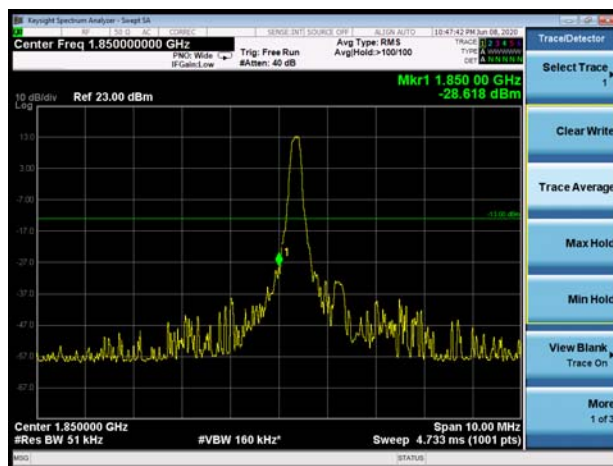


LTE Band 25 5MHz QPSK 1RB CH-High

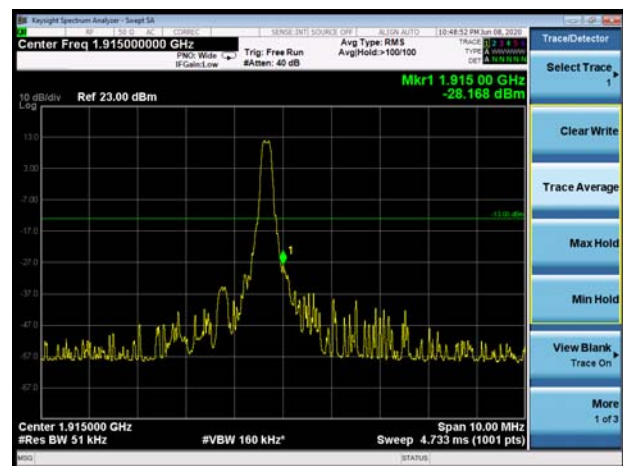

LTE Band 25 5MHz QPSK 100%RB CH-Low

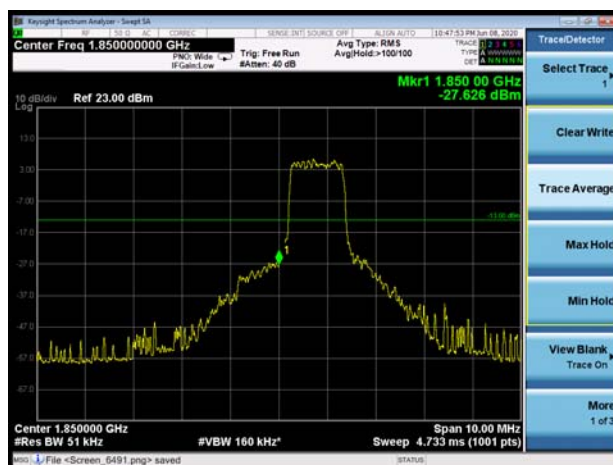


LTE Band 25 5MHz QPSK 100%RB CH-High

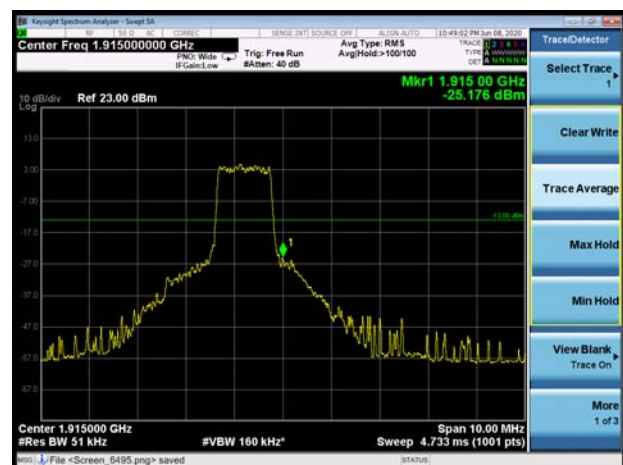





## LTE Band 25 10MHz QPSK 1RB CH-Low

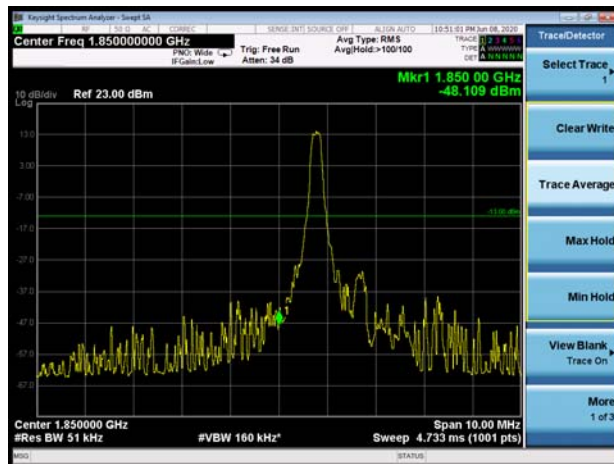


## LTE Band 25 10MHz QPSK 1RB CH-High

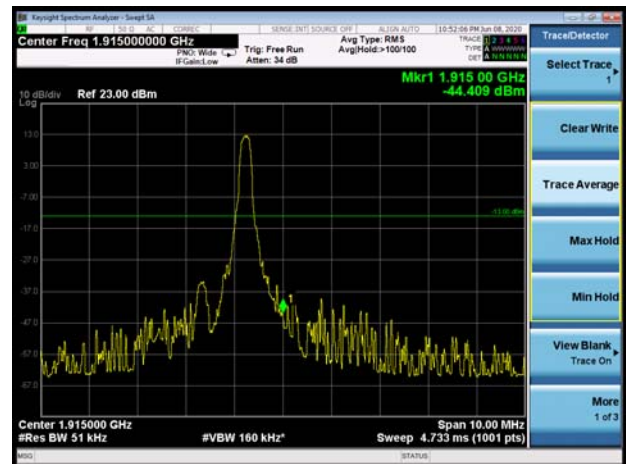


## LTE Band 25 10MHz QPSK 100%RB CH-Low

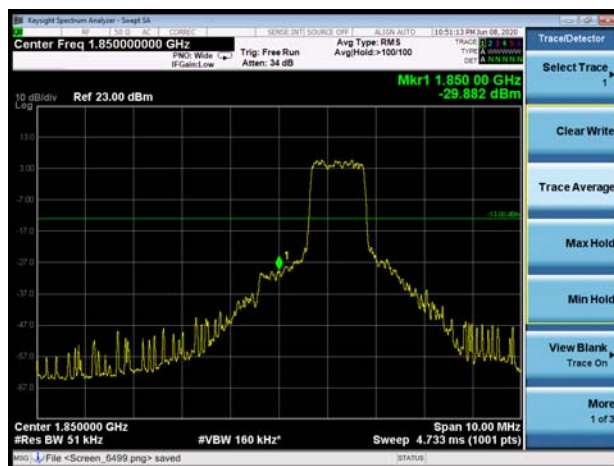


## LTE Band 25 10MHz QPSK 100%RB CH-High

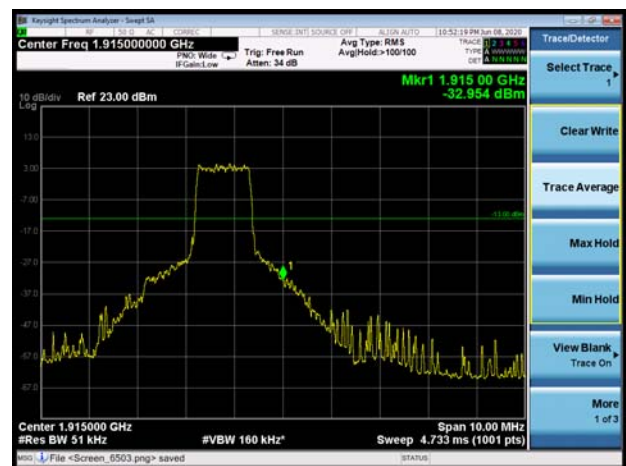

## LTE Band 25 15MHz QPSK 1RB CH-Low

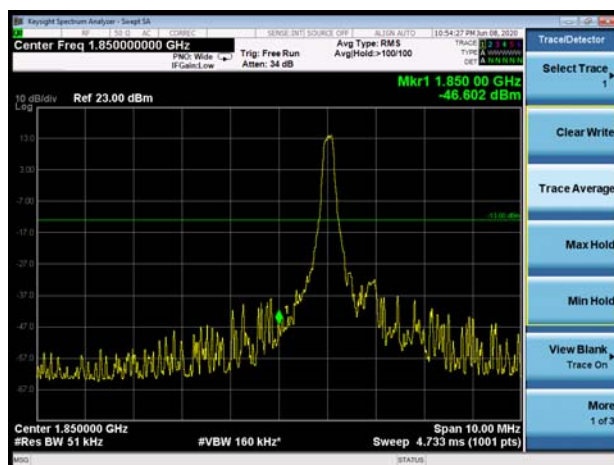


## LTE Band 25 15MHz QPSK 1RB CH-High

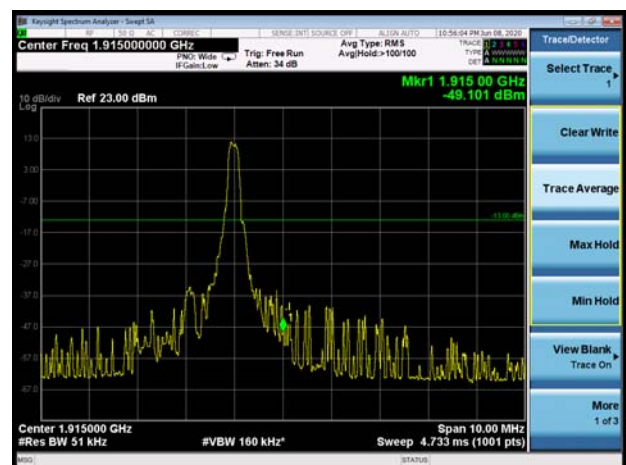





LTE Band 25 15MHz QPSK 100%RB CH-Low

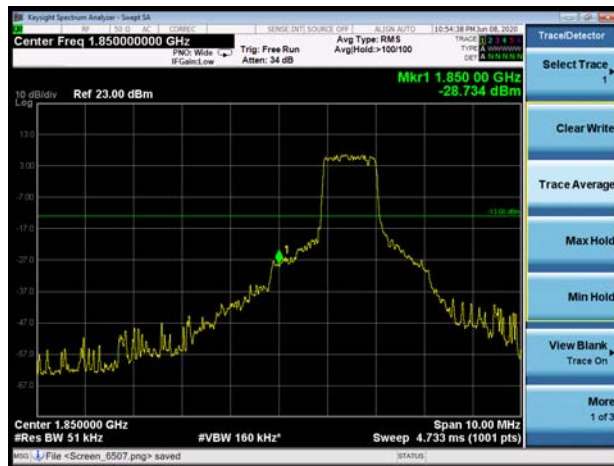


LTE Band 25 15MHz QPSK 100%RB CH-High

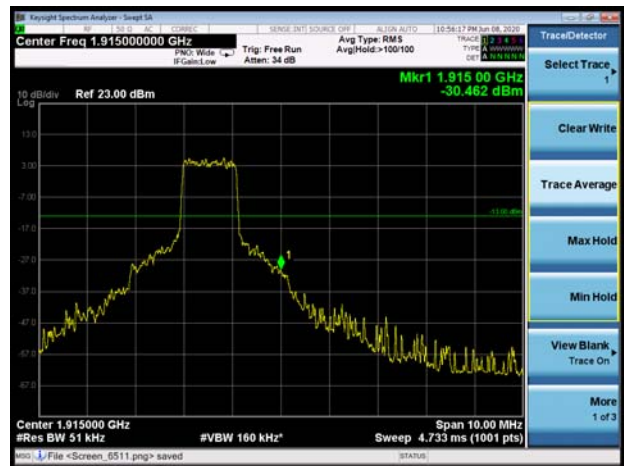


LTE Band 25 20MHz QPSK 1RB CH-Low

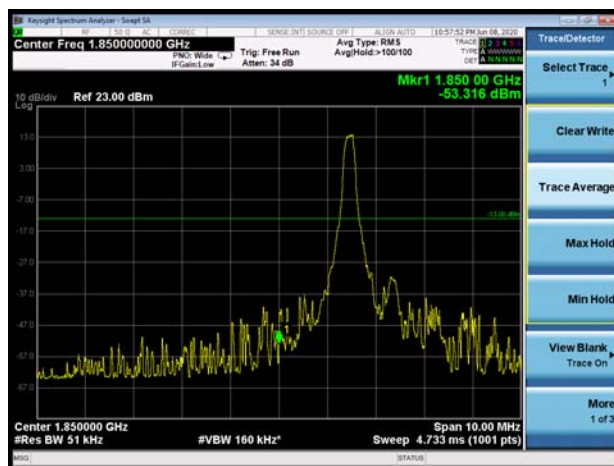


LTE Band 25 20MHz QPSK 1RB CH-High

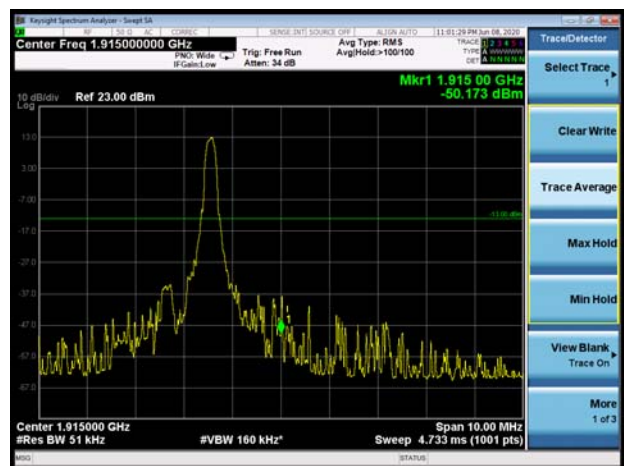


LTE Band 25 20MHz QPSK 100%RB CH-Low

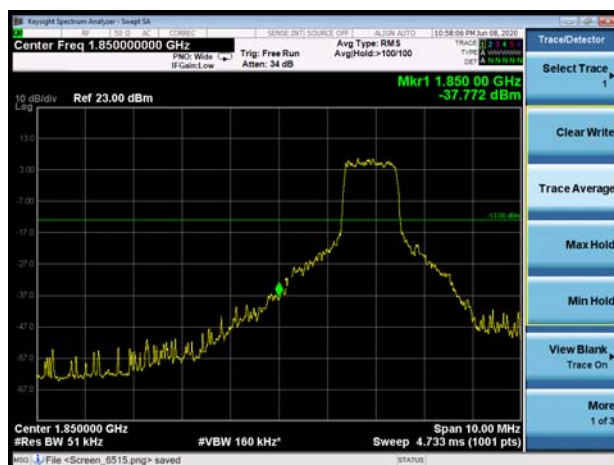


LTE Band 25 20MHz QPSK 100%RB CH-High

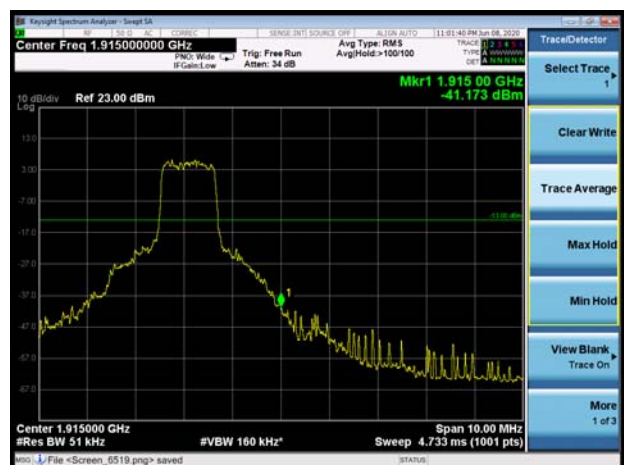


LTE Band 25 1.4MHz 16QAM 1RB CH-Low

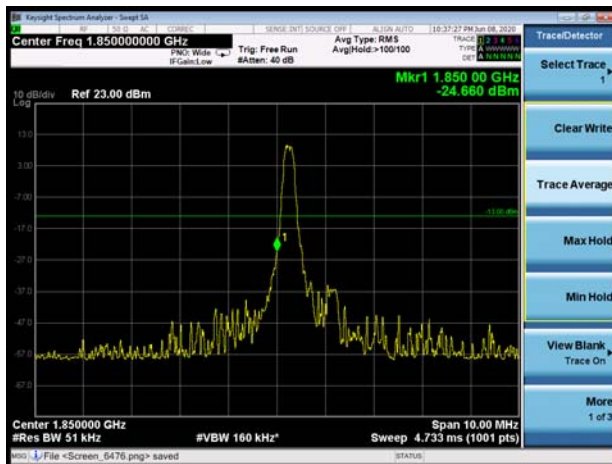


LTE Band 25 1.4MHz 16QAM 1RB CH-High

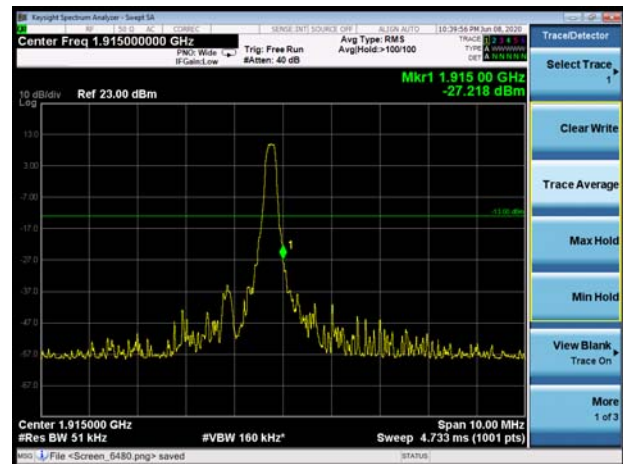


LTE Band 25 1.4MHz 16QAM 100%RB CH-Low

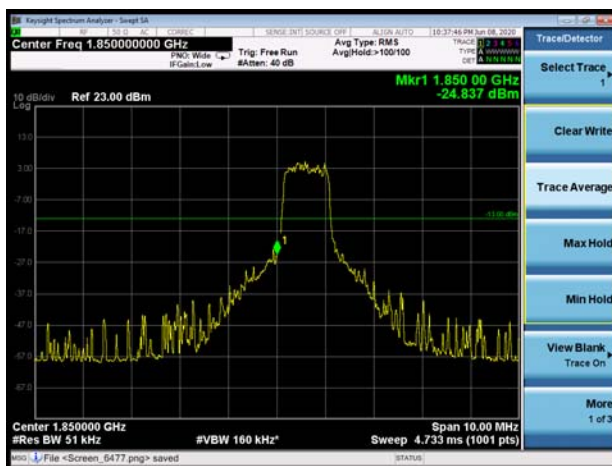


LTE Band 25 1.4MHz 16QAM 100%RB CH-High

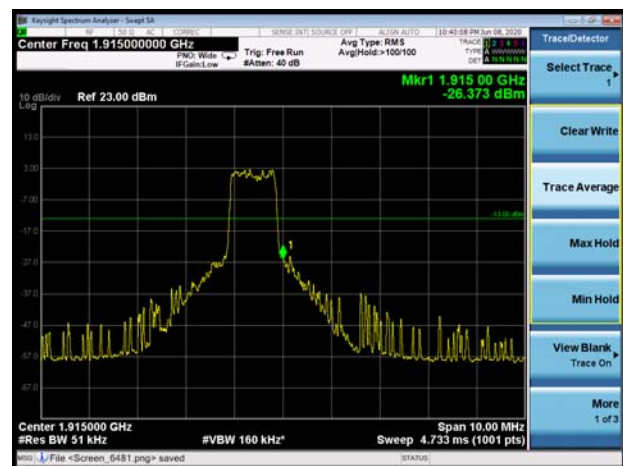

LTE Band 25 3MHz 16QAM 1RB CH-Low

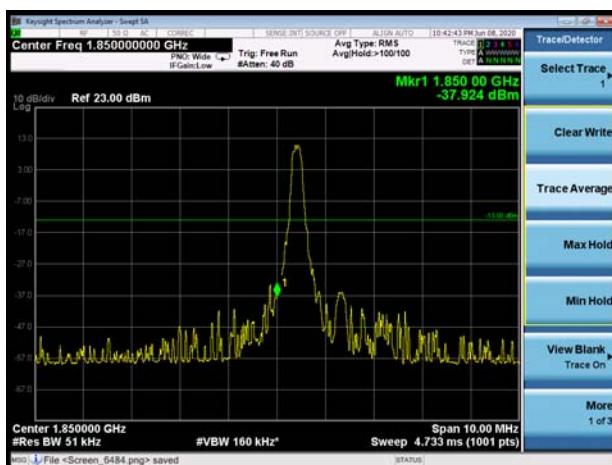

LTE Band 25 3MHz 16QAM 1RB CH-High

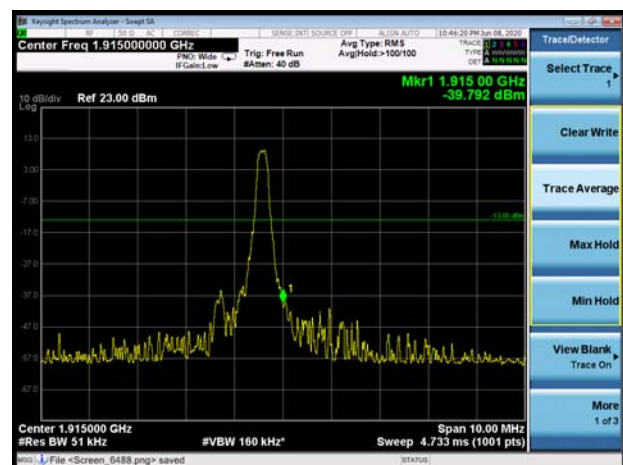




LTE Band 25 3MHz 16QAM 100%RB CH-Low



LTE Band 25 3MHz 16QAM 100%RB CH-High

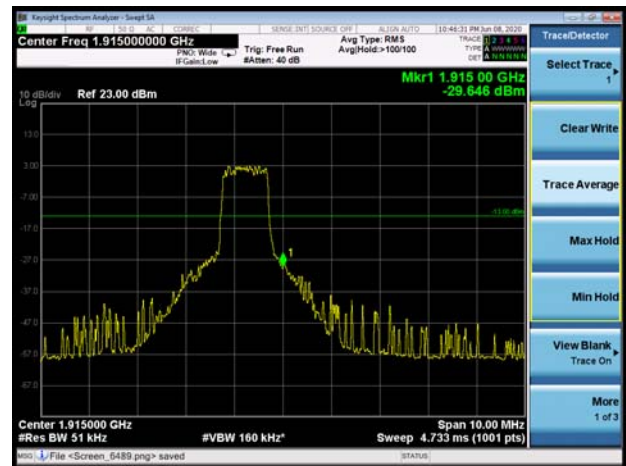


LTE Band 25 5MHz 16QAM 1RB CH-Low




LTE Band 25 5MHz 16QAM 1RB CH-High



LTE Band 25 5MHz 16QAM 100%RB CH-Low

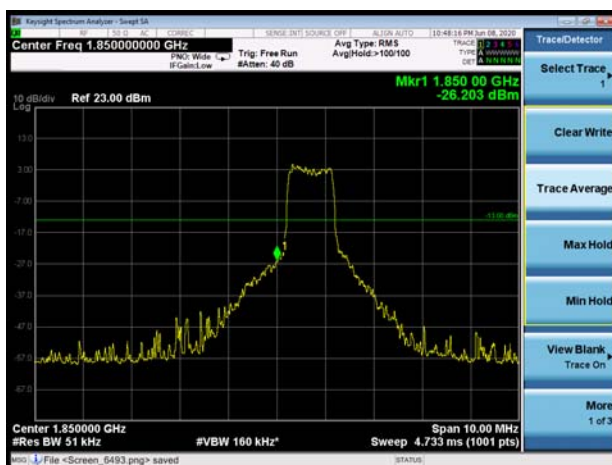


LTE Band 25 5MHz 16QAM 100%RB CH-High

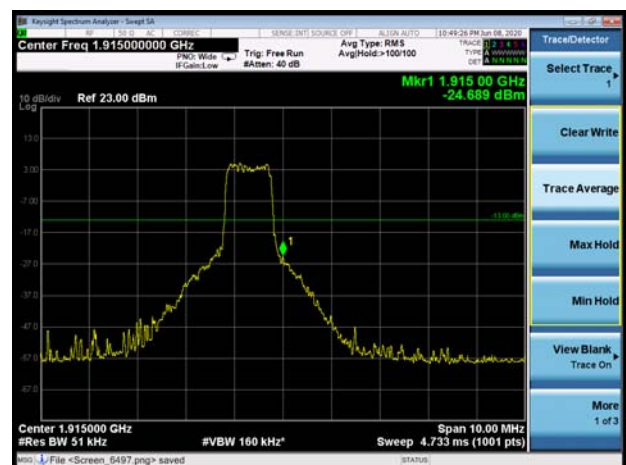





LTE Band 25 10MHz 16QAM 1RB CH-Low

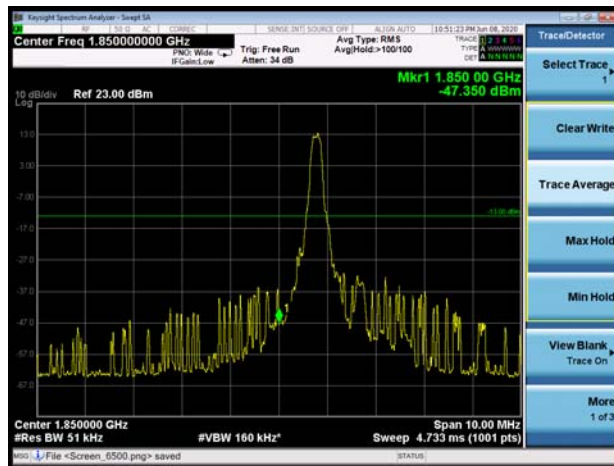


LTE Band 25 10MHz 16QAM 1RB CH-High

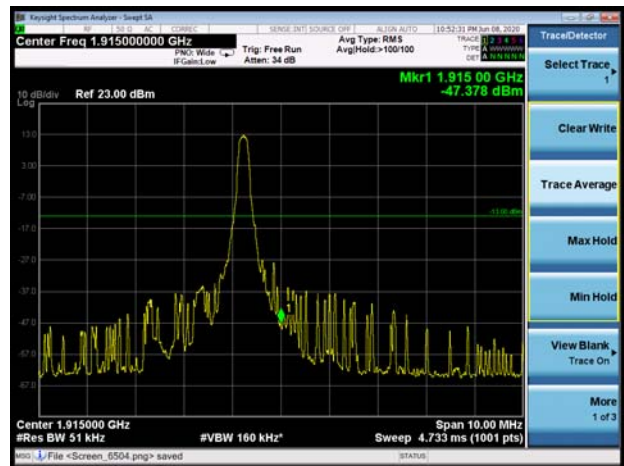


LTE Band 25 10MHz 16QAM 100%RB CH-Low

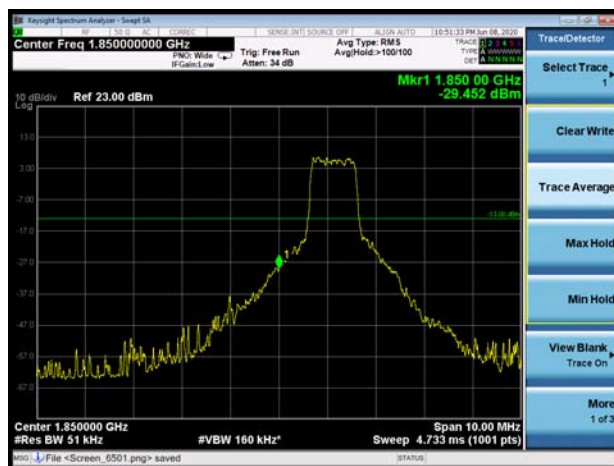


LTE Band 25 10MHz 16QAM 100%RB CH-High

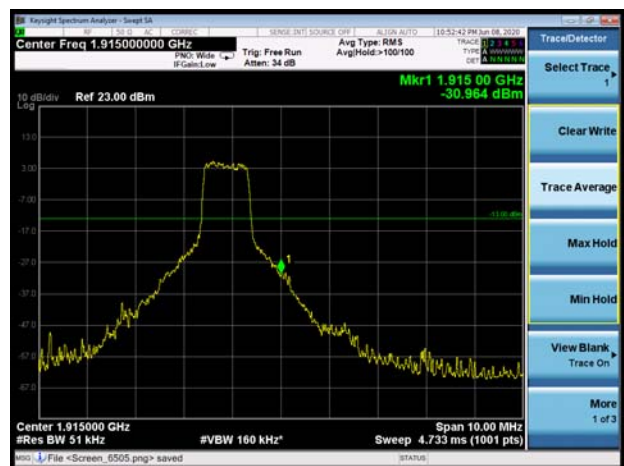

LTE Band 25 15MHz 16QAM 1RB CH-Low

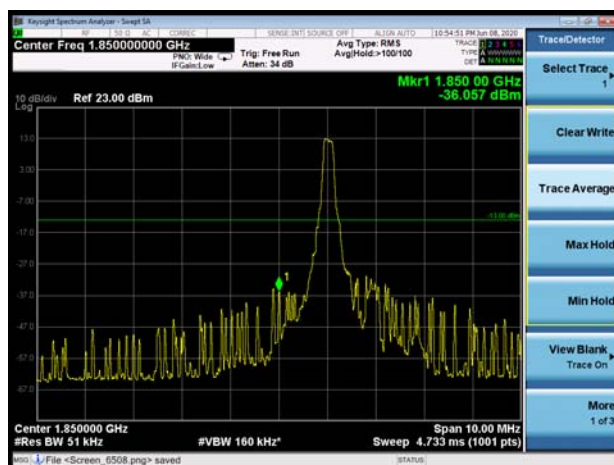


LTE Band 25 15MHz 16QAM 1RB CH-High

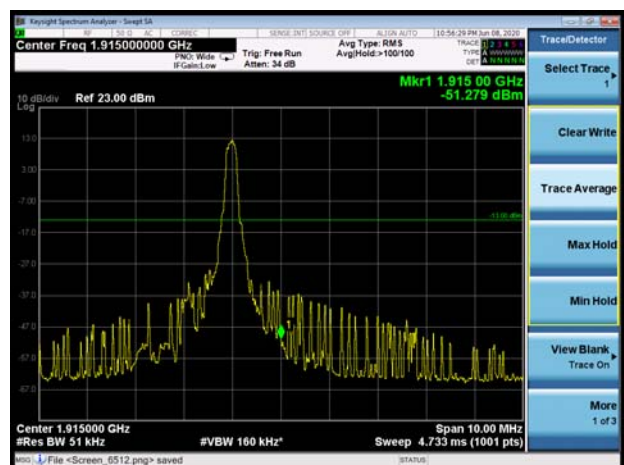




LTE Band 25 15MHz 16QAM 100%RB CH-Low

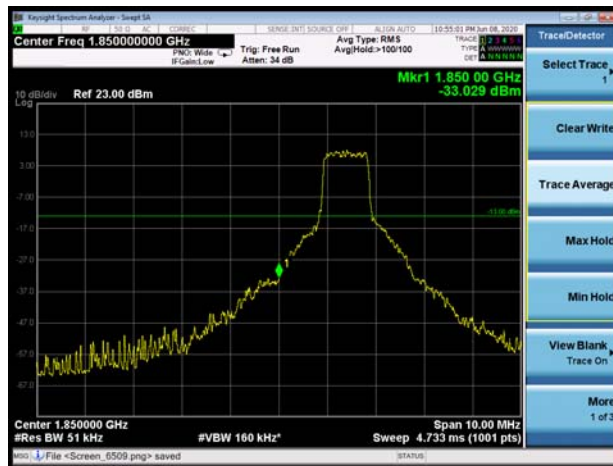


LTE Band 25 15MHz 16QAM 100%RB CH-High

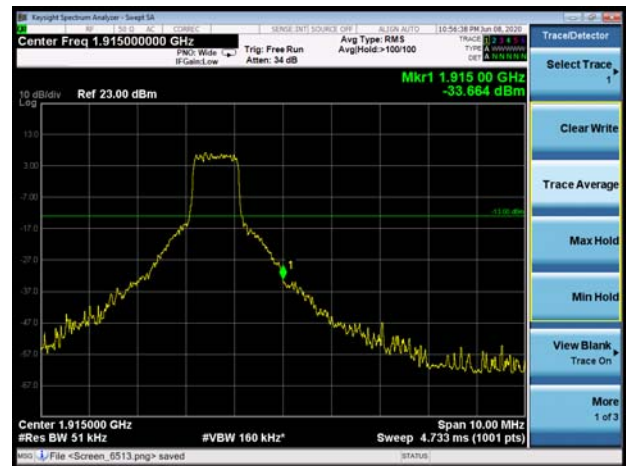


LTE Band 25 20MHz 16QAM 1RB CH-Low




LTE Band 25 20MHz 16QAM 1RB CH-High

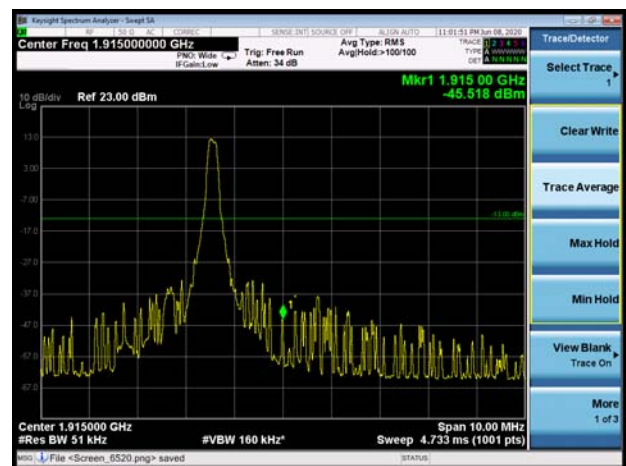

LTE Band 25 20MHz 16QAM 100%RB CH-Low

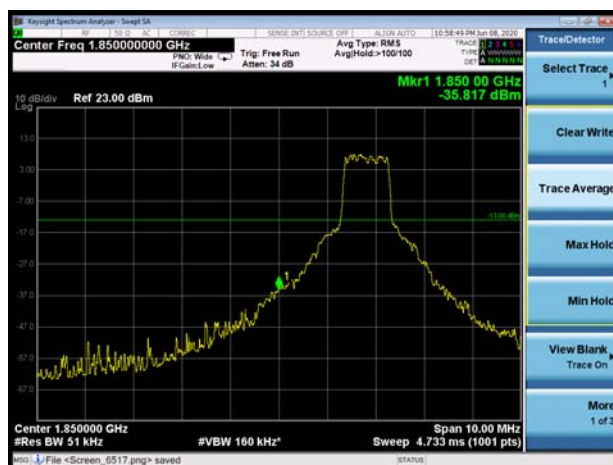

LTE Band 25 20MHz 16QAM 100%RB CH-High

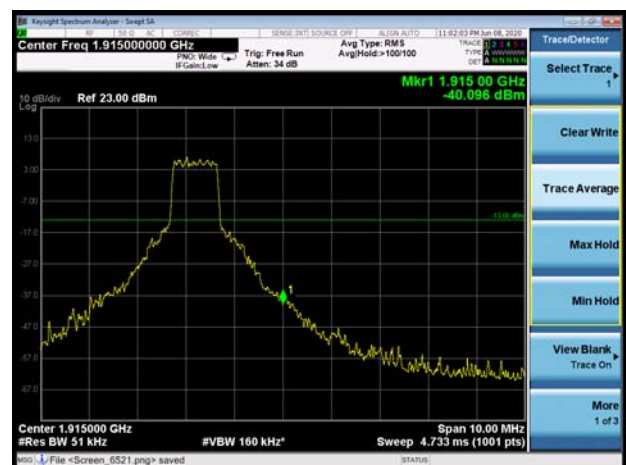

## 5.4. Peak-to-Average Power Ratio (PAPR)

### Ambient condition


| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

### Methods of Measurement

Measure the total peak power and record as PPk. And measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$\text{PAPR (dB)} = \text{PPk (dBm)} - \text{PAvg (dBm)}.$$

### Test Setup

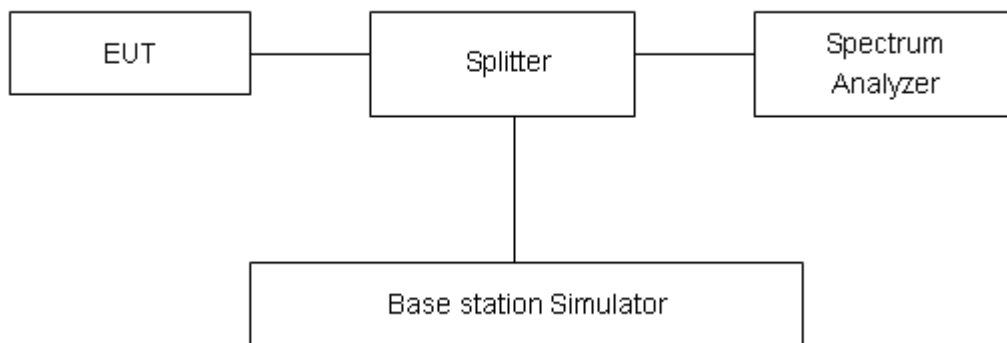

### Limits

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB in 24.232(d).

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.4$  dB.



## Test Results

| Mode              | Channel | Frequency (MHz) | Peak(dBm) | Avg(dBm) | PAPR(dB) | Limit(dB) | Conclusion |
|-------------------|---------|-----------------|-----------|----------|----------|-----------|------------|
| GSM 1900 (GMSK)   | 512     | 1850.2          | 30.99     | 30.46    | 0.53     | ≤13       | PASS       |
|                   | 661     | 1880            | 30.93     | 30.34    | 0.59     | ≤13       | PASS       |
|                   | 810     | 1909.8          | 30.87     | 30.18    | 0.69     | ≤13       | PASS       |
| GPRS 1900 (GMSK)  | 512     | 1850.2          | 30.37     | 29.65    | 0.72     | ≤13       | PASS       |
|                   | 661     | 1880            | 30.33     | 29.56    | 0.77     | ≤13       | PASS       |
|                   | 810     | 1909.8          | 30.27     | 29.48    | 0.79     | ≤13       | PASS       |
| EGPRS 1900 (8PSK) | 512     | 1850.2          | 27.80     | 26.37    | 1.43     | ≤13       | PASS       |
|                   | 661     | 1880            | 27.47     | 26.01    | 1.46     | ≤13       | PASS       |
|                   | 810     | 1909.8          | 27.56     | 26.07    | 1.49     | ≤13       | PASS       |

| Mode          | Bandwidth | Modulation | Channel/<br>Frequency(MHz) | Peak-to-Average Power Ratio<br>(PAPR) |          |          | Limit(dB) | Conclusion |
|---------------|-----------|------------|----------------------------|---------------------------------------|----------|----------|-----------|------------|
|               |           |            |                            | Peak(dBm)                             | Avg(dBm) | PAPR(dB) |           |            |
| LTE<br>Band 2 | 1.4MHz    | QPSK       | 18900/1880                 | 26.12                                 | 16.27    | 9.85     | ≤13       | PASS       |
|               |           | 16QAM      | 18900/1880                 | 26.48                                 | 16.28    | 10.20    | ≤13       | PASS       |
|               | 3MHz      | QPSK       | 18900/1880                 | 26.04                                 | 16.18    | 9.86     | ≤13       | PASS       |
|               |           | 16QAM      | 18900/1880                 | 26.35                                 | 16.31    | 10.04    | ≤13       | PASS       |
|               | 5MHz      | QPSK       | 18900/1880                 | 26.50                                 | 17.01    | 9.49     | ≤13       | PASS       |
|               |           | 16QAM      | 18900/1880                 | 26.35                                 | 16.11    | 10.24    | ≤13       | PASS       |
|               | 10MHz     | QPSK       | 18900/1880                 | 26.36                                 | 17.02    | 9.34     | ≤13       | PASS       |
|               |           | 16QAM      | 18900/1880                 | 26.37                                 | 17.22    | 9.15     | ≤13       | PASS       |
|               | 15MHz     | QPSK       | 18900/1880                 | 26.41                                 | 18.28    | 8.13     | ≤13       | PASS       |
|               |           | 16QAM      | 18900/1880                 | 26.43                                 | 18.44    | 7.99     | ≤13       | PASS       |
|               | 20MHz     | QPSK       | 18900/1880                 | 26.47                                 | 17.98    | 8.49     | ≤13       | PASS       |
|               |           | 16QAM      | 18900/1880                 | 26.50                                 | 18.50    | 8.00     | ≤13       | PASS       |

| Mode              | Bandwidth | Modulation | Channel/<br>Frequency(MHz) | Peak-to-Average Power Ratio<br>(PAPR) |          |          | Limit(dB) | Conclusion |
|-------------------|-----------|------------|----------------------------|---------------------------------------|----------|----------|-----------|------------|
|                   |           |            |                            | Peak(dBm)                             | Avg(dBm) | PAPR(dB) |           |            |
| LTE<br>Band<br>25 | 1.4MHz    | QPSK       | 26365/1882.5               | 25.80                                 | 14.44    | 11.36    | ≤13       | PASS       |
|                   |           | 16QAM      | 26365/1882.5               | 26.42                                 | 15.11    | 11.31    | ≤13       | PASS       |
|                   | 3MHz      | QPSK       | 26365/1882.5               | 25.92                                 | 15.97    | 9.95     | ≤13       | PASS       |
|                   |           | 16QAM      | 26365/1882.5               | 26.23                                 | 16.06    | 10.17    | ≤13       | PASS       |
|                   | 5MHz      | QPSK       | 26365/1882.5               | 26.42                                 | 17.55    | 8.87     | ≤13       | PASS       |
|                   |           | 16QAM      | 26365/1882.5               | 26.23                                 | 16.02    | 10.21    | ≤13       | PASS       |
|                   | 10MHz     | QPSK       | 26365/1882.5               | 26.30                                 | 16.98    | 9.32     | ≤13       | PASS       |
|                   |           | 16QAM      | 26365/1882.5               | 26.29                                 | 17.16    | 9.13     | ≤13       | PASS       |
|                   | 15MHz     | QPSK       | 26365/1882.5               | 26.34                                 | 18.02    | 8.32     | ≤13       | PASS       |
|                   |           | 16QAM      | 26365/1882.5               | 26.35                                 | 18.01    | 8.34     | ≤13       | PASS       |
|                   | 20MHz     | QPSK       | 26365/1882.5               | 26.40                                 | 18.24    | 8.16     | ≤13       | PASS       |
|                   |           | 16QAM      | 26365/1882.5               | 26.41                                 | 18.20    | 8.21     | ≤13       | PASS       |

## 5.5.Frequency Stability

### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

### Method of Measurement

#### Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -40°C to +85°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -40°C to +85°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.

#### Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.3 V and 4.3 V, with a nominal voltage of 3.8V.

### Test setup

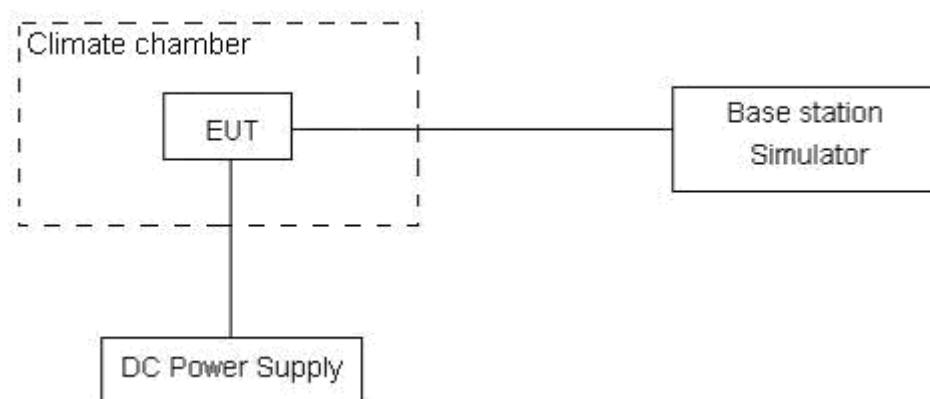

**Limits**

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block

**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor  $k = 3$ ,  $U = 0.01\text{ppm}$ .

# Test Result

| GSM1900        |         |                    |                    |                                 |                                 |         |
|----------------|---------|--------------------|--------------------|---------------------------------|---------------------------------|---------|
| Condition      |         | Freq.Error<br>(Hz) | Freq.Error<br>(Hz) | Frequency<br>Stability<br>(ppm) | Frequency<br>Stability<br>(ppm) | Verdict |
| Temperature    | Voltage | GMSK               | 8PSK               | GMSK                            | 8PSK                            |         |
| Normal (25℃)   | Normal  | 1.03               | 16.91              | 0.00055                         | 0.00900                         | PASS    |
| Extreme (85℃)  |         | 1.72               | 3.83               | 0.00092                         | 0.00204                         | PASS    |
| Extreme (80℃)  |         | 15.92              | 2.05               | 0.00847                         | 0.00109                         | PASS    |
| Extreme (70℃)  |         | 12.14              | 14.08              | 0.00646                         | 0.00749                         | PASS    |
| Extreme (60℃)  |         | 1.66               | 11.71              | 0.00088                         | 0.00623                         | PASS    |
| Extreme (50℃)  |         | 17.35              | 2.49               | 0.00923                         | 0.00132                         | PASS    |
| Extreme (40℃)  |         | 1.72               | 5.78               | 0.00092                         | 0.00307                         | PASS    |
| Extreme (30℃)  |         | 9.29               | 9.34               | 0.00494                         | 0.00497                         | PASS    |
| Extreme (20℃)  |         | 11.82              | 2.24               | 0.00629                         | 0.00119                         | PASS    |
| Extreme (10℃)  |         | 10.67              | 13.97              | 0.00567                         | 0.00743                         | PASS    |
| Extreme (0℃)   |         | 12.86              | 3.14               | 0.00684                         | 0.00167                         | PASS    |
| Extreme (-10℃) |         | 8.44               | 16.04              | 0.00449                         | 0.00853                         | PASS    |
| Extreme (-20℃) |         | 7.95               | 8.01               | 0.00423                         | 0.00426                         | PASS    |
| Extreme (-30℃) |         | 6.52               | 9.09               | 0.00347                         | 0.00483                         | PASS    |
| Extreme (-40℃) |         | 17.81              | 13.21              | 0.00947                         | 0.00703                         | PASS    |
| 25℃            | LV      | 13.38              | 6.52               | 0.00711                         | 0.00347                         | PASS    |
|                | HV      | 17.97              | 6.50               | 0.00956                         | 0.00346                         | PASS    |

| LTE Band 2    |         |                    |                    |                                 |                                 |         |
|---------------|---------|--------------------|--------------------|---------------------------------|---------------------------------|---------|
| Condition     |         | Freq.Error<br>(Hz) | Freq.Error<br>(Hz) | Frequency<br>Stability<br>(ppm) | Frequency<br>Stability<br>(ppm) | Verdict |
| BANDWIDTH     | 1.4MHz  |                    |                    |                                 |                                 |         |
| Temperature   | Voltage | 16QAM              | QPSK               | 16QAM                           | QPSK                            |         |
| Normal (25℃)  | Normal  | 13.98              | 17.37              | 0.00743                         | 0.00924                         | PASS    |
| Extreme (85℃) |         | 11.92              | 14.01              | 0.00634                         | 0.00745                         | PASS    |
| Extreme (80℃) |         | 1.06               | 7.11               | 0.00056                         | 0.00378                         | PASS    |
| Extreme (70℃) |         | 9.65               | 4.34               | 0.00513                         | 0.00231                         | PASS    |
| Extreme (60℃) |         | 1.32               | 7.51               | 0.00070                         | 0.00400                         | PASS    |
| Extreme (50℃) |         | 8.60               | 3.95               | 0.00458                         | 0.00210                         | PASS    |
| Extreme (40℃) |         | 15.28              | 10.95              | 0.00813                         | 0.00583                         | PASS    |
| Extreme (30℃) |         | 4.73               | 11.07              | 0.00252                         | 0.00589                         | PASS    |
| Extreme (20℃) |         | 12.21              | 6.86               | 0.00649                         | 0.00365                         | PASS    |
| Extreme (10℃) |         | 17.50              | 9.30               | 0.00931                         | 0.00495                         | PASS    |
| Extreme (0℃)  |         | 17.74              | 12.80              | 0.00943                         | 0.00681                         | PASS    |



|                |         |                 |                 |                           |                           |         |
|----------------|---------|-----------------|-----------------|---------------------------|---------------------------|---------|
| Extreme (-10℃) |         | 11.75           | 13.77           | 0.00625                   | 0.00732                   | PASS    |
| Extreme (-20℃) |         | 16.26           | 1.41            | 0.00865                   | 0.00075                   | PASS    |
| Extreme (-30℃) |         | 8.77            | 9.95            | 0.00466                   | 0.00529                   | PASS    |
| Extreme (-40℃) |         | 17.53           | 10.61           | 0.00932                   | 0.00565                   | PASS    |
| 25℃            | LV      | 8.58            | 15.04           | 0.00456                   | 0.00800                   | PASS    |
|                | HV      | 6.07            | 13.62           | 0.00323                   | 0.00725                   | PASS    |
| Condition      |         | Freq.Error (Hz) | Freq.Error (Hz) | Frequency Stability (ppm) | Frequency Stability (ppm) | Verdict |
| BANDWIDTH      | 3MHz    |                 |                 |                           |                           |         |
| Temperature    | Voltage | 16QAM           | QPSK            | 16QAM                     | QPSK                      |         |
| Normal (25℃)   | Normal  | 10.51           | 10.21           | 0.00559                   | 0.00543                   | PASS    |
| Extreme (85℃)  |         | 14.58           | 10.19           | 0.00776                   | 0.00542                   | PASS    |
| Extreme (80℃)  |         | 1.72            | 15.01           | 0.00092                   | 0.00798                   | PASS    |
| Extreme (70℃)  |         | 8.49            | 16.74           | 0.00452                   | 0.00891                   | PASS    |
| Extreme (60℃)  |         | 3.04            | 6.15            | 0.00162                   | 0.00327                   | PASS    |
| Extreme (50℃)  |         | 2.59            | 8.75            | 0.00138                   | 0.00465                   | PASS    |
| Extreme (40℃)  |         | 14.04           | 4.28            | 0.00747                   | 0.00228                   | PASS    |
| Extreme (30℃)  |         | 16.50           | 4.02            | 0.00878                   | 0.00214                   | PASS    |
| Extreme (20℃)  |         | 11.01           | 9.62            | 0.00585                   | 0.00512                   | PASS    |
| Extreme (10℃)  |         | 14.32           | 2.40            | 0.00762                   | 0.00127                   | PASS    |
| Extreme (0℃)   |         | 12.17           | 11.57           | 0.00647                   | 0.00616                   | PASS    |
| Extreme (-10℃) |         | 4.27            | 4.26            | 0.00227                   | 0.00226                   | PASS    |
| Extreme (-20℃) |         | 15.44           | 3.44            | 0.00821                   | 0.00183                   | PASS    |
| Extreme (-30℃) |         | 14.77           | 13.04           | 0.00786                   | 0.00694                   | PASS    |
| Extreme (-40℃) |         | 2.98            | 6.62            | 0.00158                   | 0.00352                   | PASS    |
| 25℃            | LV      | 10.14           | 10.09           | 0.00540                   | 0.00537                   | PASS    |
|                | HV      | 13.50           | 8.61            | 0.00718                   | 0.00458                   | PASS    |
| Condition      |         | Freq.Error (Hz) | Freq.Error (Hz) | Frequency Stability (ppm) | Frequency Stability (ppm) | Verdict |
| BANDWIDTH      | 5MHz    |                 |                 |                           |                           |         |
| Temperature    | Voltage | 16QAM           | QPSK            | 16QAM                     | QPSK                      |         |
| Normal (25℃)   | Normal  | 16.91           | 13.94           | 0.00899                   | 0.00741                   | PASS    |
| Extreme (85℃)  |         | 14.80           | 6.83            | 0.00787                   | 0.00363                   | PASS    |
| Extreme (80℃)  |         | 8.63            | 3.67            | 0.00459                   | 0.00195                   | PASS    |
| Extreme (70℃)  |         | 7.80            | 3.07            | 0.00415                   | 0.00163                   | PASS    |
| Extreme (60℃)  |         | 17.49           | 13.59           | 0.00930                   | 0.00723                   | PASS    |
| Extreme (50℃)  |         | 12.99           | 10.27           | 0.00691                   | 0.00546                   | PASS    |
| Extreme (40℃)  |         | 16.61           | 11.13           | 0.00884                   | 0.00592                   | PASS    |
| Extreme (30℃)  |         | 10.73           | 13.45           | 0.00571                   | 0.00716                   | PASS    |
| Extreme (20℃)  |         | 3.79            | 2.59            | 0.00202                   | 0.00138                   | PASS    |
| Extreme (10℃)  |         | 13.86           | 9.58            | 0.00737                   | 0.00509                   | PASS    |
| Extreme (0℃)   |         | 7.88            | 2.10            | 0.00419                   | 0.00112                   | PASS    |



|                |         |                 |                 |                           |                           |         |
|----------------|---------|-----------------|-----------------|---------------------------|---------------------------|---------|
| Extreme (-10℃) |         | 1.94            | 17.99           | 0.00103                   | 0.00957                   | PASS    |
| Extreme (-20℃) |         | 16.85           | 9.89            | 0.00896                   | 0.00526                   | PASS    |
| Extreme (-30℃) |         | 13.72           | 4.97            | 0.00730                   | 0.00264                   | PASS    |
| Extreme (-40℃) |         | 17.60           | 15.94           | 0.00936                   | 0.00848                   | PASS    |
| 25℃            | LV      | 11.16           | 16.83           | 0.00594                   | 0.00895                   | PASS    |
|                | HV      | 15.93           | 12.18           | 0.00847                   | 0.00648                   | PASS    |
| Condition      |         | Freq.Error (Hz) | Freq.Error (Hz) | Frequency Stability (ppm) | Frequency Stability (ppm) | Verdict |
| BANDWIDTH      | 10MHz   |                 |                 |                           |                           |         |
| Temperature    | Voltage | 16QAM           | QPSK            | 16QAM                     | QPSK                      |         |
| Normal (25℃)   | Normal  | 9.90            | 4.14            | 0.00526                   | 0.00220                   | PASS    |
| Extreme (85℃)  |         | 9.80            | 16.11           | 0.00521                   | 0.00857                   | PASS    |
| Extreme (80℃)  |         | 16.71           | 14.18           | 0.00889                   | 0.00754                   | PASS    |
| Extreme (70℃)  |         | 7.15            | 14.28           | 0.00380                   | 0.00760                   | PASS    |
| Extreme (60℃)  |         | 9.09            | 7.16            | 0.00484                   | 0.00381                   | PASS    |
| Extreme (50℃)  |         | 9.29            | 3.53            | 0.00494                   | 0.00188                   | PASS    |
| Extreme (40℃)  |         | 17.43           | 6.92            | 0.00927                   | 0.00368                   | PASS    |
| Extreme (30℃)  |         | 5.78            | 12.54           | 0.00307                   | 0.00667                   | PASS    |
| Extreme (20℃)  |         | 16.18           | 8.67            | 0.00861                   | 0.00461                   | PASS    |
| Extreme (10℃)  |         | 10.32           | 16.79           | 0.00549                   | 0.00893                   | PASS    |
| Extreme (0℃)   |         | 7.75            | 2.83            | 0.00412                   | 0.00150                   | PASS    |
| Extreme (-10℃) |         | 7.46            | 14.85           | 0.00397                   | 0.00790                   | PASS    |
| Extreme (-20℃) |         | 10.57           | 17.84           | 0.00562                   | 0.00949                   | PASS    |
| Extreme (-30℃) |         | 3.71            | 4.39            | 0.00197                   | 0.00233                   | PASS    |
| Extreme (-40℃) |         | 7.75            | 8.30            | 0.00412                   | 0.00441                   | PASS    |
| 25℃            | LV      | 1.35            | 8.86            | 0.00072                   | 0.00471                   | PASS    |
|                | HV      | 16.89           | 3.48            | 0.00898                   | 0.00185                   | PASS    |
| Condition      |         | Freq.Error (Hz) | Freq.Error (Hz) | Frequency Stability (ppm) | Frequency Stability (ppm) | Verdict |
| BANDWIDTH      | 15MHz   |                 |                 |                           |                           |         |
| Temperature    | Voltage | 16QAM           | QPSK            | 16QAM                     | QPSK                      |         |
| Normal (25℃)   | Normal  | 3.20            | 2.66            | 0.00170                   | 0.00142                   | PASS    |
| Extreme (85℃)  |         | 12.52           | 15.71           | 0.00666                   | 0.00836                   | PASS    |
| Extreme (80℃)  |         | 6.16            | 8.00            | 0.00327                   | 0.00425                   | PASS    |
| Extreme (70℃)  |         | 11.43           | 6.77            | 0.00608                   | 0.00360                   | PASS    |
| Extreme (60℃)  |         | 5.10            | 7.14            | 0.00271                   | 0.00380                   | PASS    |
| Extreme (50℃)  |         | 1.62            | 9.04            | 0.00086                   | 0.00481                   | PASS    |
| Extreme (40℃)  |         | 8.25            | 5.55            | 0.00439                   | 0.00295                   | PASS    |
| Extreme (30℃)  |         | 10.88           | 2.28            | 0.00579                   | 0.00121                   | PASS    |
| Extreme (20℃)  |         | 6.18            | 9.40            | 0.00328                   | 0.00500                   | PASS    |
| Extreme (10℃)  |         | 13.95           | 9.56            | 0.00742                   | 0.00508                   | PASS    |
| Extreme (0℃)   |         | 6.65            | 3.34            | 0.00354                   | 0.00178                   | PASS    |



|                |         |                 |                 |                           |                           |         |
|----------------|---------|-----------------|-----------------|---------------------------|---------------------------|---------|
| Extreme (-10℃) |         | 4.35            | 10.12           | 0.00232                   | 0.00538                   | PASS    |
| Extreme (-20℃) |         | 11.05           | 8.35            | 0.00588                   | 0.00444                   | PASS    |
| Extreme (-30℃) |         | 4.51            | 13.98           | 0.00240                   | 0.00743                   | PASS    |
| Extreme (-40℃) |         | 12.36           | 12.42           | 0.00658                   | 0.00661                   | PASS    |
| 25℃            | LV      | 17.94           | 12.74           | 0.00954                   | 0.00678                   | PASS    |
|                | HV      | 16.82           | 9.51            | 0.00895                   | 0.00506                   | PASS    |
| Condition      |         | Freq.Error (Hz) | Freq.Error (Hz) | Frequency Stability (ppm) | Frequency Stability (ppm) | Verdict |
| BANDWIDTH      | 20MHz   |                 |                 |                           |                           |         |
| Temperature    | Voltage | 16QAM           | QPSK            | 16QAM                     | QPSK                      |         |
| Normal (25℃)   | Normal  | 2.72            | 9.29            | 0.00145                   | 0.00494                   | PASS    |
| Extreme (85℃)  |         | 6.45            | 12.53           | 0.00343                   | 0.00666                   | PASS    |
| Extreme (80℃)  |         | 4.55            | 5.86            | 0.00242                   | 0.00312                   | PASS    |
| Extreme (70℃)  |         | 4.91            | 12.51           | 0.00261                   | 0.00665                   | PASS    |
| Extreme (60℃)  |         | 1.92            | 17.63           | 0.00102                   | 0.00938                   | PASS    |
| Extreme (50℃)  |         | 2.96            | 7.30            | 0.00158                   | 0.00388                   | PASS    |
| Extreme (40℃)  |         | 13.79           | 5.21            | 0.00733                   | 0.00277                   | PASS    |
| Extreme (30℃)  |         | 8.72            | 11.85           | 0.00464                   | 0.00630                   | PASS    |
| Extreme (20℃)  |         | 11.54           | 9.32            | 0.00614                   | 0.00496                   | PASS    |
| Extreme (10℃)  |         | 12.22           | 5.54            | 0.00650                   | 0.00295                   | PASS    |
| Extreme (0℃)   |         | 8.13            | 14.88           | 0.00432                   | 0.00792                   | PASS    |
| Extreme (-10℃) |         | 4.79            | 3.11            | 0.00255                   | 0.00165                   | PASS    |
| Extreme (-20℃) |         | 8.53            | 15.24           | 0.00454                   | 0.00811                   | PASS    |
| Extreme (-30℃) |         | 1.22            | 6.01            | 0.00065                   | 0.00320                   | PASS    |
| Extreme (-40℃) |         | 14.06           | 16.46           | 0.00748                   | 0.00875                   | PASS    |
| 25℃            | LV      | 16.66           | 2.04            | 0.00886                   | 0.00108                   | PASS    |
|                | HV      | 8.16            | 16.32           | 0.00434                   | 0.00868                   | PASS    |

| LTE Band 25   |         |                 |                 |                           |                           |         |
|---------------|---------|-----------------|-----------------|---------------------------|---------------------------|---------|
| Condition     |         | Freq.Error (Hz) | Freq.Error (Hz) | Frequency Stability (ppm) | Frequency Stability (ppm) | Verdict |
| BANDWIDTH     | 1.4MHz  |                 |                 |                           |                           |         |
| Temperature   | Voltage | 16QAM           | QPSK            | 16QAM                     | QPSK                      |         |
| Normal (25℃)  | Normal  | 3.56            | 2.34            | 0.00189                   | 0.00124                   | PASS    |
| Extreme (85℃) |         | 12.11           | 7.70            | 0.00644                   | 0.00410                   | PASS    |
| Extreme (80℃) |         | 2.42            | 5.16            | 0.00129                   | 0.00274                   | PASS    |
| Extreme (70℃) |         | 17.64           | 7.88            | 0.00939                   | 0.00419                   | PASS    |
| Extreme (60℃) |         | 13.39           | 15.48           | 0.00712                   | 0.00823                   | PASS    |
| Extreme (50℃) |         | 14.55           | 5.75            | 0.00774                   | 0.00306                   | PASS    |
| Extreme (40℃) |         | 3.16            | 10.35           | 0.00168                   | 0.00550                   | PASS    |



|                |         |                 |                 |                           |                           |         |
|----------------|---------|-----------------|-----------------|---------------------------|---------------------------|---------|
| Extreme (30℃)  |         | 3.96            | 12.77           | 0.00211                   | 0.00679                   | PASS    |
| Extreme (20℃)  |         | 11.83           | 11.38           | 0.00629                   | 0.00605                   | PASS    |
| Extreme (10℃)  |         | 1.25            | 13.94           | 0.00067                   | 0.00742                   | PASS    |
| Extreme (0℃)   |         | 1.74            | 1.85            | 0.00092                   | 0.00098                   | PASS    |
| Extreme (-10℃) |         | 14.32           | 14.06           | 0.00762                   | 0.00748                   | PASS    |
| Extreme (-20℃) |         | 2.77            | 11.89           | 0.00148                   | 0.00632                   | PASS    |
| Extreme (-30℃) |         | 2.06            | 2.09            | 0.00110                   | 0.00111                   | PASS    |
| Extreme (-40℃) |         | 7.17            | 1.73            | 0.00382                   | 0.00092                   | PASS    |
| 25℃            | LV      | 2.20            | 5.67            | 0.00117                   | 0.00302                   | PASS    |
|                | HV      | 10.33           | 17.32           | 0.00549                   | 0.00921                   | PASS    |
| Condition      |         | Freq.Error (Hz) | Freq.Error (Hz) | Frequency Stability (ppm) | Frequency Stability (ppm) | Verdict |
| BANDWIDTH      | 3MHz    |                 |                 |                           |                           |         |
| Temperature    | Voltage | 16QAM           | QPSK            | 16QAM                     | QPSK                      |         |
| Normal (25℃)   | Normal  | 10.13           | 8.73            | 0.00539                   | 0.00464                   | PASS    |
| Extreme (85℃)  |         | 13.98           | 4.04            | 0.00744                   | 0.00215                   | PASS    |
| Extreme (80℃)  |         | 15.92           | 13.78           | 0.00847                   | 0.00733                   | PASS    |
| Extreme (70℃)  |         | 3.93            | 11.01           | 0.00209                   | 0.00586                   | PASS    |
| Extreme (60℃)  |         | 15.26           | 7.69            | 0.00812                   | 0.00409                   | PASS    |
| Extreme (50℃)  |         | 5.23            | 12.78           | 0.00278                   | 0.00680                   | PASS    |
| Extreme (40℃)  |         | 9.82            | 6.63            | 0.00522                   | 0.00353                   | PASS    |
| Extreme (30℃)  |         | 13.89           | 1.70            | 0.00739                   | 0.00091                   | PASS    |
| Extreme (20℃)  |         | 5.53            | 6.95            | 0.00294                   | 0.00370                   | PASS    |
| Extreme (10℃)  |         | 3.03            | 7.43            | 0.00161                   | 0.00395                   | PASS    |
| Extreme (0℃)   |         | 8.99            | 9.88            | 0.00478                   | 0.00526                   | PASS    |
| Extreme (-10℃) |         | 7.38            | 17.37           | 0.00392                   | 0.00924                   | PASS    |
| Extreme (-20℃) |         | 15.27           | 4.60            | 0.00812                   | 0.00245                   | PASS    |
| Extreme (-30℃) |         | 15.04           | 16.59           | 0.00800                   | 0.00882                   | PASS    |
| Extreme (-40℃) |         | 8.70            | 9.94            | 0.00463                   | 0.00529                   | PASS    |
| 25℃            | LV      | 8.42            | 2.95            | 0.00448                   | 0.00157                   | PASS    |
|                | HV      | 16.08           | 15.52           | 0.00855                   | 0.00826                   | PASS    |
| Condition      |         | Freq.Error (Hz) | Freq.Error (Hz) | Frequency Stability (ppm) | Frequency Stability (ppm) | Verdict |
| BANDWIDTH      | 5MHz    |                 |                 |                           |                           |         |
| Temperature    | Voltage | 16QAM           | QPSK            | 16QAM                     | QPSK                      |         |
| Normal (25℃)   | Normal  | 6.09            | 10.61           | 0.00324                   | 0.00565                   | PASS    |
| Extreme (85℃)  |         | 11.44           | 7.30            | 0.00608                   | 0.00388                   | PASS    |
| Extreme (80℃)  |         | 17.56           | 12.02           | 0.00934                   | 0.00640                   | PASS    |
| Extreme (70℃)  |         | 6.89            | 14.25           | 0.00366                   | 0.00758                   | PASS    |
| Extreme (60℃)  |         | 12.61           | 11.74           | 0.00671                   | 0.00625                   | PASS    |
| Extreme (50℃)  |         | 16.54           | 4.66            | 0.00880                   | 0.00248                   | PASS    |



|                |         |                    |                    |                                 |                                 |         |
|----------------|---------|--------------------|--------------------|---------------------------------|---------------------------------|---------|
| Extreme (40℃)  |         | 2.73               | 17.72              | 0.00145                         | 0.00942                         | PASS    |
| Extreme (30℃)  |         | 16.58              | 3.71               | 0.00882                         | 0.00197                         | PASS    |
| Extreme (20℃)  |         | 12.19              | 12.85              | 0.00648                         | 0.00684                         | PASS    |
| Extreme (10℃)  |         | 12.89              | 2.10               | 0.00685                         | 0.00112                         | PASS    |
| Extreme (0℃)   |         | 14.96              | 15.09              | 0.00796                         | 0.00803                         | PASS    |
| Extreme (-10℃) |         | 5.98               | 12.49              | 0.00318                         | 0.00664                         | PASS    |
| Extreme (-20℃) |         | 9.08               | 9.98               | 0.00483                         | 0.00531                         | PASS    |
| Extreme (-30℃) |         | 7.33               | 12.78              | 0.00390                         | 0.00680                         | PASS    |
| Extreme (-40℃) |         | 2.52               | 8.43               | 0.00134                         | 0.00448                         | PASS    |
| 25℃            | LV      | 13.46              | 2.61               | 0.00716                         | 0.00139                         | PASS    |
|                | HV      | 17.48              | 9.71               | 0.00930                         | 0.00517                         | PASS    |
| Condition      |         | Freq.Error<br>(Hz) | Freq.Error<br>(Hz) | Frequency<br>Stability<br>(ppm) | Frequency<br>Stability<br>(ppm) | Verdict |
| BANDWIDTH      | 10MHz   |                    |                    |                                 |                                 |         |
| Temperature    | Voltage | 16QAM              | QPSK               | 16QAM                           | QPSK                            |         |
| Normal (25℃)   | Normal  | 14.36              | 6.25               | 0.00764                         | 0.00333                         | PASS    |
| Extreme (85℃)  |         | 12.12              | 3.46               | 0.00645                         | 0.00184                         | PASS    |
| Extreme (80℃)  |         | 12.87              | 3.14               | 0.00684                         | 0.00167                         | PASS    |
| Extreme (70℃)  |         | 8.12               | 10.90              | 0.00432                         | 0.00580                         | PASS    |
| Extreme (60℃)  |         | 16.95              | 10.06              | 0.00902                         | 0.00535                         | PASS    |
| Extreme (50℃)  |         | 10.40              | 4.90               | 0.00553                         | 0.00261                         | PASS    |
| Extreme (40℃)  |         | 16.98              | 5.22               | 0.00903                         | 0.00278                         | PASS    |
| Extreme (30℃)  |         | 12.46              | 13.61              | 0.00663                         | 0.00724                         | PASS    |
| Extreme (20℃)  |         | 17.11              | 10.05              | 0.00910                         | 0.00535                         | PASS    |
| Extreme (10℃)  |         | 7.47               | 3.34               | 0.00397                         | 0.00178                         | PASS    |
| Extreme (0℃)   |         | 9.59               | 15.13              | 0.00510                         | 0.00805                         | PASS    |
| Extreme (-10℃) |         | 7.94               | 4.11               | 0.00422                         | 0.00218                         | PASS    |
| Extreme (-20℃) |         | 17.11              | 5.20               | 0.00910                         | 0.00276                         | PASS    |
| Extreme (-30℃) |         | 15.83              | 11.38              | 0.00842                         | 0.00605                         | PASS    |
| Extreme (-40℃) |         | 6.22               | 11.57              | 0.00331                         | 0.00615                         | PASS    |
| 25℃            | LV      | 1.43               | 16.91              | 0.00076                         | 0.00899                         | PASS    |
|                | HV      | 10.43              | 12.00              | 0.00555                         | 0.00638                         | PASS    |
| Condition      |         | Freq.Error<br>(Hz) | Freq.Error<br>(Hz) | Frequency<br>Stability<br>(ppm) | Frequency<br>Stability<br>(ppm) | Verdict |
| BANDWIDTH      | 15MHz   |                    |                    |                                 |                                 |         |
| Temperature    | Voltage | 16QAM              | QPSK               | 16QAM                           | QPSK                            |         |
| Normal (25℃)   | Normal  | 14.08              | 9.29               | 0.00749                         | 0.00494                         | PASS    |
| Extreme (85℃)  |         | 17.46              | 11.77              | 0.00929                         | 0.00626                         | PASS    |
| Extreme (80℃)  |         | 9.06               | 2.63               | 0.00482                         | 0.00140                         | PASS    |
| Extreme (70℃)  |         | 12.09              | 14.33              | 0.00643                         | 0.00762                         | PASS    |
| Extreme (60℃)  |         | 17.13              | 5.39               | 0.00911                         | 0.00287                         | PASS    |



|                |         |                 |                 |                           |                           |         |
|----------------|---------|-----------------|-----------------|---------------------------|---------------------------|---------|
| Extreme (50℃)  |         | 11.55           | 10.42           | 0.00614                   | 0.00554                   | PASS    |
| Extreme (40℃)  |         | 14.60           | 13.48           | 0.00776                   | 0.00717                   | PASS    |
| Extreme (30℃)  |         | 15.00           | 14.62           | 0.00798                   | 0.00778                   | PASS    |
| Extreme (20℃)  |         | 15.54           | 16.31           | 0.00826                   | 0.00867                   | PASS    |
| Extreme (10℃)  |         | 1.42            | 14.45           | 0.00075                   | 0.00769                   | PASS    |
| Extreme (0℃)   |         | 11.51           | 6.81            | 0.00612                   | 0.00362                   | PASS    |
| Extreme (-10℃) |         | 7.78            | 6.67            | 0.00414                   | 0.00355                   | PASS    |
| Extreme (-20℃) |         | 7.92            | 5.77            | 0.00422                   | 0.00307                   | PASS    |
| Extreme (-30℃) |         | 9.59            | 4.45            | 0.00510                   | 0.00237                   | PASS    |
| Extreme (-40℃) |         | 12.32           | 13.18           | 0.00655                   | 0.00701                   | PASS    |
| 25℃            | LV      | 16.57           | 8.03            | 0.00881                   | 0.00427                   | PASS    |
|                | HV      | 4.70            | 12.64           | 0.00250                   | 0.00672                   | PASS    |
| Condition      |         | Freq.Error (Hz) | Freq.Error (Hz) | Frequency Stability (ppm) | Frequency Stability (ppm) | Verdict |
| BANDWIDTH      | 20MHz   |                 |                 |                           |                           |         |
| Temperature    | Voltage | 16QAM           | QPSK            | 16QAM                     | QPSK                      |         |
| Normal (25℃)   | Normal  | 6.16            | 6.12            | 0.00327                   | 0.00326                   | PASS    |
| Extreme (85℃)  |         | 13.97           | 5.95            | 0.00743                   | 0.00316                   | PASS    |
| Extreme (80℃)  |         | 15.26           | 14.65           | 0.00812                   | 0.00779                   | PASS    |
| Extreme (70℃)  |         | 1.01            | 4.09            | 0.00053                   | 0.00218                   | PASS    |
| Extreme (60℃)  |         | 12.03           | 7.68            | 0.00640                   | 0.00408                   | PASS    |
| Extreme (50℃)  |         | 13.70           | 4.65            | 0.00729                   | 0.00248                   | PASS    |
| Extreme (40℃)  |         | 11.81           | 10.99           | 0.00628                   | 0.00584                   | PASS    |
| Extreme (30℃)  |         | 14.67           | 14.69           | 0.00780                   | 0.00781                   | PASS    |
| Extreme (20℃)  |         | 7.43            | 9.88            | 0.00395                   | 0.00526                   | PASS    |
| Extreme (10℃)  |         | 3.91            | 13.17           | 0.00208                   | 0.00700                   | PASS    |
| Extreme (0℃)   |         | 12.00           | 1.94            | 0.00638                   | 0.00103                   | PASS    |
| Extreme (-10℃) |         | 6.83            | 1.41            | 0.00363                   | 0.00075                   | PASS    |
| Extreme (-20℃) |         | 12.98           | 17.05           | 0.00690                   | 0.00907                   | PASS    |
| Extreme (-30℃) |         | 17.13           | 10.42           | 0.00911                   | 0.00554                   | PASS    |
| Extreme (-40℃) |         | 14.31           | 8.97            | 0.00761                   | 0.00477                   | PASS    |
| 25℃            | LV      | 3.76            | 1.89            | 0.00200                   | 0.00101                   | PASS    |
|                | HV      | 7.96            | 5.00            | 0.00423                   | 0.00266                   | PASS    |

## 5.6. Spurious Emissions at Antenna Terminals

### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

### Method of Measurement


The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier. The peak detector is used.

RBW is set to 100kHz, VBW is set to 300kHz for 30MHz~1GHz

RBW is set to 1MHz, VBW is set to 3MHz for above 1GHz, Sweep is set to ATUO.

The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

### Test setup

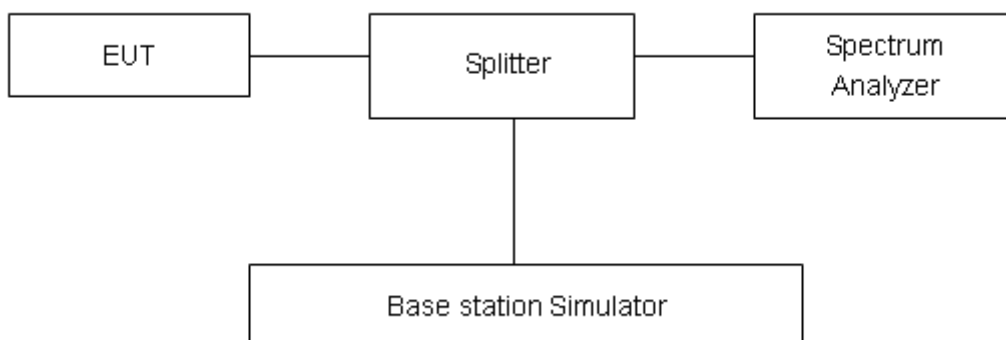

### Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log_{10} (P)$  dB.”

| Limit | -13 dBm |
|-------|---------|
|-------|---------|

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .


| Frequency  | Uncertainty |
|------------|-------------|
| 9kHz-1GHz  | 0.684 dB    |
| 1GHz-20GHz | 1.407 dB    |

## Test Result


Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions more than 20 dB below the limit are not reported.

The signal beyond the limit is carrier.


### GSM 1900 CH-Low 30MHz ~ 1GHz

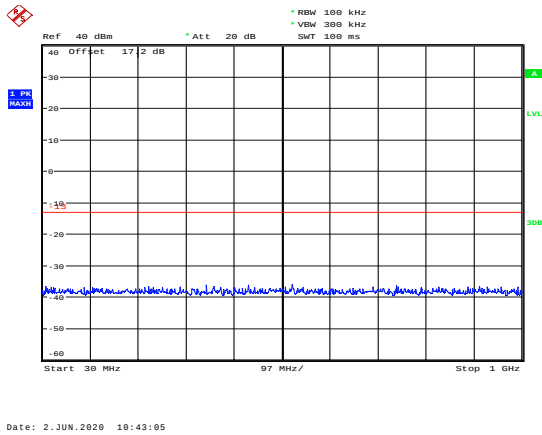


### GSM 1900 CH-Low 1GHz ~ 20GHz

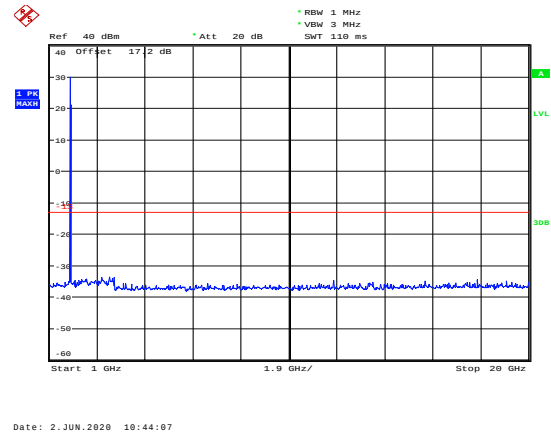


### GSM 1900 CH- Middle 30MHz ~ 1GHz

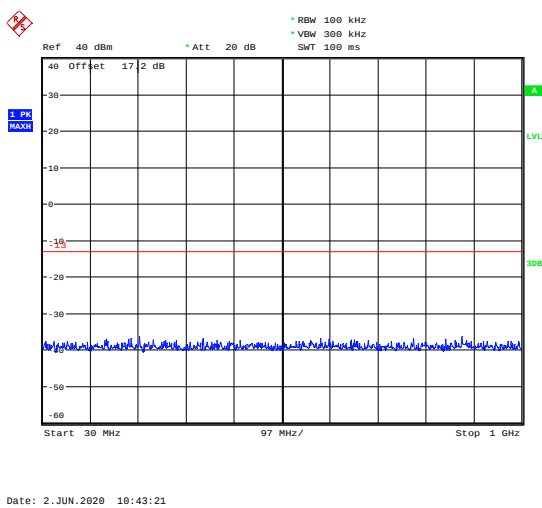


### GSM 1900 CH- Middle 1GHz ~ 20GHz

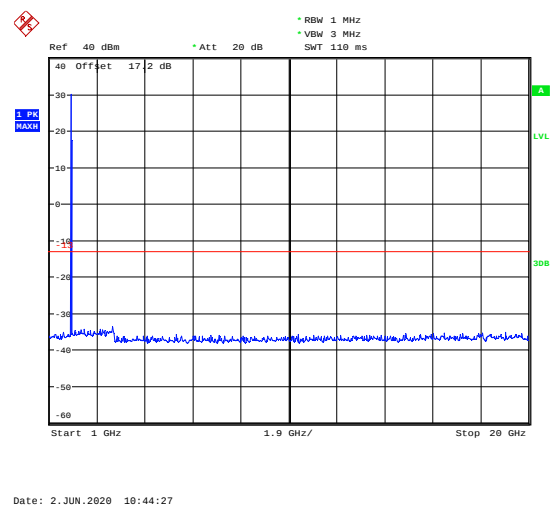

### GSM 1900 CH-High 30MHz ~ 1GHz

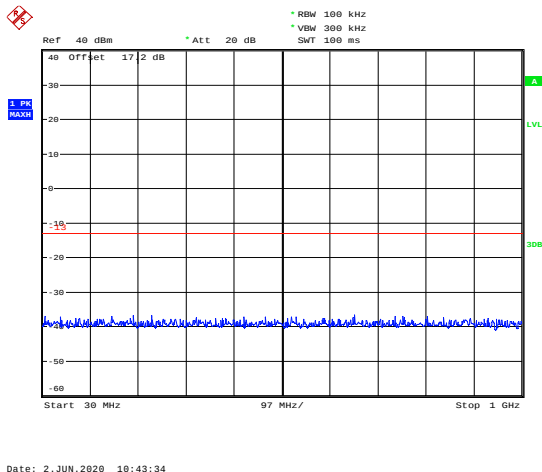


### GSM 1900 CH-High 1GHz ~ 20GHz

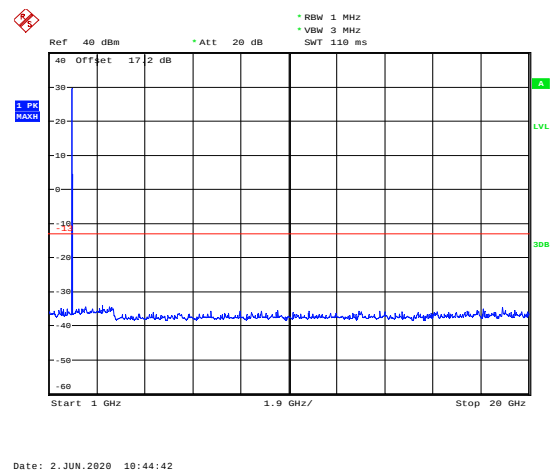




## GPRS 1900 CH-Low 30MHz ~ 1GHz

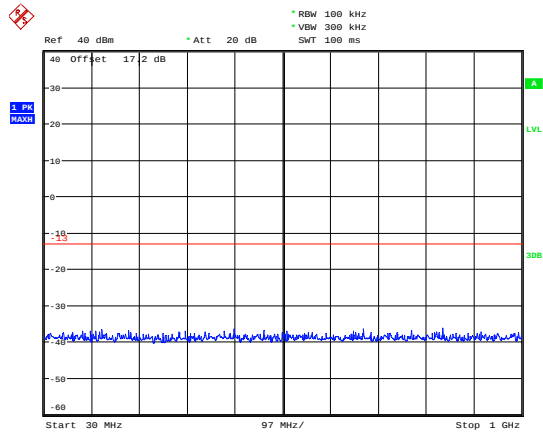


Date: 2.JUN.2020 10:45:30

## GPRS 1900 CH-Low 1GHz ~ 20GHz

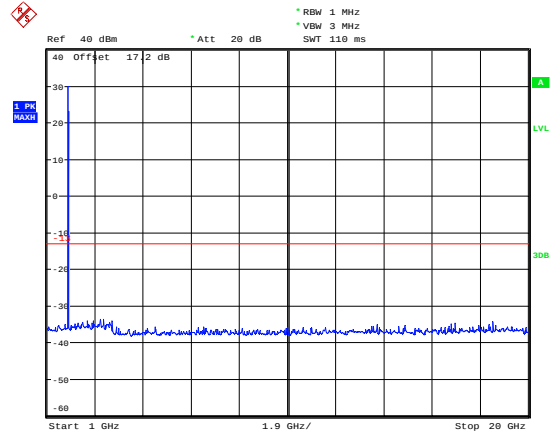


Date: 2.JUN.2020 10:46:31

## GPRS 1900 CH- Middle 30MHz ~ 1GHz

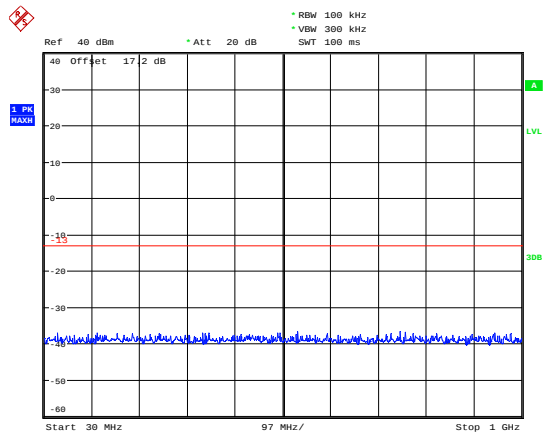


Date: 2.JUN.2020 10:45:46

## GPRS 1900 CH- Middle 1GHz ~ 20GHz

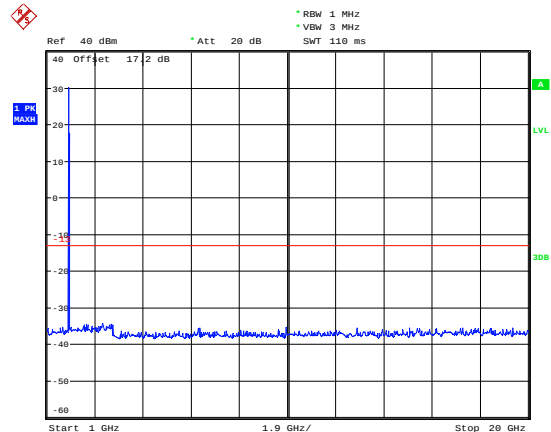


Date: 2.JUN.2020 10:46:49

## GPRS 1900 CH-High 30MHz ~ 1GHz

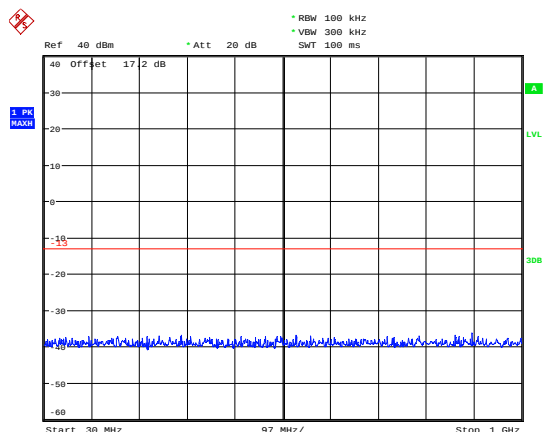

Date: 2.JUN.2020 10:45:58


## GPRS 1900 CH-High 1GHz ~ 20GHz

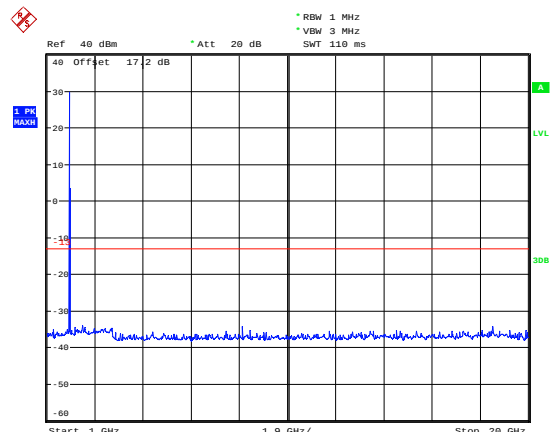

Date: 2.JUN.2020 10:47:10




## EGPRS 1900 CH-Low 30MHz ~ 1GHz

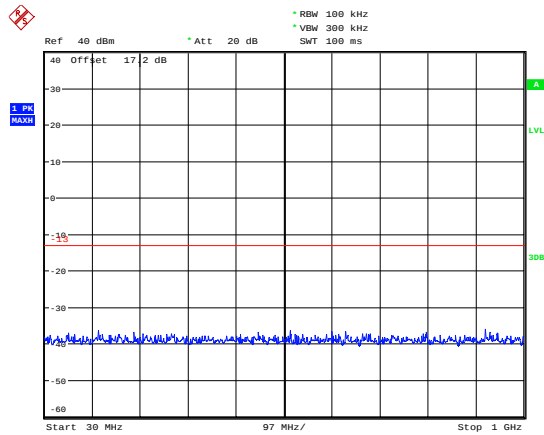


Date: 2.JUN.2020 10:48:31

## EGPRS 1900 CH-Low 1GHz ~ 20GHz

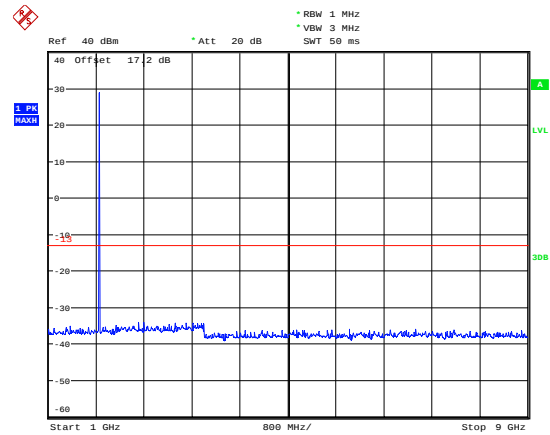


Date: 2.JUN.2020 10:49:17

## EGPRS 1900 CH- Middle 30MHz ~ 1GHz

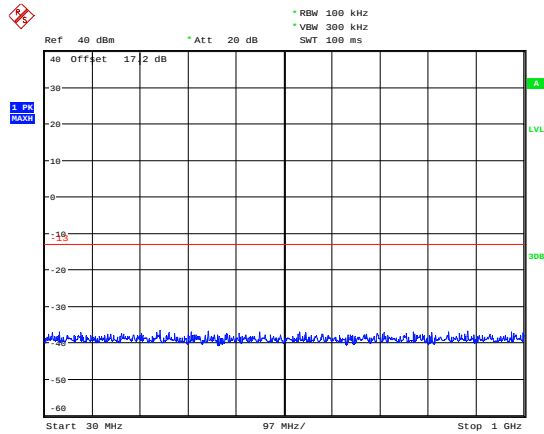


Date: 2.JUN.2020 10:48:44

## EGPRS 1900 CH- Middle 1GHz ~ 20GHz

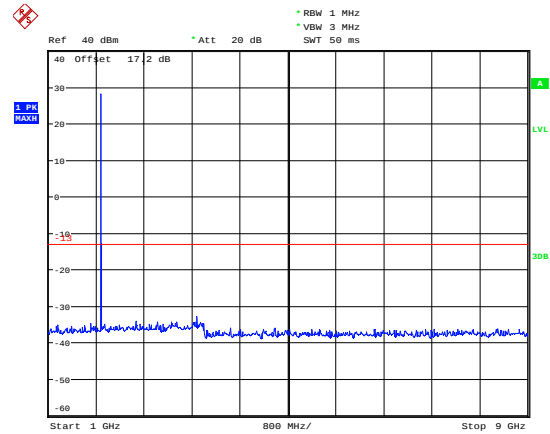


Date: 2.JUN.2020 10:49:35

## EGPRS 1900 CH-High 30MHz ~ 1GHz

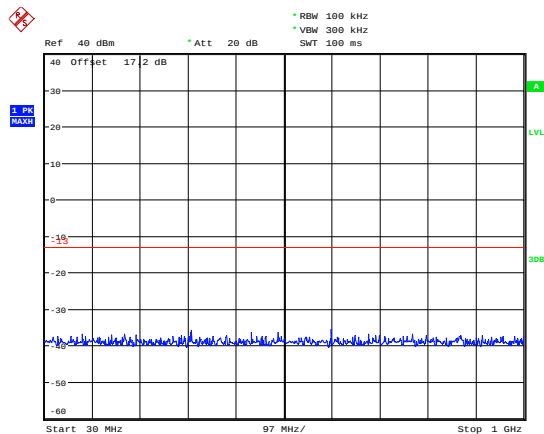

Date: 2.JUN.2020 10:48:56


## EGPRS 1900 CH-High 1GHz ~ 20GHz

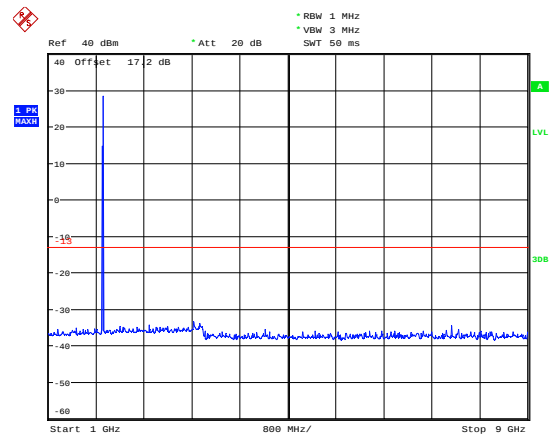

Date: 2.JUN.2020 10:49:56




## LTE Band 2 1.4MHz CH-Low 30MHz~1GHz

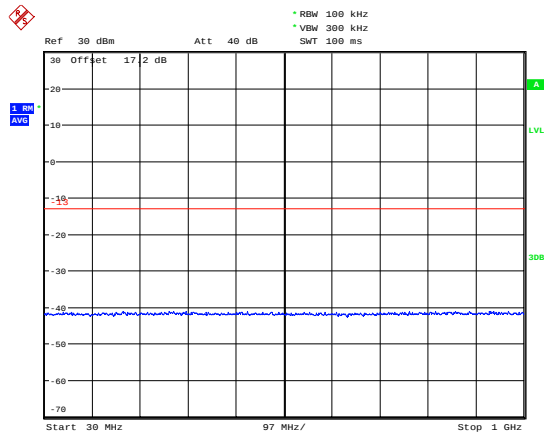


Date: 11.JUN.2020 20:22:23

## LTE Band 2 1.4MHz CH-Low 1GHz~20GHz

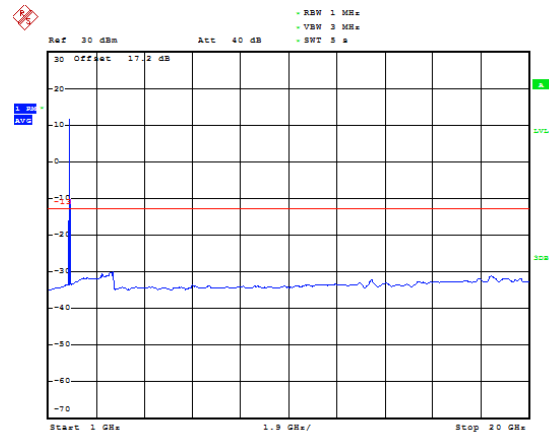


Date: 11.JUN.2020 20:26:42

## LTE Band 2 1.4MHz CH-Middle 30MHz~1GHz

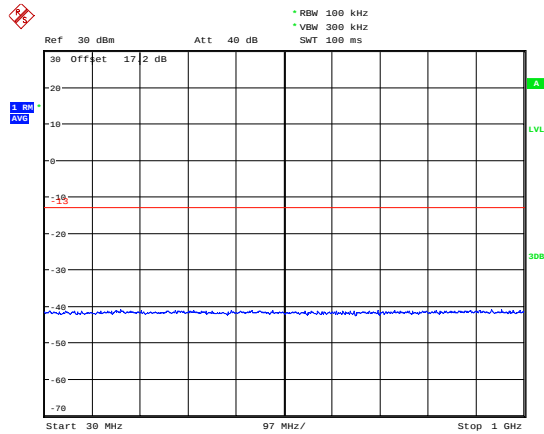


Date: 11.JUN.2020 20:22:32

## LTE Band 2 1.4MHz CH-Middle 1GHz~20GHz

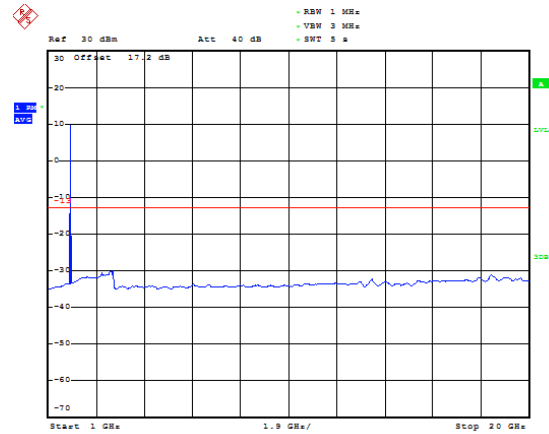


Date: 11.JUN.2020 20:30:38

## LTE Band 2 1.4MHz CH-High 30MHz~1GHz

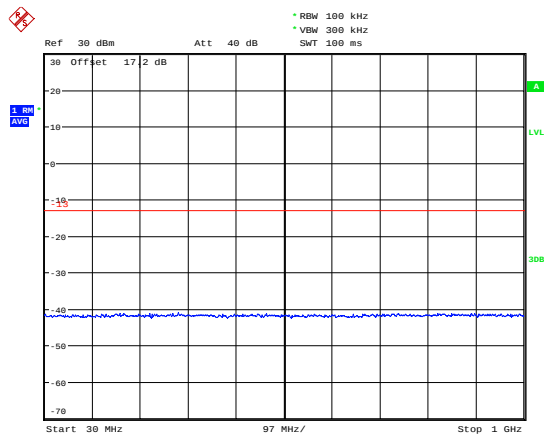

Date: 11.JUN.2020 20:22:40


## LTE Band 2 1.4MHz CH-High 1GHz~20GHz

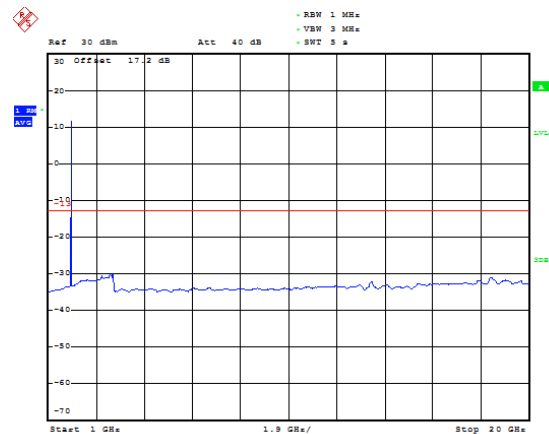

Date: 11.JUN.2020 20:31:54




## LTE Band 2 3MHz CH-Low 30MHz~1GHz

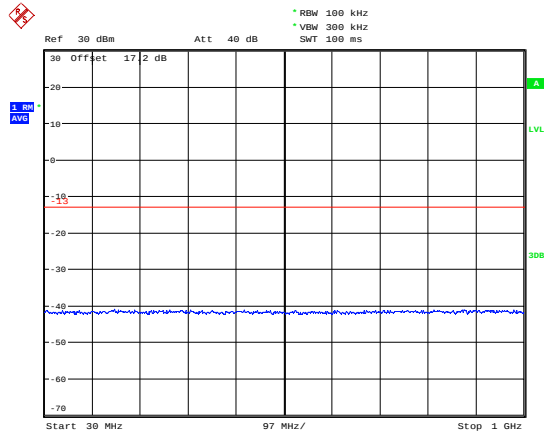


Date: 11.JUN.2020 20:45:52

## LTE Band 2 3MHz CH-Low 1GHz ~ 20GHz

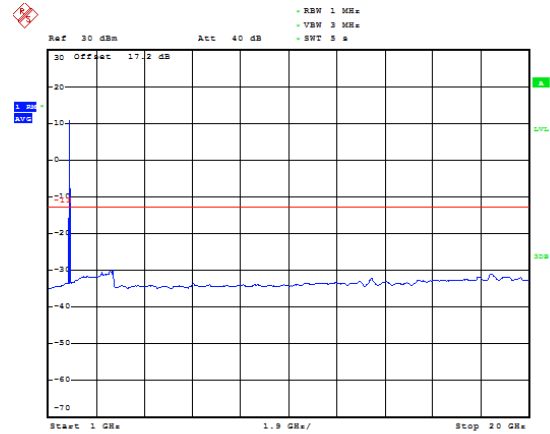


Date: 11.JUN.2020 20:52:58

## LTE Band 2 3MHz CH-Middle 30MHz~1GHz

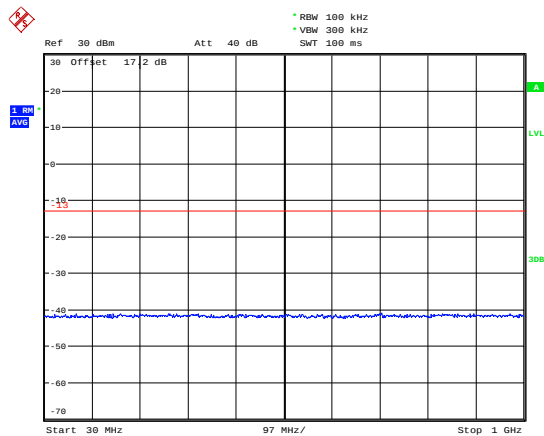


Date: 11.JUN.2020 20:46:00

## LTE Band 2 3MHz CH-Middle 1GHz ~ 20GHz

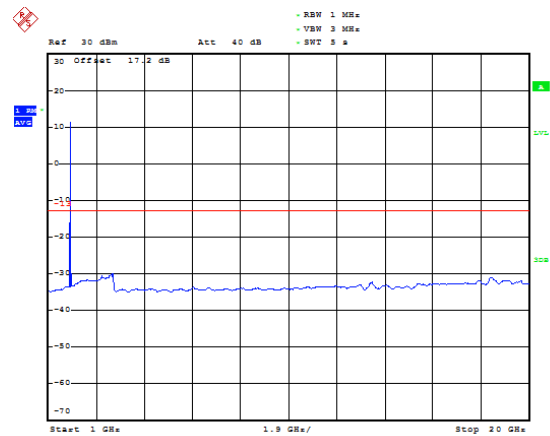


Date: 11.JUN.2020 20:53:40

## LTE Band 2 3MHz CH-High 30MHz~1GHz

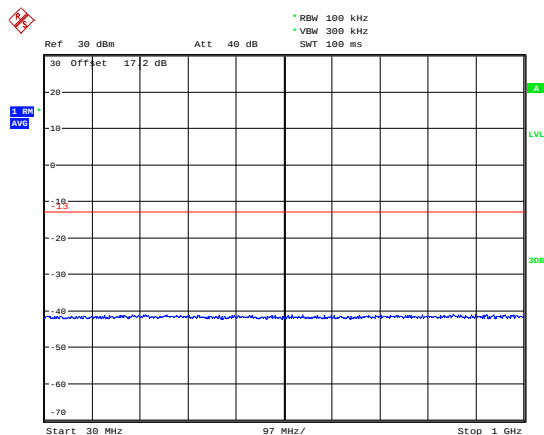

Date: 11.JUN.2020 20:46:07


## LTE Band 2 3MHz CH-High 1GHz ~ 20GHz

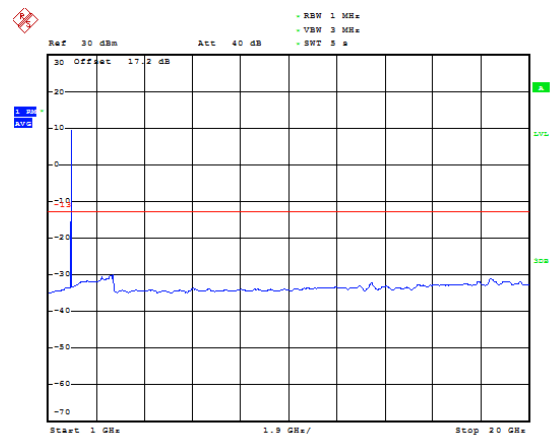

Date: 11.JUN.2020 20:54:24




## LTE Band 2 5MHz CH-Low 30MHz~1GHz

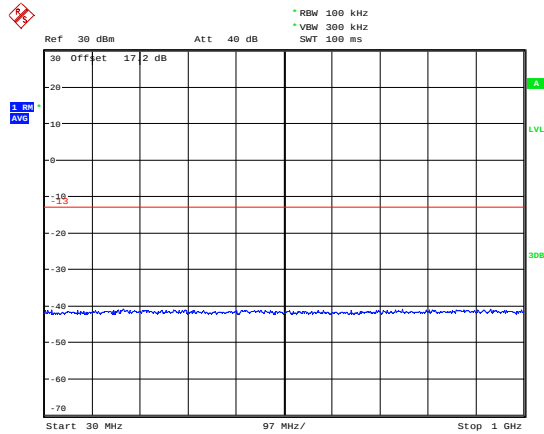


Date: 11.JUN.2020 20:46:15

## LTE Band 2 5MHz CH-Low 1GHz ~ 20GHz

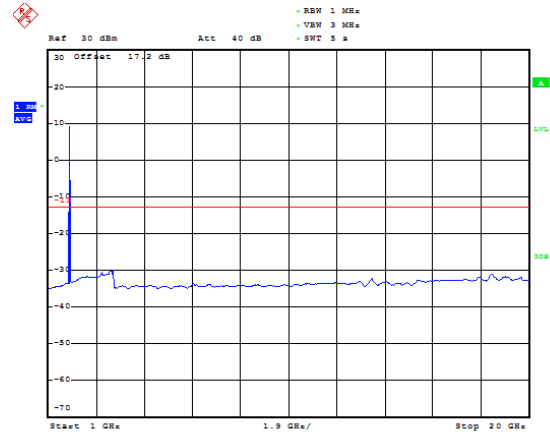


Date: 11.JUN.2020 20:46:28

## LTE Band 2 5MHz CH-Middle 30MHz~1GHz

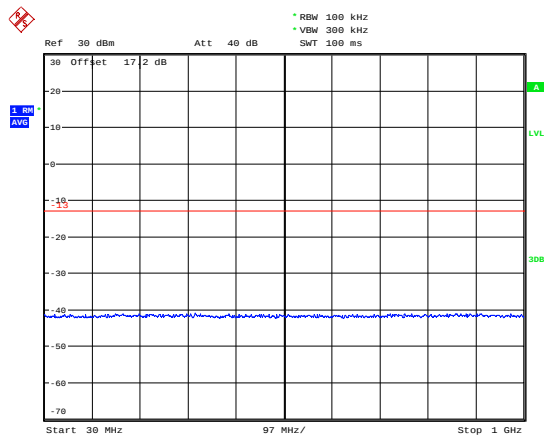


Date: 11.JUN.2020 20:46:22

## LTE Band 2 5MHz CH-Middle 1GHz ~ 20GHz

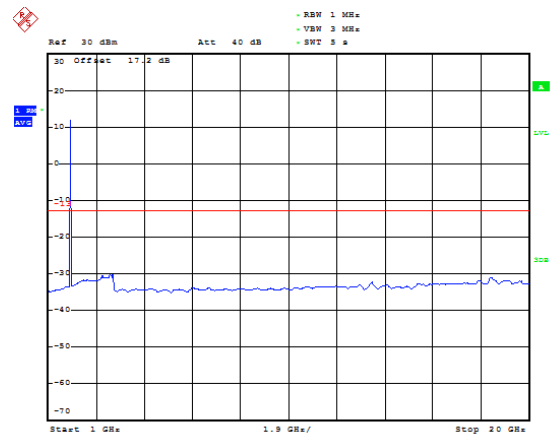


Date: 11.JUN.2020 20:46:52

## LTE Band 2 5MHz CH-High 30MHz~1GHz

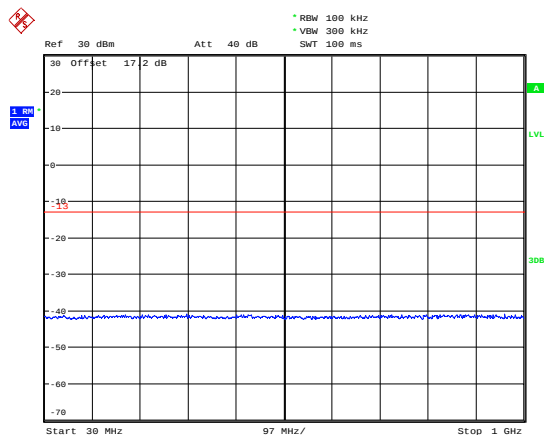


Date: 11.JUN.2020 20:46:30

## LTE Band 2 5MHz CH-High 1GHz ~ 20GHz

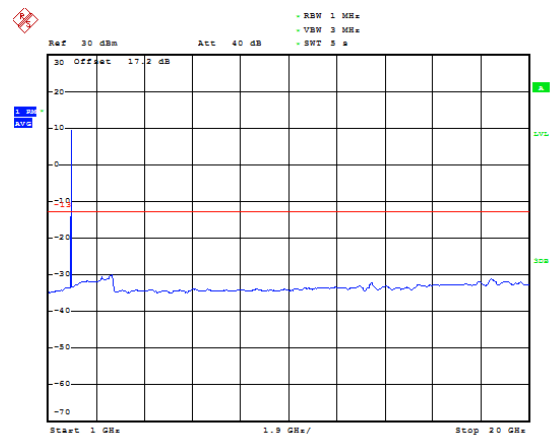


Date: 11.JUN.2020 20:47:20

### LTE Band 2 10MHz CH-Low 30MHz~1GHz

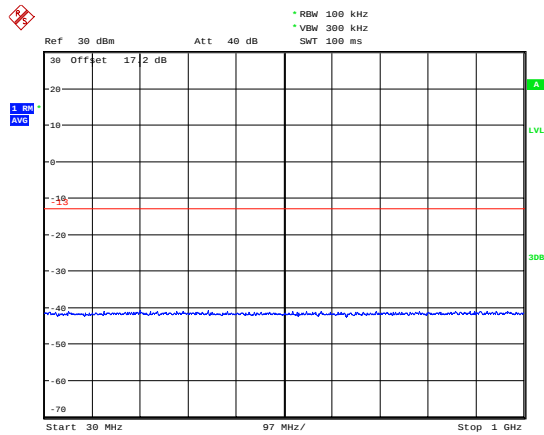


Date: 11.JUN.2020 20:46:37

### LTE Band 2 10MHz CH-Low 1GHz ~ 20GHz

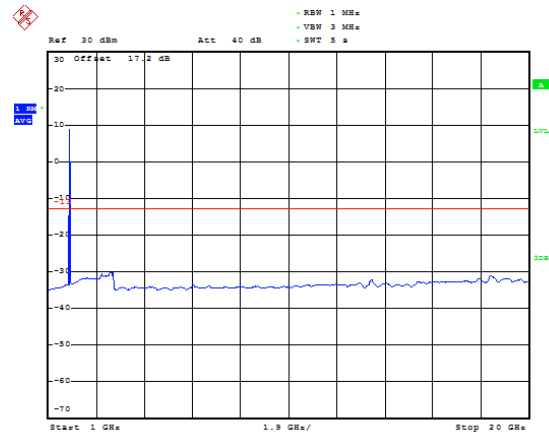


Date: 11.JUN.2020 20:39:33

### LTE Band 2 10MHz CH-Middle 30MHz~1GHz

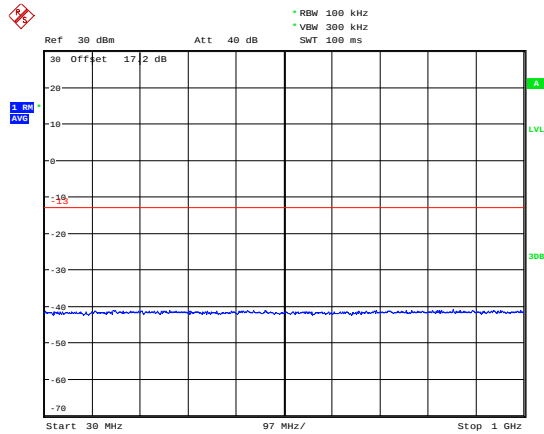


Date: 11.JUN.2020 20:46:46

### LTE Band 2 10MHz CH-Middle 1GHz ~ 20GHz

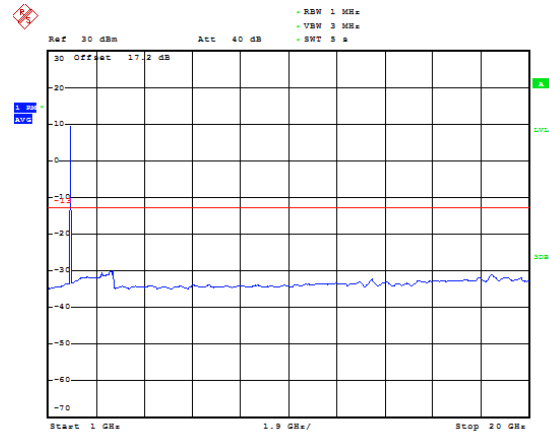


Date: 11.JUN.2020 20:40:01

### LTE Band 2 10MHz CH-High 30MHz~1GHz

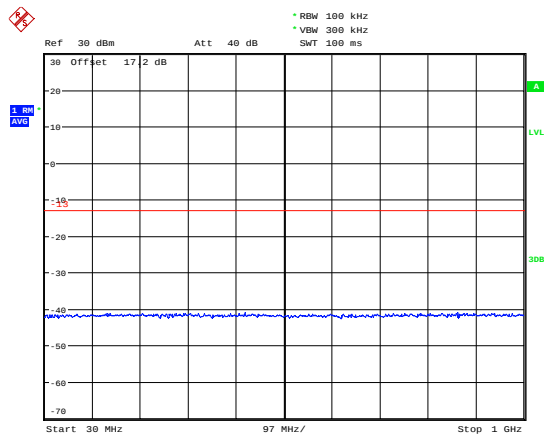

Date: 11.JUN.2020 20:46:53


### LTE Band 2 10MHz CH-High 1GHz ~ 20GHz

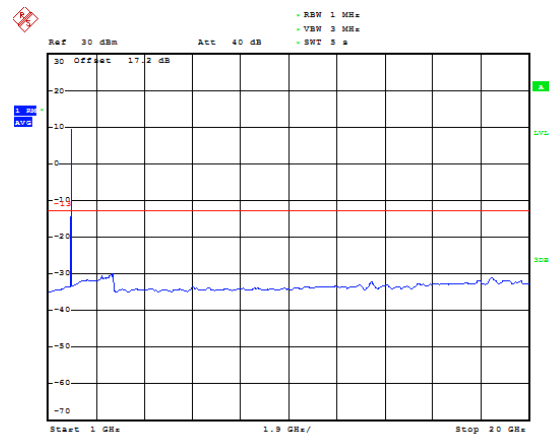

Date: 11.JUN.2020 20:40:38




## LTE Band 2 15MHz CH-Low 30MHz~1GHz

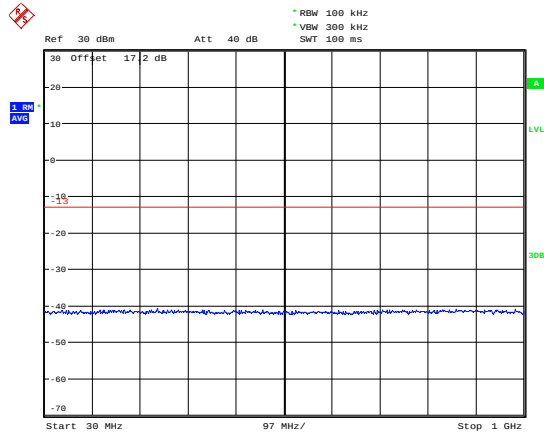


Date: 11.JUN.2020 20:47:00

## LTE Band 2 15MHz CH-Low 1GHz ~ 20GHz

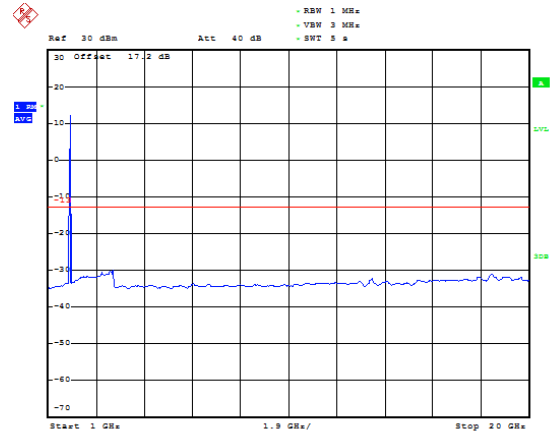


Date: 11.JUN.2020 20:42:26

## LTE Band 2 15MHz CH-Middle 30MHz~1GHz

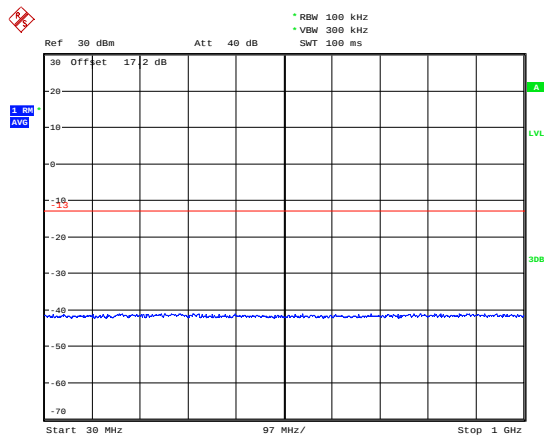


Date: 11.JUN.2020 20:47:07

## LTE Band 2 15MHz CH-Middle 1GHz ~ 20GHz

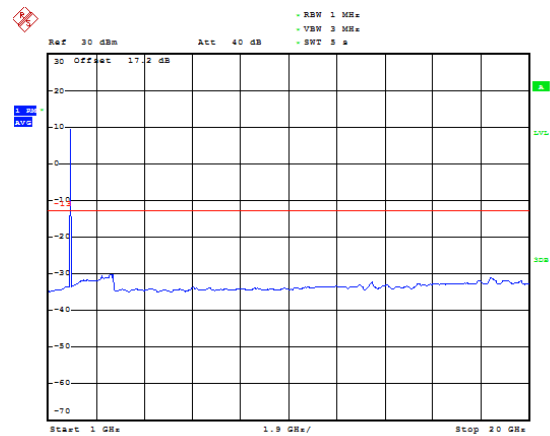


Date: 11.JUN.2020 20:42:53

## LTE Band 2 15MHz CH-High 30MHz~1GHz

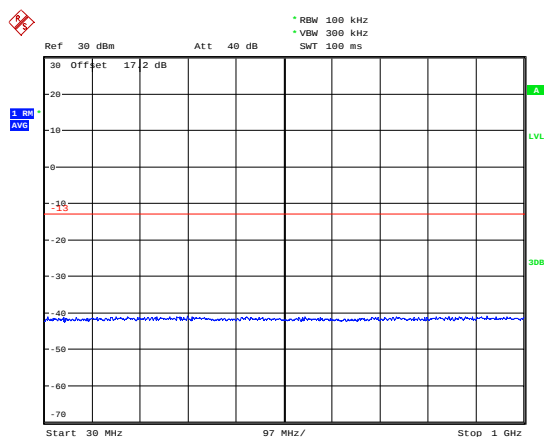

Date: 11.JUN.2020 20:47:14


## LTE Band 2 15MHz CH-High 1GHz ~ 20GHz

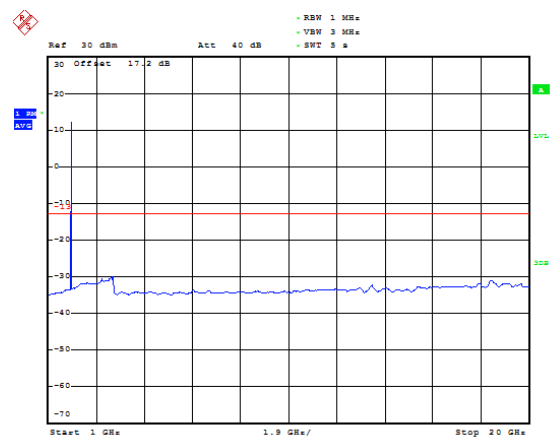

Date: 11.JUN.2020 20:43:18




## LTE Band 2 20MHz CH-Low 30MHz~1GHz

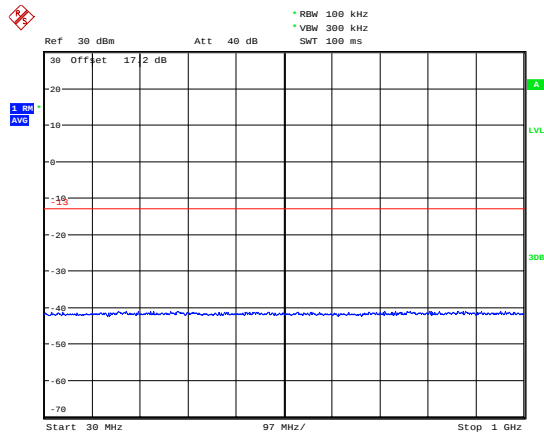


Date: 11.JUN.2020 20:47:21

## LTE Band 2 20MHz CH-Low 1GHz ~ 20GHz

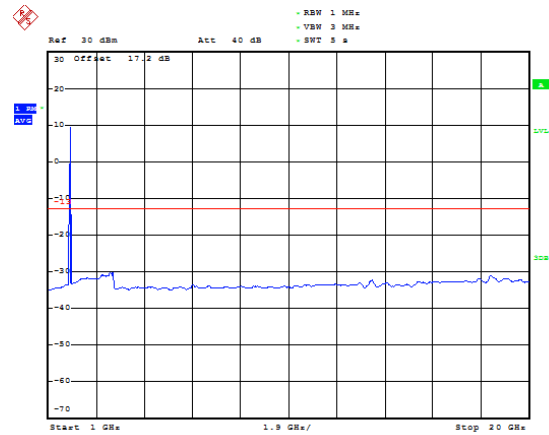


Date: 11.JUN.2020 20:48:54

## LTE Band 2 20MHz CH-Middle 30MHz~1GHz

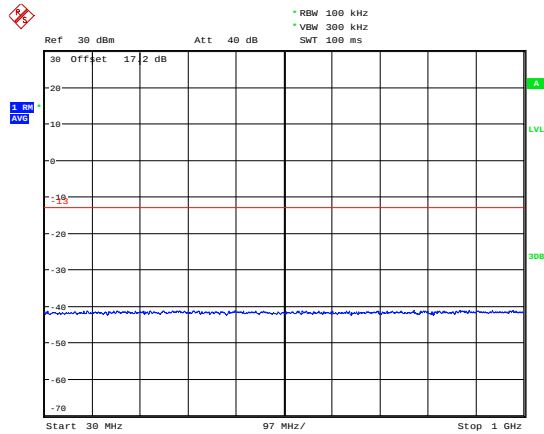


Date: 11.JUN.2020 20:47:31

## LTE Band 2 20MHz CH-Middle 1GHz ~ 20GHz

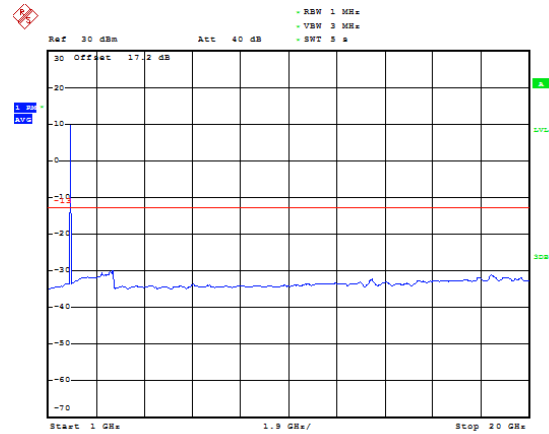


Date: 11.JUN.2020 20:48:28

## LTE Band 2 20MHz CH-High 30MHz~1GHz

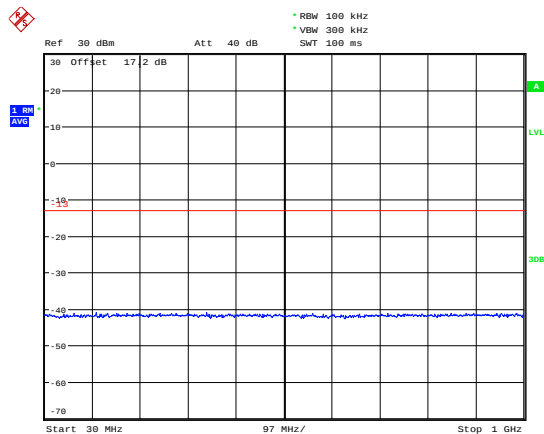

Date: 11.JUN.2020 20:47:39


## LTE Band 2 20MHz CH-High 1GHz ~ 20GHz

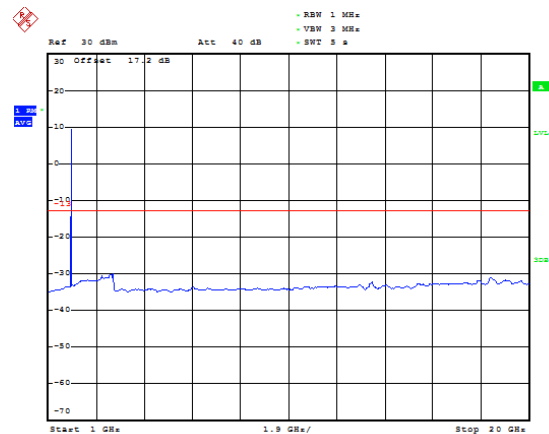

Date: 11.JUN.2020 20:48:59




## LTE Band 25 1.4MHz CH-Low 30MHz~1GHz

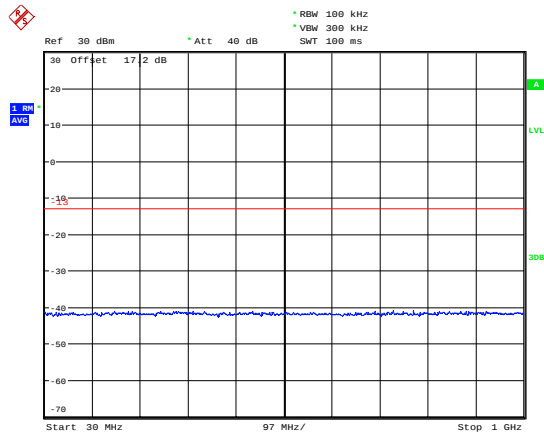


Date: 11.JUN.2020 22:38:12

## LTE Band 25 1.4MHz CH-Low 1GHz~20GHz

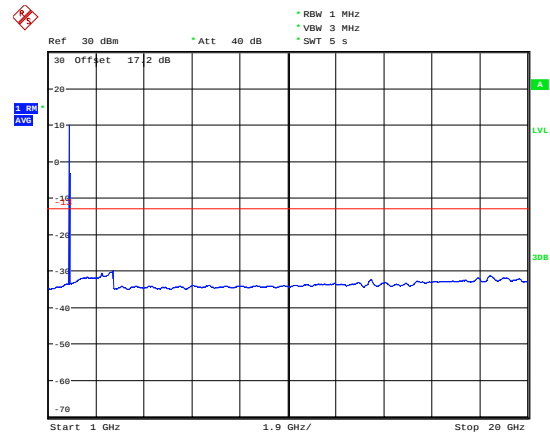


Date: 11.JUN.2020 22:42:09

## LTE Band 25 1.4MHz CH-Middle 30MHz~1GHz

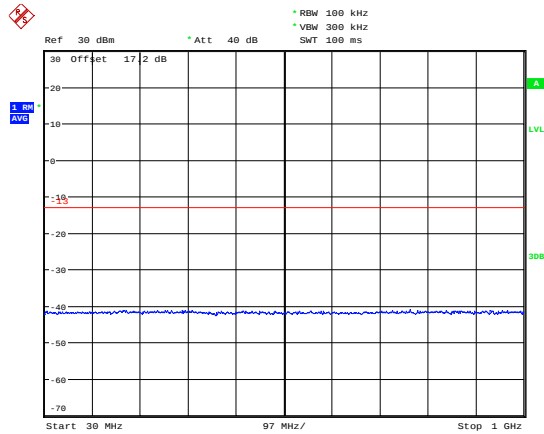


Date: 11.JUN.2020 22:39:06

## LTE Band 25 1.4MHz CH-Middle 1GHz~20GHz

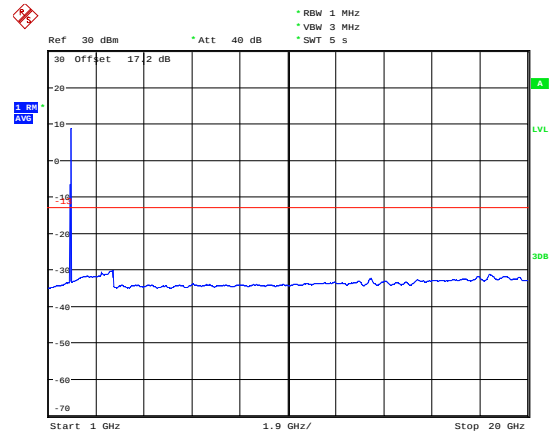


Date: 11.JUN.2020 22:43:42

## LTE Band 25 1.4MHz CH-High 30MHz~1GHz

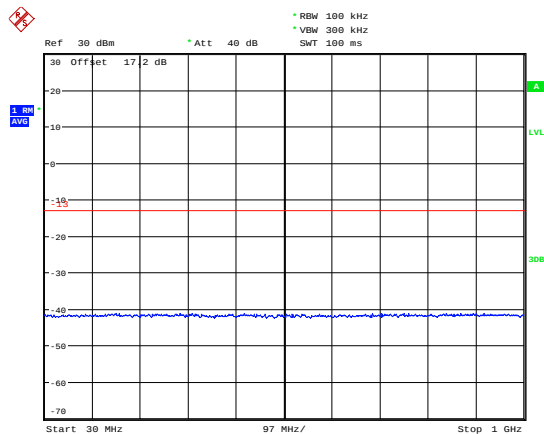

Date: 11.JUN.2020 22:39:15


## LTE Band 25 1.4MHz CH-High 1GHz~20GHz

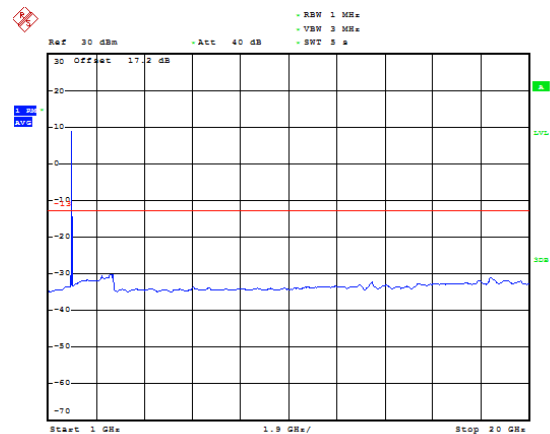

Date: 11.JUN.2020 22:44:15




## LTE Band 25 3MHz CH-Low 30MHz~1GHz

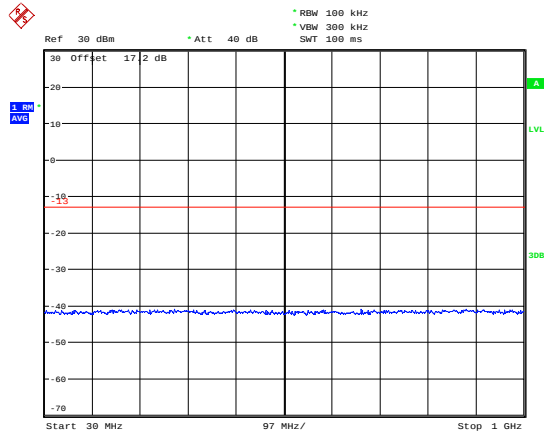


Date: 11.JUN.2020 22:39:25

## LTE Band 25 3MHz CH-Low 1GHz ~ 20GHz

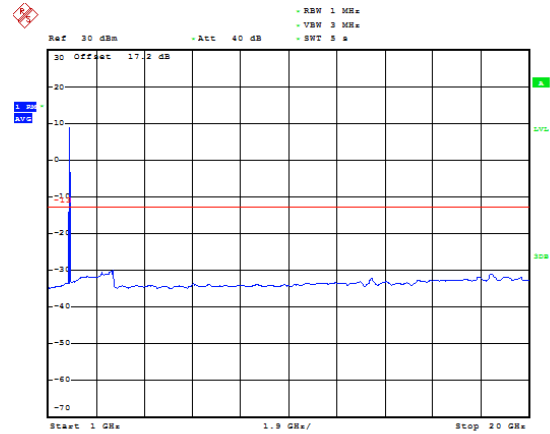


Date: 11.JUN.2020 22:45:22

## LTE Band 25 3MHz CH-Middle 30MHz~1GHz

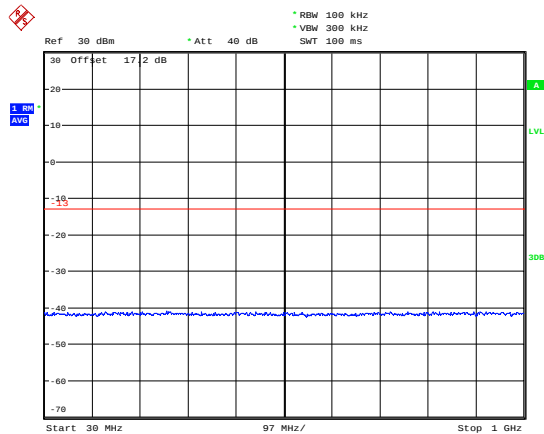


Date: 11.JUN.2020 22:39:33

## LTE Band 25 3MHz CH-Middle 1GHz ~ 20GHz

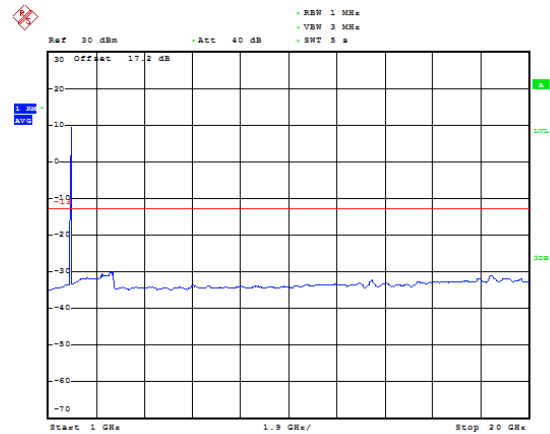


Date: 11.JUN.2020 22:46:49

## LTE Band 25 3MHz CH-High 30MHz~1GHz

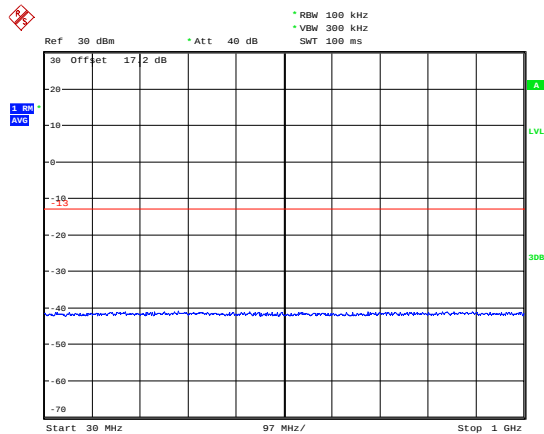

Date: 11.JUN.2020 22:39:41


## LTE Band 25 3MHz CH-High 1GHz ~ 20GHz

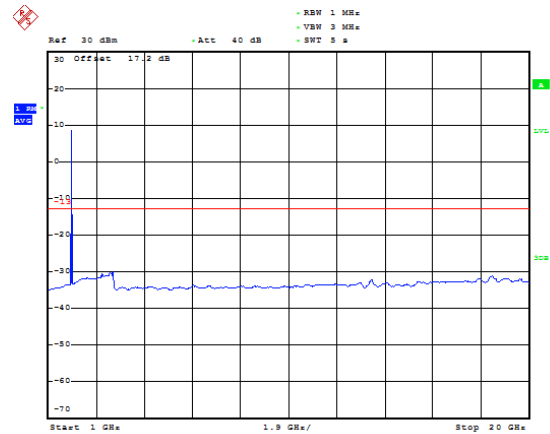

Date: 11.JUN.2020 22:47:58




## LTE Band 25 5MHz CH-Low 30MHz~1GHz

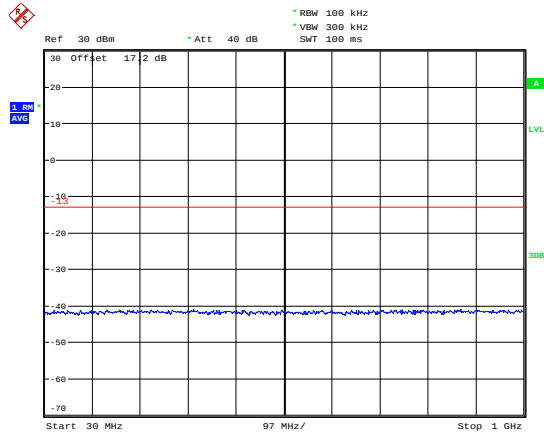


Date: 11.JUN.2020 22:39:48

## LTE Band 25 5MHz CH-Low 1GHz ~ 20GHz

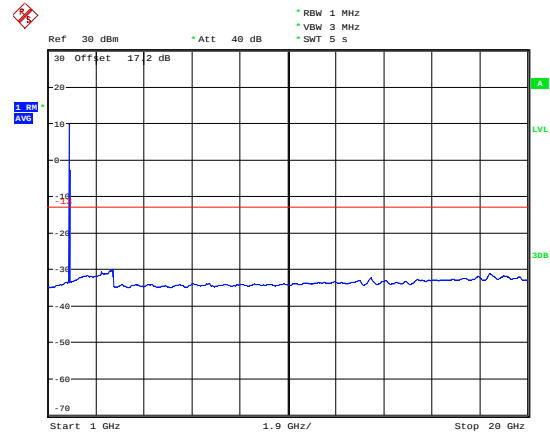


Date: 11.JUN.2020 22:49:35

## LTE Band 25 5MHz CH-Middle 30MHz~1GHz

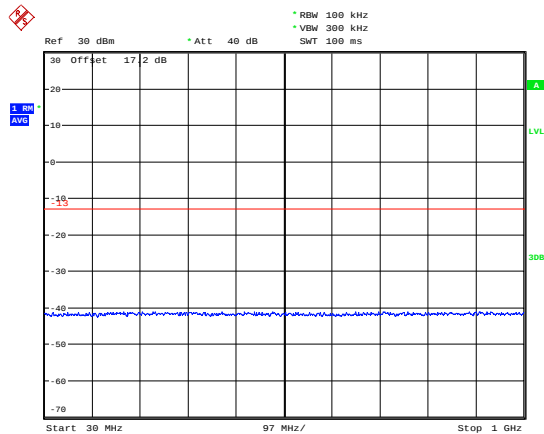


Date: 11.JUN.2020 22:39:54

## LTE Band 25 5MHz CH-Middle 1GHz ~ 20GHz

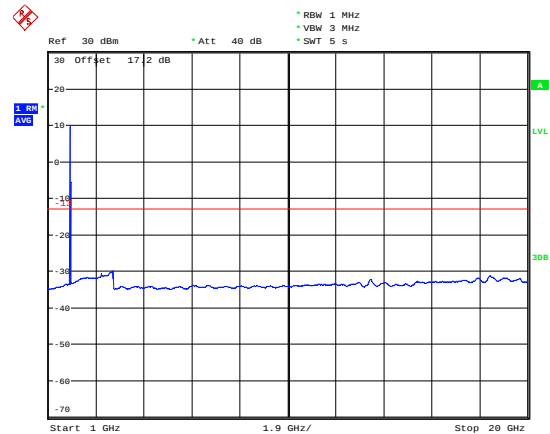


Date: 11.JUN.2020 22:49:58

## LTE Band 25 5MHz CH-High 30MHz~1GHz

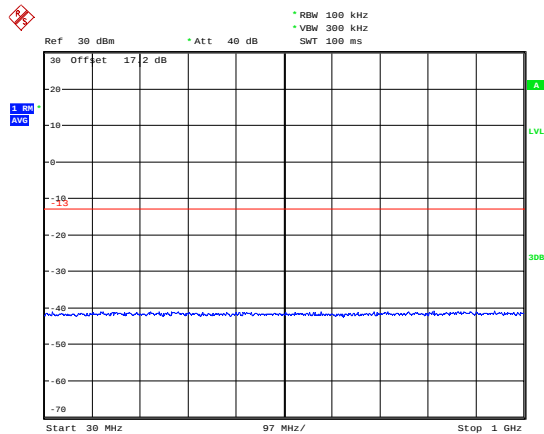

Date: 11.JUN.2020 22:48:02


## LTE Band 25 5MHz CH-High 1GHz ~ 20GHz

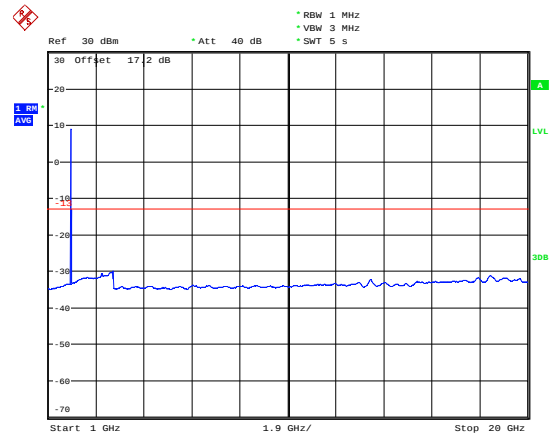

Date: 11.JUN.2020 22:51:11




## LTE Band 25 10MHz CH-Low 30MHz~1GHz

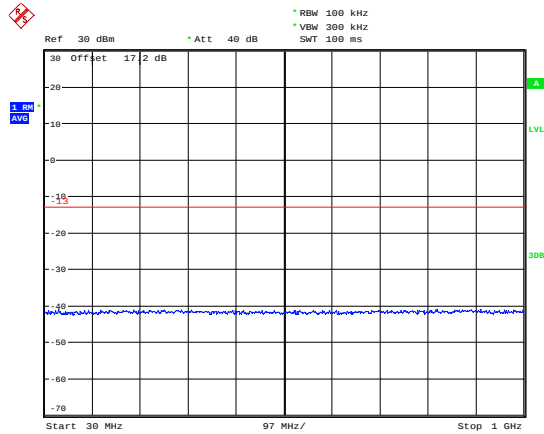


Date: 11.JUN.2020 22:40:09

## LTE Band 25 10MHz CH-Low 1GHz ~ 20GHz

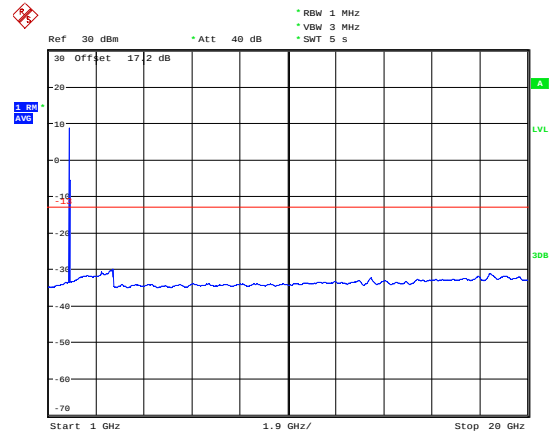


Date: 11.JUN.2020 22:53:10

## LTE Band 25 10MHz CH-Middle 30MHz~1GHz

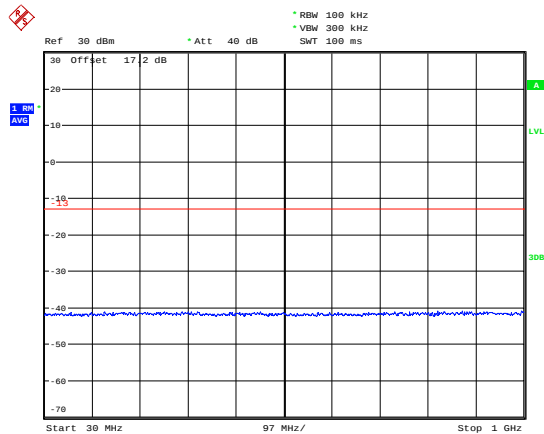


Date: 11.JUN.2020 22:40:19

## LTE Band 25 10MHz CH-Middle 1GHz ~ 20GHz

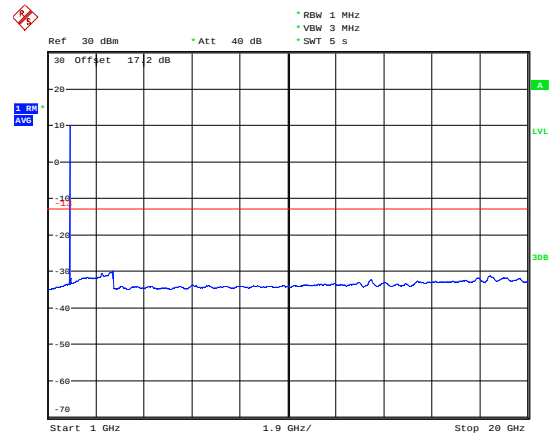


Date: 11.JUN.2020 22:53:41

## LTE Band 25 10MHz CH-High 30MHz~1GHz

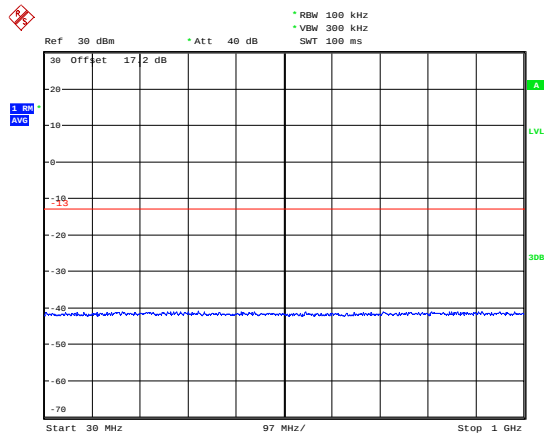


Date: 11.JUN.2020 22:40:26

## LTE Band 25 10MHz CH-High 1GHz ~ 20GHz

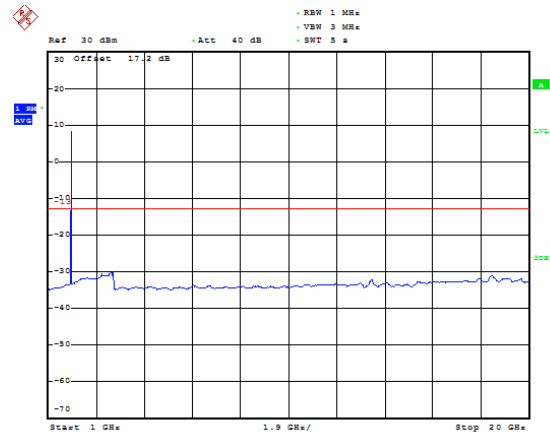


Date: 11.JUN.2020 22:54:07

### LTE Band 25 15MHz CH-Low 30MHz~1GHz

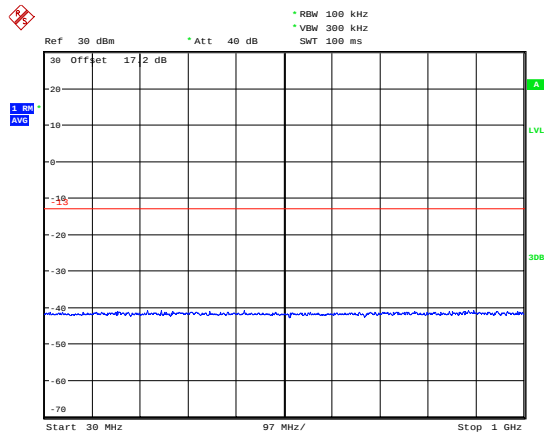


Date: 11.JUN.2020 22:48:41

### LTE Band 25 15MHz CH-Low 1GHz ~ 20GHz

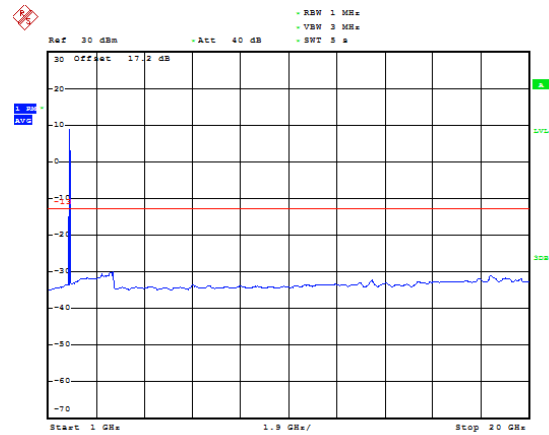


Date: 11.JUN.2020 22:55:46

### LTE Band 25 15MHz CH-Middle 30MHz~1GHz

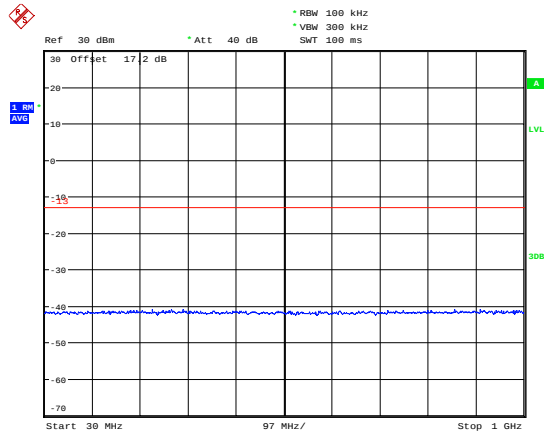


Date: 11.JUN.2020 22:48:48

### LTE Band 25 15MHz CH-Middle 1GHz ~ 20GHz

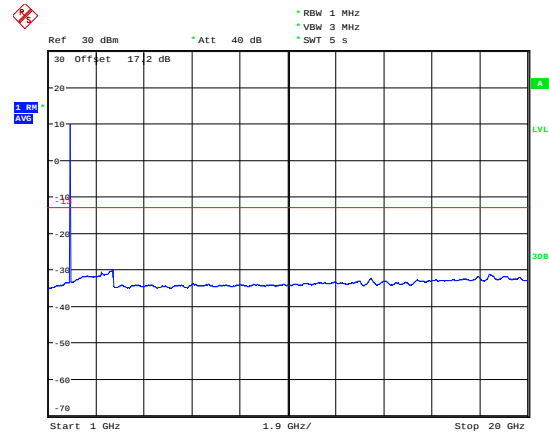


Date: 11.JUN.2020 22:56:11

### LTE Band 25 15MHz CH-High 30MHz~1GHz

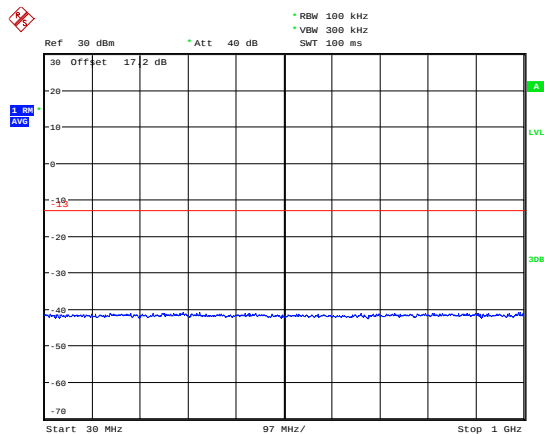

Date: 11.JUN.2020 22:48:57

### LTE Band 25 15MHz CH-High 1GHz ~ 20GHz

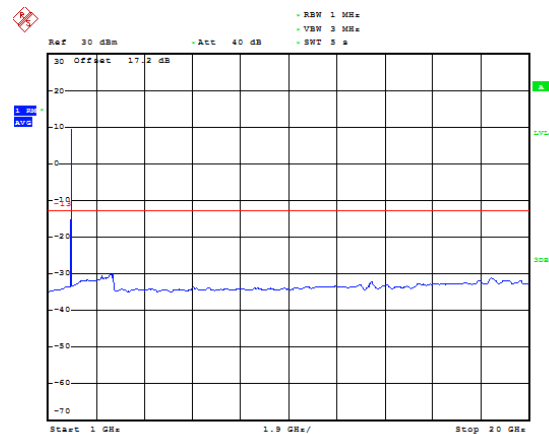


Date: 11.JUN.2020 22:56:46



**Report No.: R2005A0283-R2V1**


LTE Band 25 20MHz CH-Low 1GHz ~ 20GHz

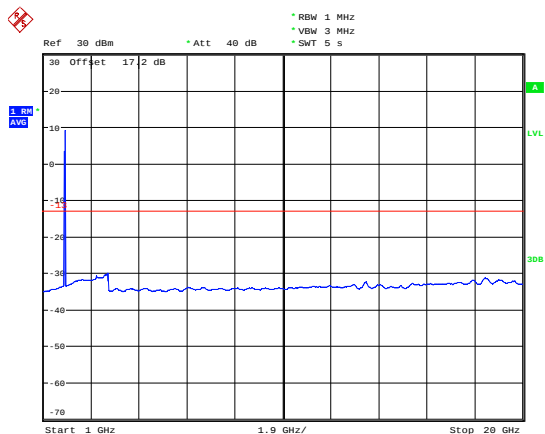

Date: 11.JUN.2020 22:41:05

Date: 11.JUN.2020 22:57:16


LTE Band 25 20MHz CH-Middle 1GHz ~ 20GHz

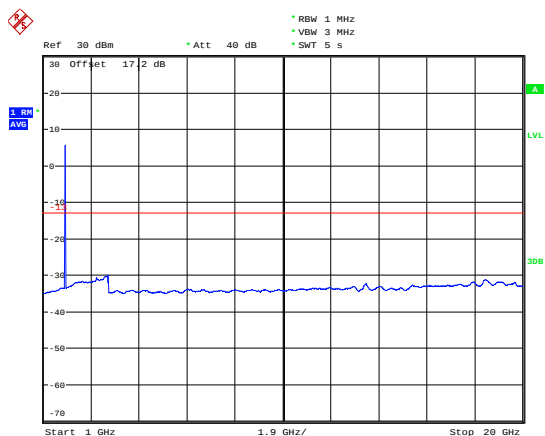

Date: 11.JUN.2020 22:41:14

Date: 11.JUN.2020 22:57:42

LTE Band 25 20MHz CH-High 1GHz ~ 20GHz

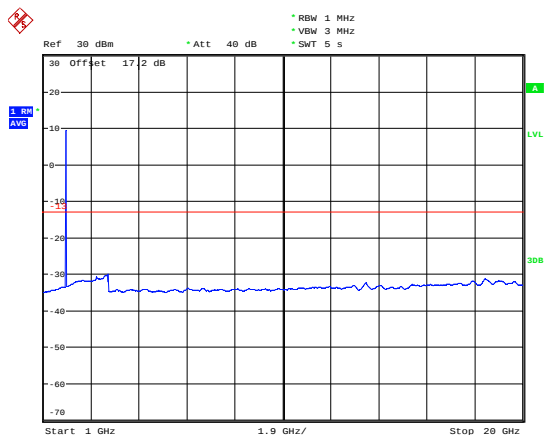

Date: 11.JUN.2020 22:41:23

Date: 11.JUN.2020 22:58:11

## 5.7. Radiates Spurious Emission

### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

### Method of Measurement

1. The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).
2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=200Hz,VBW=600Hz for 9kHz150kHz , RBW=10kHz, VBW=30kHz 150kHz-30MHz , RBW=100kHz,VBW=300kHz for 30MHz to 1GHz and RBW=1MHz, VBW=3MHz for above 1GHz, And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:  

$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$
The measurement results are amend as described below:  


$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi)

and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$ .


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

## Test setup


### 9KHz ~ 30MHz

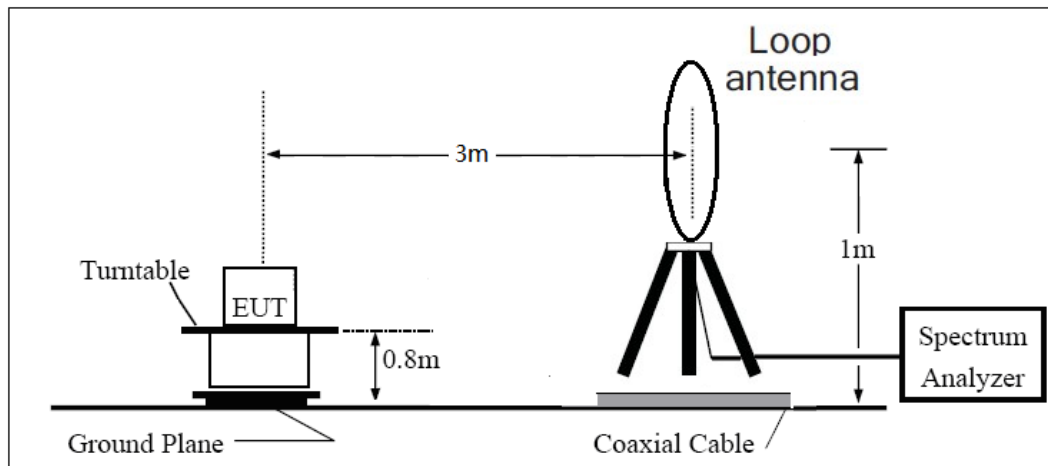

### 30MHz ~ 1GHz

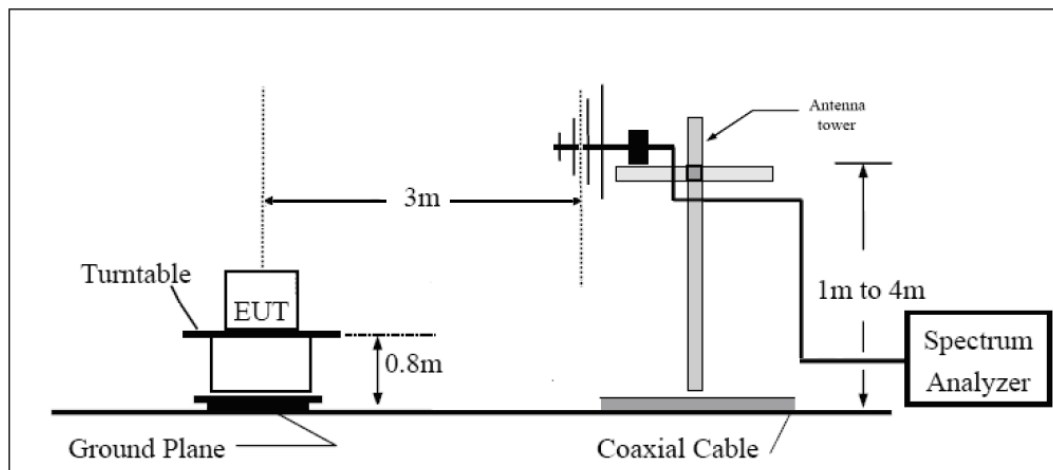

### Above 1GHz

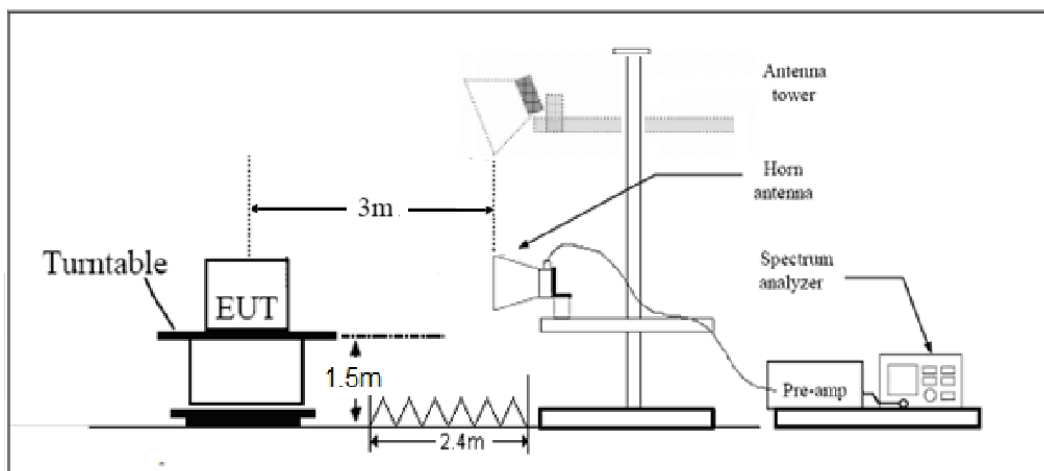



Note: Area side: 2.4mX3.6m

### Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log_{10} (P)$  dB.”

|       |         |
|-------|---------|
| Limit | -13 dBm |
|-------|---------|

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U = 3.55$  dB.

## Test Result

For radiated spurious emissions test, the worst mode (Middle Channel) should be reflected in the report.

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

### GSM 1900 CH-Middle

| Harmonic                                                                                                                                                      | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2                                                                                                                                                             | 3760.0          | -48.55   | 5.10            | 11.05      | Horizontal           | -42.60           | -13.00      | 29.60       | 45            |
| 3                                                                                                                                                             | 5640.0          | -55.33   | 5.42            | 12.65      | Horizontal           | -48.10           | -13.00      | 35.10       | 270           |
| 4                                                                                                                                                             | 7520.0          | -53.65   | 6.70            | 13.85      | Horizontal           | -46.50           | -13.00      | 33.50       | 180           |
| 5                                                                                                                                                             | 9400.0          | -53.64   | 7.01            | 14.75      | Horizontal           | -45.90           | -13.00      | 32.90       | 45            |
| 6                                                                                                                                                             | 11280.0         | -51.37   | 7.48            | 15.95      | Horizontal           | -42.90           | -13.00      | 29.90       | 225           |
| 7                                                                                                                                                             | 13160.0         | -50.24   | 7.51            | 16.55      | Horizontal           | -41.20           | -13.00      | 28.20       | 135           |
| 8                                                                                                                                                             | 15040.0         | -48.71   | 8.24            | 15.35      | Horizontal           | -41.60           | -13.00      | 28.60       | 45            |
| 9                                                                                                                                                             | 16920.0         | -44.74   | 8.41            | 14.95      | Horizontal           | -38.20           | -13.00      | 25.20       | 90            |
| 10                                                                                                                                                            | 18800.0         | --       | --              | --         | --                   | --               | --          | --          | --            |
| Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.<br>2. The worst emission was found in the antenna is Horizontal position. |                 |          |                 |            |                      |                  |             |             |               |

### LTE Band 2 1.4MHz CH-Middle

| Harmonic                                                                                                                                                      | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2                                                                                                                                                             | 3759.0          | -53.59   | 5.10            | 11.05      | Horizontal           | -47.64           | -13.00      | 34.64       | 270           |
| 3                                                                                                                                                             | 5638.9          | -56.83   | 5.42            | 12.65      | Horizontal           | -49.60           | -13.00      | 36.60       | 90            |
| 4                                                                                                                                                             | 7520.0          | -48.24   | 6.70            | 13.85      | Horizontal           | -41.09           | -13.00      | 28.09       | 270           |
| 5                                                                                                                                                             | 9400.0          | -54.44   | 7.01            | 14.75      | Horizontal           | -46.70           | -13.00      | 33.70       | 0             |
| 6                                                                                                                                                             | 11280.0         | -51.87   | 7.48            | 15.95      | Horizontal           | -43.40           | -13.00      | 30.40       | 45            |
| 7                                                                                                                                                             | 13160.0         | -50.44   | 7.51            | 16.55      | Horizontal           | -41.40           | -13.00      | 28.40       | 315           |
| 8                                                                                                                                                             | 15040.0         | -48.21   | 8.24            | 15.35      | Horizontal           | -41.10           | -13.00      | 28.10       | 225           |
| 9                                                                                                                                                             | 16920.0         | -46.44   | 8.41            | 14.95      | Horizontal           | -39.90           | -13.00      | 26.90       | 90            |
| 10                                                                                                                                                            | 18800.0         | --       | --              | --         | --                   | --               | --          | --          | --            |
| Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.<br>2. The worst emission was found in the antenna is Horizontal position. |                 |          |                 |            |                      |                  |             |             |               |

## LTE Band 2 5MHz CH-Middle

| Harmonic                                                                                                                                                      | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2                                                                                                                                                             | 3755.6          | -52.75   | 5.10            | 11.05      | Horizontal           | -46.80           | -13.00      | 33.80       | 45            |
| 3                                                                                                                                                             | 5633.6          | -56.33   | 5.42            | 12.65      | Horizontal           | -49.10           | -13.00      | 36.10       | 315           |
| 4                                                                                                                                                             | 7520.0          | -49.85   | 6.70            | 13.85      | Horizontal           | -42.70           | -13.00      | 29.70       | 90            |
| 5                                                                                                                                                             | 9400.0          | -54.94   | 7.01            | 14.75      | Horizontal           | -47.20           | -13.00      | 34.20       | 0             |
| 6                                                                                                                                                             | 11280.0         | -53.27   | 7.48            | 15.95      | Horizontal           | -44.80           | -13.00      | 31.80       | 0             |
| 7                                                                                                                                                             | 13160.0         | -50.84   | 7.51            | 16.55      | Horizontal           | -41.80           | -13.00      | 28.80       | 45            |
| 8                                                                                                                                                             | 15040.0         | -48.51   | 8.24            | 15.35      | Horizontal           | -41.40           | -13.00      | 28.40       | 135           |
| 9                                                                                                                                                             | 16920.0         | -46.34   | 8.41            | 14.95      | Horizontal           | -39.80           | -13.00      | 26.80       | 225           |
| 10                                                                                                                                                            | 18800.0         | --       | --              | --         | --                   | --               | --          | --          | --            |
| Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.<br>2. The worst emission was found in the antenna is Horizontal position. |                 |          |                 |            |                      |                  |             |             |               |

## LTE Band 2 20MHz CH-Middle

| Harmonic                                                                                                                                                      | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2                                                                                                                                                             | 3742.1          | -52.25   | 5.10            | 11.05      | Horizontal           | -46.30           | -13.00      | 33.30       | 0             |
| 3                                                                                                                                                             | 5613.4          | -56.73   | 5.42            | 12.65      | Horizontal           | -49.50           | -13.00      | 36.50       | 45            |
| 4                                                                                                                                                             | 7484.6          | -50.05   | 6.70            | 13.85      | Horizontal           | -42.90           | -13.00      | 29.90       | 135           |
| 5                                                                                                                                                             | 9400.0          | -55.04   | 7.01            | 14.75      | Horizontal           | -47.30           | -13.00      | 34.30       | 225           |
| 6                                                                                                                                                             | 11280.0         | -53.37   | 7.48            | 15.95      | Horizontal           | -44.90           | -13.00      | 31.90       | 0             |
| 7                                                                                                                                                             | 13160.0         | -51.14   | 7.51            | 16.55      | Horizontal           | -42.10           | -13.00      | 29.10       | 45            |
| 8                                                                                                                                                             | 15040.0         | -49.11   | 8.24            | 15.35      | Horizontal           | -42.00           | -13.00      | 29.00       | 315           |
| 9                                                                                                                                                             | 16920.0         | -45.74   | 8.41            | 14.95      | Horizontal           | -39.20           | -13.00      | 26.20       | 90            |
| 10                                                                                                                                                            | 18800.0         | --       | --              | --         | --                   | --               | --          | --          | --            |
| Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.<br>2. The worst emission was found in the antenna is Horizontal position. |                 |          |                 |            |                      |                  |             |             |               |

## LTE Band 25 1.4MHz CH-Middle

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2        | 3765.0          | -52.25   | 5.10            | 11.05      | Horizontal           | -46.30           | -13.00      | 33.30       | 180           |
| 3        | 5647.5          | -57.23   | 5.42            | 12.65      | Horizontal           | -50.00           | -13.00      | 37.00       | 0             |
| 4        | 7530.0          | -52.25   | 6.70            | 13.85      | Horizontal           | -45.10           | -13.00      | 32.10       | 45            |
| 5        | 9412.5          | -54.74   | 7.01            | 14.75      | Horizontal           | -47.00           | -13.00      | 34.00       | 225           |
| 6        | 11295.0         | -53.17   | 7.48            | 15.95      | Horizontal           | -44.70           | -13.00      | 31.70       | 135           |
| 7        | 13177.5         | -50.74   | 7.51            | 16.55      | Horizontal           | -41.70           | -13.00      | 28.70       | 90            |
| 8        | 15060.0         | -48.31   | 8.24            | 15.35      | Horizontal           | -41.20           | -13.00      | 28.20       | 45            |
| 9        | 16942.5         | -45.84   | 8.41            | 14.95      | Horizontal           | -39.30           | -13.00      | 26.30       | 315           |
| 10       | 18825.0         | --       | --              | --         | --                   | --               | --          | --          | --            |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

## LTE Band 25 5MHz CH-Middle

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2        | 3765.0          | -51.85   | 5.10            | 11.05      | Horizontal           | -45.90           | -13.00      | 32.90       | 135           |
| 3        | 5647.5          | -57.22   | 5.42            | 12.65      | Horizontal           | -49.99           | -13.00      | 36.99       | 270           |
| 4        | 7530.0          | -51.05   | 6.70            | 13.85      | Horizontal           | -43.90           | -13.00      | 30.90       | 0             |
| 5        | 9412.5          | -54.24   | 7.01            | 14.75      | Horizontal           | -46.50           | -13.00      | 33.50       | 0             |
| 6        | 11295.0         | -53.07   | 7.48            | 15.95      | Horizontal           | -44.60           | -13.00      | 31.60       | 45            |
| 7        | 13177.5         | -50.44   | 7.51            | 16.55      | Horizontal           | -41.40           | -13.00      | 28.40       | 90            |
| 8        | 15060.0         | -49.21   | 8.24            | 15.35      | Horizontal           | -42.10           | -13.00      | 29.10       | 45            |
| 9        | 16942.5         | -46.54   | 8.41            | 14.95      | Horizontal           | -40.00           | -13.00      | 27.00       | 135           |
| 10       | 18825.0         | --       | --              | --         | --                   | --               | --          | --          | --            |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.



LTE Band 25 20MHz CH-Middle

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2        | 3748.1          | -51.45   | 5.10            | 11.05      | Horizontal           | -45.50           | -13.00      | 32.50       | 90            |
| 3        | 5622.0          | -57.22   | 5.42            | 12.65      | Horizontal           | -49.99           | -13.00      | 36.99       | 180           |
| 4        | 7496.0          | -49.95   | 6.70            | 13.85      | Horizontal           | -42.80           | -13.00      | 29.80       | 135           |
| 5        | 9370.0          | -54.24   | 7.01            | 14.75      | Horizontal           | -46.50           | -13.00      | 33.50       | 45            |
| 6        | 11244.0         | -53.47   | 7.48            | 15.95      | Horizontal           | -45.00           | -13.00      | 32.00       | 315           |
| 7        | 13118.0         | -50.14   | 7.51            | 16.55      | Horizontal           | -41.10           | -13.00      | 28.10       | 270           |
| 8        | 14992.0         | -49.61   | 8.24            | 15.35      | Horizontal           | -42.50           | -13.00      | 29.50       | 45            |
| 9        | 16866.0         | -46.44   | 8.41            | 14.95      | Horizontal           | -39.90           | -13.00      | 26.90       | 315           |
| 10       | 18740.0         | --       | --              | --         | --                   | --               | --          | --          | --            |

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

## 6. Main Test Instruments

| Name                                 | Manufacturer | Type         | Serial Number | Calibration Date | Expiration Date |
|--------------------------------------|--------------|--------------|---------------|------------------|-----------------|
| Base Station Simulator               | R&S          | CMU200       | 118133        | 2020-05-17       | 2021-05-16      |
| Power Splitter                       | Hua Xiang    | SHX-GF2-2-13 | 10120101      | /                | /               |
| Spectrum Analyzer                    | Key sight    | N9010A       | MY50210259    | 2020-05-18       | 2021-05-17      |
| Universal Radio Communication Tester | Key sight    | E5515C       | MY48367192    | 2020-05-27       | 2021-05-26      |
| Signal Analyzer                      | R&S          | FSV30        | 100815        | 2019-12-15       | 2020-12-14      |
| Loop Antenna                         | SCHWARZBECK  | FMZB1519     | 1519-047      | 2017-09-26       | 2020-09-25      |
| Trilog Antenna                       | SCHWARZBECK  | VUBL 9163    | 9163-201      | 2017-11-18       | 2020-11-17      |
| Horn Antenna                         | R&S          | HF907        | 102723        | 2018-08-11       | 2021-08-10      |
| Horn Antenna                         | ETS-Lindgren | 3160-09      | 00102643      | 2018-06-20       | 2021-06-19      |
| Signal generator                     | R&S          | SMB 100A     | 102594        | 2020-05-18       | 2021-05-17      |
| Climatic Chamber                     | ESPEC        | SU-242       | 93000506      | 2017-12-17       | 2020-12-16      |
| Preamplifier                         | R&S          | SCU18        | 102327        | 2020-05-18       | 2021-05-17      |
| MOB COMMS DC SUPPLY                  | Keysight     | 66319D       | MY43004105    | 2020-05-18       | 2021-05-17      |
| RF Cable                             | Agilent      | SMA 15cm     | 0001          | 2019-12-13       | 2020-06-12      |
| RF Cable                             | Agilent      | SMA 15cm     | 0001          | 2020-06-12       | 2020-12-11      |
| Software                             | R&S          | EMC32        | 9.26.0        | /                | /               |

\*\*\*\*\*END OF REPORT \*\*\*\*\*