


| | | | |
|----------------|-----------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/3/12 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Horizontal | Temperature (°C) | 19.0 |
| Test Condition | 802.11ax,Ch229,7.095G,BW20M | Humidity (%RH) | 58.0 |

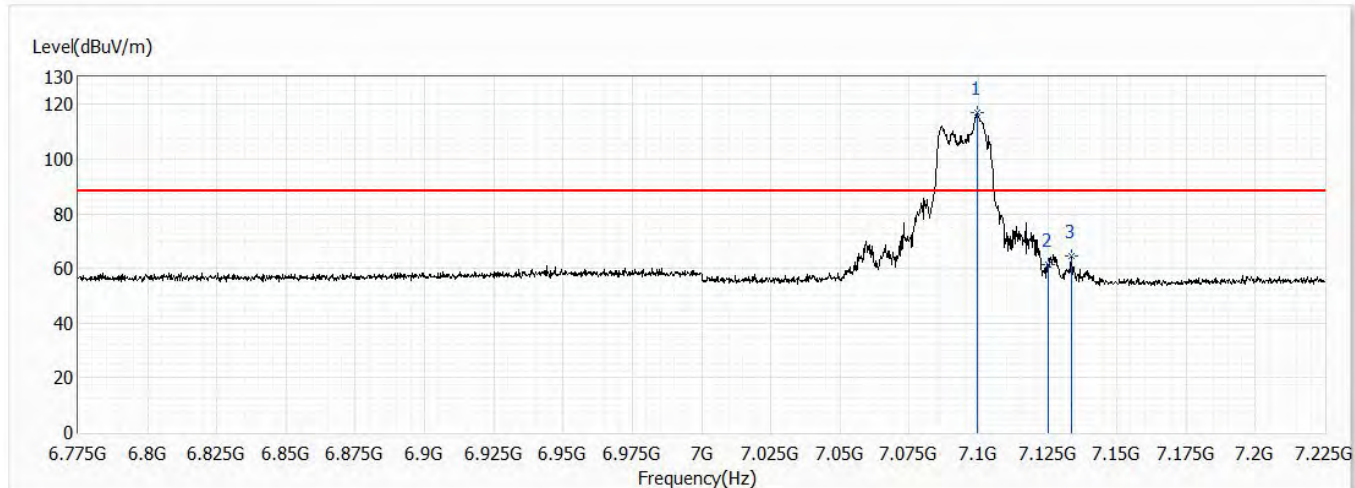


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| ! 1 | 7099.450 | 116.95 | 88.20 | 28.75 | 88.11 | 28.84 | PK |
| 2 | 7125.000 | 61.58 | 88.20 | -26.62 | 32.65 | 28.93 | PK |
| 3 | 7133.425 | 64.75 | 88.20 | -23.45 | 35.79 | 28.96 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-----------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/3/12 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Vertical | Temperature (°C) | 19.0 |
| Test Condition | 802.11ax,Ch229,7.095G,BW20M | Humidity (%RH) | 58.0 |

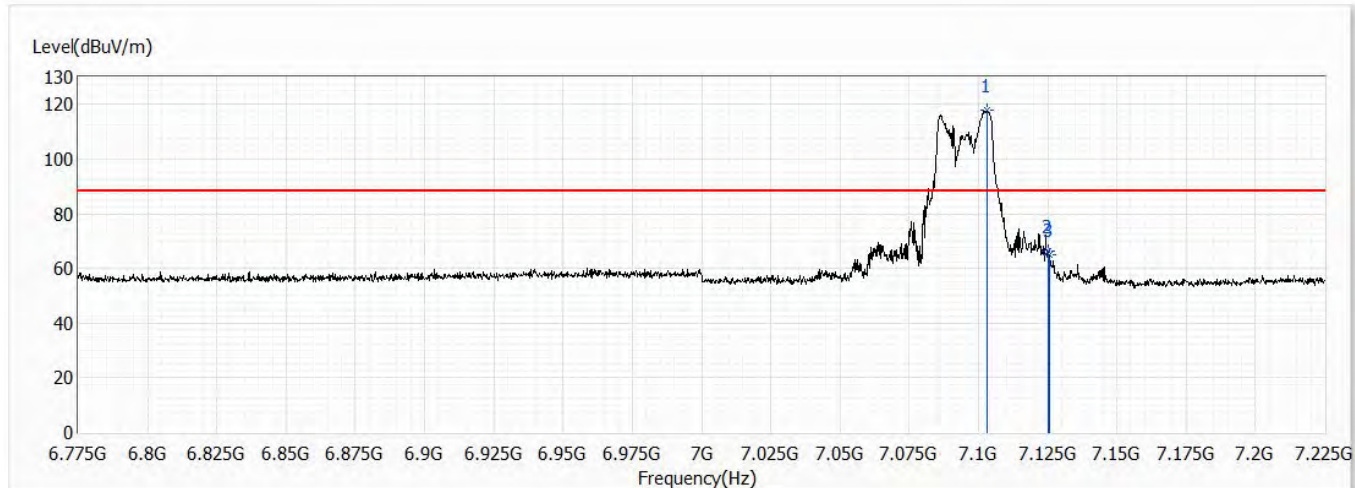


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| ! 1 | 7103.050 | 117.89 | 88.20 | 29.69 | 89.04 | 28.85 | PK |
| 2 | 7125.000 | 66.22 | 88.20 | -21.98 | 37.29 | 28.93 | PK |
| 3 | 7125.550 | 64.90 | 88.20 | -23.30 | 35.96 | 28.94 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-----------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/3/12 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Horizontal | Temperature (°C) | 19.0 |
| Test Condition | 802.11ax,Ch195,6.925G,BW40M | Humidity (%RH) | 58.0 |

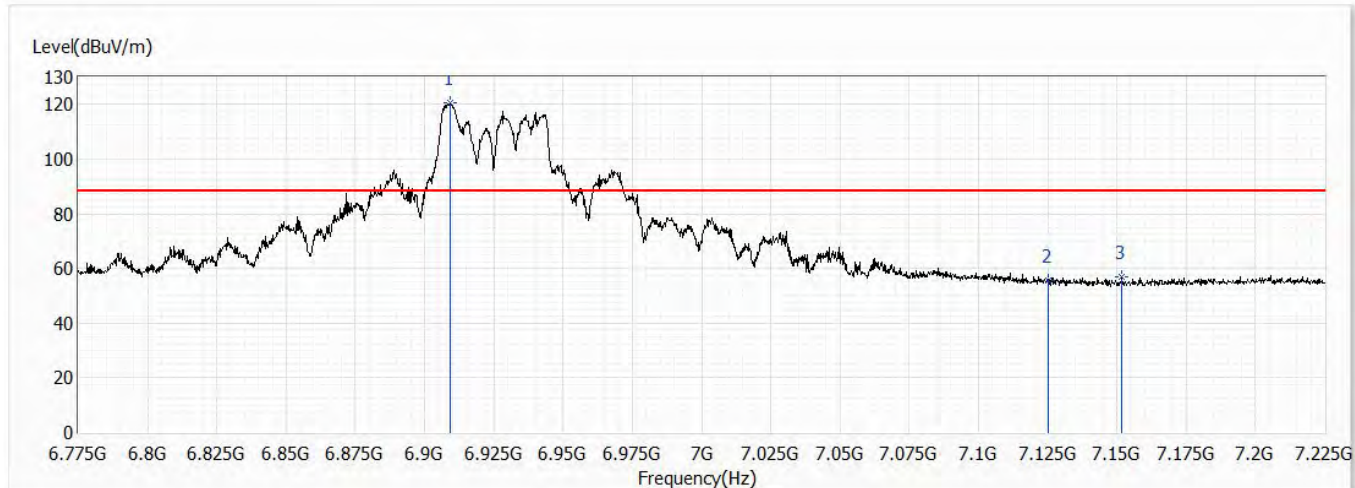

| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| ! 1 | 6909.325 | 120.77 | 88.20 | 32.57 | 92.70 | 28.07 | PK |
| 2 | 7125.000 | 55.78 | 88.20 | -32.42 | 26.85 | 28.93 | PK |
| 3 | 7151.875 | 56.80 | 88.20 | -31.40 | 27.78 | 29.02 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-----------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/3/12 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Vertical | Temperature (°C) | 19.0 |
| Test Condition | 802.11ax,Ch195,6.925G,BW40M | Humidity (%RH) | 58.0 |




| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| ! 1 | 6935.200 | 125.31 | 88.20 | 37.11 | 97.13 | 28.18 | PK |
| 2 | 7125.000 | 55.08 | 88.20 | -33.12 | 26.15 | 28.93 | PK |
| 3 | 7148.050 | 58.44 | 88.20 | -29.76 | 29.42 | 29.02 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-----------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/3/12 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Horizontal | Temperature (°C) | 19.0 |
| Test Condition | 802.11ax,Ch211,7.005G,BW40M | Humidity (%RH) | 58.0 |

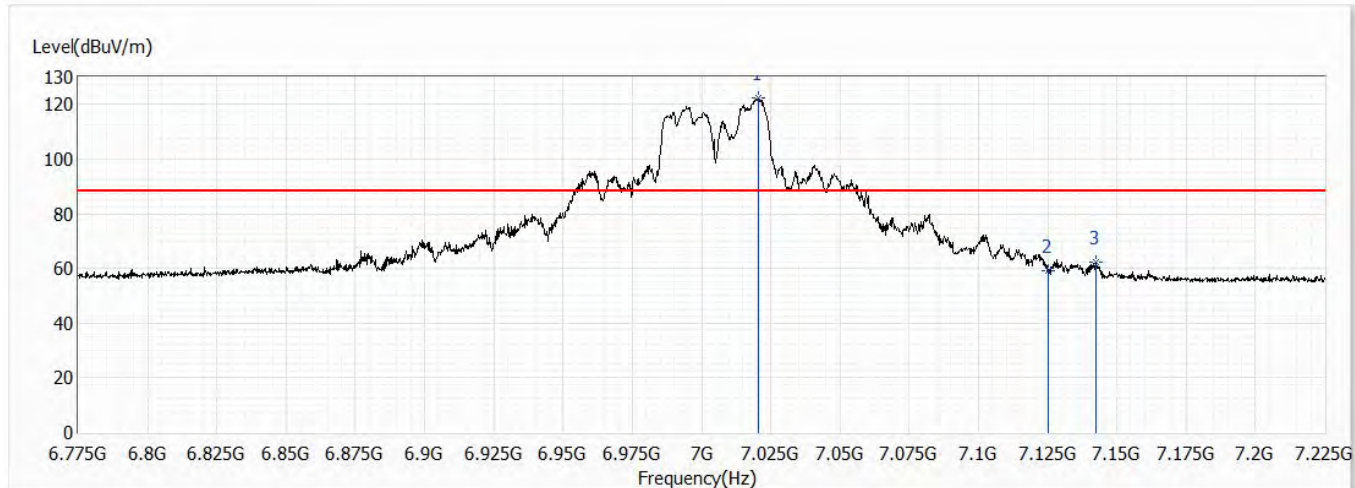


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| ! 1 | 7020.700 | 122.27 | 88.20 | 34.07 | 93.70 | 28.57 | PK |
| 2 | 7125.000 | 58.99 | 88.20 | -29.21 | 30.06 | 28.93 | PK |
| 3 | 7142.200 | 62.21 | 88.20 | -25.99 | 33.22 | 28.99 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-----------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/3/12 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Vertical | Temperature (°C) | 19.0 |
| Test Condition | 802.11ax,Ch211,7.005G,BW40M | Humidity (%RH) | 58.0 |

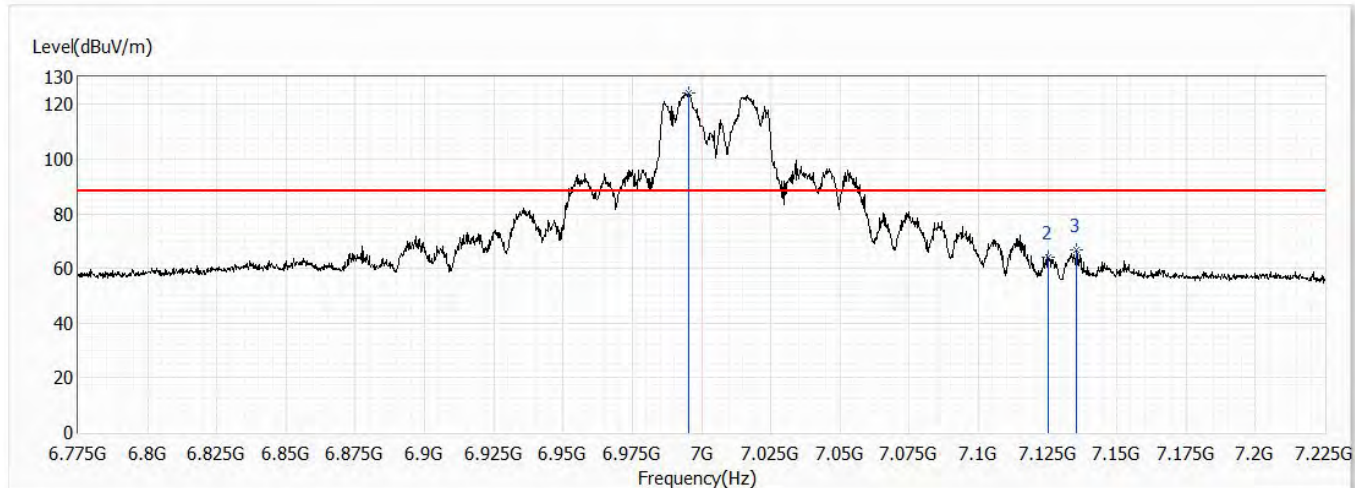


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| ! 1 | 6995.275 | 124.03 | 88.20 | 35.83 | 95.56 | 28.47 | PK |
| 2 | 7125.000 | 64.32 | 88.20 | -23.88 | 35.39 | 28.93 | PK |
| 3 | 7135.450 | 66.68 | 88.20 | -21.52 | 37.72 | 28.96 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-----------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/3/12 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Horizontal | Temperature (°C) | 19.0 |
| Test Condition | 802.11ax,Ch227,7.085G,BW40M | Humidity (%RH) | 58.0 |

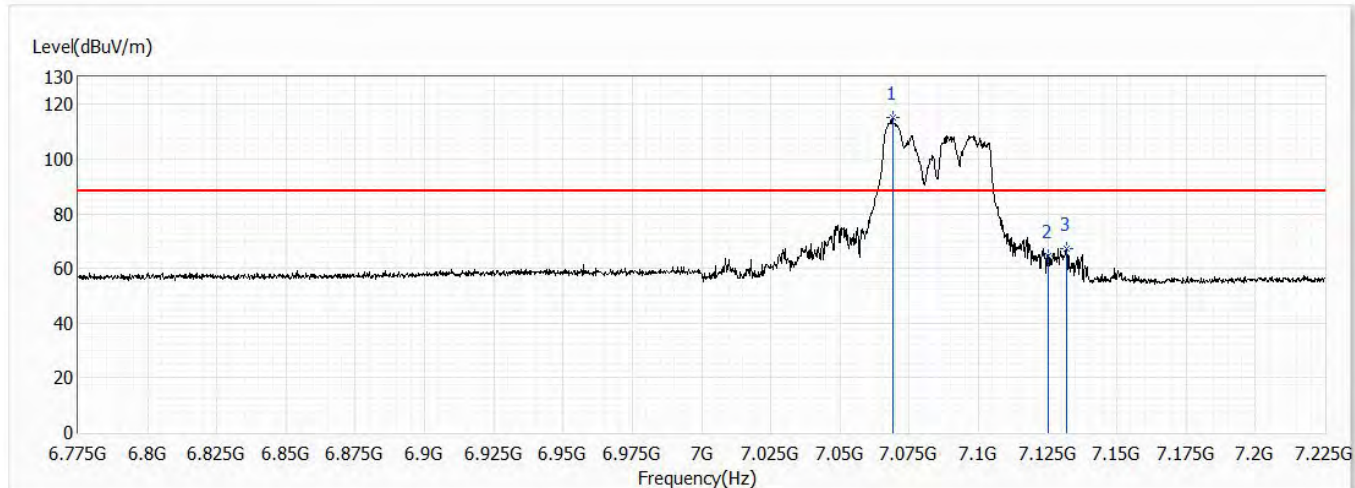


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| ! 1 | 7069.075 | 115.16 | 88.20 | 26.96 | 86.43 | 28.73 | PK |
| 2 | 7125.000 | 64.69 | 88.20 | -23.51 | 35.76 | 28.93 | PK |
| 3 | 7131.625 | 67.12 | 88.20 | -21.08 | 38.16 | 28.96 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-----------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/3/12 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Vertical | Temperature (°C) | 19.0 |
| Test Condition | 802.11ax,Ch227,7.085G,BW40M | Humidity (%RH) | 58.0 |

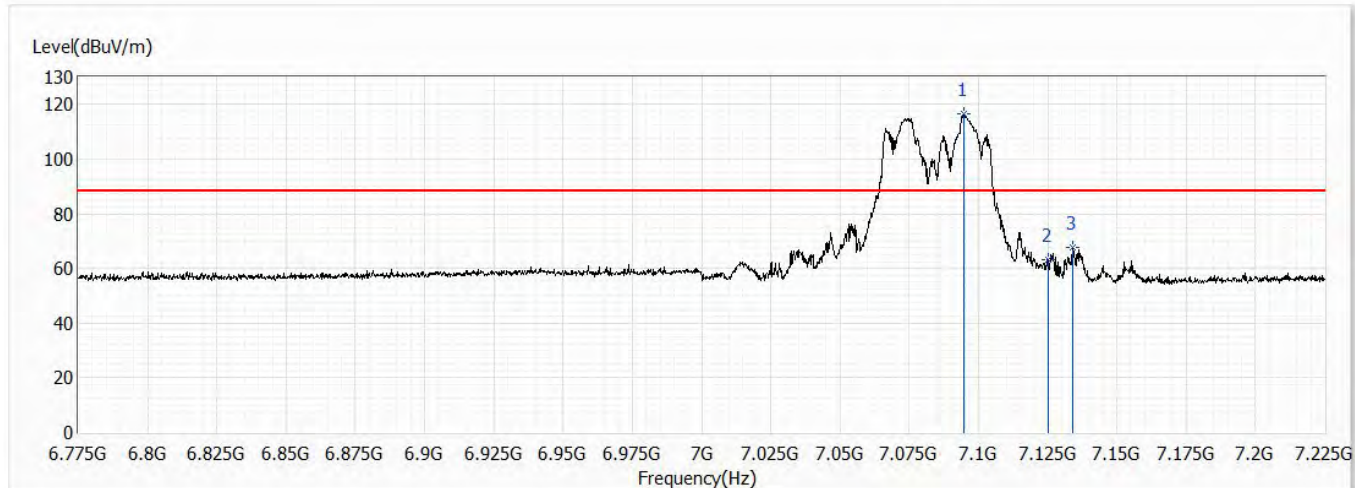


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| ! 1 | 7094.725 | 116.34 | 88.20 | 28.14 | 87.51 | 28.83 | PK |
| 2 | 7125.000 | 63.25 | 88.20 | -24.95 | 34.32 | 28.93 | PK |
| 3 | 7133.875 | 67.47 | 88.20 | -20.73 | 38.51 | 28.96 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-----------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/3/12 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Horizontal | Temperature (°C) | 19.0 |
| Test Condition | 802.11ax,Ch199,6.945G,BW80M | Humidity (%RH) | 58.0 |

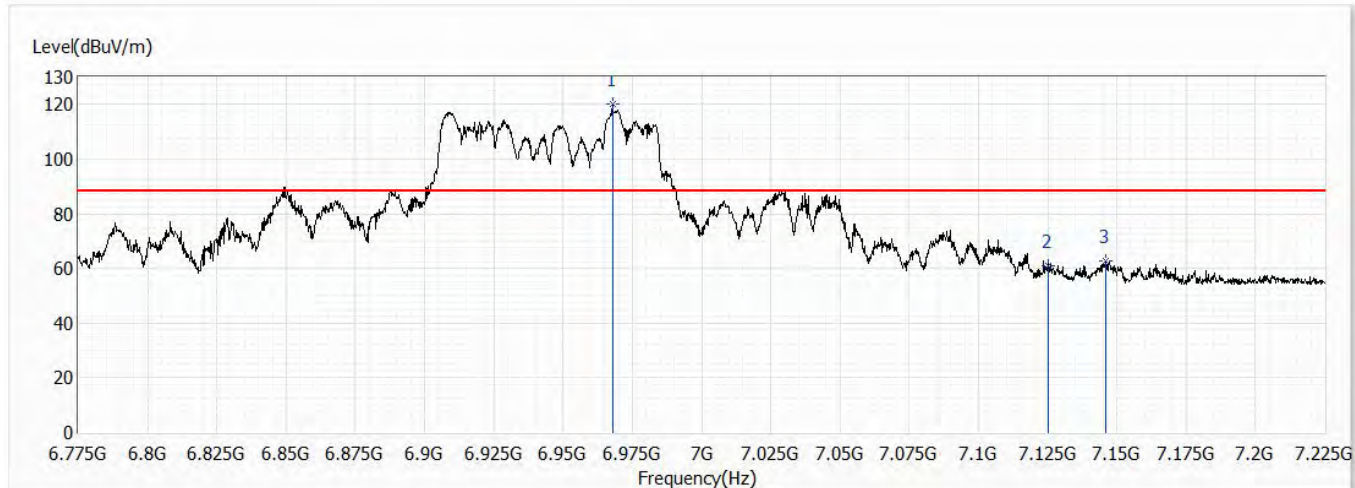


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| ! 1 | 6967.825 | 120.19 | 88.20 | 31.99 | 91.84 | 28.35 | PK |
| 2 | 7125.000 | 60.90 | 88.20 | -27.30 | 31.97 | 28.93 | PK |
| 3 | 7146.025 | 62.63 | 88.20 | -25.57 | 33.63 | 29.00 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-----------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/3/12 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Vertical | Temperature (°C) | 19.0 |
| Test Condition | 802.11ax,Ch199,6.945G,BW80M | Humidity (%RH) | 58.0 |

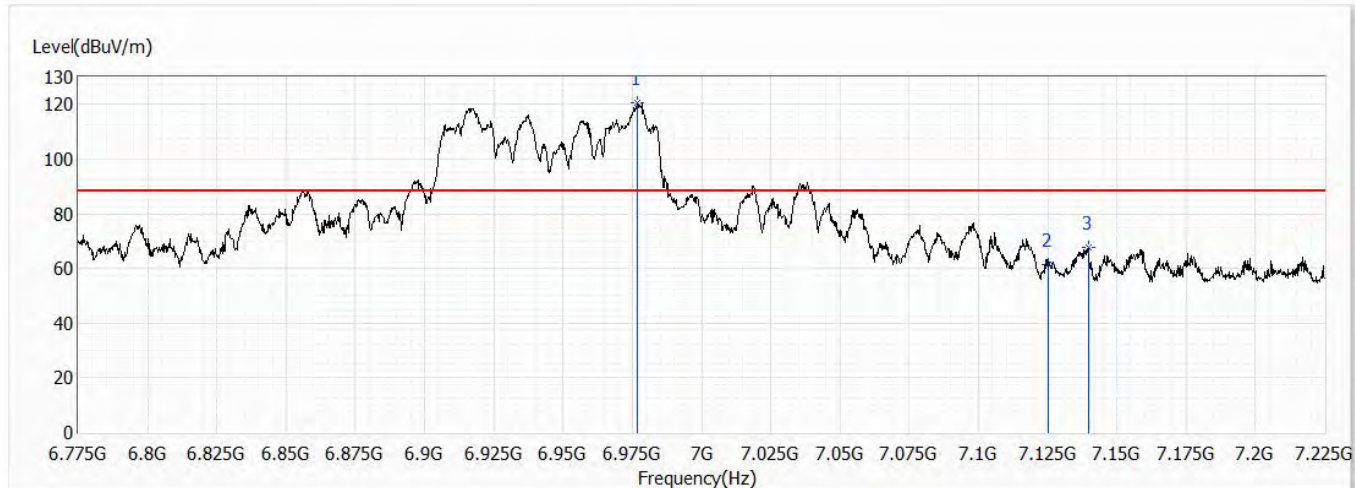


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| ! 1 | 6976.825 | 120.47 | 88.20 | 32.27 | 92.09 | 28.38 | PK |
| 2 | 7125.000 | 61.48 | 88.20 | -26.72 | 32.55 | 28.93 | PK |
| 3 | 7139.725 | 67.67 | 88.20 | -20.53 | 38.69 | 28.98 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-----------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/3/12 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Horizontal | Temperature (°C) | 19.0 |
| Test Condition | 802.11ax,Ch215,7.025G,BW80M | Humidity (%RH) | 58.0 |

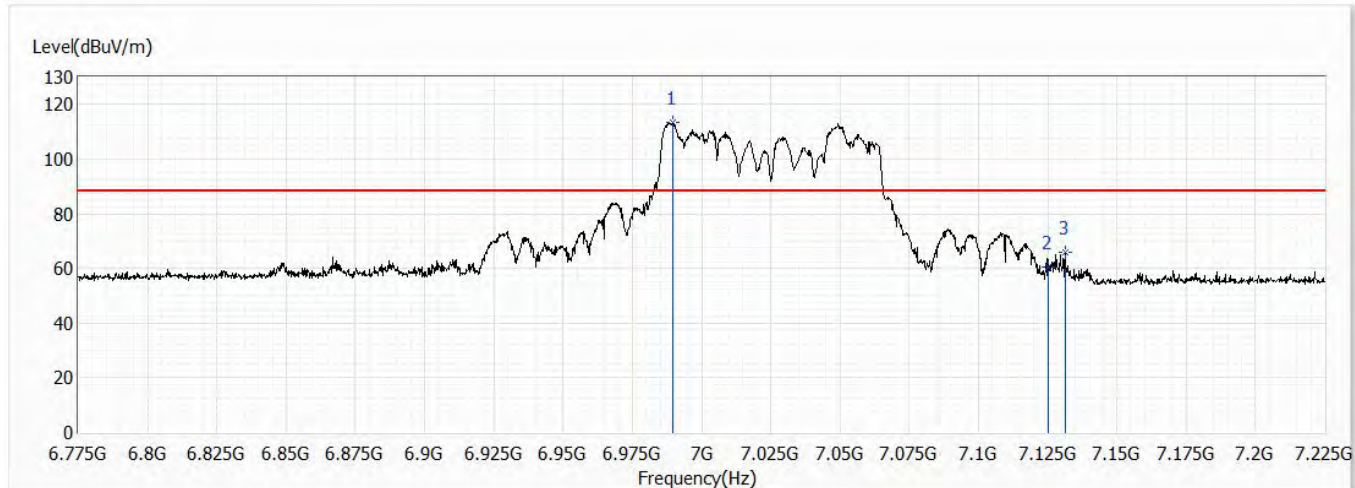


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| ! 1 | 6989.650 | 113.42 | 88.20 | 25.22 | 84.97 | 28.45 | PK |
| 2 | 7125.000 | 60.47 | 88.20 | -27.73 | 31.54 | 28.93 | PK |
| 3 | 7131.175 | 65.79 | 88.20 | -22.41 | 36.84 | 28.95 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-----------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/3/12 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Vertical | Temperature (°C) | 19.0 |
| Test Condition | 802.11ax,Ch215,7.025G,BW80M | Humidity (%RH) | 58.0 |

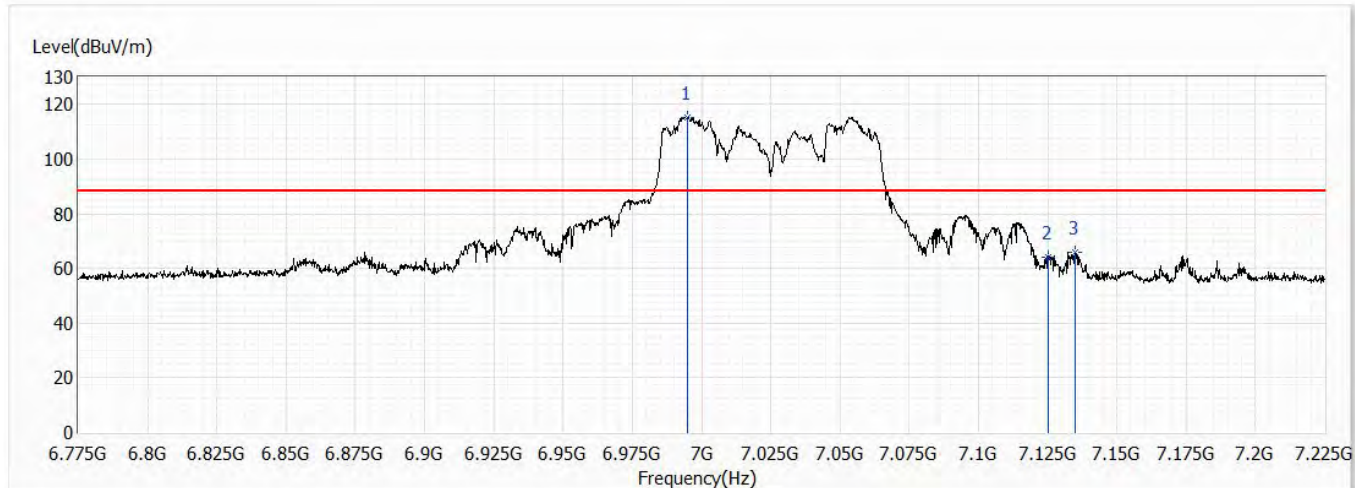


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| ! 1 | 6994.825 | 115.35 | 88.20 | 27.15 | 86.88 | 28.47 | PK |
| 2 | 7125.000 | 63.92 | 88.20 | -24.28 | 34.99 | 28.93 | PK |
| 3 | 7134.775 | 65.87 | 88.20 | -22.33 | 36.91 | 28.96 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|------------------------------|------------------|-------------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/4/28 |
| Test Mode | Mode 1 | Engineer | Rueyyan Lin |
| Polarity | Horizontal | Temperature (°C) | 19.0 |
| Test Condition | 802.11ax,Ch207,6.985G,BW160M | Humidity (%RH) | 58.0 |

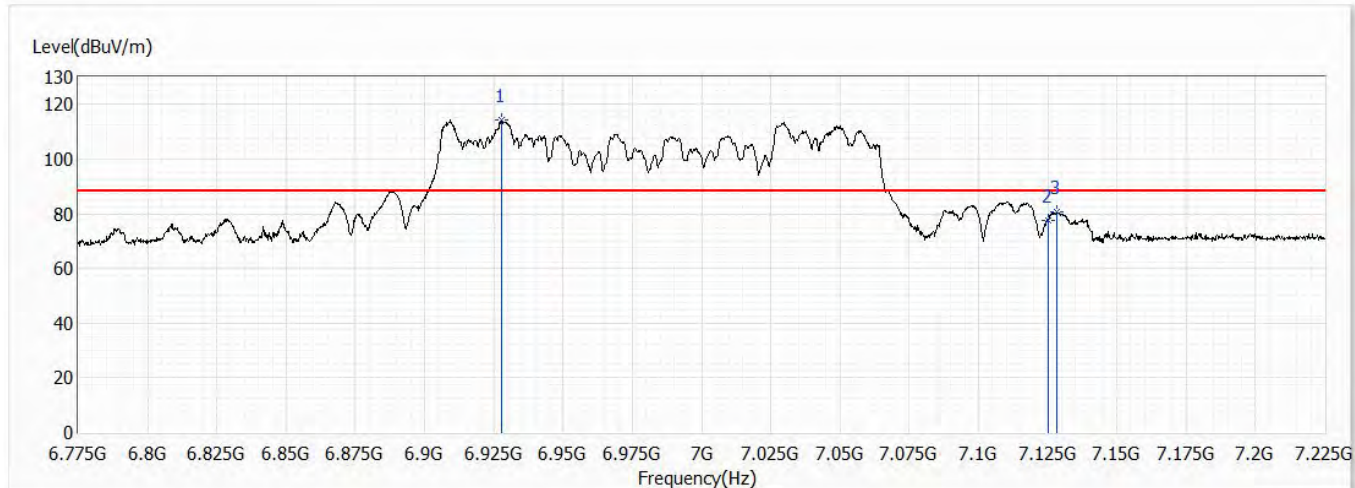


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| ! 1 | 6928.000 | 114.27 | 88.20 | 26.07 | 86.11 | 28.16 | PK |
| 2 | 7125.000 | 77.58 | 88.20 | -10.62 | 48.65 | 28.93 | PK |
| 3 | 7128.250 | 80.47 | 88.20 | -7.73 | 51.53 | 28.94 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|------------------------------|------------------|-------------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/4/28 |
| Test Mode | Mode 1 | Engineer | Rueyyan Lin |
| Polarity | Horizontal | Temperature (°C) | 19.0 |
| Test Condition | 802.11ax,Ch207,6.985G,BW160M | Humidity (%RH) | 58.0 |

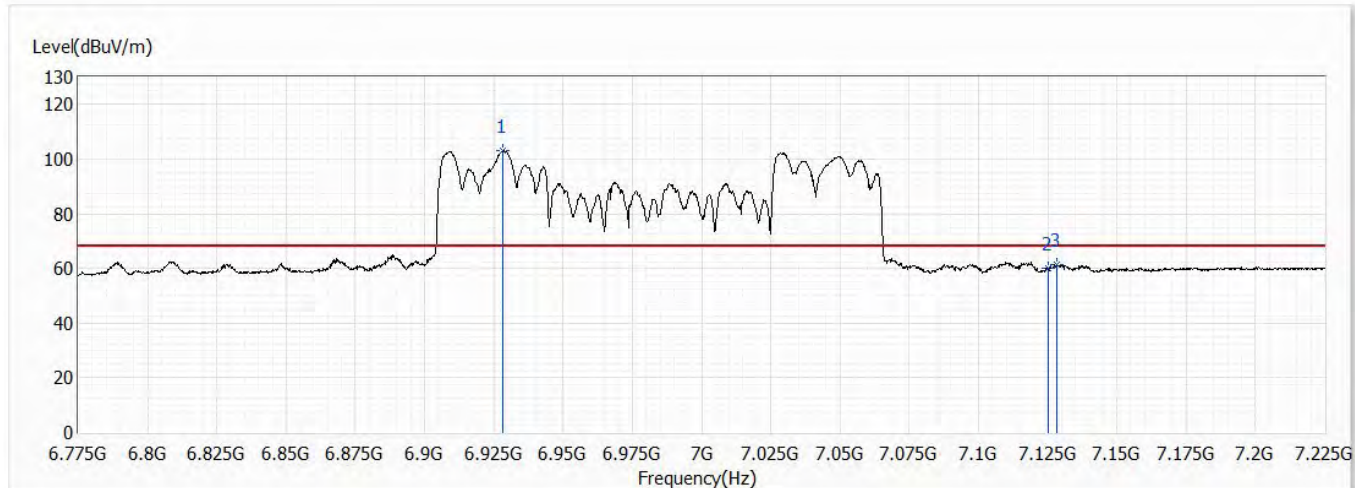


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| ! 1 | 6928.450 | 102.93 | 68.20 | 34.73 | 74.77 | 28.16 | AV |
| 2 | 7125.000 | 60.09 | 68.20 | -8.11 | 31.16 | 28.93 | AV |
| 3 | 7128.250 | 61.28 | 68.20 | -6.92 | 32.34 | 28.94 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|------------------------------|------------------|-------------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/4/28 |
| Test Mode | Mode 1 | Engineer | Rueyyan Lin |
| Polarity | Vertical | Temperature (°C) | 19.0 |
| Test Condition | 802.11ax,Ch207,6.985G,BW160M | Humidity (%RH) | 58.0 |

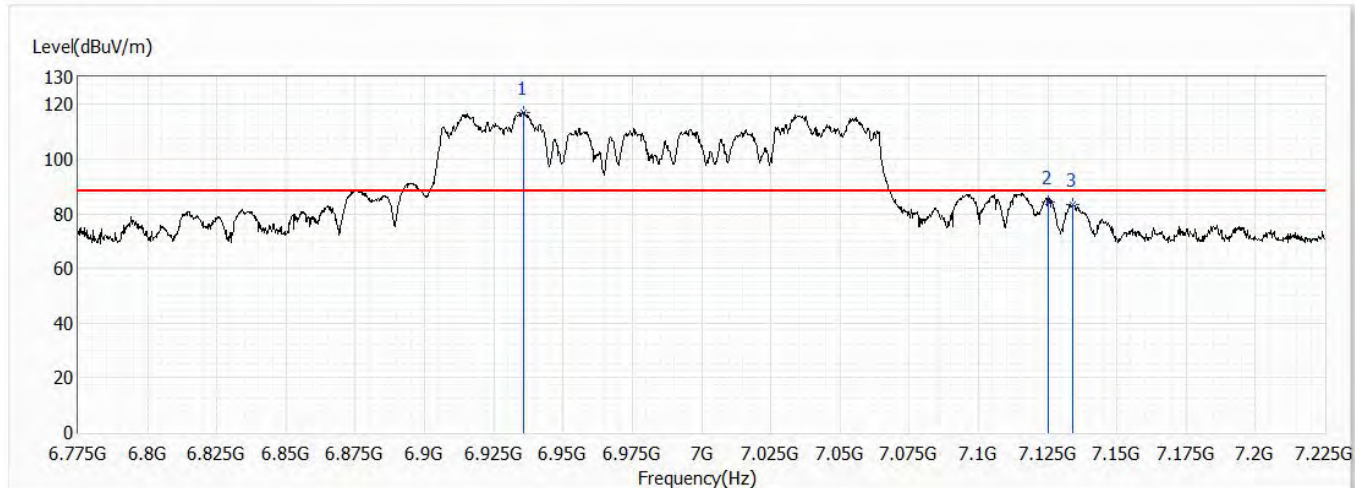


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| ! 1 | 6935.650 | 117.19 | 88.20 | 28.99 | 89.00 | 28.19 | PK |
| 2 | 7125.000 | 84.41 | 88.20 | -3.79 | 55.48 | 28.93 | PK |
| 3 | 7134.100 | 83.34 | 88.20 | -4.86 | 54.38 | 28.96 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|------------------------------|------------------|-------------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/4/28 |
| Test Mode | Mode 1 | Engineer | Rueyyan Lin |
| Polarity | Vertical | Temperature (°C) | 19.0 |
| Test Condition | 802.11ax,Ch207,6.985G,BW160M | Humidity (%RH) | 58.0 |

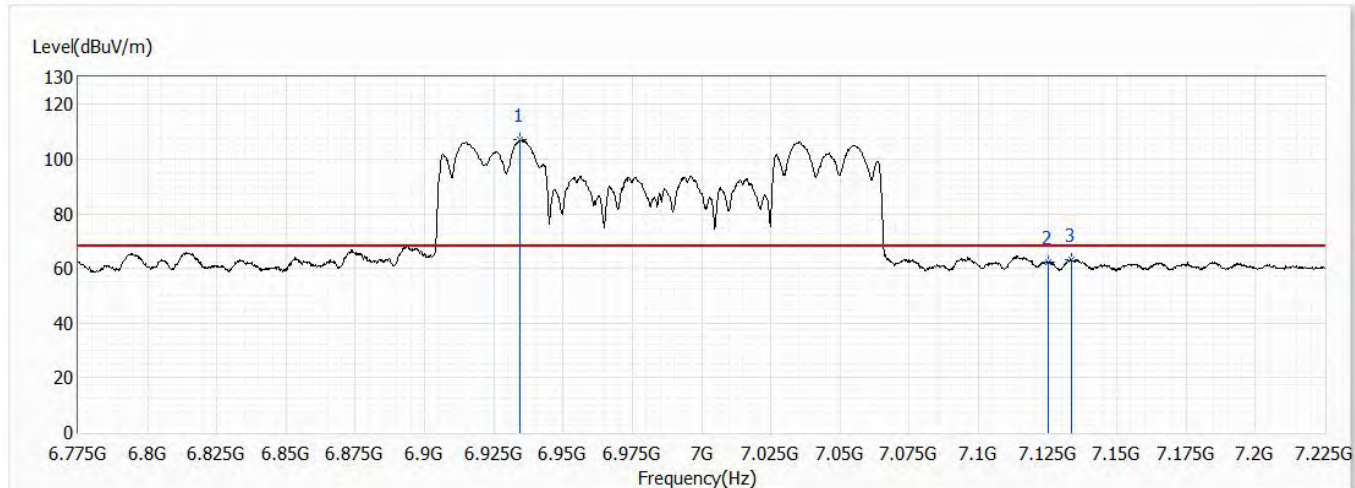


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| ! 1 | 6934.525 | 107.17 | 68.20 | 38.97 | 78.99 | 28.18 | AV |
| 2 | 7125.000 | 62.25 | 68.20 | -5.95 | 33.32 | 28.93 | AV |
| 3 | 7133.425 | 63.11 | 68.20 | -5.09 | 34.15 | 28.96 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Beamforming mode

| | | | |
|----------------|-------------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/19 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Horizontal | Temperature (°C) | 19.0 |
| Test Condition | BF,802.11ax,Ch33,6.115G,BW20M | Humidity (%RH) | 58.0 |

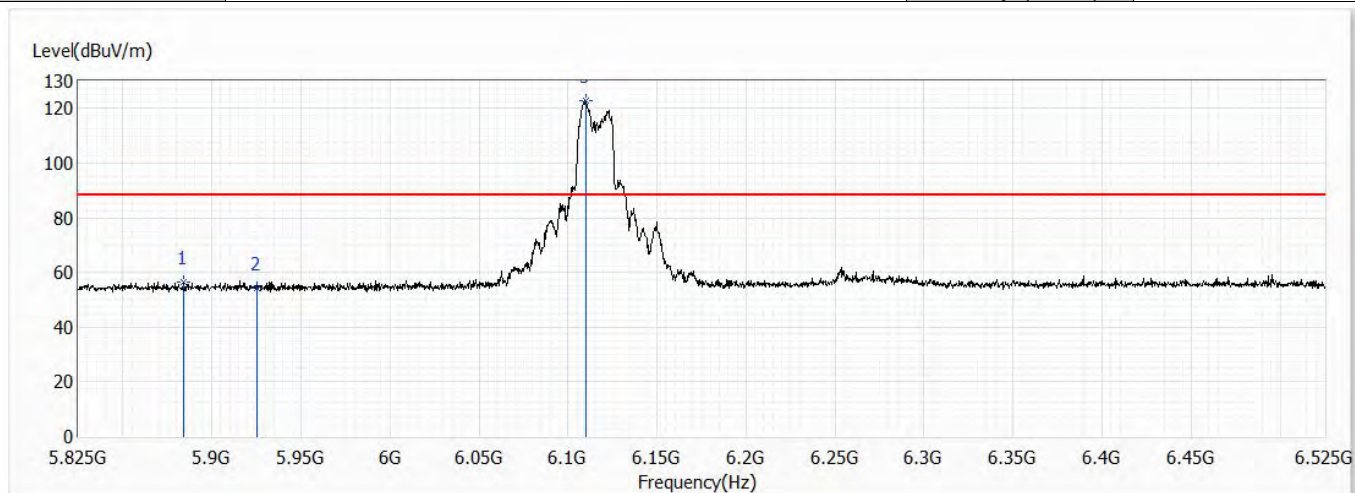


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 5884.150 | 56.47 | 88.20 | -31.73 | 32.22 | 24.25 | PK |
| 2 | 5925.000 | 54.26 | 88.20 | -33.94 | 29.89 | 24.37 | PK |
| ! 3 | 6110.250 | 122.65 | 88.20 | 34.45 | 97.67 | 24.98 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-------------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/19 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Vertical | Temperature (°C) | 19.0 |
| Test Condition | BF,802.11ax,Ch33,6.115G,BW20M | Humidity (%RH) | 58.0 |

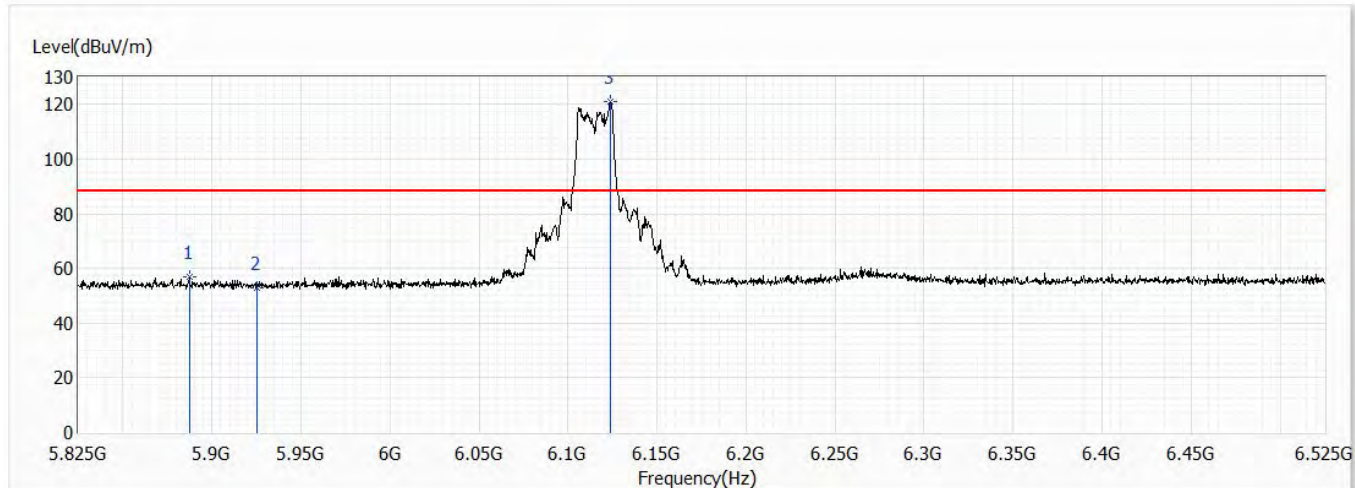


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 5887.300 | 56.80 | 88.20 | -31.40 | 32.55 | 24.25 | PK |
| 2 | 5925.000 | 52.97 | 88.20 | -35.23 | 28.60 | 24.37 | PK |
| ! 3 | 6123.900 | 120.99 | 88.20 | 32.79 | 95.97 | 25.02 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-------------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/19 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Horizontal | Temperature (°C) | 19.0 |
| Test Condition | BF,802.11ax,Ch61,6.255G,BW20M | Humidity (%RH) | 58.0 |

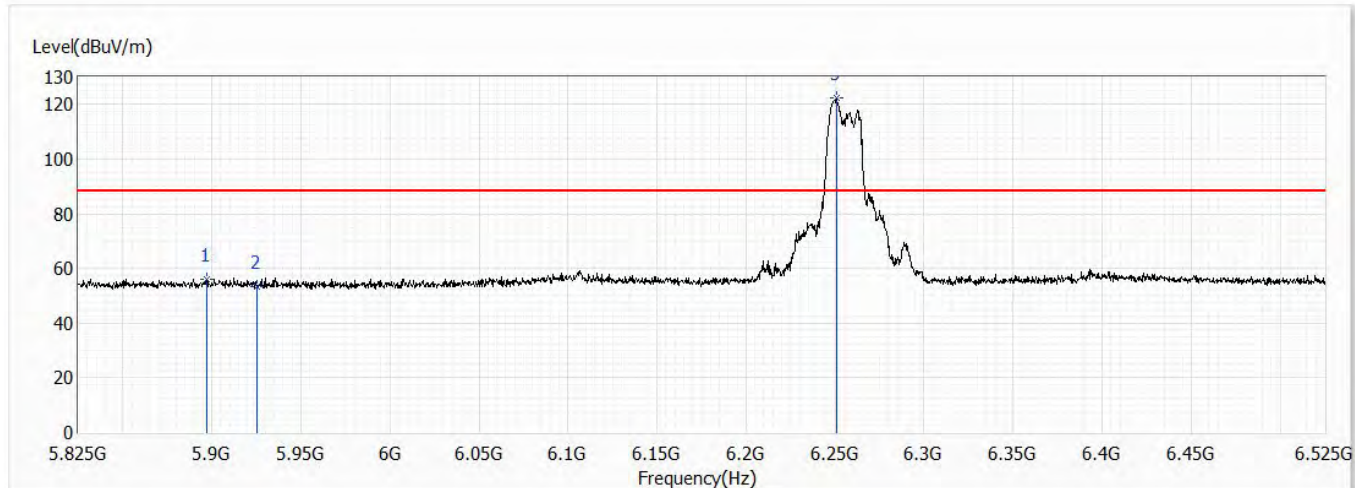


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 5897.100 | 56.22 | 88.20 | -31.98 | 31.92 | 24.30 | PK |
| 2 | 5925.000 | 53.48 | 88.20 | -34.72 | 29.11 | 24.37 | PK |
| ! 3 | 6250.600 | 122.58 | 88.20 | 34.38 | 97.12 | 25.46 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-------------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/19 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Vertical | Temperature (°C) | 19.0 |
| Test Condition | BF,802.11ax,Ch61,6.255G,BW20M | Humidity (%RH) | 58.0 |

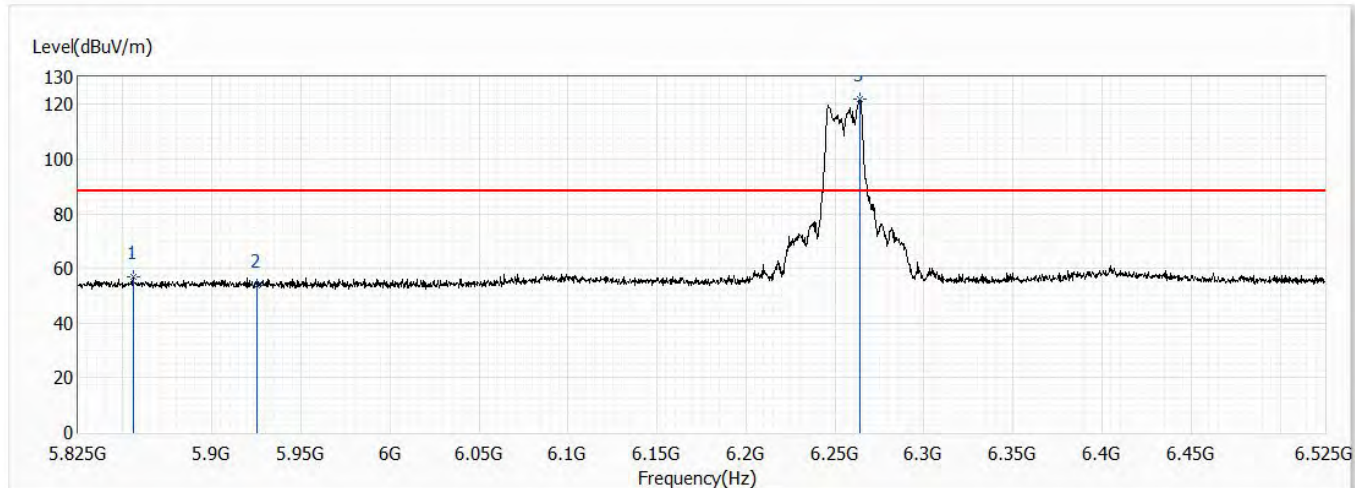


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 5855.800 | 56.78 | 88.20 | -31.42 | 32.61 | 24.17 | PK |
| 2 | 5925.000 | 53.97 | 88.20 | -34.23 | 29.60 | 24.37 | PK |
| ! 3 | 6264.250 | 121.82 | 88.20 | 33.62 | 96.31 | 25.51 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-------------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/19 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Horizontal | Temperature (°C) | 19.0 |
| Test Condition | BF,802.11ax,Ch93,6.415G,BW20M | Humidity (%RH) | 58.0 |

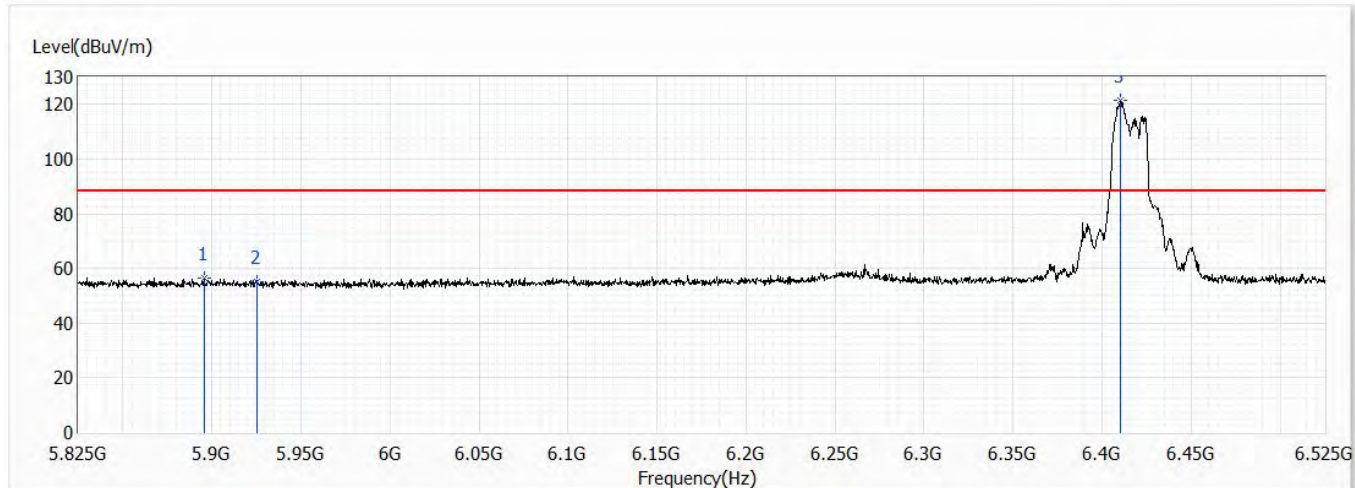


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 5895.700 | 56.65 | 88.20 | -31.55 | 32.38 | 24.27 | PK |
| 2 | 5925.000 | 55.03 | 88.20 | -33.17 | 30.66 | 24.37 | PK |
| ! 3 | 6410.200 | 121.28 | 88.20 | 33.08 | 95.37 | 25.91 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-------------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/19 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Vertical | Temperature (°C) | 19.0 |
| Test Condition | BF,802.11ax,Ch93,6.415G,BW20M | Humidity (%RH) | 58.0 |

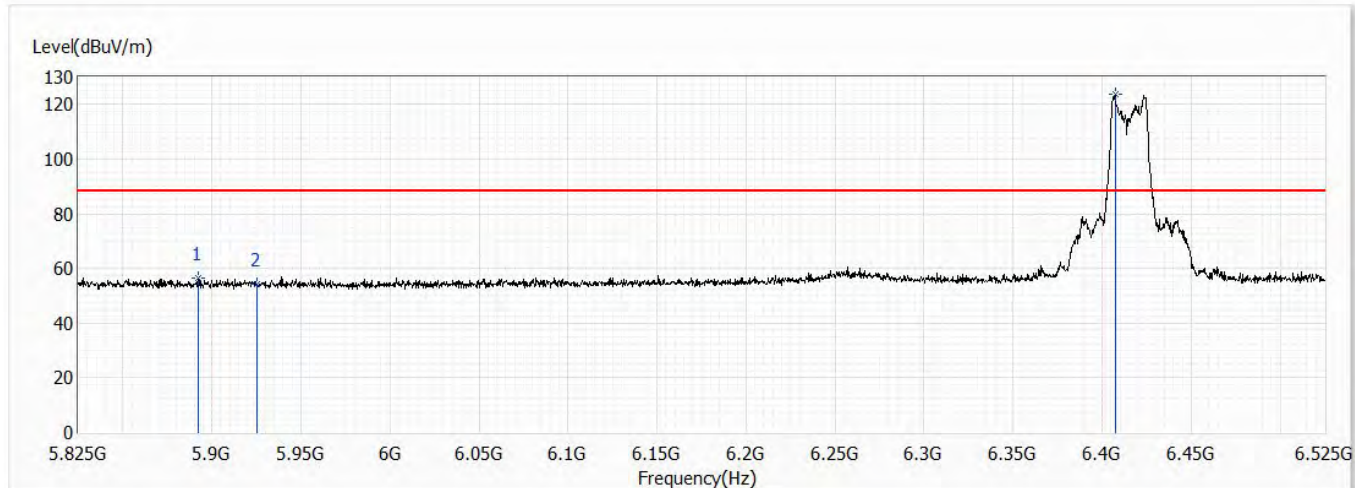


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 5892.550 | 56.28 | 88.20 | -31.92 | 32.01 | 24.27 | PK |
| 2 | 5925.000 | 54.19 | 88.20 | -34.01 | 29.82 | 24.37 | PK |
| ! 3 | 6407.400 | 123.53 | 88.20 | 35.33 | 97.63 | 25.90 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-------------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/19 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Horizontal | Temperature (°C) | 19.0 |
| Test Condition | BF,802.11ax,Ch35,6.125G,BW40M | Humidity (%RH) | 58.0 |

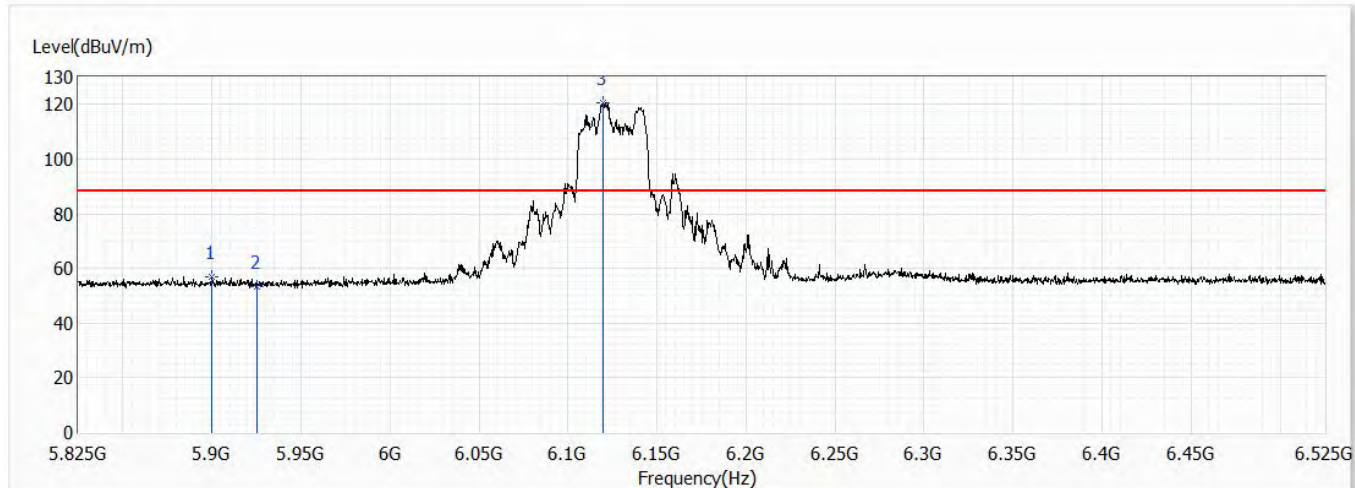


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 5899.550 | 57.06 | 88.20 | -31.14 | 32.76 | 24.30 | PK |
| 2 | 5925.000 | 53.41 | 88.20 | -34.79 | 29.04 | 24.37 | PK |
| ! 3 | 6119.700 | 120.49 | 88.20 | 32.29 | 95.47 | 25.02 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-------------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/19 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Vertical | Temperature (°C) | 19.0 |
| Test Condition | BF,802.11ax,Ch35,6.125G,BW40M | Humidity (%RH) | 58.0 |

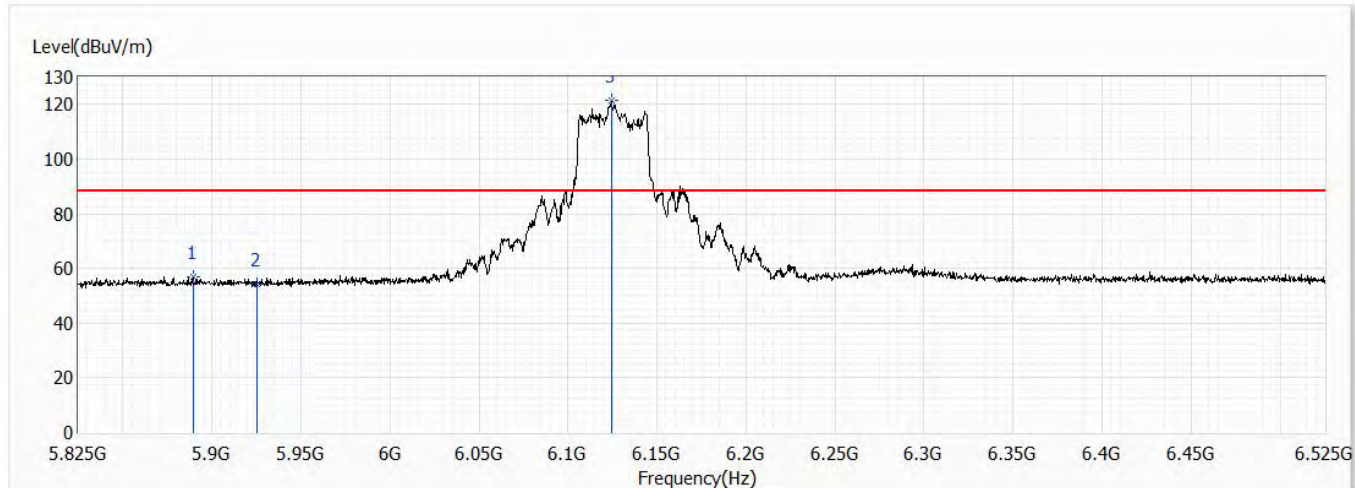


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 5889.400 | 57.14 | 88.20 | -31.06 | 32.87 | 24.27 | PK |
| 2 | 5925.000 | 54.35 | 88.20 | -33.85 | 29.98 | 24.37 | PK |
| ! 3 | 6124.250 | 121.64 | 88.20 | 33.44 | 96.62 | 25.02 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-------------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/19 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Horizontal | Temperature (°C) | 19.0 |
| Test Condition | BF,802.11ax,Ch59,6.245G,BW40M | Humidity (%RH) | 58.0 |

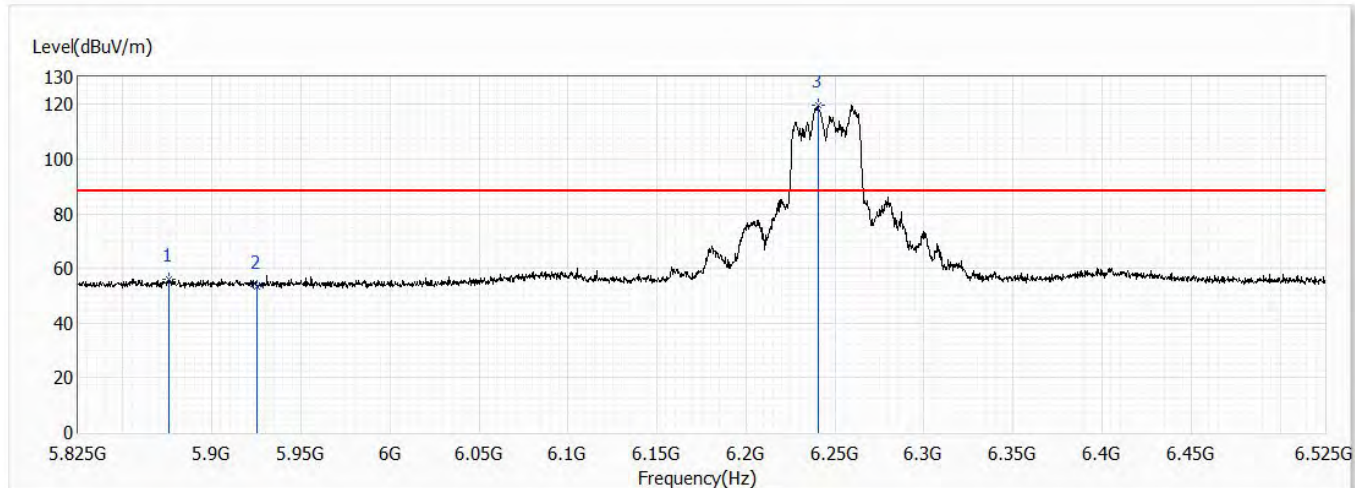


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 5875.750 | 56.15 | 88.20 | -32.05 | 31.92 | 24.23 | PK |
| 2 | 5925.000 | 53.50 | 88.20 | -34.70 | 29.13 | 24.37 | PK |
| ! 3 | 6240.450 | 119.67 | 88.20 | 31.47 | 94.24 | 25.43 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-------------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/19 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Vertical | Temperature (°C) | 19.0 |
| Test Condition | BF,802.11ax,Ch59,6.245G,BW40M | Humidity (%RH) | 58.0 |

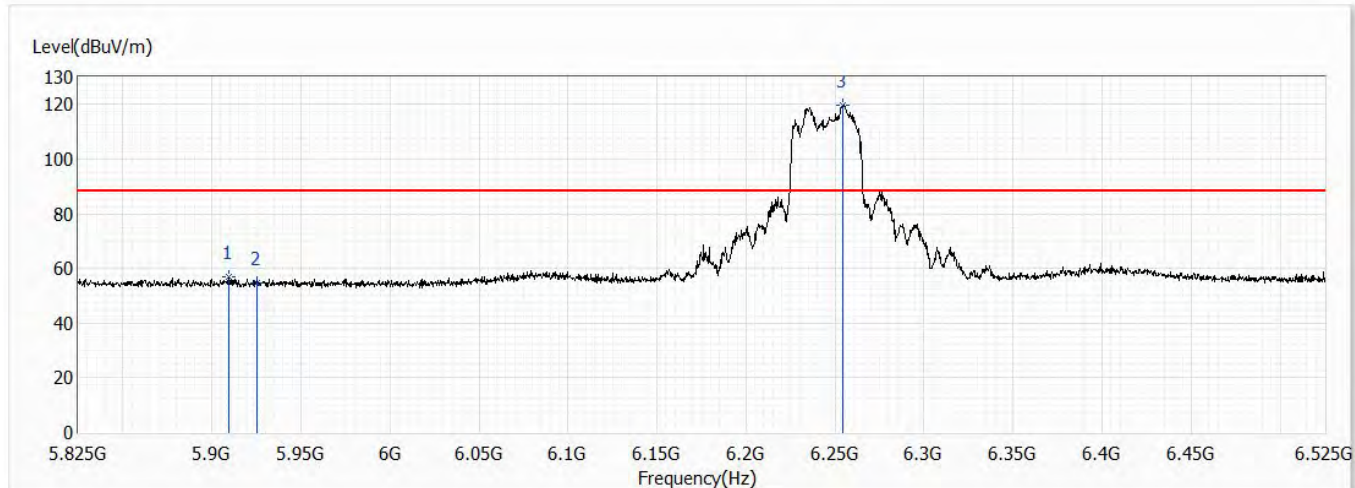


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 5909.700 | 56.82 | 88.20 | -31.38 | 32.50 | 24.32 | PK |
| 2 | 5925.000 | 54.80 | 88.20 | -33.40 | 30.43 | 24.37 | PK |
| ! 3 | 6254.450 | 119.77 | 88.20 | 31.57 | 94.30 | 25.47 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-------------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/19 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Horizontal | Temperature (°C) | 19.0 |
| Test Condition | BF,802.11ax,Ch91,6.405G,BW40M | Humidity (%RH) | 58.0 |

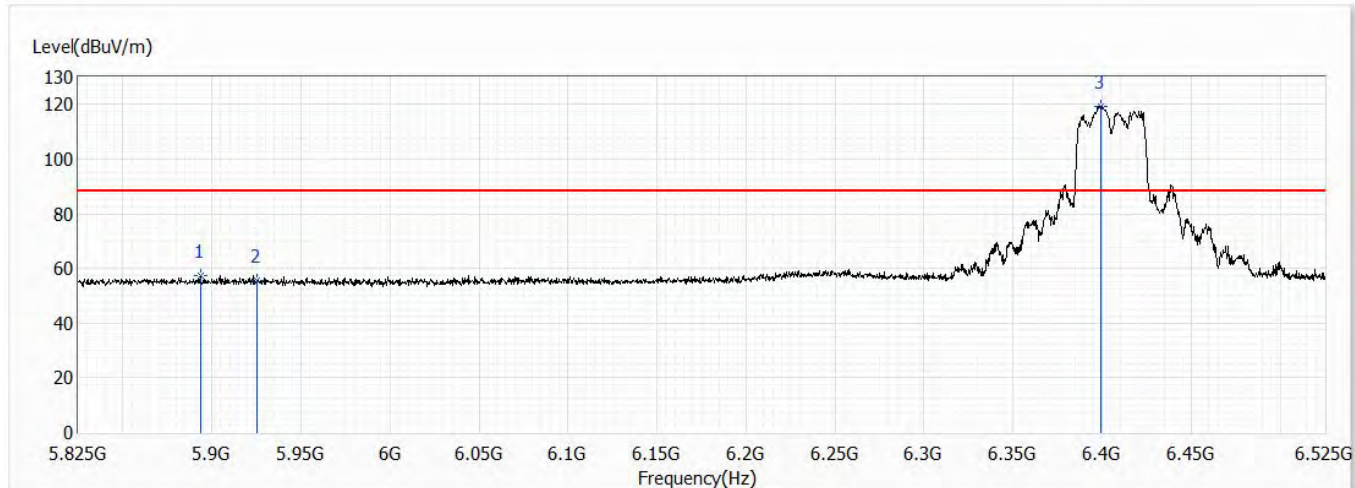


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 5893.600 | 57.44 | 88.20 | -30.76 | 33.17 | 24.27 | PK |
| 2 | 5925.000 | 55.41 | 88.20 | -32.79 | 31.04 | 24.37 | PK |
| ! 3 | 6399.350 | 119.45 | 88.20 | 31.25 | 93.56 | 25.89 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-------------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/19 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Vertical | Temperature (°C) | 19.0 |
| Test Condition | BF,802.11ax,Ch91,6.405G,BW40M | Humidity (%RH) | 58.0 |

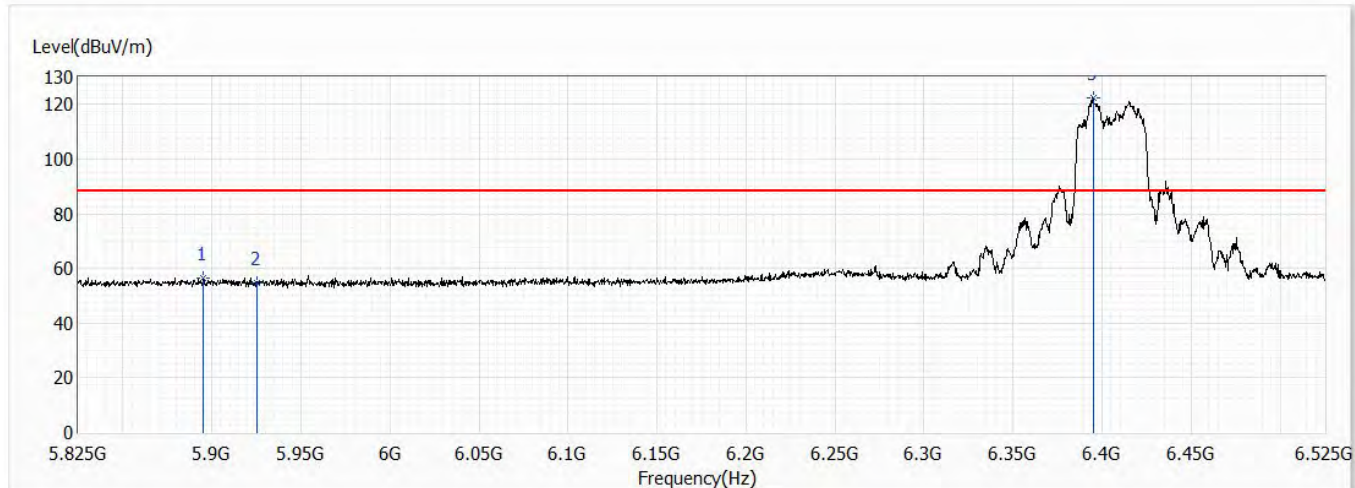


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 5895.350 | 56.44 | 88.20 | -31.76 | 32.17 | 24.27 | PK |
| 2 | 5925.000 | 54.61 | 88.20 | -33.59 | 30.24 | 24.37 | PK |
| ! 3 | 6395.150 | 122.34 | 88.20 | 34.14 | 96.47 | 25.87 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-------------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/19 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Horizontal | Temperature (°C) | 19.0 |
| Test Condition | BF,802.11ax,Ch39,6.145G,BW80M | Humidity (%RH) | 58.0 |

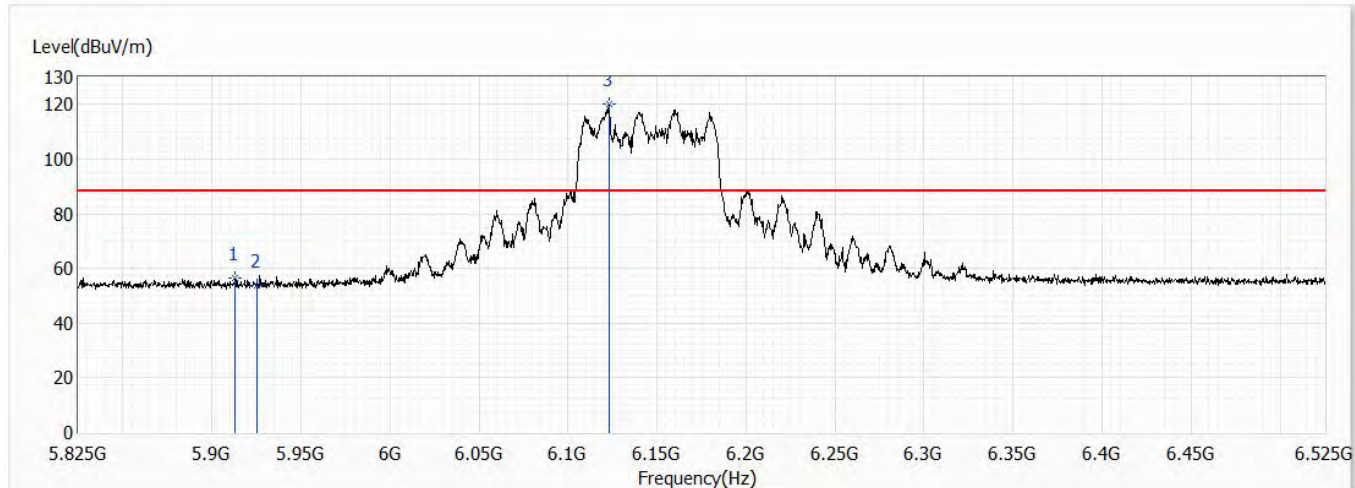


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 5913.200 | 56.31 | 88.20 | -31.89 | 31.97 | 24.34 | PK |
| 2 | 5925.000 | 53.67 | 88.20 | -34.53 | 29.30 | 24.37 | PK |
| ! 3 | 6122.850 | 120.05 | 88.20 | 31.85 | 95.03 | 25.02 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-------------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/19 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Vertical | Temperature (°C) | 19.0 |
| Test Condition | BF,802.11ax,Ch39,6.145G,BW80M | Humidity (%RH) | 58.0 |

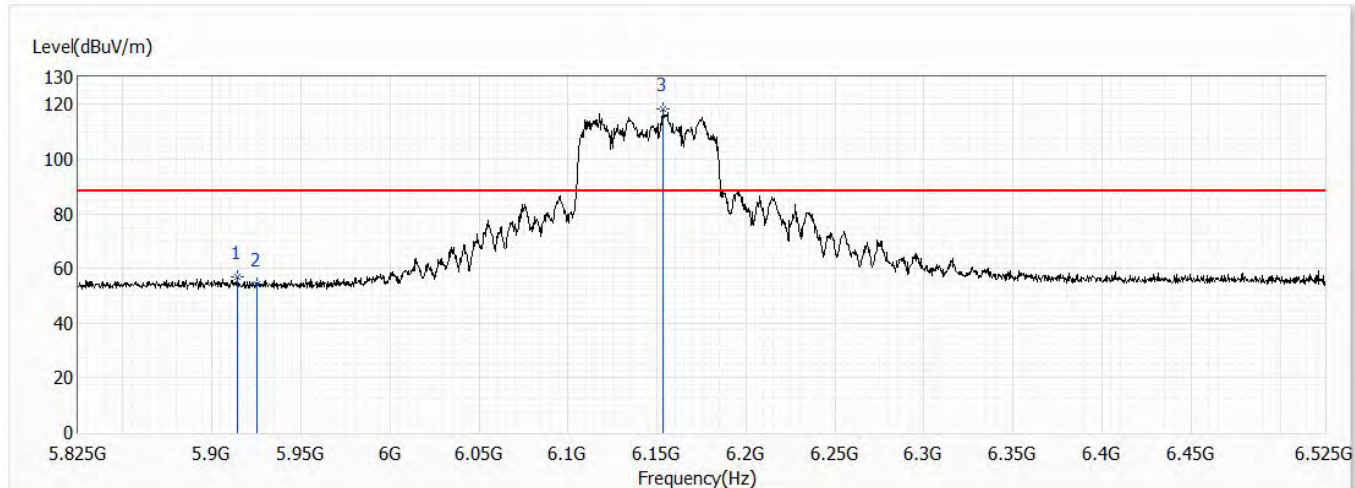


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 5914.250 | 57.07 | 88.20 | -31.13 | 32.73 | 24.34 | PK |
| 2 | 5925.000 | 54.28 | 88.20 | -33.92 | 29.91 | 24.37 | PK |
| ! 3 | 6153.300 | 118.20 | 88.20 | 30.00 | 93.07 | 25.13 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-------------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/19 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Horizontal | Temperature (°C) | 19.0 |
| Test Condition | BF,802.11ax,Ch55,6.225G,BW80M | Humidity (%RH) | 58.0 |

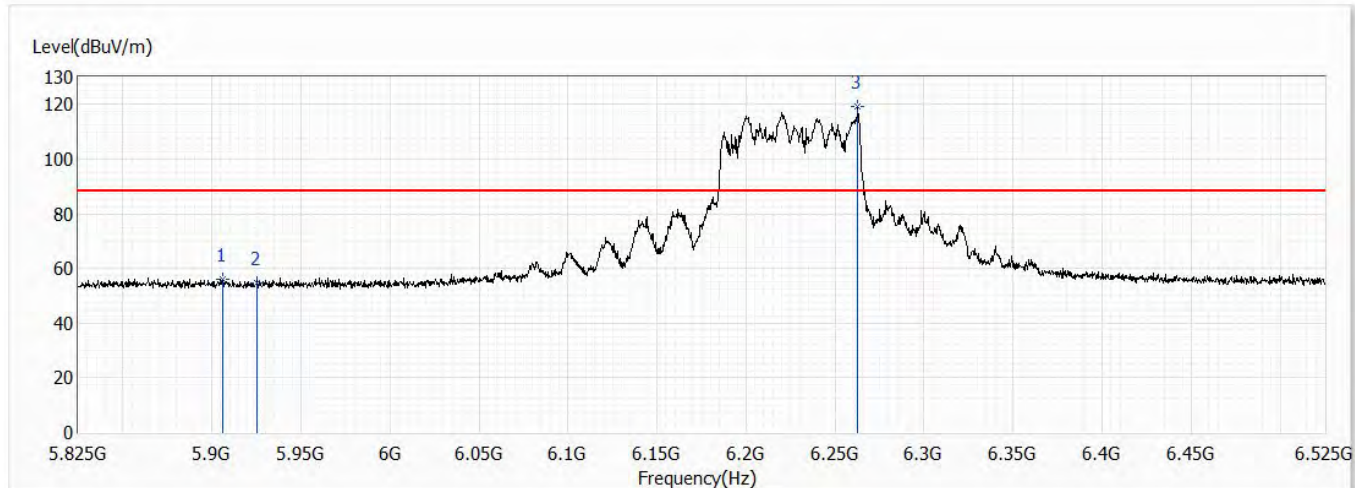


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 5906.200 | 56.15 | 88.20 | -32.05 | 31.83 | 24.32 | PK |
| 2 | 5925.000 | 54.54 | 88.20 | -33.66 | 30.17 | 24.37 | PK |
| ! 3 | 6262.850 | 119.25 | 88.20 | 31.05 | 93.75 | 25.50 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-------------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/19 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Vertical | Temperature (°C) | 19.0 |
| Test Condition | BF,802.11ax,Ch55,6.225G,BW80M | Humidity (%RH) | 58.0 |

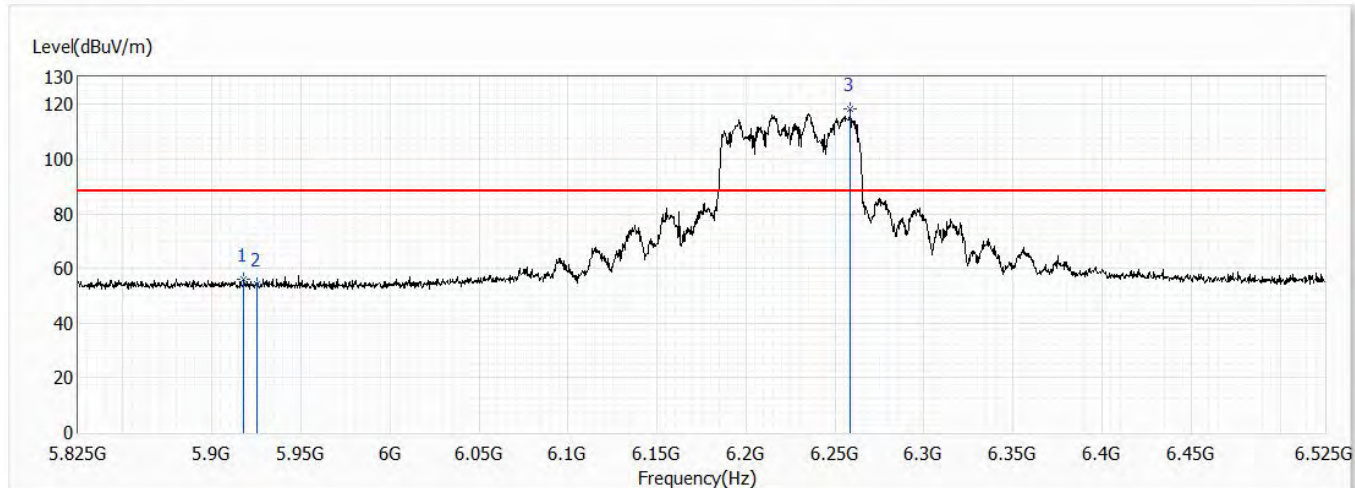


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 5917.750 | 55.84 | 88.20 | -32.36 | 31.50 | 24.34 | PK |
| 2 | 5925.000 | 54.25 | 88.20 | -33.95 | 29.88 | 24.37 | PK |
| ! 3 | 6258.650 | 118.19 | 88.20 | 29.99 | 92.70 | 25.49 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-------------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/19 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Horizontal | Temperature (°C) | 19.0 |
| Test Condition | BF,802.11ax,Ch87,6.385G,BW80M | Humidity (%RH) | 58.0 |

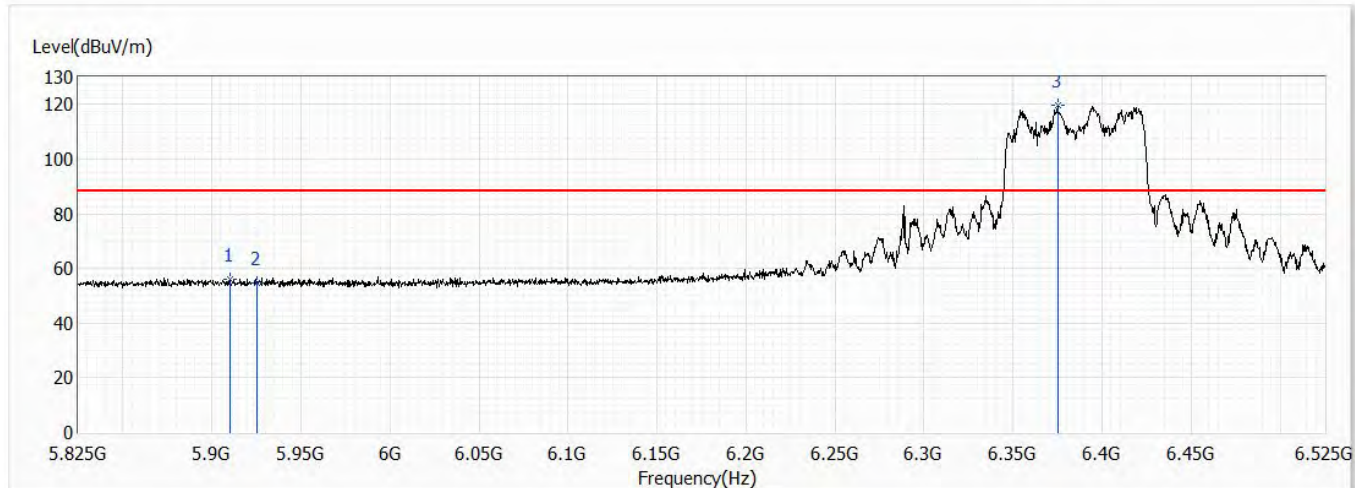


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 5910.050 | 56.24 | 88.20 | -31.96 | 31.92 | 24.32 | PK |
| 2 | 5925.000 | 54.76 | 88.20 | -33.44 | 30.39 | 24.37 | PK |
| ! 3 | 6375.200 | 119.80 | 88.20 | 31.60 | 93.98 | 25.82 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-------------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/19 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Vertical | Temperature (°C) | 19.0 |
| Test Condition | BF,802.11ax,Ch87,6.385G,BW80M | Humidity (%RH) | 58.0 |

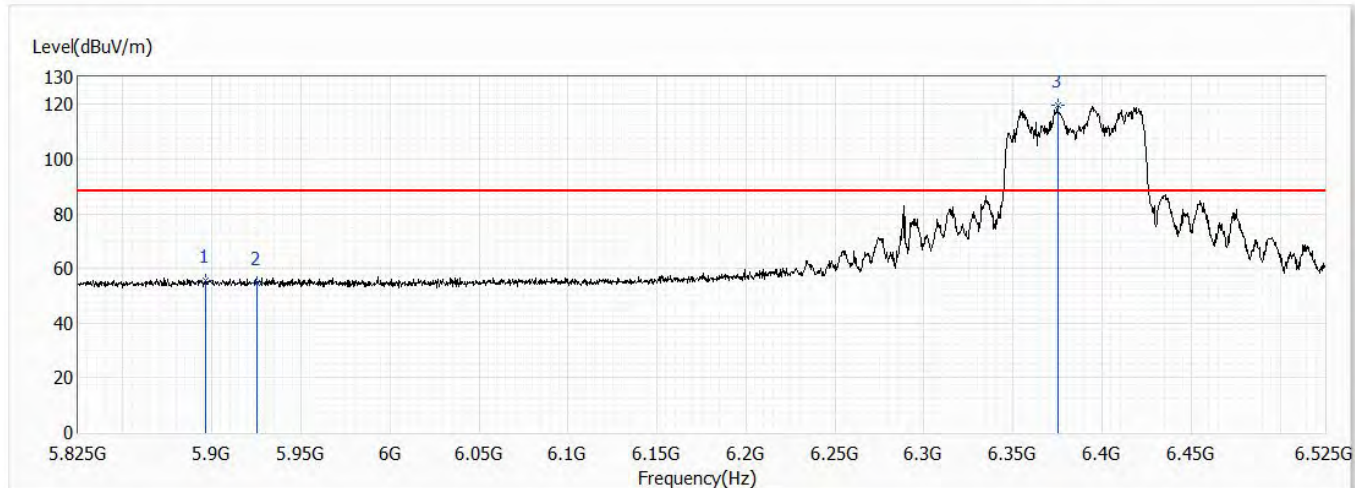


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 5896.750 | 55.81 | 88.20 | -32.39 | 31.51 | 24.30 | PK |
| 2 | 5925.000 | 54.76 | 88.20 | -33.44 | 30.39 | 24.37 | PK |
| ! 3 | 6375.200 | 119.80 | 88.20 | 31.60 | 93.98 | 25.82 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|--------------------------------|------------------|-----------|
| Test Mode | Mode 1 | | |
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/19 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Horizontal | Temperature (°C) | 19.0 |
| Test Condition | BF,802.11ax,Ch47,6.185G,BW160M | Humidity (%RH) | 58.0 |

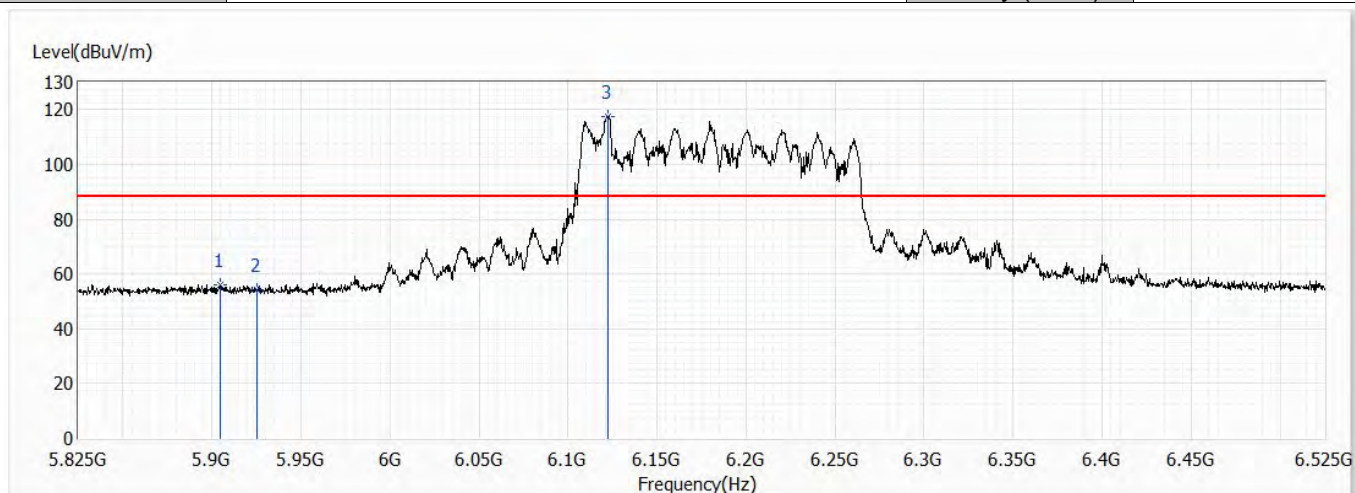


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 5904.450 | 56.20 | 88.20 | -32.00 | 31.88 | 24.32 | PK |
| 2 | 5925.000 | 54.26 | 88.20 | -33.94 | 29.89 | 24.37 | PK |
| ! 3 | 6122.500 | 117.62 | 88.20 | 29.42 | 92.60 | 25.02 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|--------------------------------|------------------|-----------|
| Test Mode | Mode 1 | | |
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/19 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Vertical | Temperature (°C) | 19.0 |
| Test Condition | BF,802.11ax,Ch47,6.185G,BW160M | Humidity (%RH) | 58.0 |

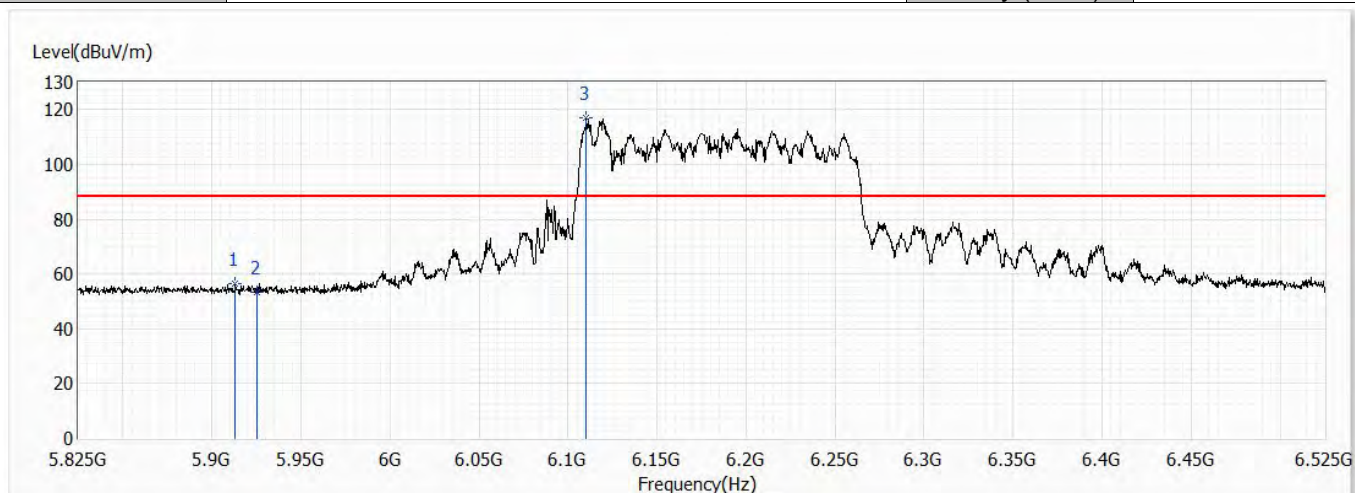


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 5913.200 | 56.38 | 88.20 | -31.82 | 32.04 | 24.34 | PK |
| 2 | 5925.000 | 53.52 | 88.20 | -34.68 | 29.15 | 24.37 | PK |
| ! 3 | 6110.250 | 116.85 | 88.20 | 28.65 | 91.87 | 24.98 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|--------------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/19 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Horizontal | Temperature (°C) | 19.0 |
| Test Condition | BF,802.11ax,Ch79,6.345G,BW160M | Humidity (%RH) | 58.0 |

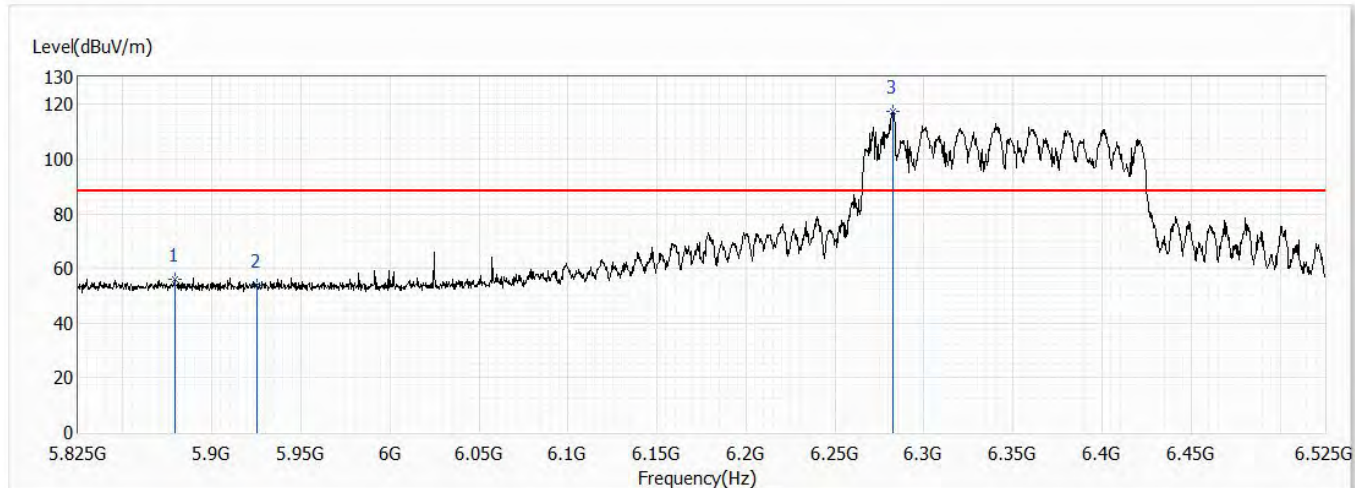


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 5879.250 | 56.09 | 88.20 | -32.11 | 31.86 | 24.23 | PK |
| 2 | 5925.000 | 53.98 | 88.20 | -34.22 | 29.61 | 24.37 | PK |
| ! 3 | 6282.450 | 117.54 | 88.20 | 29.34 | 91.99 | 25.55 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|--------------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/19 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Vertical | Temperature (°C) | 19.0 |
| Test Condition | BF,802.11ax,Ch79,6.345G,BW160M | Humidity (%RH) | 58.0 |

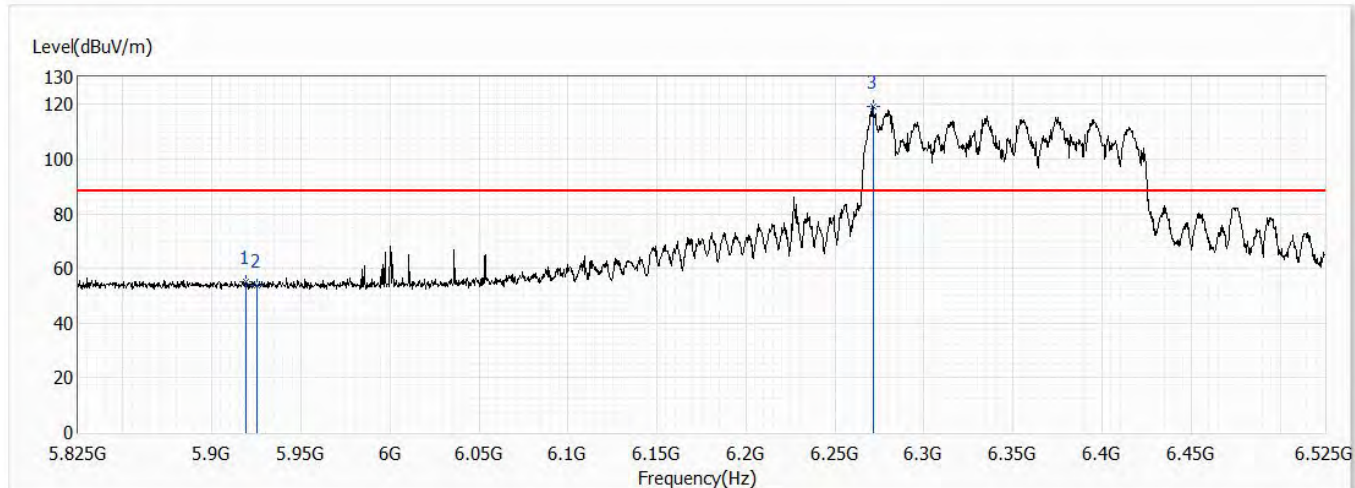


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 5918.800 | 55.20 | 88.20 | -33.00 | 30.84 | 24.36 | PK |
| 2 | 5925.000 | 53.57 | 88.20 | -34.63 | 29.20 | 24.37 | PK |
| ! 3 | 6271.250 | 119.20 | 88.20 | 31.00 | 93.68 | 25.52 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|------------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/19 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Horizontal | Temperature (°C) | 19.0 |
| Test Condition | 802.11ax,Ch189,6.895G,BW160M | Humidity (%RH) | 58.0 |

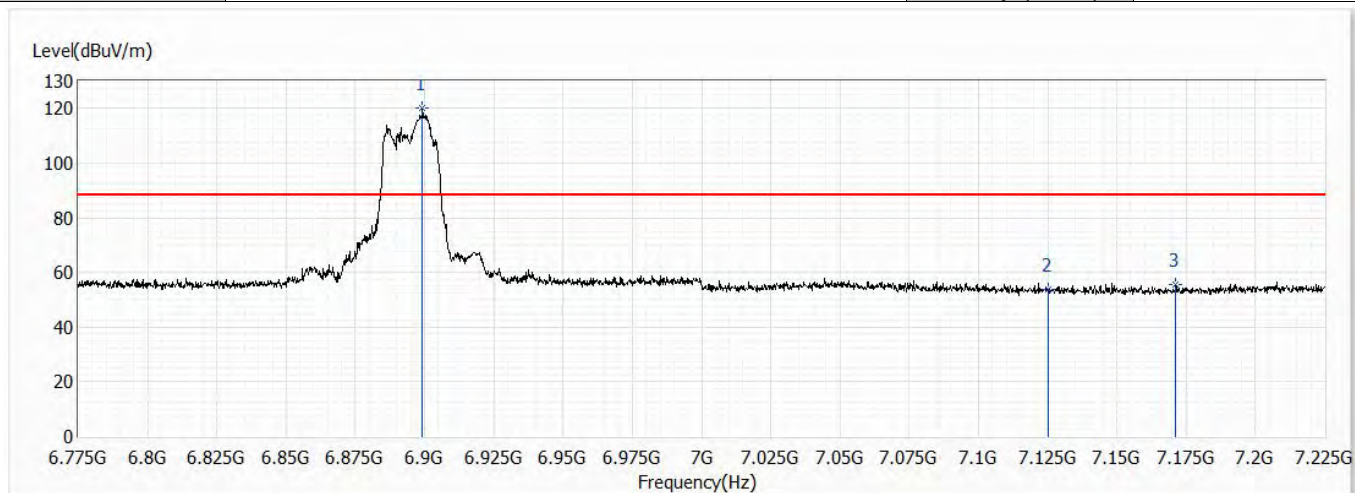


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| ! 1 | 6899.200 | 120.09 | 88.20 | 31.89 | 92.06 | 28.03 | PK |
| 2 | 7125.000 | 53.78 | 88.20 | -34.42 | 24.85 | 28.93 | PK |
| 3 | 7171.225 | 55.60 | 88.20 | -32.60 | 26.50 | 29.10 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|------------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/19 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Vertical | Temperature (°C) | 19.0 |
| Test Condition | 802.11ax,Ch189,6.895G,BW160M | Humidity (%RH) | 58.0 |

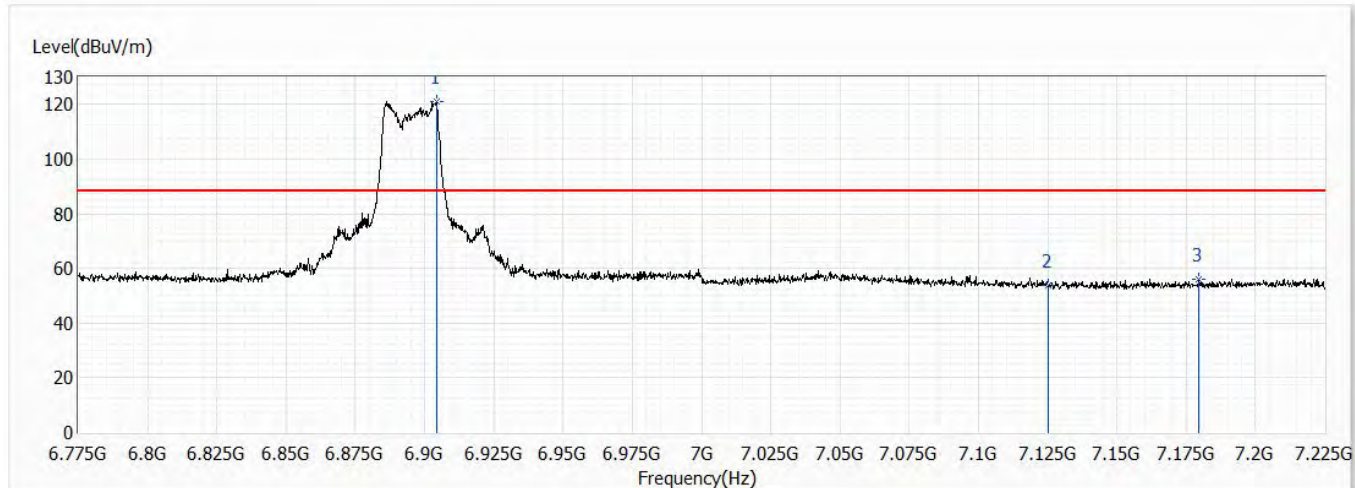


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| ! 1 | 6904.375 | 121.06 | 88.20 | 32.86 | 93.01 | 28.05 | PK |
| 2 | 7125.000 | 53.96 | 88.20 | -34.24 | 25.03 | 28.93 | PK |
| 3 | 7179.550 | 56.10 | 88.20 | -32.10 | 26.98 | 29.12 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|------------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/19 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Horizontal | Temperature (°C) | 19.0 |
| Test Condition | 802.11ax,Ch209,6.995G,BW160M | Humidity (%RH) | 58.0 |

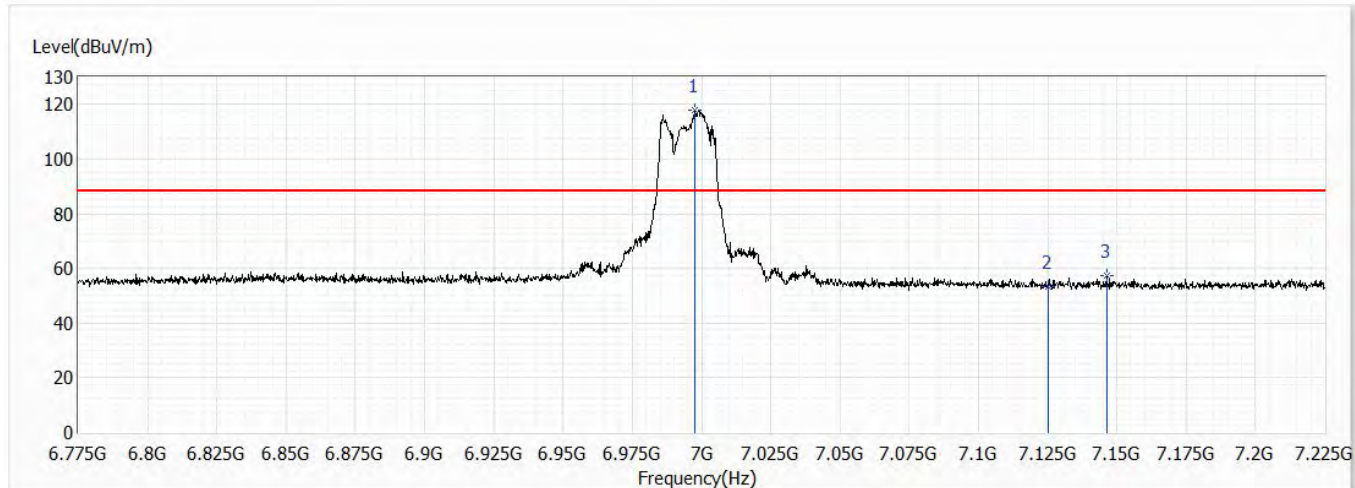


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| ! 1 | 6997.525 | 118.07 | 88.20 | 29.87 | 89.59 | 28.48 | PK |
| 2 | 7125.000 | 53.42 | 88.20 | -34.78 | 24.49 | 28.93 | PK |
| 3 | 7146.250 | 57.38 | 88.20 | -30.82 | 28.38 | 29.00 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|------------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/19 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Vertical | Temperature (°C) | 19.0 |
| Test Condition | 802.11ax,Ch209,6.995G,BW160M | Humidity (%RH) | 58.0 |

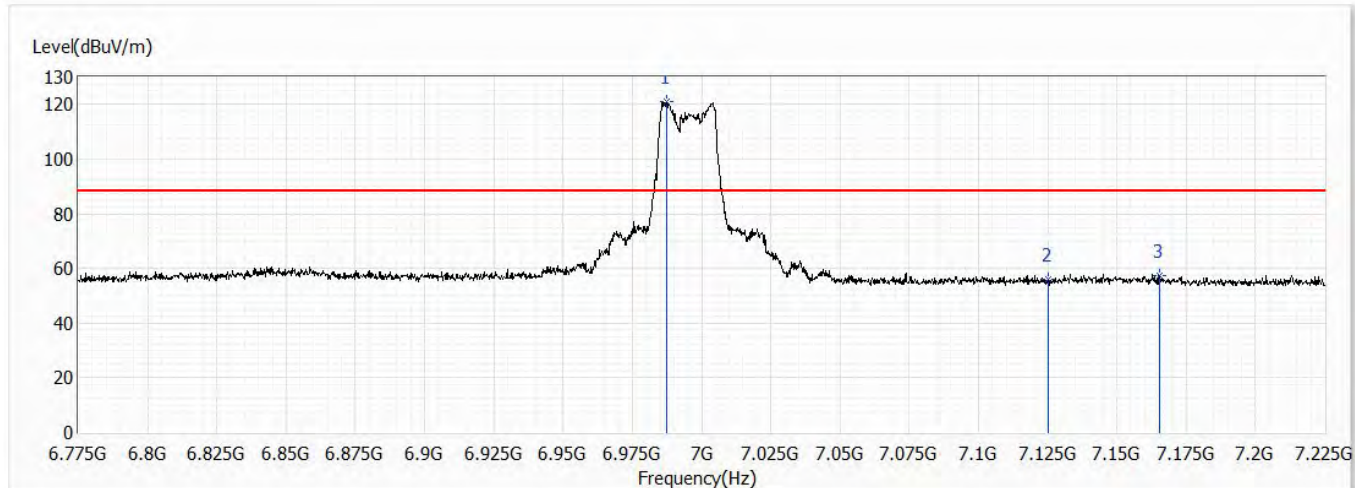


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| ! 1 | 6987.400 | 121.04 | 88.20 | 32.84 | 92.62 | 28.42 | PK |
| 2 | 7125.000 | 56.02 | 88.20 | -32.18 | 27.09 | 28.93 | PK |
| 3 | 7165.600 | 57.57 | 88.20 | -30.63 | 28.50 | 29.07 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|---------------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/19 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Horizontal | Temperature (°C) | 19.0 |
| Test Condition | CDD,802.11ax,Ch229,7.095G,BW20M | Humidity (%RH) | 58.0 |

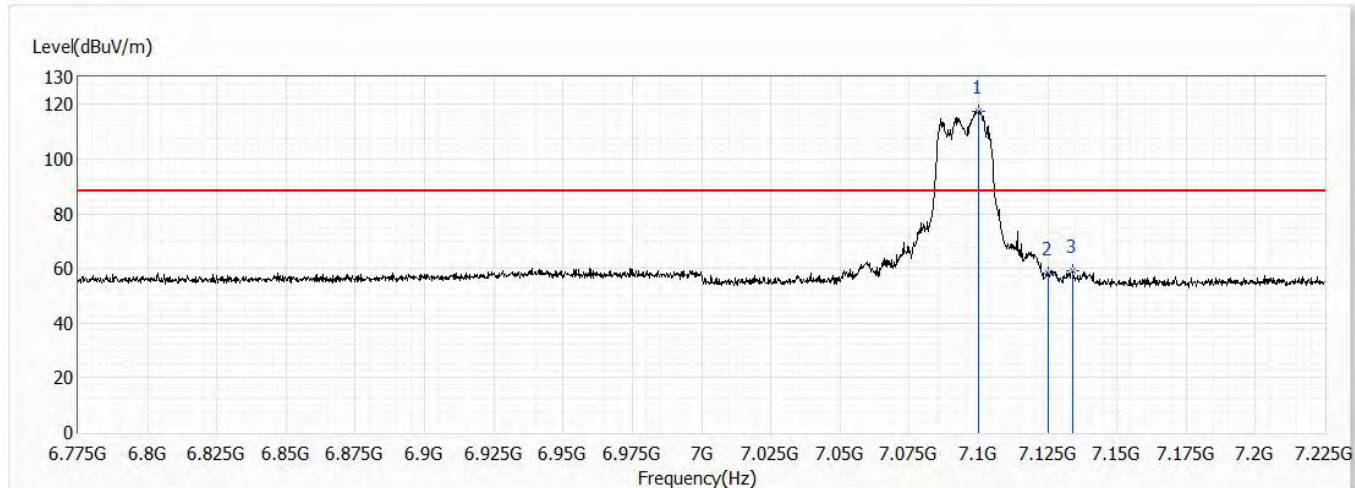


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| ! 1 | 7100.125 | 117.60 | 88.20 | 29.40 | 88.76 | 28.84 | PK |
| 2 | 7125.000 | 58.41 | 88.20 | -29.79 | 29.48 | 28.93 | PK |
| 3 | 7133.875 | 59.20 | 88.20 | -29.00 | 30.24 | 28.96 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|---------------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/19 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Vertical | Temperature (°C) | 19.0 |
| Test Condition | CDD,802.11ax,Ch229,7.095G,BW20M | Humidity (%RH) | 58.0 |

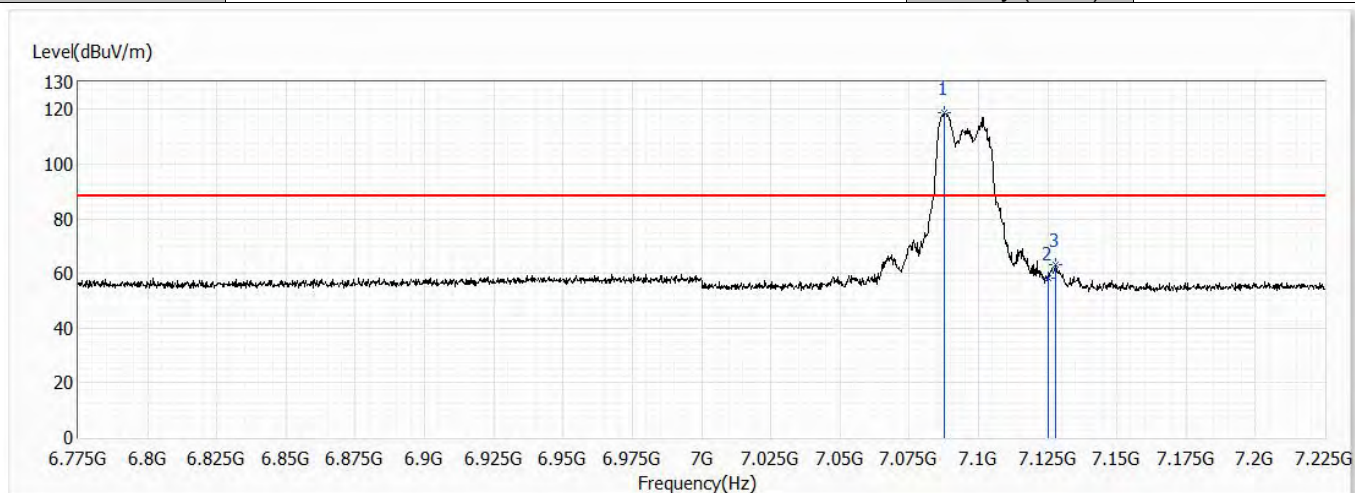


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| ! 1 | 7087.525 | 118.97 | 88.20 | 30.77 | 90.17 | 28.80 | PK |
| 2 | 7125.000 | 58.21 | 88.20 | -29.99 | 29.28 | 28.93 | PK |
| 3 | 7128.025 | 63.30 | 88.20 | -24.90 | 34.36 | 28.94 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-----------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/20 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Horizontal | Temperature (°C) | 19.0 |
| Test Condition | 802.11ax,Ch195,6.925G,BW40M | Humidity (%RH) | 58.0 |

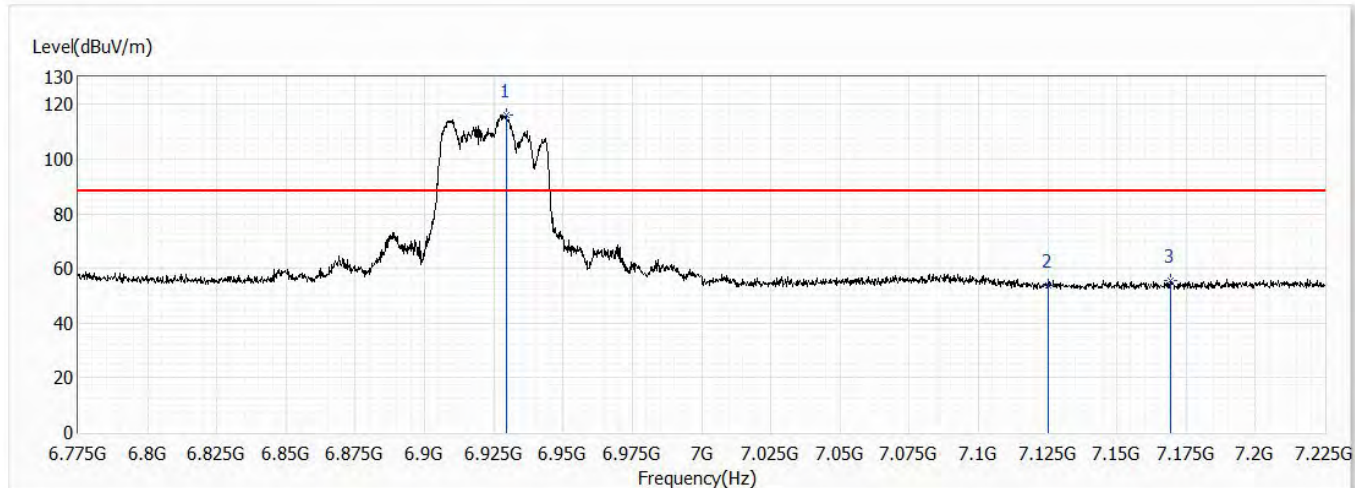


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| ! 1 | 6929.350 | 116.26 | 88.20 | 28.06 | 88.10 | 28.16 | PK |
| 2 | 7125.000 | 53.91 | 88.20 | -34.29 | 24.98 | 28.93 | PK |
| 3 | 7169.425 | 55.44 | 88.20 | -32.76 | 26.35 | 29.09 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-----------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/20 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Vertical | Temperature (°C) | 19.0 |
| Test Condition | 802.11ax,Ch195,6.925G,BW40M | Humidity (%RH) | 58.0 |

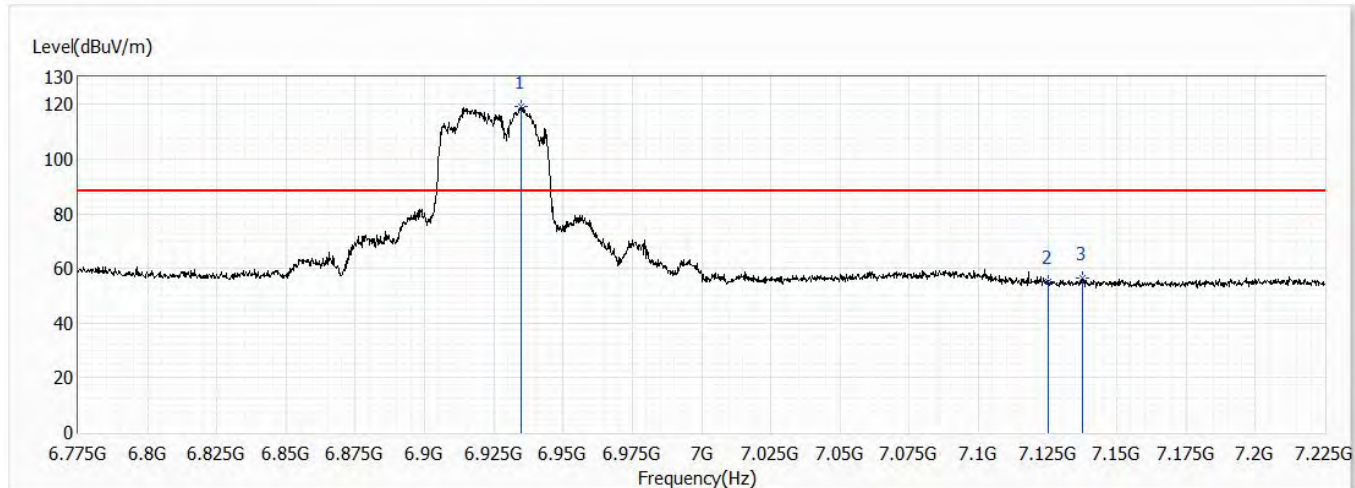


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| ! 1 | 6934.975 | 119.28 | 88.20 | 31.08 | 91.10 | 28.18 | PK |
| 2 | 7125.000 | 55.06 | 88.20 | -33.14 | 26.13 | 28.93 | PK |
| 3 | 7137.475 | 56.28 | 88.20 | -31.92 | 27.30 | 28.98 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-----------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/20 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Horizontal | Temperature (°C) | 19.0 |
| Test Condition | 802.11ax,Ch211,7.005G,BW40M | Humidity (%RH) | 58.0 |

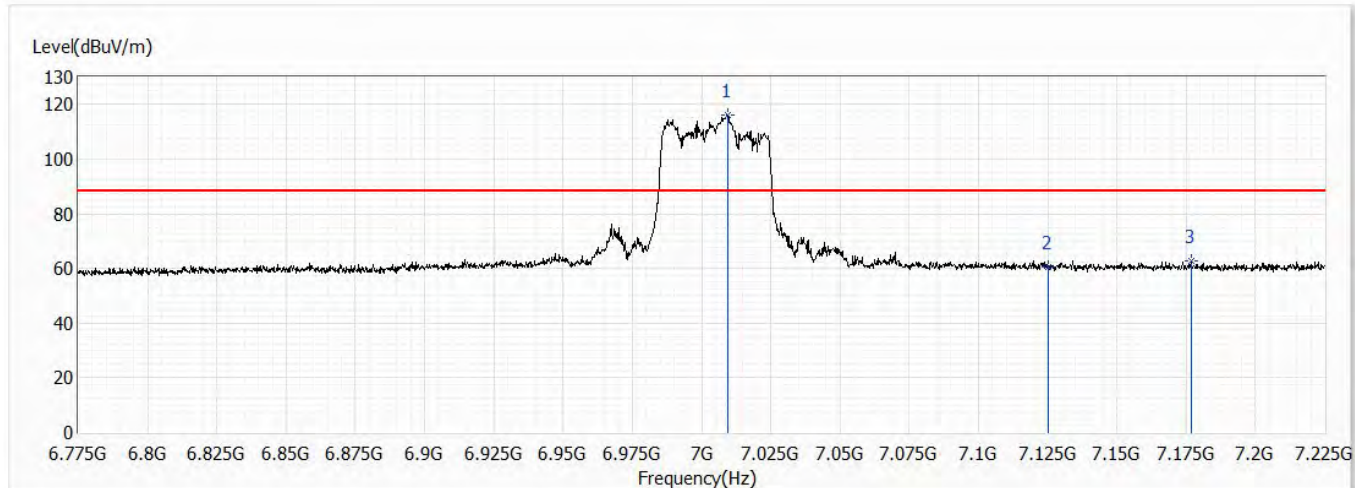


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| ! 1 | 7009.450 | 116.30 | 88.20 | 28.10 | 87.77 | 28.53 | PK |
| 2 | 7125.000 | 60.59 | 88.20 | -27.61 | 31.66 | 28.93 | PK |
| 3 | 7176.850 | 62.58 | 88.20 | -25.62 | 33.47 | 29.11 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-----------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/20 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Vertical | Temperature (°C) | 19.0 |
| Test Condition | 802.11ax,Ch211,7.005G,BW40M | Humidity (%RH) | 58.0 |

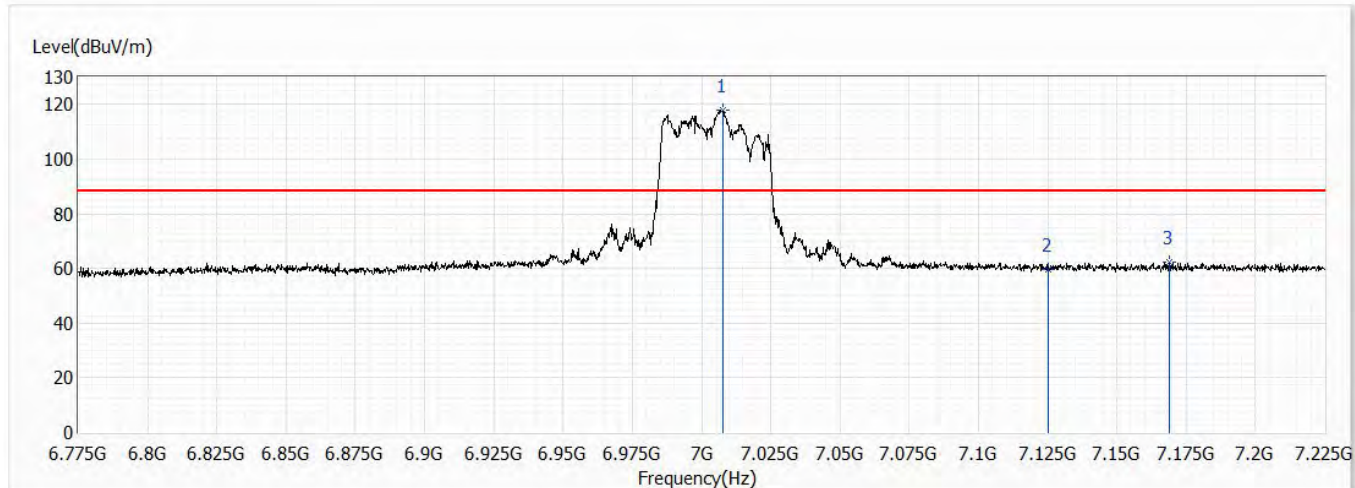


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| ! 1 | 7007.650 | 118.08 | 88.20 | 29.88 | 89.56 | 28.52 | PK |
| 2 | 7125.000 | 59.65 | 88.20 | -28.55 | 30.72 | 28.93 | PK |
| 3 | 7168.975 | 62.14 | 88.20 | -26.06 | 33.05 | 29.09 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-----------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/20 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Horizontal | Temperature (°C) | 19.0 |
| Test Condition | 802.11ax,Ch227,7.085G,BW40M | Humidity (%RH) | 58.0 |

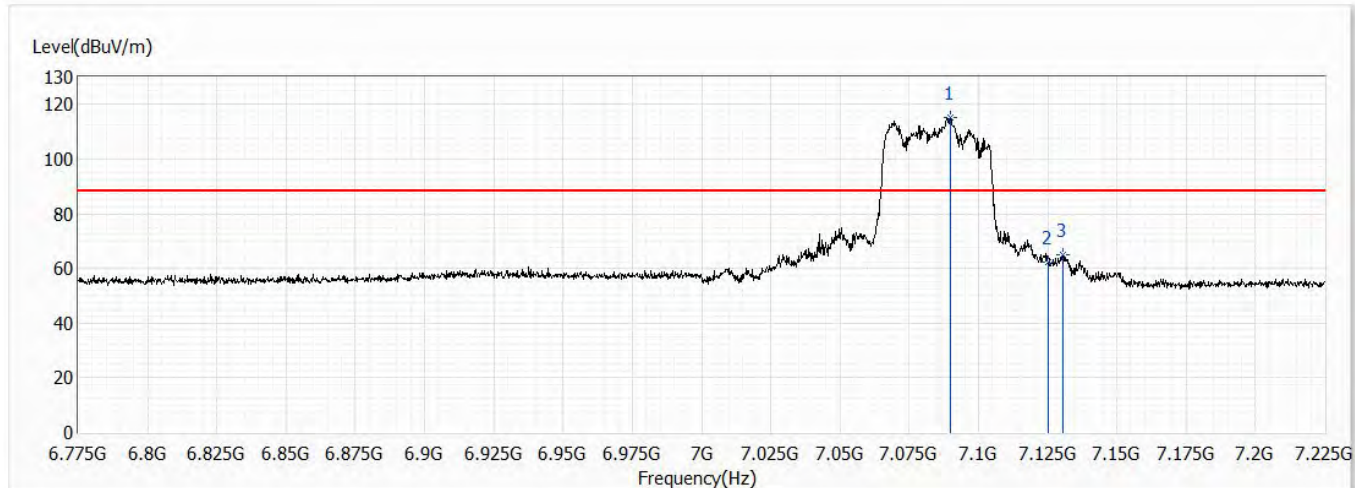


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| ! 1 | 7090.000 | 115.32 | 88.20 | 27.12 | 86.52 | 28.80 | PK |
| 2 | 7125.000 | 62.38 | 88.20 | -25.82 | 33.45 | 28.93 | PK |
| 3 | 7130.275 | 64.80 | 88.20 | -23.40 | 35.86 | 28.94 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-----------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/20 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Vertical | Temperature (°C) | 19.0 |
| Test Condition | 802.11ax,Ch227,7.085G,BW40M | Humidity (%RH) | 58.0 |

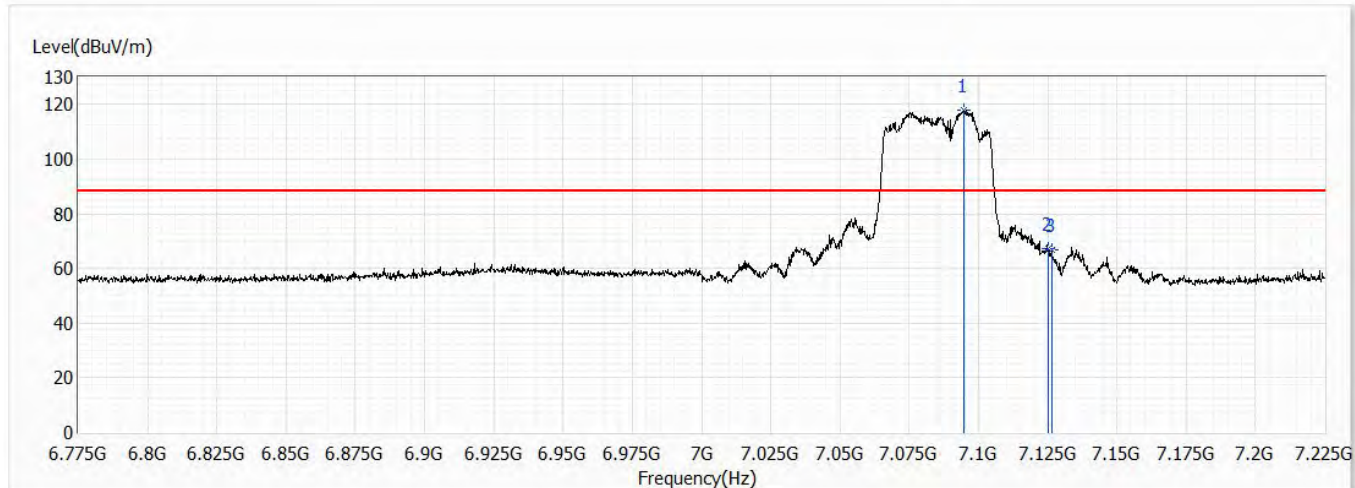


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| ! 1 | 7094.725 | 117.95 | 88.20 | 29.75 | 89.12 | 28.83 | PK |
| 2 | 7125.000 | 67.45 | 88.20 | -20.75 | 38.52 | 28.93 | PK |
| 3 | 7126.450 | 66.96 | 88.20 | -21.24 | 38.02 | 28.94 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-----------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/20 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Horizontal | Temperature (°C) | 19.0 |
| Test Condition | 802.11ax,Ch199,6.945G,BW80M | Humidity (%RH) | 58.0 |

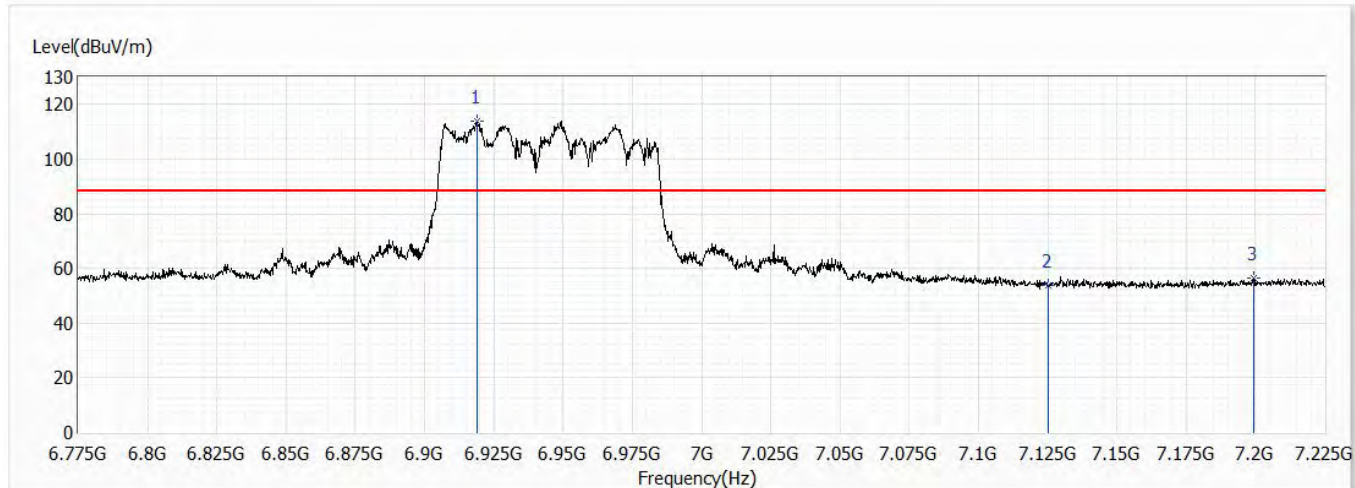


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| ! 1 | 6918.775 | 114.08 | 88.20 | 25.88 | 85.96 | 28.12 | PK |
| 2 | 7125.000 | 53.83 | 88.20 | -34.37 | 24.90 | 28.93 | PK |
| 3 | 7199.575 | 56.44 | 88.20 | -31.76 | 27.25 | 29.19 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-----------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/20 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Vertical | Temperature (°C) | 19.0 |
| Test Condition | 802.11ax,Ch199,6.945G,BW80M | Humidity (%RH) | 58.0 |

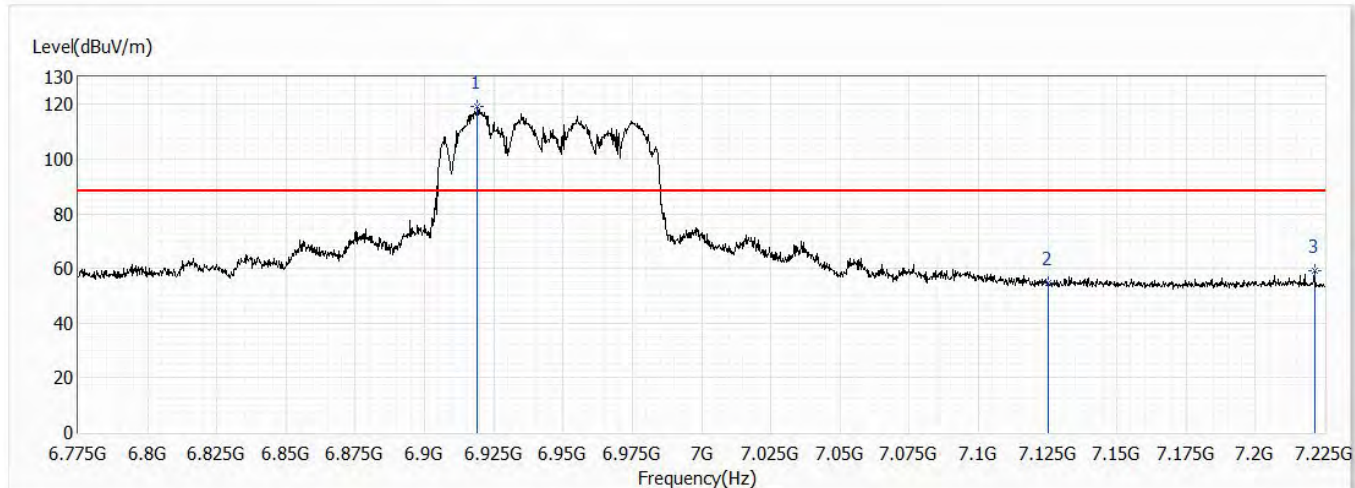


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| ! 1 | 6919.000 | 119.06 | 88.20 | 30.86 | 90.94 | 28.12 | PK |
| 2 | 7125.000 | 54.60 | 88.20 | -33.60 | 25.67 | 28.93 | PK |
| 3 | 7221.400 | 59.35 | 88.20 | -28.85 | 30.08 | 29.27 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-----------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/20 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Horizontal | Temperature (°C) | 19.0 |
| Test Condition | 802.11ax,Ch215,7.025G,BW80M | Humidity (%RH) | 58.0 |

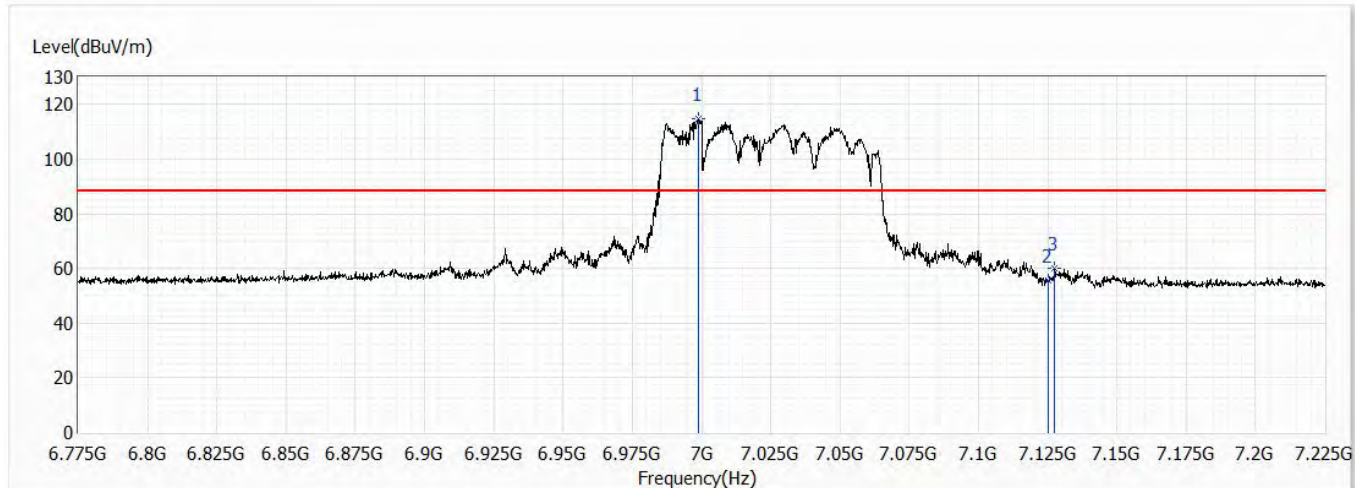


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| ! 1 | 6998.875 | 114.94 | 88.20 | 26.74 | 86.45 | 28.49 | PK |
| 2 | 7125.000 | 55.73 | 88.20 | -32.47 | 26.80 | 28.93 | PK |
| 3 | 7127.575 | 59.96 | 88.20 | -28.24 | 31.02 | 28.94 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-----------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/20 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Vertical | Temperature (°C) | 19.0 |
| Test Condition | 802.11ax,Ch215,7.025G,BW80M | Humidity (%RH) | 58.0 |

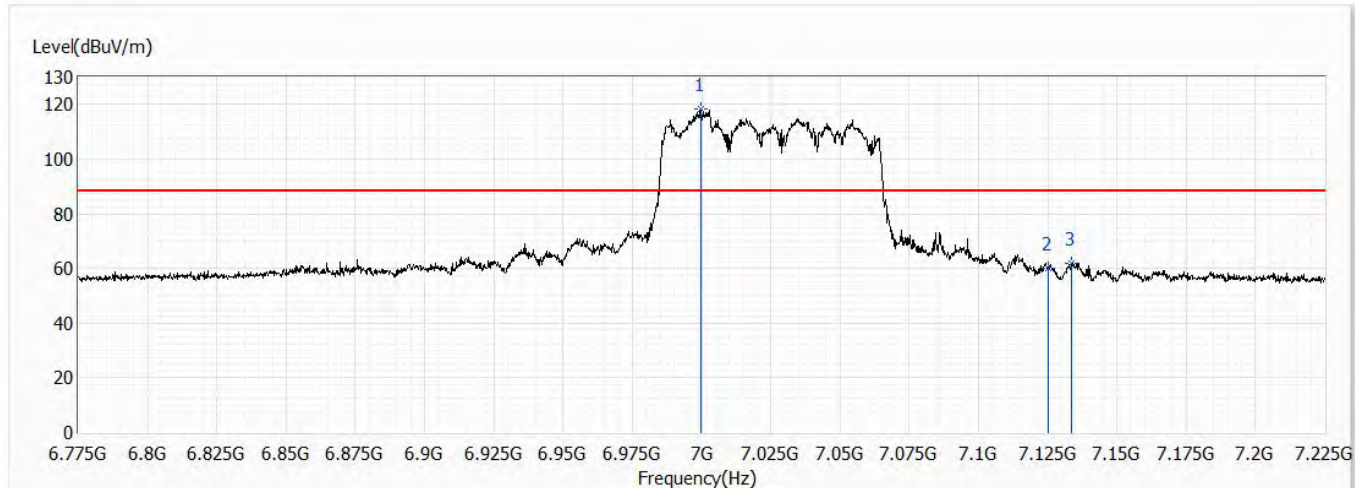


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| ! 1 | 6999.775 | 118.17 | 88.20 | 29.97 | 89.68 | 28.49 | PK |
| 2 | 7125.000 | 60.16 | 88.20 | -28.04 | 31.23 | 28.93 | PK |
| 3 | 7133.650 | 61.67 | 88.20 | -26.53 | 32.71 | 28.96 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-----------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/20 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Horizontal | Temperature (°C) | 19.0 |
| Test Condition | 802.11axCh207,6.985G,BW160M | Humidity (%RH) | 58.0 |

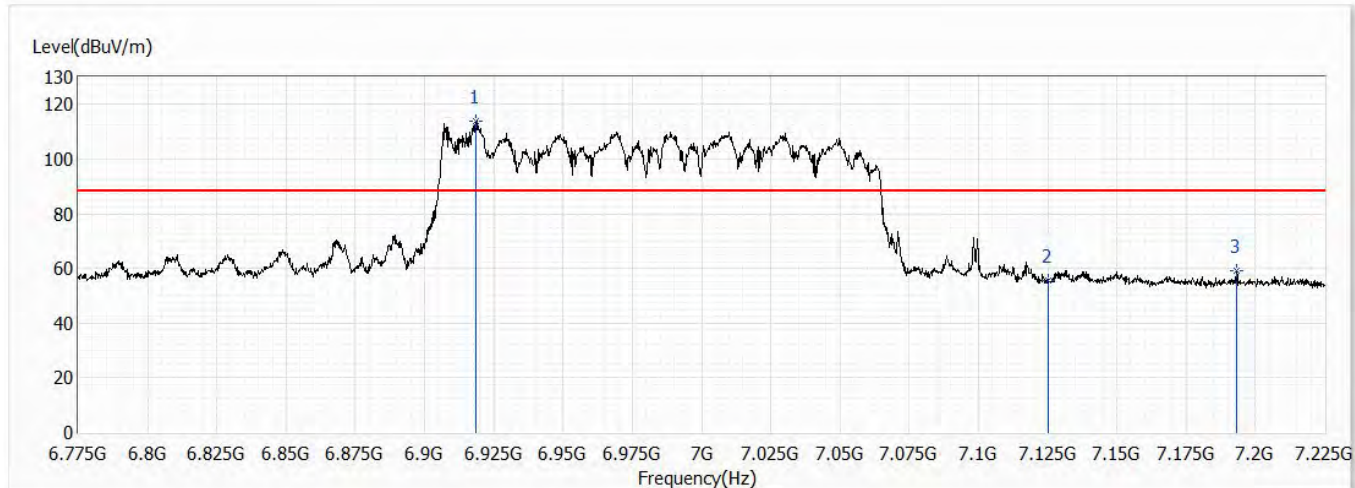


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| ! 1 | 6918.325 | 113.80 | 88.20 | 25.60 | 85.68 | 28.12 | PK |
| 2 | 7125.000 | 55.64 | 88.20 | -32.56 | 26.71 | 28.93 | PK |
| 3 | 7193.050 | 59.39 | 88.20 | -28.81 | 30.22 | 29.17 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

| | | | |
|----------------|-----------------------------|------------------|-----------|
| Model No | CR1000A | Site | CB4-H |
| Test Voltage | AC 120V/60Hz | Test Date | 2021/2/20 |
| Test Mode | Mode 1 | Engineer | Elwin Lin |
| Polarity | Vertical | Temperature (°C) | 19.0 |
| Test Condition | 802.11axCh207,6.985G,BW160M | Humidity (%RH) | 58.0 |

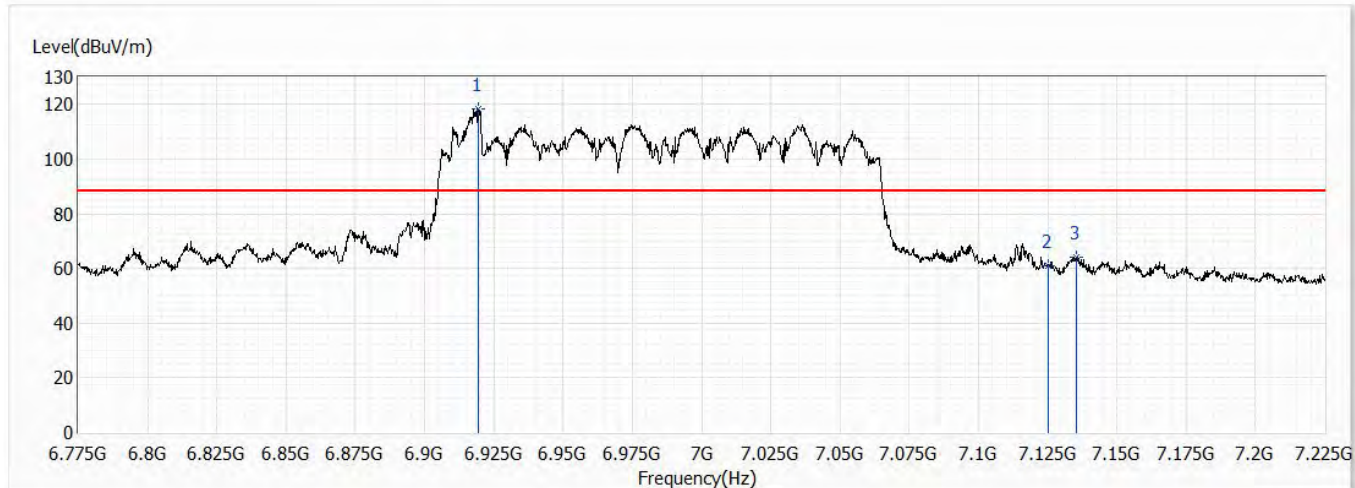


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| ! 1 | 6919.225 | 118.18 | 88.20 | 29.98 | 90.06 | 28.12 | PK |
| 2 | 7125.000 | 61.09 | 88.20 | -27.11 | 32.16 | 28.93 | PK |
| 3 | 7135.450 | 63.90 | 88.20 | -24.30 | 34.94 | 28.96 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

9. In-Band Emission (Mask)

9.1. Test Setup

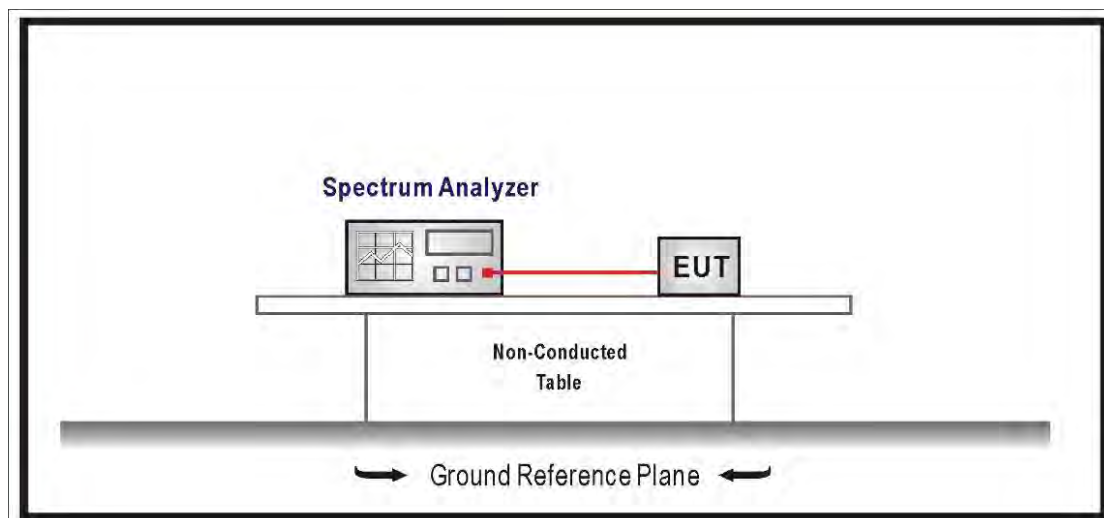

9.2. Limits

| Test Items | Frequencies (MHz) | (X) dBc*1 |
|---------------|---|-----------|
| Emission Mask | At 1MHz outside of channel edge | 20 |
| | At one channel bandwidth from the channel center*2 | 28 |
| | At one- and one-half times the channel bandwidth away from channel center*3 | 40 |
| | More than one- and one-half times the channel bandwidth | 40 |

Remark:

1. The power spectral density must be suppressed by "x" dB.
2. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20dB and 28dB suppression.
3. At frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28dB and 40dB suppression.

9.3. Test Procedure


1. Connect output of the antenna port to a spectrum analyzer and adjust appropriate attenuation.
2. Measure the 26 dB EBW using the test procedure 12.4.1 of ANSI C63.10-2013. (Determine the channel edge.)
3. Measure the power spectral density (for emissions mask reference) using the following procedure:
 - (1) Set the span to encompass the entire 26 dB EBW of the signal.
 - (2) Set RBW = same RBW used for 26 dB EBW measurement.
 - (3) Set VBW $\geq 3 \times$ RBW
 - (4) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - (5) Sweep time = auto.
 - (6) Detector = RMS (i.e., power averaging)
 - (7) Trace average at least 100 traces in power averaging (rms) mode.
 - (8) Use the peak search function on the instrument to find the peak of the spectrum.
4. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
 - (1) Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)
 - (2) Suppressed by 28 dB at one channel bandwidth from the channel center.
 - (3) Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
5. Adjust the span to encompass the entire mask as necessary and clear trace.
6. Trace average at least 100 traces in power averaging (rms) mode.
7. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask

9.4. Test Result of In-Band Emission (Mask)


Non-beamforming mode for RU-Full

Spectrum Plot


802.11a / Ant. 0 / 6115 MHz

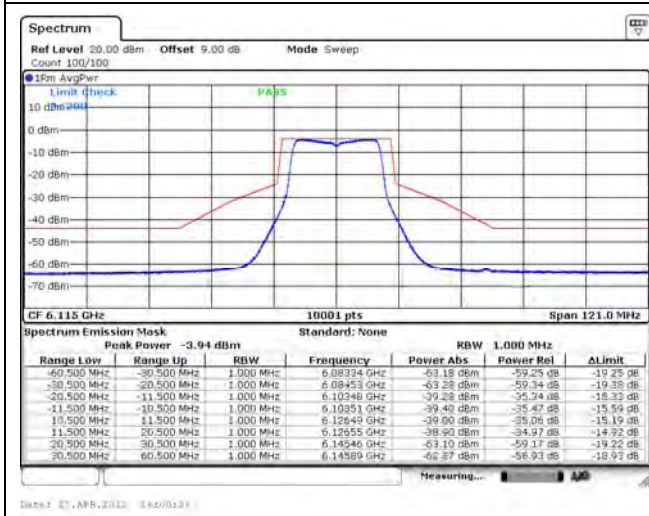


802.11a / Ant. 0 / 6255 MHz

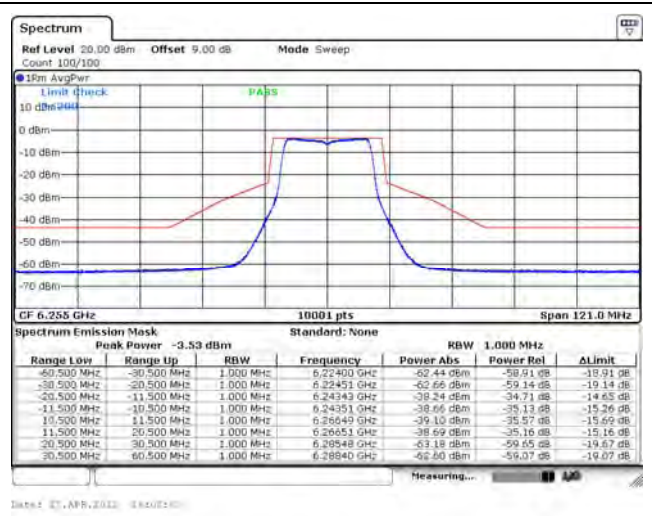


802.11a / Ant. 0 / 6415 MHz

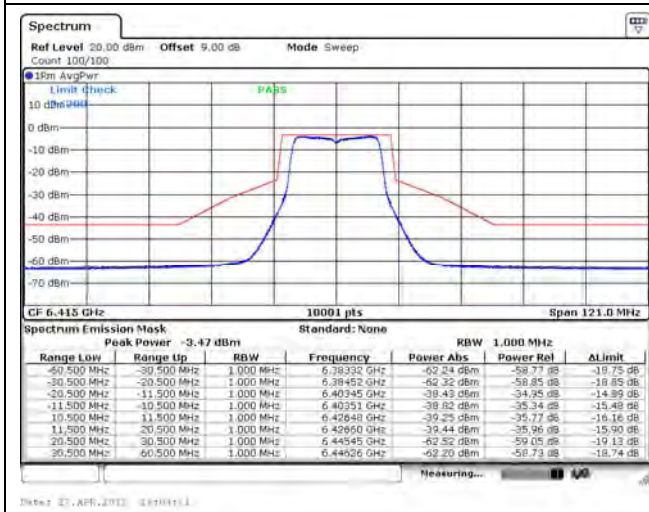


802.11a / Ant. 0 / 6435 MHz

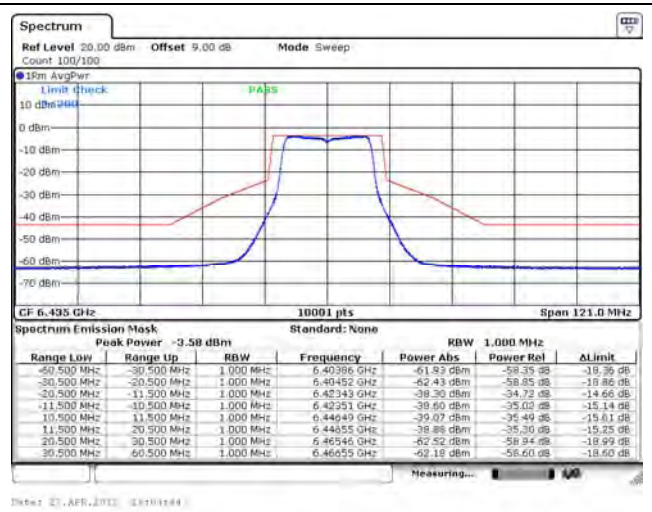

802.11a / Ant. 0 / 6475 MHz

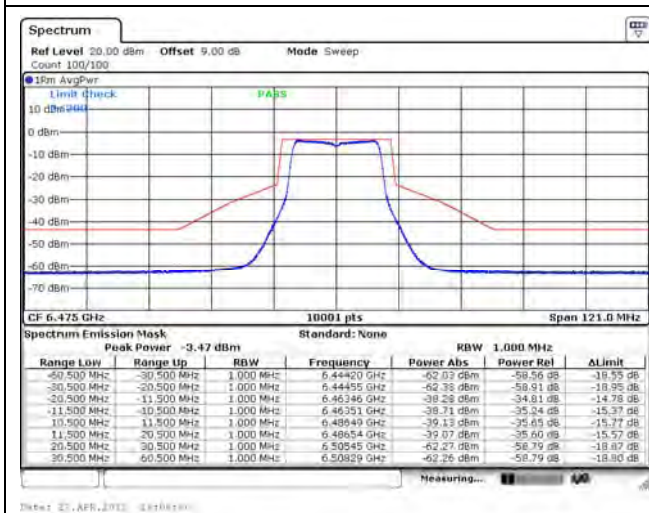


802.11a / Ant. 0 / 6515 MHz

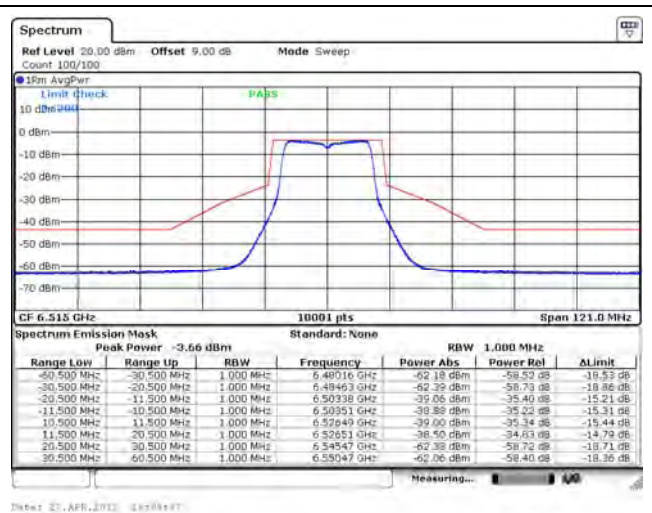


Spectrum Plot


802.11a / Ant. 0 / 6535 MHz

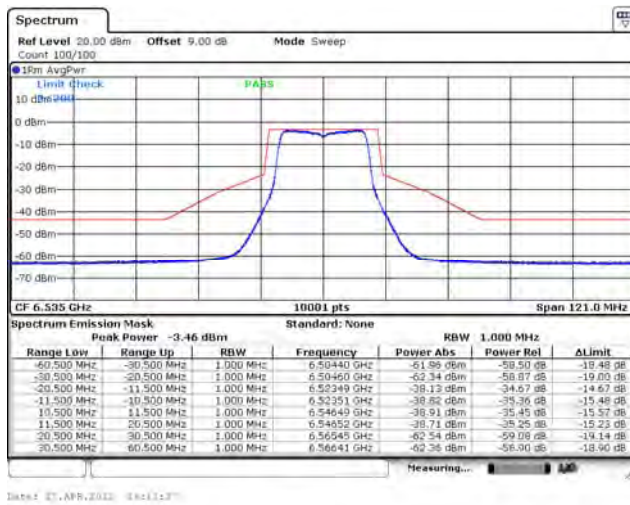


802.11a / Ant. 0 / 6695 MHz

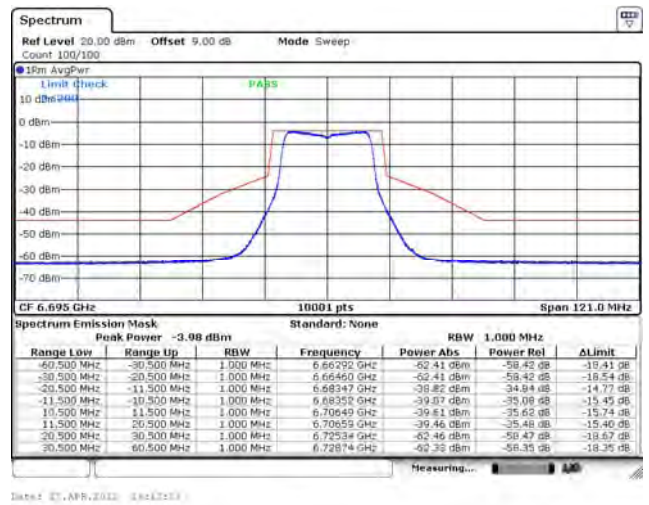


802.11a / Ant. 0 / 6855 MHz

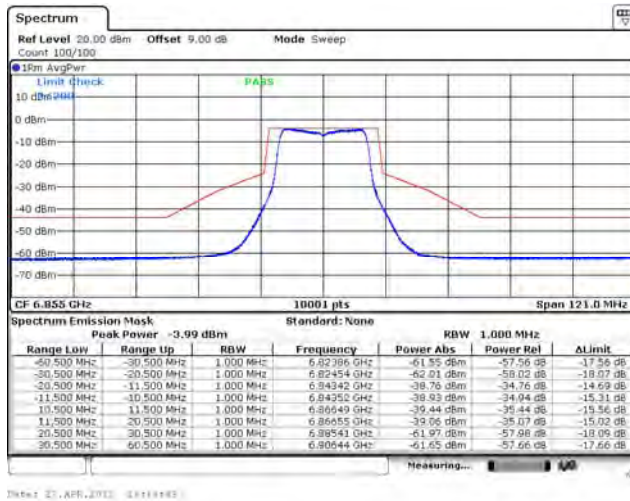


802.11a / Ant. 0 / 6875 MHz

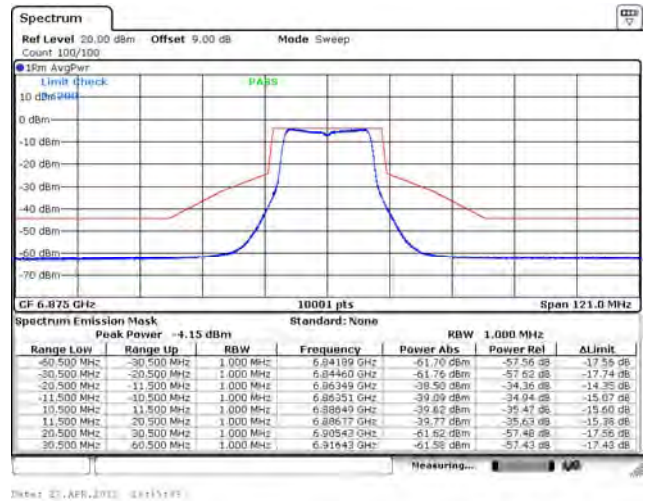


802.11a / Ant. 0 / 6895 MHz

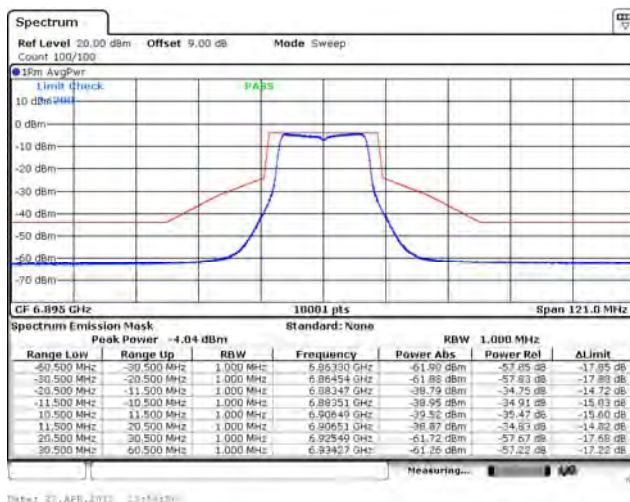


802.11a / Ant. 0 / 6995 MHz

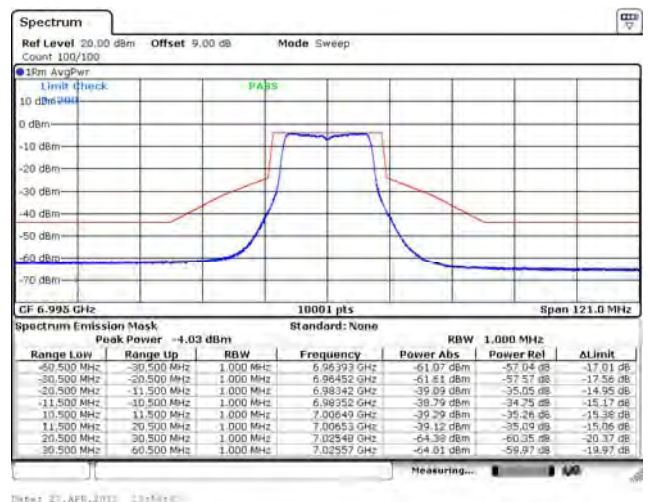

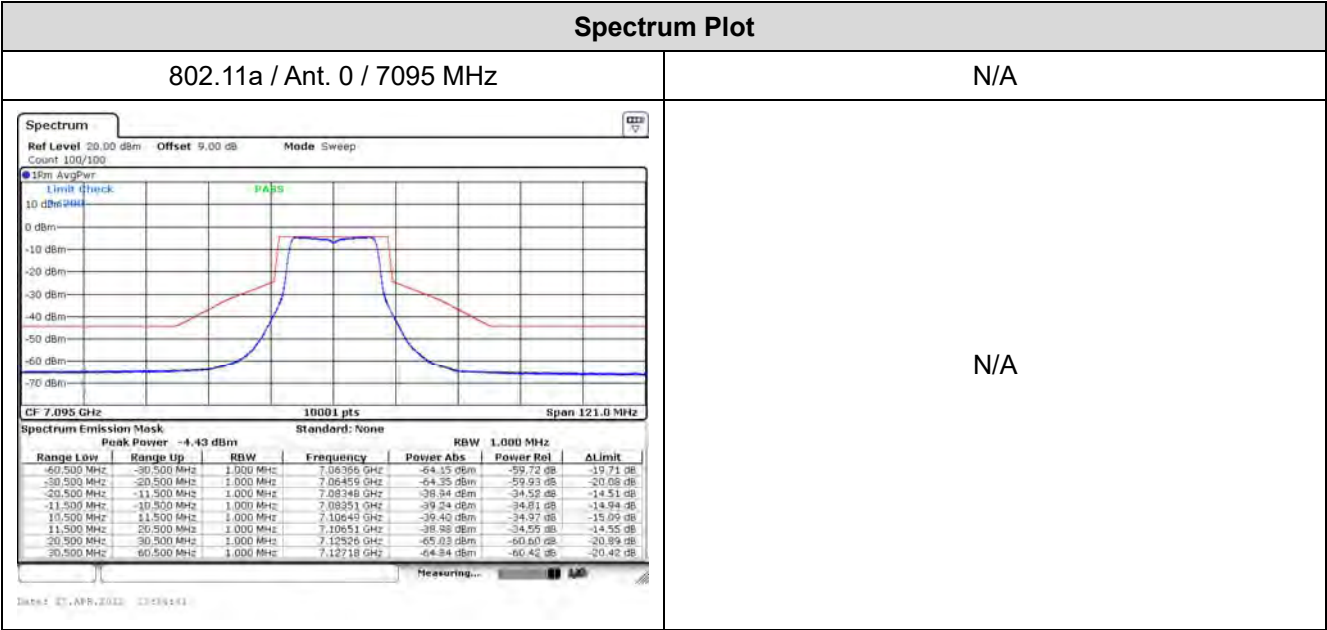


Spectrum Plot


802.11a / Ant. 1 / 6115 MHz

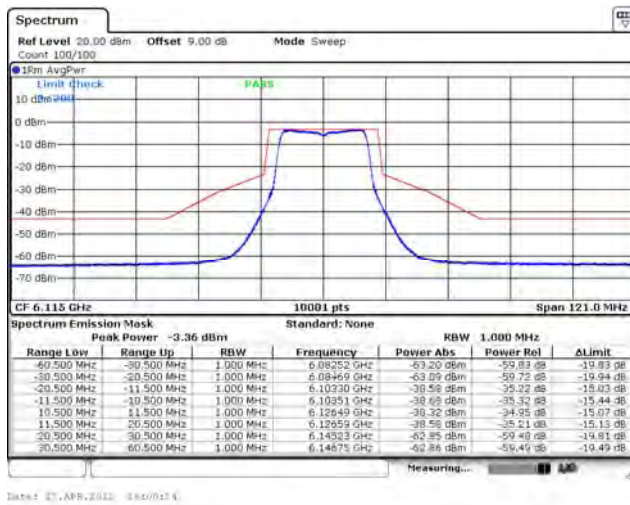


802.11a / Ant. 1 / 6255 MHz

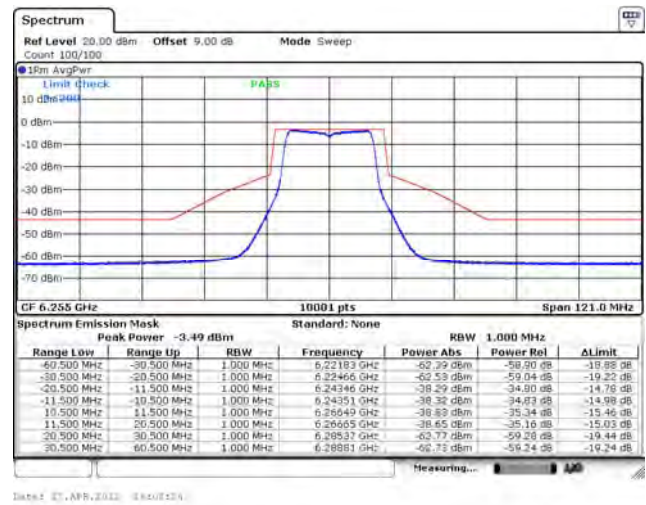


802.11a / Ant. 1 / 6415 MHz

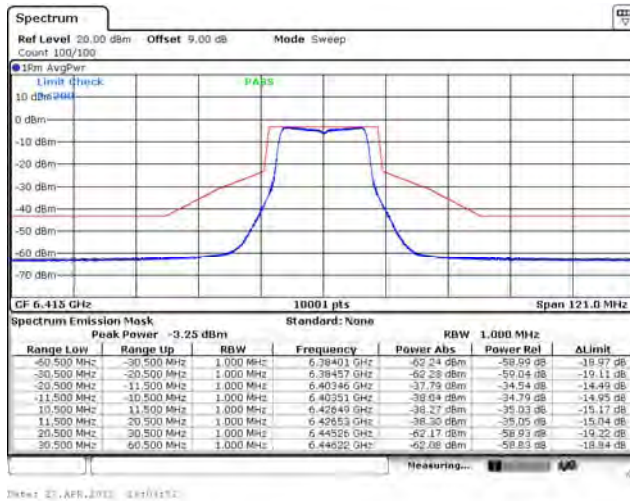


802.11a / Ant. 1 / 6435 MHz

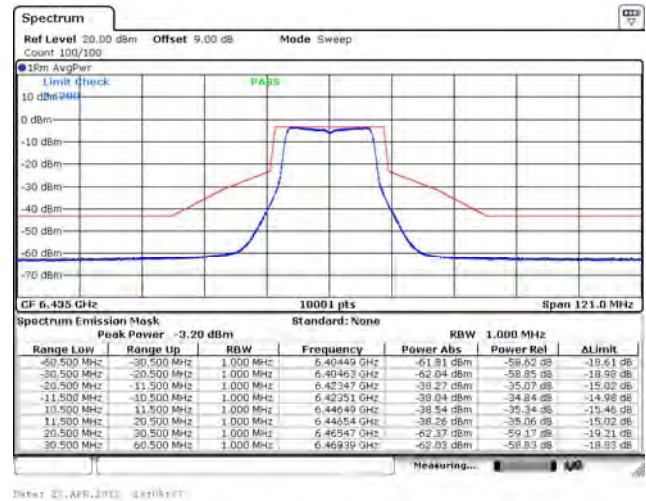

802.11a / Ant. 1 / 6475 MHz

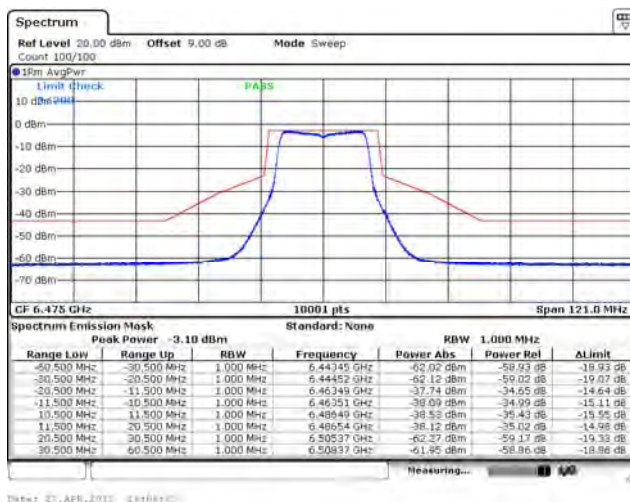


802.11a / Ant. 1 / 6515 MHz

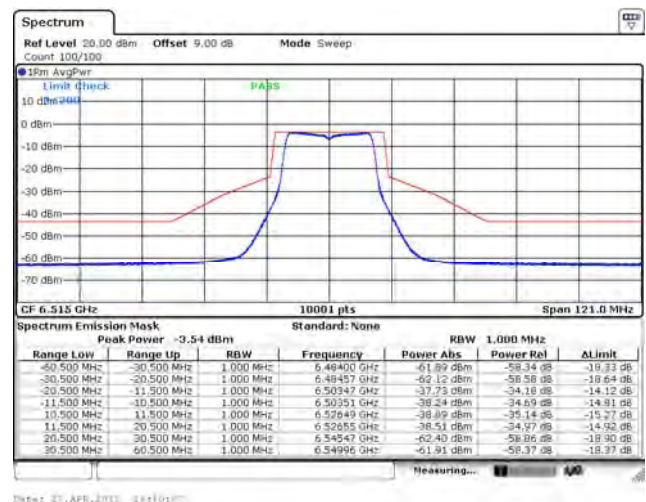


Spectrum Plot


802.11a / Ant. 1 / 6535 MHz

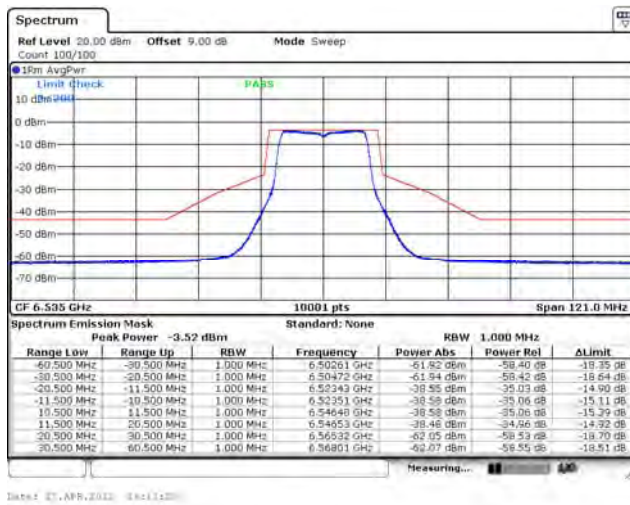


802.11a / Ant. 1 / 6695 MHz

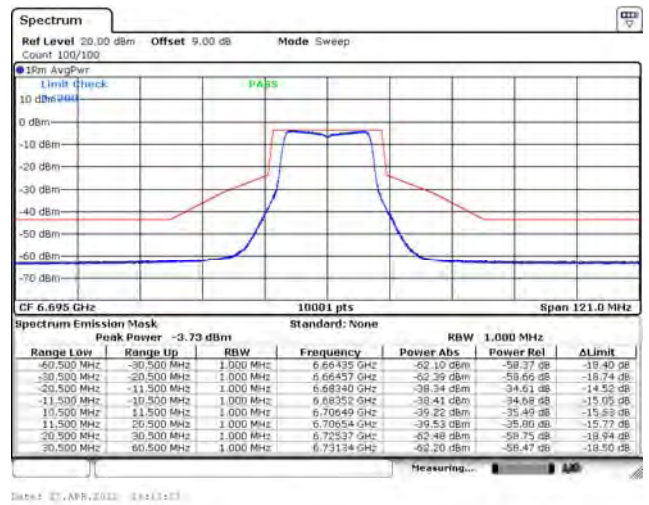


802.11a / Ant. 1 / 6855 MHz

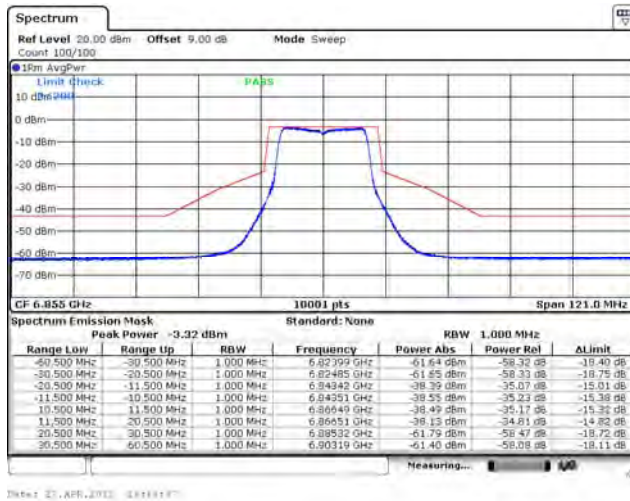


802.11a / Ant. 1 / 6875 MHz

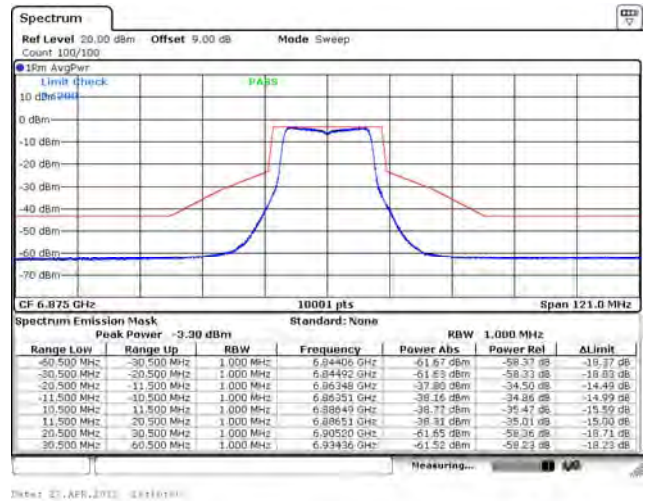


802.11a / Ant. 1 / 6895 MHz

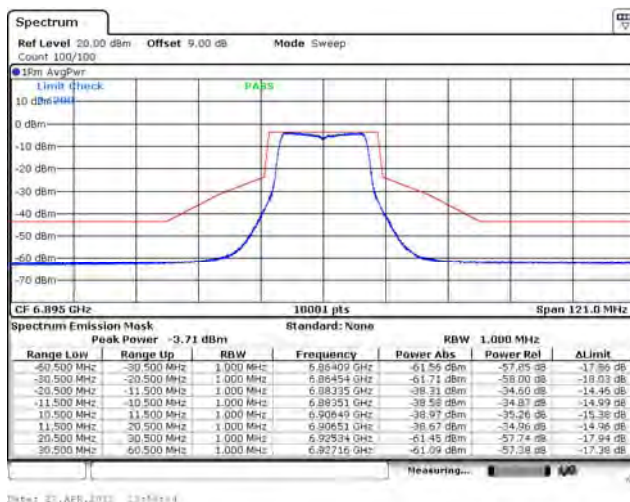


802.11a / Ant. 1 / 6995 MHz

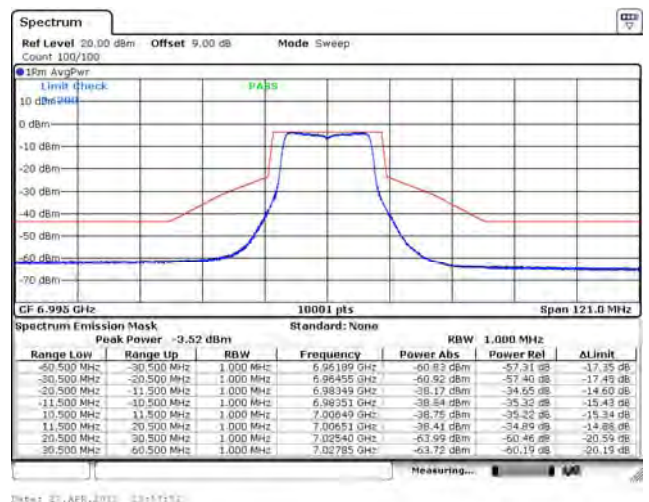

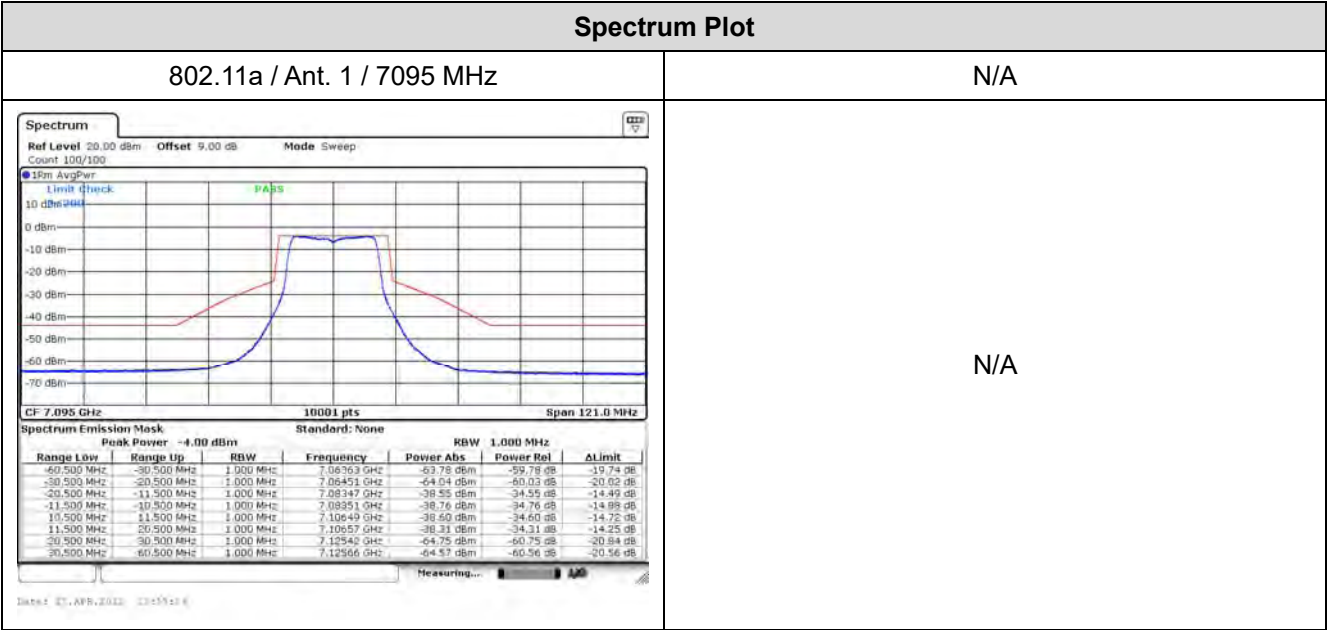


Spectrum Plot


802.11a / Ant. 2 / 6115 MHz

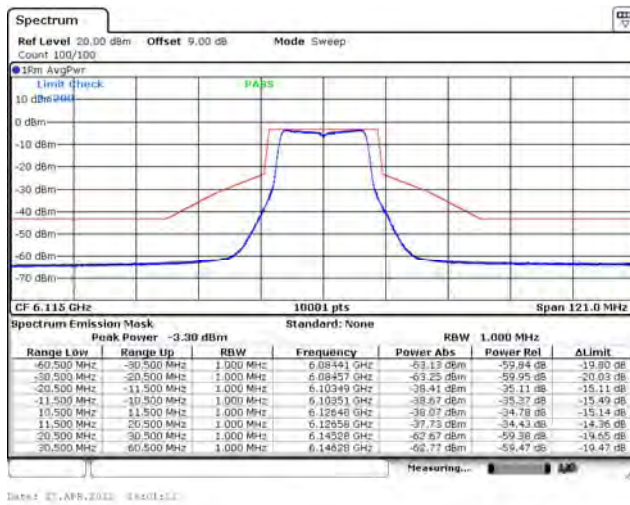


802.11a / Ant. 2 / 6255 MHz

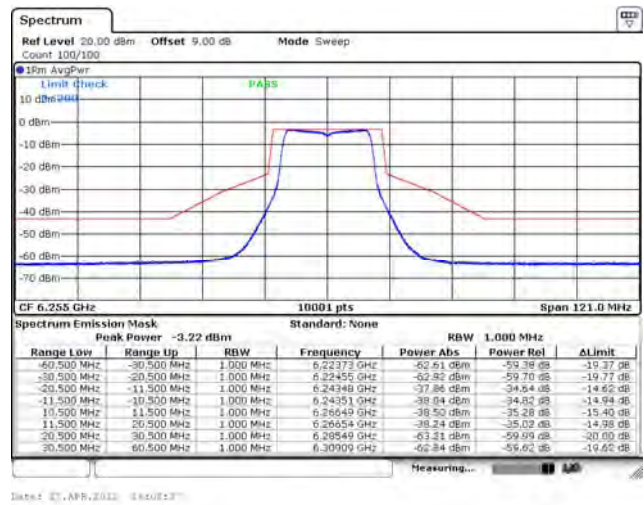


802.11a / Ant. 2 / 6415 MHz

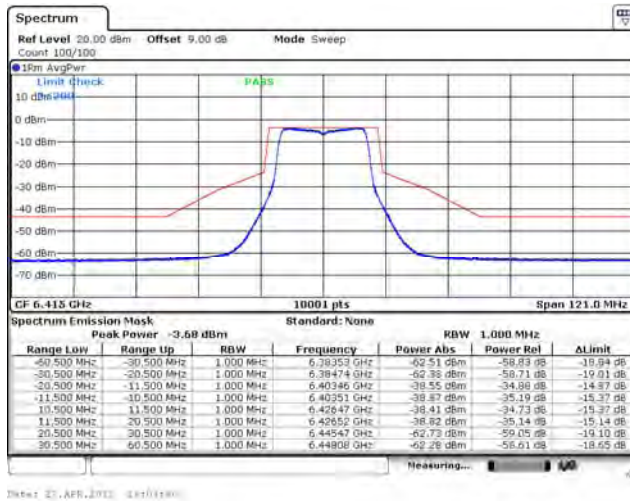


802.11a / Ant. 2 / 6435 MHz

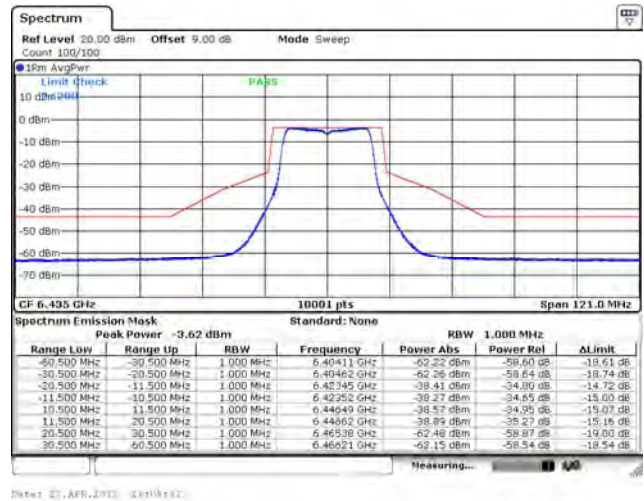

802.11a / Ant. 2 / 6475 MHz

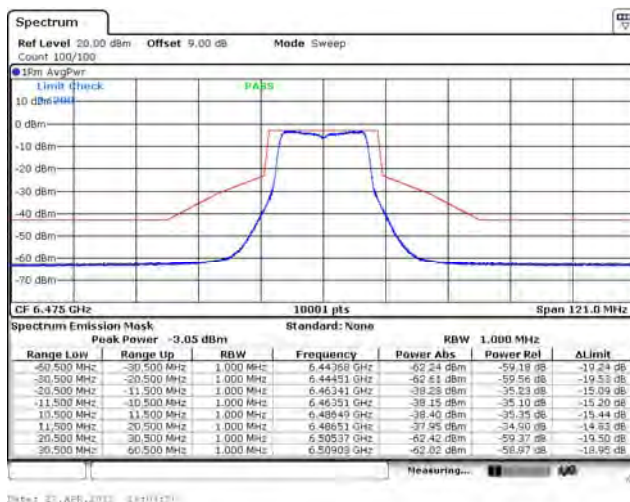


802.11a / Ant. 2 / 6515 MHz

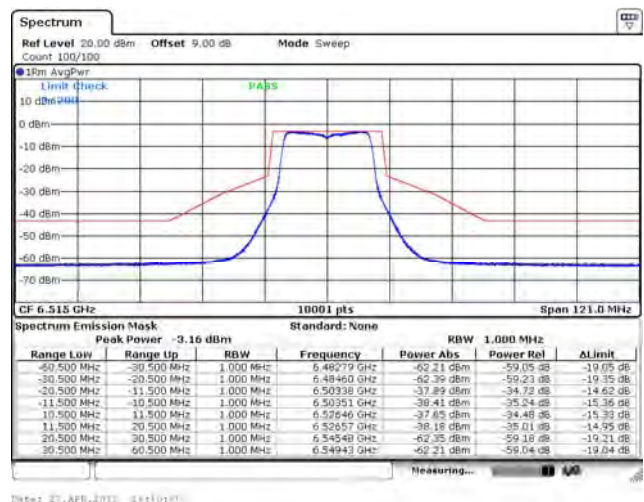


Spectrum Plot


802.11a / Ant. 2 / 6535 MHz

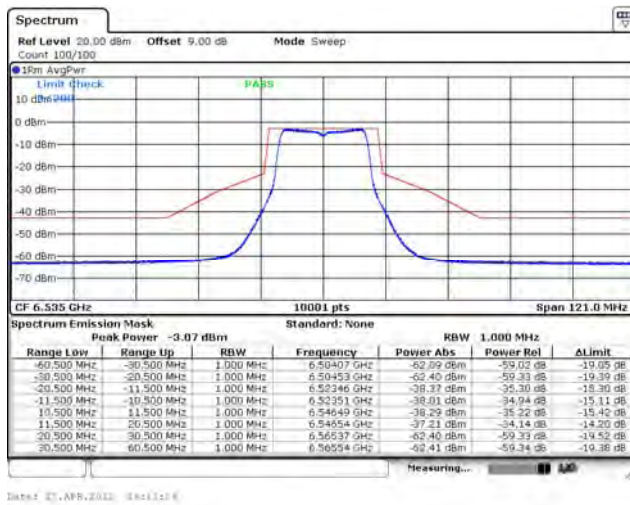


802.11a / Ant. 2 / 6695 MHz

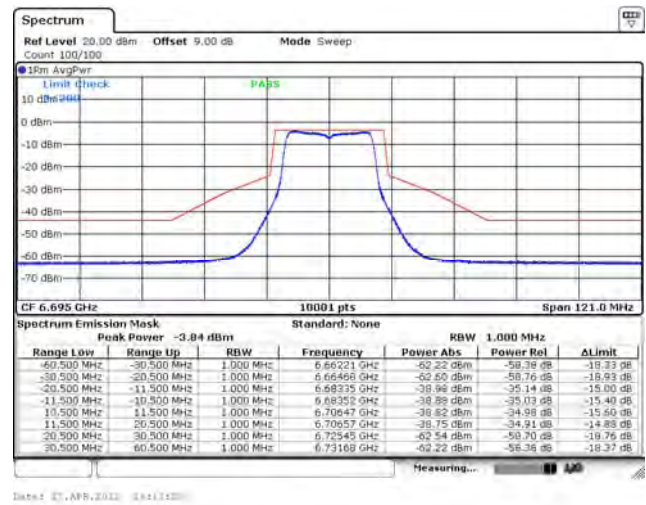


802.11a / Ant. 2 / 6855 MHz

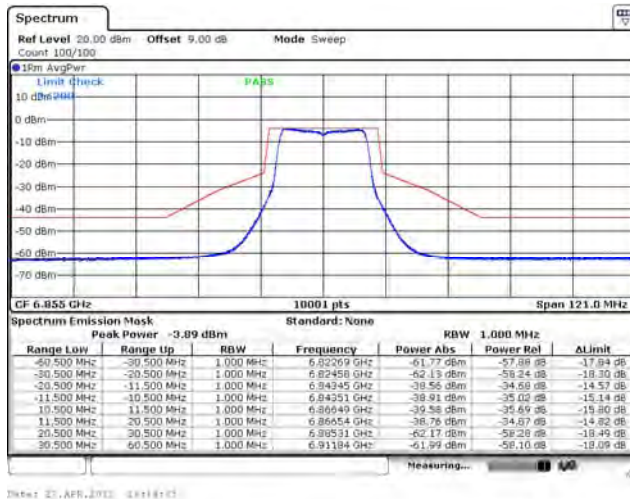


802.11a / Ant. 2 / 6875 MHz

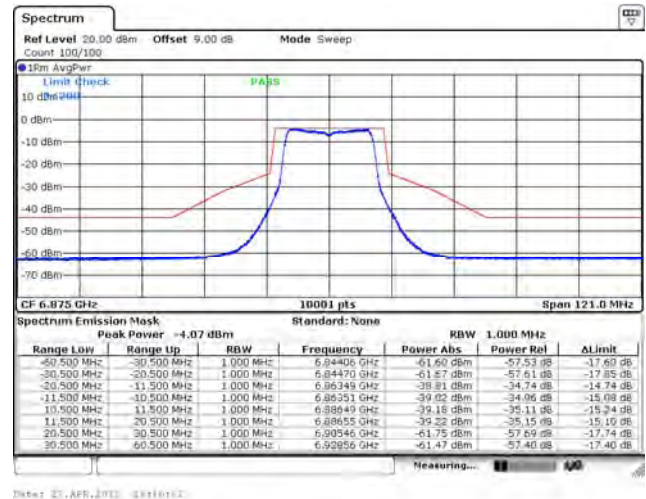


802.11a / Ant. 2 / 6895 MHz

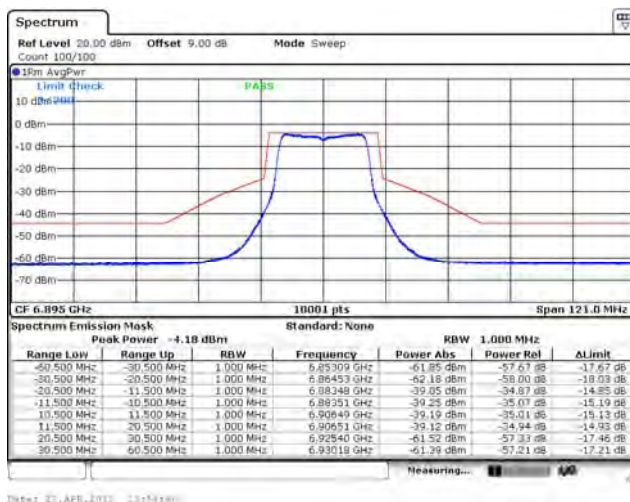


802.11a / Ant. 2 / 6995 MHz

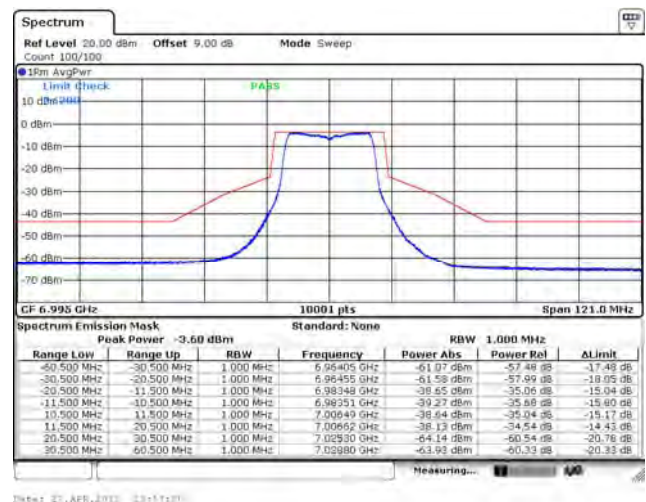

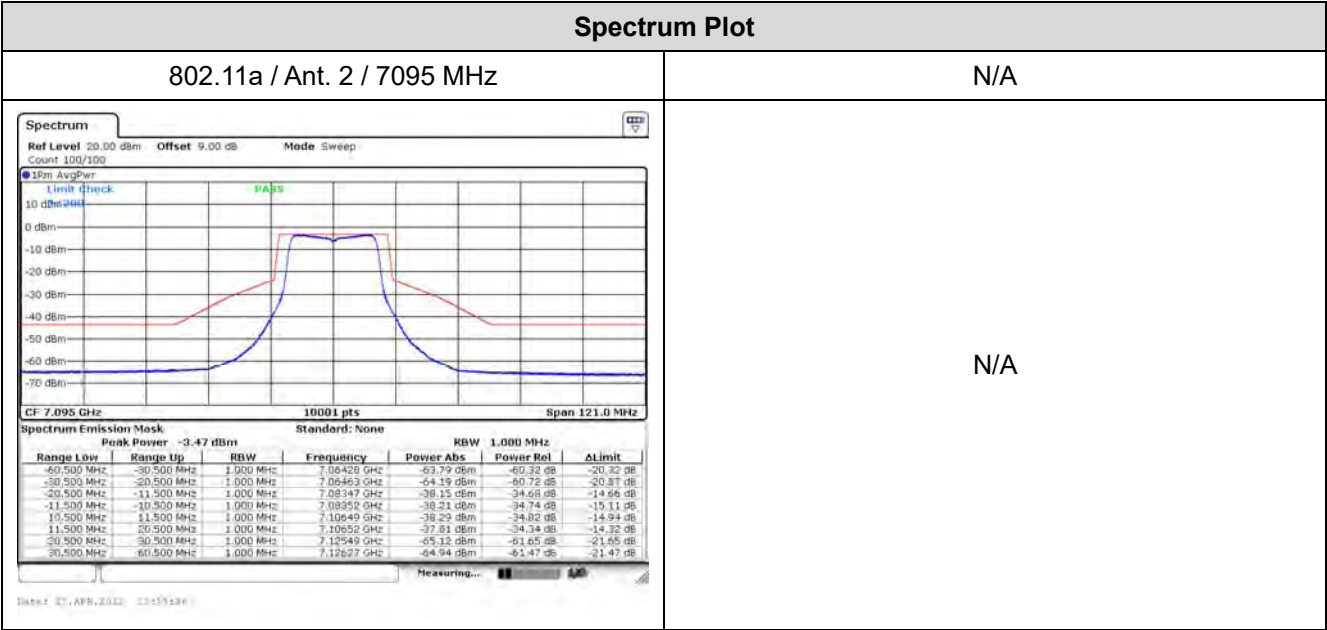


Spectrum Plot


802.11a / Ant. 3 / 6115 MHz

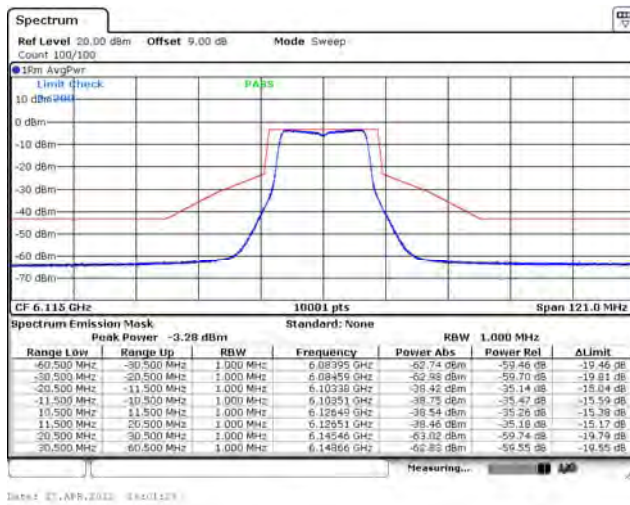


802.11a / Ant. 3 / 6255 MHz

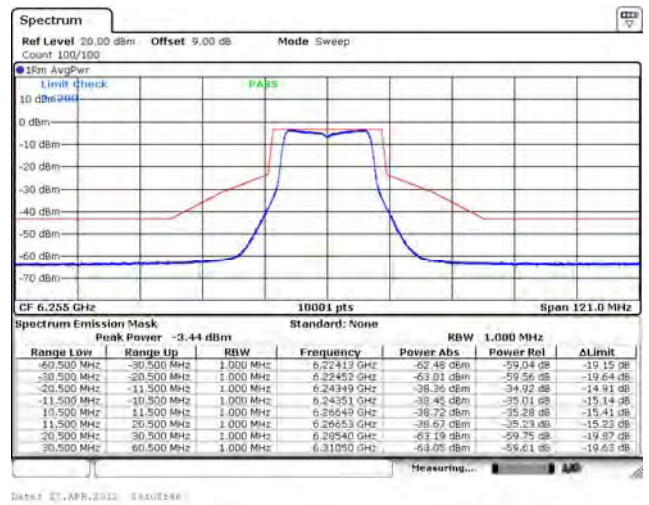


802.11a / Ant. 3 / 6415 MHz

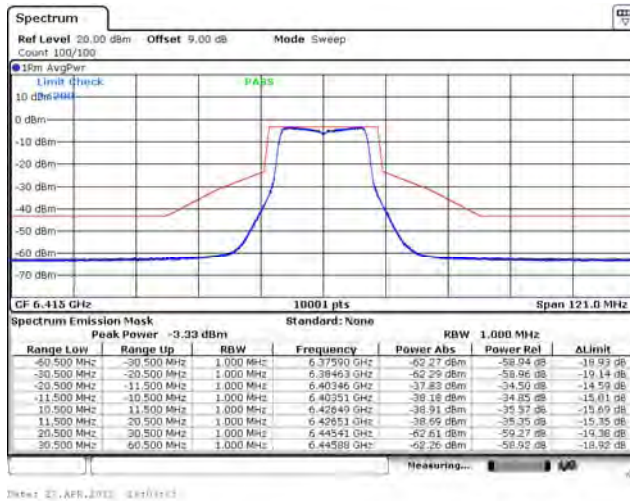


802.11a / Ant. 3 / 6435 MHz

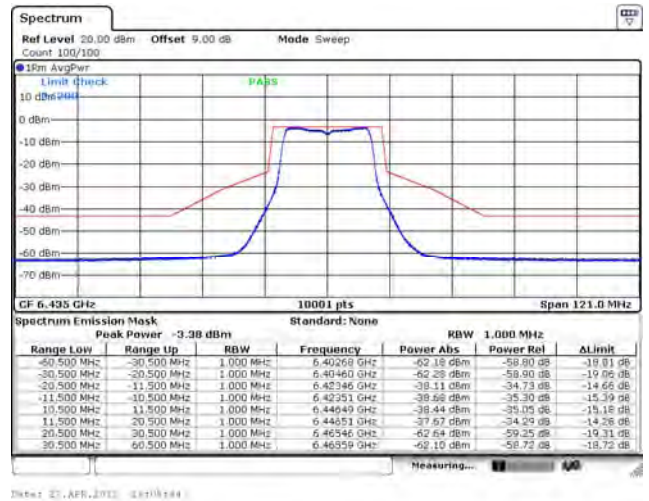

802.11a / Ant. 3 / 6475 MHz

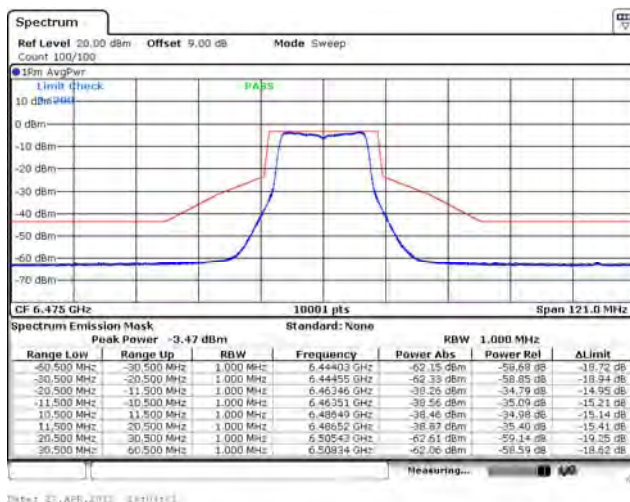


802.11a / Ant. 3 / 6515 MHz

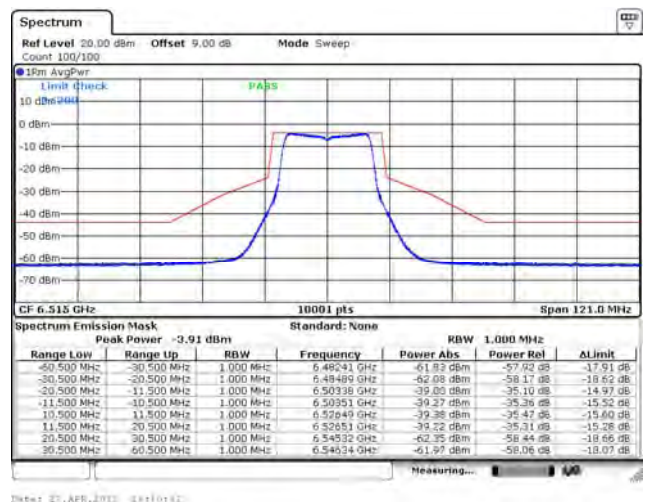


Spectrum Plot


802.11a / Ant. 3 / 6535 MHz

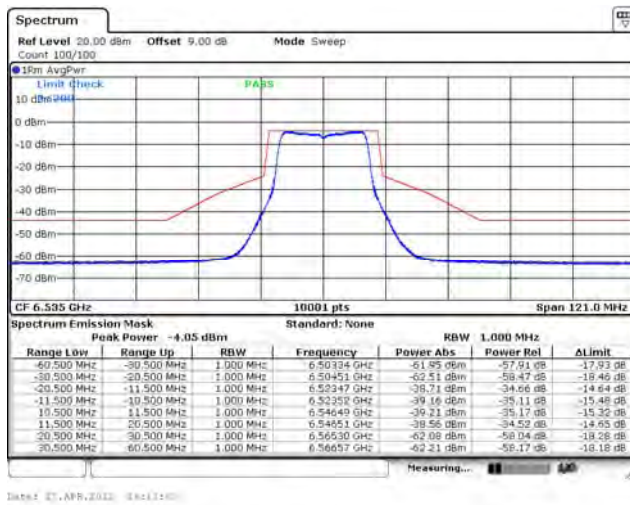


802.11a / Ant. 3 / 6695 MHz

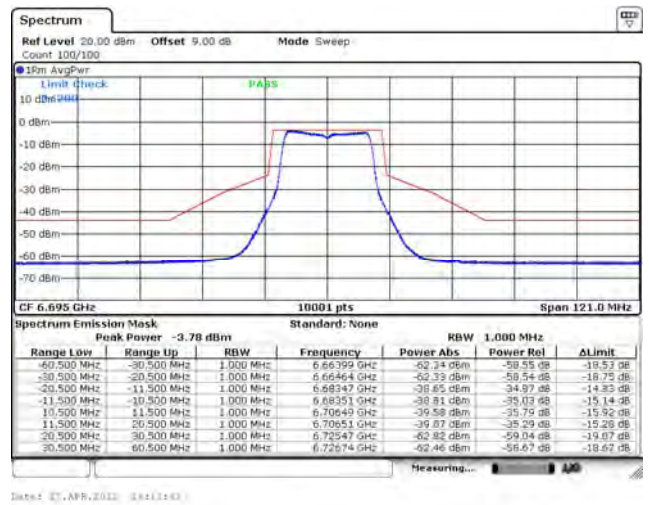


802.11a / Ant. 3 / 6855 MHz

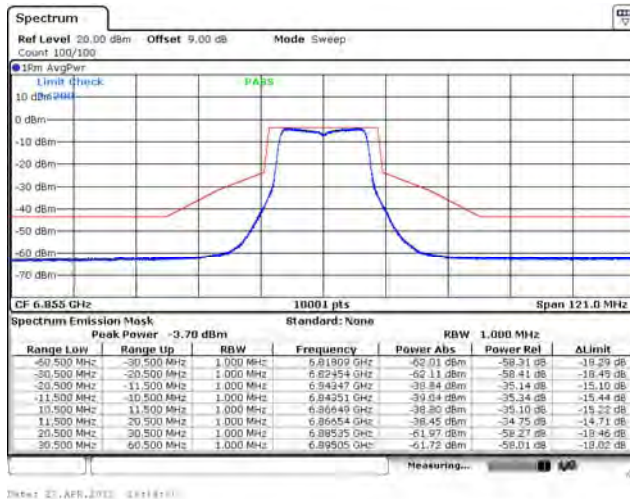


802.11a / Ant. 3 / 6875 MHz

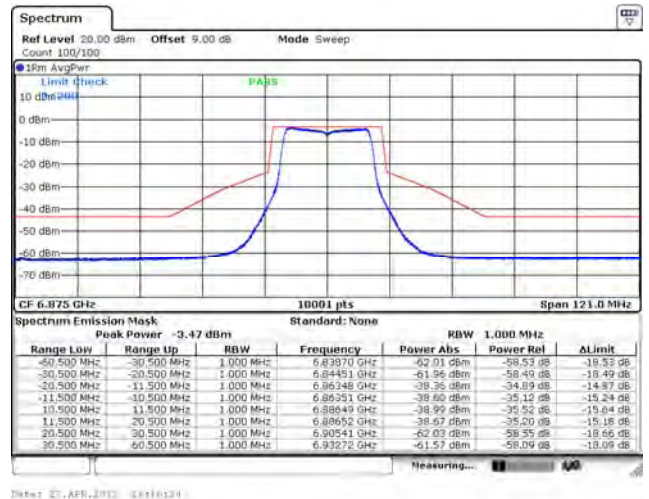


802.11a / Ant. 3 / 6895 MHz

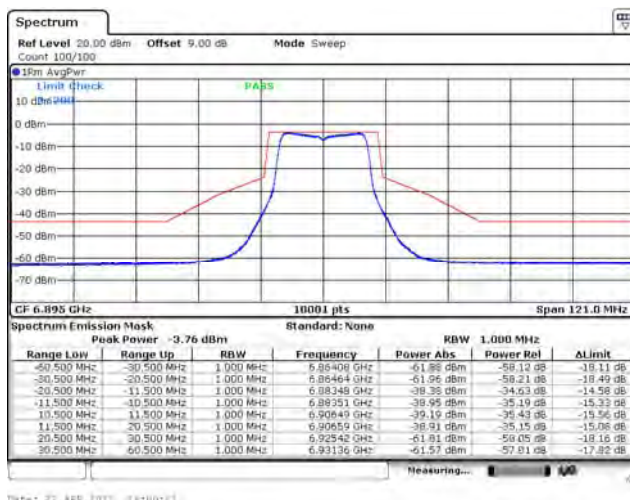


802.11a / Ant. 3 / 6995 MHz

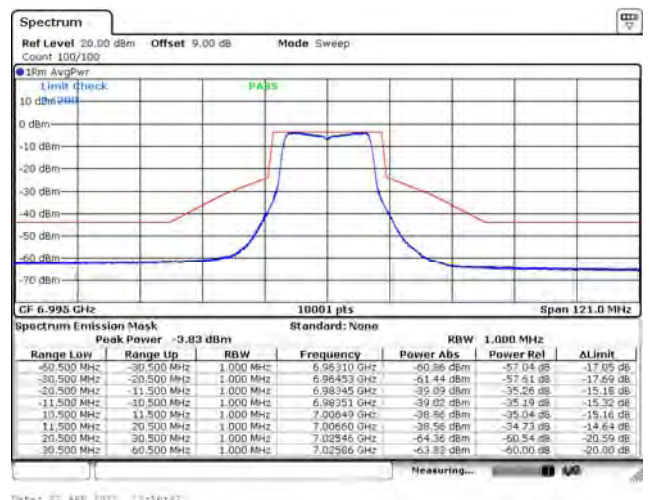

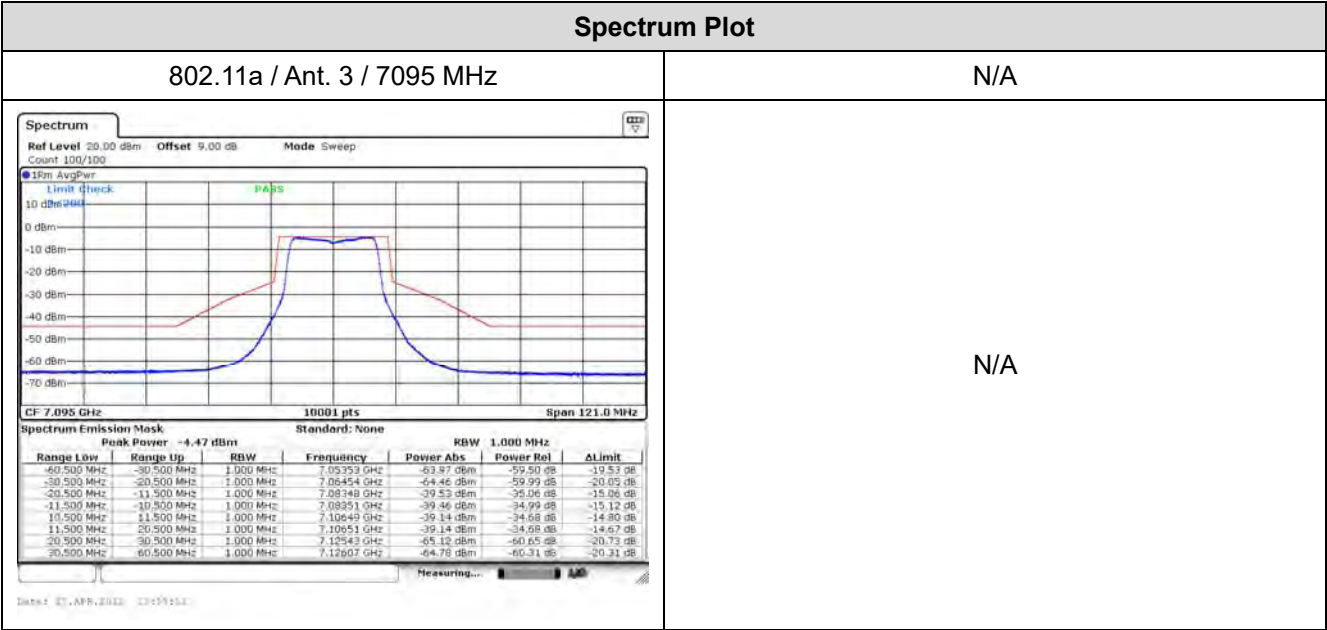


Spectrum Plot


802.11ax (20 MHz) / Ant. 0 / 6115 MHz

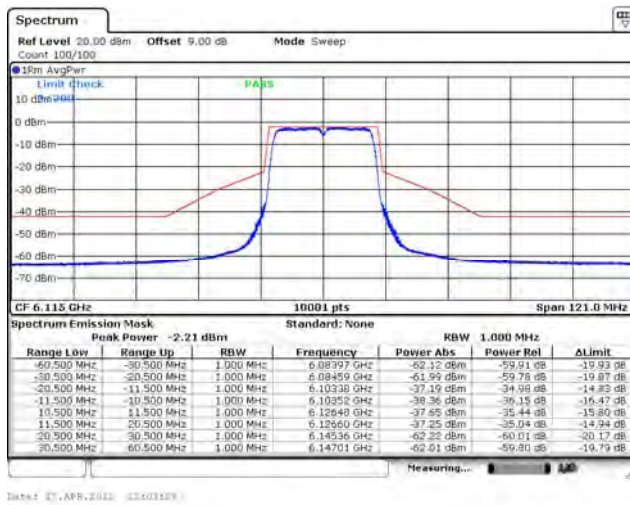


802.11ax (20 MHz) / Ant. 0 / 6255 MHz

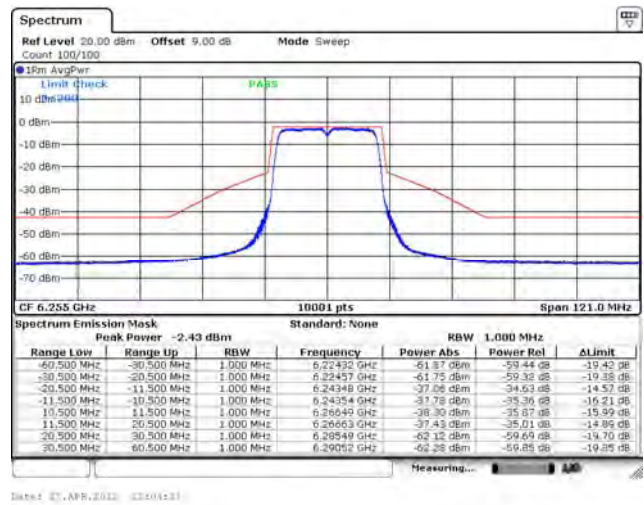


802.11ax (20 MHz) / Ant. 0 / 6415 MHz

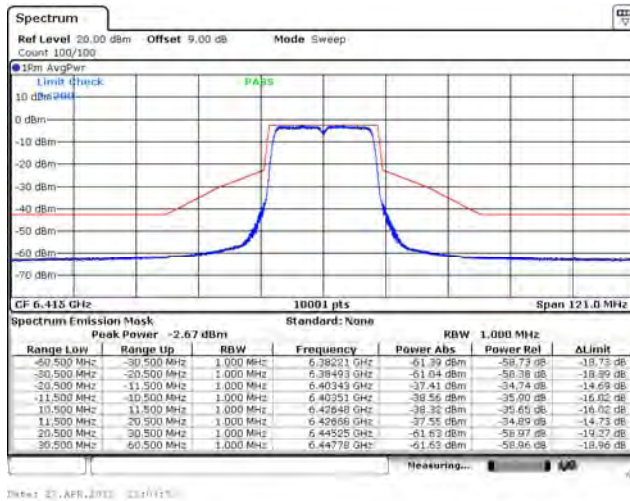


802.11ax (20 MHz) / Ant. 0 / 6435 MHz

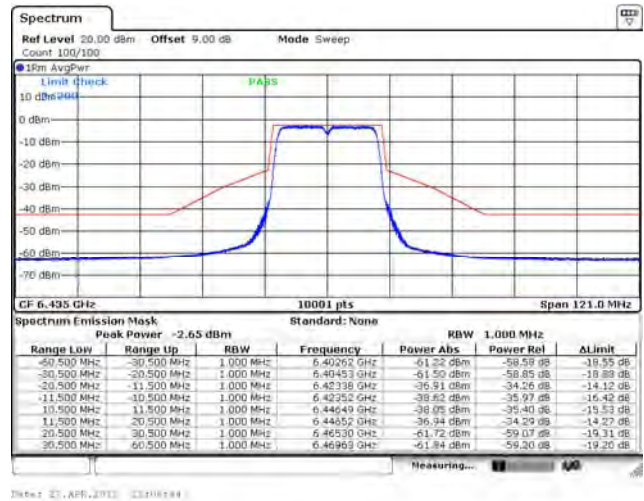

802.11ax (20 MHz) / Ant. 0 / 6475 MHz

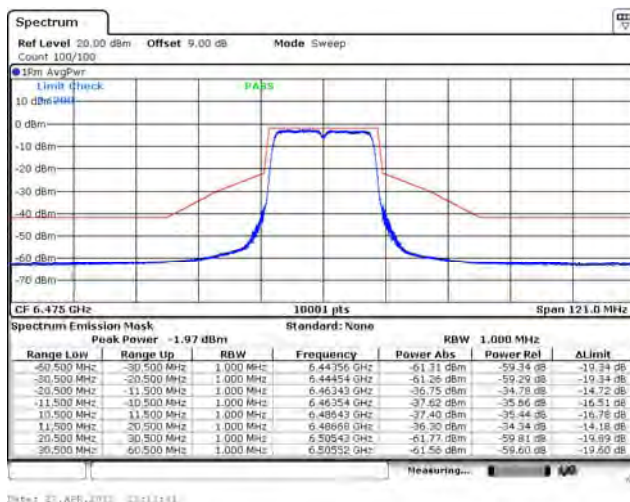


802.11ax (20 MHz) / Ant. 0 / 6515 MHz

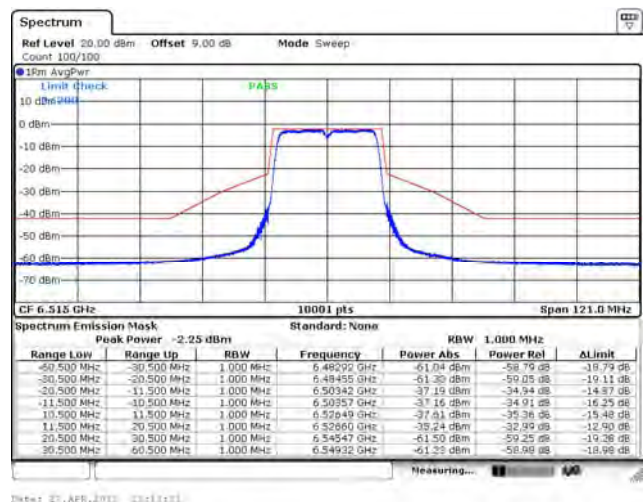


Spectrum Plot


802.11ax (20 MHz) / Ant. 0 / 6535 MHz

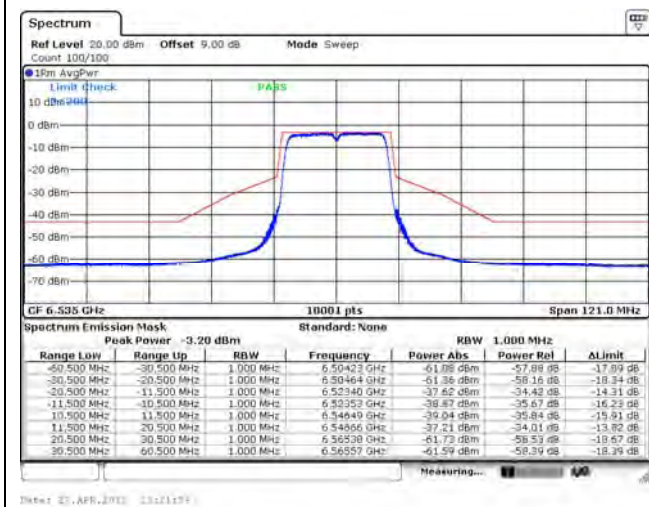


802.11ax (20 MHz) / Ant. 0 / 6695 MHz

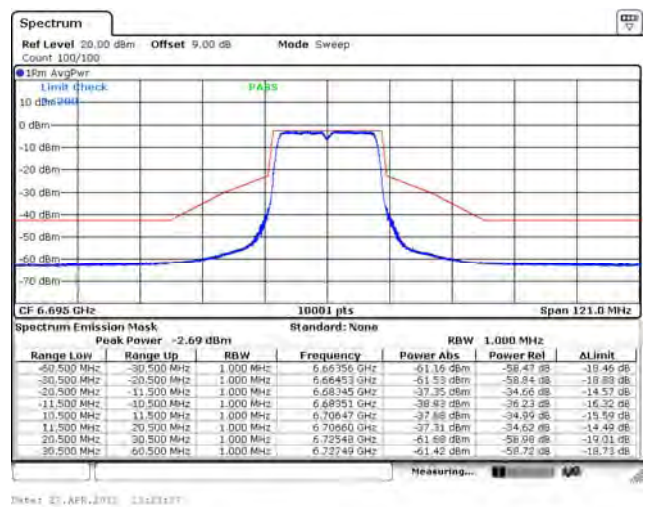


802.11ax (20 MHz) / Ant. 0 / 6855 MHz

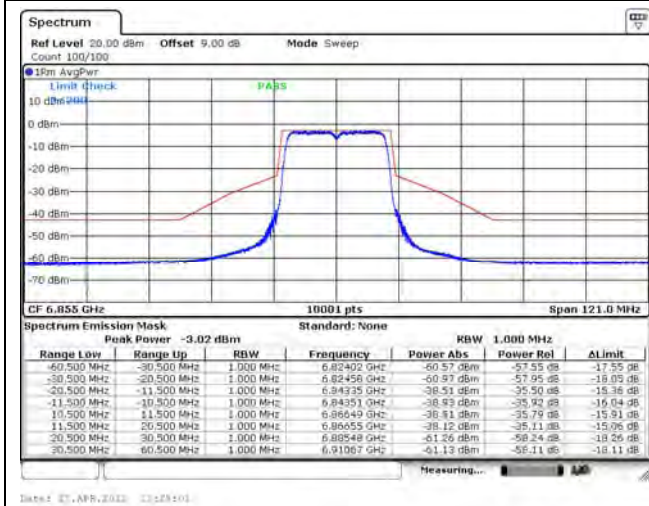


802.11ax (20 MHz) / Ant. 0 / 6875 MHz

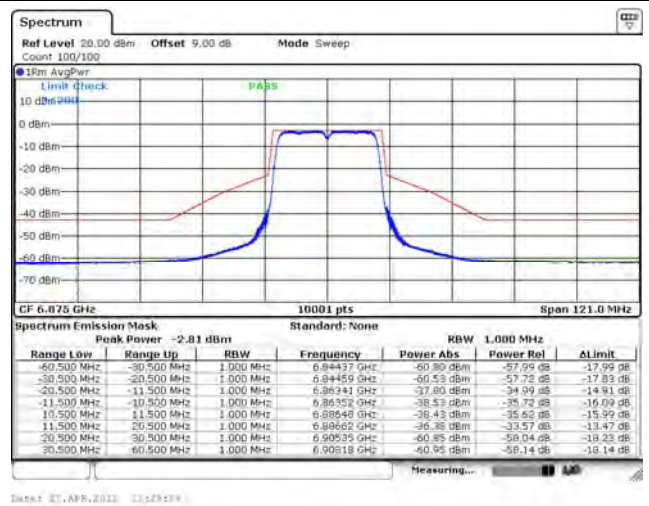


802.11ax (20 MHz) / Ant. 0 / 6895 MHz

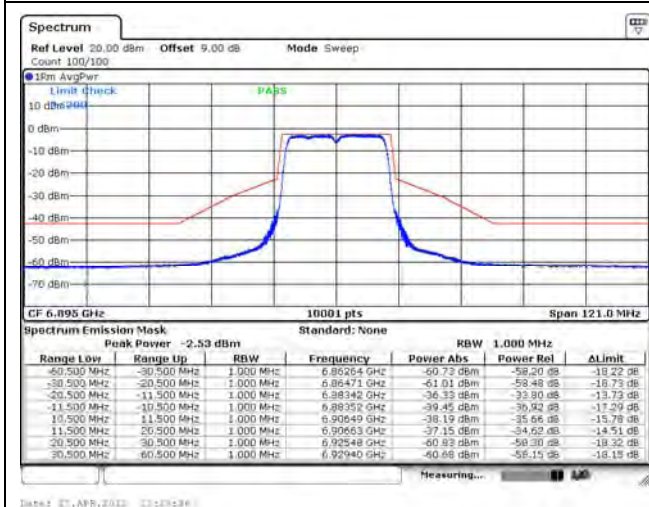


802.11ax (20 MHz) / Ant. 0 / 6995 MHz

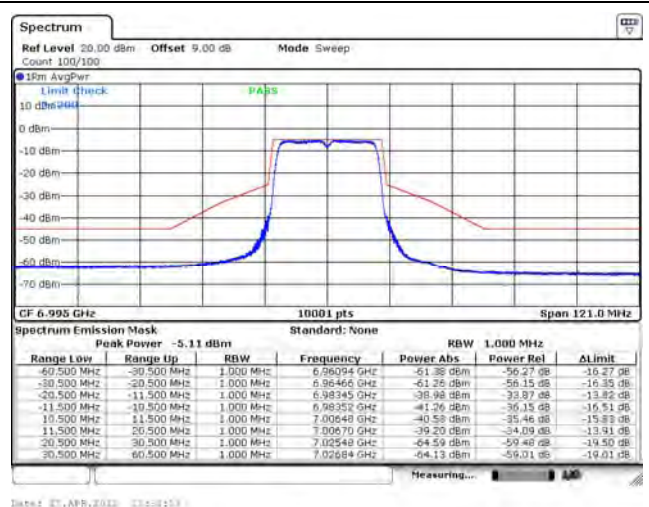

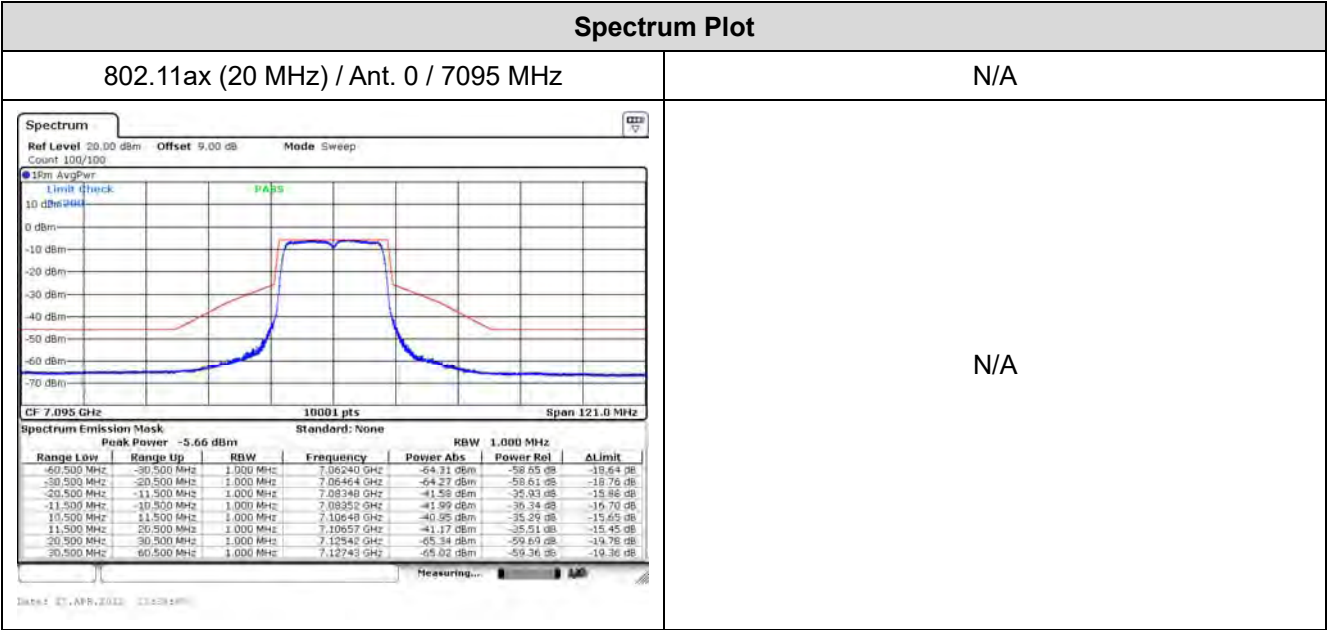


Spectrum Plot


802.11ax (20 MHz) / Ant. 1 / 6115 MHz

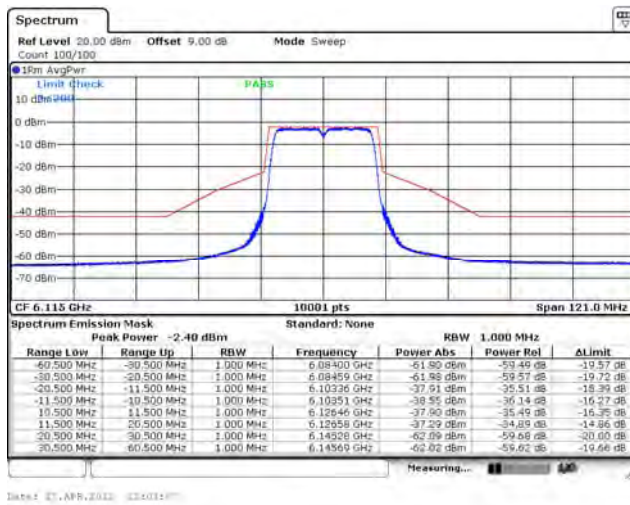


802.11ax (20 MHz) / Ant. 1 / 6255 MHz

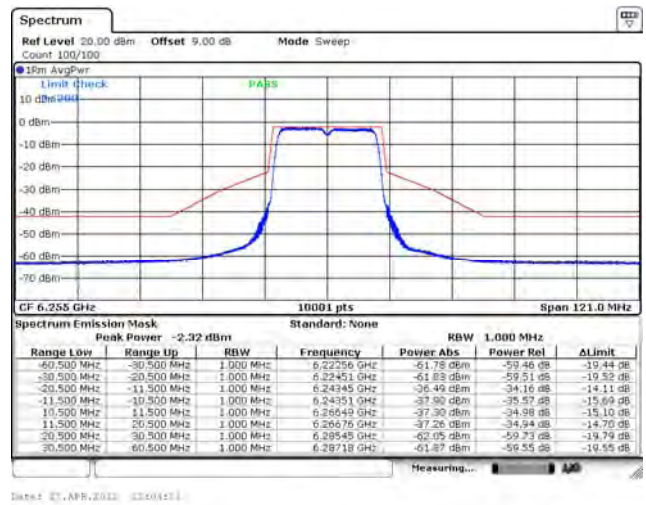


802.11ax (20 MHz) / Ant. 1 / 6415 MHz

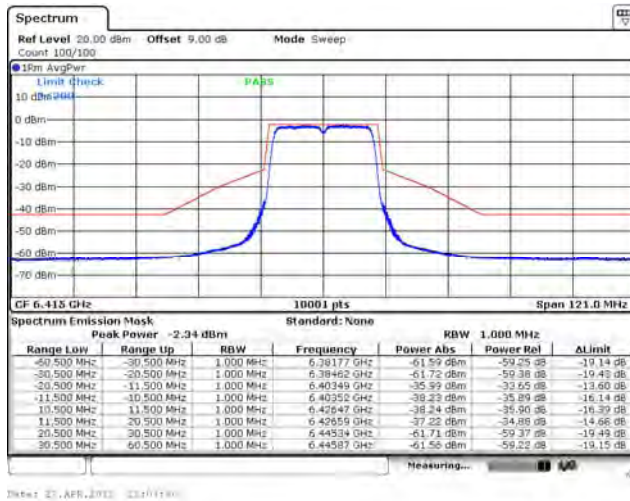


802.11ax (20 MHz) / Ant. 1 / 6435 MHz

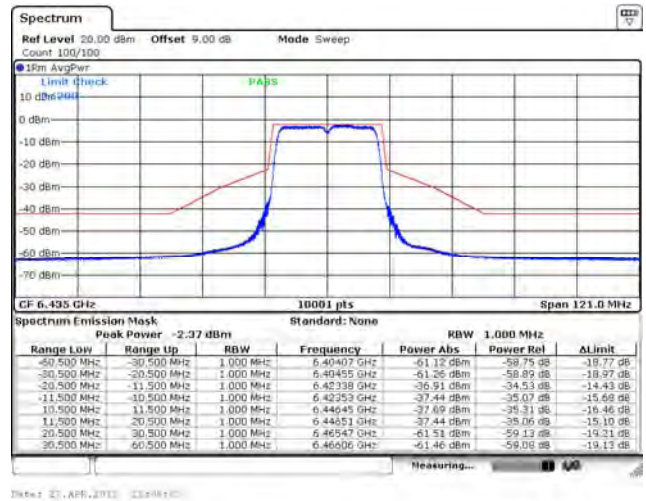

802.11ax (20 MHz) / Ant. 1 / 6475 MHz

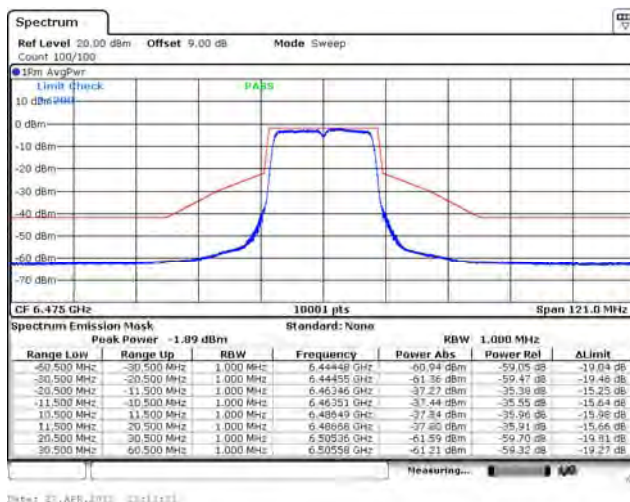


802.11ax (20 MHz) / Ant. 1 / 6515 MHz

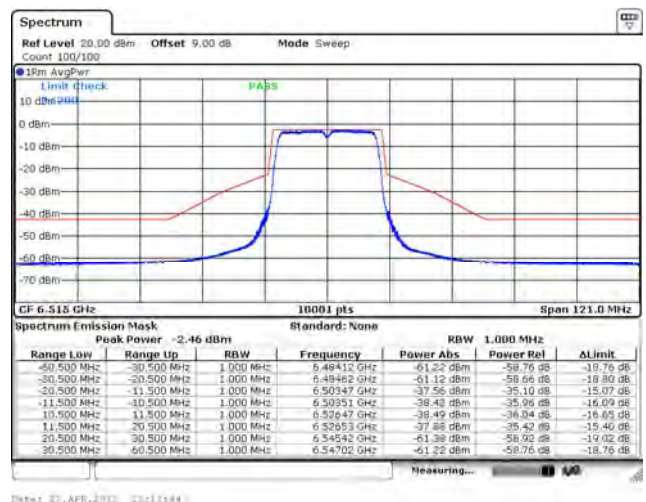


Spectrum Plot


802.11ax (20 MHz) / Ant. 1 / 6535 MHz

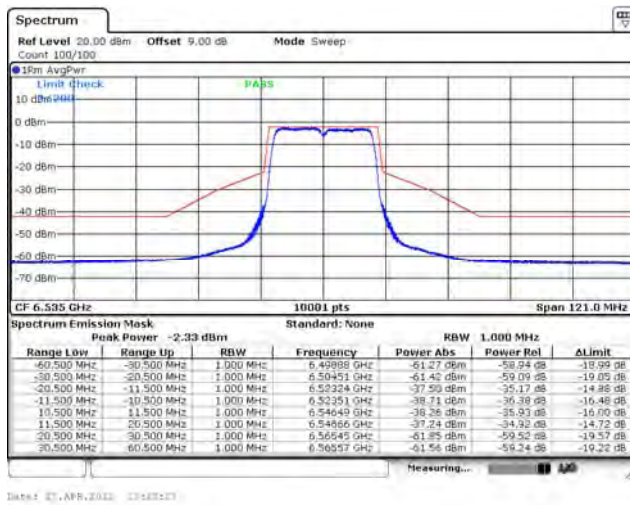


802.11ax (20 MHz) / Ant. 1 / 6695 MHz

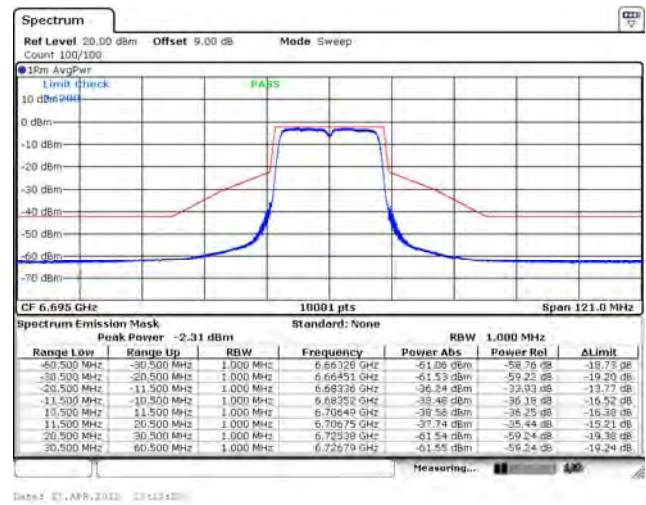


802.11ax (20 MHz) / Ant. 1 / 6855 MHz

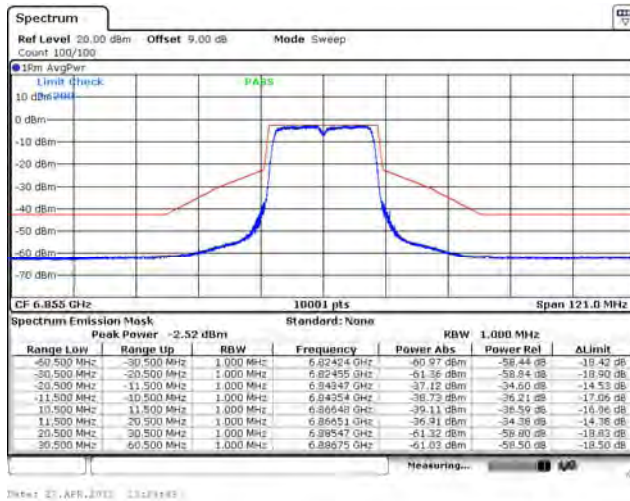


802.11ax (20 MHz) / Ant. 1 / 6875 MHz

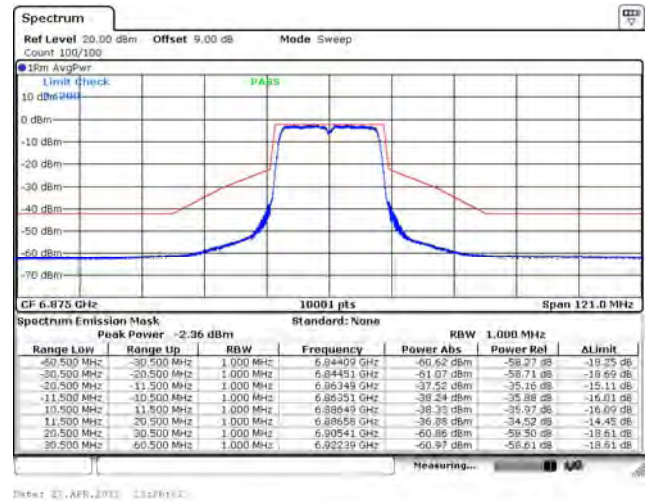


802.11ax (20 MHz) / Ant. 1 / 6895 MHz

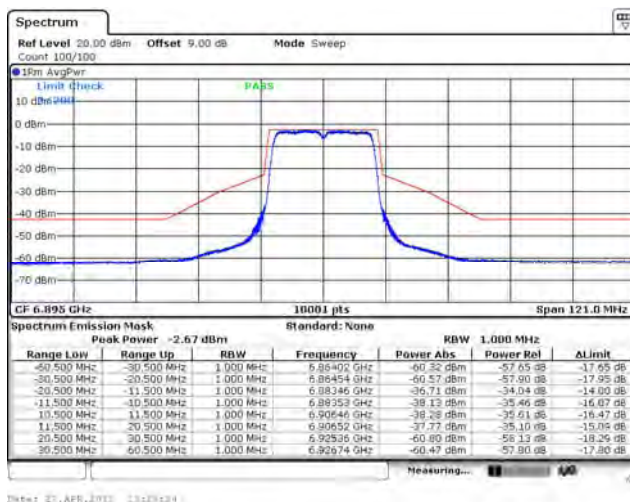


802.11ax (20 MHz) / Ant. 1 / 6995 MHz

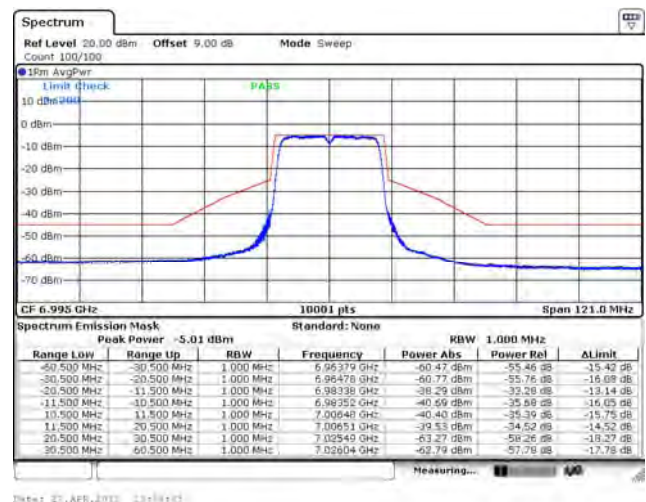

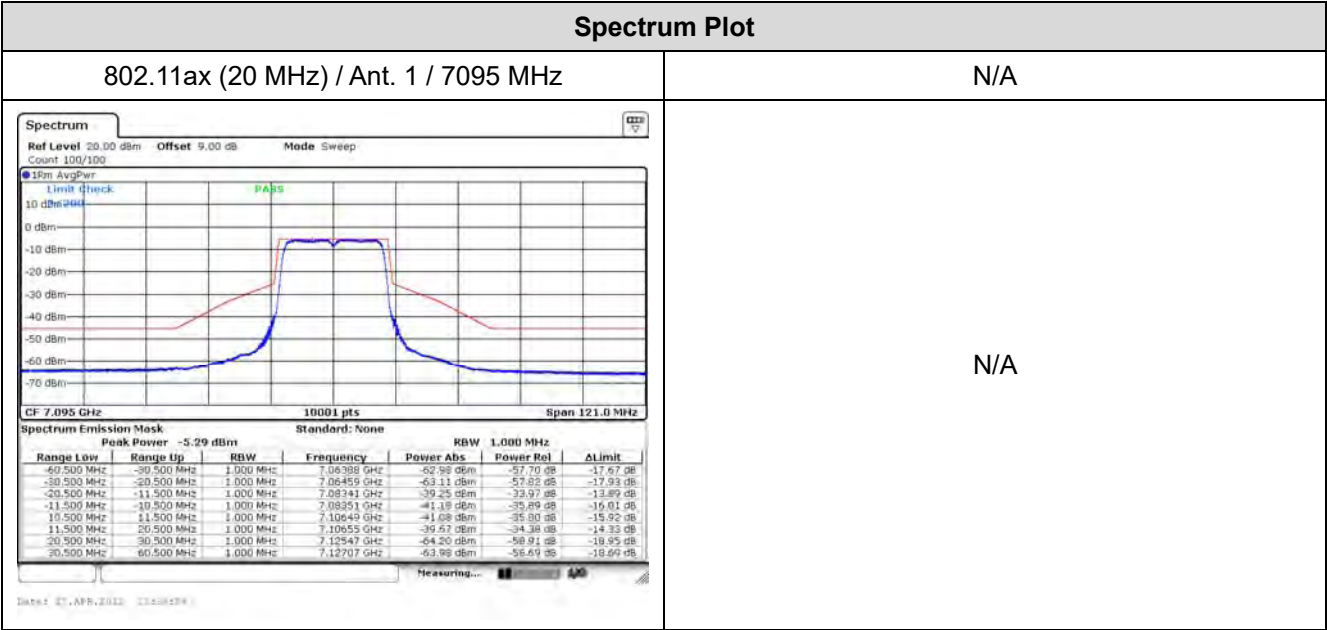


Spectrum Plot


802.11ax (20 MHz) / Ant. 2 / 6115 MHz

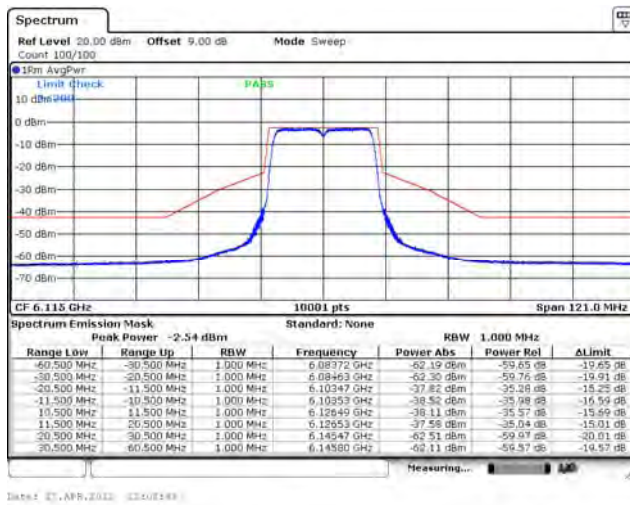


802.11ax (20 MHz) / Ant. 2 / 6255 MHz

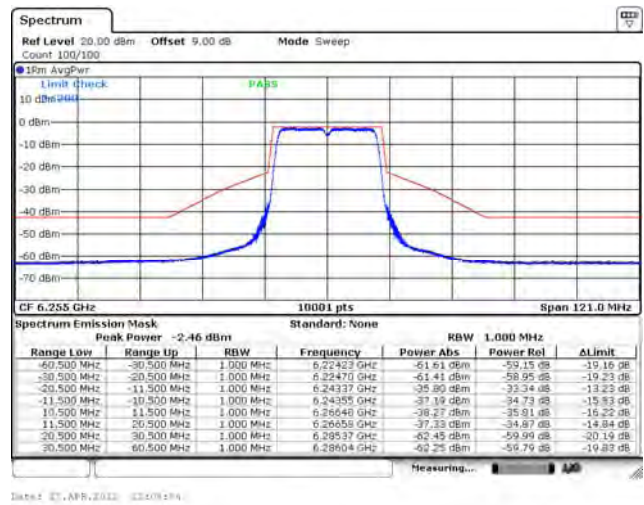


802.11ax (20 MHz) / Ant. 2 / 6415 MHz

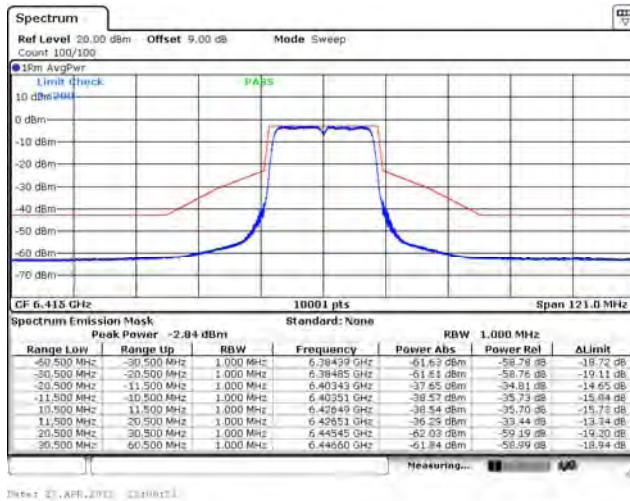


802.11ax (20 MHz) / Ant. 2 / 6435 MHz

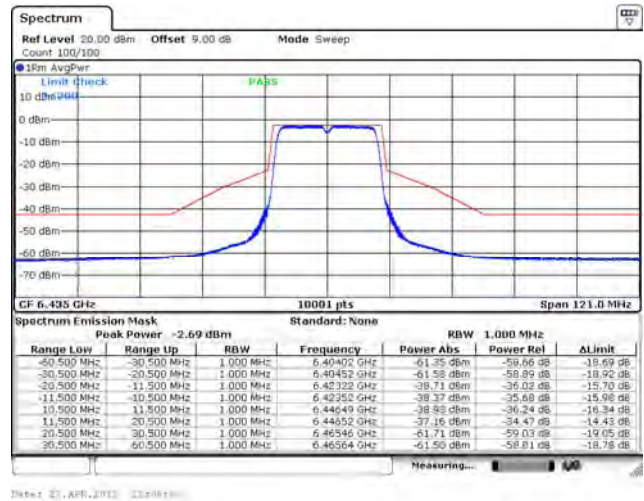

802.11ax (20 MHz) / Ant. 2 / 6475 MHz

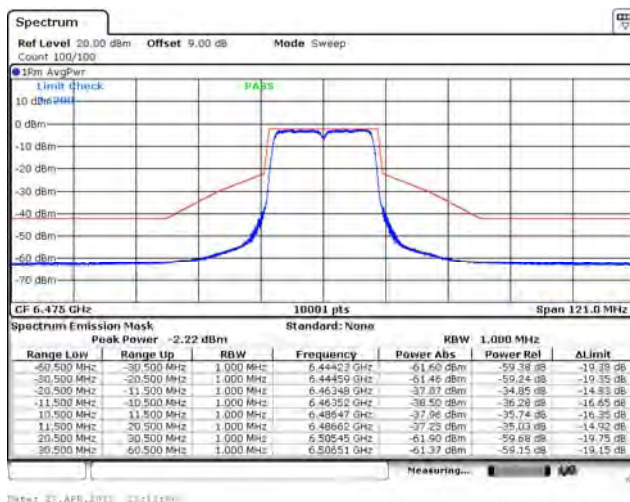


802.11ax (20 MHz) / Ant. 2 / 6515 MHz

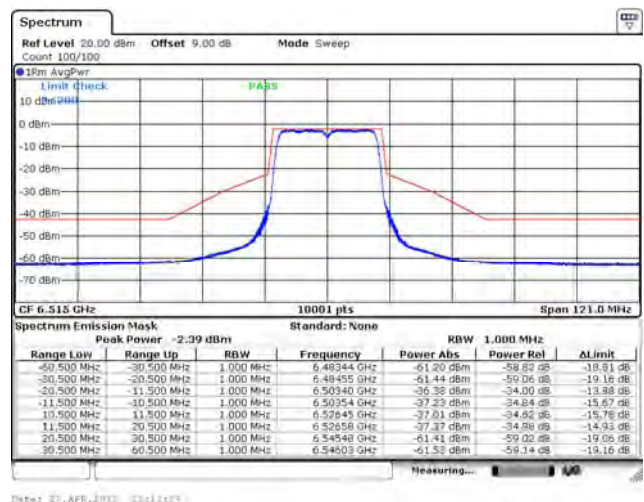


Spectrum Plot


802.11ax (20 MHz) / Ant. 2 / 6535 MHz

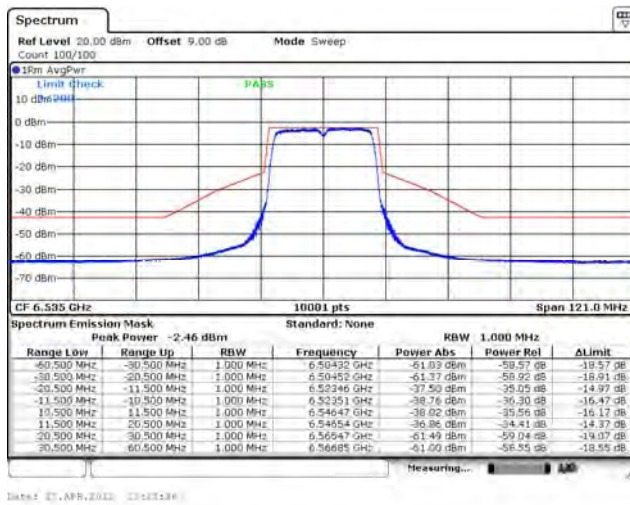


802.11ax (20 MHz) / Ant. 2 / 6695 MHz

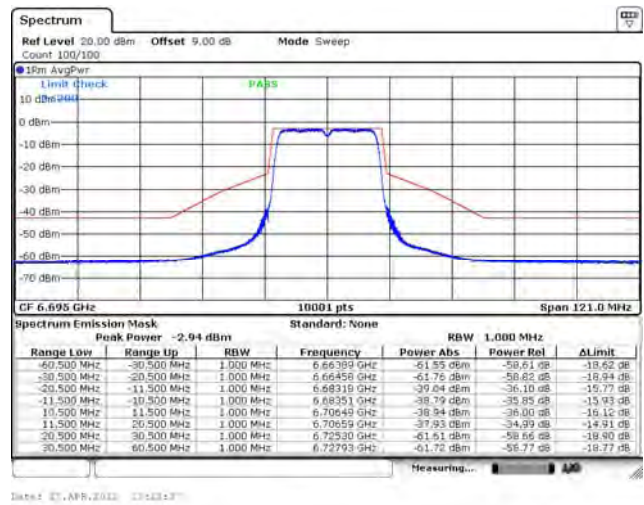


802.11ax (20 MHz) / Ant. 2 / 6855 MHz

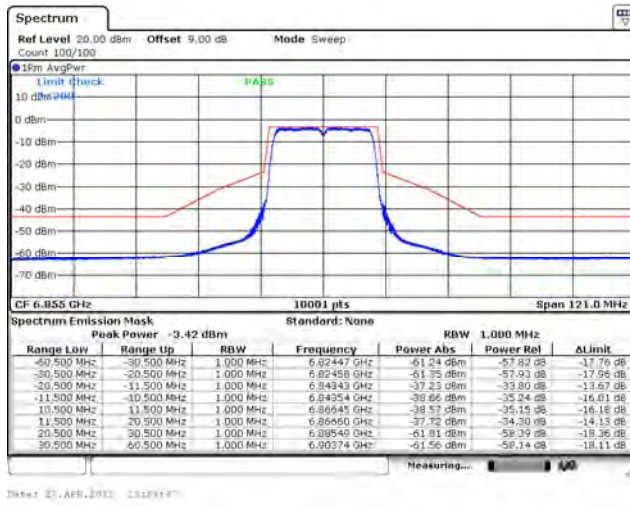


802.11ax (20 MHz) / Ant. 2 / 6875 MHz

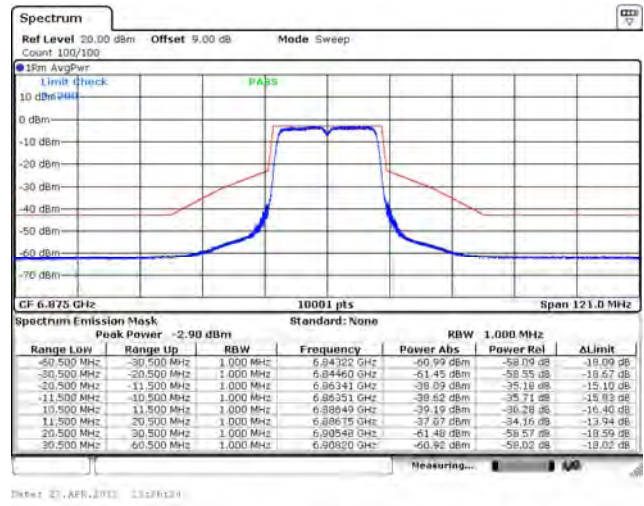


802.11ax (20 MHz) / Ant. 2 / 6895 MHz

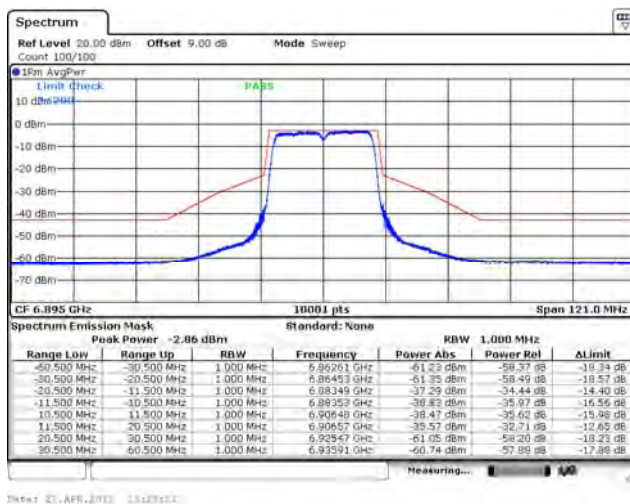


802.11ax (20 MHz) / Ant. 2 / 6995 MHz

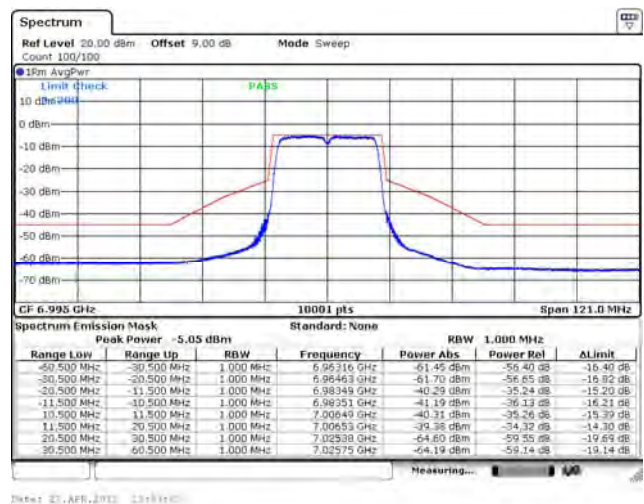

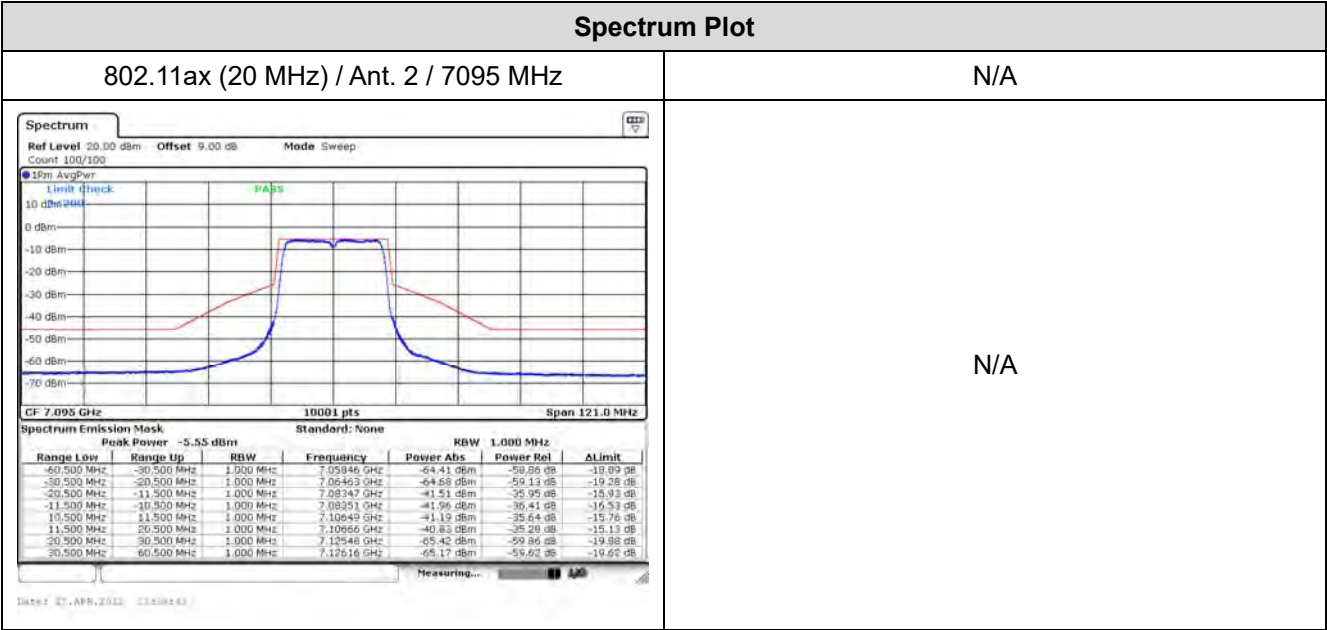


Spectrum Plot


802.11ax (20 MHz) / Ant. 3 / 6115 MHz

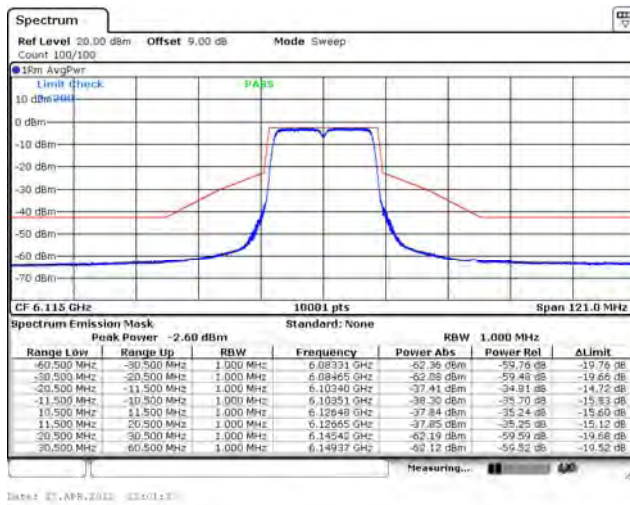


802.11ax (20 MHz) / Ant. 3 / 6255 MHz

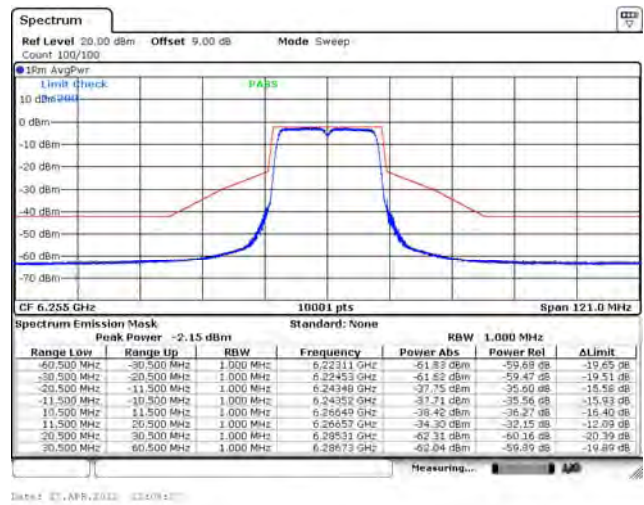


802.11ax (20 MHz) / Ant. 3 / 6415 MHz

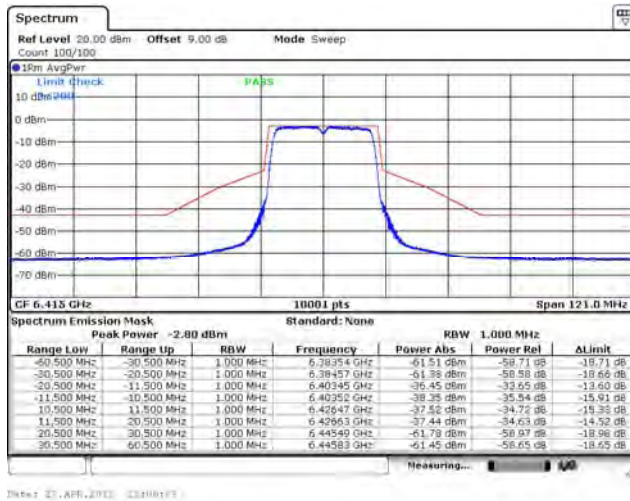


802.11ax (20 MHz) / Ant. 3 / 6435 MHz

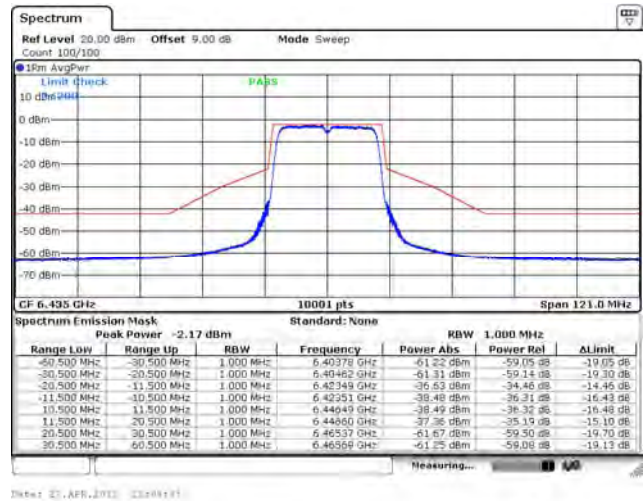

802.11ax (20 MHz) / Ant. 3 / 6475 MHz

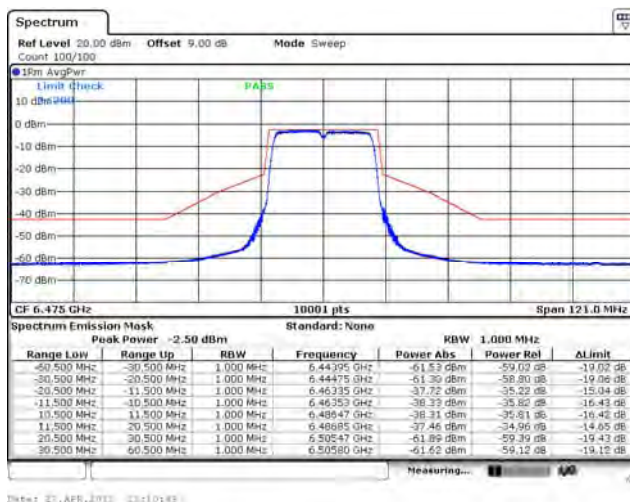


802.11ax (20 MHz) / Ant. 3 / 6515 MHz

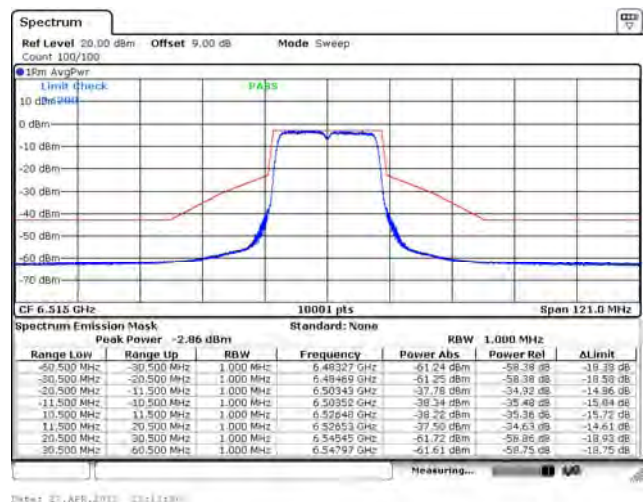


Spectrum Plot


802.11ax (20 MHz) / Ant. 3 / 6535 MHz

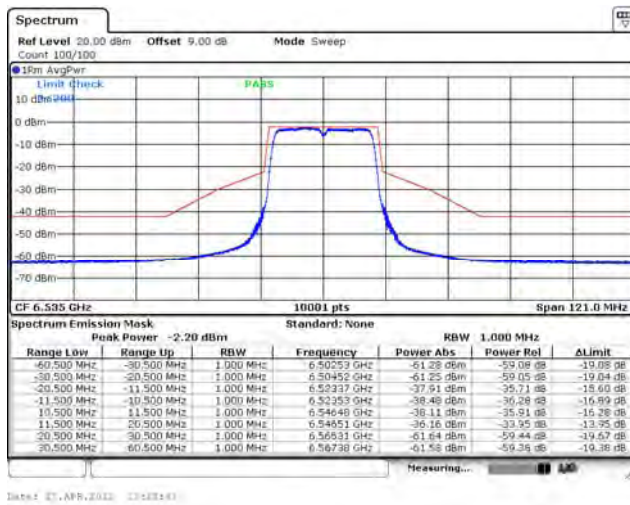


802.11ax (20 MHz) / Ant. 3 / 6695 MHz

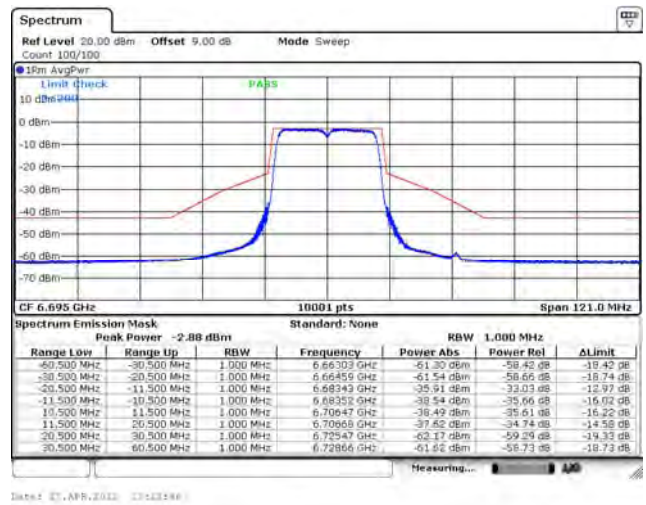


802.11ax (20 MHz) / Ant. 3 / 6855 MHz

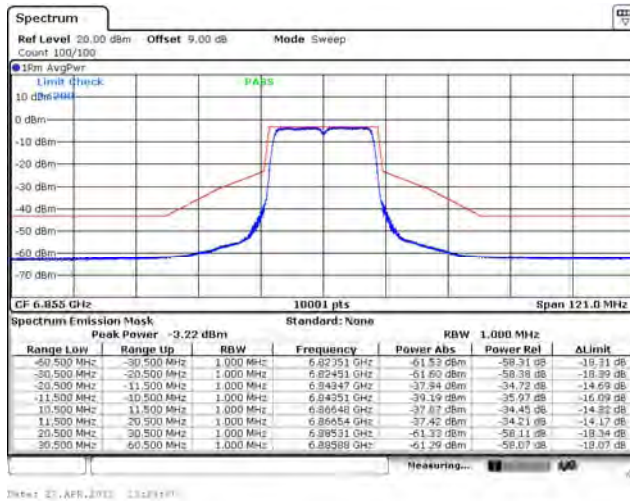


802.11ax (20 MHz) / Ant. 3 / 6875 MHz

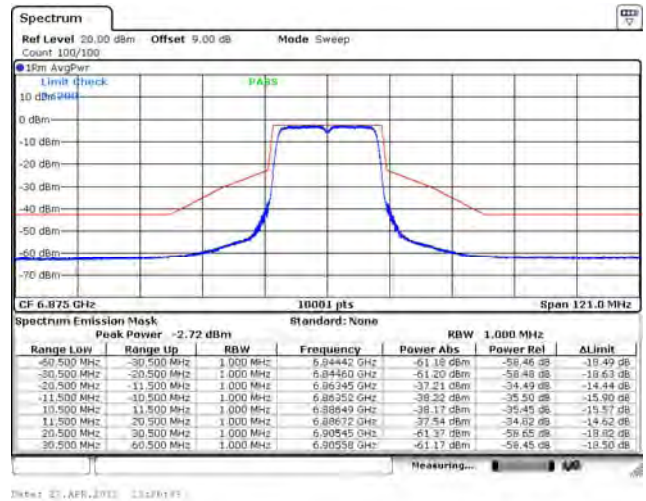


802.11ax (20 MHz) / Ant. 3 / 6895 MHz

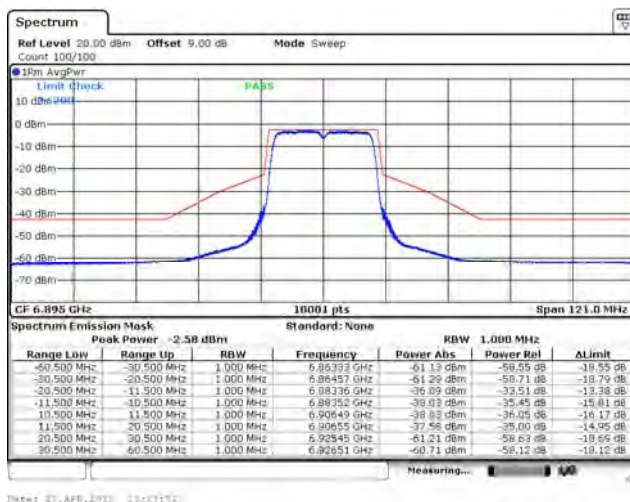


802.11ax (20 MHz) / Ant. 3 / 6995 MHz

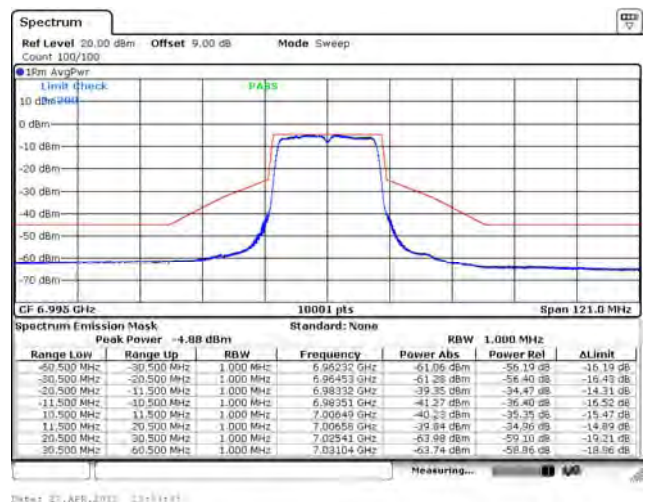

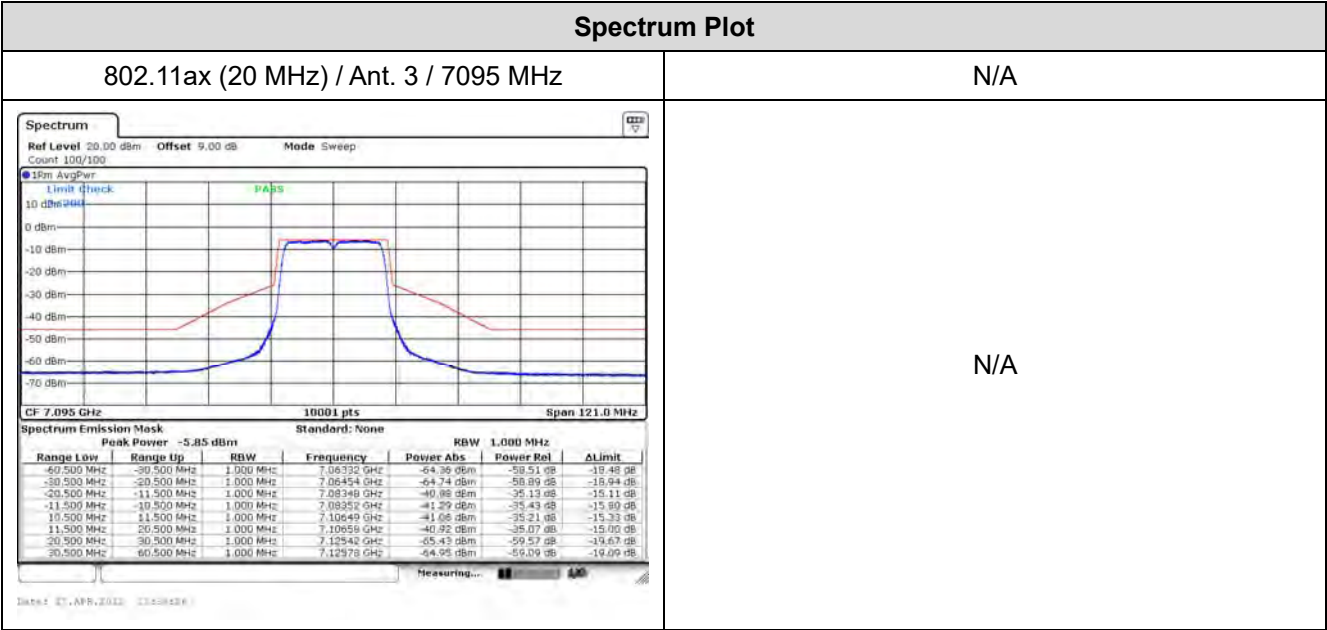


Spectrum Plot


802.11ax (40 MHz) / Ant. 0 / 6125 MHz

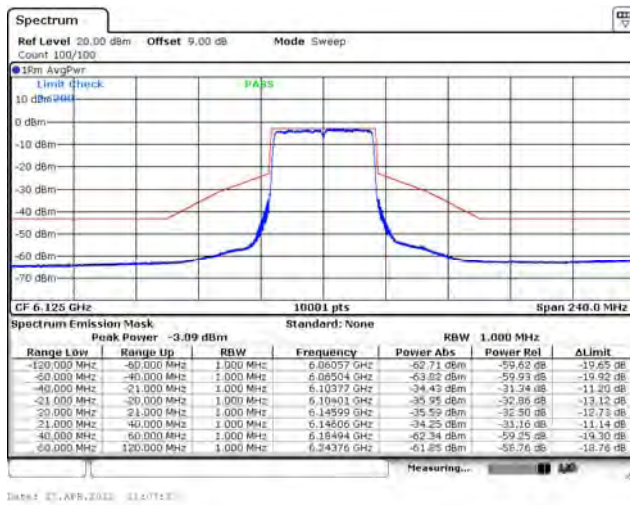


802.11ax (40 MHz) / Ant. 0 / 6245 MHz

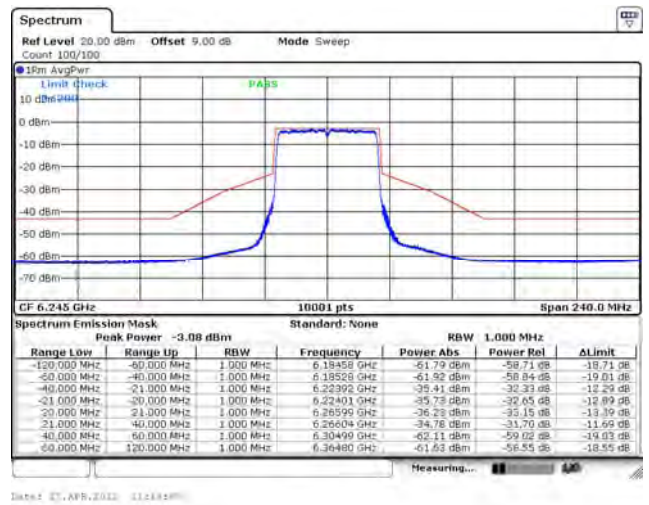


802.11ax (40 MHz) / Ant. 0 / 6405 MHz

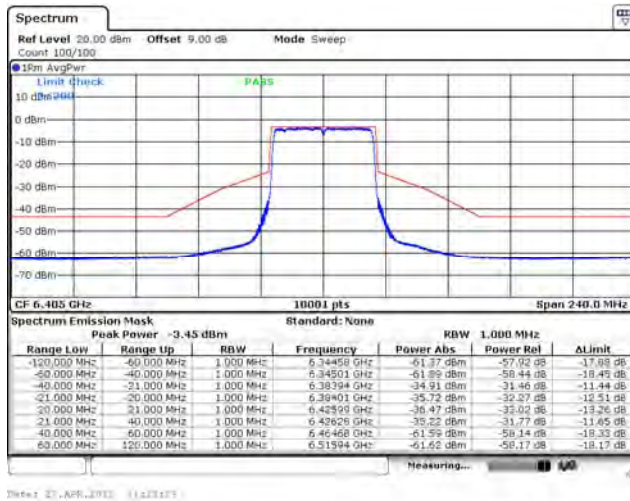


802.11ax (40 MHz) / Ant. 0 / 6445 MHz

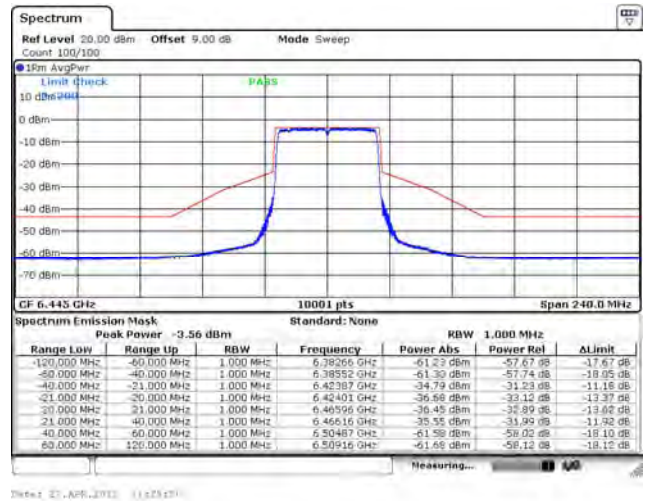

802.11ax (40 MHz) / Ant. 0 / 6485 MHz

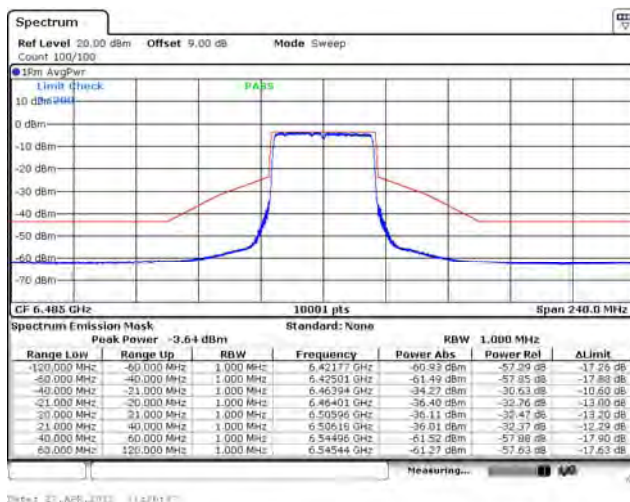


802.11ax (40 MHz) / Ant. 0 / 6525 MHz

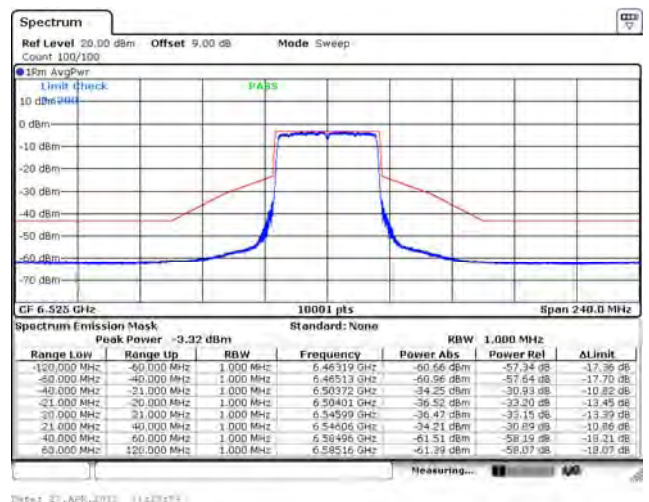


Spectrum Plot


802.11ax (40 MHz) / Ant. 0 / 6565 MHz

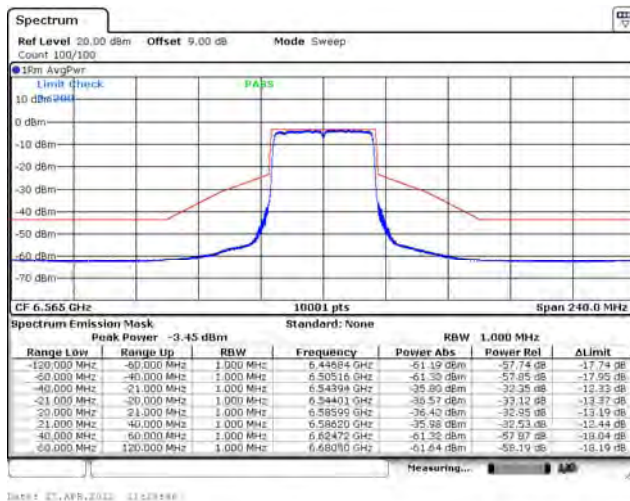


802.11ax (40 MHz) / Ant. 0 / 6725 MHz

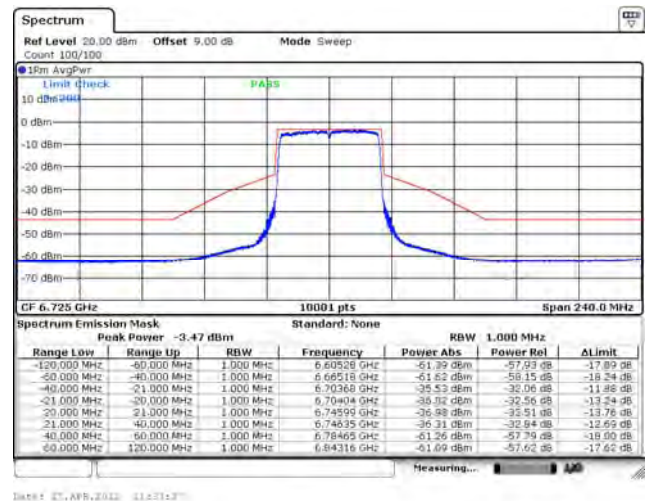


802.11ax (40 MHz) / Ant. 0 / 6845 MHz

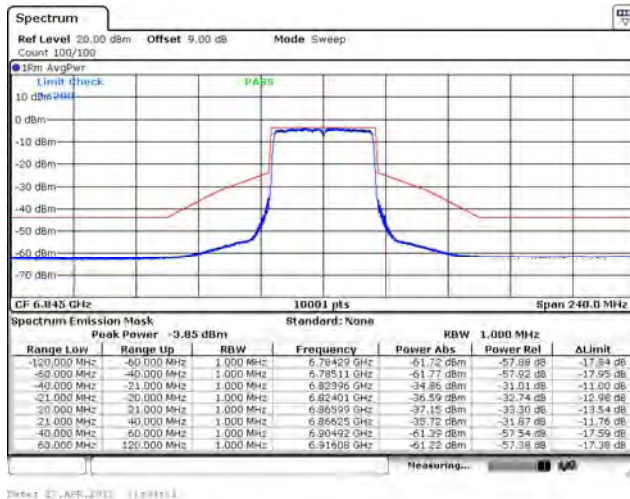


802.11ax (40 MHz) / Ant. 0 / 6885 MHz

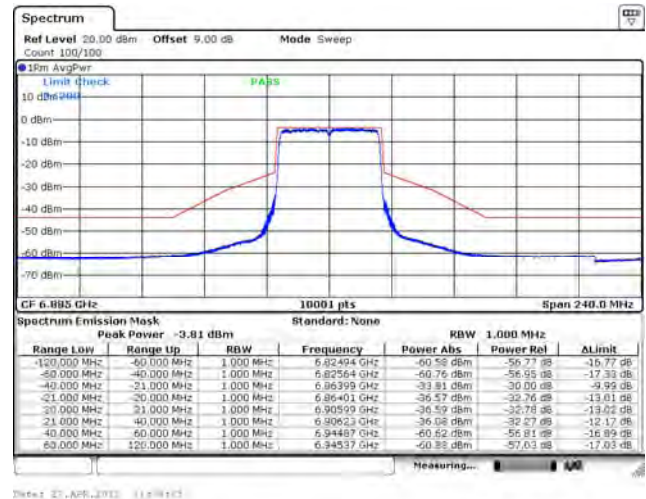


802.11ax (40 MHz) / Ant. 0 / 6925 MHz

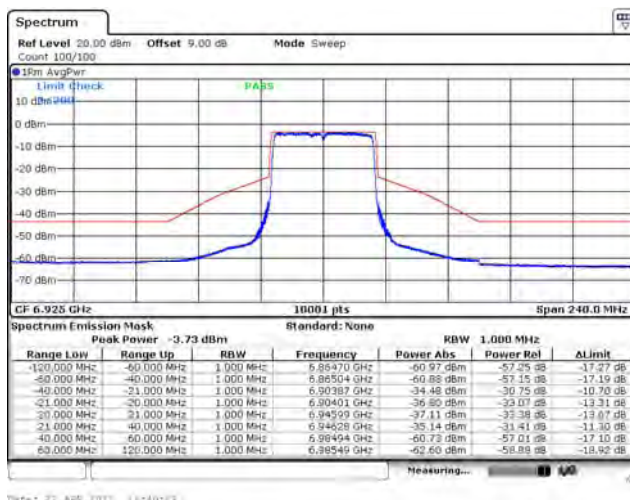


802.11ax (40 MHz) / Ant. 0 / 7005 MHz

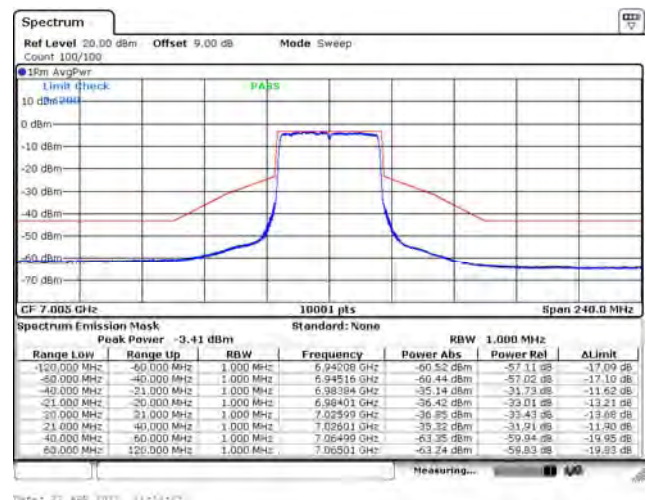

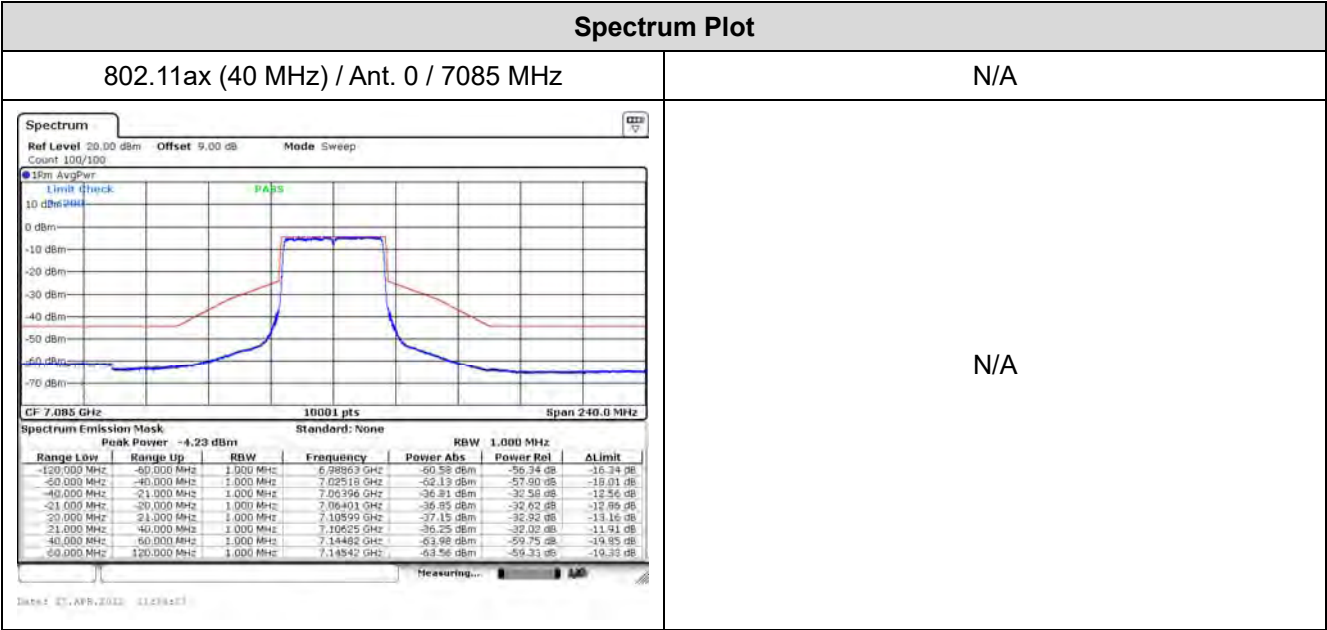


Spectrum Plot


802.11ax (40 MHz) / Ant. 1 / 6125 MHz

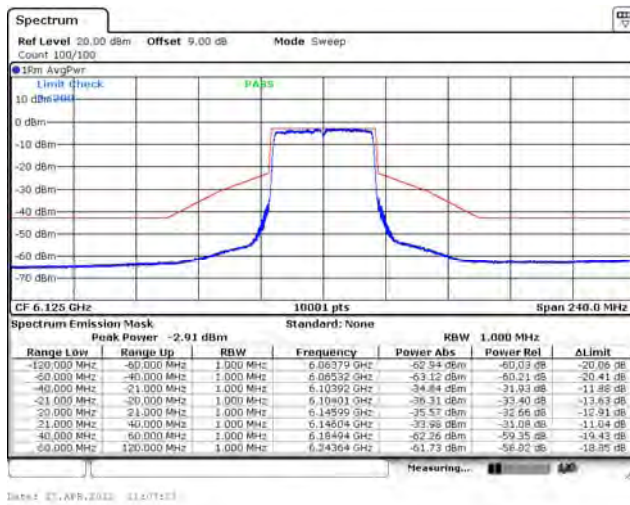


802.11ax (40 MHz) / Ant. 1 / 6245 MHz

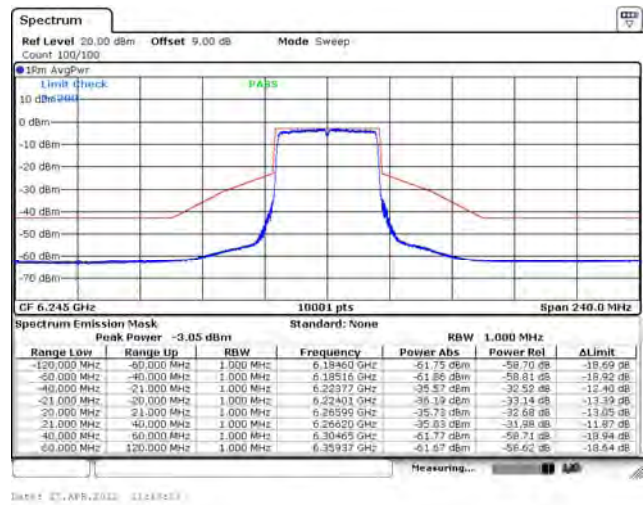


802.11ax (40 MHz) / Ant. 1 / 6405 MHz

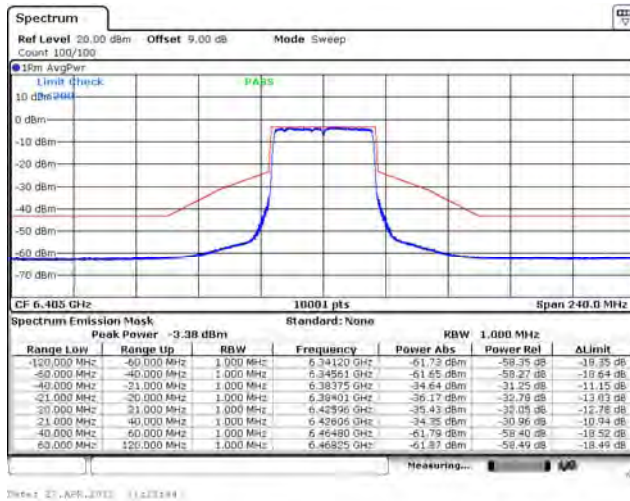


802.11ax (40 MHz) / Ant. 1 / 6445 MHz

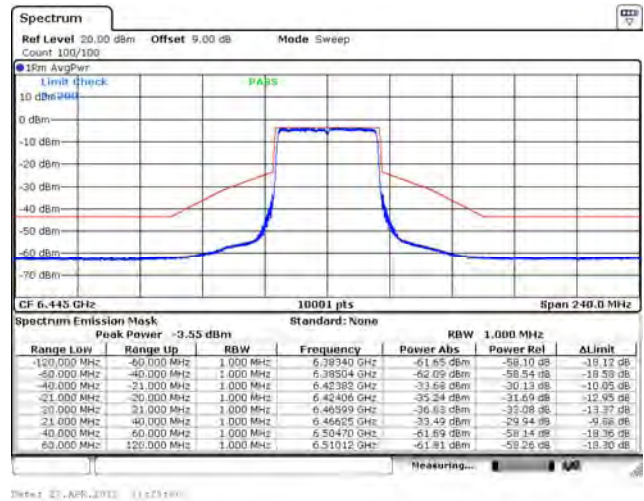

802.11ax (40 MHz) / Ant. 1 / 6485 MHz

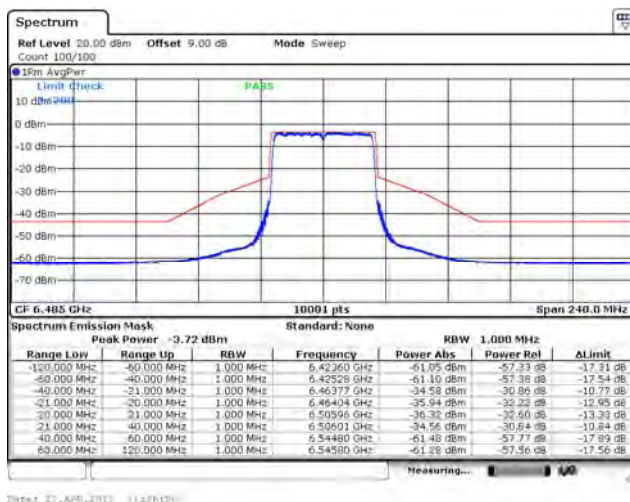


802.11ax (40 MHz) / Ant. 1 / 6525 MHz

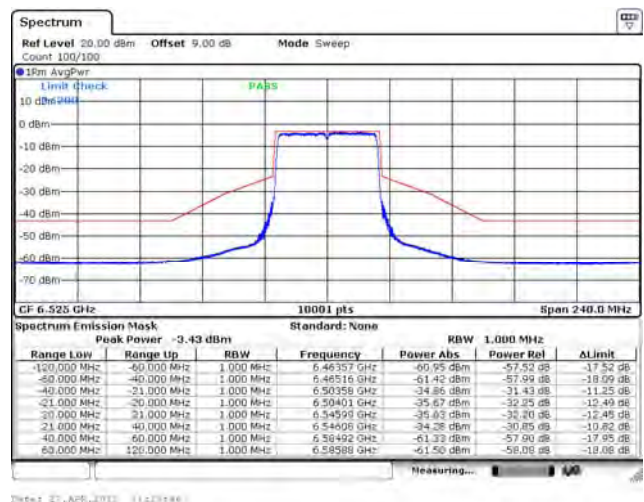


Spectrum Plot


802.11ax (40 MHz) / Ant. 1 / 6565 MHz

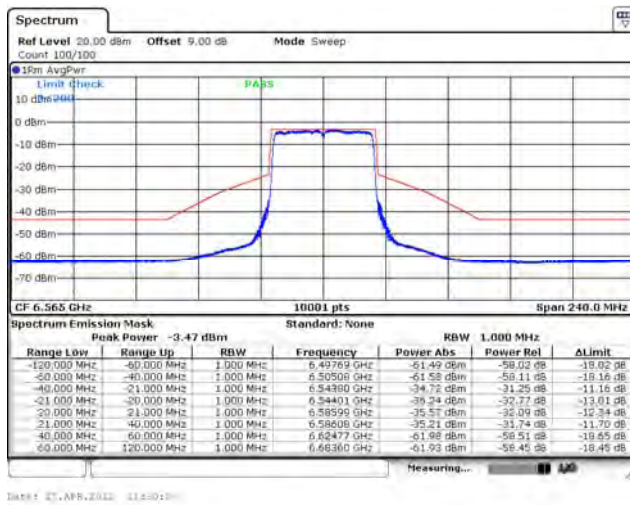


802.11ax (40 MHz) / Ant. 1 / 6725 MHz

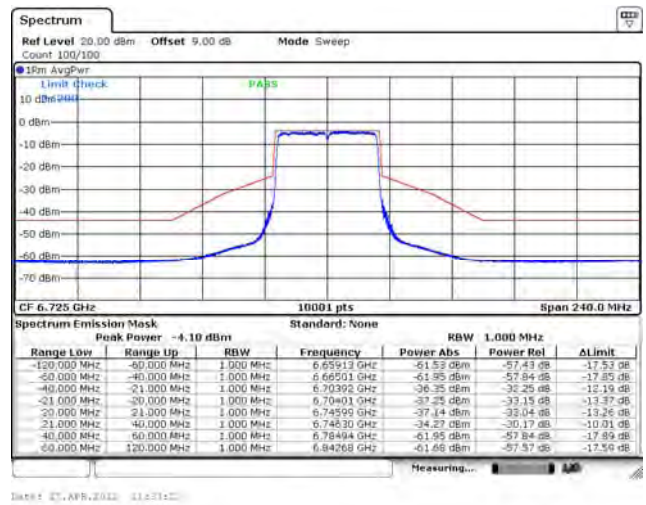


802.11ax (40 MHz) / Ant. 1 / 6845 MHz

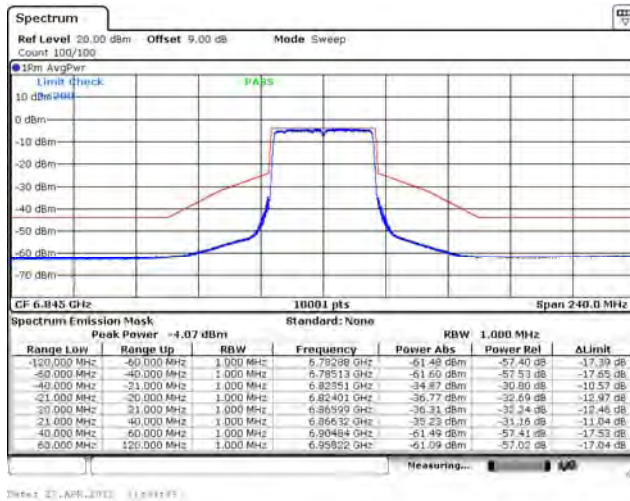


802.11ax (40 MHz) / Ant. 1 / 6885 MHz

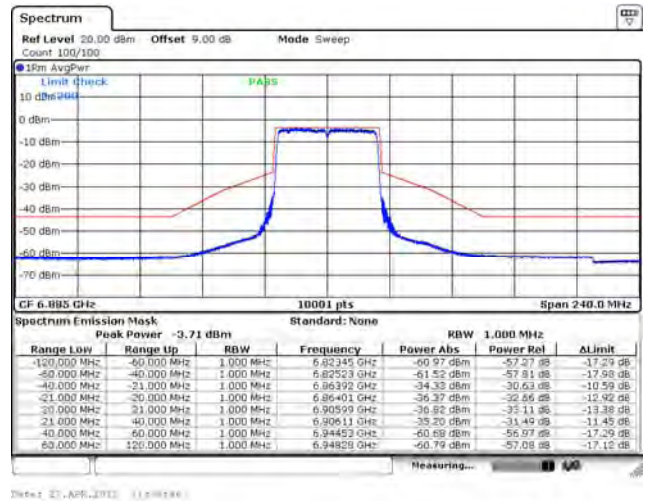


802.11ax (40 MHz) / Ant. 1 / 6925 MHz

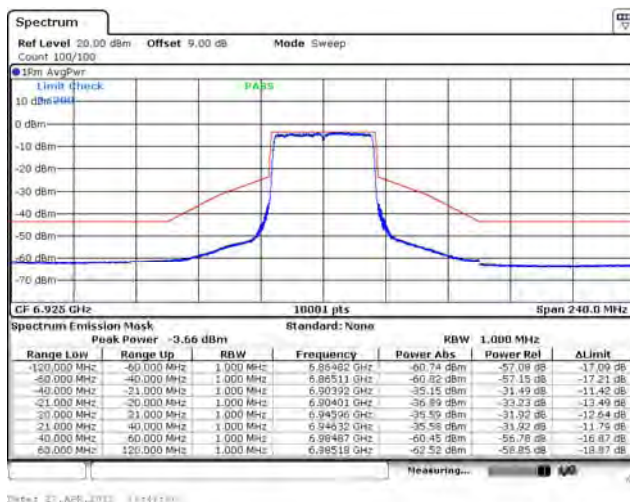


802.11ax (40 MHz) / Ant. 1 / 7005 MHz

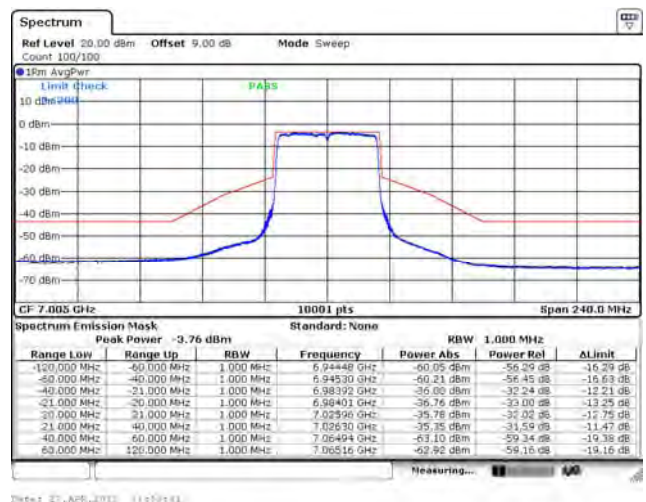

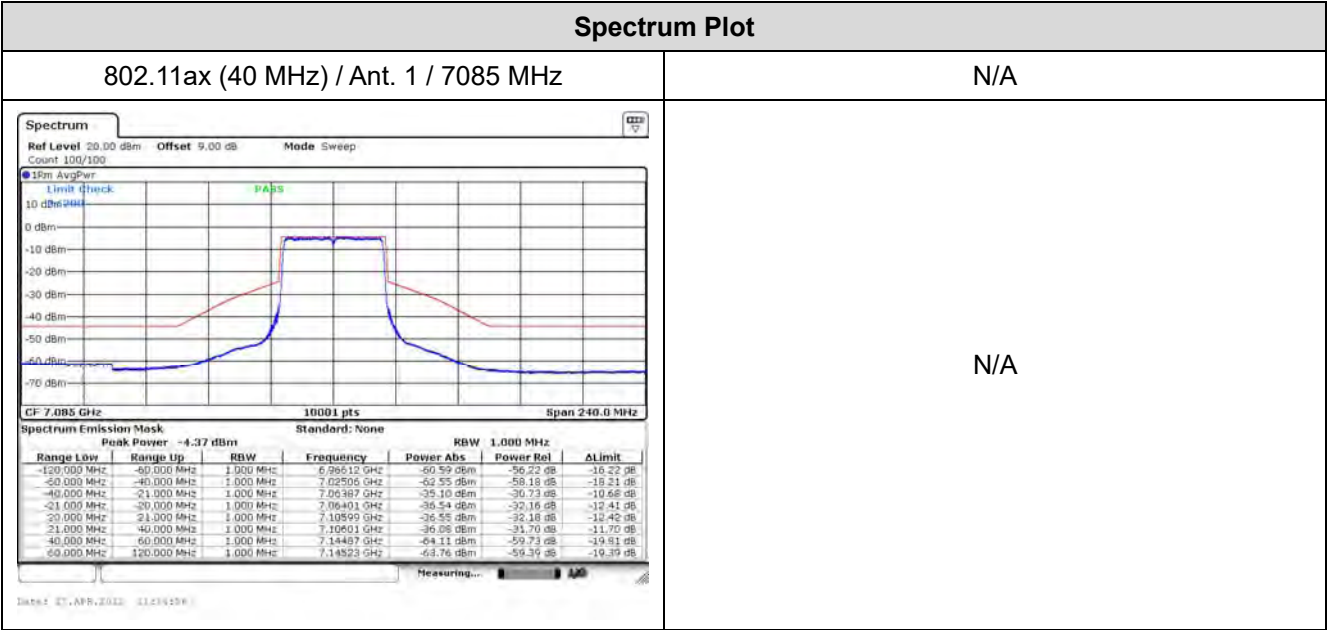


Spectrum Plot


802.11ax (40 MHz) / Ant. 2 / 6125 MHz

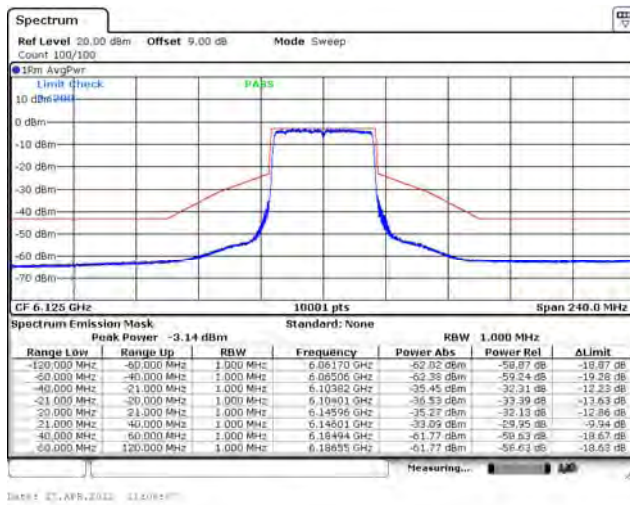


802.11ax (40 MHz) / Ant. 2 / 6245 MHz

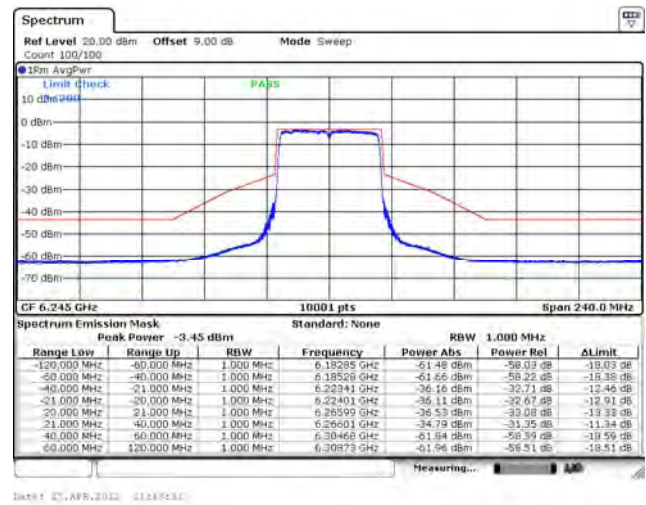


802.11ax (40 MHz) / Ant. 2 / 6405 MHz

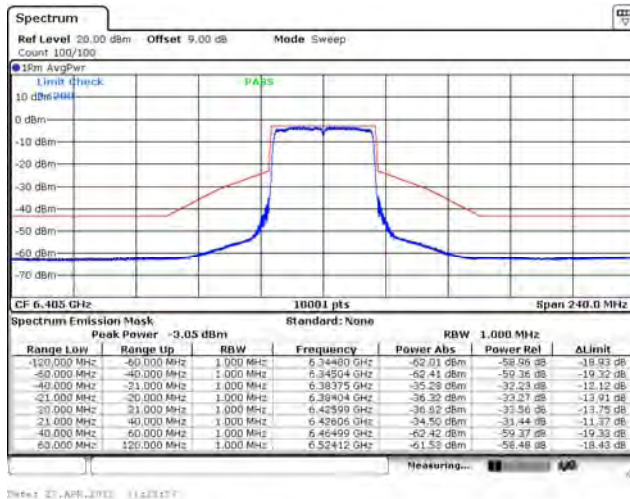


802.11ax (40 MHz) / Ant. 2 / 6445 MHz

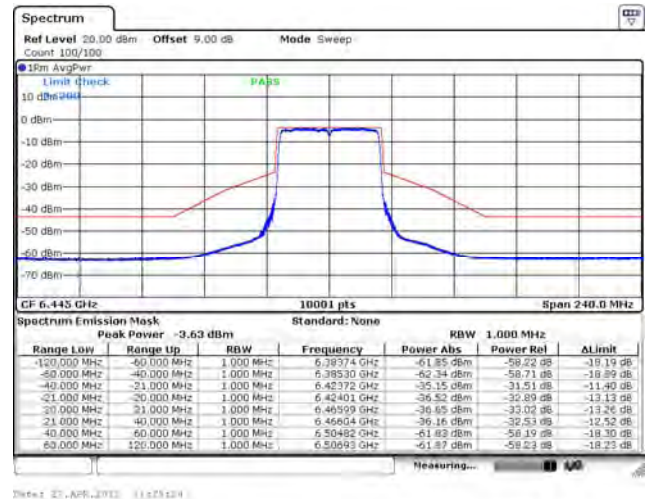

802.11ax (40 MHz) / Ant. 2 / 6485 MHz

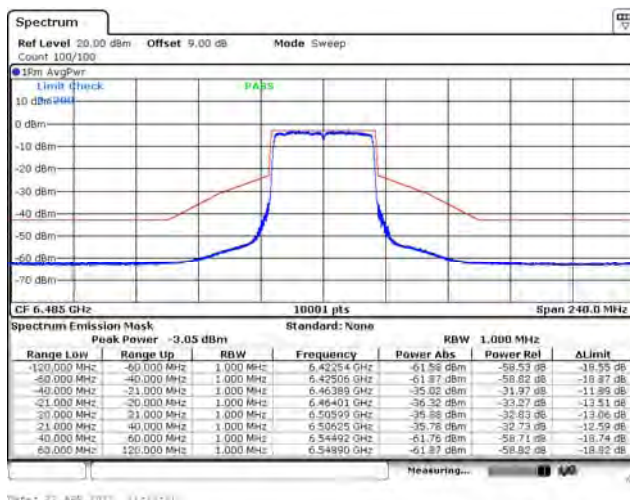


802.11ax (40 MHz) / Ant. 2 / 6525 MHz

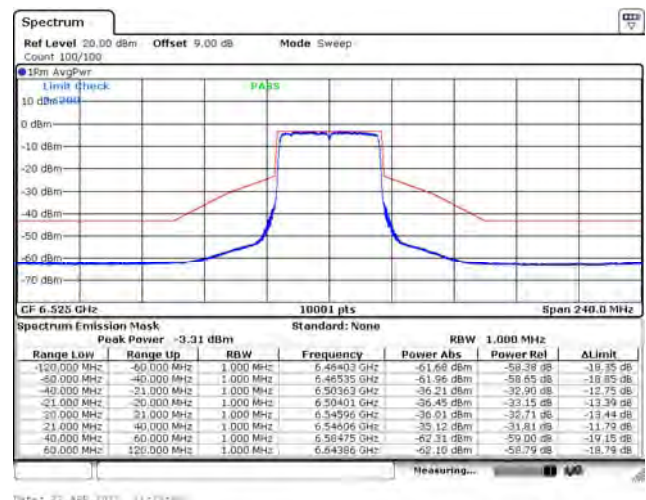


Spectrum Plot


802.11ax (40 MHz) / Ant. 2 / 6565 MHz

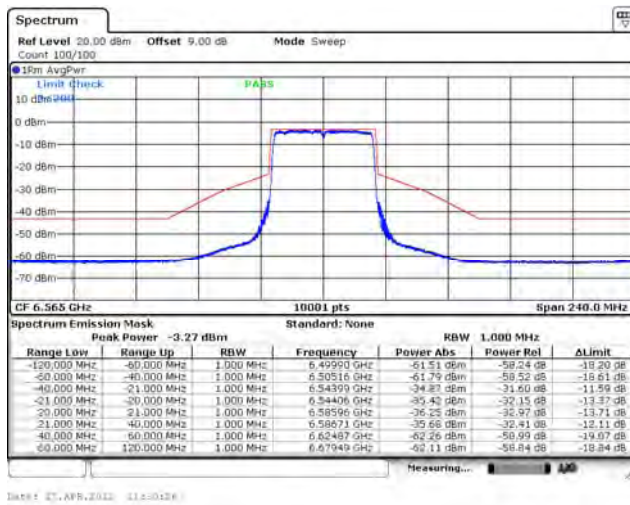


802.11ax (40 MHz) / Ant. 2 / 6725 MHz

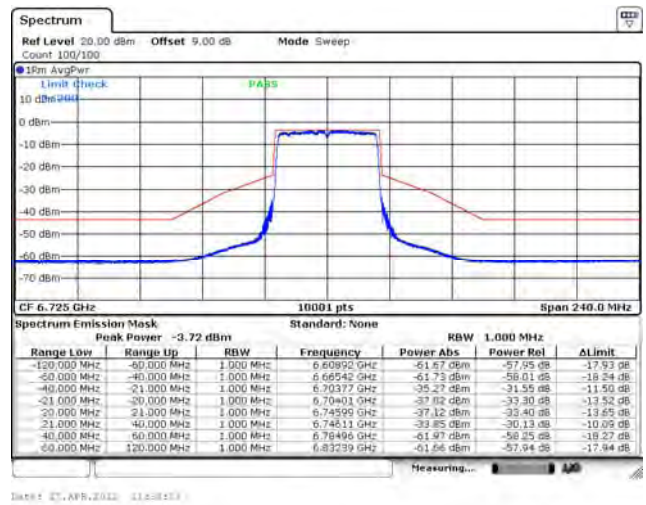


802.11ax (40 MHz) / Ant. 2 / 6845 MHz

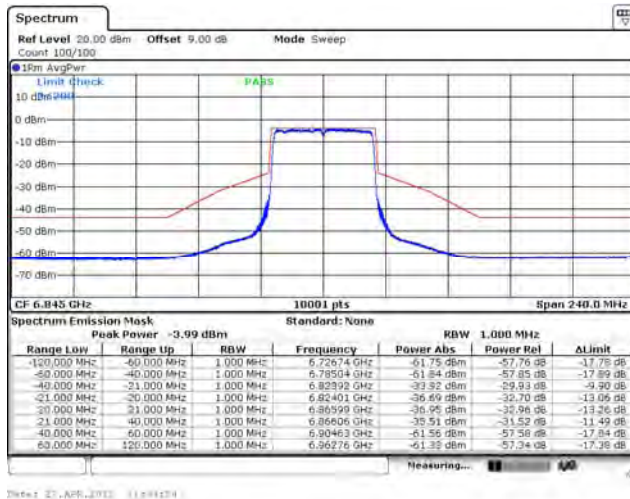


802.11ax (40 MHz) / Ant. 2 / 6885 MHz

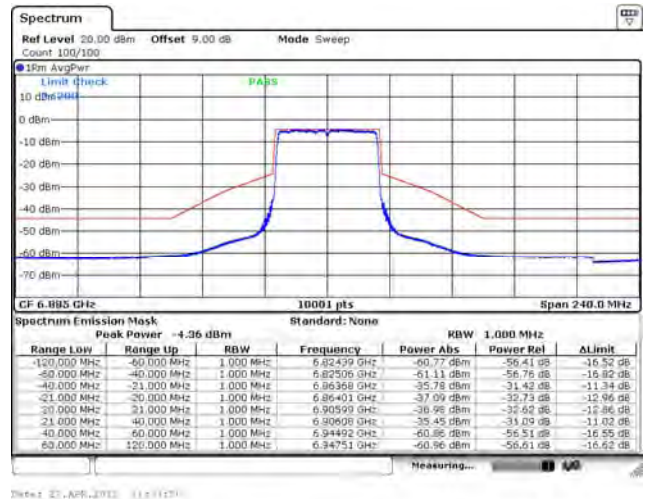


802.11ax (40 MHz) / Ant. 2 / 6925 MHz

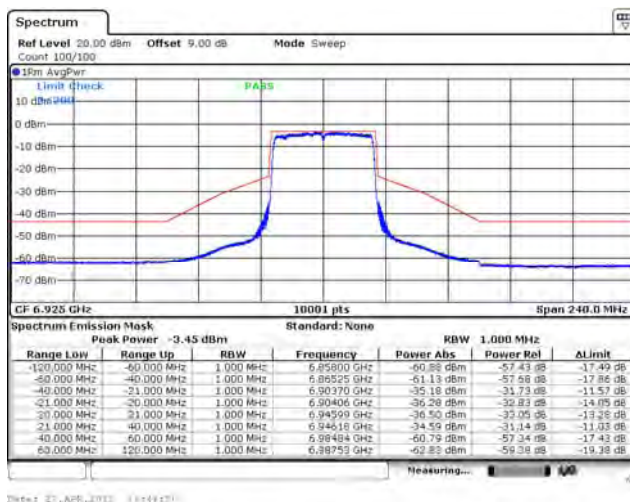


802.11ax (40 MHz) / Ant. 2 / 7005 MHz

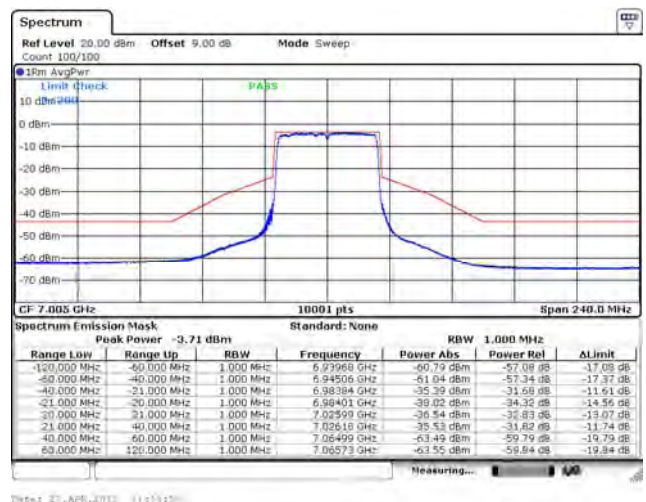

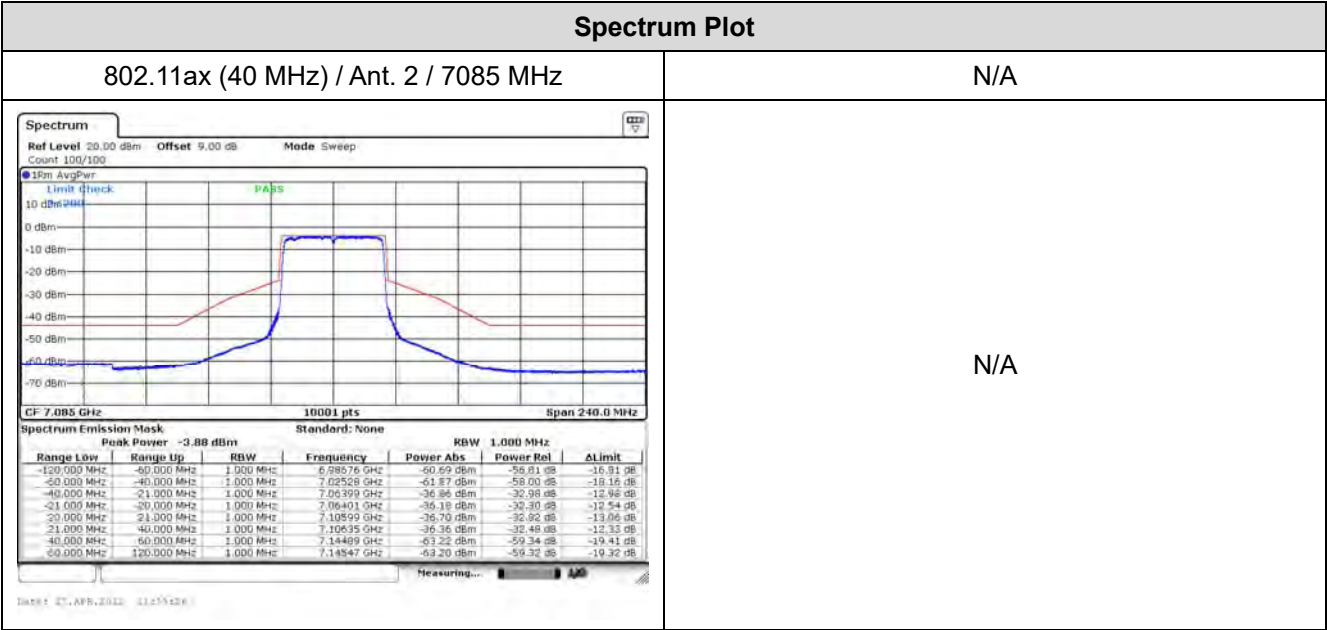


Spectrum Plot


802.11ax (40 MHz) / Ant. 3 / 6125 MHz

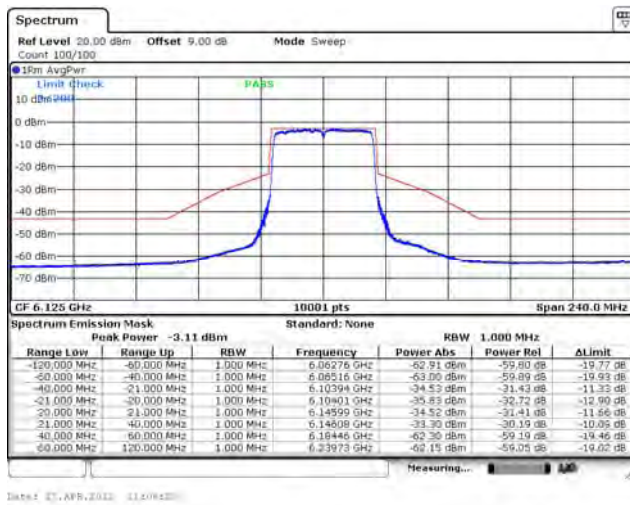


802.11ax (40 MHz) / Ant. 3 / 6245 MHz

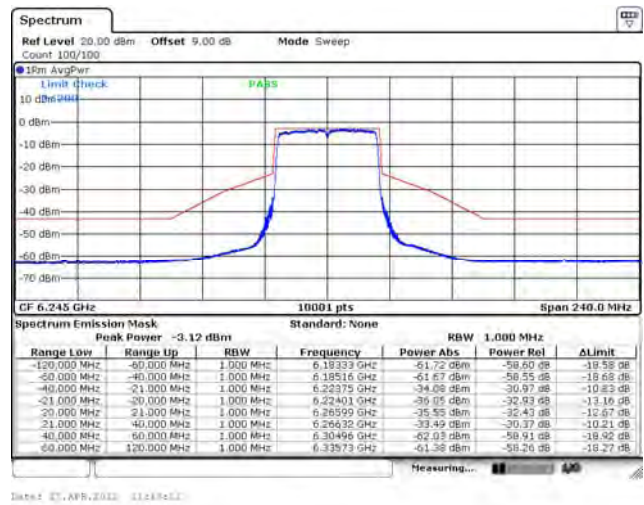


802.11ax (40 MHz) / Ant. 3 / 6405 MHz

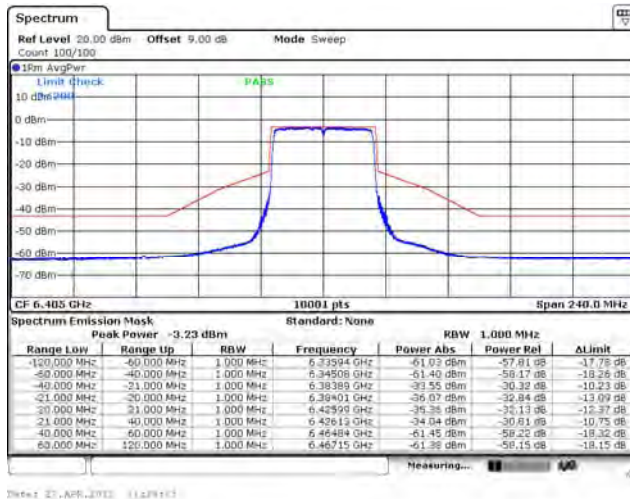


802.11ax (40 MHz) / Ant. 3 / 6445 MHz

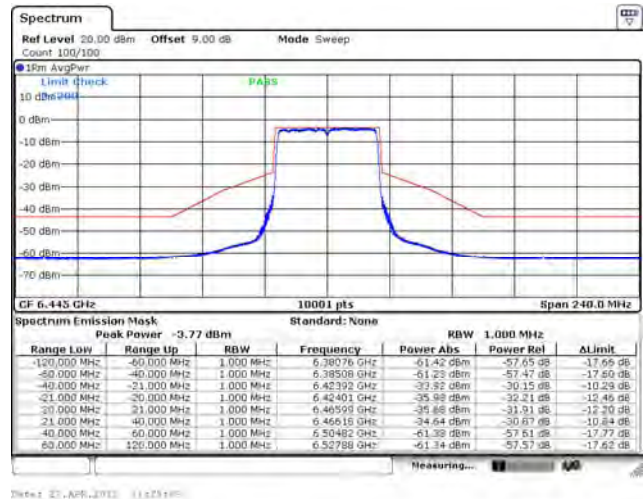

802.11ax (40 MHz) / Ant. 3 / 6485 MHz

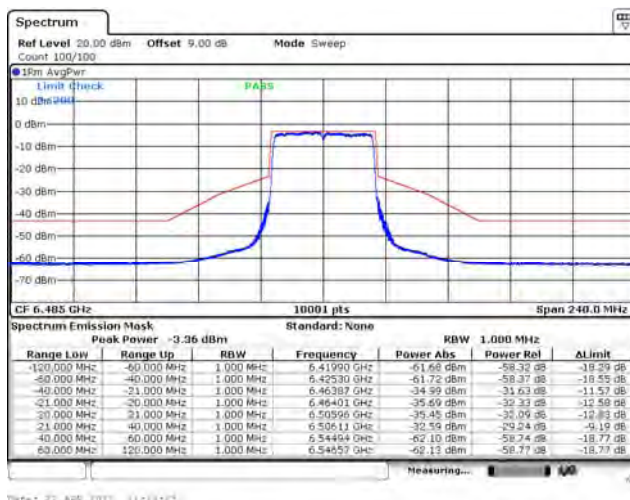


802.11ax (40 MHz) / Ant. 3 / 6525 MHz

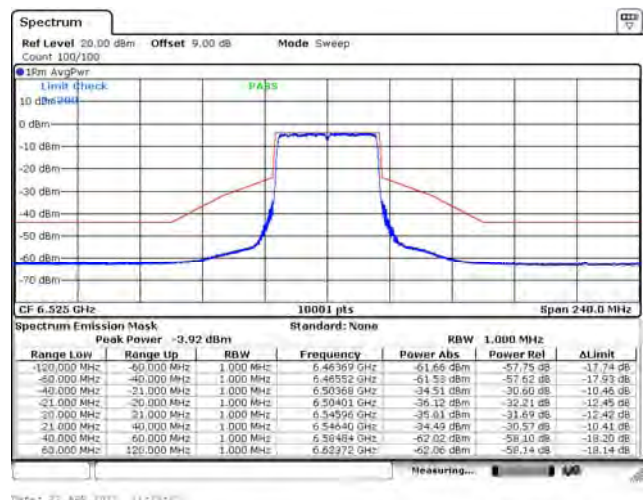


Spectrum Plot


802.11ax (40 MHz) / Ant. 3 / 6565 MHz

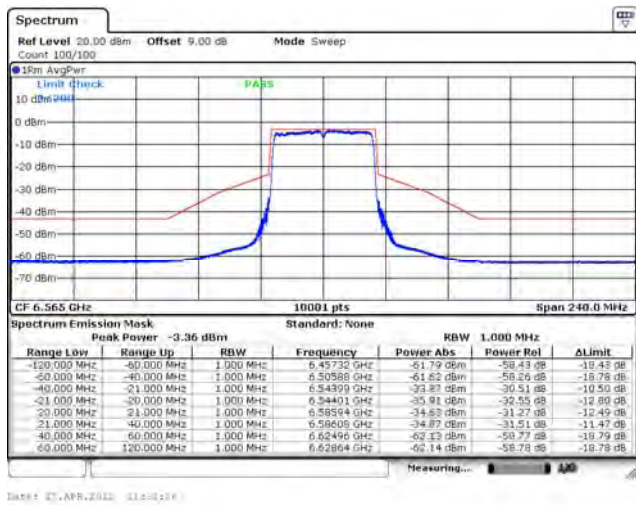


802.11ax (40 MHz) / Ant. 3 / 6725 MHz

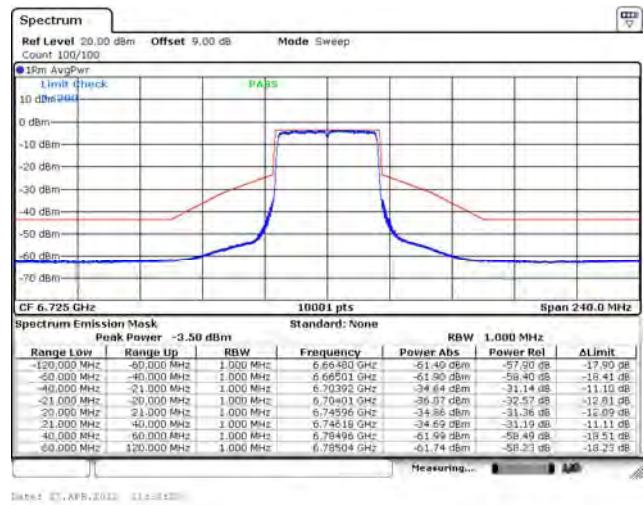


802.11ax (40 MHz) / Ant. 3 / 6845 MHz

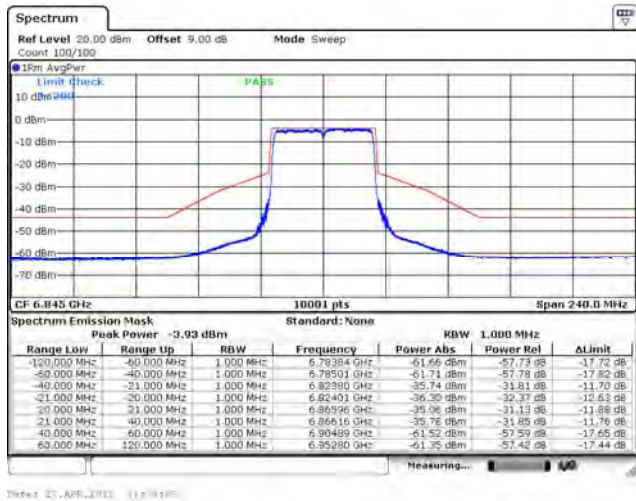


802.11ax (40 MHz) / Ant. 3 / 6885 MHz

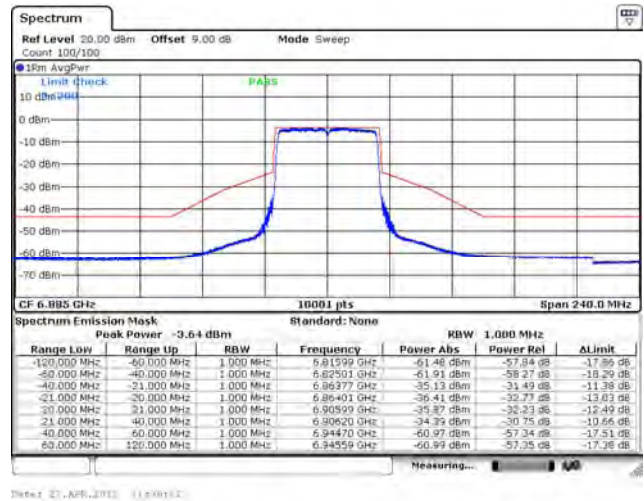


802.11ax (40 MHz) / Ant. 3 / 6925 MHz

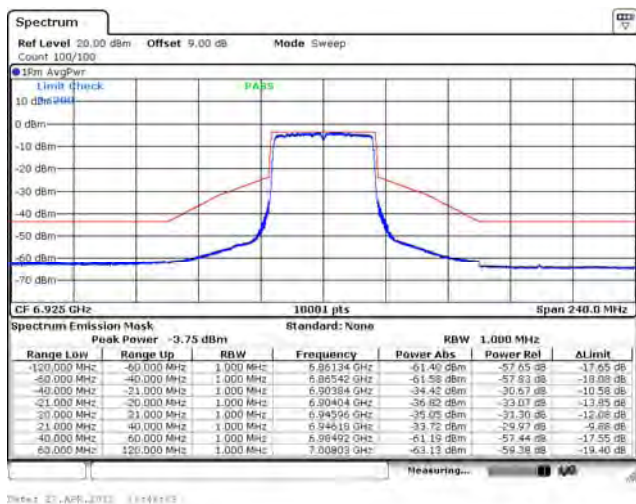

802.11ax (40 MHz) / Ant. 3 / 7005 MHz

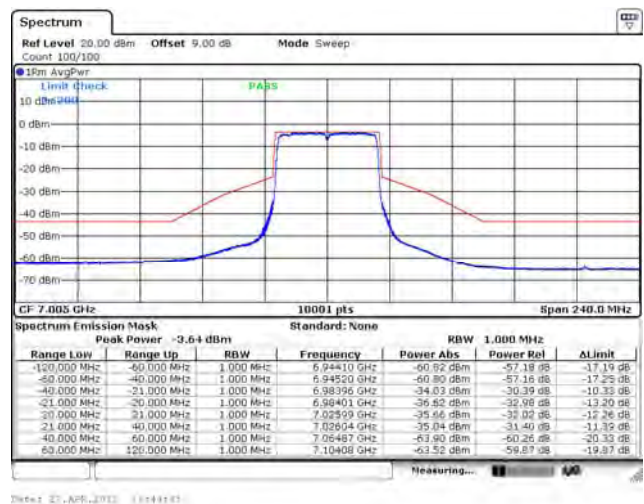

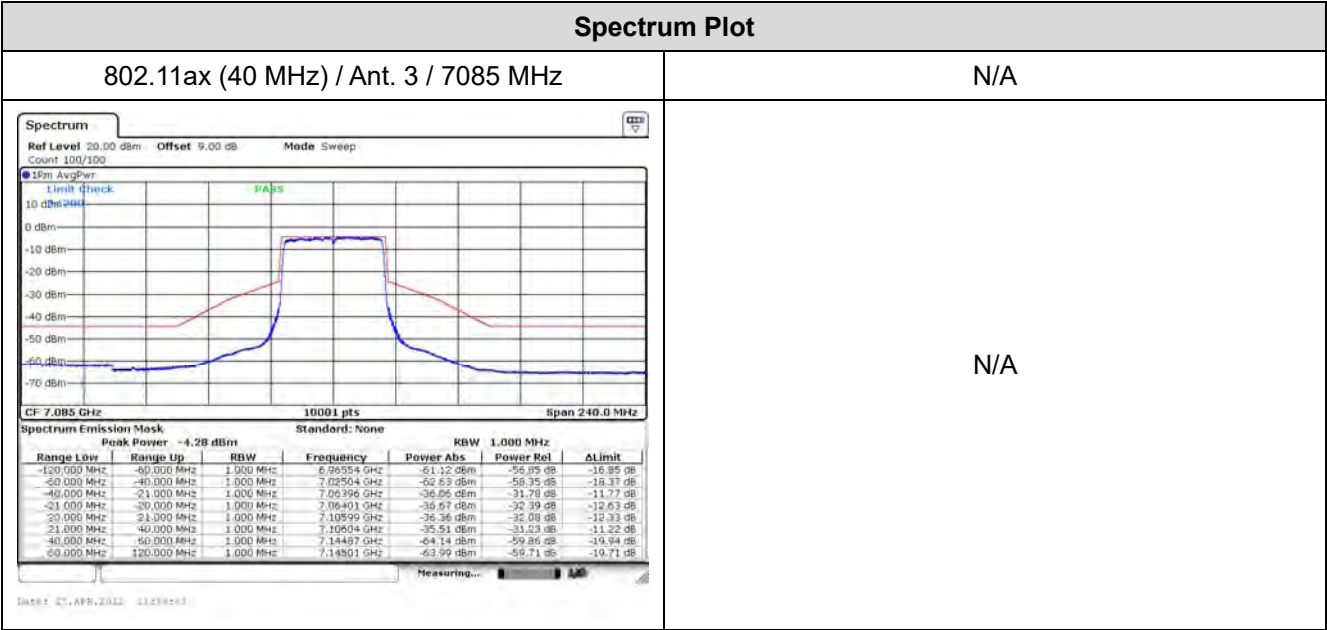


Spectrum Plot


802.11ax (80 MHz) / Ant. 0 / 6145 MHz




802.11ax (80 MHz) / Ant. 0 / 6225 MHz

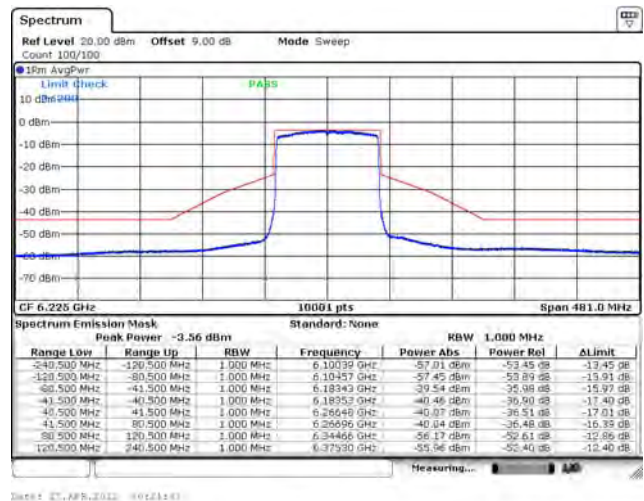


802.11ax (80 MHz) / Ant. 0 / 6385 MHz

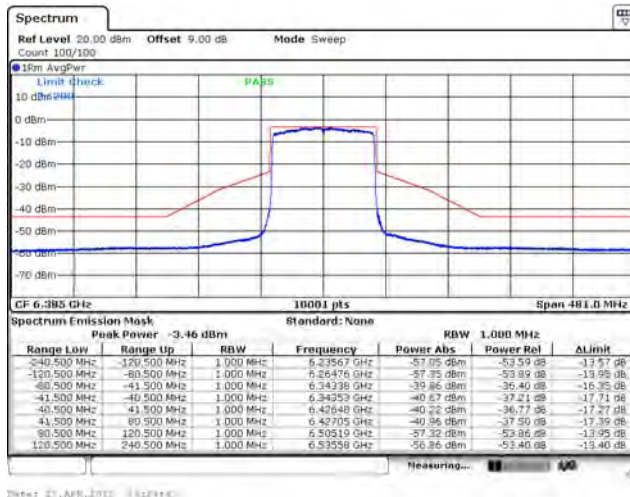


802.11ax (80 MHz) / Ant. 0 / 6465 MHz

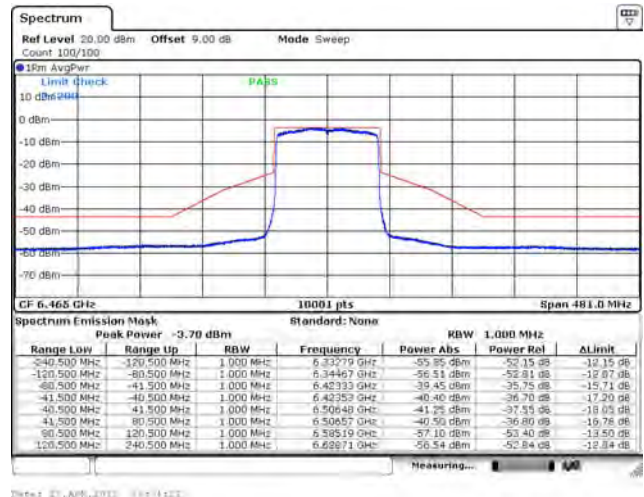

802.11ax (80 MHz) / Ant. 0 / 6545 MHz

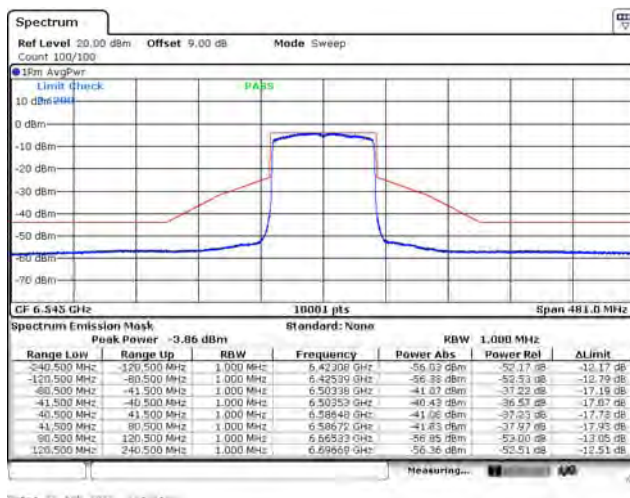


802.11ax (80 MHz) / Ant. 0 / 6625 MHz

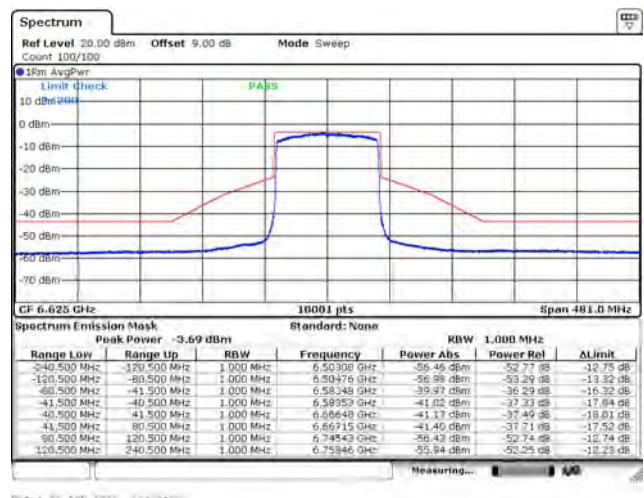


Spectrum Plot


802.11ax (80 MHz) / Ant. 0 / 6705 MHz

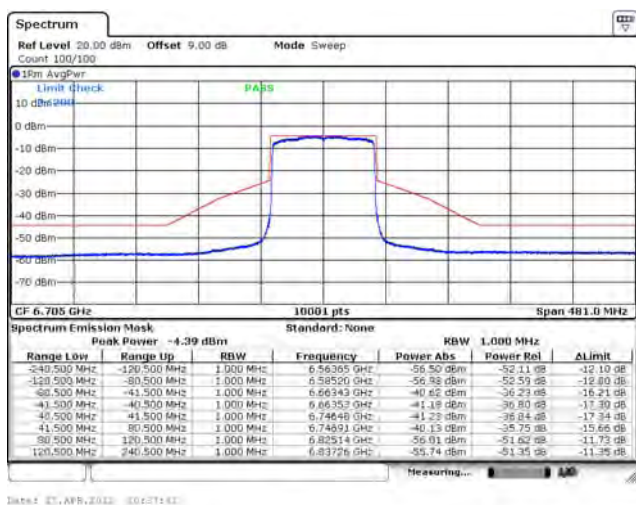

802.11ax (80 MHz) / Ant. 0 / 6785 MHz

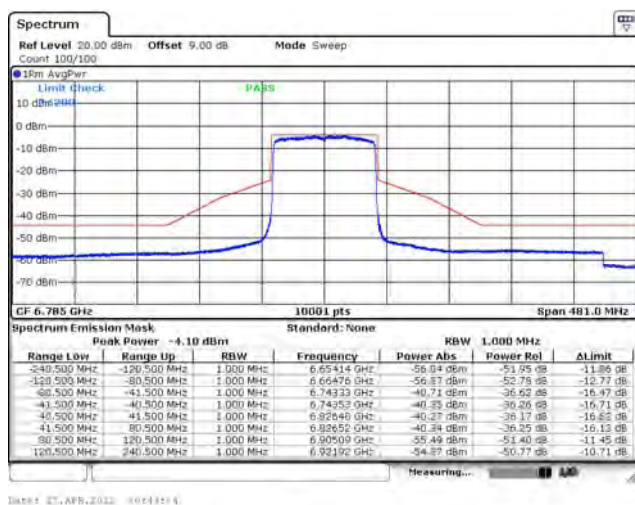


802.11ax (80 MHz) / Ant. 0 / 6865 MHz

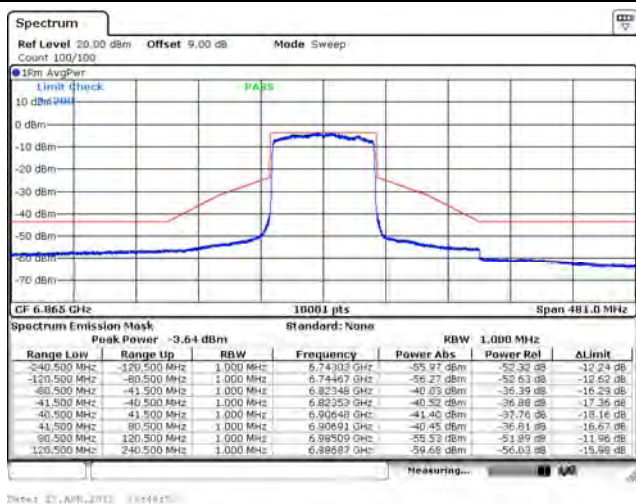

802.11ax (80 MHz) / Ant. 0 / 6945 MHz



802.11ax (80 MHz) / Ant. 0 / 7025 MHz

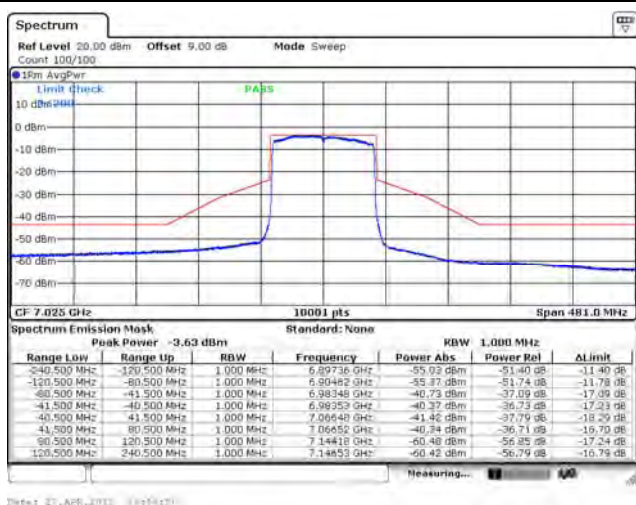


N/A


N/A

Spectrum Plot

802.11ax (80 MHz) / Ant. 1 / 6145 MHz

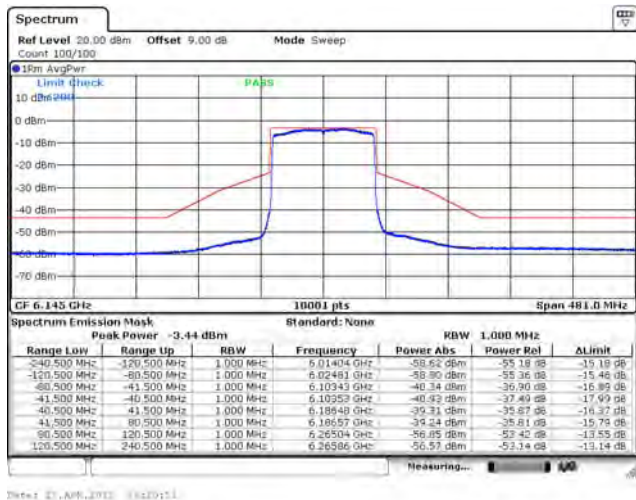

802.11ax (80 MHz) / Ant. 1 / 6225 MHz

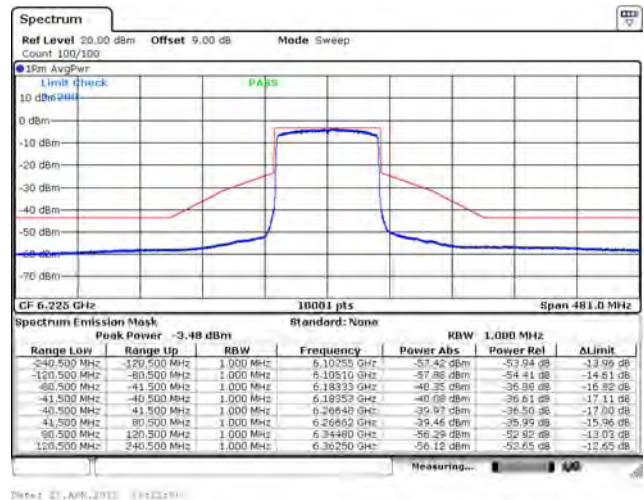


802.11ax (80 MHz) / Ant. 1 / 6385 MHz




802.11ax (80 MHz) / Ant. 1 / 6465 MHz



802.11ax (80 MHz) / Ant. 1 / 6545 MHz

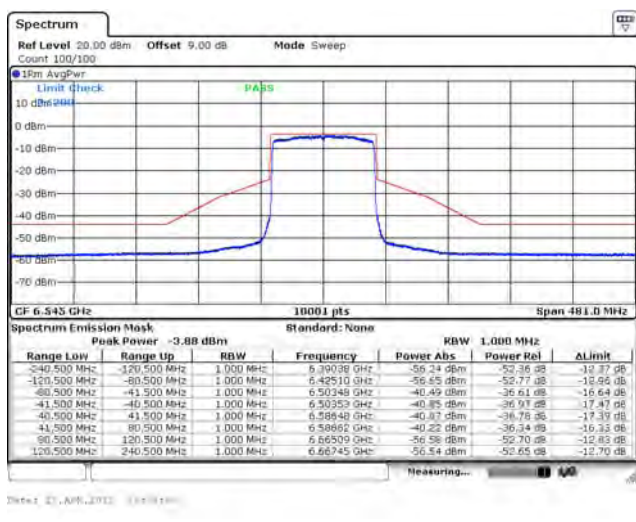


802.11ax (80 MHz) / Ant. 1 / 6625 MHz

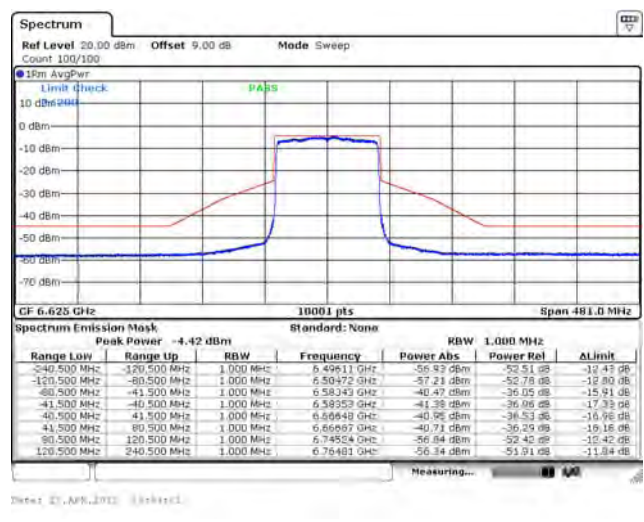


Spectrum Plot


802.11ax (80 MHz) / Ant. 1 / 6705 MHz

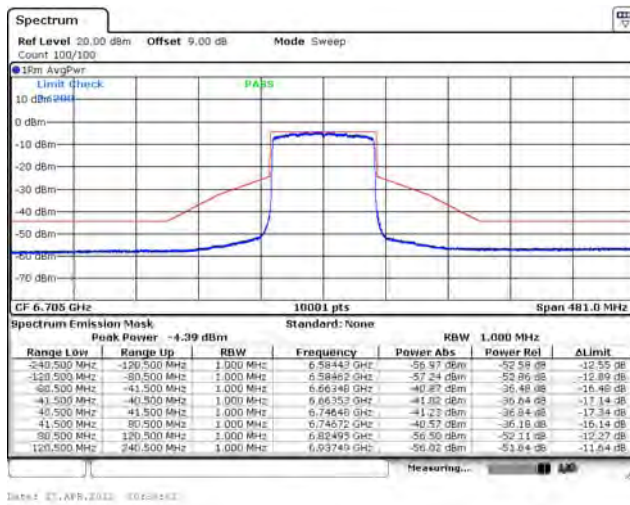


802.11ax (80 MHz) / Ant. 1 / 6785 MHz

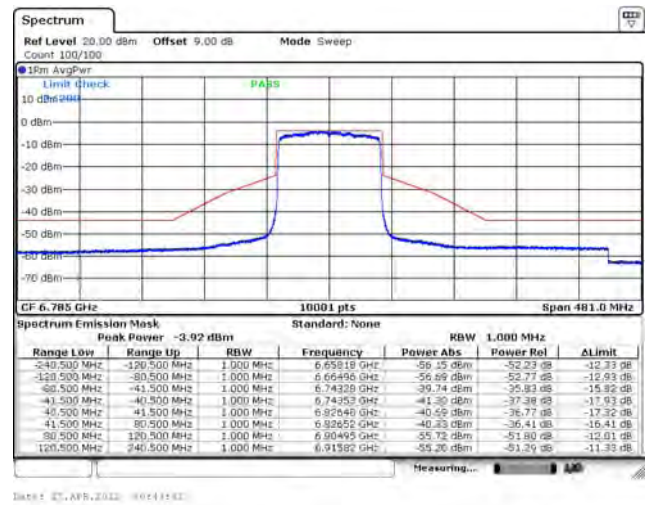


802.11ax (80 MHz) / Ant. 1 / 6865 MHz

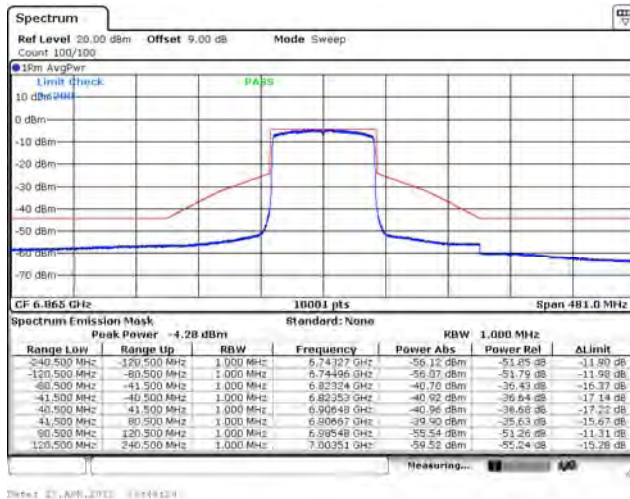

802.11ax (80 MHz) / Ant. 1 / 6945 MHz

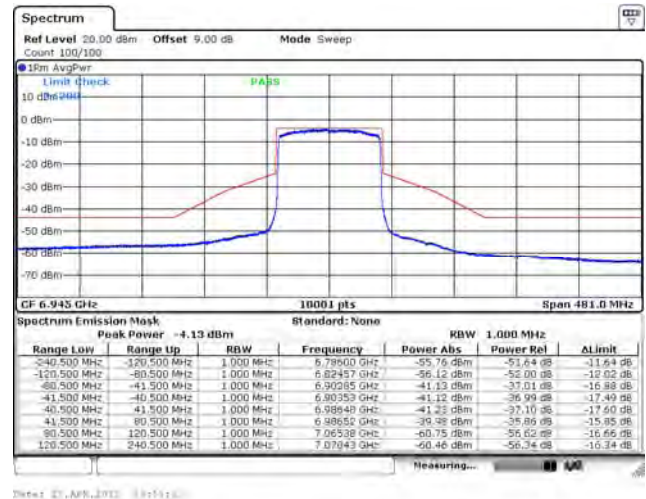

802.11ax (80 MHz) / Ant. 1 / 7025 MHz

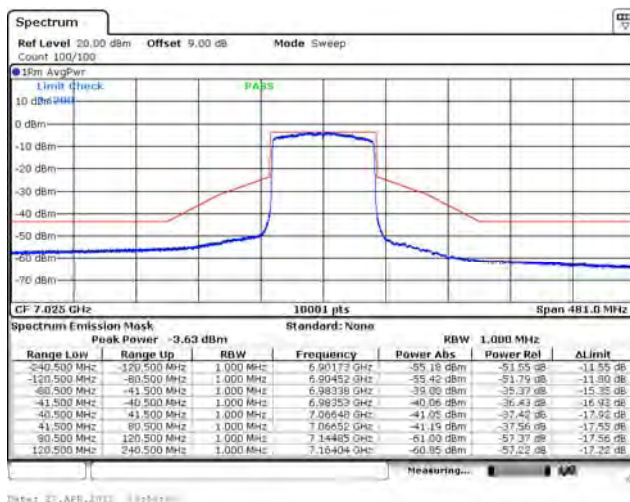


N/A


N/A

Spectrum Plot


802.11ax (80 MHz) / Ant. 2 / 6145 MHz

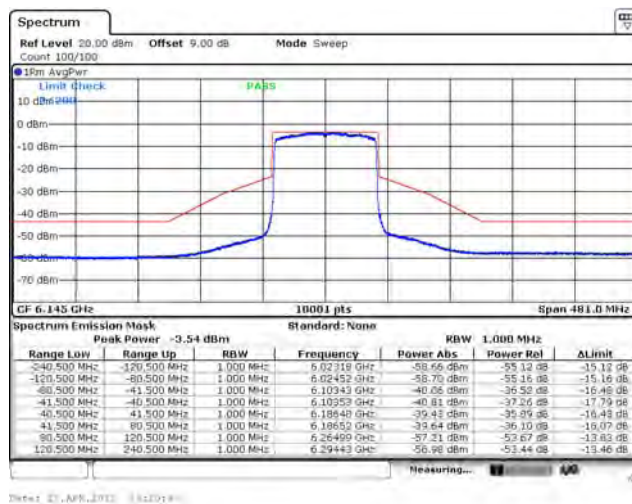


802.11ax (80 MHz) / Ant. 2 / 6225 MHz

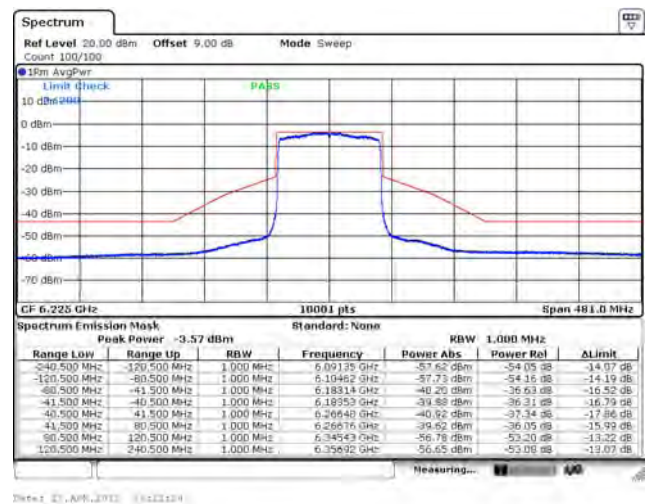


802.11ax (80 MHz) / Ant. 2 / 6385 MHz

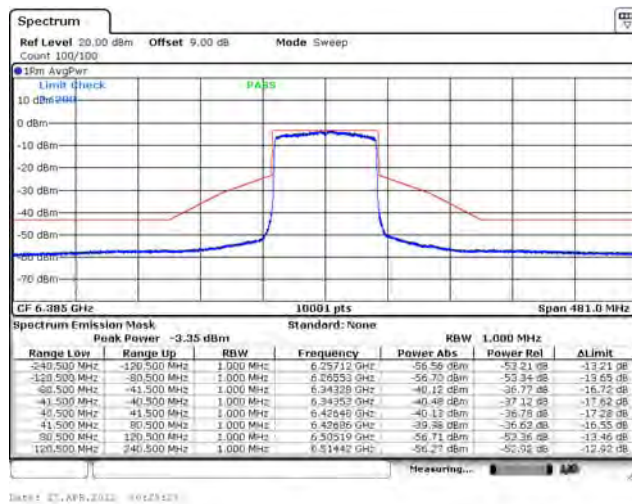

802.11ax (80 MHz) / Ant. 2 / 6465 MHz

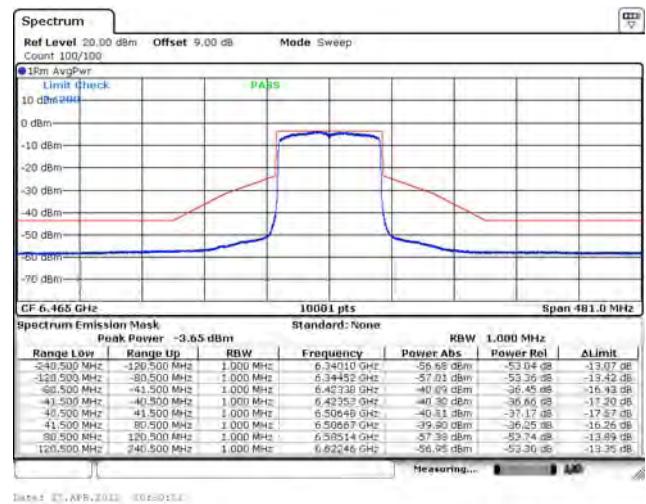

802.11ax (80 MHz) / Ant. 2 / 6545 MHz

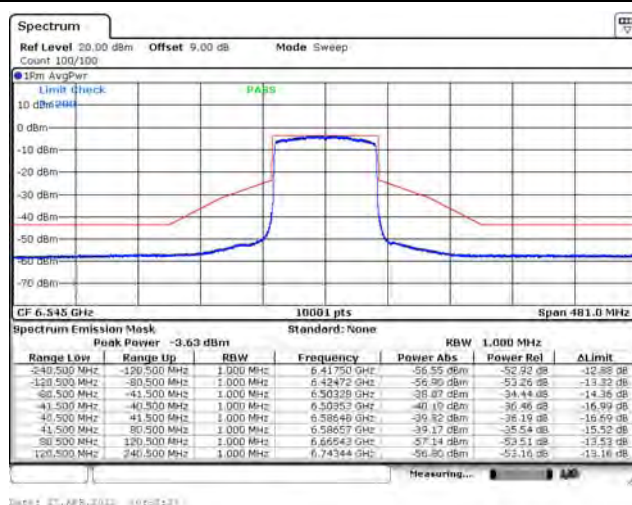


802.11ax (80 MHz) / Ant. 2 / 6625 MHz




Spectrum Plot


802.11ax (80 MHz) / Ant. 2 / 6705 MHz

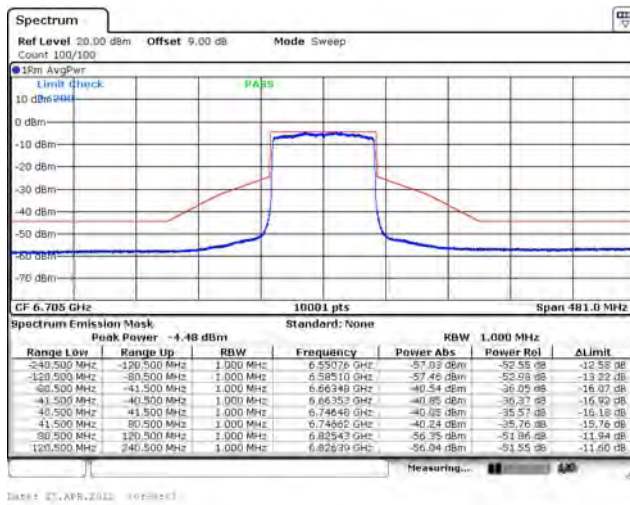


802.11ax (80 MHz) / Ant. 2 / 6785 MHz

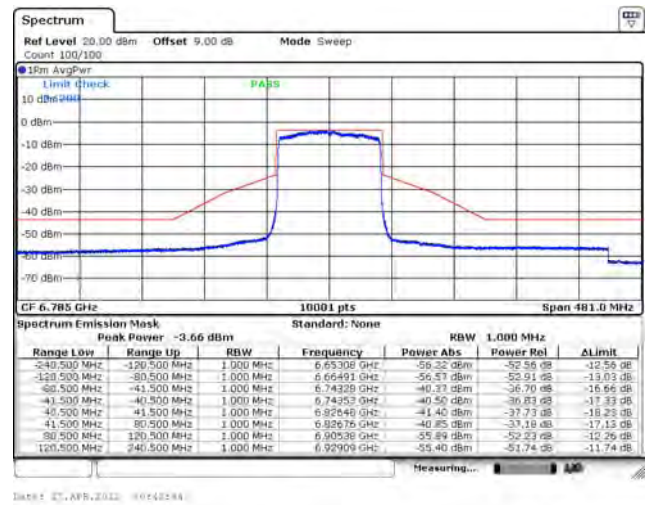

802.11ax (80 MHz) / Ant. 2 / 6865 MHz

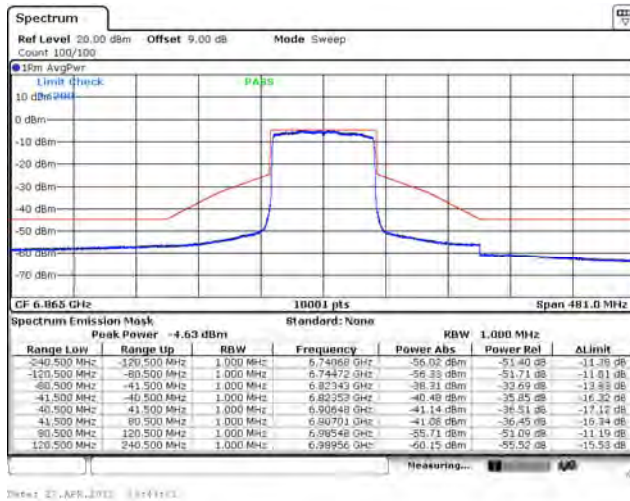

802.11ax (80 MHz) / Ant. 2 / 6945 MHz

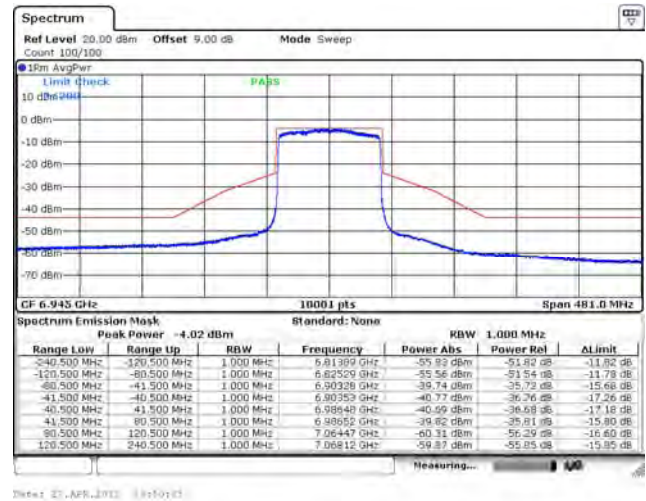

802.11ax (80 MHz) / Ant. 2 / 7025 MHz




N/A


N/A

Spectrum Plot


802.11ax (80 MHz) / Ant. 3 / 6145 MHz

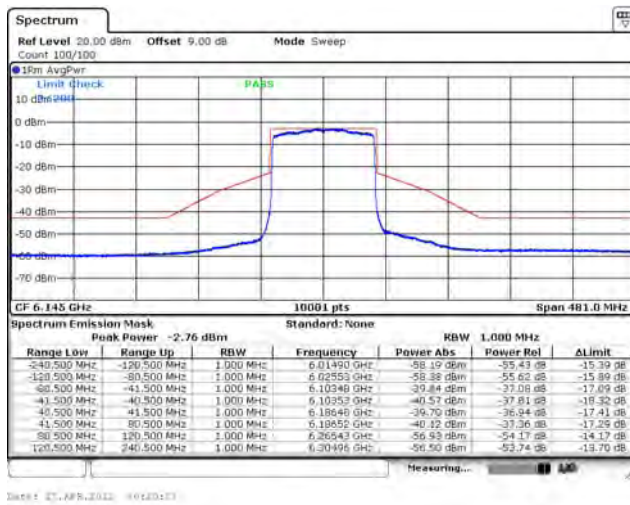


802.11ax (80 MHz) / Ant. 3 / 6225 MHz

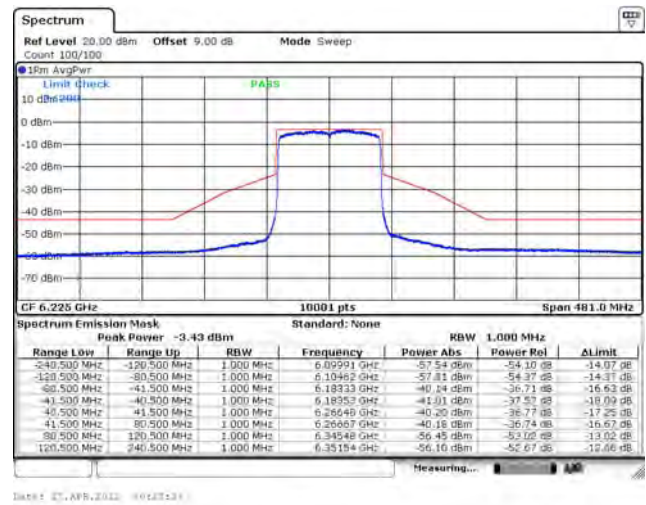


802.11ax (80 MHz) / Ant. 3 / 6385 MHz

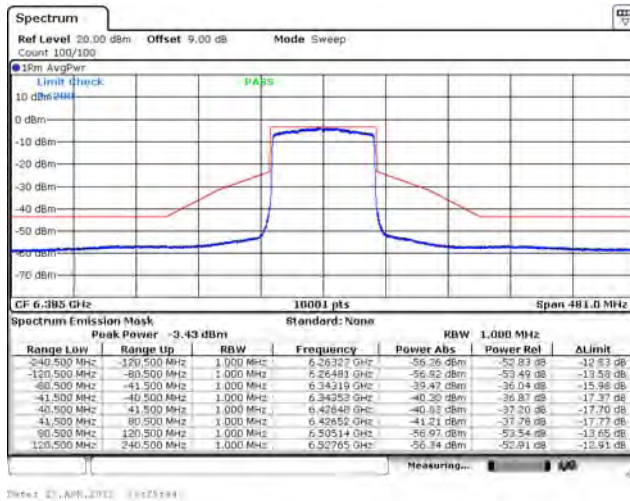

802.11ax (80 MHz) / Ant. 3 / 6465 MHz

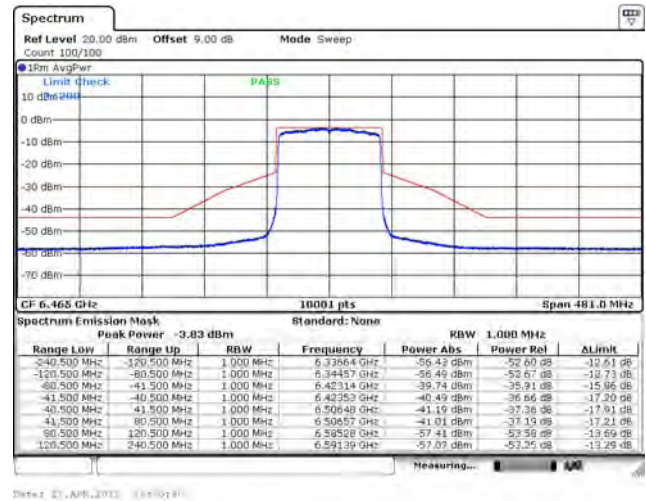

802.11ax (80 MHz) / Ant. 3 / 6545 MHz

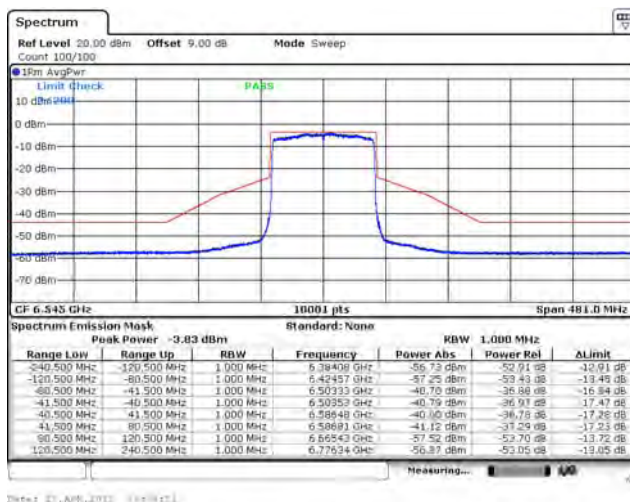

802.11ax (80 MHz) / Ant. 3 / 6625 MHz

