


APPENDIX I

Conducted Test set up Diagram

- Conducted Measurement

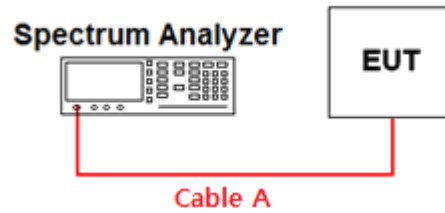

APPENDIX II

Duty Cycle Information

■ Test Procedure

Duty Cycle $[X = \text{On Time} / (\text{On} + \text{Off time})]$ is measured using Measurement Procedure of **KDB789033 D02v02r01**

1. Set the center frequency of the spectrum analyzer to the center frequency of the transmission.
2. Set RBW $\geq$ EBW if possible; otherwise, set RBW to the largest available value.
3. Set VBW $\geq$ RBW. Set detector = peak.
4. Note : The zero-span measurement method shall not be used unless both **RBW and VBW are $> 50/T$** , where T is defined in section II.B.1.a), and **the number of sweep points across duration T exceeds 100**. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

T : The minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

(T = **On time** of the above table since the EUT operates with above fixed Duty Cycle and it is the minimum On time)

■ Test Results:

Duty cycle: Single

Mode	Data Rate	Tested Frequency [MHz]	Maximum Achievable Duty Cycle (x) = On / (On+Off)			Duty Cycle Correction Factor [dB]	50/ T [kHz]
			On Time [ms]	(On+Off) Time [ms]	x		
802.11a	6Mbps	5180	2.03	2.13	95.31	0.21	24.63
802.11ac (VHT20)	MCS0	5180	1.90	2.01	94.53	0.25	26.32
802.11ac (VHT40)	MCS0	5190	1.28	1.38	92.75	0.33	39.06
802.11ac (VHT80)	MCS0	5210	1.17	1.28	91.41	0.40	42.74


Duty cycle: SDM

Mode	Data Rate	Tested Frequency [MHz]	Maximum Achievable Duty Cycle (x) = On / (On+Off)			Duty Cycle Correction Factor [dB]	50/ T [kHz]
			On Time [ms]	(On+Off) Time [ms]	x		
802.11ac (VHT20)	MCS0	5180	0.98	1.07	91.59	0.39	51.02
802.11n (HT40)	MCS8	5190	0.66	0.76	86.84	0.62	75.76
802.11ac (VHT80)	MCS0	5210	0.61	0.72	84.72	0.73	81.97

Single Transmit


Duty Cycle

Test Mode: 802.11a & Ch.36

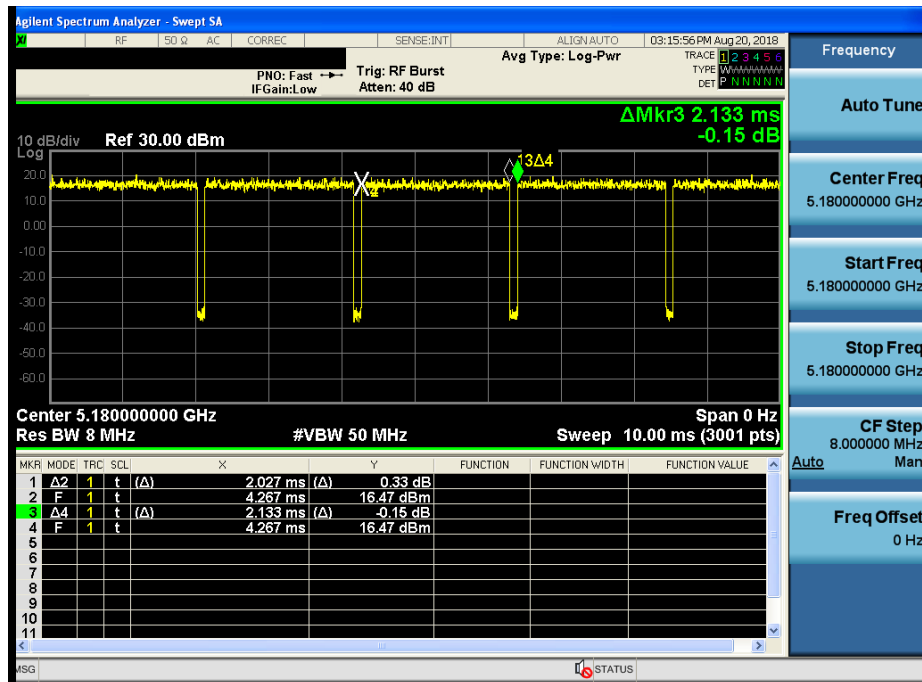


Duty Cycle

Test Mode: 802.11ac VHT20 & Ch.36

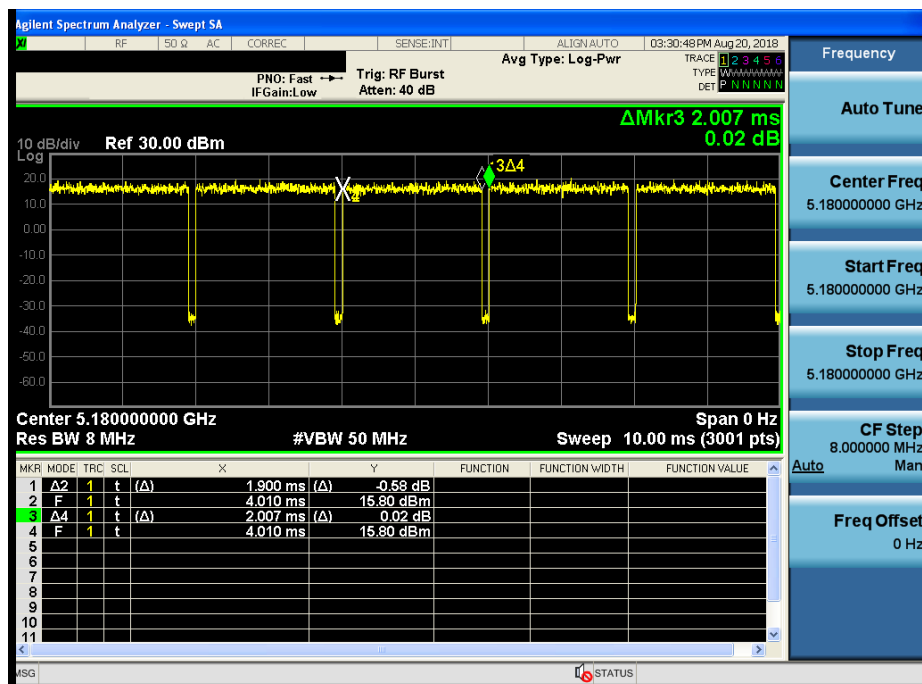


Duty Cycle

Test Mode: 802.11ac VHT40 & Ch.38

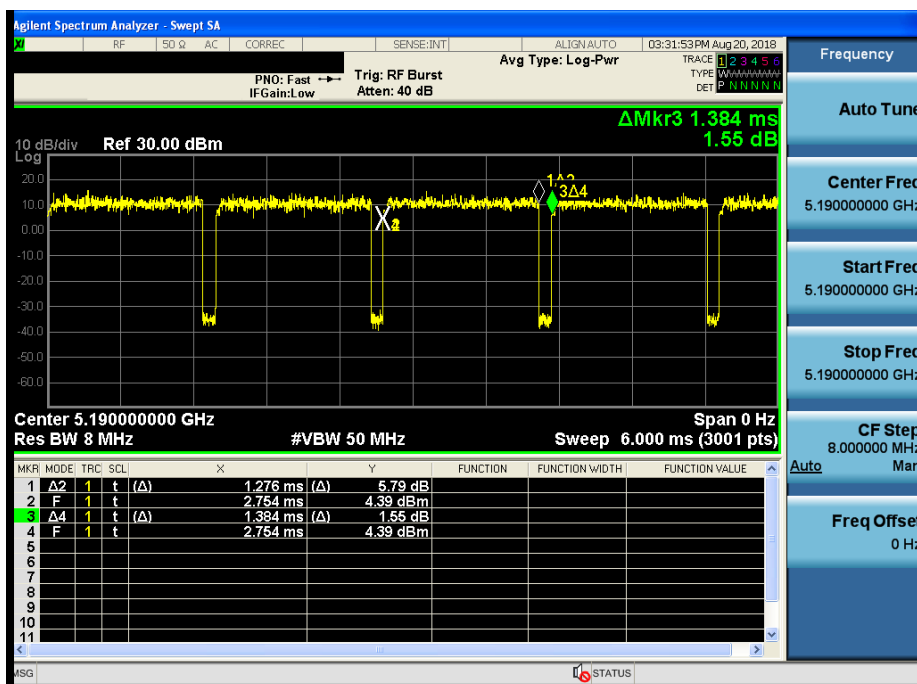

Duty Cycle


Test Mode: 802.11ac VHT80 & Ch.42

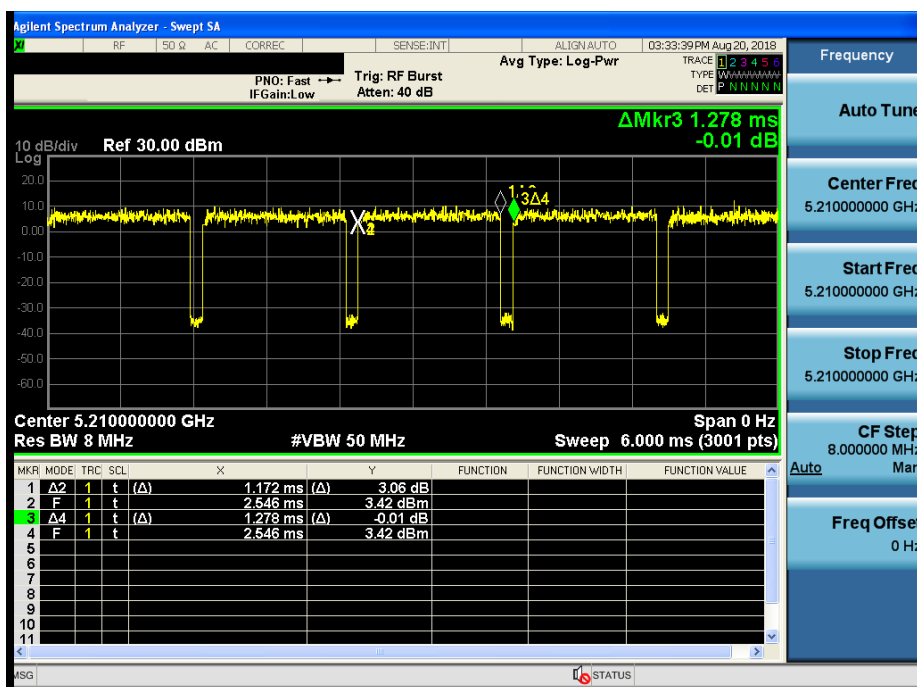

Multiple Transmit _ SDM


Duty Cycle

Test Mode: 802.11ac VHT20 & Ch.36

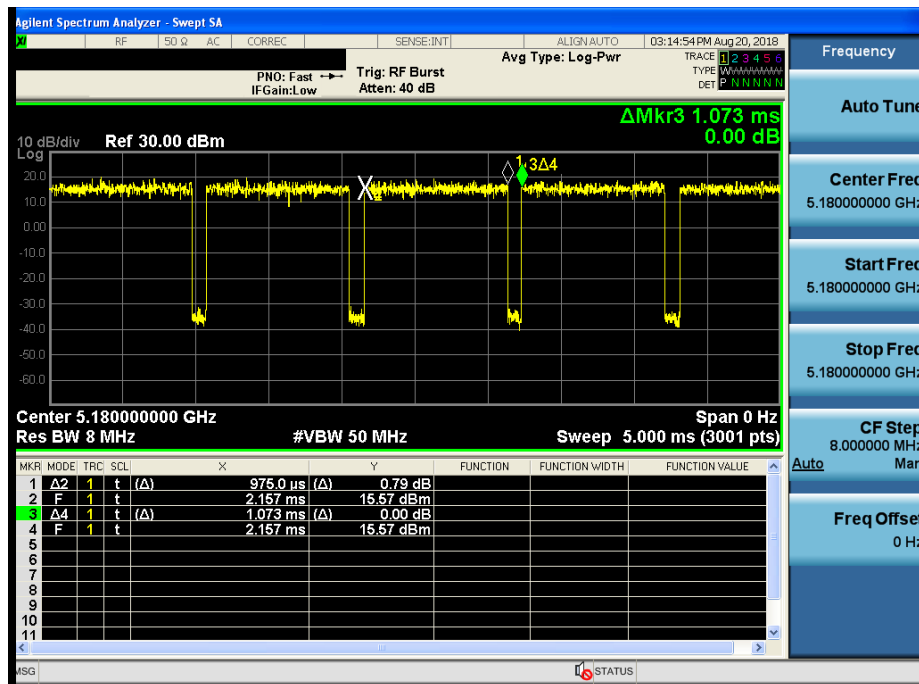

Duty Cycle

Test Mode: 802.11n HT40 & Ch.38

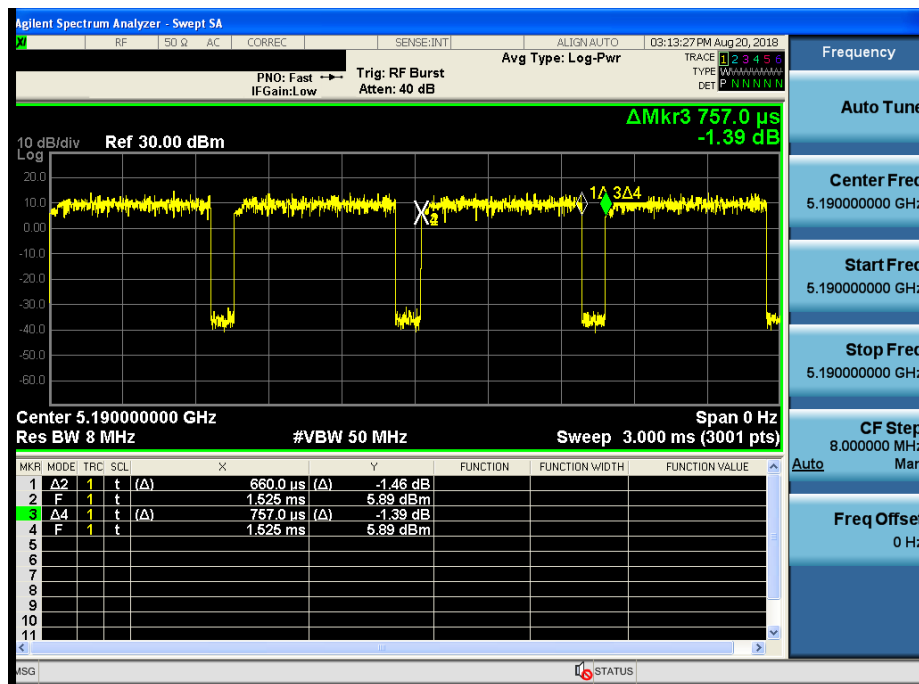

AC Line Conducted Emissions (Graph)

Test Mode: U-NII 1 & 802.11ac VHT20 & MIMO(CDD) & 5180 MHz


Results of Conducted Emission

DTNC

Date 2018-08-17

Order No.
Model No.
Serial No.
Test ConditionLM-Q850FA
5.1GHzReference No.
Power Supply
Temp/Humi.
Operator120 V / 60Hz
23 'C / 44 %
S.G.LEE

Memo

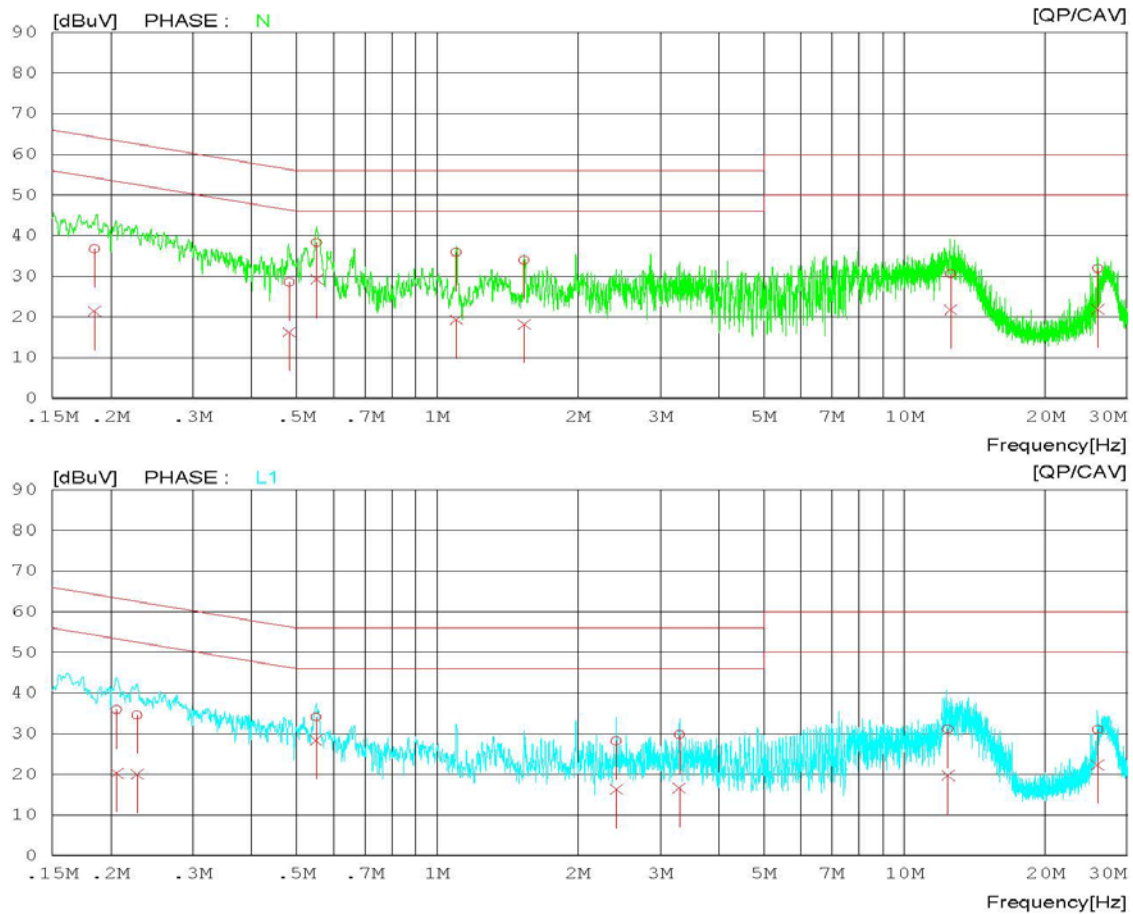LIMIT : FCC P15.207 QP
FCC P15.207 AV

AC Line Conducted Emissions (Data List)

Test Mode: U-NII 1 & 802.11ac VHT20 & MIMO(CDD) & 5180 MHz

Results of Conducted Emission

DTNC

Date 2018-08-17

Order No.		Reference No.	
Model No.	LM-Q850FA	Power Supply	120 V / 60Hz
Serial No.		Temp/Humi.	23 'C / 44 %
Test Condition	5.1GHz	Operator	S.G.LEE

Memo

LIMIT : FCC P15.207 QP
FCC P15.207 AV

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	CAV [dBuV]		QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	
1	0.18455	26.69	11.49	9.96	36.65	21.45	64.28	54.28	27.63	32.83	N
2	0.48198	18.57	6.26	9.99	28.56	16.25	56.30	46.30	27.74	30.05	N
3	0.55228	28.36	19.27	9.98	38.34	29.25	56.00	46.00	17.66	16.75	N
4	1.09820	25.88	9.34	9.99	35.87	19.33	56.00	46.00	20.13	26.67	N
5	1.53440	23.98	8.17	10.02	34.00	18.19	56.00	46.00	22.00	27.81	N
6	12.55360	20.37	11.53	10.25	30.62	21.78	60.00	50.00	29.38	28.22	N
7	25.89580	21.47	11.40	10.48	31.95	21.88	60.00	50.00	28.05	28.12	N
8	0.20606	25.89	10.33	9.94	35.83	20.27	63.36	53.36	27.53	33.09	L1
9	0.22775	24.62	10.06	9.94	34.56	20.00	62.53	52.53	27.97	32.53	L1
10	0.55013	24.11	18.35	9.98	34.09	28.33	56.00	46.00	21.91	17.67	L1
11	2.41840	18.08	6.26	10.05	28.13	16.31	56.00	46.00	27.87	29.69	L1
12	3.29480	19.61	6.57	10.06	29.67	16.63	56.00	46.00	26.33	29.37	L1
13	12.38340	20.84	9.46	10.24	31.08	19.70	60.00	50.00	28.92	30.30	L1
14	25.89520	20.47	11.79	10.48	30.95	22.27	60.00	50.00	29.05	27.73	L1

AC Line Conducted Emissions (Graph)

Test Mode: U-NII 2A & 802.11ac VHT20 & MIMO(CDD) & 5320 MHz

Results of Conducted Emission

DTNC

Date 2018-08-17

Order No.
Model No.
Serial No.
Test Condition


LM-Q850FA
5.3GHz

Reference No.
Power Supply
Temp/Humi.
Operator

120 V / 60Hz
23 'C / 44 %
S.G.LEE

Memo

LIMIT : FCC P15.207 QP
FCC P15.207 AV

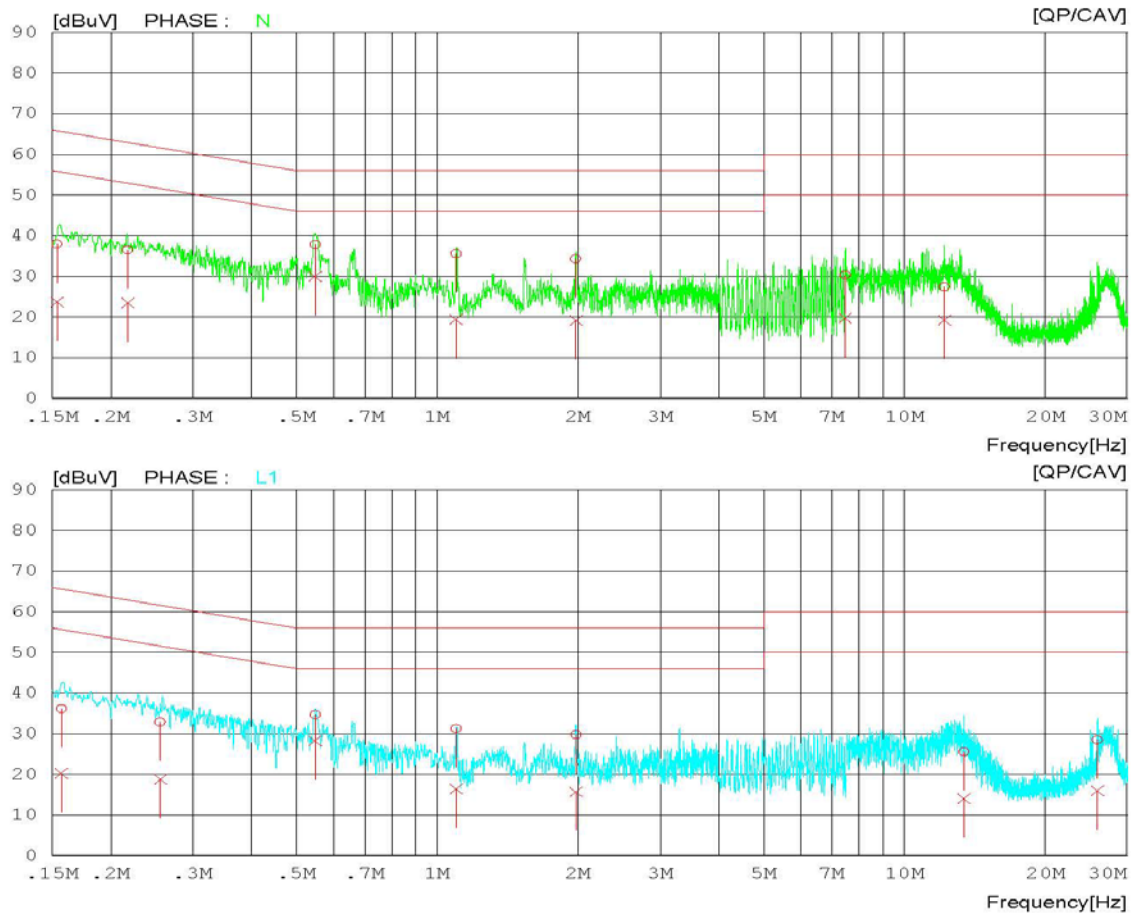

AC Line Conducted Emissions (Data List)

Test Mode: U-NII 2A & 802.11ac20 VHT & MIMO(CDD) & 5320 MHz

Results of Conducted Emission

DTNC

Date 2018-08-17

Order No.	LM-Q850FA	Reference No.	
Model No.		Power Supply	120 V / 60Hz
Serial No.		Temp/Humi.	23 'C / 44 %
Test Condition	5.3GHz	Operator	S.G.LEE

Memo

LIMIT : FCC P15.207 QP
FCC P15.207 AV

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	CAV [dBuV]		QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	
1	0.15355	27.95	13.68	9.99	37.94	23.67	65.81	55.81	27.87	32.14	N
2	0.21764	26.59	13.52	9.94	36.53	23.46	62.91	52.91	26.38	29.45	N
3	0.54799	27.88	19.99	9.98	37.86	29.97	56.00	46.00	18.14	16.03	N
4	1.09760	25.60	9.39	9.99	35.59	19.38	56.00	46.00	20.41	26.62	N
5	1.97880	24.32	9.09	10.04	34.36	19.13	56.00	46.00	21.64	26.87	N
6	7.46500	20.15	9.60	10.15	30.30	19.75	60.00	50.00	29.70	30.25	N
7	12.18160	17.18	9.04	10.23	27.41	19.27	60.00	50.00	32.59	30.73	N
8	0.15690	26.14	10.10	9.98	36.12	20.08	65.63	55.63	29.51	35.55	L1
9	0.25556	22.87	8.81	9.95	32.82	18.76	61.57	51.57	28.75	32.81	L1
10	0.54794	24.68	18.22	9.98	34.66	28.20	56.00	46.00	21.34	17.80	L1
11	1.09780	21.28	6.37	9.99	31.27	16.36	56.00	46.00	24.73	29.64	L1
12	1.98100	19.63	5.60	10.04	29.67	15.64	56.00	46.00	26.33	30.36	L1
13	13.40620	15.24	3.75	10.27	25.51	14.02	60.00	50.00	34.49	35.98	L1
14	25.87160	17.97	5.45	10.48	28.45	15.93	60.00	50.00	31.55	34.07	L1

AC Line Conducted Emissions (Graph)

Test Mode: U-NII 2C & 802.11ac VHT20 & MIMO(CDD) & 5500 MHz


Results of Conducted Emission

DTNC

Date 2018-08-17

Order No.
Model No.
Serial No.
Test ConditionLM-Q850FA
5.5GHzReference No.
Power Supply
Temp/Humi.
Operator120 V / 60Hz
23 'C / 44 %
S.G.LEE

Memo

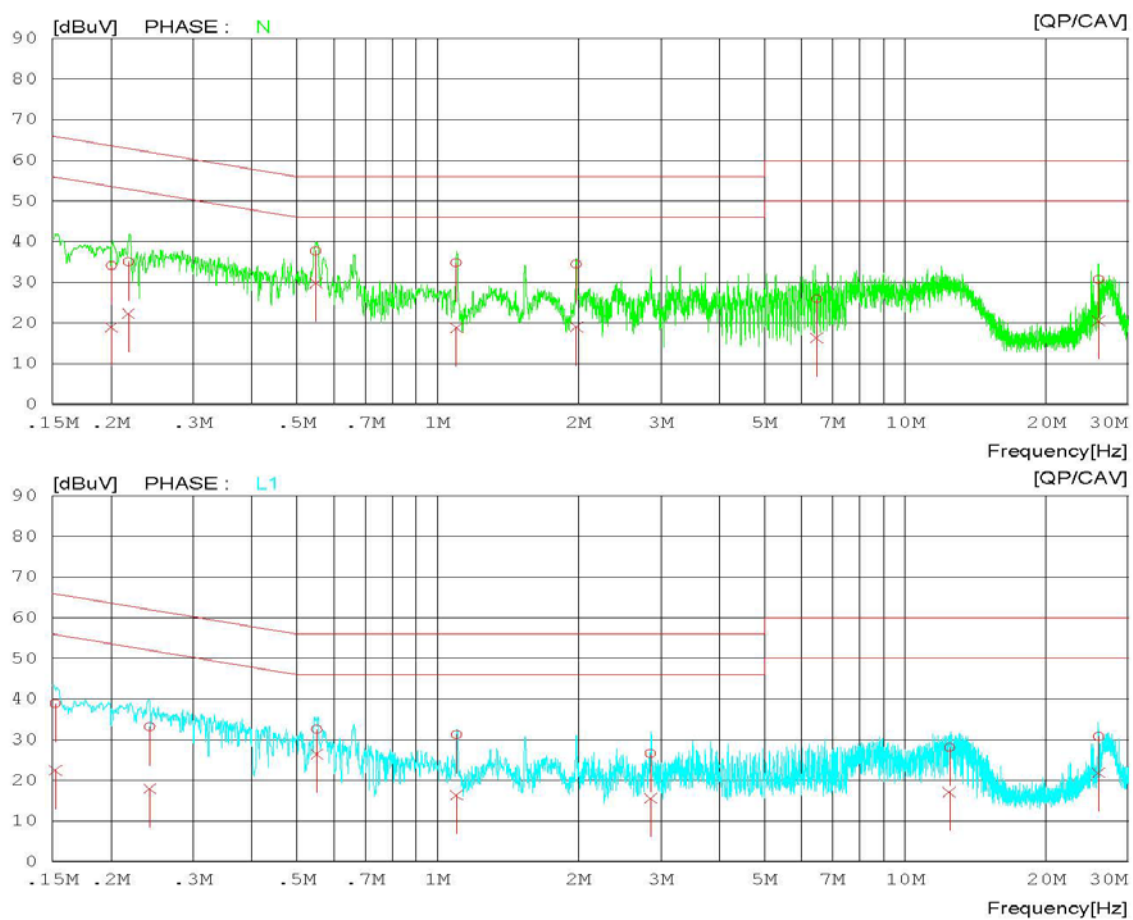LIMIT : FCC P15.207 QP
FCC P15.207 AV

AC Line Conducted Emissions (Data List)

Test Mode: U-NII 2C & 802.11ac VHT20 & MIMO(CDD) & 5500 MHz

Results of Conducted Emission

DTNC

Date 2018-08-17

Order No.		Reference No.	
Model No.	LM-Q850FA	Power Supply	120 V / 60Hz
Serial No.		Temp/Humi.	23 'C / 44 %
Test Condition	5.5GHz	Operator	S.G.LEE

Memo

LIMIT : FCC P15.207 QP
FCC P15.207 AV

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	CAV [dBuV]		QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	
1	0.20071	24.18	9.03	9.94	34.12	18.97	63.58	53.58	29.46	34.61	N
2	0.21812	25.09	12.42	9.94	35.03	22.36	62.89	52.89	27.86	30.53	N
3	0.54900	27.74	19.88	9.98	37.72	29.86	56.00	46.00	18.28	16.14	N
4	1.09600	24.76	8.80	9.99	34.75	18.79	56.00	46.00	21.25	27.21	N
5	1.97880	24.35	9.04	10.04	34.39	19.08	56.00	46.00	21.61	26.92	N
6	6.46540	15.74	6.20	10.12	25.86	16.32	60.00	50.00	34.14	33.68	N
7	25.90180	20.27	10.07	10.48	30.75	20.55	60.00	50.00	29.25	29.45	N
8	0.15237	28.87	12.39	9.99	38.86	22.38	65.87	55.87	27.01	33.49	L1
9	0.24238	23.15	7.95	9.95	33.10	17.90	62.01	52.01	28.91	34.11	L1
10	0.55185	22.49	16.39	9.98	32.47	26.37	56.00	46.00	23.53	19.63	L1
11	1.09760	21.24	6.33	9.99	31.23	16.32	56.00	46.00	24.77	29.68	L1
12	2.85240	16.52	5.55	10.05	26.57	15.60	56.00	46.00	29.43	30.40	L1
13	12.44380	17.83	6.85	10.24	28.07	17.09	60.00	50.00	31.93	32.91	L1
14	25.90560	20.26	11.28	10.48	30.74	21.76	60.00	50.00	29.27	28.24	L1

AC Line Conducted Emissions (Graph)

Test Mode: U-NII 2C & 802.11ac VHT20 & MIMO(CDD) & 5745 MHz

Results of Conducted Emission

DTNC

Date 2018-08-17

Order No.
Model No.
Serial No.
Test Condition


LM-Q850FA
5.7GHz

Reference No.
Power Supply
Temp/Humi.
Operator

120 V / 60Hz
23 'C / 44 %
S.G.LEE

Memo

LIMIT : FCC P15.207 QP
FCC P15.207 AV

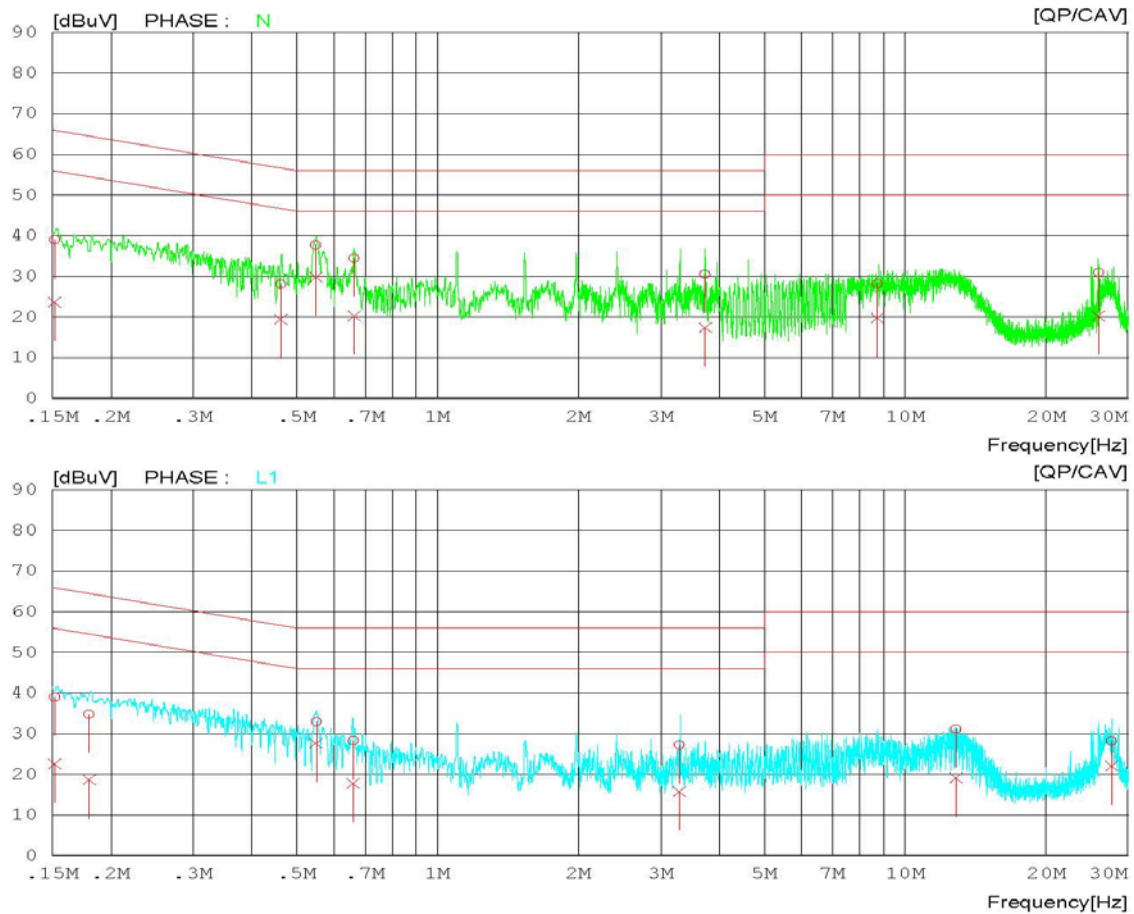

AC Line Conducted Emissions (Data List)

Test Mode: U-NII 2C & 802.11ac VHT20 & MIMO(CDD) & 5745 MHz

Results of Conducted Emission

DTNC

Date 2018-08-17

Order No.		Reference No.	
Model No.	LM-Q850FA	Power Supply	120 V / 60Hz
Serial No.		Temp/Humi.	23 'C / 44 %
Test Condition	5.7GHz	Operator	S.G.LEE

Memo

LIMIT : FCC P15.207 QP
FCC P15.207 AV

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	CAV [dBuV]		QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	
1	0.15155	28.94	13.65	9.99	38.93	23.64	65.91	55.91	26.98	32.27	N
2	0.46184	18.03	9.37	9.98	28.01	19.35	56.66	46.66	28.65	27.31	N
3	0.54901	27.77	19.84	9.98	37.75	29.82	56.00	46.00	18.25	16.18	N
4	0.66293	24.53	10.27	9.97	34.50	20.24	56.00	46.00	21.50	25.76	N
5	3.73120	20.42	7.32	10.06	30.48	17.38	56.00	46.00	25.52	28.62	N
6	8.71580	17.99	9.49	10.18	28.17	19.67	60.00	50.00	31.83	30.33	N
7	25.90920	20.44	9.83	10.48	30.92	20.31	60.00	50.00	29.08	29.69	N
8	0.15173	28.95	12.51	9.99	38.94	22.50	65.90	55.90	26.96	33.40	L1
9	0.17972	24.81	8.67	9.96	34.77	18.63	64.50	54.50	29.73	35.87	L1
10	0.54959	22.91	17.58	9.98	32.89	27.56	56.00	46.00	23.11	18.44	L1
11	0.66015	18.26	7.75	9.97	28.23	17.72	56.00	46.00	27.77	28.28	L1
12	3.29320	17.21	5.64	10.06	27.27	15.70	56.00	46.00	28.73	30.30	L1
13	12.83140	20.89	8.81	10.26	31.15	19.07	60.00	50.00	28.85	30.93	L1
14	27.64660	17.69	11.56	10.49	28.18	22.05	60.00	50.00	31.82	27.95	L1

9. LIST OF TEST EQUIPMENT

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent Technologies	N9020A	17/12/28	18/12/28	MY50200816
Spectrum Analyzer	Agilent Technologies	N9020A	18/01/03	19/01/03	MY48011700
Spectrum Analyzer	Agilent Technologies	N9030A	18/07/09	19/07/09	MY53310140
Multimeter	FLUKE	17B	17/12/26	18/12/26	26030065WS
Signal Generator	Rohde Schwarz	SMBV100A	17/12/27	18/12/27	255571
Signal Generator	ANRITSU	MG3695C	18/02/12	19/02/12	173501
Thermohygrometer	BODYCOM	BJ5478	18/07/09	19/07/09	N/A
Thermohygrometer	BODYCOM	BJ5478	18/01/03	19/01/03	120612-1
Temp & Humi	SJ Science	SJ-TH-S50	18/07/06	19/07/06	U5542113
Loop Antenna	Schwarzbeck	FMZB1513	18/01/30	20/01/30	1513-128
Bilog Antenna	Schwarzbeck	VULB 9160	18/07/13	20/07/13	3359
Horn Antenna	ETS-Lindgren	3115	17/01/13	19/01/13	9202-3820
Horn Antenna	Schwarzbeck	BBHA 9120C	17/12/04	19/12/04	9120C-561
Horn Antenna	A.H.Systems Inc.	SAS-574	17/07/31	19/07/31	155
PreAmplifier	tsj	MLA-100K01-B01-26	18/02/19	19/02/19	1252741
PreAmplifier	tsj	MLA-0118-J01-45	18/02/08	19/02/08	17138
PreAmplifier	tsj	MLA-1840-J02-45	18/07/06	19/07/06	16966-10728
EMI Test Receiver	ROHDE&SCHWARZ	ESR7	18/02/13	19/02/13	101061
Attenuator	SMAJK	SMAJK-2-3	18/07/02	19/07/02	3
Attenuator	Aeroflex/Weinschel	56-3	17/12/27	18/12/27	Y2370
Attenuator	SRTechnology	F01-B0606-01	18/07/02	19/07/02	13092403
Attenuator	Hefei Shunze	SS5T2.92-10-40	17/12/27	18/12/27	16012202
Attenuator	SMAJK	SMAJK-50-10	18/07/04	19/07/04	15081903
High Pass Filter	Wainwright Instruments	WHKX12-935-1000-15000-40SS	18/07/02	19/07/02	8
High Pass Filter	Wainwright Instruments	WHNX8.0/26.5-6SS	18/07/02	19/07/02	3
High Pass Filter	Wainwright Instruments	WHKX10-2838-3300-18000-60SS	18/07/02	19/07/02	1
Power Meter & Wide Bandwidth Sensor	Anritsu	ML2495A	18/04/17	19/04/17	1306007
		MA2490A			1249001
EMI TEST RECEIVER	Rohde Schwarz	ESCi7	18/02/12	19/02/12	100910
PULSE LIMITER	Rohde Schwarz	ESH3-Z2	17/09/29	18/09/29	101333
LISN	SCHWARZBECK	NNLK 8121	18/03/20	19/03/20	06183
Cable	DT&C	CABLE	18/01/10	19/01/10	RF-55
Cable	DT&C	CABLE	18/03/26	19/03/26	RF-68
Cable	DT&C	CABLE	18/03/26	19/03/26	P-IN
Cable	DT&C	CABLE	18/03/26	19/03/26	RF-71
Cable	DT&C	CABLE	18/06/22	19/06/22	RF-82
Cable	Radiall	TESTPRO3	18/06/22	19/06/22	RF-74
Cable	Radiall	TESTPRO3	18/06/22	19/06/22	RF-66
Cable	HUBER+SUHNER	SUCOFLEX	17/12/22	18/12/22	C-1
Cable	HUBER+SUHNER	SUCOFLEX	17/12/22	18/12/22	C-2
Cable	HUBER+SUHNER	SUCOFLEX	17/12/22	18/12/22	C-3
Cable	HUBER+SUHNER	SUCOFLEX	17/12/22	18/12/22	C-4


Note 1: The measurement antennas were calibrated in accordance to the requirements of ANSI C63.5-2017

Note 2: The cable is not a regular calibration item, so it has been calibrated by DT & C itself.

APPENDIX I

Conducted Test set up Diagram

- Conducted Measurement

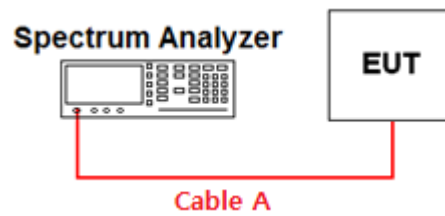

APPENDIX II

Duty Cycle Information

■ Test Procedure

Duty Cycle $[X = \text{On Time} / (\text{On} + \text{Off time})]$ is measured using Measurement Procedure of **KDB789033 D02v02r01**

1. Set the center frequency of the spectrum analyzer to the center frequency of the transmission.
2. Set RBW $\geq$ EBW if possible; otherwise, set RBW to the largest available value.
3. Set VBW $\geq$ RBW. Set detector = peak.
4. Note : The zero-span measurement method shall not be used unless both **RBW and VBW are $> 50/T$** , where T is defined in section II.B.1.a), and **the number of sweep points across duration T exceeds 100**. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

T : The minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

(T = **On time** of the above table since the EUT operates with above fixed Duty Cycle and it is the minimum On time)

■ Test Results:

Duty cycle: Single

Mode	Data Rate	Tested Frequency [MHz]	Maximum Achievable Duty Cycle (x) = On / (On+Off)			Duty Cycle Correction Factor [dB]	50/ T [kHz]
			On Time [ms]	(On+Off) Time [ms]	x		
802.11a	6Mbps	5180	2.03	2.13	95.31	0.21	24.63
802.11ac (VHT20)	MCS0	5180	1.90	2.01	94.53	0.25	26.32
802.11ac (VHT40)	MCS0	5190	1.28	1.38	92.75	0.33	39.06
802.11ac (VHT80)	MCS0	5210	1.17	1.28	91.41	0.40	42.74


Duty cycle: SDM

Mode	Data Rate	Tested Frequency [MHz]	Maximum Achievable Duty Cycle (x) = On / (On+Off)			Duty Cycle Correction Factor [dB]	50/ T [kHz]
			On Time [ms]	(On+Off) Time [ms]	x		
802.11ac (VHT20)	MCS0	5180	0.98	1.07	91.59	0.39	51.02
802.11n (HT40)	MCS8	5190	0.66	0.76	86.84	0.62	75.76
802.11ac (VHT80)	MCS0	5210	0.61	0.72	84.72	0.73	81.97

Single Transmit


Duty Cycle

Test Mode: 802.11a & Ch.36

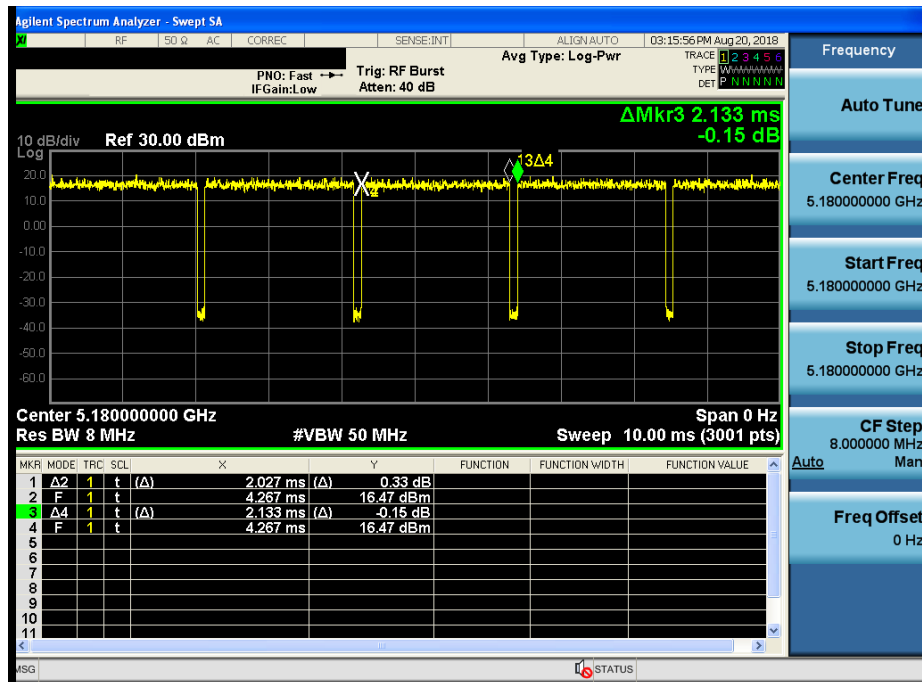


Duty Cycle

Test Mode: 802.11ac VHT20 & Ch.36

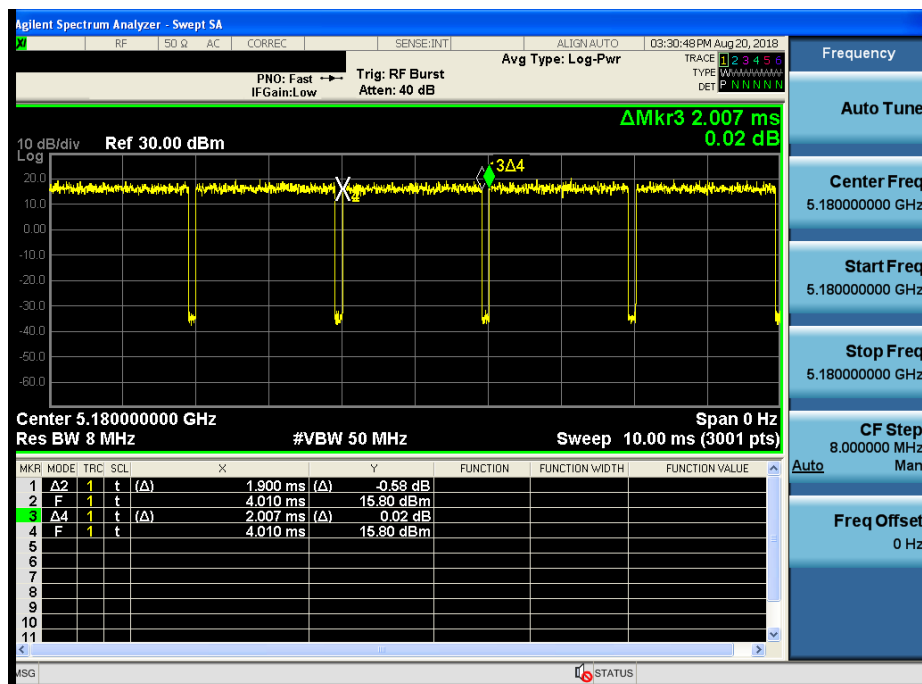


Duty Cycle

Test Mode: 802.11ac VHT40 & Ch.38

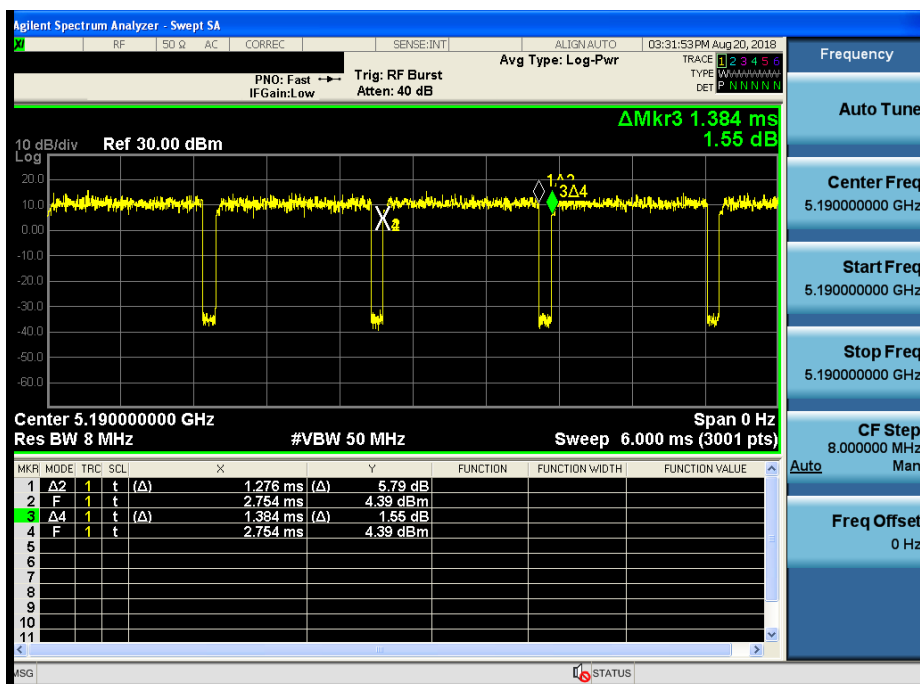

Duty Cycle


Test Mode: 802.11ac VHT80 & Ch.42

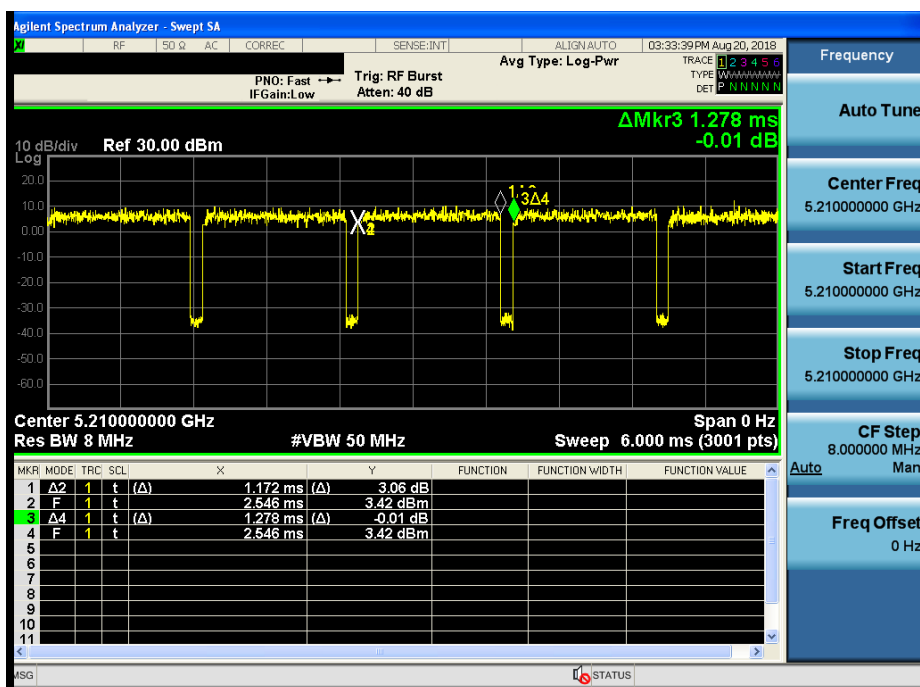

Multiple Transmit _ SDM


Duty Cycle

Test Mode: 802.11ac VHT20 & Ch.36

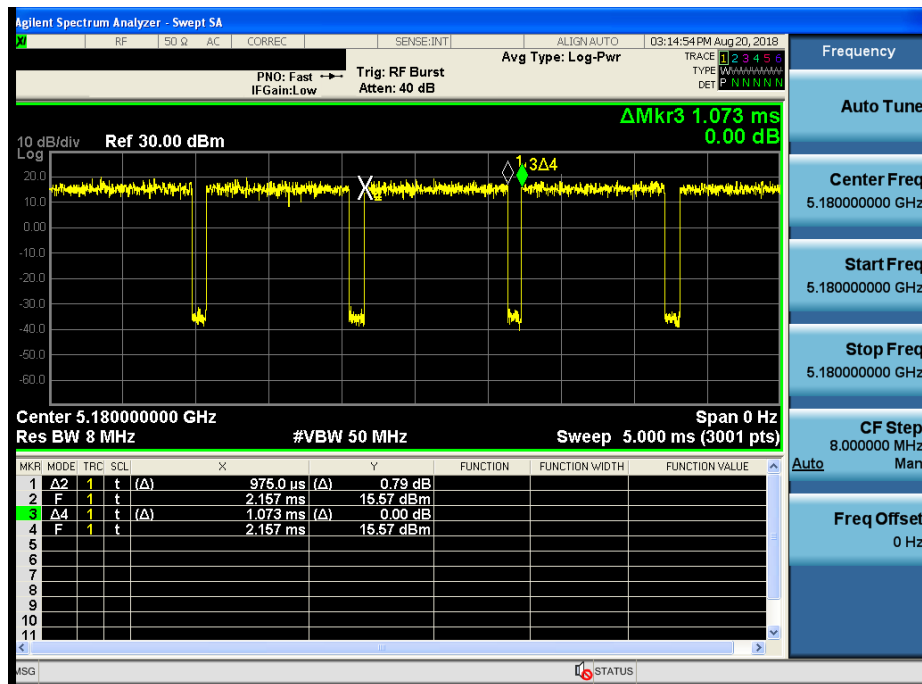


Duty Cycle

Test Mode: 802.11n HT40 & Ch.38

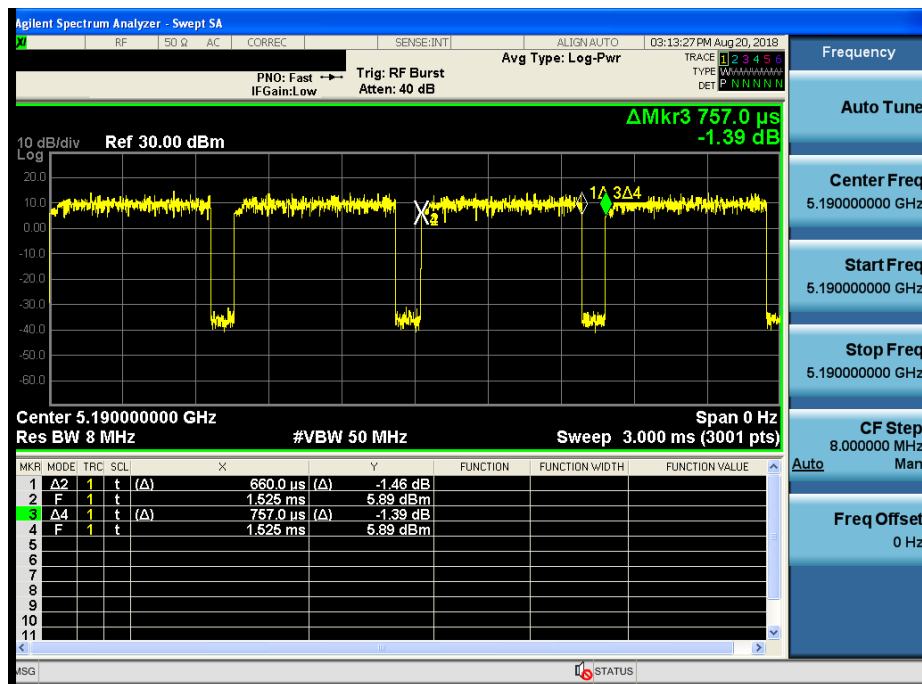

Duty Cycle

Test Mode: 802.11ac VHT80 & Ch.42

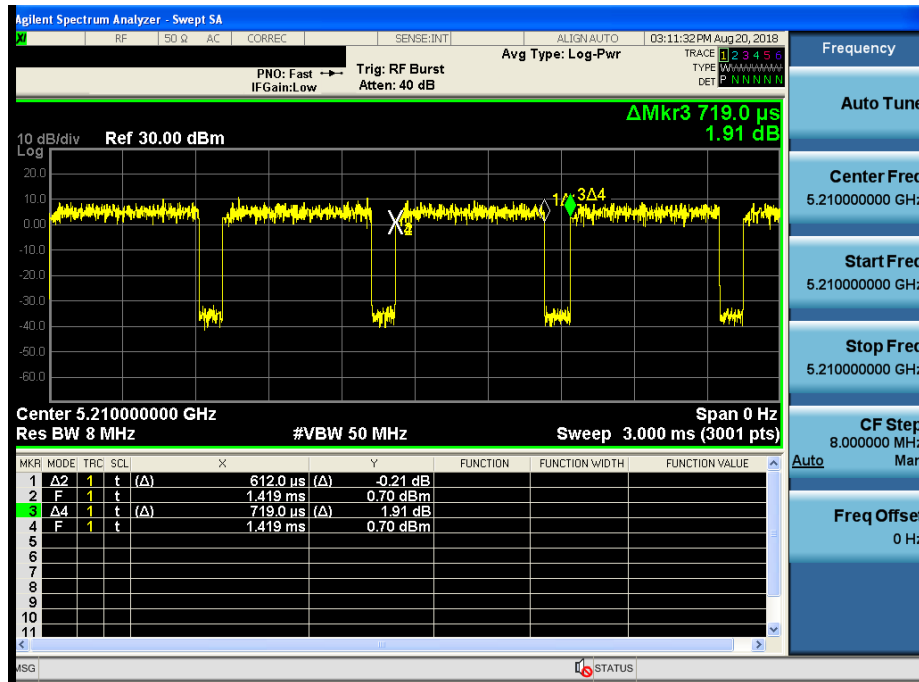


APPENDIX III

Unwanted Emissions (Radiated) Test Plot: MIMO(CDD)


802.11a & U-NII 1 & Ch.36 & Z axis & Hor

Detector Mode : PK

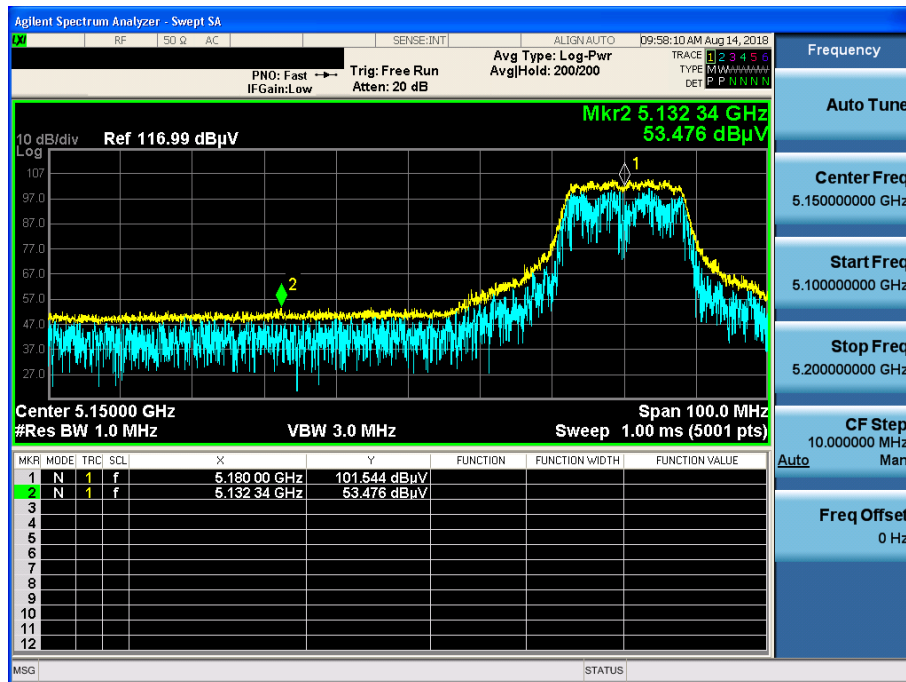


802.11a & U-NII 1 & Ch.36 & Z axis & Hor

Detector Mode : AV

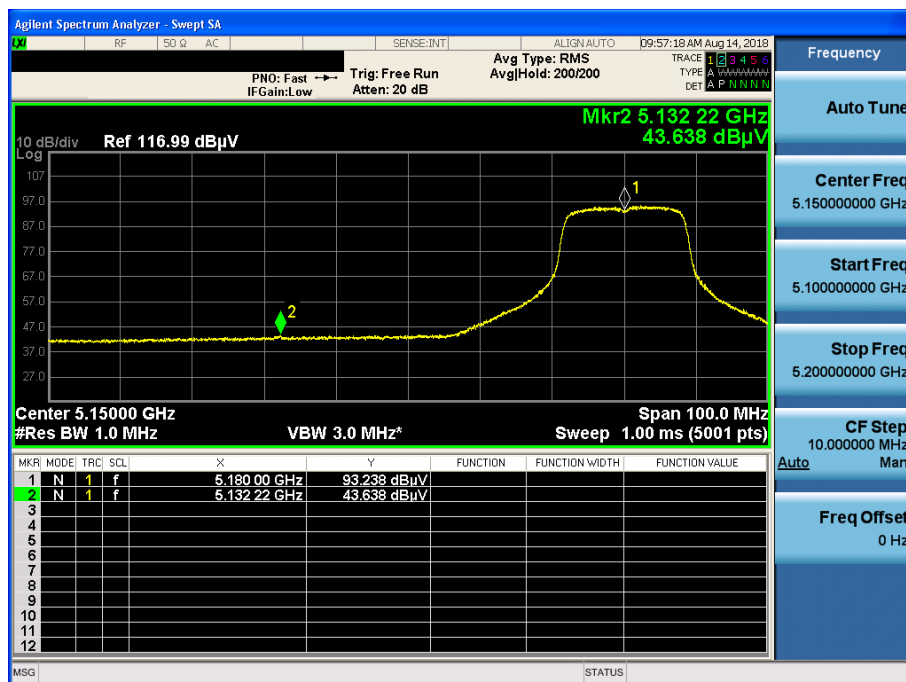


802.11a & U-NII 1 & Ch.40 & Y axis & Ver

Detector Mode : PK

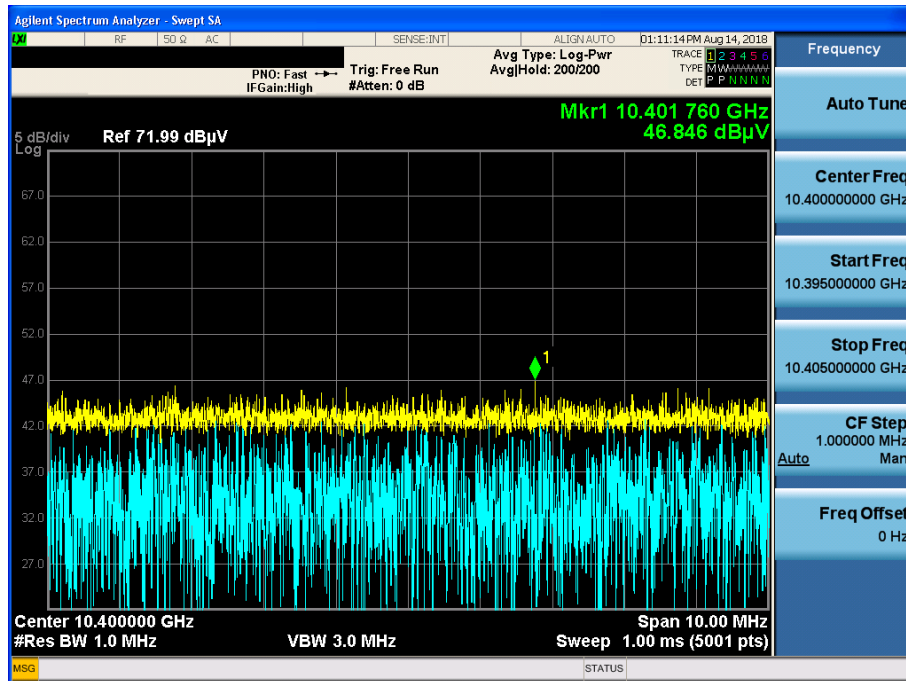


802.11a & U-NII 2A & Ch.64 & Z axis & Hor

Detector Mode : PK

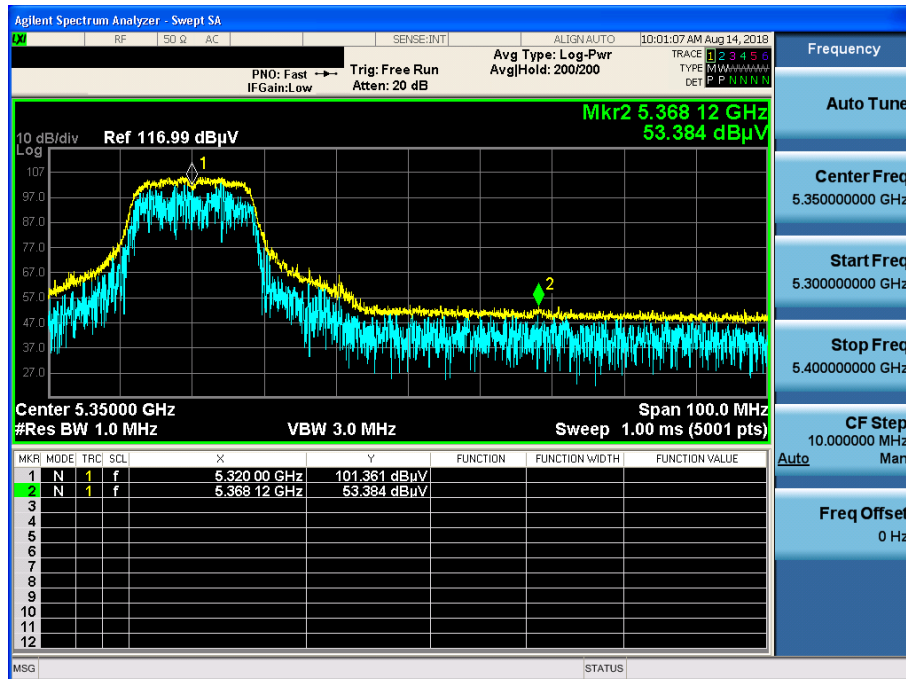


802.11a & U-NII 2A & Ch.64 & Z axis & Hor

Detector Mode : AV

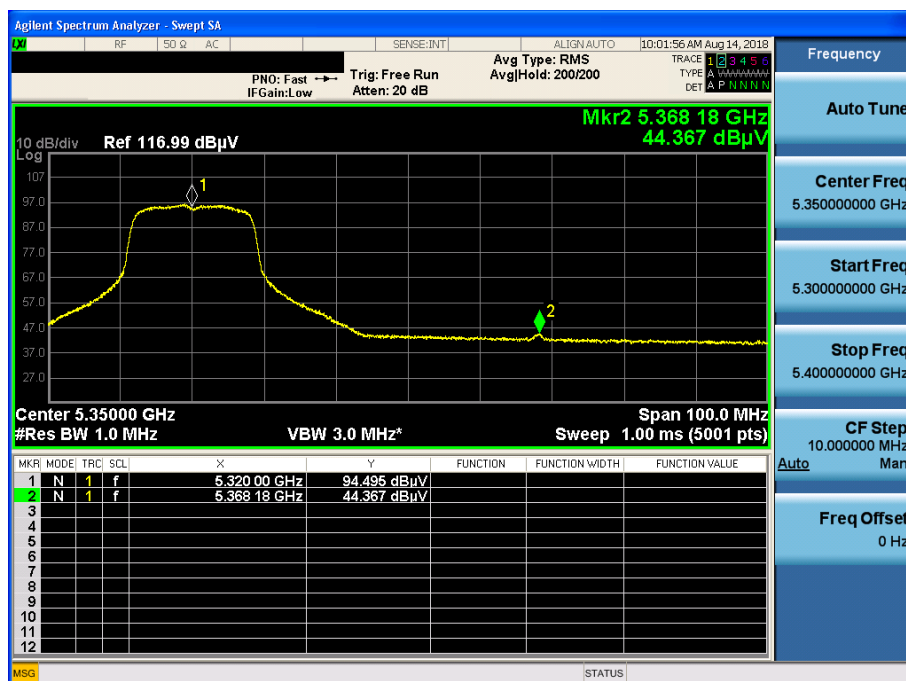


802.11a & U-NII 2A & Ch.60 & Y axis & Ver

Detector Mode : AV

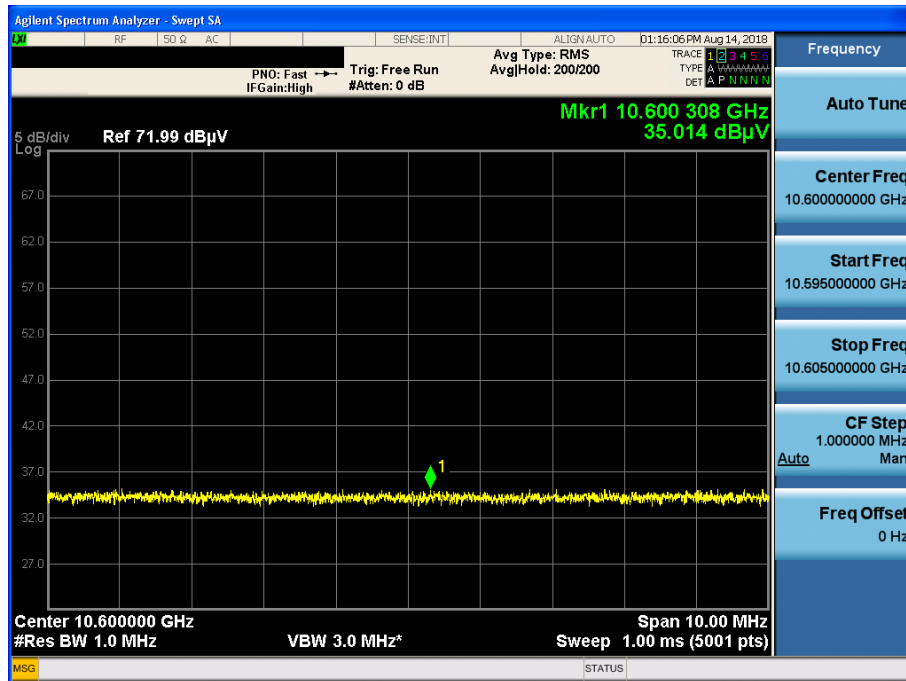


802.11a & U-NII 2C & Ch.100 & Z axis & Hor

Detector Mode : PK

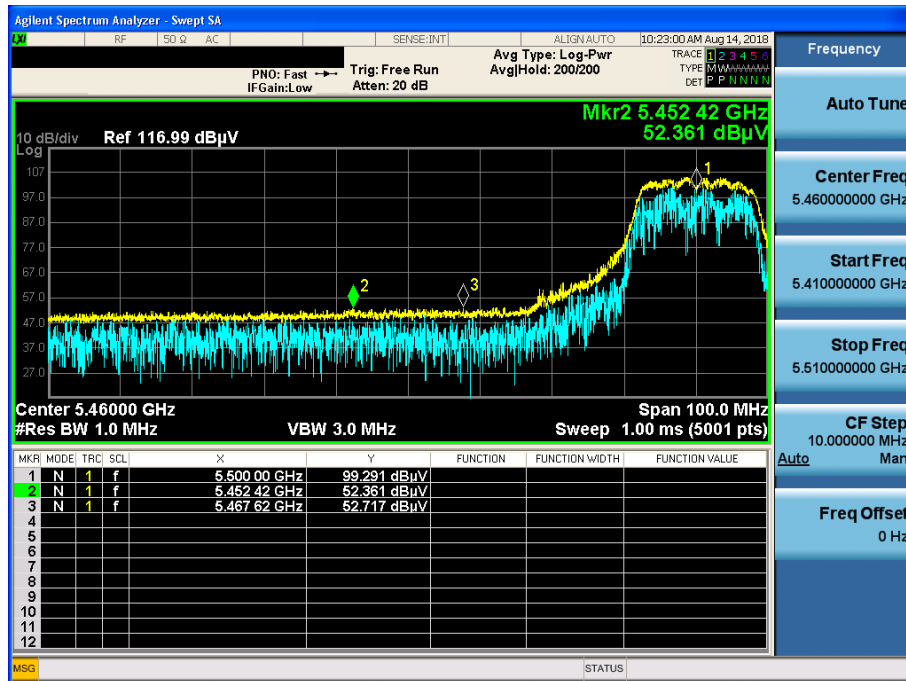


802.11a & U-NII 2C & Ch.100 & Z axis & Hor

Detector Mode : AV

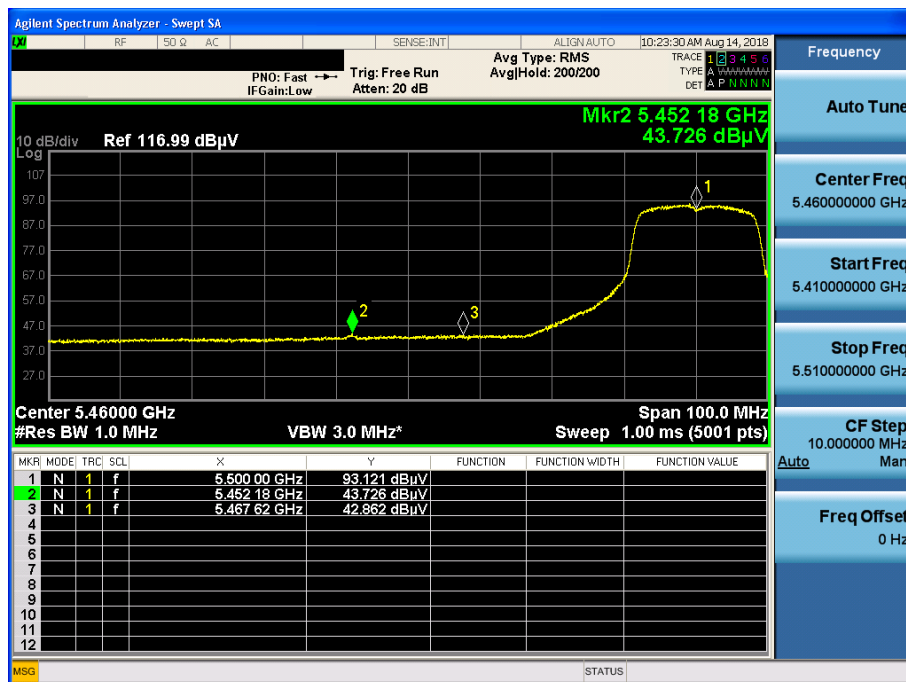


802.11a & U-NII 2C & Ch.144 & Y axis & Ver

Detector Mode : AV

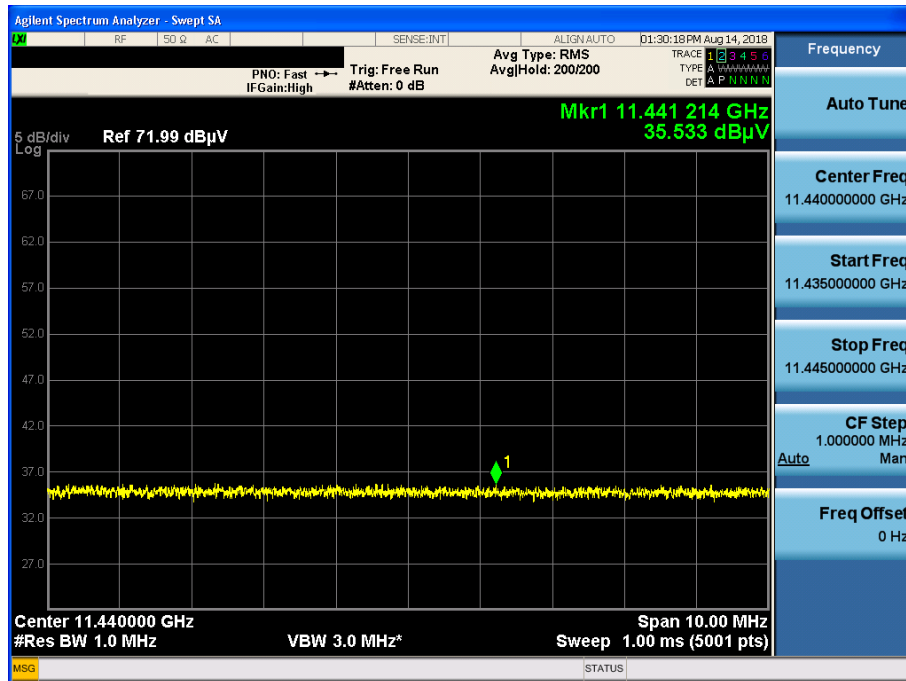


802.11a & U-NII 3 & Ch.149 & Z axis & Hor

Detector Mode : PK

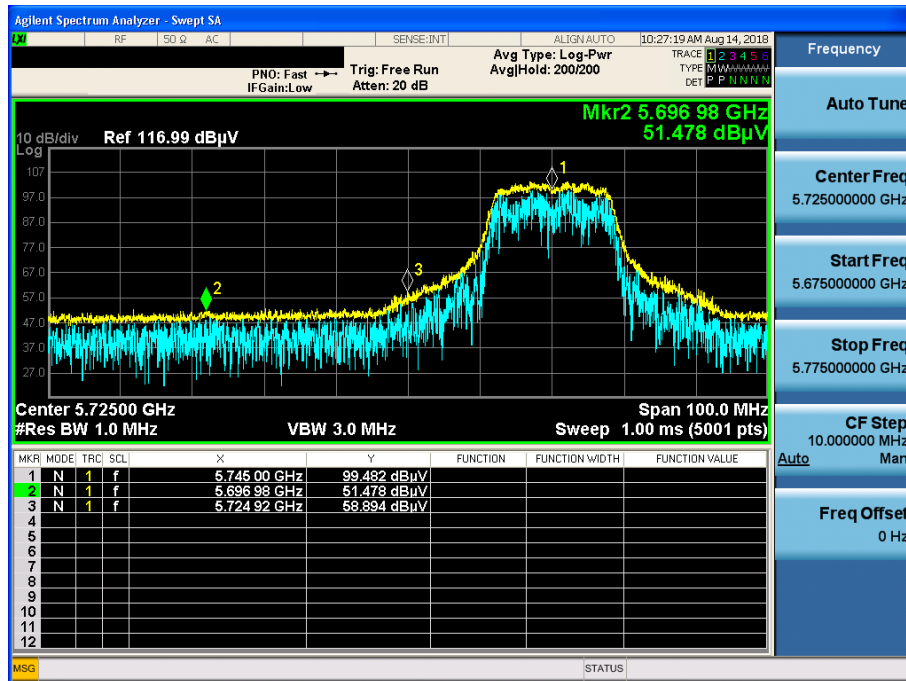


802.11a & U-NII 3 & Ch.165 & Z axis & Hor

Detector Mode : PK

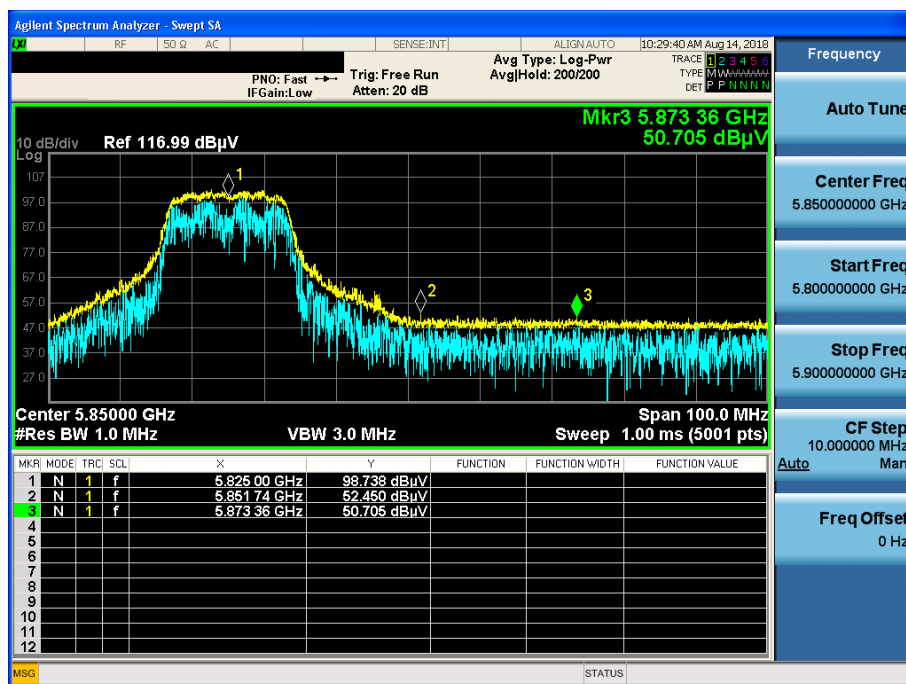


802.11a & U-NII 3 & Ch.165 & Y axis & Ver

Detector Mode : AV

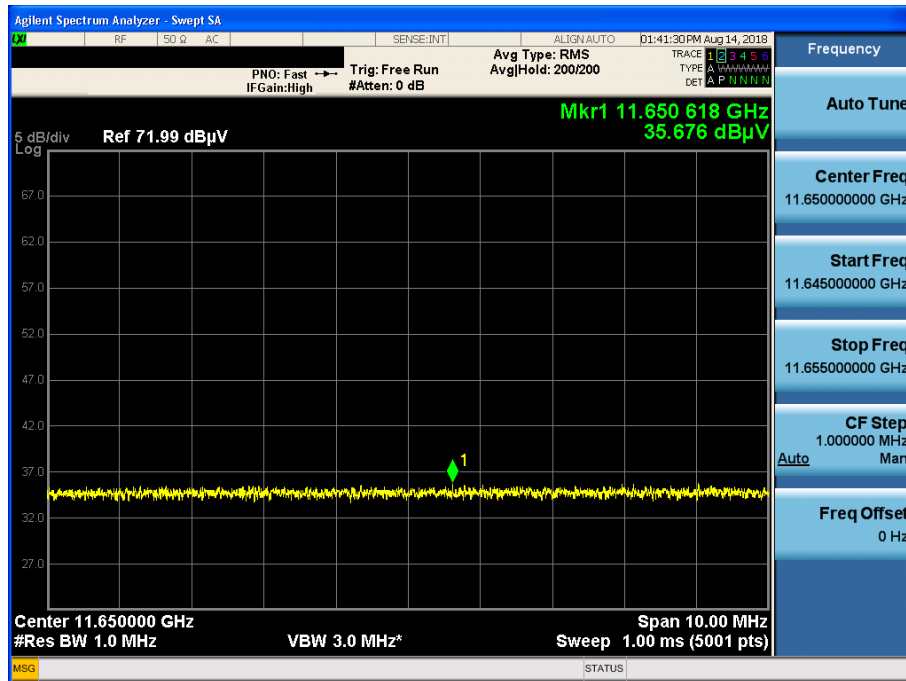


802.11ac(VHT20) & U-NII 1 & Ch.36 & Z axis & Hor

Detector Mode : PK

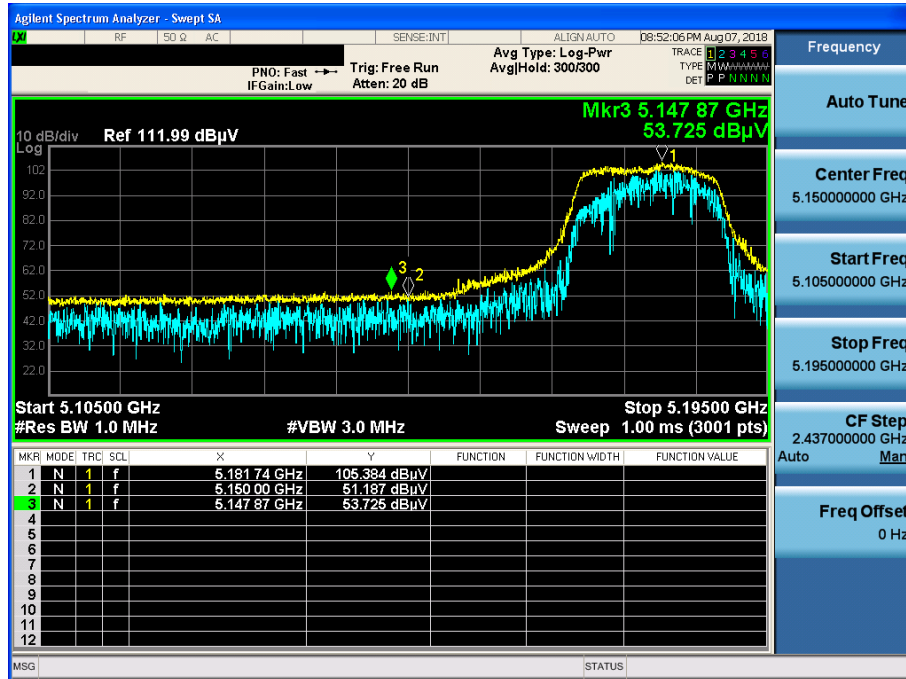


802.11ac(VHT20) & U-NII 1 & Ch.36 & Z axis & Hor

Detector Mode : AV

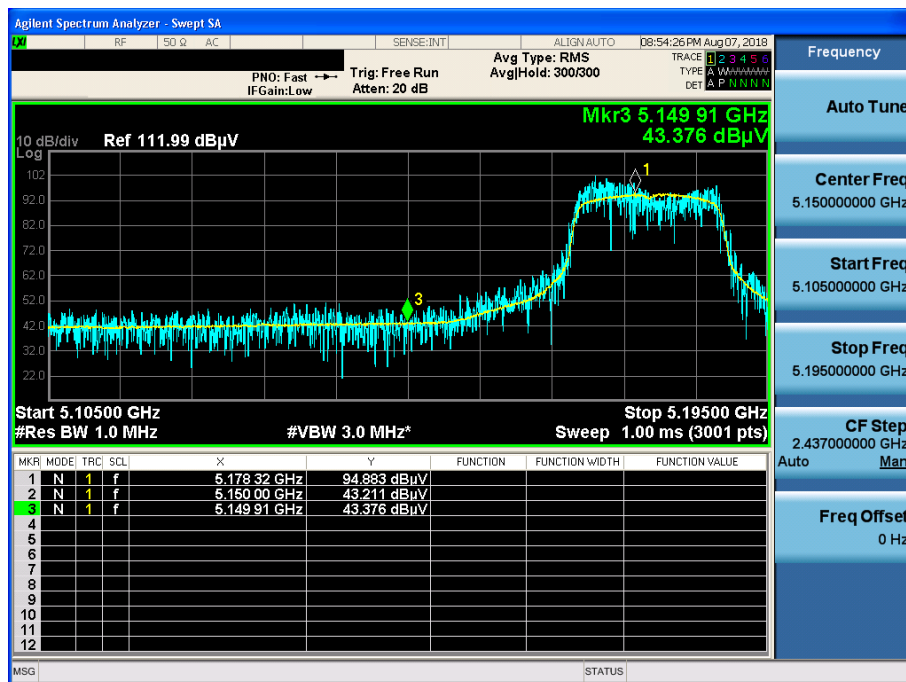


Detector Mode : PK

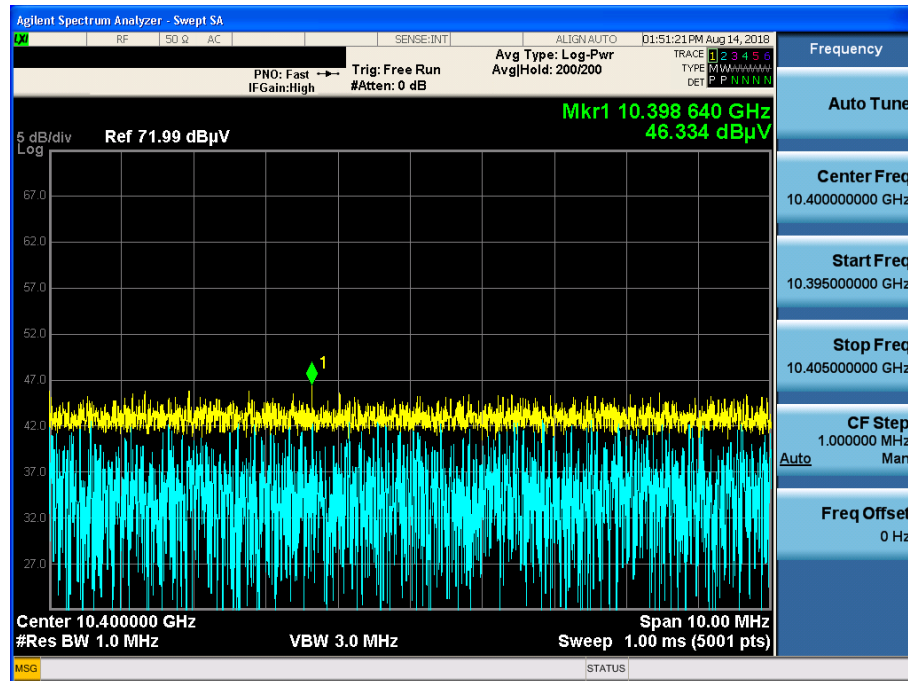


802.11ac(VHT20) & U-NII 2A & Ch.64 & Z axis & Hor

Detector Mode : PK

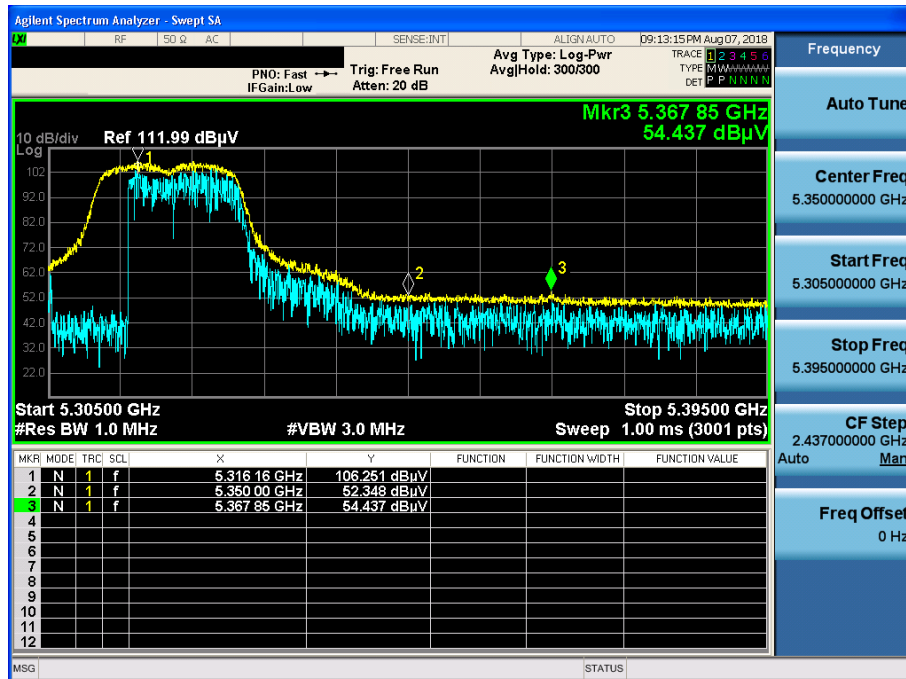


802.11ac(VHT20) & U-NII 2A & Ch.64 & Z axis & Hor

Detector Mode : AV

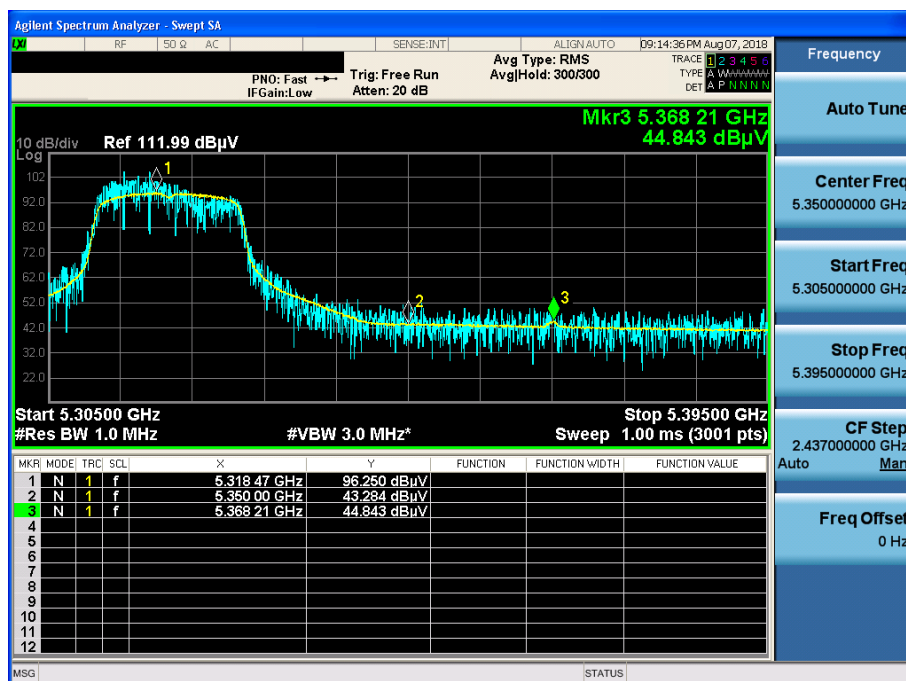


802.11ac(VHT20) & U-NII 2A & Ch.64 & Y axis & Ver

Detector Mode : AV

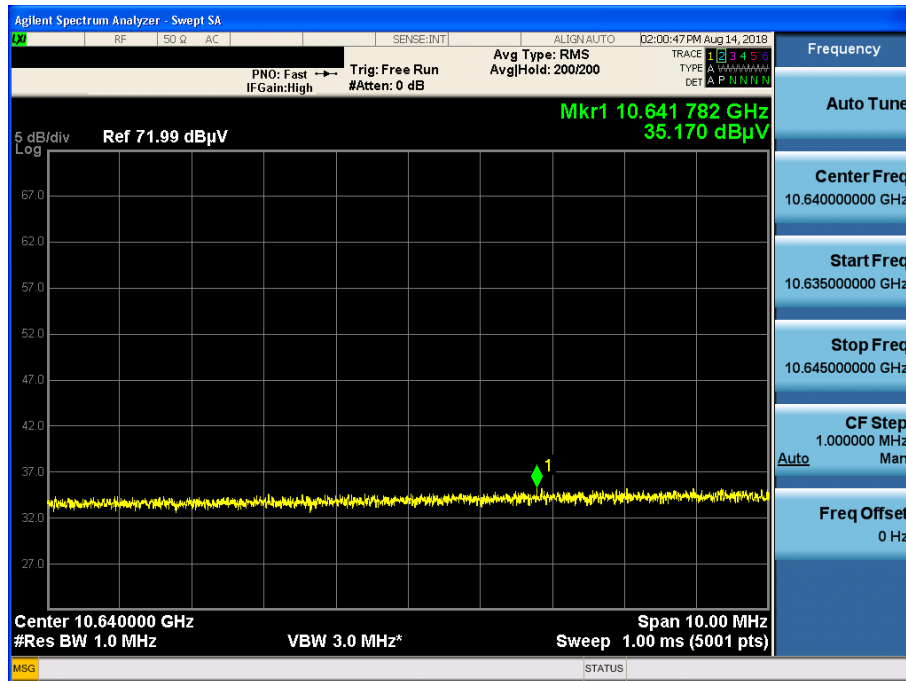


802.11ac(VHT20) & U-NII 2C & Ch.100 & Z axis & Hor

Detector Mode : PK

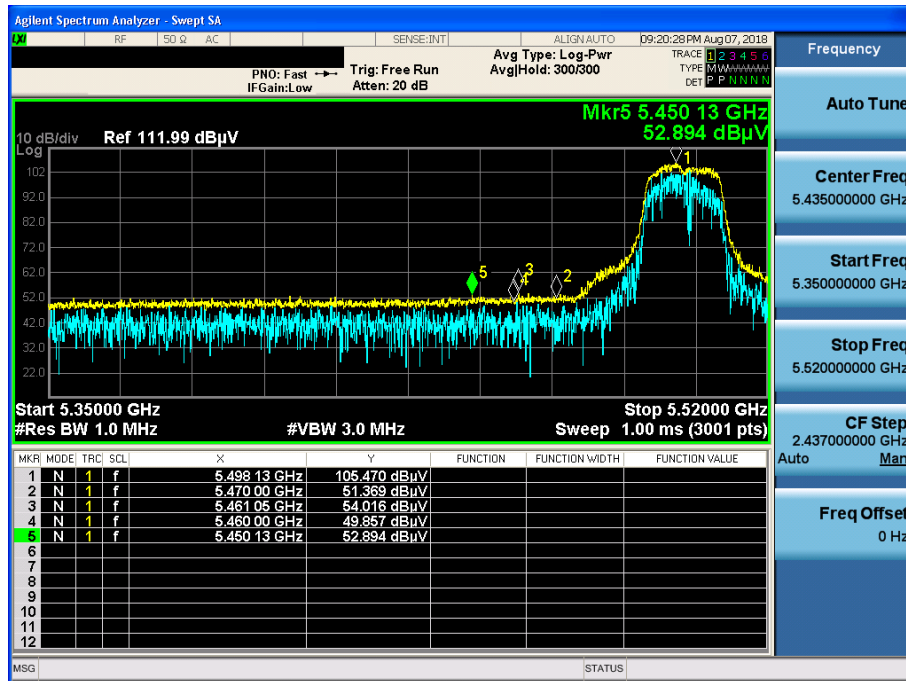


802.11ac(VHT20) & U-NII 2C & Ch.100 & Z axis & Hor

Detector Mode : AV

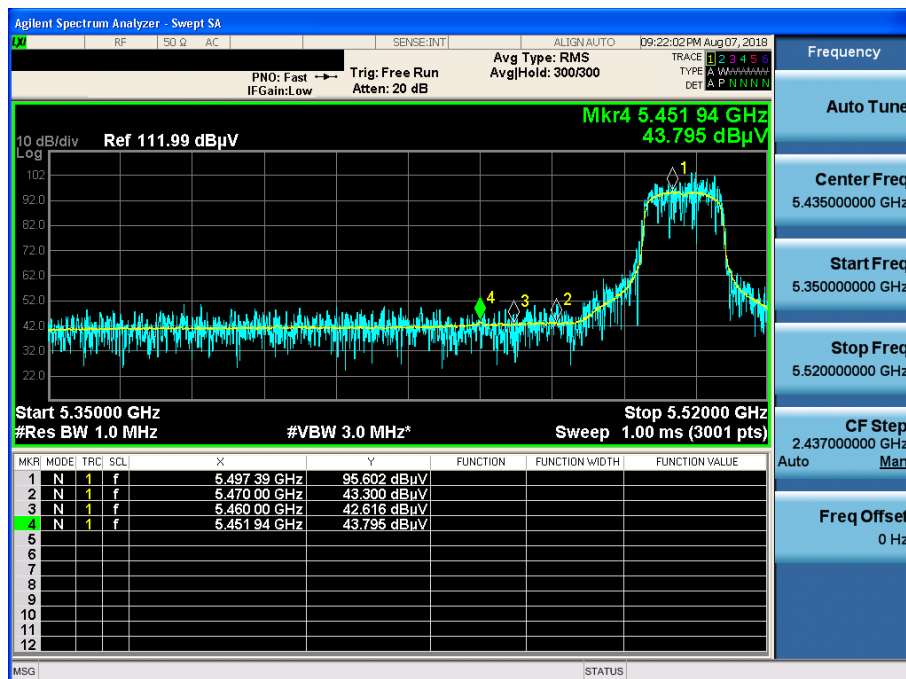


802.11ac(VHT20) & U-NII 2C & Ch.144 & Y axis & Ver

Detector Mode : AV

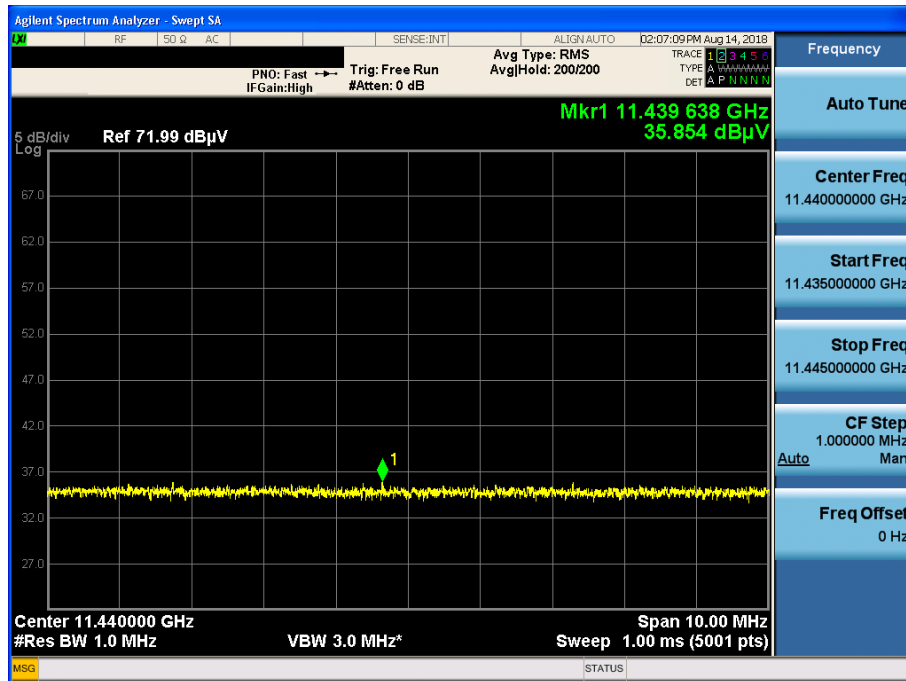


802.11ac(VHT20) & U-NII 3 & Ch.149 & Z axis & Hor

Detector Mode : PK

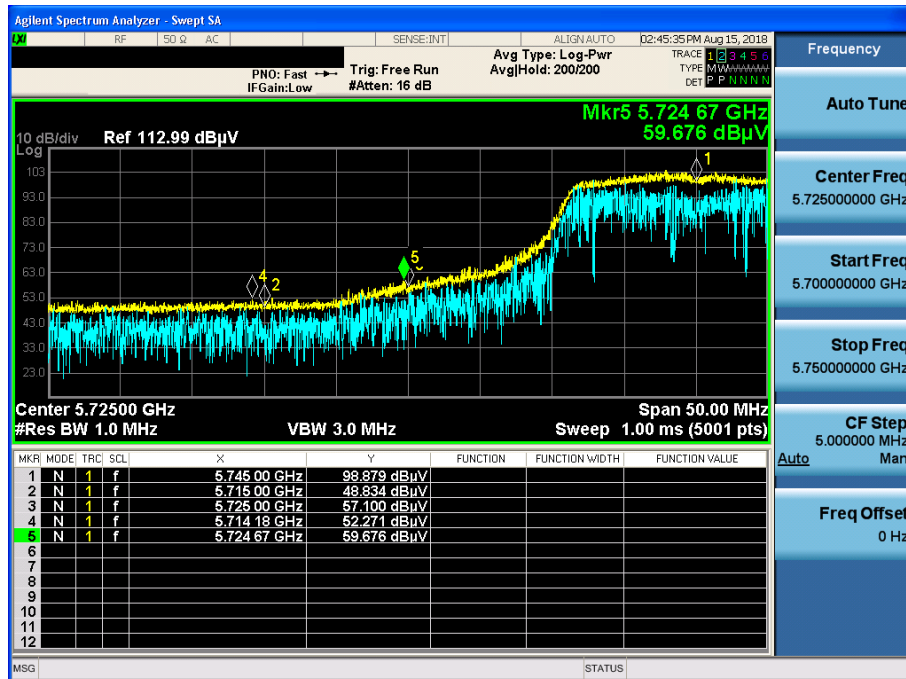


802.11ac(VHT20) & U-NII 3 & Ch.165 & Z axis & Hor

Detector Mode : PK

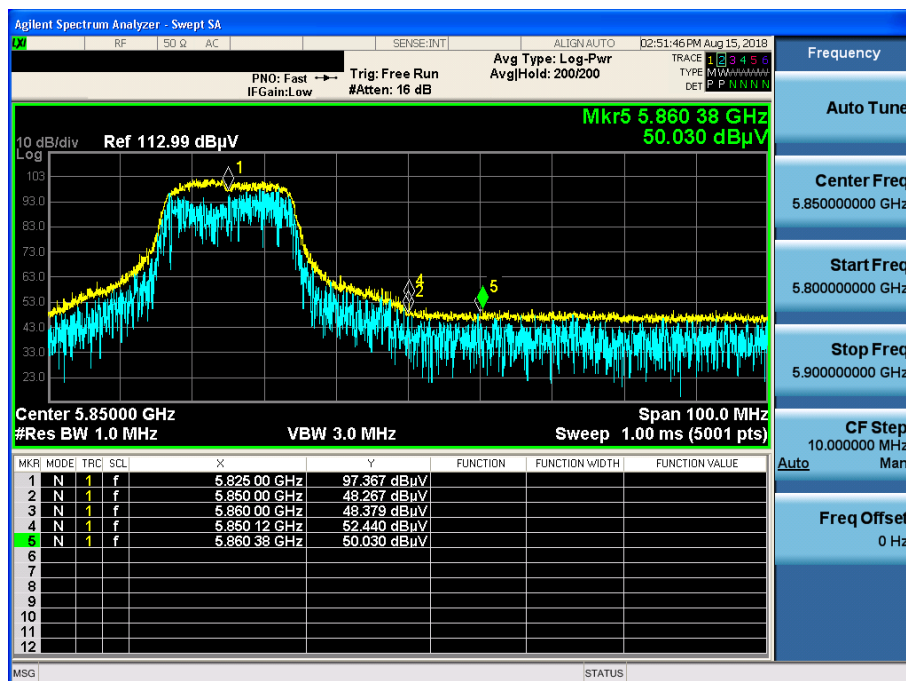


802.11ac(VHT20) & U-NII 3 & Ch.165 & Y axis & Ver

Detector Mode : AV

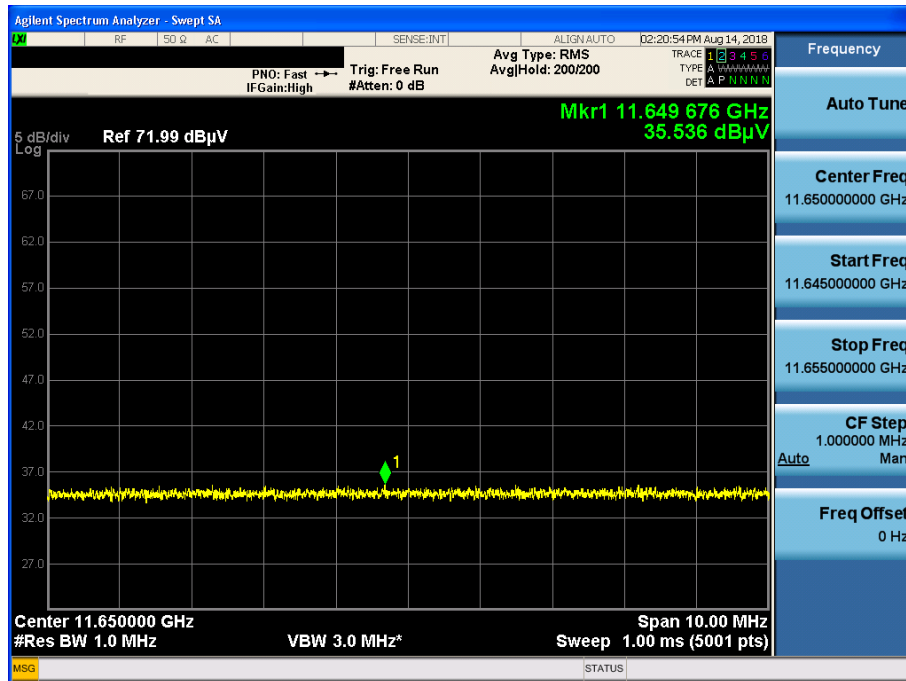


802.11ac(VHT40) & U-NII 1 & Ch.38 & Z axis & Hor

Detector Mode : PK

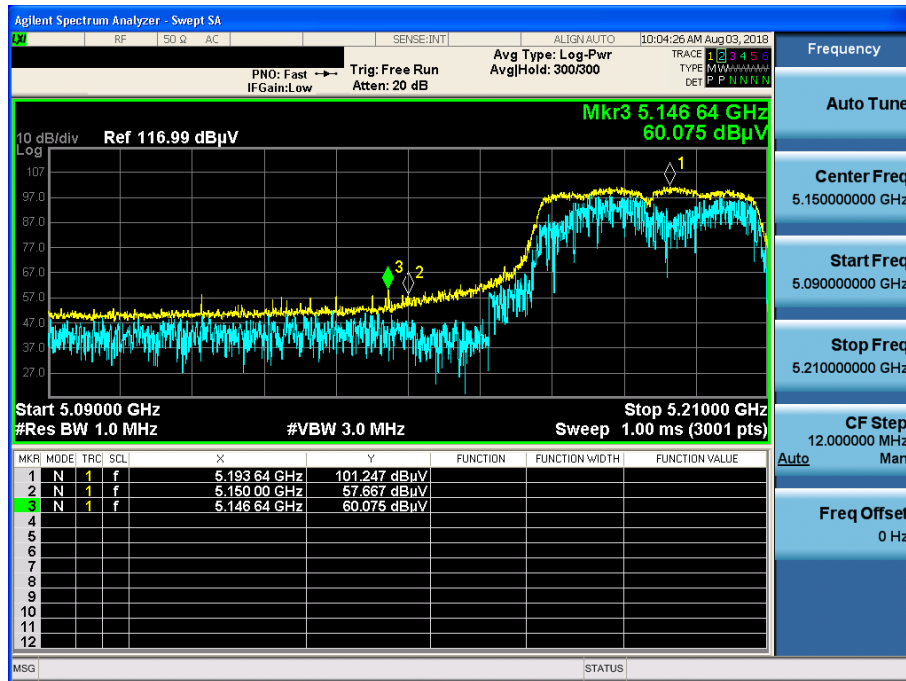

802.11ac(VHT40) & U-NII 1 & Ch.38 & Z axis & Hor

Detector Mode : AV

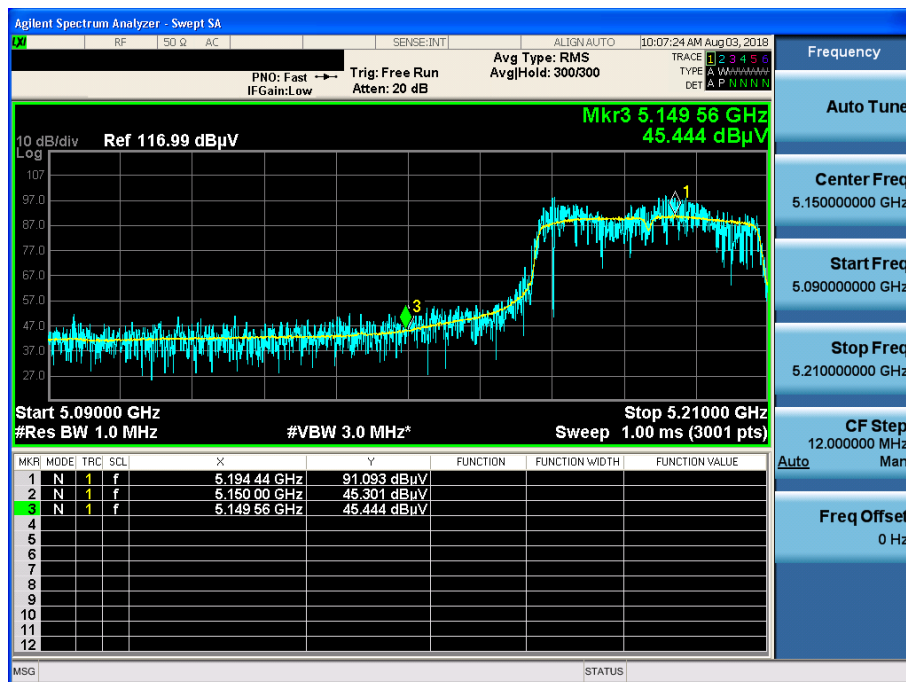

802.11ac(VHT40) & U-NII 1 & Ch.46 & Y axis & Ver

Detector Mode : PK

