

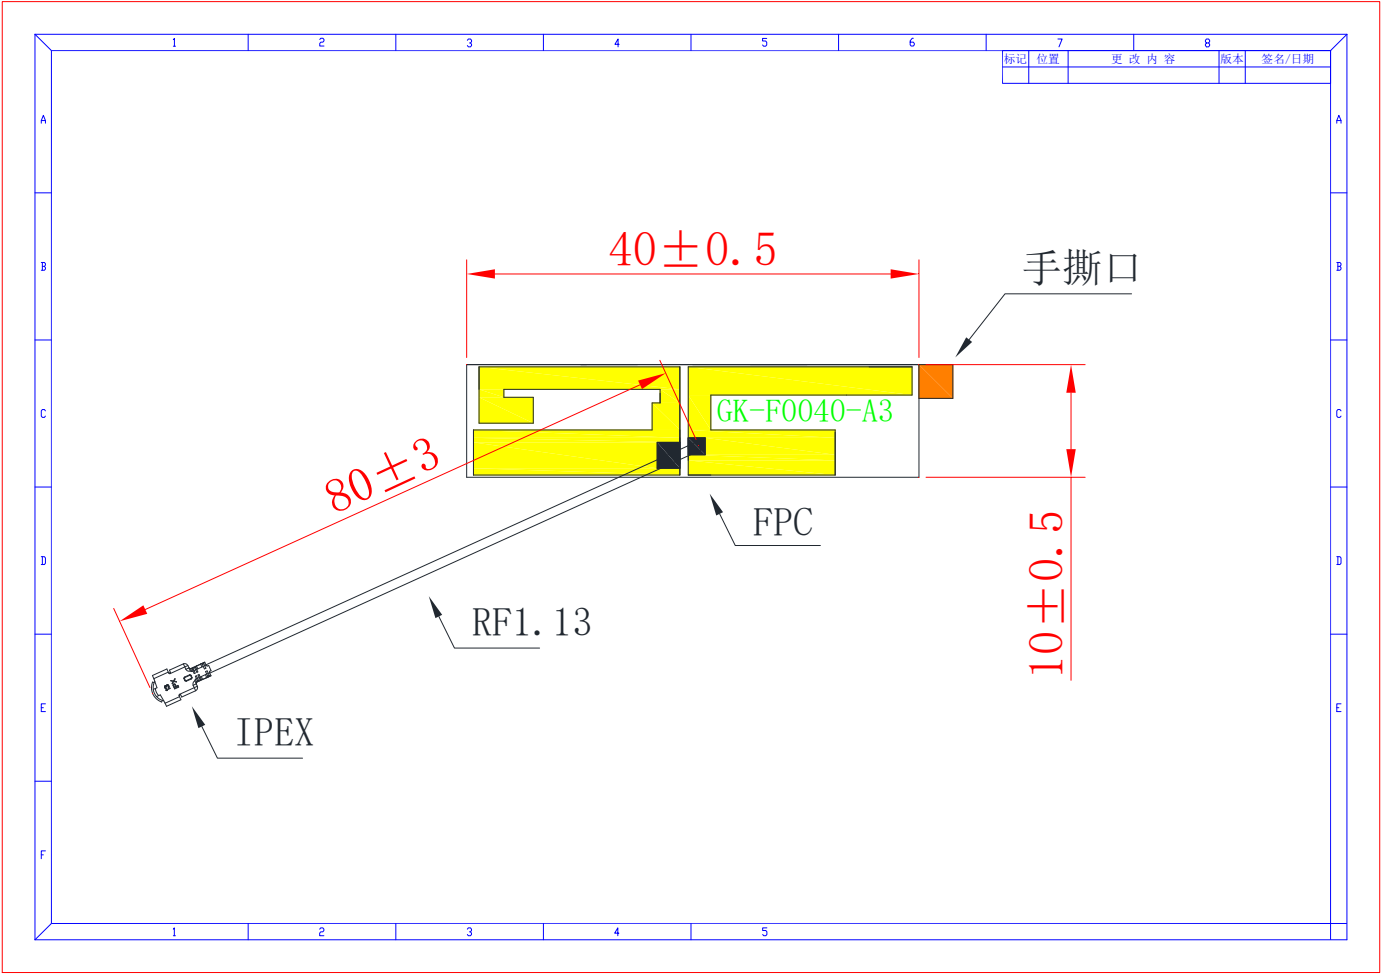


一、Product Structure Drawing (mm)

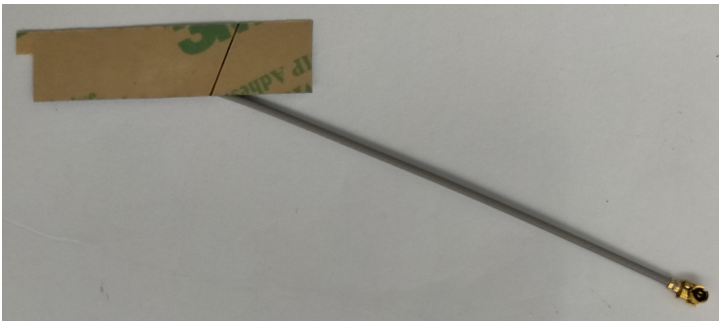

二、Product physical picture

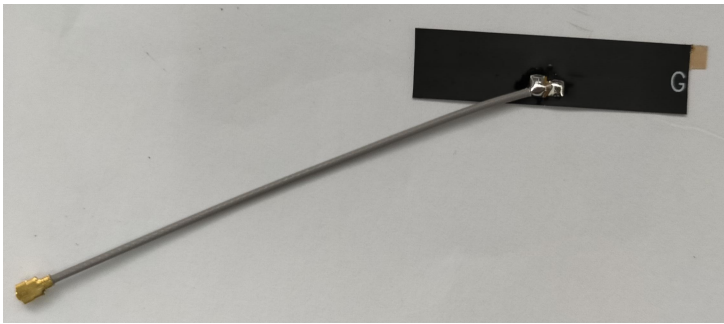


三、Antenna technical parameters


Design Specifications	Typical
天线形式(Antenna form)	2.4G 内置天线
工作频率(working Frequency)	2400-2500MHz
增益 (Gain)	3.94dBi (均值)、4.59dBi (峰值) @2400-2500MHz
天线效率 (Antenna efficiency)	≥60%
电压驻波比 (VSWR)	≤1.5
极化方式(Ploriaztion)	Linear polarization
辐射方向(Radiation pattern)	omnidirectional
馈电阻抗(impedance)	50 Ω
天线尺寸(Overal dimensions)	40x10mm
重量(Weight)	0.5g
工作温度(Operatin Temp)	-40℃~80℃

四、Antenna performance testing


1、Return loss&standing wave ratio

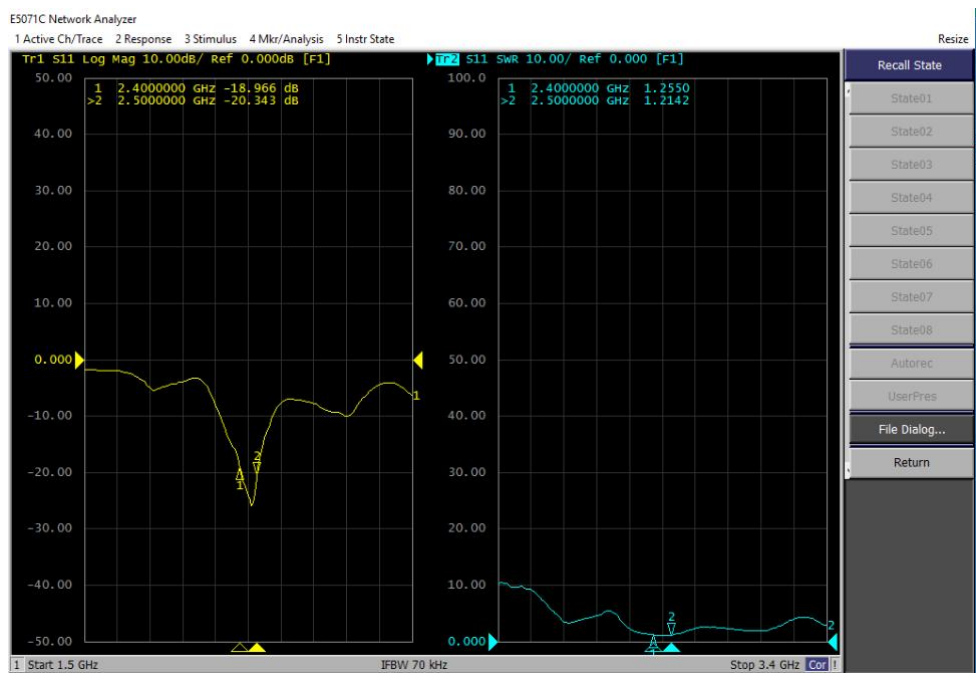

3、Direction diagram (2D 及 3D 图)

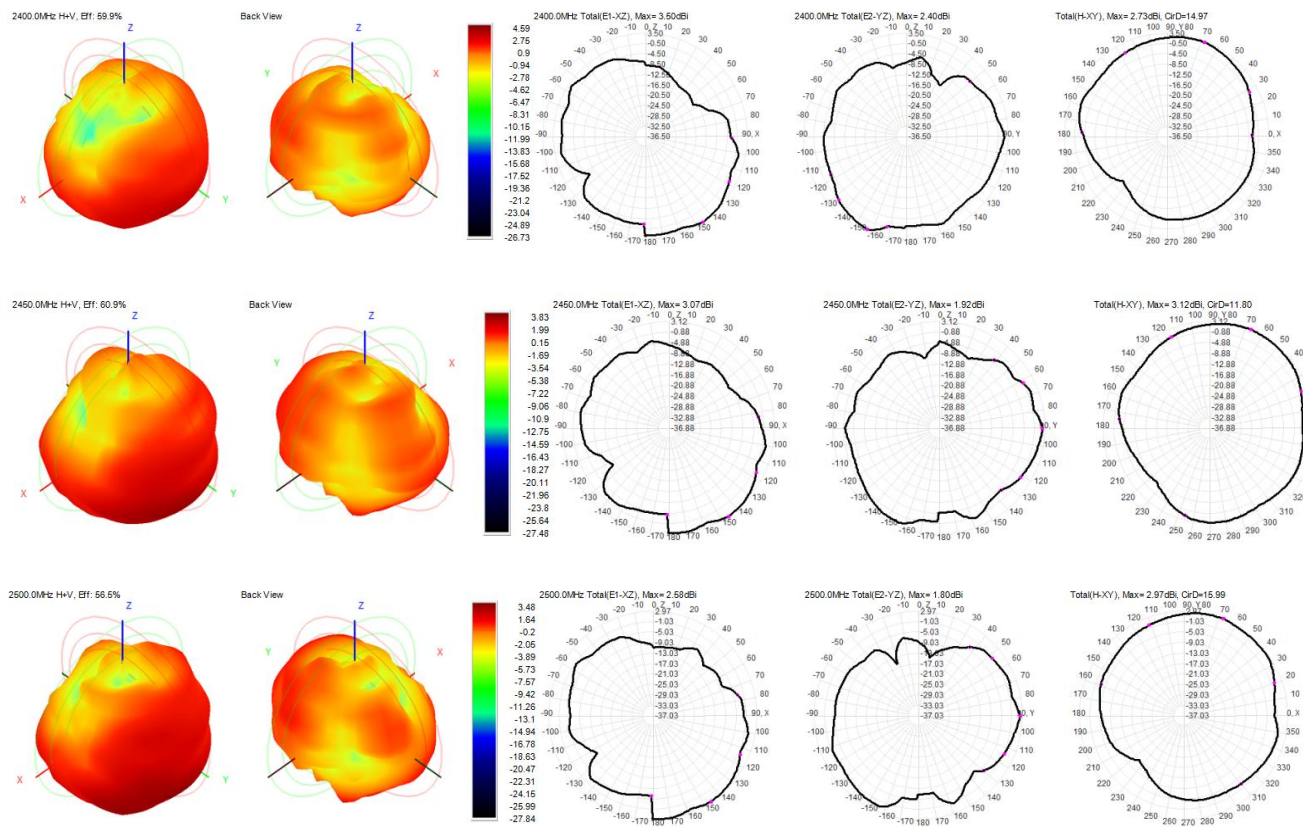

4、Efficiency curve chart

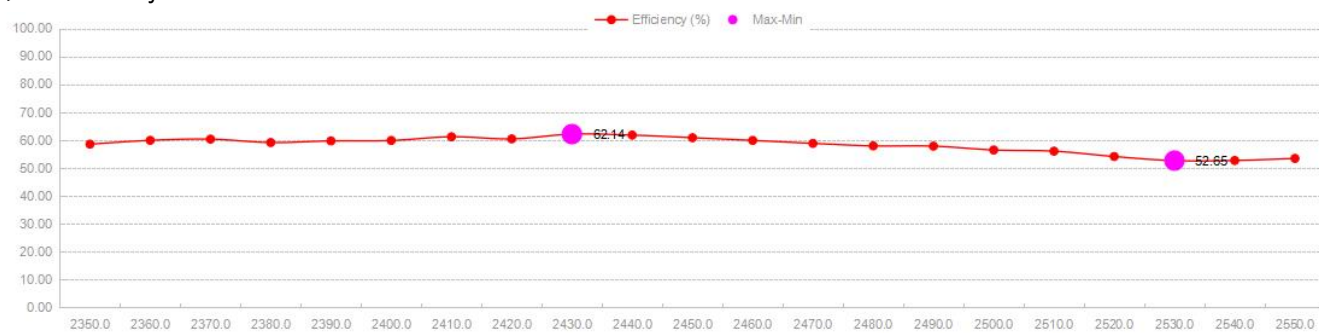

5、Gain curve graph

