


Test Mode	UNII-8_TX AX(HE40) Mode 6925 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

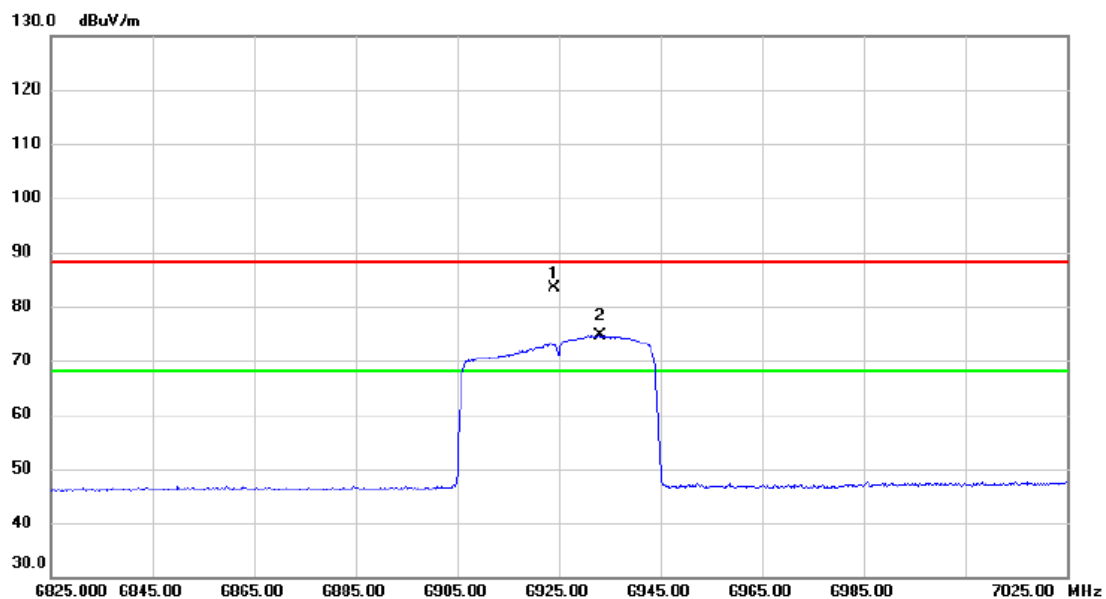


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		6924.200	63.92	19.55	83.47	88.20	-4.73	peak	No Limit
2	*	6933.000	54.98	19.58	74.56	68.20	6.36	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE40) Mode 6925 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

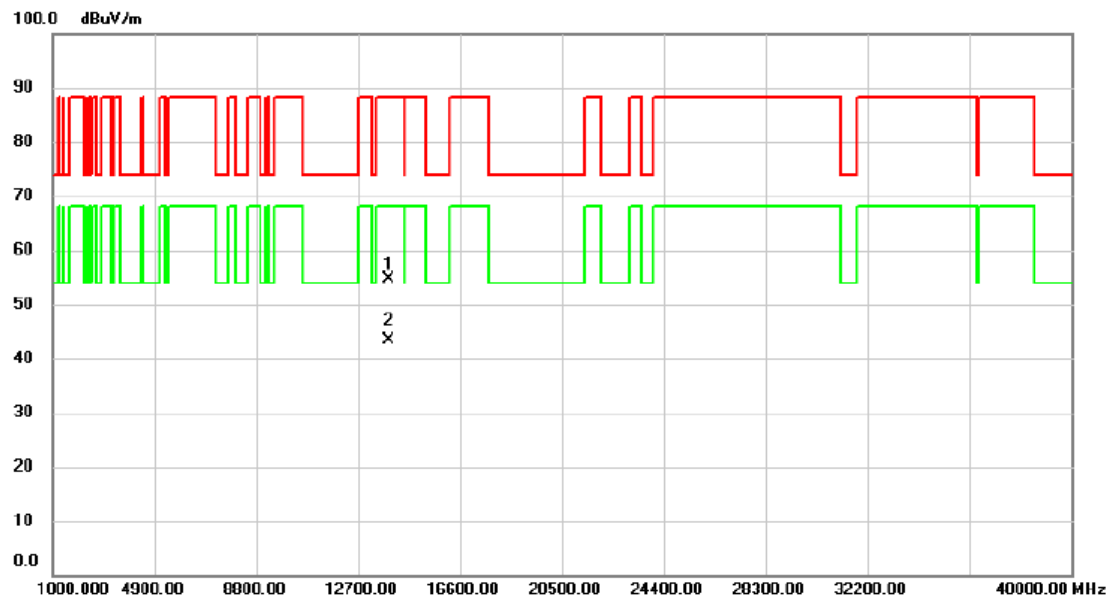


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		13849.52	36.82	17.70	54.52	88.20	-33.68	peak	
2	*	13850.56	25.71	17.71	43.42	68.20	-24.78	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE40) Mode 7005 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

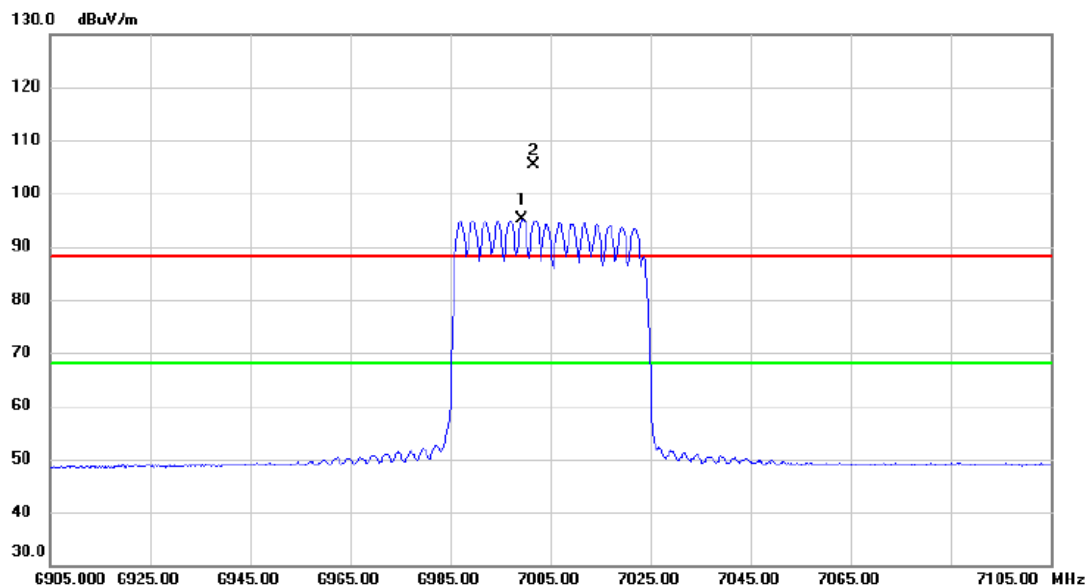


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6999.400	75.39	19.79	95.18	68.20	26.98	AVG	No Limit
2	X	7001.600	85.49	19.79	105.28	88.20	17.08	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE40) Mode 7005 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

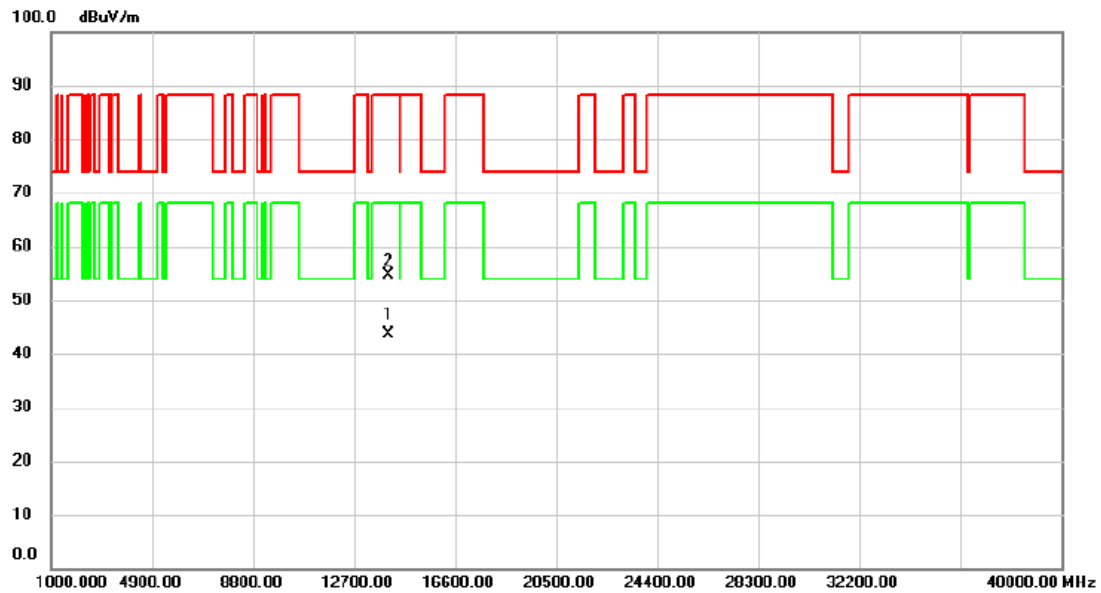


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	14010.60	25.51	18.20	43.71	68.20	-24.49	AVG	
2		14011.24	36.39	18.20	54.59	88.20	-33.61	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE40) Mode 7005 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

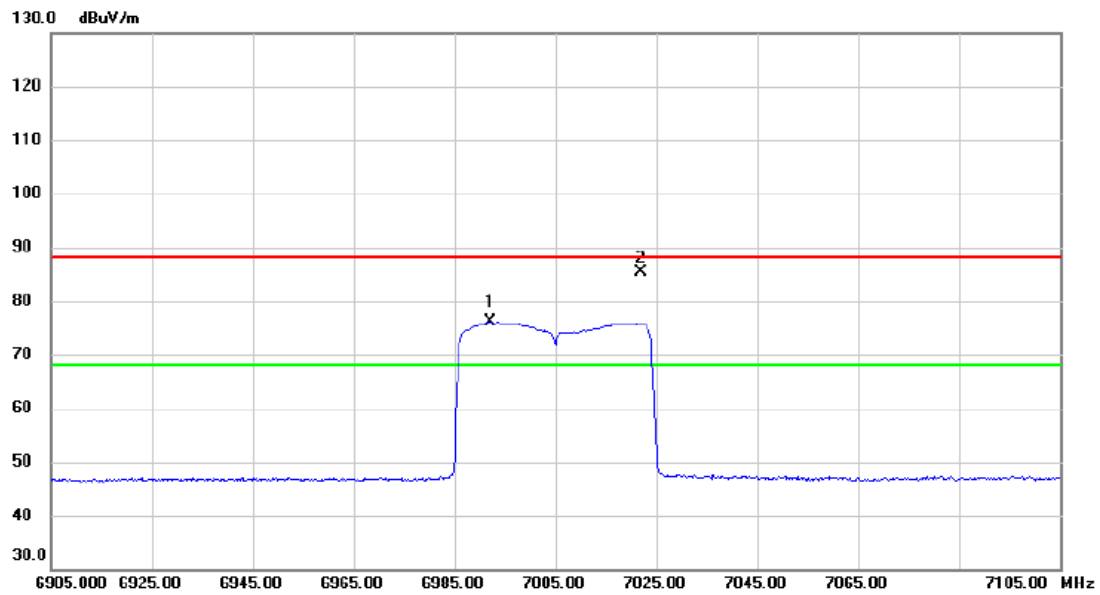


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6992.200	56.39	19.76	76.15	68.20	7.95	AVG	No Limit
2		7021.800	65.69	19.81	85.50	88.20	-2.70	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE40) Mode 7005 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

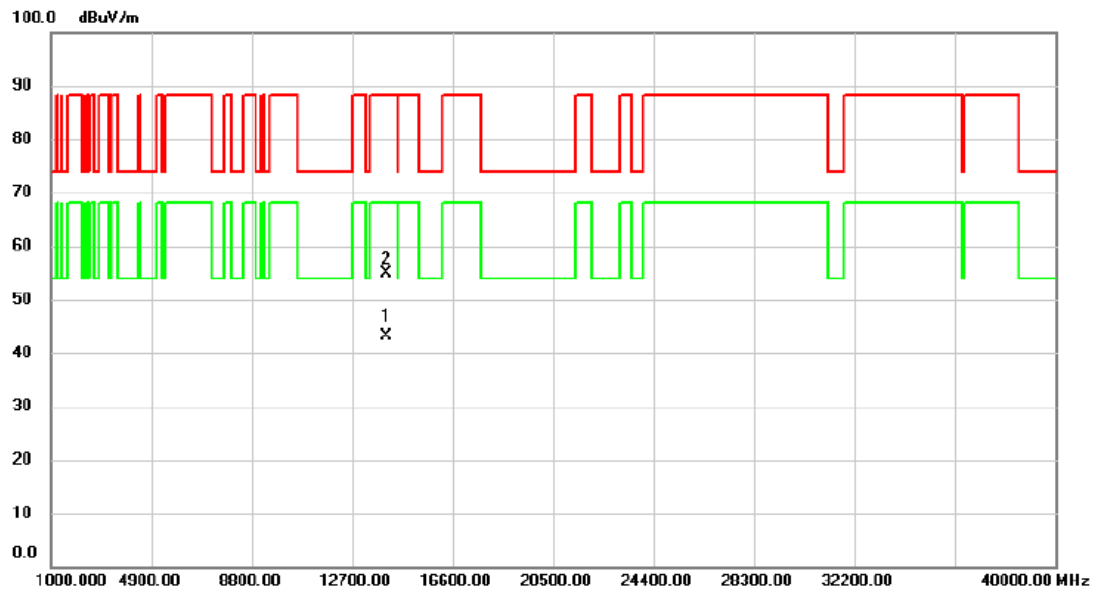


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	14009.05	24.94	18.20	43.14	68.20	-25.06	AVG	
2		14010.86	36.68	18.20	54.88	88.20	-33.32	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE40) Mode 7085 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

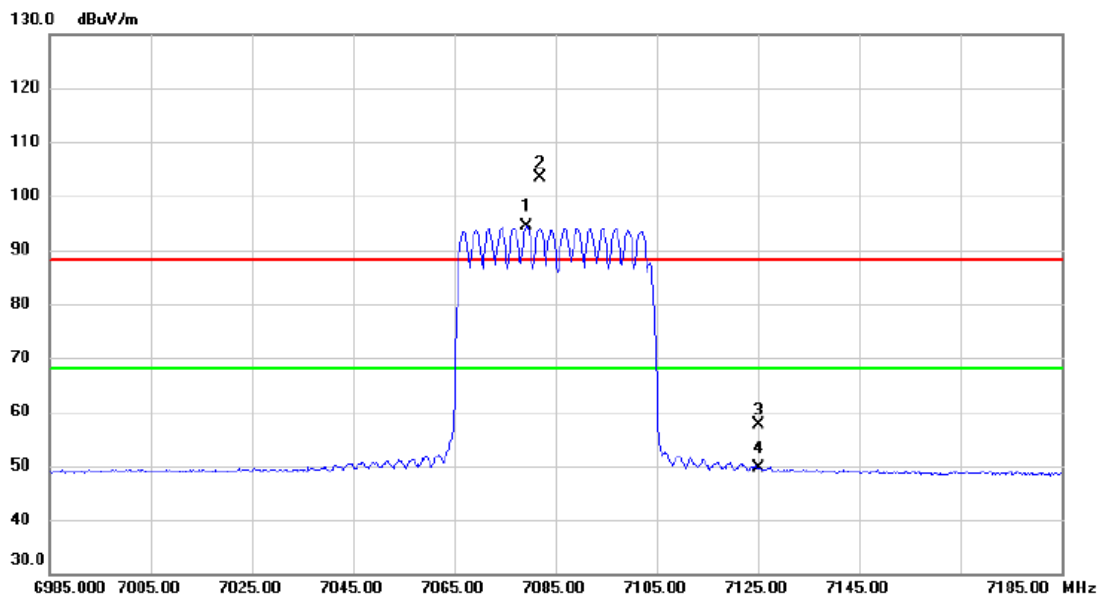


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	7079.400	74.42	19.88	94.30	68.20	26.10	AVG	No Limit
2	X	7082.000	83.49	19.89	103.38	88.20	15.18	peak	No Limit
3		7125.000	37.59	19.93	57.52	88.20	-30.68	peak	
4		7125.000	29.77	19.93	49.70	68.20	-18.50	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE40) Mode 7085 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

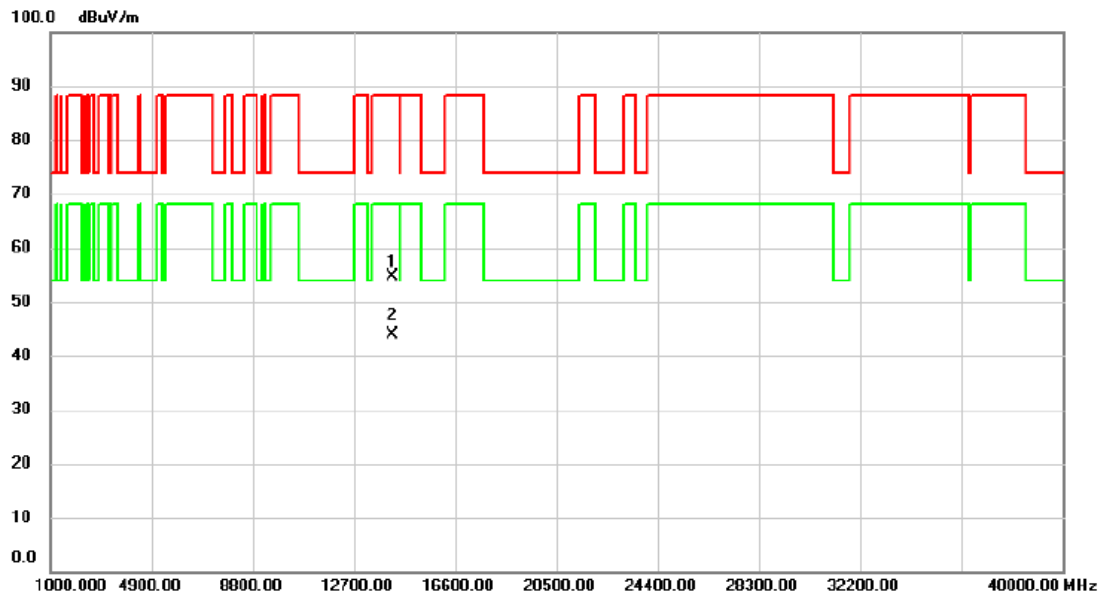


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		14169.70	36.08	18.63	54.71	88.20	-33.49	peak	
2	*	14171.37	25.31	18.63	43.94	68.20	-24.26	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE40) Mode 7085 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

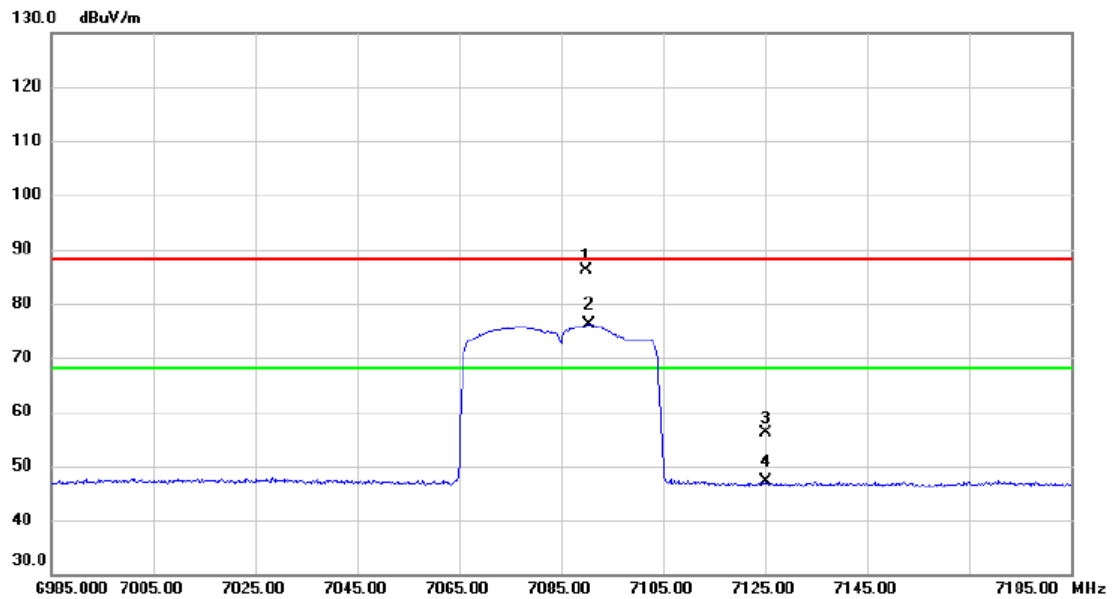


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7089.800	66.25	19.89	86.14	88.20	-2.06	peak	No Limit
2	*	7090.400	56.31	19.89	76.20	68.20	8.00	AVG	No Limit
3		7125.000	36.26	19.93	56.19	88.20	-32.01	peak	
4		7125.000	27.09	19.93	47.02	68.20	-21.18	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE40) Mode 7085 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

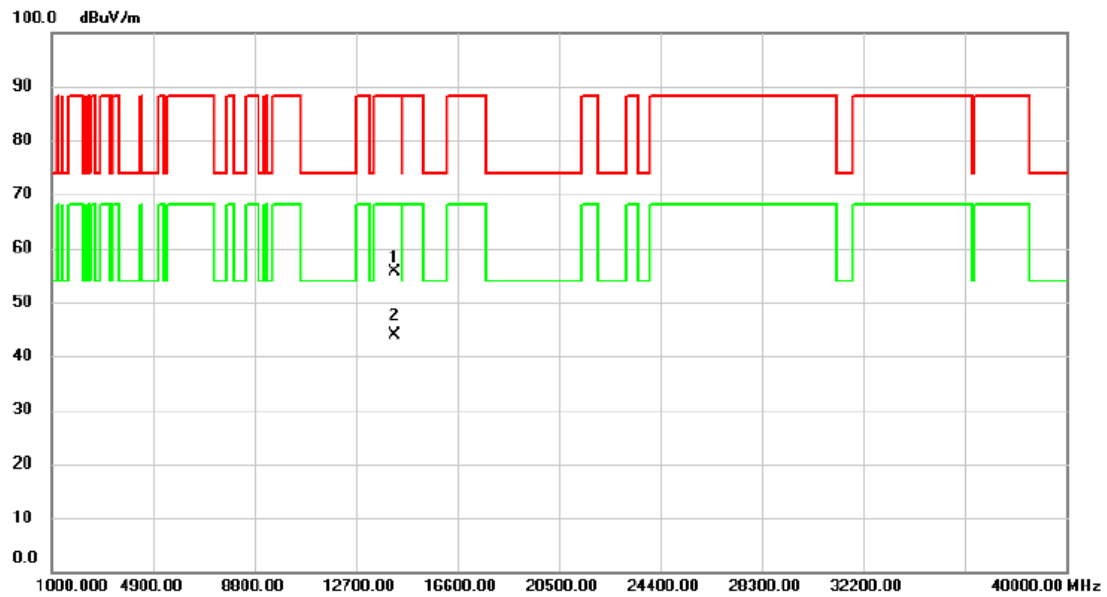


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		14170.93	37.00	18.63	55.63	88.20	-32.57	peak	
2	*	14172.46	25.21	18.64	43.85	68.20	-24.35	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE80) Mode 6945 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

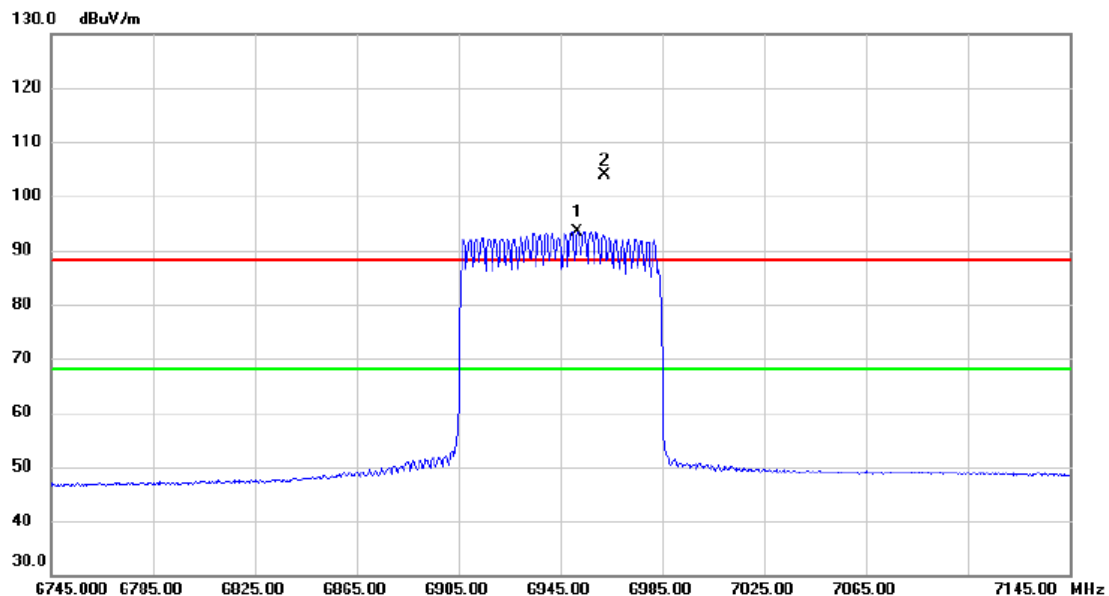


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6951.800	73.85	19.64	93.49	68.20	25.29	AVG	No Limit
2	X	6962.200	84.16	19.67	103.83	88.20	15.63	peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE80) Mode 6945 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

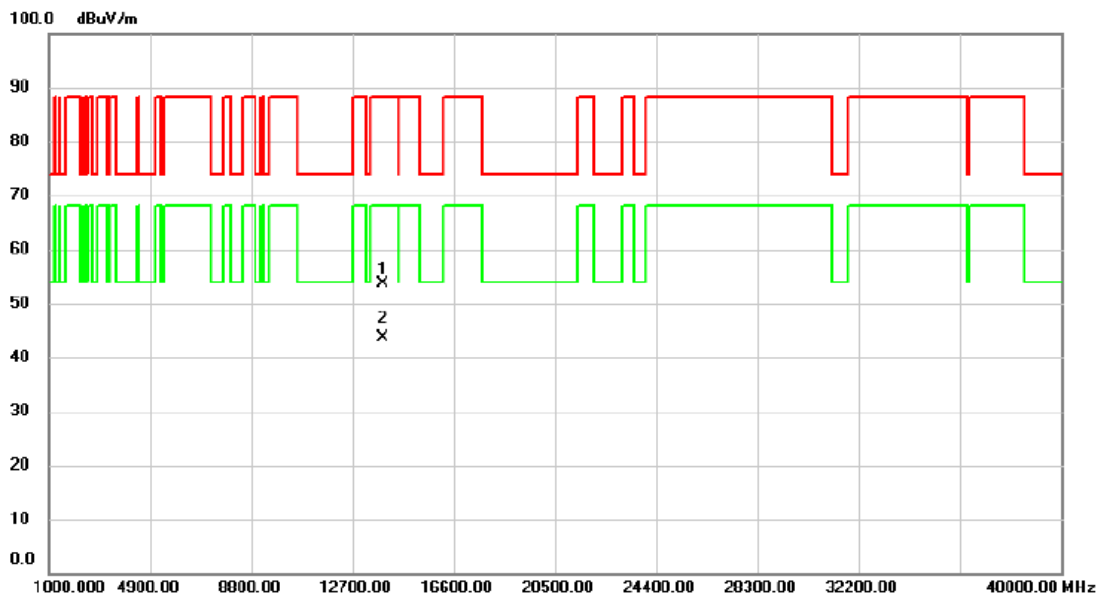


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	13888.17	35.78	17.82	53.60	88.20	-34.60	peak	
2 *	13889.94	25.73	17.82	43.55	68.20	-24.65	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE80) Mode 6945 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

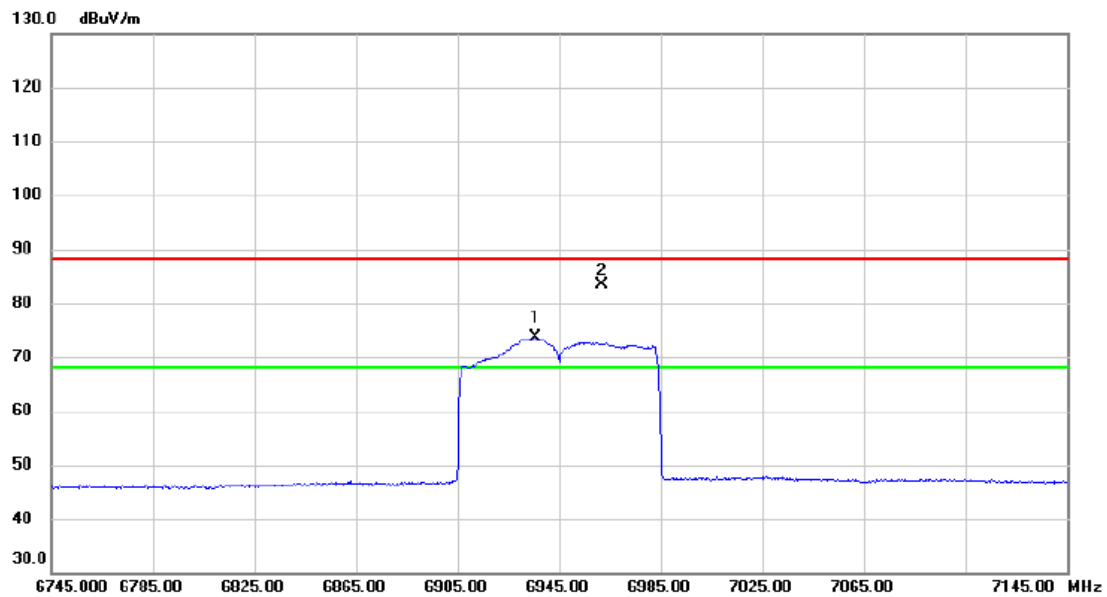


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6935.800	53.94	19.58	73.52	68.20	5.32	AVG	No Limit
2		6961.800	63.70	19.67	83.37	88.20	-4.83	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE80) Mode 6945 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

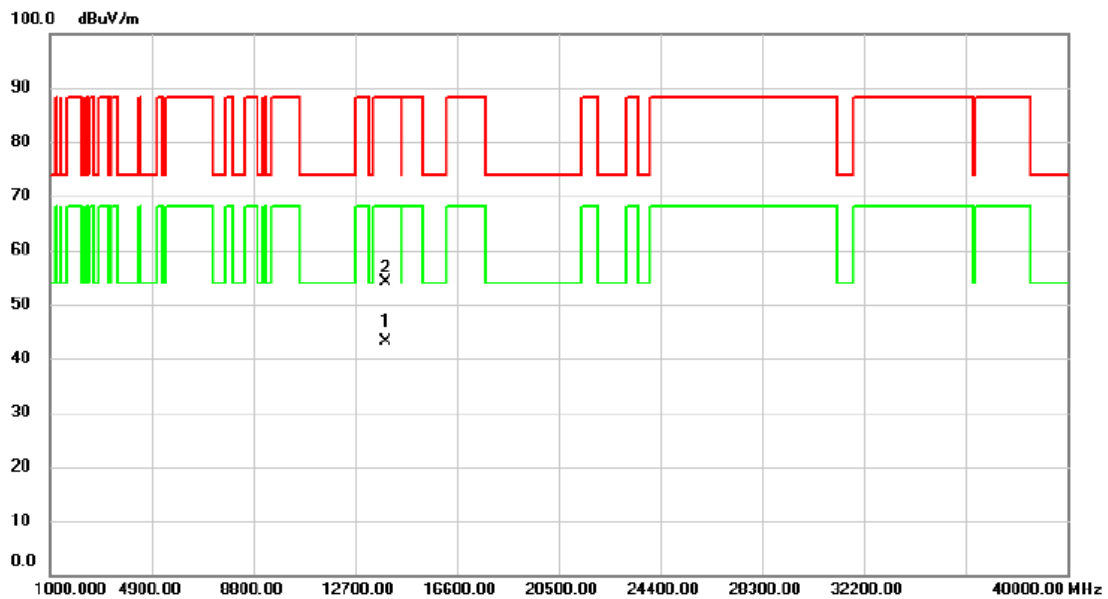


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	13889.09	25.41	17.82	43.23	68.20	-24.97	AVG	
2		13892.50	36.29	17.84	54.13	88.20	-34.07	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE80) Mode 7025 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

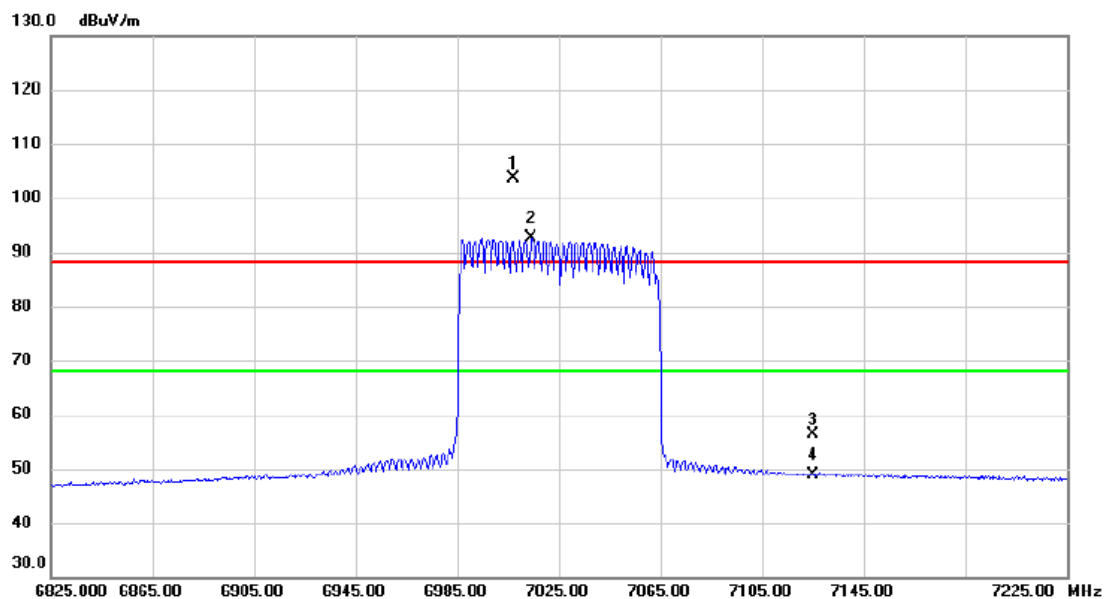


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	7007.000	83.79	19.80	103.59	88.20	15.39	peak	No Limit
2	*	7014.200	72.85	19.80	92.65	68.20	24.45	AVG	No Limit
3		7125.000	36.44	19.93	56.37	88.20	-31.83	peak	
4		7125.000	29.07	19.93	49.00	68.20	-19.20	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE80) Mode 7025 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

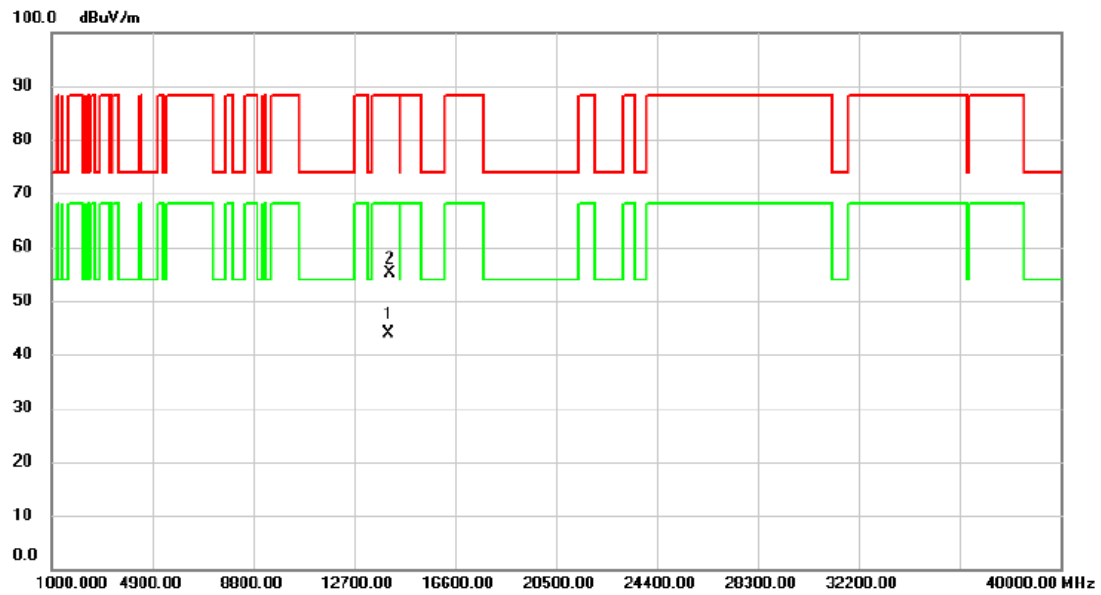


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	14051.15	25.61	18.30	43.91	68.20	-24.29	AVG	
2		14052.00	36.92	18.31	55.23	88.20	-32.97	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE80) Mode 7025 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

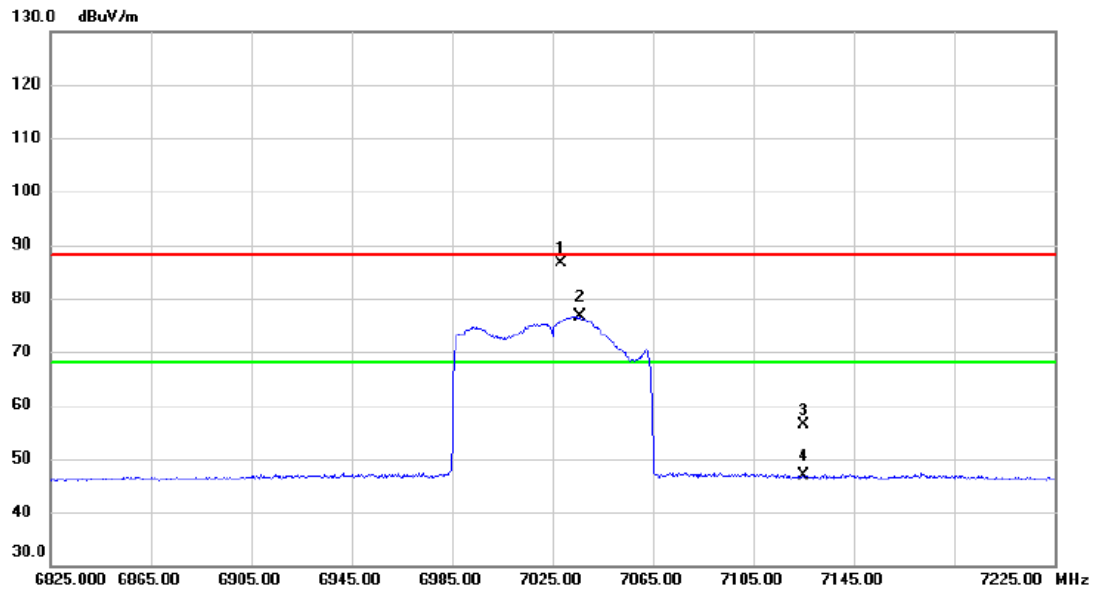


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7028.600	66.85	19.82	86.67	88.20	-1.53	peak	No Limit
2	*	7036.200	56.83	19.83	76.66	68.20	8.46	AVG	No Limit
3		7125.000	36.41	19.93	56.34	88.20	-31.86	peak	
4		7125.000	26.96	19.93	46.89	68.20	-21.31	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE80) Mode 7025 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

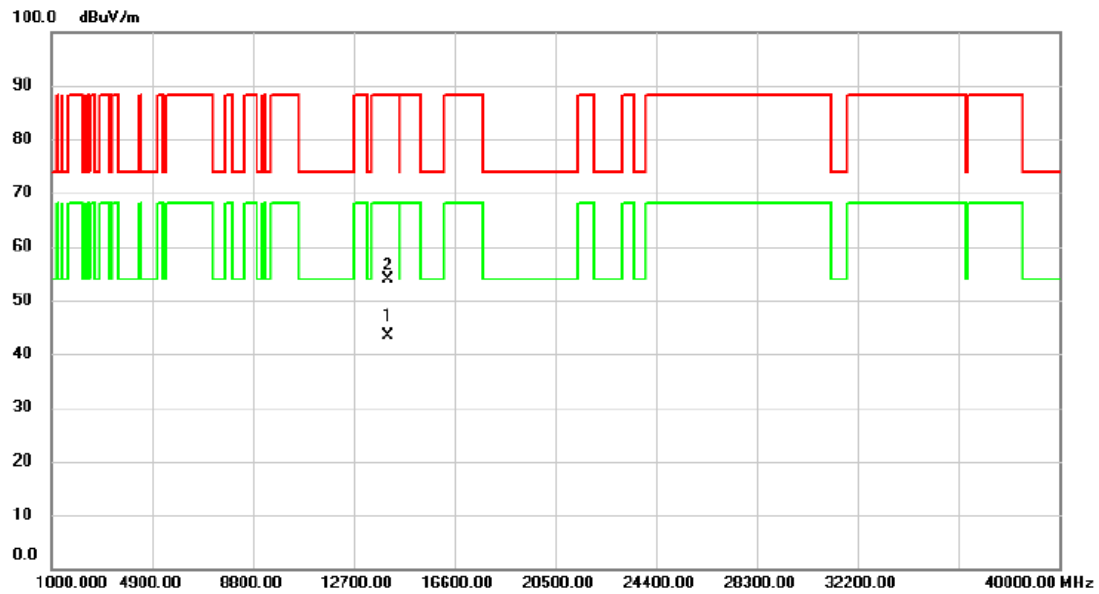


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	14049.40	25.03	18.31	43.34	68.20	-24.86	AVG	
2		14051.97	35.69	18.31	54.00	88.20	-34.20	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE160) Mode 6985 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

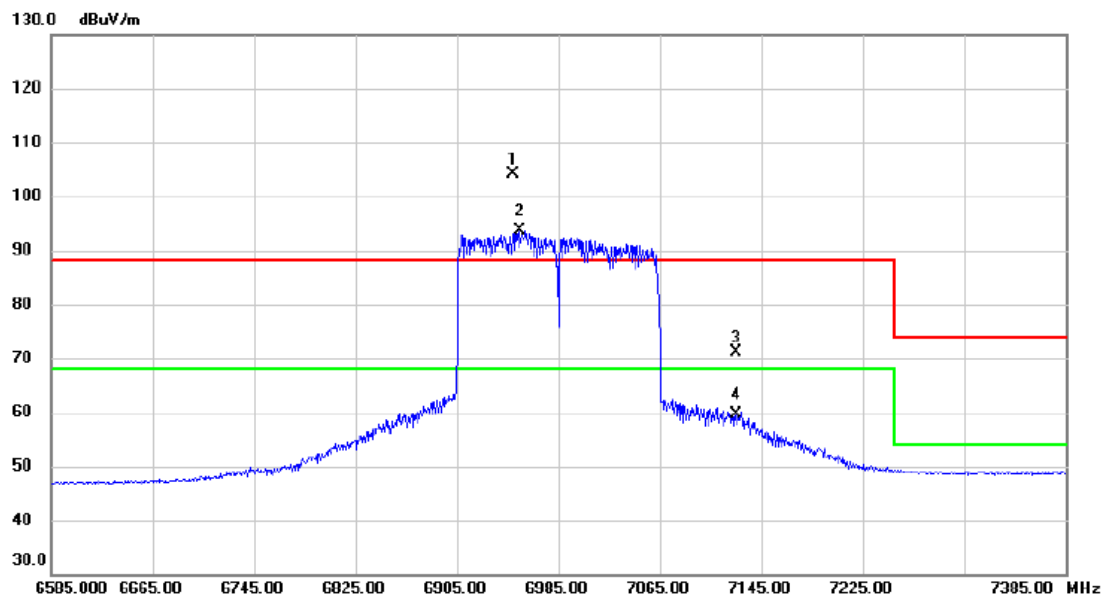


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6949.000	84.49	19.62	104.11	88.20	15.91	peak	No Limit
2	*	6954.600	73.99	19.65	93.64	68.20	25.44	AVG	No Limit
3		7125.000	51.08	19.93	71.01	88.20	-17.19	peak	
4		7125.000	39.80	19.93	59.73	68.20	-8.47	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE160) Mode 6985 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

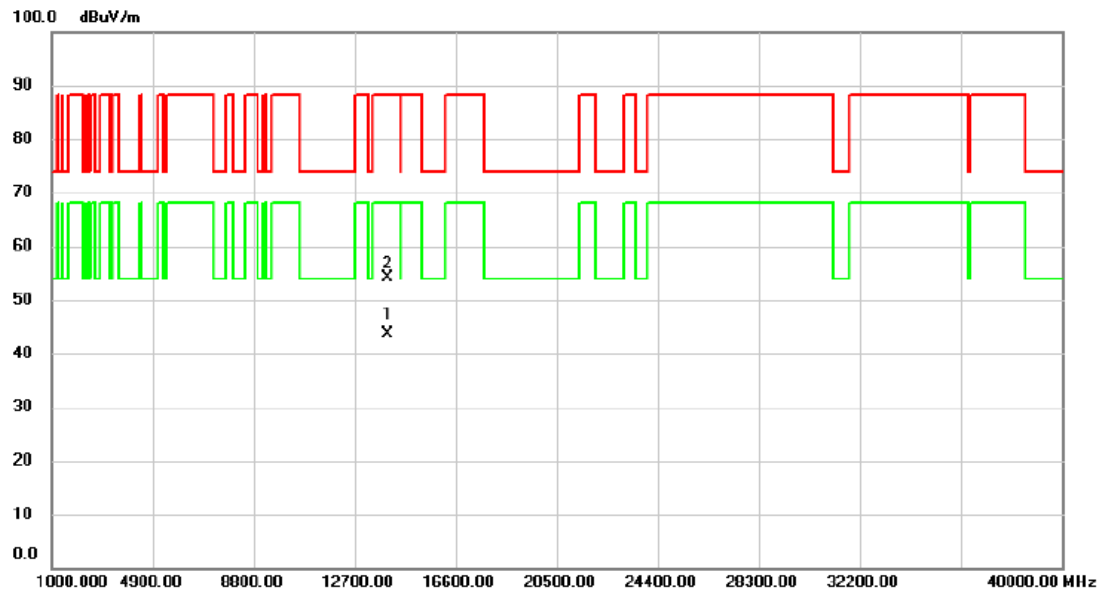


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	13969.65	25.56	18.08	43.64	68.20	-24.56	AVG	
2		13971.00	36.12	18.08	54.20	88.20	-34.00	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE160) Mode 6985 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

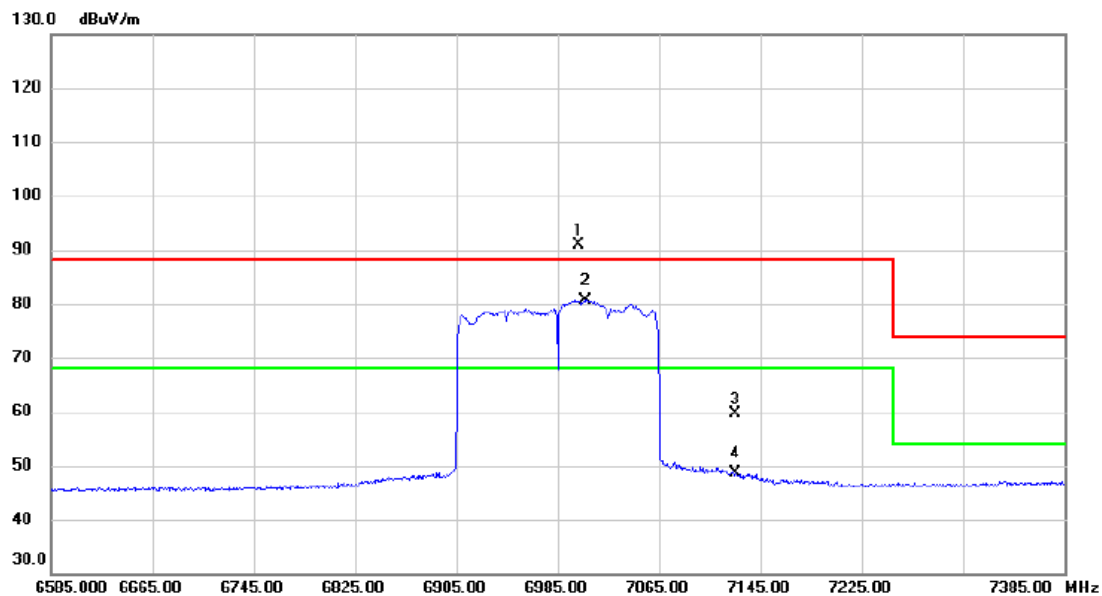


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	7001.800	71.19	19.79	90.98	88.20	2.78	peak	No Limit
2	*	7007.400	60.81	19.80	80.61	68.20	12.41	AVG	No Limit
3		7125.000	39.71	19.93	59.64	88.20	-28.56	peak	
4		7125.000	28.69	19.93	48.62	68.20	-19.58	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE160) Mode 6985 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

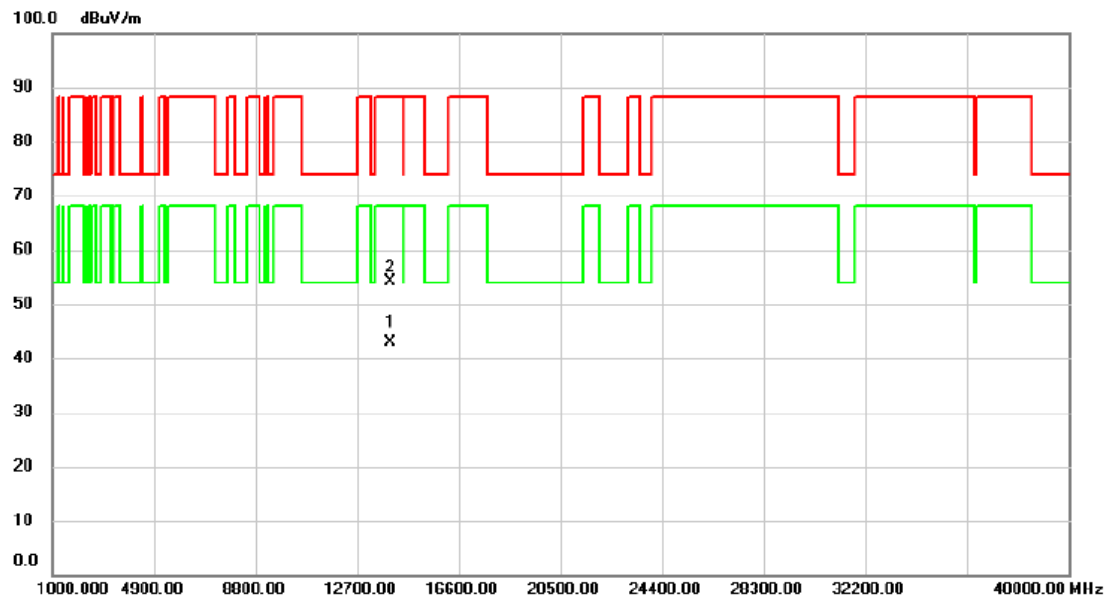


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	13968.33	24.89	18.08	42.97	68.20	-25.23	AVG	
2		13970.38	36.15	18.08	54.23	88.20	-33.97	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7+UNII-8_TX AX(HE20) Mode 6875 MHz	Polarization	Vertical
-----------	---	--------------	----------

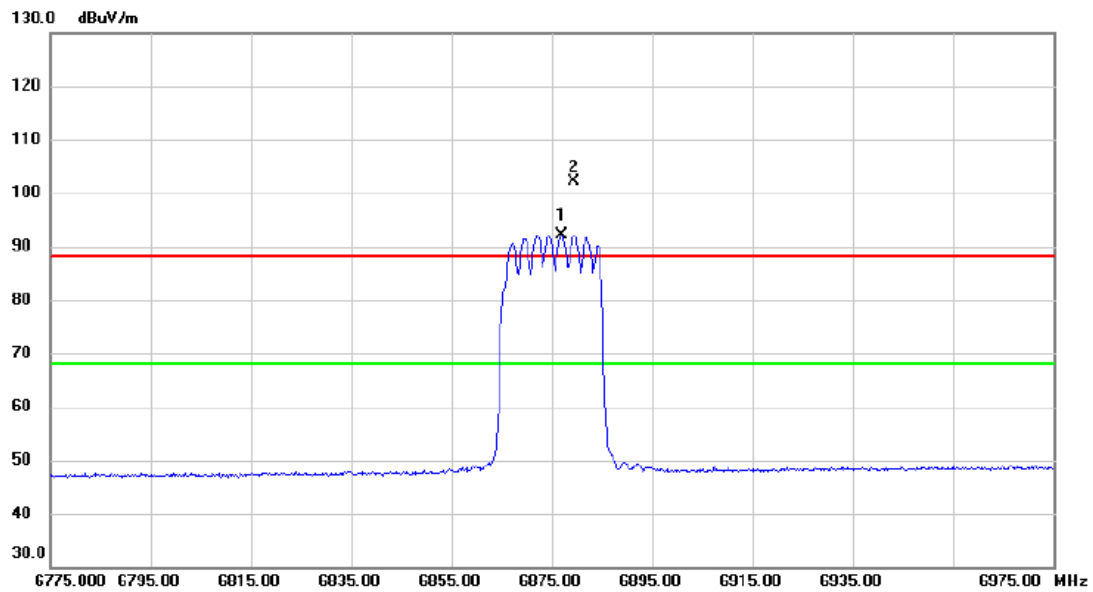


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6877.000	72.62	19.40	92.02	68.20	23.82	AVG	No Limit
2	X	6879.400	82.66	19.41	102.07	88.20	13.87	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7+UNII-8_TX AX(HE20) Mode 6875 MHz	Polarization	Vertical
-----------	---	--------------	----------

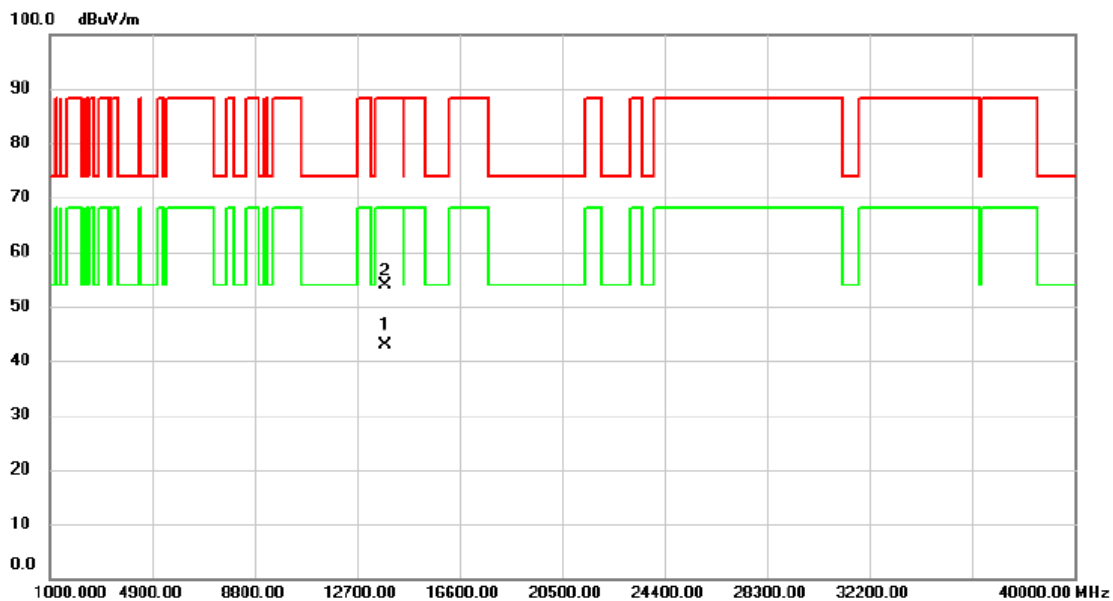


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	13750.25	25.42	17.41	42.83	68.20	-25.37	AVG	
2		13752.21	36.50	17.41	53.91	88.20	-34.29	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7+UNII-8_TX AX(HE20) Mode 6875 MHz	Polarization	Horizontal
-----------	---	--------------	------------

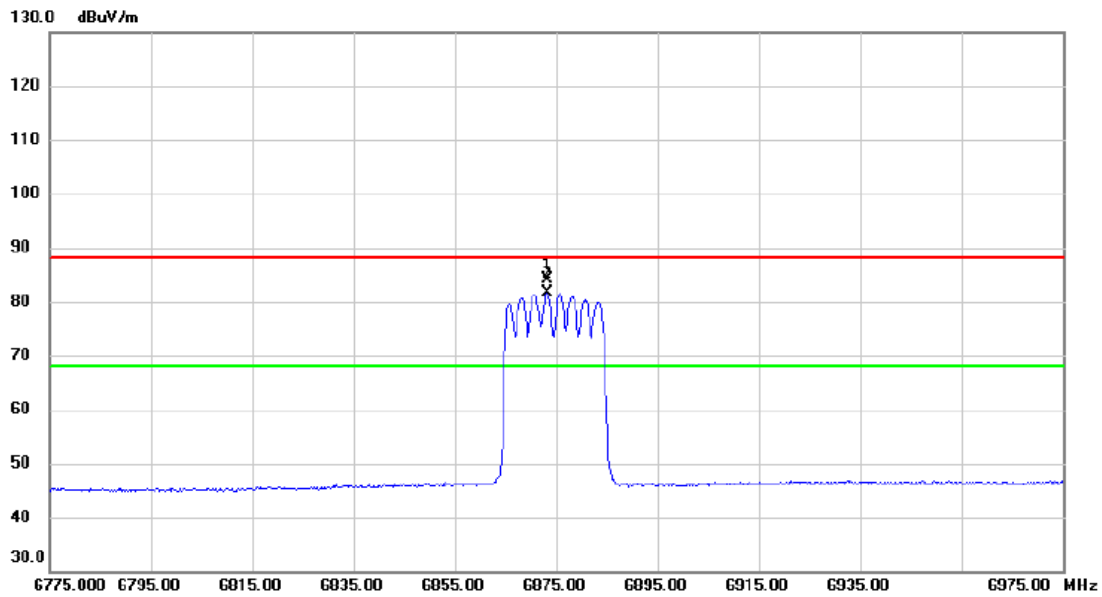


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		6873.200	64.77	19.39	84.16	88.20	-4.04	peak	No Limit
2	*	6873.200	62.27	19.39	81.66	68.20	13.46	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7+UNII-8_TX AX(HE20) Mode 6875 MHz	Polarization	Horizontal
-----------	---	--------------	------------

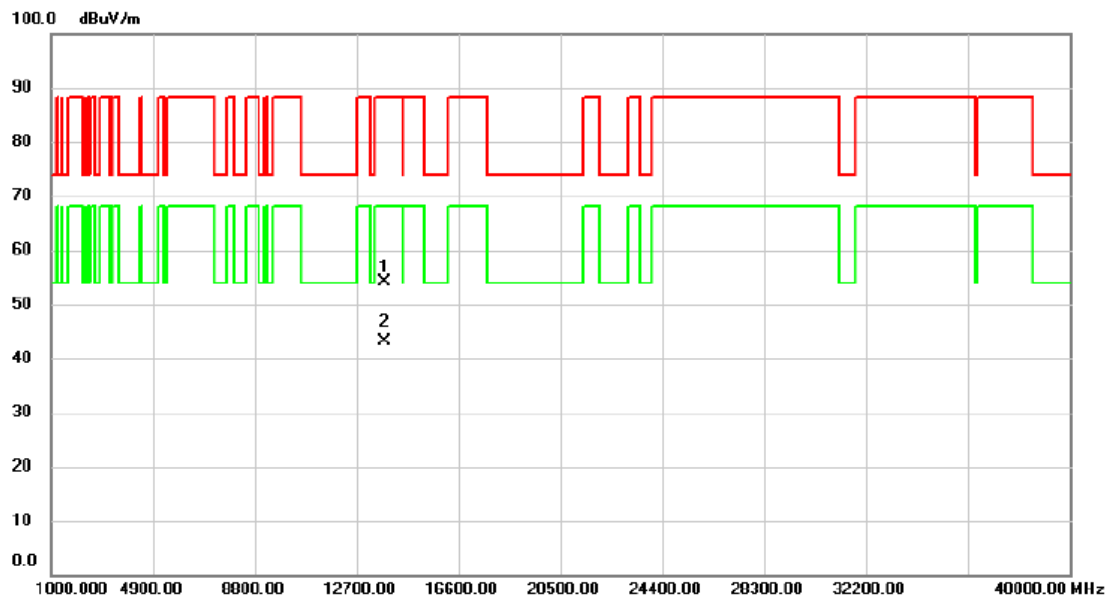


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		13747.96	36.85	17.38	54.23	88.20	-33.97	peak	
2	*	13748.81	25.74	17.38	43.12	68.20	-25.08	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7+UNII-8_TX AX(HE40) Mode 6885 MHz	Polarization	Vertical
-----------	---	--------------	----------

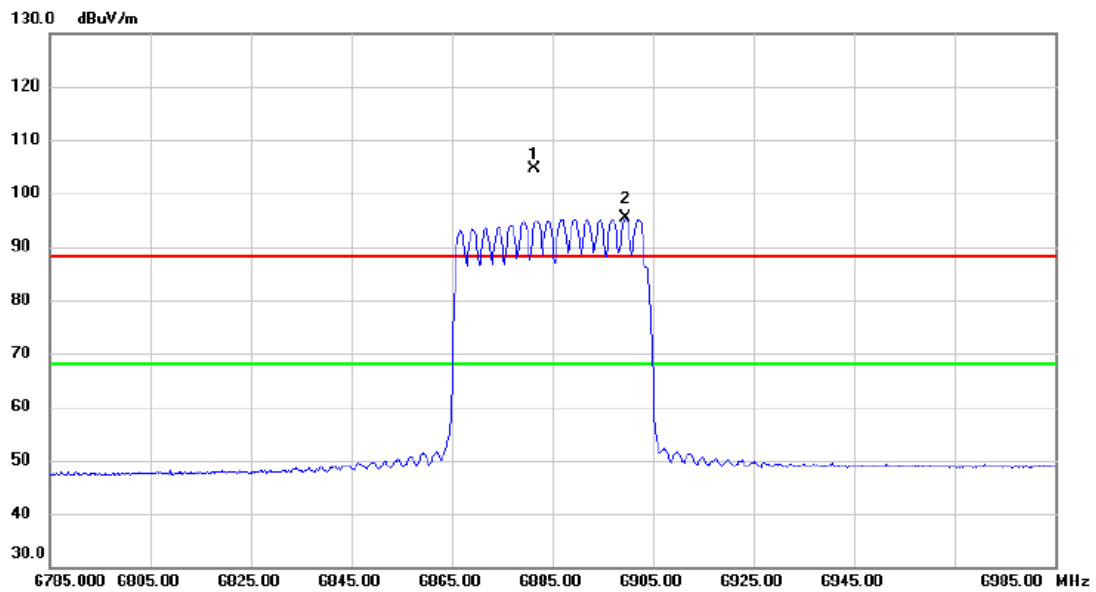


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6881.400	85.21	19.41	104.62	88.20	16.42	peak	No Limit
2	*	6899.600	75.82	19.47	95.29	68.20	27.09	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7+UNII-8_TX AX(HE40) Mode 6885 MHz	Polarization	Vertical
-----------	---	--------------	----------

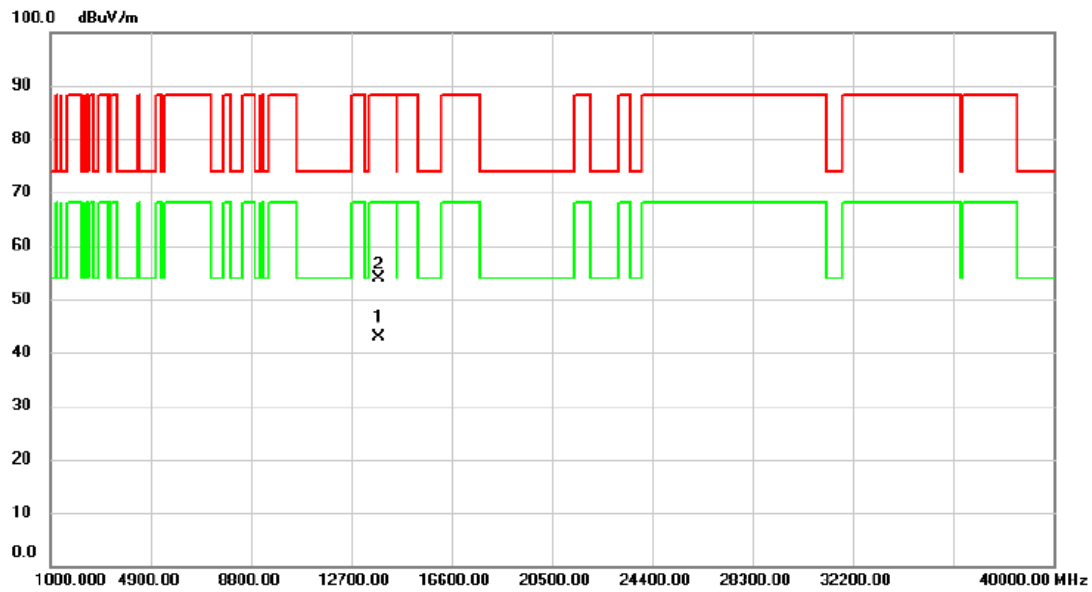


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	13769.84	25.33	17.46	42.79	68.20	-25.41	AVG	
2		13771.24	36.43	17.46	53.89	88.20	-34.31	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7+UNII-8_TX AX(HE40) Mode 6885 MHz	Polarization	Horizontal
-----------	---	--------------	------------

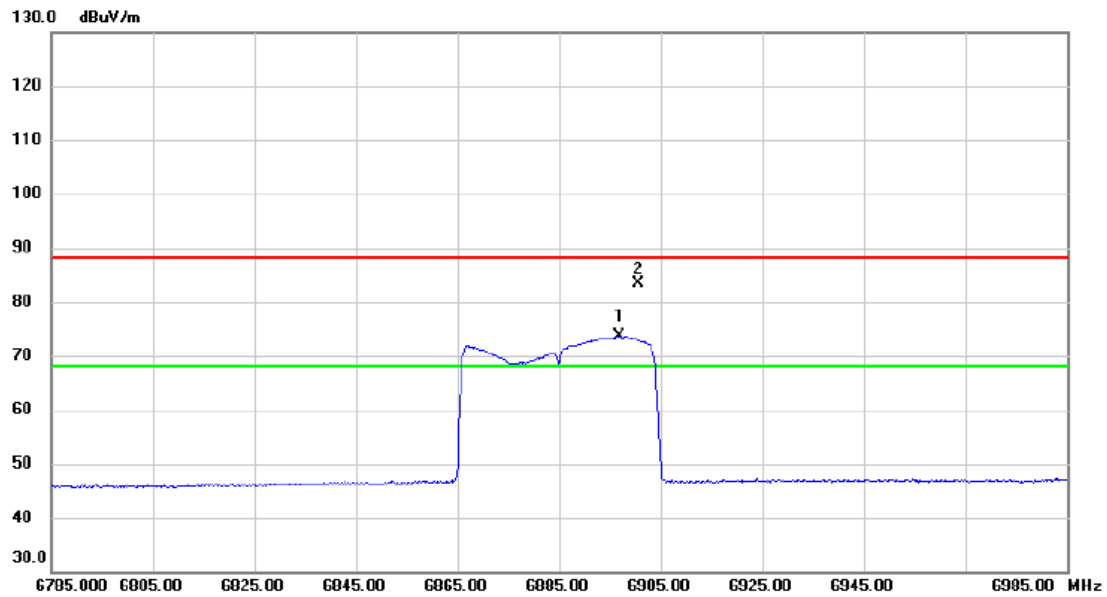


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6896.800	54.23	19.46	73.69	68.20	5.49	AVG	No Limit
2		6900.600	63.91	19.47	83.38	88.20	-4.82	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7+UNII-8_TX AX(HE40) Mode 6885 MHz	Polarization	Horizontal
-----------	---	--------------	------------

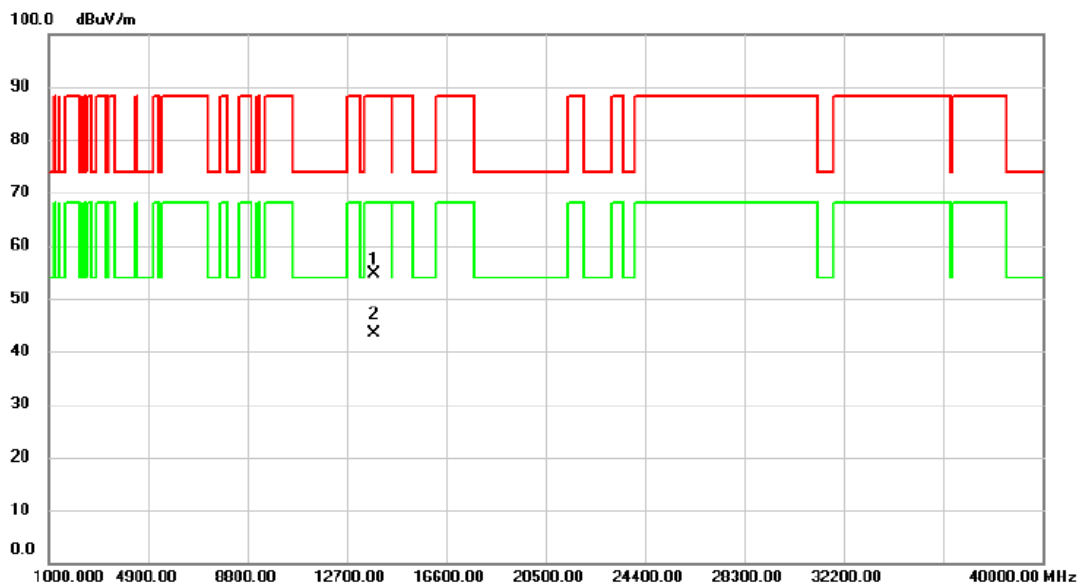


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	13769.37	37.10	17.46	54.56	88.20	-33.64	peak	
2 *	13771.65	25.94	17.46	43.40	68.20	-24.80	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7+UNII-8_TX AX(HE80) Mode 6865 MHz	Polarization	Vertical
-----------	---	--------------	----------

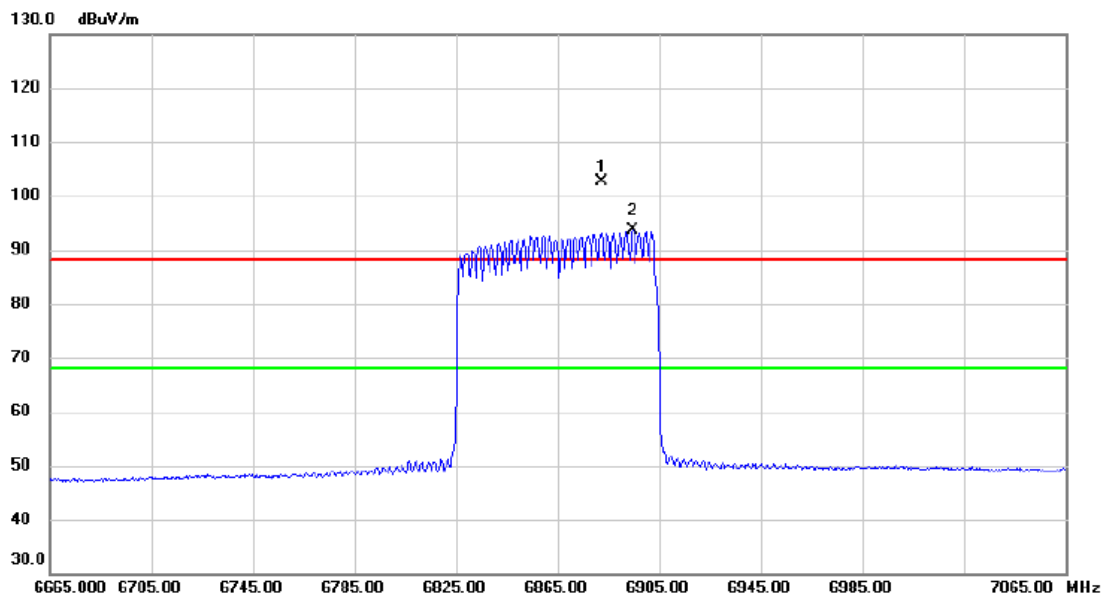


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6882.200	83.29	19.41	102.70	88.20	14.50	peak	No Limit
2	*	6894.600	74.06	19.46	93.52	68.20	25.32	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7+UNII-8_TX AX(HE80) Mode 6865 MHz	Polarization	Vertical
-----------	---	--------------	----------

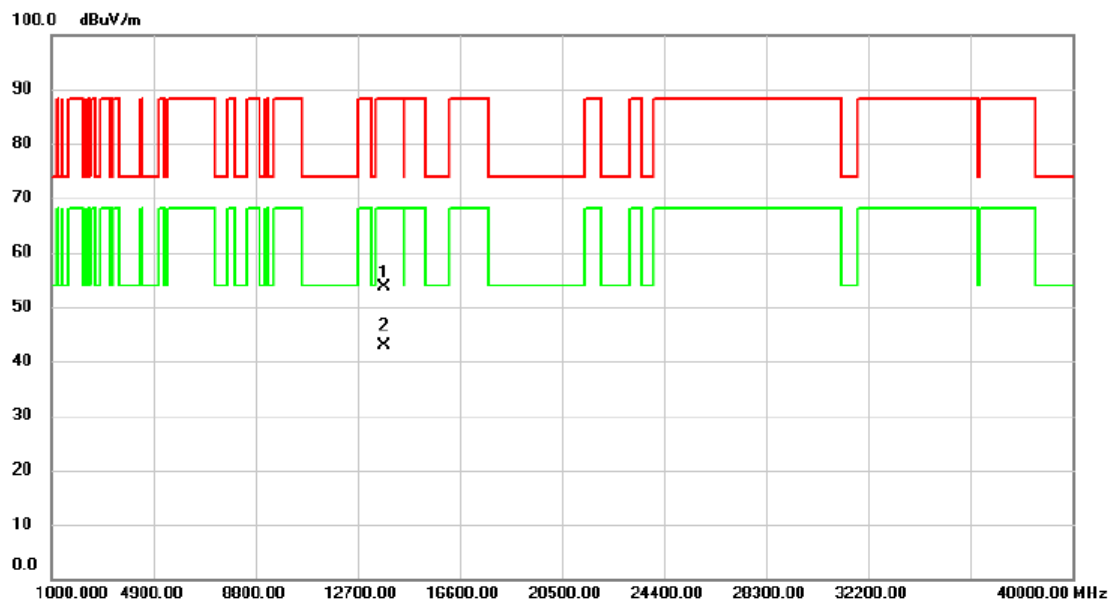


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		13728.05	36.23	17.33	53.56	88.20	-34.64	peak	
2	*	13729.54	25.52	17.33	42.85	68.20	-25.35	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7+UNII-8_TX AX(HE80) Mode 6865 MHz	Polarization	Horizontal
-----------	---	--------------	------------

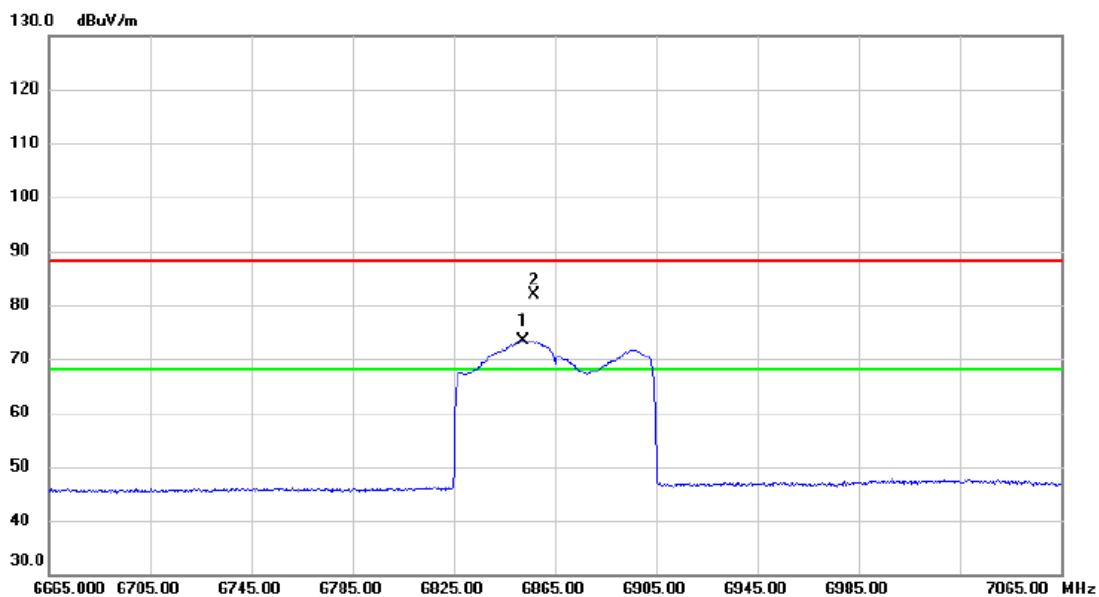


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6852.600	53.95	19.33	73.28	68.20	5.08	AVG	No Limit
2		6856.600	62.44	19.34	81.78	88.20	-6.42	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7+UNII-8_TX AX(HE80) Mode 6865 MHz	Polarization	Horizontal
-----------	---	--------------	------------

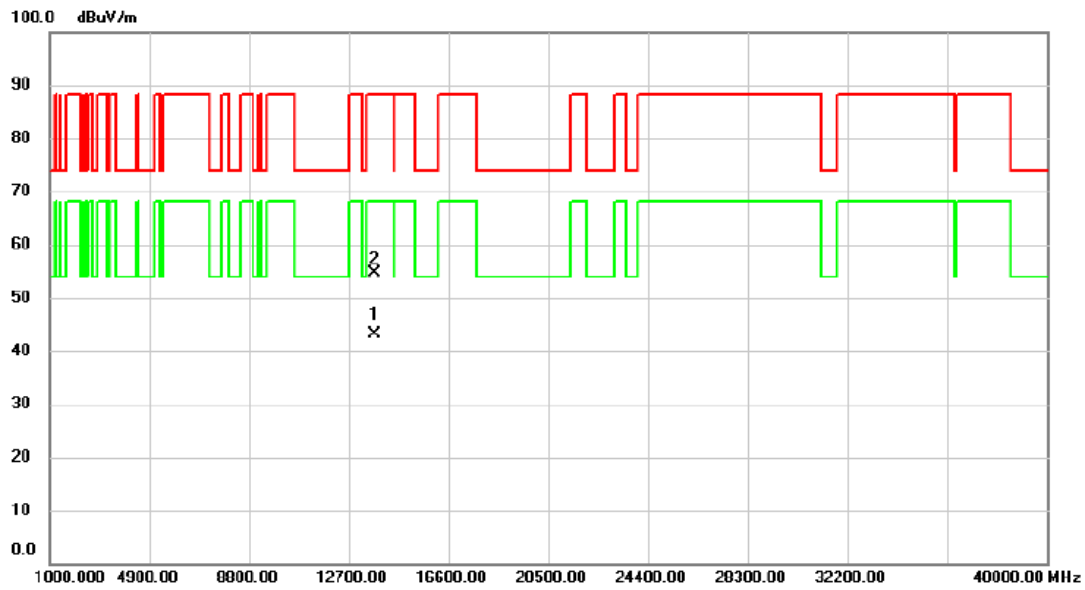


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	13730.43	25.85	17.33	43.18	68.20	-25.02	AVG	
2		13731.16	37.21	17.34	54.55	88.20	-33.65	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7+UNII-8_TX AX(HE160) Mode 6825 MHz	Polarization	Vertical
-----------	--	--------------	----------

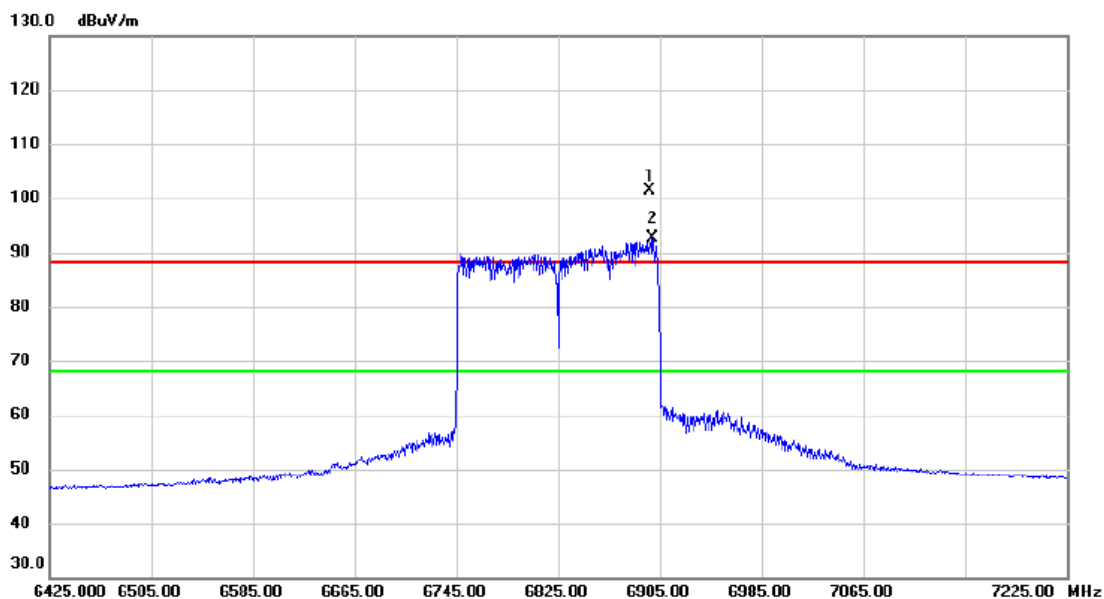


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6897.000	81.97	19.46	101.43	88.20	13.23	peak	No Limit
2	*	6899.400	73.27	19.47	92.74	68.20	24.54	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7+UNII-8_TX AX(HE160) Mode 6825 MHz	Polarization	Vertical
-----------	--	--------------	----------

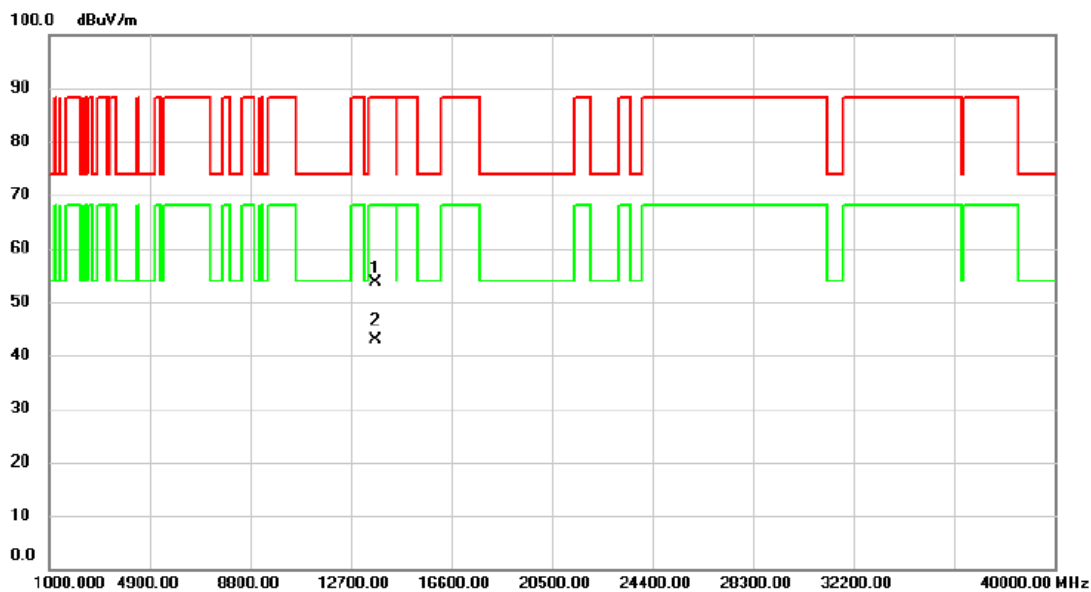


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		13648.54	36.46	17.08	53.54	88.20	-34.66	peak	
2	*	13649.59	25.77	17.08	42.85	68.20	-25.35	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7+UNII-8_TX AX(HE160) Mode 6825 MHz	Polarization	Horizontal
-----------	--	--------------	------------

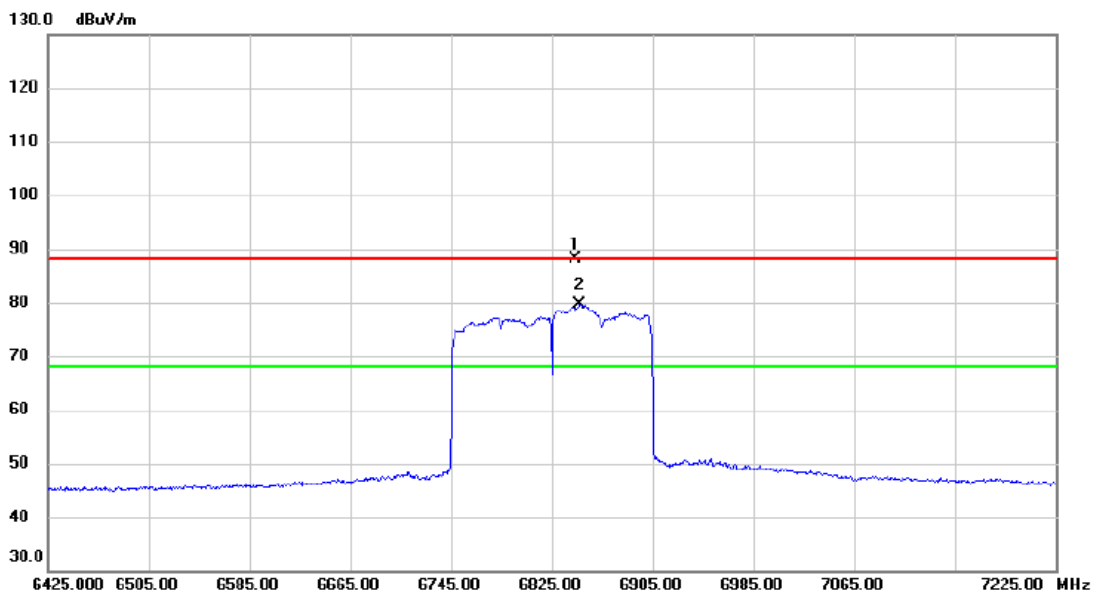


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		6844.200	68.87	19.29	88.16	88.20	-0.04	peak	No Limit
2	*	6847.400	60.31	19.30	79.61	68.20	11.41	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7+UNII-8_TX AX(HE160) Mode 6825 MHz	Polarization	Horizontal
-----------	--	--------------	------------

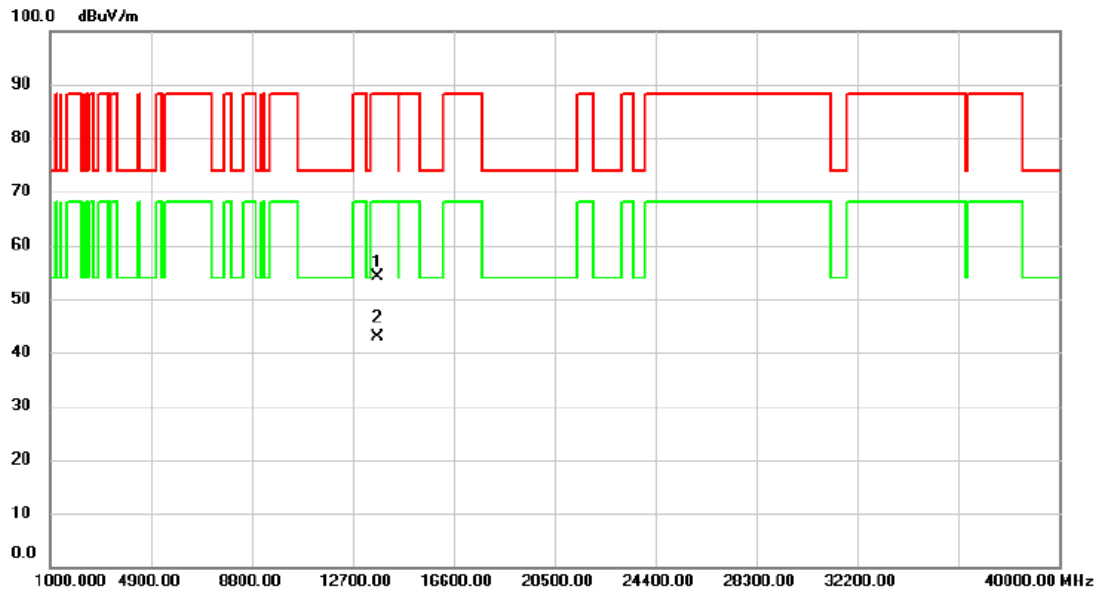


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		13648.78	37.03	17.08	54.11	88.20	-34.09	peak	
2	*	13649.17	25.84	17.08	42.92	68.20	-25.28	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

NSS2

Test Mode	UNII-5_TX AX(HE20) Mode 5955 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

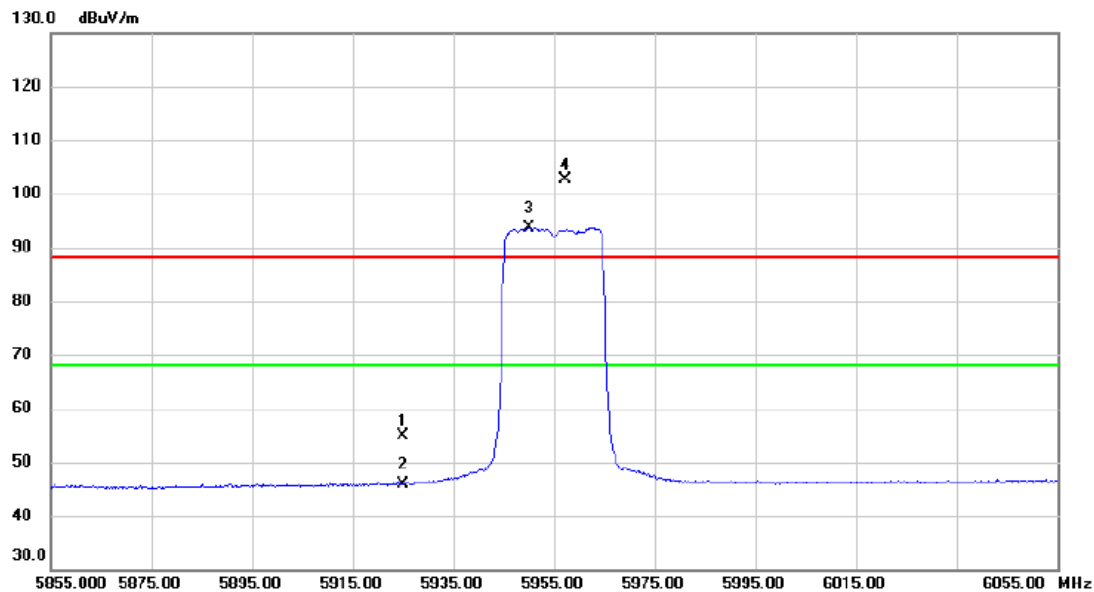


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5925.000	37.93	16.92	54.85	88.20	-33.35	peak	
2		5925.000	29.03	16.92	45.95	68.20	-22.25	AVG	
3	*	5950.200	76.78	16.97	93.75	68.20	25.55	AVG	No Limit
4	X	5957.400	85.64	16.98	102.62	88.20	14.42	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE20) Mode 5955 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

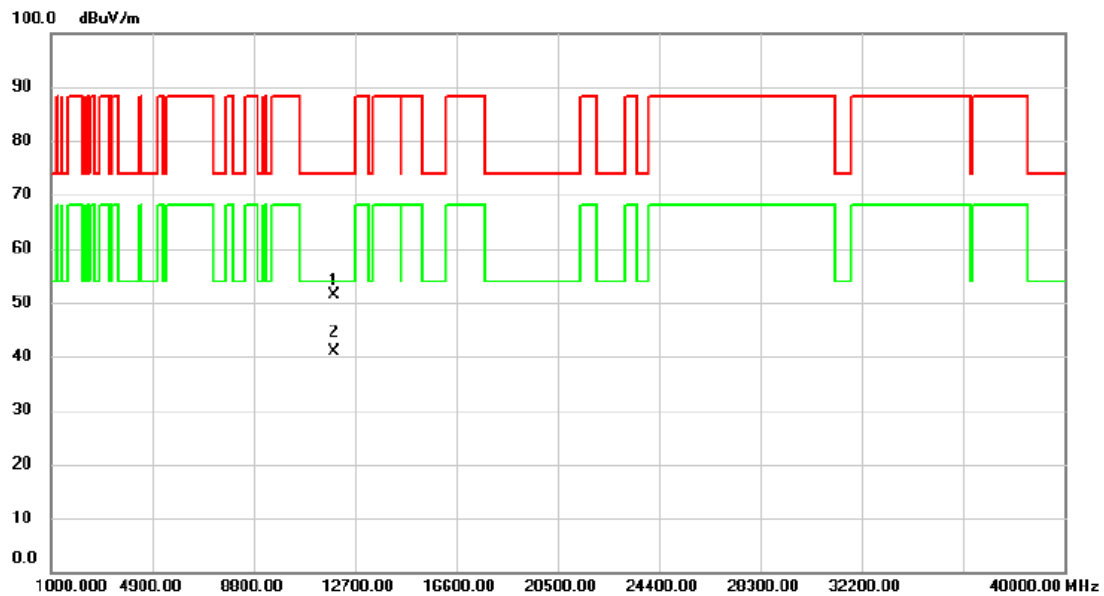


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11909.41	36.57	14.86	51.43	74.00	-22.57	peak	
2	*	11909.64	25.90	14.86	40.76	54.00	-13.24	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE20) Mode 5955 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

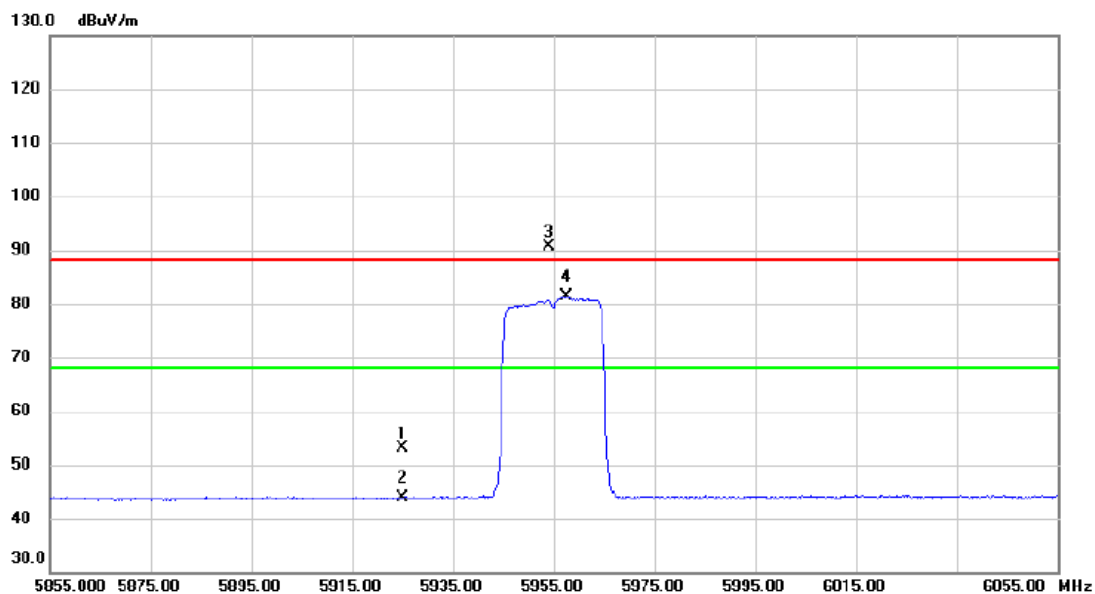


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5925.000	36.14	16.92	53.06	88.20	-35.14	peak	
2		5925.000	26.92	16.92	43.84	68.20	-24.36	AVG	
3	X	5954.200	73.65	16.98	90.63	88.20	2.43	peak	No Limit
4	*	5957.600	64.36	16.98	81.34	68.20	13.14	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE20) Mode 5955 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

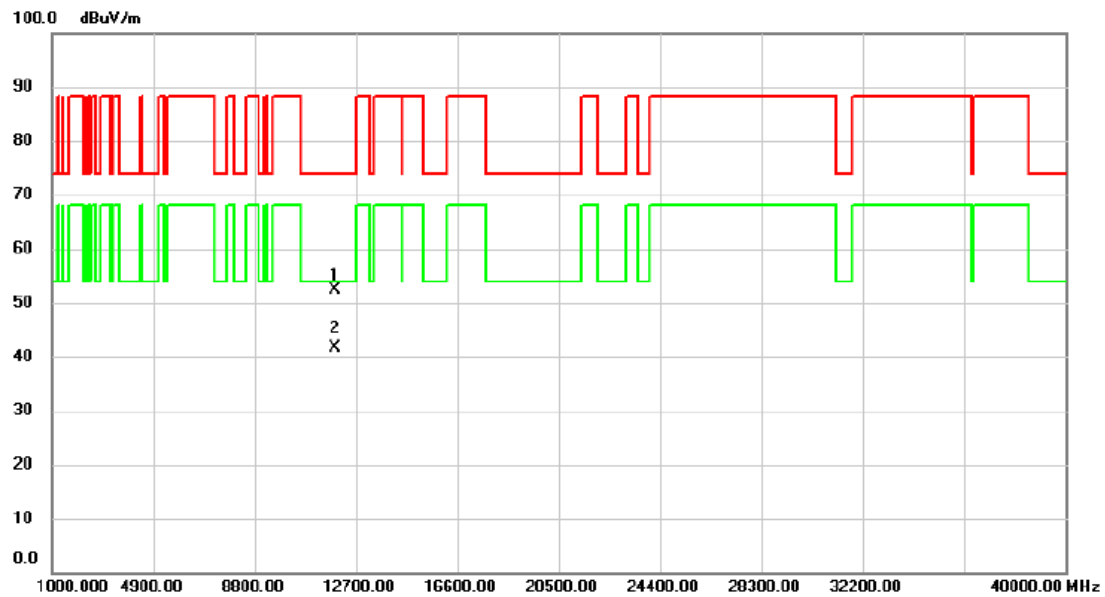


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11911.94	37.60	14.86	52.46	74.00	-21.54	peak	
2	*	11912.37	26.85	14.86	41.71	54.00	-12.29	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE20) Mode 6175 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

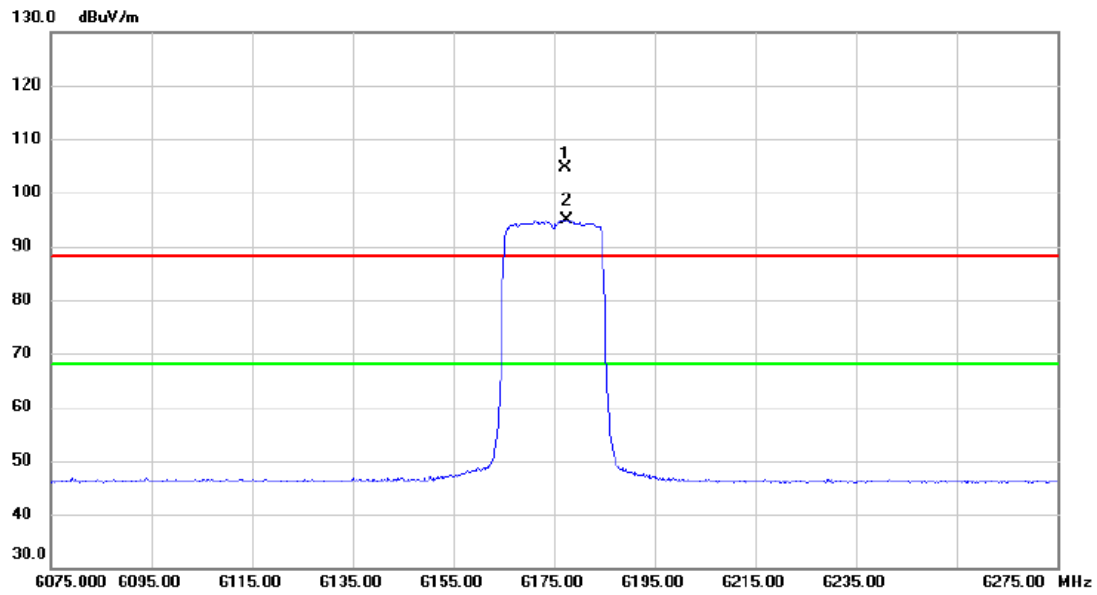


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6177.200	87.17	17.46	104.63	88.20	16.43	peak	No Limit
2	*	6177.600	77.35	17.46	94.81	68.20	26.61	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE20) Mode 6175 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

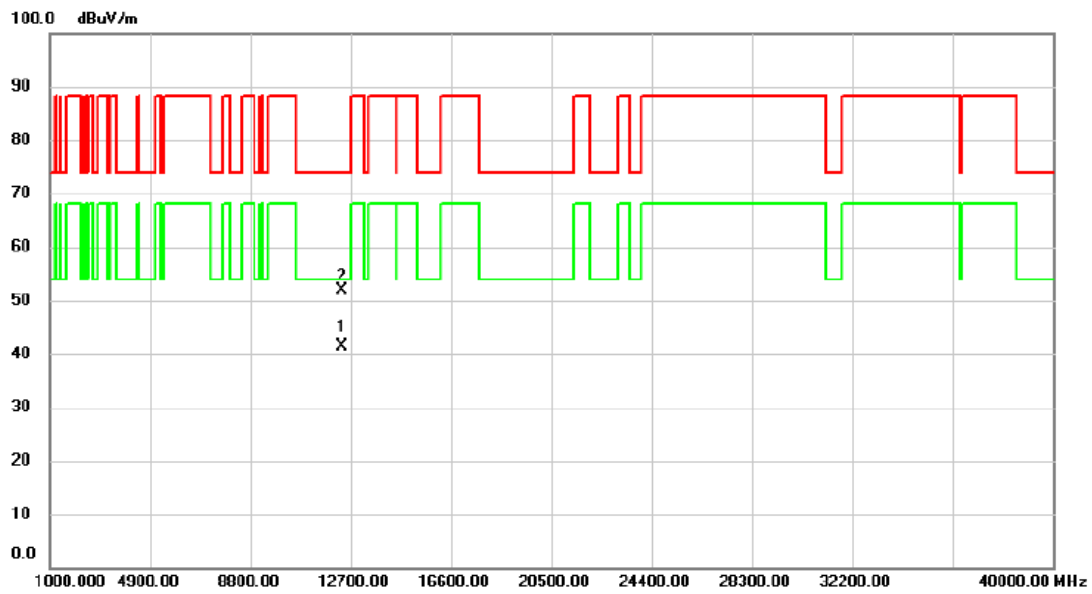


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	12348.82	25.80	15.57	41.37	54.00	-12.63	AVG	
2		12351.20	36.42	15.58	52.00	74.00	-22.00	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE20) Mode 6175 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

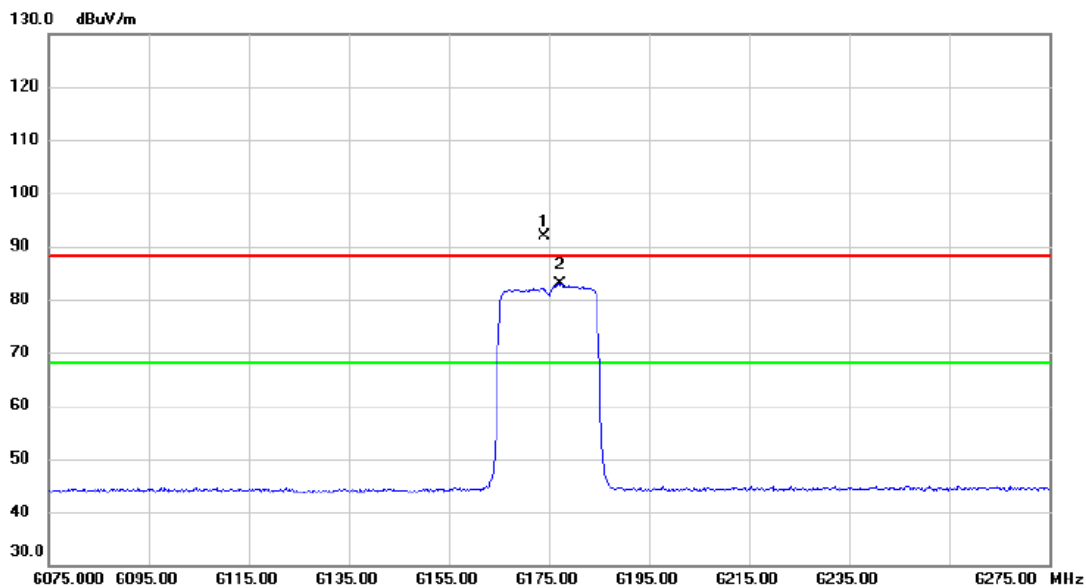


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6174.200	74.53	17.46	91.99	88.20	3.79	peak	No Limit
2	*	6177.400	65.47	17.46	82.93	68.20	14.73	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE20) Mode 6175 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

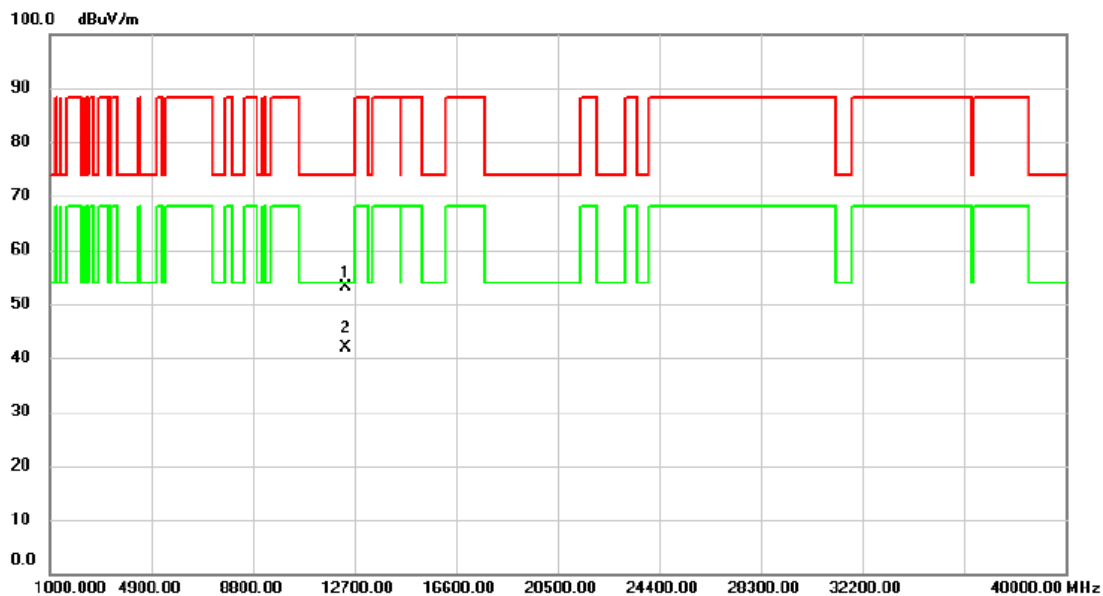


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		12350.74	37.55	15.58	53.13	74.00	-20.87	peak	
2	*	12352.36	26.30	15.58	41.88	54.00	-12.12	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE20) Mode 6415 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

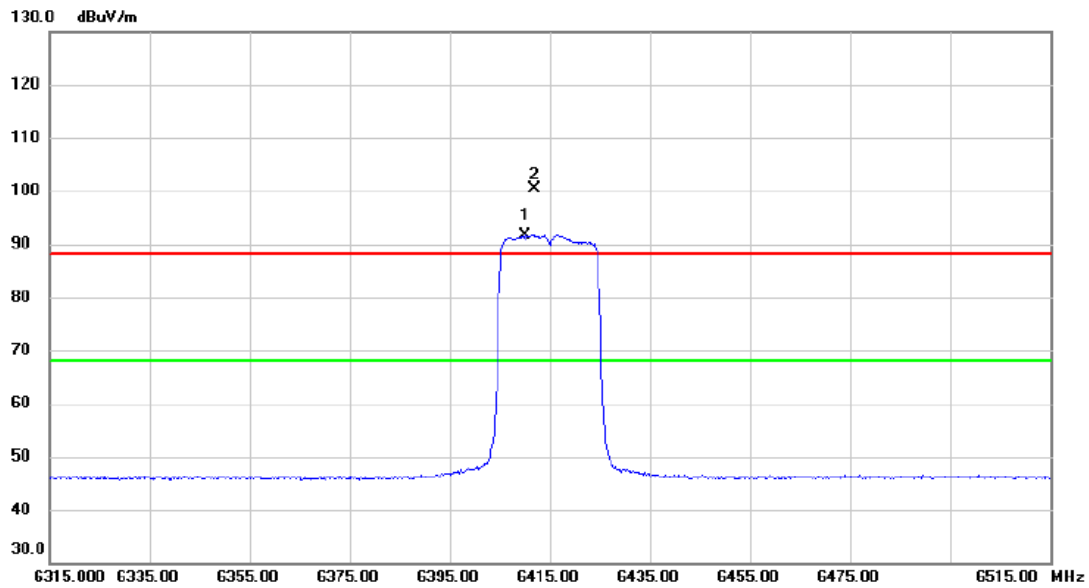


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6410.200	73.74	17.99	91.73	68.20	23.53	AVG	No Limit
2	X	6411.800	82.29	17.99	100.28	88.20	12.08	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE20) Mode 6415 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

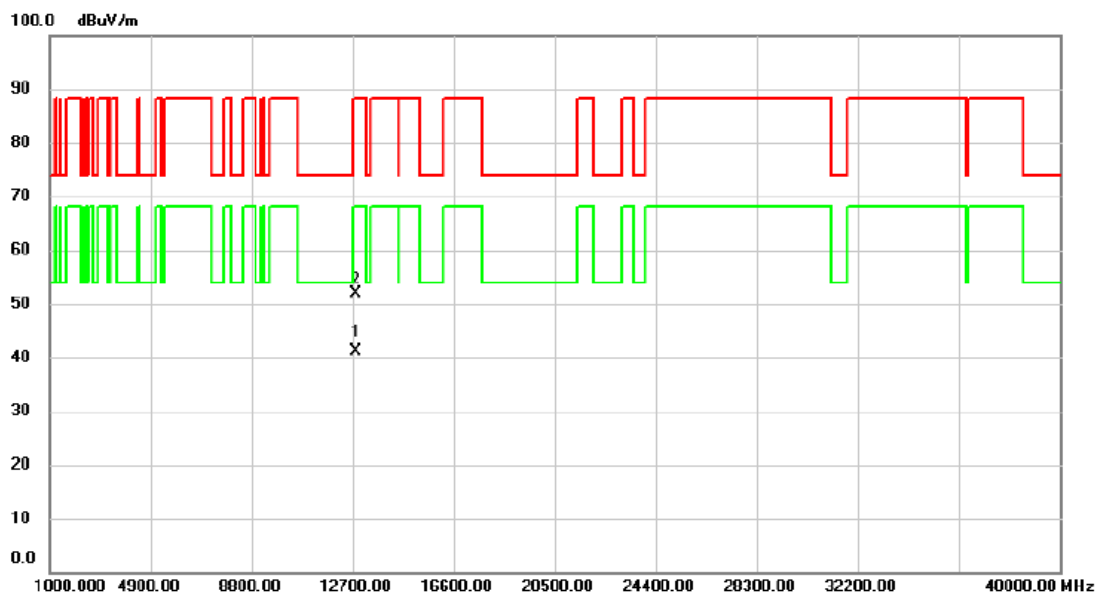


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	12829.12	25.31	15.86	41.17	68.20	-27.03	AVG	
2		12832.21	35.93	15.86	51.79	88.20	-36.41	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE20) Mode 6415 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

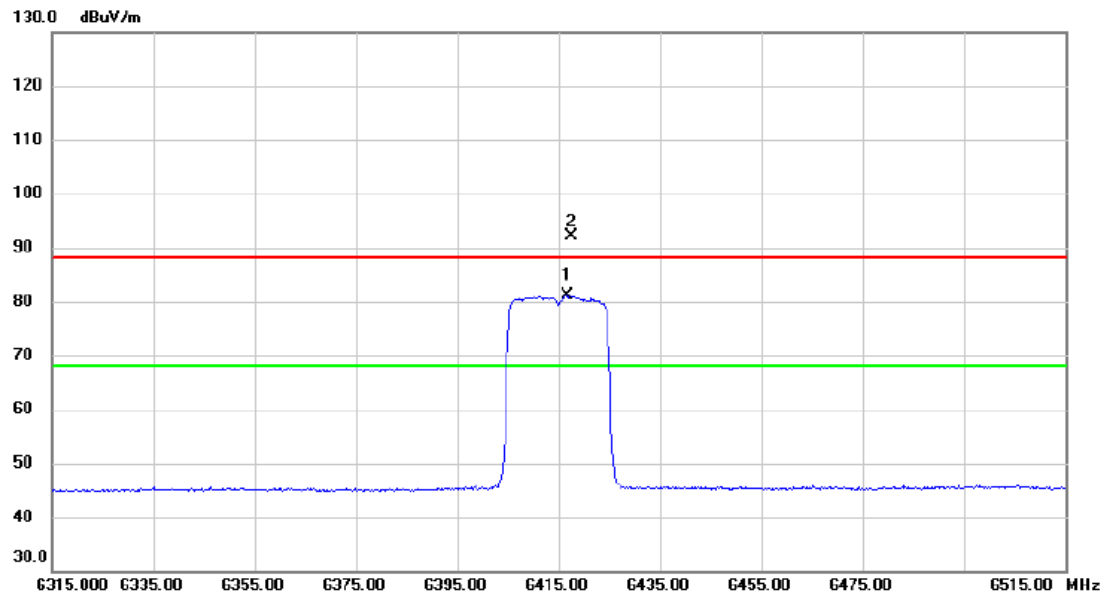


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6416.600	63.07	18.01	81.08	68.20	12.88	AVG	No Limit
2	X	6417.600	74.04	18.01	92.05	88.20	3.85	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE20) Mode 6415 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

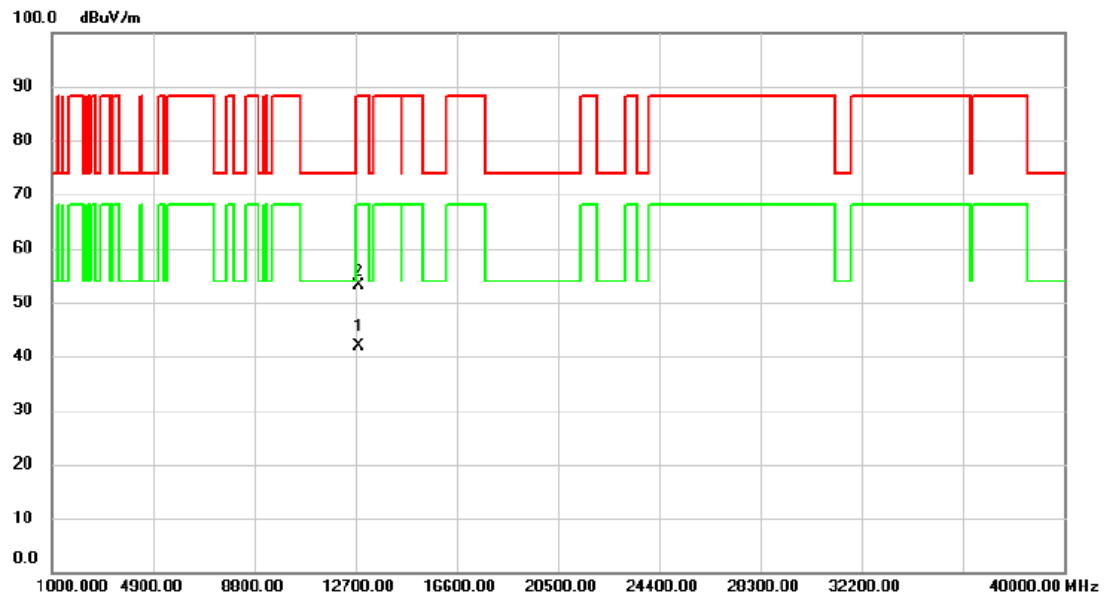


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	12829.99	26.03	15.86	41.89	68.20	-26.31	AVG	
2		12831.55	37.33	15.86	53.19	88.20	-35.01	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE40) Mode 5965 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

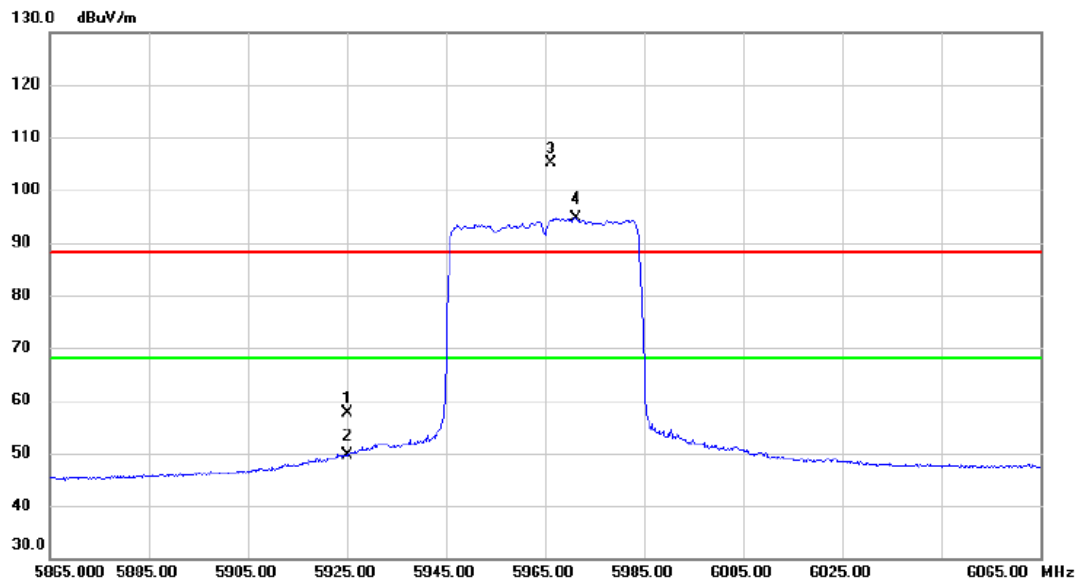


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5925.000	40.59	16.92	57.51	88.20	-30.69	peak	
2		5925.000	32.70	16.92	49.62	68.20	-18.58	AVG	
3	X	5966.200	88.20	17.00	105.20	88.20	17.00	peak	No Limit
4	*	5971.200	77.64	17.01	94.65	68.20	26.45	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE40) Mode 5965 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

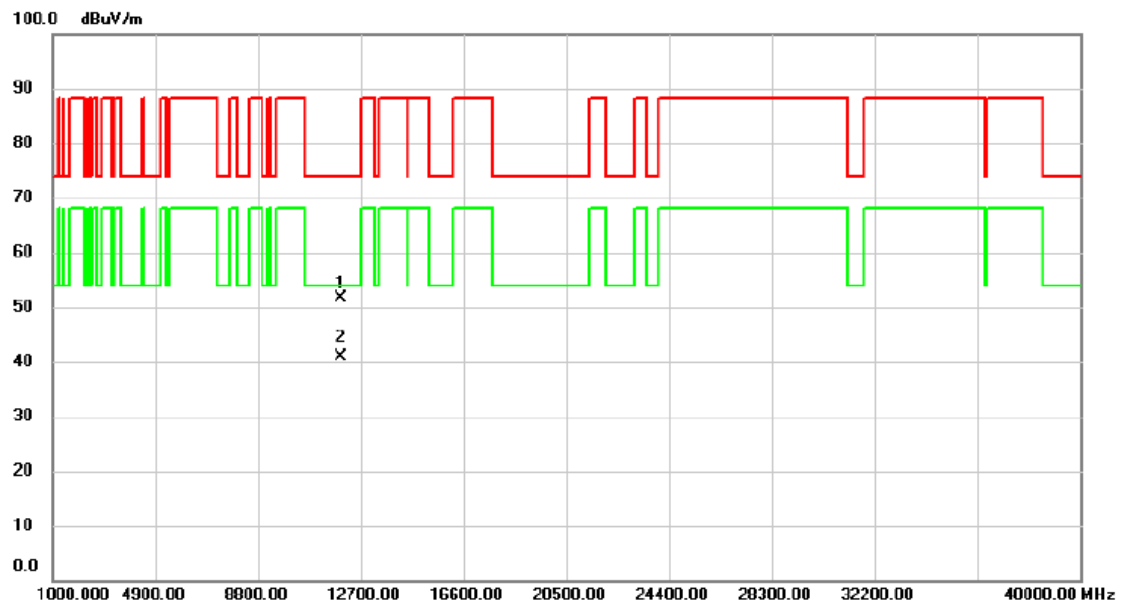


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11929.57	36.69	14.88	51.57	74.00	-22.43	peak	
2	*	11930.31	25.98	14.88	40.86	54.00	-13.14	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE40) Mode 5965 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

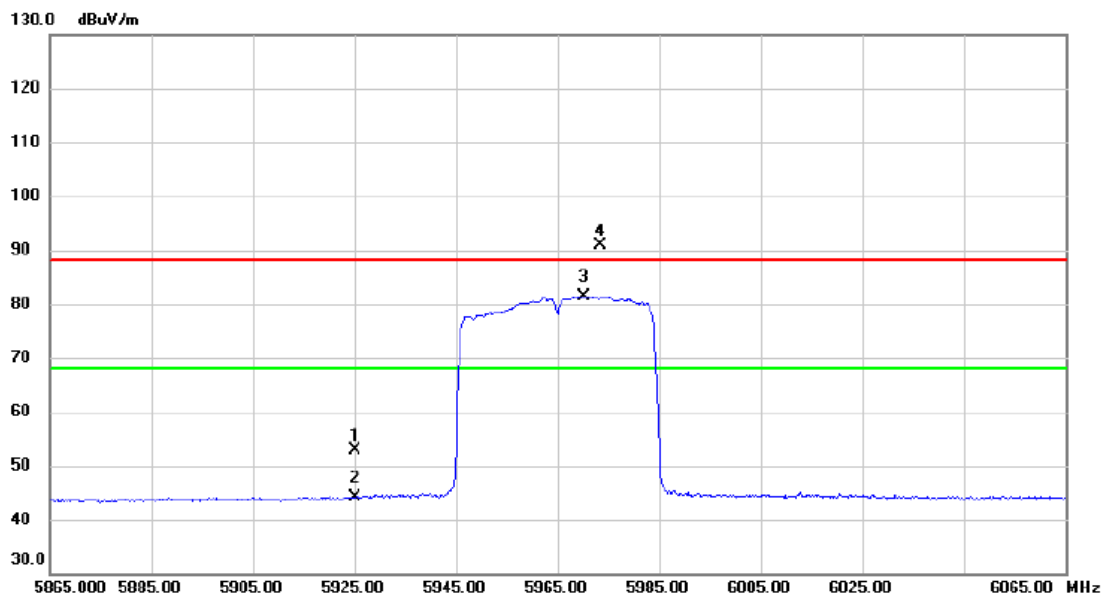


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5925.000	36.05	16.92	52.97	88.20	-35.23	peak	
2		5925.000	27.20	16.92	44.12	68.20	-24.08	AVG	
3	*	5970.200	64.48	17.01	81.49	68.20	13.29	AVG	No Limit
4	X	5973.400	73.76	17.01	90.77	88.20	2.57	peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE40) Mode 5965 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

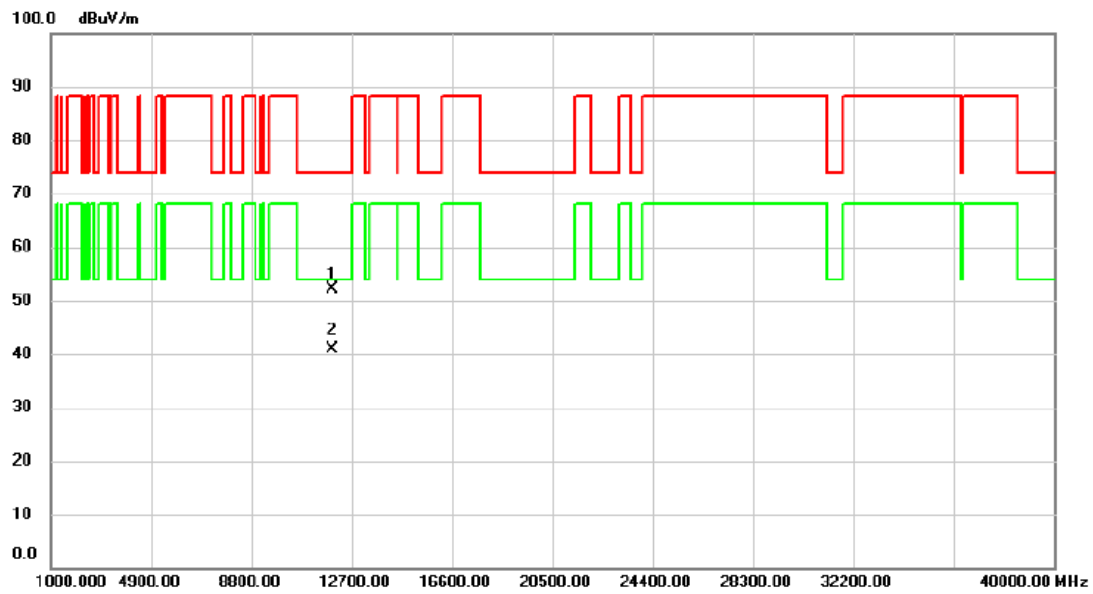


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11930.00	37.31	14.88	52.19	74.00	-21.81	peak	
2	*	11930.00	26.04	14.88	40.92	54.00	-13.08	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE40) Mode 6165 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

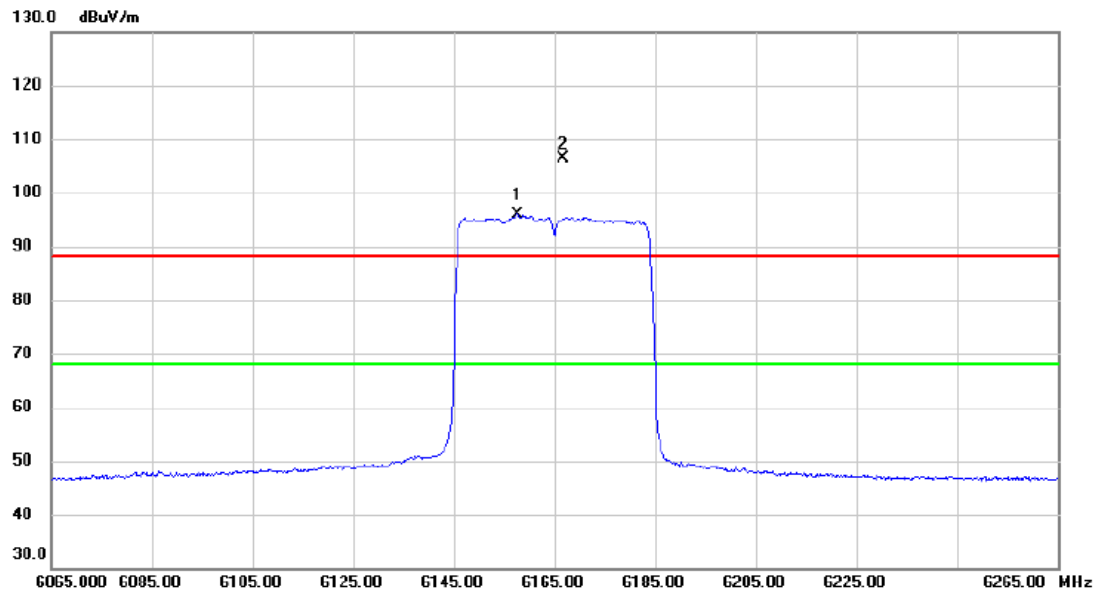


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6157.600	78.58	17.42	96.00	68.20	27.80	AVG	No Limit
2	X	6166.800	88.85	17.44	106.29	88.20	18.09	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE40) Mode 6165 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

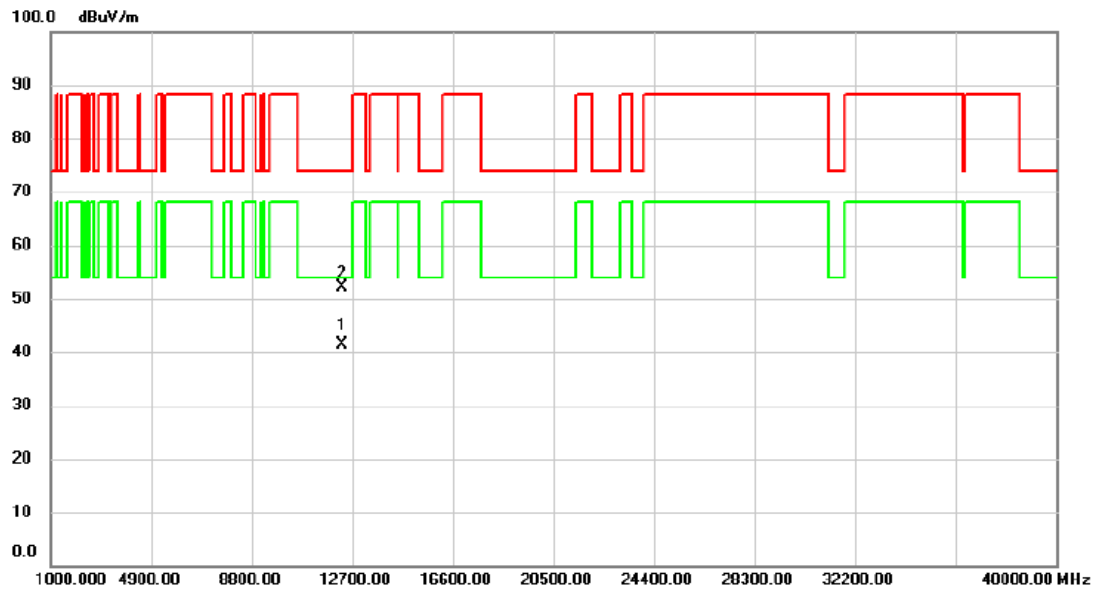


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	12327.76	25.77	15.55	41.32	54.00	-12.68	AVG	
2		12329.47	36.60	15.55	52.15	74.00	-21.85	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE40) Mode 6165 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

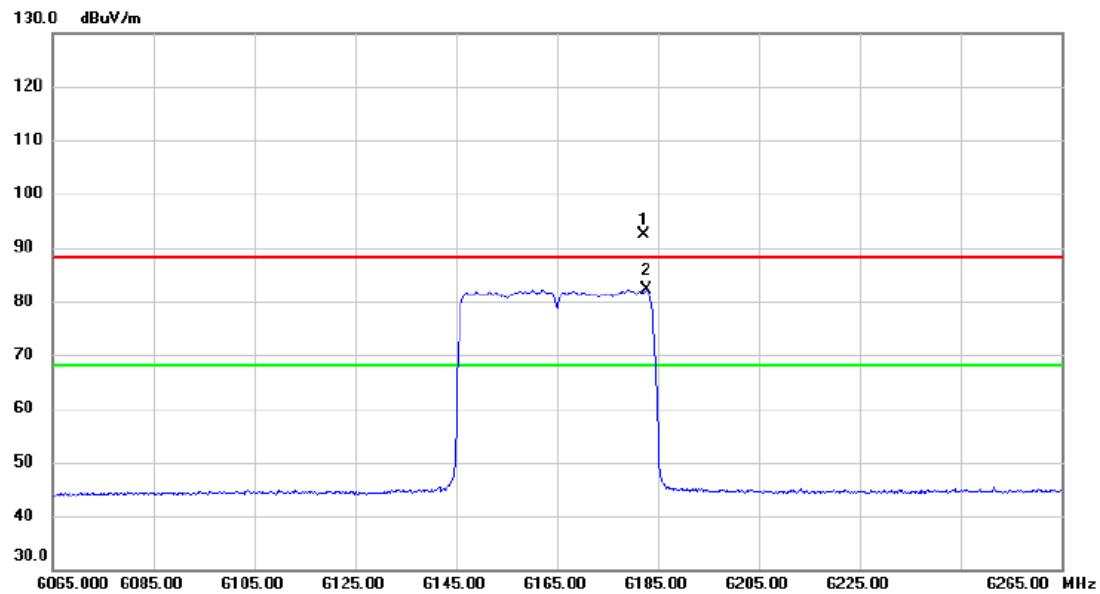


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6182.200	74.90	17.48	92.38	88.20	4.18	peak	No Limit
2	*	6182.600	64.64	17.48	82.12	68.20	13.92	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE40) Mode 6165 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

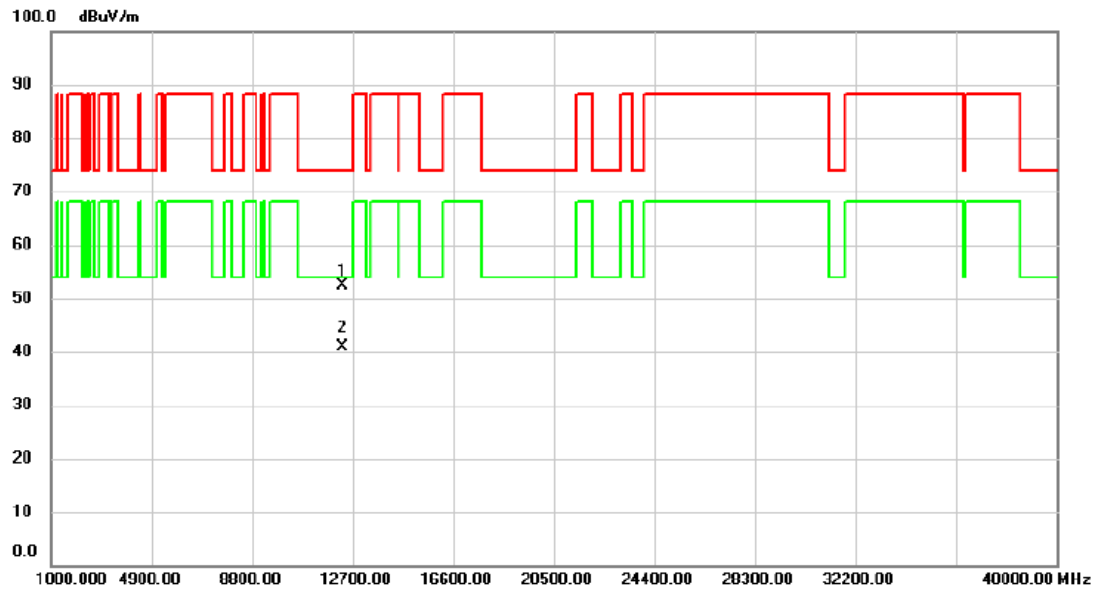


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		12330.00	36.76	15.55	52.31	74.00	-21.69	peak	
2	*	12330.00	25.21	15.55	40.76	54.00	-13.24	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE40) Mode 6405 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

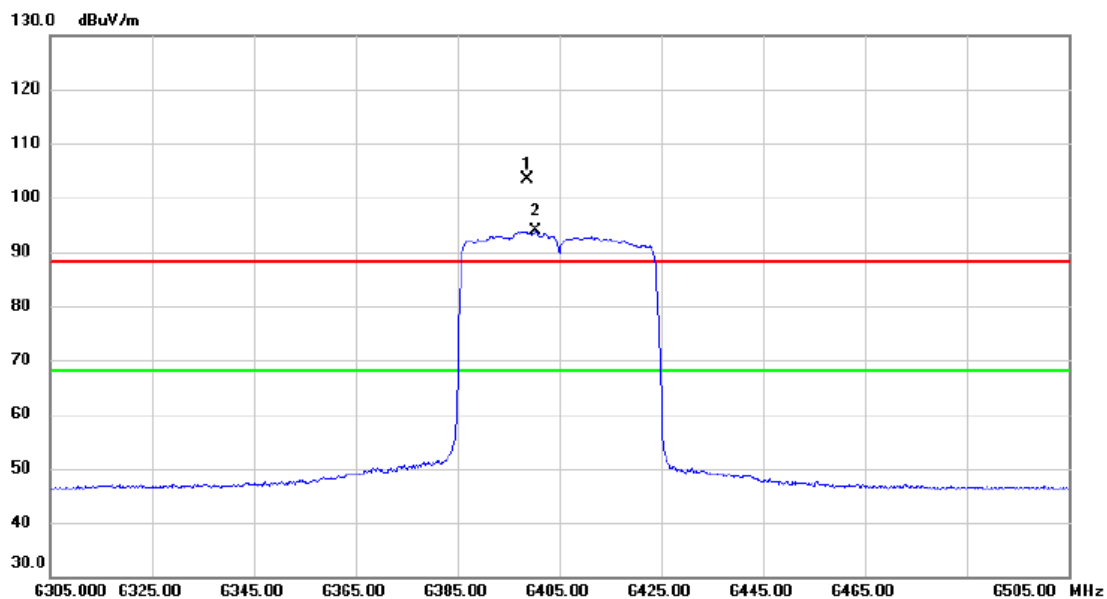


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6398.600	85.32	17.97	103.29	88.20	15.09	peak	No Limit
2	*	6400.400	75.88	17.97	93.85	68.20	25.65	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE40) Mode 6405 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

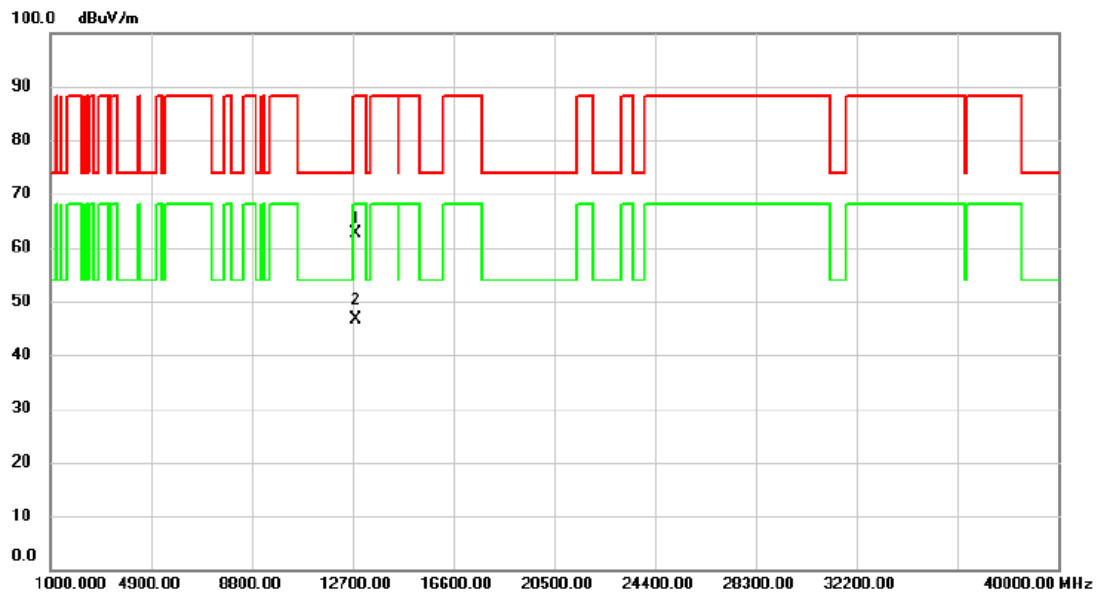


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		12807.66	46.76	15.86	62.62	88.20	-25.58	peak	
2	*	12807.78	30.86	15.86	46.72	68.20	-21.48	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE40) Mode 6405 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

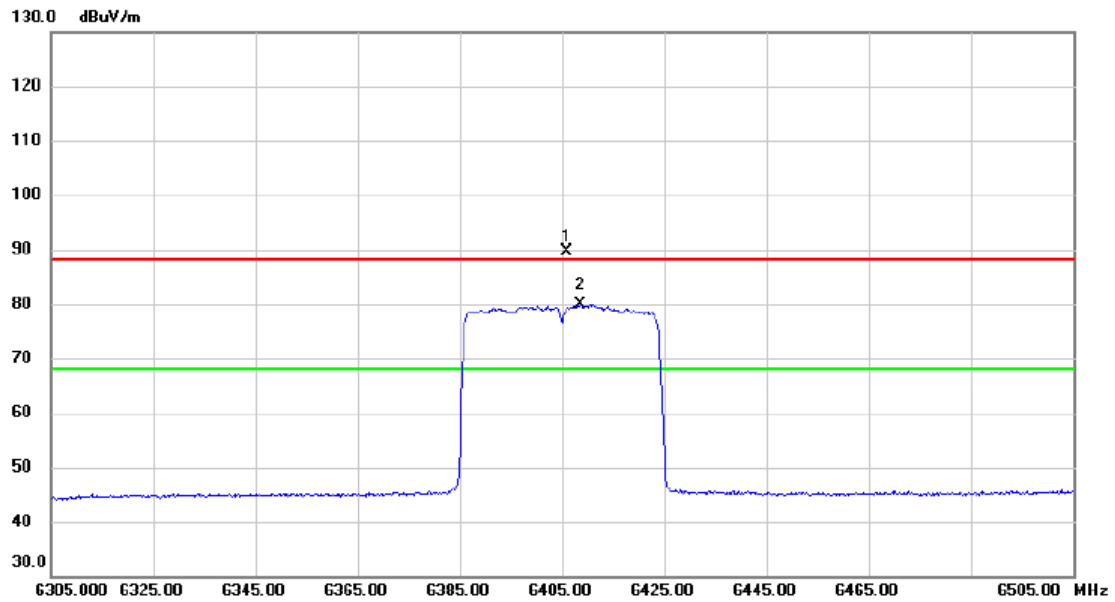


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6406.000	71.74	17.99	89.73	88.20	1.53	peak	No Limit
2	*	6408.600	61.89	17.99	79.88	68.20	11.68	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE40) Mode 6405 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

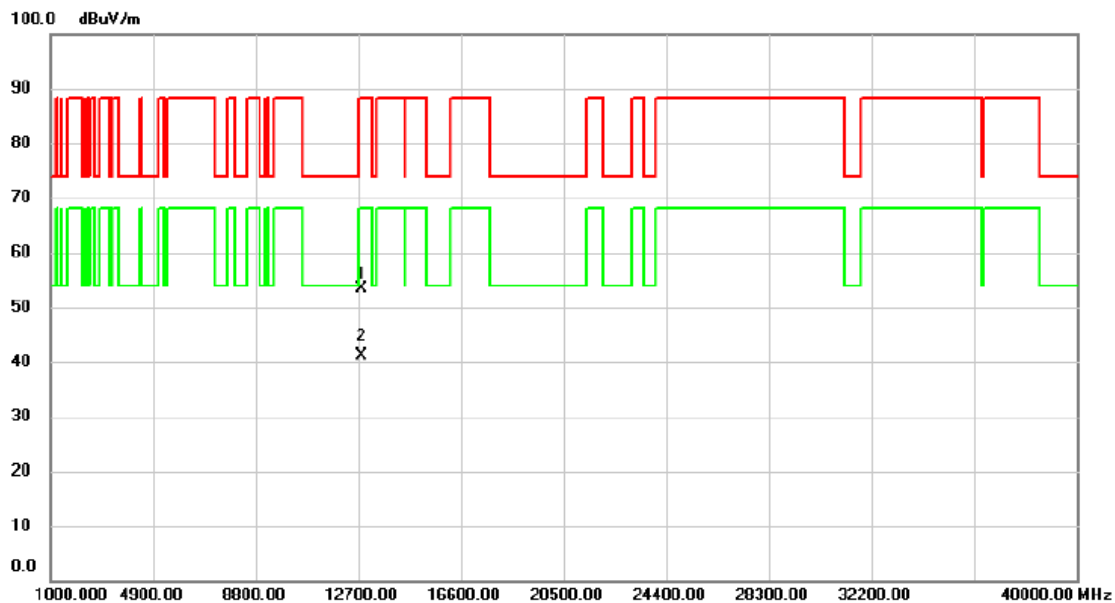


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		12810.00	37.49	15.87	53.36	88.20	-34.84	peak	
2	*	12810.00	25.28	15.87	41.15	68.20	-27.05	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE80) Mode 5985 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

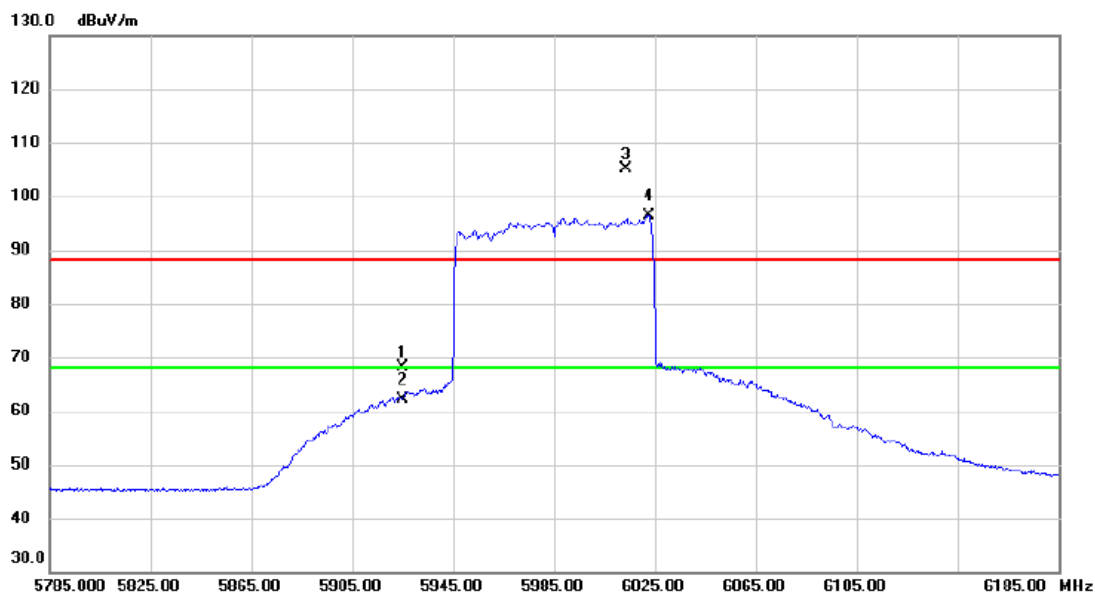


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5925.000	51.30	16.92	68.22	88.20	-19.98	peak	
2		5925.000	45.27	16.92	62.19	68.20	-6.01	AVG	
3	X	6013.400	87.98	17.09	105.07	88.20	16.87	peak	No Limit
4	*	6022.600	79.37	17.11	96.48	68.20	28.28	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE80) Mode 5985 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

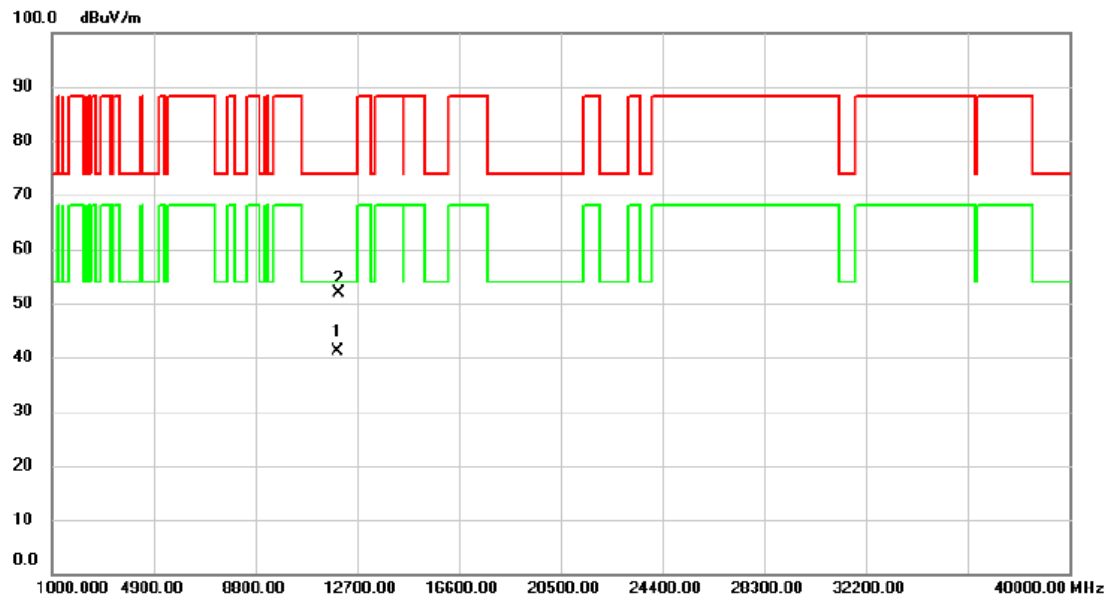


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11967.95	26.25	14.93	41.18	54.00	-12.82	AVG	
2		11972.24	37.01	14.94	51.95	74.00	-22.05	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE80) Mode 5985 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

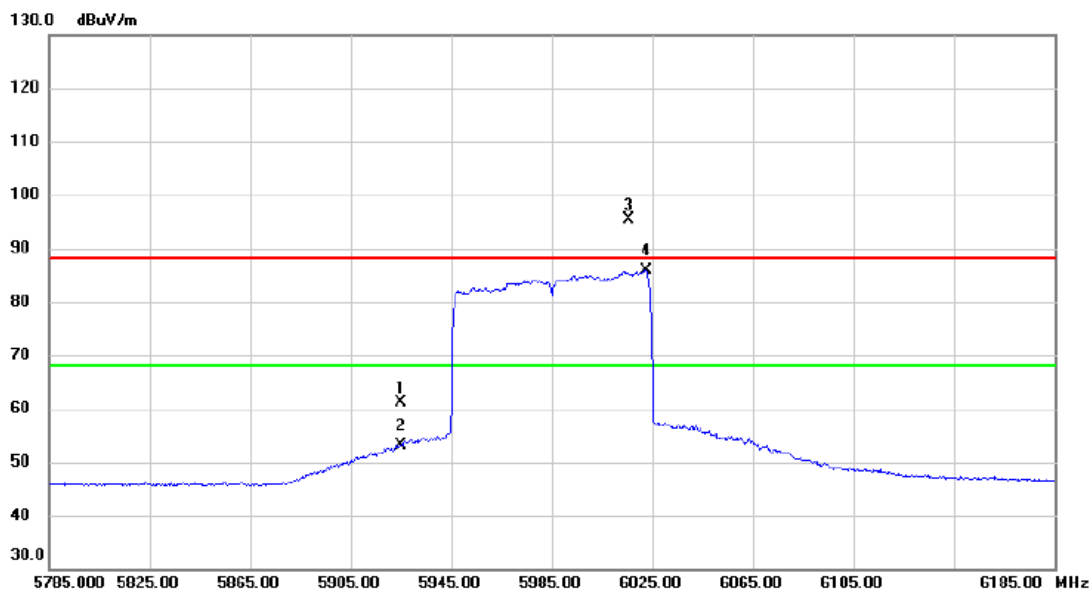


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5925.000	44.12	16.92	61.04	88.20	-27.16	peak	
2	5925.000	36.24	16.92	53.16	68.20	-15.04	AVG	
3 X	6015.800	78.35	17.10	95.45	88.20	7.25	peak	No Limit
4 *	6022.600	68.66	17.11	85.77	68.20	17.57	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE80) Mode 5985 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

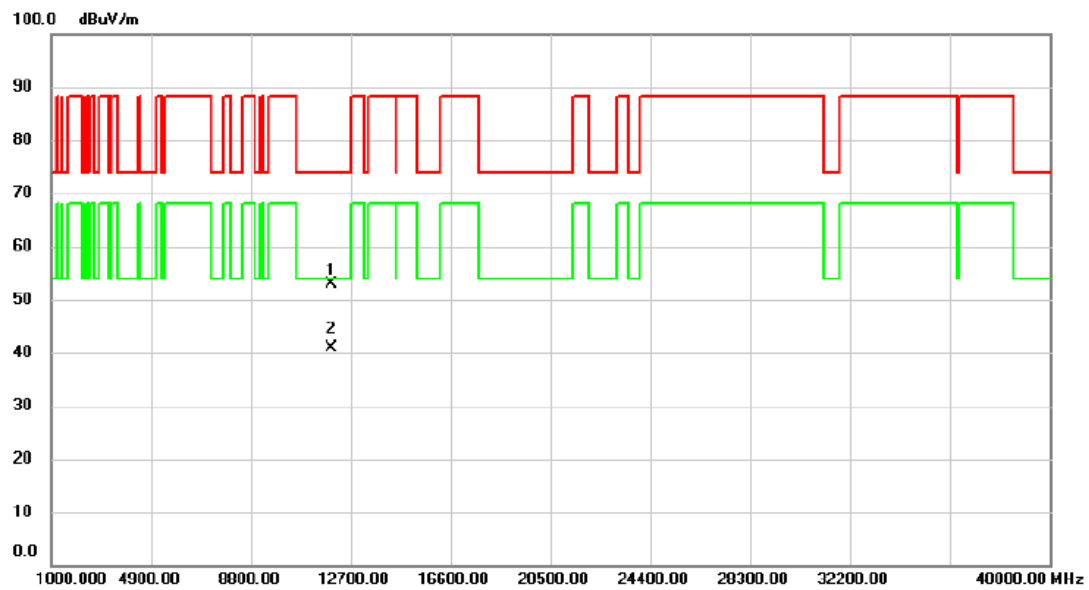


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11970.00	37.88	14.93	52.81	74.00	-21.19	peak	
2	*	11970.00	26.02	14.93	40.95	54.00	-13.05	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE80) Mode 6145 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

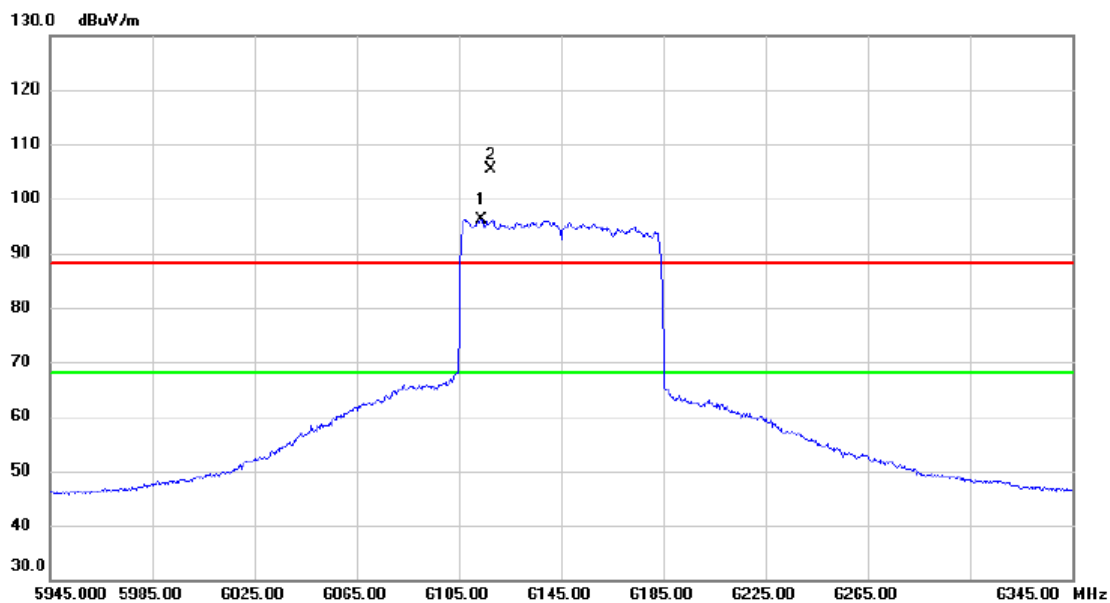


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6113.800	78.93	17.32	96.25	68.20	28.05	AVG	No Limit
2	X	6117.400	88.00	17.33	105.33	88.20	17.13	peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE80) Mode 6145 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

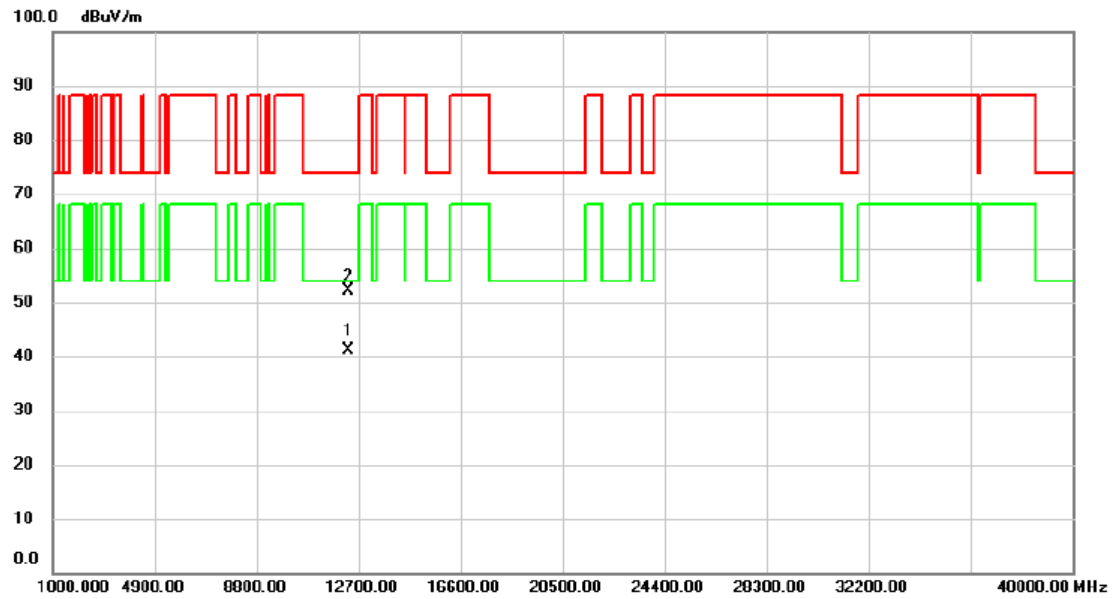


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	12288.37	25.79	15.46	41.25	54.00	-12.75	AVG	
2		12290.74	36.58	15.48	52.06	74.00	-21.94	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE80) Mode 6145 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

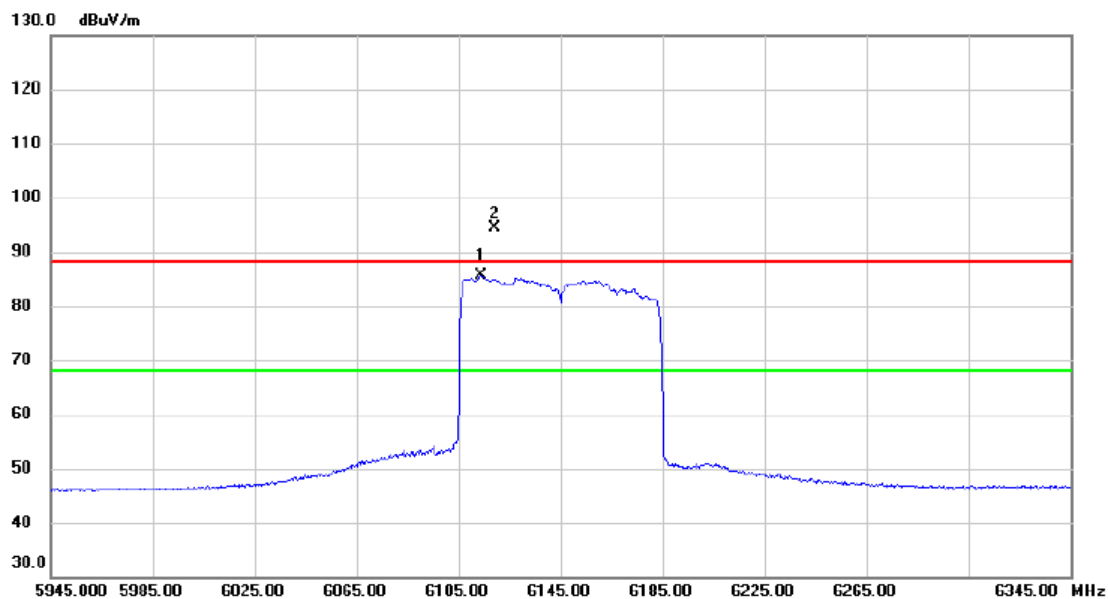


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	6113.800	68.33	17.32	85.65	68.20	17.45	AVG	No Limit
2	X	6119.400	77.01	17.33	94.34	88.20	6.14	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE80) Mode 6145 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

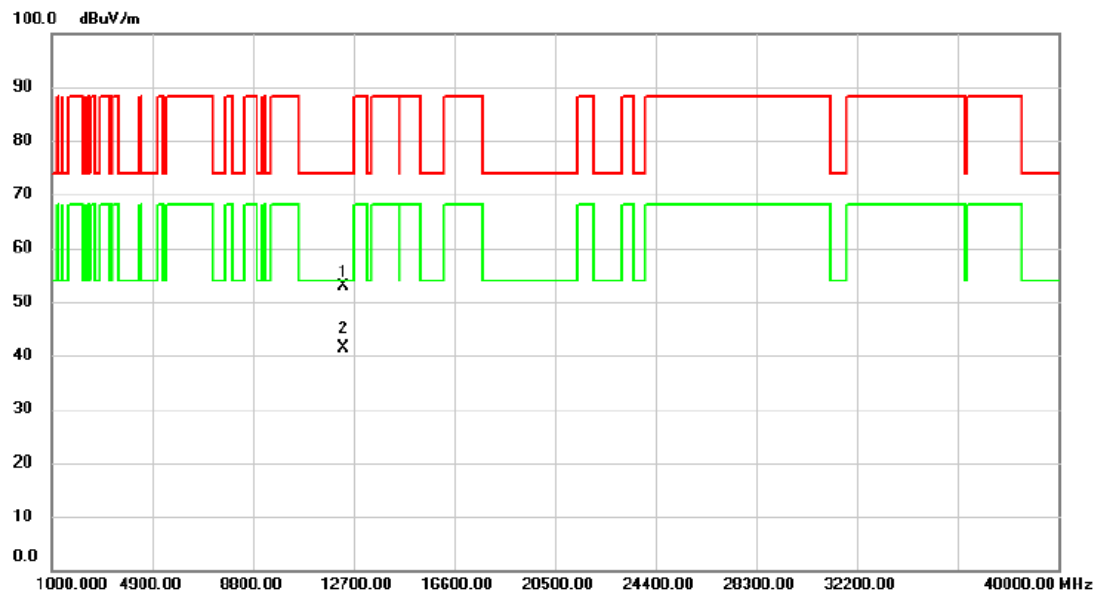


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		12290.00	37.40	15.48	52.88	74.00	-21.12	peak	
2	*	12290.00	25.85	15.48	41.33	54.00	-12.67	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE80) Mode 6385 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

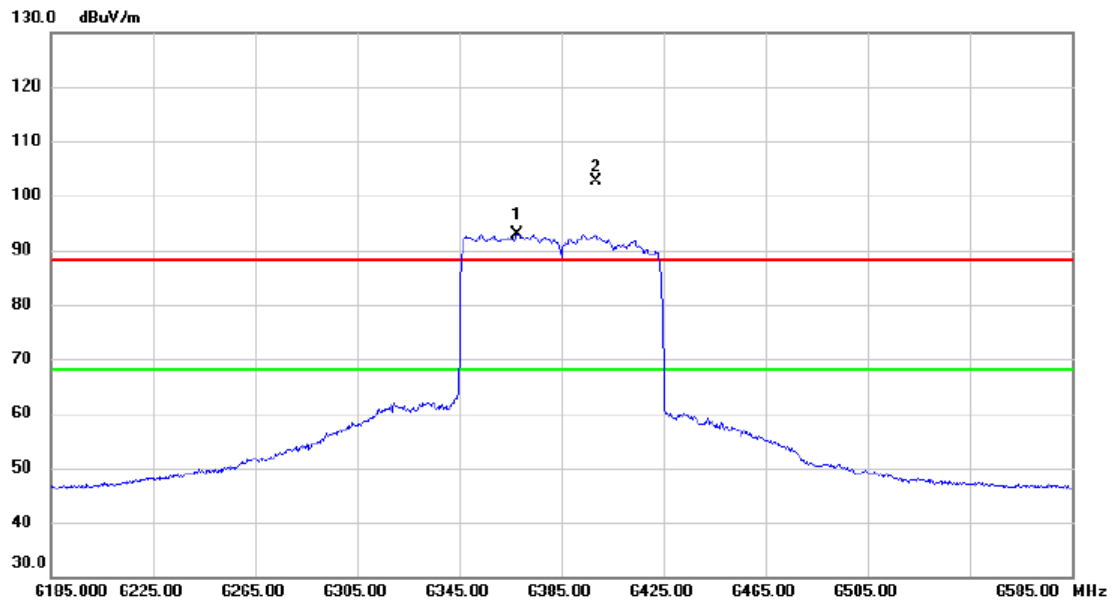


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6367.800	75.01	17.90	92.91	68.20	24.71	AVG	No Limit
2	X	6398.600	84.63	17.97	102.60	88.20	14.40	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE80) Mode 6385 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

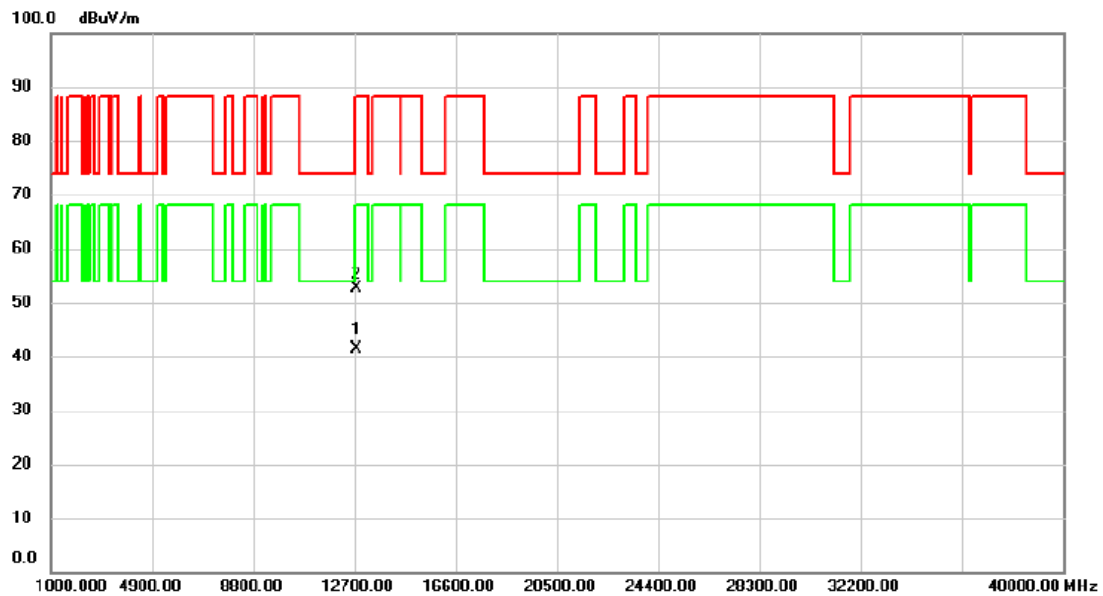


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	12768.52	25.53	15.86	41.39	68.20	-26.81	AVG	
2		12770.36	36.74	15.86	52.60	88.20	-35.60	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE80) Mode 6385 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

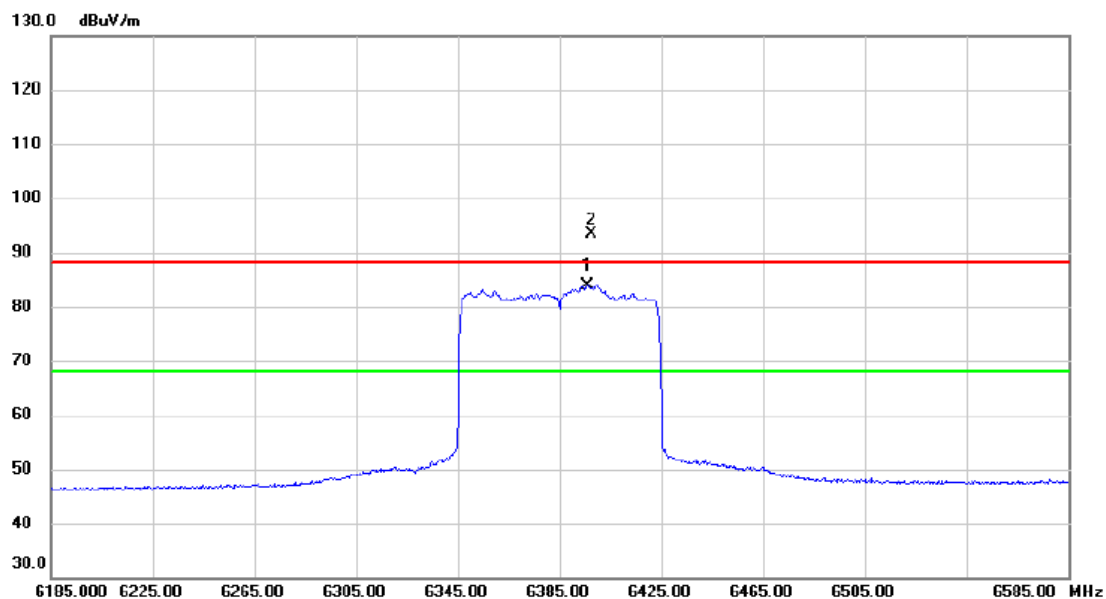


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6396.200	65.94	17.97	83.91	68.20	15.71	AVG	No Limit
2	X	6397.400	75.30	17.97	93.27	88.20	5.07	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE80) Mode 6385 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

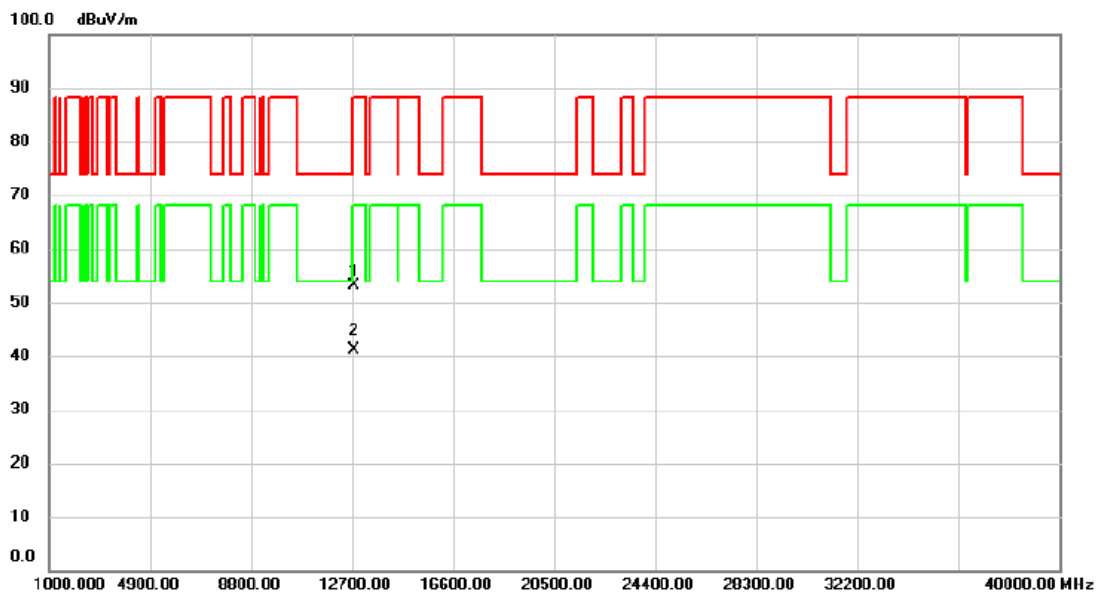


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		12770.00	37.27	15.86	53.13	88.20	-35.07	peak	
2	*	12770.00	25.17	15.86	41.03	68.20	-27.17	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE160) Mode 6025 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

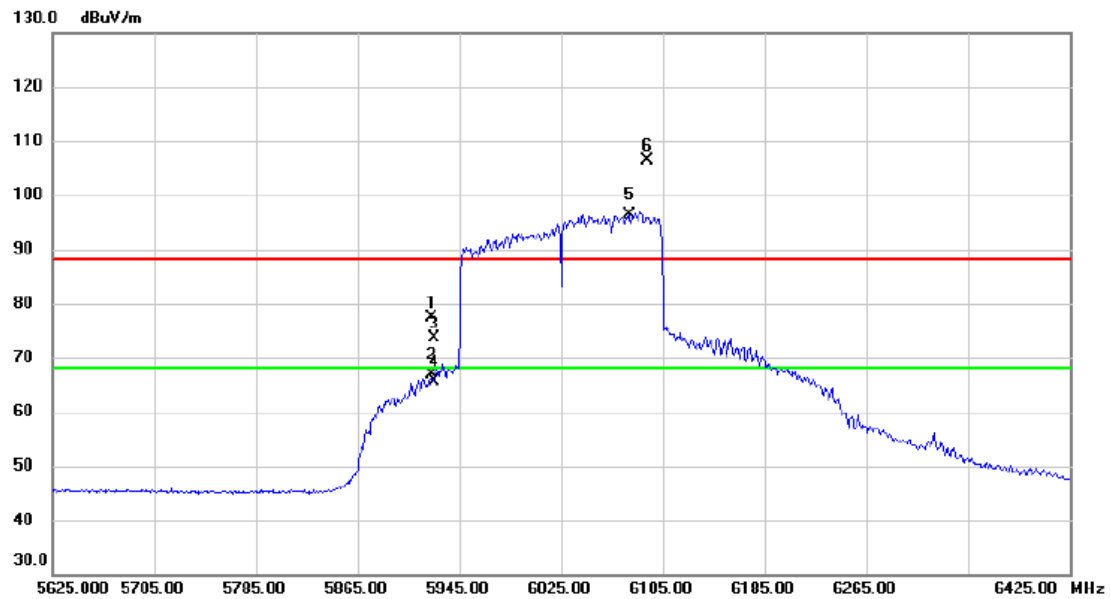


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5922.600	60.44	16.91	77.35	88.20	-10.85	peak	
2		5922.600	49.92	16.91	66.83	68.20	-1.37	AVG	
3		5925.000	56.74	16.92	73.66	88.20	-14.54	peak	
4		5925.000	48.62	16.92	65.54	68.20	-2.66	AVG	
5	*	6078.600	79.24	17.24	96.48	68.20	28.28	AVG	No Limit
6	X	6093.000	89.07	17.27	106.34	88.20	18.14	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE160) Mode 6025 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

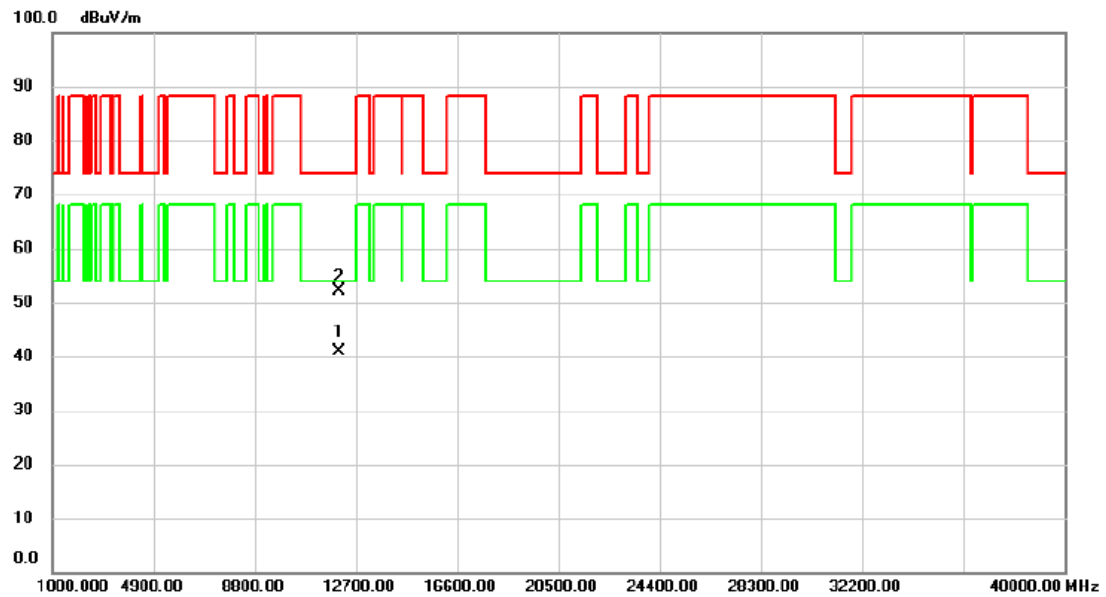


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	12049.56	25.93	15.05	40.98	54.00	-13.02	AVG	
2		12050.26	37.10	15.06	52.16	74.00	-21.84	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE160) Mode 6025 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

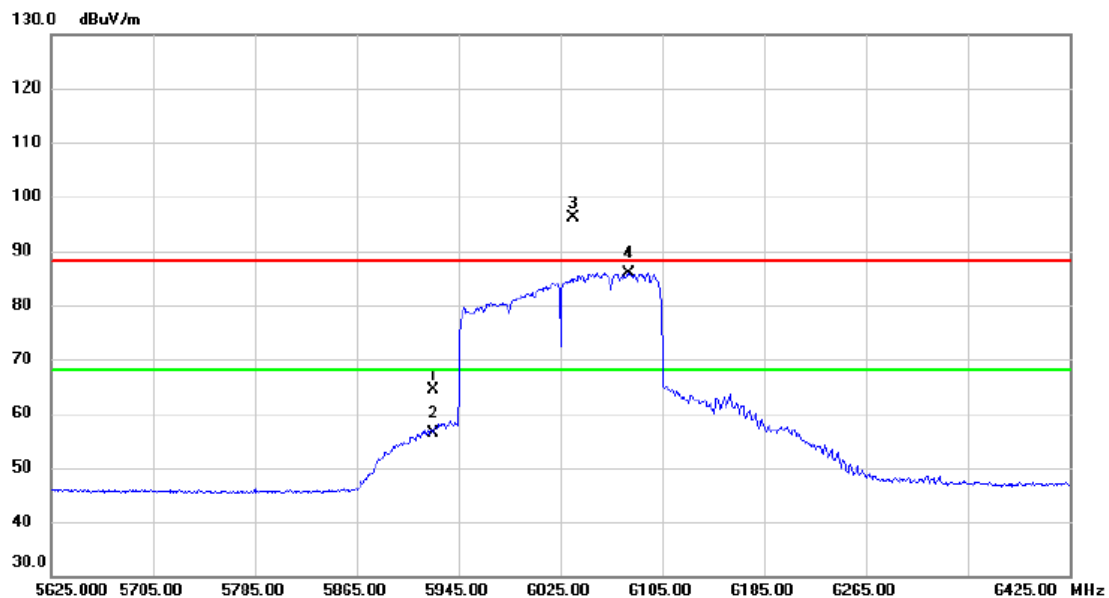


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5925.000	47.54	16.92	64.46	88.20	-23.74	peak	
2		5925.000	39.37	16.92	56.29	68.20	-11.91	AVG	
3	X	6034.600	78.99	17.13	96.12	88.20	7.92	peak	No Limit
4	*	6078.600	68.75	17.24	85.99	68.20	17.79	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE160) Mode 6025 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

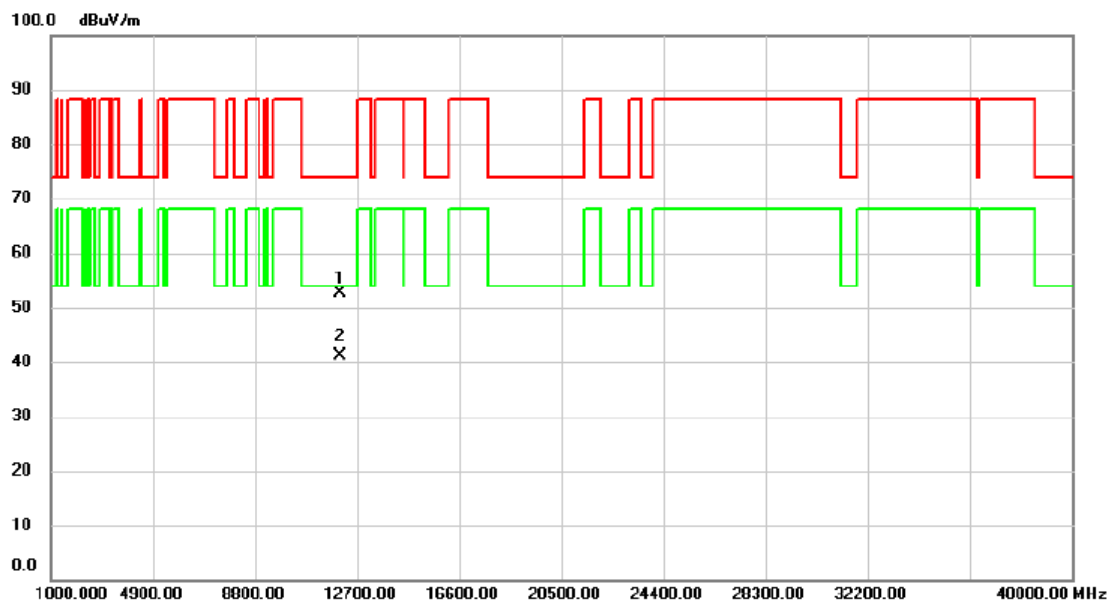


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	12050.00	37.58	15.05	52.63	74.00	-21.37	peak	
2 *	12050.00	26.08	15.05	41.13	54.00	-12.87	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE160) Mode 6185 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

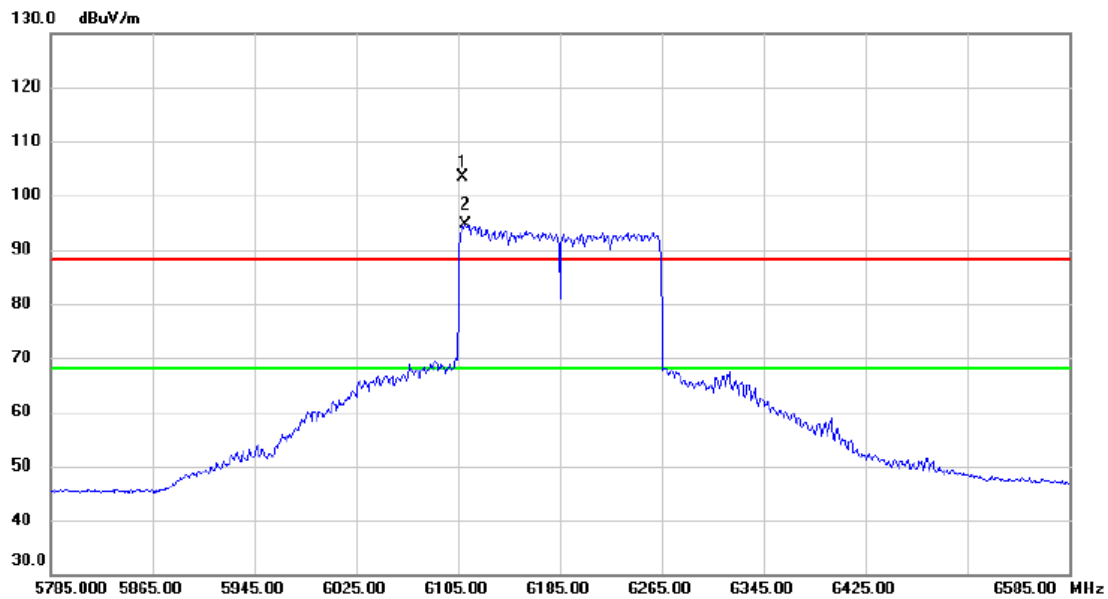


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6109.000	86.00	17.31	103.31	88.20	15.11	peak	No Limit
2	*	6111.400	77.31	17.31	94.62	68.20	26.42	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE160) Mode 6185 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

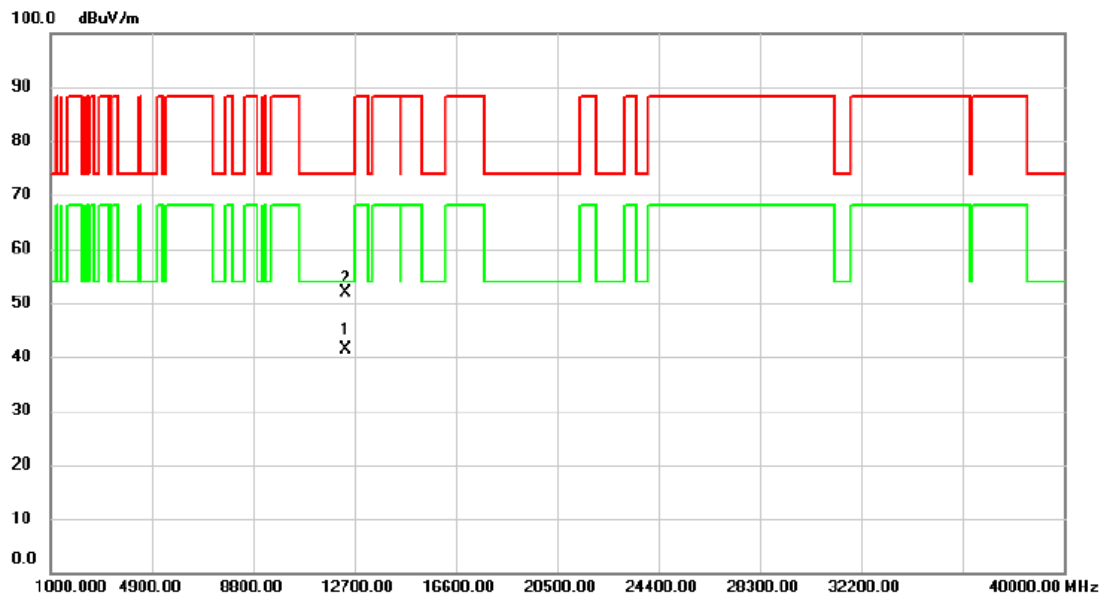


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	12368.42	25.72	15.62	41.34	54.00	-12.66	AVG	
2		12371.94	36.38	15.62	52.00	74.00	-22.00	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE160) Mode 6185 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

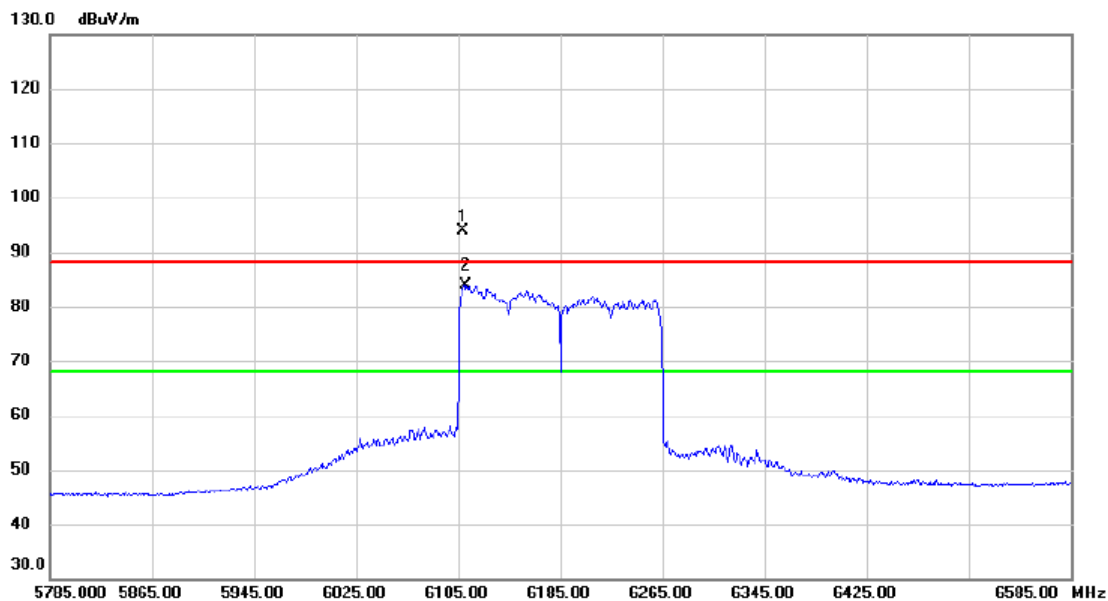


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6109.000	76.62	17.31	93.93	88.20	5.73	peak	No Limit
2	*	6110.600	66.48	17.31	83.79	68.20	15.59	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE160) Mode 6185 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

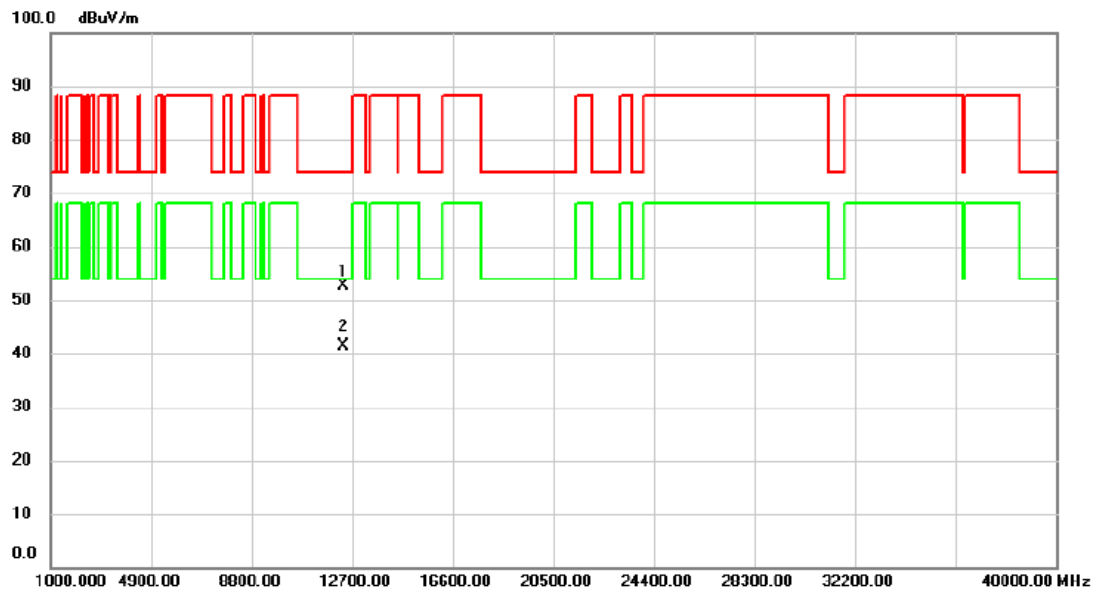


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		12370.00	37.13	15.62	52.75	74.00	-21.25	peak	
2	*	12370.00	25.81	15.62	41.43	54.00	-12.57	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE160) Mode 6345 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

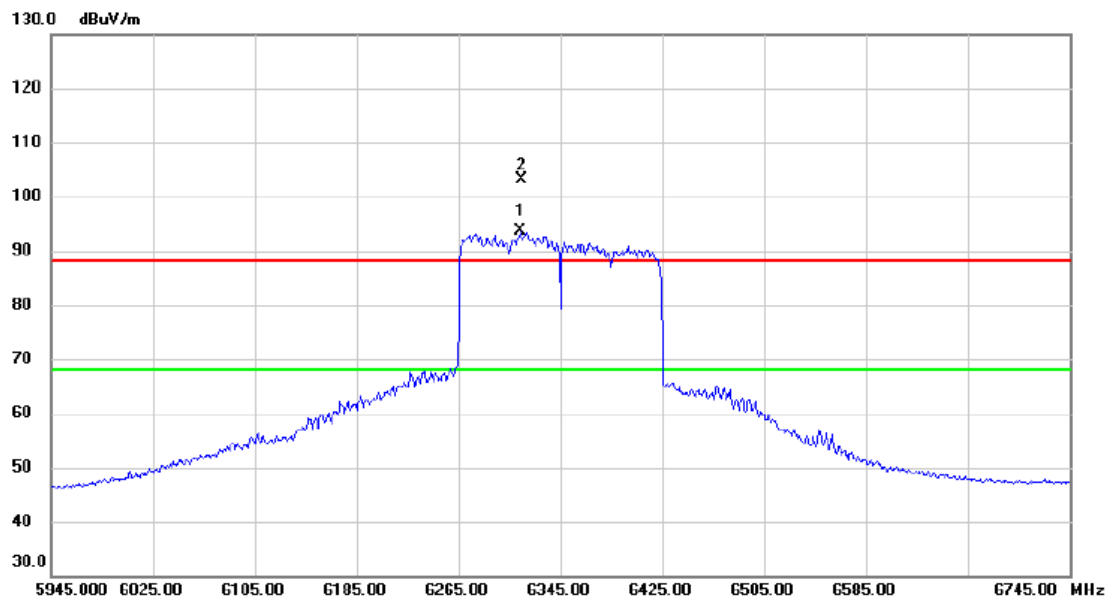


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	6313.800	75.74	17.78	93.52	68.20	25.32	AVG	No Limit
2	X	6314.600	85.23	17.78	103.01	88.20	14.81	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE160) Mode 6345 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

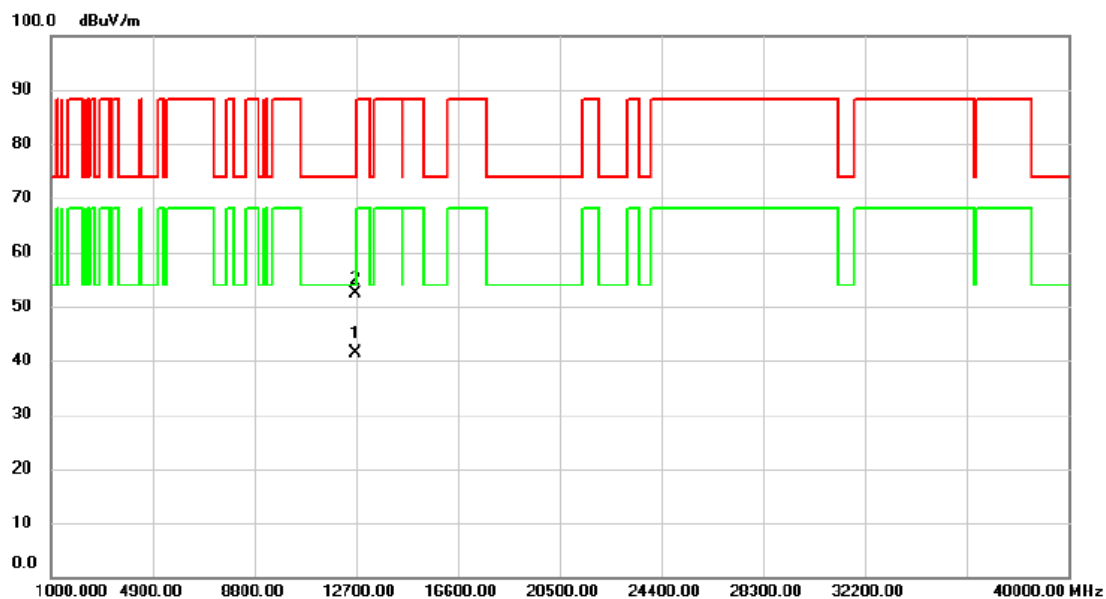


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	12689.80	25.42	15.85	41.27	54.00	-12.73	AVG	
2		12690.13	36.57	15.85	52.42	74.00	-21.58	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE160) Mode 6345 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

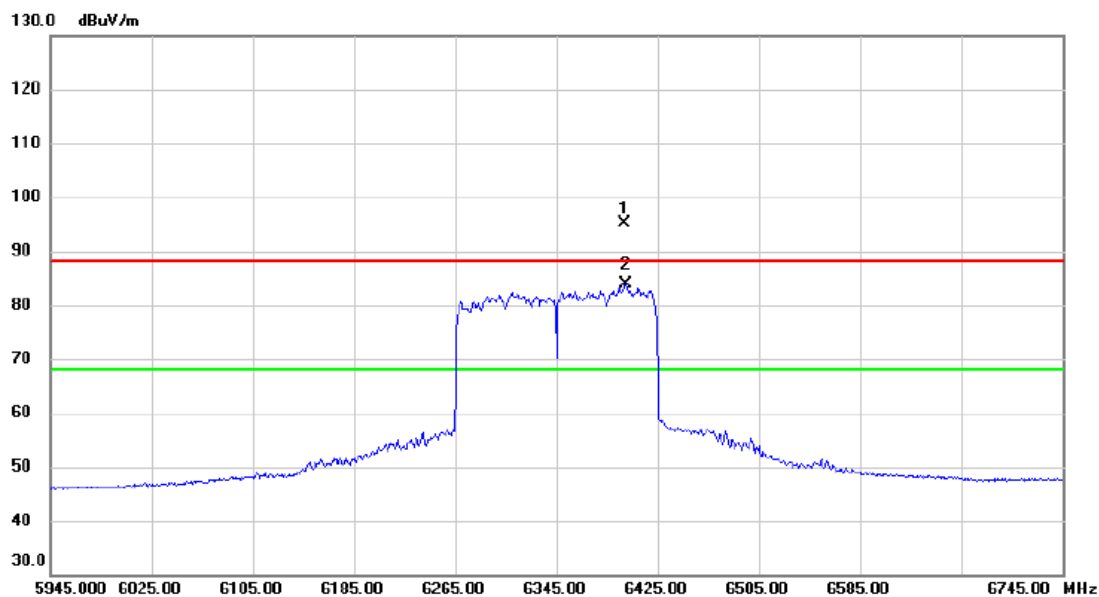


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6399.400	77.10	17.97	95.07	88.20	6.87	peak	No Limit
2	*	6400.200	66.00	17.97	83.97	68.20	15.77	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX(HE160) Mode 6345 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

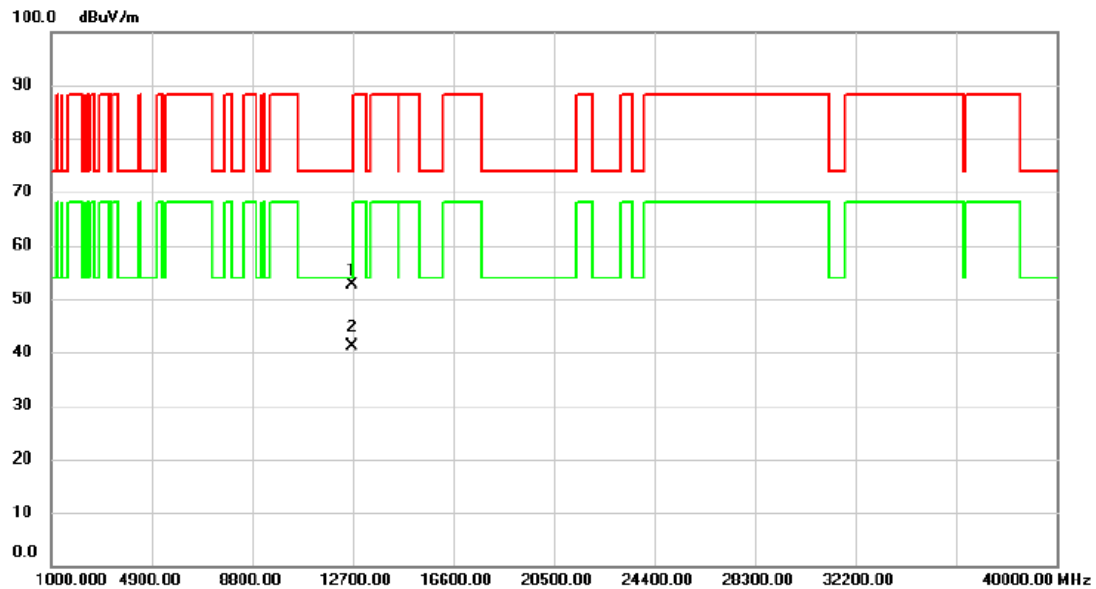


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		12690.00	36.77	15.85	52.62	74.00	-21.38	peak	
2	*	12690.00	25.30	15.85	41.15	54.00	-12.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX AX(HE20) Mode 6435 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

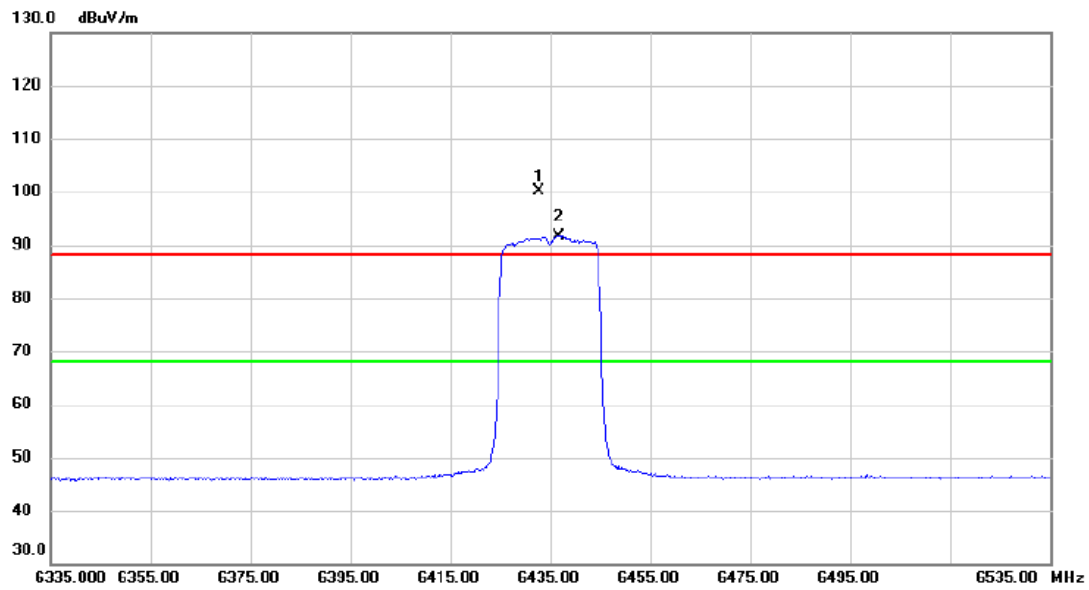


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6432.800	81.99	18.04	100.03	88.20	11.83	peak	No Limit
2	*	6436.600	73.56	18.05	91.61	68.20	23.41	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX AX(HE20) Mode 6435 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

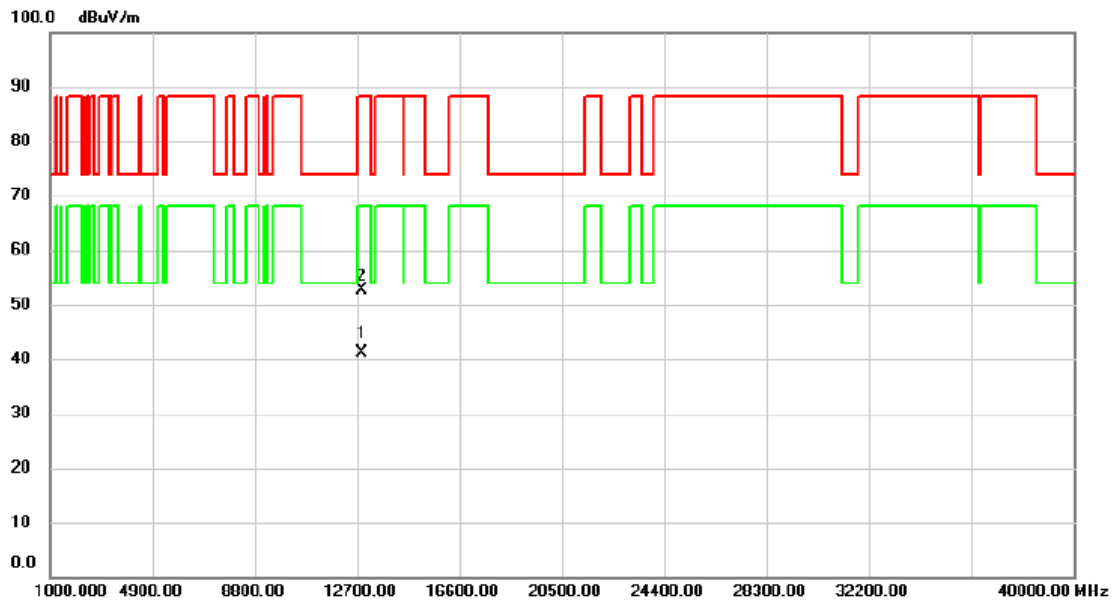


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	12869.08	25.32	15.88	41.20	68.20	-27.00	AVG	
2		12870.10	36.72	15.87	52.59	88.20	-35.61	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX AX(HE20) Mode 6435 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

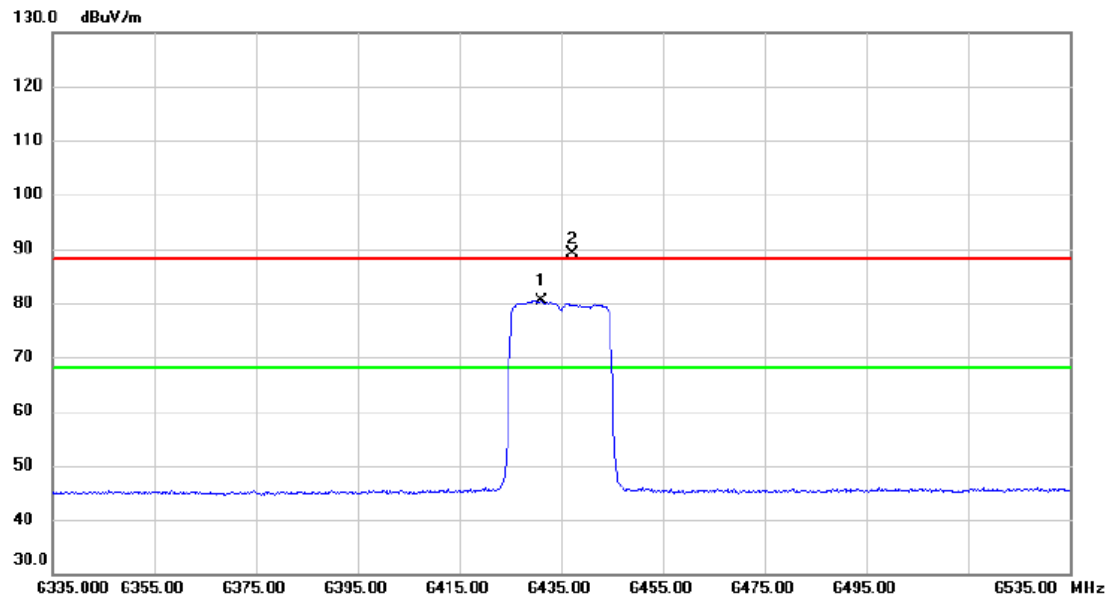


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6431.000	62.36	18.04	80.40	68.20	12.20	AVG	No Limit
2	X	6437.200	71.15	18.05	89.20	88.20	1.00	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX AX(HE20) Mode 6435 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

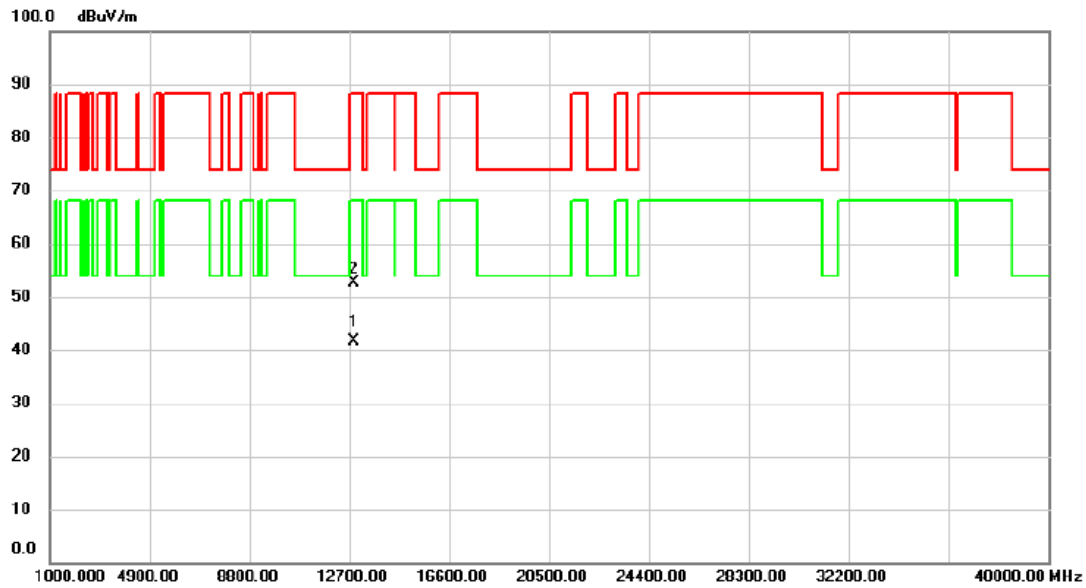


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	12868.25	25.82	15.88	41.70	68.20	-26.50	AVG	
2		12870.33	36.74	15.87	52.61	88.20	-35.59	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX AX(HE20) Mode 6475 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

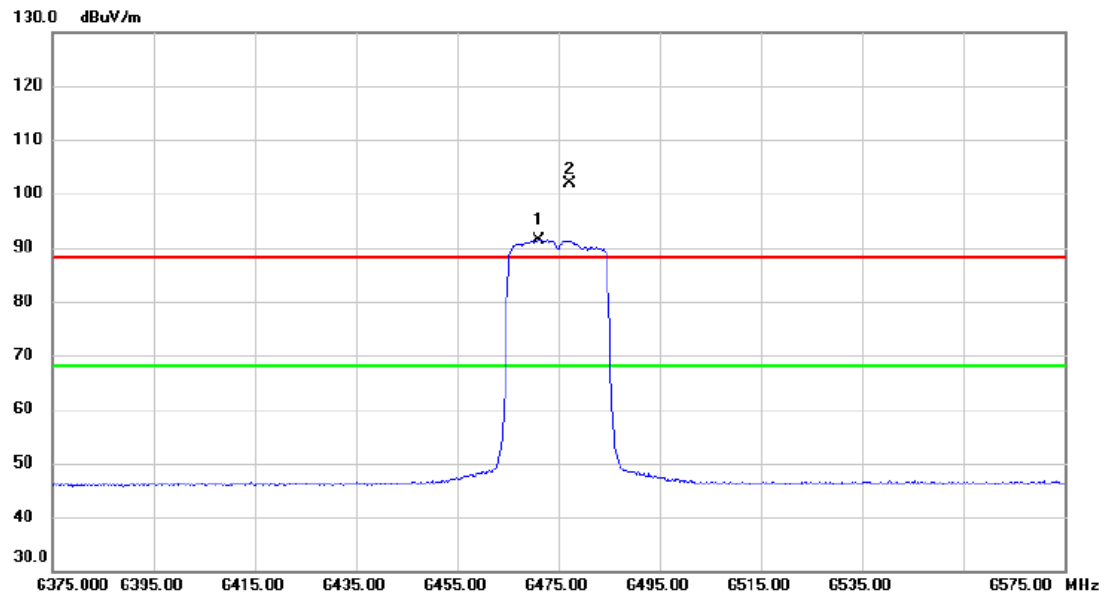


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6471.200	73.20	18.14	91.34	68.20	23.14	AVG	No Limit
2	X	6477.400	83.79	18.15	101.94	88.20	13.74	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX AX(HE20) Mode 6475 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

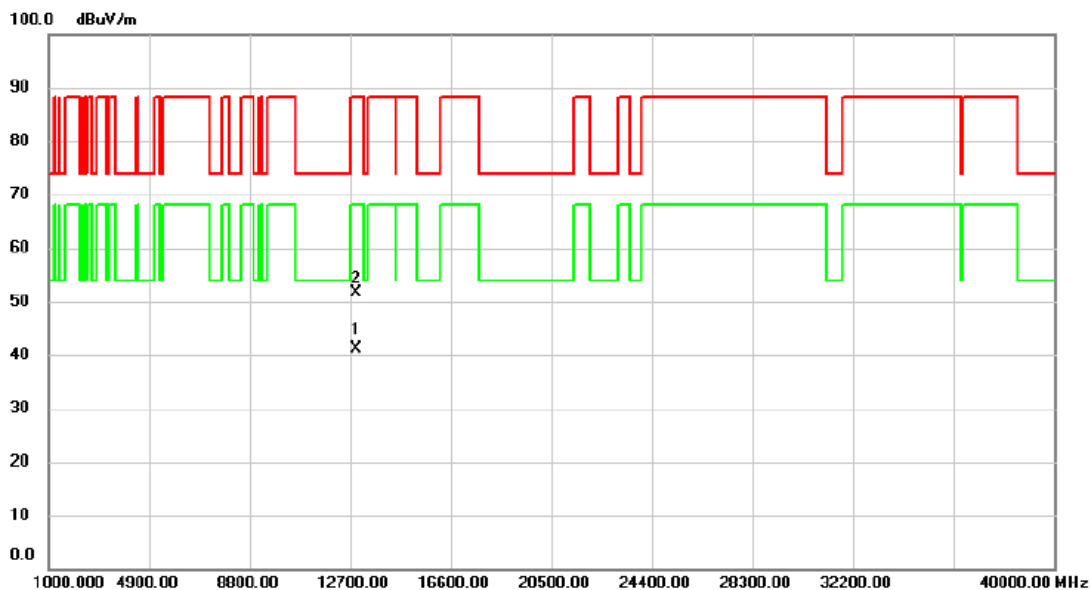


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	12948.65	25.22	15.87	41.09	68.20	-27.11	AVG	
2		12951.55	35.69	15.88	51.57	88.20	-36.63	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX AX(HE20) Mode 6475 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

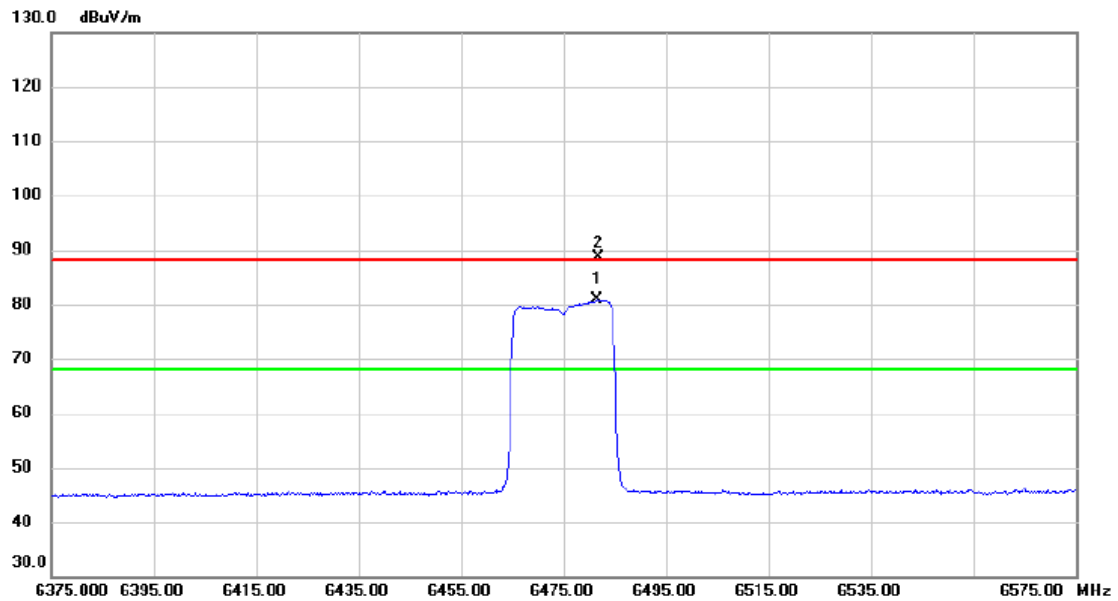


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	6481.600	62.63	18.16	80.79	68.20	12.59	AVG	No Limit
2	X	6481.800	70.40	18.16	88.56	88.20	0.36	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX AX(HE20) Mode 6475 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

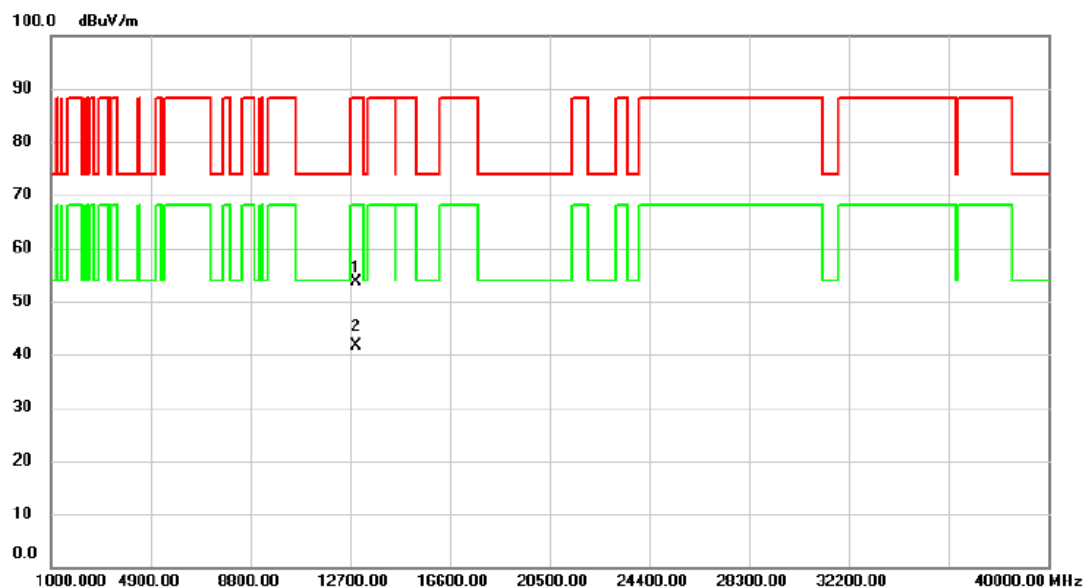


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		12947.80	37.64	15.87	53.51	88.20	-34.69	peak	
2	*	12951.16	25.67	15.88	41.55	68.20	-26.65	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX AX(HE20) Mode 6515 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

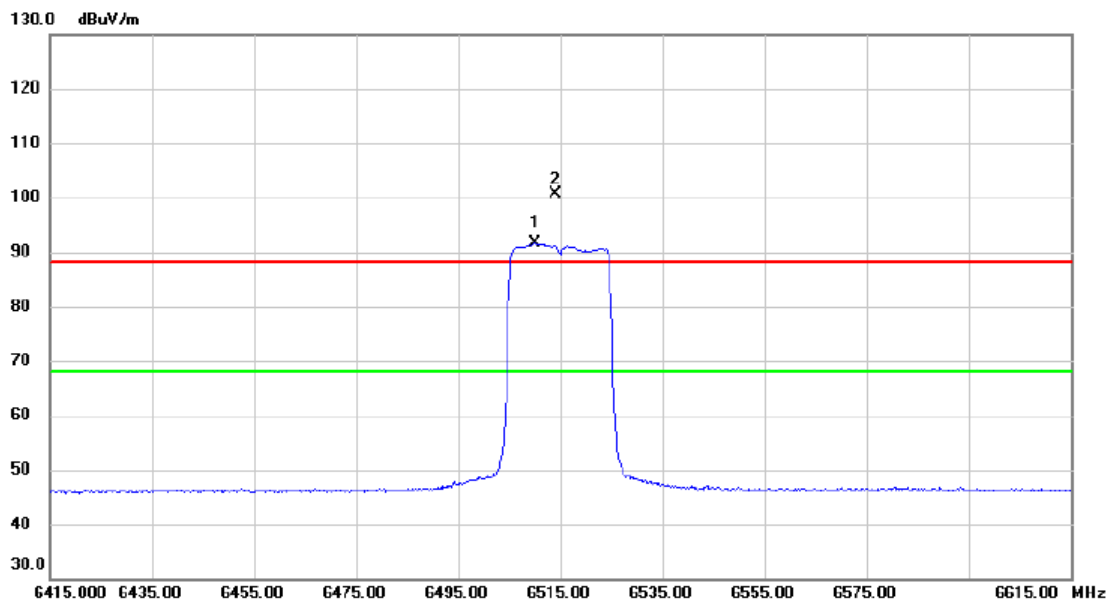


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	6510.200	73.39	18.23	91.62	68.20	23.42	AVG	No Limit
2	X	6514.000	82.40	18.25	100.65	88.20	12.45	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX AX(HE20) Mode 6515 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

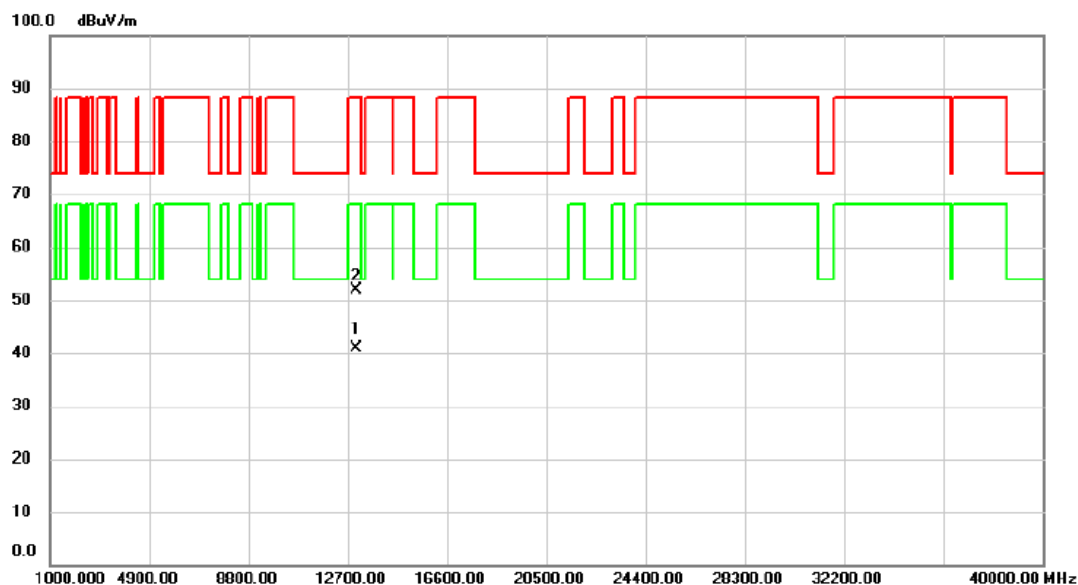


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	13029.40	25.02	15.93	40.95	68.20	-27.25	AVG	
2		13029.62	35.94	15.93	51.87	88.20	-36.33	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX AX(HE20) Mode 6515 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

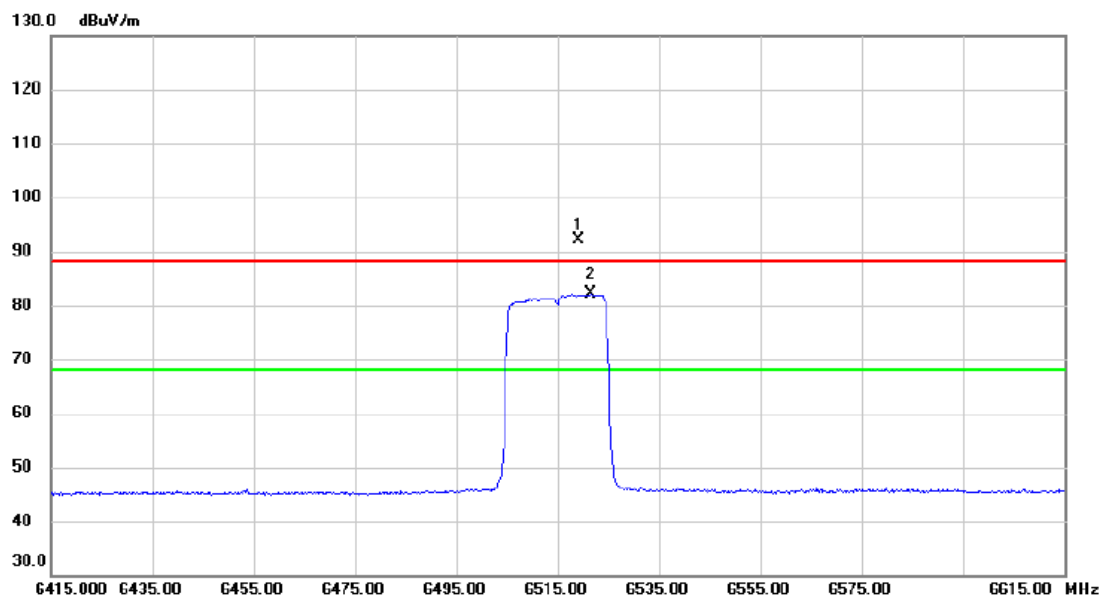


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6519.000	73.96	18.26	92.22	88.20	4.02	peak	No Limit
2	*	6521.600	63.77	18.26	82.03	68.20	13.83	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX AX(HE20) Mode 6515 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

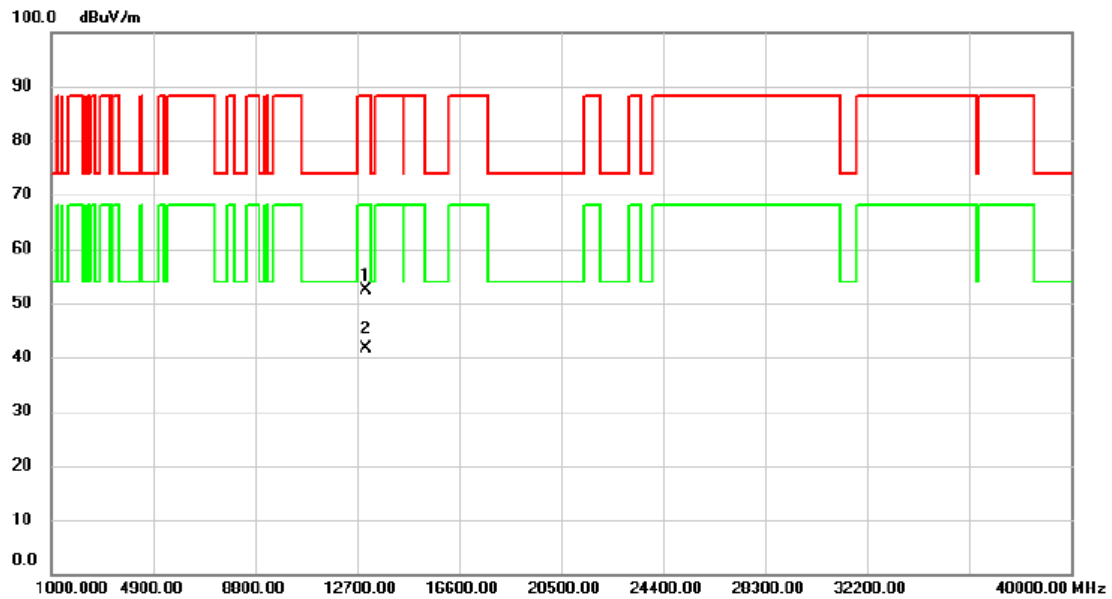


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		13029.44	36.39	15.93	52.32	88.20	-35.88	peak	
2	*	13031.43	25.76	15.93	41.69	68.20	-26.51	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX AX(HE40) Mode 6445 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

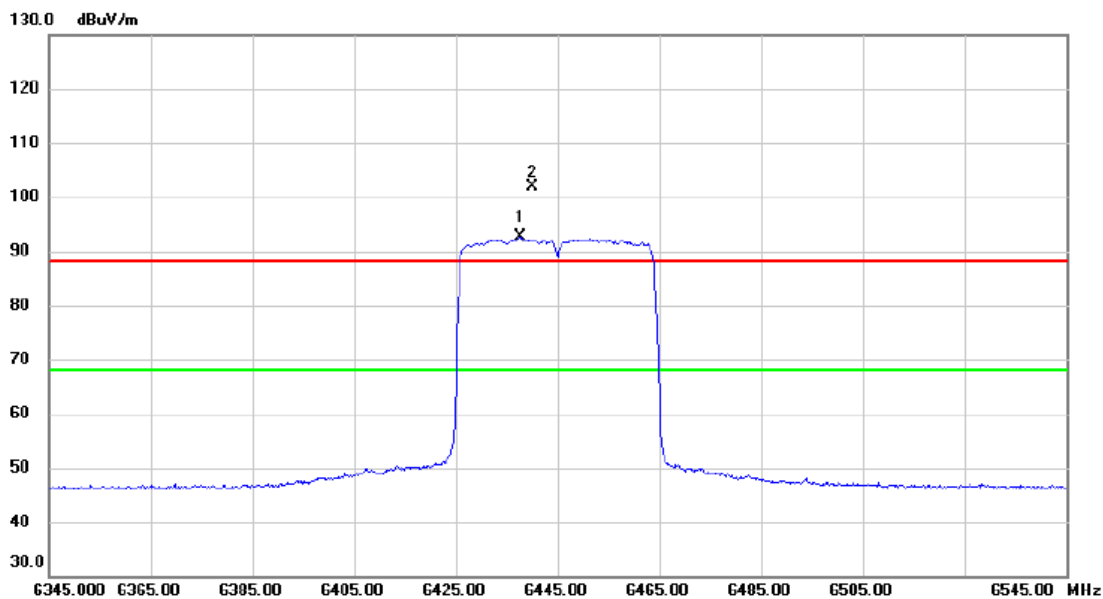


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6437.600	74.52	18.06	92.58	68.20	24.38	AVG	No Limit
2	X	6440.200	83.83	18.06	101.89	88.20	13.69	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX AX(HE40) Mode 6445 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

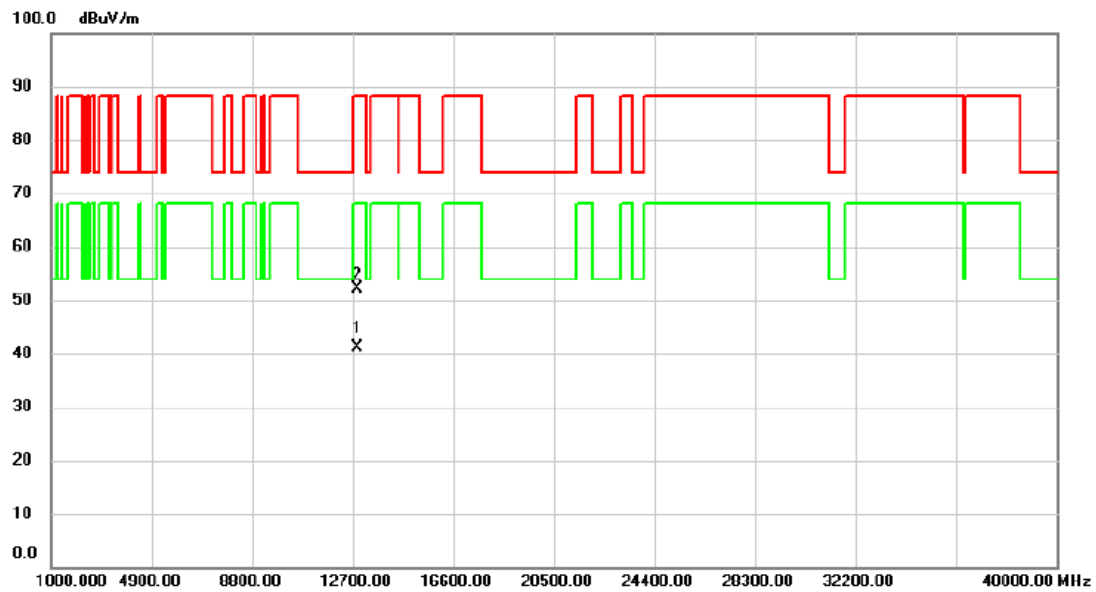


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	12887.70	25.21	15.87	41.08	68.20	-27.12	AVG	
2		12892.09	36.21	15.86	52.07	88.20	-36.13	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX AX(HE40) Mode 6445 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

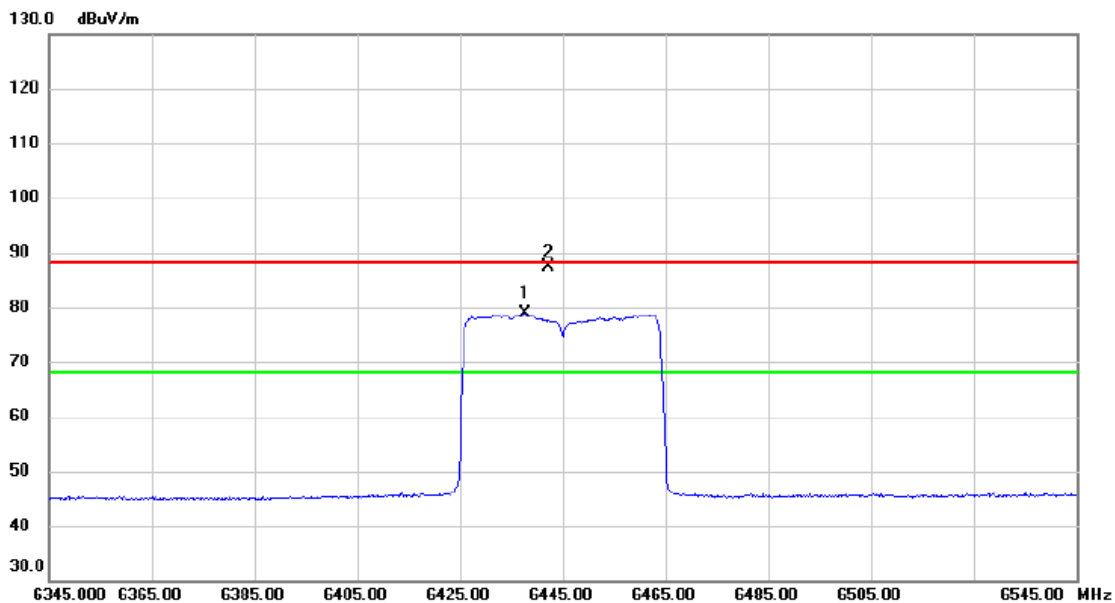


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6437.600	60.89	18.06	78.95	68.20	10.75	AVG	No Limit
2		6442.200	69.44	18.06	87.50	88.20	-0.70	peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX AX(HE40) Mode 6445 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

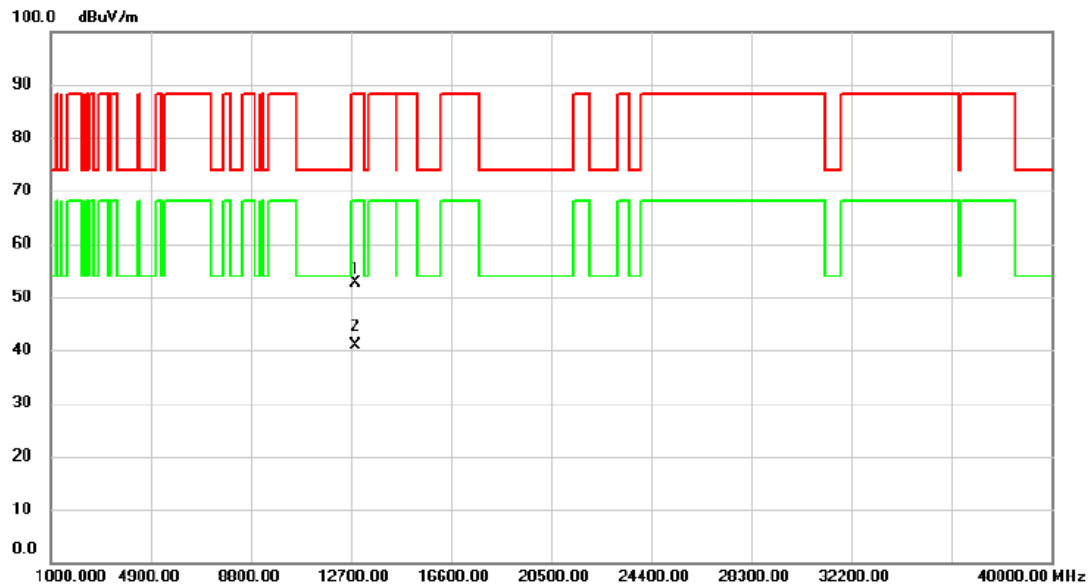


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		12890.00	36.88	15.87	52.75	88.20	-35.45	peak	
2	*	12890.00	24.90	15.87	40.77	68.20	-27.43	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX AX(HE40) Mode 6485 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

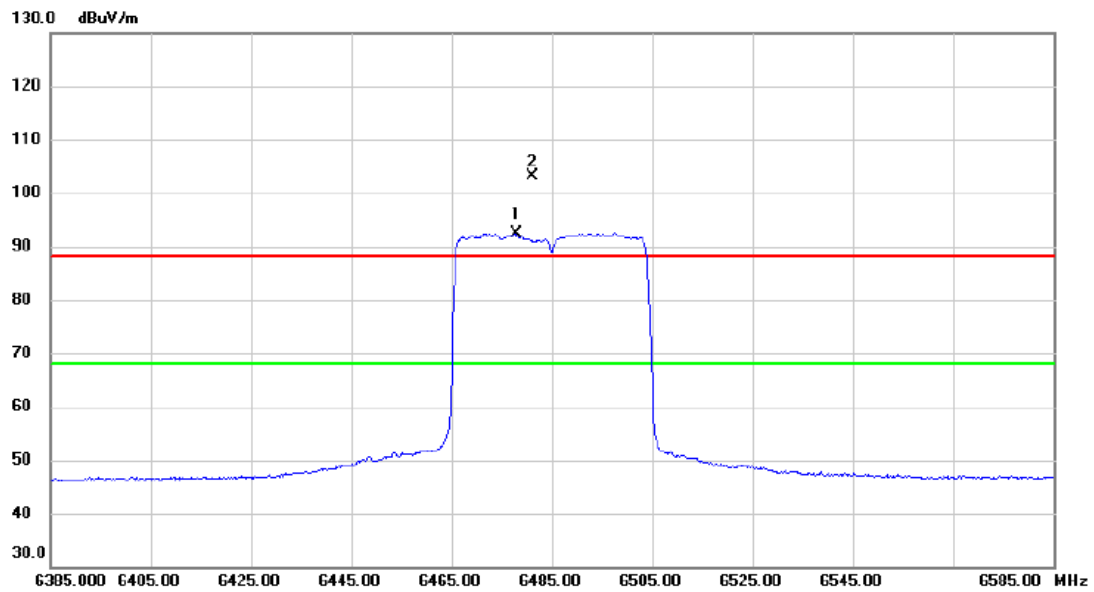


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6477.800	74.18	18.15	92.33	68.20	24.13	AVG	No Limit
2	X	6481.000	84.87	18.16	103.03	88.20	14.83	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX AX(HE40) Mode 6485 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

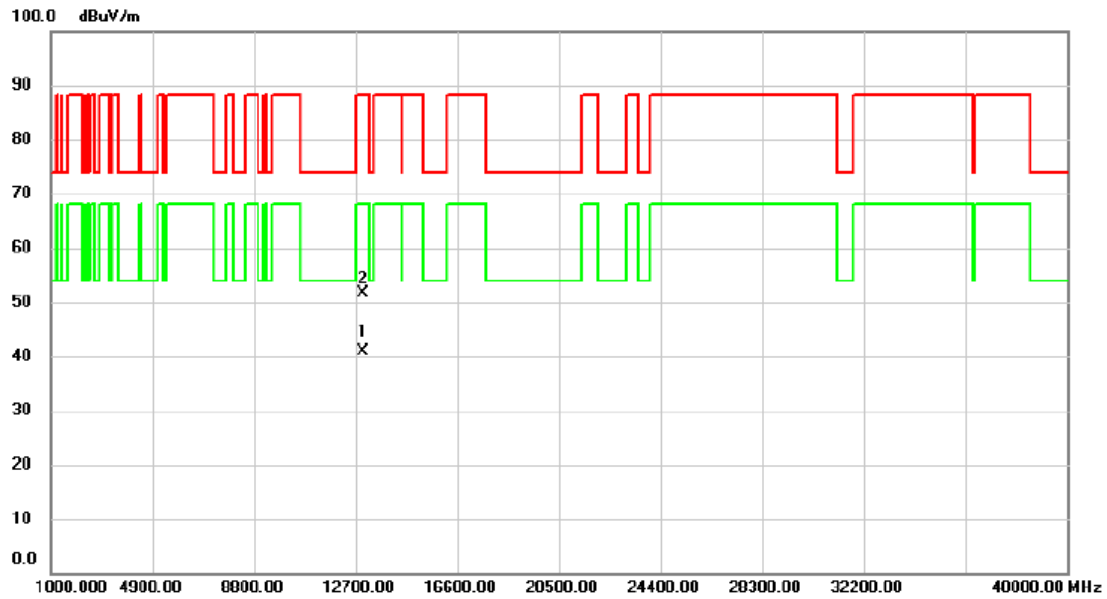


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	12967.84	24.95	15.88	40.83	68.20	-27.37	AVG	
2		12970.68	35.77	15.88	51.65	88.20	-36.55	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX AX(HE40) Mode 6485 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

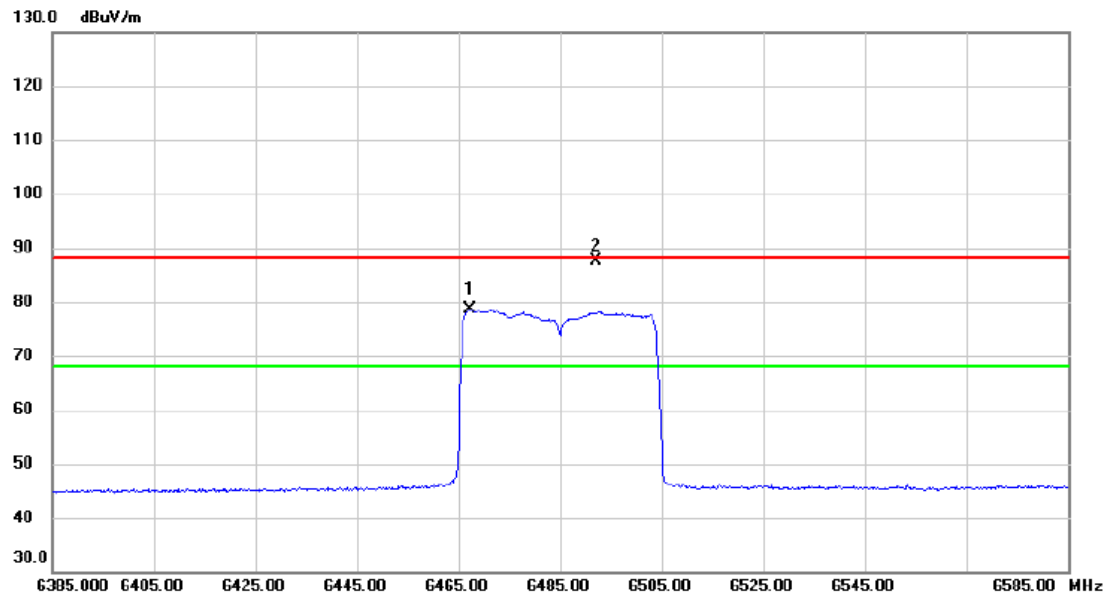


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6467.400	60.60	18.13	78.73	68.20	10.53	AVG	No Limit
2		6492.000	69.49	18.18	87.67	88.20	-0.53	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX AX(HE40) Mode 6485 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

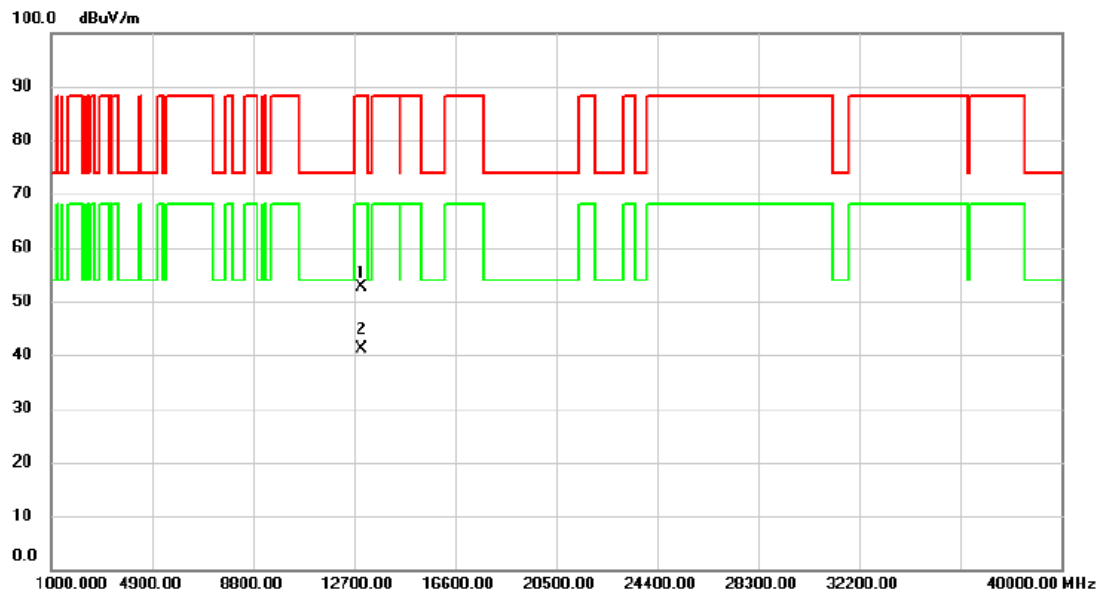


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		12970.00	36.63	15.88	52.51	88.20	-35.69	peak	
2	*	12970.00	25.26	15.88	41.14	68.20	-27.06	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX AX(HE80) Mode 6465 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

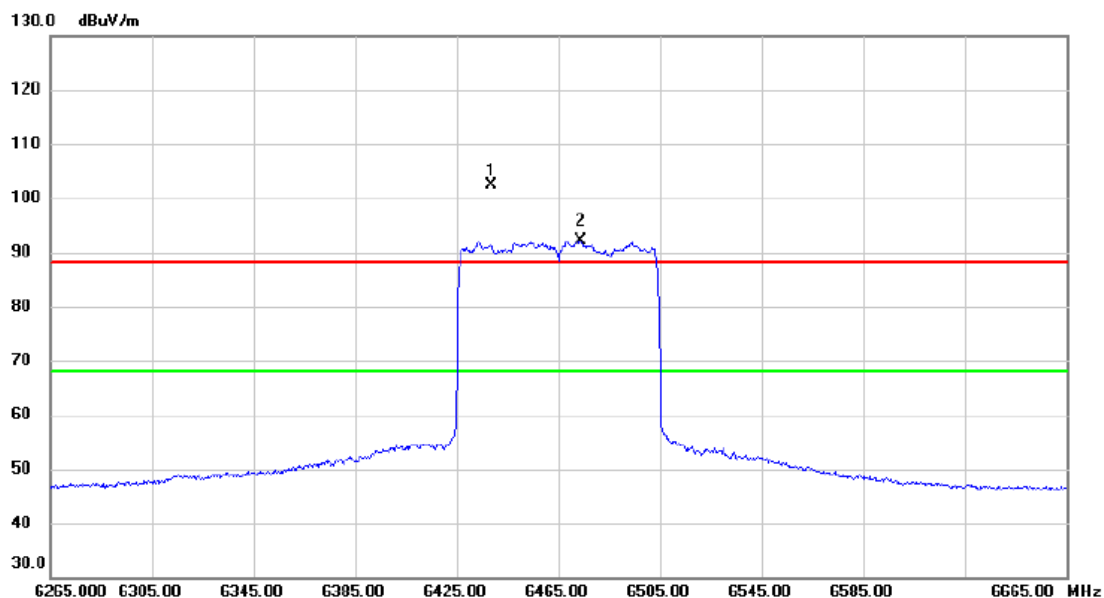


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6438.600	84.31	18.06	102.37	88.20	14.17	peak	No Limit
2	*	6473.800	74.02	18.14	92.16	68.20	23.96	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX AX(HE80) Mode 6465 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

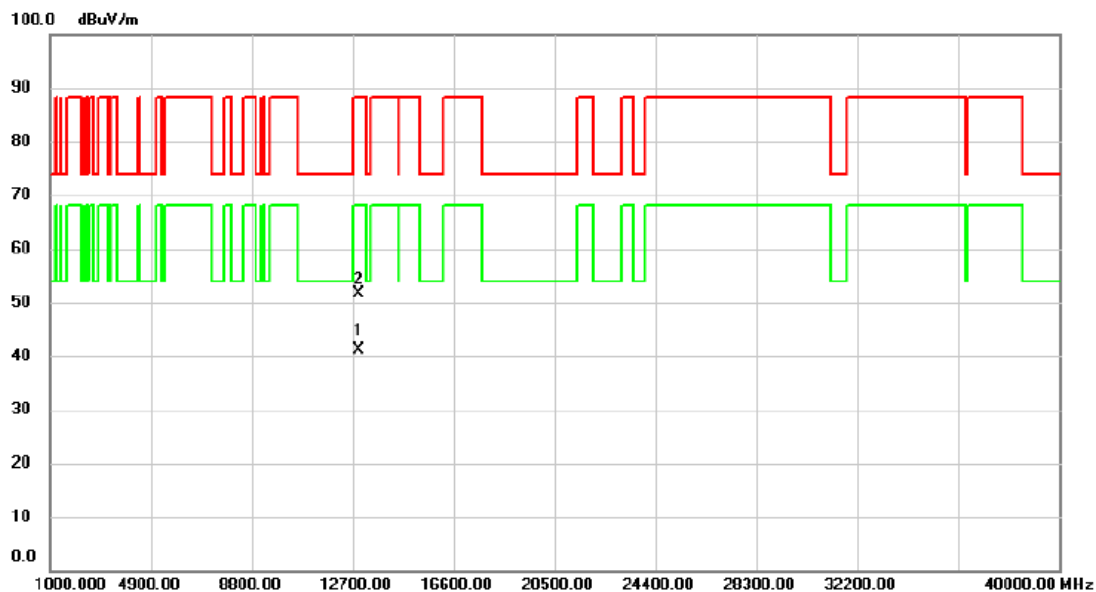


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	12928.31	25.33	15.88	41.21	68.20	-26.99	AVG	
2		12931.74	35.80	15.88	51.68	88.20	-36.52	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX AX(HE80) Mode 6465 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

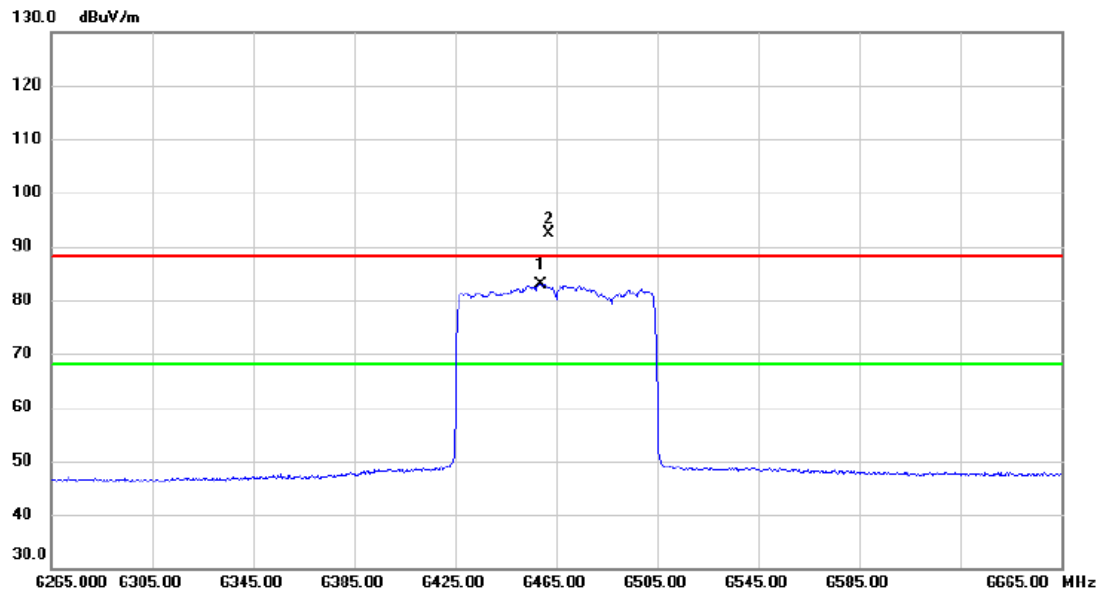


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6458.600	64.82	18.11	82.93	68.20	14.73	AVG	No Limit
2	X	6461.800	74.22	18.11	92.33	88.20	4.13	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX AX(HE80) Mode 6465 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

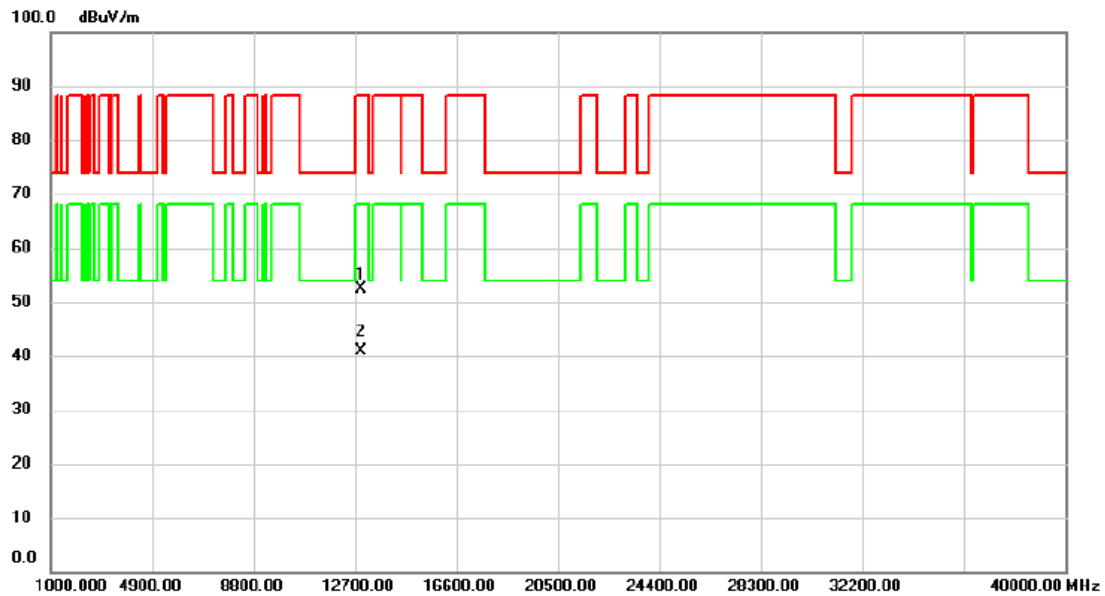


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		12930.00	36.47	15.88	52.35	88.20	-35.85	peak	
2	*	12930.00	24.95	15.88	40.83	68.20	-27.37	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE20) Mode 6535 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

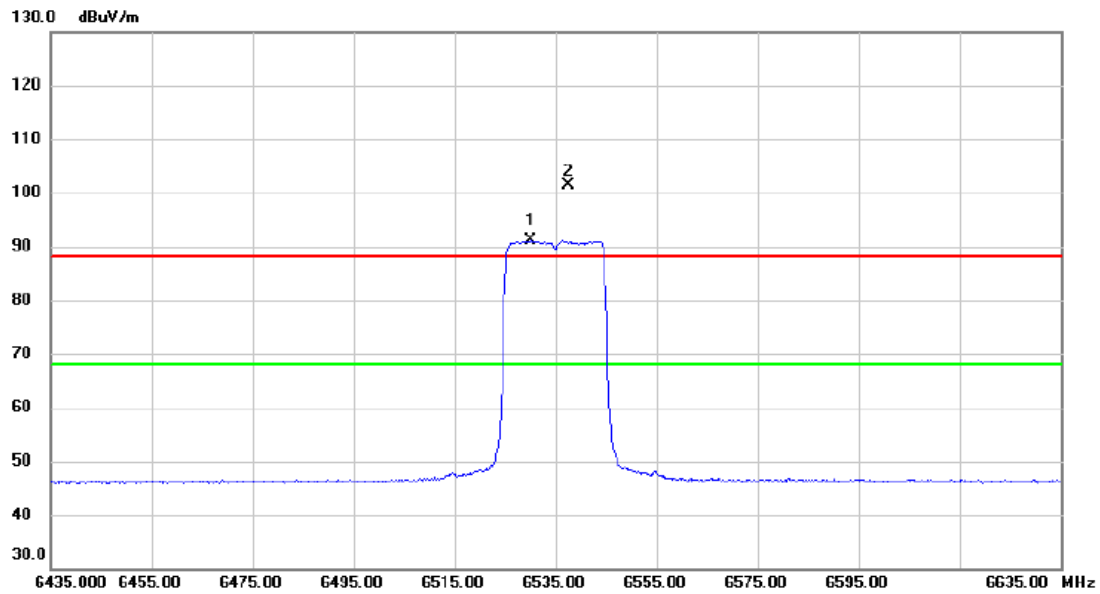


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6530.000	72.79	18.29	91.08	68.20	22.88	AVG	No Limit
2	X	6537.600	83.00	18.32	101.32	88.20	13.12	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE20) Mode 6535 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

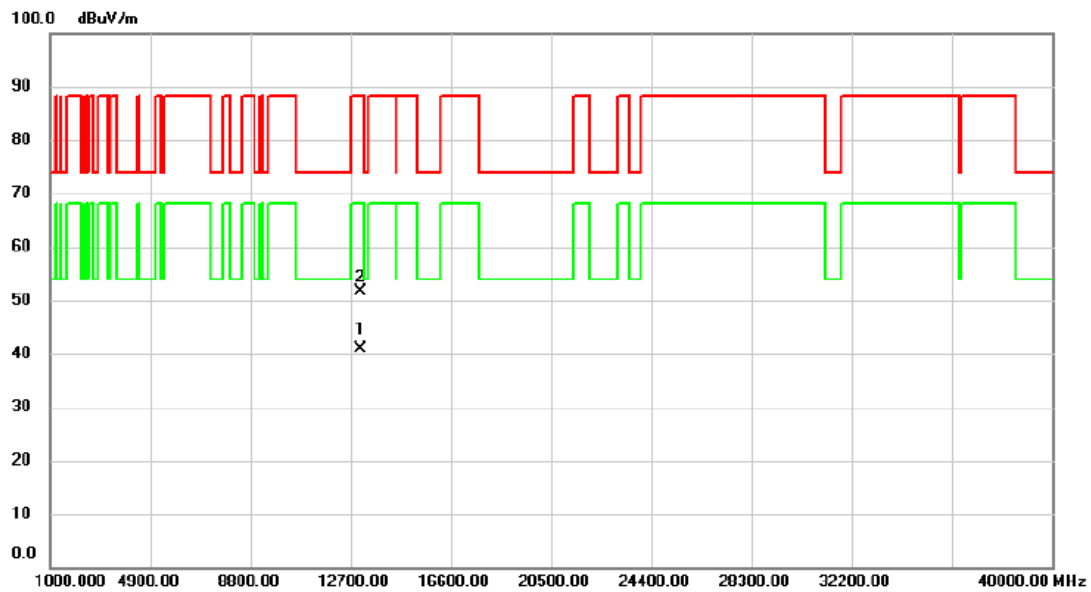


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	13068.23	24.99	15.99	40.98	68.20	-27.22	AVG	
2		13069.27	35.56	15.99	51.55	88.20	-36.65	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE20) Mode 6535 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

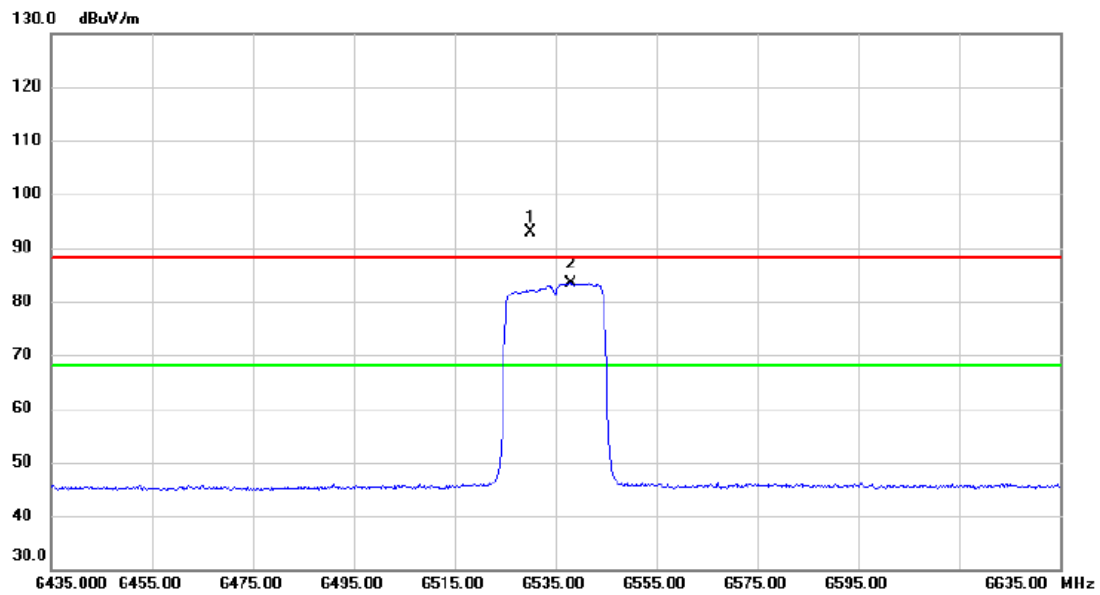


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6530.000	74.57	18.29	92.86	88.20	4.66	peak	No Limit
2	*	6538.000	64.94	18.32	83.26	68.20	15.06	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE20) Mode 6535 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

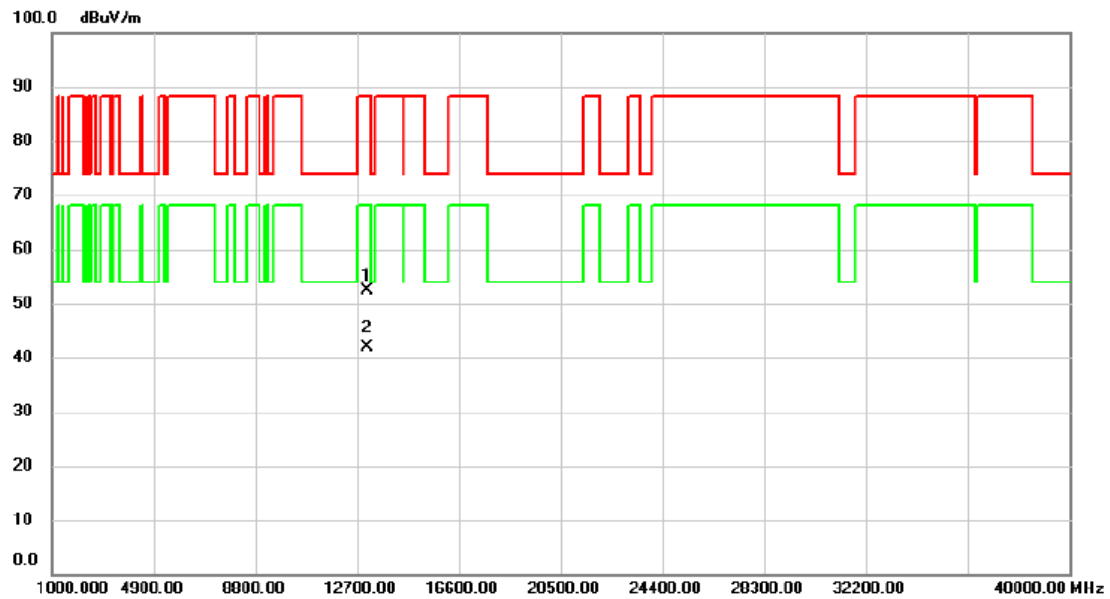


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		13070.43	36.30	15.99	52.29	88.20	-35.91	peak	
2	*	13070.43	25.82	15.99	41.81	68.20	-26.39	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE20) Mode 6695 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

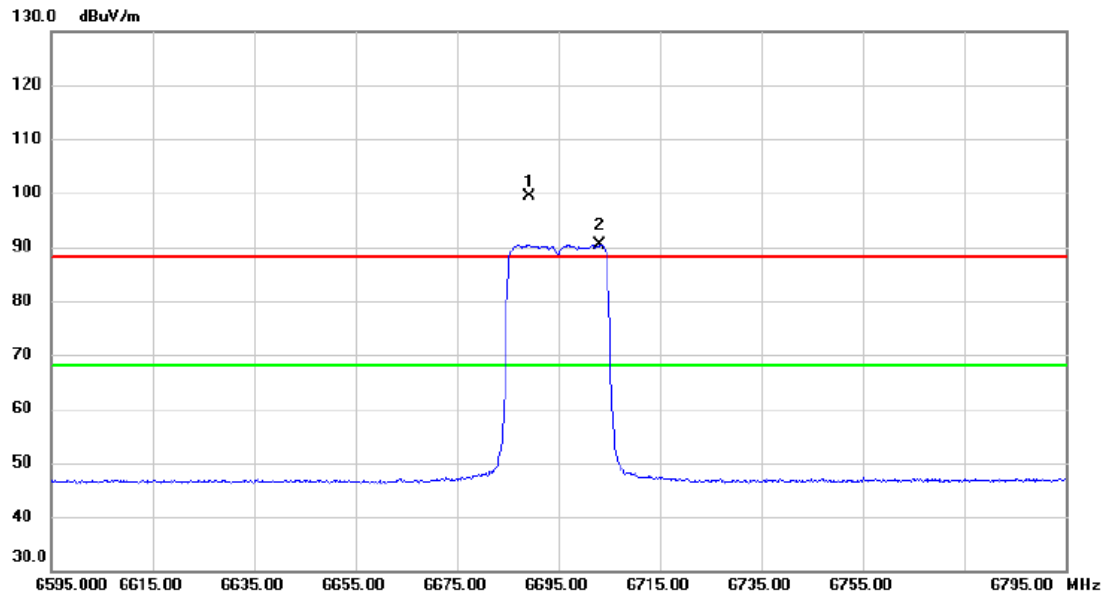


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6689.400	80.67	18.80	99.47	88.20	11.27	peak	No Limit
2	*	6703.200	71.58	18.85	90.43	68.20	22.23	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE20) Mode 6695 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

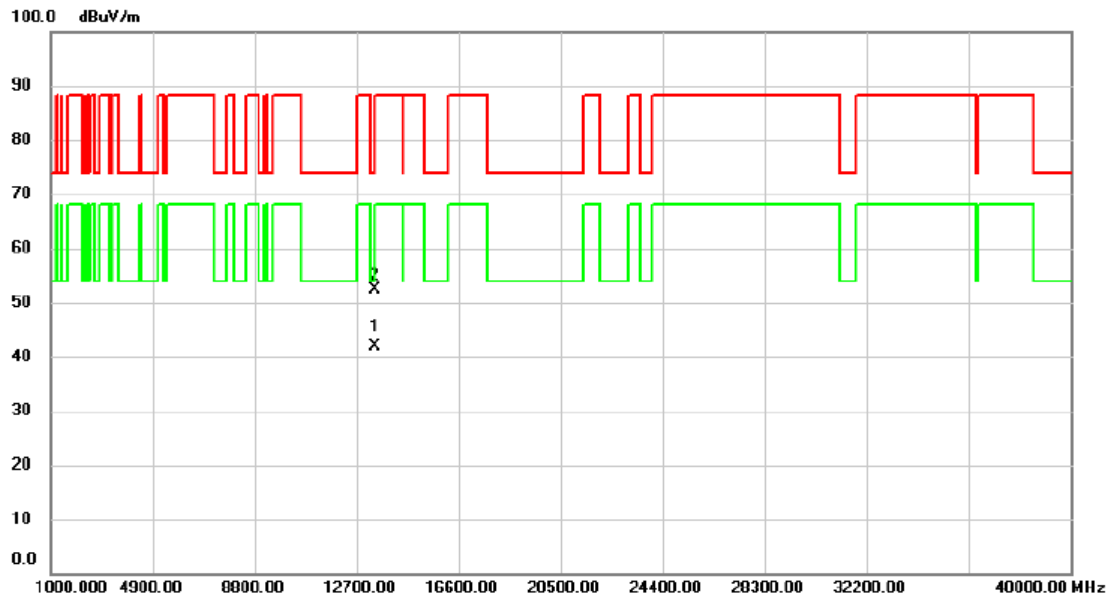


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	13390.47	25.31	16.46	41.77	54.00	-12.23	AVG	
2		13391.77	35.91	16.46	52.37	74.00	-21.63	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE20) Mode 6695 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

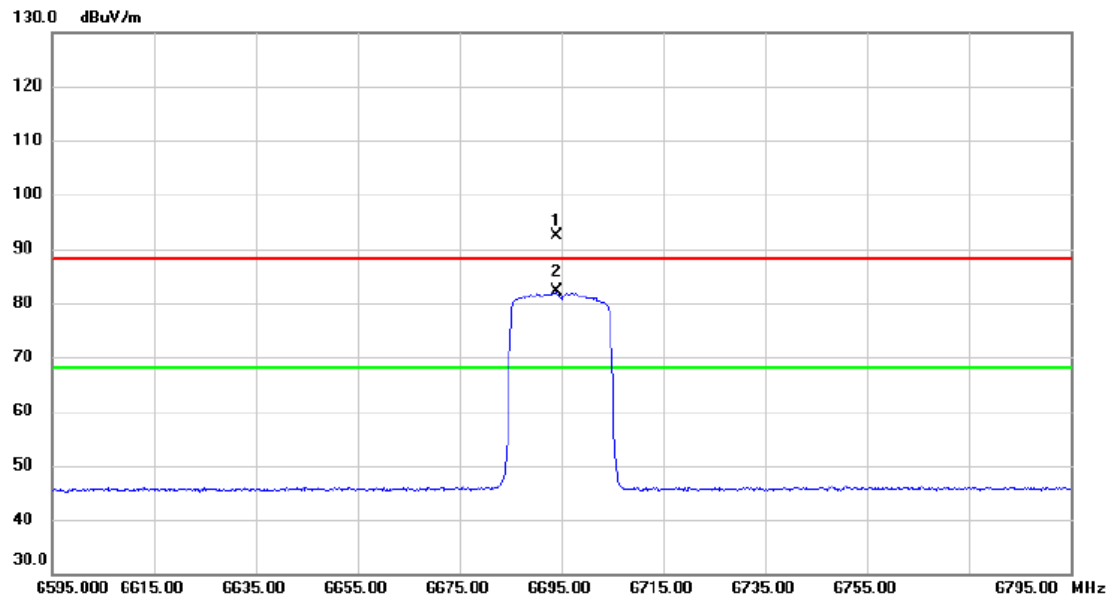


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6694.000	73.55	18.82	92.37	88.20	4.17	peak	No Limit
2	*	6694.000	63.21	18.82	82.03	68.20	13.83	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE20) Mode 6695 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

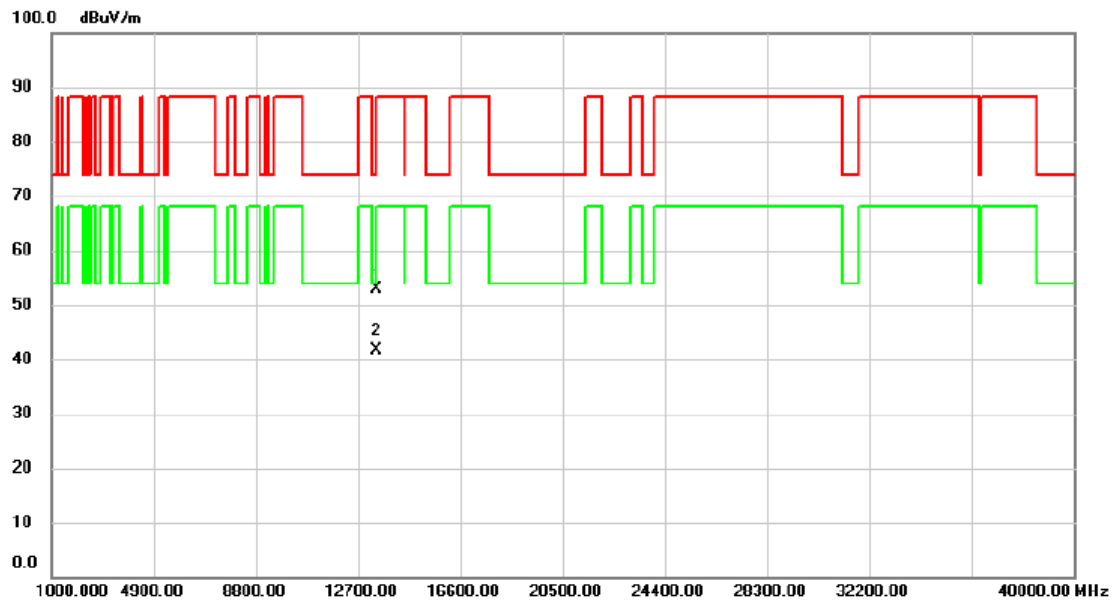


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		13388.01	36.35	16.46	52.81	74.00	-21.19	peak	
2	*	13391.51	25.13	16.46	41.59	54.00	-12.41	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE20) Mode 6855 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

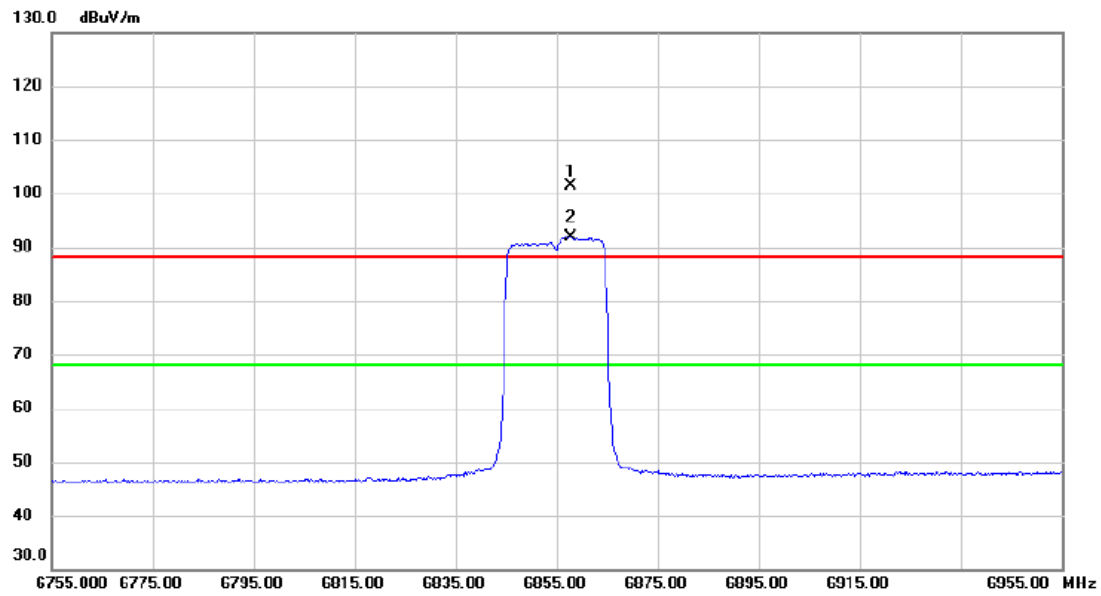


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6857.800	82.00	19.35	101.35	88.20	13.15	peak	No Limit
2	*	6857.800	72.46	19.35	91.81	68.20	23.61	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE20) Mode 6855 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

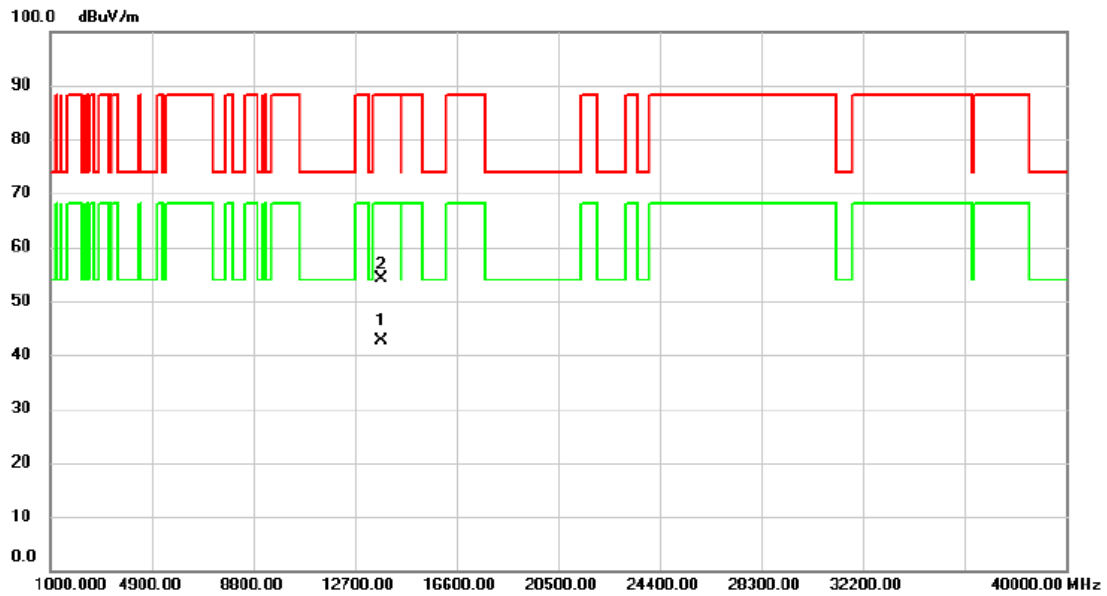


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	13708.66	25.43	17.27	42.70	68.20	-25.50	AVG	
2		13708.76	36.94	17.27	54.21	88.20	-33.99	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE20) Mode 6855 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

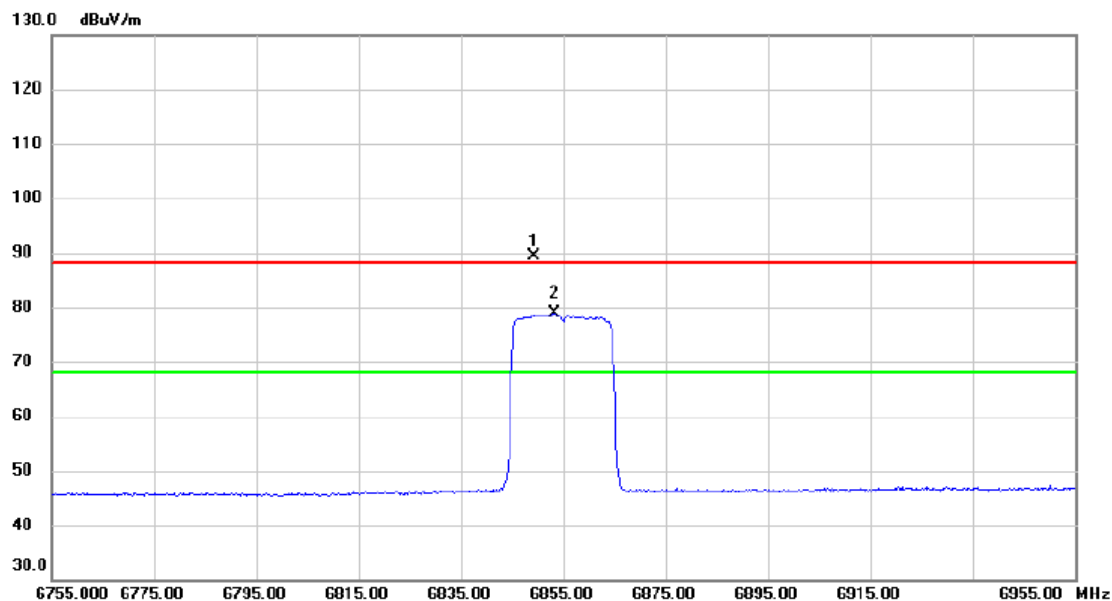


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6849.200	70.01	19.31	89.32	88.20	1.12	peak	No Limit
2	*	6853.200	59.64	19.33	78.97	68.20	10.77	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE20) Mode 6855 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

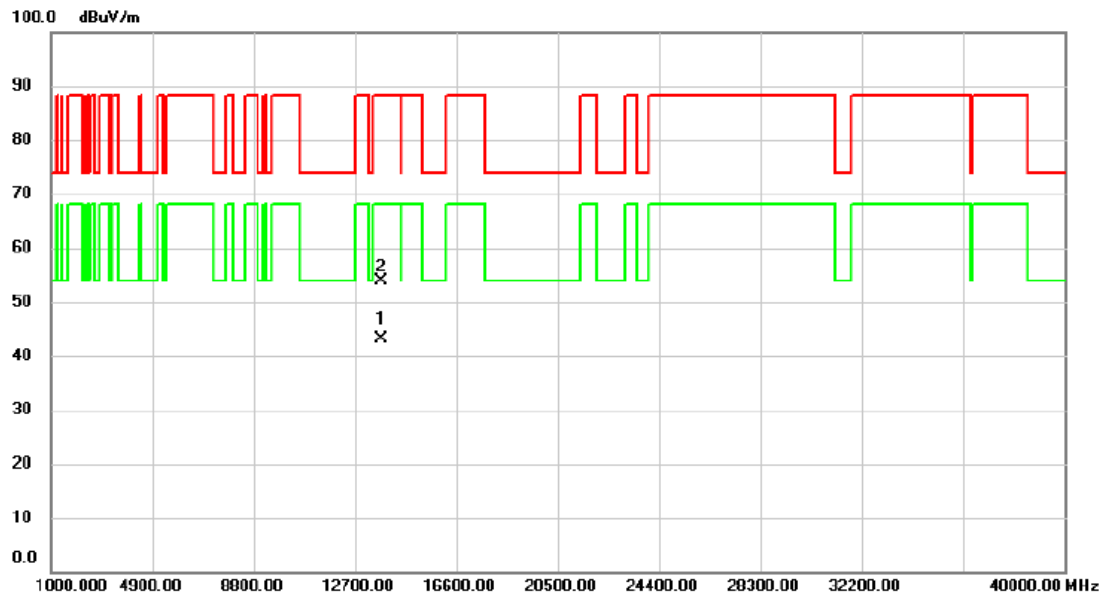


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	13709.86	25.80	17.27	43.07	68.20	-25.13	AVG	
2		13710.99	36.58	17.27	53.85	88.20	-34.35	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE40) Mode 6565 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

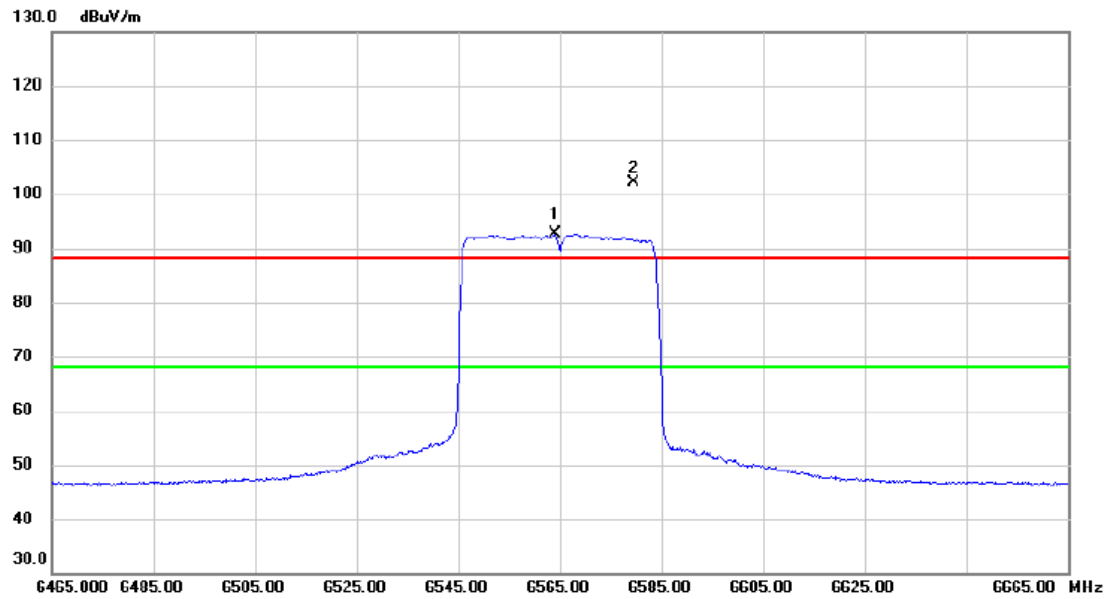


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6564.200	74.14	18.41	92.55	68.20	24.35	AVG	No Limit
2	X	6579.600	83.72	18.46	102.18	88.20	13.98	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE40) Mode 6565 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

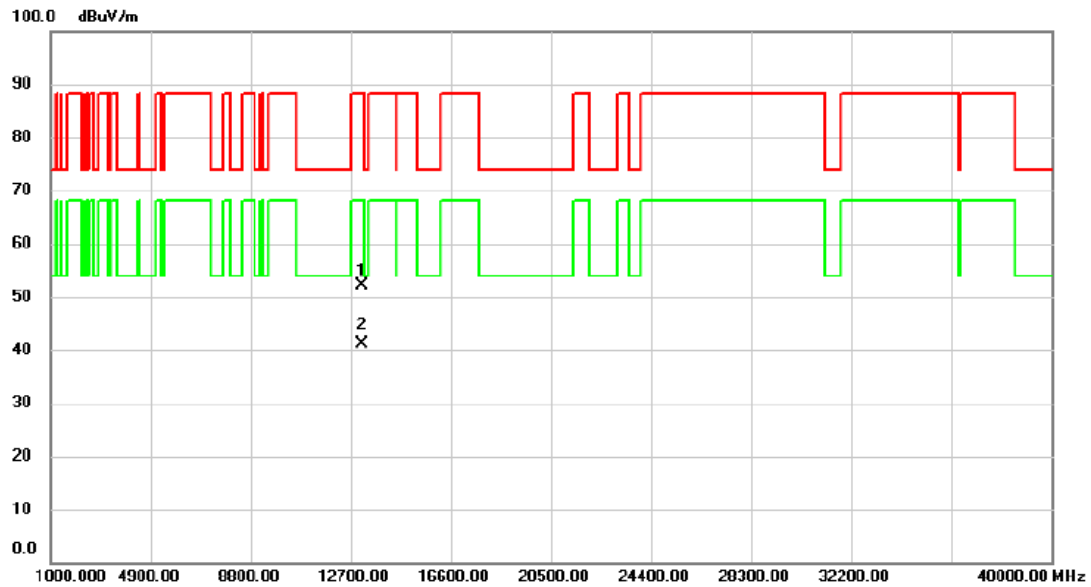


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		13127.93	36.06	16.07	52.13	88.20	-36.07	peak	
2	*	13129.11	24.98	16.07	41.05	68.20	-27.15	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE40) Mode 6565 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

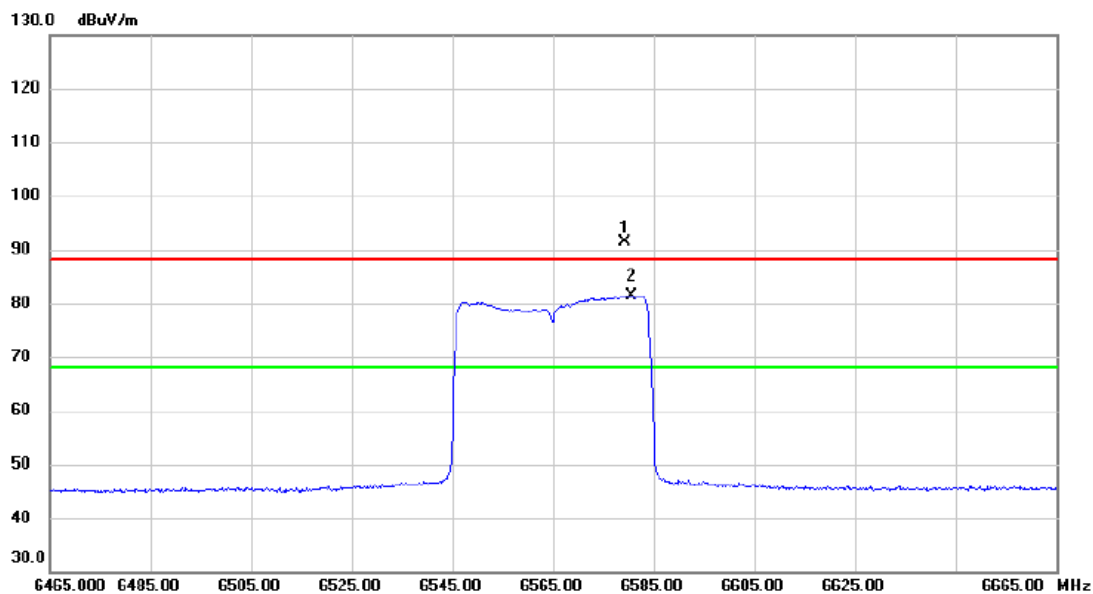


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6579.400	72.99	18.46	91.45	88.20	3.25	peak	No Limit
2	*	6580.600	63.02	18.46	81.48	68.20	13.28	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE40) Mode 6565 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

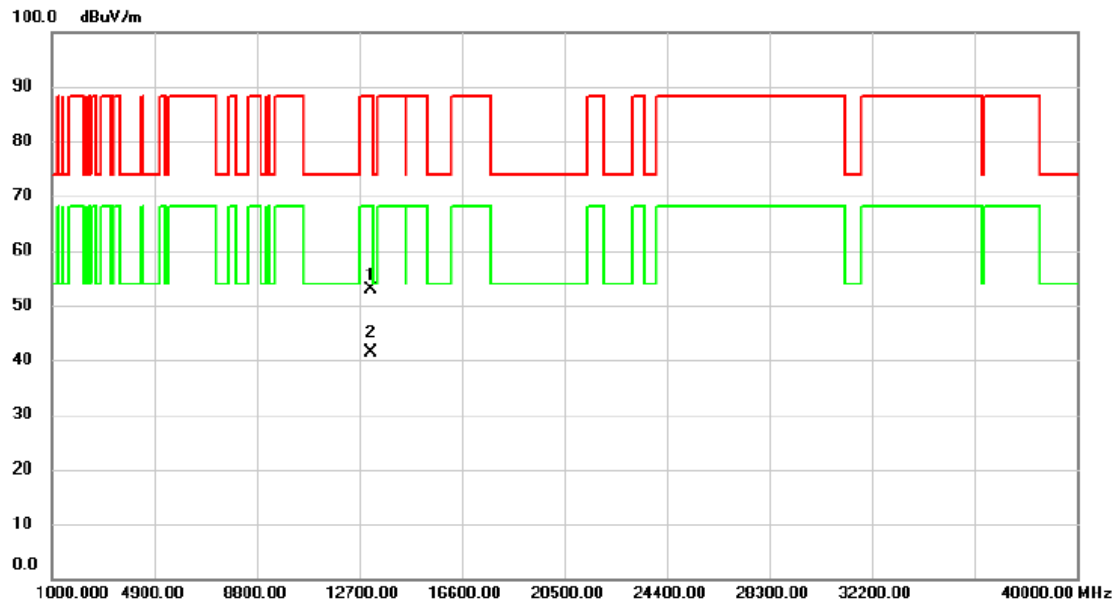


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		13130.00	36.86	16.07	52.93	88.20	-35.27	peak	
2	*	13130.00	25.25	16.07	41.32	68.20	-26.88	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE40) Mode 6685 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

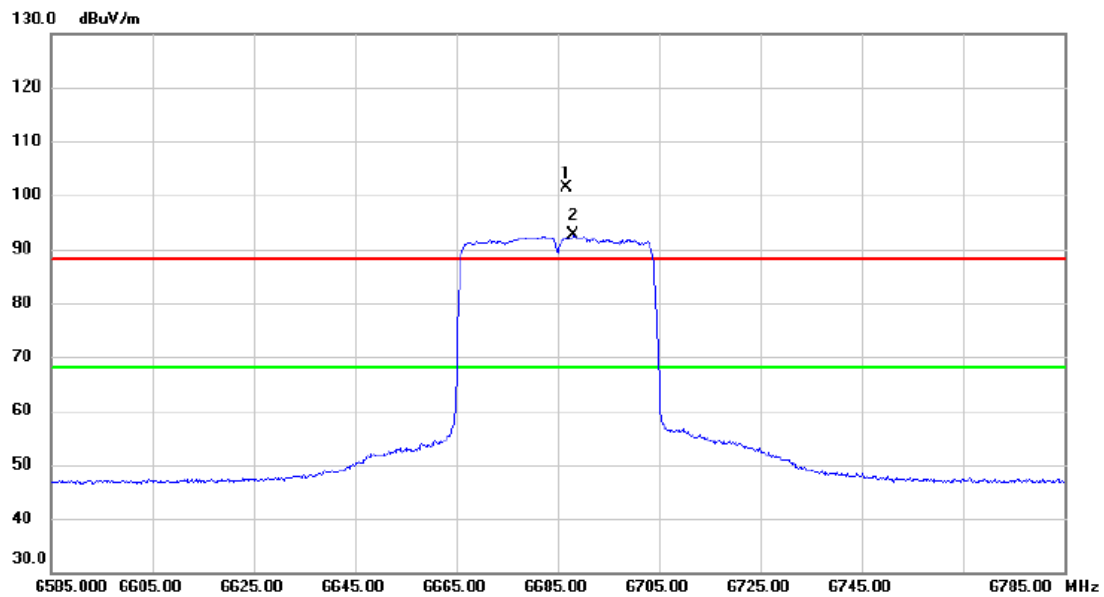


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6686.800	82.69	18.79	101.48	88.20	13.28	peak	No Limit
2	*	6688.200	73.75	18.80	92.55	68.20	24.35	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE40) Mode 6685 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

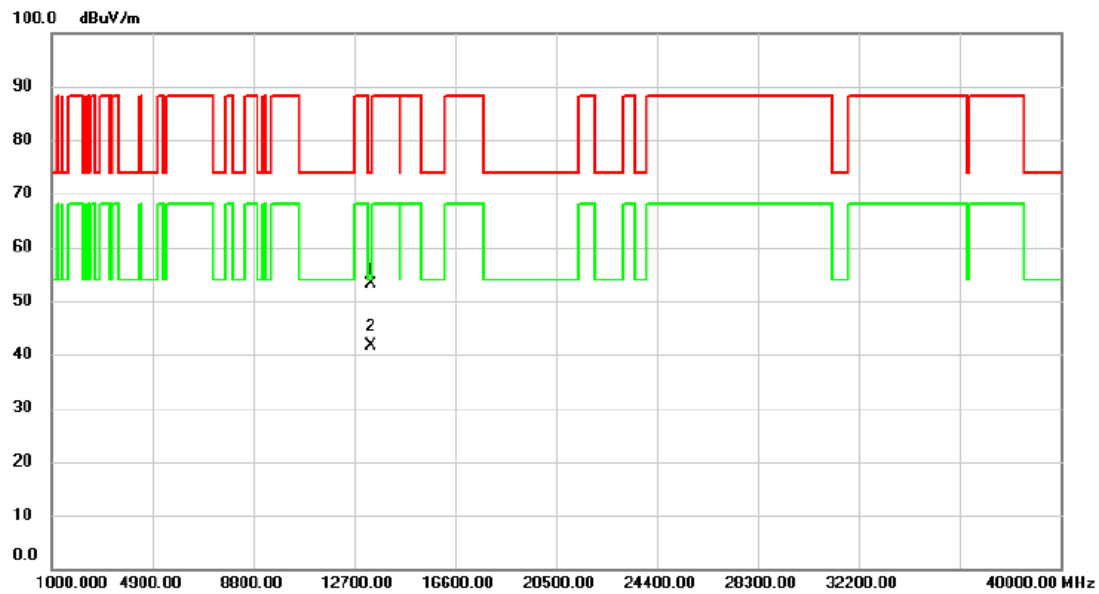


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		13367.73	36.70	16.43	53.13	74.00	-20.87	peak	
2	*	13368.12	25.25	16.43	41.68	54.00	-12.32	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE40) Mode 6685 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

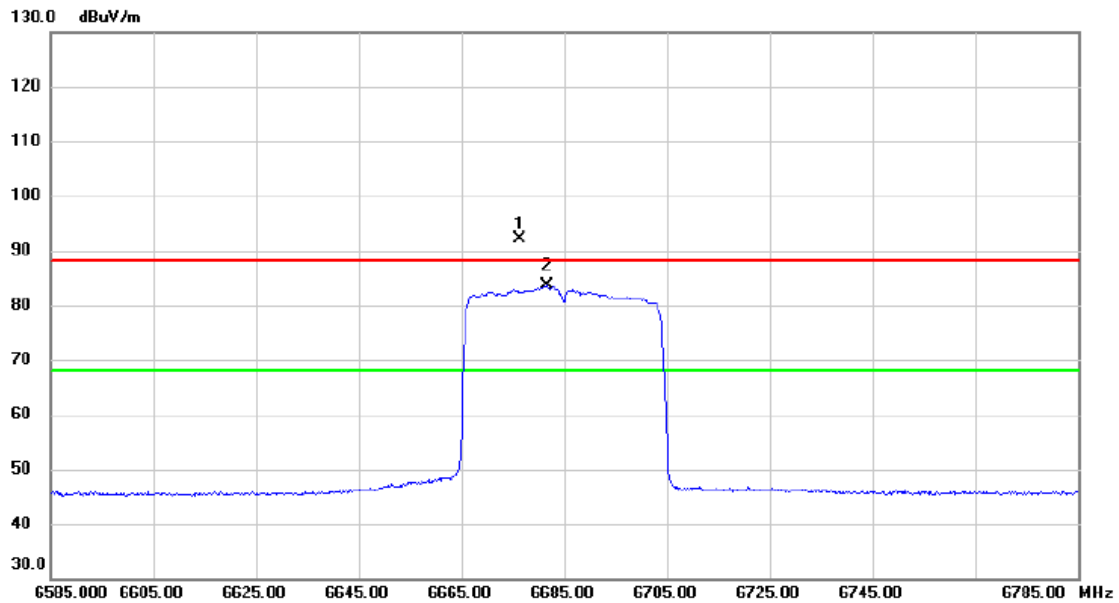


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6676.400	73.40	18.76	92.16	88.20	3.96	peak	No Limit
2	*	6681.600	64.89	18.78	83.67	68.20	15.47	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE40) Mode 6685 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

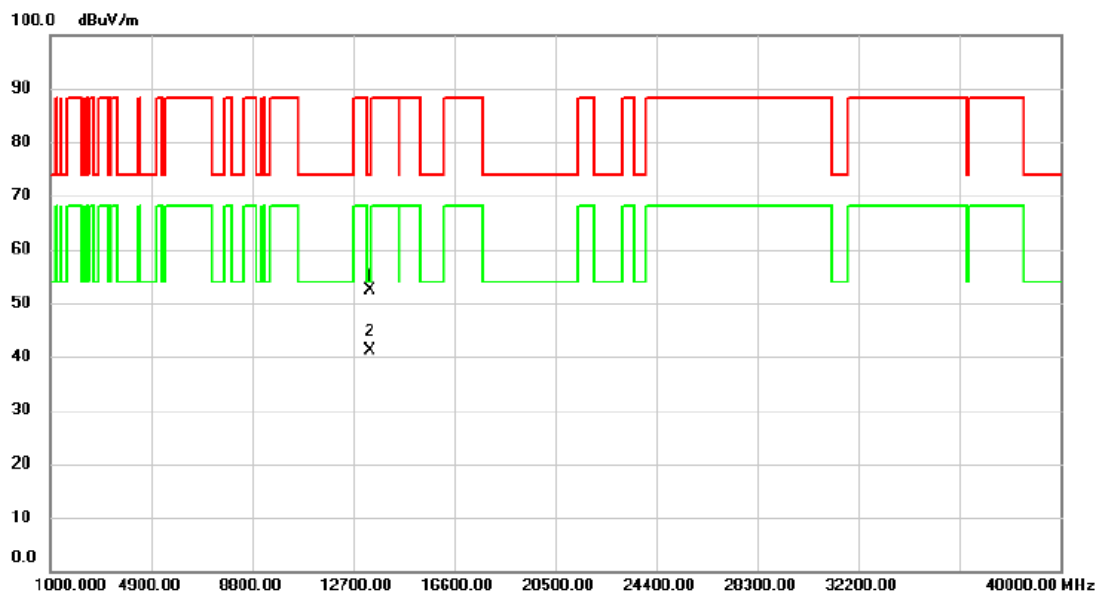


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		13370.00	36.03	16.43	52.46	74.00	-21.54	peak	
2	*	13370.00	24.70	16.43	41.13	54.00	-12.87	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE40) Mode 6845 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

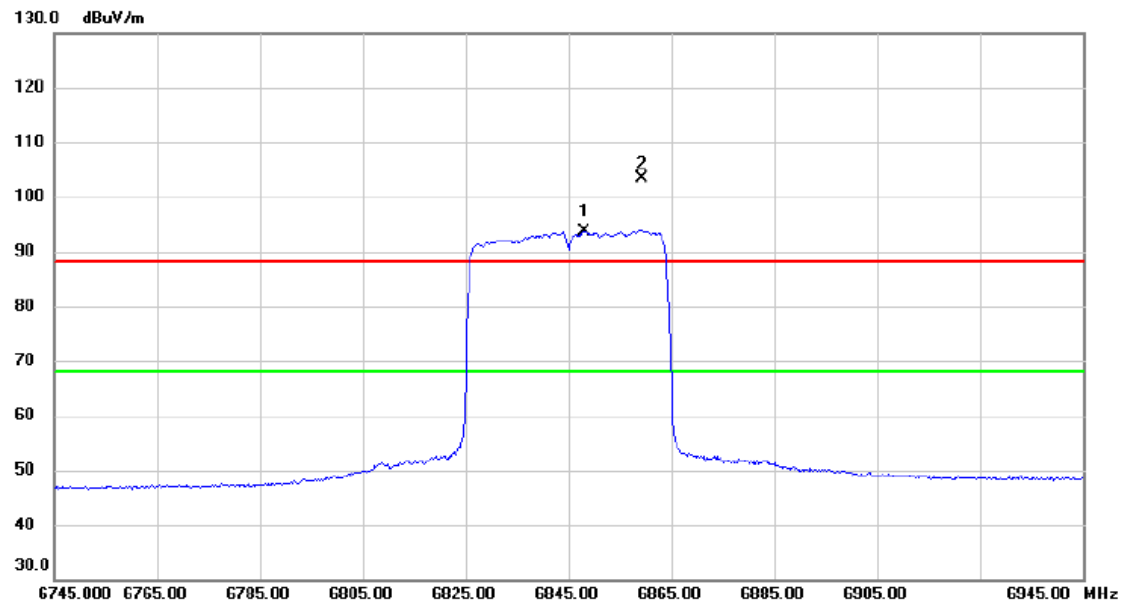


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6848.200	74.33	19.31	93.64	68.20	25.44	AVG	No Limit
2	X	6859.400	84.08	19.35	103.43	88.20	15.23	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE40) Mode 6845 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

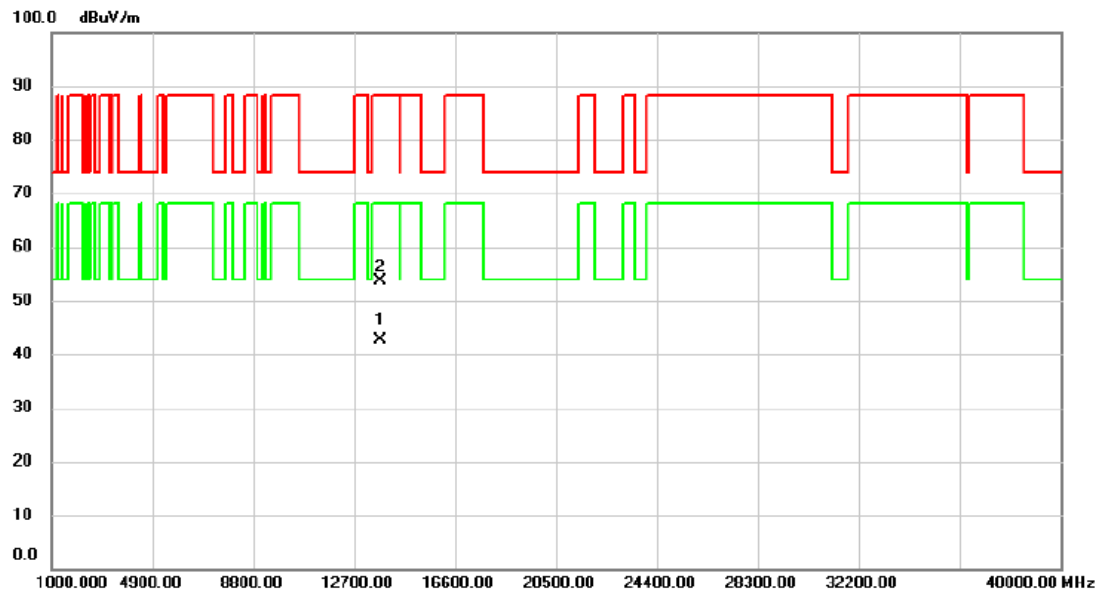


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	13688.18	25.49	17.20	42.69	68.20	-25.51	AVG	
2		13691.59	36.54	17.21	53.75	88.20	-34.45	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE40) Mode 6845 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

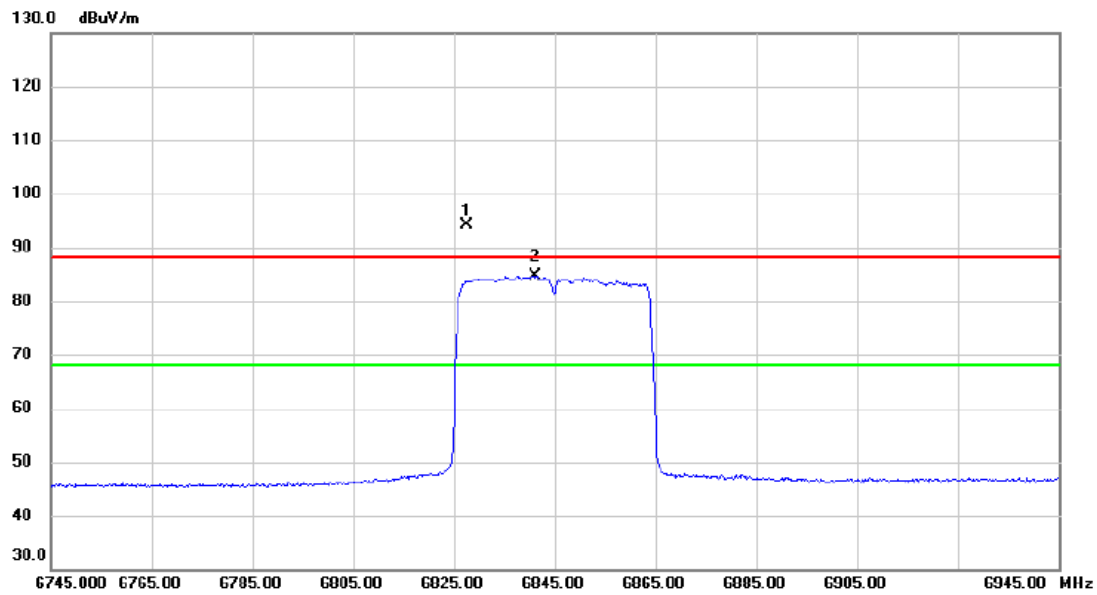


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6827.600	75.00	19.24	94.24	88.20	6.04	peak	No Limit
2	*	6841.000	65.32	19.28	84.60	68.20	16.40	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE40) Mode 6845 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

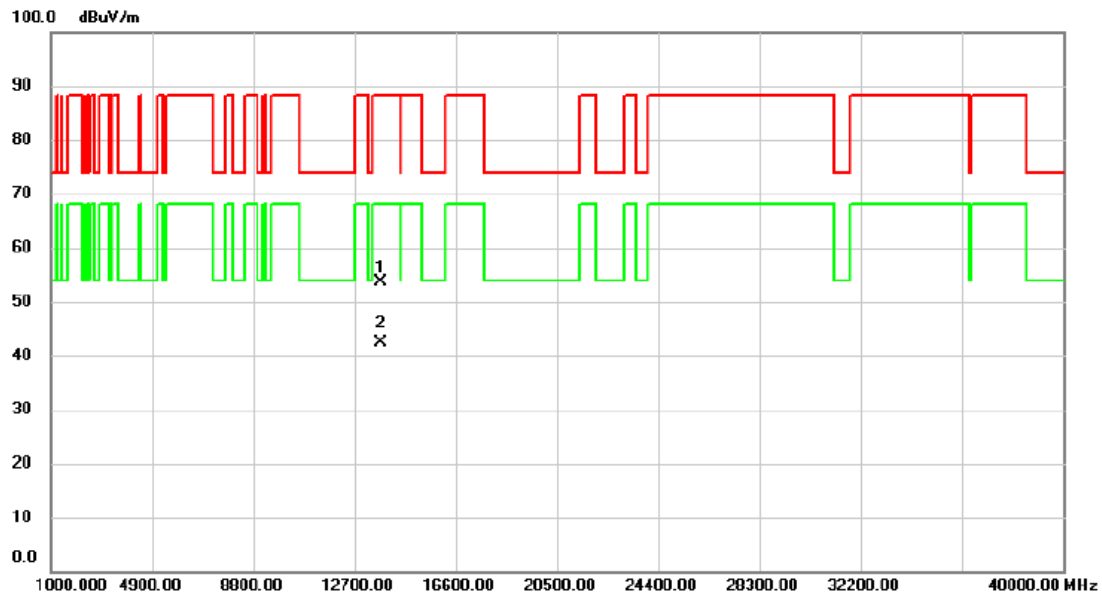


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		13690.00	36.49	17.20	53.69	88.20	-34.51	peak	
2	*	13690.00	25.23	17.20	42.43	68.20	-25.77	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE80) Mode 6625 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

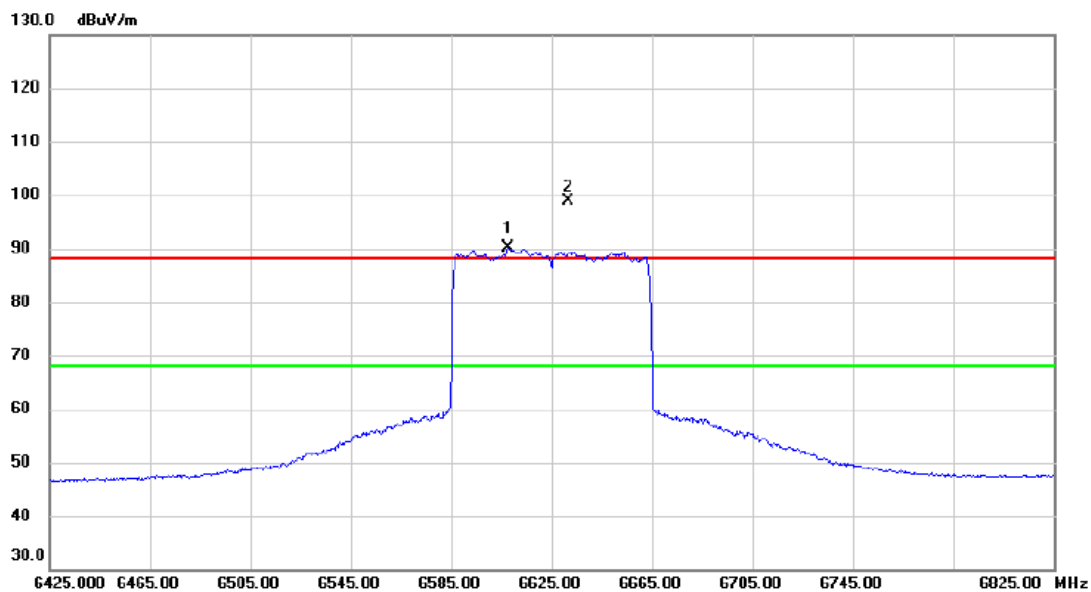


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6607.800	71.49	18.55	90.04	68.20	21.84	AVG	No Limit
2	X	6631.800	80.17	18.61	98.78	88.20	10.58	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE80) Mode 6625 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

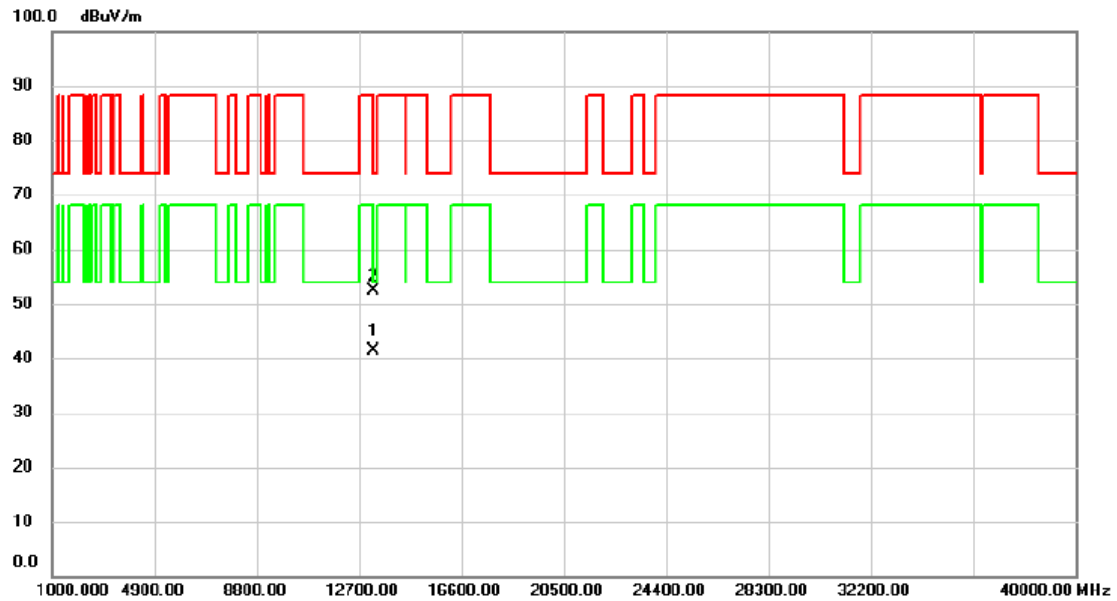


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		13248.61	25.06	16.24	41.30	68.20	-26.90	AVG	
2	*	13251.90	36.08	16.26	52.34	74.00	-21.66	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE80) Mode 6625 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

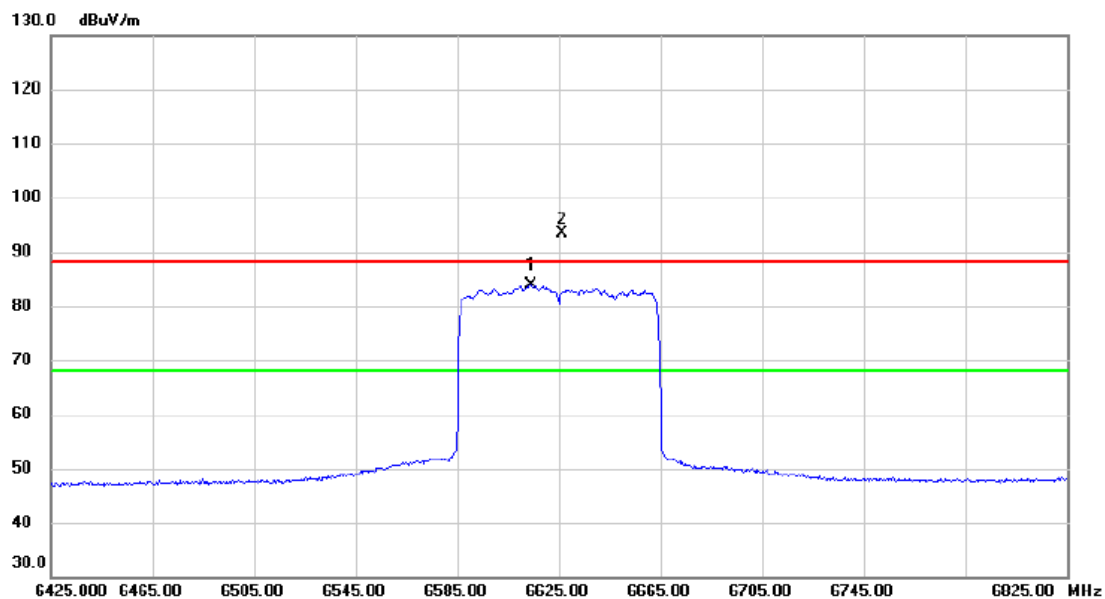


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6613.800	65.30	18.56	83.86	68.20	15.66	AVG	No Limit
2	X	6626.200	74.82	18.60	93.42	88.20	5.22	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE80) Mode 6625 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

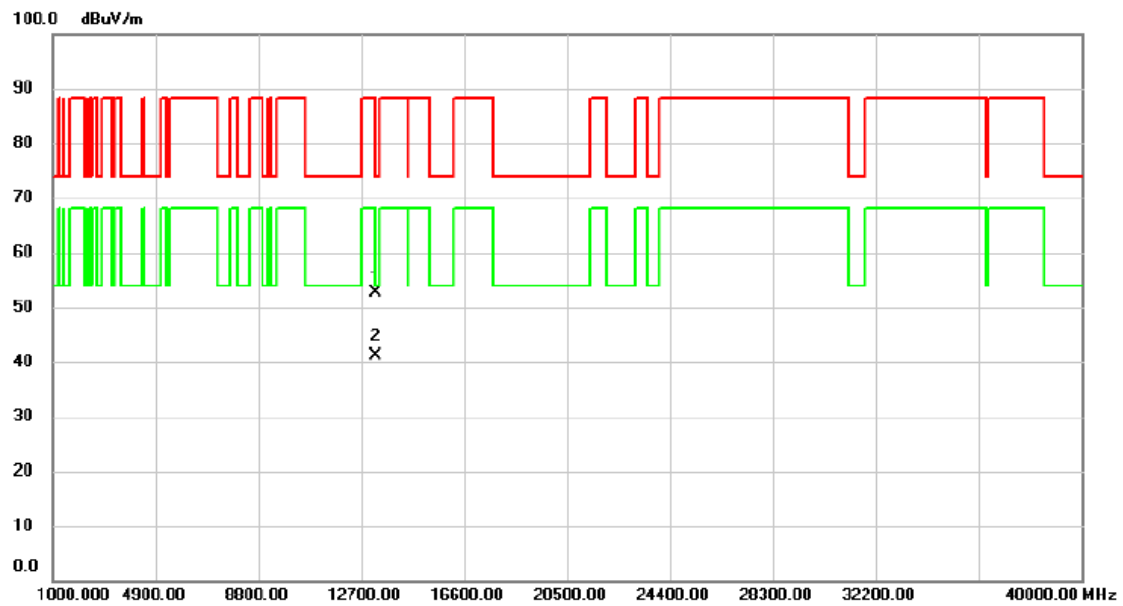


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		13250.00	36.27	16.26	52.53	74.00	-21.47	peak	
2	*	13250.00	24.76	16.26	41.02	54.00	-12.98	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE80) Mode 6705 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

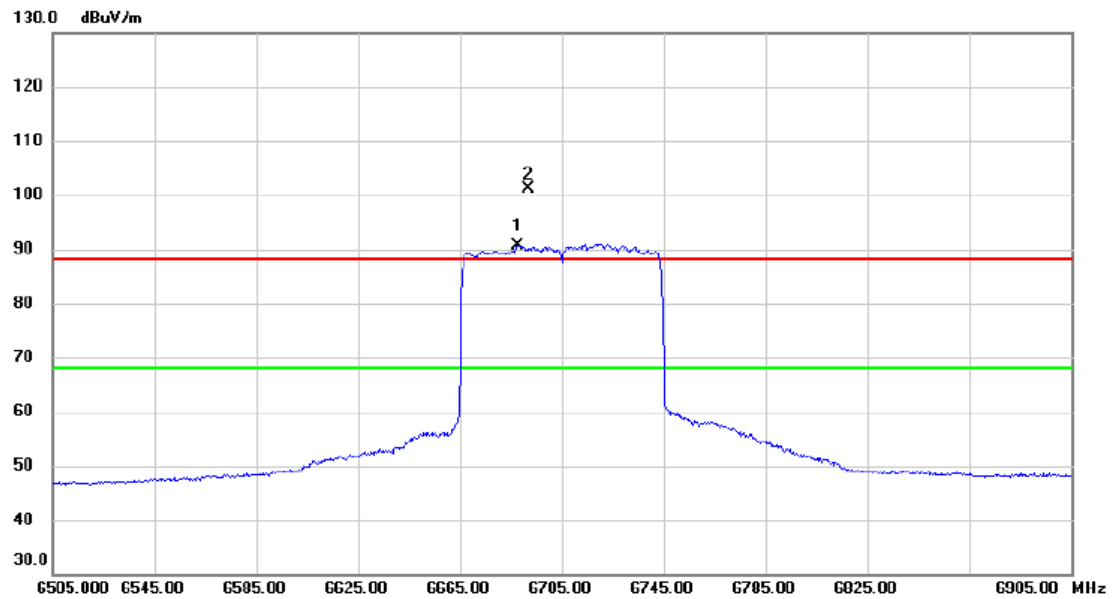


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6687.800	71.88	18.80	90.68	68.20	22.48	AVG	No Limit
2	X	6691.800	82.34	18.81	101.15	88.20	12.95	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE80) Mode 6705 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

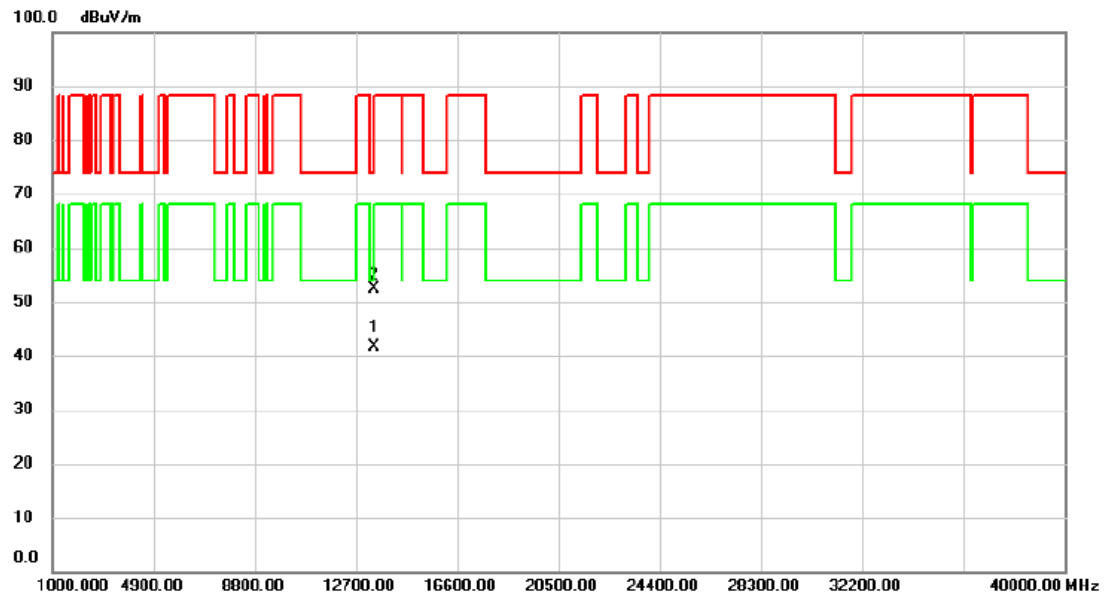


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	13407.52	25.19	16.49	41.68	68.20	-26.52	AVG	
2		13412.07	36.01	16.49	52.50	88.20	-35.70	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE80) Mode 6705 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

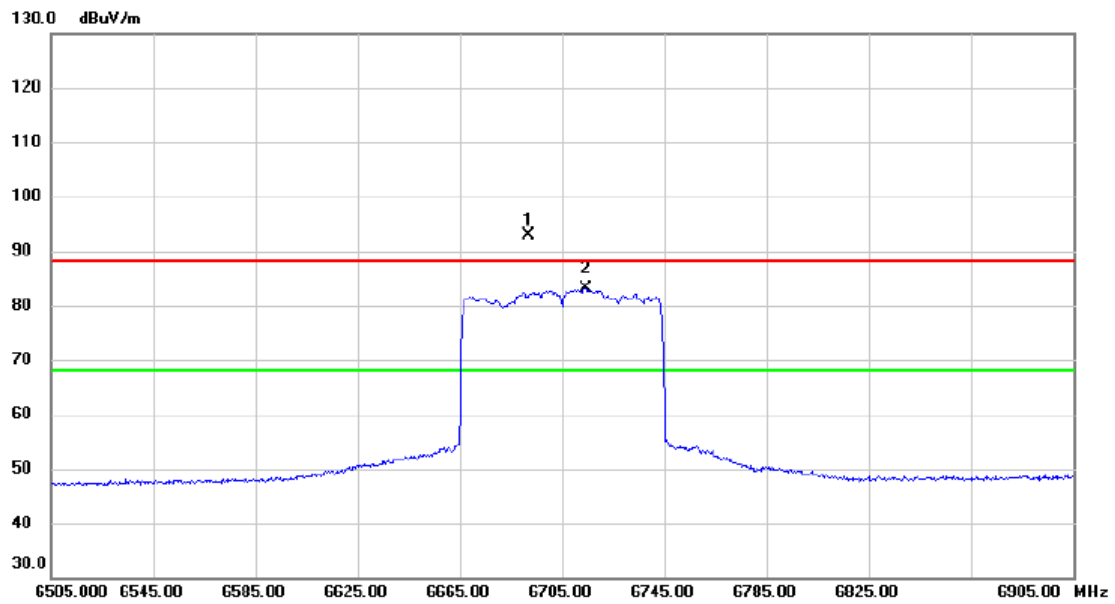


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6692.200	74.08	18.81	92.89	88.20	4.69	peak	No Limit
2	*	6714.200	64.30	18.88	83.18	68.20	14.98	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE80) Mode 6705 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

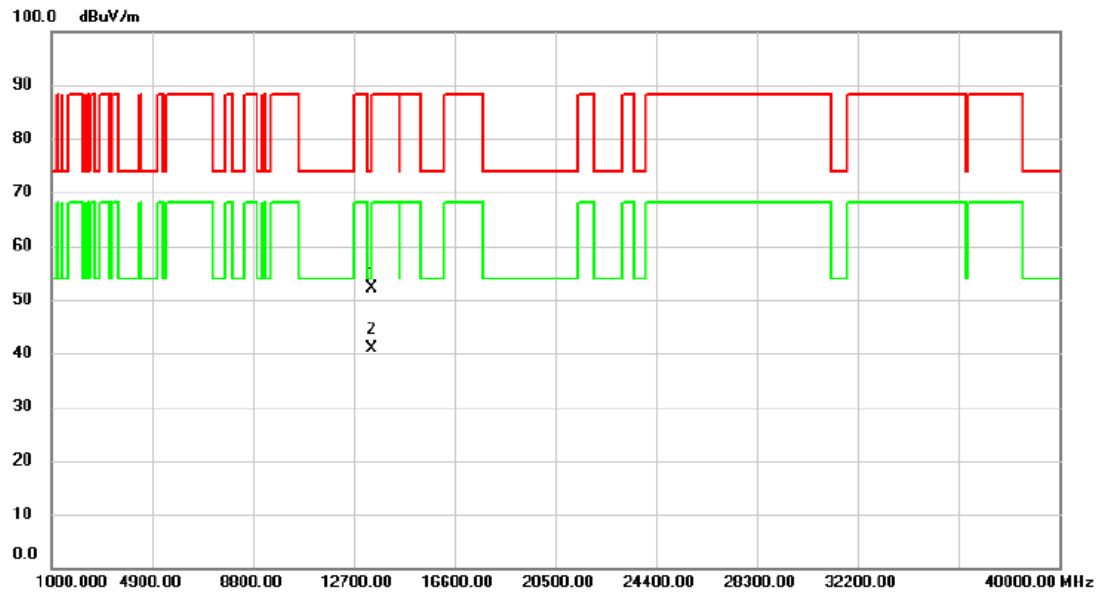


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		13410.00	35.66	16.49	52.15	88.20	-36.05	peak	
2	*	13410.00	24.42	16.49	40.91	68.20	-27.29	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE80) Mode 6785 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

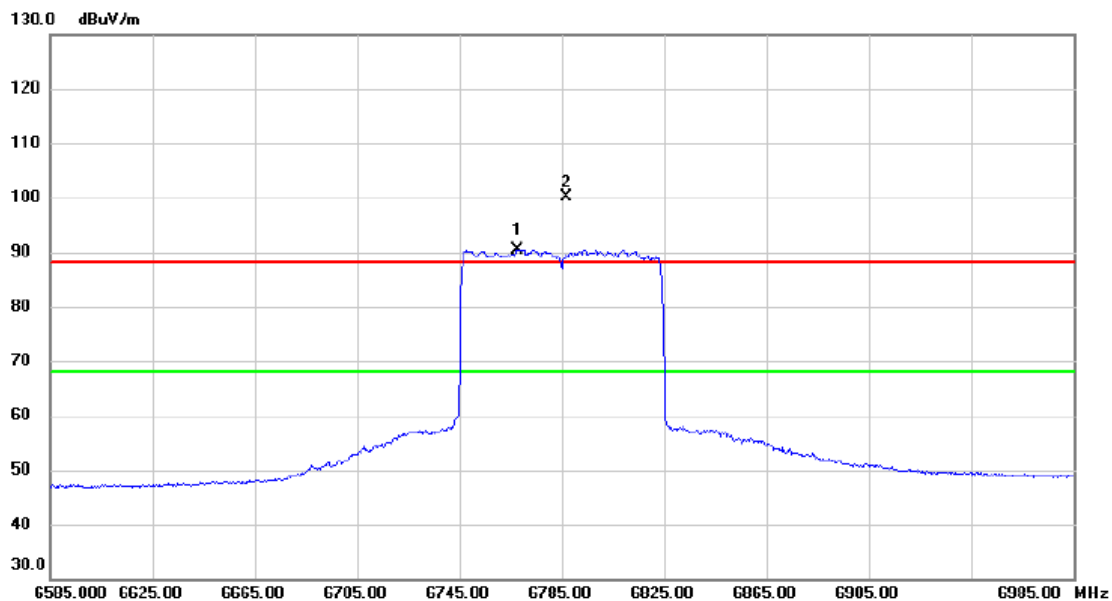


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6767.800	71.43	19.06	90.49	68.20	22.29	AVG	No Limit
2	X	6786.600	81.03	19.11	100.14	88.20	11.94	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE80) Mode 6785 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

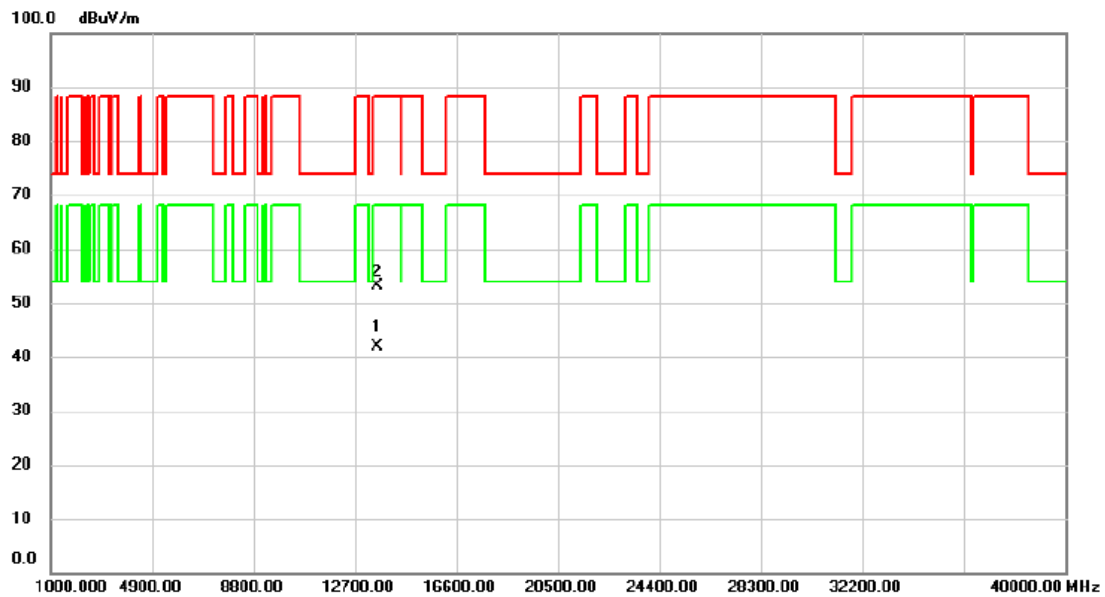


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	13569.31	25.02	16.83	41.85	68.20	-26.35	AVG	
2		13570.25	36.26	16.83	53.09	88.20	-35.11	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE80) Mode 6785 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

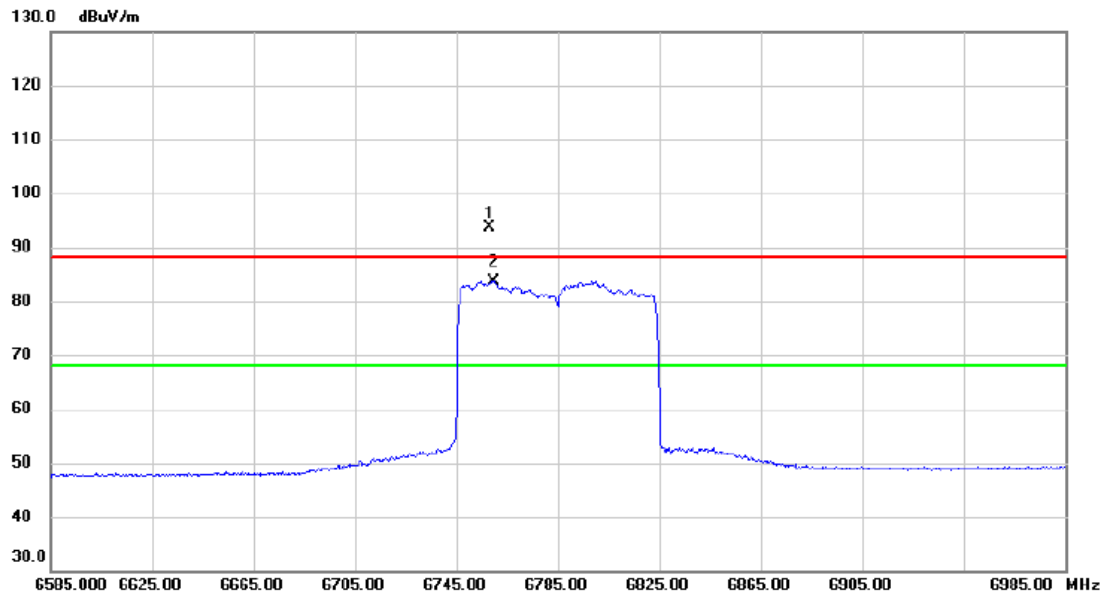


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6758.200	74.63	19.03	93.66	88.20	5.46	peak	No Limit
2	*	6759.800	64.61	19.03	83.64	68.20	15.44	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE80) Mode 6785 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

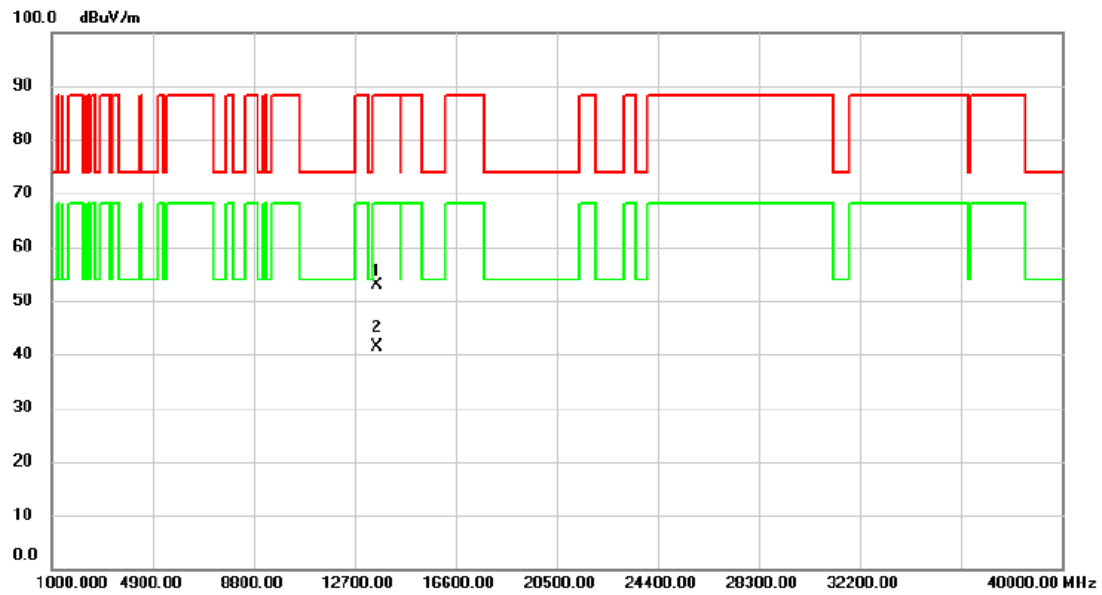


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		13570.00	36.01	16.83	52.84	88.20	-35.36	peak	
2	*	13570.00	24.57	16.83	41.40	68.20	-26.80	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE160) Mode 6665 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

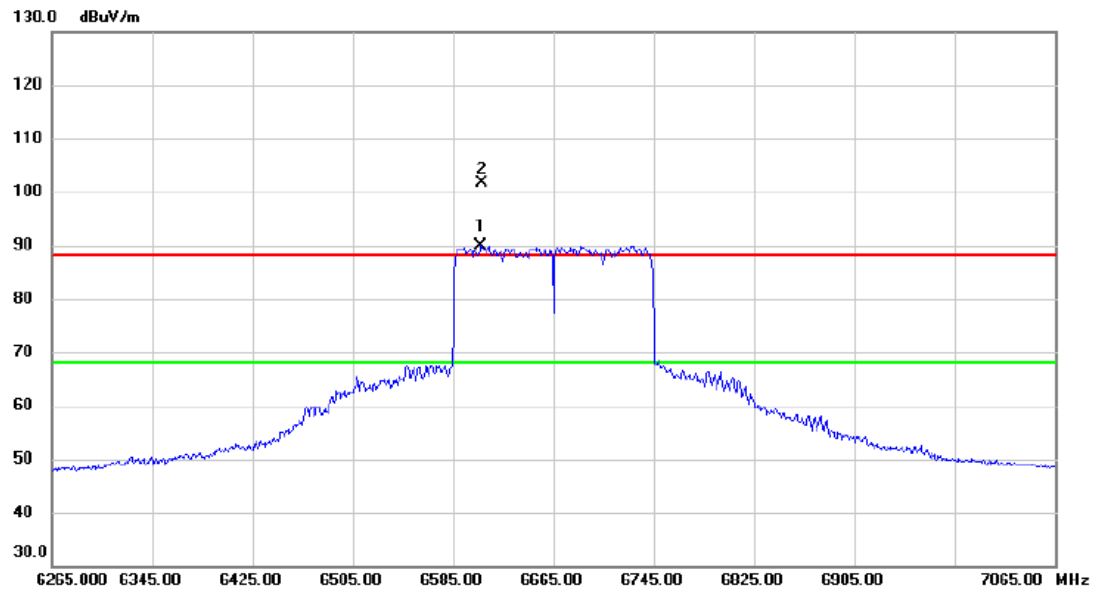


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	6607.400	71.46	18.54	90.00	68.20	21.80	AVG	No Limit
2	X	6608.200	83.03	18.55	101.58	88.20	13.38	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE160) Mode 6665 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

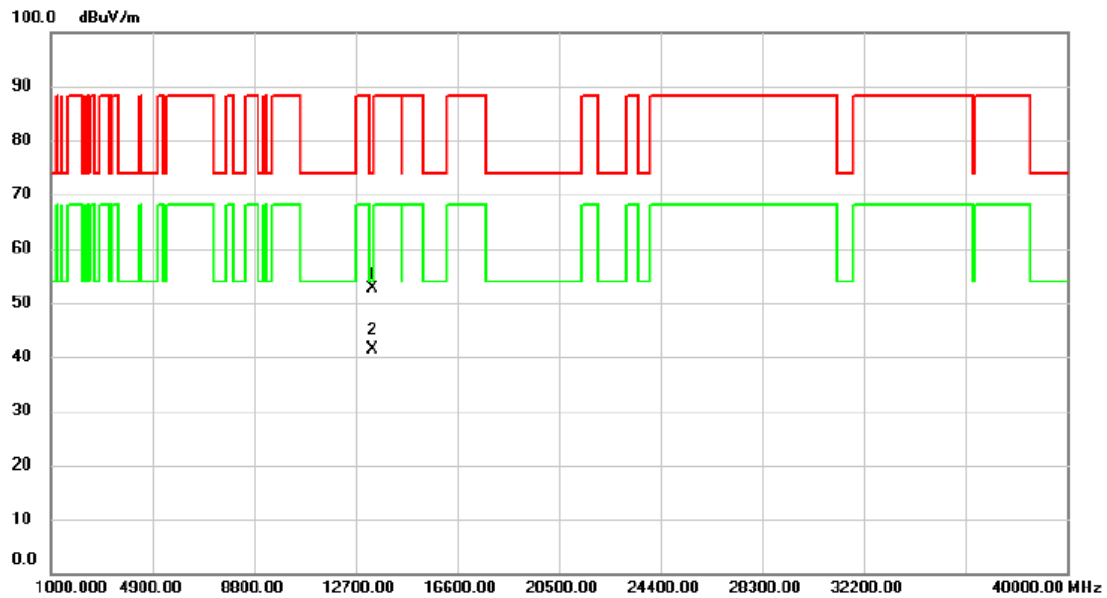


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		13330.60	36.15	16.37	52.52	74.00	-21.48	peak	
2	*	13330.89	25.06	16.37	41.43	54.00	-12.57	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE160) Mode 6665 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

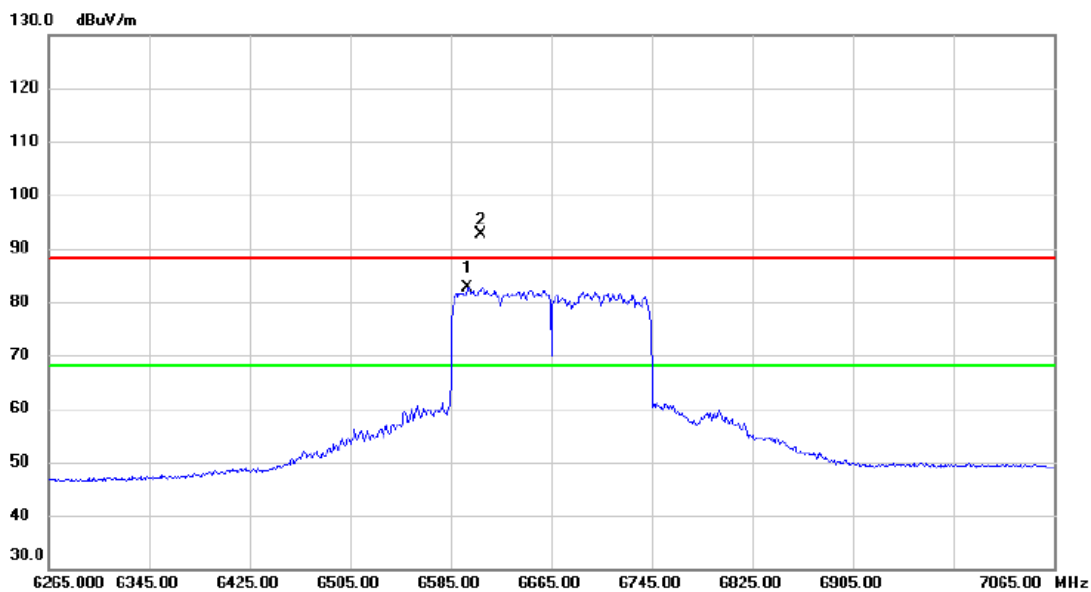


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6598.600	64.15	18.52	82.67	68.20	14.47	AVG	No Limit
2	X	6609.000	74.17	18.55	92.72	88.20	4.52	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX(HE160) Mode 6665 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

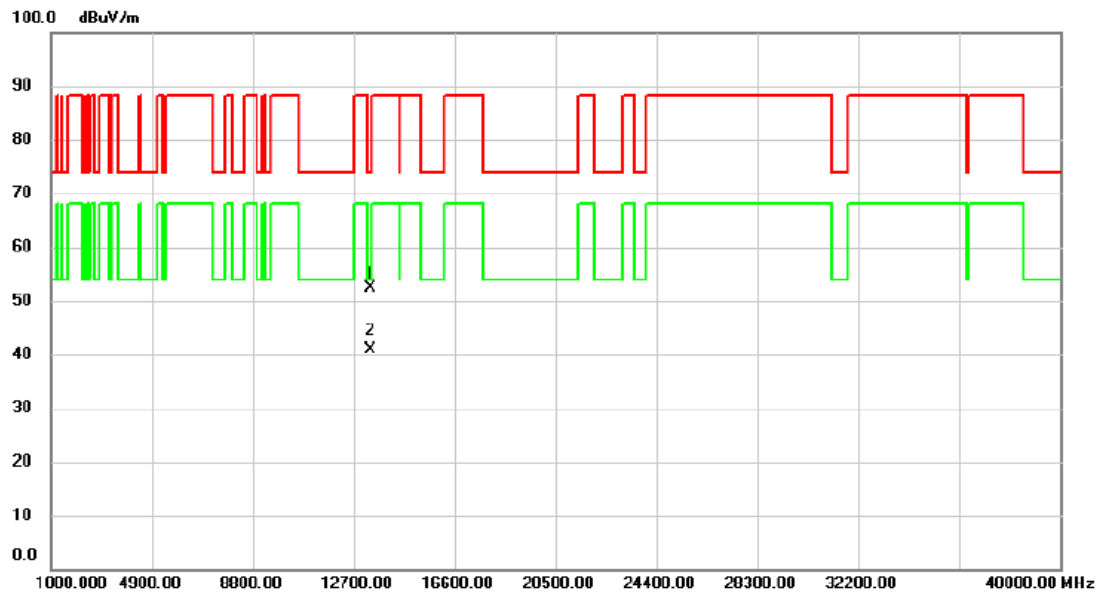


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		13330.00	36.04	16.36	52.40	74.00	-21.60	peak	
2	*	13330.00	24.55	16.36	40.91	54.00	-13.09	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6+UNII-7_TX AX(HE40) Mode 6525 MHz	Polarization	Vertical
-----------	---	--------------	----------

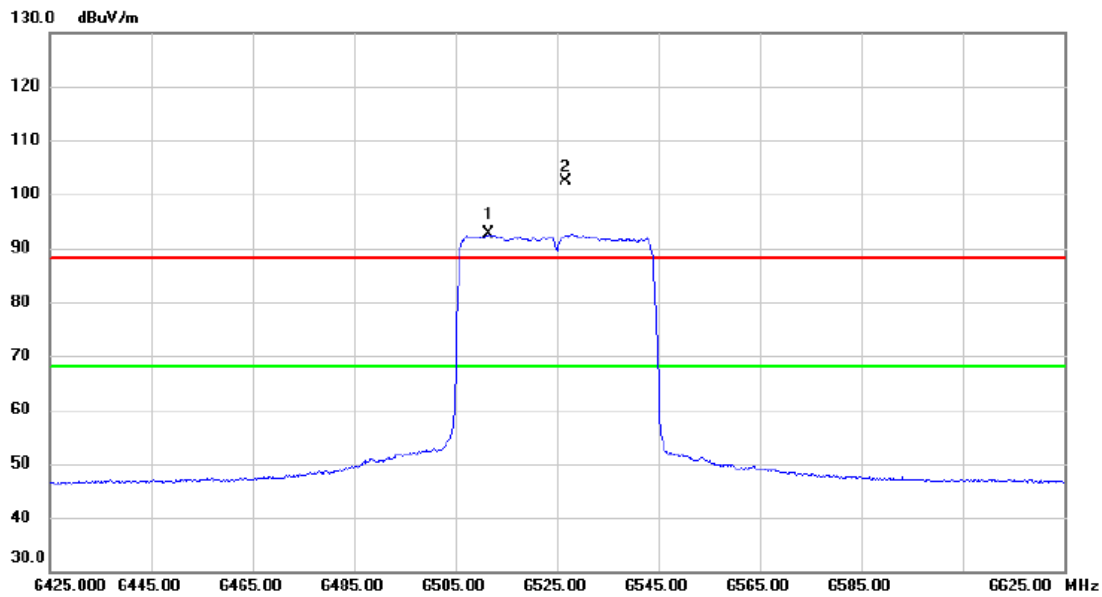


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6511.600	74.29	18.23	92.52	68.20	24.32	AVG	No Limit
2	X	6526.800	83.98	18.28	102.26	88.20	14.06	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6+UNII-7_TX AX(HE40) Mode 6525 MHz	Polarization	Vertical
-----------	---	--------------	----------

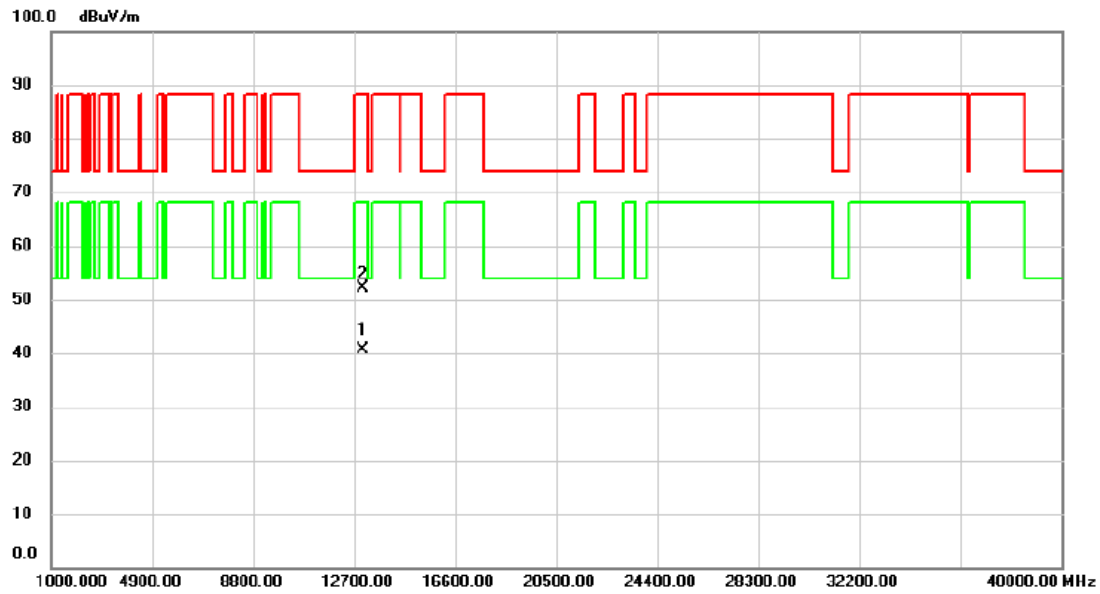


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	13051.46	24.64	15.96	40.60	68.20	-27.60	AVG	
2		13051.56	36.11	15.96	52.07	88.20	-36.13	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6+UNII-7_TX AX(HE40) Mode 6525 MHz	Polarization	Horizontal
-----------	---	--------------	------------

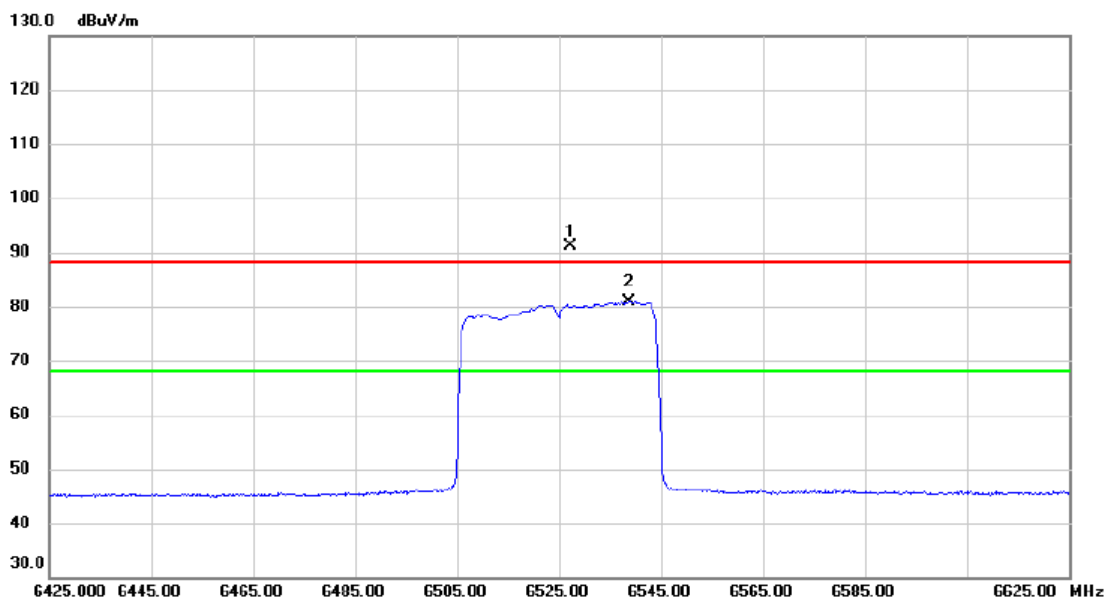


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6527.400	72.75	18.28	91.03	88.20	2.83	peak	No Limit
2	*	6538.600	62.61	18.32	80.93	68.20	12.73	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6+UNII-7_TX AX(HE40) Mode 6525 MHz	Polarization	Horizontal
-----------	---	--------------	------------

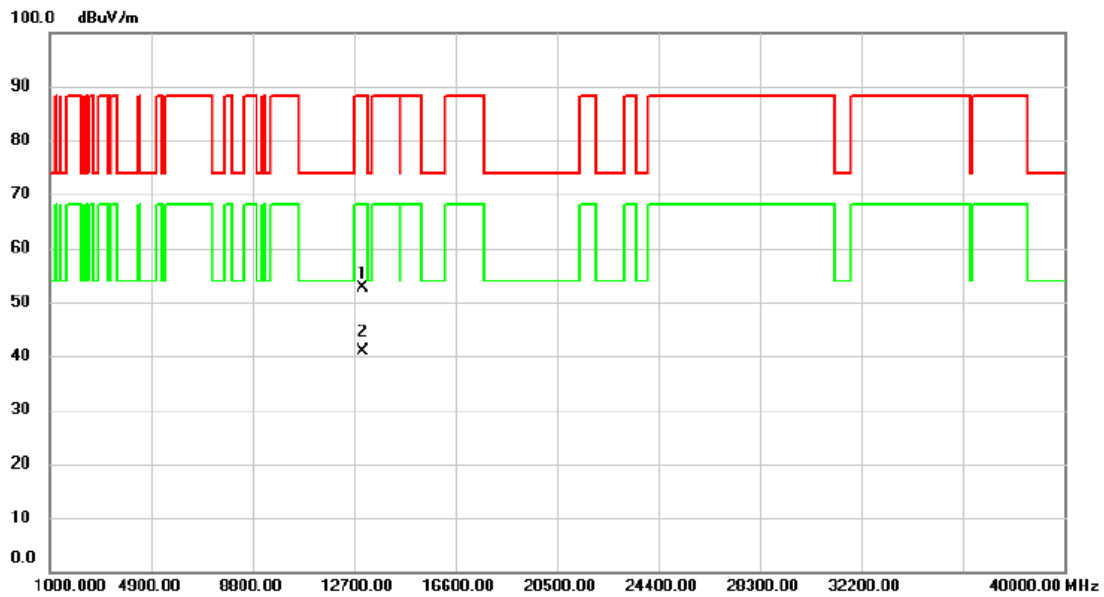


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		13050.00	36.72	15.96	52.68	88.20	-35.52	peak	
2	*	13050.00	24.96	15.96	40.92	68.20	-27.28	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6+UNII-7_TX AX(HE80) Mode 6545 MHz	Polarization	Vertical
-----------	---	--------------	----------

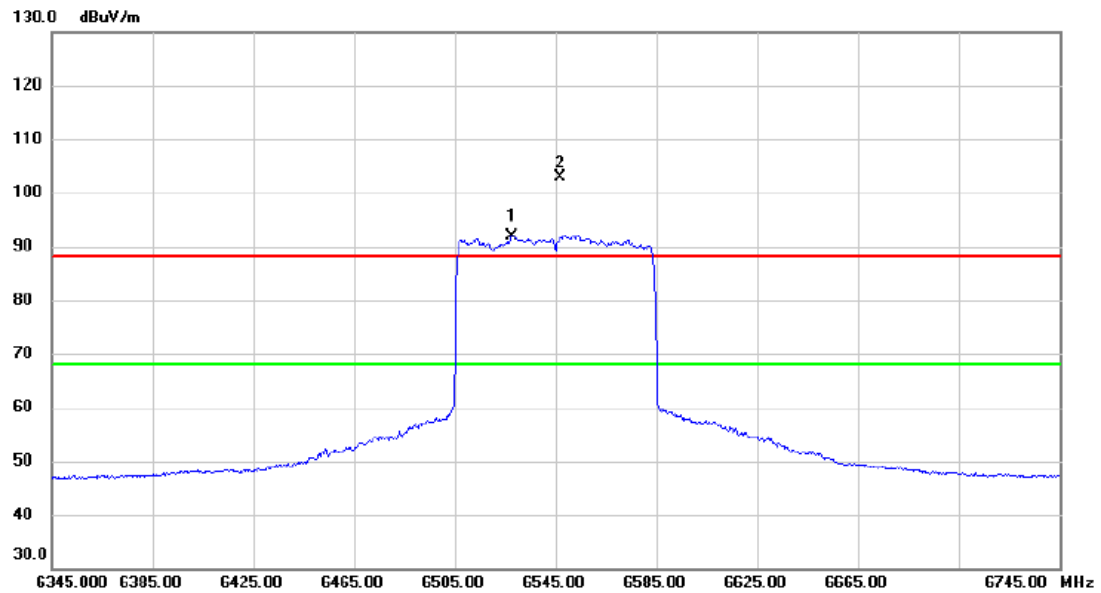


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6527.800	73.67	18.29	91.96	68.20	23.76	AVG	No Limit
2	X	6546.600	84.43	18.34	102.77	88.20	14.57	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6+UNII-7_TX AX(HE80) Mode 6545 MHz	Polarization	Vertical
-----------	---	--------------	----------

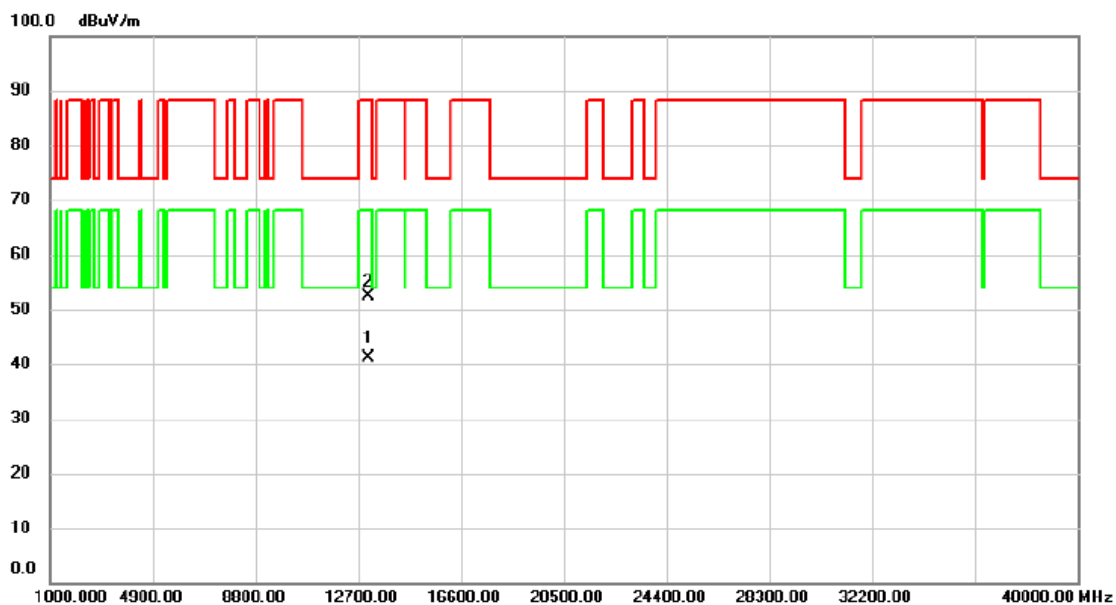


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13087.83	25.13	16.01	41.14	68.20	-27.06	AVG	
2		13089.65	36.34	16.01	52.35	88.20	-35.85	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6+UNII-7_TX AX(HE80) Mode 6545 MHz	Polarization	Horizontal
-----------	---	--------------	------------

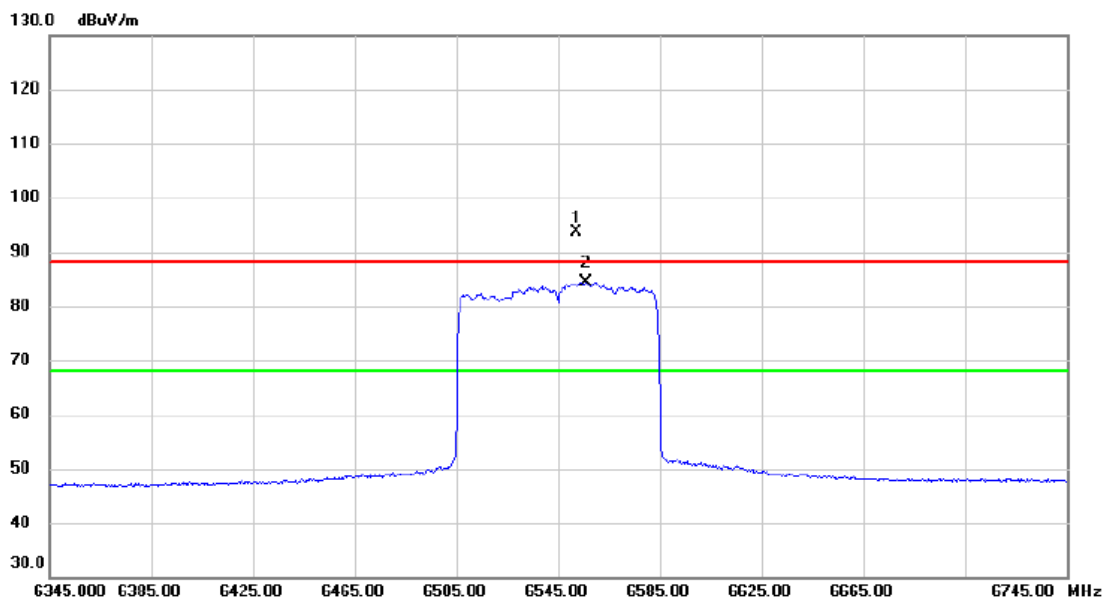


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6552.200	75.16	18.37	93.53	88.20	5.33	peak	No Limit
2	*	6555.800	65.98	18.38	84.36	68.20	16.16	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6+UNII-7_TX AX(HE80) Mode 6545 MHz	Polarization	Horizontal
-----------	---	--------------	------------

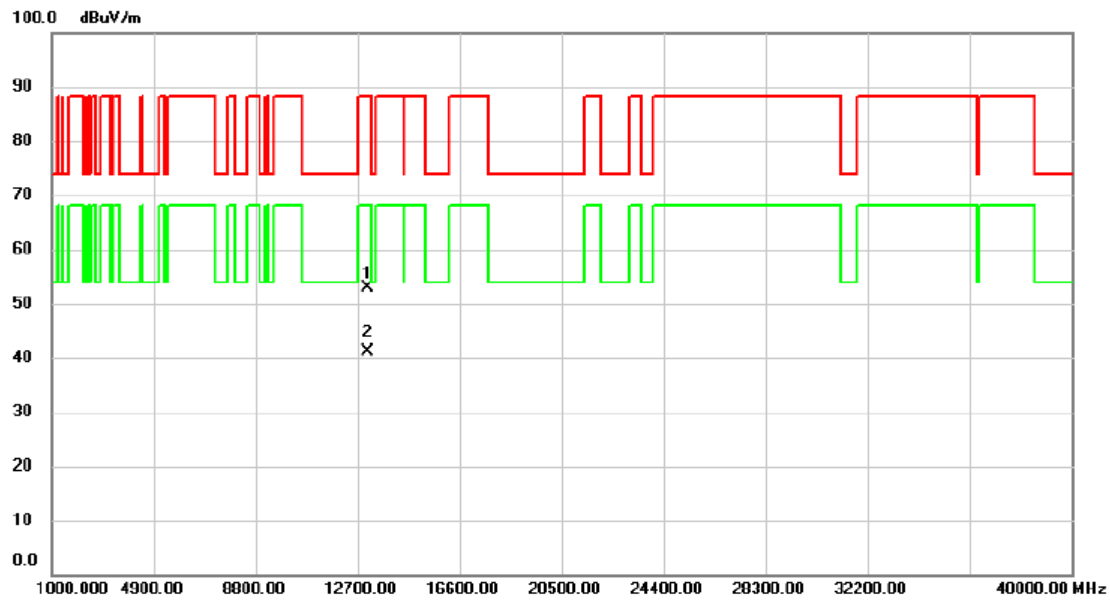


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		13090.00	36.97	16.01	52.98	88.20	-35.22	peak	
2	*	13090.00	25.16	16.01	41.17	68.20	-27.03	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6+UNII-7_TX AX(HE160) Mode 6505 MHz	Polarization	Vertical
-----------	--	--------------	----------

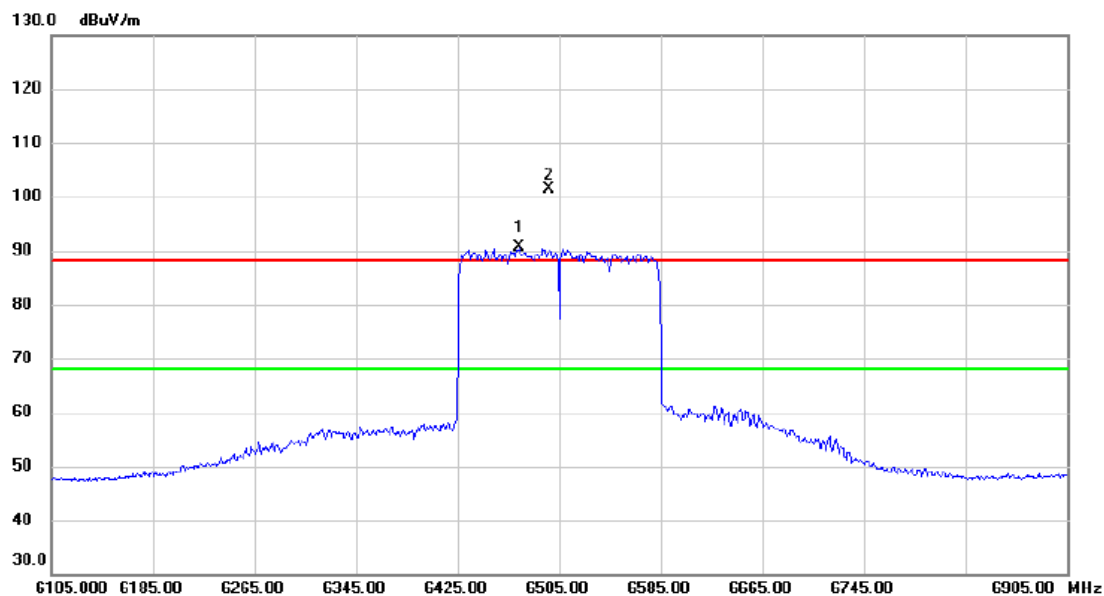


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6473.800	72.42	18.14	90.56	68.20	22.36	AVG	No Limit
2	X	6497.000	83.18	18.20	101.38	88.20	13.18	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6+UNII-7_TX AX(HE160) Mode 6505 MHz	Polarization	Vertical
-----------	--	--------------	----------

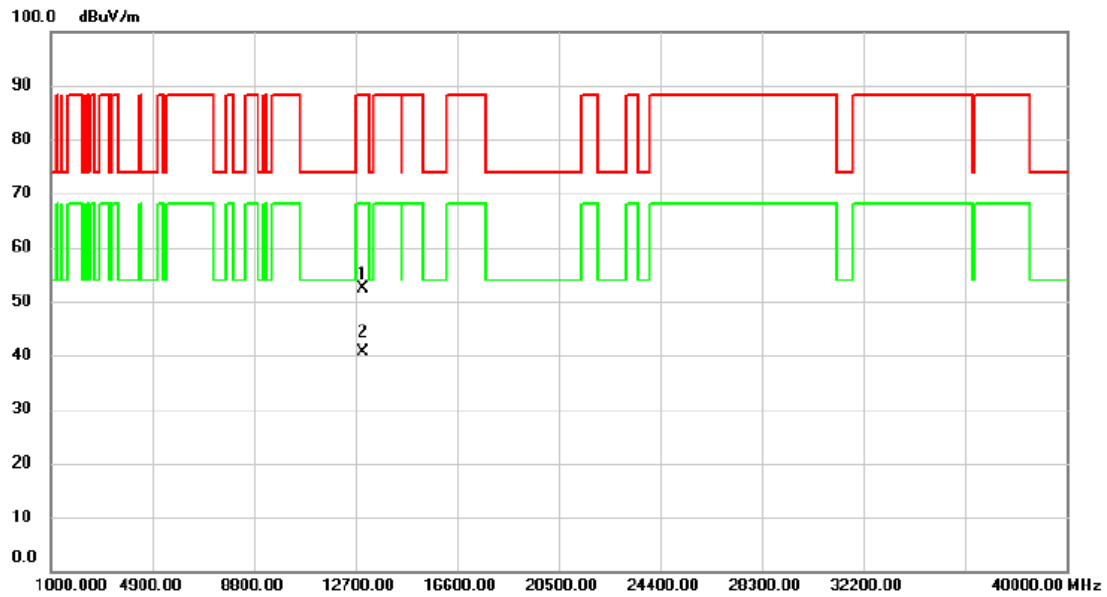


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		13007.77	36.42	15.89	52.31	88.20	-35.89	peak	
2	*	13011.70	24.76	15.90	40.66	68.20	-27.54	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6+UNII-7_TX AX(HE160) Mode 6505 MHz	Polarization	Horizontal
-----------	--	--------------	------------

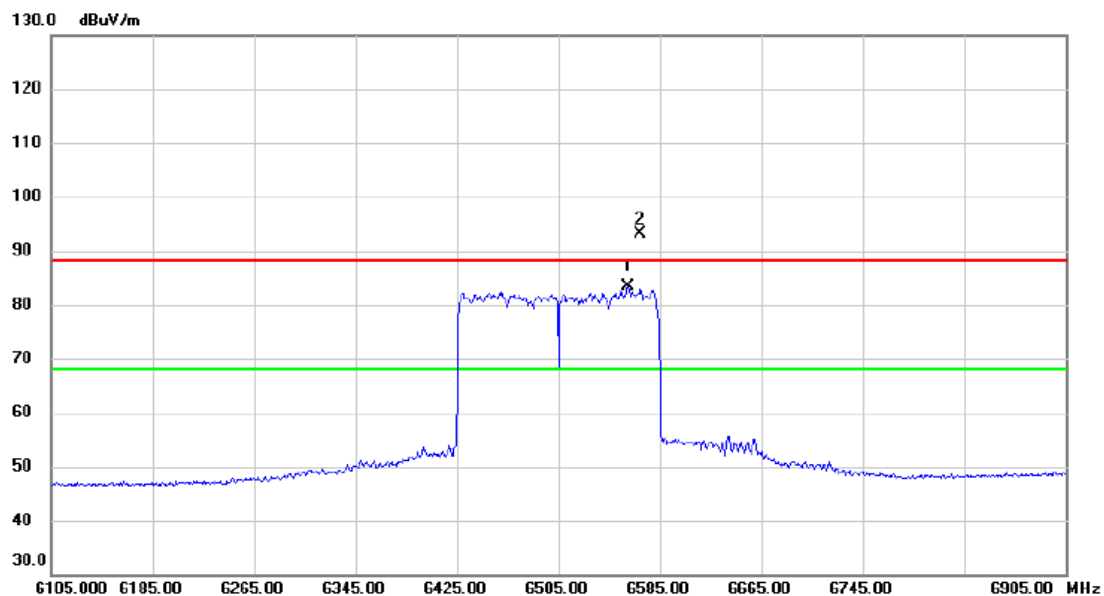


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6560.200	64.98	18.40	83.38	68.20	15.18	AVG	No Limit
2	X	6569.800	74.76	18.43	93.19	88.20	4.99	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6+UNII-7_TX AX(HE160) Mode 6505 MHz	Polarization	Horizontal
-----------	--	--------------	------------

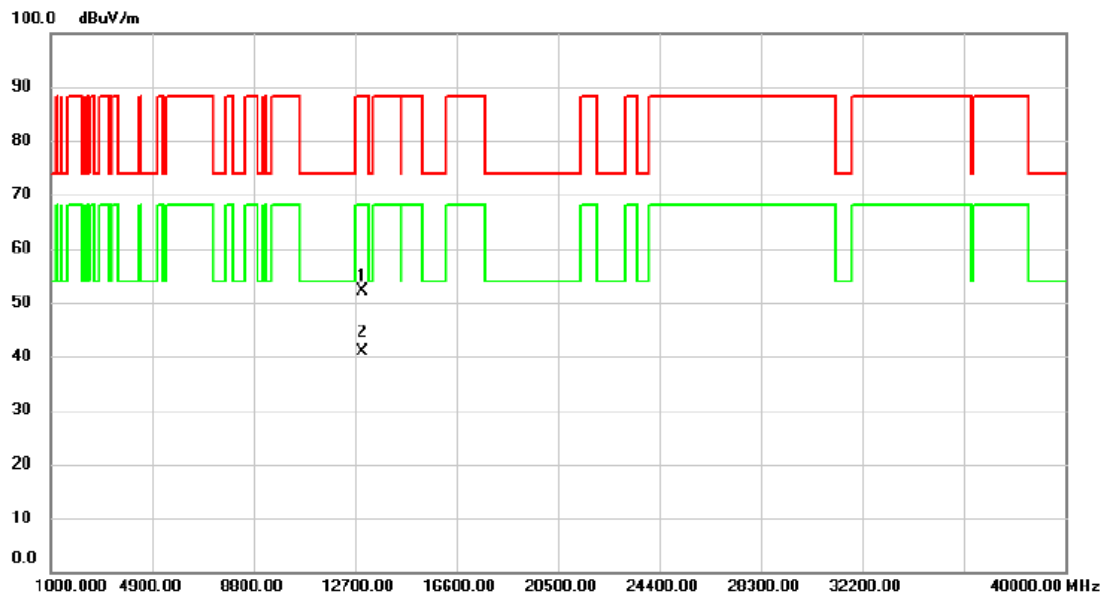


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		13010.00	36.15	15.90	52.05	88.20	-36.15	peak	
2	*	13010.00	25.04	15.90	40.94	68.20	-27.26	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE20) Mode 6895 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

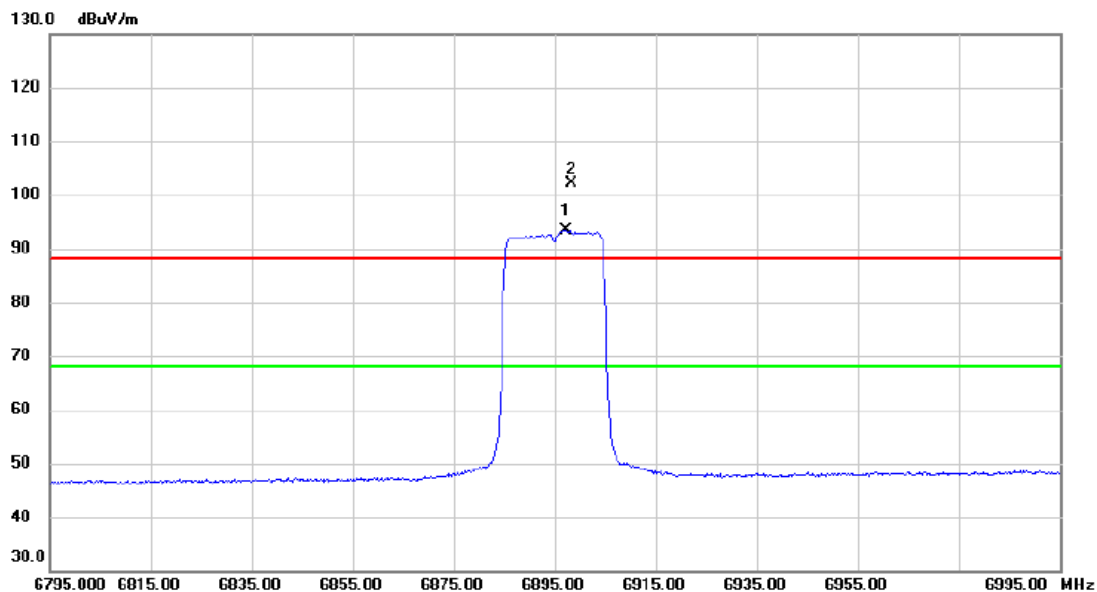


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6897.400	73.98	19.46	93.44	68.20	25.24	AVG	No Limit
2	X	6898.400	82.66	19.47	102.13	88.20	13.93	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE20) Mode 6895 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

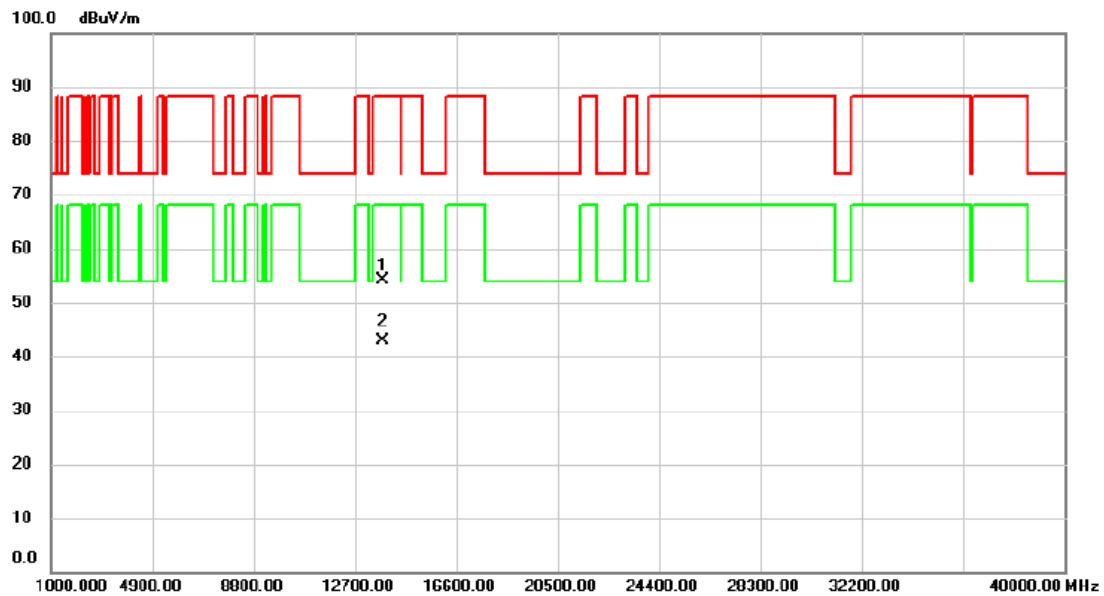


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		13789.89	36.53	17.52	54.05	88.20	-34.15	peak	
2	*	13790.22	25.35	17.52	42.87	68.20	-25.33	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE20) Mode 6895 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

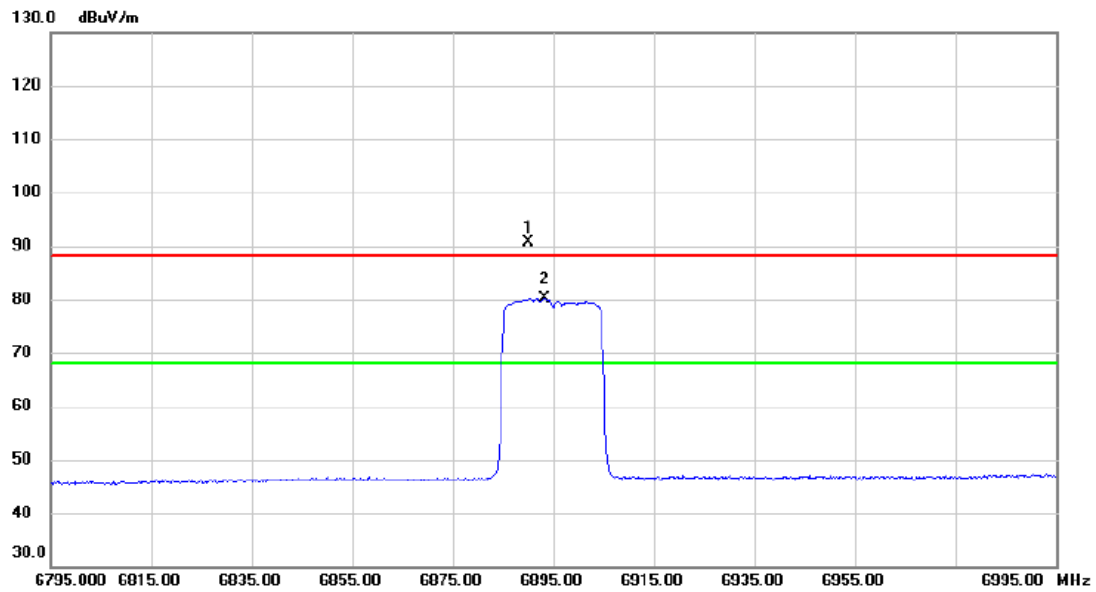


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6890.000	71.14	19.44	90.58	88.20	2.38	peak	No Limit
2	*	6893.200	60.70	19.45	80.15	68.20	11.95	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE20) Mode 6895 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

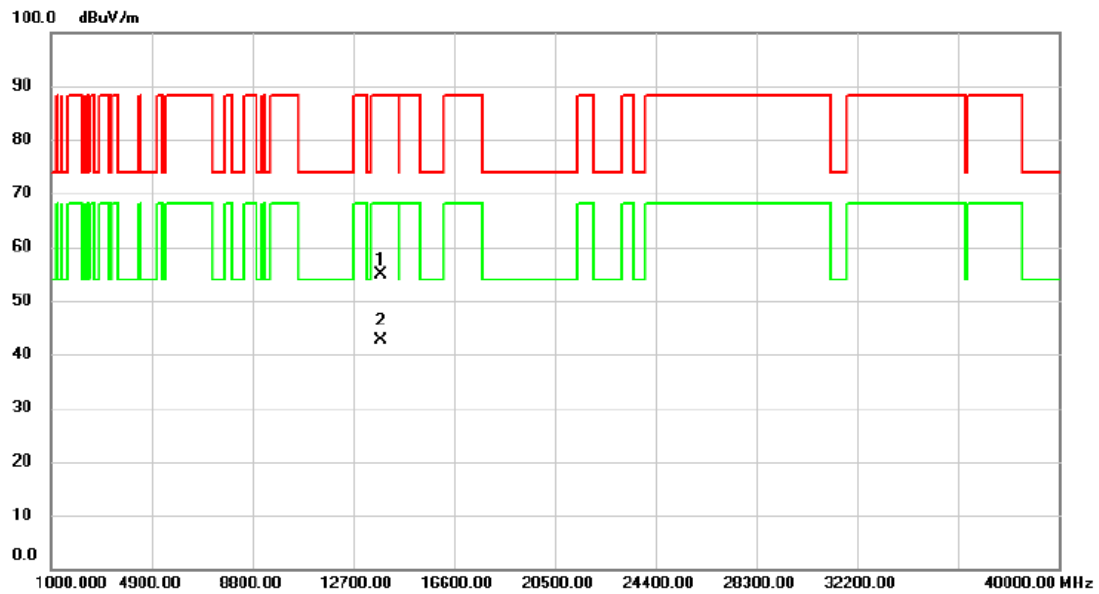


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		13790.00	37.27	17.52	54.79	88.20	-33.41	peak	
2	*	13790.00	25.17	17.52	42.69	68.20	-25.51	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE20) Mode 7015 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

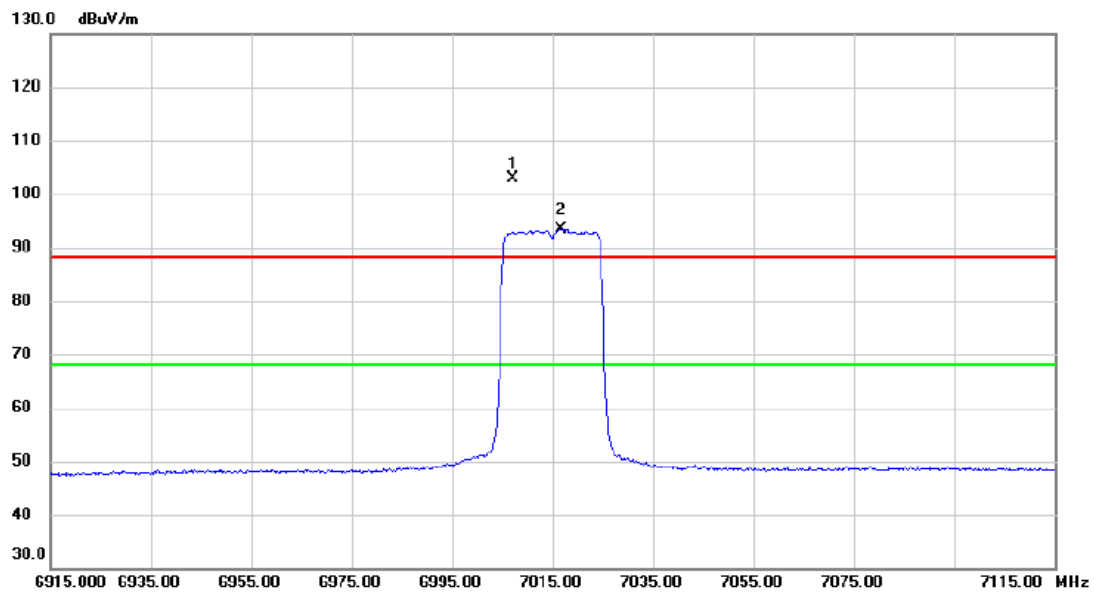


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	7007.200	83.09	19.80	102.89	88.20	14.69	peak	No Limit
2	*	7016.800	73.63	19.80	93.43	68.20	25.23	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE20) Mode 7015 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

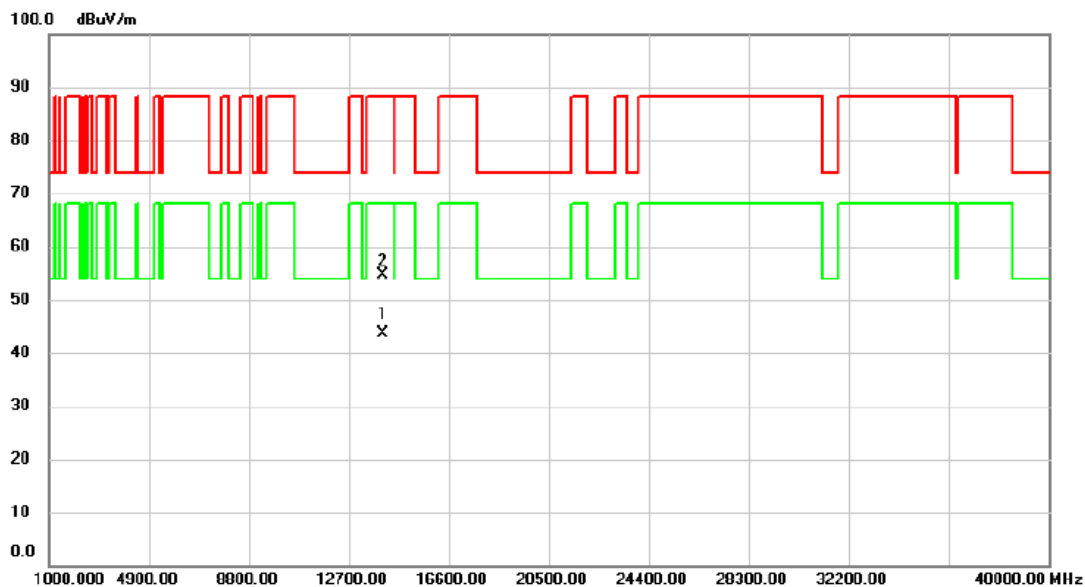


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	14028.41	25.49	18.25	43.74	68.20	-24.46	AVG	
2		14031.65	36.38	18.25	54.63	88.20	-33.57	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE20) Mode 7015 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

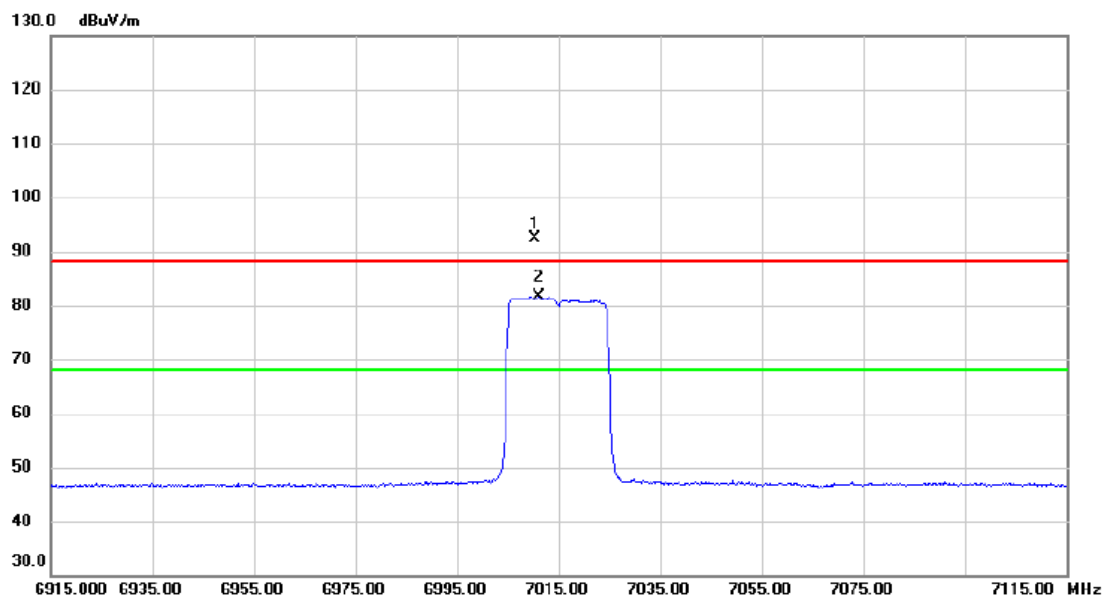


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	7010.400	72.70	19.80	92.50	88.20	4.30	peak	No Limit
2	*	7011.200	61.85	19.80	81.65	68.20	13.45	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE20) Mode 7015 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

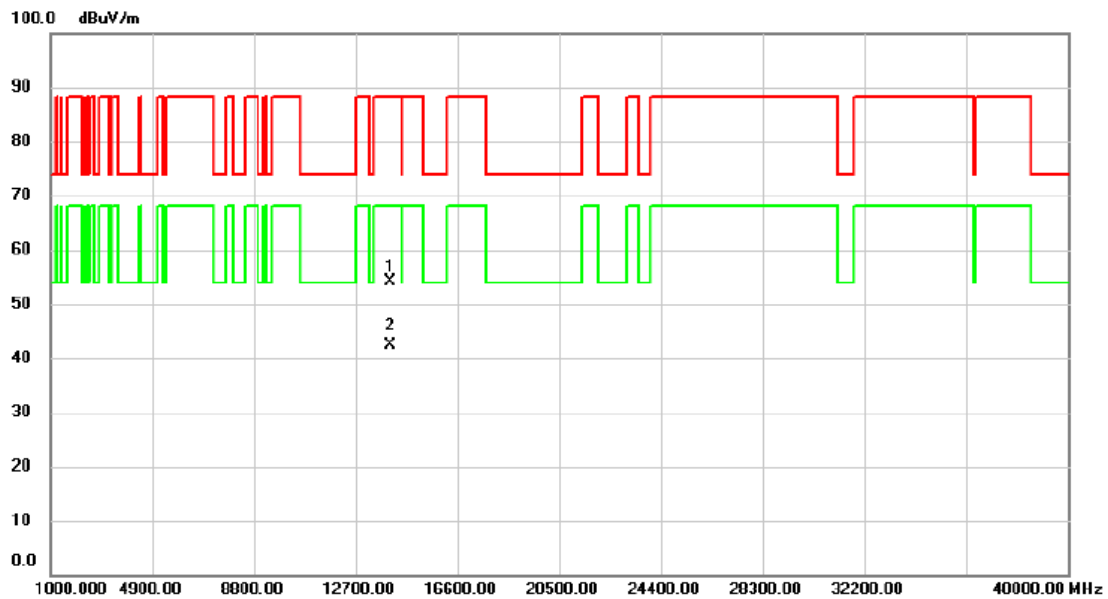


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		14030.00	35.91	18.25	54.16	88.20	-34.04	peak	
2	*	14030.00	24.19	18.25	42.44	68.20	-25.76	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE40) Mode 6925 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

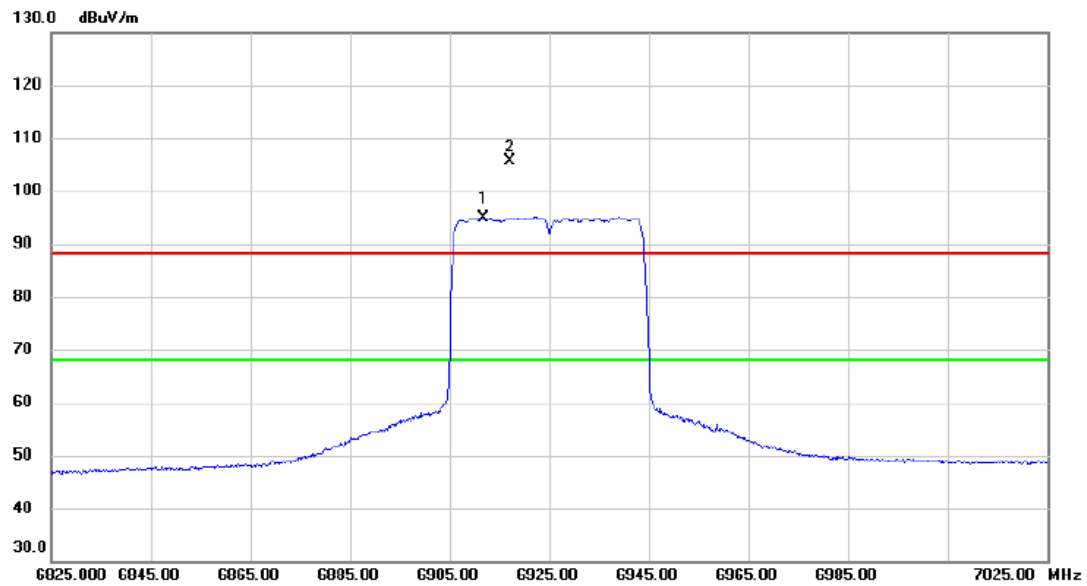


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6911.800	75.40	19.50	94.90	68.20	26.70	AVG	No Limit
2	X	6917.200	86.20	19.52	105.72	88.20	17.52	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE40) Mode 6925 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

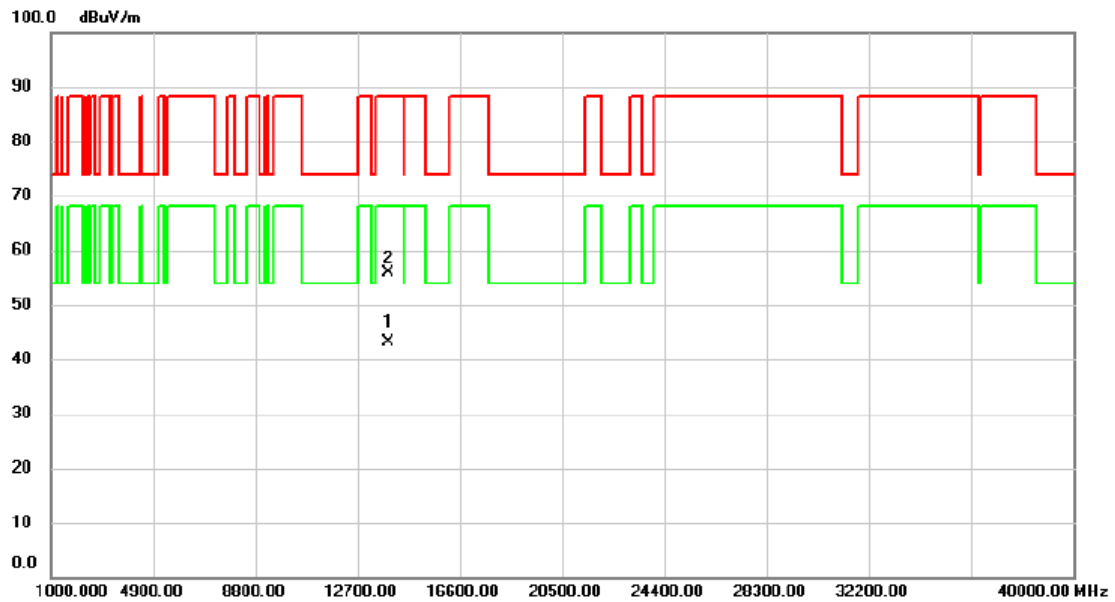


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	13847.70	25.44	17.70	43.14	68.20	-25.06	AVG	
2		13848.45	38.24	17.70	55.94	88.20	-32.26	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE40) Mode 6925 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

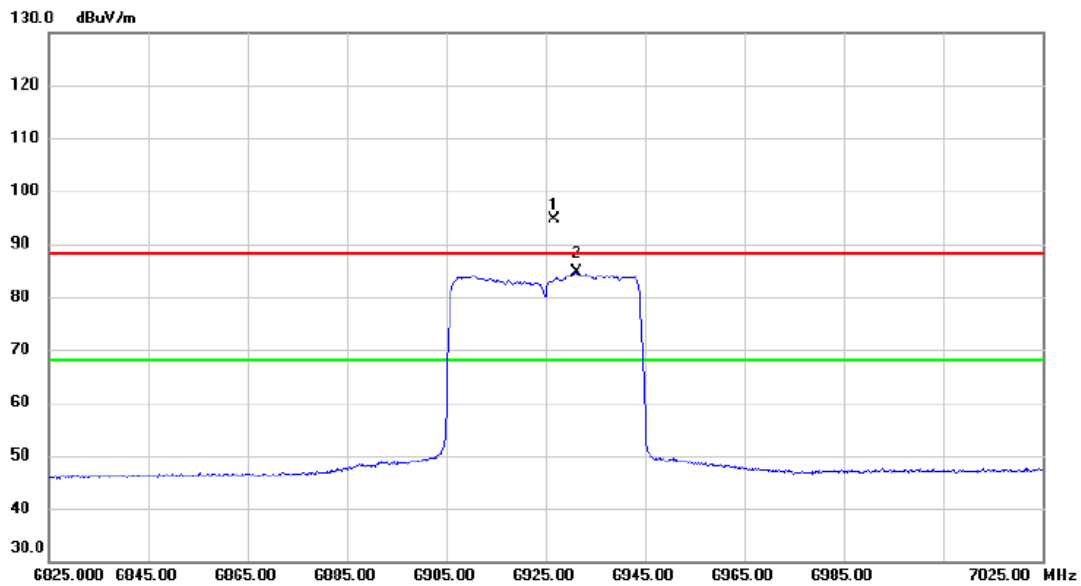


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6926.600	75.00	19.55	94.55	88.20	6.35	peak	No Limit
2	*	6931.200	65.10	19.57	84.67	68.20	16.47	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE40) Mode 6925 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

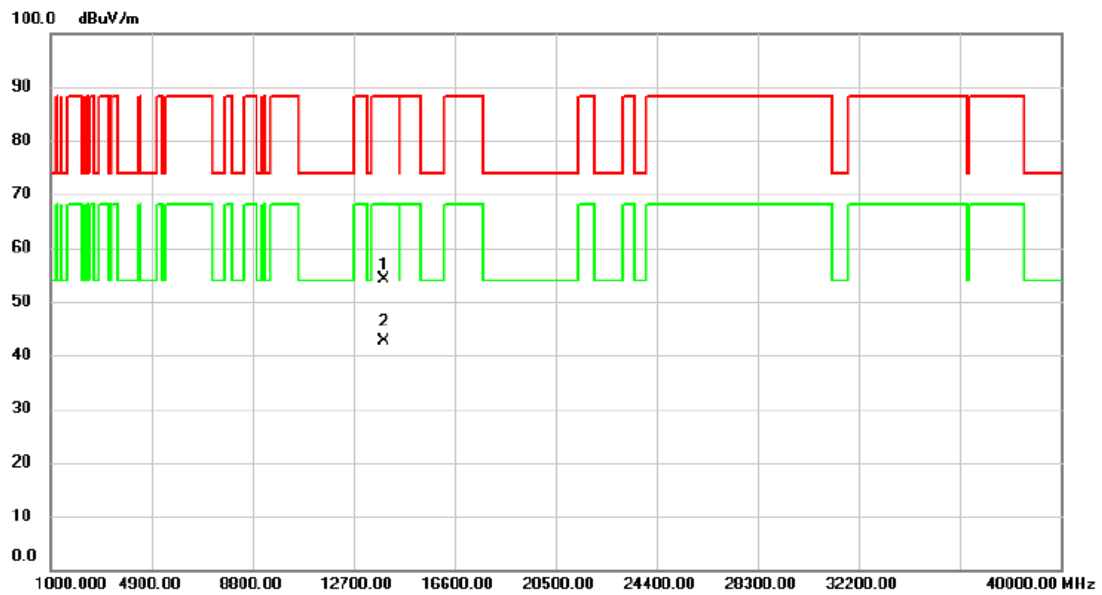


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		13850.00	36.45	17.71	54.16	88.20	-34.04	peak	
2	*	13850.00	24.89	17.71	42.60	68.20	-25.60	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE40) Mode 7005 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

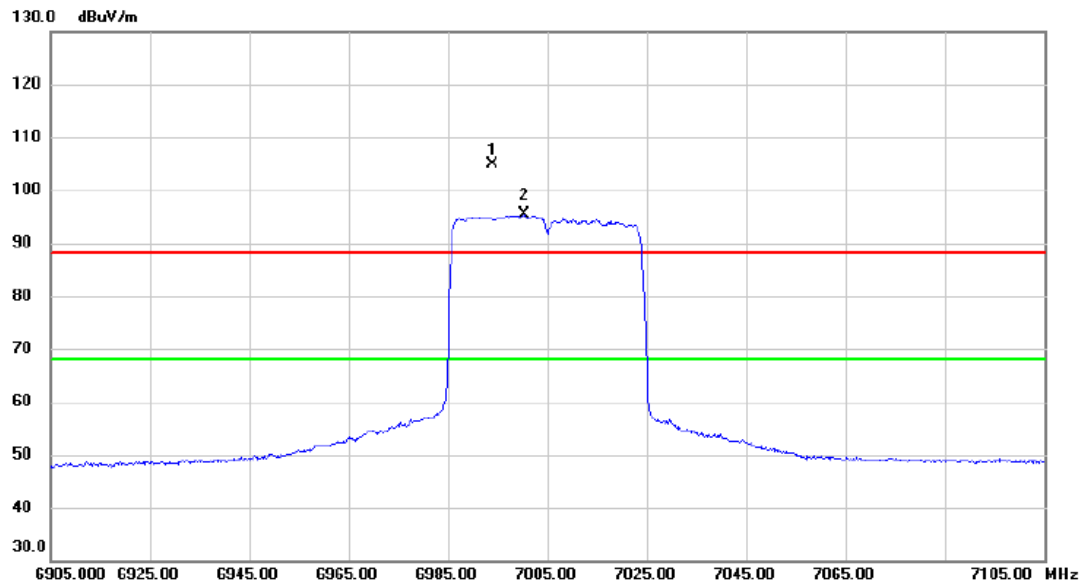


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6993.800	85.01	19.77	104.78	88.20	16.58	peak	No Limit
2	*	7000.400	75.56	19.79	95.35	68.20	27.15	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE40) Mode 7005 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

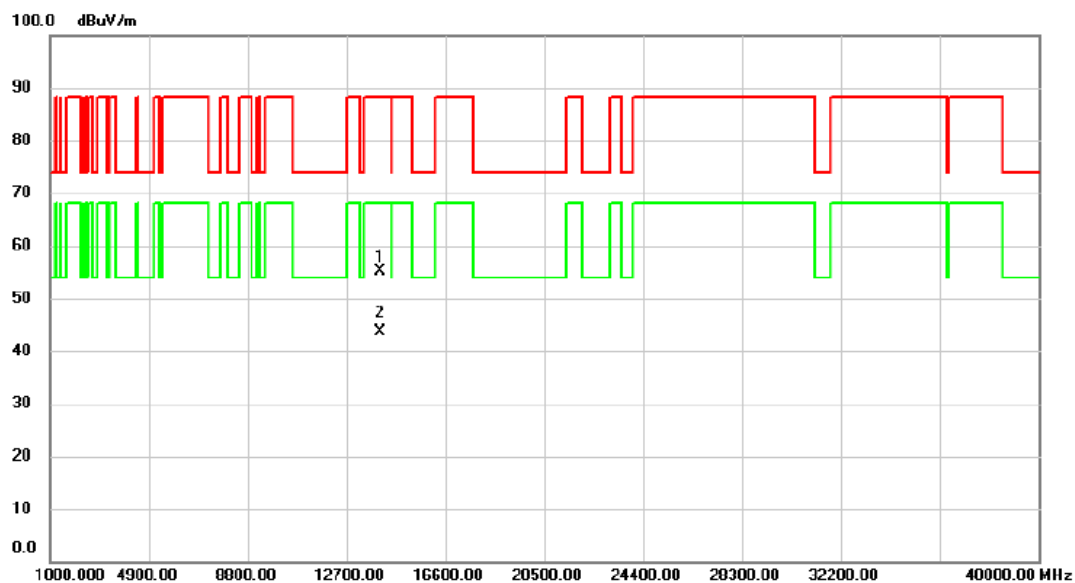


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		14010.50	36.88	18.20	55.08	88.20	-33.12	peak	
2	*	14010.63	25.42	18.20	43.62	68.20	-24.58	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE40) Mode 7005 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

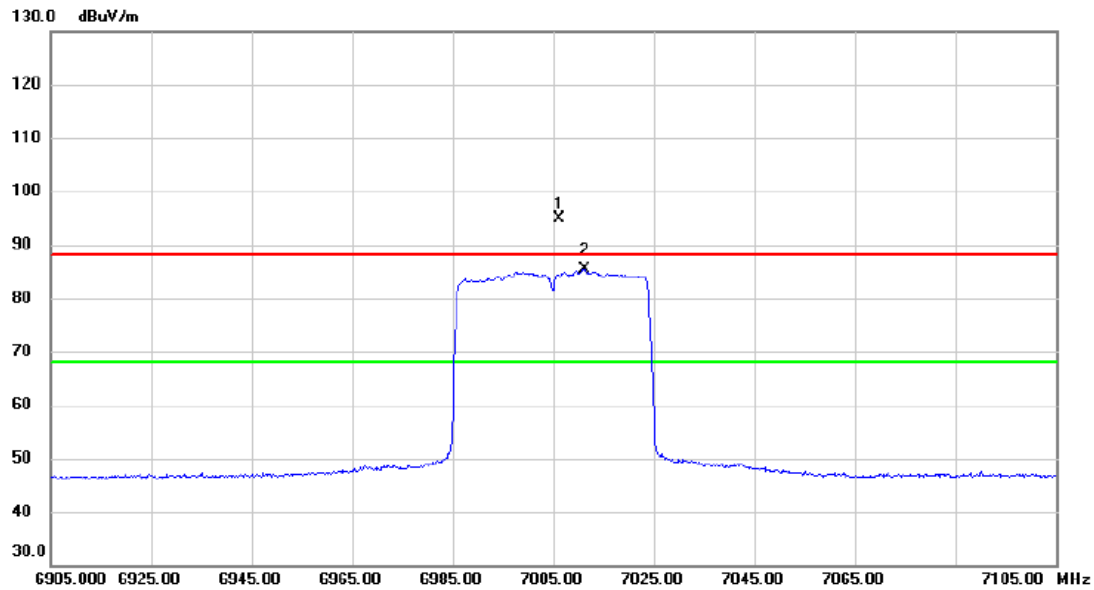


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	7006.200	75.08	19.79	94.87	88.20	6.67	peak	No Limit
2	*	7011.200	65.65	19.80	85.45	68.20	17.25	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE40) Mode 7005 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

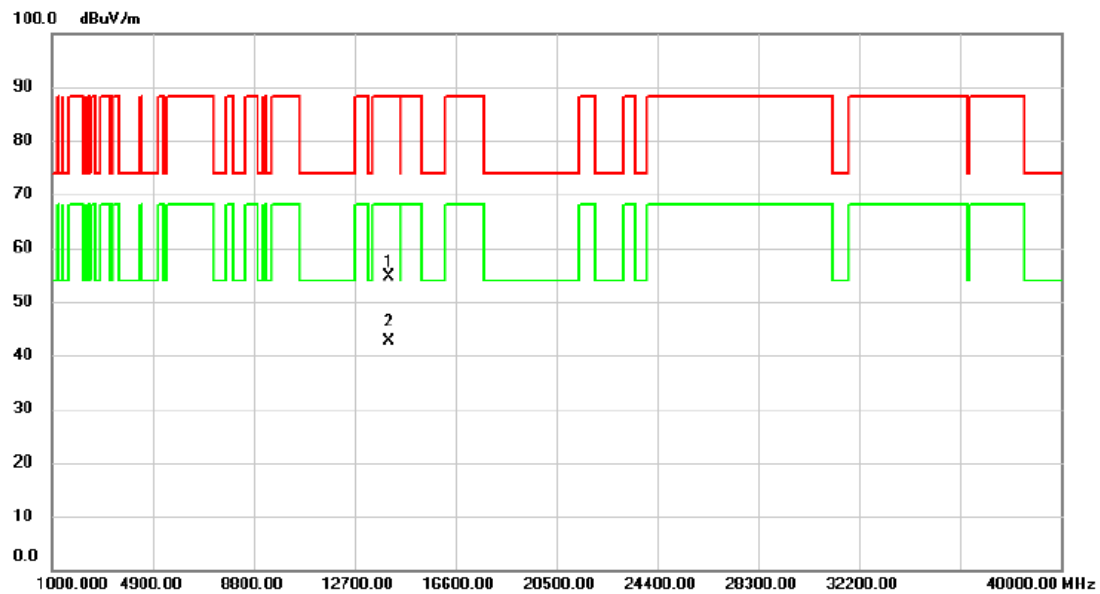


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		14010.00	36.41	18.20	54.61	88.20	-33.59	peak	
2	*	14010.00	24.42	18.20	42.62	68.20	-25.58	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE40) Mode 7085 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

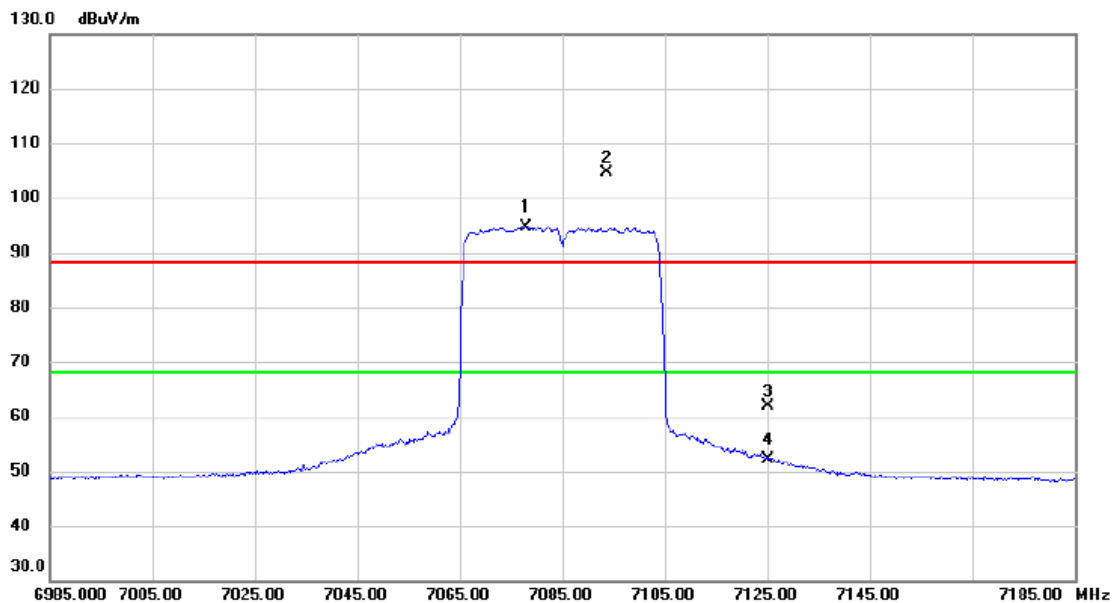


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	7078.000	74.82	19.88	94.70	68.20	26.50	AVG	No Limit
2	X	7093.600	84.85	19.89	104.74	88.20	16.54	peak	No Limit
3		7125.000	42.05	19.93	61.98	88.20	-26.22	peak	
4		7125.000	32.24	19.93	52.17	68.20	-16.03	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE40) Mode 7085 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

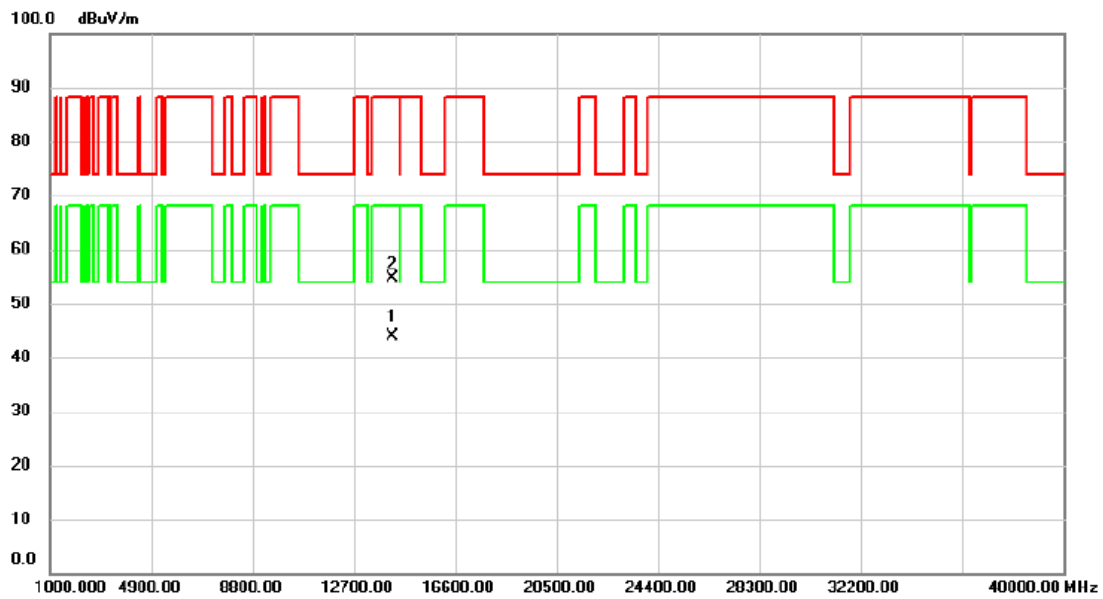


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	14170.10	25.28	18.63	43.91	68.20	-24.29	AVG	
2		14171.43	35.97	18.63	54.60	88.20	-33.60	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE40) Mode 7085 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

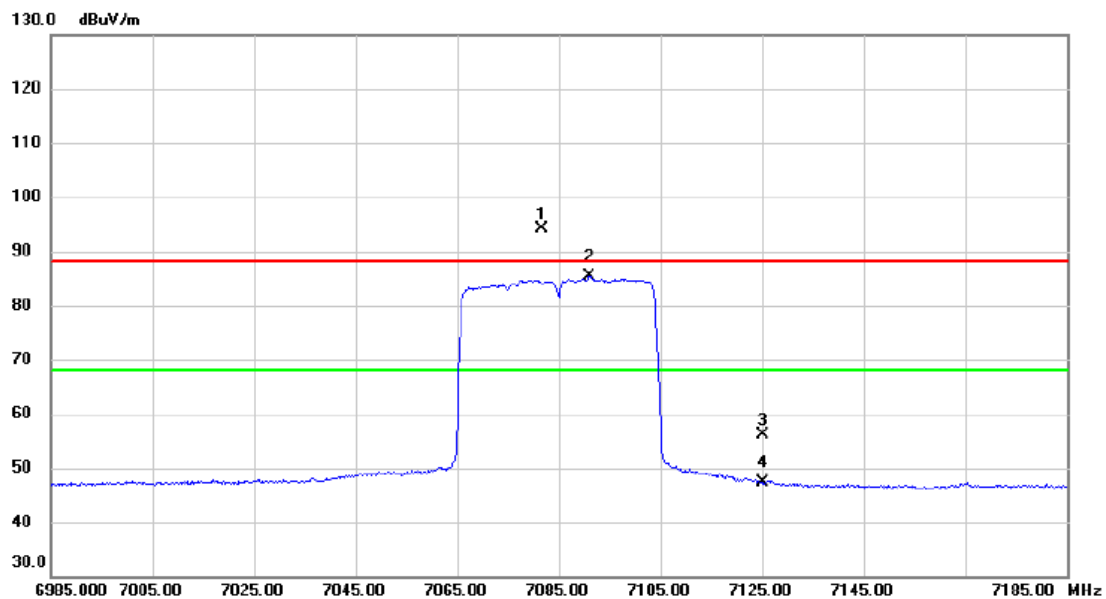


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	7081.600	74.33	19.89	94.22	88.20	6.02	peak	No Limit
2	*	7091.000	65.48	19.89	85.37	68.20	17.17	AVG	No Limit
3		7125.000	36.32	19.93	56.25	88.20	-31.95	peak	
4		7125.000	27.43	19.93	47.36	68.20	-20.84	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE40) Mode 7085 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

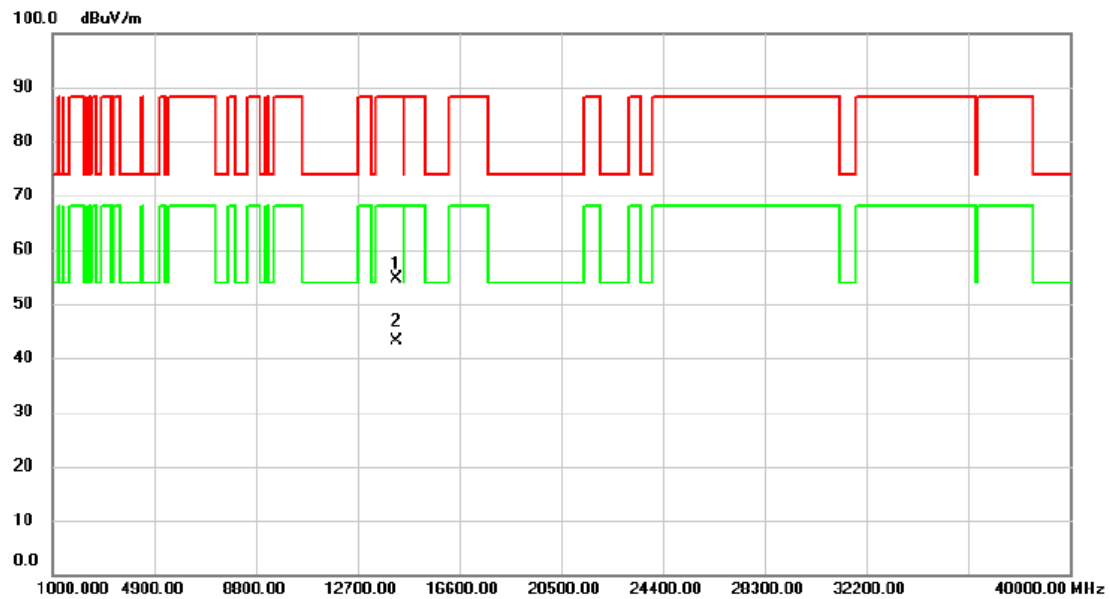


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		14170.00	36.12	18.63	54.75	88.20	-33.45	peak	
2	*	14170.00	24.62	18.63	43.25	68.20	-24.95	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE80) Mode 6945 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

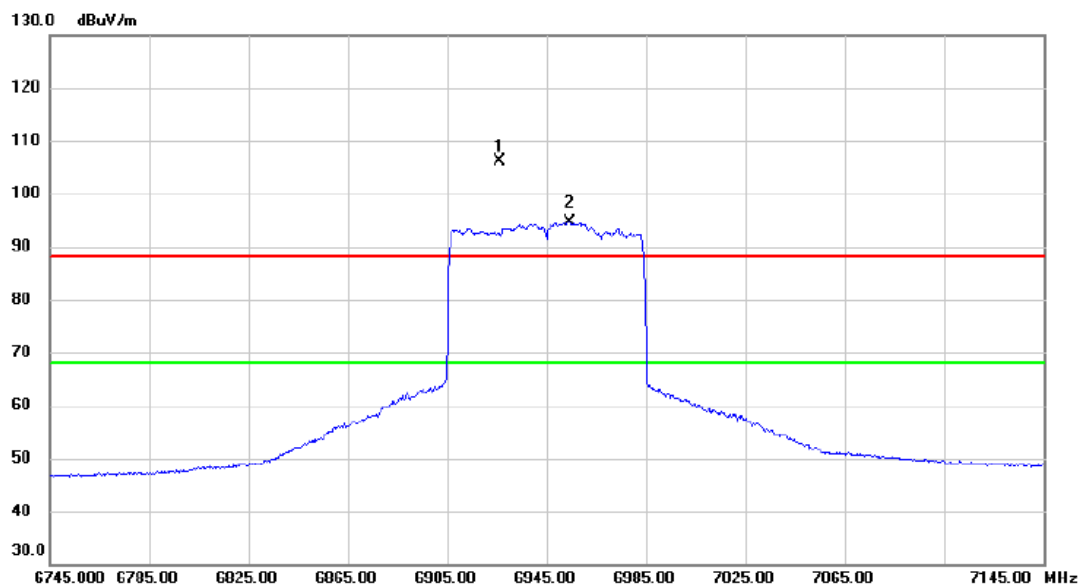


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6925.800	86.64	19.55	106.19	88.20	17.99	peak	No Limit
2	*	6954.200	75.05	19.65	94.70	68.20	26.50	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE80) Mode 6945 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

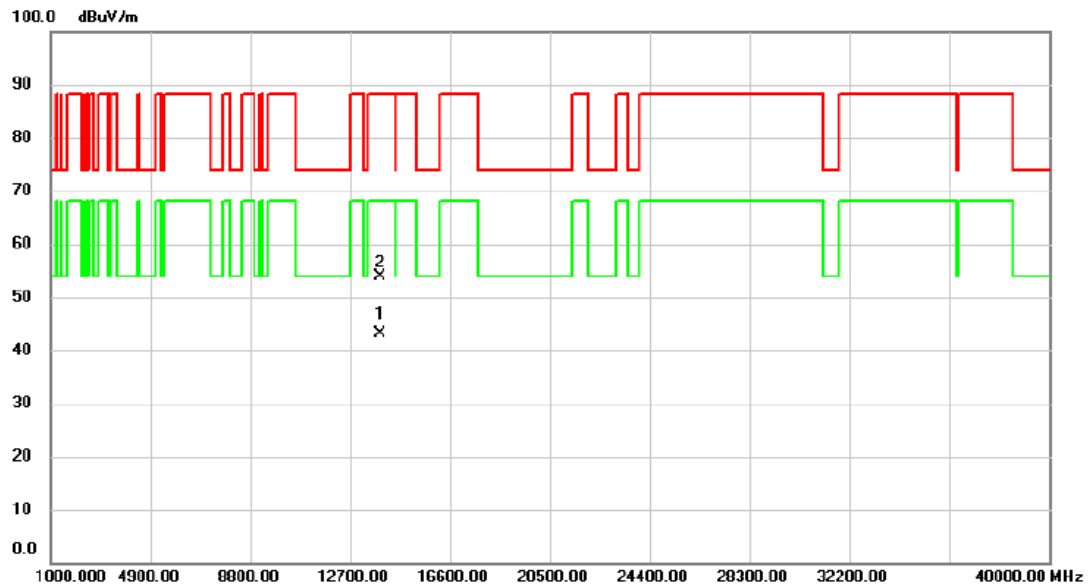


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	13889.01	25.33	17.82	43.15	68.20	-25.05	AVG	
2		13889.94	35.95	17.82	53.77	88.20	-34.43	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE80) Mode 6945 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

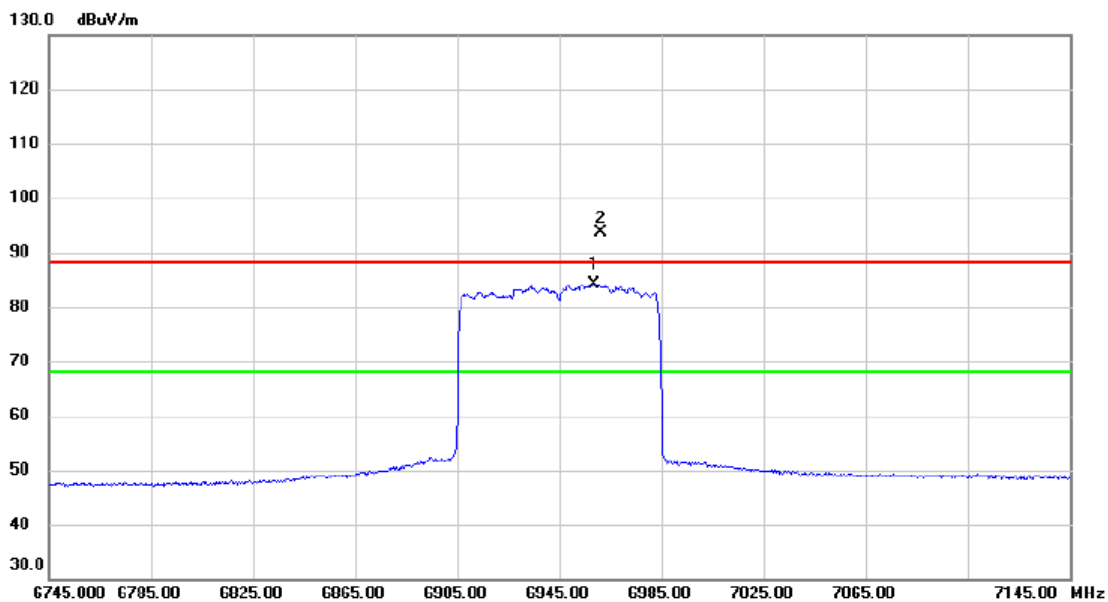


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6958.600	64.54	19.67	84.21	68.20	16.01	AVG	No Limit
2	X	6961.000	73.97	19.67	93.64	88.20	5.44	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE80) Mode 6945 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

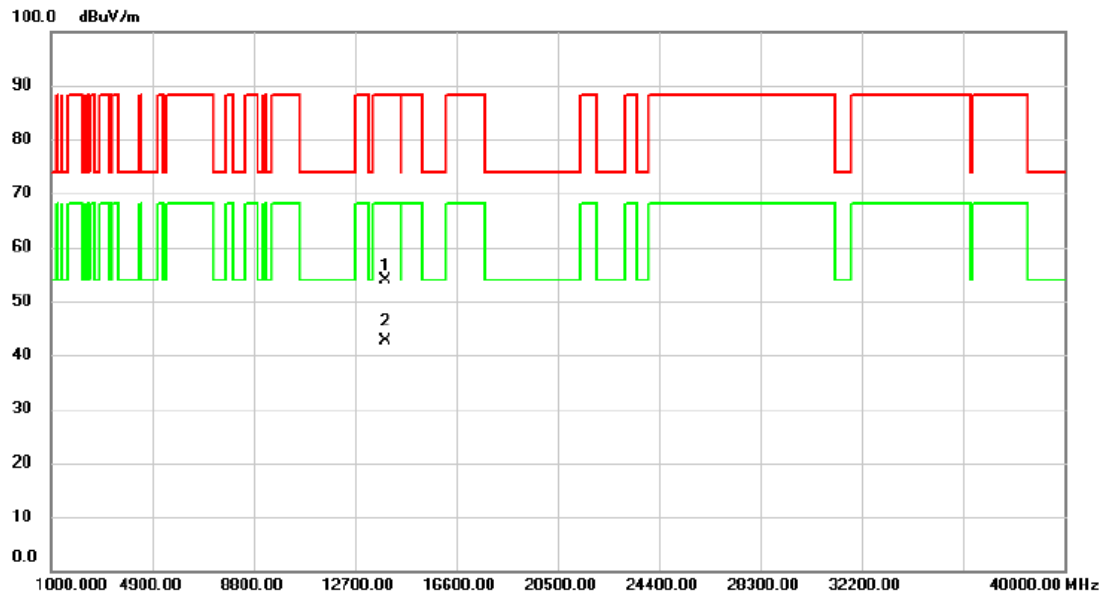


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		13890.00	36.15	17.82	53.97	88.20	-34.23	peak	
2	*	13890.00	24.71	17.82	42.53	68.20	-25.67	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE80) Mode 7025 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

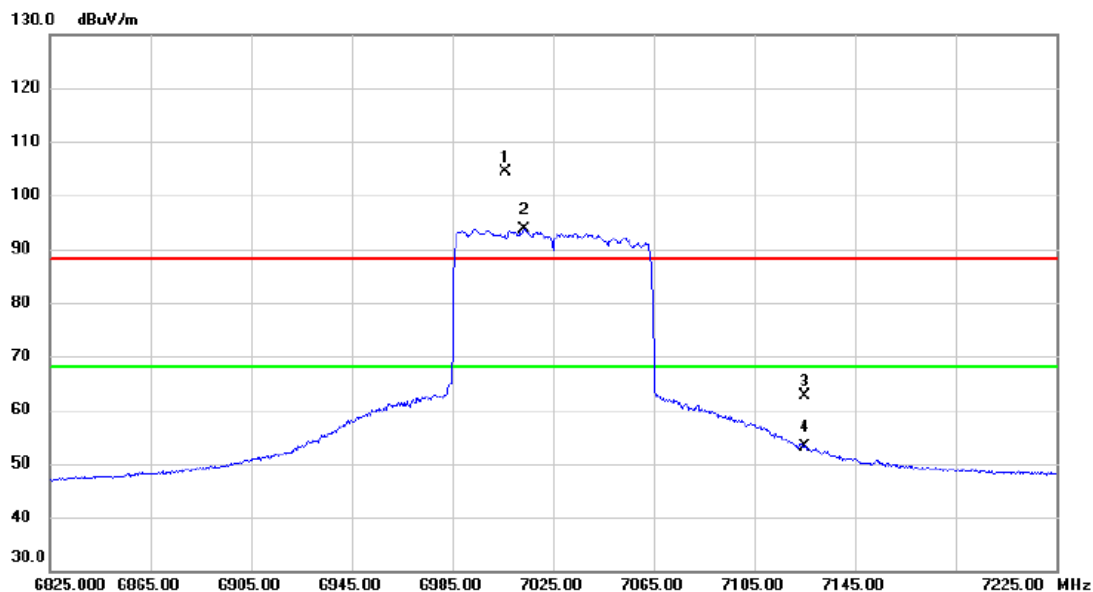


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	7005.800	84.52	19.79	104.31	88.20	16.11	peak	No Limit
2	*	7013.400	73.72	19.80	93.52	68.20	25.32	AVG	No Limit
3		7125.000	42.59	19.93	62.52	88.20	-25.68	peak	
4		7125.000	33.28	19.93	53.21	68.20	-14.99	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE80) Mode 7025 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

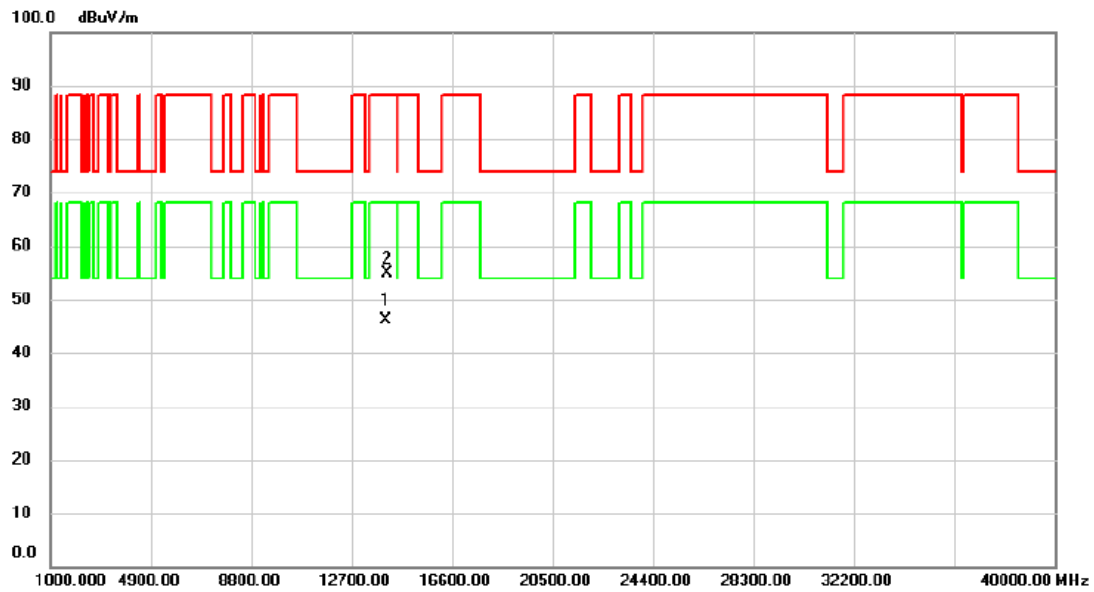


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	14051.13	27.95	18.30	46.25	68.20	-21.95	AVG	
2		14052.22	36.58	18.31	54.89	88.20	-33.31	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE80) Mode 7025 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

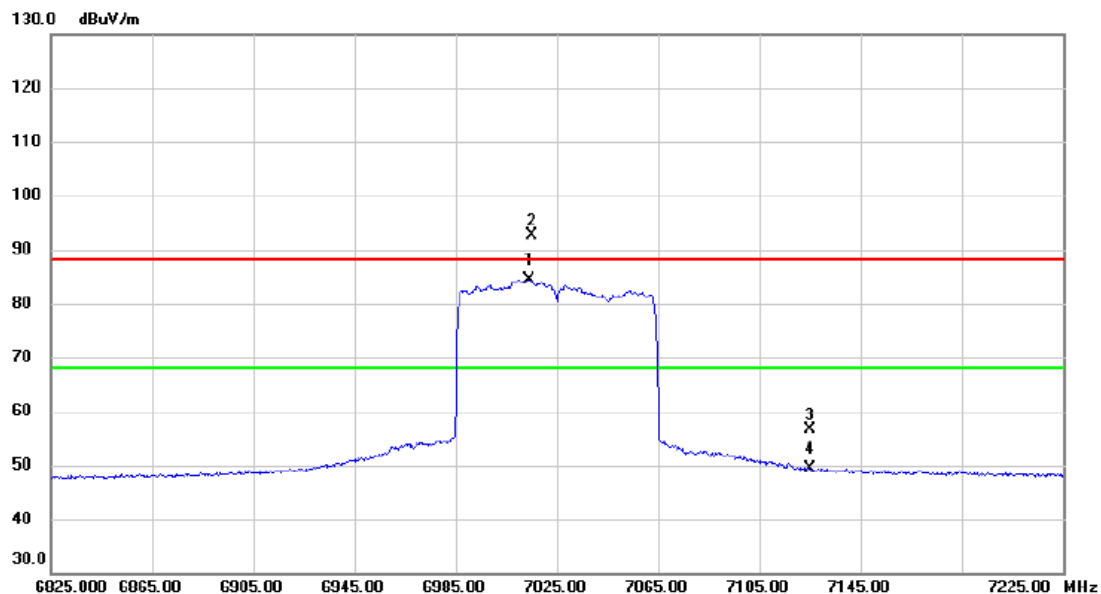


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	7013.800	64.70	19.80	84.50	68.20	16.30	AVG	No Limit
2	X	7015.000	72.92	19.80	92.72	88.20	4.52	peak	No Limit
3		7125.000	36.60	19.93	56.53	88.20	-31.67	peak	
4		7125.000	29.34	19.93	49.27	68.20	-18.93	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE80) Mode 7025 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

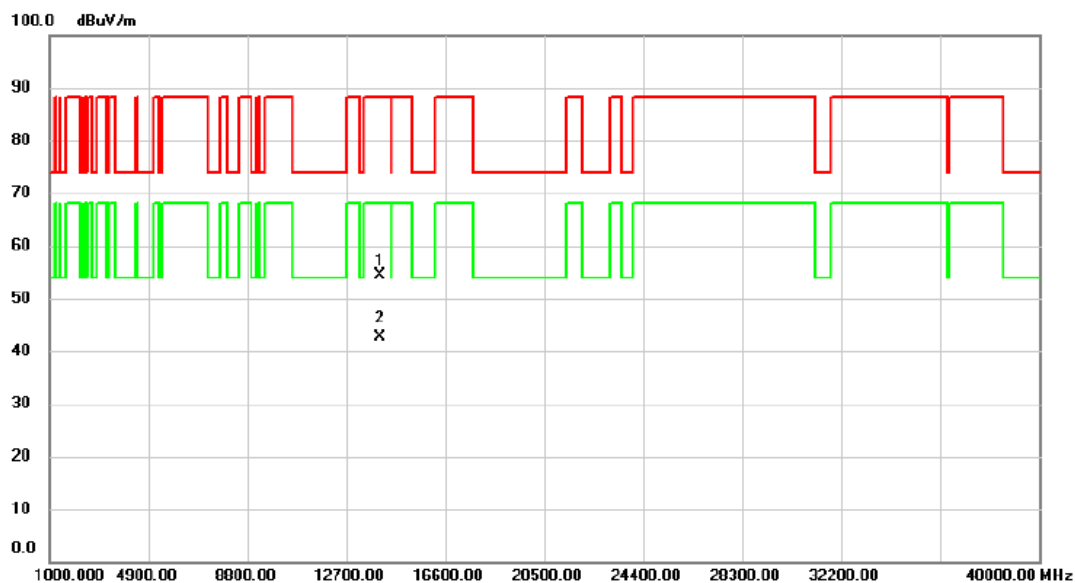


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		14050.00	35.98	18.30	54.28	88.20	-33.92	peak	
2	*	14050.00	24.36	18.30	42.66	68.20	-25.54	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE160) Mode 6985 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

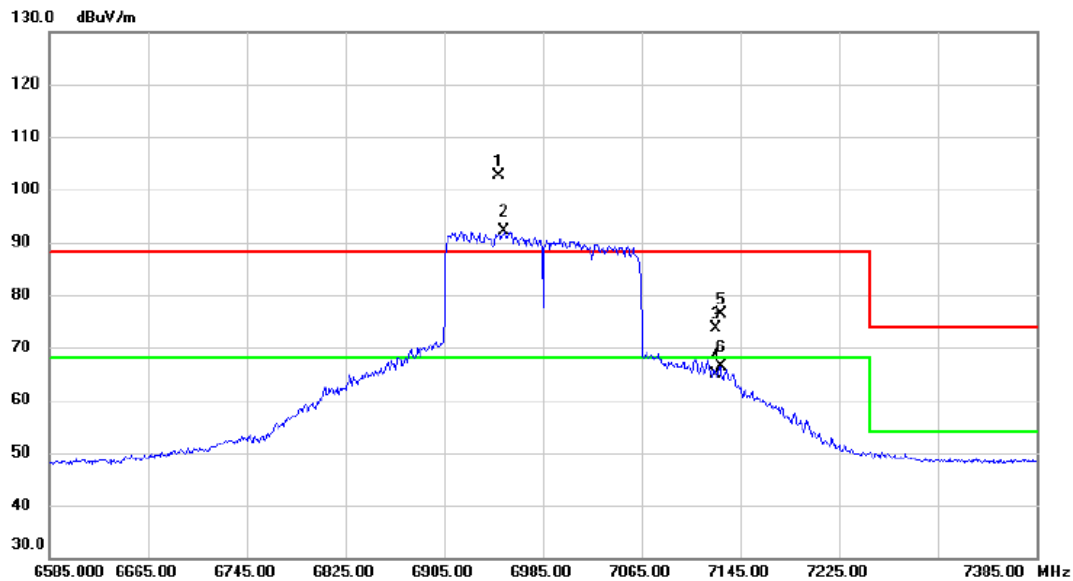


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6949.000	82.99	19.62	102.61	88.20	14.41	peak	No Limit
2	*	6953.800	72.43	19.65	92.08	68.20	23.88	AVG	No Limit
3		7125.000	53.72	19.93	73.65	88.20	-14.55	peak	
4		7125.000	44.95	19.93	64.88	68.20	-3.32	AVG	
5		7129.000	56.54	19.93	76.47	88.20	-11.73	peak	
6		7129.000	46.44	19.93	66.37	68.20	-1.83	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE160) Mode 6985 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

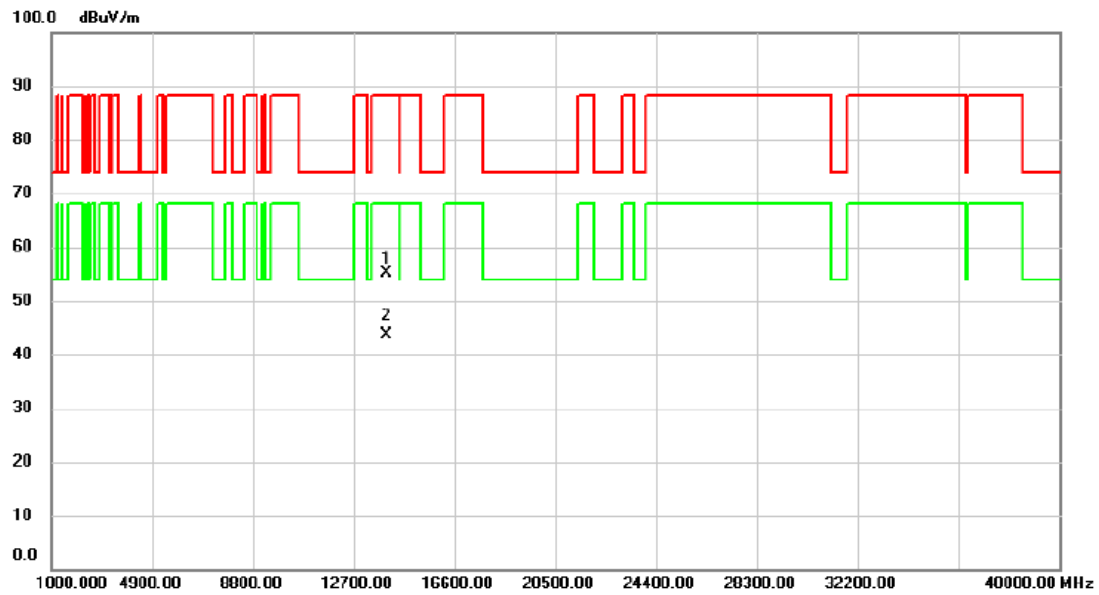


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	13968.38	37.03	18.08	55.11	88.20	-33.09	peak	
2 *	13969.79	25.54	18.08	43.62	68.20	-24.58	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE160) Mode 6985 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

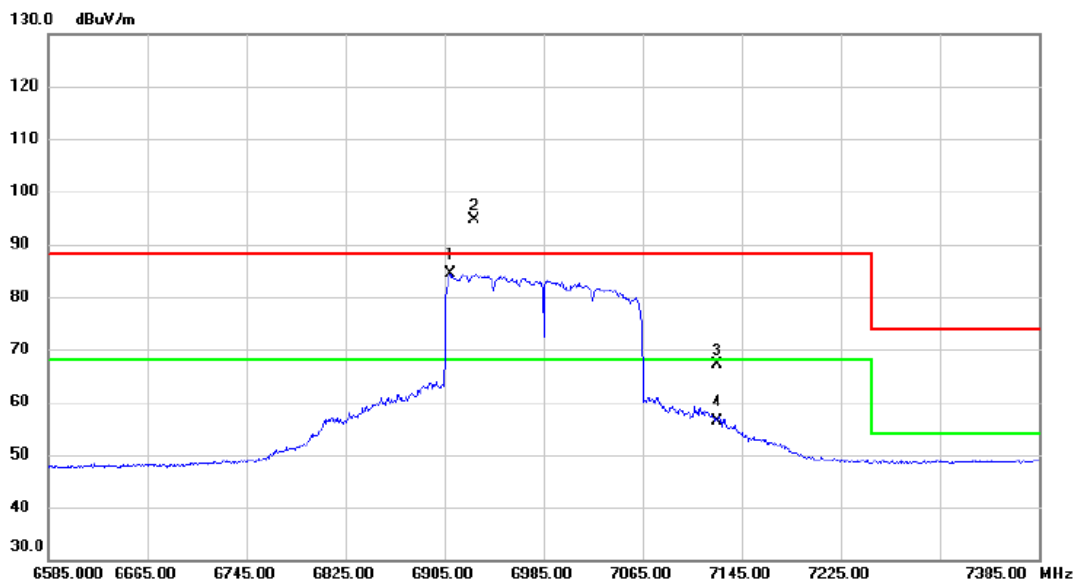


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6909.800	65.00	19.50	84.50	68.20	16.30	AVG	No Limit
2	X	6929.000	75.15	19.56	94.71	88.20	6.51	peak	No Limit
3		7125.000	47.14	19.93	67.07	88.20	-21.13	peak	
4		7125.000	36.50	19.93	56.43	68.20	-11.77	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX(HE160) Mode 6985 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

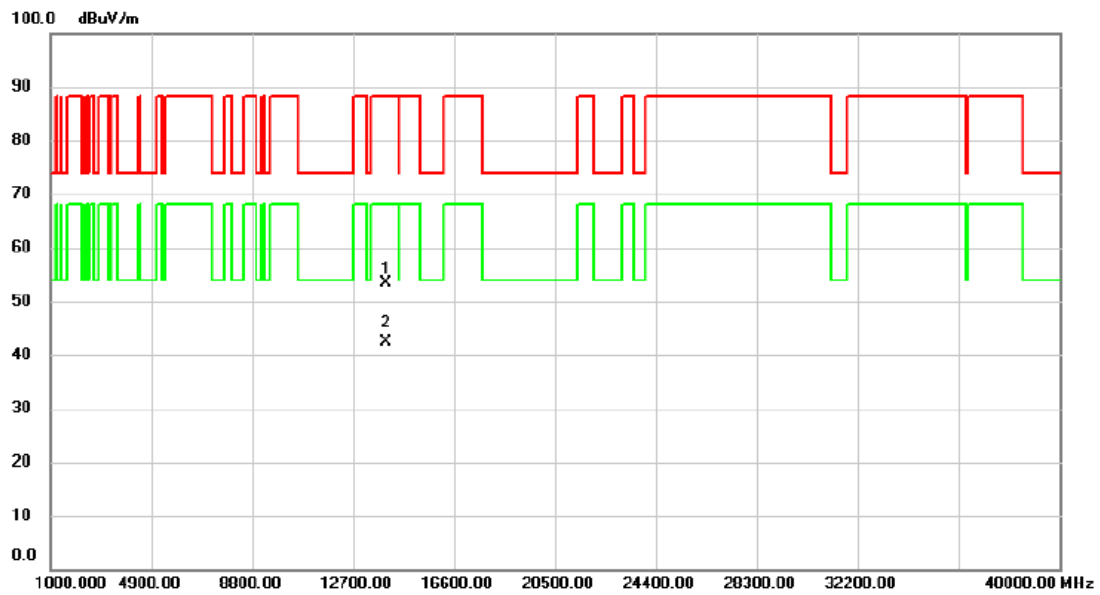


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		13970.00	35.29	18.08	53.37	88.20	-34.83	peak	
2	*	13970.00	24.27	18.08	42.35	68.20	-25.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7+UNII-8_TX AX(HE20) Mode 6875 MHz	Polarization	Vertical
-----------	---	--------------	----------

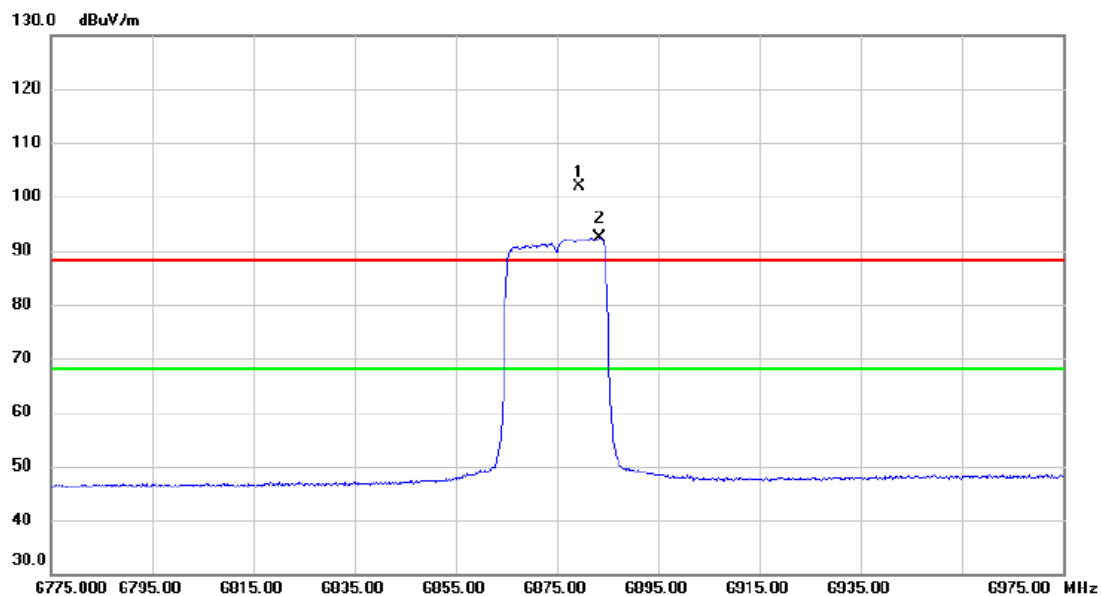


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6879.400	82.42	19.41	101.83	88.20	13.63	peak	No Limit
2	*	6883.400	72.99	19.42	92.41	68.20	24.21	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7+UNII-8_TX AX(HE20) Mode 6875 MHz	Polarization	Vertical
-----------	---	--------------	----------

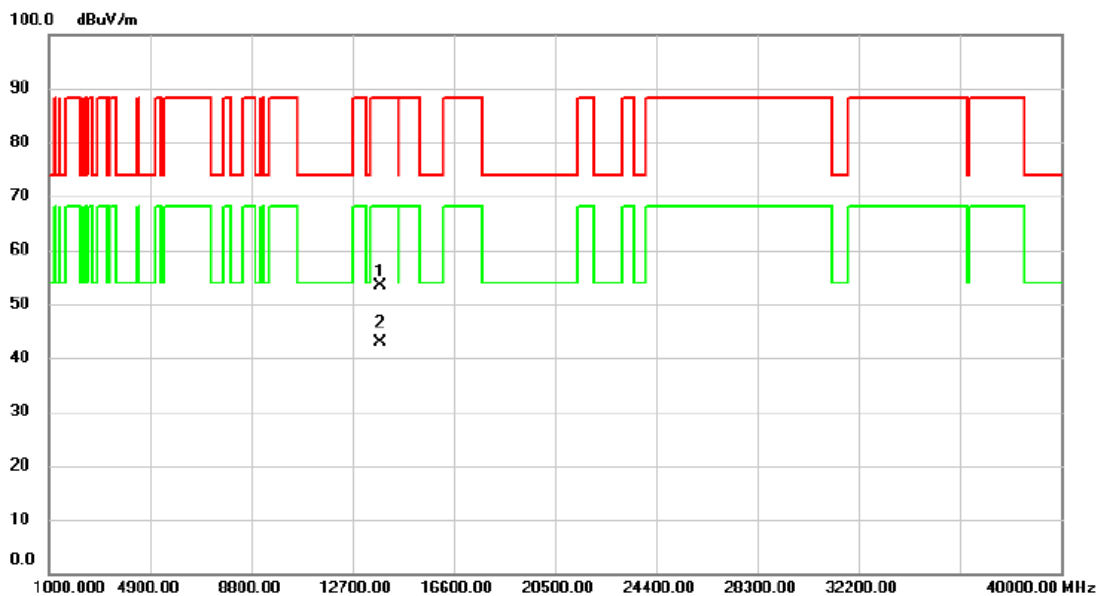


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	13748.25	36.06	17.38	53.44	88.20	-34.76	peak	
2 *	13748.97	25.53	17.38	42.91	68.20	-25.29	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7+UNII-8_TX AX(HE20) Mode 6875 MHz	Polarization	Horizontal
-----------	---	--------------	------------

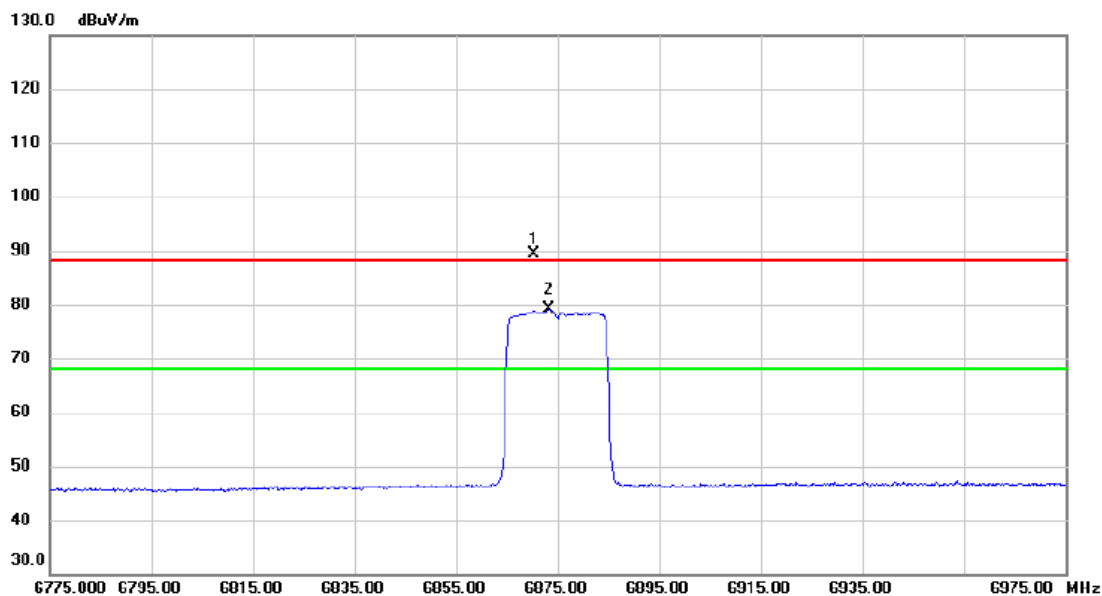


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6870.400	69.97	19.38	89.35	88.20	1.15	peak	No Limit
2	*	6873.400	59.78	19.39	79.17	68.20	10.97	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7+UNII-8_TX AX(HE20) Mode 6875 MHz	Polarization	Horizontal
-----------	---	--------------	------------

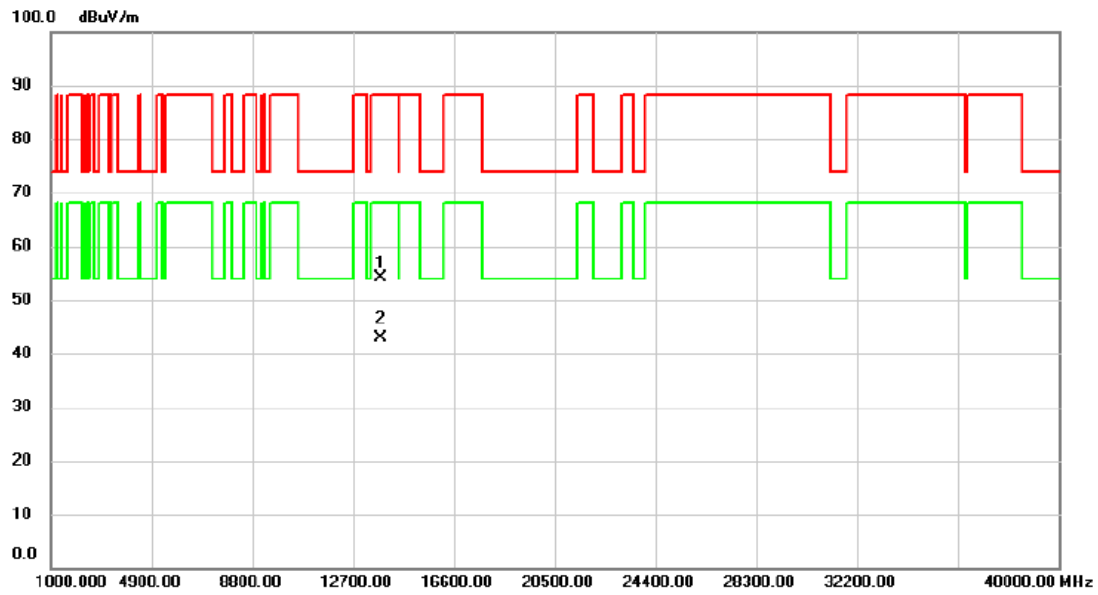


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		13750.00	36.85	17.40	54.25	88.20	-33.95	peak	
2	*	13750.00	25.36	17.40	42.76	68.20	-25.44	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7+UNII-8_TX AX(HE40) Mode 6885 MHz	Polarization	Vertical
-----------	---	--------------	----------

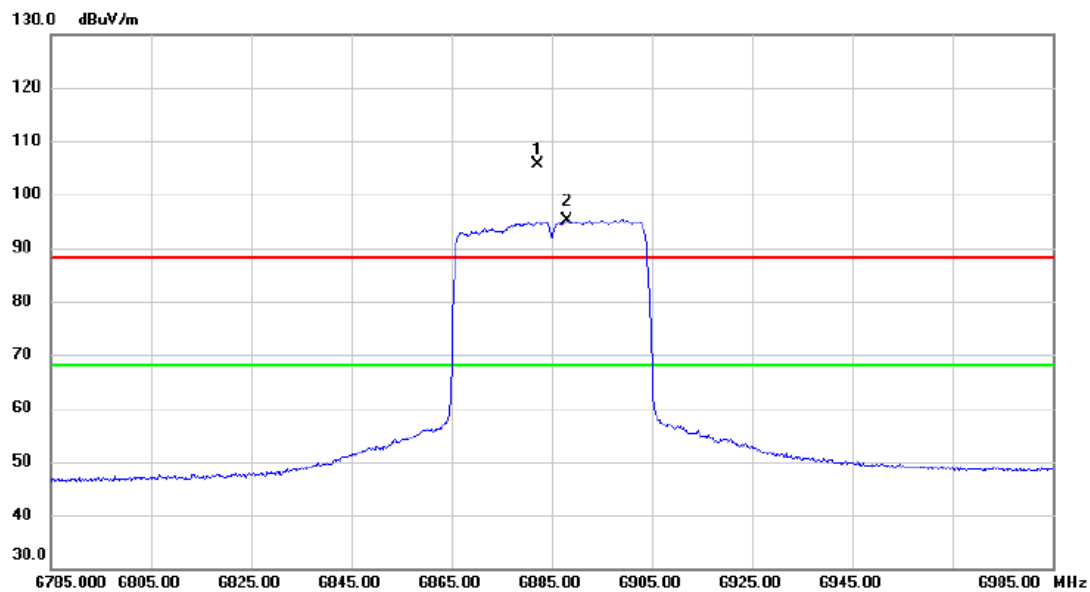


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6882.200	86.14	19.41	105.55	88.20	17.35	peak	No Limit
2	*	6888.200	75.74	19.44	95.18	68.20	26.98	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7+UNII-8_TX AX(HE40) Mode 6885 MHz	Polarization	Vertical
-----------	---	--------------	----------

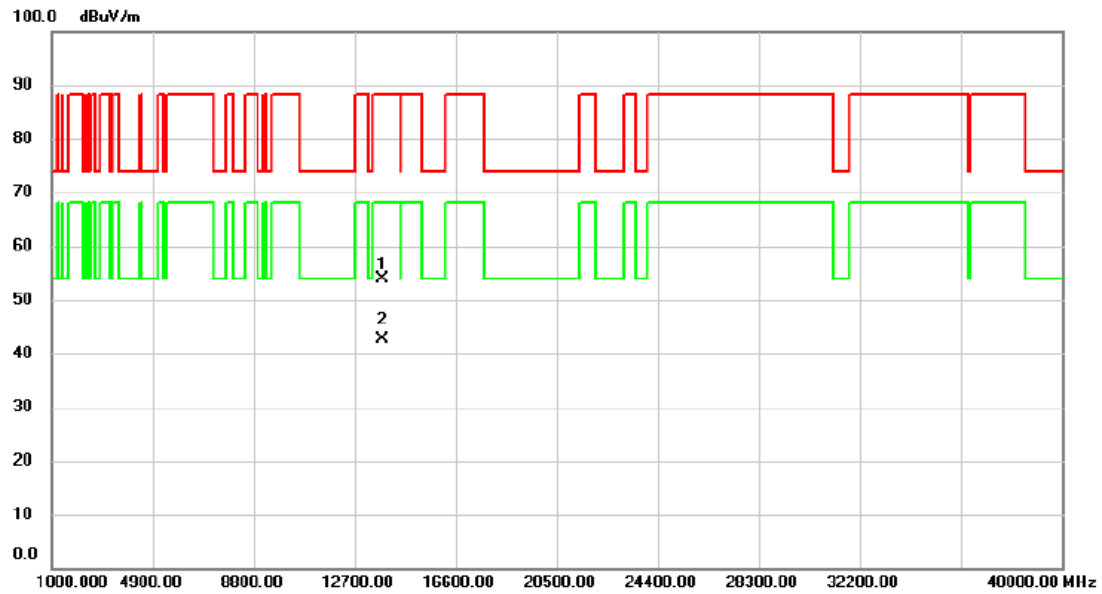


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		13767.74	36.50	17.45	53.95	88.20	-34.25	peak	
2	*	13770.57	25.26	17.46	42.72	68.20	-25.48	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7+UNII-8_TX AX(HE40) Mode 6885 MHz	Polarization	Horizontal
-----------	---	--------------	------------

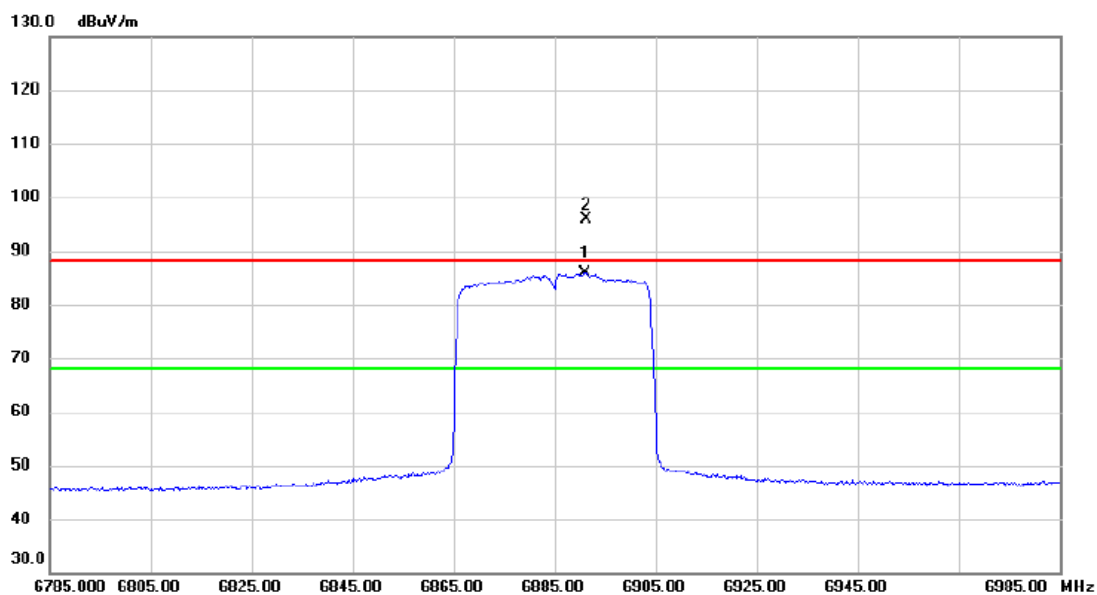


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6891.000	66.50	19.44	85.94	68.20	17.74	AVG	No Limit
2	X	6891.400	76.36	19.44	95.80	88.20	7.60	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7+UNII-8_TX AX(HE40) Mode 6885 MHz	Polarization	Horizontal
-----------	---	--------------	------------

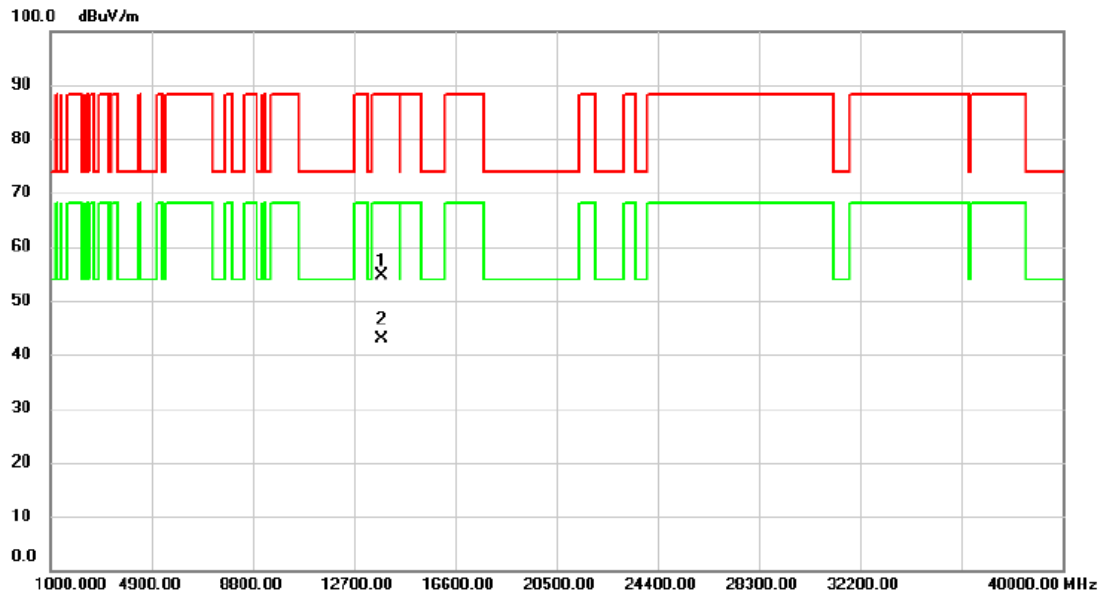


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		13770.00	37.20	17.46	54.66	88.20	-33.54	peak	
2	*	13770.00	25.36	17.46	42.82	68.20	-25.38	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7+UNII-8_TX AX(HE80) Mode 6865 MHz	Polarization	Vertical
-----------	---	--------------	----------

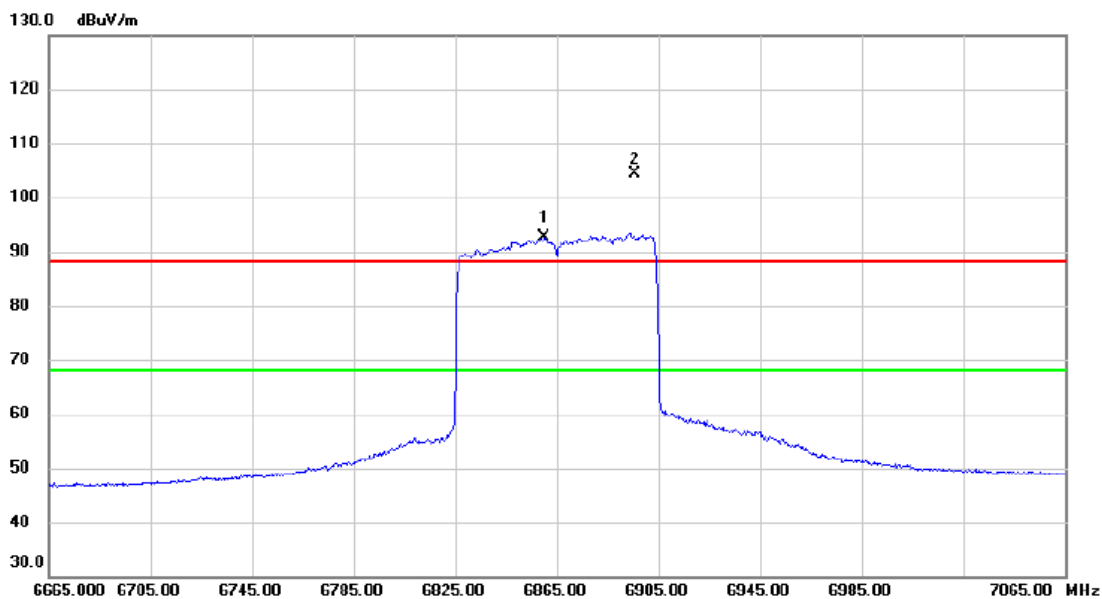


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6860.200	73.17	19.35	92.52	68.20	24.32	AVG	No Limit
2	X	6895.800	84.89	19.46	104.35	88.20	16.15	peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7+UNII-8_TX AX(HE80) Mode 6865 MHz	Polarization	Vertical
-----------	---	--------------	----------

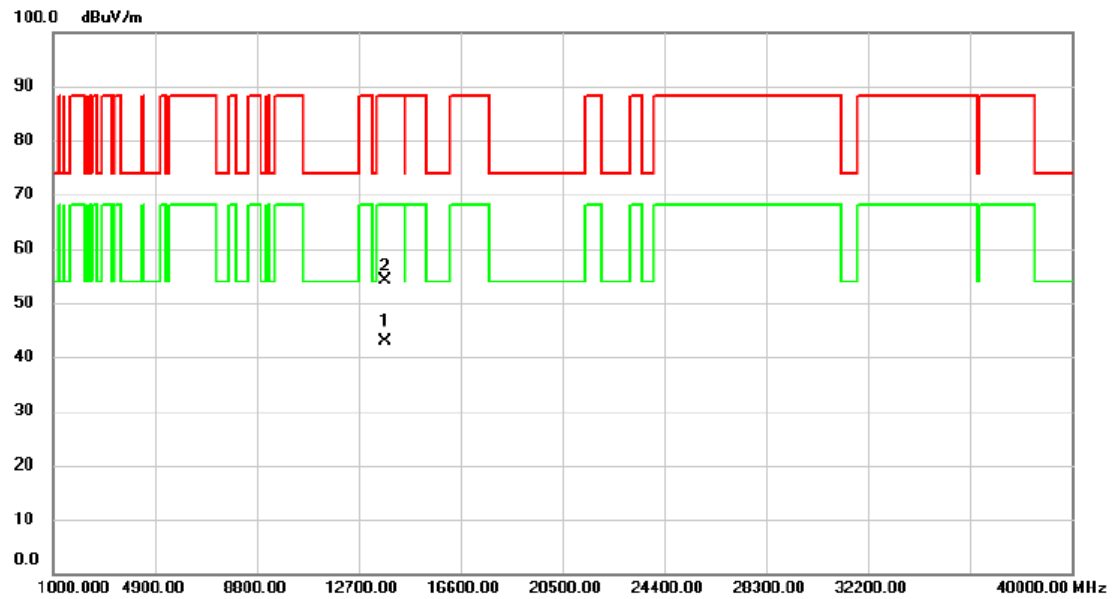


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13728.14	25.48	17.33	42.81	68.20	-25.39	AVG	
2		13730.02	36.68	17.33	54.01	88.20	-34.19	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7+UNII-8_TX AX(HE80) Mode 6865 MHz	Polarization	Horizontal
-----------	---	--------------	------------

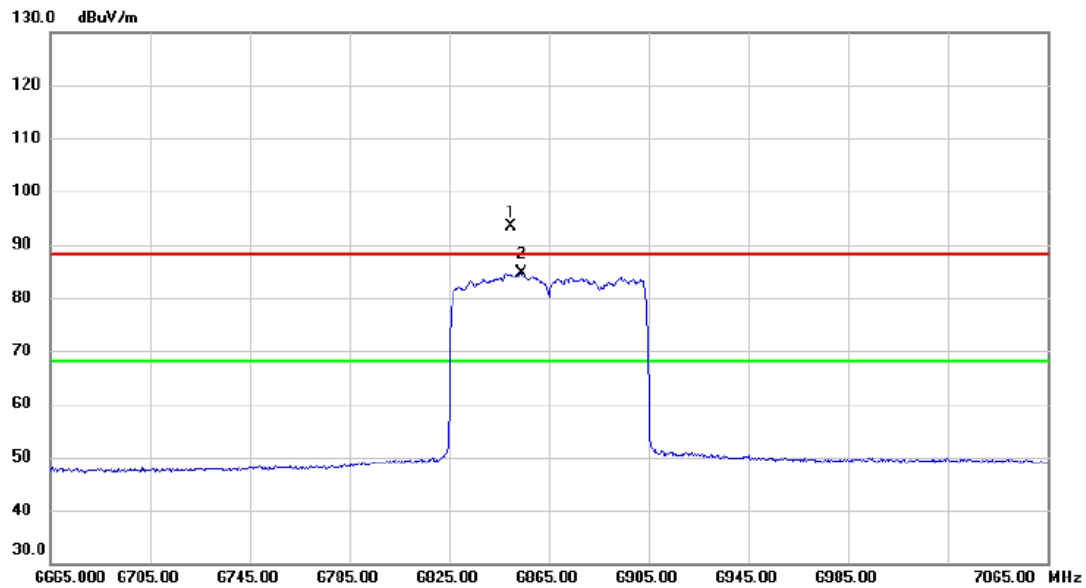


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6849.800	74.03	19.31	93.34	88.20	5.14	peak	No Limit
2	*	6853.800	65.26	19.33	84.59	68.20	16.39	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7+UNII-8_TX AX(HE80) Mode 6865 MHz	Polarization	Horizontal
-----------	---	--------------	------------

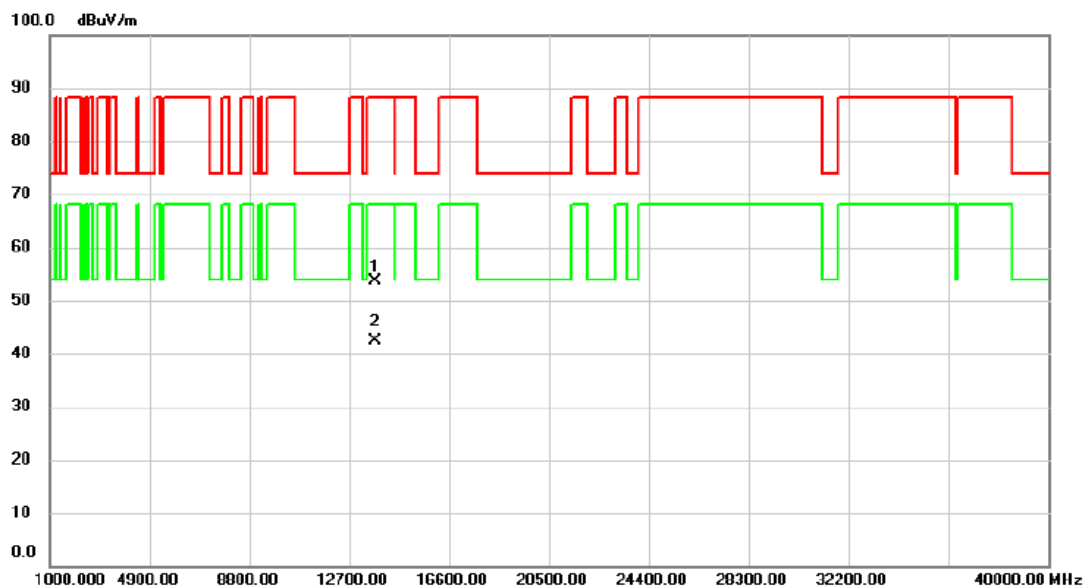


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		13730.00	36.32	17.33	53.65	88.20	-34.55	peak	
2	*	13730.00	25.17	17.33	42.50	68.20	-25.70	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7+UNII-8_TX AX(HE160) Mode 6825 MHz	Polarization	Vertical
-----------	--	--------------	----------

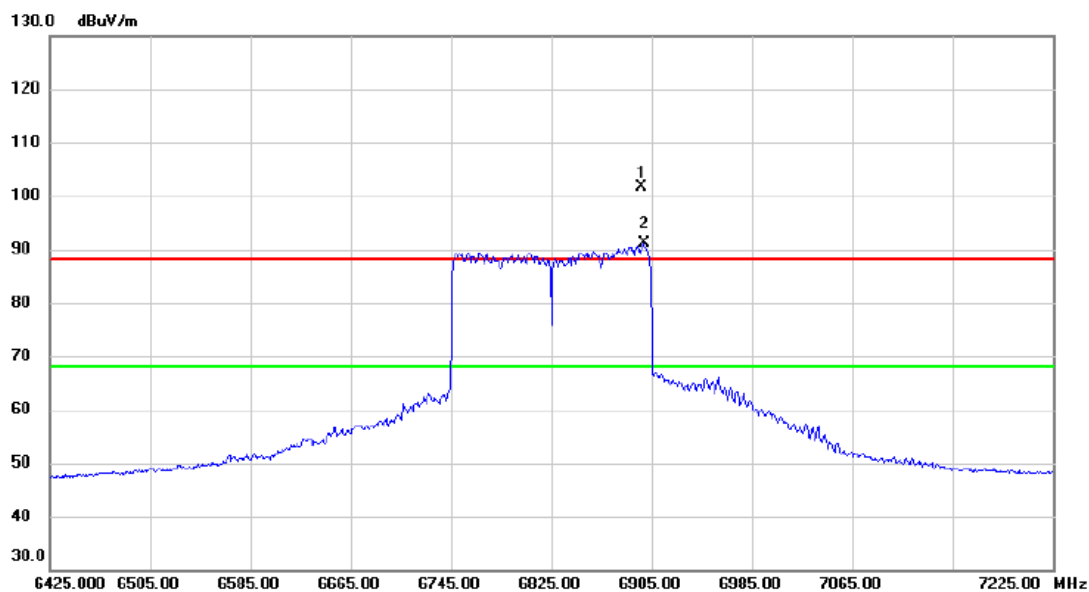


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6897.000	82.25	19.46	101.71	88.20	13.51	peak	No Limit
2	*	6898.600	71.74	19.47	91.21	68.20	23.01	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7+UNII-8_TX AX(HE160) Mode 6825 MHz	Polarization	Vertical
-----------	--	--------------	----------

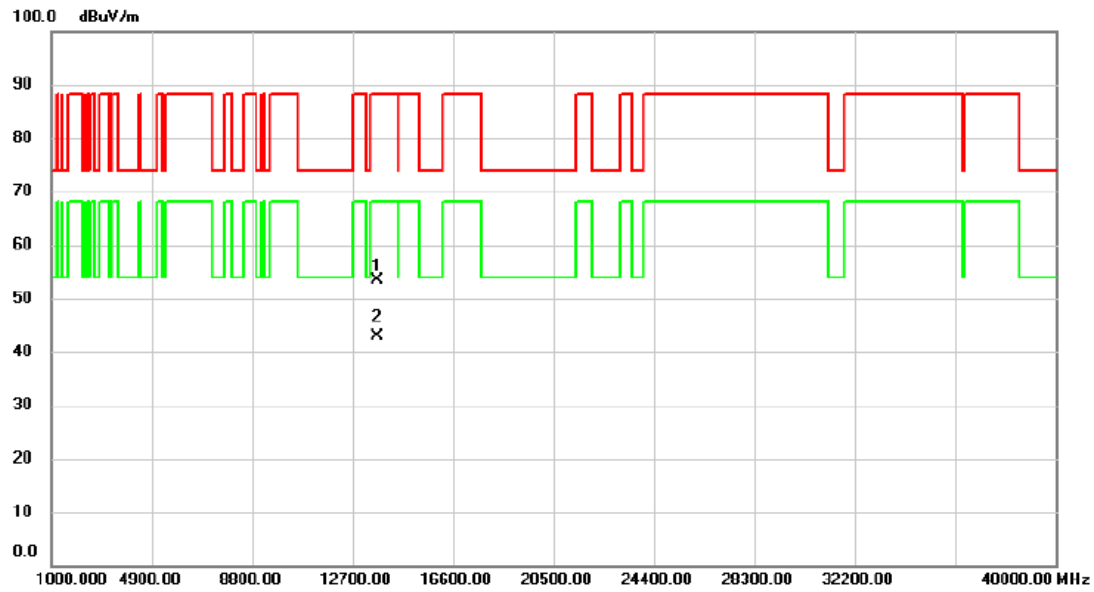


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		13648.99	36.36	17.08	53.44	88.20	-34.76	peak	
2	*	13649.40	25.75	17.08	42.83	68.20	-25.37	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7+UNII-8_TX AX(HE160) Mode 6825 MHz	Polarization	Horizontal
-----------	--	--------------	------------

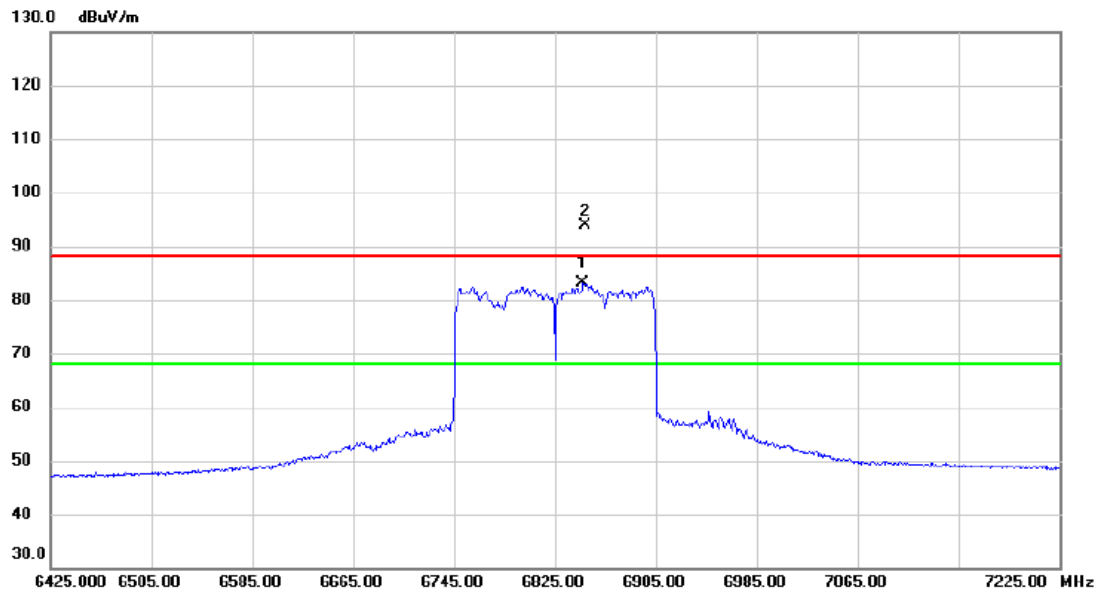


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6847.400	63.72	19.30	83.02	68.20	14.82	AVG	No Limit
2	X	6849.000	74.49	19.31	93.80	88.20	5.60	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7+UNII-8_TX AX(HE160) Mode 6825 MHz	Polarization	Horizontal
-----------	--	--------------	------------

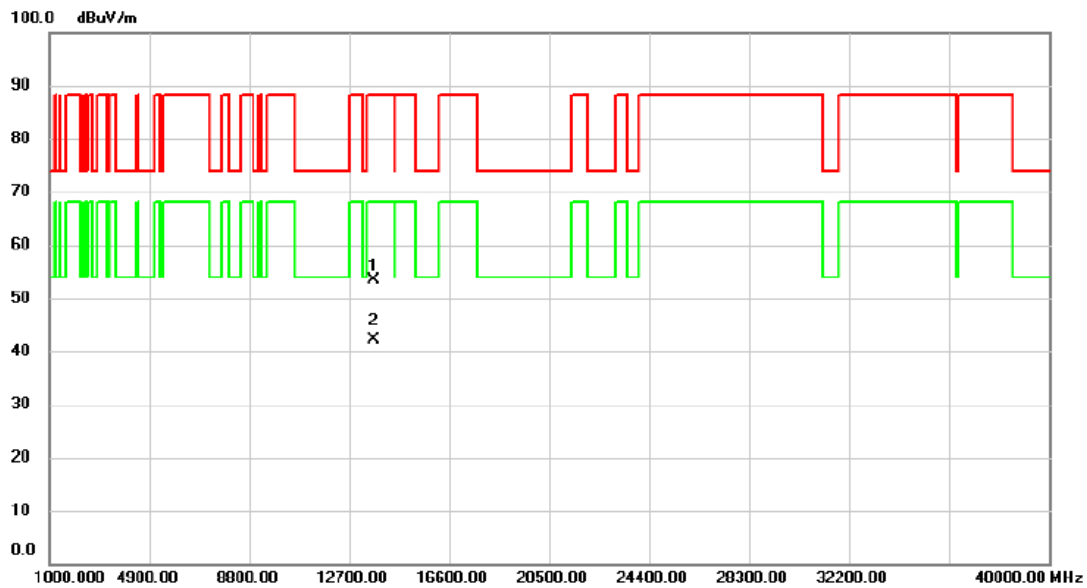

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		13650.00	36.37	17.09	53.46	88.20	-34.74	peak	
2	*	13650.00	25.11	17.09	42.20	68.20	-26.00	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH

NSS1

Test Mode	UNII-5_TX AX(HE20) Mode
-----------	-------------------------




Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit (MHz)	Result
01	5955	21.11	19.11	320	Complies
45	6175	21.08	19.14	320	Complies
93	6415	21.33	19.10	320	Complies

CH01

CH45

CH93

26 dB Bandwidth

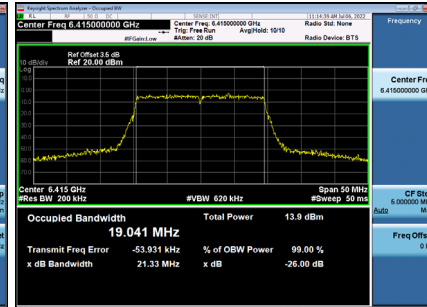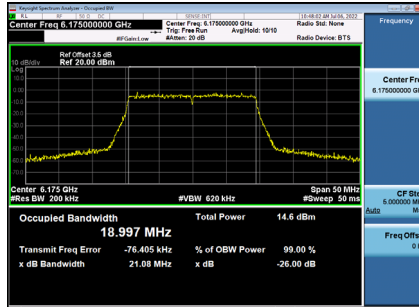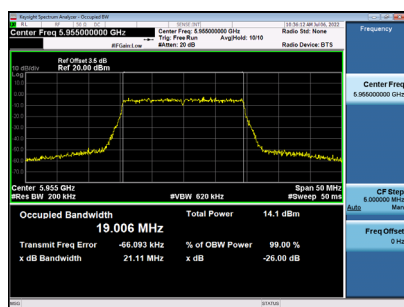

99 % Occupied Bandwidth

