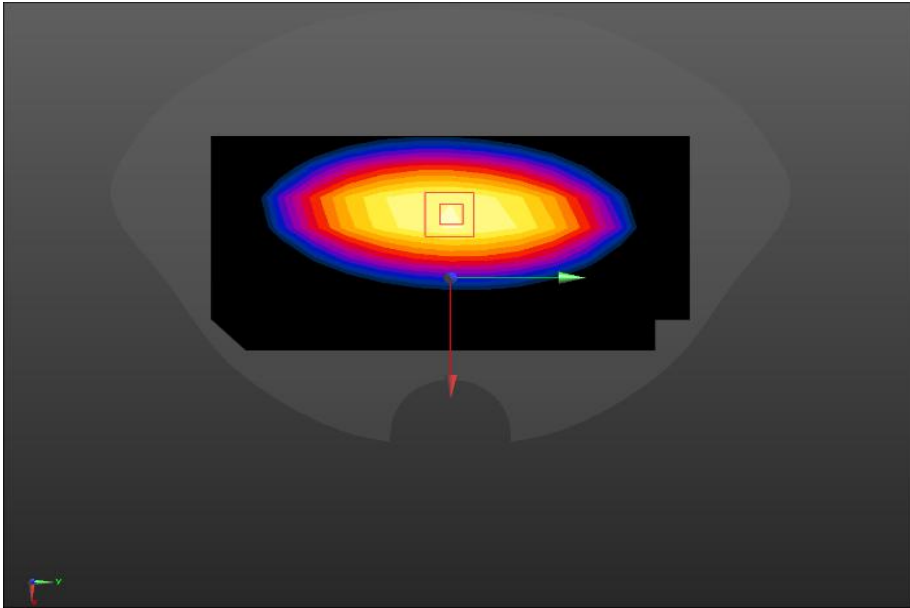
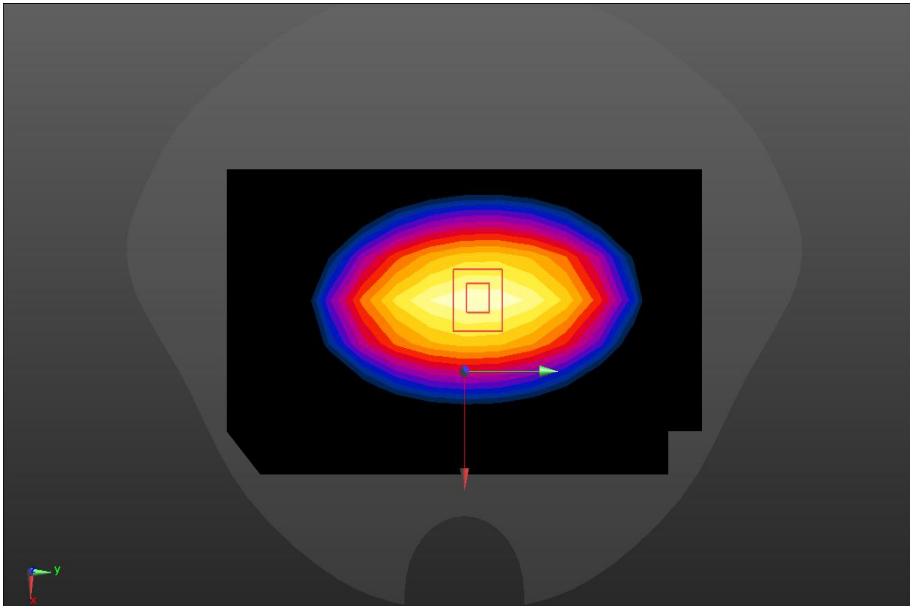


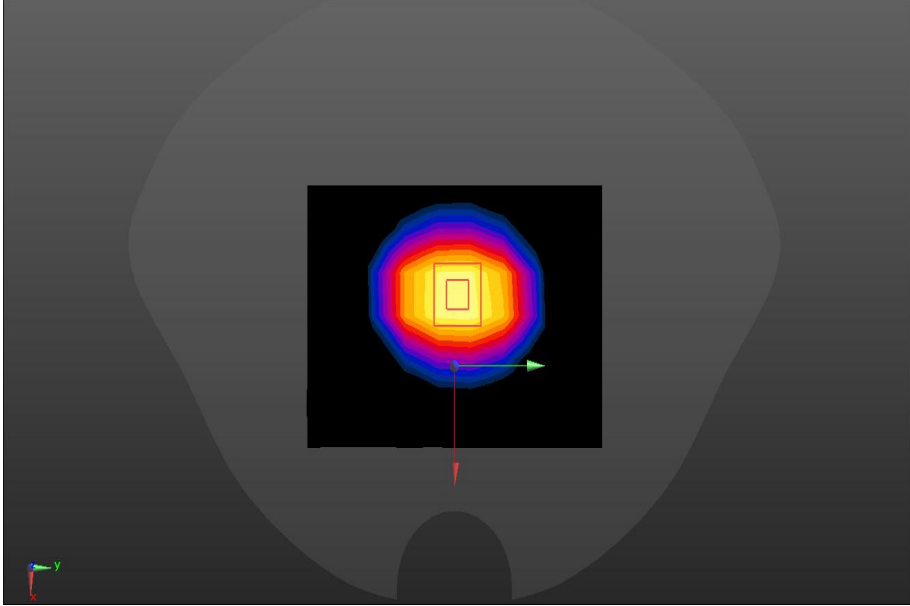
ANNEX A – TEST PLOTS

System check	750MHz
Communication System: UID 0, CW (0) Frequency: 750 MHz; Duty cycle:1:1 Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.88 \text{ S/m}$; $\epsilon_r = 41.76$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.75, 9.75, 9.75); Calibrated: 2020/10/30 - Sensor-Surface: 1.4mm (Mechanical Surface Detection), - Electronics: DAE4 Sn546; Calibrated: 11/11/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: 1559 - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) System Performance Check at Frequencies 750MHz/d=15mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 2.26 W/kg System Performance Check at Frequencies 750MHz/d=15mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 41.10 V/m; Power Drift = 0.13 dB Peak SAR (extrapolated) = 3.25 W/kg SAR(1 g) = 2.09 W/kg; SAR(10 g) = 1.44 W/kg Maximum value of SAR (measured) = 2.44 W/kg 	

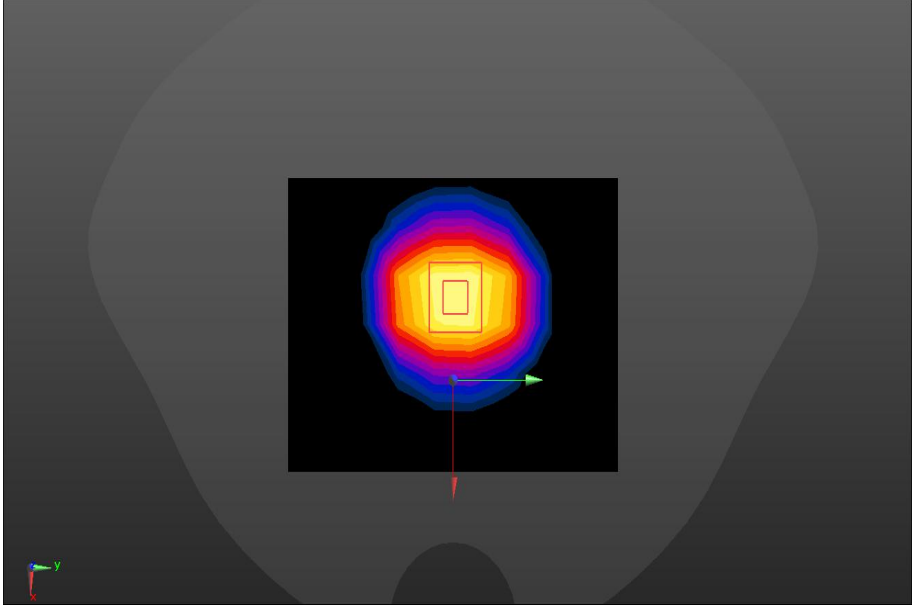
SRTC performed system check by using 250mw at antenna port

System check	835MHz
Communication System: UID 0, CW (0); Frequency: 835 MHz Duty cycle:1:1 Medium parameters used (interpolated): $f = 835 \text{ MHz}$; $\sigma = 0.89 \text{ S/m}$; $\epsilon_r = 41.20$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.39, 9.39, 9.39); Calibrated: 2020/10/30 - Sensor-Surface: 1.4mm (Mechanical Surface Detection), - Electronics: DAE4 Sn546; Calibrated: 11/11/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: 1559 - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) Configuration 835/835/Area Scan (8x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 2.73 W/kg Configuration 835/835/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 51.54 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 3.55 W/kg SAR(1 g) = 2.34 W/kg; SAR(10 g) = 1.56 W/kg Maximum value of SAR (measured) = 2.77W/kg 	

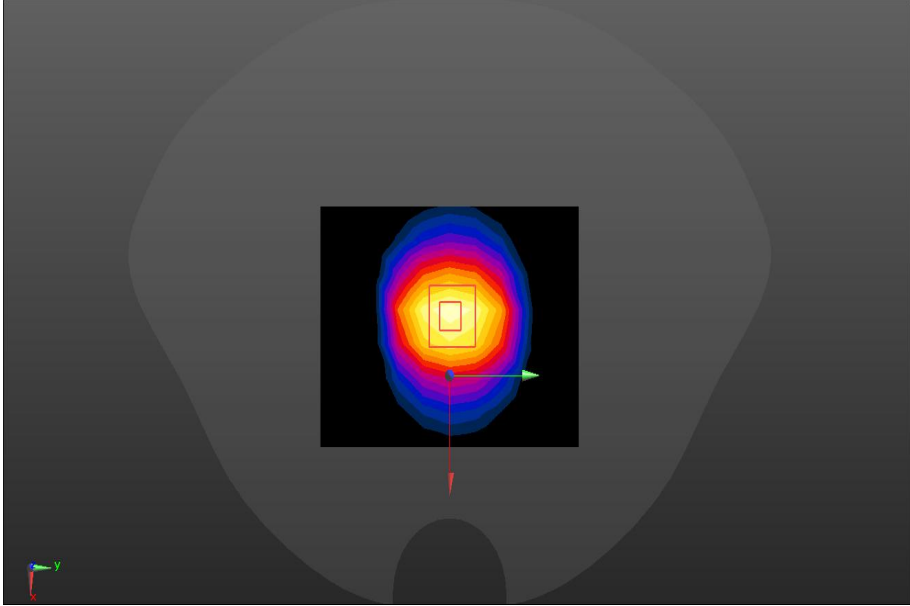
SRTC performed system check by using 250mw at antenna port

System check	1800MHz
Communication System: UID 0, CW (0); Frequency: 1800 MHz; Duty cycle:1:1 Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.39 \text{ S/m}$; $\epsilon_r = 39.93$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(8.27, 8.27, 8.27); Calibrated: 2020/10/30 - Sensor-Surface: 1.4mm (Mechanical Surface Detection), - Electronics: DAE4 Sn546; Calibrated: 11/11/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: 1559 - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) Configuration 1800/1800/Area Scan (7x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 8.35 W/kg Configuration 1800/1800/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 76.78 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 17.6 W/kg SAR(1 g) = 9.89 W/kg; SAR(10 g) = 5.24 W/kg Maximum value of SAR (measured) = 12.2 W/kg 	

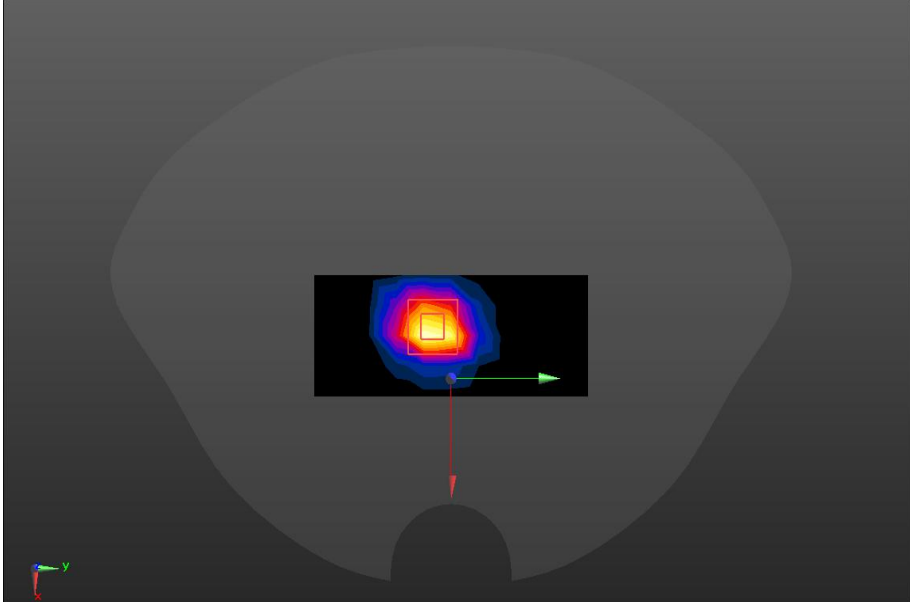
SRTC performed system check by using 250mw at antenna port

System check	2000MHz
Communication System: UID 0, CW (0); Frequency: 2000 MHz; Duty cycle:1:1 Medium parameters used: $f = 2000 \text{ MHz}$; $\sigma = 1.37 \text{ S/m}$; $\epsilon_r = 39.92$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.94, 7.94, 7.94); Calibrated: 2020/10/30 - Sensor-Surface: 1.4mm (Mechanical Surface Detection), - Electronics: DAE4 Sn546; Calibrated: 11/11/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: 1559 - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) Configuration 2000/2000/Area Scan (7x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 8.42 W/kg Configuration 2000/2000/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 76.25 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 18.8 W/kg SAR(1 g) = 10.56 W/kg; SAR(10 g) = 5.24 W/kg Maximum value of SAR (measured) = 12.7 W/kg 	

SRTC performed system check by using 250mw at antenna port

System check	2450MHz
Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty cycle:1:1 Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.77 \text{ S/m}$; $\epsilon_r = 38.82$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.48, 7.48, 7.48); Calibrated: 2020/10/30 - Sensor-Surface: 1.4mm (Mechanical Surface Detection), - Electronics: DAE4 Sn546; Calibrated: 11/11/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: 1559 - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) System Performance Check at Frequencies 2450 MHz/2450/Area Scan (8x11x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 21.4 W/kg System Performance Check at Frequencies 2450 MHz/2450/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 108.5 V/m; Power Drift = 0.12 dB Peak SAR (extrapolated) = 28.3 W/kg SAR(1 g) = 13.57 W/kg; SAR(10 g) = 6.32 W/kg Maximum value of SAR (measured) = 22.5 W/kg 	

SRTC performed system check by using 250mw at antenna port

System check	2600MHz
Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 2600 \text{ MHz}$; $\sigma = 1.87 \text{ S/m}$; $\epsilon_r = 38.58$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.37, 7.37, 7.37); Calibrated: 2020/10/30 - Sensor-Surface: 1.4mm (Mechanical Surface Detection), - Electronics: DAE4 Sn546; Calibrated: 11/11/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: 1559 - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) SYSTEM CHECK 2600/Area Scan (5x11x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 22.6 W/kg SYSTEM CHECK 2600/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 102.5 V/m; Power Drift = 0.10 dB Peak SAR (extrapolated) = 33.7 W/kg SAR(1 g) = 14.62 W/kg; SAR(10 g) = 6.60 W/kg Maximum value of SAR (measured) = 26.5 W/kg 	

SRTC performed system check by using 250mw at antenna port

GSM850

Body-worn	Back
Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 2:8 Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.89 \text{ S/m}$; $\epsilon_r = 41.20$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.39, 9.39, 9.39) @ 836.6 MHz; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 11/11/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) Back 10mm/GSM850 2TX/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.537 W/kg Back 10mm/GSM850 2TX/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 17.97 V/m; Power Drift = -0.02 dB Peak SAR (extrapolated) = 0.717 W/kg SAR(1 g) = 0.395 W/kg; SAR(10 g) = 0.225 W/kg Maximum value of SAR (measured) = 0.599 W/kg	

GSM1900

Body-worn	Back
Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 3:8 Medium parameters used (interpolated): $f = 1880 \text{ MHz}$; $\sigma = 1.41 \text{ S/m}$; $\epsilon_r = 40.1$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.99, 7.99, 7.99) @ 1880 MHz; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 11/11/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) Back 10mm/GSM1900 3TX/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.460 W/kg Back 10mm/GSM1900 3TX/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 5.951 V/m; Power Drift = -0.01 dB Peak SAR (extrapolated) = 0.553 W/kg SAR(1 g) = 0.306 W/kg; SAR(10 g) = 0.166 W/kg Maximum value of SAR (measured) = 0.462 W/kg	

WCDMA Band II

Body-worn	Back
Communication System: UID 0, WCDMA BAND2 (0); Frequency: 1880 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1880 \text{ MHz}$; $\sigma = 1.41 \text{ S/m}$; $\epsilon_r = 40.1$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.99, 7.99, 7.99) @ 1880 MHz; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 11/11/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) Back 10mm/WCDMA B2/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.683 W/kg Back 10mm/WCDMA B2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 7.224 V/m; Power Drift = -0.05 dB Peak SAR (extrapolated) = 0.817 W/kg SAR(1 g) = 0.454 W/kg; SAR(10 g) = 0.248 W/kg Maximum value of SAR (measured) = 0.685 W/kg	

WCDMA Band IV

Body-worn	Back
Communication System: UID 0, WCDMA BAND4 (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1732.6$ MHz; $\sigma = 1.376$ S/m; $\epsilon_r = 40.07$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(8.27, 8.27, 8.27) @ 1732.6 MHz; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 11/11/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) Back 10mm/WCDMA B4/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.577 W/kg Back 10mm/WCDMA B4/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 7.010 V/m; Power Drift = -0.11 dB Peak SAR (extrapolated) = 0.752 W/kg SAR(1 g) = 0.437 W/kg; SAR(10 g) = 0.246 W/kg Maximum value of SAR (measured) = 0.644 W/kg	

WCDMA Band V

Body-worn	Back
Communication System: UID 0, WCDMA BAND 5 (0); Frequency: 836.6 MHz ;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.89 \text{ S/m}$; $\epsilon_r = 41.20$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.39, 9.39, 9.39) @ 836.6 MHz; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 11/11/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) Back 10mm/WCDMA B5/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.245 W/kg Back 10mm/WCDMA B5/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 12.76 V/m; Power Drift = -0.04 dB Peak SAR (extrapolated) = 0.349 W/kg SAR(1 g) = 0.194 W/kg; SAR(10 g) = 0.112 W/kg Maximum value of SAR (measured) = 0.293 W/kg	

LTE Band 2

Body-worn	Back
Communication System: UID 0, LTE band 02 (0); Frequency: 1880 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1880 \text{ MHz}$; $\sigma = 1.41 \text{ S/m}$; $\epsilon_r = 40.1$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.99, 7.99, 7.99) @ 1880 MHz; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 11/11/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) Back 10mm/LTE B2/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.673 W/kg Back 10mm/LTE B2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 9.174 V/m; Power Drift = -0.01 dB Peak SAR (extrapolated) = 0.934 W/kg SAR(1 g) = 0.519 W/kg; SAR(10 g) = 0.285 W/kg Maximum value of SAR (measured) = 0.773 W/kg	

LTE Band 4

Body-worn	Back
Communication System: UID 0, LTE band 4 (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1732.5 \text{ MHz}$; $\sigma = 1.375 \text{ S/m}$; $\epsilon_r = 40.07$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(8.27, 8.27, 8.27) @ 1732.5 MHz; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 11/11/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) Back 10mm/LTE B4/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.544 W/kg Back 10mm/LTE B4/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 7.816 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 0.804 W/kg SAR(1 g) = 0.465 W/kg; SAR(10 g) = 0.260 W/kg Maximum value of SAR (measured) = 0.656 W/kg	

LTE Band 5

Body-worn	Back
Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.5 \text{ MHz}$; $\sigma = 0.89 \text{ S/m}$; $\epsilon_r = 41.20$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.39, 9.39, 9.39) @ 836.5 MHz; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 11/11/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) Back 10mm/LTE B5/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.354 W/kg Back 10mm/LTE B5/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 13.98 V/m; Power Drift = -0.03 dB Peak SAR (extrapolated) = 0.415 W/kg SAR(1 g) = 0.230 W/kg; SAR(10 g) = 0.132 W/kg Maximum value of SAR (measured) = 0.349 W/kg	

LTE Band 7

Body-worn	Back
Communication System: UID 0, LTE BAND07 (0); Frequency: 2535 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 2535 \text{ MHz}$; $\sigma = 1.888 \text{ S/m}$; $\epsilon_r = 39.084$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.37, 7.37, 7.37) @ 2535 MHz; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 11/11/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) Back 10mm/LTE B7/Area Scan (10x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 1.19 W/kg Back 10mm/LTE B7/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 1.113 V/m; Power Drift = 0.11 dB Peak SAR (extrapolated) = 1.65 W/kg SAR(1 g) = 0.721 W/kg; SAR(10 g) = 0.284 W/kg Maximum value of SAR (measured) = 1.29 W/kg	

LTE Band 12

Body-worn	Back
Communication System: UID 0, LTE Band 12 (0); Frequency: 707.5 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 707.5 \text{ MHz}$; $\sigma = 0.887 \text{ S/m}$; $\epsilon_r = 42.115$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.75, 9.75, 9.75) @ 707.5 MHz; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 11/11/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) Back 10mm/LTE B12/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.211 W/kg Back 10mm/LTE B12/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 16.28 V/m; Power Drift = 0.07 dB Peak SAR (extrapolated) = 0.221 W/kg SAR(1 g) = 0.171 W/kg; SAR(10 g) = 0.130 W/kg Maximum value of SAR (measured) = 0.205 W/kg	

LTE Band 26

Body-worn	Back
Communication System: UID 0, LTE Band 26 (0); Frequency: 831.5 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 831.5 \text{ MHz}$; $\sigma = 0.89 \text{ S/m}$; $\epsilon_r = 41.20$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.39, 9.39, 9.39) @ 831.5 MHz; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 11/11/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) Back 10mm/LTE B26/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.293 W/kg Back 10mm/LTE B26/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 13.78 V/m; Power Drift = -0.06 dB Peak SAR (extrapolated) = 0.347 W/kg SAR(1 g) = 0.194 W/kg; SAR(10 g) = 0.112 W/kg Maximum value of SAR (measured) = 0.292 W/kg	

WIFI 2.4GHz

Body-worn	Back
Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2462 MHz; Duty Cycle: 1:1.01 Medium parameters used (interpolated): $f = 2462 \text{ MHz}$; $\sigma = 1.77 \text{ S/m}$; $\epsilon_r = 38.82$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Left Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.48, 7.48, 7.48) @ 2462 MHz; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 11/11/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) Configuration/WIFI 2.4G/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.527 W/kg Configuration/WIFI 2.4G/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 11.98 V/m; Power Drift = -0.18 dB Peak SAR (extrapolated) = 0.734 W/kg SAR(1 g) = 0.355 W/kg; SAR(10 g) = 0.180 W/kg Maximum value of SAR (measured) = 0.542 W/kg	