

FCC PART 15.247

TEST REPORT

For

SPRESSIF SYSTEMS (SHANGHAI) PTE LTD

456 Bibo Road Room A201 Shanghai, China

FCC ID: 2AC7Z-ESPWROOMS2

Report Type: Original Report	Product Type: WIFI Module
Test Engineer: <u>Ada Yu</u> <i>Ada Yu</i>	
Report Number: <u>RKS161206001-00B</u>	
Report Date: <u>2016-12-28</u>	
Reviewed By: <u>Oscar Ye</u> <i>Oscar Ye</i> RF Engineer	
Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	7
EUT EXERCISE SOFTWARE	7
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS.....	9
TEST EQUIPMENT LIST	10
FCC§15.247 (i), §1.1310& §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	11
APPLICABLE STANDARD	11
FCC §15.203 - ANTENNA REQUIREMENT.....	12
APPLICABLE STANDARD	12
ANTENNA CONNECTOR CONSTRUCTION	12
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	13
APPLICABLE STANDARD	13
EUT SETUP	13
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE	13
CORRECTED FACTOR & MARGIN CALCULATION	14
TEST RESULTS SUMMARY	14
TEST DATA	14
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	17
APPLICABLE STANDARD	17
EUT SETUP	17
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	18
TEST PROCEDURE	18
CORRECTED AMPLITUDE & MARGIN CALCULATION	18
TEST RESULTS SUMMARY	18
TEST DATA	19
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	30
APPLICABLE STANDARD	30
TEST PROCEDURE	30
TEST DATA	30
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	37
APPLICABLE STANDARD	37

TEST PROCEDURE	37
TEST DATA	37
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	41
APPLICABLE STANDARD	41
TEST PROCEDURE	41
TEST DATA	41
FCC §15.247(e) - POWER SPECTRAL DENSITY	45
APPLICABLE STANDARD	45
TEST PROCEDURE	45
TEST DATA	45

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Manufacturer	ESPRESSIF SYSTEMS (SHANGHAI) PTE LTD
EUT Description	WIFI Module
Tested Model	ESP-WROOM-S2
Multiple Model	N/A
FCC ID	2AC7Z-ESPWROOMS2
Rate Voltage	Input DC 3.3V, rated power :6W
Dimension	16 mm(H)×23 mm(W)×3.3 mm(T)

**All measurement and test data in this report was gathered from production sample serial number: 20161129001
(Assigned by the BACL. The EUT supplied by the applicant was received on 2016-11-29)*

Objective

This report is prepared on behalf of ESPRESSIF SYSTEMS (SHANGHAI) PTE LTD in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No related submittal(s)/grant(s)

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB558074 D01 DTS Meas Guidance v03r05.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.26 dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	5.91dB
	1GHz~6GHz	4.68dB
	6 GHz ~18 GHz	4.92dB
	18 GHz~40 GHz	4.88dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road,Kunshan,Jiangsu province,China.

Test site at Bay Area Compliance Laboratories Corp. (Kunshan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 06, 2014. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.10-2013.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 815570. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 802.11b, 802.11g and 802.11n-HT20 mode, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	/	/
6	2437	/	/
7	2442	/	/

EUT was tested with Channel 1, 6 and 11.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

WL43341B0

The worst case was performed under:

802.11b: Data rate: 1 Mbps, Power level: 17

802.11g: Data rate: 6 Mbps, Power level: 17

802.11n-HT20: Data rate: MCS0, Power level: 17

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DELL	Notebook	GX620	D65874152
ESPRESSIF	Control Board	/	/

External I/O Cable


Cable Description	Shielding Type	Length (m)	From Port	To
USB Cable	Un-shielding	0.3	Control Board	Notebook

Block Diagram of Test Setup

For Radiated Emissions (Below 1GHz):

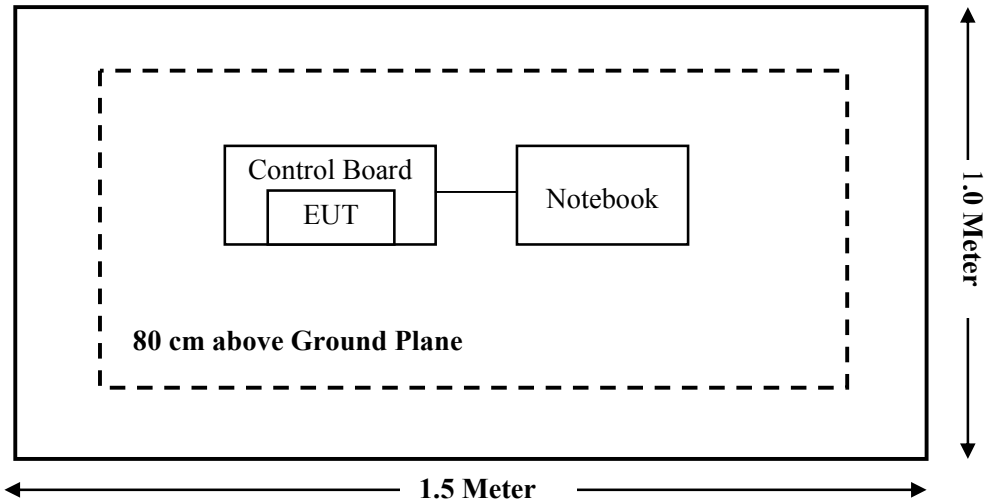

For Radiated Emissions (Above 1GHz):

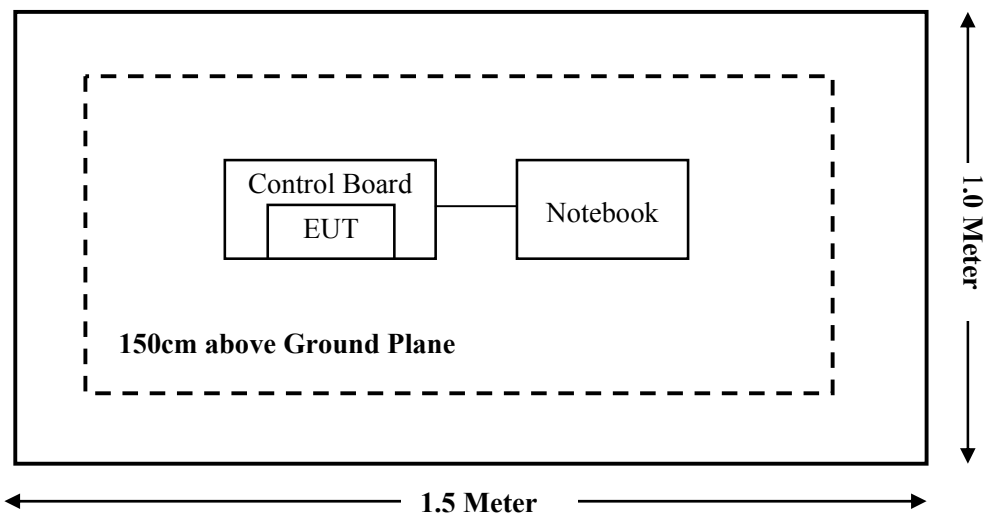

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (1)& §2.1091	MAXIMUM PERMISSIBLE EXPOSURE (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2016-11-25	2017-11-24
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2016-11-25	2017-11-24
Sunol Sciences	Broadband Antenna	JB3	A090314-2	2016-01-09	2019-01-08
ETS-LINDGREN	Horn Antenna	3115	6229	2016-01-11	2019-01-10
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-10-18	2019-10-17
Sonoma Instrument	Amplifier	330	171377	2016-10-21	2017-10-20
Narda	Pre-amplifier	AFS42-00101800	2001270	2016-09-08	2017-09-07
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
Haojintech	Coaxial Cable	Cable-1	001	2016-12-12	2017-12-11
Haojintech	Coaxial Cable	Cable-2	002	2016-12-12	2017-12-11
Haojintech	Coaxial Cable	Cable-3	003	2016-12-12	2017-12-11
MICRO-COAX	Coaxial Cable	Cable-4	004	2016-12-12	2017-12-11
MICRO-COAX	Coaxial Cable	Cable-5	005	2016-12-12	2017-12-11
RF Conducted Test					
Rohde & Schwarz	OSP120 Base Unit	OSP120	101247	2016-07-04	2017-07-03
BACL	EMC32 Version	EMC 32	V 09.10.0	/	/
Rohde & Schwarz	SMBV100A Vector Signal Generator	SMBV100A	261558	2016-07-04	2017-07-03
Rohde & Schwarz	SMB 100A Signal Generator	SMB100A	110390	2016-07-04	2017-07-03
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2016-09-21	2017-09-21
Agilent	Power Meter	N1912A	MY5000492	2016-11-18	2017-11-17
Agilent	Power Sensor	N1921A	MY54210024	2016-11-18	2017-11-17
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCS30	834115/007	2016-11-25	2017-11-24
Rohde & Schwarz	LISN	ESH3-Z5	862770/011	2016-10-10	2017-10-09
Rohde & Schwarz	LISN	ENV216	3560655016	2016-11-25	2017-11-24
Rohde & Schwarz	CE Test software	EMC 32	100357	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2016-09-08	2017-09-07

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (i), §1.1310& §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;
According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency Range	Antenna Gain		Output Power		Evaluation Distance	Power Density	MPE Limit
	(MHz)	(dBi)	(numeric)	(dBm)	(mW)	(cm)	(mW/cm ²)	(mW/cm ²)
802.11b	2412-2462	2.0	1.58	18.00	63.10	20	0.0199	1.0
802.11g	2412-2462	2.0	1.58	18.00	63.10	20	0.0199	1.0
802.11n HT20	2412-2462	2.0	1.58	18.00	63.10	20	0.0199	1.0

Note: The target output power:

802.11b: 17±1dBm, which declared by the Manufacturer.

802.11g: 17±1dBm, which declared by the Manufacturer.

802.11n HT20: 17±1dBm, which declared by the Manufacturer.

Result: The device meet FCC MPE at 20 cm distance.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has a PCB antenna, which the antenna gain is 2dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup

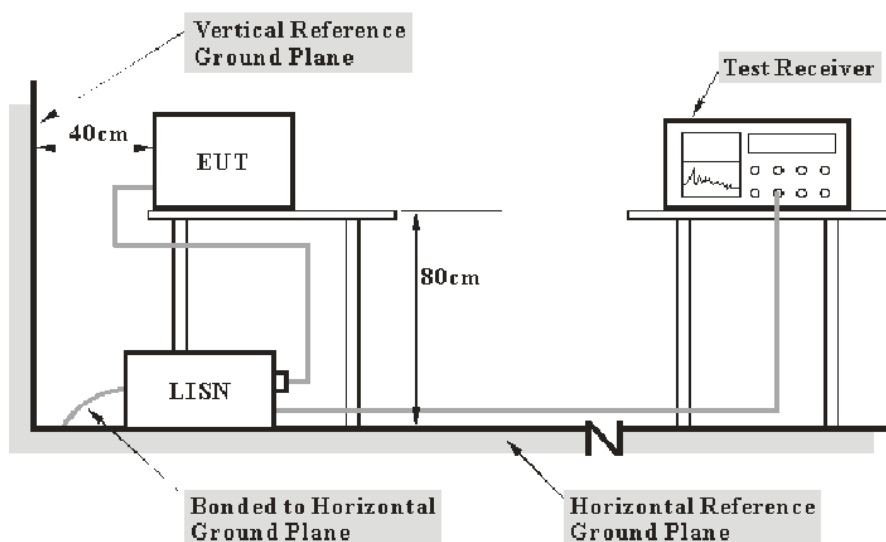

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The adapter was connected to a AC 120 V/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, the worst margin reading as below:

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{\text{lim}} + U_{\text{cispr}}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.


Test Data

Environmental Conditions


Temperature:	23 °C
Relative Humidity:	55 %
ATM Pressure:	101.1kPa

The testing was performed by Ada Yu on 2016-12-15.

EUT operation mode: Transmitting

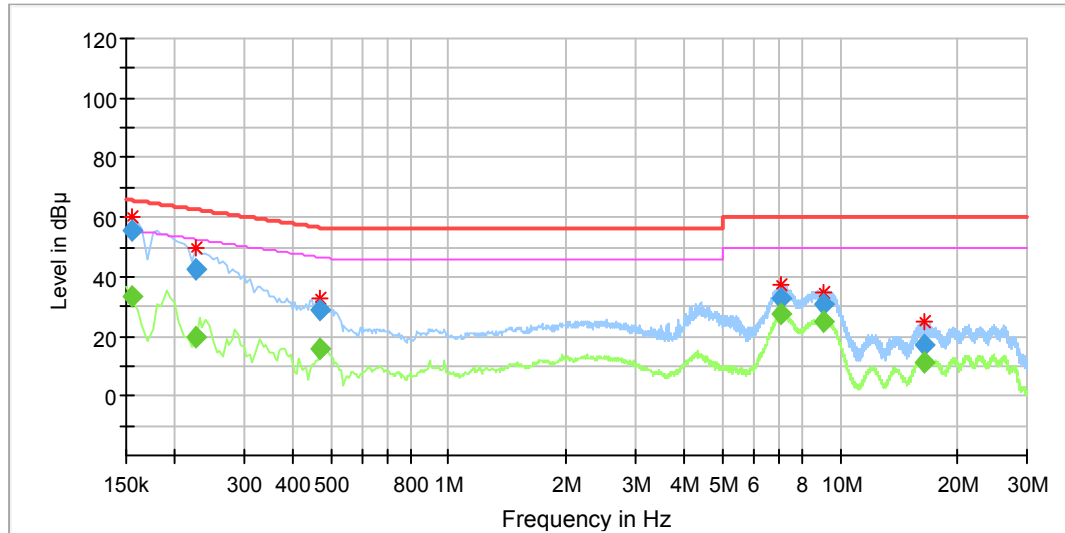AC 120V/60 Hz, Line

Frequency (MHz)	QuasiPeak (dBμV)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.155000	---	33.64	9.000	L1	10.3	22.09	55.73	Compliance
0.155000	55.67	---	9.000	L1	10.3	10.06	65.73	Compliance
0.225000	---	19.76	9.000	L1	10.3	32.87	52.63	Compliance
0.225000	42.58	---	9.000	L1	10.3	20.05	62.63	Compliance
0.470000	---	15.73	9.000	L1	10.3	30.78	46.51	Compliance
0.470000	28.96	---	9.000	L1	10.3	27.55	56.51	Compliance
7.020000	---	27.70	9.000	L1	10.5	22.30	50.00	Compliance
7.020000	32.74	---	9.000	L1	10.5	27.26	60.00	Compliance
9.020000	---	25.02	9.000	L1	10.5	24.98	50.00	Compliance
9.020000	30.49	---	9.000	L1	10.5	29.51	60.00	Compliance
16.310000	---	11.34	9.000	L1	10.5	38.66	50.00	Compliance
16.310000	16.81	---	9.000	L1	10.5	43.19	60.00	Compliance

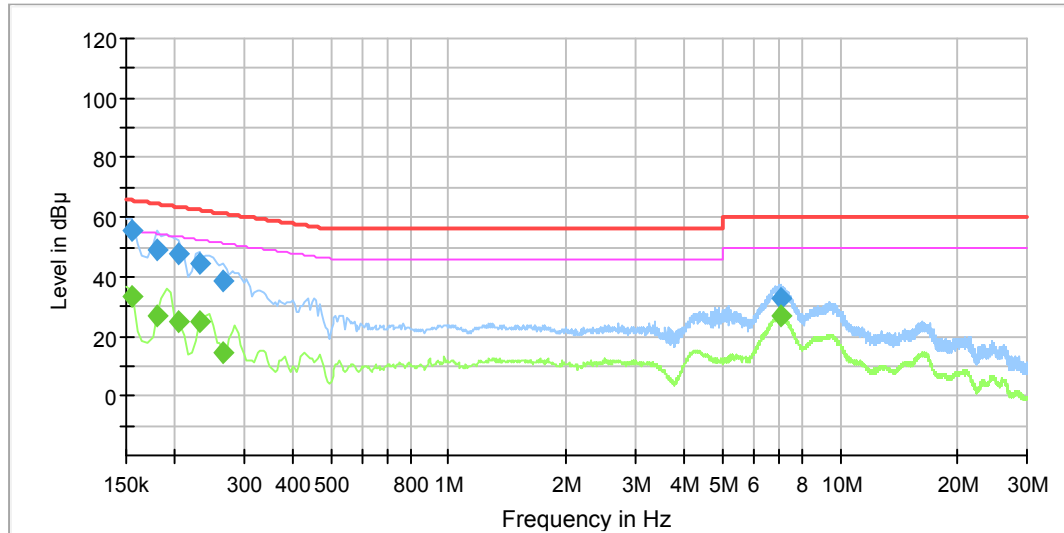AC 120V/60 Hz, Neutral


Frequency (MHz)	QuasiPeak (dBμV)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.155000	---	33.67	9.000	N	10.3	22.06	55.73	Compliance
0.155000	55.42	---	9.000	N	10.3	10.31	65.73	Compliance
0.180000	---	26.60	9.000	N	10.3	27.89	54.49	Compliance
0.180000	48.92	---	9.000	N	10.3	15.57	64.49	Compliance
0.205000	---	25.19	9.000	N	10.3	28.22	53.41	Compliance
0.205000	47.46	---	9.000	N	10.3	15.95	63.41	Compliance
0.230000	---	25.22	9.000	N	10.3	27.23	52.45	Compliance
0.230000	44.77	---	9.000	N	10.3	17.68	62.45	Compliance
0.265000	---	14.77	9.000	N	10.3	36.50	51.27	Compliance
0.265000	38.67	---	9.000	N	10.3	22.60	61.27	Compliance
7.030000	---	26.95	9.000	N	10.6	23.05	50.00	Compliance
7.030000	32.62	---	9.000	N	10.6	27.38	60.00	Compliance

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1 GHz:

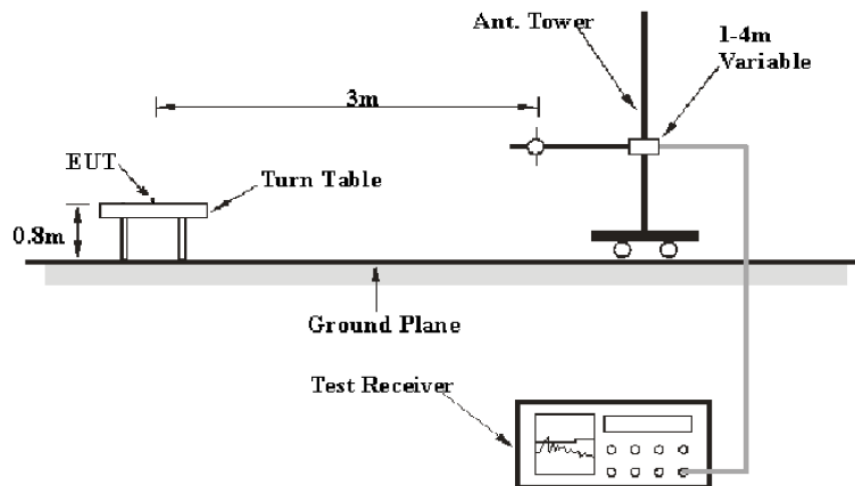

Above 1GHz:

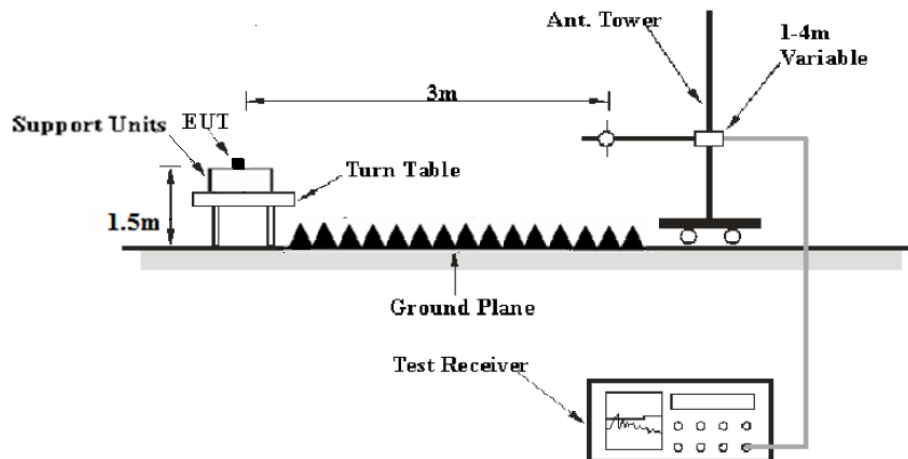

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The adapter was connected to a AC 120 V/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP

Frequency Range	RBW	Video B/W	Duty cycle	Detector
1GHz – 25GHz	1MHz	3 MHz	Any	PK
	1MHz	10 Hz	>98%	Ave.
	1MHz	1/T	<98%	

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data**Environmental Conditions**

Temperature:	23 °C
Relative Humidity:	54 %
ATM Pressure:	101.2kPa

The testing was performed by Ada Yu on 2016-12-15.

EUT operation mode: Transmitting

30MHz-1GHz

Frequency	Receiver		Turntable	Rx Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/205/209	
	Reading	Detector		Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave.)	Degree	(cm)	(H/V)	(dB)	(dBμV/m)	(dB μV/m)	(dB)
72.01	35.35	QP	173	153	H	-16.93	18.42	40.00	21.58
160.01	36.82	QP	149	161	V	-12.39	24.43	43.50	19.07
179.18	29.91	QP	135	128	V	-12.01	17.90	43.50	25.60
320.02	34.20	QP	176	136	V	-10.06	24.14	46.00	21.86
480.02	33.46	QP	135	111	H	-6.34	27.12	46.00	18.88
723.52	29.99	QP	189	125	H	-2.25	27.74	46.00	18.26

Note: The worst case (802.11b, high channel) was recorded.

802.11b mode

Frequency	Receiver		Turntable	Rx Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/205/209	
	Reading	Detector		Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave.)	Degree	(cm)	(H/V)	(dB)	(dBμV/m)	(dB μV/m)	(dB)
Low Channel (2412 MHz)									
2412.00	109.26	PK	271	122	V	-6.17	103.09	/	/
2412.00	105.34	Ave	271	122	V	-6.17	99.17	/	/
2412.00	107.23	PK	242	229	H	-6.17	101.06	/	/
2412.00	103.62	Ave	242	229	H	-6.17	97.45	/	/
2390.00	55.06	PK	30	212	V	-6.22	48.84	74.00	25.16
2390.00	51.26	Ave	30	212	V	-6.22	45.04	54.00	8.96
2400.00	67.03	PK	156	239	V	-6.19	60.84	74.00	13.16
2400.00	52.36	Ave	156	239	V	-6.19	46.17	54.00	7.83
4824.00	53.48	PK	263	148	H	1.66	55.14	74.00	18.86
4824.00	48.64	Ave	263	148	H	1.66	50.30	54.00	3.70
7236.00	46.12	PK	345	118	H	7.58	53.70	74.00	20.30
7236.00	42.58	Ave	345	118	H	7.58	50.16	54.00	3.84

Frequency	Receiver		Turntable	Rx Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/205/209	
	Reading	Detector		Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave.)	Degree	(cm)	(H/V)	(dB)	(dBμV/m)	(dB μV/m)	(dB)
Middle Channel (2437 MHz)									
2437.00	109.23	PK	214	247	V	-6.11	103.12	/	/
2437.00	106.98	Ave	214	247	V	-6.11	100.87	/	/
2437.00	107.11	PK	41	165	H	-6.11	101.00	/	/
2437.00	105.32	Ave	41	165	H	-6.11	99.21	/	/
4874.00	53.17	PK	272	205	V	1.77	54.94	74.00	19.06
4874.00	48.19	Ave	272	205	V	1.77	49.96	54.00	4.04
7311.00	44.65	PK	81	202	H	7.66	52.31	74.00	21.69
7311.00	40.79	Ave	81	202	H	7.66	48.45	54.00	5.55

Frequency	Receiver		Turntable	Rx Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/205/209	
	Reading	Detector		Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave.)	Degree	(cm)	(H/V)	(dB)	(dBμV/m)	(dB μ V/m)	(dB)
High Channel (2462 MHz)									
2462.00	109.99	PK	318	203	V	-6.06	103.93	/	/
2462.00	105.65	Ave	318	203	V	-6.06	99.59	/	/
2462.00	106.68	PK	171	225	H	-6.06	100.62	/	/
2462.00	102.02	Ave	171	225	H	-6.06	95.96	/	/
2483.50	56.37	PK	283	118	V	-6.01	50.36	74.00	23.64
2483.50	51.26	Ave	283	118	V	-6.01	45.25	54.00	8.75
4924.00	51.39	PK	145	189	V	1.89	53.28	74.00	20.72
4924.00	47.94	Ave	145	189	V	1.89	49.83	54.00	4.17
7386.00	45.17	PK	179	129	H	7.73	52.90	74.00	21.10
7386.00	41.02	Ave	179	129	H	7.73	48.75	54.00	5.25

802.11g mode

Frequency	Receiver		Turntable	Rx Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/205/209	
	Reading	Detector		Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave.)	Degree	(cm)	(H/V)	(dB)	(dBμV/m)	(dB μ V/m)	(dB)
Low Channel (2412 MHz)									
2412.00	109.01	PK	328	242	V	-6.17	102.84	/	/
2412.00	107.66	Ave	328	242	V	-6.17	101.49	/	/
2412.00	107.23	PK	251	245	H	-6.17	101.06	/	/
2412.00	105.03	Ave	251	245	H	-6.17	98.86	/	/
2390.00	56.98	PK	286	165	V	-6.22	50.76	74.00	23.24
2390.00	42.63	Ave	286	165	V	-6.22	46.41	54.00	17.59
2400.00	68.69	PK	221	239	V	-6.19	62.50	74.00	11.50
2400.00	56.03	Ave	221	239	V	-6.19	49.84	54.00	4.16
4824.00	52.22	PK	166	144	H	1.66	53.88	74.00	20.12
4824.00	47.61	Ave	166	144	H	1.66	49.27	54.00	4.73
7236.00	47.09	PK	104	107	H	7.58	54.67	74.00	19.33
7236.00	41.27	Ave	104	107	H	7.58	48.85	54.00	5.15

Frequency	Receiver		Turntable	Rx Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/205/209	
	Reading	Detector		Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave.)	Degree	(cm)	(H/V)	(dB)	(dBμV/m)	(dB μV/m)	(dB)
Middle Channel (2437 MHz)									
2437.00	108.59	PK	5	185	V	-6.11	102.48	/	/
2437.00	105.65	Ave	5	185	V	-6.11	99.54	/	/
2437.00	106.68	PK	307	123	H	-6.11	100.57	/	/
2437.00	102.02	Ave	307	123	H	-6.11	95.91	/	/
4874.00	53.42	PK	306	183	V	1.77	55.19	74.00	18.81
4874.00	47.96	Ave	306	183	V	1.77	49.73	54.00	4.27
7311.00	47.33	PK	148	205	H	7.66	54.99	74.00	19.01
7311.00	41.56	Ave	148	205	H	7.66	49.22	54.00	4.78



Frequency	Receiver		Turntable	Rx Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/205/209	
	Reading	Detector		Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave.)	Degree	(cm)	(H/V)	(dB)	(dBμV/m)	(dB μV/m)	(dB)
High Channel (2462 MHz)									
2462.00	109.63	PK	311	183	V	-6.06	103.57	/	/
2462.00	106.08	Ave	311	183	V	-6.06	100.02	/	/
2462.00	107.98	PK	13	243	H	-6.06	101.92	/	/
2462.00	105.34	Ave	13	243	H	-6.06	99.28	/	/
2483.50	56.38	PK	78	201	V	-6.01	50.37	74.00	23.63
2483.50	53.21	Ave	78	201	V	-6.01	47.20	54.00	6.80
4924.00	53.11	PK	276	132	V	1.89	55.00	74.00	19.00
4924.00	47.86	Ave	276	132	V	1.89	49.75	54.00	4.25
7386.00	46.57	PK	71	121	H	7.73	54.30	74.00	19.70
7386.00	41.64	Ave	71	121	H	7.73	49.37	54.00	4.63

802.11n HT20 mode


Frequency	Receiver		Turntable	Rx Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/205/209	
	Reading	Detector		Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave.)	Degree	(cm)	(H/V)	(dB)	(dBμV/m)	(dB μV/m)	(dB)
Low Channel (2412 MHz)									
2412.00	109.03	PK	43	143	V	-6.17	102.86	/	/
2412.00	108.66	Ave	43	143	V	-6.17	102.49	/	/
2412.00	107.34	PK	60	194	H	-6.17	101.17	/	/
2412.00	106.02	Ave	60	194	H	-6.17	99.85	/	/
2390.00	60.11	PK	325	179	V	-6.22	53.89	74.00	20.11
2390.00	56.33	Ave	325	179	V	-6.22	50.11	54.00	3.89
2400.00	70.34	PK	291	116	V	-6.19	64.15	74.00	9.85
2400.00	56.27	Ave	291	116	V	-6.19	50.08	54.00	3.92
4824.00	52.95	PK	306	198	H	1.66	54.61	74.00	19.39
4824.00	46.01	Ave	306	198	H	1.66	47.67	54.00	6.33
7236.00	45.23	PK	259	216	H	7.58	52.81	74.00	21.19
7236.00	10.33	Ave	259	216	H	7.58	17.91	54.00	36.09

Frequency	Receiver		Turntable	Rx Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/205/209	
	Reading	Detector		Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave.)	Degree	(cm)	(H/V)	(dB)	(dBμV/m)	(dB μV/m)	(dB)
Middle Channel (2437 MHz)									
2437.00	109.85	PK	245	228	V	-6.11	103.74	/	/
2437.00	106.23	Ave	245	228	V	-6.11	100.12	/	/
2437.00	107.66	PK	237	129	H	-6.11	101.55	/	/
2437.00	105.33	Ave	237	129	H	-6.11	99.22	/	/
4874.00	53.41	PK	127	159	V	1.77	55.18	74.00	18.82
4874.00	48.36	Ave	127	159	V	1.77	50.13	54.00	3.87
7311.00	46.88	PK	338	204	H	7.66	54.54	74.00	19.46
7311.00	40.54	Ave	338	204	H	7.66	48.20	54.00	5.80


Frequency	Receiver		Turntable	Rx Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/205/209	
	Reading	Detector		Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave.)	Degree	(cm)	(H/V)	(dB)	(dBμV/m)	(dB μ V/m)	(dB)
High Channel (2462 MHz)									
2462.00	110.26	PK	32	155	V	-6.06	104.20	/	/
2462.00	108.33	Ave	32	155	V	-6.06	102.27	/	/
2462.00	109.63	PK	72	117	H	-6.06	103.57	/	/
2462.00	106.98	Ave	72	117	H	-6.06	100.92	/	/
2483.50	60.33	PK	328	135	V	-6.01	54.32	74.00	19.68
2483.50	56.91	Ave	328	135	V	-6.01	50.90	54.00	3.10
4924.00	52.67	PK	143	203	V	1.89	54.56	74.00	19.44
4924.00	47.16	Ave	143	203	V	1.89	49.05	54.00	4.95
7386.00	48.22	PK	200	156	H	7.73	55.95	74.00	18.05
7386.00	40.87	Ave	200	156	H	7.73	48.60	54.00	5.40

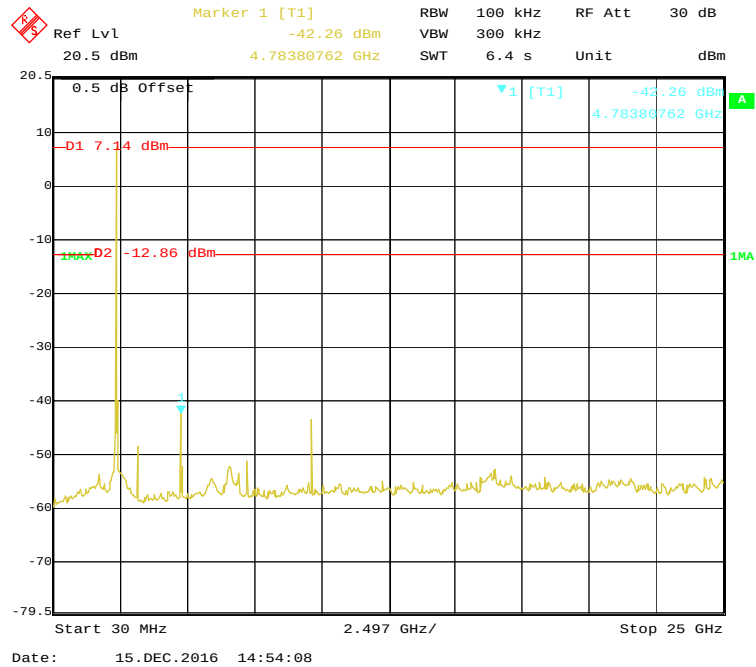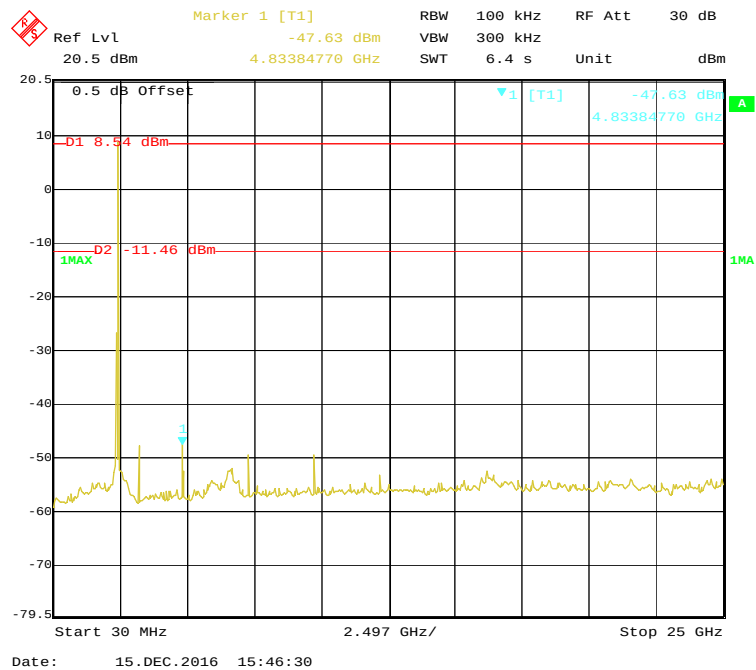Conducted Spurious Emissions at Antenna Port**802.11b Low Channel****802.11b Middle Channel**


802.11b High Channel

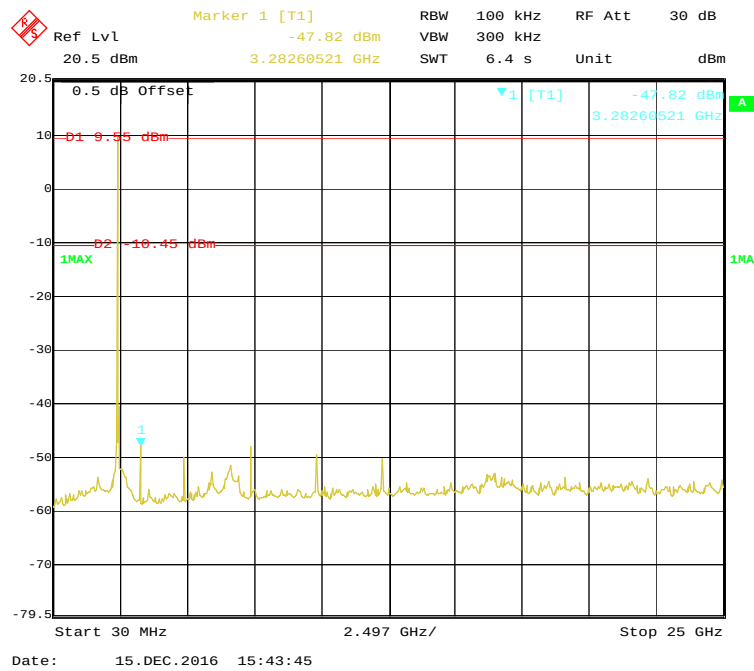


802.11g Low Channel


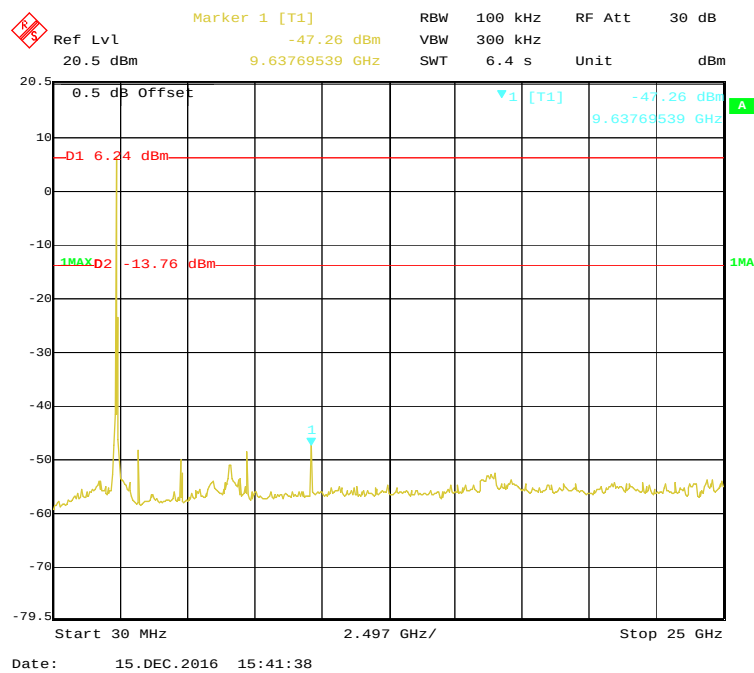


802.11g Middle Channel

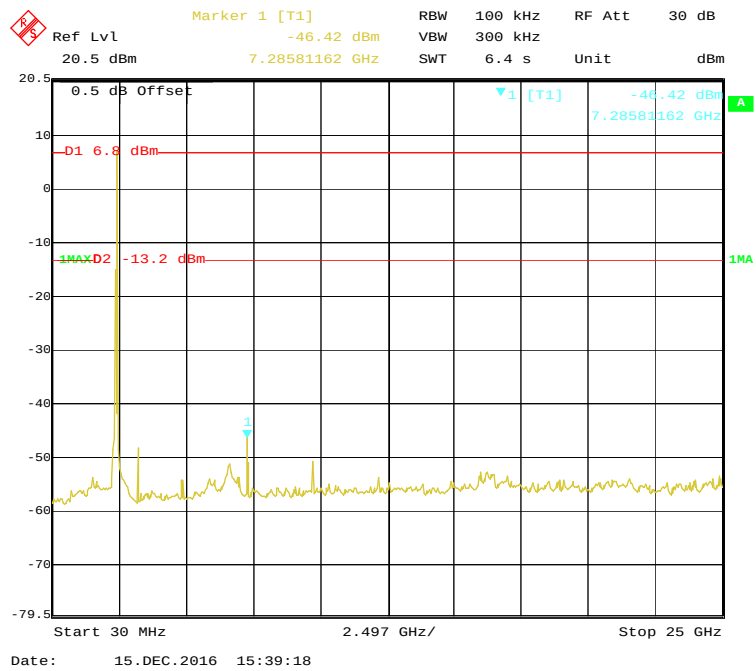


802.11g High Channel

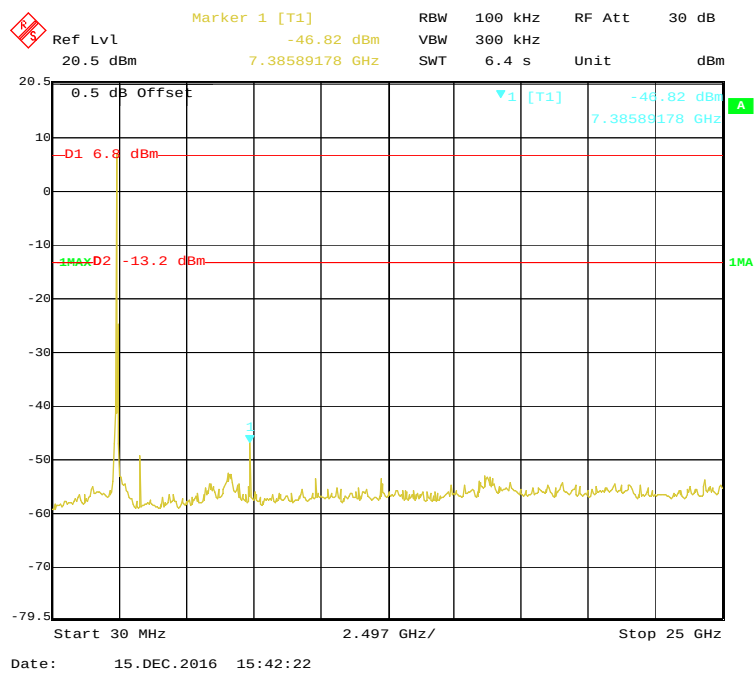

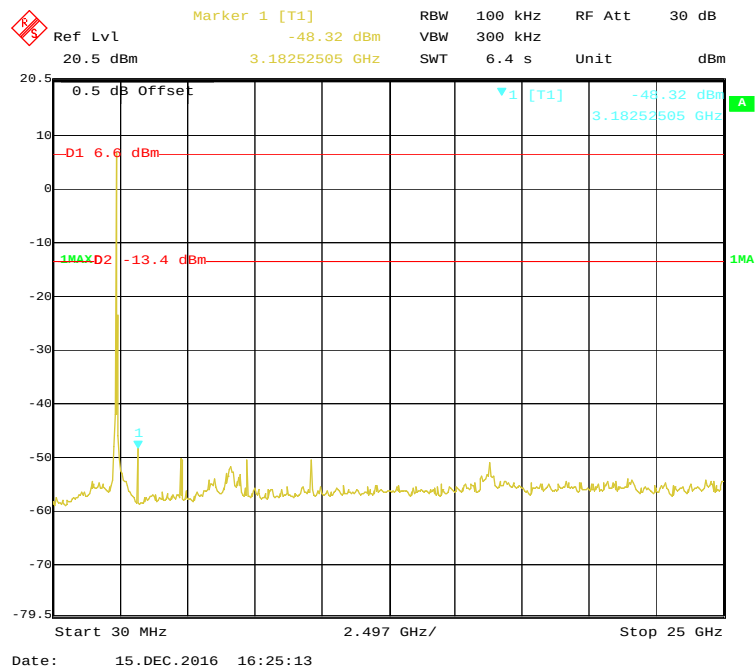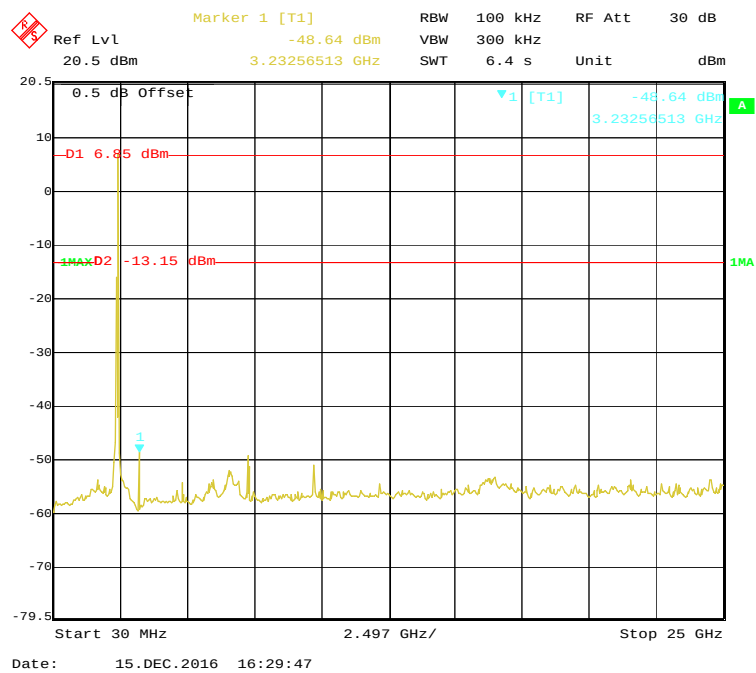802.11n-HT20 Low Channel**802.11n-HT20 Middle Channel**

802.11n-HT20 High Channel

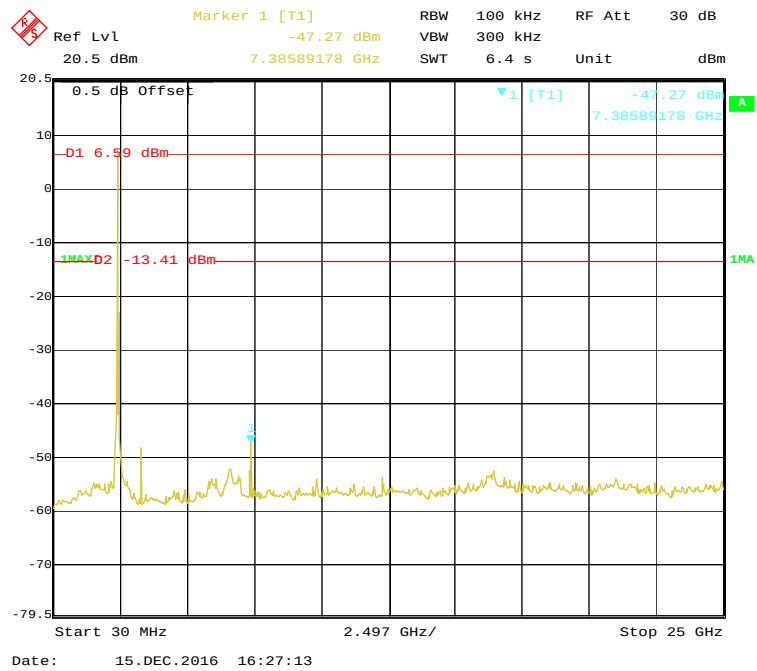


FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH**Applicable Standard**

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

**Test Data****Environmental Conditions**

Temperature:	24 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Ada Yu on 2016-12-15.


Test Result: Pass.

Please refer to the following tables and plots.


EUT operation mode: Transmitting

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
802.11b mode			
Low	2412	9.018	≥ 0.5
Middle	2437	9.058	≥ 0.5
High	2462	9.018	≥ 0.5
802.11g mode			
Low	2412	16.413	≥ 0.5
Middle	2437	16.413	≥ 0.5
High	2462	16.473	≥ 0.5
802.11n-HT20 mode			
Low	2412	17.735	≥ 0.5
Middle	2437	17.675	≥ 0.5
High	2462	17.675	≥ 0.5

802.11b Low Channel

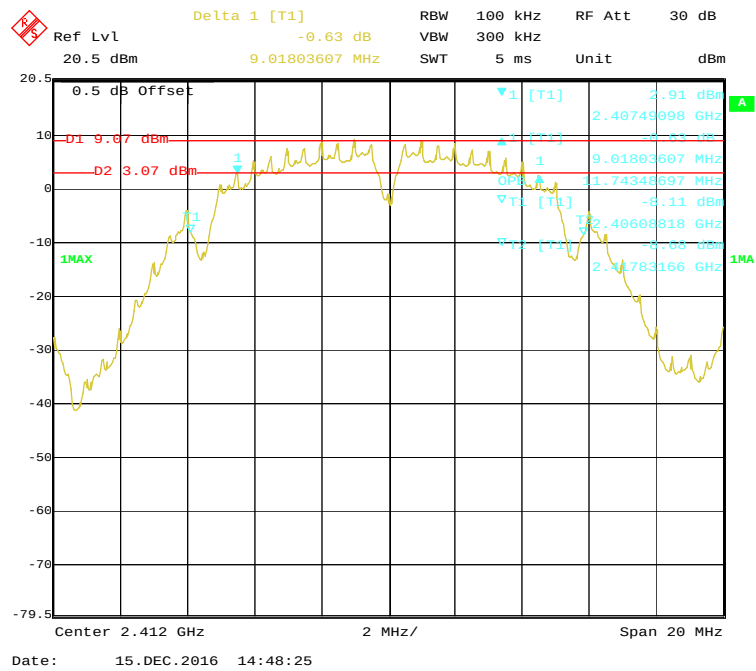

802.11b Middle Channel

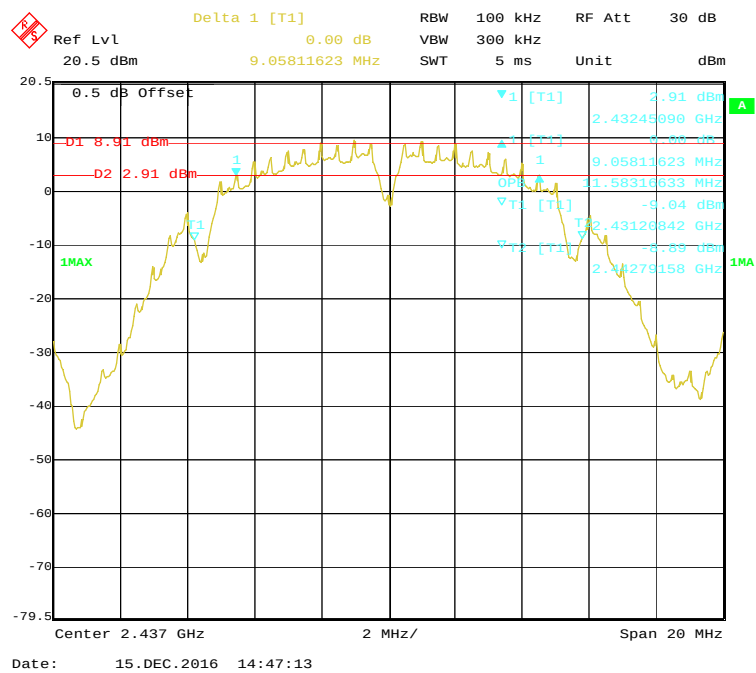

Delta 1 [T1]

Ref Lvl -0.41 dB

20.5 dBm 9.01803607 MHz

RBW 100 kHz RF Att 30 dB

SWT 5 ms Unit dBm

0.5 dB Offset

D1 9.27 dBm

D2 3.27 dBm

1MAX

T1 [T1]

T2 [T1]

T3 [T1]

T4 [T1]

1

2.45749998 GHz

9.01803607 MHz

1.58316633 MHz

-5.04 dBm

-8.83 dBm

2.46779158 GHz

1MA

Center 2.462 GHz

2 MHz/

Span 20 MHz

Date: 15.DEC.2016 14:49:36

Delta 1 [T1] -0.93 dB
 RBW 100 kHz RF Att 30 dB
 Ref Lvl 20.5 dBm
 SWT 7.5 ms Unit dBm

0.5 dB Offset
 -D1 7.21 dBm
 -D2 1.21 dBm
 1MAX
 1MA


T1 [T1] 1.95 dBm
 T2 [T1] -0.93 dBm
 T3 [T1] -0.25 dBm
 T4 [T1] -7.21 dBm

2.40379359 GHz
 2.4041282565 GHz
 2.40378759 GHz
 2.40349299 GHz
 2.4038677 GHz


Center 2.412 GHz 3 MHz/ Span 30 MHz

Date: 15.DEC.2016 15:35:07


802.11g Middle Channel

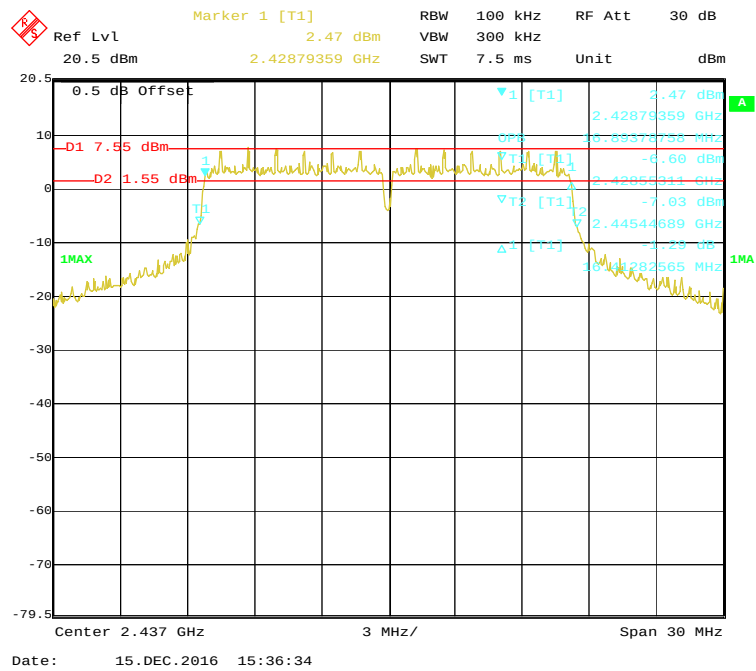


802.11g High Channel

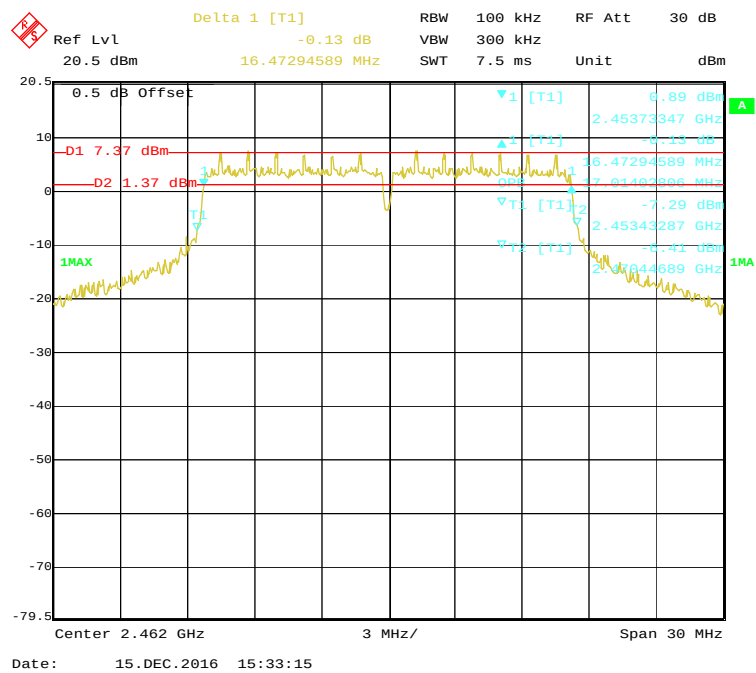


802.11n-HT20 Low Channel

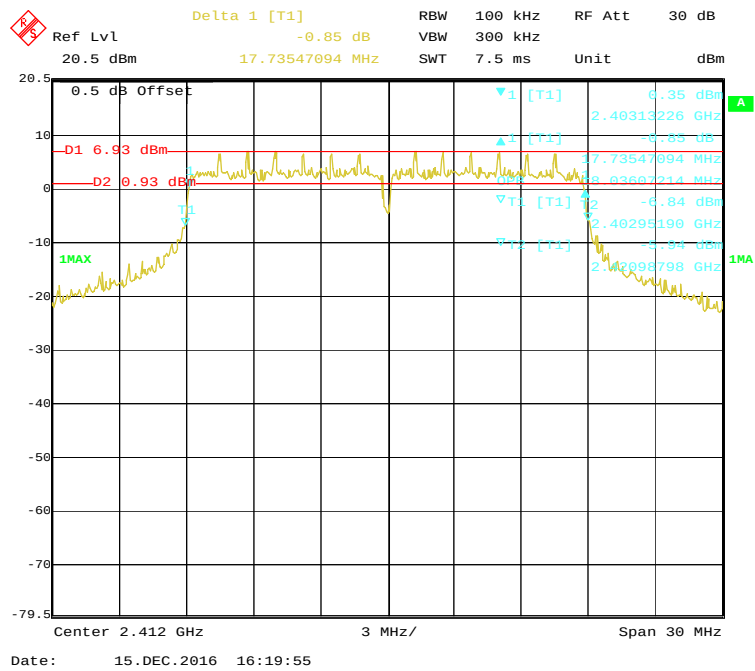

802.11n-HT20 Middle Channel

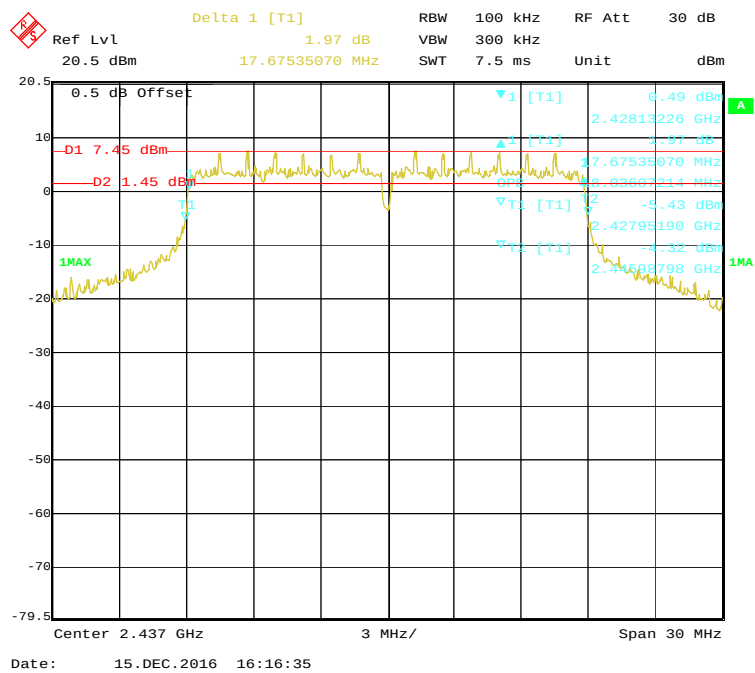

802.11n-HT20 High Channel

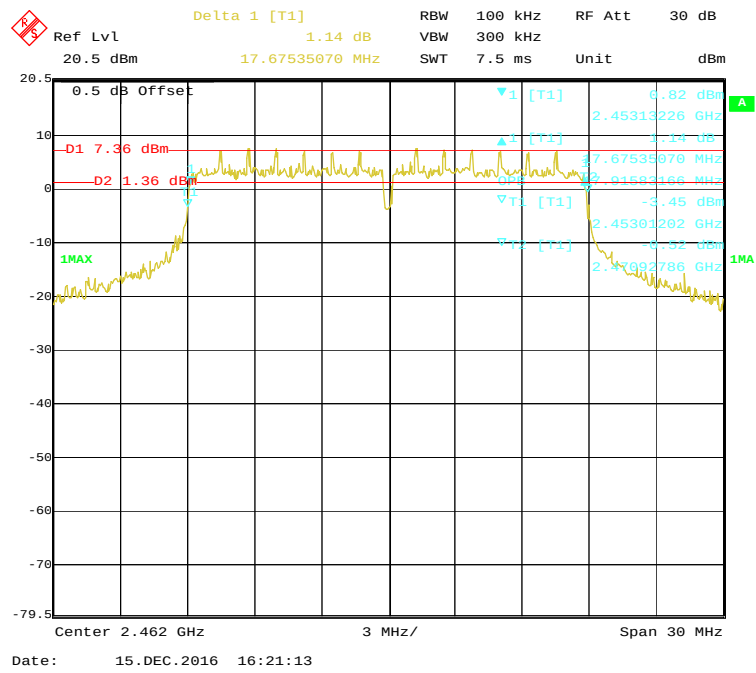


FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	23.8°C
Relative Humidity:	54 %
ATM Pressure:	101.2 kPa

The testing was performed by Ada Yu on 2016-12-22.

EUT operation mode: Transmitting


Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Conducted Average Output Power Reading (dBm)	Corrected Factor $10\log(1/x)$ (dB)	Conducted Average Output Power (dBm)	Limit (dBm)	Result
802.11b							
Low	2412	22.95	17.16	0.00	17.16	30	Pass
Middle	2437	23.05	17.20	0.00	17.20	30	Pass
High	2462	23.44	17.35	0.00	17.35	30	Pass
802.11g							
Low	2412	24.28	17.16	0.00	17.16	30	Pass
Middle	2437	24.20	17.21	0.00	17.21	30	Pass
High	2462	24.17	17.14	0.00	17.14	30	Pass
802.11n-HT20							
Low	2412	24.16	17.26	0.00	17.26	30	Pass
Middle	2437	24.46	17.32	0.00	17.32	30	Pass
High	2462	24.68	17.48	0.00	17.48	30	Pass

Note: x is the duty cycle. For 802.11b: x=1.0, 802.11g: x=1.0, 802.11n20: x=1.0


Conducted Average Output Power= Reading+ Corrected Factor

The reading value is reading from the test software.


802.11b Mode Middle Channel duty cycle

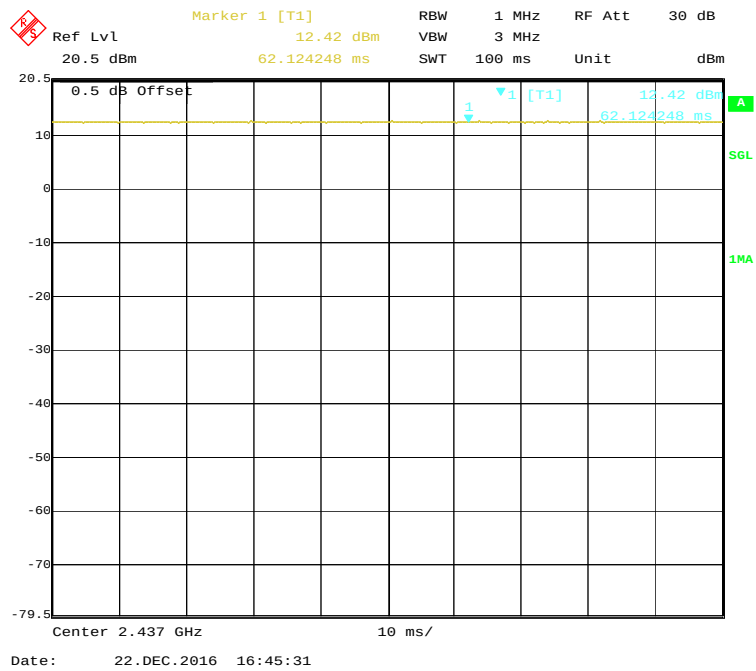

802.11g Mode Middle Channel duty cycle

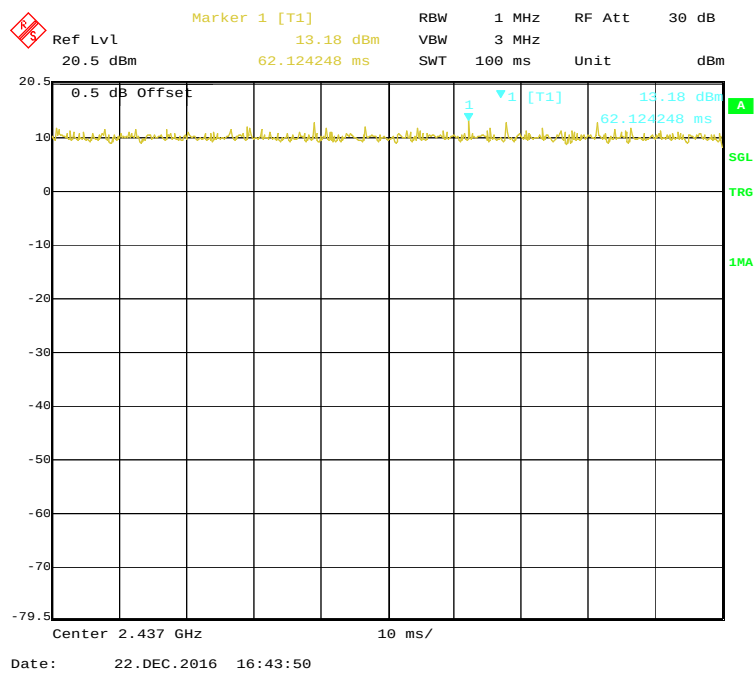

802.11n20 Mode Middle Channel duty cycle

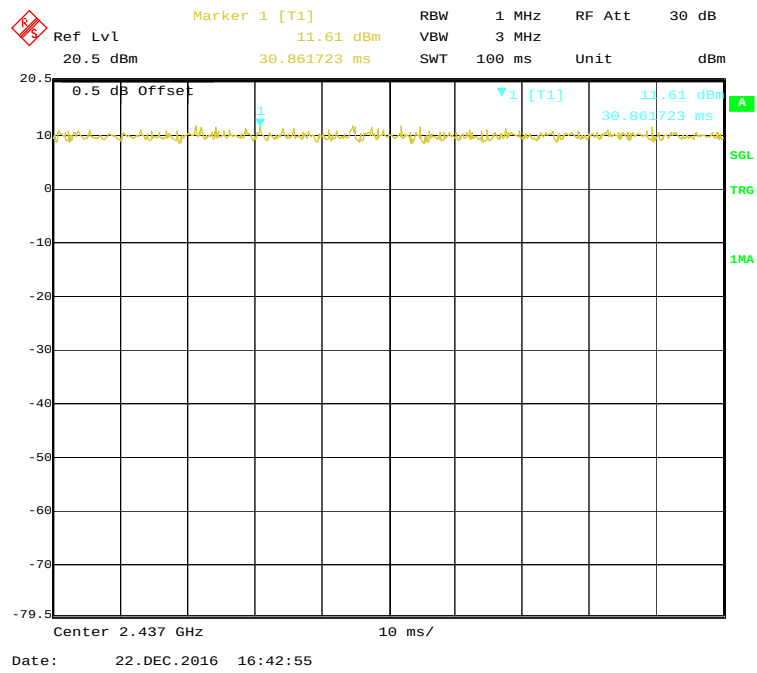

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data**Environmental Conditions**


Temperature:	24.3 °C
Relative Humidity:	55 %
ATM Pressure:	101.3 kPa

The testing was performed by Ada Yu on 2016-12-15.


Test Result: *Compliance*

Please refer to the following table and plots.


802.11b: Band Edge, Left Side

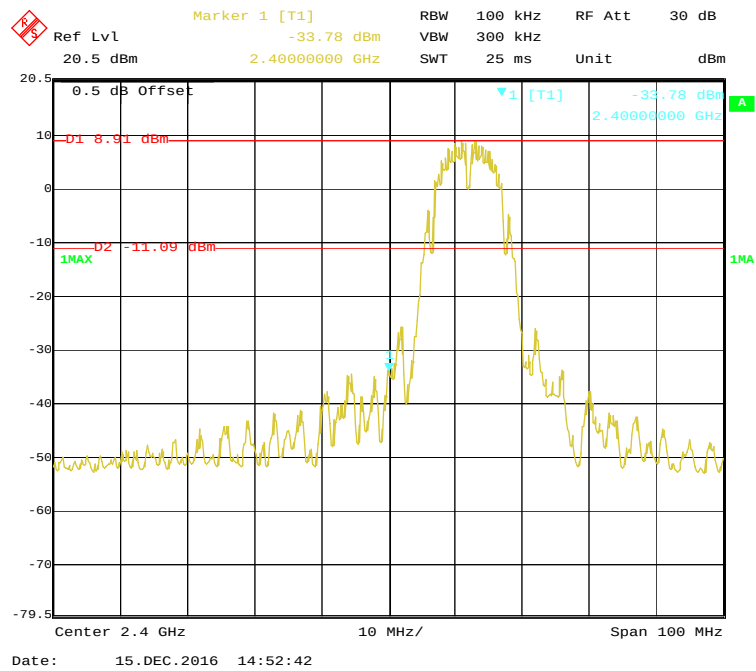


802.11b: Band Edge, Right Side

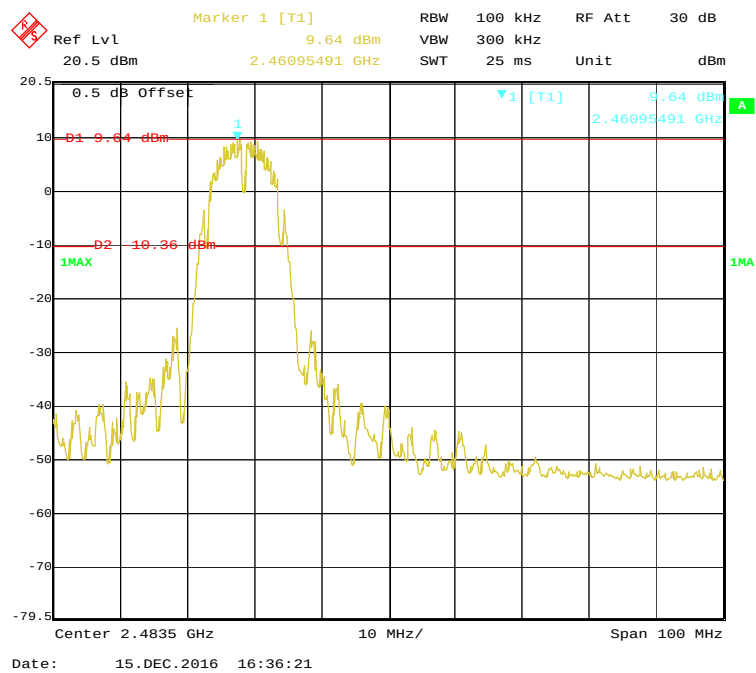


802.11g: Band Edge, Left Side

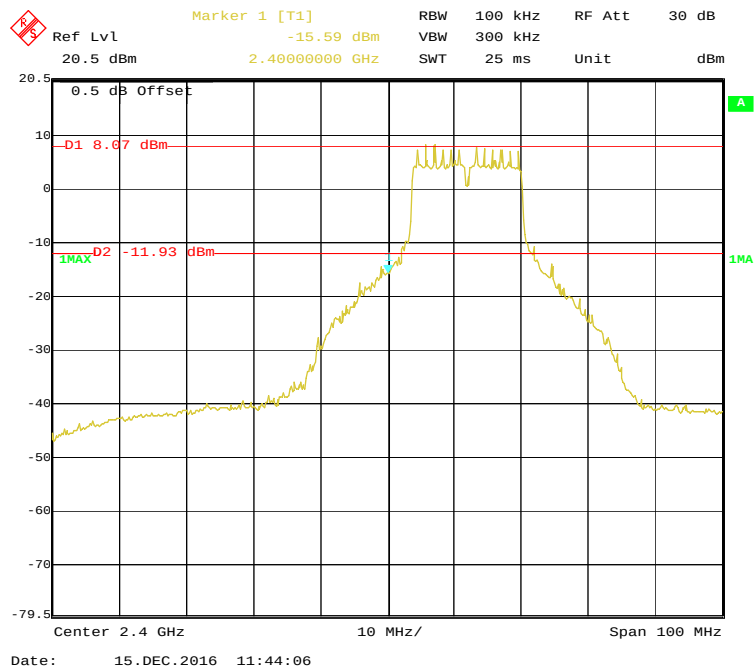


802.11g: Band Edge, Right Side

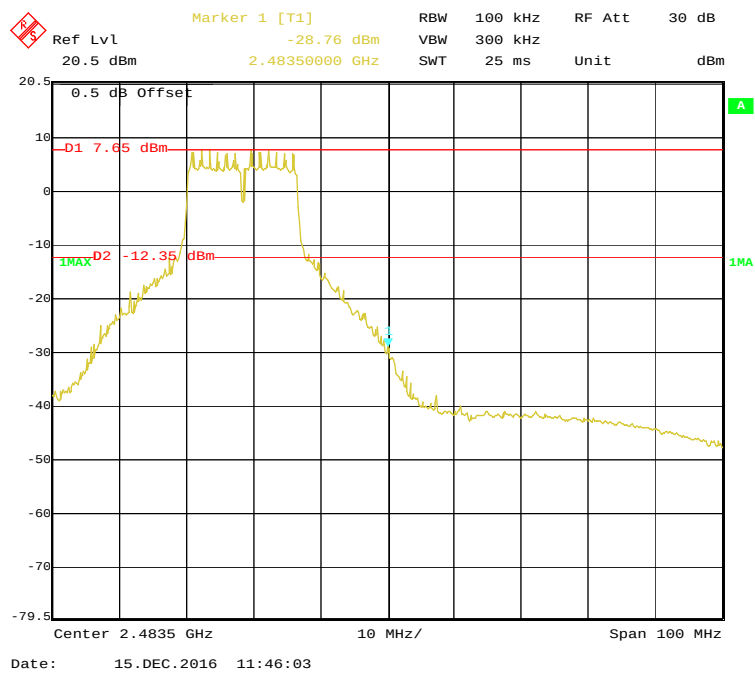

802.11n-HT20: Band Edge, Left Side

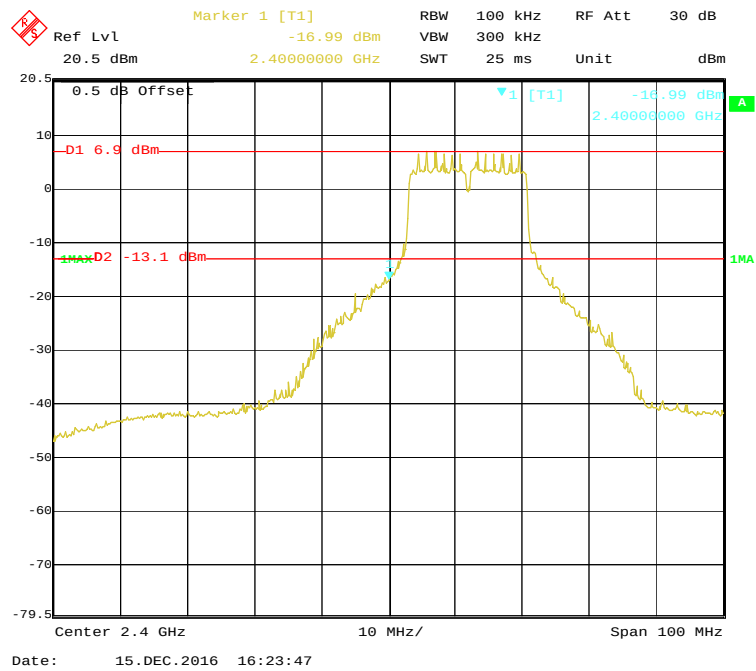

802.11n-HT20: Band Edge, Right Side

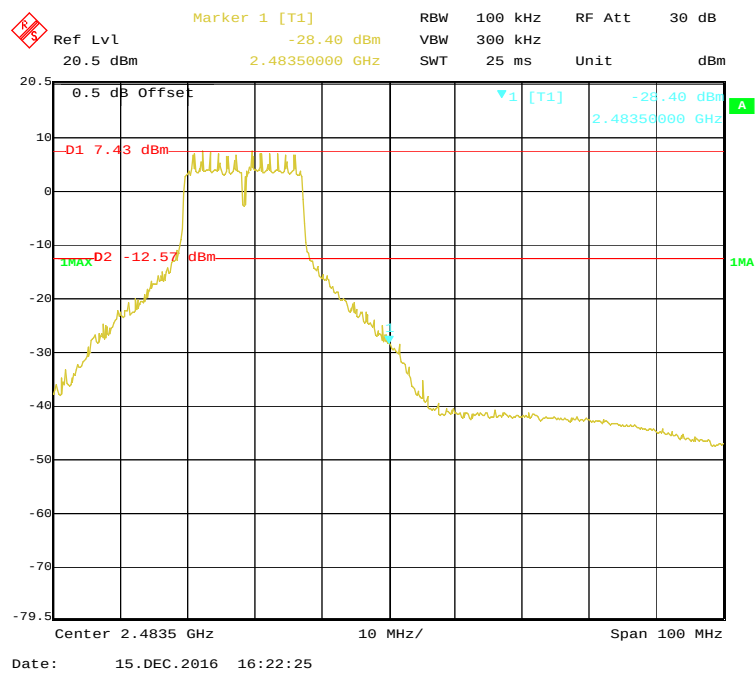

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to KDB558074 D01 DTS Meas Guidance v03r05.

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Data

Environmental Conditions

Temperature:	24.1 °C
Relative Humidity:	54 %
ATM Pressure:	101.3 kPa


The testing was performed by Ada Yu on 2016-12-15.

EUT operation mode: Transmitting


Test Result: Pass

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
802.11b mode			
Low	2412	-3.54	≤ 8
Middle	2437	-2.82	≤ 8
High	2462	-2.78	≤ 8
802.11g mode			
Low	2412	-8.27	≤ 8
Middle	2437	-7.85	≤ 8
High	2462	-7.42	≤ 8
802.11n-HT20 mode			
Low	2412	-8.66	≤ 8
Middle	2437	-6.62	≤ 8
High	2462	-7.95	≤ 8


Power Spectral Density , 802.11b Low Channel

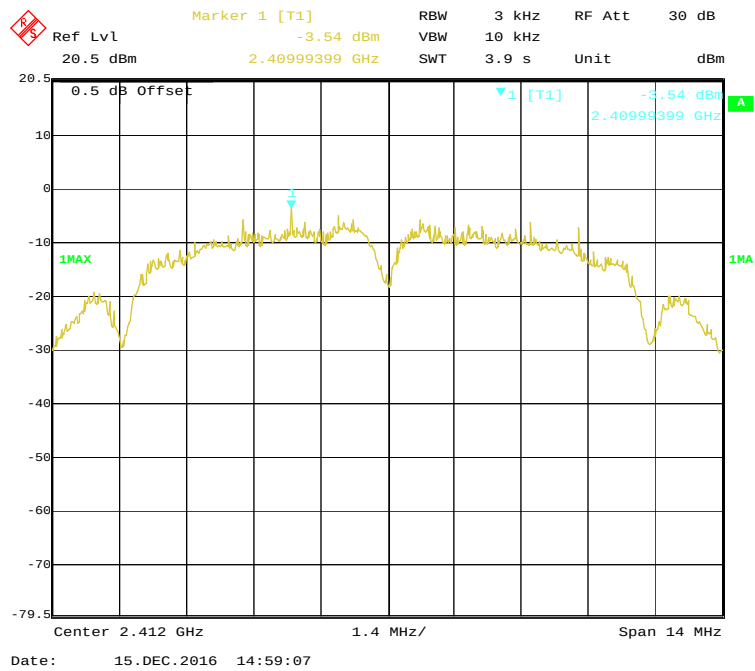


Power Spectral Density , 802.11b Middle Channel

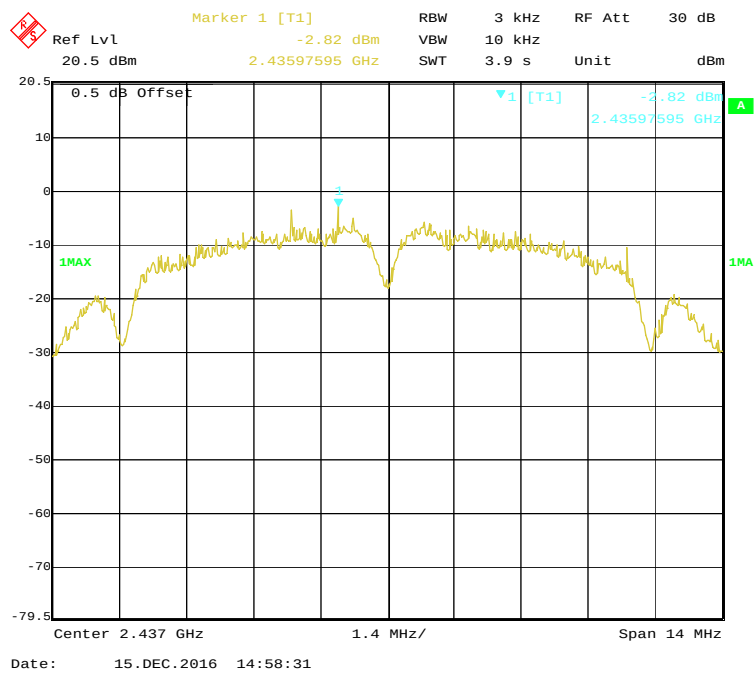


Power Spectral Density , 802.11b High Channel

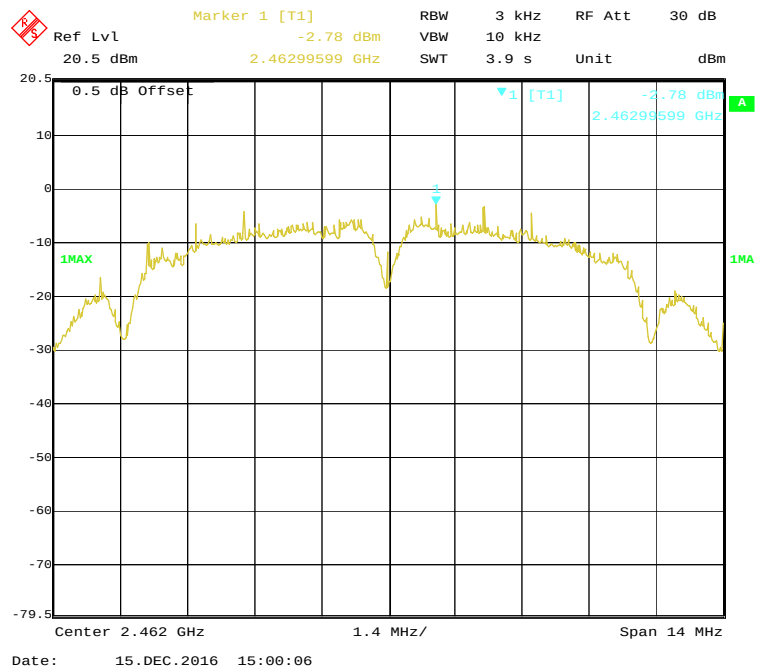


Power Spectral Density , 802.11g Low Channel

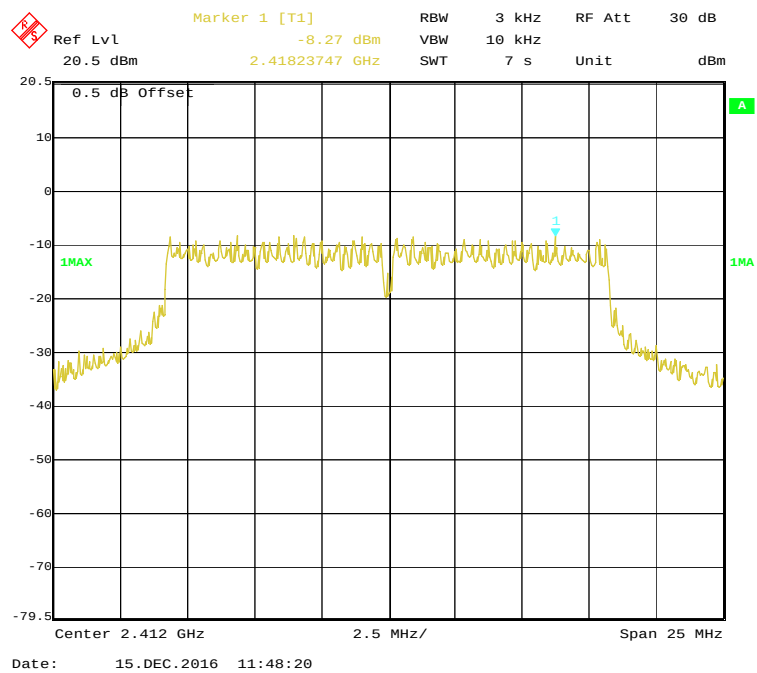


Power Spectral Density , 802.11g Middle Channel

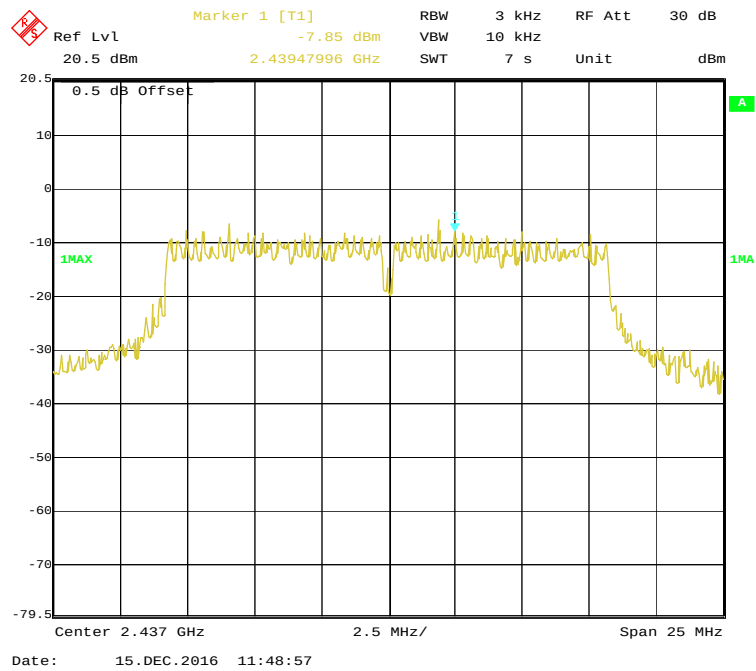


Power Spectral Density , 802.11g High Channel

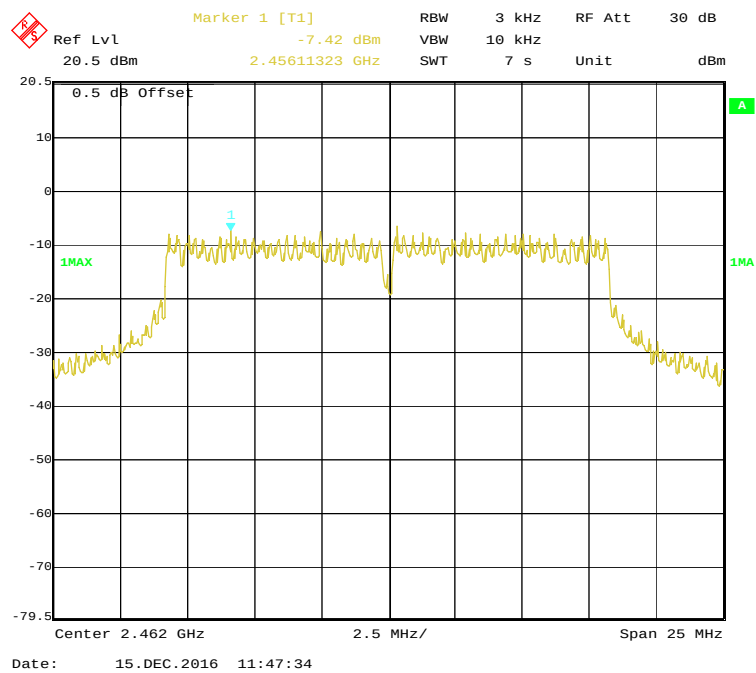


Power Spectral Density , 802.11n-HT20 Low Channel

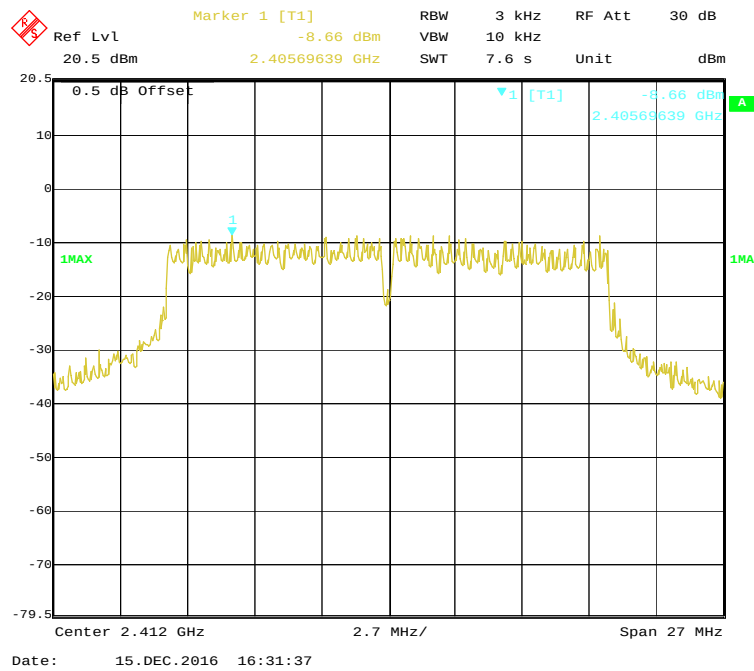

Power Spectral Density , 802.11n-HT20 Middle Channel

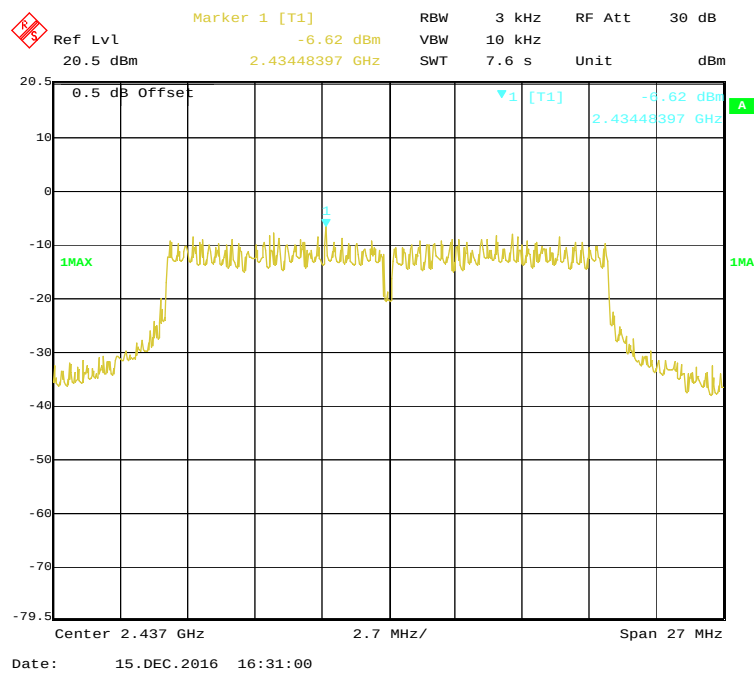

Power Spectral Density , 802.11n-HT20 High Channel

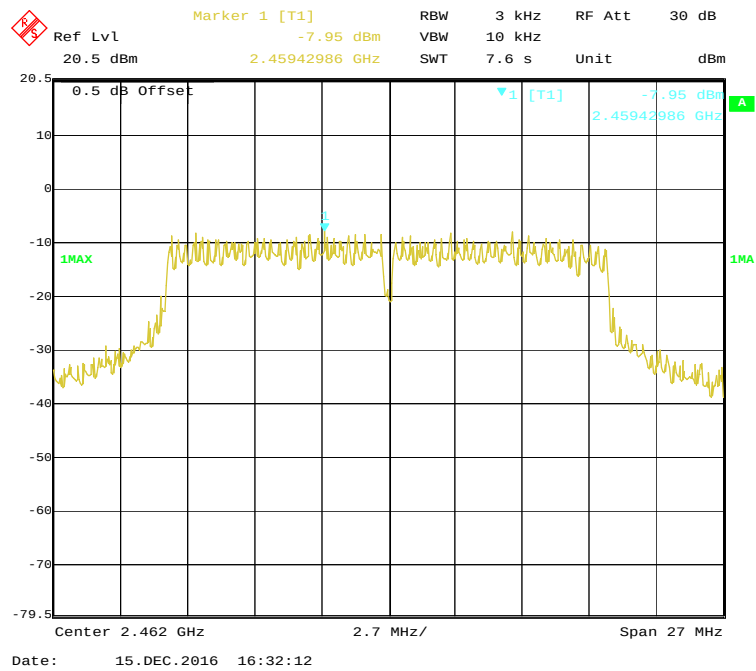

***** END OF REPORT *****