



# H.B. Compliance Solutions

## Intentional Radiator Test Report

For the

**Globalstar, Inc.**

**ST100**

Tested under

The FCC Rules contained in Title 47 of the CFR, Part 25 and ISSED RSS-170 Issue 3 Class II  
Permissive Change for

Satellite Communications

February 23, 2022

**Prepared for:**

Globalstar, Inc.

1351 Holiday Square Blvd.

Covington, LA 70433

**Prepared By:**

H.B. Compliance Solutions

5005 S. Ash Avenue, Suite # A-10

Tempe, Arizona 85282

**Reviewed By:**

A handwritten signature in black ink, appearing to read 'Hoosamuddin Bandukwala'.

Hoosamuddin Bandukwala



**Cert # ATL-0062-E**

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedure indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurement made, the equipment tested is capable of operation in accordance with the requirements of Part 25 of the FCC Rules under normal use and maintenance. All results contained herein relate only to the sample tested.

## Report Status Sheet

Revision #	Report Date	Reason for Revision
Ø	February 23, 2022	Initial Issue

## Table of Contents

EXECUTIVE SUMMARY .....	4
1. Testing Summary .....	4
EQUIPMENT CONFIGURATION .....	5
1. Overview .....	5
2. Test Facility .....	6
3. Description of Test Sample .....	7
4. Equipment Configuration .....	7
5. Support Equipment .....	7
6. Ports and Cabling Information .....	8
7. Method of Monitoring EUT Operation .....	8
8. Mode of Operation .....	8
9. Modifications .....	8
10. Disposition of EUT .....	8
Criteria for Intentional Radiators .....	9
1. Radiated Spurious Emissions .....	9
Test Equipment .....	12
6. Measurement Uncertainty .....	13

## EXECUTIVE SUMMARY

### 1. Testing Summary

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 25. All tests were conducted using measurement procedure from ANSI C63.26-2015 RSS-GEN Issue 5 and RSS-170 Issue 3 as appropriate.

Test Name	Test Method / FCC Standard	ISED Standard	Result	Comments
Radiated Spurious Emissions	§2.1053; §25.202(f)	RSS-170 (5.4.3.1)	Pass	

#### Class II Permissive Change :

ST100 is enclosed in the Recon Dynamics WACTag. Battery is enclosed to provide power to the ST100.

## EQUIPMENT CONFIGURATION

### 1. Overview

H.B Compliance Solutions was contracted by Recon Dynamics to perform testing on the ST100 under the quotation number Q22011002.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Globalstar, ST100.

The tests were based on FCC Part 25 Rules. The tests described in this document were formal tests as described with the objective of the testing was to evaluate compliance of the Equipment Under Test (EUT) to the requirements of the aforementioned specifications. Recon Dynamics should retain a copy of this document and it should be kept on file for at least five years after the manufacturing of the EUT has been permanently discontinued. The results obtained relate only to the item(s) tested.

<b>Product Name:</b>	ST100
<b>Model(s) Tested:</b>	ST100
<b>FCC ID:</b>	L2V-ST100
<b>IC ID:</b>	3989A-ST100
<b>Supply Voltage Input:</b>	Primary Power: 4.2 VDC
<b>Frequency Range:</b>	1611.25MHz to 1618.75MHz
<b>No. of Channels:</b>	Four Channel
<b>Necessary Bandwidth</b>	N/A
<b>Type(s) of Modulation:</b>	BPSK
<b>Range of Operation Power:</b>	0.29W
<b>Voltage into final Transistor</b>	3.3V
<b>Current into final Transistor</b>	475mA
<b>Emission Designator:</b>	2M00G1D
<b>Channel Spacing(s)</b>	2.5MHz
<b>Test Item:</b>	Pre-Production
<b>Type of Equipment:</b>	Mobile
<b>Antenna:</b>	1.06dBi Integrated PCB Trace Antenna (Internal) 3dBi Patch Antenna (External)
<b>Environmental Test Conditions:</b>	Temperature: 15-35°C Humidity: 30-60% Barometric Pressure: 860-1060 mbar
<b>Modification to the EUT:</b>	None
<b>Evaluated By:</b>	Staff at H.B. Compliance Solutions
<b>Test Date(s):</b>	03/03/2022

## 2. Test Facility

All testing was performed at H.B. Compliance Solutions. This facility is located at 5005 S. Ash Avenue, Suite # A-10, Tempe AZ-85282. All equipment used in making physical determination is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements from 30MHz to 1GHz were performed in a GTEM chamber (equivalent to an Open Area Test Site). Radiated Emissions Above 1GHz were performed on an Open Area Test Site (OATS). In accordance with §2.948(a)(3), a complete site description is contained at H.B. Compliance Solutions.

Test facility H.B. Compliance Solutions is an ANAB accredited test site. The ANAB certificate number is L2458. The scope of accreditation can be found on ANAB website [www.anab.org](http://www.anab.org)



### 3. Description of Test Sample

The Globalstar ST100 is an IoT board which is a simplex Satellite transmitter designed to send small packets of user defined data to a network of low earth orbiting (LEO) satellites using the Globalstar simplex satellite network. This module is used inside the Recon Dynamics WACTag which is a solar powered Satellite data communication device designed to communicate directly with the Globalstar Sattelite network to track, monitor, and manage outdoor assets nearly anywhere in the world without the need for a local gateway, phone or any other terrestrial wireless backhaul. The WACTag is powered by a battery.

### 4. Equipment Configuration

Ref. ID	Name / Description	Model Number	Serial Number
# 2	Globalstar (Recon Dynamics WACTag)	ST100	-

Table 1. Equipment Configuration

### 5. Support Equipment

All support equipment supplied is listed in the following Support Equipment List.

Ref ID	Name / Description	Manufacturer	Model #	Serial #
#2	DC Power Supply	Lambda	LA-200	LA2-AA20-143 3535

Table 2. Support Equipment

## 6. Ports and Cabling Information

Ref ID	Port name on the EUT	Cable Description	Qty.	Length (m)	Shielded? (Y/N)	Termination Box ID & Port ID
#4	Power	2 wire	1	2	N	DC Power Supply

Table 3. Ports and Cabling Information

## 7. Method of Monitoring EUT Operation

A test receiver will be used to monitor the data transmission from the EUT.

## 8. Mode of Operation

The EUT will be configured to transmit at maximum power level. Test mode was provided using an external PCB board with dip switches to control the transmitter channels. These settings were created for testing purpose only.

## 9. Modifications

### 9.1 Modifications to EUT

No modifications were made to the EUT

### 9.2 Modifications to Test Standard

No Modifications were made to the test standard.

## 10. Disposition of EUT

The test sample including all support equipment submitted to H.B Compliance Solutions for testing will be returned to Recon Dynamics upon completion of testing & certification



## Criteria for Intentional Radiators

### 1. Radiated Spurious Emissions

<b>Test Requirement(s):</b>	§2.1053, §25.202(f) and RSS-170 §5.4.3.1	<b>Test Engineer(s):</b>	Sean E.
<b>Test Results:</b>	Pass	<b>Test Date(s):</b>	03/03/2022


**Test Procedures:** As required by 47 CFR 2.1053 and RSS-170 §5.4.3.1, field strength of radiated spurious measurements were made in accordance with the procedures of the ANSI C63.26-2015.

The EUT was placed on a non-reflective table inside a 3-meter open area test site. The EUT was set on continuous transmit.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3 orthogonal axes. The frequency range up to the 10<sup>th</sup> harmonic was investigated.

To get a maximum emission level from the EUT, the EUT was rotated throughout the X-axis, Y-axis and Z-axis. Worst case is X-axis

**Test Setup:**

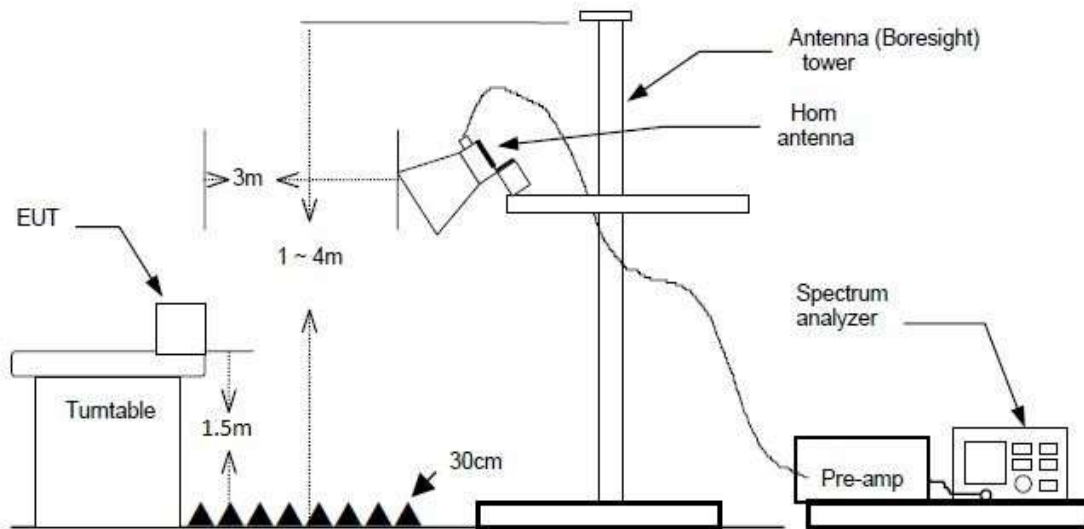

**Figure 4 – Radiated Spurious Emissions**

## Test Results:

Frequency (MHz)	Measured Amplitude (dBuV/m)	Equivalent Radiated Power (dBm)	Antenna Polarity (V/H)	Spurious Limit (dBm)	Margin	Comment
1611.25	111.81	14.43	Horizontal	-	-	Fundamental
3222.5	70.41	-26.97	Horizontal	-13	-13.97	

Table 6 - Spurious Radiated Emission Data – Low Band

Frequency (MHz)	Measured Amplitude (dBuV/m)	Equivalent Radiated Power (dBm)	Antenna Polarity (V/H)	Spurious Limit (dBm)	Margin (dB)	Comment
1616.25	111.31	13.93	Horizontal	-	-	Fundamental
3232.5	69.41	-27.97	Horizontal	-13	-14.97	

Table 7– Spurious Radiated Emission Data – Mid Band

Frequency (MHz)	Measured Amplitude (dBuV/m)	Equivalent Radiated Power (dBm)	Antenna Polarity (V/H)	Spurious Limit (dBm)	Margin	Comment
1618.75	109.47	12.09	Horizontal	-	-	Fundamental
3237.5	67.06	-30.32	Horizontal	-13	-17.32	

Table 8– Spurious Radiated Emission Data – High Band

**NOTE:** There were no detectable emissions above the 2<sup>nd</sup> harmonic. Measurement was made at the 10<sup>th</sup> harmonic.

## Test Equipment

Equipment	Manufacturer	Model	Serial #	Last Cal Date	Cal Due Date
Spectrum Analyzer	Hewlett Packard	8563E	3821A09316	Apr/28/21	Apr/28/22
Attenuator 20dB	Weinschel	41-20-12	86332	May/27/21	May/27/22
Variable Attenuator	JFW	50R-320-SMA	7054221439	NCR	None
Signal Generator	Agilent	E4432B	US38220446	NCR	None
Horn Antenna	Com-Power	AHA-118	071150	Dec/17/20	Dec/17/22
Horn Antenna	Com-Power	AH-118	71350	NCR	None
Antenna	EMCO	GTEM 5417	1063	Verified	
Attenuator 10dB	Huber+Suhner	6810.17.A	747300	May/27/21	May/27/23
Digital Multimeter	Fluke	77 III	72550270	Apr/26/21	Apr/26/22
Power Supply	Hewlett Packard	6236B	2735A-19608	NCR	None

**Table 10 – Test Equipment List**

**\*Statement of Traceability:** Test equipment is maintained and calibrated on a regular basis. All calibrations have been performed by a 17025 accredited test facility, traceable to National Institute of Standards and Technology (NIST)

## 6. Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. These measurements figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2. Instrumentation measurement uncertainty has **not** been taken into account to determine compliance.

The following measurement uncertainty values have been calculated as show in the table below:

Measured Parameter	Measurement Unit	Frequency Range	Expanded Uncertainty
Conducted Emissions (AC Power)	dBuV or dBuA	150kHz – 30MHz	± 4.3dB
Radiated Emissions below 1GHz	dBuV/m	30 – 1000MHz	± 5.6dB
Radiated Emissions above 1GHz	dBuV/m	1 – 26.5GHz	± 4.1dB

The reported expanded uncertainty has been estimated at a 95% confidence level (k=2)

## **END OF TEST REPORT**