


## Starkey Laboratories, Inc.

Livio RIC R

FCC 15.247:2019 Bluetooth

Report # STAK0186

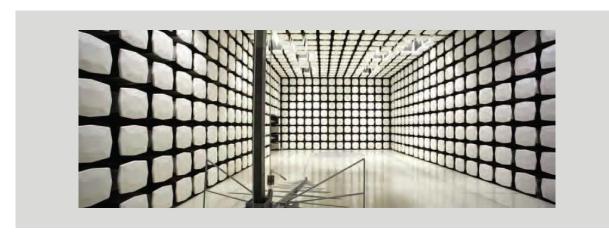





## **CERTIFICATE OF TEST**



Last Date of Test: September 24, 2019 Starkey Laboratories, Inc. EUT: Livio RIC R

## **Radio Equipment Testing**

#### **Standards**

Specification	Method
FCC 15.247:2019	ANSI C63.10:2013, KDB 558074

#### Results

Nesults				
Method Clause	Test Description	Applied	Results	Comments
6.2	Powerline Conducted Emissions	No	N/A	Not required for a battery powered EUT.
11.6	Duty Cycle	Yes	Pass	
11.8.2	Occupied Bandwidth	Yes	Pass	
11.9.1.1	Output Power	Yes	Pass	
11.9.1.1	Equivalent Isotropic Radiated Power	Yes	Pass	
11.10.2	Power Spectral Density	Yes	Pass	
11.11	Band Edge Compliance	Yes	Pass	
11.11	Spurious Conducted Emissions	Yes	Pass	
11.12.1, 11.13.2, 6.5, 6.6	Spurious Radiated Emissions	Yes	Pass	

#### **Deviations From Test Standards**

None

Approved By:

Matt Nuernberg, Operations Manager

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information. As indicated in the Statement of Work sent with the quotation, Element's standard process is to always use the latest published version of the test methods even when earlier versions are cited in the test specification. Issuance of a purchase order was de facto acceptance of this approach. Otherwise, the client would have advised Element in writing of the specific version of the test methods they wanted applied to the subject testing.

Report No. STAK0186 2/45

# **REVISION HISTORY**



Revision Number	Description	Date (yyyy-mm-dd)	Page Number
00	None		

Report No. STAK0186 3/45

# ACCREDITATIONS AND AUTHORIZATIONS



#### **United States**

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

**A2LA** - Accredited by A2LA to ISO / IEC 17065 as a product certifier. This allows Element to certify transmitters to FCC and IC specifications.

NVLAP - Each laboratory is accredited by NVLAP to ISO 17025

#### Canada

**ISED** - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB) and as a CAB for the acceptance of test data.

#### **European Union**

European Commission - Within Element, we have a EU Notified Body validated for the EMCD and RED Directives.

#### Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

#### Korea

MSIT / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

#### Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

#### **Taiwan**

**BSMI** – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

#### **Singapore**

**IDA** – Recognized by IDA as a CAB for the acceptance of test data.

#### Israel

MOC - Recognized by MOC as a CAB for the acceptance of test data.

#### **Hong Kong**

**OFCA** – Recognized by OFCA as a CAB for the acceptance of test data.

#### **Vietnam**

**MIC** – Recognized by MIC as a CAB for the acceptance of test data.

#### SCOPE

For details on the Scopes of our Accreditations, please visit: <a href="https://www.nwemc.com/emc-testing-accreditations">https://www.nwemc.com/emc-testing-accreditations</a>

Report No. STAK0186 4/45


# **FACILITIES**







<b>California</b> Labs OC01-17 41 Tesla Irvine, CA 92618 (949) 861-8918	Minnesota Labs MN01-10 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612)-638-5136	Oregon Labs EV01-12 6775 NE Evergreen Pkwy #400 Hillsboro, OR 97124 (503) 844-4066	<b>Texas</b> Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	<b>Washington</b> Labs NC01-05 19201 120 <sup>th</sup> Ave NE Bothell, WA 98011 (425)984-6600	
		NVLAP			
NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code: 200630-0	NVLAP Lab Code:201049-0	NVLAP Lab Code: 200629-0	
Innovation, Science and Economic Development Canada					
2834B-1, 2834B-3	2834E-1, 2834E-3	2834D-1	2834G-1	2834F-1	
BSMI					
SL2-IN-E-1154R	SL2-IN-E-1152R	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R	
VCCI					
A-0029	A-0109	A-0108	A-0201	A-0110	
Re	Recognized Phase I CAB for ISED, ACMA, BSMI, IDA, KCC/RRA, MIC, MOC, NCC, OFCA				
US0158	US0175	US0017	US0191	US0157	

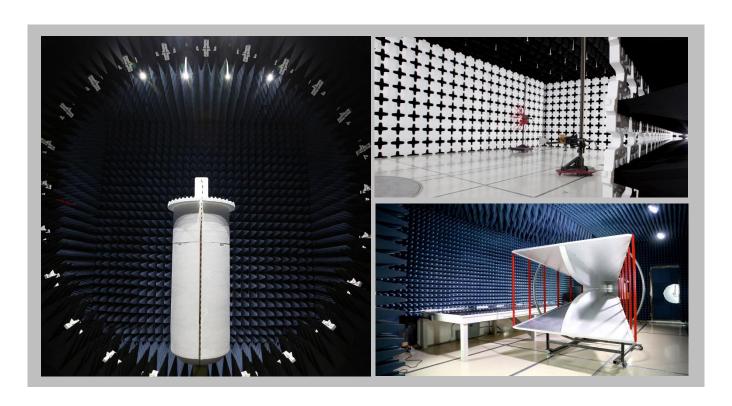

Report No. STAK0186 5/45

## MEASUREMENT UNCERTAINTY



#### **Measurement Uncertainty**

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.

A measurement uncertainty estimation has been performed for each test per our internal quality document WP 342. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) for each test is on each data sheet. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.

The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.


Test	+ MU	<u>- MU</u>
Frequency Accuracy (Hz)	0.0007%	-0.0007%
Amplitude Accuracy (dB)	1.2 dB	-1.2 dB
Conducted Power (dB)	0.3 dB	-0.3 dB
Radiated Power via Substitution (dB)	0.7 dB	-0.7 dB
Temperature (degrees C)	0.7°C	-0.7°C
Humidity (% RH)	2.5% RH	-2.5% RH
Voltage (AC)	1.0%	-1.0%
Voltage (DC)	0.7%	-0.7%
Field Strength (dB)	5.2 dB	-5.2 dB
AC Powerline Conducted Emissions (dB)	2.4 dB	-2.4 dB

Report No. STAK0186 6/45


# **Test Setup Block Diagrams**




#### **Antenna Port Conducted Measurements**

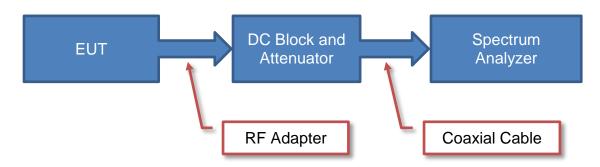

## **Near Field Test Fixture Measurements**

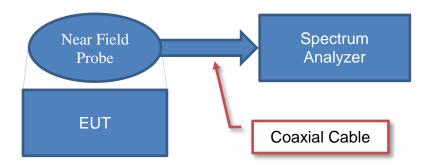

## **Spurious Radiated Emissions**

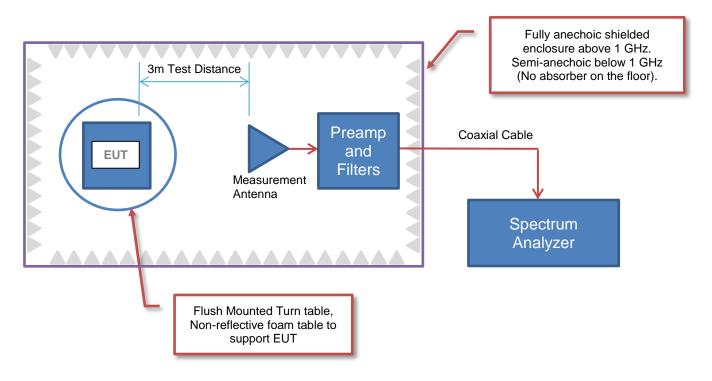

Report No. STAK0186 7/45

# PRODUCT DESCRIPTION



## **Client and Equipment Under Test (EUT) Information**

Company Name: Starkey Laboratories, Inc.		
Address:	6600 Washington Ave S	
City, State, Zip:	Eden Prairie, MN 55344-3404	
Test Requested By:	Bill Mitchell	
EUT:	Livio RIC R	
First Date of Test:	September 23, 2019	
Last Date of Test:	September 24, 2019	
Receipt Date of Samples:	September 23, 2019	
Equipment Design Stage:	Production	
<b>Equipment Condition:</b>	No Damage	
Purchase Authorization:	Verified	

## **Information Provided by the Party Requesting the Test**

Functional Description of the EUT:	
Hearing aid with 2.4 GHz and NFMI	

#### Testing Objective:

To demonstrate compliance of the Bluetooth radio to FCC 15.247 requirements.

Report No. STAK0186 8/45

# **CONFIGURATIONS**



## Configuration STAK0186-1

Software/Firmware Running during test		
Description	Version	
Firmware	6.5.2.2.100	

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Hearing Aid	Starkey Laboratories, Inc.	Livio RIC R	191323924

## Configuration STAK0186- 2

Software/Firmware Running during test		
<b>Description</b> Version		
Firmware	6.5.2.2.100	

EUT				
Description	Manufacturer	Model/Part Number	Serial Number	
Hearing Aid	Starkey Laboratories, Inc.	Livio RIC R	191323922	

Remote Equipment Outside of Test Setup Boundary				
Description	Manufacturer	Model/Part Number	Serial Number	
DC Power Supply	EZ Digital Co., Ltd.	GP-4303D	TQK	
Multimeter	Fluke	117	MLS	
Bluetooth Dongle Dock	TruLink	None	None	
Bluetooth Dongle	Anatel	BLE0112	None	
Laptop	Dell	Latitude 5490	DZ658Y2	
Power Supply (Laptop)	Dell	HA65NM130	CN-0FPC2Y-CH200-966-C2BF- A04	

Cables										
Cable Type Shield		Length (m)	Ferrite	Connection 1	Connection 2					
AC Cable	No	1.8 m	No	DC Power Supply	AC Mains					
DC Leads (x2)	No	0.5 m	No	DC Power Supply	Multimeter					
DC Leads (x2)	No	0.5 m	No	DC Power Supply	Hearing Aid					
AC Cable	No	0.9 m	No	Power Supply (Laptop)	AC Mains					
DC Cable	No	1.8 m	No	Laptop	Power Supply (Laptop)					
USB Cable	Yes	1.8 m	No	Laptop	Bluetooth Dongle Dock					

Report No. STAK0186 9/45

# **MODIFICATIONS**



# **Equipment Modifications**

Item	Date	Test	Modification	Note	Disposition of EUT
	0040 00 00	Spurious	Tested as	No EMI suppression	EUT remained at
1	2019-09-23	Radiated	delivered to	devices were added or	Element following the
		Emissions	Test Station.	modified during this test.	test.
			Tested as	No EMI suppression	EUT remained at
2	2019-09-24	Duty Cycle	delivered to	devices were added or	Element following the
			Test Station.	modified during this test.	test.
		Occupied	Tested as	No EMI suppression	EUT remained at
3	2019-09-24	Bandwidth	delivered to	devices were added or	Element following the
		Danuwiuin	Test Station.	modified during this test.	test.
			Tested as	No EMI suppression	EUT remained at
4	2019-09-24	Output Power	delivered to	devices were added or	Element following the
			Test Station.	modified during this test.	test.
5	2019-09-24	Equivalent Isotropic Radiated Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
		Power	Tested as	No EMI suppression	EUT remained at
6	2019-09-24	Spectral	delivered to	devices were added or	Element following the
		Density	Test Station.	modified during this test.	test.
7	2019-09-24	Band Edge	Tested as delivered to	No EMI suppression devices were added or	EUT remained at Element following the
		Compliance	Test Station.	modified during this test.	test.
		Spurious	Tested as	•	0.1
8	2019-09-24		delivered to		· ·
-		Emissions	Test Station.		was completed.
8	2019-09-24	Spurious Conducted	Tested as delivered to	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

Report No. STAK0186 10/45



XMit 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

#### **TEST EQUIPMENT**

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	ESM Cable Corp.	TTBJ141-KMKM-72	MNU	11-Apr-19	11-Apr-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	1-May-19	1-May-20

#### **TEST DESCRIPTION**

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The Duty Cycle (x) of the single channel operation of the radio as controlled by the provided test software was measured for each of the EUT operating modes.

There is no compliance requirement to be met by this test, so therefore no Pass / Fail criteria.

The measurements were made using a zero span on the spectrum analyzer to see the pulses in the time domain. The transmit power was set to its default maximum.

The duty cycle was calculated by dividing the transmission pulse duration (T) by the total period of a single on and total off time.

If the transmit duty cycle < 98 percent, burst gating may have been used during some of the other tests in this report to only take the measurement during the burst duration.

Report No. STAK0186 11/45




EUT: Livio RIC R
Serial Number: 191323922
Customer: Starkey Laboratories, Inc.
Attendees: Charlie Esch
Project: None
Tested by: Andrew Rogstad
TEST SPECIFICATIONS Work Order: STAK0186
Date: 24-Sep-19
Temperature: 21.9 °C Humidity: 56% RH Barometric Pres.: 1007 mbar Power: 3.8 VDC
Test Method Job Site: MN08 FCC 15.247:2019 ANSI C63.10:2013 COMMENTS Reference level offset includes; Measurement Cable, DC Block, and 20 dB Attenuator. DEVIATIONS FROM TEST STANDARD Rogertan Configuration # 2 a Signature Value (%) 31.6 Number of Pulses Pulse Width Period Results **(%)** N/A 625 us N/A 625.1 us N/A 625.1 us BLE/GFSK (2 Mbps) Low Channel, 2402 MHz BLE/GFSK (2 Mbps) Low Channel, 2402 MHz BLE/GFSK (2 Mbps) Mid Channel, 2442 MHz BLE/GFSK (2 Mbps) Mid Channel, 2442 MHz BLE/GFSK (2 Mbps) High Channel, 2480 MHz N/A N/A N/A N/A N/A N/A N/A N/A 197.7 us N/A 31.6 N/A N/A 5 197.6 us 31.6 N/A BLE/GFSK (2 Mbps) High Channel, 2480 MHz N/A N/A N/A N/A


Report No. STAK0186



| BLE/GFSK (2 Mbps) Low Channel, 2402 MHz | Number of Value Limit | Pulse Width | Period Pulses (%) (%) | Results | 197.4 us | 625 us | 1 | 31.6 | N/A | N/A |

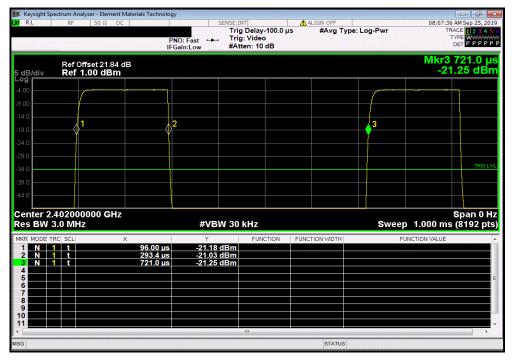

BLE/GFSK (2 Mbps) Low Channel, 2402 MHz							
			Number of	Value	Limit		
	Pulse Width	Period	Pulses	(%)	(%)	Results	
	N/A	N/A	5	N/A	N/A	N/A	

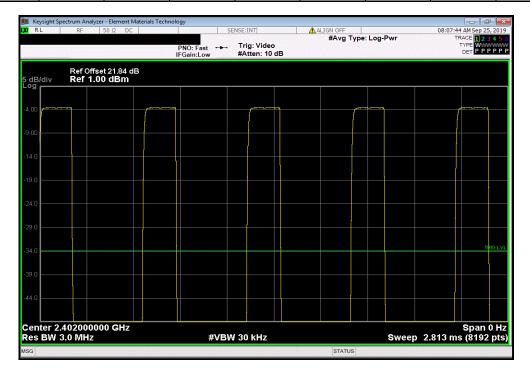

Report No. STAK0186 13/45




BLE/GFSK (2 Mbps) Mid Channel, 2442 MHz


Number of Value Limit

Pulse Width Period Pulses (%) (%) Results

197.7 us 625.1 us 1 31.6 N/A N/A

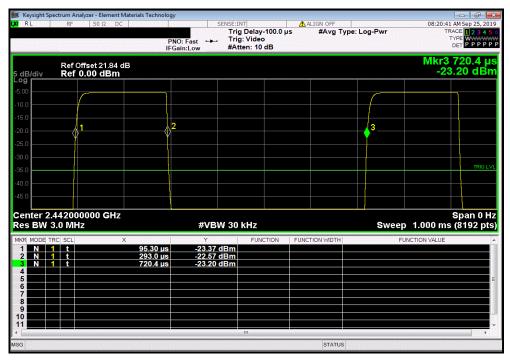

	BLE/GFSK (2 Mbps) Mid Channel, 2442 MHz							
		Number of	Value	Limit				
	Pulse Width	Period	Pulses	(%)	(%)	Results		
	N/A	N/A	5	N/A	N/A	N/A		

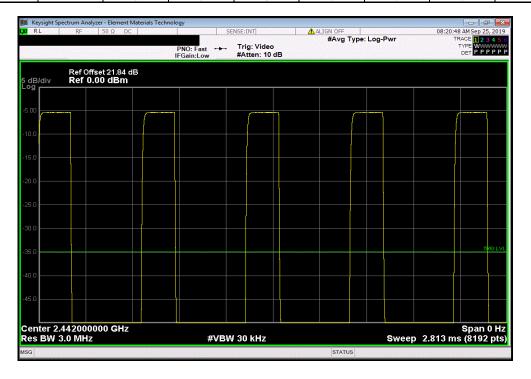

Report No. STAK0186 14/45




BLE/GFSK (2 Mbps) High Channel, 2480 MHz


Number of Value Limit

Pulse Width Period Pulses (%) (%) Results

197.6 us 625.1 us 1 31.6 N/A N/A

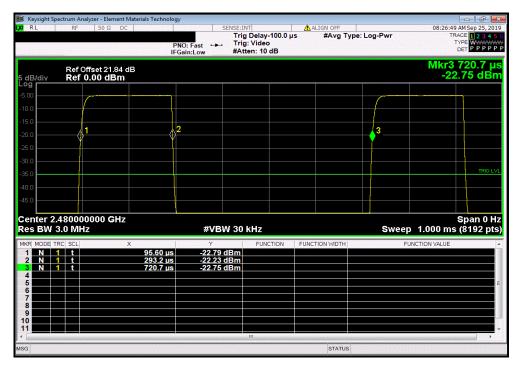

	BLE/GFSK (2 Mbps) High Channel, 2480 MHz							
				Number of	Value	Limit		
		Pulse Width	Period	Pulses	(%)	(%)	Results	
ı		N/A	N/A	5	N/A	N/A	N/A	

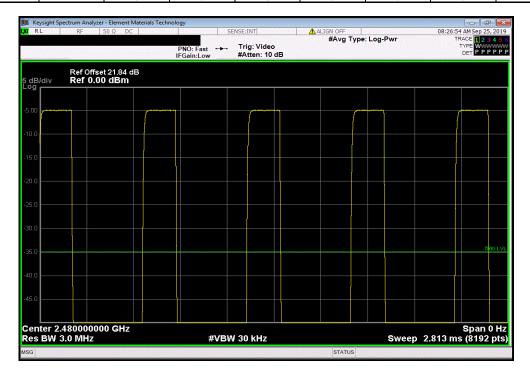

Report No. STAK0186 15/45



XMit 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

#### **TEST EQUIPMENT**

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	ESM Cable Corp.	TTBJ141-KMKM-72	MNU	11-Apr-19	11-Apr-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	1-May-19	1-May-20

#### **TEST DESCRIPTION**

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The EUT was set to the channels and modes listed in the datasheet.

The 6dB occupied bandwidth was measured using 100 kHz resolution bandwidth and 300 kHz video bandwidth. The 99.0% occupied bandwidth was also measured at the same time which can be needed during Output Power depending on the applicable method.

Report No. STAK0186 16/45



						10t1x 2019.06.02	AMIL 2019.09.05
EUT: Livio	RIC R				Work Order:	STAK0186	
Serial Number: 1913	23922				Date:	24-Sep-19	
Customer: Star	key Laboratories, Inc.				Temperature:	22 °C	
Attendees: Char	rlie Esch				Humidity:	57.3% RH	
Project: None	е				Barometric Pres.:	1008 mbar	•
Tested by: And	rew Rogstad		Power:	3.8 VDC	Job Site:	MN08	
TEST SPECIFICATIONS				Test Method			
FCC 15.247:2019				ANSI C63.10:2013			
COMMENTS							
		DC Block, and 20 dB Attenua	tor.				
DEVIATIONS FROM TES	II STANDARD						
None							
Configuration #	2	Signature	INFE	of tall			
						Limit	
					Value	(≥)	Result
BLE/GFSK (2 Mbps) Low	Channel, 2402 MHz	<u> </u>		<u> </u>	1.279 MHz	500 kHz	Pass
BLE/GFSK (2 Mbps) Mid	Channel, 2442 MHz	1.28 MHz	500 kHz	Pass			
BLE/GFSK (2 Mbps) High	ı Channel, 2480 MHz				1.278 MHz	500 kHz	Pass

Report No. STAK0186 17/45





BLE/GFSK (2 Mbps) Low Channel, 2402 MHz


Limit

Value (2) Result

1.279 MHz 500 kHz Pass

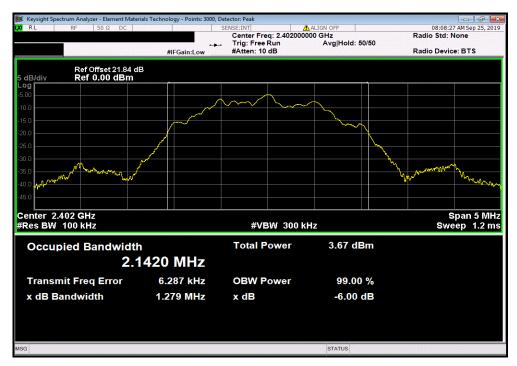



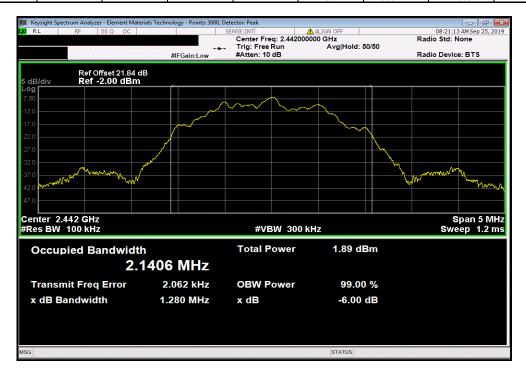

Report No. STAK0186 18/45



BLE/GFSK (2 Mbps) High Channel, 2480 MHz

Limit

Value (2) Result

1.278 MHz 500 kHz Pass



Report No. STAK0186 19/45



XMit 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

#### **TEST EQUIPMENT**

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	ESM Cable Corp.	TTBJ141-KMKM-72	MNU	11-Apr-19	11-Apr-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	1-May-19	1-May-20

#### **TEST DESCRIPTION**

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The transmit frequency was set to the required channels in each band. The transmit power was set to its default maximum.

Prior to measuring peak transmit power the DTS bandwidth (B) was measured.

The method found in ANSI C63.10:2013 Section 11.9.1.1 was used because the RBW on the analyzer was greater than the DTS Bandwidth of the radio.

Report No. STAK0186 20/45



						TbtTx 2019.08.02	XMit 2019.09.
EUT: Liv	io RIC R				Work Orde	r: STAK0186	
Serial Number: 191	1323922					24-Sep-19	
Customer: Sta	rkey Laboratories, Inc	•			Temperatur	22 °C	
Attendees: Cha	arlie Esch		Humidit	/: 56.9% RH			
Project: No					Barometric Pres		
Tested by: And	drew Rogstad		Power:	3.8 VDC	Job Sit	e: MN08	
TEST SPECIFICATIONS	S			Test Method			
FCC 15.247:2019				ANSI C63.10:2013			
COMMENTS							
DEVIATIONS FROM TE	ST STANDARD						
None							
Configuration #	2	Signature	in R	and the			
					Out Pwr	Limit	
					(dBm)	(dBm)	Result
BLE/GFSK (2 Mbps) Lov	w Channel, 2402 MHz				-3.346	30	Pass
BLE/GFSK (2 Mbps) Mic	d Channel, 2442 MHz				-5.014	30	Pass
BLE/GFSK (2 Mbps) Hig	h Channel, 2480 MHz				-4.537	30	Pass


Report No. STAK0186 21/45




BLE/GFSK (2 Mbps) Low Channel, 2402 MHz

Out Pwr Limit
(dBm) (dBm) Result

-3.346 30 Pass

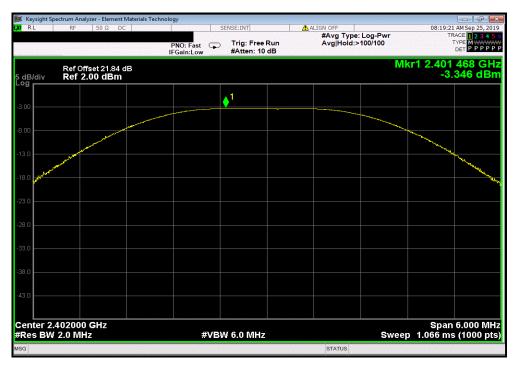

BLE/GFSK (2 Mbps) Mid Channel, 2442 MHz								
				Out Pwr	Limit			
				(dBm)	(dBm)	Result		
				-5.014	30	Pass		

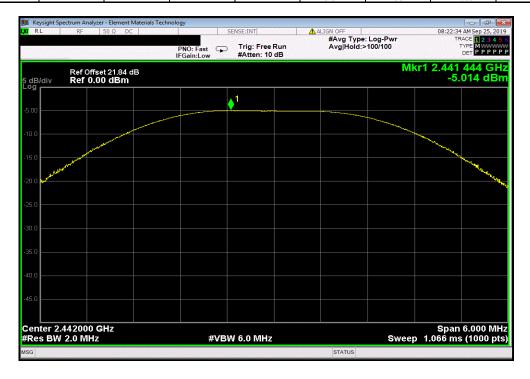


Report No. STAK0186 22/45



BLE/GFSK (2 Mbps) High Channel, 2480 MHz

Out Pwr Limit
(dBm) (dBm) Result

-4.537 30 Pass

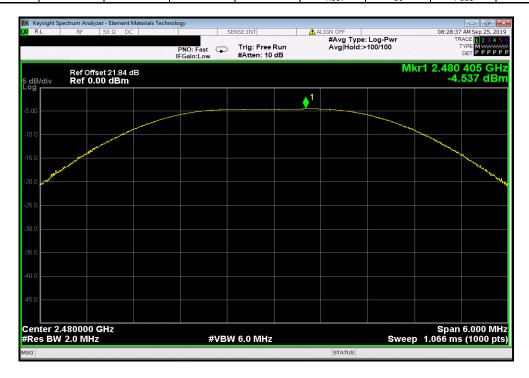

Report No. STAK0186 23/45



XMit 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

#### **TEST EQUIPMENT**

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	ESM Cable Corp.	TTBJ141-KMKM-72	MNU	11-Apr-19	11-Apr-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	1-May-19	1-May-20

#### **TEST DESCRIPTION**

The transmit frequency was set to the required channels in each band. The transmit power was set to its default maximum.

Prior to measuring peak transmit power the DTS bandwidth (B) was measured.

The method found in ANSI C63.10:2013 Section 11.9.1.1 was used because the RBW on the analyzer was greater than the DTS Bandwidth of the radio.

The antenna gain was added to out the conducted output power value to calculate the EIRP.

Report No. STAK0186 24/45



								TbtTx 2019.08.02	XMit 2019.09.05
	Livio RIC R						Work Order:		
Serial Number:	191323922							24-Sep-19	
Customer:	Starkey Laboratories, Inc.						Temperature:	21.9 °C	
	Charlie Esch							59.5% RH	
Project:							Barometric Pres.:		
	Andrew Rogstad		Power:	3.8 VDC			Job Site:	MN08	
TEST SPECIFICATI	ONS			Test Method					
FCC 15.247:2019				ANSI C63.10:2013					
	<u> </u>	<u> </u>				_			
COMMENTS									
Reference level offs	set includes; Measurement	Cable, DC Block, and 20 dB Attenu	ator.						
DEVIATIONS FROM	I TEST STANDARD								
None									
Configuration #	2	Signature	TOR	on tail					
					Out Pwr	Antenna	EIRP	EIRP Limit	
					(dBm)	Gain (dBi)	(dBm)	(dBm)	Result
BLE/GFSK (2 Mbps)	BLE/GFSK (2 Mbps) Low Channel, 2402 MHz -3.346					-11.75	-15.096	36	Pass
BLE/GFSK (2 Mbps)	Mid Channel, 2442 MHz				-5.014	-11.75	-16.764	36	Pass
BLE/GFSK (2 Mbps)	High Channel, 2480 MHz				-4.537	-11.75	-16.287	36	Pass


Report No. STAK0186 25/45




BLE/GFSK (2 Mbps) Low Channel, 2402 MHz

Out Pwr Antenna EIRP EIRP Limit
(dBm) Gain (dBi) (dBm) (dBm) Result

-3.346 -11.75 -15.096 36 Pass

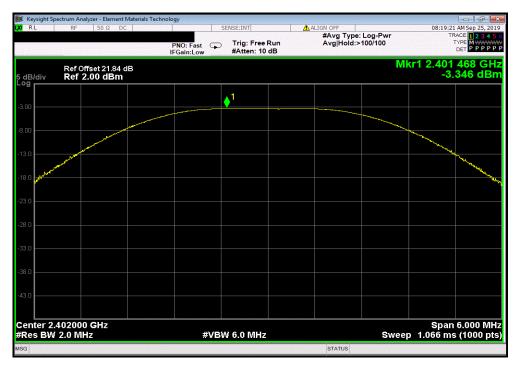

		BLE/GFSK (2	Mbps) Mid Chan	nel, 2442 MHz		
		Out Pwr	Antenna	EIRP	EIRP Limit	
		(dBm)	Gain (dBi)	(dBm)	(dBm)	Result
1		-5.014	-11.75	-16.764	36	Pass

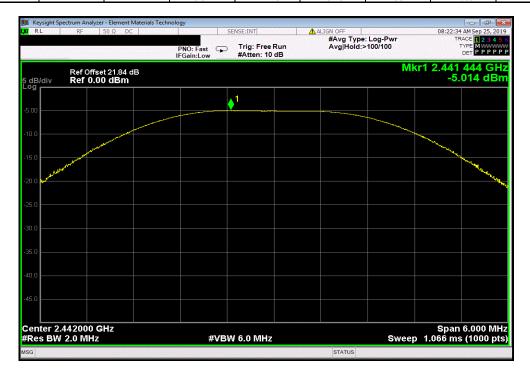


Report No. STAK0186 26/45



BLE/GFSK (2 Mbps) High Channel, 2480 MHz

Out Pwr Antenna EIRP EIRP Limit
(dBm) Gain (dBi) (dBm) (dBm) Result

-4.537 -11.75 -16.287 36 Pass

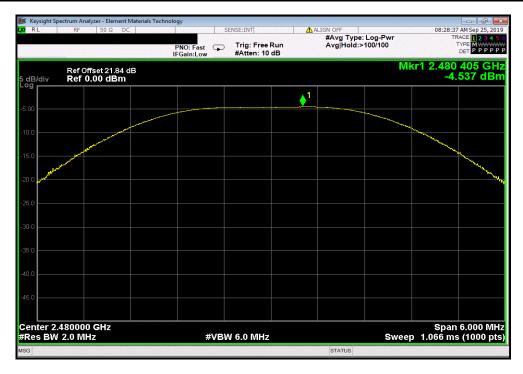

Report No. STAK0186 27/45



XMit 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

#### **TEST EQUIPMENT**

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	ESM Cable Corp.	TTBJ141-KMKM-72	MNU	11-Apr-19	11-Apr-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	1-May-19	1-May-20

#### **TEST DESCRIPTION**

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The maximum power spectral density measurements was measured using the channels and modes as called out on the following data sheets.

Per the procedure outlined in ANSI C63.10 the peak power spectral density was measured in a 3 kHz RBW.

Report No. STAK0186 28/45



						TbtTx 2019.08.02	XMit 2019.09.05
EUT: Livi	io RIC R				Work Order:	STAK0186	
Serial Number: 191	323922				Date:	24-Sep-19	
Customer: Sta	rkey Laboratories, Inc.				Temperature:	21.9 °C	
Attendees: Cha	arlie Esch				Humidity:	56.5% RH	
Project: Nor	Project: None			Barometric Pres.:	1007 mbar		
Tested by: And	drew Rogstad		Power: 3.8	3 VDC	Job Site:	MN08	
TEST SPECIFICATIONS	3		Te	st Method			
FCC 15.247:2019			IA!	ISI C63.10:2013			
COMMENTS							
DEVIATIONS FROM TE	ST STANDARD						
None							
Configuration #	2	Signature	To Roo	Stark			
		-			Value dBm/3kHz	Limit < dBm/3kHz	Results
BLE/GFSK (2 Mbps) Lov	v Channel, 2402 MHz				-21.31	8	Pass
BLE/GFSK (2 Mbps) Mid	Channel, 2442 MHz				-23.023	8	Pass
BLE/GFSK (2 Mbps) Hig	h Channel, 2480 MHz				-22.542	8	Pass

Report No. STAK0186 29/45




BLE/GFSK (2 Mbps) Low Channel, 2402 MHz


Value


Limit

dBm/3kHz < dBm/3kHz Results

-21.31 8 Pass

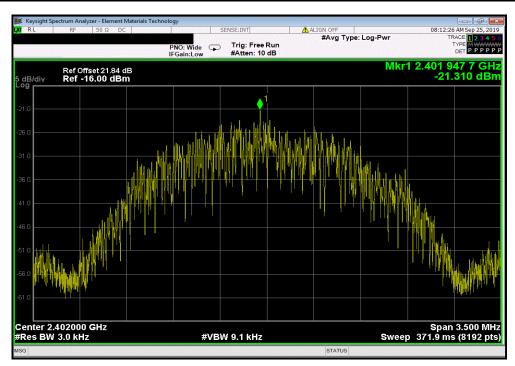



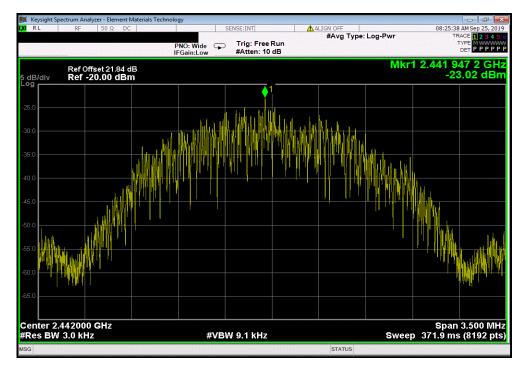

Report No. STAK0186 30/45




BLE/GFSK (2 Mbps) High Channel, 2480 MHz

Value Limit

dBm/3kHz < dBm/3kHz Results

-22.542 8 Pass

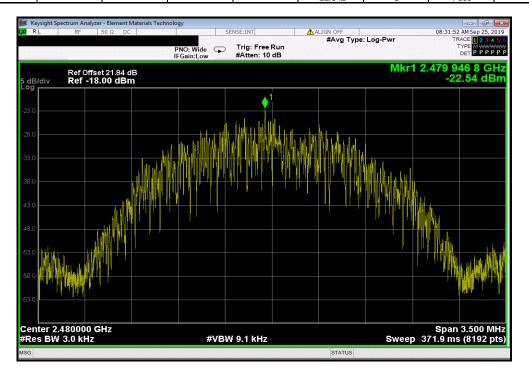

Report No. STAK0186 31/45

## **BAND EDGE COMPLIANCE**



XMit 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

#### **TEST EQUIPMENT**

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	ESM Cable Corp.	TTBJ141-KMKM-72	MNU	11-Apr-19	11-Apr-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	1-May-19	1-May-20

#### **TEST DESCRIPTION**

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The spurious RF conducted emissions at the edges of the authorized bands were measured with the EUT set to low and high transmit frequencies in each available band. The channels closest to the band edges were selected. The EUT was transmitting at the data rate(s) listed in the datasheet.

The spectrum was scanned below the lower band edge and above the higher band edge.

Report No. STAK0186 32/45

## **BAND EDGE COMPLIANCE**



EUT: Livio RIC R
Serial Number: 191323922
Customer: Starkey Laboratories, Inc.
Attendees: Charlie Esch
Project: None
Tested by: Andrew Rogstad
TEST SPECIFICATIONS Work Order: STAK0186
Date: 24-Sep-19
Temperature: 21.9 °C Humidity: 59.3% RH Barometric Pres.: 1008 mbar Power: 3.8 VDC
Test Method Job Site: MN08 ANSI C63.10:2013 FCC 15.247:2019 COMMENTS Reference level offset includes; Measurement Cable, DC Block, and 20 dB Attenuator. DEVIATIONS FROM TEST STANDARD Chy Rogelas Configuration # 2 Signature Value (dBc) Limit ≤ (dBc) Result BLE/GFSK (2 Mbps) Low Channel, 2402 MHz Pass Pass BLE/GFSK (2 Mbps) High Channel, 2480 MHz -38.7 -20

Report No. STAK0186

## **BAND EDGE COMPLIANCE**





BLE/GFSK (2 Mbps) Low Channel, 2402 MHz

Value Limit
(dBc) ≤ (dBc) Result

-26.49 -20 Pass





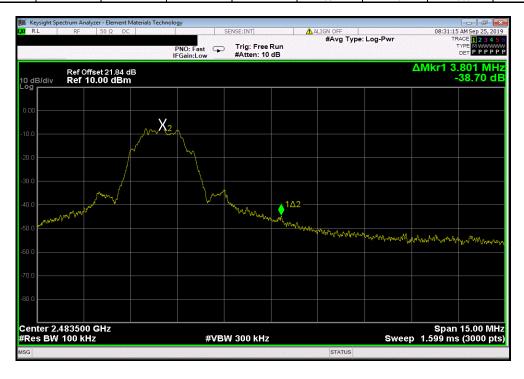

Report No. STAK0186 34/45



XMit 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

#### **TEST EQUIPMENT**

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	ESM Cable Corp.	TTBJ141-KMKM-72	MNU	11-Apr-19	11-Apr-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	1-May-19	1-May-20

#### **TEST DESCRIPTION**

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The spurious RF conducted emissions were measured with the EUT set to low, medium and high transmit frequencies. The EUT was transmitting at the data rate(s) listed in the datasheet. For each transmit frequency, the spectrum was scanned throughout the specified frequency range.

Report No. STAK0186 35/45



EUT: Livio RIC F				Work Order:		
Serial Number: 191323922					24-Sep-19	
Customer: Starkey La				Temperature:		
Attendees: Charlie Esc	ch			Humidity:		
Project: None				Barometric Pres.:		
Tested by: Andrew Ro	gstad	Power: 3.8 VDC		Job Site:	MN08	
TEST SPECIFICATIONS		Test Method				
FCC 15.247:2019		ANSI C63.10:2013				
COMMENTS		<u> </u>				
Reference level offset includes	s; Measurement Cable, DC Block, and 20 dE	3 Attenuator.				
	,					
<b>DEVIATIONS FROM TEST STA</b>	NDARD					
DEVIATIONS FROM TEST STA None	NDARD					
None						
	2	and Routel				
None		Char Rogatosh				
None	2	Frequency	Measured	Max Value	Limit	
None Configuration #	2 Signature	Frequency Range	Freq (MHz)	(dBc)	≤ (dBc)	Result
None Configuration # BLE/GFSK (2 Mbps) Low Chann	2 Signature	Frequency Range Fundamental	Freq (MHz) 2402.01	(dBc) N/A	≤ (dBc) N/A	N/A
None  Configuration #  BLE/GFSK (2 Mbps) Low Chann BLE/GFSK (2 Mbps) Low Chann	2 Signature sel, 2402 MHz el, 2402 MHz	Frequency Range Fundamental 30 MHz - 12.5 GHz	Freq (MHz) 2402.01 2397.34	(dBc) N/A -41.75	≤ (dBc) N/A -20	N/A Pass
None  Configuration #  BLE/GFSK (2 Mbps) Low Chann BLE/GFSK (2 Mbps) Low Chann BLE/GFSK (2 Mbps) Low Chann	2 Signature iel, 2402 MHz iel, 2402 MHz el, 2402 MHz	Frequency Range Fundamental 30 MHz - 12.5 GHz 12.5 GHz - 25 GHz	Freq (MHz) 2402.01 2397.34 23757.78	(dBc) N/A -41.75 -46.84	≤ (dBc) N/A -20 -20	N/A Pass Pass
None  Configuration #  BLE/GFSK (2 Mbps) Low Chann BLE/GFSK (2 Mbps) Low Chann BLE/GFSK (2 Mbps) Low Chann BLE/GFSK (2 Mbps) Mid Channe	2 Signature  lel, 2402 MHz lel, 2402 MHz lel, 2402 MHz lel, 2402 MHz lel, 2404 MHz	Frequency Range Fundamental 30 MHz - 12.5 GHz 12.5 GHz - 25 GHz Fundamental	Freq (MHz) 2402.01 2397.34 23757.78 2442.01	(dBc) N/A -41.75 -46.84 N/A	≤ (dBc)  N/A -20 -20 N/A	N/A Pass Pass N/A
None  Configuration #  BLE/GFSK (2 Mbps) Low Chann BLE/GFSK (2 Mbps) Low Chann BLE/GFSK (2 Mbps) Low Chann BLE/GFSK (2 Mbps) Mid Channe BLE/GFSK (2 Mbps) Mid Channe	2 Signature  iel, 2402 MHz iel, 2402 MHz el, 2402 MHz el, 2402 MHz el, 2442 MHz el, 2442 MHz	Frequency Range Fundamental 30 MHz - 12.5 GHz 12.5 GHz - 25 GHz Fundamental 30 MHz - 12.5 GHz	Freq (MHz) 2402.01 2397.34 23757.78 2442.01 9765.76	N/A -41.75 -46.84 N/A -47.12	≤ (dBc) N/A -20 -20 N/A -20	N/A Pass Pass N/A Pass
None  Configuration #  BLE/GFSK (2 Mbps) Low Chann BLE/GFSK (2 Mbps) Low Chann BLE/GFSK (2 Mbps) Low Chann BLE/GFSK (2 Mbps) Mid Channe BLE/GFSK (2 Mbps) Mid Channe BLE/GFSK (2 Mbps) Mid Channe	2 Signature  sel, 2402 MHz el, 2402 MHz el, 2402 MHz el, 2402 MHz el, 2404 MHz el, 2404 MHz el, 2444 MHz el, 2444 MHz el, 2444 MHz el, 2444 MHz	Frequency Range Fundamental 30 MHz - 12.5 GHz 12.5 GHz - 25 GHz Fundamental	Freq (MHz) 2402.01 2397.34 23757.78 2442.01	(dBc) N/A -41.75 -46.84 N/A	≤ (dBc)  N/A -20 -20 N/A	N/A Pass Pass N/A
None  Configuration #  BLE/GFSK (2 Mbps) Low Chann BLE/GFSK (2 Mbps) Low Chann BLE/GFSK (2 Mbps) Low Chann BLE/GFSK (2 Mbps) Mid Channe BLE/GFSK (2 Mbps) Mid Channe	2 Signature  sel, 2402 MHz el, 2402 MHz el, 2402 MHz el, 2402 MHz el, 2404 MHz el, 2404 MHz el, 2444 MHz el, 2444 MHz el, 2444 MHz el, 2444 MHz	Frequency Range Fundamental 30 MHz - 12.5 GHz 12.5 GHz - 25 GHz Fundamental 30 MHz - 12.5 GHz	Freq (MHz) 2402.01 2397.34 23757.78 2442.01 9765.76	N/A -41.75 -46.84 N/A -47.12	≤ (dBc) N/A -20 -20 N/A -20	N/A Pass Pass N/A Pass
None  Configuration #  BLE/GFSK (2 Mbps) Low Chann BLE/GFSK (2 Mbps) Low Chann BLE/GFSK (2 Mbps) Low Chann BLE/GFSK (2 Mbps) Mid Channe BLE/GFSK (2 Mbps) Mid Channe BLE/GFSK (2 Mbps) Mid Channe	2 Signature  lel, 2402 MHz lel, 2402 MHz lel, 2402 MHz lel, 2404 MHz lel, 2442 MHz lel, 2440 MHz	Frequency Range Fundamental 30 MHz - 12.5 GHz 12.5 GHz - 25 GHz Fundamental 30 MHz - 12.5 GHz 12.5 GHz - 25 GHz	Freq (MHz) 2402.01 2397.34 23757.78 2442.01 9765.76 24372.79	(dBc) N/A -41.75 -46.84 N/A -47.12 -44.37	≤ (dBc)  N/A -20 -20 N/A -20 -20 20	N/A Pass Pass N/A Pass Pass

Report No. STAK0186 36/45



BLE/GFSK (2 Mbps) Low Channel, 2402 MHz


Frequency Measured Max Value Limit

Range Freq (MHz) (dBc) ≤ (dBc) Result

Fundamental 2402.01 N/A N/A N/A



	BLE/GFSK	2 Mbps) Low Chan	nel, 2402 MHz		
	Frequency	Measured	Max Value	Limit	
	Range	Freq (MHz)	(dBc)	≤ (dBc)	Result
,	30 MHz - 12.5 GHz	2397.34	-41.75	-20	Pass

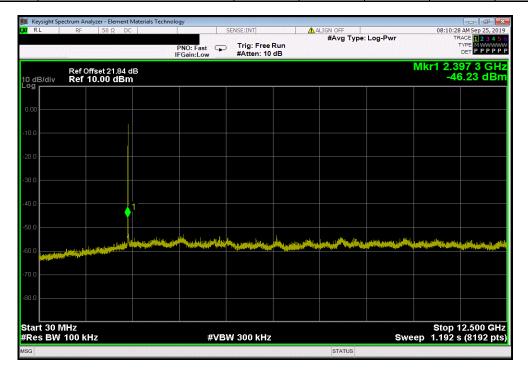

Report No. STAK0186 37/45




BLE/GFSK (2 Mbps) Low Channel, 2402 MHz

Frequency Measured Max Value Limit

Range Freq (MHz) (dBc) ≤ (dBc) Result

12.5 GHz - 25 GHz 23757.78 -46.84 -20 Pass

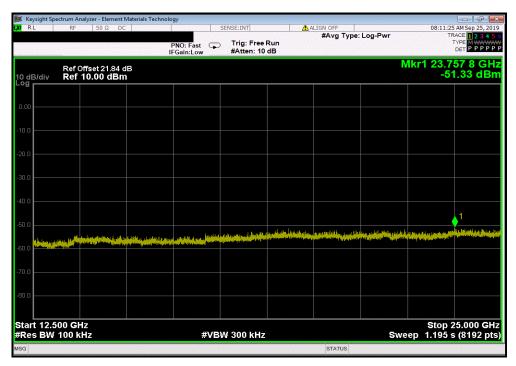

BLE/GF	SK (2 Mbps) Mid Chan	nel, 2442 MHz		
Frequency	Measured	Max Value	Limit	
 Range	Freq (MHz)	(dBc)	≤ (dBc)	Result
Fundamental	2442.01	N/A	N/A	N/A



Report No. STAK0186 38/45




BLE/GFSK (2 Mbps) Mid Channel, 2442 MHz


Frequency Measured Max Value Limit

Range Freq (MHz) (dBc) ≤ (dBc) Result

30 MHz - 12.5 GHz 9765.76 -47.12 -20 Pass

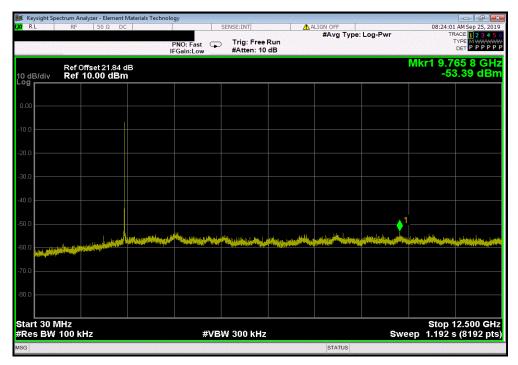

BLE/GFSK	2 Mbps) Mid Chan	nel, 2442 MHz		
Frequency	Measured	Max Value	Limit	
Range	Freq (MHz)	(dBc)	≤ (dBc)	Result
12.5 GHz - 25 GHz	24372.79	-44.37	-20	Pass

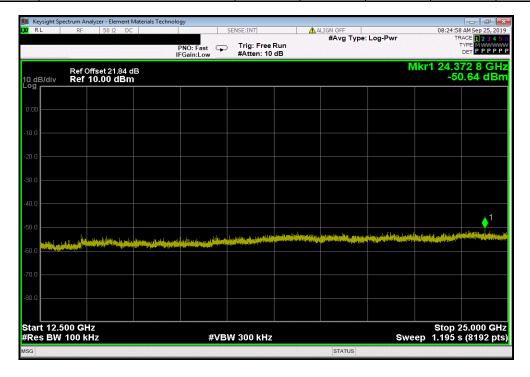

Report No. STAK0186 39/45



BLE/GFSK (2 Mbps) High Channel, 2480 MHz


Frequency Measured Max Value Limit

Range Freq (MHz) (dBc) ≤ (dBc) Result

Fundamental 2480.01 N/A N/A N/A



	BLE/GFSK (	2 Mbps) High Char	nnel, 2480 MHz		
	Frequency	Measured	Max Value	Limit	
	Range	Freq (MHz)	(dBc)	≤ (dBc)	Result
1	30 MHz - 12.5 GHz	820.13	-43.1	-20	Pass

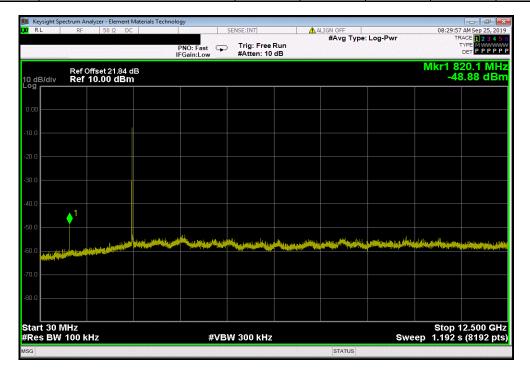

Report No. STAK0186 40/45




BLE/GFSK (2 Mbps) High Channel, 2480 MHz

Frequency Measured Max Value Limit

Range Freq (MHz) (dBc) ≤ (dBc) Result

12.5 GHz - 25 GHz 23712 -45.14 -20 Pass

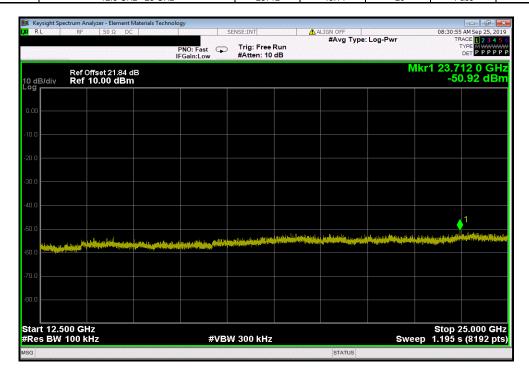

Report No. STAK0186 41/45

## SPURIOUS RADIATED EMISSIONS



PSA-ESCI 2019.05.10

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

#### **MODES OF OPERATION**

Tx on Low channel (2402 MHz), Mid channel (2442 MHz), and High channel (2480 MHz); 2 Mbps BLE

#### **POWER SETTINGS INVESTIGATED**

Battery

#### **CONFIGURATIONS INVESTIGATED**

STAK0186 - 1

#### FREQUENCY RANGE INVESTIGATED

Start Frequency 1 GHz Stop Frequency 18 GHz

#### **SAMPLE CALCULATIONS**

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

#### **TEST EQUIPMENT**

Description	Manufacturer	Model	ID	Last Cal.	Interval
Filter - High Pass	Micro-Tronics	HPM50111	LFN	12-Sep-2019	12 mo
Attenuator	Fairview Microwave	SA18E-10	TYA	17-Sep-2019	12 mo
Attenuator	Fairview Microwave	SA18E-20	TWZ	17-Sep-2019	12 mo
Analyzer - Spectrum Analyzer	Agilent	E4440A	AFD	28-Jul-2019	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-12001800-30-10P	AVW	8-Feb-2019	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-08	AIQ	NCR	0 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-08001200-30-10P	AVV	8-Feb-2019	12 mo
Cable	ESM Cable Corp.	Standard Gain Horn Cables	MNJ	8-Mar-2019	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-07	AXP	NCR	0 mo
Amplifier - Pre-Amplifier	Miteq	AMF-3D-00100800-32-13P	AVT	8-Feb-2019	12 mo
Cable	ESM Cable Corp.	Double Ridge Guide Horn Cables	MNI	17-Sep-2019	12 mo
Antenna - Double Ridge	ETS-Lindgren	3115	AJQ	16-Jan-2019	24 mo

Report No. STAK0186 42/45

## SPURIOUS RADIATED EMISSIONS



#### **TEST DESCRIPTION**

The highest gain antenna of each type to be used with the EUT was tested. The EUT was configured for the required transmit frequencies and the modes as showed in the data sheets.

For each configuration, the spectrum was scanned throughout the specified range as part of the exploratory investigation of the emissions. These "pre-scans" are not included in the report. Final measurements on individual emissions were then made and included in this test report.

The individual emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis if required, and adjusting the measurement antenna height and polarization (per ANSI C63.10). A preamp and high pass filter (and notch filter) were used for this test in order to provide sufficient measurement sensitivity.

Measurements were made with the required detectors and annotated on the data for each individual point using the following annotation:

QP = Quasi-Peak Detector

PK = Peak Detector

AV = RMS Detector

Measurements were made to satisfy the specific requirements of the test specification for out of band emissions as well as the restricted band requirements.

If there are no detectable emissions above the noise floor, the data included may show noise floor measurements for reference only.

Measurements at the edges of the allowable band may be presented in an alternative method as provided for in the ANSI C63.10 Marker-Delta method. This method involves performing an in-band fundamental measurement followed by a screen capture of the fundamental and out-of-band emission using reduced measurement instrumentation bandwidths. The amplitude delta measured on this screen capture is applied to the fundamental emission value to show the out-of-band emission level as applied to the limit.

Where the radio test software does not provide for a duty cycle at continuous transmit conditions (> 98%) and the RMS (power average) measurements were made across the on and off times of the EUT transmissions, a duty cycle correction is added to the measurements using the formula of 10\*LOG(1/dc).

Report No. STAK0186 43/45

# **SPURIOUS RADIATED EMISSIONS**



					EmiR5 2019.08.01	PSA-ESCI 2019.05.10						
Work Order:	STAK0186	Date:	23-Sep-2019									
Project:	None	Temperature:	21.4 °C		PY	P						
Job Site:	MN05	Humidity:	57.5% RH		Logsun							
Serial Number:	191323924	Barometric Pres.:	1018 mbar		Tested by: Andrew Rogstad							
EUT:	Livio RIC R											
Configuration:	1					<u> </u>						
Customer:	Starkey Laboratories,	Inc.										
Attendees:	Charlie Esch											
EUT Power:	Battery											
Operating Mode:	Tx on Low channel (2-	402 MHz), Mid channel (	(2442 MHz), and H	ligh channel (2	2480 MHz); 2 Mbps BLE							
Deviations:	None											
Comments:	(DCCF = 10*Log(1/D0	A duty cycle of 31% was measured, so a Duty Cycle Correction Factor of 5.1 dB was added to the average measurements (DCCF = 10*Log(1/DC). Testing at frequencies below 1 GHz and above 18 GHz is documented in STAK0153. See data comments for EUT orientation. Tx channel, and modulation.										
Test Specifications			Test Me	ethod								

ANSI C63.10:2013

FCC 15.247:2019

Run#	14	Test Distance (	tance (m) 3 Antenna Height(s) 1 to 4(m)				Results		Pass	
80										
70								-		
60										
50		•		•						
40		•		•						
30										
20										
10										
0 1000						10000				1000

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
7326.227	30.8	13.5	2.2	27.0	5.1	0.0	Horz	AV	0.0	49.4	54.0	-4.6	EUT horz, Mid ch., 2 Mbps
7326.867	30.8	13.5	1.4	78.9	5.1	0.0	Vert	AV	0.0	49.4	54.0	-4.6	EUT horz, Mid ch., 2 Mbps
7440.953	30.9	13.2	1.5	177.0	5.1	0.0	Horz	AV	0.0	49.2	54.0	-4.8	EUT horz, High ch., 2 Mbps
7440.207	30.9	13.2	1.5	326.9	5.1	0.0	Vert	AV	0.0	49.2	54.0	-4.8	EUT horz, High ch., 2 Mbps
7440.697	30.9	13.2	1.5	92.9	5.1	0.0	Vert	AV	0.0	49.2	54.0	-4.8	EUT vert, High ch., 2 Mbps
7440.483	30.9	13.2	1.5	113.0	5.1	0.0	Horz	AV	0.0	49.2	54.0	-4.8	EUT on side, High ch., 2 Mbps
7440.827	30.8	13.2	1.5	0.0	5.1	0.0	Horz	AV	0.0	49.1	54.0	-4.9	EUT vert, High ch., 2 Mbps
7440.880	30.8	13.2	1.3	210.0	5.1	0.0	Vert	AV	0.0	49.1	54.0	-4.9	EUT on side, High ch., 2 Mbps
7205.160	30.2	13.7	1.5	322.9	5.1	0.0	Horz	AV	0.0	49.0	54.0	-5.0	EUT horz, Low ch., 2 Mbps
7206.463	30.0	13.6	1.5	63.0	5.1	0.0	Vert	AV	0.0	48.7	54.0	-5.3	EUT horz, Low ch., 2 Mbps
2483.527	33.3	-3.8	1.0	283.9	5.1	10.0	Vert	AV	0.0	44.6	54.0	-9.4	EUT on side, High ch., 2 Mbps
2389.643	32.6	-3.6	1.5	177.0	5.1	10.0	Horz	AV	0.0	44.1	54.0	-9.9	EUT horz, Low ch., 2 Mbps
2483.797	32.7	-3.8	3.6	204.9	5.1	10.0	Horz	AV	0.0	44.0	54.0	-10.0	EUT horz, High ch., 2 Mbps
2483.943	32.7	-3.8	1.5	127.9	5.1	10.0	Vert	AV	0.0	44.0	54.0	-10.0	EUT horz, High ch., 2 Mbps
2484.710	32.7	-3.8	1.5	261.9	5.1	10.0	Horz	AV	0.0	44.0	54.0	-10.0	EUT vert, High ch., 2 Mbps
2484.263	32.7	-3.8	1.5	37.0	5.1	10.0	Vert	AV	0.0	44.0	54.0	-10.0	EUT vert, High ch., 2 Mbps
2388.480	32.5	-3.6	1.5	245.0	5.1	10.0	Vert	AV	0.0	44.0	54.0	-10.0	EUT on side, Low ch., 2 Mbps
2484.353	32.6	-3.8	3.9	178.9	5.1	10.0	Horz	AV	0.0	43.9	54.0	-10.1	EUT on side, High ch., 2 Mbps
4883.880	30.6	4.7	1.6	24.9	5.1	0.0	Horz	AV	0.0	40.4	54.0	-13.6	EUT horz, Mid ch., 2 Mbps
4884.097	30.5	4.7	1.5	182.9	5.1	0.0	Vert	AV	0.0	40.3	54.0	-13.7	EUT horz, Mid ch., 2 Mbps
4959.463	30.0	4.8	1.5	164.9	5.1	0.0	Horz	AV	0.0	39.9	54.0	-14.1	EUT horz, High ch., 2 Mbps
4960.283	30.0	4.8	2.8	149.0	5.1	0.0	Vert	AV	0.0	39.9	54.0	-14.1	EUT horz, High ch., 2 Mbps

Report No. STAK0186 44/45

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
4803.390	30.2	4.6	1.5	131.0	5.1	0.0	Horz	AV	0.0	39.9	54.0	-14.1	EUT horz, Low ch., 2 Mbps
4803.077	30.1	4.6	2.9	232.9	5.1	0.0	Vert	AV	0.0	39.8	54.0	-14.2	EUT horz, Low ch., 2 Mbps
12400.690	29.0	5.4	1.9	328.0	5.1	0.0	Horz	AV	0.0	39.5	54.0	-14.5	EUT horz, High ch., 2 Mbps
12400.110	28.9	5.4	1.5	328.0	5.1	0.0	Vert	AV	0.0	39.4	54.0	-14.6	EUT horz, High ch., 2 Mbps
7326.577	42.4	13.5	2.2	27.0	0.0	0.0	Horz	PK	0.0	55.9	74.0	-18.1	EUT horz, Mid ch., 2 Mbps
7440.667	42.2	13.2	1.3	210.0	0.0	0.0	Vert	PK	0.0	55.4	74.0	-18.6	EUT on side, High ch., 2 Mbps
7439.057	42.0	13.2	1.5	92.9	0.0	0.0	Vert	PK	0.0	55.2	74.0	-18.8	EUT vert, High ch., 2 Mbps
7440.580	42.0	13.2	1.5	113.0	0.0	0.0	Horz	PK	0.0	55.2	74.0	-18.8	EUT on side, High ch., 2 Mbps
7325.300	41.6	13.5	1.4	78.9	0.0	0.0	Vert	PK	0.0	55.1	74.0	-18.9	EUT horz, Mid ch., 2 Mbps
7440.240	41.9	13.2	1.5	177.0	0.0	0.0	Horz	PK	0.0	55.1	74.0	-18.9	EUT horz, High ch., 2 Mbps
7439.597	41.9	13.2	1.5	326.9	0.0	0.0	Vert	PK	0.0	55.1	74.0	-18.9	EUT horz, High ch., 2 Mbps
7205.200	41.1	13.7	1.5	322.9	0.0	0.0	Horz	PK	0.0	54.8	74.0	-19.2	EUT horz, Low ch., 2 Mbps
7205.900	41.0	13.7	1.5	63.0	0.0	0.0	Vert	PK	0.0	54.7	74.0	-19.3	EUT horz, Low ch., 2 Mbps
7440.033	41.4	13.2	1.5	0.0	0.0	0.0	Horz	PK	0.0	54.6	74.0	-19.4	EUT vert, High ch., 2 Mbps
12399.030	29.7	-0.6	1.2	328.0	5.1	0.0	Horz	AV	0.0	34.2	54.0	-19.8	EUT horz, High ch., 2 Mbps
12399.800	29.2	-0.6	1.5	258.9	5.1	0.0	Vert	AV	0.0	33.7	54.0	-20.3	EUT horz, High ch., 2 Mbps
12210.780	30.1	-1.7	1.5	299.0	5.1	0.0	Vert	AV	0.0	33.5	54.0	-20.5	EUT horz, Mid ch., 2 Mbps
12209.070	30.0	-1.7	1.5	192.0	5.1	0.0	Horz	AV	0.0	33.4	54.0	-20.6	EUT horz, Mid ch., 2 Mbps
12009.140	30.2	-2.2	1.5	204.9	5.1	0.0	Horz	AV	0.0	33.1	54.0	-20.9	EUT horz, Low ch., 2 Mbps
12009.150	30.2	-2.2	1.5	27.9	5.1	0.0	Vert	AV	0.0	33.1	54.0	-20.9	EUT horz, Low ch., 2 Mbps
2484.177	44.8	-3.8	1.5	261.9	0.0	10.0	Horz	PK	0.0	51.0	74.0	-23.0	EUT vert, High ch., 2 Mbps EUT on side. Low ch., 2 Mbps
2389.010	44.5	-3.6	1.5 1.0	245.0	0.0	10.0	Vert	PK PK	0.0	50.9	74.0 74.0	-23.1 -23.4	EUT on side, Low ch., 2 Mbps
2483.523 2389.170	44.4	-3.8	1.5	283.9 177.0	0.0	10.0 10.0	Vert	PK PK	0.0 0.0	50.6	74.0 74.0	-23.4 -23.4	EUT horz, Low ch., 2 Mbps
2484.033	44.2 44.0	-3.6 -3.8	1.5	37.0	0.0 0.0	10.0	Horz Vert	PK	0.0	50.6 50.2	74.0	-23.4	EUT vert, High ch., 2 Mbps
2484.063	43.8	-3.6 -3.8	3.6	204.9	0.0	10.0	Horz	PK	0.0	50.2	74.0	-23.6 -24.0	EUT horz. High ch., 2 Mbps
2485.023	43.6	-3.6 -3.8	3.9	178.9	0.0	10.0	Horz	PK	0.0	49.8	74.0	-24.0	EUT on side, High ch., 2 Mbps
2484.280	43.4	-3.6 -3.8	1.5	176.9	0.0	10.0	Vert	PK	0.0	49.6	74.0	-24.2 -24.4	EUT horz, High ch., 2 Mbps
4883.120	41.9	4.7	1.6	24.9	0.0	0.0	Horz	PK	0.0	46.6	74.0	-27.4	EUT horz, Mid ch., 2 Mbps
4960.707	41.6	4.8	2.8	149.0	0.0	0.0	Vert	PK	0.0	46.4	74.0	-27.6	EUT horz, High ch., 2 Mbps
4803.183	41.8	4.6	2.9	232.9	0.0	0.0	Vert	PK	0.0	46.4	74.0	-27.6	EUT horz, Low ch., 2 Mbps
12400.370	40.7	5.4	1.9	328.0	0.0	0.0	Horz	PK	0.0	46.1	74.0	-27.9	EUT horz, High ch., 2 Mbps
4960.317	41.2	4.8	1.5	164.9	0.0	0.0	Horz	PK	0.0	46.0	74.0	-28.0	EUT horz, High ch., 2 Mbps
4804.660	41.3	4.6	1.5	131.0	0.0	0.0	Horz	PK	0.0	45.9	74.0	-28.1	EUT horz, Low ch., 2 Mbps
4884.747	41.1	4.7	1.5	182.9	0.0	0.0	Vert	PK	0.0	45.8	74.0	-28.2	EUT horz, Mid ch., 2 Mbps
12400.340	40.3	5.4	1.5	328.0	0.0	0.0	Vert	PK	0.0	45.7	74.0	-28.3	EUT horz, High ch., 2 Mbps
12399.790	42.6	-0.6	1.2	328.0	0.0	0.0	Horz	PK	0.0	42.0	74.0	-32.0	EUT horz, High ch., 2 Mbps
12399.790	40.5	-0.6	1.5	258.9	0.0	0.0	Vert	PK	0.0	39.9	74.0	-34.1	EUT horz, High ch., 2 Mbps
12009.680	41.9	-2.2	1.5	27.9	0.0	0.0	Vert	PK	0.0	39.7	74.0	-34.3	EUT horz, Low ch., 2 Mbps
12209.880	41.2	-1.7	1.5	299.0	0.0	0.0	Vert	PK	0.0	39.5	74.0	-34.5	EUT horz, Mid ch., 2 Mbps
12210.880	41.1	-1.7	1.5	192.0	0.0	0.0	Horz	PK	0.0	39.4	74.0	-34.6	EUT horz, Mid ch., 2 Mbps
12010.270	40.9	-2.2	1.5	204.9	0.0	0.0	Horz	PK	0.0	38.7	74.0	-35.3	EUT horz, Low ch., 2 Mbps

Report No. STAK0186 45/45