

#01_WLAN2.4GHz_802.11b 1Mbps_Edge 4_0mm_Ch1;Ant 1

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1.012

Medium: MSL_2450_190110 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.861$ S/m; $\epsilon_r = 53.034$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.56, 7.56, 7.56) ; Calibrated: 2018/9/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2018/11/16
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (51x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.722 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.27 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.408 W/kg; SAR(10 g) = 0.154 W/kg

Maximum value of SAR (measured) = 0.890 W/kg

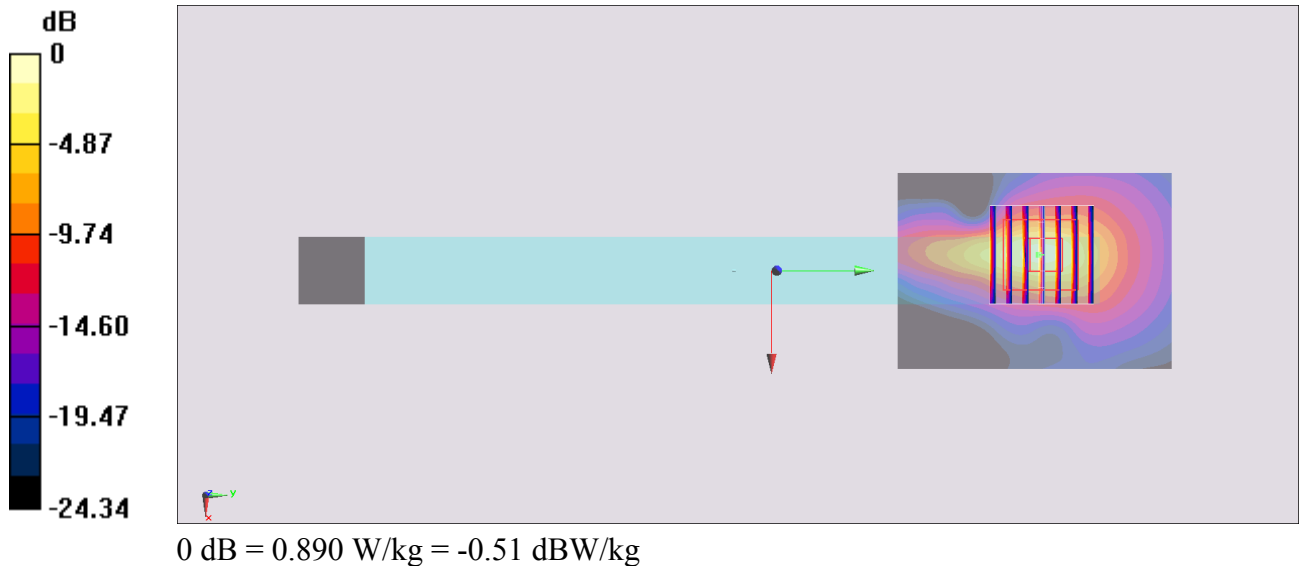

#02_WLAN5GHz_802.11ac-VHT160 MCS0_Edge 1_0mm_Ch50;Ant 1

Communication System: 802.11ac; Frequency: 5250 MHz; Duty Cycle: 1:1.077

Medium: MSL_5G_190114 Medium parameters used: $f = 5250$ MHz; $\sigma = 5.19$ S/m; $\epsilon_r = 47.452$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(4.4, 4.4, 4.4) ; Calibrated: 2018/9/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2018/11/16
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1131
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (61x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.31 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 6.237 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.77 W/kg

SAR(1 g) = 0.734 W/kg; SAR(10 g) = 0.184 W/kg

Maximum value of SAR (measured) = 2.27 W/kg

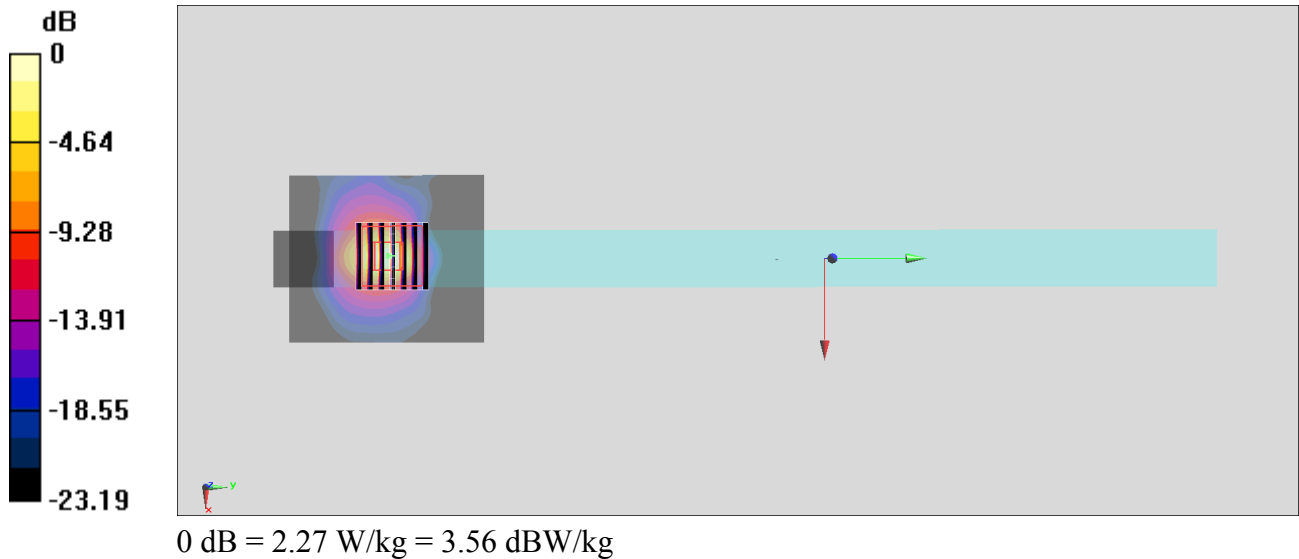

#03_WLAN5GHz_802.11ac-VHT160 MCS0_Edge 1_0mm_Ch114;Ant 2

Communication System: 802.11ac; Frequency: 5570 MHz; Duty Cycle: 1:1.077

Medium: MSL_5G_190114 Medium parameters used: $f = 5570$ MHz; $\sigma = 5.592$ S/m; $\epsilon_r = 47.051$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(3.82, 3.82, 3.82) ; Calibrated: 2018/9/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2018/11/16
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1131
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (61x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.27 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 17.66 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 3.88 W/kg

SAR(1 g) = 0.856 W/kg; SAR(10 g) = 0.239 W/kg

Maximum value of SAR (measured) = 2.23 W/kg

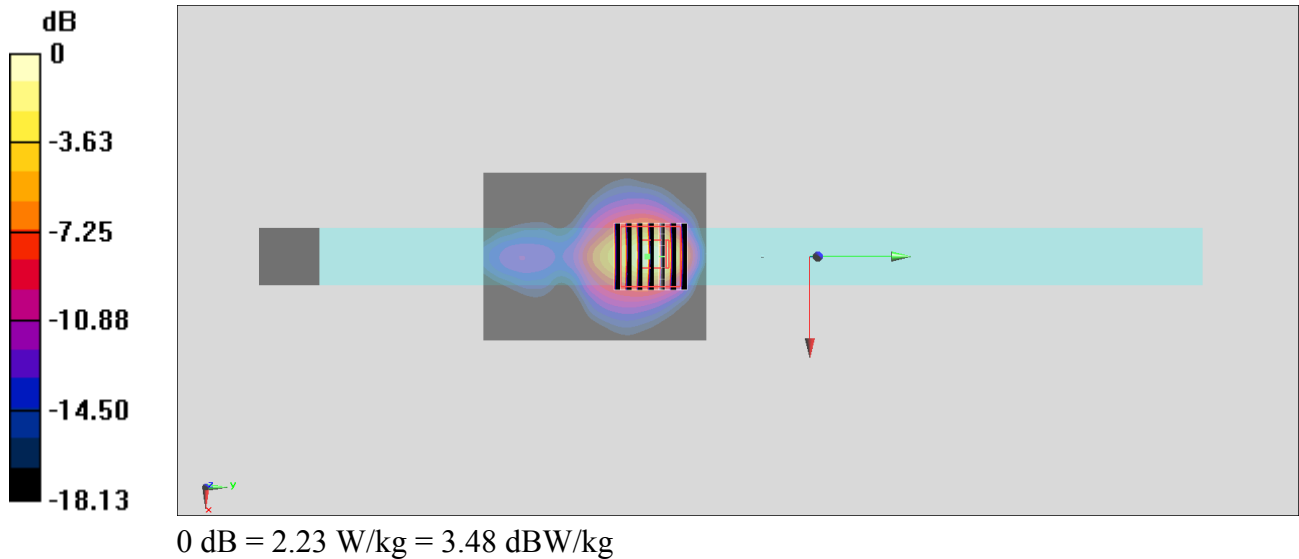

#04_WLAN5GHz_802.11ac-VHT80 MCS0_Edge 1_0mm_Ch155;Ant 2

Communication System: 802.11ac; Frequency: 5775 MHz; Duty Cycle: 1:1.061

Medium: MSL_5G_190114 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.853$ S/m; $\epsilon_r = 46.699$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(4.11, 4.11, 4.11) ; Calibrated: 2018/9/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2018/11/16
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1131
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (61x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.84 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 21.35 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 4.63 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.265 W/kg

Maximum value of SAR (measured) = 2.70 W/kg

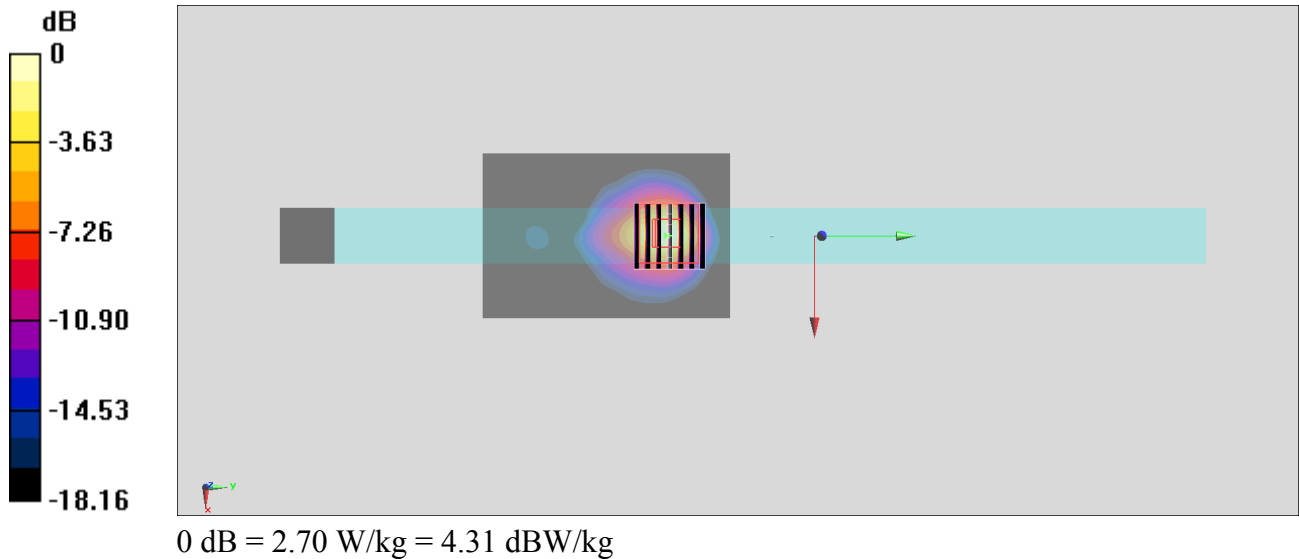

#05_Bluetooth_1Mbps_Edge 1_0mm_Ch78;Ant 2

Communication System: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1.305

Medium: MSL_2450_190115 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.951$ S/m; $\epsilon_r = 52.813$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.56, 7.56, 7.56) ; Calibrated: 2018/9/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2018/11/16
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (51x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0793 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.841 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.107 W/kg

SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.019 W/kg

Maximum value of SAR (measured) = 0.0794 W/kg

