


# FCC RADIO TEST REPORT

Applicant..... : Xiamen Hanin Co.,Ltd.  
Address..... : Room 305A, Angye Building, Pioneering Park Torch High-tech,Zone Xiamen  
China  
Manufacturer..... : Xiamen Hanin Co.,Ltd.  
Address..... : Room 305A, Angye Building, Pioneering Park Torch High-tech,Zone Xiamen  
China  
Factory..... : Xiamen Hanin Co.,Ltd.  
Address..... : No.96, Rongyuan Road, Tong'an District, Xiamen, China 361100  
Product Name..... : Portable Thermal Printer  
Brand Name..... : N/A  
Model No. .... : HM-A200U (For addition models and model difference refer to section 2.)  
FCC ID..... : 2AUTE-HMDL23003  
Measurement Standard..... : 47 CFR FCC Part 15, Subpart C (Section 15.247)  
Receipt Date of Samples..... : March 28, 2024  
Date of Tested..... : March 29, 2024 to April 24, 2024  
Date of Report..... : April 30, 2024

This report shows that above equipment is technically compliant with the requirements of the standards above.  
All test results in this report apply only to the tested sample(s). Without prior written approval of Dongguan Nore  
Testing Center Co., Ltd, this report shall not be reproduced except in full



Prepared by

Alina Guo / Project Engineer



Issued by

Iori Fan / Authorized Signatory

## Table of Contents

1. Summary of Test Result.....	4
2. General Description of EUT .....	5
3. Test Channels and Modes Detail .....	8
4. Configuration of EUT .....	8
5. Modification of EUT .....	8
6. Description of Support Device.....	9
7. Test Facility and Location .....	10
8. Applicable Standards and References.....	11
9. Deviations and Abnormalities from Standard Conditions .....	11
10. Test Conditions .....	12
11. Measurement Uncertainty .....	13
12. Sample Calculations.....	14
13. Test Items and Results .....	15
13.1 Conducted Emissions Measurement .....	15
13.2 Radiated Spurious Emissions and Restricted Bands Measurement.....	21
13.3 Channel Separation test.....	30
13.4 20dB Bandwidth .....	33
13.5 Hopping Channel Number.....	36
13.6 Time of Occupancy (Dwell Time).....	38
13.7 Maximum Peak Output Power .....	41
13.8 Band Edge Conducted Spurious Emission Measurement.....	44
13.9 Antenna Requirement .....	47
14. Test Equipment List.....	48

## Revision History

[illegible]

## 1. Summary of Test Result

FCC Rules	Description of Test	Result	Remarks
§15.247(a)(1)	Channel Separation test	PASS	---
§15.247(a)(1)	20dB Bandwidth	PASS	---
§15.247(a)(1)(iii)	Hopping Channel Number	PASS	---
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	PASS	---
§15.247(b)	Max Peak output Power test	PASS	---
§15.247(d)	Band edge test	PASS	---
§15.207 (a)	AC Power Conducted Emission	PASS	---
§15.247(d), §15.209, §15.205	Radiated Emission	PASS	---
§15.203	Antenna Requirement	PASS	---
§15.247(d)	Conducted Spurious Emission	PASS	---

## 2. General Description of EUT

Product Information	
Product Name:	Portable Thermal Printer
Main Model Name:	HM-A200U
Additional Model Name:	HPL2D2301, HM-A201U, HM-A202U, HM-A203U, HM-A204U, HM-A205U, BMAU20U, BMA2U, BMA20U, BMA200U, BMA201U, MA202U, BMA203U, BMA204U, BMA205U, BMAU2, BMAU20, BMAU200, BMAU201, BMAU202, BMAU203, BMAU204, BMAU205, MU20, H10
Model difference:	These models have the same circuit schematic, structure, PCB Layout and critical components. The difference is model number and color due to trading purpose.
S/N:	2403-1407
Brand Name:	N/A
Hardware Version:	HM-A200U-MBA
Software Version:	HM-A200U-MBA_V1
Rating:	DC 5V 1A come from adapter; DC 3.7V come from li-ion battery
Typical Arrangement:	Tabletop
I/O Port:	Refer to the user manual
Accessories Information	
Adapter 1:	Manufacturer: Shenzhen KunXing Technology Co., Ltd. Model: TC331U-5100 Input: AC 100-240V, 50/60Hz, 0.25A Output: DC 5V 1A S/N: KX21F0000029
Adapter 2:	Manufacturer: XIAMEN KELI ELECTRONICS CO., LTD. Model: SW-0018C Input: AC 100-240V, 50/60Hz, 0.2A Output: DC 5V 1A
Cable:	USB line: 1.08m, shielded, detachable
Other:	N/A

Additional Information	
Note:	<p>1. According to the model difference and manufacturer's requirements, all tests were performed on model HM-A200U.</p> <p>2. This EUT has two optional power supplies, both power supplies have been tested for AC Power Conducted Emission and Radiated Emission (below 1G) items, details are in the report.</p>
Remark:	All the information above are provided by the manufacturer. More detailed feature of the EUT please refers to the user manual.
Technical Specification	
Bluetooth Version:	V5.0
Frequency Range:	2402-2480MHz
Modulation Type:	GFSK
Number of Channel:	79 (refer to following channel list for details)
Channel Space:	1MHz
Antenna Type:	PCB Antenna
Antenna Gain:	-3.77 dBi
Remark:	This report only replies to BDR feature of the EUT.


Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	---	---

### 3. Test Channels and Modes Detail

No.	Mode	Channel	Frequency (MHz)	Modulation
1	TX	Hopping	2402-2480	GFSK
2	TX	Low	2402	GFSK
3	TX	Mid	2441	GFSK
4	TX	High	2480	GFSK
5	BT Link	---	---	---

Note: TX mode means that the EUT was programmed to be in continuously transmitting mode.

### 4. Configuration of EUT

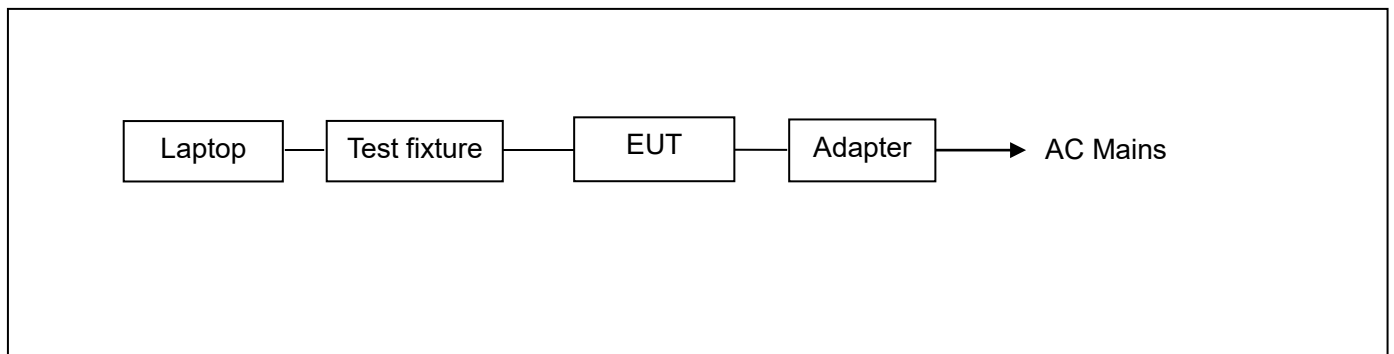

### 5. Modification of EUT

No modifications are made to the EUT during all test items.



## 6. Description of Support Device

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Brand	M/N	S/N	Cable Specification	Remarks
1.	Laptop	DELL	VOSTRO 3400	H3K2XA01	I/P: AC 100-240V 50-60Hz, 1.3A O/P: DC 19.5V 2.31A 45W AC Line: 1.13m unshielded DC Line: 1.15m unshielded with a core	Provided by the Lab
2.	Adapter	DELL	HA45NM 140	---		Provided by the Lab
3.	Test fixture	---	---	---	----	Provide by the manufacturer

No.	Software	Modulation	Power Setting
1.	fcc_test_tool.exe	GFSK	0

## 7. Test Facility and Location

Test Site	:	Dongguan Nore Testing Center Co., Ltd. (Dongguan NTC Co., Ltd.)
Accreditations and Authorizations	:	<p>The Laboratory has been assessed and proved to be in compliance with CNAS/CL01</p> <p>Listed by CNAS, August 13, 2018</p> <p>The Certificate Registration Number is L5795.</p> <p>The Certificate is valid until August 13, 2024</p> <p>The Laboratory has been assessed and proved to be in compliance with ISO17025</p> <p>Listed by A2LA, November 01, 2017</p> <p>The Certificate Registration Number is 4429.01</p> <p>The Certificate is valid until December 31, 2025</p> <p>Listed by FCC, November 06, 2017</p> <p>Test Firm Registration Number: 907417</p> <p>Listed by Industry Canada, June 08, 2017</p> <p>The Certificate Registration Number. Is 46405-9743A</p> <p>The CAB identifier number: CN0015</p>
Test Site Location	:	Building D, Gaosheng Science and Technology Park, Hongtu Road, Nancheng District, Dongguan City, Guangdong Province, China

## 8. Applicable Standards and References

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

### Test Standards:

47 CFR Part 15, Subpart C, 15.247

ANSI C63.10-2013

### References Test Guidance:

DTS KDB 558074 D01 15.247 Meas Guidance v05r02

### Remark:

The EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

## 9. Deviations and Abnormalities from Standard Conditions

No additions, deviations and exclusions from the standard.

## 10. Test Conditions

No.	Test Item	Test Mode	Test Voltage	Tested by	Remarks
1.	Channel Separation test	1	AC 120V 60Hz	Sean Yuan	See note <sup>1</sup>
2.	20dB Bandwidth	2-4	AC 120V 60Hz	Sean Yuan	See note <sup>1</sup>
3.	Hopping Channel Number	1	AC 120V 60Hz	Sean Yuan	See note <sup>1</sup>
4.	Time of Occupancy (Dwell Time)	1	AC 120V 60Hz	Sean Yuan	See note <sup>1</sup>
5.	Max Peak output Power test	2-4	AC 120V 60Hz	Sean Yuan	See note <sup>1</sup>
6.	Band edge test	1-4	AC 120V 60Hz DC 3.7V	Sean Yuan	See note <sup>1</sup>
7.	AC Power Conducted Emission	1-5	AC 120V 60Hz	Sean Yuan	See note <sup>1</sup>
8.	Radiated Emission	1-5	AC 120V 60Hz DC 3.7V	Sean Yuan	See note <sup>1</sup>
9.	Antenna Requirement	---	---	---	---
10.	Conducted Spurious Emission	1-4	AC 120V 60Hz	Sean Yuan	See note <sup>1</sup>

**Note:**

1. The testing climatic conditions for temperature, humidity, and atmospheric pressure are within: 15~35℃, 30~70%, 86~106kPa
2. For test voltage AC 120V 60Hz were come from Adapter; DC 3.7V was come from internal li-ion battery.
3. Only the worst case was recorded in the report.

## 11. Measurement Uncertainty

No.	Test Item	Frequency	Uncertainty	Remarks
1.	Conducted Emission	150KHz ~ 30MHz	±2.52 dB	---
2.	Radiated Emission	9kHz ~ 30MHz	±5.66 dB	
		30MHz ~ 1GHz	±5.66 dB	---
		1GHz ~ 18GHz	±5.19 dB	---
		18GHz ~ 40GHz	±5.19 dB	
3.	Conducted Spurious Emissions	10Hz ~ 40GHz	±0.98 dB	---
4.	RF Output Power	10Hz ~ 40GHz	±1.18 dB	
5.	Power Spectral Density	10Hz ~ 40GHz	±1.18 dB	
6.	Occupied Channel Bandwidth	---	±0.72%	---

**Note:**

1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
2. The measurement uncertainty levels above are estimated and calculated according to CISPR 16-4-2.
3. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

## 12. Sample Calculations

Conducted Emission						
Freq. (MHz)	Reading Level (dBUV)	Correct Factor (dB)	Measurement (dBUV)	Limit (dBUV)	Over (dB)	Detector
0.5100	35.27	10.03	45.30	56.00	-10.70	QP
<p>Where,</p> <p>Freq. = Emission frequency in MHz</p> <p>Reading Level = Spectrum Analyzer/Receiver Reading</p> <p>Corrector Factor = Insertion loss of LISN + Cable Loss + RF Switching Unit attenuation</p> <p>Measurement = Reading + Corrector Factor</p> <p>Limit = Limit stated in standard</p> <p>Margin = Measurement - Limit</p> <p>Detector = Reading for Quasi-Peak / Average / Peak</p>						

Radiated Spurious Emissions and Restricted Bands						
Freq. (MHz)	Reading Level (dBUV)	Correct Factor (dB/m)	Measurement (dBUV/m)	Limit (dBUV/m)	Over (dB)	Detector
179.3800	47.30	-9.30	38.00	43.50	-5.50	QP
<p>Where,</p> <p>Freq. = Emission frequency in MHz</p> <p>Reading Level = Spectrum Analyzer/Receiver Reading</p> <p>Corrector Factor = Antenna Factor + Cable Loss - Pre-amplifier</p> <p>Measurement = Reading + Corrector Factor</p> <p>Limit = Limit stated in standard</p> <p>Over = Margin, which calculated by Measurement - Limit</p> <p>Detector = Reading for Quasi-Peak / Average / Peak</p>						

Note: For all conducted test items, the spectrum analyzer offset or transducer is derived from RF cable loss and attenuator factor. The offset or transducer is equal to the RF cable loss plus attenuator factor.

## 13. Test Items and Results

### 13.1 Conducted Emissions Measurement


#### LIMITS

According to the requirements of FCC PART 15.207, the limits are as follows:

Frequency (MHz)	Quasi-peak	Average
0.15 to 0.5	66 to 56	56 to 46
0.5 to 5	56	46
5 to 30	60	50

- Note:
1. If the limits for the average detector are met when using the quasi-peak detector, then the limits for the measurements with the average detector are considered to be met.
  2. The lower limit shall apply at the transition frequencies.
  3. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5MHz.

#### BLOCK DIAGRAM OF TEST SETUP

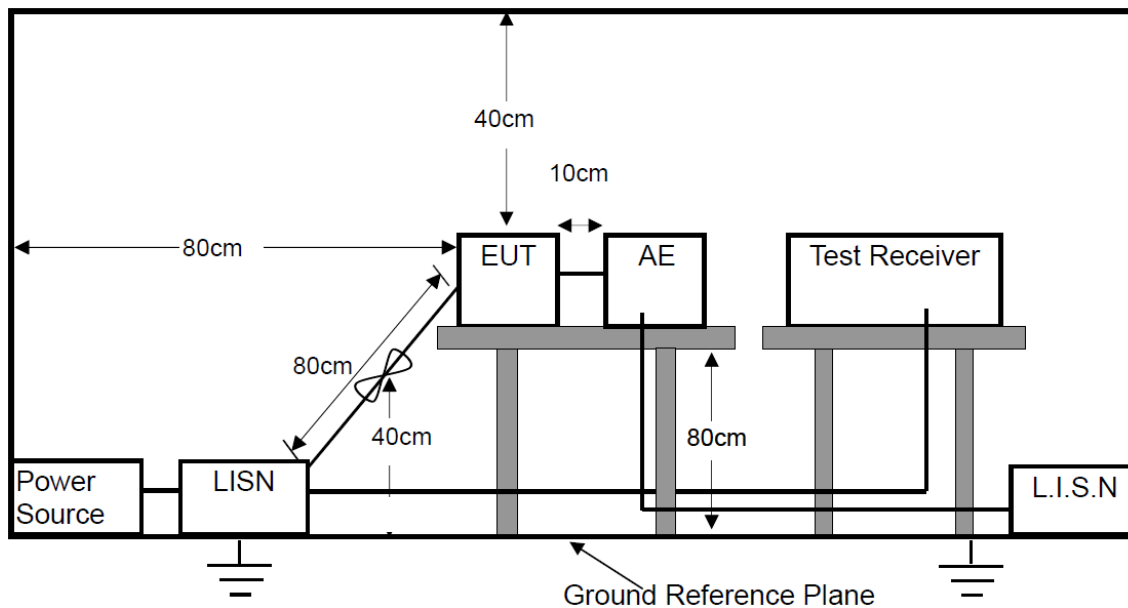

---

## TEST PROCEDURES

- a. The EUT was placed on a wooden table 0.8m height from the metal ground plan and 0.4m from the conducting wall of the shielding room and it was kept at 0.8m from any other grounded conducting surface.
- b. All I/O cables and support devices were positioned as per ANSI C63.10.
- c. Connect mains power port of the EUT to a line impedance stabilization network (LISN).
- d. Connect all support devices to the other LISN and AAN, if needed.
- e. Scan the frequency range from 150KHz to 30MHz at both sides of AC line for maximum conducted interference checking and record the test data.

## TEST RESULTS

PASS

Please refer to the following pages of the worst case.




M/N: HM-A200U	Testing Voltage: AC 120V/60Hz
Phase: L1	Detector: QP & AVG
Test Mode: 1	Adapter: TC331U-5100

## Conducted Emission Measurement

Date: 2024/4/9

Time: 15:27:01

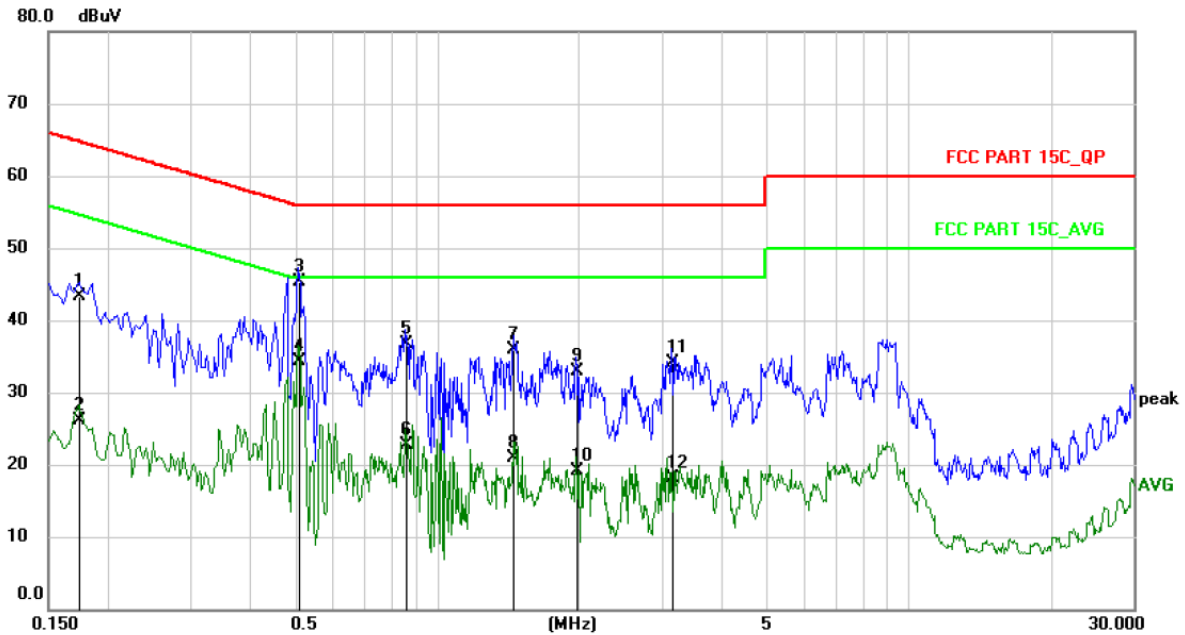


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.1740	33.31	9.99	43.30	64.77	-21.47	QP	
2	0.1740	16.21	9.99	26.20	54.77	-28.57	AVG	
3 *	0.5100	35.27	10.03	45.30	56.00	-10.70	QP	
4	0.5100	24.37	10.03	34.40	46.00	-11.60	AVG	
5	0.8580	26.69	10.01	36.70	56.00	-19.30	QP	
6	0.8580	12.79	10.01	22.80	46.00	-23.20	AVG	
7	1.4540	25.90	10.00	35.90	56.00	-20.10	QP	
8	1.4540	11.00	10.00	21.00	46.00	-25.00	AVG	
9	1.9739	22.89	10.01	32.90	56.00	-23.10	QP	
10	1.9739	9.09	10.01	19.10	46.00	-26.90	AVG	
11	3.1459	24.06	10.04	34.10	56.00	-21.90	QP	
12	3.1459	8.06	10.04	18.10	46.00	-27.90	AVG	

M/N: HM-A200U	Testing Voltage: AC 120V/60Hz
Phase: N	Detector: QP & AVG
Test Mode: 1	Adapter: TC331U-5100

## Conducted Emission Measurement

Date: 2024/4/9

Time: 15:32:30

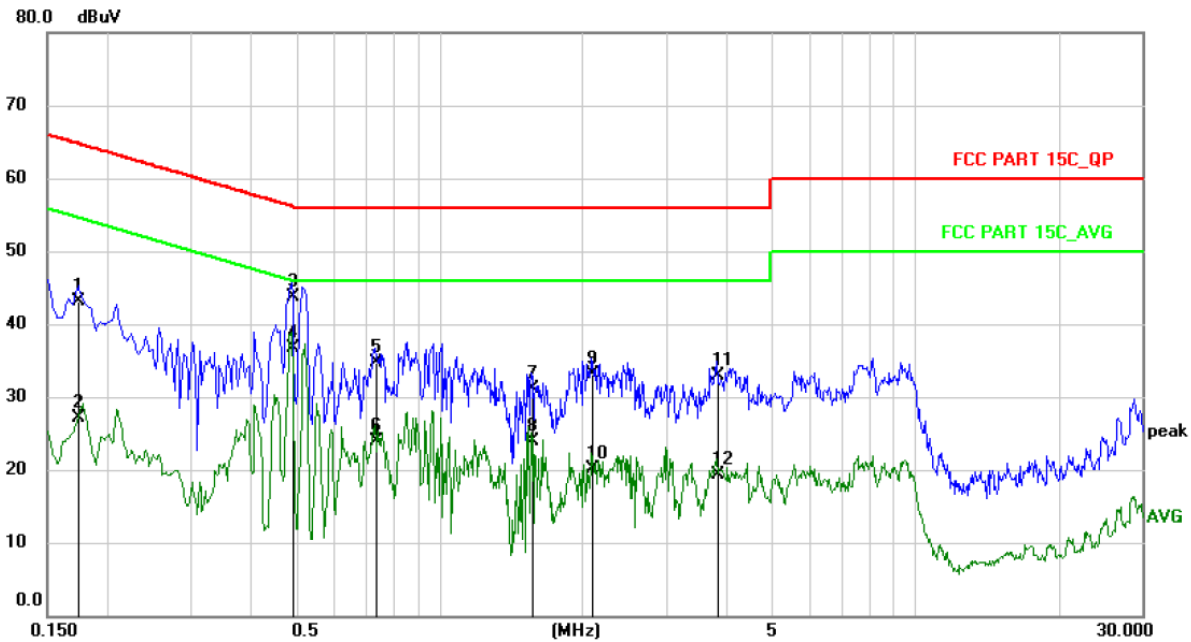


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.1740	33.25	9.95	43.20	64.77	-21.57	QP	
2	0.1740	17.15	9.95	27.10	54.77	-27.67	AVG	
3	0.4900	33.70	10.00	43.70	56.17	-12.47	QP	
4 *	0.4900	26.80	10.00	36.80	46.17	-9.37	AVG	
5	0.7340	24.82	9.98	34.80	56.00	-21.20	QP	
6	0.7340	14.02	9.98	24.00	46.00	-22.00	AVG	
7	1.5660	21.23	9.97	31.20	56.00	-24.80	QP	
8	1.5660	13.93	9.97	23.90	46.00	-22.10	AVG	
9	2.0900	23.23	9.97	33.20	56.00	-22.80	QP	
10	2.0900	10.23	9.97	20.20	46.00	-25.80	AVG	
11	3.8380	22.88	10.02	32.90	56.00	-23.10	QP	
12	3.8380	9.38	10.02	19.40	46.00	-26.60	AVG	

M/N: HM-A200U	Testing Voltage: AC 120V/60Hz
Phase: L1	Detector: QP & AVG
Test Mode: 1	Adapter: SW-7845

## Conducted Emission Measurement

Date: 2024/4/21

Time: 22:58:58

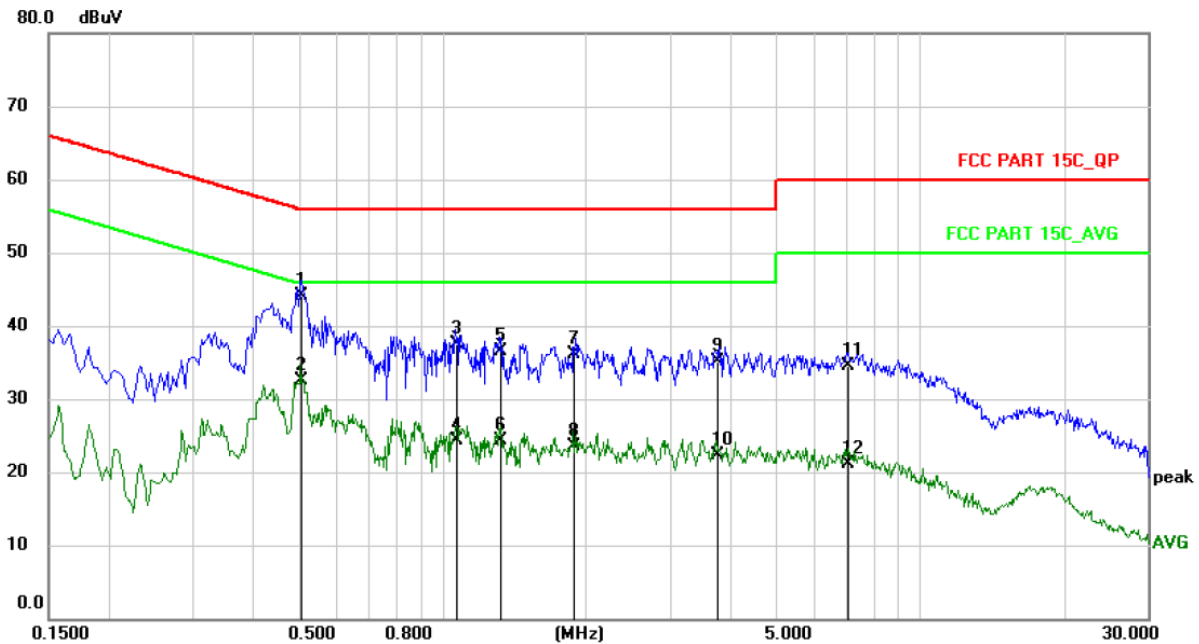


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
	MHz	dBuV	dB	dBuV	dBuV	dB		
1 *	0.5060	34.16	10.04	44.20	56.00	-11.80	QP	
2	0.5060	22.56	10.04	32.60	46.00	-13.40	AVG	
3	1.0700	27.50	10.00	37.50	56.00	-18.50	QP	
4	1.0700	14.30	10.00	24.30	46.00	-21.70	AVG	
5	1.3180	26.50	10.00	36.50	56.00	-19.50	QP	
6	1.3180	14.30	10.00	24.30	46.00	-21.70	AVG	
7	1.8818	26.19	10.01	36.20	56.00	-19.80	QP	
8	1.8818	13.59	10.01	23.60	46.00	-22.40	AVG	
9	3.7418	25.05	10.05	35.10	56.00	-20.90	QP	
10	3.7418	12.35	10.05	22.40	46.00	-23.60	AVG	
11	7.0579	24.40	10.10	34.50	60.00	-25.50	QP	
12	7.0579	11.10	10.10	21.20	50.00	-28.80	AVG	

M/N: HM-A200U	Testing Voltage: AC 120V/60Hz
Phase: N	Detector: QP & AVG
Test Mode: 1	Adapter: SW-7845

## Conducted Emission Measurement

Date: 2024/4/21

Time: 23:05:49

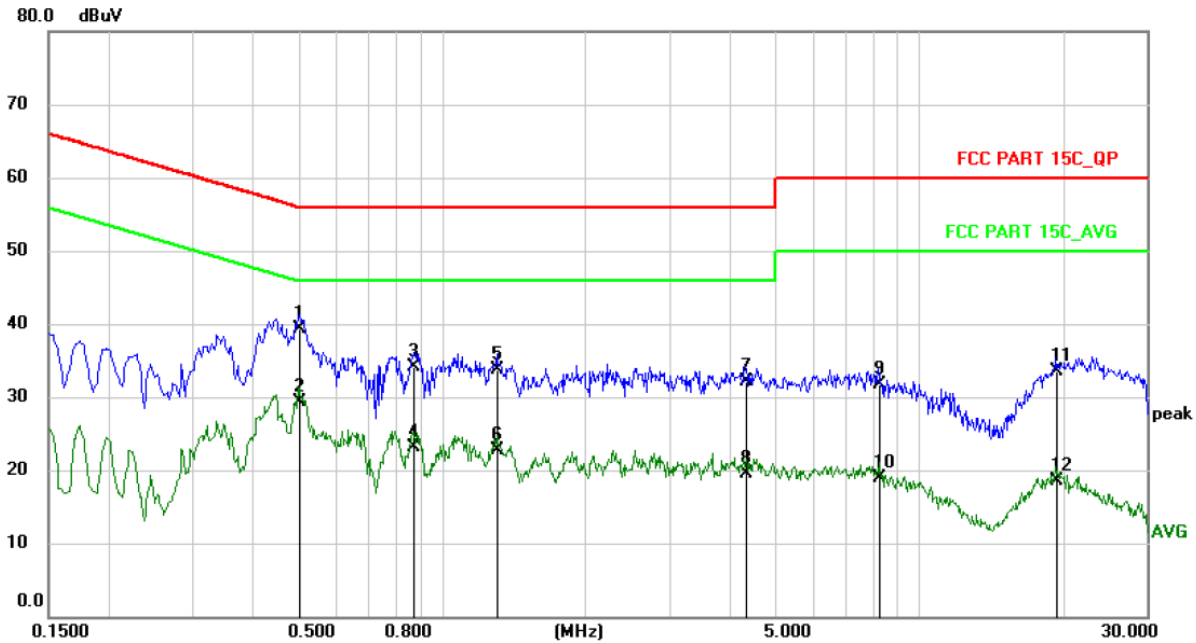

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1 *	0.5020	29.40	10.00	39.40	56.00	-16.60	QP	
2	0.5020	19.30	10.00	29.30	46.00	-16.70	AVG	
3	0.8700	24.13	9.97	34.10	56.00	-21.90	QP	
4	0.8700	13.13	9.97	23.10	46.00	-22.90	AVG	
5	1.3060	23.84	9.96	33.80	56.00	-22.20	QP	
6	1.3060	12.84	9.96	22.80	46.00	-23.20	AVG	
7	4.3300	22.18	10.02	32.20	56.00	-23.80	QP	
8	4.3300	9.48	10.02	19.50	46.00	-26.50	AVG	
9	8.2220	21.72	10.08	31.80	60.00	-28.20	QP	
10	8.2220	8.92	10.08	19.00	50.00	-31.00	AVG	
11	19.4140	23.26	10.34	33.60	60.00	-26.40	QP	
12	19.4140	8.16	10.34	18.50	50.00	-31.50	AVG	

## 13.2 Radiated Spurious Emissions and Restricted Bands Measurement

### LIMIT of Radiated Band Edges and non-restricted bands

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB.

### LIMIT of Restricted bands


In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below:

Frequency range MHz	Distance Meters	Field Strengths Limit (15.209)
		$\mu\text{V/m}$
0.009 ~ 0.490	300	$2400/F(\text{kHz})$
0.490 ~ 1.705	30	$24000/F(\text{kHz})$
1.705 ~ 30	30	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960	3	500


- Remark:
- (1) Emission level (dB) $\mu\text{V}$  = 20 log Emission level  $\mu\text{V/m}$
  - (2) The smaller limit shall apply at the cross point between two frequency bands.
  - (3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
  - (4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.
  - (5) §15.247(d) specifies that emissions which fall in the restricted bands, as defined in §15.205 comply with radiated emission limits specified in §15.209.

## BLOCK DIAGRAM OF TEST SETUP


For Radiated Emission below 30MHz

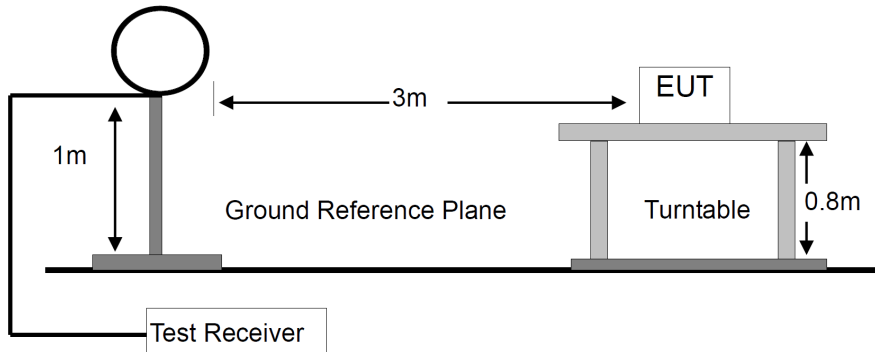

For Radiated Emission 30-1000MHz

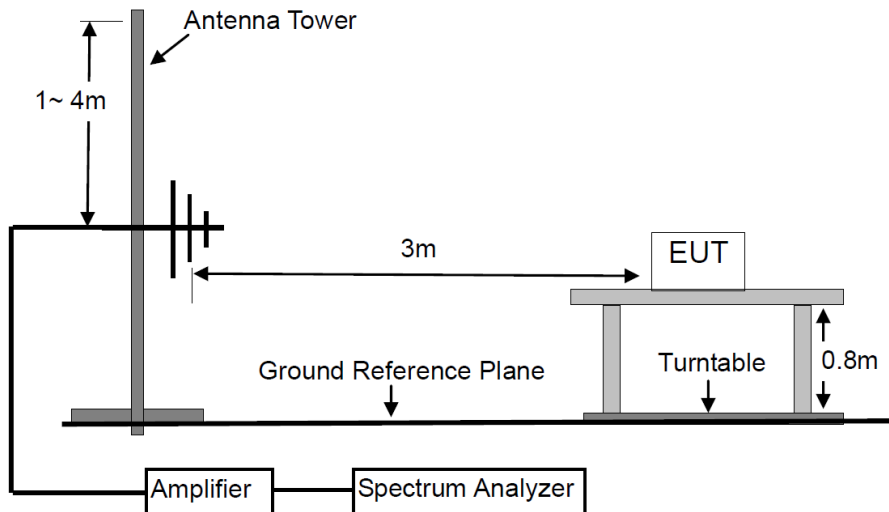

For Radiated Emission Above 1000MHz.

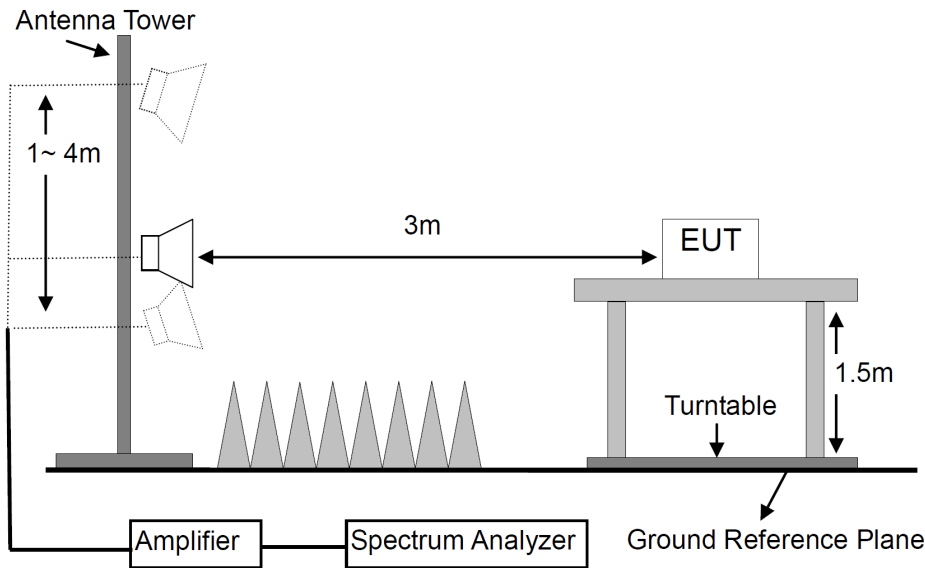

## TEST PROCEDURES

- Below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic chamber room.
- For the radiated emission test above 1GHz:
 

The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.
- f. A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.
- g. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and packet type.

The worst case was found when the EUT was positioned on Z axis for radiated emission.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band (MHz)	Detector	Resolution Bandwidth	Video Bandwidth
0.009~0.15	QP & AVG	200 Hz	1 kHz
0.15~30	QP & AVG	10 kHz	30 kHz
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	3 MHz
	Average	1 MHz	10 Hz

## TEST RESULTS

PASS

Please refer to the following pages of the worst case.




M/N: HM-A200U	Testing Voltage: AC 120V/60Hz
Polarization: Horizontal	Detector: QP
Test Mode: 1 (Adapter: TC331U-5100)	Distance: 3m

## Radiated Emission Measurement

Date: 2024/4/2

Time: 5:48:09

80.0 dBuV/m

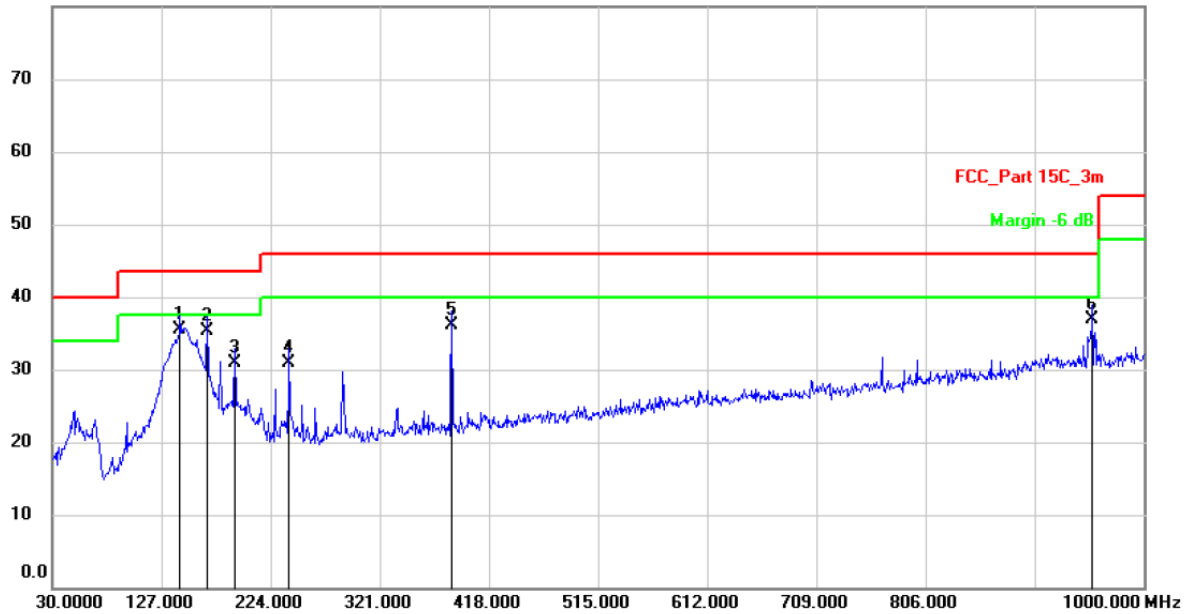

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	143.4900	46.43	-10.97	35.46	43.50	-8.04	QP	
2		167.7400	45.37	-10.11	35.26	43.50	-8.24	QP	
3		191.9900	39.03	-8.12	30.91	43.50	-12.59	QP	
4		240.4900	37.55	-6.61	30.94	46.00	-15.06	QP	
5		385.0200	39.68	-3.65	36.03	46.00	-9.97	QP	
6		954.4100	30.72	6.28	37.00	46.00	-9.00	QP	


**Note:** Below 30MHz, the emissions are lower than 20dB below the allowable limit.

M/N: HM-A200U	Testing Voltage: AC 120V/60Hz
Polarization: Vertical	Detector: QP
Test Mode: 1 (Adapter: TC331U-5100)	Distance: 3m

## Radiated Emission Measurement

Date: 2024/4/2

Time: 5:42:29

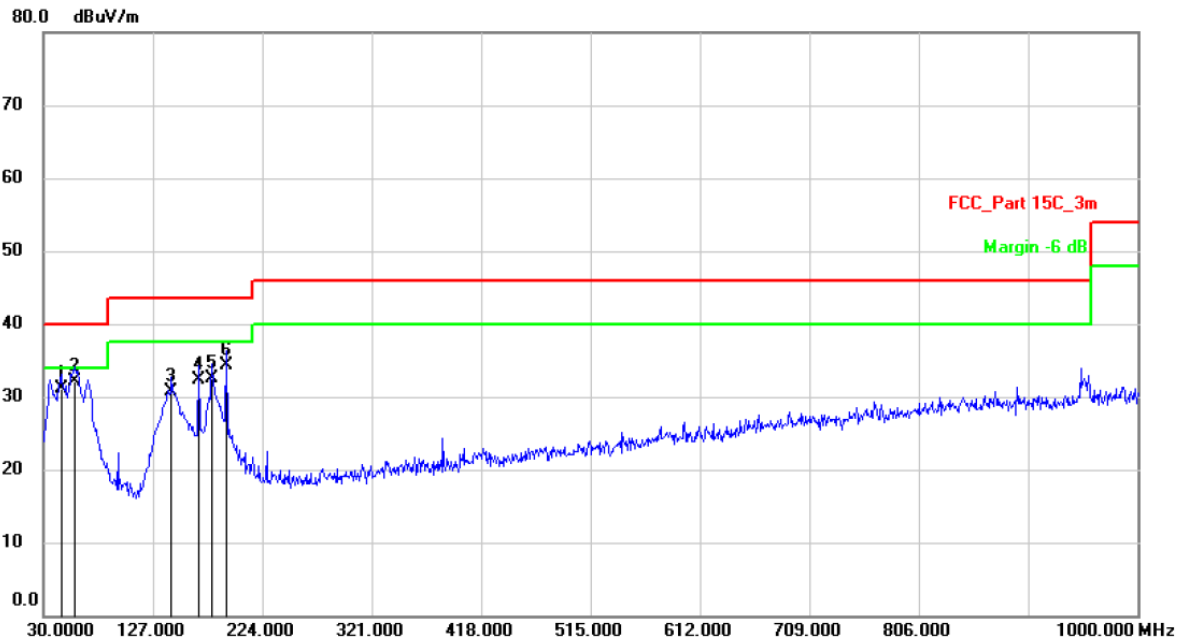

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		45.5200	38.62	-7.56	31.06	40.00	-8.94	QP	
2	*	57.1600	39.70	-7.68	32.02	40.00	-7.98	QP	
3		143.4900	42.34	-11.60	30.74	43.50	-12.76	QP	
4		167.7400	42.70	-10.41	32.29	43.50	-11.21	QP	
5		179.3800	41.89	-9.45	32.44	43.50	-11.06	QP	
6		191.9900	43.29	-9.03	34.26	43.50	-9.24	QP	


**Note:** Below 30MHz, the emissions are lower than 20dB below the allowable limit.

M/N: HM-A200U	Testing Voltage: AC 120V/60Hz
Polarization: Horizontal	Detector: QP
Test Mode: 1 (Adapter: SW-7845)	Distance: 3m

## Radiated Emission Measurement

Date: 2024/4/19

Time: 10:06:00

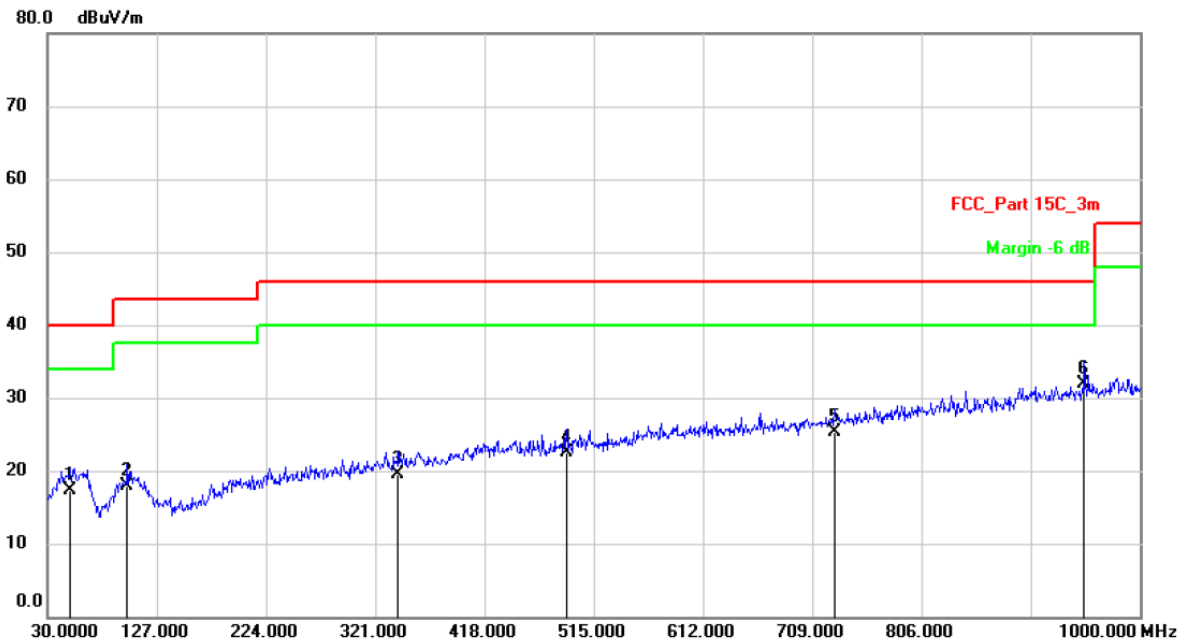

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		50.3700	24.24	-6.94	17.30	40.00	-22.70	QP
2		100.8100	25.41	-7.51	17.90	43.50	-25.60	QP
3		341.3700	23.90	-4.30	19.60	46.00	-26.40	QP
4		490.7500	24.50	-1.90	22.60	46.00	-23.40	QP
5		728.4000	22.61	2.69	25.30	46.00	-20.70	QP
6	*	950.5300	25.63	6.27	31.90	46.00	-14.10	QP


**Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.**

M/N: HM-A200U	Testing Voltage: AC 120V/60Hz
Polarization: Vertical	Detector: QP
Test Mode: 1 (Adapter: SW-7845)	Distance: 3m

## Radiated Emission Measurement

Date: 2024/4/19

Time: 9:59:30

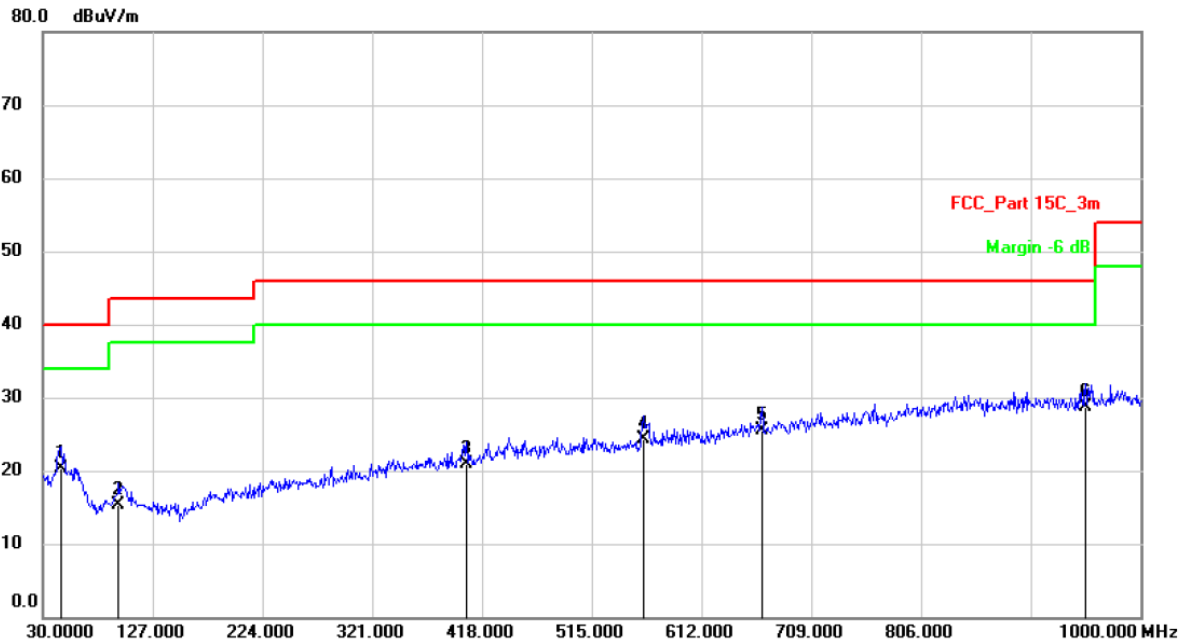

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		45.5200	27.86	-7.56	20.30	40.00	-19.70	QP	
2		96.9300	24.19	-8.89	15.30	43.50	-28.20	QP	
3		404.4200	25.16	-4.26	20.90	46.00	-25.10	QP	
4		560.5900	25.87	-1.47	24.40	46.00	-21.60	QP	
5		665.3500	24.03	1.57	25.60	46.00	-20.40	QP	
6	*	951.5000	23.72	5.08	28.80	46.00	-17.20	QP	

**Note:** Below 30MHz, the emissions are lower than 20dB below the allowable limit.

Modulation: GFSK					Test Result: PASS		Test frequency range: 1-25GHz			
Freq. (MHz)	Ant. Pol. (H/V)	Reading Level(dBuV)		Factor (dB/m)	Emission Level (dBuV/m)		Limit 3m (dBuV/m)		Margin (dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
Operation Mode: TX Mode (Low)										
4804	H	45.07	33.08	6.30	51.37	39.38	74.00	54.00	-22.63	-14.62
7206	H	46.24	32.25	10.44	56.68	42.69	74.00	54.00	-17.32	-11.31
---										
4804	V	44.52	33.00	6.30	50.82	39.30	74.00	54.00	-23.18	-14.70
7206	V	45.73	31.76	10.44	56.17	42.20	74.00	54.00	-17.83	-11.80
---										
Operation Mode: TX Mode (Mid)										
4882	H	45.05	31.75	6.60	51.65	38.35	74.00	54.00	-22.35	-15.65
7323	H	45.13	31.85	10.55	55.68	42.40	74.00	54.00	-18.32	-11.60
---										
4882	V	44.69	31.64	6.60	51.29	38.24	74.00	54.00	-22.71	-15.76
7323	V	45.11	31.85	10.55	55.66	42.40	74.00	54.00	-18.34	-11.60
---										
Operation Mode: TX Mode (High)										
4960	H	44.97	31.71	6.89	51.86	38.60	74.00	54.00	-22.14	-15.40
7440	H	45.20	31.59	10.60	55.80	42.19	74.00	54.00	-18.20	-11.81
---										
4960	V	44.99	31.71	6.89	51.88	38.60	74.00	54.00	-22.12	-15.40
7440	V	44.92	31.58	10.60	55.52	42.18	74.00	54.00	-18.48	-11.82
---										
Spurious Emission in restricted band:										
2390.000	H	52.27	33.35	0.09	52.36	33.44	74.00	54.00	-21.64	-20.56
2390.000	V	56.33	34.48	0.09	56.42	34.57	74.00	54.00	-17.58	-19.43
2483.500	H	67.69	42.41	0.34	68.03	42.75	74.00	54.00	-5.97	-11.25
2483.500	V	65.84	41.58	0.34	66.18	41.92	74.00	54.00	-7.82	-12.08


Remark: Data of measurement within this frequency range shown "----" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits.

### 13.3 Channel Separation test

#### LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

#### BLOCK DIAGRAM OF TEST SETUP



#### TEST PROCEDURES

- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- Set to the maximum power setting and enable the EUT transmit continuously.
- Enable the EUT hopping function.
- Set spectrum analyzer and perform testing according to ANSI C63.10 clause 7.8.2.


#### TEST RESULTS

PASS


Please refer to the following tables.

Modulation	Channel	Frequency (MHz)	Hopping Separation Measurement (MHz)	Hopping Separation Limit (KHz)	Test Result
GFSK	Low	2402	1.002	>632.4	Pass
	Mid	2441	0.996	>629.5	Pass
	High	2480	1.023	>628.1	Pass


### GFSK / Low Channel

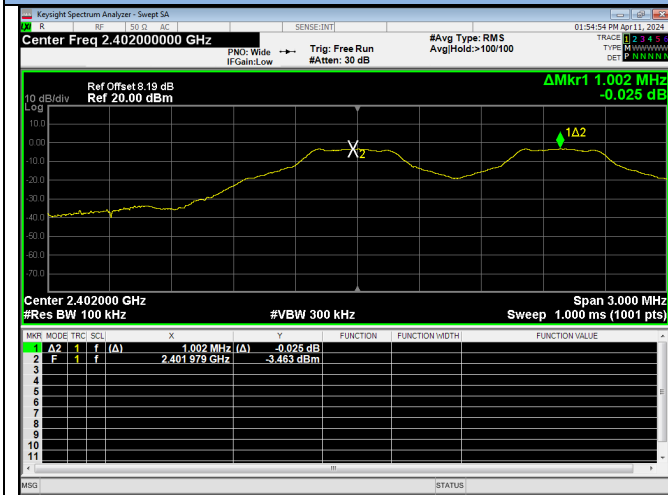

### GFSK / Mid Channel

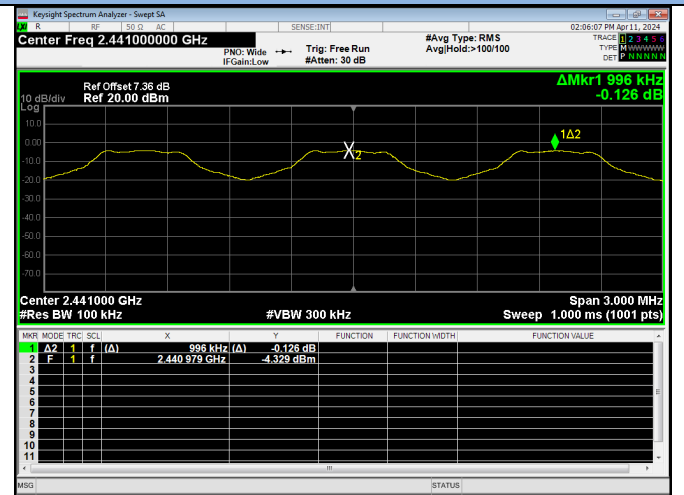

### GFSK / High Channel

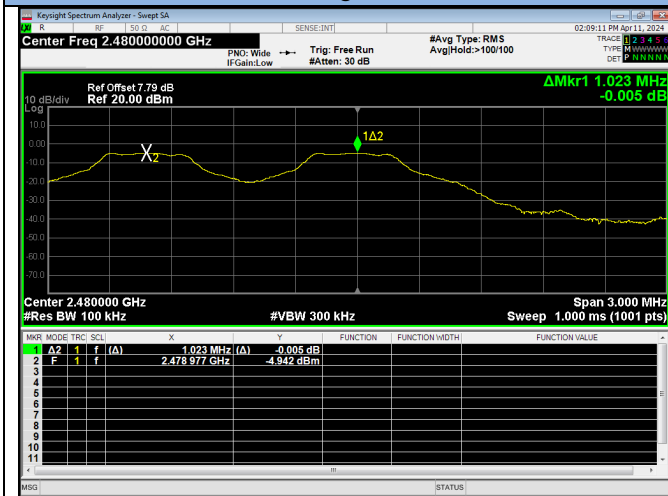

Blank




### 13.4 20dB Bandwidth

#### LIMIT

N/A

#### BLOCK DIAGRAM OF TEST SETUP



#### TEST PROCEDURES

- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- Set to the maximum power setting and enable the EUT transmit continuously.
- Set spectrum analyzer and perform testing according to ANSI C63.10 clause 6.9.2.


#### TEST RESULTS

PASS


Please refer to the following tables.

Modulation	Channel	Frequency (MHz)	20dB Measurement (KHz)	Limit (MHz)	Remark
GFSK	Low	2402	948.6	N/A	Reporting only
	Mid	2441	944.2	N/A	
	High	2480	942.1	N/A	


### GFSK / Low Channel

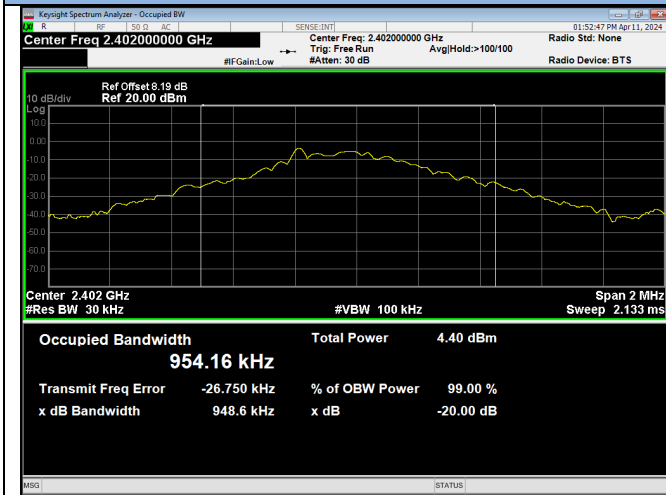

### GFSK / Mid Channel

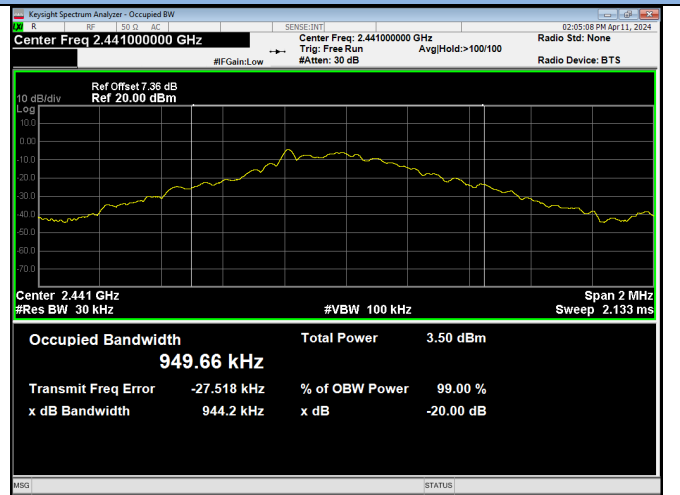

### GFSK / High Channel

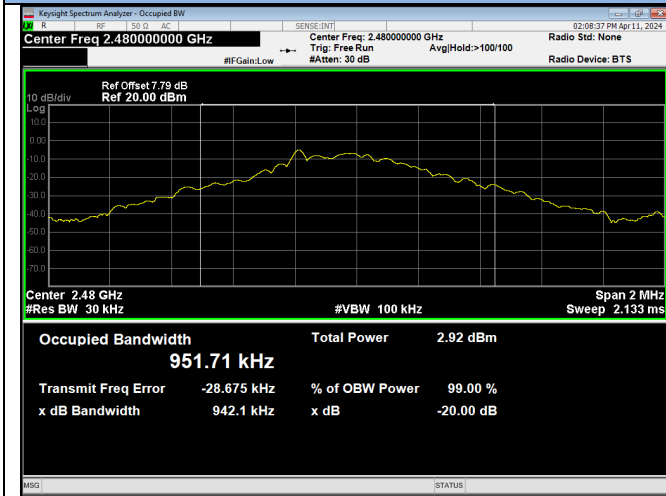


Blank

### 13.5 Hopping Channel Number

#### LIMIT

Frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

#### BLOCK DIAGRAM OF TEST SETUP



#### TEST PROCEDURES


- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- Set to the maximum power setting and enable the EUT transmit continuously.
- Enable the EUT hopping function.
- Set spectrum analyzer and perform testing according to ANSI C63.10 clause 7.8.3.

#### TEST RESULTS

PASS

Please refer to the following table.

Modulation	Number of Hopping Channels Measurement	Limit	Test Result
GFSK	79	$\geq 15$	PASS

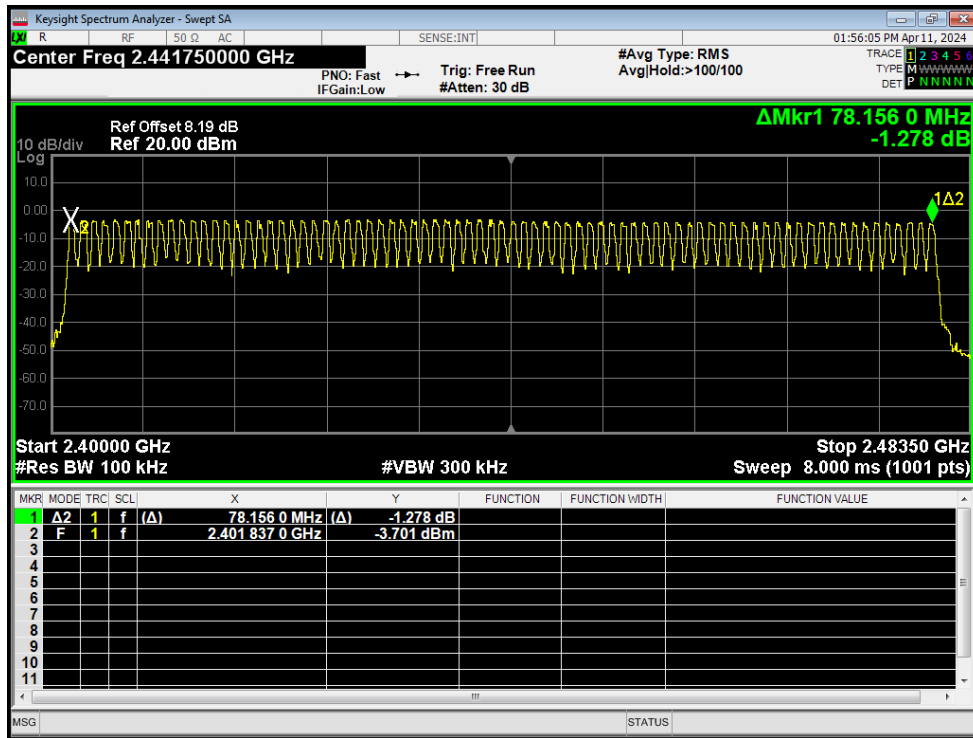


### 13.6 Time of Occupancy (Dwell Time)

#### LIMIT

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

#### BLOCK DIAGRAM OF TEST SETUP



#### TEST PROCEDURES


- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- Set to the maximum power setting and enable the EUT transmit continuously.
- Enable the EUT hopping function.
- Set spectrum analyzer and perform testing according to ANSI C63.10 clause 7.8.4.

#### TEST RESULTS

PASS

Please refer to the following table.

Modulation	Packet	Frequency (MHz)	Dwell Time Measurement (msec)	Limit (msec)	Test Result
GFSK	DH1	2441	0.431 (ms)*(1600/(2*79))*31.6= 137.92	400	Pass
	DH3	2441	1.630 (ms)*(1600/(4*79))*31.6= 260.80	400	Pass
	DH5	2441	2.825 (ms)*(1600/(6*79))*31.6= 301.33	400	Pass

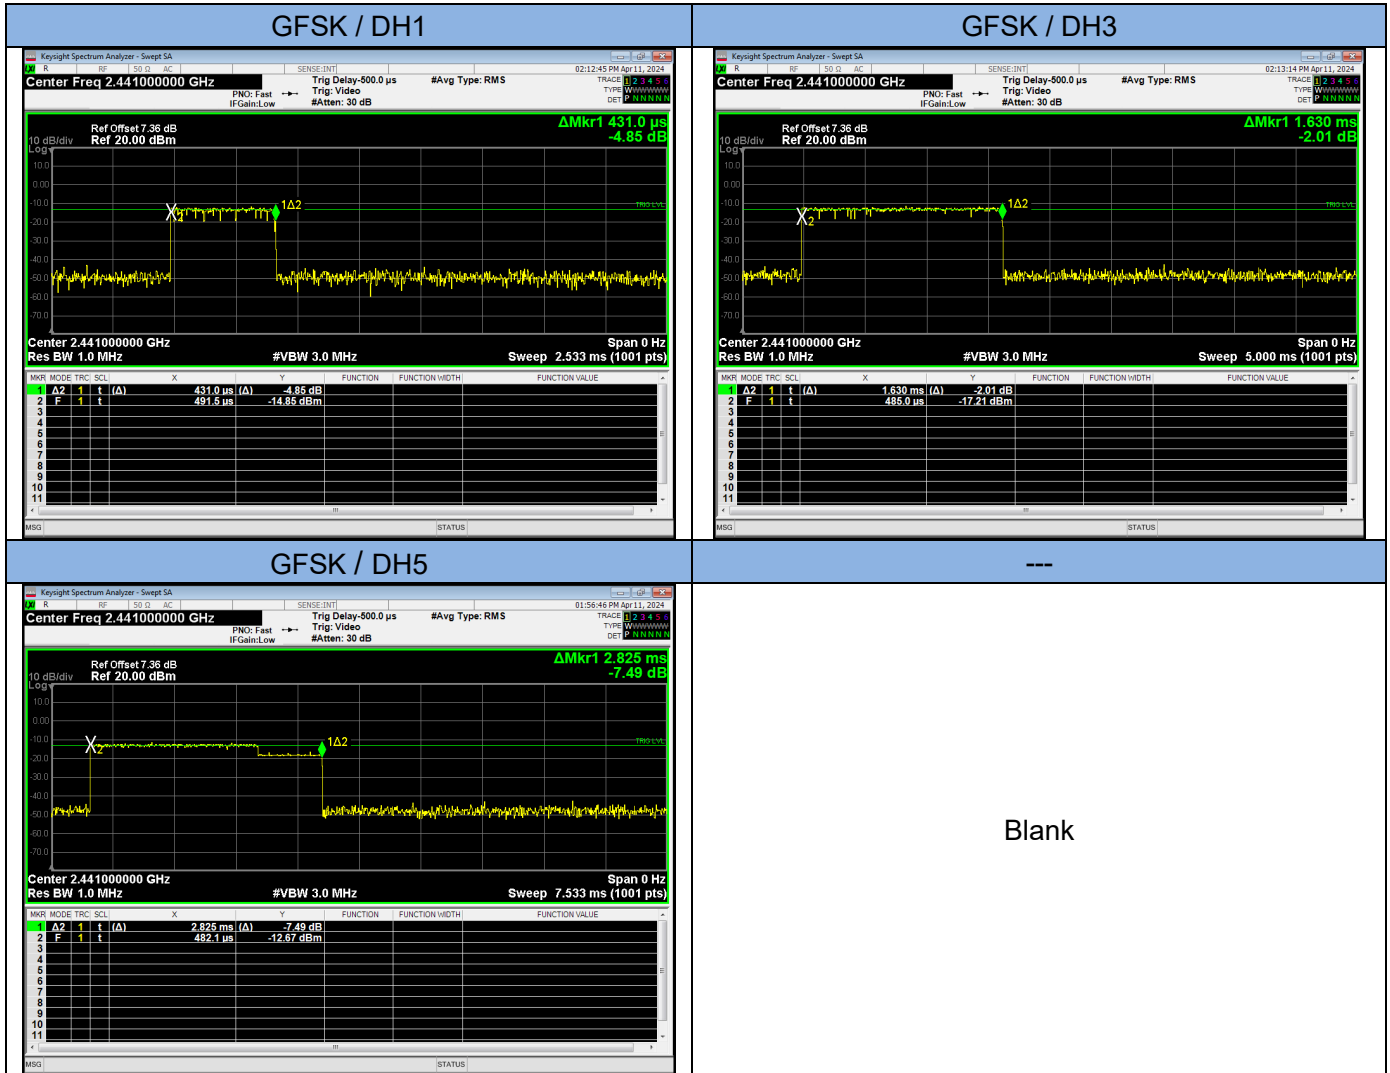




### 13.7 Maximum Peak Output Power

#### LIMIT

The maximum peak conducted output power of the intentional radiator shall not exceed the following: For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.

#### BLOCK DIAGRAM OF TEST SETUP



#### TEST PROCEDURES

- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- Set to the maximum power setting and enable the EUT transmit continuously.
- Set spectrum analyzer and perform testing according to ANSI C63.10 clause 7.8.5.

#### TEST RESULTS

PASS


Please refer to the following tables.

Modulation	Frequency (MHz)	Peak Power output Measurement (dBm)	Peak Power output Measurement (mW)	Peak Power Limit (dBm)	Test Result
GFSK	2402.00	-1.904	0.65	30	Pass
	2441.00	-2.865	0.52	30	Pass
	2480.00	-3.336	0.46	30	Pass


### GFSK / Low Channel



### GFSK / Mid Channel

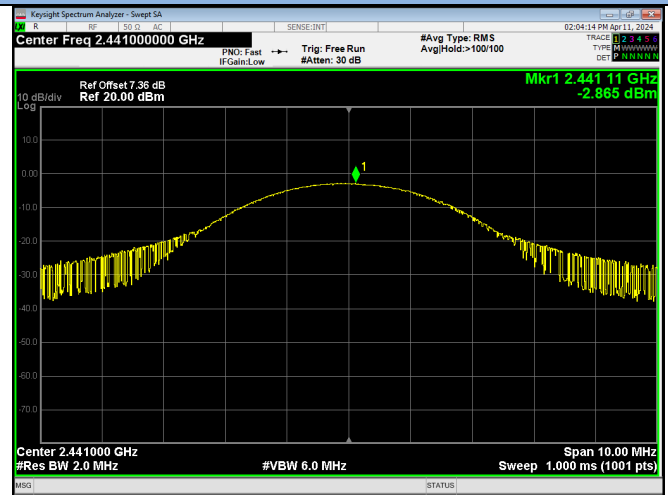

### GFSK / High Channel

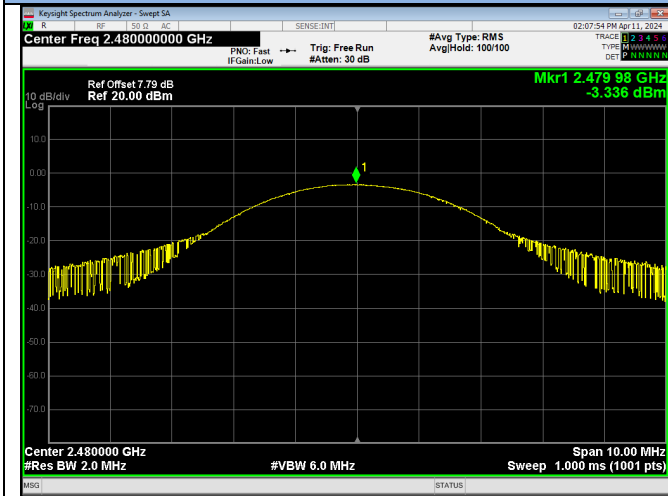


Blank

## 13.8 Band Edge Conducted Spurious Emission Measurement

### LIMIT

In any 100KHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### BLOCK DIAGRAM OF TEST SETUP



### TEST PROCEDURES

- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- Set to the maximum power setting and enable the EUT transmit continuously.
- Set spectrum analyzer and perform testing according to ANSI C63.10 clause 7.8.6 and 6.10.
- Enable hopping function of the EUT and then repeat steps above.


### TEST RESULTS

PASS


Please refer to the following test plots.

## Band Edge


### GFSK / Low / 2402

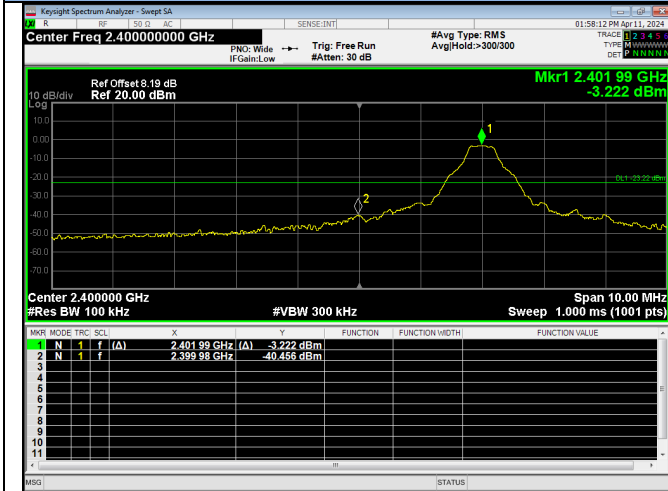


### GFSK / Hopping

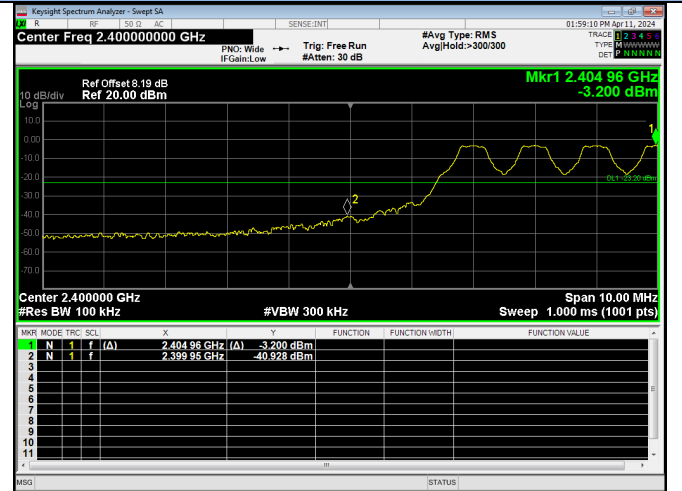

### GFSK / High Channel / 2480

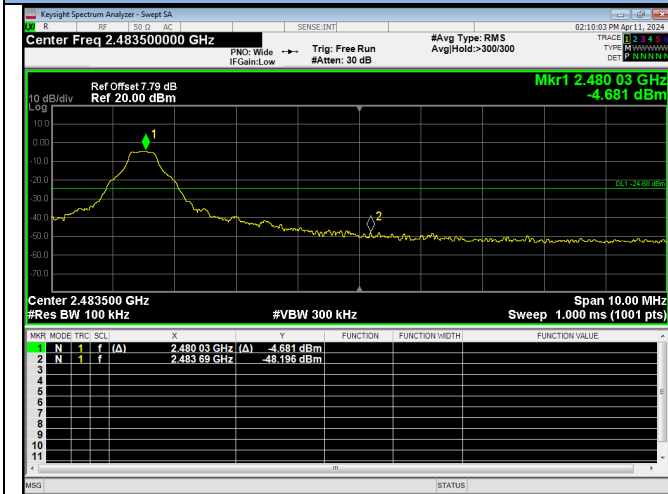


### GFSK / Hopping

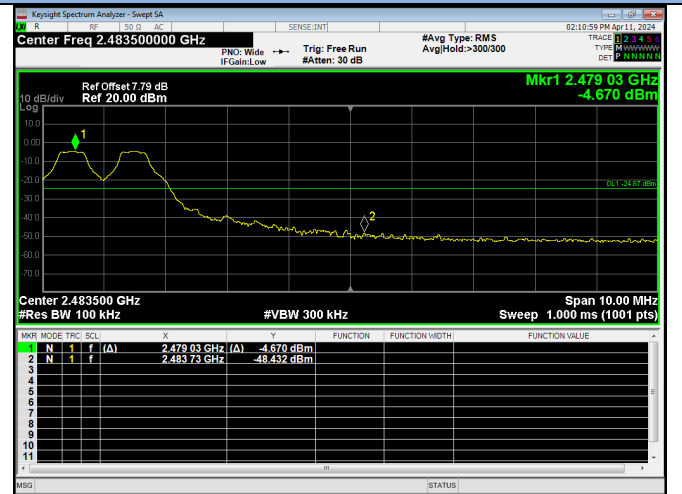

## Conducted Spurious Emission

### GFSK / Low Channel / 30MHz~26.5GHz

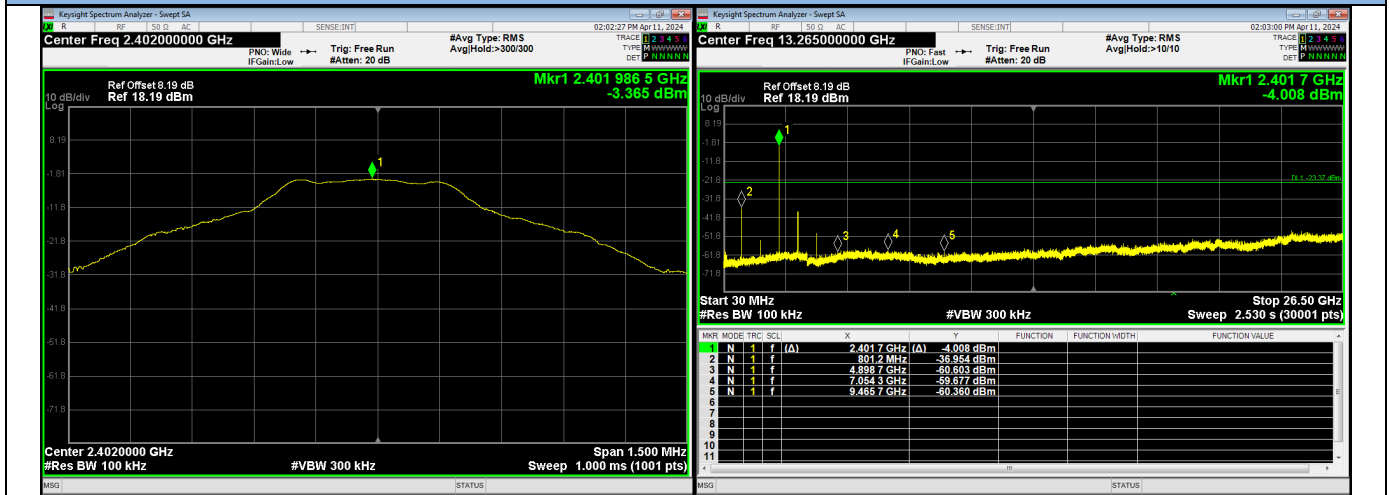

### GFSK / Mid Channel / 30MHz~26.5GHz



### GFSK / High Channel / 30MHz~26.5GHz



## **13.9 Antenna Requirement**

### **STANDARD APPLICABLE**

According to of FCC part 15C section 15.203 and 15.247:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Systems operating in the 2400-2483.5MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### **ANTENNA CONNECTED CONSTRUCTION**

The antenna is PCB antenna that no antenna other than furnished by the responsible party shall be used with the device, and the best case gain of the antenna is -3.77dBi, Therefore, the antenna is considered to meet the requirement.

## 14. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCI7	100837	Mar. 12, 2024	1 Year
2.	Antenna	Schwarzbeck	VULB9162	9162-010	Mar. 23, 2024	2 Year
3.	Spectrum Analyzer	Keysight	N9020A	MY54200831	Mar. 12, 2024	1 Year
4.	Spectrum Analyzer	Keysight	N9010B	MY62170254	Aug. 07, 2023	1 Year
5.	Horn Antenna+Pre-Amplifier	COM-POWER	AH-840	10100020	Mar. 23, 2024	2 Year
6.	Power Sensor	DARE	RPR3006W	15I00041SNO 64	Mar. 12, 2024	1 Year
7.	Horn Antenna	COM-Power	AH-118	071078	Mar. 23, 2024	2 Year
8.	Pre-Amplifier	HP	HP 8449B	3008A00964	Mar. 12, 2024	1 Year
9.	Pre-Amplifier	HP	HP 8447D	1145A00203	Mar. 12, 2024	1 Year
10.	Loop Antenna	Schwarzbeck	FMZB 1513	1513-272	Mar. 23, 2024	2 Year
11.	Test Receiver	Rohde & Schwarz	ESCI	101152	Mar. 12, 2024	1 Year
12.	L.I.S.N	Rohde & Schwarz	ENV 216	101317	Mar. 12, 2024	1 Year
13.	L.I.S.N	Rohde & Schwarz	ESH2-Z5	893606/014	Mar. 12, 2024	1 Year
14.	RF Switching Unit	Compliance Direction Systems Inc.	RSU-M2	38311	Mar. 12, 2024	1 Year
15.	Temperature & Humidity Chamber	WANSHUN	SS-HWHS-80	N/A	Mar. 12, 2024	1 Year
16.	DC Source	Maynuo	MY8811	N/A	Mar. 12, 2024	1 Year
17.	Temporary antenna connector	TESCOM	SS402	N/A	N/A	N/A
18.	Chamber	SAEMC	9*7*7m	N/A	Apr. 21, 2023	2 Year
19.	Test Software	EZ	EZ EMC NTC-3A1.1	N/A	N/A	N/A

Note: For photographs of EUT and measurement, please refer to appendix in separate documents.

---End---