





# FCC PART 15 B TEST REPORT

For

## SZ DJI TECHNOLOGY CO., LTD

14th floor, West Wing, Skyworth Semiconductor Design Building NO.18 Gaoxin South 4th Ave,  
Nanshan, Shenzhen, Guangdong, China

**FCC ID: SS3-CS785U1706**

<b>Report Type:</b> Original Report	<b>Product Name:</b> CrystalSky(Ultra 7.85 inch)
<b>Test Engineer:</b>	<u>Lorin Bian</u> 
<b>Report Number:</b>	<u>RDG170603002C</u>
<b>Report Date:</b>	<u>2017-06-21</u>
<b>Reviewed By:</b>	Henry Ding EMC Leader 
<b>Test Laboratory:</b>	Bay Area Compliance Laboratories Corp. (Chengdu) No.5040, Huilongwan Plaza, No.1, Shawan Road, Jinniu District, Chengdu, Sichuan, China Tel: 028-65523123, Fax: 028-65525125 <a href="http://www.baclcorp.com">www.baclcorp.com</a>

**Note:** This test report was prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Chengdu). Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. This report was valid only with a valid digital signature.

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION .....</b>	<b>3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
OBJECTIVE .....	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY .....	3
TEST FACILITY.....	4
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>5</b>
DESCRIPTION OF TEST CONFIGURATION .....	5
EUT EXERCISE SOFTWARE.....	5
EQUIPMENT MODIFICATIONS .....	5
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS .....	5
SUPPORT CABLE LIST AND DETAILS.....	6
CONFIGURATION OF TEST SETUP.....	6
<b>SUMMARY OF TEST RESULTS.....</b>	<b>7</b>
<b>FCC§15.107 - CONDUCTED EMISSIONS .....</b>	<b>8</b>
EUT SETUP.....	8
EMI TEST RECEIVER SETUP .....	8
TEST EQUIPMENT LIST AND DETAILS .....	9
TEST PROCEDURE .....	9
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	9
TEST DATA .....	10
<b>FCC §15.109 - RADIATED SPURIOUS EMISSIONS .....</b>	<b>15</b>
EUT SETUP.....	15
EMI TEST RECEIVER SETUP .....	16
TEST PROCEDURE .....	16
TEST EQUIPMENT LIST AND DETAILS .....	17
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	17
TEST DATA .....	18

## GENERAL INFORMATION

---

### Product Description for Equipment Under Test (EUT)

The **SZ DJI TECHNOLOGY CO., LTD**'s product, model number: **CS785U (FCC ID: SS3-CS785U1706)** (the "EUT") in this report was a **CrystalSky(Ultra 7.85 inch)**, which was measured approximately: 20.8 cm (L) x 14.8 cm (W) x 3.5 cm (H), rated input voltage: DC7.6V, the battery can be removed to charge. The Highest operation frequency is 5825MHz.

*\*All measurement and test data in this report was gathered from final production sample, serial number: 170603002 (assigned by the BACL, Chengdu). It may have deviation from any other sample. The EUT supplied by the applicant was received on 2017-06-03, and EUT conformed to test requirement.*

### Objective

This test report is prepared on behalf of **SZ DJI TECHNOLOGY CO., LTD** in accordance with Part 2, Subpart J, and Part 15-Subparts A and B of the Federal Communications Commission's rules.

The objective of the manufacturer is to determine the compliance of EUT with FCC Rules Part 15 B Class B.

### Related Submittal(s)/Grant(s)

FCC Part 15C DTS and 15E NII submissions with FCC ID: SS3-CS785U1706.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All of the measurements detailed in this Test Report were performed by Bay Area Compliance Laboratories Corp. (Chengdu).

The Bay Area Compliance Laboratories Corp. Chengdu's measurement Uncertainties (calculated for a k=2 Coverage Factor corresponding to approximately 95% Coverage) were as follows:

-For all of the AC Line Conducted Emissions Tests reported herein:  $\pm 3.17$  dB.

-For of all of the direct Radiated Emissions Tests reported herein are:

30 MHz to 200 MHz:  $\pm 4.7$  dB;  
200 MHz to 1 GHz:  $\pm 6.0$  dB;  
1 GHz to 6 GHz:  $\pm 5.13$  dB; and,  
6 GHz to 40 GHz:  $\pm 5.47$  dB.

And the uncertainty will not be taken into consideration for all test data recorded in the report.

## **Test Facility**

The test site used by BACL to collect test data is located in the No.5040, Huilongwan Plaza, No.1, Shawan Road, Jinniu District, Chengdu, Sichuan, China.

Test site at BACL has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on April 24, 2015. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 560332. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

## SYSTEM TEST CONFIGURATION

---

### Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user). The test configured as below test modes:

1. Type C USB Downloading: in this test mode, the EUT transceiving with PC via type C USB port, and playing with video.
2. Micro USB Downloading: in this test mode, the EUT transceiving with PC via Micro USB port, and playing with video.

### EUT Exercise Software

The software “winthrax.exe” was used during test.

### Equipment Modifications

No modification was made to the EUT tested.


### Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
IBM	PC	8176	99Y7315
DELL	Display 1	E157FPC	060229-11
ANTER	Modem	EGW802	0508350054-1B
Lenovo	Keyboard	KB-US19EB	IMHYX011071016460
Lenovo	Mouse	MO-5013U	IMJS011041409259
Kingston	USB Disk	32GB	/
PHILIPS	Display 2	227E3L	AU3A1140001077
Kinston	TF Card	4GB	/

## Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Serial Cable	yes	No	1.6	Serial Port of PC	Modem
Mouse Cable	yes	No	1.4	USB Port of PC	Mouse
Keyboard Cable	yes	No	1.3	USB Port of PC	Keyboard
Type C USB Cable	yes	No	0.8	USB Port of PC	EUT
VGA Cable	Yes	Yes	1.5	PC	Display 1
Earphone Cable	No	No	1.2	Audio Port of EUT	Earphone
Micro USB Cable	yes	No	0.8	USB Port of PC	EUT
HDMI Cable	yes	yes	1.2	EUT	Display 2

## Configuration of Test Setup

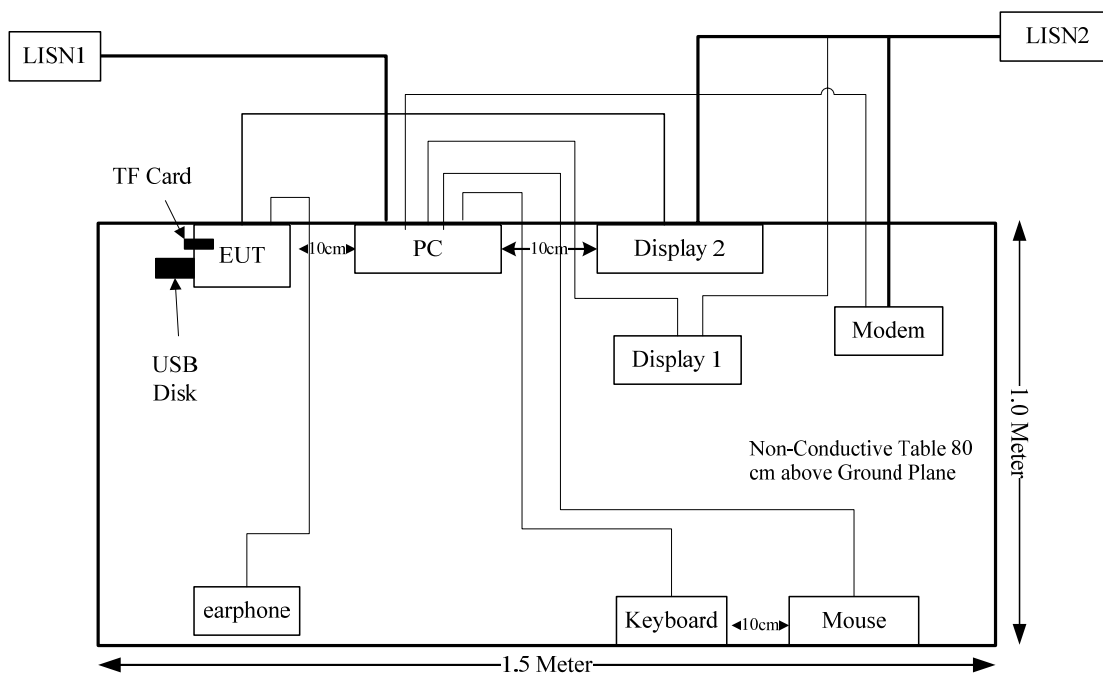


## SUMMARY OF TEST RESULTS

---

FCC Rules	Description of Test	Results
§15.107	Conducted Emissions	Compliance
§15.109	Radiated Emissions	Compliance

## FCC§15.107 - CONDUCTED EMISSIONS

### EUT Setup

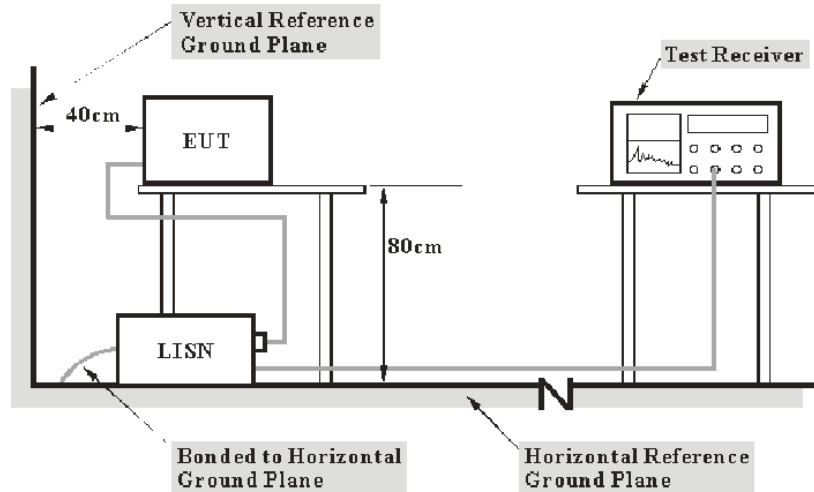

- Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15 B Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The PC was connected to the Main LISN with a 120V/60Hz AC power.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz



## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS 30	836858/0016	2016-12-02	2017-12-01
Rohde & Schwarz	L.I.S.N.	ENV216	100018	2016-12-02	2017-12-01
Rohde & Schwarz	PULSE LIMITER	ESH3Z2	DE14781	2016-10-31	2017-10-30
SOLAR ELECTRONICS	L.I.S.N.	9252-50-24 -BNC	984413	2016-12-02	2017-12-01
Unknown	Conducted Cable	Unknown	NO.5	2016-11-10	2017-11-09
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

\* **Statement of Traceability:** BACL(Chengdu) attests that all of the calibrations on the equipment items listed above were traceable to NIM or to another internationally recognized National Metrology Institute (NMI), and were compliant with the NIST HB 150-2016 Normative Annex B "Implementation of traceability policy in accredited laboratories".

## Test Procedure

During the conducted emission test, the monitor was connected to the outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

## Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

$V_C$ : corrected voltage amplitude

$V_R$ : reading voltage amplitude

$A_C$ : attenuation caused by cable loss

VDF: voltage division factor of AMN or ISN

The "**Margin**" column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Data


### Environmental Conditions

<b>Temperature:</b>	26.7 °C
<b>Relative Humidity:</b>	62.8%
<b>ATM Pressure:</b>	100.1 kPa

*The testing was performed by Lorin Bian on 2017-06-15.*

Test Mode: Downloading (Type-C)


AC120V, 60Hz, Line:

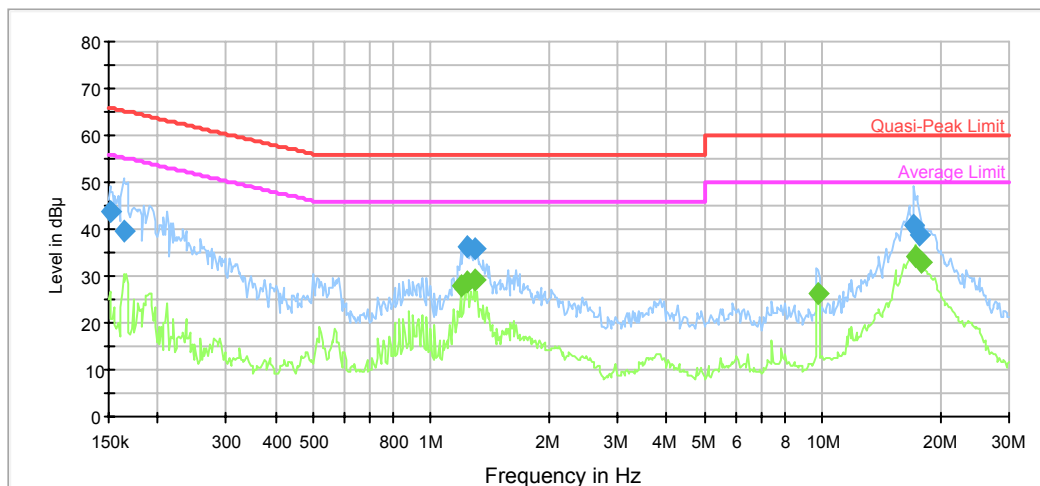

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.151200	43.8	9.000	L1	19.7	22.1	65.9	Compliance
0.163741	39.7	9.000	L1	19.7	25.6	65.3	Compliance
1.239175	36.1	9.000	L1	19.7	19.9	56.0	Compliance
1.289541	35.8	9.000	L1	19.7	20.2	56.0	Compliance
17.183363	41.0	9.000	L1	20.1	19.0	60.0	Compliance
17.739864	38.8	9.000	L1	20.1	21.2	60.0	Compliance

Frequency (MHz)	Average (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
1.190776	27.7	9.000	L1	19.7	18.3	46.0	Compliance
1.239175	28.6	9.000	L1	19.7	17.4	46.0	Compliance
1.289541	29.1	9.000	L1	19.7	16.9	46.0	Compliance
9.759114	26.4	9.000	L1	19.9	23.6	50.0	Compliance
17.320829	34.0	9.000	L1	20.1	16.0	50.0	Compliance
17.881783	33.1	9.000	L1	20.1	16.9	50.0	Compliance

**AC120V, 60Hz, Neutral:**

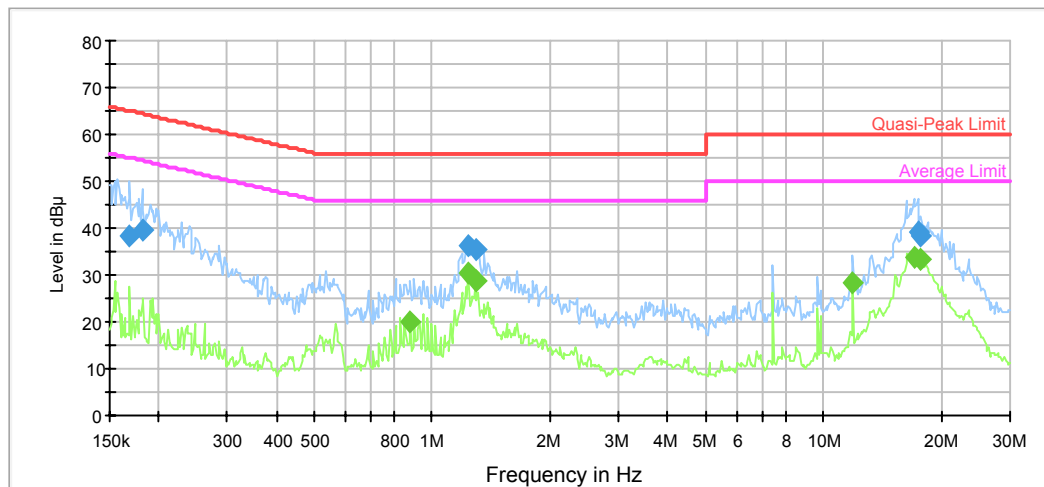


Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.169044	38.3	9.000	N	19.7	26.7	65.0	Compliance
0.181612	39.7	9.000	N	19.7	24.7	64.4	Compliance
1.239175	36.2	9.000	N	19.6	19.8	56.0	Compliance
1.289541	35.3	9.000	N	19.6	20.7	56.0	Compliance
17.459396	39.1	9.000	N	19.9	20.9	60.0	Compliance
17.739864	38.4	9.000	N	19.9	21.6	60.0	Compliance

Frequency (MHz)	Average (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.879690	19.9	9.000	N	19.6	26.1	46.0	Compliance
1.239175	30.6	9.000	N	19.6	15.4	46.0	Compliance
1.289541	28.8	9.000	N	19.6	17.2	46.0	Compliance
11.910327	28.4	9.000	N	19.9	21.6	50.0	Compliance
17.046987	33.8	9.000	N	19.9	16.2	50.0	Compliance
17.739864	33.3	9.000	N	19.9	16.7	50.0	Compliance

Test Mode: Downloading (Micro USB)


AC120V, 60Hz, Line:

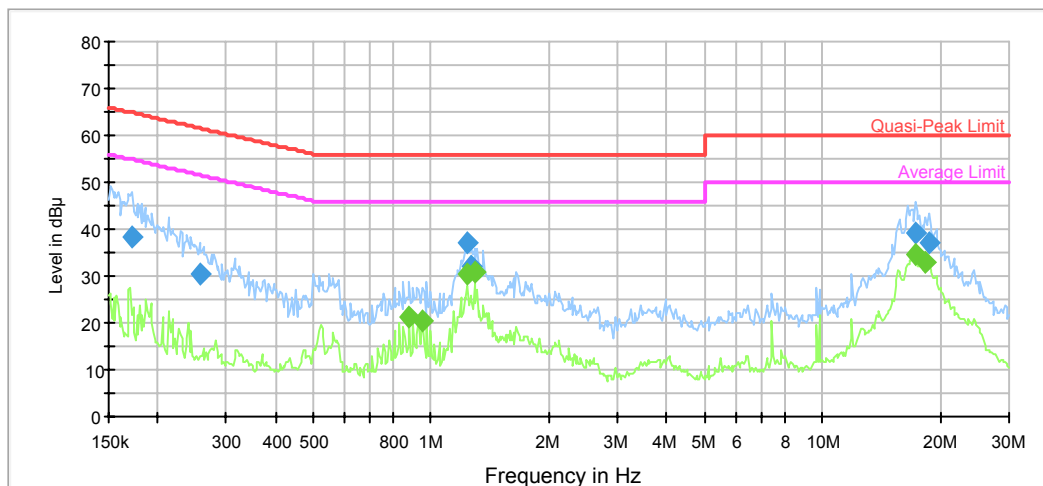

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.171759	38.4	9.000	L1	19.7	26.5	64.9	Compliance
0.255827	30.3	9.000	L1	19.7	31.3	61.6	Compliance
1.239175	37.2	9.000	L1	19.7	18.8	56.0	Compliance
1.269154	32.2	9.000	L1	19.7	23.8	56.0	Compliance
17.320829	39.2	9.000	L1	20.1	20.8	60.0	Compliance
18.757459	37.0	9.000	L1	20.0	23.0	60.0	Compliance

Frequency (MHz)	Average (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.879690	21.1	9.000	L1	19.7	24.9	46.0	Compliance
0.952654	20.5	9.000	L1	19.7	25.5	46.0	Compliance
1.239175	30.4	9.000	L1	19.7	15.6	46.0	Compliance
1.289541	30.9	9.000	L1	19.7	15.1	46.0	Compliance
17.320829	34.5	9.000	L1	20.1	15.5	50.0	Compliance
18.314388	33.0	9.000	L1	20.1	17.0	50.0	Compliance

**AC120V, 60Hz, Neutral:**

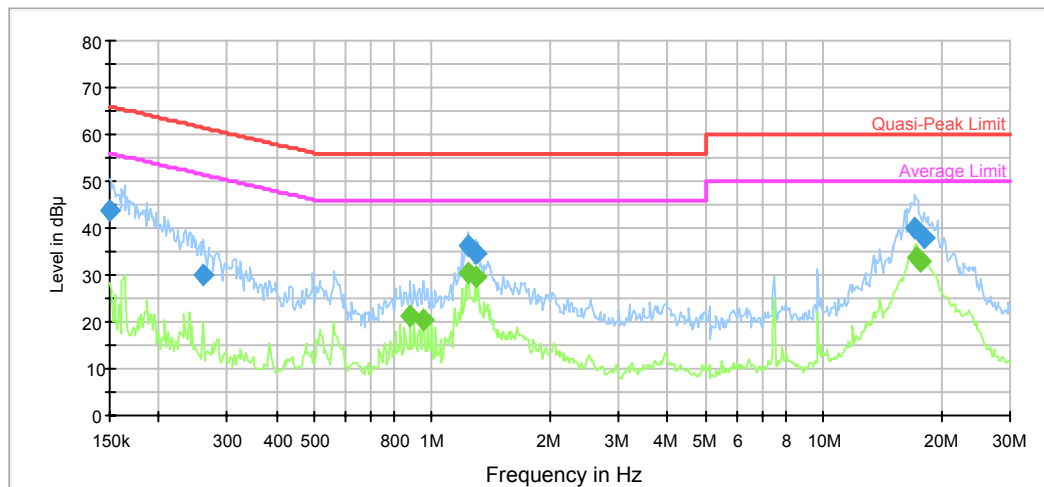


Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.150000	43.9	9.000	N	19.7	22.1	66.0	Compliance
0.259937	30.0	9.000	N	19.6	31.4	61.4	Compliance
1.239175	36.4	9.000	N	19.6	19.6	56.0	Compliance
1.289541	34.8	9.000	N	19.6	21.2	56.0	Compliance
17.183363	39.8	9.000	N	19.9	20.2	60.0	Compliance
18.024837	38.1	9.000	N	19.9	21.9	60.0	Compliance

Frequency (MHz)	Average (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.879690	21.1	9.000	N	19.6	24.9	46.0	Compliance
0.952654	20.3	9.000	N	19.7	25.7	46.0	Compliance
1.239175	30.3	9.000	N	19.6	15.7	46.0	Compliance
1.289541	29.6	9.000	N	19.6	16.4	46.0	Compliance
17.320829	33.9	9.000	N	19.9	16.1	50.0	Compliance
17.739864	32.8	9.000	N	19.9	17.2	50.0	Compliance


## FCC §15.109 - RADIATED SPURIOUS EMISSIONS

### EUT Setup

Below 1GHz:

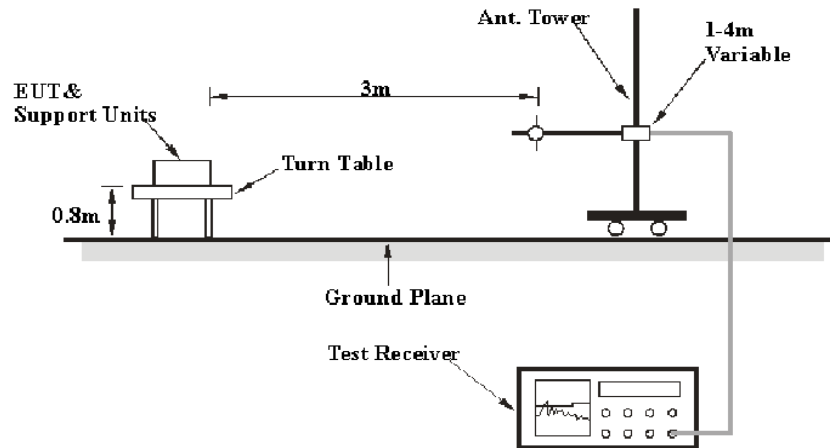

Above 1GHz:

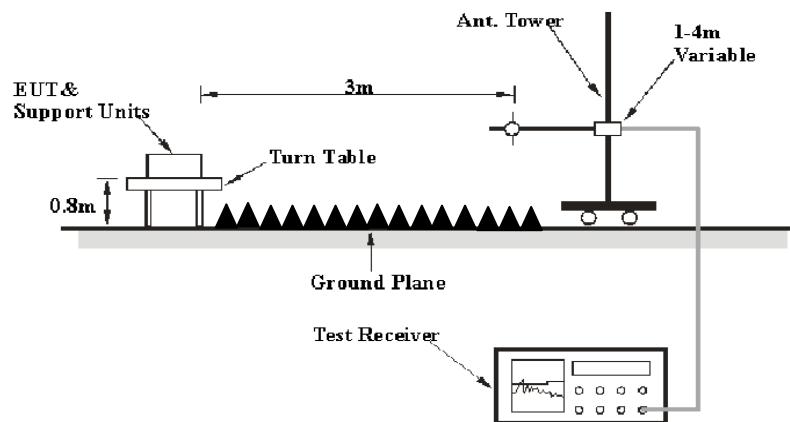

The radiated emission tests were performed at the 3 meters distance in chamber, using the setup accordance with the ANSI C63.4-2014. The specification used was the FCC Part 15.109 Class B limits.

## EMI Test Receiver Setup

The system was investigated from 30 MHz to 30 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	Peak
	1 MHz	10 Hz	/	AVG

## Test Procedure

During the radiated emissions, the monitor was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The data was recorded in the Quasi-peak detection mode for below 1 GHz, peak and average detection mode above 1 GHz.



## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Amplifier	8447D	2944A10442	2016-12-02	2017-12-01
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2016-12-02	2017-12-01
Sunol Sciences	Broadband Antenna	JB3	A121808	2016-04-10	2019-04-09
Rohde & Schwarz	Spectrum Analyzer	FSEM30	100018	2016-12-02	2017-12-01
ETS	Horn Antenna	3115	003-6076	2016-12-02	2017-12-01
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-0113024	2014-06-16	2017-06-15
Mini-circuits	Amplifier	ZVA-183-S+	771001215	2017-05-20	2018-05-19
EMCT	Semi-Anechoic Chamber	966	966-1	2015-04-24	2018-04-23
Unknown	RF Cable (below 1GHz)	Unknown	NO.1	2016-11-10	2017-11-09
Unknown	RF Cable (below 1GHz)	Unknown	NO.4	2016-11-10	2017-11-09
Unknown	RF Cable (above 1GHz)	Unknown	NO.2	2016-11-10	2017-11-09
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-01 1312	2016-08-18	2017-08-18
Quinstar	Amplifier	QLW-18405536-JO	15964001032	2016-08-18	2017-08-18
Agilent	Spectrum Analyzer	8564E	5943A01752	2016-08-18	2017-08-18

\* **Statement of Traceability:** BACL(Chengdu) attests that all of the calibrations on the equipment items listed above were traceable to NIM or to another internationally recognized National Metrology Institute (NMI), and were compliant with the NIST HB 150-2016 Normative Annex B "Implementation of traceability policy in accredited laboratories".

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The "**Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Data

### Environmental Conditions


Temperature:	27.3 °C
Relative Humidity:	51.2 %
ATM Pressure:	100.1 kPa

\* The testing was performed by Lorin Bian on 2017-06-12.

Test Result: Compliance

Test Mode: Downloading (Type C USB)

#### 1) Below 1GHz:

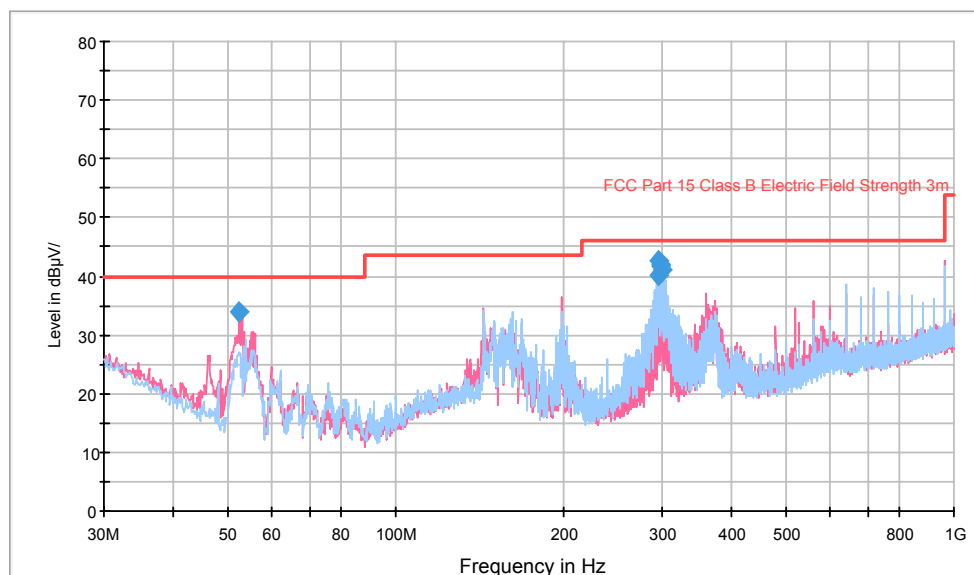


Frequency (MHz)	QuasiPeak (dBμV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
52.310000	33.8	100.0	V	180.0	-13.1	6.2	40.0
294.567500	40.1	100.0	H	118.0	-6.1	5.9	46.0
296.022500	42.6	100.0	H	109.0	-6.0	3.4	46.0
297.356250	41.8	100.0	H	118.0	-6.0	4.2	46.0
298.811250	42.0	100.0	H	118.0	-5.9	4.0	46.0
300.266250	41.2	100.0	H	100.0	-5.8	4.8	46.0

2) 1-30GHz:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB)					
1140.281	44.47	PK	H	23.16	2.17	26.68	43.12	74.00	30.88
1140.281	34.49	AV	H	23.16	2.17	26.68	33.14	54.00	20.86
1400.802	45.62	PK	H	23.84	2.53	26.43	45.56	74.00	28.44
1400.802	34.85	AV	H	23.84	2.53	26.43	34.79	54.00	19.21
1941.884	42.9	PK	H	24.81	3.01	26.76	43.96	74.00	30.04
1941.884	32.52	AV	H	24.81	3.01	26.76	33.58	54.00	20.42
1380.762	51.8	PK	V	23.79	2.51	26.44	51.66	74.00	22.34
1380.762	37.72	AV	V	23.79	2.51	26.44	37.58	54.00	16.42
1631.263	45.72	PK	V	24.31	2.77	26.46	46.34	74.00	27.66
1631.263	34.84	AV	V	24.31	2.77	26.46	35.46	54.00	18.54
2052.104	43.92	PK	V	24.72	3.04	26.83	44.85	74.00	29.15
2052.104	32.89	AV	V	24.72	3.04	26.83	33.82	54.00	20.18

Test Mode: Downloading (Micro USB)

1) Below 1GHz:

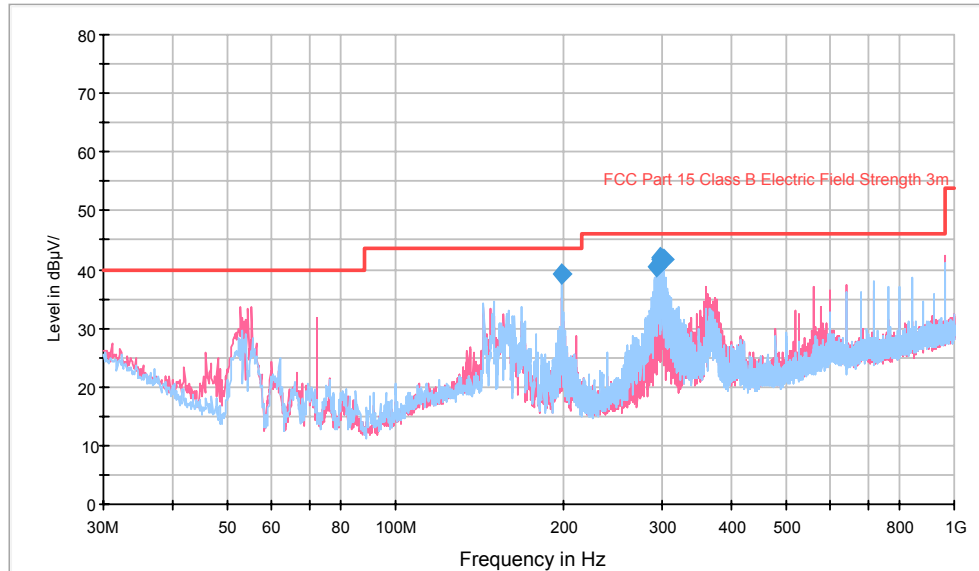

Frequency (MHz)	QuasiPeak (dBμV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
198.295000	39.1	100.0	H	130.0	-7.6	4.4	43.5
293.112500	40.6	100.0	H	101.0	-6.2	5.4	46.0
297.356250	41.6	100.0	H	130.0	-6.0	4.4	46.0
298.690000	41.9	100.0	H	120.0	-5.9	4.1	46.0
300.145000	41.6	100.0	H	130.0	-5.8	4.4	46.0
301.478750	41.7	100.0	H	101.0	-5.8	4.3	46.0

**2) 1-30GHz:**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB)					
1140.281	44.4	PK	H	23.16	2.17	26.68	43.05	74.00	30.95
1140.281	32.82	AV	H	23.16	2.17	26.68	31.47	54.00	22.53
1320.641	46.31	PK	H	23.63	2.42	26.50	45.86	74.00	28.14
1320.641	33.6	AV	H	23.63	2.42	26.50	33.15	54.00	20.85
1901.804	44.48	PK	H	24.74	2.98	26.72	45.48	74.00	28.52
1901.804	32.82	AV	H	24.74	2.98	26.72	33.82	54.00	20.18
1380.762	50.42	PK	V	23.79	2.51	26.44	50.28	74.00	23.72
1380.762	38.56	AV	V	23.79	2.51	26.44	38.42	54.00	15.58
1631.263	45.22	PK	V	24.31	2.77	26.46	45.84	74.00	28.16
1631.263	33.96	AV	V	24.31	2.77	26.46	34.58	54.00	19.42
2062.124	43.26	PK	V	24.69	3.04	26.83	44.16	74.00	29.84
2062.124	31.53	AV	V	24.69	3.04	26.83	32.43	54.00	21.57

**\*\*\*\*\* END OF REPORT \*\*\*\*\***