

EMC TEST REPORT

FCC 47 CFR Part 15B
Industry Canada ICES-003

Electromagnetic compatibility - Unintentional radiators

Report Reference No. : G0M-1712-7109-EF0115B-V01

Testing Laboratory : Eurofins Product Service GmbH

Address : Storkower Str. 38c
15526 Reichenwalde
Germany

Accreditation :



A2LA Accredited Testing Laboratory, Certificate No.: 1983.01
FCC Test Firm Designation Number: DE0008
IC Testing Laboratory site: 3470A-3

Applicant's name : eResearchTechnology GmbH

Address : Sieboldstrasse 3
97230 Estenfeld
Germany

Test specification:

Standard..... : 47 CFR Part 15 Subpart B
ICES-003, Issue 6:2016
ANSI C63.4:2014

Equipment under test (EUT):

Product description	Asthma Monitor AM3	
Model No.	AM3 Option BT+	
Additional Models	None	
Hardware version	1.0	
Firmware / Software version	9.40	
Contains	FCC-ID: 2AAUFAM3G03	IC: 11335A-AM3G03
Test result	Passed	

Test Report No.: G0M-1712-7109-EF0115B-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Possible test case verdicts:

- not applicable to test object: N/A
- test object does meet the requirement.....: P (Pass)
- test object does not meet the requirement.....: F (Fail)

Testing:

Date of receipt of test item: 2018-01-23

Date (s) of performance of tests: 2018-02-20


Compiled by: Ruslan Colbasiuc

Tested by (+ signature).....: R. Colbasiuc / A. Pflug

Approved by (+ signature): Jens Marquardt
Deputy Head of Lab

Date of issue: 2018-02-27

Total number of pages: 31

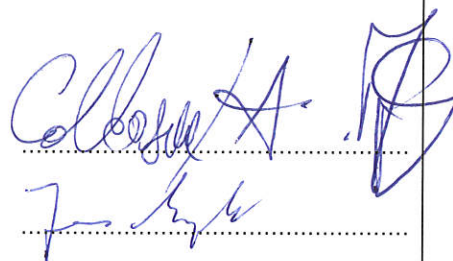
General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

Additional comments:

Version History

Version	Issue Date	Remarks	Revised by
V01	2018-02-27	Initial Release	



REPORT INDEX

1	EQUIPMENT (TEST ITEM) DESCRIPTION	5
1.1	Photos – Equipment external	6
1.2	Photos – Equipment internal	9
1.3	Photos – Test setup	12
1.4	Supporting Equipment Used During Testing	13
1.5	Input / Output Ports	13
1.6	Operating Modes and Configurations	14
1.7	Test Equipment Used During Testing	15
1.8	Sample emission level calculation	16
2	RESULT SUMMARY	17
3	TEST CONDITIONS AND RESULTS	18
3.1	Test Conditions and Results – Radiated emissions	18
3.2	Test Conditions and Results – AC power line conducted emissions	28

1 Equipment (Test item) Description

Description	Asthma Monitor AM3	
Model	AM3 Option BT+	
Additional Models	None	
Serial number	708508-V0C00010	
Hardware version	1.0	
Software / Firmware version	9.40	
Contains FCC-ID	2AAUFAM3G03	
Contains IC	11335A-AM3G03	
Power supply	3.7 VDC	
AC/DC-Adaptor	Model : GTM41134-0606 Manufacturer : GlobTek Inc. Input : 100-240VAC / 50-60Hz Output : 5 VDC / 1.2 A	
Radio module	Type	Bluetooth Radio Module
	Model	BT121
	Manufacturer	Silicon Labs (former BlueGiga)
	HW Version	N/A
	SW Version	N/A
	SVN	Not specified
	FCC-ID	QOQBT121
	IC	QOQBT121
	IMEI	Not specified
Manufacturer	eResearchTechnology GmbH Sieboldstrasse 3 97230 Estenfeld Germany	
Highest internal frequency	2400 MHz	
Device classification	Class B	
Equipment type	Tabletop	
Number of tested samples	1	

1.1 Photos – Equipment external

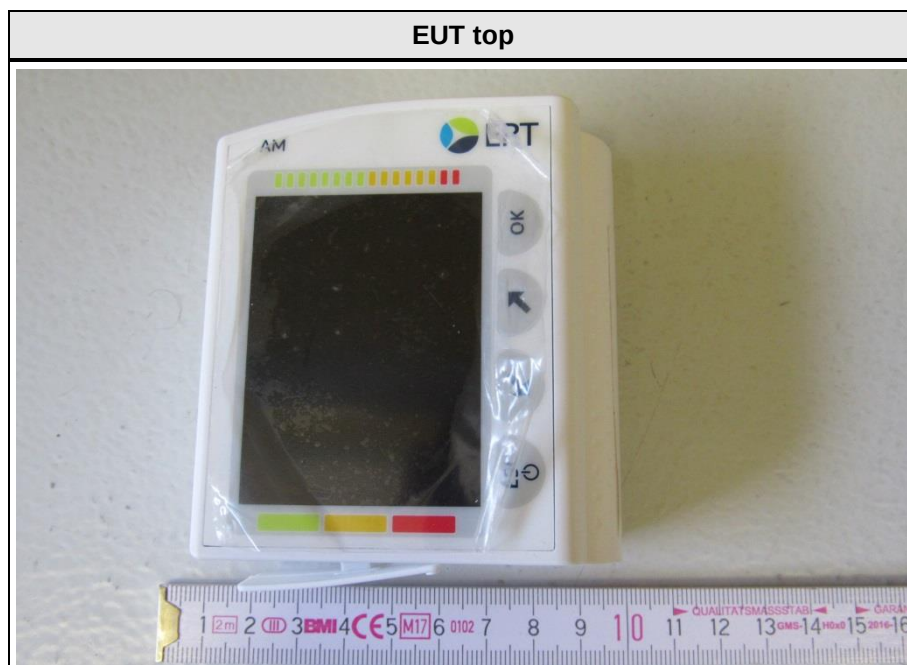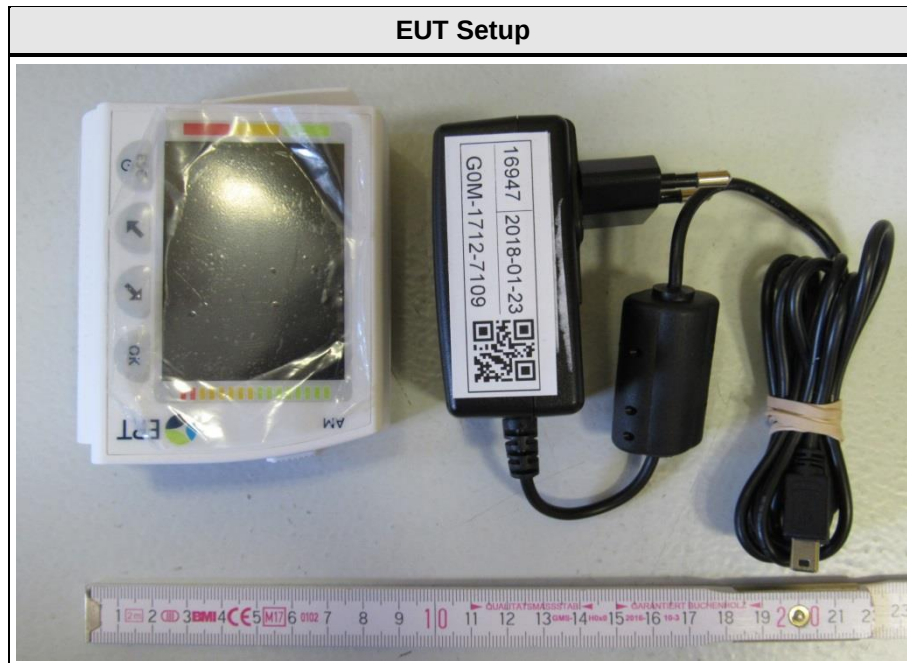


EUT bottom



EUT port





EUT label

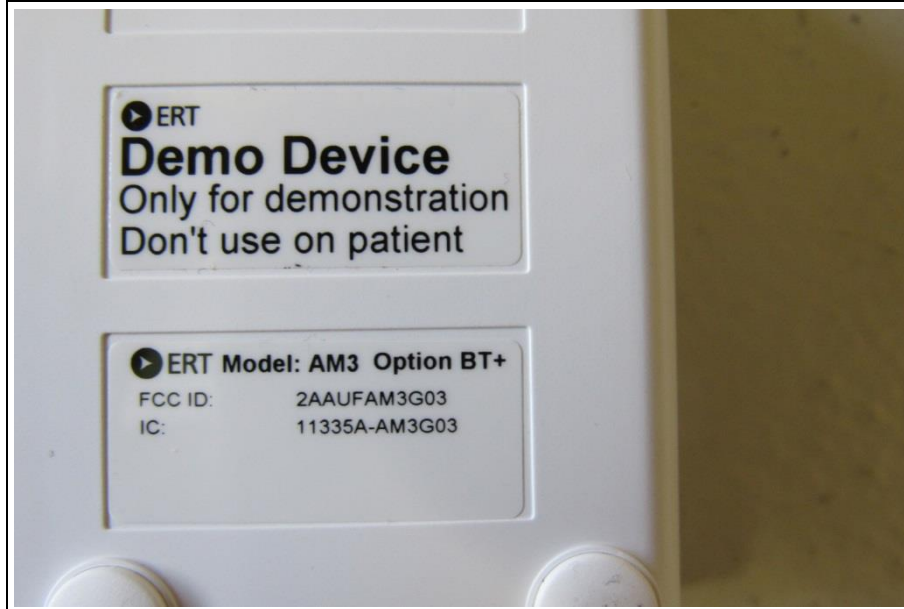


EUT SN




1.2 Photos – Equipment internal

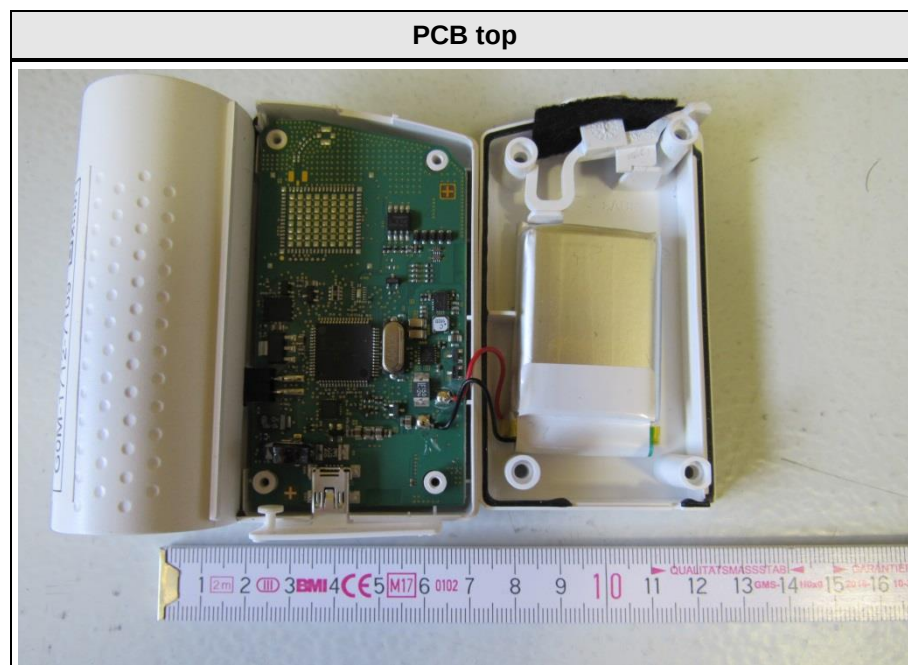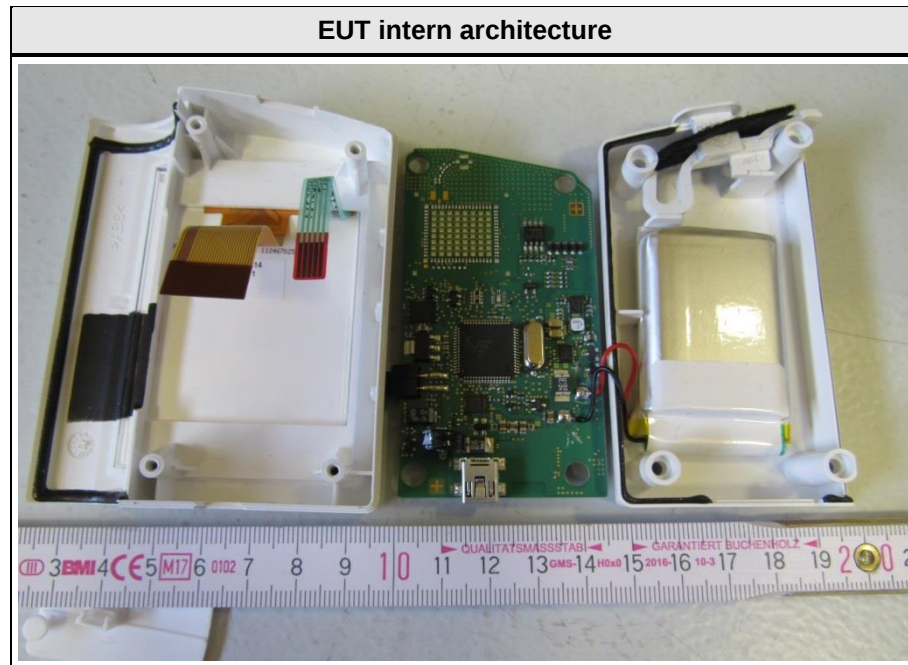

PCB bottom

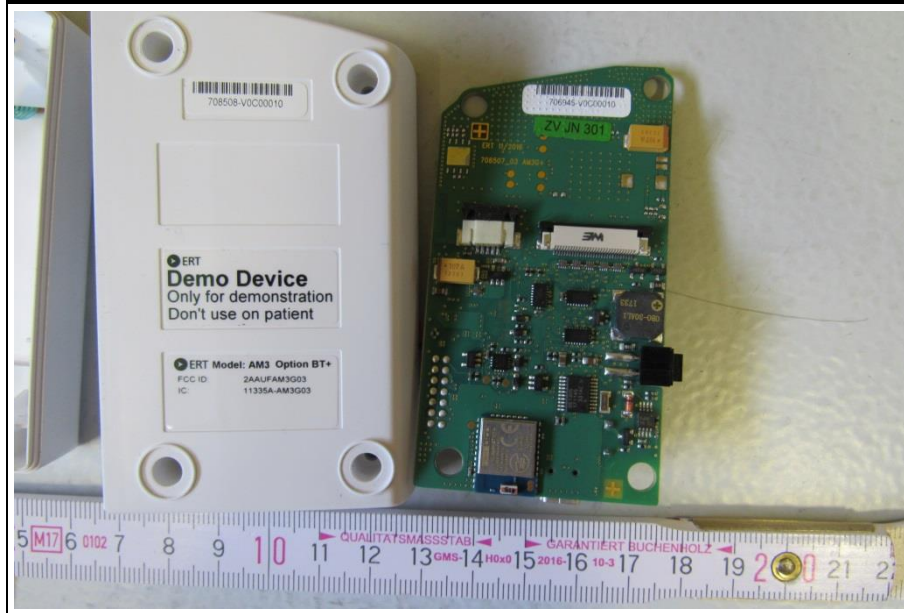



BT module

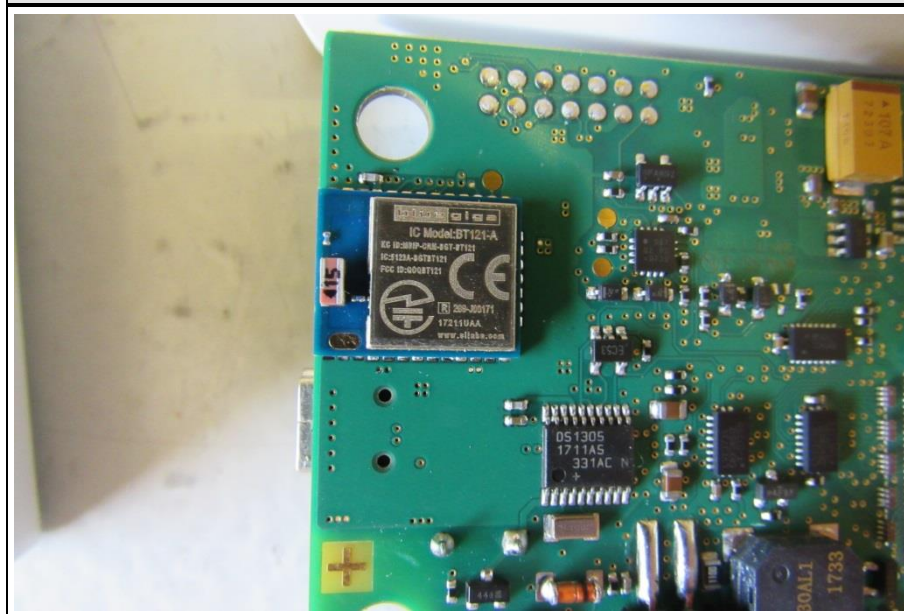

EUT display label



1.3 Photos – Test setup

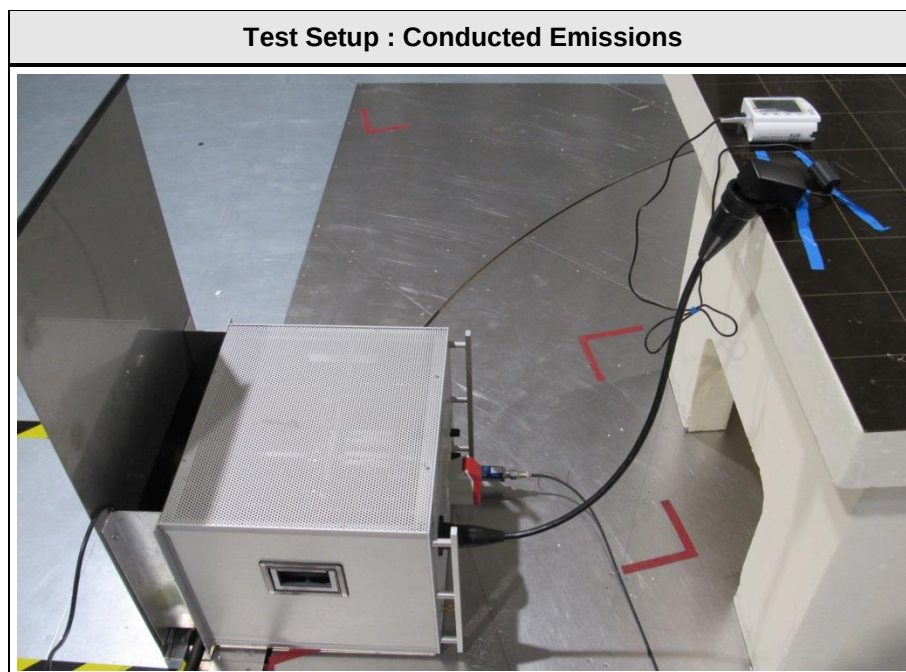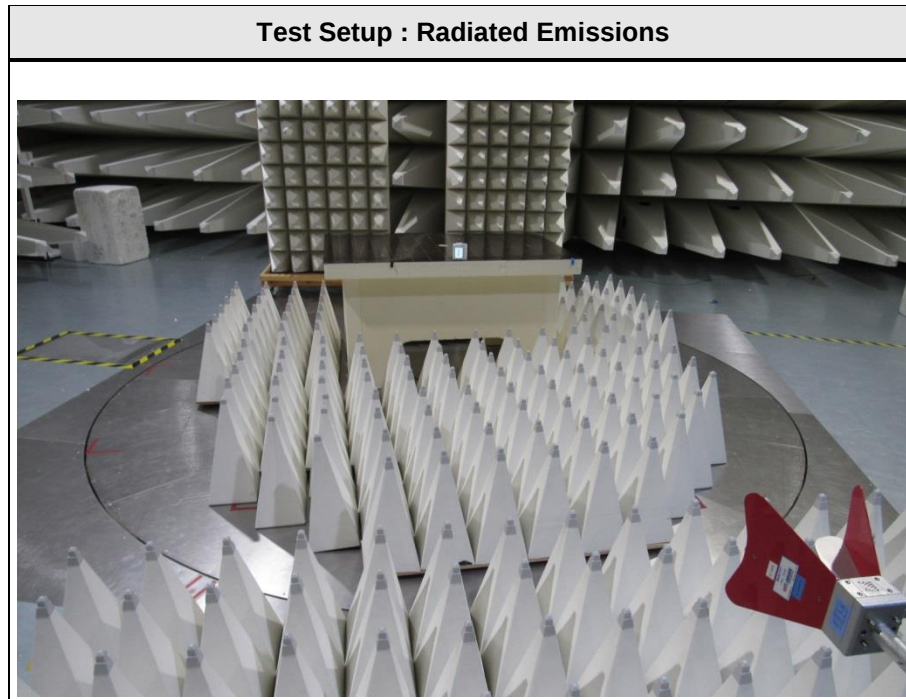

1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments (e.g. serial no.)
SIM	Laptop	HP	HP650	
SIM	Software	eResearchTechnology GmbH	BT PING AM3G+	
None				
*Note: Use the following abbreviations: AE : Auxiliary/Associated Equipment, or SIM : Simulator (Not Subjected to Test) CABL : Connecting cables				

1.5 Input / Output Ports

Port #	Name	Type*	Max. Cable Length	Cable Shielded	Comments (e.g. Cat. of Cable)
1	PC communication and charging	miniUSB	1.8 m	Yes	
*Note: Use the following abbreviations: AC : AC power port DC : DC power port N/E : Non electrical I/O : Signal input or output port TP : Telecommunication port					

1.6 Operating Modes and Configurations

Mode #	Description
1	Charging mode. No communication with the PC.
2	Device has a continuous communication with the PC via Bluetooth.

Configuration #	EUT Configuration
1	Device is connected to the AC/DC adaptor, no communication is active.
2	Bluetooth activated on the Device. Communication with the PC. Device sending each 3 second a status information with the software version to the PC.

1.7 Test Equipment Used During Testing

Measurement Software			
Description	Manufacturer	Name	Version
EMC Test Software	Dare Instruments	Radimation	2016.1.10

Conducted emissions AC6					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
LISN	Schwarzbeck	NSLK 8128	EF00975	2017-07	2019-07
EMI Test Receiver	Rohde & Schwarz Vertriebs GmbH	ESU26	EF00887	2017-07	2018-07
Pulse Limiter	R&S	ESH3-Z2	EF01063	2017-07	2018-07
Cable	-	RG223/U	-	System Cal.	System Cal.

Radiated emissions AC6					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
TRILOG Broadband Antenna	Schwarzbeck	VULB 9162	EF00978	2016-11	2019-11
Double-Ridged Guide Antenna	ETS-Lindgren	3117	EF00976	2016-03	2019-03
EMI Test Receiver	R&S	ESU26	EF00887	2017-07	2018-07
RF Cable	Huber & Suhner	Sucoflex 106	-	System Cal.	System Cal.
RF Cable	Huber & Suhner	Multiflex 141	-	System Cal.	System Cal.

1.8 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dBμV. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBμV/m). The FCC limits are given in units of μV/m. The following formula is used to convert the units of μV/m to dBμV/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading	+	AF	=	Net Reading	:	Net reading - FCC limit	=	Margin
21.5 dBμV	+	26 dB	=	47.5 dBμV/m	:	47.5 dBμV/m - 57.0 dBμV/m	=	-9.5 dB

2 Result Summary

FCC 47 CFR Part 15B, Industry Canada ICES-003				
Product Specific Standard	Requirement – Test	Reference Method	Result	Remarks
47 CFR 15.109 ICES-003 Item 6.2	Radiated emissions	ANSI C 63.4	PASS	
47 CFR 15.107 ICES-003 Item 6.1	AC power line conducted emissions	ANSI C63.4	PASS	
Remarks:				

3 Test Conditions and Results

3.1 Test Conditions and Results – Radiated emissions

Radiated emissions acc. FCC 47 CFR 15.109 / ICES-003				Verdict: PASS		
Laboratory Parameters:		Required prior to the test		During the test		
Ambient Temperature		15 to 35 °C		22 °C		
Relative Humidity		30 to 60 %		30 %		
Test according referenced standards		Reference Method				
		ANSI C63.4				
Sample is tested with respect to the requirements of the equipment class		Equipment class				
		Class B				
Test frequency range determined from highest emission frequency		Highest emission frequency				
		Fmax [MHz] = 2400				
Fully configured sample scanned over the following frequency range		Frequency range				
		30 MHz to 13 GHz				
Operating mode		1, 2				
Configuration		1, 2				
Limits and results Class B						
Frequency [MHz]	Quasi-Peak [dBµV/m]	Result	Average [dBµV/m]	Result	Peak [dBµV/m]	Result
30 – 88	40	PASS	-		-	-
88 – 216	43.5	PASS	-		-	-
216 – 960	46	PASS	-		-	-
960 – 1000	54	PASS	-		-	-
> 1000	-	-	54	PASS	74	PASS
Comments:						

Test Procedure:

The test site is in accordance with ANSI C63-4:2014 requirements and is listed by FCC.
The measurement procedure is as follows:

Exploratory measurement:

- The EUT was placed on a non-conductive table at a height of 0.8m.
- The EUT and support equipment, if needed, were set up to simulate typical usage.
- Cables, of type and length specified by the manufacturer, were connected to at least one port of each type and were terminated by a device or simulating load of actual usage.
- The antenna was placed at a distance of 3 or 10 m.
- The received signal was monitored at the measurement receiver.
 - Cables not bundled were manipulated within the range of likely arrangements to produce the highest emission amplitude
 - To maximize the suspected emissions the EUT is rotated 360 degrees. If the signal exceeds the previous amplitude, go back to the corresponding azimuth and manipulate the cables again for maximizing the emissions if possible.
 - Move the antenna from 1 to 4m to maximize the suspected highest amplitude signal.
- This procedure has to be performed in both antenna polarizations, horizontal and vertical.
- The arrangement of the equipment with the maximum emission level is shown on the setup picture at item 1.3.

Final measurement:


- The EUT was placed on a 0.8 m non-conductive table at a 3 m distance from the receive antenna. The antenna output was connected to the measurement receiver
- A biconical antenna was used for the frequency range 30 – 200 MHz, a logarithmic periodical antenna was used for the frequency range from 200 – 1000 MHz. Above one 1 GHz a Double Ridged Broadband Horn antenna was used. The antenna was placed on an adjustable height antenna mast
- The EUT and cable arrangement were based on the exploratory measurement results
- Emissions were maximized at each frequency by rotating the EUT and adjusting the receive antenna height and polarization. The maximum values were recorded.
- The test data of the worst-case conditions were recorded and shown on the next pages.

Radiated emissions according to FCC 15B

Project number: G0M-1712-7109

Applicant: eResearchTechnology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option BT+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Colbasiuc
 Test Conditions: Tnom: 22°C, Unom: 3.7 VDC
 Antenna: Schwarzbeck VULB 9162, Vertical
 Measurement distance: 3 m
 Mode: 1
 Test Date: 2018-02-20
 Note:

Index 7

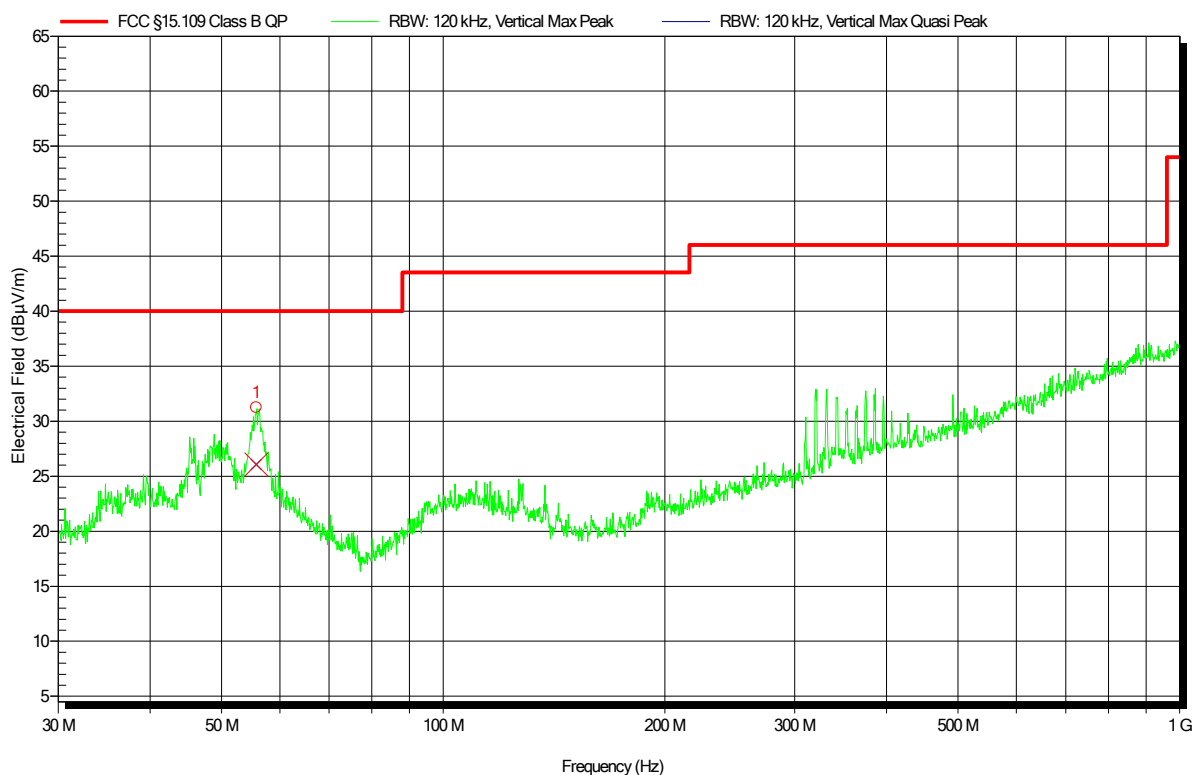

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
1	55.74 MHz	26.1 dBµV/m	40 dBµV/m	-13.9 dB	Pass	-180 Degree	1 m

Test Report No.: G0M-1712-7109-EF0115B-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated emissions according to FCC 15B

Project number: G0M-1712-7109

Applicant:	eResearchTechnology GmbH
EUT Name:	Asthma Monitor AM3
Model:	AM3 Option BT+
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Colbasiuc
Test Conditions:	Tnom: 22°C, Unom: 3.7 VDC
Antenna:	Schwarzbeck VULB 9162, Horizontal
Measurement distance:	3 m
Mode:	1
Test Date:	2018-02-20
Note:	

Index 8

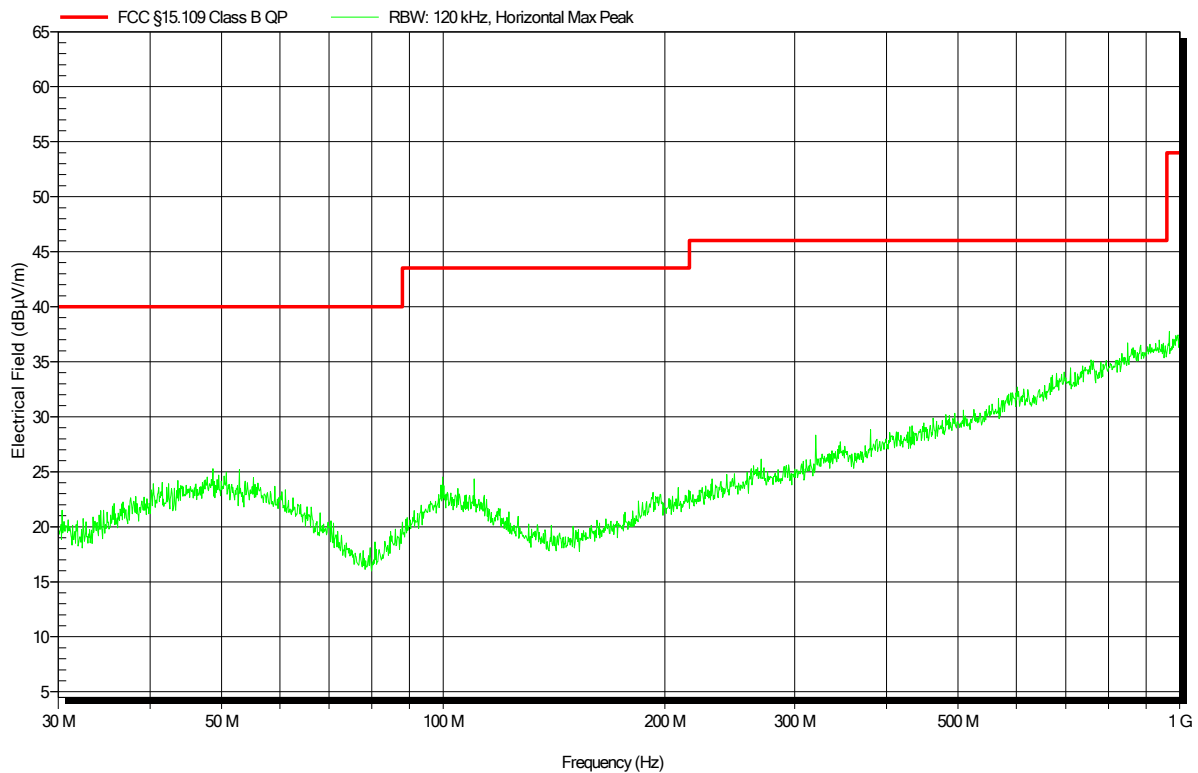


Radiated emissions according to FCC 15B

Project number: G0M-1712-7109

Applicant: eResearchTechnology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option BT+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Colbasiuc
 Test Conditions: Tnom: 22°C, Unom: 3.7 VDC
 Antenna: ETS-Lindgren 3117, Vertical
 Measurement distance: 3 m
 Mode: 1
 Test Date: 2018-02-20
 Note:

Index 10

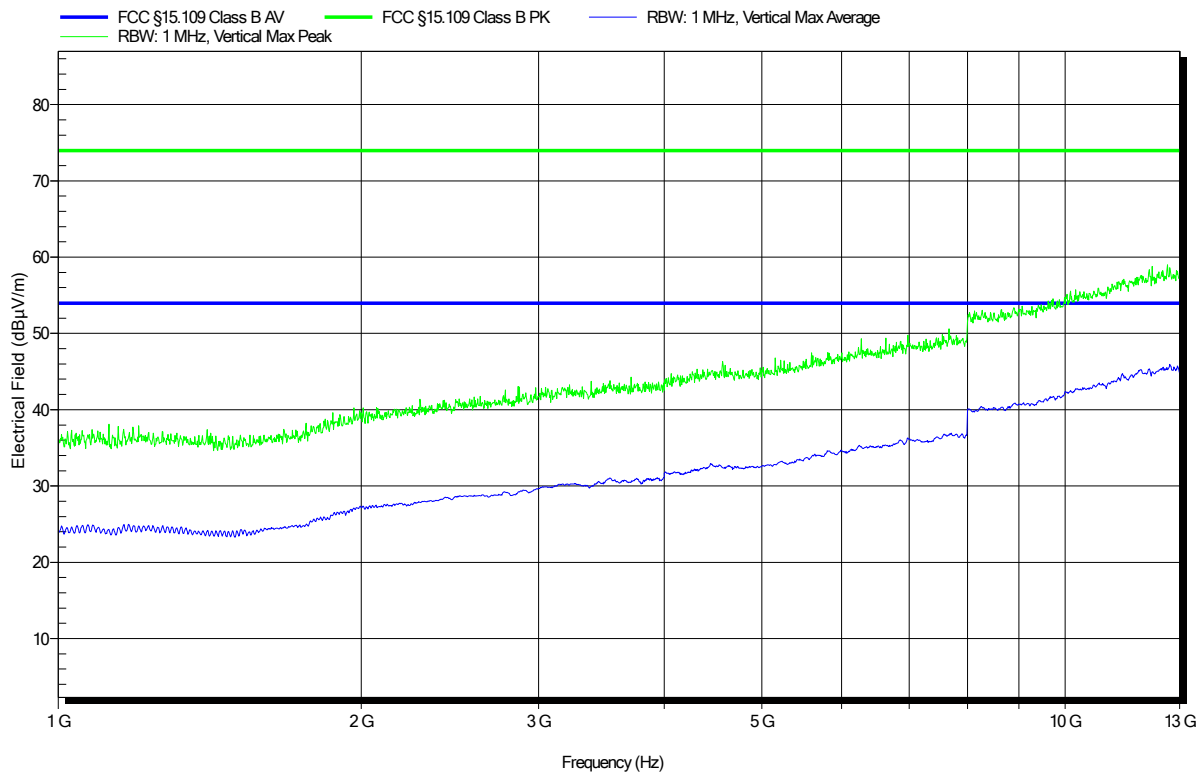


Radiated emissions according to FCC 15B

Project number: G0M-1712-7109

Applicant: eResearchTechnology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option BT+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Colbasiuc
 Test Conditions: Tnom: 22°C, Unom: 3.7 VDC
 Antenna: ETS-Lindgren 3117, Horizontal
 Measurement distance: 3 m
 Mode: 1
 Test Date: 2018-02-20
 Note:

Index 11

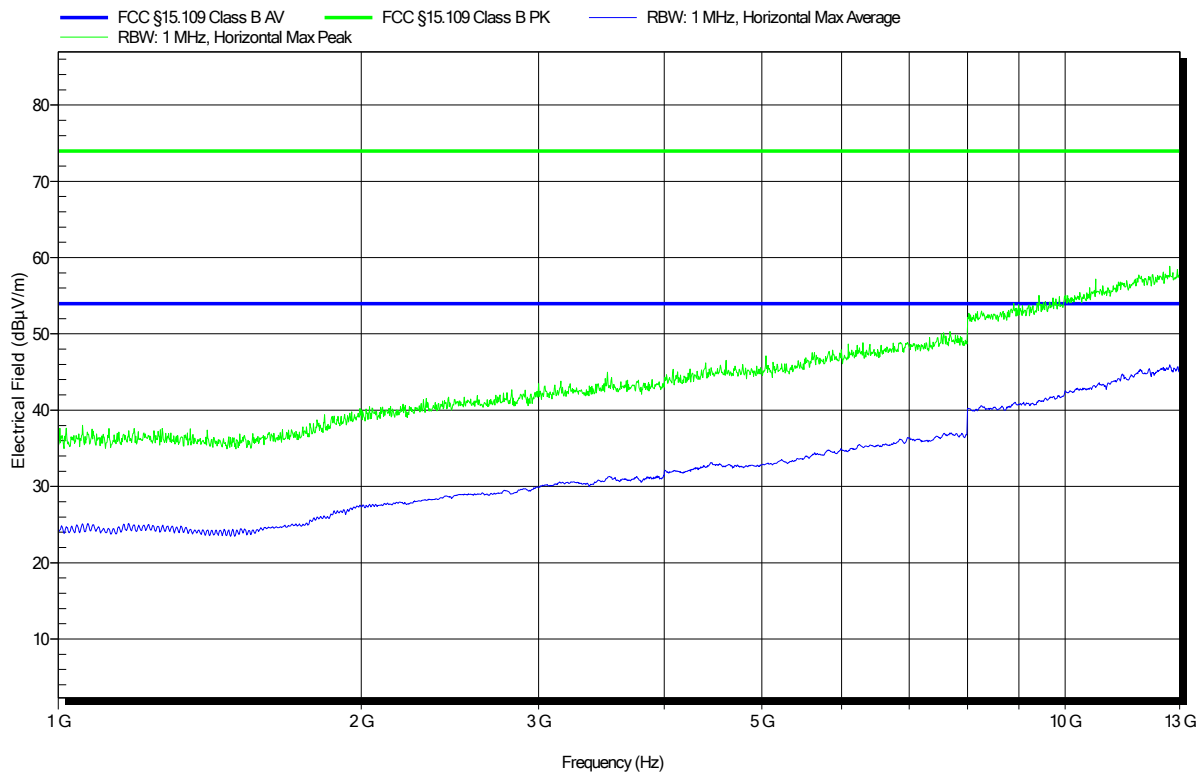


Radiated emissions according to FCC 15B

Project number: G0M-1712-7109

Applicant: eResearchTechnology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option BT+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Colbasiuc
 Test Conditions: Tnom: 22°C, Unom: 3.7 VDC
 Antenna: Schwarzbeck VULB 9162, Horizontal
 Measurement distance: 3 m
 Mode: 2
 Test Date: 2018-02-20
 Note:

Index 1

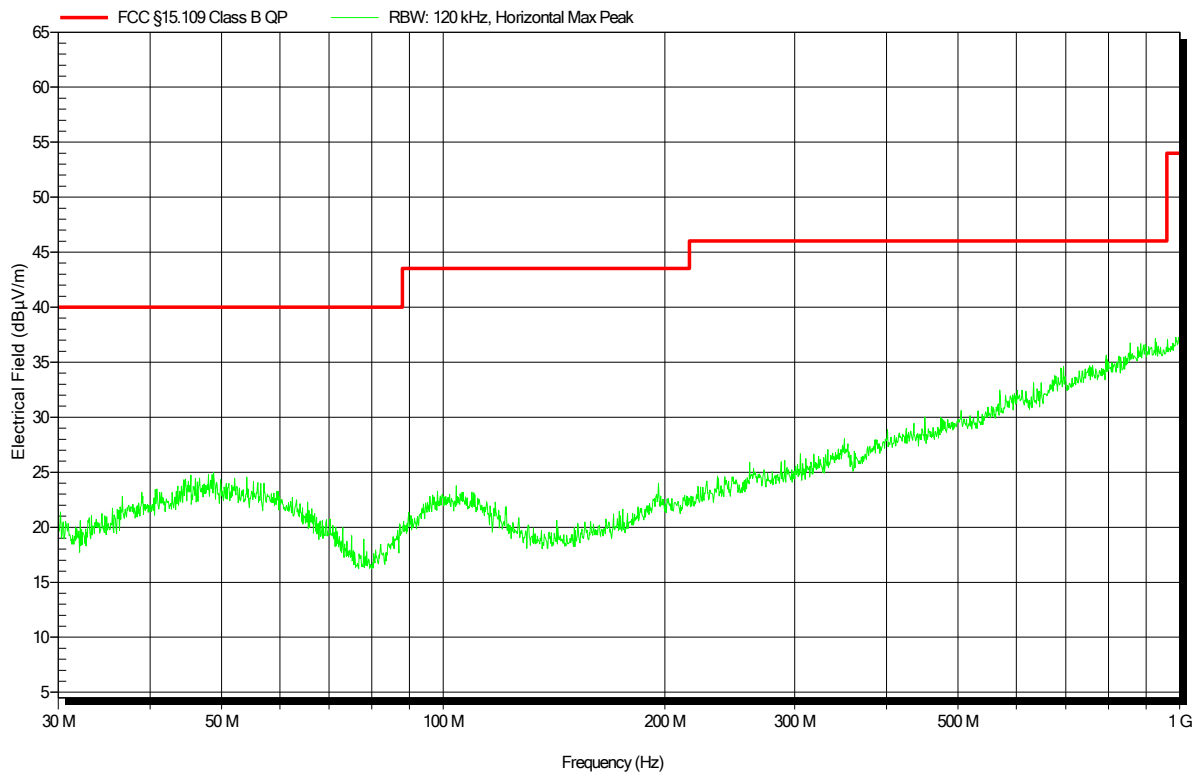


Radiated emissions according to FCC 15B

Project number: G0M-1712-7109

Applicant:	eResearchTechnology GmbH
EUT Name:	Asthma Monitor AM3
Model:	AM3 Option BT+
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Colbasiuc
Test Conditions:	Tnom: 22°C, Unom: 3.7 VDC
Antenna:	Schwarzbeck VULB 9162, Vertical
Measurement distance:	3 m
Mode:	2
Test Date:	2018-02-20
Note:	

Index 2

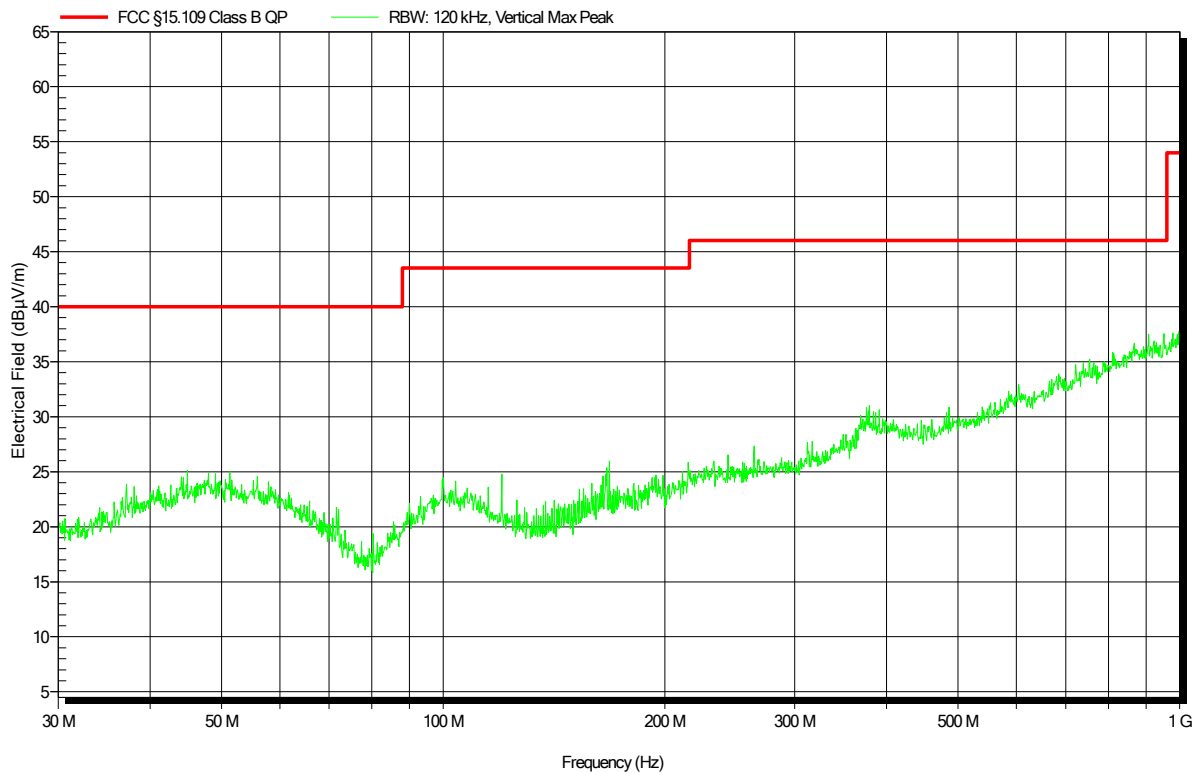


Radiated emissions according to FCC 15B

Project number: G0M-1712-7109

Applicant: eResearchTechnology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option BT+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Colbasiuc
 Test Conditions: Tnom: 22°C, Unom: 3.7 VDC
 Antenna: ETS-Lindgren 3117, Vertical
 Measurement distance: 3 m
 Mode: 2
 Test Date: 2018-02-20
 Note: Notch Filter

Index 3

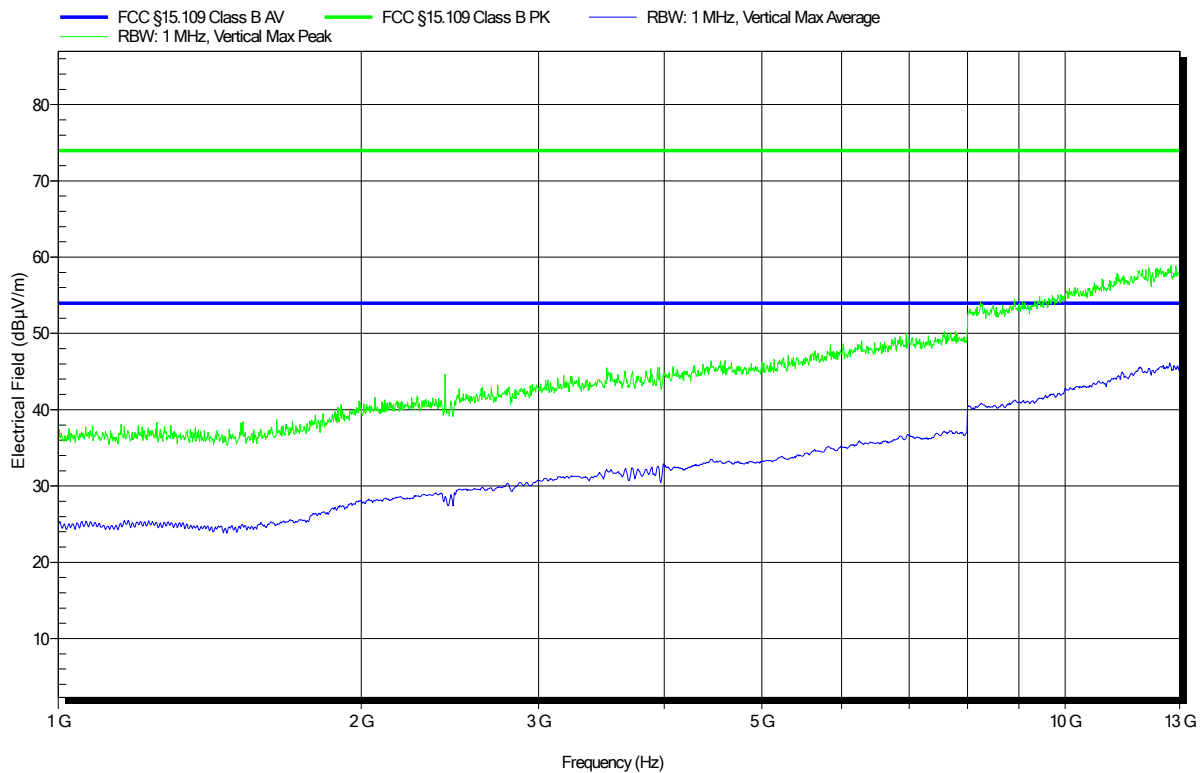


Radiated emissions according to FCC 15B

Project number: G0M-1712-7109

Applicant: eResearchTechnology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option BT+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Colbasiuc
 Test Conditions: Tnom: 22°C, Unom: 3.7 VDC
 Antenna: ETS-Lindgren 3117, Horizontal
 Measurement distance: 3 m
 Mode: 2
 Test Date: 2018-02-20
 Note: Notch Filter

Index 4

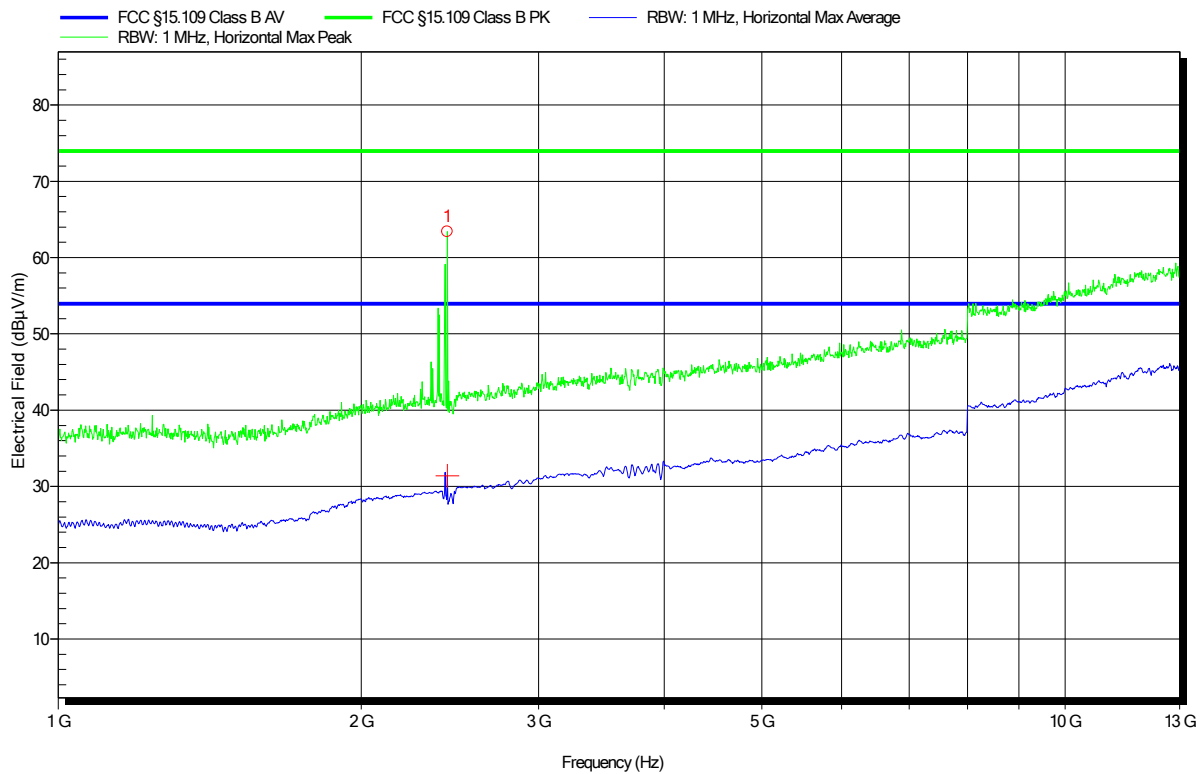

Peak Number	Frequency	Peak	Peak 1
1	2.436 GHz	63.4 dBμV/m	Carrier

Peak Number	Frequency	Average
1	2.436 GHz	31.4 dBμV/m

Test Report No.: G0M-1712-7109-EF0115B-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

3.2 Test Conditions and Results – AC power line conducted emissions

Conducted emissions acc. FCC 47 CFR 15.107 / ICES-003			Verdict: PASS	
Laboratory Parameters:		Required prior to the test		During the test
Ambient Temperature		15 to 35 °C		22 °C
Relative Humidity		30 to 60 %		30 %
Test according referenced standards		Reference Method		
		ANSI C63.4		
Fully configured sample scanned over the following frequency range		Frequency range		
		0.15 MHz to 30 MHz		
Sample is tested with respect to the requirements of the equipment class		Equipment class		
		Class B		
Points of Application		Application Interface		
AC Mains		LISN		
Operating mode		1		
Configuration		1		
Limits and results Class B				
Frequency [MHz]	Quasi-Peak [dBμV]	Result	Average [dBμV]	Result
0.15 to 5	66 to 56*	PASS	56 to 46*	PASS
0.5 to 5	56	PASS	46	PASS
5 to 30	60	PASS	50	PASS
Comments:				
* Limit decreases linearly with the logarithm of the frequency.				

Test Procedure:

The test site is in accordance with ANSI C63-4:2014 requirements and is listed by FCC.
The measurement procedure is as follows:

Exploratory measurement:

- The EUT was placed on a non conductive table 0.8 m above the reference ground plane and 0.4 m away from the vertical conducting plane (ANSI C63.4: 2014 item 7.3.1)
- The power cord that is normally supplied or recommended by the manufacturer was connected to the LISN.
- The distance between the outer edge of the EUT and the LISN shall be set to 0.8 m. A longer power cord shall be bundled to this length (bundling shall not exceed 40 cm in length).
- The LISN measurement port was connected to a measurement receiver
- I/O cables were bundled not longer than 0.4 m
- Measurement was performed in the frequency range 0.15 – 30MHz on each current-carrying conductor
- To maximize the emissions the cable positions were manipulated
- The worst configuration of EUT and cables is shown on a test setup picture at item 1.3

Test Procedure:**Final measurement:**


- The EUT was placed on a non conductive table 0.8 m above the reference ground plane and 0.4 m away from the vertical conducting plane (ANSI C63.4: 2014 item 7.3.1)
- The power cord that is normally supplied or recommended by the manufacturer was connected to the LISN.
- The distance between the outer edge of the EUT and the LISN shall be set to 0.8 m. A longer power cord shall be bundled to this length (bundling shall not exceed 40 cm in length).
- The LISN measurement port was connected to a measurement receiver
- The EUT and cable arrangement were based on the exploratory measurement results
- The test data of the worst-case conditions were recorded and shown on the next pages.

Conducted emissions according to FCC 15B

Project number: G0M-1712-7109

Applicant: eResearchTechnology GmbH
EUT Name: Asthma Monitor AM3
Model: AM3 Option BT+
Test Site: Eurofins Product Service GmbH
Operator: Mr. Colbasiuc
Test Conditions: Tnom: 22°C, Unom: 120 VAC / 60 Hz
LISN: Schwarzbeck NSLK 8128 (N)
Mode: 1
Test Date: 2018-02-20
Note:

Index 5

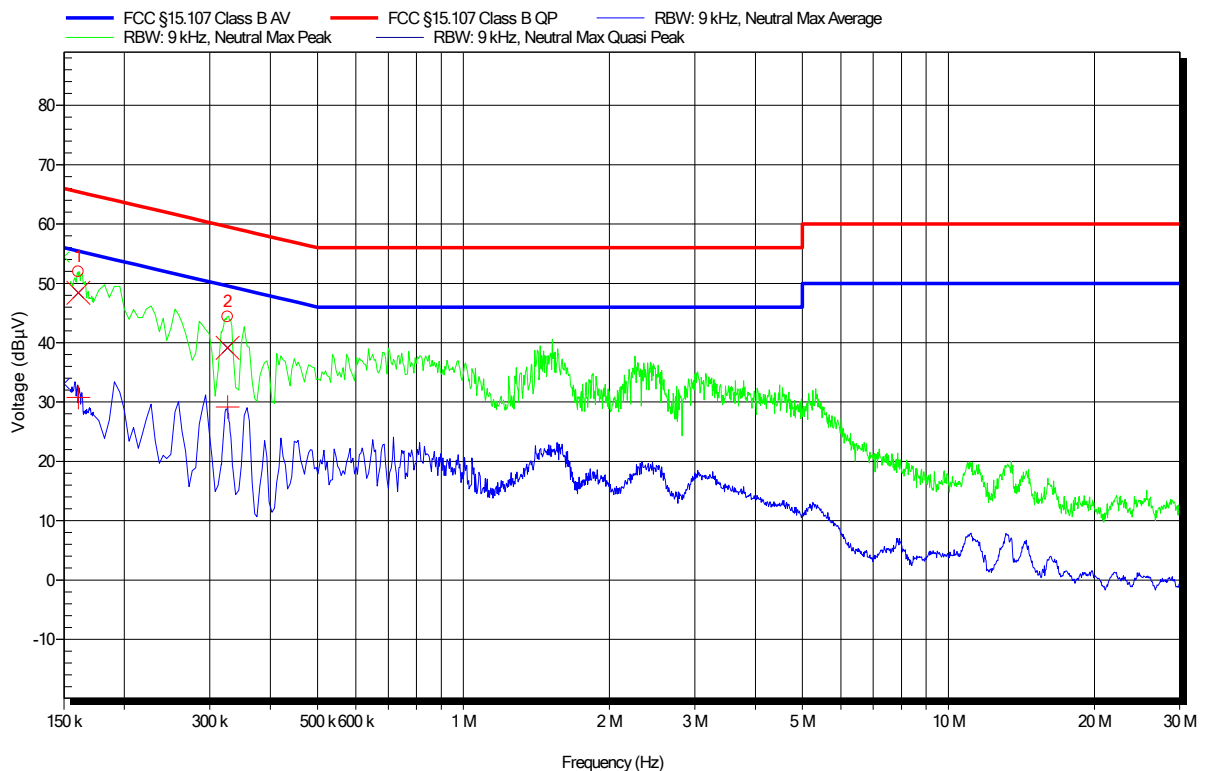

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status
1	160.8 kHz	48.4 dBμV	65.4 dBμV	-17.0 dB	Pass
2	326.4 kHz	39.1 dBμV	59.5 dBμV	-20.4 dB	Pass

Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status
1	160.8 kHz	30.8 dBμV	55.4 dBμV	-24.7 dB	Pass
2	326.4 kHz	29.2 dBμV	49.5 dBμV	-20.4 dB	Pass

Test Report No.: G0M-1712-7109-EF0115B-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Conducted emissions according to FCC 15B

Project number: G0M-1712-7109

Applicant:	eResearchTechnology GmbH
EUT Name:	Asthma Monitor AM3
Model:	AM3 Option BT+
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Colbasiuc
Test Conditions:	Tnom: 22°C, Unom: 120 VAC / 60 Hz
LISN:	Schwarzbeck NSLK 8128 (L)
Mode:	1
Test Date:	2018-02-20
Note:	

Index 6

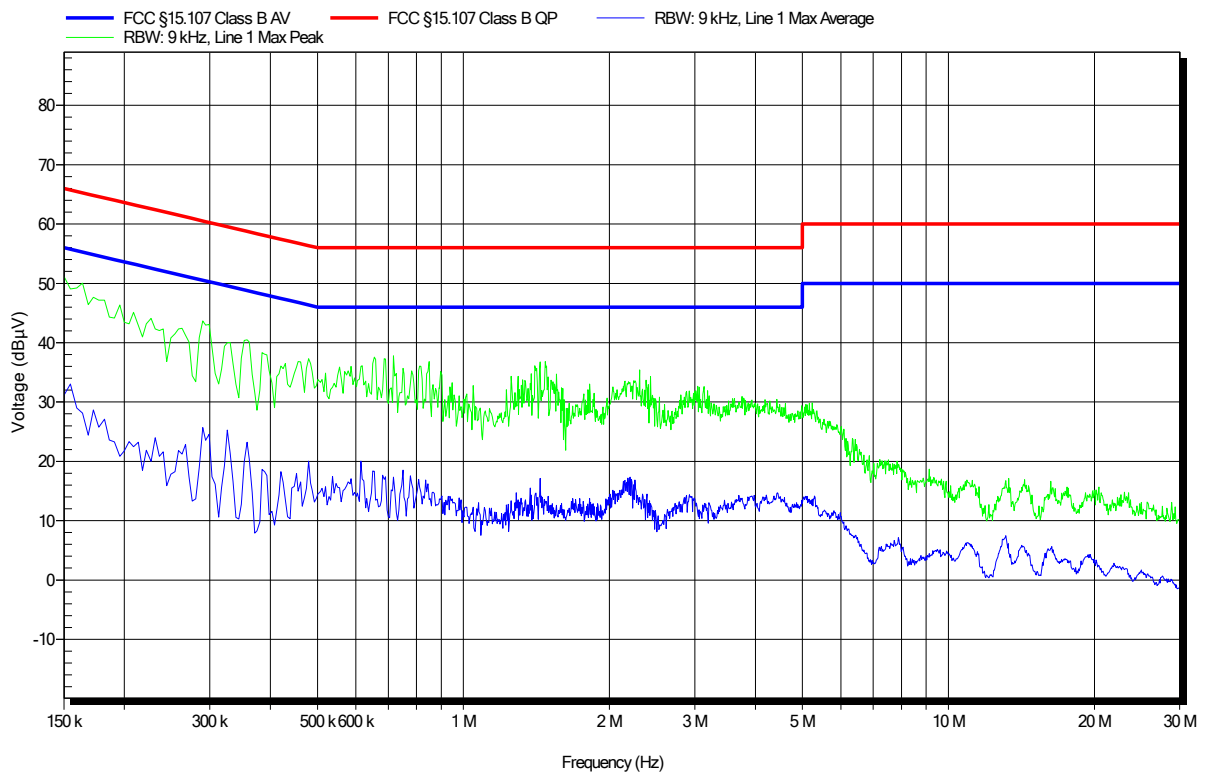

Test Report No.: G0M-1712-7109-EF0115B-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany