

Test Laboratory: BTL Inc.

Date: 2018/1/13

T18_802.11b_CH1_Tip Side_Angle 90_0.5cm_Ant 0

DUT: ARCHER ARCHER T4U;

Communication System: UID 0, IEEE 802.11b WiFi 2.4GHz (DSSS, 1Mbps) (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.925$ S/m; $\epsilon_r = 53.303$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.1 °C; Liquid Temperature: 22.3 °C

DASY Configuration:

- Probe: EX3DV4 – SN7396; ConvF(7.53, 7.53, 7.53); Calibrated: 2017/5/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2017/9/15
- Phantom: SAM Right; Type: Twin SAM; Serial: 1896
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (6x11x1): Interpolated grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (interpolated) = 1.55 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.85 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 2.52 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.428 W/kg

Maximum value of SAR (measured) = 1.66 W/kg

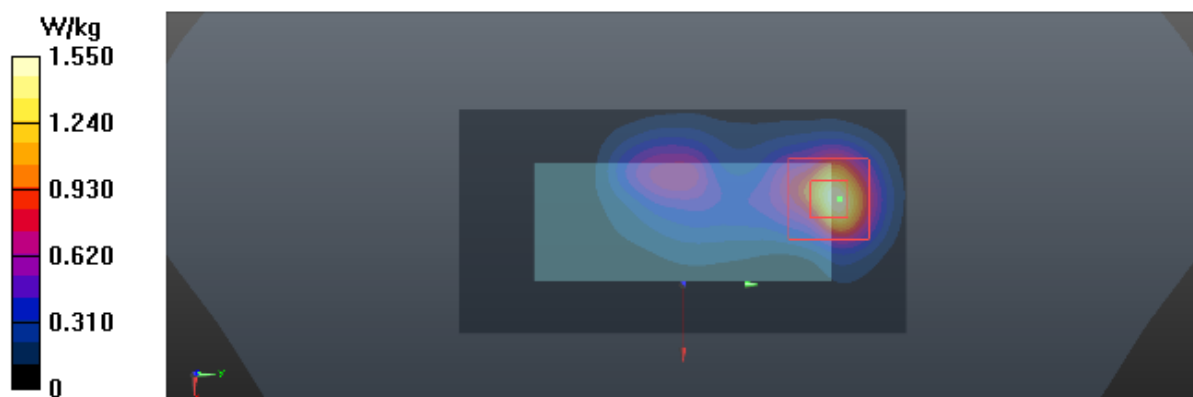

Test Laboratory: BTL Inc.

Date: 2018/1/13

T40_802.11n40_CH3_Tip Side_Angle 90_0.5cm_Ant 0+1

DUT: ARCHER ARCHER T4U;

Communication System: UID 0, IEEE 802.11n(HT40, 13.5Mbps, BPSK) (0); Frequency: 2422 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2422$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 53.307$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.1 °C; Liquid Temperature: 22.3 °C

DASY Configuration:

- Probe: EX3DV4 – SN7396; ConvF(7.53, 7.53, 7.53); Calibrated: 2017/5/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2017/9/15
- Phantom: SAM Right; Type: Twin SAM; Serial: 1896
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (6x11x1): Interpolated grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (interpolated) = 1.07 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.73 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 2.36 W/kg

SAR(1 g) = 0.999 W/kg; SAR(10 g) = 0.421 W/kg

Maximum value of SAR (measured) = 1.15 W/kg

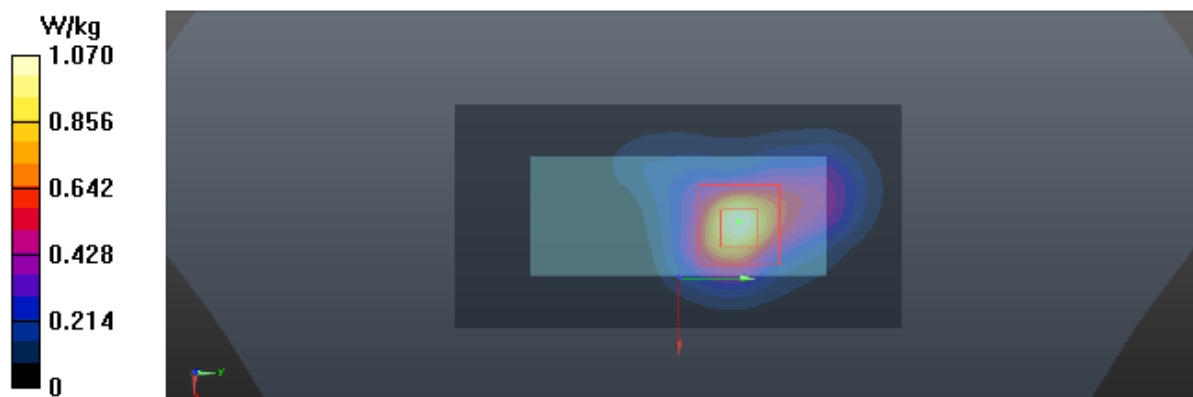

Test Laboratory: BTL Inc.

Date: 2018/1/12

T60_802.11a_CH64_Horizontal-Down_Angel 0_0.5cm_Ant 0

DUT: ARCHER T4U;

Communication System: UID 0, IEEE 802.11a WiFi 5G(OFDM, 6 Mbps,) (0); Frequency: 5320 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5320$ MHz; $\sigma = 5.51$ S/m; $\epsilon_r = 47.352$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3 °C; Liquid Temperature: 22.6 °C

DASY Configuration:

- Probe: EX3DV4 – SN7396; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/5/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2017/9/15
- Phantom: SAM Front; Type: Twin SAM; Serial: 1784
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (9x13x1): Interpolated grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 2.05 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 1.256 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 4.12 W/kg

SAR(1 g) = 0.964 W/kg; SAR(10 g) = 0.253 W/kg

Maximum value of SAR (measured) = 1.94 W/kg

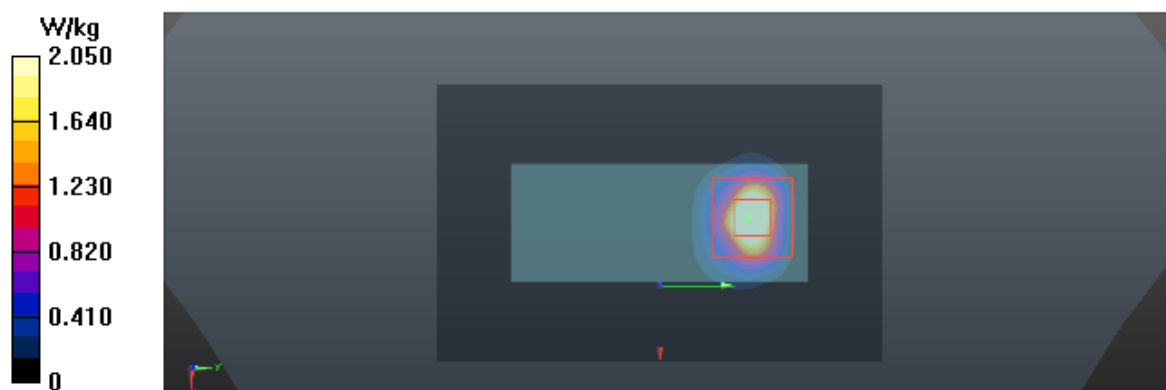

Test Laboratory: BTL Inc.

Date: 2018/1/12

T80_802.11a_CH140_Horizontal-Down_Angle 0_0.5cm_Ant 0

DUT: ARCHER T4U;

Communication System: UID 0, IEEE 802.11a WiFi 5G(OFDM, 6 Mbps,) (0); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.894$ S/m; $\epsilon_r = 46.75$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3 °C; Liquid Temperature: 22.6 °C

DASY Configuration:

- Probe: EX3DV4 – SN7396; ConvF(4.19, 4.19, 4.19); Calibrated: 2017/5/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2017/9/15
- Phantom: SAM Front; Type: Twin SAM; Serial: 1784
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (9x13x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 2.22 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 5.39 W/kg

SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.330 W/kg

Maximum value of SAR (measured) = 2.18 W/kg

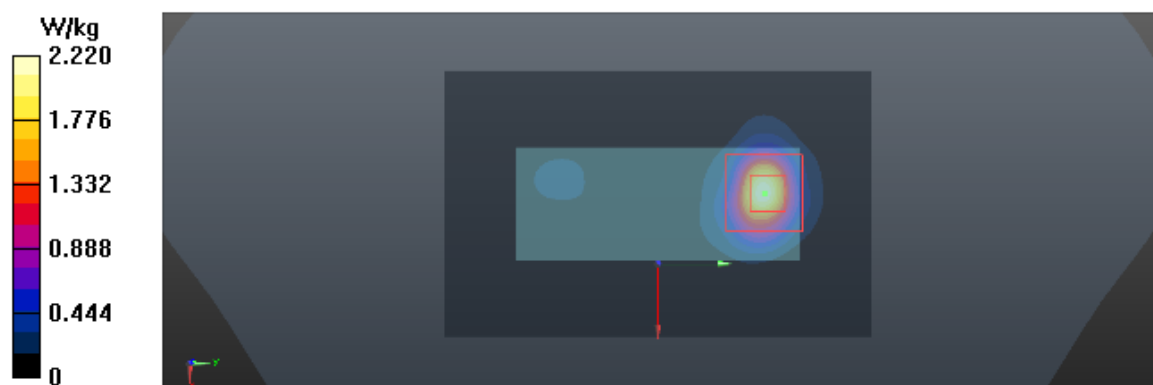

Test Laboratory: BTL Inc.

Date: 2018/1/13

T107_802.11a_CH165_Horizontal-Down_Angle 0_0.5cm_Ant 0

DUT: ARCHER T4U;

Communication System: UID 0, IEEE 802.11a WiFi 5G(OFDM, 6 Mbps,) (0); Frequency: 5825 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5825 \text{ MHz}$; $\sigma = 6.216 \text{ S/m}$; $\epsilon_r = 46.301$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: $23.1 \text{ }^\circ\text{C}$; Liquid Temperature: $22.3 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7396; ConvF(4.52, 4.52, 4.52); Calibrated: 2017/5/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2017/9/15
- Phantom: SAM Front; Type: Twin SAM; Serial: 1784
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (9x13x1): Interpolated grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (interpolated) = 2.44 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.298 V/m ; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 5.45 W/kg

SAR(1 g) = 1.11 W/kg ; SAR(10 g) = 0.348 W/kg

Maximum value of SAR (measured) = 2.09 W/kg

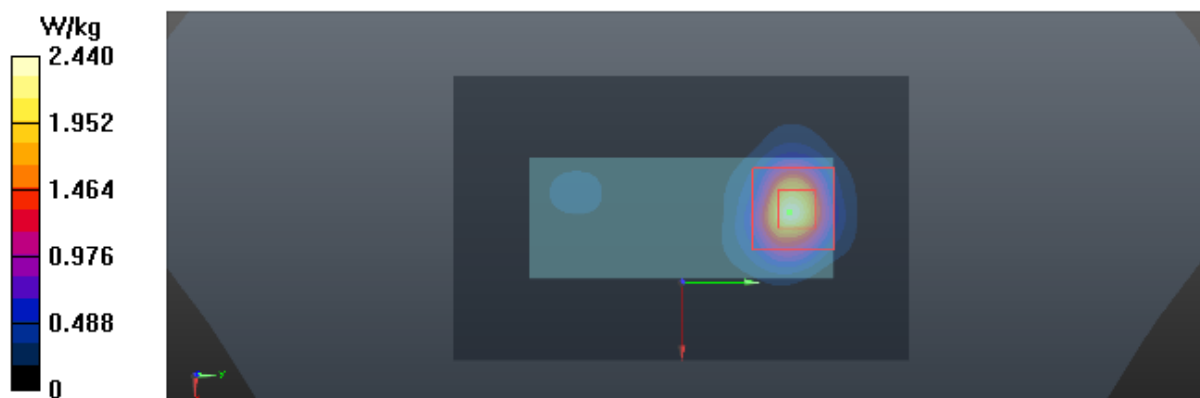

Test Laboratory: BTL Inc.

Date: 2018/1/12

T113_802.11ac_CH58_Horizontal-Down_Angle 0_0.5cm_Ant 0+1

DUT: ARCHER T4U;

Communication System: UID 0, IEEE 802.11ac WIFI (80MHz, 64-QAM, 99pc duty cycle) (0); Frequency: 5290 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5290$ MHz; $\sigma = 5.472$ S/m; $\epsilon_r = 47.377$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3 °C; Liquid Temperature: 22.6 °C

DASY Configuration:

- Probe: EX3DV4 - SN7396; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/5/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2017/9/15
- Phantom: SAM Front; Type: Twin SAM; Serial: 1784
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (9x13x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.61 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.762 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 5.03 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.278 W/kg

Maximum value of SAR (measured) = 2.00 W/kg

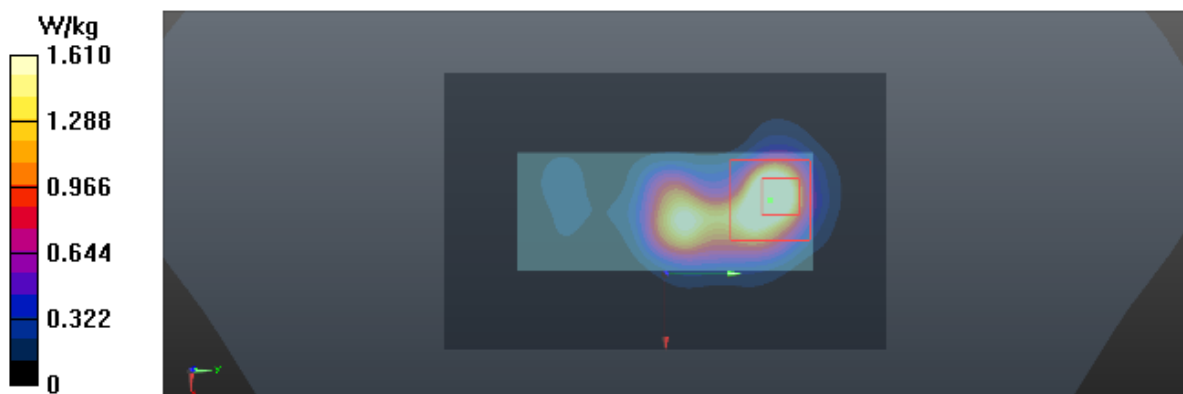

Test Laboratory: BTL Inc.

Date: 2018/1/12

T128_802.11ac_CH122_Horizontal-Down_Angle 0_0.5cm_Ant 0+1

DUT: ARCHER T4U;

Communication System: UID 0, IEEE 802.11ac WIFI (80MHz, 64-QAM, 99pc duty cycle) (0); Frequency: 5610 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5610$ MHz; $\sigma = 5.915$ S/m; $\epsilon_r = 46.724$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3 °C; Liquid Temperature: 22.6 °C

DASY Configuration:

- Probe: EX3DV4 - SN7396; ConvF(4.19, 4.19, 4.19); Calibrated: 2017/5/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2017/9/15
- Phantom: SAM Front; Type: Twin SAM; Serial: 1784
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (9x13x1): Interpolated grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 2.88 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 8.292 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 3.84 W/kg

SAR(1 g) = 0.907 W/kg; SAR(10 g) = 0.298 W/kg

Maximum value of SAR (measured) = 1.68 W/kg

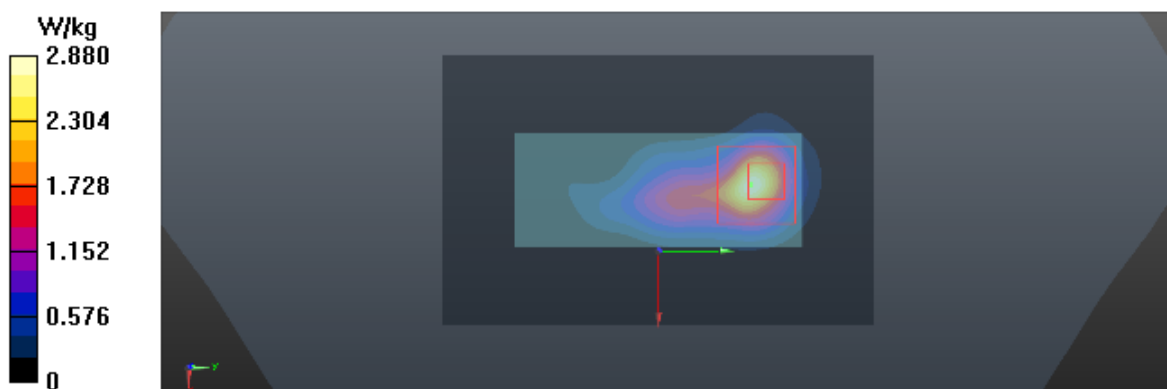

Test Laboratory: BTL Inc.

Date: 2018/1/13

T146_802.11ac_CH155_Horizontal-Down_Angle 0_0.5cm_Ant 0+1

DUT: ARCHER T4U;

Communication System: UID 0, IEEE 802.11ac WIFI (80MHz, 64-QAM, 99pc duty cycle) (0); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5775$ MHz; $\sigma = 6.149$ S/m; $\epsilon_r = 46.491$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.1 °C; Liquid Temperature: 22.3 °C

DASY Configuration:

- Probe: EX3DV4 - SN7396; ConvF(4.52, 4.52, 4.52); Calibrated: 2017/5/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2017/9/15
- Phantom: SAM Front; Type: Twin SAM; Serial: 1784
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (9x13x1): Interpolated grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 2.69 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 6.555 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 4.25 W/kg

SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.330 W/kg

Maximum value of SAR (measured) = 1.92 W/kg

