

TABLE OF CONTENTS LIST

APPLICANT: RADIOSHACK CORPORATION

FCC ID: AAO1900903

TEST REPORT:

PAGE	1.....COVER SHEET - GENERAL INFORMATION & TECHNICAL DESCR.
PAGE	2.....TECHNICAL DESCRIPTION CONTINUED & RF POWER OUTPUT
PAGE	3.....MODULATION CHARACTERISTICS & OCCUPIED BANDWIDTH
PAGE	4.....SPURIOUS EMISSIONS AT ANTENNA TERMINALS
PAGE	5.....UNWANTED RADIATION
PAGE	6.....METHOD OF MEASURING SPURIOUS EMISSIONS
PAGE	7.....FREQUENCY STABILITY
PAGE	8.....LIST OF TEST EQUIPMENT

EXHIBITS CONTAINING:

EXHIBIT	1.....FCC ID LABEL SAMPLE
EXHIBIT	2.....SKETCH OF LABEL LOCATION
EXHIBIT	3A.....EXTERNAL FRONT VIEW PHOTOGRAPH
EXHIBIT	3B.....EXTERNAL BACK VIEW PHOTOGRAPH
EXHIBIT	4A.....INTERNAL COMPONENT VIEW PHOTOGRAPH
EXHIBIT	4B.....INTERNAL COPPER VIEW PHOTOGRAPH
EXHIBIT	5.....BLOCK DIAGRAM
EXHIBIT	6.....SCHEMATICS
EXHIBIT	7.....USER'S MANUAL
EXHIBIT	8A-8B.....OPERATIONAL DESCRIPTION
EXHIBIT	9A-9C.....TUNING PROCEDURE
EXHIBIT	10.....AUDIO LOW PASS FILTER
EXHIBIT	11A.....MODULATION LIMITING 300 Hz
EXHIBIT	11B.....MODULATION LIMITING 1000 Hz
EXHIBIT	11C.....MODULATION LIMITING 3000 Hz
EXHIBIT	12.....AUDIO FREQUENCY RESPONSE GRAPH
EXHIBIT	13.....OCCUPIED BANDWIDTH CW PLOT
EXHIBIT	14.....OCCUPIED BANDWIDTH
EXHIBIT	15.....TEST SET UP PHOTO

APPLICANT: RADIOSHACK CORPORATION

FCC ID: AAO1900903

DATE: JANUARY 24, 2001

REPORT #: T:\CUS\R\RADSHACK\577AH0\577AH0.RPT

PAGE: TABLE OF CONTENTS

GENERAL INFORMATION REQUIRED
FOR CERTIFICATION

2.1033(c)(1)(2) RADIOSHACK CORPORATION will manufacture the
FCCID: AAO1900903 GMRS CHANNELS
TRANSCEIVER in quantity, for use under FCC RULES
PART 95.

RADIOSHACK CORPORATION
100 THROCKMORTON STREET SUITE 1300
FT. WORTH, TX 76102-2802

2.1033 (c) TECHNICAL DESCRIPTION

2.1033(c)(3) Instruction book. A draft copy of the instruction
manual is included as EXHIBIT 7.

2.1033(c) (4) Type of Emission: 11K4F3E
95.629

$B_n = 2M + 2DK$

$M = 3000$

$D = 2.70K$

$B_n = 2(3.0) + 2(2.70) = 11.4K$

Authorized Bandwidth 20.0KHz

2.1033(c)(5) Frequency Range: 462.5500 - 462.7250 MHz
95.627

2.10311c)(6)(7) The Maximum Output Power Rating:
High: 5 Watts Low: 1 Watt effective radiated power.

2.1033(c)(8) DC Voltages and Current into Final Amplifier:
FINAL AMPLIFIER ONLY

FOR LOW POWER SETTING INPUT POWER: $(8.4V)(0.475A) = 3.99$ Watts

FOR HIGH POWER SETTING INPUT POWER: $(8.4V)(2.625A) = 22.056$ Watts

2.1033(c)(9) Tune-up procedure. The tune-up procedure is included
9A-9C.

APPLICANT: RADIOSHACK CORPORATION


FCC ID: AAO1900903

DATE: JANUARY 24, 2001

REPORT #: T:\CUS\R\RADSHACK\577AH0\577AH0.RPT

PAGE #: 1

- 2.1033(c)(10) Complete Circuit Diagrams: The circuit diagram is included as EXHIBIT 6 of this report. The block diagrams are included as EXHIBIT 5 of this report.
- 2.1033(c)(11) A photograph or a drawing of the equipment identification label is included as exhibit No. 1.
- 2.1033(c)(12) Photographs(8"X10") of the equipment of sufficient clarity to reveal equipment construction and layout, including meters, labels for controls, including any view under shields. See exhibit 3A-3B,4A-4B.
- 2.1033(c)(13) Digital modulation is not allowed.
- 2.1033(c)(14) The data required by 2.1046 through 2.1057 is submitted below.
- 95.639 Power Output shall not exceed 50.0 Watts effective radiated power. There can be no provisions for
- 95.649 increasing the power or varying the power.RF power output.
- 2.1046(a) RF power is measured by connecting a 50 ohm, resistive watt meter to the RF output connector. With a nominal battery voltage of 8.4 V, and the transmitter properly adjusted the RF output measures:
- OUTPUT POWER: HIGH: 5 Watts
LOW: 1 Watt
- 2.1046(a) RF power output. The test procedure used was TIA/EIA-603 S2.2.1.

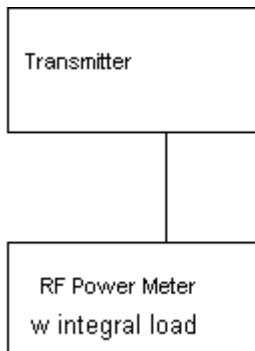

2.1047(a)(b) Modulation characteristics:

AUDIO FREQUENCY RESPONSE

The audio frequency response was measured in accordance with TIA/EIA Specification 603. The audio frequency response curve is shown on the next page. The audio signal was fed into a dummy microphone circuit and into the microphone connector. The input required to produce 30 percent modulation level was measured. See Exhibit 12.

2.1047(b)

Audio input versus modulation

The audio input level needed for a particular percentage of modulation was measured in accordance with TIA/EIA Specification 603. The audio input curves versus modulation are on the following pages. Curves are provided for audio input frequencies of 300, 1000, and 3000 Hz. See Exhibits 11A-11C.

95.637

Post Limiter Filter Each GMRS transmitter, except a mobile station transmitter with a power of 2.5Watts or less, must be equipped with an audio low pass filter. At any frequency between 3 & 20KHz the filter must have an attenuation of $60\log(f/3)$ greater than the attenuation at 1KHz. See Exhibit 10.


2.1049

Occupied bandwidth:

95.635(b)(1)(3)(7)

At least 25dB on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth. At least 35 dB on any frequency removed from the center of the authorized BW by more than 100% up to and including 250% of the authorized BW. At least $43 + \log_{10}(T)$ on any frequency removed from the center of the authorized bandwidth by more than 250%.


Occupied BW Test Equipment Setup

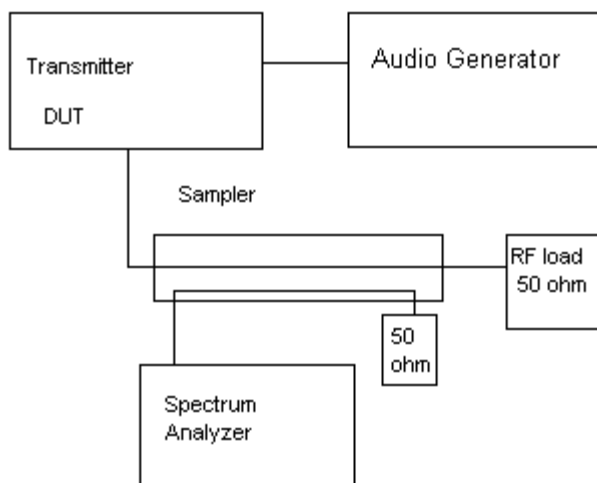

2.1051

Spurious emissions at antenna terminals(conducted):
The following data shows the level of conducted spurious responses at the antenna terminal. The test procedure used was TIA/EIA 603 S2.2.13 with the exception that the emissions were recorded in dBc. The spectrum was scanned from 0.4 to at least the 10th harmonic of the fundamental.

Spurious Emissions at Antenna Terminals

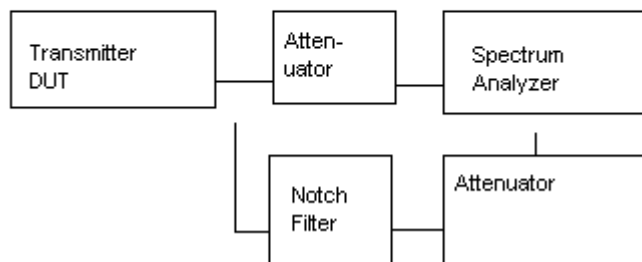

Method of Measuring Conducted Spurious Emissions

2.1051 Spurious emissions at the Antenna Terminals

NAME OF TEST: SPURIOUS EMISSIONS AT ANTENNA TERMINALS

REQUIREMENTS: Emissions must be $43 + 10\log(P_o)$ dB below the mean power output of the transmitter.

HIGH POWER $43 + 10\log(5.0) = 49.99$ dB OR 70dB Whichever is the lessor
LOW POWER $43 + 10\log(1.0) = 43.00$ dB

EMISSION FREQUENCY MHz	dB BELOW CARRIER	
	HIGH POWER	LOW POWER
462.50	00.0	00.0
925.00	67.5	58.8
1387.50	56.5	58.1
1850.00	81.9	64.8
2312.50	63.9	63.7
2775.00	76.1	80.2
3237.50	70.2	79.1
3700.00	75.5	81.1
4162.50	84.2	83.9
4625.00	85.5	83.4

APPLICANT: RADIOSHACK CORPORATION

FCC ID: AAO1900903

DATE: JANUARY 24, 2001


REPORT #: T:\CUS\R\RADSHACK\577AH0\577AH0.RPT

PAGE #: 4

APPLICANT : RADIOSHACK CORPORATION

FCC ID : AA01900903

Method of Measuring Radiated Spurious Emissions

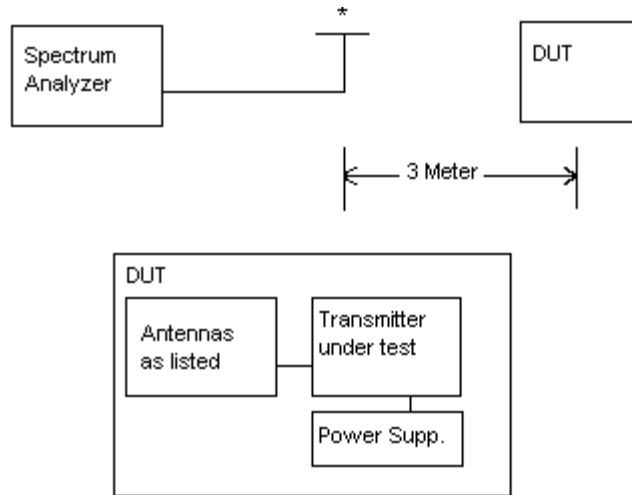

Equipment placed 80cm above ground
on a rotatable platform.

* Appropriate antenna raised from 1 to 4 M.

APPLICANT: RADIOSHACK CORPORATION

FCC ID: AA01900903

DATE: JANUARY 24, 2001

REPORT #: T:\CUS\R\RADSHACK\577AH0\577AH0.RPT

PAGE #: 6

2.1055

Frequency stability:

95.621(b)

Temperature and voltage tests were performed to verify that the frequency remains within the 0.00025%, 2.5 ppm specification limit. The test was conducted as follows: The transmitter was placed in the temperature chamber at 25 degrees C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30 degrees C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 second intervals. The worst case number was recorded for temperature plotting. This procedure was repeated in 10 degree increments up to + 50 degrees C.

Readings were also taken at plus and minus 15% of the battery voltage of 8.4 VDC.

MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 462.725 000

<u>TEMPERATURE</u>	<u>CFREQUENCY_MHz</u>	<u>PPM</u>
REFERENCE_____	462.575000	00.00
-30C_____	462.575687	1.49
-20C_____	462.574515	-1.05
-10C_____	462.574717	-0.61
0C_____	462.575244	0.53
10C_____	462.575200	0.43
20C_____	462.575696	1.51
30C_____	462.575182	0.39
40C_____	462.575335	0.73
50C_____	462.575943	2.04

BATT. %	BATT. DATA	VOLTS	BATT. PPM
-15%	462.575322	7.14	0.70
+15%	462.575406	9.66	0.88

RESULTS OF MEASUREMENTS: The maximum frequency variation over the temperature range was 0.70 to 0.88 ppm. The maximum frequency variation with voltage was 0.88 ppm.

APPLICANT: RADIOSHACK CORPORATION

FCC ID: AAO1900903

DATE: JANUARY 24, 2001

REPORT #: T:\CUS\R\RADSHACK\577AH0\577AH0.RPT

PAGE #: 7

APPLICANT: RADIOSHACK CORPORATION
FCC ID: AAO1900903

TEST EQUIPMENT LIST

- 1._X_Spectrum Analyzer: HP 8566B-Opt 462, S/N 3138A07786, w/
preselector HP 85685A, S/N 3221A01400, Quasi-Peak Adapter
HP 85650A, S/N 3303A01690 & Preamplifier HP 8449B-OPT H02,
S/N 3008A00372 Cal. 10/17/99
- 2._X_Biconnical Antenna: Eaton Model 94455-1, S/N 1057
- 3.___Biconnical Antenna: Electro-Metrics Model BIA-25, S/N 1171
- 4._X_Log-Periodic Antenna: Electro-Metrics Model EM-6950, S/N 632
- 5.___Log-Periodic Antenna: Electro-Metrics Model LPA-30, S/N 409
- 6._X_Double-Ridged Horn Antenna: Electro-Metrics Model RGA-180,
1-18 GHz, S/N 2319
- 7.___18-26.3GHz Systron Donner Standard Gain Horn #DBE-520-20
- 8.___Horn 40-60GHz: ATM Part #19-443-6R
- 9.___Line Impedance Stabilization Network: Electro-Metrics Model
ANS-25/2, S/N 2604 Cal. 2/9/00
- 10.___Temperature Chamber: Tenney Engineering Model TTTC, S/N 11717-7
- 11.___Frequency Counter: HP Model 5385A, S/N 3242A07460 Cal 10/6/99
- 12.___Peak Power Meter: HP Model 8900C, S/N 2131A00545
- 13._X_Open Area Test Site #1-3meters Cal. 12/22/99
- 14.___Signal Generator: HP 8640B, S/N 2308A21464 Cal. 9/23/99
- 15.___Signal Generator: HP 8614A, S/N 2015A07428
- 16.___Passive Loop Antenna: EMCO Model 6512, 9KHz to 30MHz, S/N
9706-1211 Cal. 6/10/00
- 17.___Dipole Antenna Kit: Electro-Metrics Model TDA-30/1-4, S/N 153
Cal. 11/24/99
- 18.___AC Voltmeter: HP Model 400FL, S/N 2213A14499 Cal. 9/21/99
- 19.___Digital Multimeter: Fluke Model 8012A, S/N 4810047 Cal 9/21/99
- 20.___Digital Multimeter: Fluke Model 77, S/N 43850817 Cal 9/21/99
- 21.___Oscilloscope: Tektronix Model 2230, S/N 300572 Cal 9/23/99

APPLICANT: RADIOSHACK CORPORATION
FCC ID: AAO1900903
DATE: JANUARY 24, 2001
REPORT #: T:\CUS\R\RADSHACK\577AH0\577AH0.RPT
PAGE #: 8