

# TEST REPORT

FCC DTS Test for DA351I6MG  
Certification

**APPLICANT**  
Hyundai Mobis Co., Ltd

**REPORT NO.**  
HCT-RF-2503-FC049-R1

**DATE OF ISSUE**  
April 8, 2025

**Tested by**  
Kyung Jun Woo



**Technical Manager**  
Jong Seok Lee



Accredited by KOLAS, Republic of KOREA

**HCT CO., LTD.**  
*BongJai Huh*  
BongJai Huh / CEO

**HCT CO.,LTD.**

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea  
Tel. +82 31 645 6300 Fax. +82 31 645 6401

# TEST REPORT

**REPORT NO.**

HCT-RF-2503-FC049-R1

**DATE OF ISSUE**

April 08, 2025

**Additional Model**

DA350I6NG, DA351I6NG, DA350I6GG, DA351I6GG, DA352I6GG, DA350I6GN,  
DA350I6GP, DA350I6MG, DA360I6GG, DA361I6GG, DA360I6GN, DA360I6GP

**Applicant**

**Hyundai Mobis Co., Ltd**

203, Teheran-ro, Gangnam-gu, Seoul, Republic of Korea

**Product Name**

DISPLAY CAR SYSTEM

**Model Name**

DA351I6MG

**FCC ID**

TQ8-DA351I6MG

**Date of Test**

February 14, 2025 ~ March 13, 2025

**FCC Classification**

Digital Transmission System(DTS)

**Test Standard Used**

FCC Rule Part(s): Part 15.247

**Test Results**

PASS

**Location of Test**

☒ Permanent Testing Lab ☐ On Site Testing Lab

(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)

## REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	March 13, 2025	Initial Release
1	April 08, 2025	Page 24, Revised the Worst case configuration and mode

## Notice

---

### Content

---

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

When confirmation of authenticity of this test report is required, please contact [www.hct.co.kr](http://www.hct.co.kr)

This test report provides test result(s) under the scope accredited by the Korea Laboratory Accreditation Scheme (KOLAS), which signed the ILAC-MRA.  
(KOLAS (KS Q ISO/IEC 17025) Accreditation No. KT197)

This test report provides test result(s) under the lab's valid Scope of Accreditation by A2LA (American Association for Laboratory Accreditation), signatory of the ILAC-MRA.  
(A2LA (ISO/IEC 17025) Certificate No. 4114.01)

---

## CONTENTS

1. EUT DESCRIPTION	5
2. TEST METHODOLOGY	6
EUT CONFIGURATION	6
EUT EXERCISE	6
GENERAL TEST PROCEDURES	6
DESCRIPTION OF TEST MODES	7
3. INSTRUMENT CALIBRATION	7
4. FACILITIES AND ACCREDITATIONS	7
FACILITIES	7
EQUIPMENT	7
5. ANTENNA REQUIREMENTS	8
6. MEASUREMENT UNCERTAINTY	8
7. DESCRIPTION OF TESTS	9
8. SUMMARY TEST OF RESULTS	25
9. TEST RESULT	26
9.1 DUTY CYCLE	26
9.2 6 dB BANDWIDTH	27
9.3 OUTPUT POWER	29
9.4 POWER SPECTRAL DENSITY	30
9.5 BAND EDGE / CONDUCTED SPURIOUS EMISSIONS	32
9.6 RADIATED SPURIOUS EMISSIONS	34
9.7 RADIATED RESTRICTED BAND EDGES	39
10. LIST OF TEST EQUIPMENT	42
11. ANNEX A_ TEST SETUP PHOTO	44

## 1. EUT DESCRIPTION

<b>Model</b>	DA351I6MG		
<b>Additional Model</b>	DA350I6NG, DA351I6NG, DA350I6GG, DA351I6GG, DA352I6GG, DA350I6GN, DA350I6GP, DA350I6MG, DA360I6GG, DA361I6GG, DA360I6GN, DA360I6GP		
<b>EUT Type</b>	DISPLAY CAR SYSTEM		
<b>Power Supply</b>	DC 14.4 V		
<b>Frequency Range</b>	2 412 MHz - 2 462 MHz		
<b>Max. RF Output Power</b>	Average Power	802.11b : 802.11g : 802.11n(HT20) :	3.80 dBm 4.71 dBm 3.73 dBm
	Peak Power	802.11b : 802.11g : 802.11n(HT20) :	9.84 dBm 12.11 dBm 11.61 dBm
<b>Modulation Type</b>	DSSS/CCK : 802.11b OFDM : 802.11g, 802.11n		
<b>Number of Channels</b>	11 Channels		
<b>Antenna Specification</b>	Type: Pattern Antenna Peak Gain: -0.01 dBi		
<b>Serial number</b>	Conducted : MMA240730050 Radiated : MMA240730045		

This device supports simultaneous transmission operation.

Simultaneous transmission Scenario	2.4 GHz WiFi	5 GHz WiFi	BT	Test Case
Bluetooth + 2.4 GHz WiFi	on	-	on	Scenario1
Bluetooth + 5 GHz WiFi	-	on	on	Scenario2

## 2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10 (Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

### EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

## GENERAL TEST PROCEDURES

### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5 m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

## DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

## 3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 4. FACILITIES AND ACCREDITATIONS

### FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated March 11, 2024 (Registration Number: KR0032).

### EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 5. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203

## 6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ kHz)
X dB, 99% Bandwidth	95 (Confidence level about 95 %, $k=2$ )
Frequency stability	28 (Confidence level about 95 %, $k=2$ )


  

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.98 (Confidence level about 95 %, $k=2$ )
Conducted Output Power(Power Meter)	0.54 (Confidence level about 95 %, $k=2$ )
Conducted Output Power(Signal Analyzer)	0.68 (Confidence level about 95 %, $k=2$ )
Power Spectral Density	1.03 (Confidence level about 95 %, $k=2$ )
Band Edge (Out of Band Emissions)	0.70 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (30 MHz ~ 1 GHz)	5.70 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (1 GHz ~ 18 GHz)	5.52 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (18 GHz ~ 40 GHz)	5.66 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (Above 40 GHz)	5.58 (Confidence level about 95 %, $k=2$ )

## 7. DESCRIPTION OF TESTS

### 7.1. Duty Cycle

#### Test Configuration

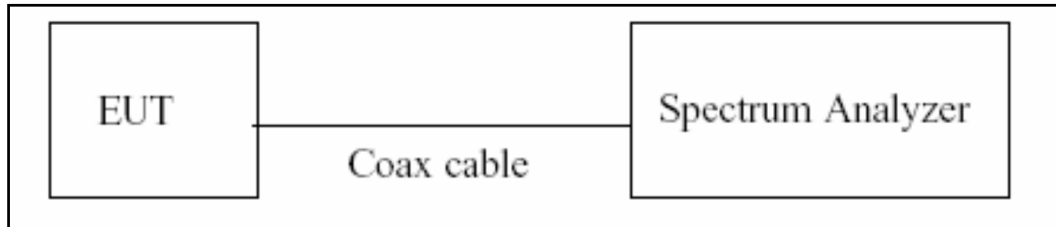

#### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if  $T \leq 6.25$  microseconds. ( $50/6.25 = 8$ )

The zero-span method was used because all measured T data are  $> 6.25$  microseconds and both RBW and VBW are  $> 50/T$ .


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz or 50 MHz ( $\geq$  RBW)
3. SPAN = 0 Hz
4. Detector = Average
5. Number of points in sweep  $> 100$
6. Trace mode = Clear write
7. Measure  $T_{\text{total}}$  and  $T_{\text{on}}$
8. Calculate Duty Cycle =  $T_{\text{on}} / T_{\text{total}}$  and Duty Cycle Factor =  $10\log(1/\text{Duty Cycle})$

## 7.2. 6 dB Bandwidth

### Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

### Test Configuration



### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW  $\geq 3 \times$  RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

### 7.3. Output Power

#### Limit

The maximum permissible conducted output power is 1 Watt.

#### Test Configuration



#### Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)  
: Measure the peak power of the transmitter.
  
- Average Power (Procedure 11.9.2.3 in ANSI 63.10-2013)
  - 1) Measure the duty cycle.
  - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
  - 3) Add  $10 \log (1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

#### Sample Calculation


- Conducted Output Power(Peak) = Measured Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Measured Value + ATT loss + Cable loss + Duty Cycle Factor

#### 7.4. Power Spectral Density

##### Limit

The transmitter power density average over 1-second interval shall not be greater than 8 dBm in any 3 kHz BW.

##### Test Configuration



##### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the DTS bandwidth.
- 3)  $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$ .
- 4)  $VBW \geq 3 \times RBW$ .
- 5) Sweep = auto couple.
- 6) Detector = Peak.
- 7) Trace mode = max hold.
- 8) Allow trace to fully stabilize.
- 9) Use the peak marker function to determine the maximum amplitude level within the RBW.
- 10) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

##### Sample Calculation

- Power Spectral Density = Measured Value + ATT loss + Cable loss


## 7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

### Limit

The maximum conducted (Peak) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

[ Conducted > 20 dBc ]

### Test Configuration



### Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW  $\geq 3 \times$  RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points  $\geq 2 \times$  Span/RBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

### Factors for frequency

Freq(MHz)	Factor(dB)
30	10.40
100	10.47
200	10.50
300	10.48
400	10.59
500	10.67
600	10.70
700	10.84
800	10.96
900	11.06
1000	11.08
2000	11.08
2400	<b>11.12</b>
2500	<b>11.12</b>
3000	11.34
4000	11.78
5000	12.66
6000	12.66
7000	12.74
8000	12.75
9000	12.79
10000	12.86
11000	12.85
12000	12.88
13000	12.90
14000	13.03
15000	12.98
16000	13.04
17000	13.08
18000	13.12
19000	13.18
20000	13.22
21000	13.24
22000	13.28
23000	13.35
24000	13.39
25000	13.40

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss + Cable loss


## 7.6. Radiated Test

### Limit


Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ )	Measurement Distance (m)
0.009 – 0.490	$2400/F(\text{kHz})$	300
0.490 – 1.705	$24000/F(\text{kHz})$	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

### Test Configuration


Below 30 MHz

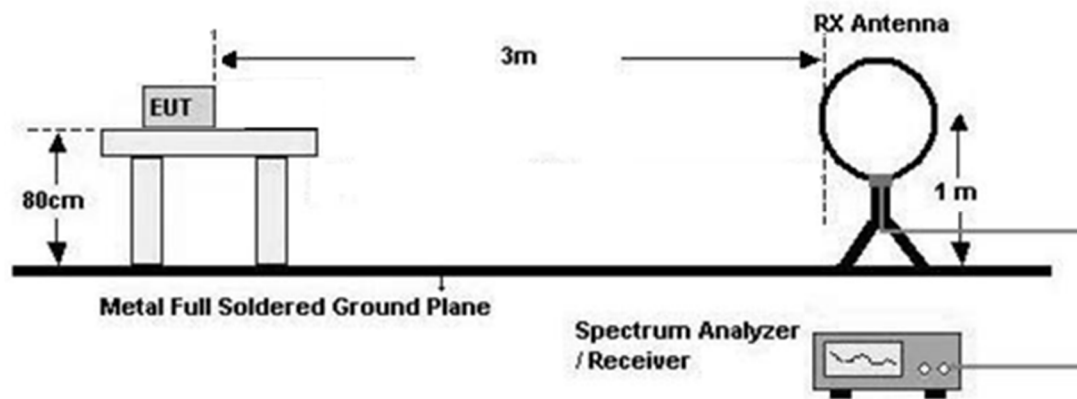

30 MHz - 1 GHz

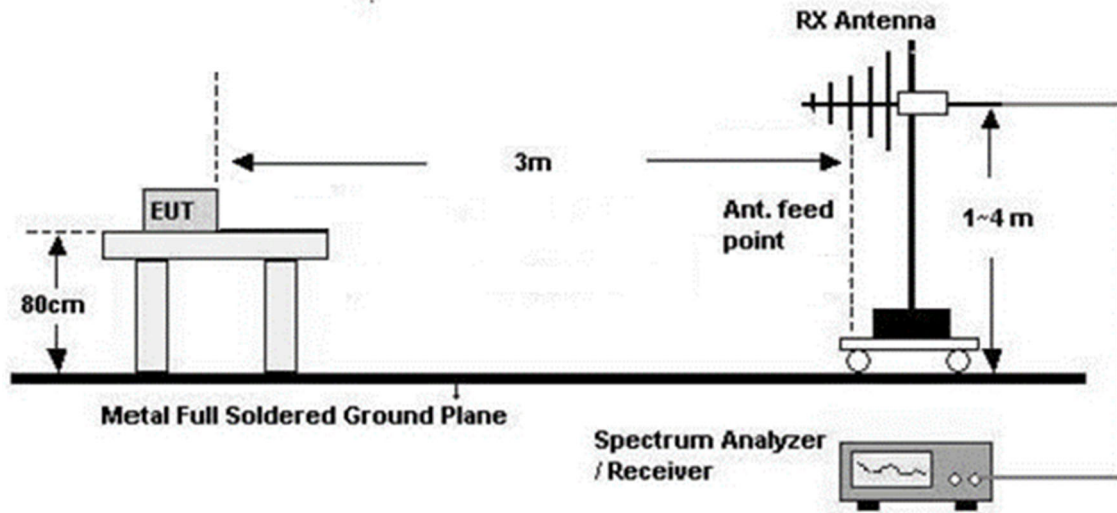

Above 1 GHz

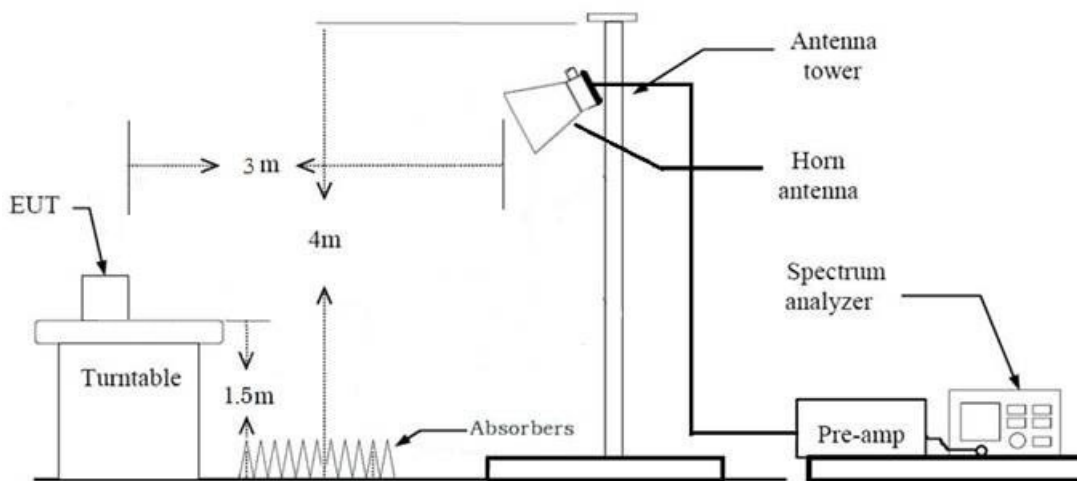

**Test Procedure of Radiated spurious emissions (Below 30 MHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8 m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) =  $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$   
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) =  $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$   
Measurement Distance : 3 m
8. Spectrum Setting
  - Frequency Range = 9 kHz ~ 30 MHz
  - Detector = Peak
  - Trace = Max hold
  - RBW = 9 kHz
  - VBW  $\geq 3 \times$  RBW
9. Total = Measured value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

**KDB 414788 OFS and Chamber Correlation Justification**

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

**Test Procedure of Radiated spurious emissions (Below 1 GHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

**6. Spectrum Setting****(1) Measurement Type(Peak):**

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Max hold
- RBW = 100 kHz
- VBW  $\geq 3 \times$  RBW

**(2) Measurement Type(Quasi-peak):**

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

In general, (1) is used mainly

7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

**Test Procedure of Radiated spurious emissions (Above 1 GHz)**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)

**(1) Measurement Type(Peak):**

- Measured Frequency Range : 1 GHz – 25 GHz

- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW  $\geq 3 \times$  RBW

(2) Measurement Type(Average): Duty cycle  $\geq 98 \%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW  $\geq 3 \times$  RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle  $< 98 \%$ , duty cycle variations are less than  $\pm 2 \%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW  $\geq 3 \times$  RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 % duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $> 20$  dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor =  $20\log$  (test distance / specific distance) (dB)

11. Total(Measurement Type : Peak)

= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle  $\geq 98 \%$ )

= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle  $< 98 \%$ )

= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)  
+ Duty Cycle Factor

**Test Procedure of Radiated Restricted Band Edge**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.

**8. Spectrum Setting****(1) Measurement Type(Peak):**

- Measured Frequency Range : 2310 MHz ~ 2390 MHz / 2483.5 MHz ~ 2500 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW  $\geq 3 \times$  RBW

**(2) Measurement Type(Average): Duty cycle  $\geq 98 \%$ ,**

- Measured Frequency Range : 2310 MHz ~ 2390 MHz / 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW  $\geq 3 \times$  RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

**(3) Measurement Type(Average): Duty cycle  $< 98 \%$ , duty cycle variations are less than  $\pm 2 \%$** 

- Measured Frequency Range : 2310 MHz ~ 2390 MHz / 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW  $\geq 3 \times$  RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 % duty cycle.

- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.
- 9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- 10. Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)
- 11. Total (Measurement Type : Peak)
  - = Peak Measured Value
  - Total(Measurement Type : Average, Duty cycle  $\geq 98\%$ )
    - = Average Measured Value
    - Total(Measurement Type : Average, Duty cycle < 98 %)
      - = Average Measured Value + Duty Cycle Factor
      - We apply to the offset in the range 1 GHz - 18 GHz.
      - The offset = Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

## 7.7. AC Power line Conducted Emissions

### Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 <sup>(a)</sup>	56 to 46 <sup>(a)</sup>
0.50 to 5	56	46
5 to 30	60	50

<sup>(a)</sup>Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

### Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

### Sample Calculation

Quasi-peak(Final Result) = Measured Value + Correction Factor

## 7.8. Worst case configuration and mode

### Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone , Stand alone + Shark Antenna
  - Mode : Stand alone + Shark Antenna
2. EUT Axis
  - Radiated Spurious Emissions : X
  - Radiated Restricted Band Edge : X
3. Duty cycle factor applies only 802.11g/n (Duty cycle < 98 %).
4. All data rate of operation were investigated and the test results are worst case in lowest Data Rate of each mode.
  - 802.11b : 1 Mbps
  - 802.11g : 6 Mbps
  - 802.11n(HT20): MCS 0
5. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
  - Position : Horizontal, Vertical, Parallel to the ground plane
6. Radiated Spurious Emission
  - All mode of operation were investigated and the worst case results are reported.
  - Worst case : 802.11b : 1 Mbps
7. DA351I6MG, Additional Models were tested and the worst case results are reported.  
(Worst case : DA351I6MG)

### AC Power line Conducted Emissions

1. We don't perform powerline conducted emission test. The device only employ battery power for operation.

### Conducted test

1. The EUT was configured with data rate of highest power.
2. DA351I6MG, Additional Models were tested and the worst case results are reported.  
(Worst case : DA351I6MG)

### Radiated test(Simultaneous transmission Scenario)

1. All modes of operation were investigated and the worst case configuration results are reported.

- Mode : Stand alone , Stand alone + Shark Antenna

- Mode : Stand alone + Shark Antenna

2. EUT Axis

- Radiated Spurious Emissions : X

3. All of Simultaneous transmission Scenario were investigated and the worst case configuration results are reported.

Simultaneous transmission Scenario	2.4 GHz WiFi	5 GHz WiFi	BT	Test Case
Bluetooth + 2.4 GHz WiFi	on	-	on	Scenario1
Bluetooth + 5 GHz WiFi	-	on	on	Scenario2

4. The Simultaneous transmission mode test investigated both intermodulation and radiated spurious emissions. And the worst results were reported.

- Worst result: Radiated spurious emissions

- Intermodulation: No signals are generated.

- Radiated spurious emissions: cf. Section 9.6.

Scenario	Description	Bluetooth Emission	2.4 GHz Emission
1	Antenna	BT ANT	WLAN ANT
	Channel	78	1
	Data Rate	1 Mbps	1 Mbps
	Mode	GFSK	802.11b

Note : BT Simultaneous transmission Scenario Data refer to [BT] Test Report

## 8. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§ 15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§ 15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§ 15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§ 15.247(d)	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	§ 15.207	cf. Section 7.7		N/A (Note1)
Radiated Spurious Emissions	§ 15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§ 15.247(d), 15.205, 15.209	cf. Section 7.6		PASS

### Note

1. The device only employ battery power for operation.

## 9. TEST RESULT

### 9.1 DUTY CYCLE



Mode	Data Rate	T <sub>on</sub> (ms)	T <sub>total</sub> (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11b	1 Mbps	12.420	12.520	0.992	0.000
802.11g	6 Mbps	2.059	2.169	0.949	0.226
802.11n (HT20)	MCS0	1.922	2.024	0.950	0.225

#### Test Plots


**Note:** In order to simplify the report, attached plots were only the lowest data rate.

802.11b (1 Mbps)

802.11g (6 Mbps)

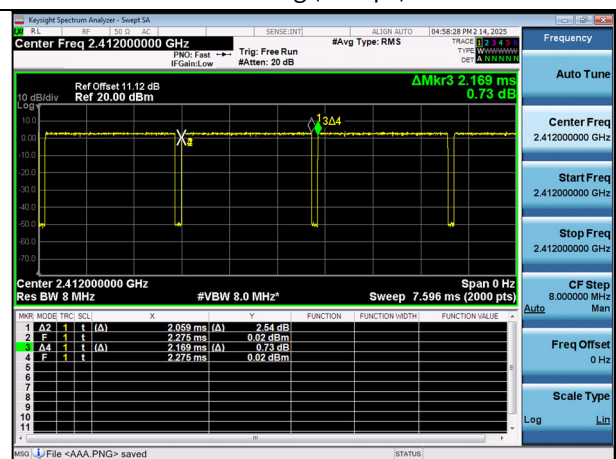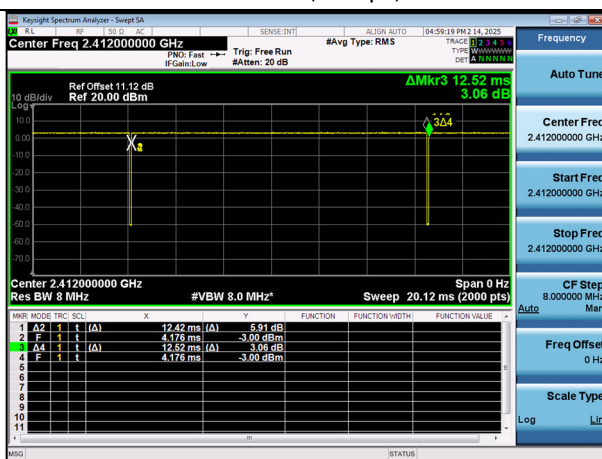

802.11n(HT20) (MCS0)

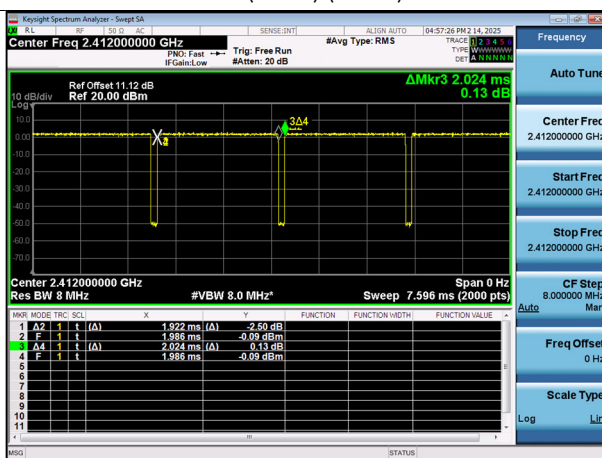

**9.2 6 dB BANDWIDTH**


Mode	Frequency [MHz]	Channel No.	6dB Bandwidth [MHz]	Limit [MHz]
802.11b	2412	1	7.118	0.50
	2437	6	7.118	0.50
	2462	11	7.111	0.50
802.11g	2412	1	16.34	0.50
	2437	6	16.32	0.50
	2462	11	16.33	0.50
802.11n (HT20)	2412	1	17.30	0.50
	2437	6	17.31	0.50
	2462	11	17.32	0.50

## Test Plots(6 dB Bandwidth)

### Note:

In order to simplify the report, attached plots were only the narrowest 6 dB BW channel.


802.11b-CH 11

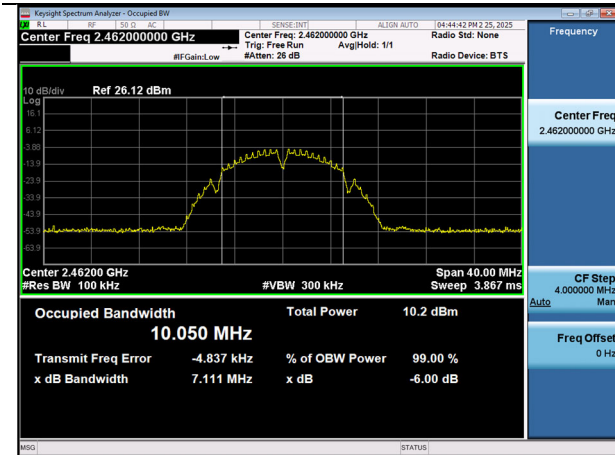

802.11g-CH 6



802.11n\_HT20-CH 1

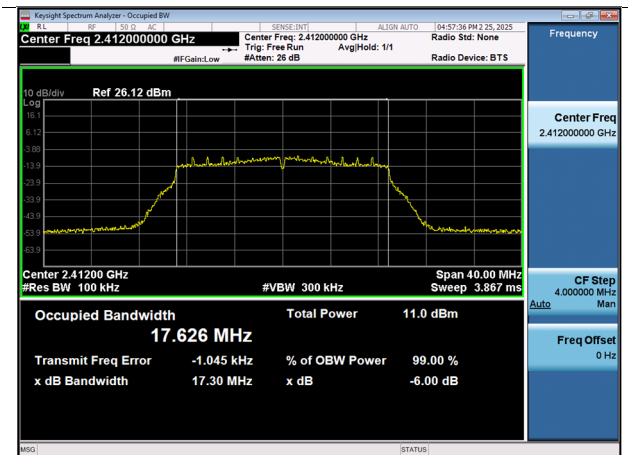

### 9.3 OUTPUT POWER

#### Peak Power

Mode	Frequency [MHz]	Channel No.	Data Rate	Conducted Peak Power [dBm]	Limit [dBm]
802.11b	2412	1	11M	9.84	30
	2437	6	11M	9.52	30
	2462	11	11M	9.38	30
802.11g	2412	1	6M	12.11	30
	2437	6	6M	11.81	30
	2462	11	6M	11.63	30
802.11n (HT20)	2412	1	MCS0	11.61	30
	2437	6	MCS0	10.97	30
	2462	11	MCS0	10.85	30

#### Average Power

Mode	Frequency [MHz]	Channel No.	Data Rate	Conducted Average Power [dBm]			Limit [dBm]
				Measured Value	D.C.F	Summed	
802.11b	2412	1	1M	3.80	0.00	3.80	30
	2437	6	1M	3.39	0.00	3.39	30
	2462	11	1M	3.20	0.00	3.20	30
802.11g	2412	1	6M	4.48	0.23	4.71	30
	2437	6	6M	4.01	0.23	4.24	30
	2462	11	6M	3.84	0.23	4.07	30
802.11n (HT20)	2412	1	MCS0	3.51	0.22	3.73	30
	2437	6	MCS0	3.19	0.22	3.41	30
	2462	11	MCS0	2.76	0.22	2.98	30


#### 9.4 POWER SPECTRAL DENSITY

Mode	Frequency [MHz]	Channel No.	Data Rate	Power Spectral Density [dBm/kHz]	Limit [dBm/3kHz]
802.11b	2412	1	11M	-7.537	8
	2437	6	11M	-8.416	8
	2462	11	11M	-8.595	8
802.11g	2412	1	6M	-10.587	8
	2437	6	6M	-10.921	8
	2462	11	6M	-11.103	8
802.11n (HT20)	2412	1	MCS0	-10.029	8
	2437	6	MCS0	-11.317	8
	2462	11	MCS0	-11.112	8


## Test Plots

**Note :** In order to simplify the report, attached plots were only the worst case PSD channel.


802.11b-CH 1

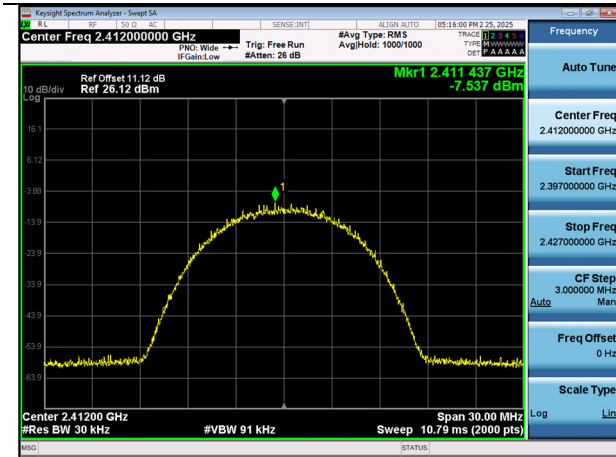

802.11g-CH 1

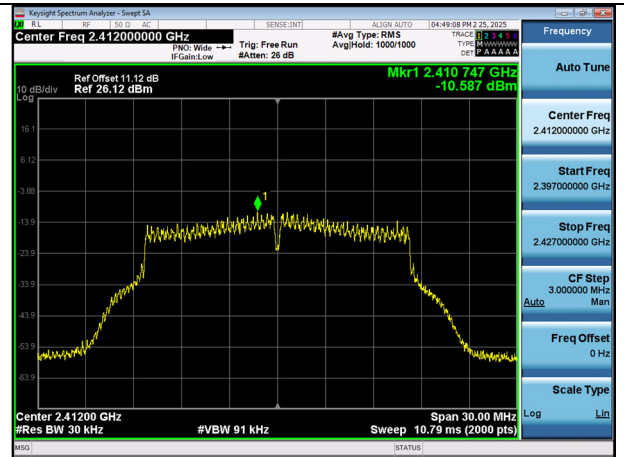

802.11n\_HT20-CH 1

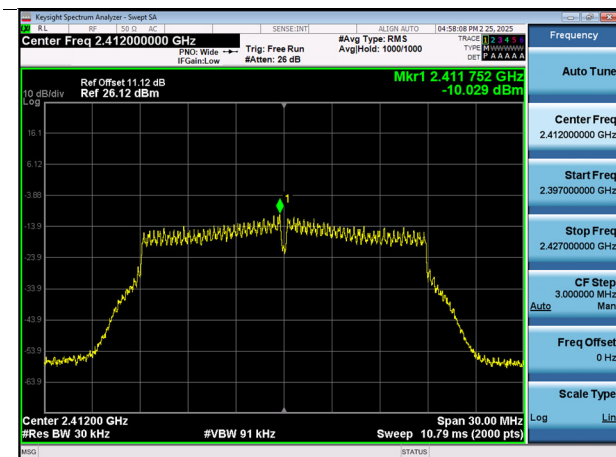

## 9.5 BAND EDGE / CONDUCTED SPURIOUS EMISSIONS

# Limit : 20 dBc

### Band Edge

Mode	Frequency [MHz]	Channel No.	TEST Position	Band-Edge [dBc]
802.11b	2412	1	Lower	47.997
	2462	11	Upper	46.212
802.11g	2412	1	Lower	41.172
	2462	11	Upper	43.477
802.11n (HT20)	2412	1	Lower	40.303
	2462	11	Upper	42.395


### Conducted Spurious Emission

Mode	Frequency [MHz]	Channel No.	Conducted Spurious Emission [dBc]	Deviation [dBc]
802.11b	2412	1	47.734	20
	2437	6	46.862	20
	2462	11	47.420	20
802.11g	2412	1	44.946	20
	2437	6	44.798	20
	2462	11	45.658	20
802.11n HT20	2412	1	45.284	20
	2437	6	44.041	20
	2462	11	43.933	20

### Test Plots(Band Edge)

**Note:** In order to simplify the report, attached plots were only the worst case.


802.11n(HT20)\_CH 1

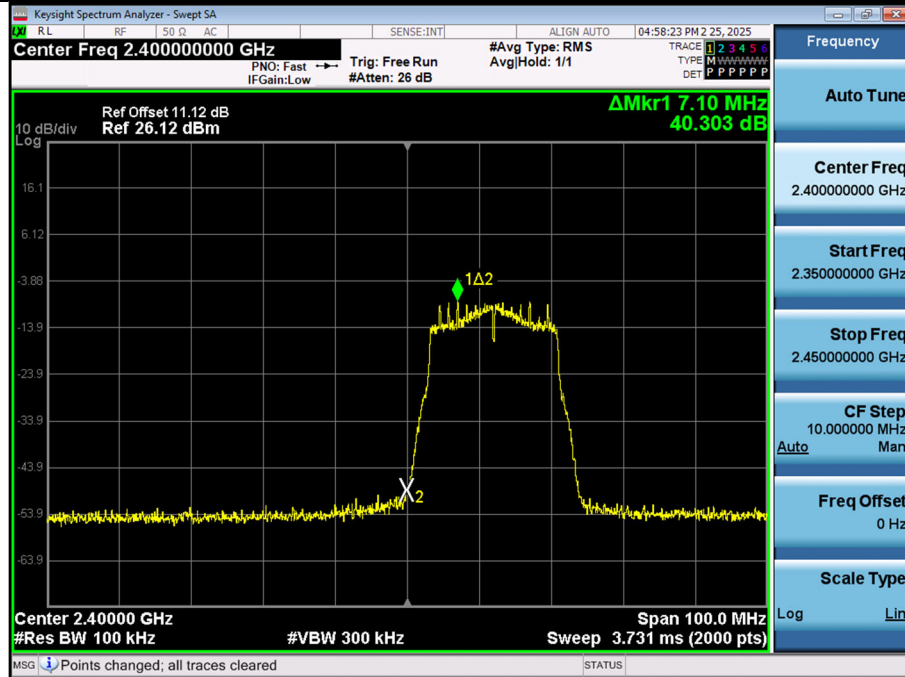

### Test Plots(Conducted Spurious Emission)

**Note:** In order to simplify the report, attached plots were only the worst case.

802.11n(HT20)-CH 11

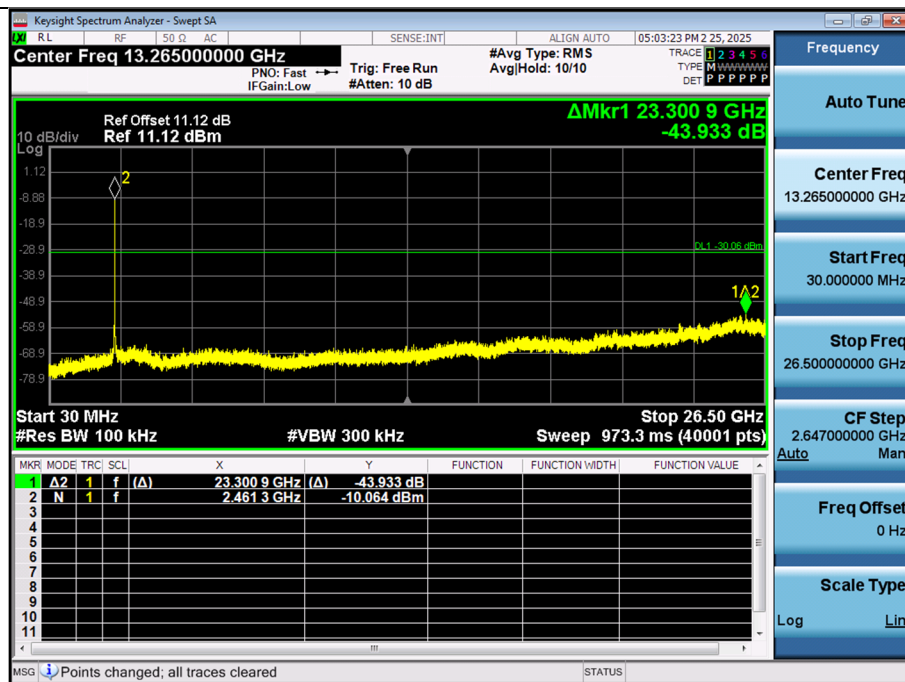

## 9.6 RADIATED SPURIOUS EMISSIONS

### Frequency Range : 9 kHz – 30 MHz

Frequency	Measured Value	A.F+C.L+D.F	Ant. POL	Total	Limit	Margin
[MHz]	[dB $\mu$ V/m]	[dB/m]	[H/V]	[dB $\mu$ V/m]	[dB $\mu$ V/m]	[dB]

No Critical peaks found

#### Note:

1. The Measured value of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor =  $40\log(\text{specific distance} / \text{test distance})$  (dB)
3. Limit line = specific Limits (dB $\mu$ V) + Distance extrapolation factor

### Frequency Range : Below 1 GHz

Frequency	Measured Value	A.F+C.L	Ant. POL	Total	Limit	Margin
[MHz]	[dB $\mu$ V/m]	[dB/m]	[H/V]	[dB $\mu$ V/m]	[dB $\mu$ V/m]	[dB]

No Critical peaks found

#### Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

### Frequency Range : Above 1 GHz

802.11b								
Band : DTS			Operation Mode :		802.11b			
CH.1 2412 MHz			Transfer Rate :		1Mbps			
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4824	43.15	0.00	3.91	V	47.06	73.98	26.92	PK
4824	30.99	0.00	3.91	V	34.90	53.98	19.08	AV
7236	43.15	0.00	9.99	V	53.14	73.98	20.84	PK
7236	32.84	0.00	9.99	V	42.83	53.98	11.15	AV
4824	43.23	0.00	3.91	H	47.14	73.98	26.84	PK
4824	31.19	0.00	3.91	H	35.10	53.98	18.88	AV
7236	43.40	0.00	9.99	H	53.39	73.98	20.59	PK
7236	33.65	0.00	9.99	H	43.64	53.98	10.34	AV

802.11b								
Band : DTS			Operation Mode :		802.11b			
CH.6 2437 MHz			Transfer Rate :		1Mbps			
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4874	42.15	0.00	4.16	V	46.31	73.98	27.67	PK
4874	30.11	0.00	4.16	V	34.27	53.98	19.71	AV
7311	42.31	0.00	10.47	V	52.78	73.98	21.20	PK
7311	30.98	0.00	10.47	V	41.45	53.98	12.53	AV
4874	42.80	0.00	4.16	H	46.96	73.98	27.02	PK
4874	30.29	0.00	4.16	H	34.45	53.98	19.53	AV
7311	42.35	0.00	10.47	H	52.82	73.98	21.16	PK
7311	31.12	0.00	10.47	H	41.59	53.98	12.39	AV

802.11b								
Band : DTS			Operation Mode :		802.11b			
CH.11 2462 MHz			Transfer Rate :		1Mbps			
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4924	42.58	0.00	3.45	V	46.03	73.98	27.95	PK
4924	30.29	0.00	3.45	V	33.74	53.98	20.24	AV
7386	42.05	0.00	11.22	V	53.27	73.98	20.71	PK
7386	31.17	0.00	11.22	V	42.39	53.98	11.59	AV
4924	42.60	0.00	3.45	H	46.05	73.98	27.93	PK
4924	30.34	0.00	3.45	H	33.79	53.98	20.19	AV
7386	42.32	0.00	11.22	H	53.54	73.98	20.44	PK
7386	31.37	0.00	11.22	H	42.59	53.98	11.39	AV

# [Simultaneous transmission Scenario]

## Scenario 1


Bluetooth DH5\_Ch.78 + WLAN 2.4 GHz 802.11b\_Ch. 1

Frequency	Measured value	D.C.F	CL+AF+DF-AG	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
4824	43.19	0.00	3.91	V	47.10	73.98	26.88	PK
4824	31.11	0.00	3.91	V	35.02	53.98	18.96	AV
7236	43.29	0.00	9.99	V	53.28	73.98	20.70	PK
7236	33.05	0.00	9.99	V	43.04	53.98	10.94	AV
4824	44.71	0.00	3.91	H	48.62	73.98	25.36	PK
4824	31.33	0.00	3.91	H	35.24	53.98	18.74	AV
7236	43.85	0.00	9.99	H	53.84	73.98	20.14	PK
7236	33.61	0.00	9.99	H	43.60	53.98	10.38	AV

## Test Plots


**Note:** In order to simplify the report, Plot of worst case are only reported.

Radiated Spurious Emissions plot – Average Result (802.11b\_1 Mbps, Ch.1 3rd Harmonic, X-H)

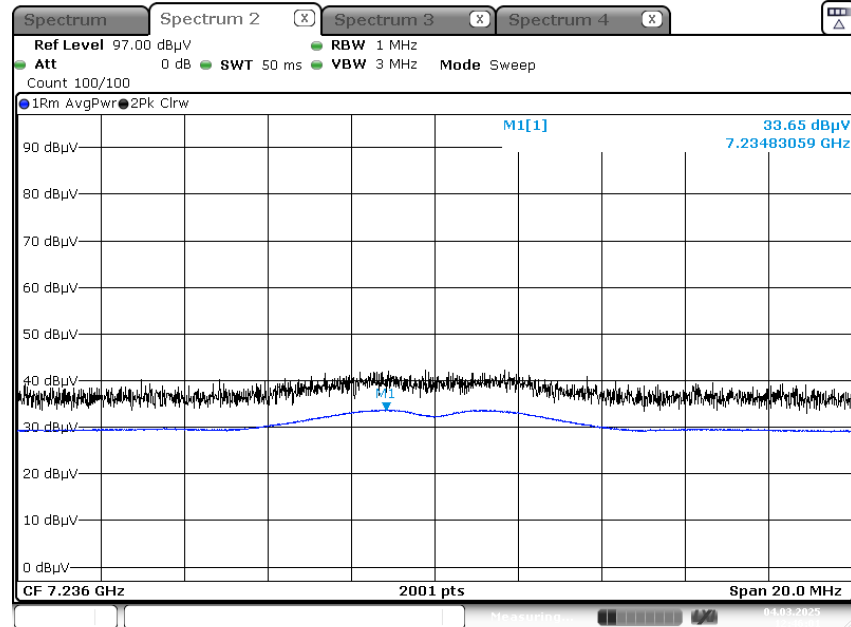

Date: 4.MAR.2025 12:46:02

Radiated Spurious Emissions plot – Peak Result (802.11b\_1 Mbps, Ch.1 3rd Harmonic, X-H)

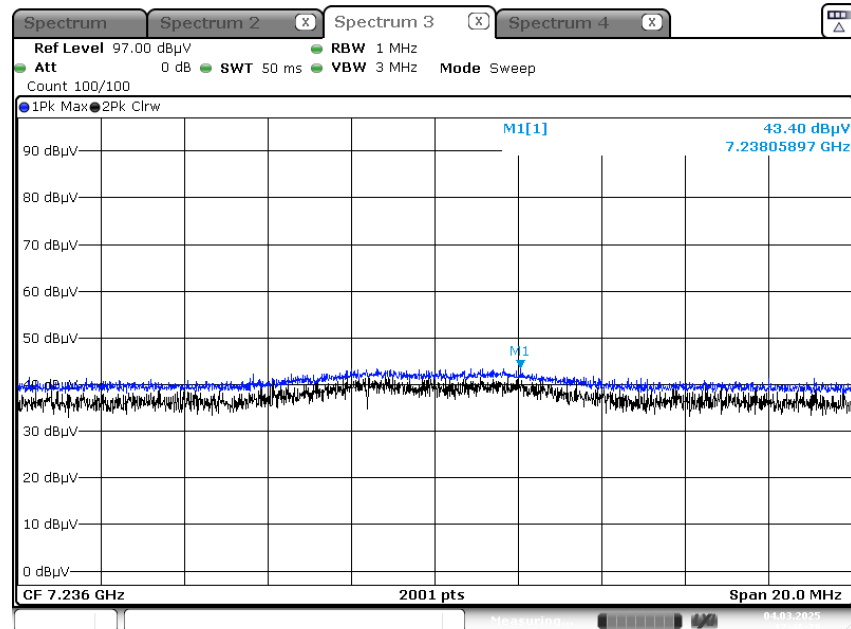


Date: 4.MAR.2025 12:46:28

## [Simultaneous transmission Scenario]


### Scenario 1

Bluetooth DH5\_Ch.78 + WLAN 2.4 GHz 802.11b\_Ch. 1

#### Radiated Spurious Emissions plot – Average Result (3rd Harmonic, X-H)

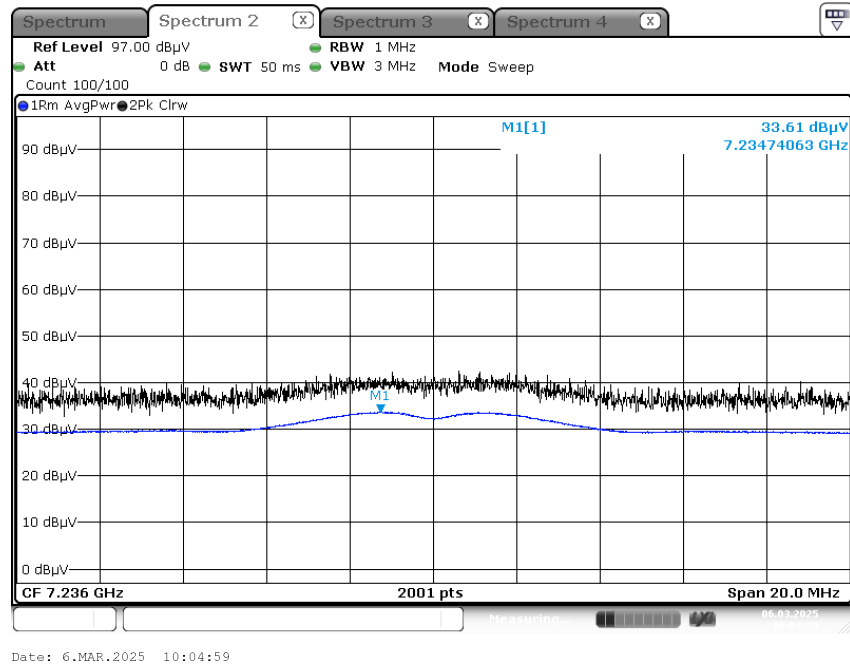

#### Radiated Spurious Emissions plot – Peak Result (3rd Harmonic, X-H)

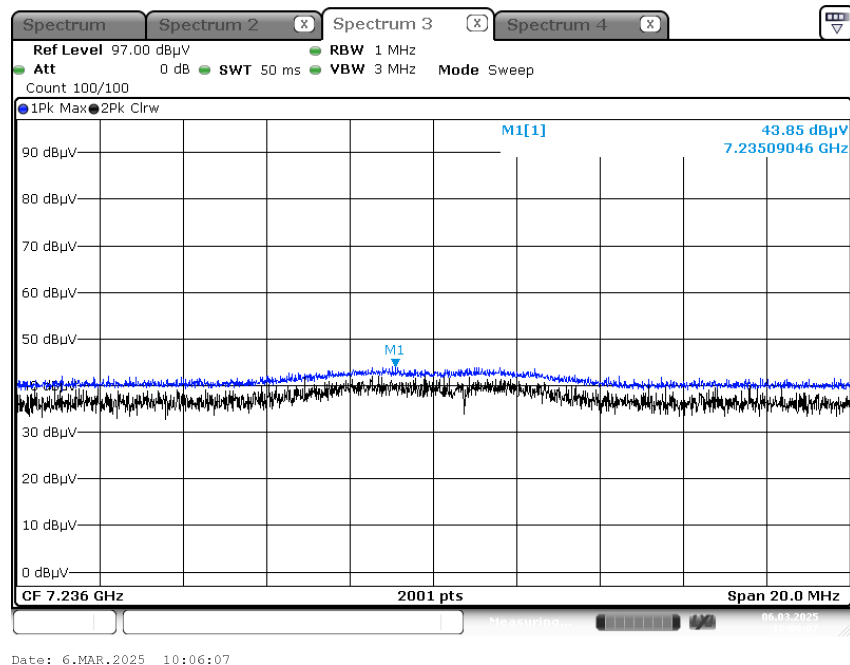

## 9.7 RADIATED RESTRICTED BAND EDGES

802.11b	Channel	01 Ch	Freq	2412 MHz		Transfer Rate	1 Mbps
Frequency	Measured Value	A.F.+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
2390.0	55.11	-	V	55.11	73.98	18.87	PK
2390.0	43.22	-	V	43.22	53.98	10.76	AV

802.11b	Channel	11 Ch	Freq	2462 MHz		Transfer Rate	1 Mbps
Frequency	Measured Value	A.F.+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
2483.5	54.85	-	V	54.85	73.98	19.13	PK
2483.5	42.71	-	V	42.71	53.98	11.27	AV

802.11g		Channel	01 Ch	Freq	2412 MHz		Transfer Rate	6 Mbps
Frequency	Measured Value	Duty Cycle Factor	A.F.+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
2390.0	55.90	0.00	-	V	55.90	73.98	18.08	PK
2390.0	43.60	0.23	-	V	43.83	53.98	10.15	AV

802.11g		Channel	11Ch	Freq	2462MHz		Transfer Rate	6 Mbps
Frequency	Measured Value	Duty Cycle Factor	A.F.+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
2483.5	54.70	0.00	-	V	54.70	73.98	19.28	PK
2483.5	42.74	0.23	-	V	42.97	53.98	11.01	AV


802.11n (HT20)		Channel	01 Ch	Freq	2412 MHz		Transfer MCS Index	MCS0
Frequency	Measured Value	Duty Cycle Factor	A.F.+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
2390.0	56.48	0.00	-	V	56.48	73.98	17.50	PK
2390.0	43.65	0.22	-	V	43.87	53.98	10.11	AV

802.11n (HT20)		Channel	11 Ch	Freq	2462 MHz		Transfer MCS Index	MCS0
Frequency	Measured Value	Duty Cycle Factor	A.F.+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
2483.5	55.02	0.00	-	V	55.02	73.98	18.96	PK
2483.5	42.74	0.22	-	V	42.96	53.98	11.02	AV


## Test Plots

**Note:** In order to simplify the report, Plots of worst case are only reported.

Radiated Restricted Band Edges plot – Average Result (802.11n (HT20)\_MCS0, Ch.1, X-V)

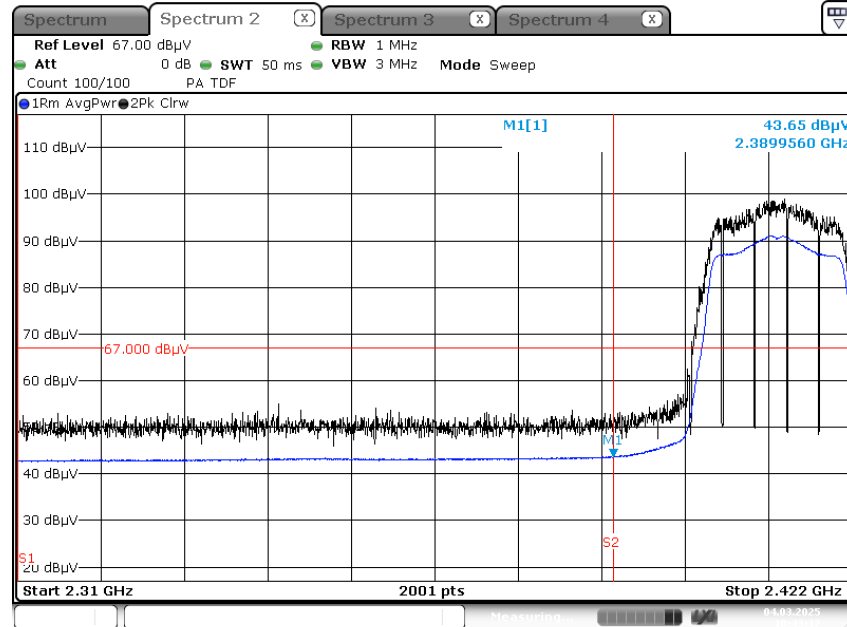

Radiated Restricted Band Edges plot – Peak Result (802.11n (HT20)\_MCS0, Ch.1, X-V)

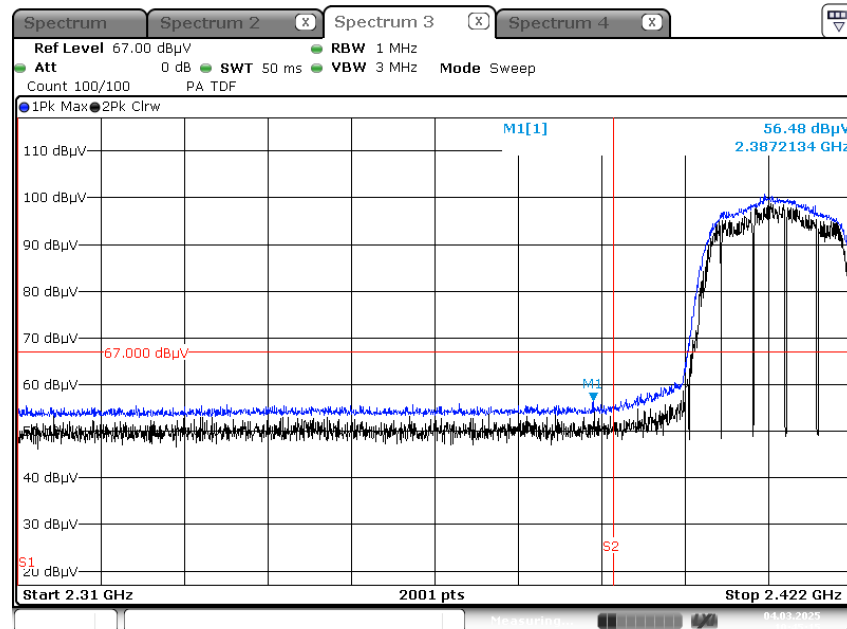

## 10. LIST OF TEST EQUIPMENT

### Conducted Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
LISN	ENV216	Rohde & Schwarz	102245	07/17/2025	Annual
EMI Test Receiver	ESR	Rohde & Schwarz	101910	07/02/2025	Annual
Temperature Chamber	SU-642	ESPEC	93022487	06/27/2025	Annual
Signal Analyzer	N9030A	Keysight	MY55410508	08/23/2025	Annual
Power Measurement Set	OSP 120	Rohde & Schwarz	100935	08/01/2025	Annual
Power Meter	N1911A	Agilent	MY45100523	02/21/2026	Annual
Power Sensor	N1921A	Agilent	MY57820067	02/04/2026	Annual
Directional Coupler	87300B	Agilent	3116A03621	10/21/2025	Annual
Power Splitter	11667B	Hewlett Packard	10545	01/23/2026	Annual
DC Power Supply	E3632A	Agilent	KR75305528	12/24/2025	Annual
Attenuator(10 dB)(DC-26.5 GHz)	8493C-010	Agilent	08285	05/28/2025	Annual
Attenuator(20 dB)	18N-20dB	Rohde & Schwarz	8	02/18/2026	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A
FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	HCT CO., LTD.	N/A	N/A	N/A
Bluetooth Tester	CBT	Rohde & Schwarz	100752	12/27/2025	Annual

### Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

### Radiated Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller(Antenna mast)	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	S3AM	07/30/2025	Annual
Controller	EM2090	Emco	060520	N/A	N/A
Turn Table	N/A	Ets	N/A	N/A	N/A
Amp & Filter Bank Switch Controller	FBSM-01A	TNM system	0	N/A	N/A
Loop Antenna	FMZB 1513	Rohde & Schwarz	1513-333	03/07/2026	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	9168-0895	08/28/2026	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-1191	11/07/2025	Biennial
Horn Antenna(15 GHz ~ 40 GHz)	BBHA9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Band Reject Filter	WRCJV2400/2483.5-2370/2520-60/12SS	Wainwright Instruments	2	12/26/2025	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	5	06/04/2025	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	6	06/04/2025	Annual
Band Reject Filter	WRCJV5100/5850-40/50-8EEK	Wainwright Instruments	1	01/09/2026	Annual
RF Switching System	FBSR-03A (3G HPF+LNA)	T&M SYSTEM	S3L1	10/31/2025	Annual
RF Switching System	FBSR-03A (10dB ATT+LNA)	T&M SYSTEM	S3L2	10/31/2025	Annual
RF Switching System	FBSR-03A (7G HPF+LNA)	T&M SYSTEM	S3L3	10/31/2025	Annual
RF Switching System	FBSR-03A (3dB ATT+LNA)	T&M SYSTEM	S3L4	10/31/2025	Annual
Power Amplifier	CBL18265035	CERNEX	22966	11/07/2025	Annual
Power Amplifier	CBL26405040	CERNEX	25956	02/19/2026	Annual
Bluetooth Tester	TC-3000C	TESCOM	3000C000175	03/19/2025	Annual
Spectrum Analyzer	FSV40 (9 kHz ~ 40 GHz)	Rohde & Schwarz	100900	08/27/2025	Annual

### Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

**11. ANNEX A\_ TEST SETUP PHOTO**

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2503-FC049-P