


Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
12	5,633.500	51.37	68.20	16.83	11.38	V	295.7	1.00
12	5,650.000	50.81	68.20	17.39	11.45	V	92.5	1.00
12	5,788.000	106.75			11.87	V	122.8	2.00
12	5,925.000	51.63	68.20	16.57	12.17	V	148.6	1.00
12	5,993.500	53.23	68.20	14.97	12.44	V	177.7	2.00

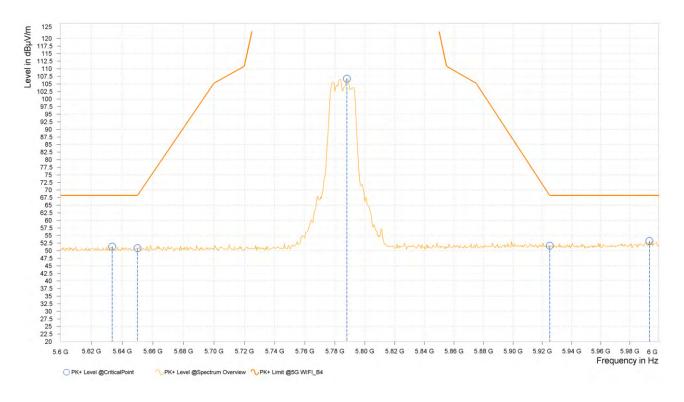

## **REMARKS**:


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5785MHz: Fundamental frequency.

Page 497 of 595




CHANNEL	TX Channel 165	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
12	5,634.500	51.58	<mark>68.20</mark>	16.62	11.38	Н	131.2	2.00
12	5,650.000	50.33	68.20	17.87	11.45	Н	<mark>84</mark> .6	2.00
12	5,823.500	106.46			11.95	Н	87.7	1.00
12	5,925.000	51.47	68.20	16.73	12.17	Н	357.6	1.00
12	5,948.000	52.38	68.20	15.82	12.20	Н	139.1	1.00

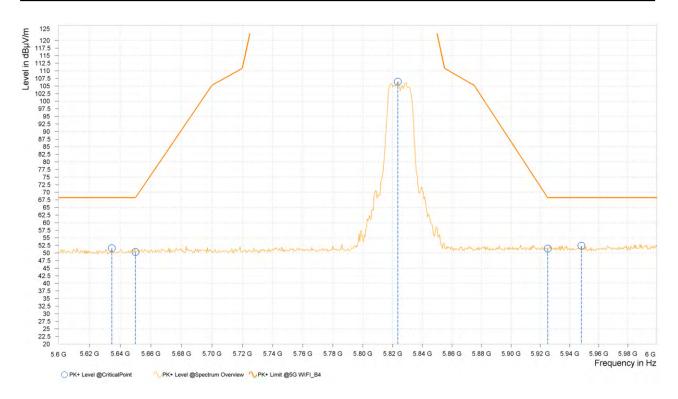



Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
12	5,647.500	<mark>51.89</mark>	<mark>68.20</mark>	16.31	11.44	V	91.3	1.00
12	5,650.000	50.55	<mark>68.20</mark>	17.65	11.45	V	121.6	2.00
12	5,822.500	105.74			11.95	V	121.6	2.00
12	5,925.000	50.79	68.20	17.41	12.17	V	121.6	2.00
12	5,979.000	52.83	<mark>68.20</mark>	15.37	12.35	V	4.9	1.00

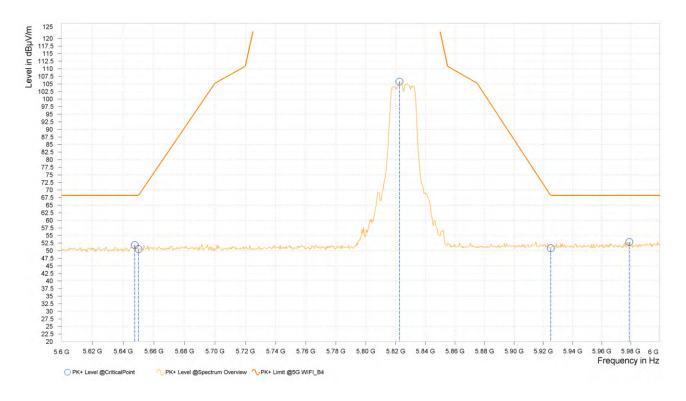

## **REMARKS**:

- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5825MHz: Fundamental frequency.


Page 499 of 595



802.11n (20MHz)


CHANNEL	TX Channel 149	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
12	5,643.500	51.58	<mark>68.20</mark>	16.62	11.42	Н	355.1	2.00
12	5,650.000	51.45	<mark>68.20</mark>	16.75	11.45	Н	311.2	1.00
12	5,746.500	102.67			11.73	Н	43.4	1.00
12	5,925.000	50.99	68.20	17.21	12.17	Н	317.7	2.00
12	5,962.000	53. <mark>1</mark> 3	68.20	15.07	12.25	Н	157	1.00

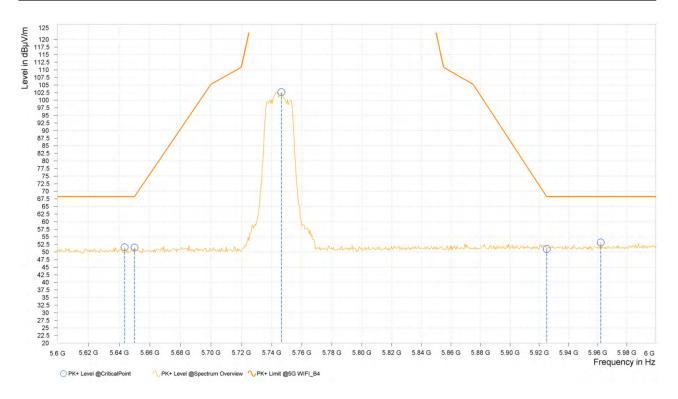



Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
12	5,620.000	52.20	68.20	16.00	11.32	V	317.7	2.00
12	5,645.000	50.95	<mark>68.20</mark>	17.25	11.43	V	222.1	2.00
12	5,745.500	104.97			11.73	V	128.9	2.00
12	5,925.000	52.00	68.20	16.20	12.17	V	359.1	1.00
12	5,984.000	52.91	68.20	15.29	12.39	V	<mark>81</mark>	2.00

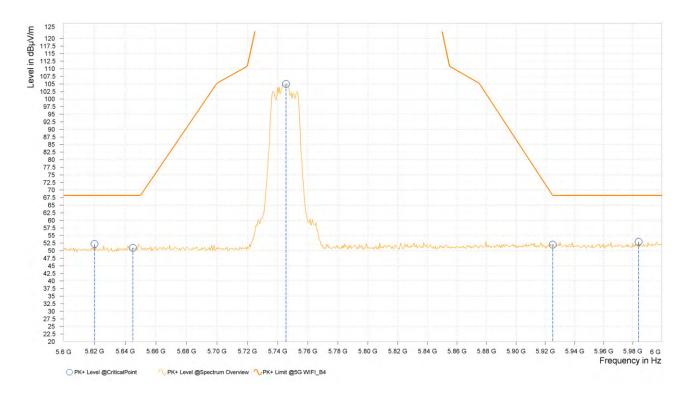

## **REMARKS**:


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5745MHz: Fundamental frequency.

Page 501 of 595




CHANNEL	TX Channel 157	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
12	5,643.500	51.44	<mark>68.20</mark>	16.76	11.42	Н	90.2	1.00
12	5,650.000	51.00	<mark>68.20</mark>	17.20	11.45	Н	277.8	1.00
12	5,783.500	106.34			11.86	Н	90.2	1.00
12	5,925.000	51.76	68.20	16.44	12.17	Н	355.8	1.00
12	5,942.000	52.90	68.20	15.30	12.20	Н	128.9	2.00

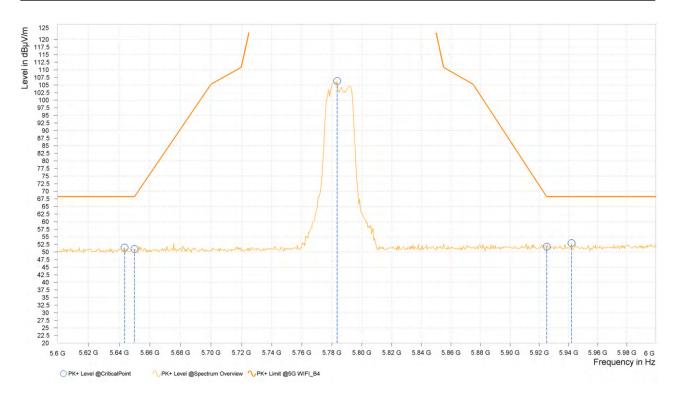



Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
12	5,637.500	51.37	<mark>68.20</mark>	16.83	11.40	V	91.3	1.00
12	5,650.000	50.67	68.20	17.53	11.45	V	277.8	1.00
12	5,783.000	104.97			11.85	V	128.8	2.00
12	5,925.000	51.22	68.20	16.98	12.17	V	359	1.00
12	5,975.500	52.68	68.20	15.52	12.33	V	43.4	1.00

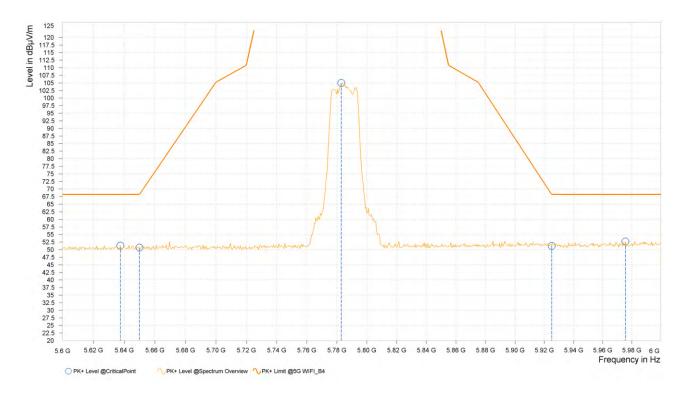

## **REMARKS**:


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5785MHz: Fundamental frequency.

Page 503 of 595




CHANNEL	TX Channel 165	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
12	5,631.000	51.56	<mark>68.20</mark>	16.64	11.37	Н	359	2.00
12	5,650.000	50.95	<mark>68.20</mark>	17.25	11.45	Н	359	2.00
12	5,826.500	105.12			11.96	Н	43.5	1.00
12	5,925.000	51.43	68.20	16.77	12.17	Н	269.9	2.00
12	5,981.500	<mark>52.6</mark> 1	68.20	15.59	12.37	Н	277.8	1.00

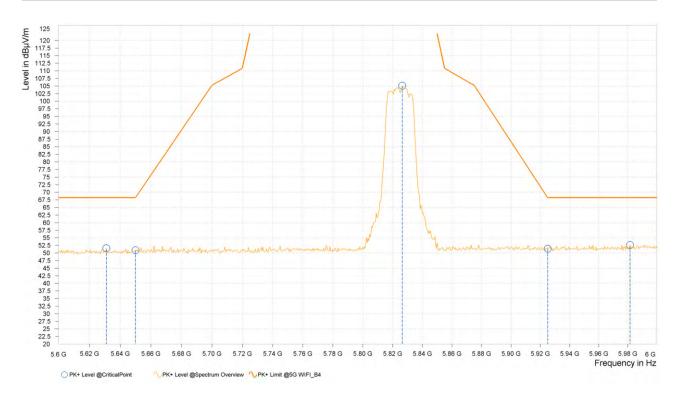



Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
12	5,645.500	51.92	<mark>68.20</mark>	16.28	11.43	V	322	1.00
12	5,650.000	50.21	<mark>68.20</mark>	17.99	11.45	V	276.6	1.00
12	5,822.000	105.51			11.95	V	127.6	2.00
12	5,925.000	51.26	68.20	16.94	12.17	V	359	2.00
12	5,997.000	53.37	68.20	14.83	12.47	V	359.1	1.00

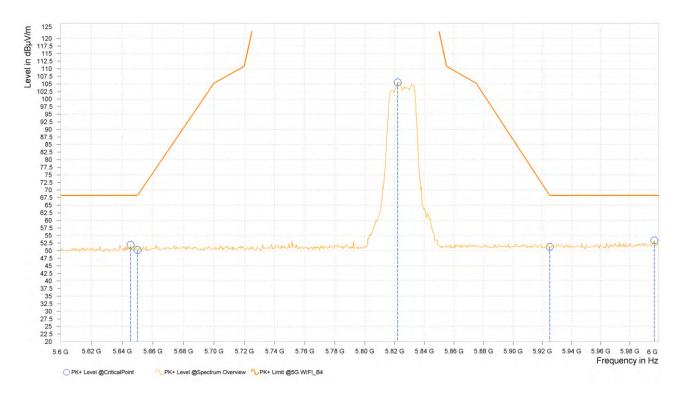

## **REMARKS**:


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5825MHz: Fundamental frequency.



802.11n (40MHz)


CHANNEL	TX Channel 151	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,632.500	51.68	<mark>68.20</mark>	16.52	11.38	Н	168.2	2.00
9	5,650.000	50.70	<mark>68.20</mark>	17.50	11.45	Н	359	2.00
9	5,742.500	102.15			11.73	Н	<mark>93.7</mark>	1.00
9	5,925.000	51.69	68.20	16.51	12.17	Н	240.8	1.00
9	5,979.500	52.75	68.20	15.45	12.36	Н	315.2	2.00

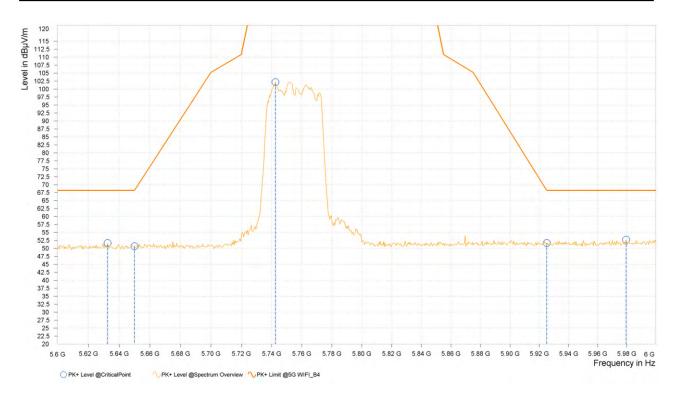



Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,621.000	51.28	<mark>68.20</mark>	16.92	11.33	V	355	2.00
9	5,650.000	50.57	<mark>68.20</mark>	17.63	11.45	V	92.5	1.00
9	5,752.000	102.57			11.74	V	118	2.00
9	5,925.000	51.46	68.20	16.74	12.17	V	287.4	1.00
9	5,964.500	53.38	68.20	14.82	12.27	V	141.5	1.00

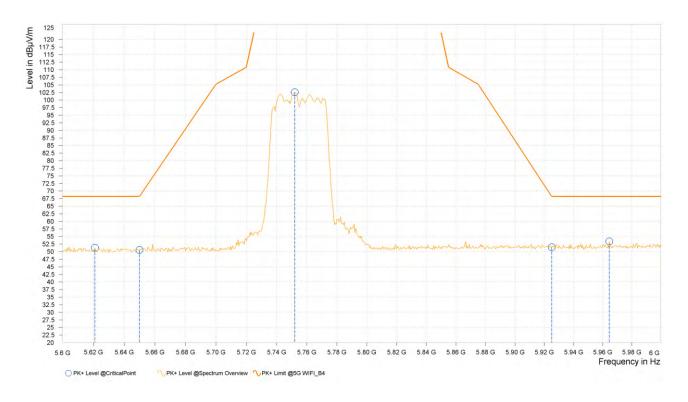

## **REMARKS:**


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5755MHz: Fundamental frequency.

Page 507 of 595




CHANNEL	TX Channel 159	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,648.000	52.24	<mark>68.20</mark>	15.96	11.44	Н	170.6	2.00
9	5,650.000	51.32	<mark>68.20</mark>	16.88	11.45	Н	315.2	2.00
9	5,783.500	101.93			11.86	Н	92.5	1.00
9	5,925.000	51. <mark>1</mark> 4	68.20	17.06	12.17	Н	140.2	1.00
9	5,981.000	53.31	68.20	14.89	12.37	Н	43.5	1.00

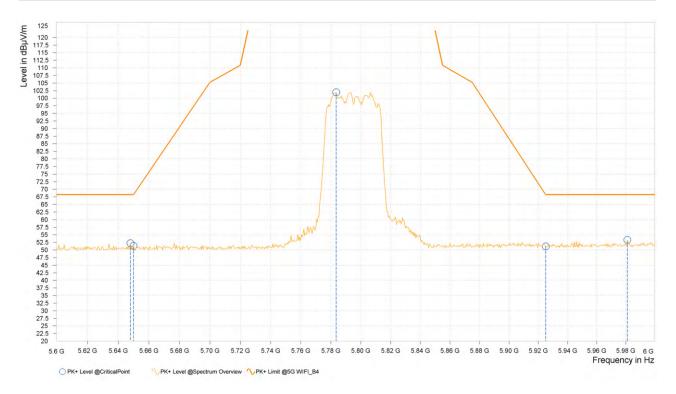



Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,618.500	51.76	<mark>68.20</mark>	16.44	11.32	V	0.9	2.00
9	5,650.000	50.06	<mark>68.20</mark>	18.14	11.45	V	140.3	1.00
9	5,790.000	102.60			11.88	V	116.8	2.00
9	5,925.000	51.57	68.20	16.63	12.17	V	189.4	1.00
9	5,994.500	53.48	68.20	14.72	12.45	V	359.1	1.00

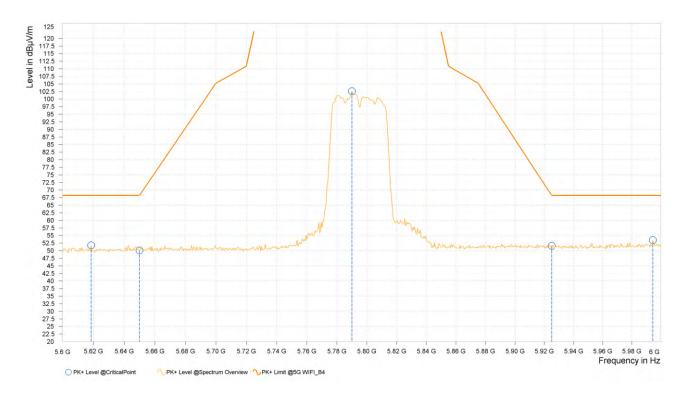

## **REMARKS:**

- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5795MHz: Fundamental frequency.


Page 509 of 595



802.11ac (20MHz)


CHANNEL	TX Channel 149	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
12	5,647.000	52.24	<mark>68.20</mark>	15.96	11.43	Н	43.5	1.00
12	5,650.000	50.60	<mark>68.20</mark>	17.60	11.45	Н	355	2.00
12	5,741.500	101.91			11.72	Н	43.5	1.00
12	5,925.000	51.23	68.20	16.97	12.17	Н	267.5	2.00
12	5,985.500	52.95	68.20	15.25	12.40	Н	43.5	1.00

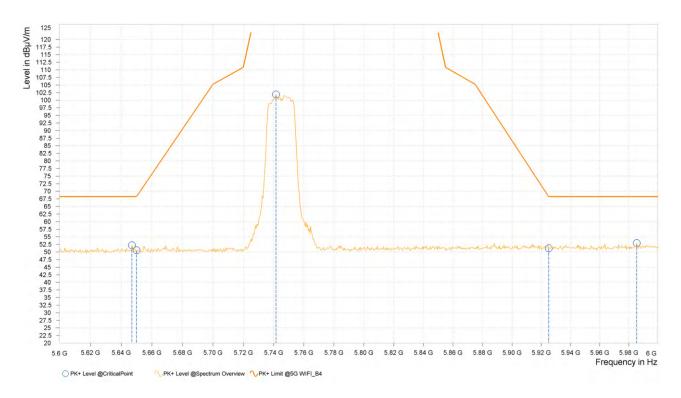



Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
12	5,635.000	51.51	<mark>68.20</mark>	16.69	11.39	V	124	2.00
12	5,650.000	50.94	<mark>68.20</mark>	17.26	11.45	V	5.5	1.00
12	5,741.500	104.31			11.72	V	124	2.00
12	5,925.000	51.11	68.20	17.09	12.17	V	92.5	1.00
12	5,997.500	53.89	68.20	14.31	12.47	V	44.6	1.00

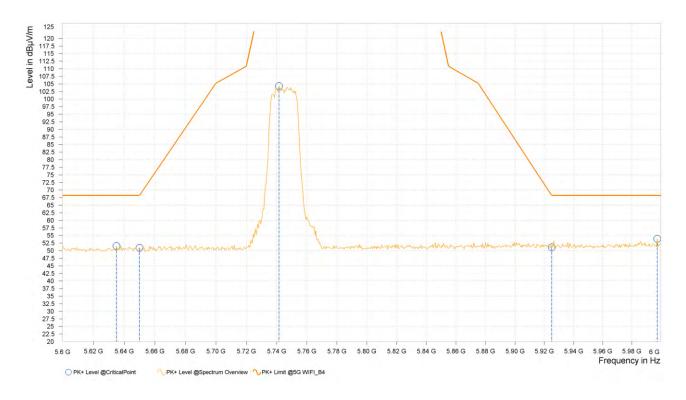

## **REMARKS:**


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5745MHz: Fundamental frequency.

Page 511 of 595




CHANNEL	TX Channel 157	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
12	5,611.000	52.09	68.20	16.11	11.30	Н	0.9	2.00
12	5,650.000	50.06	68.20	18.14	11.45	Н	92.5	1.00
12	5,784.000	104.31			11.86	Н	92.5	1.00
12	5,925.000	51.91	68.20	16.29	12.17	Н	359	1.00
12	5,985.500	52.59	68.20	15.61	12.40	Н	234.7	1.00

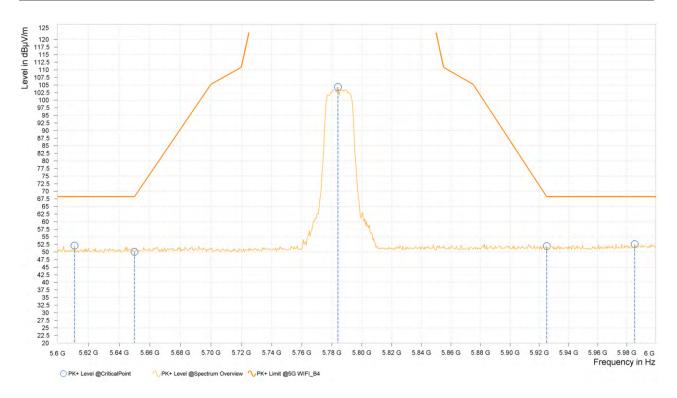



Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
12	5,643.500	51.29	68.20	16.91	11.42	V	77.4	2.00
12	5,650.000	50.36	68.20	17.84	11.45	V	44.7	1.00
12	5,784.000	104.04			11.86	V	125.2	2.00
12	5,925.000	51.58	68.20	16.62	12.17	V	125.2	2.00
12	5,926.000	52.95	<mark>68.20</mark>	15.25	12.18	V	316.4	2.00

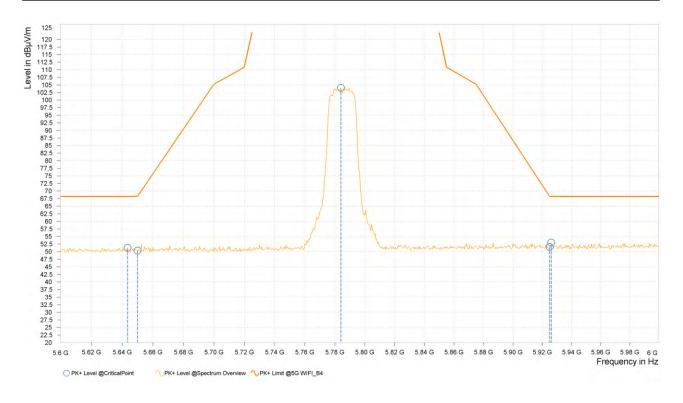


## **REMARKS**:

- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5785MHz: Fundamental frequency.




CHANNEL	TX Channel 165	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
12	5,618.500	51.46	<mark>68.20</mark>	16.74	11.32	V	169.4	2.00
12	5,650.000	49.84	<mark>68.20</mark>	18.36	11.45	V	5.6	1.00
12	5,828.000	104.45			11.96	V	50.7	1.00
12	5,925.000	51.33	68.20	16.87	12.17	V	267.4	2.00
12	5,951.500	53.09	68.20	15.11	12.21	V	1	2.00

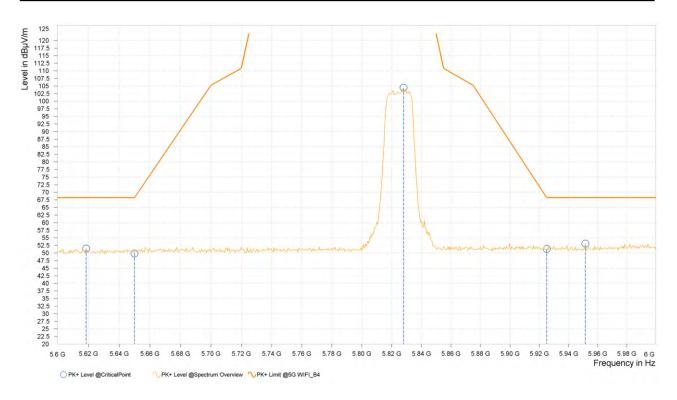



Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
12	5,631.500	51.13	<mark>68.20</mark>	17.07	11.37	Н	329.2	1.00
12	5,650.000	50.71	<mark>68.20</mark>	17.49	11.45	Н	355.7	2.00
12	5,821.500	104.13			11.95	Н	43.5	1.00
12	5,925.000	51.56	68.20	16.64	12.17	Н	357	1.00
12	5,956.500	53.66	68.20	14.54	12.23	Н	174.2	2.00

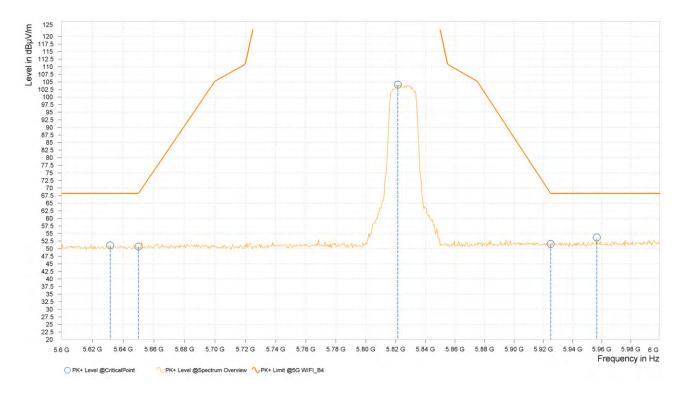

## **REMARKS**:

- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5825MHz: Fundamental frequency.


Page 515 of 595



802.11ac (40MHz)


CHANNEL	TX Channel 151	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,634.000	51.32	<mark>68.20</mark>	16.88	11.38	Н	358	1.00
9	5,650.000	50.84	<mark>68.20</mark>	17.36	11.45	Н	340.4	1.00
9	5,747.000	101.39			11.73	Н	<mark>93.7</mark>	1.00
9	5,925.000	51.92	68.20	16.28	12.17	Н	165.8	2.00
9	5,999.500	53.27	68.20	14.93	12.48	Н	292.2	1.00

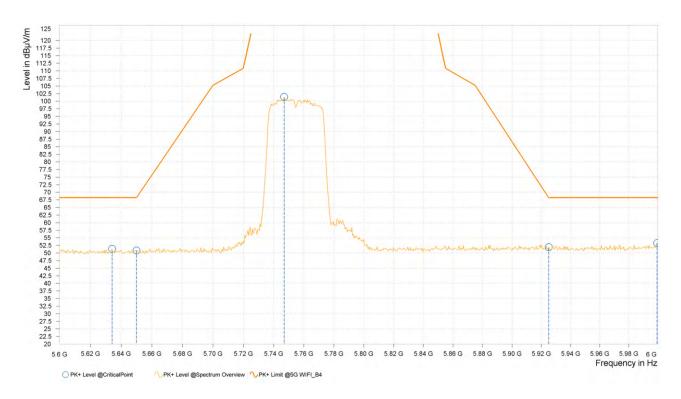



Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,612.500	51.81	68.20	16.39	11.30	V	70.2	2.00
9	5,650.000	51.68	<mark>68.20</mark>	16.52	11.45	V	0.9	2.00
9	5,742.500	101.68			11.73	V	119.2	2.00
9	5,925.000	50.96	68.20	17.24	12.17	V	191.7	1.00
9	5,979.000	53.12	68.20	15.08	12.35	V	355	2.00

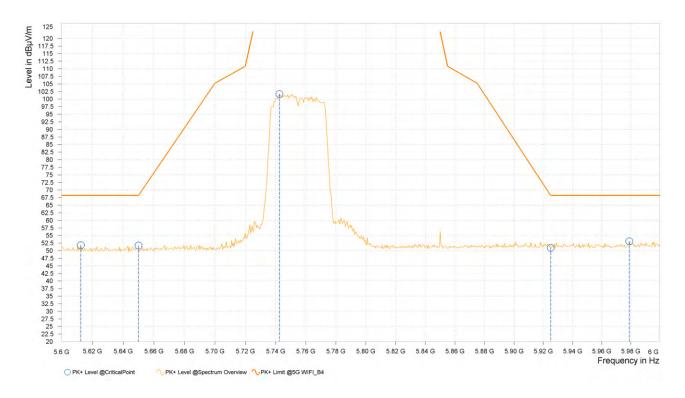


#### **REMARKS:**

- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5755MHz: Fundamental frequency.




CHANNEL	TX Channel 159	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,603.500	51.55	<mark>68.20</mark>	16.65	11.28	Н	357.9	1.00
9	5,650.000	50.48	<mark>68.20</mark>	17.72	11.45	Н	93.7	1.00
9	5,743.500	101.12			11.73	Н	93.7	1.00
9	5,925.000	52.98	68.20	15.22	12.17	Н	2.2	2.00
9	5,992.500	53.10	68.20	15.10	12.44	Н	359.1	1.00

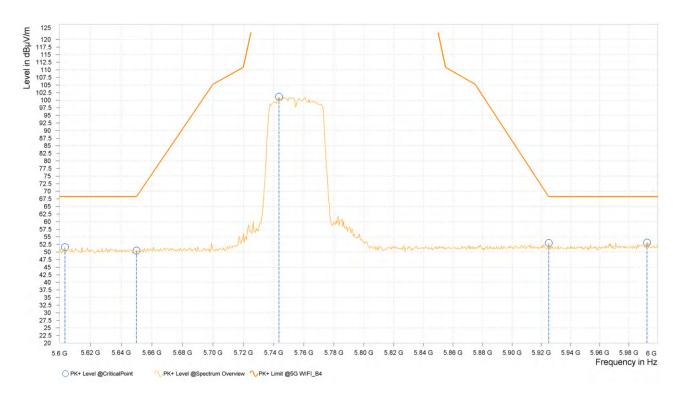



Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,610.500	51.42	<mark>68.20</mark>	16.78	11.30	V	23.6	2.00
9	5,650.000	51.54	<mark>68.20</mark>	16.66	11.45	V	120.4	2.00
9	5,748.000	101.56			11.73	V	120.4	2.00
9	5,925.000	51.55	68.20	16.65	12.17	V	357.8	1.00
9	5,993.000	53.34	68.20	14.86	12.44	V	44.7	1.00

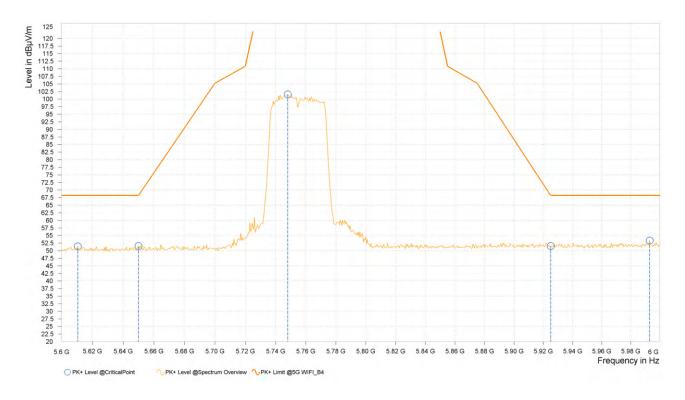

## **REMARKS:**

- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5795MHz: Fundamental frequency.


Page 519 of 595



802.11ac (80MHz)


CHANNEL	TX Channel 155	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,622.000	49.17	<mark>68.20</mark>	19.03	11.33	Н	355.7	2.00
8	5,650.000	48.08	<mark>68.20</mark>	20.12	11.45	Н	2	2.00
8	5,790.500	97.75			11.88	Н	45.9	1.00
8	5,925.000	49.57	68.20	18.63	12.17	Н	359	2.00
8	5,952.000	50.31	68.20	17.89	12.21	Н	168.2	2.00

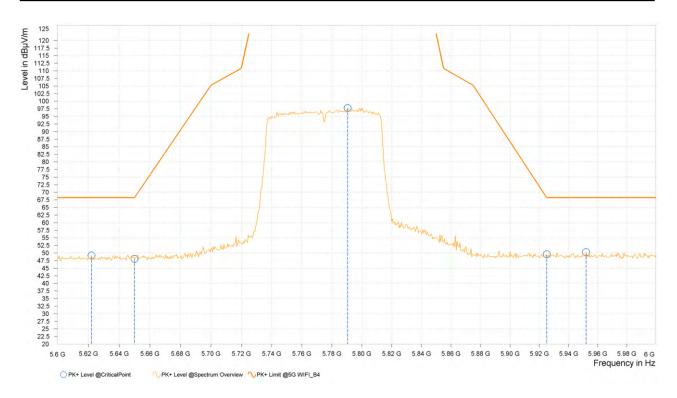



Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,620.500	49.18	<mark>68.20</mark>	19.02	11.33	V	95	1.00
8	5,650.000	48.33	<mark>68.20</mark>	19.87	11.45	V	341.3	1.00
8	5,787.500	98.82			11.87	V	115.7	2.00
8	5,925.000	49.07	68.20	19.13	12.17	V	95	1.00
8	5,987.500	50.39	68.20	17.81	12.41	V	115.7	2.00

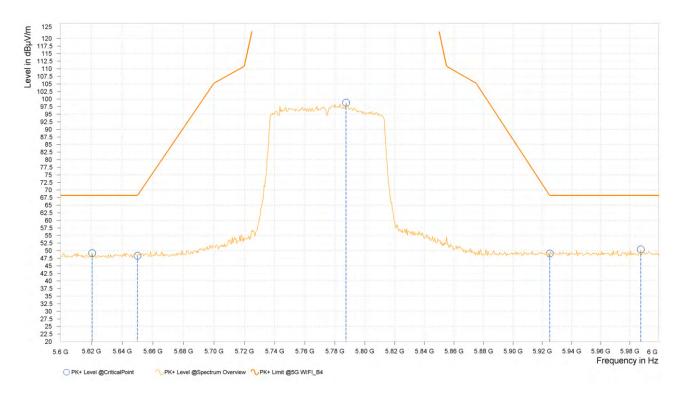

## **REMARKS**:

- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5775MHz: Fundamental frequency.


Page 521 of 595



802.11ax (20MHz)


CHANNEL	TX Channel 149	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
12	5,619.000	50.71	68.20	17.49	11.32	Н	309.3	2.00
12	5,748.000	103.44			11.73	Н	33.2	2.00
12	5,952.000	52.49	68.20	15.71	12.21	Н	355.1	2.00

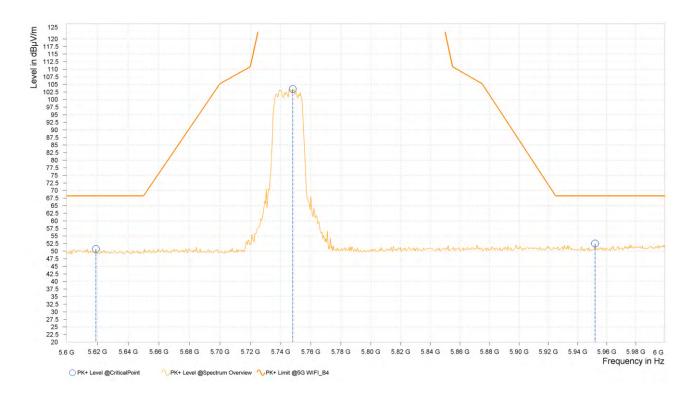



Rg	Frequency [MHz]	PK+ Level [dBμV/m]		PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
12	5,628.000	50.90	68.20	17.30	11.36	V	<mark>88</mark> .1	2.00
12	5,744.500	103.17			11.73	V	328	1.00
12	5,977.000	52.29	68.20	15.91	12.34	V	<mark>88</mark> .1	2.00

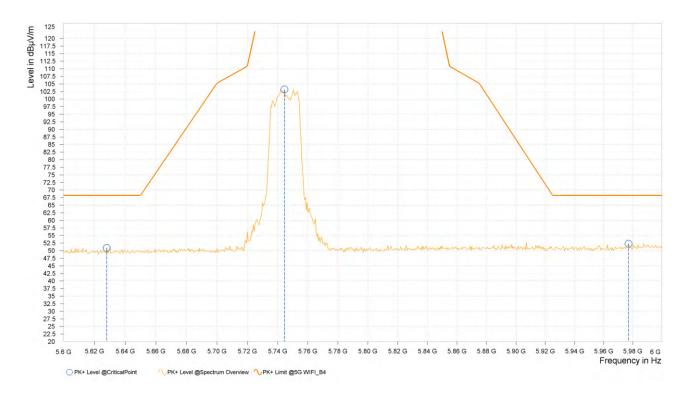

## **REMARKS**:


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5745MHz: Fundamental frequency.

Page 523 of 595



CHANNEL	TX Channel 157	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)


F	Rg	Frequency [MHz]		PK+ Limit [dBμV/m]		Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	12	5,634.000	51.10	68.20	17.10	11.38	Н	355.1	2.00
	12	5,779.000	104.67			11.84	Н	29.6	2.00
1	12	5,976.000	52.24	68.20	15.96	12.34	Н	198.2	2.00

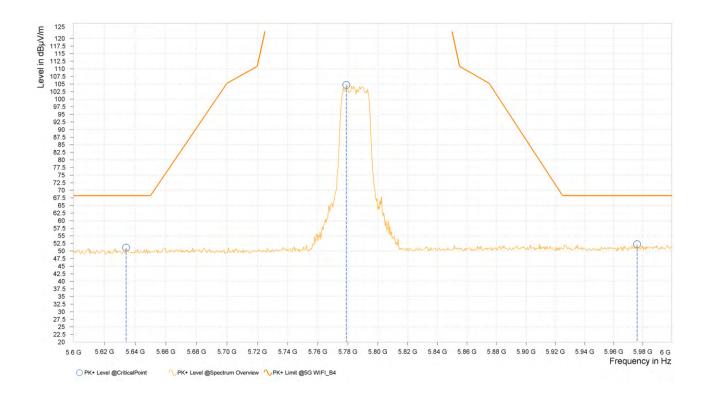

Page 524 of 595



Rg	Frequency [MHz]		РК+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
12	5,639.500	50.68	68.20	17.52	11.40	V	220.5	1.00
12	5,782.500	104.66			11.85	V	51.9	1.00
12	5,975.000	52.11	68.20	16.09	12.33	V	355	2.00

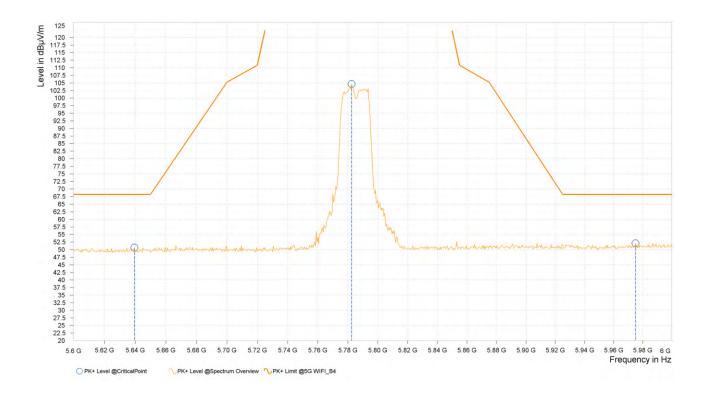

## **REMARKS**:


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level..
- 2. 5785MHz: Fundamental frequency.

Page 525 of 595




CHANNEL	TX Channel 165	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

Rg	Frequency [MHz]		PK+ Limit [dBμV/m]		Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
12	5,609.000	50.73	68.20	17.47	11.29	Н	309.3	2.00
12	5,820.000	105.05			11.95	Н	50.6	1.00
12	5,959.000	52.10	68.20	16.10	12.24	Н	331.5	1.00

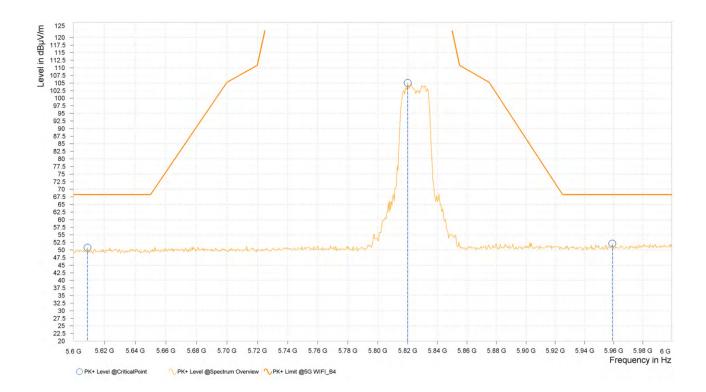



Rg	Frequency [MHz]	PK+ Level [dBμV/m]		PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
12	5,644.500	51.40	68.20	16.80	11.42	V	310.5	2.00
12	5,826.500	106.85			11.96	V	134.8	2.00
12	5,984.500	52.37	68.20	15.83	12.39	V	355.7	2.00

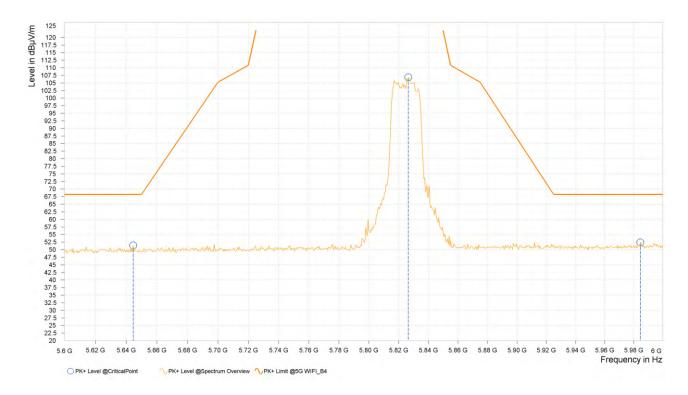

## **REMARKS:**

- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5825MHz: Fundamental frequency.




802.11ax (40MHz)

CHANNEL	TX Channel 151	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)


## ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,625.000	50.68	68.20	17.52	11.34	Н	185	2.00
9	5,767.000	100.74			11.80	Н	<mark>63</mark>	2.00
9	5,982.000	51.63	68.20	16.57	12.37	Н	1	1.00

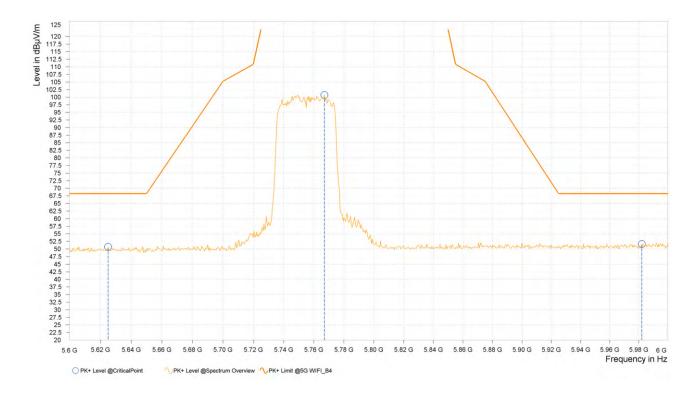



Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,620.500	51.47	68.20	16.73	11.33	V	115.2	1.00
9	5,766.000	101.70			11.79	V	124	2.00
9	5,927.000	52.28	68.20	15.92	12.18	V	64.2	2.00

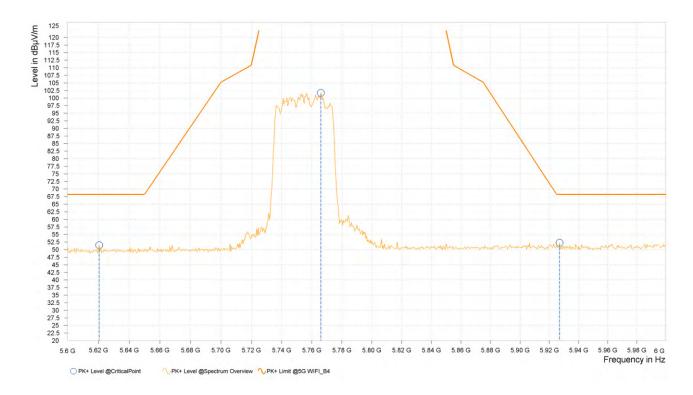

## **REMARKS**:


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5755MHz: Fundamental frequency.

Page 529 of 595




CHANNEL	TX Channel 159	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

Rg	Frequency [MHz]		PK+ Limit [dBμV/m]		Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,603.000	<mark>51.33</mark>	68.20	16.87	11.28	Н	4.9	1.00
9	5,787.000	101.19			11.87	Н	<mark>61.9</mark>	2.00
9	5,988.500	52.38	68.20	15.82	12.41	Н	182.6	2.00

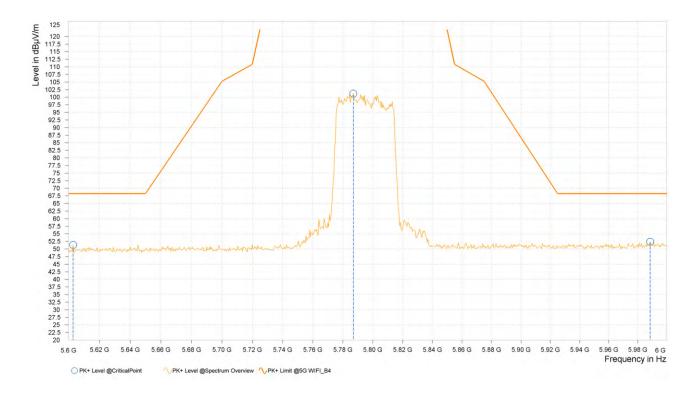



Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,608.000	50.65	68.20	17.55	11.29	V	359	2.00
9	5,788.500	101.19			11.87	V	7	1.00
9	5,959.000	51.85	68.20	16.35	12.24	V	359.1	1.00

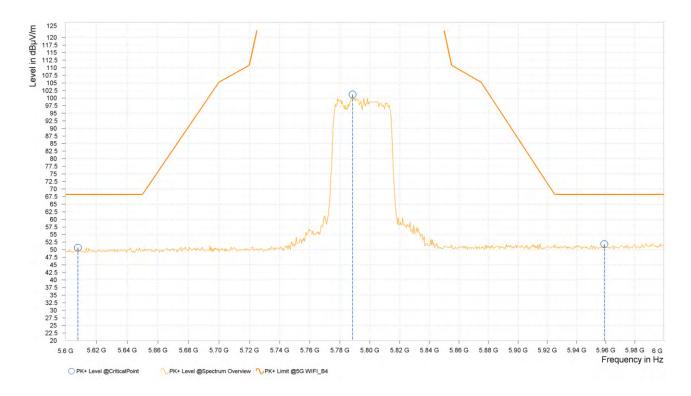

## **REMARKS**:

- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5795MHz: Fundamental frequency.




802.11ax (80MHz)

CHANNEL	TX Channel 155	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)


## ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]		РК+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,623.500	48.26	68.20	19.94	11.34	Н	350.6	1.00
8	5,763.000	99.79			11.78	Н	49.9	2.00
8	5,962.000	48.75	68.20	19.45	12.25	Н	294.6	1.00

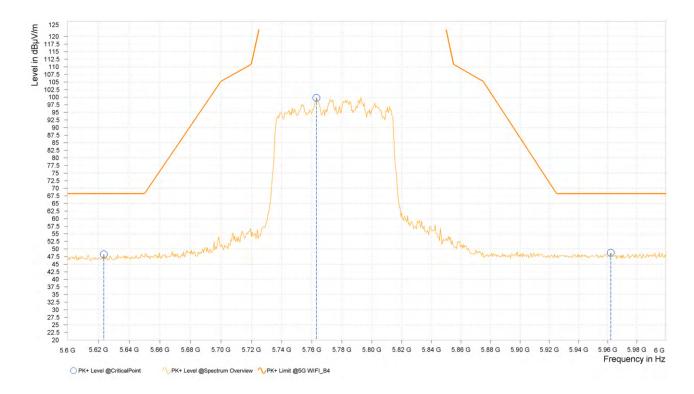



Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,635.500	48.24	68.20	19.96	11.39	V	334	1.00
8	5,803.500	98.45			11.92	V	184.6	1.00
8	5,950.500	48.95	68.20	19.25	12.21	V	359.1	1.00

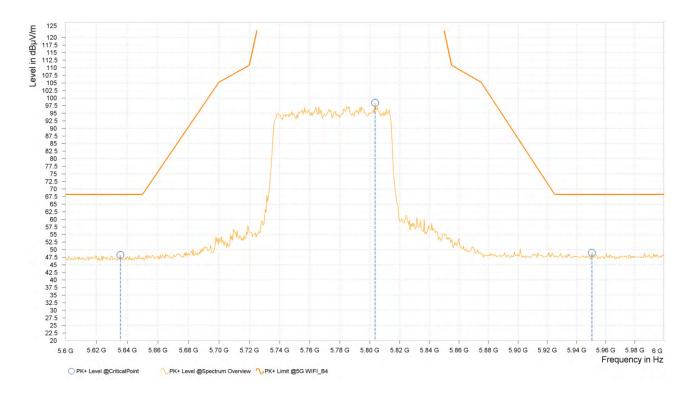

## **REMARKS**:

- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5775MHz: Fundamental frequency.

Page 533 of 595




# 5G WIFI-RU

802.11ax (20MHz)(RU26):


CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

Rg	Frequency [MHz]		PK+ Limit [dBμV/m]		Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,632.813	52.73	68.20	15.47	4.34	Н	1	1.00
12	5,736.563	96.63			4.53	Н	1	1.00
13	5,967.375	53.88	68.20	14.32	5.57	Н	1	2.00

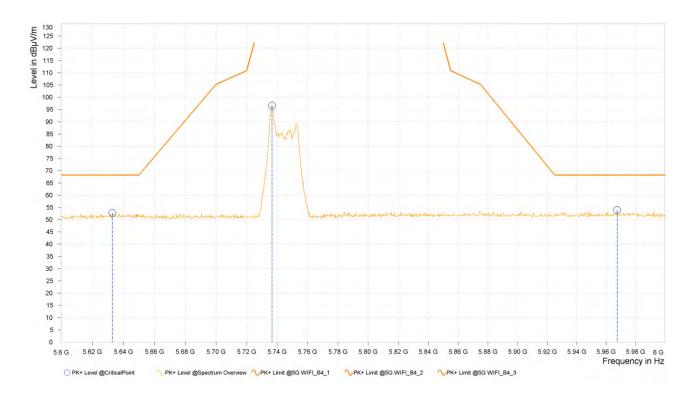



Rg	Frequency [MHz]		PK+ Limit [dBμV/m]		Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,633.750	52.40	68.20	15.80	4.34	V	5	1.00
12	5,736.563	99.70			4.53	V	359	1.00
13	5,945.625	53.85	68.20	14.35	5.49	V	359	2.00

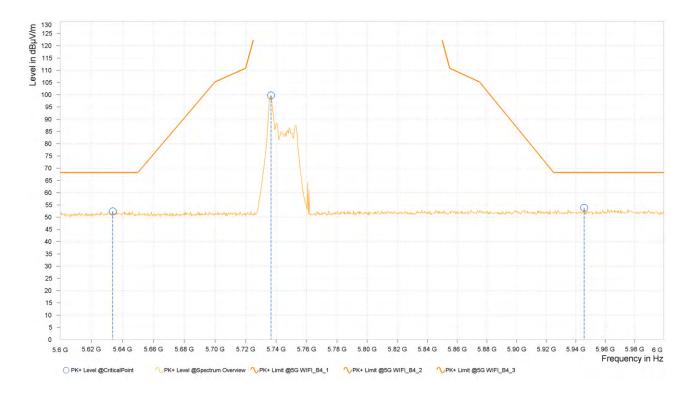

## **REMARKS:**


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value – Emission level.
- 2. 5260MHz: Fundamental frequency.



802.11ax (20MHz)(RU26):


CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,644.063	52.74	68.20	15.46	4.36	Н	355.6	2.00
12	5,785.940	101.62			4.95	Н	82.1	2.00
13	5,983.125	53.07	68.20	15.13	5.70	Н	359.1	1.00

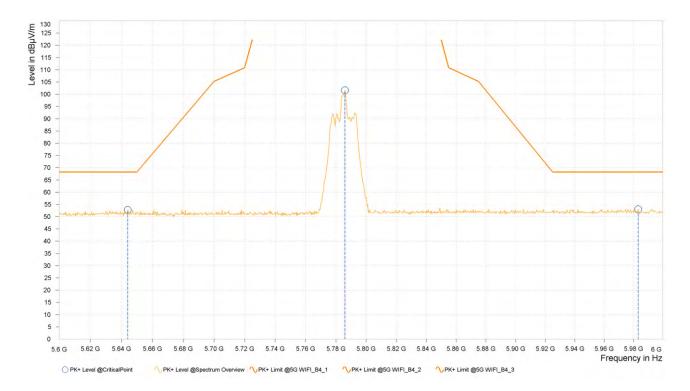



Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,633.125	52.73	68.20	15.47	4.34	V	5.1	1.00
12	5,785.625	98.46			4.94	V	359	1.00
13	5,988.750	53.72	68.20	14.48	5.75	V	19.6	2.00

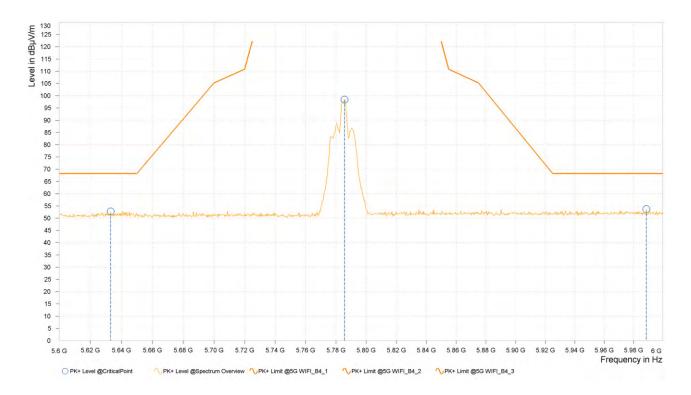

## **REMARKS:**


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value – Emission level.
- 2. 5260MHz: Fundamental frequency.



802.11ax (20MHz)(RU26):


CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

Rg	Frequency [MHz]		РК+ Limit [dBµV/m]		Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,638.125	53.60	68.20	14.60	4.35	Н	4.6	1.00
12	5,833.440	100.69			5.30	Н	359.1	1.00
13	5,983.875	53.07	68.20	15.13	5.71	Н	325.9	1.00

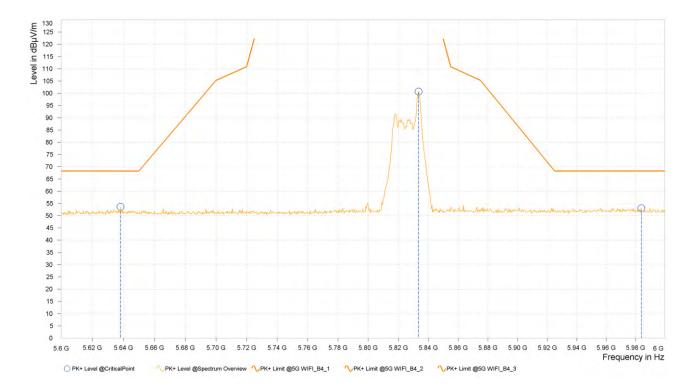



Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,628.125	52.97	68.20	15.23	4.33	V	1	1.00
12	5,833.750	94.16			5.31	V	88.1	1.00
13	5,985.750	53.05	68.20	15.15	5.72	V	1	1.00

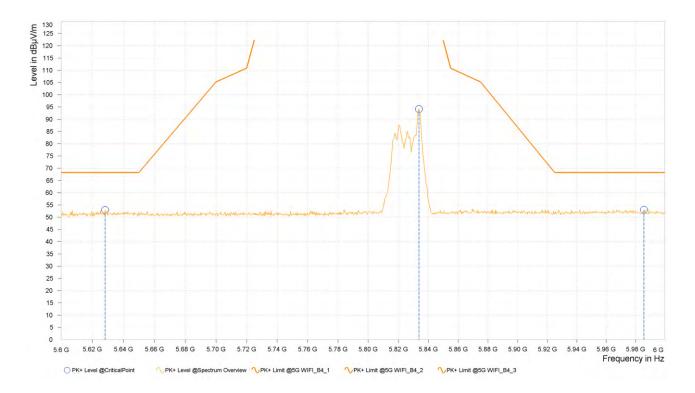

## **REMARKS:**

- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value – Emission level.
- 2. 5260MHz: Fundamental frequency.


Page 539 of 595



802.11ax (20MHz)(RU52):


CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

Rg	Frequency [MHz]		РК+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,630.625	52.86	68.20	15.34	4.33	Н	11.8	1.00
12	5,738.438	96.05			4.54	Н	359.1	1.00
13	5,971.125	53.39	68.20	14.81	5. <del>6</del> 0	Н	1	1.00

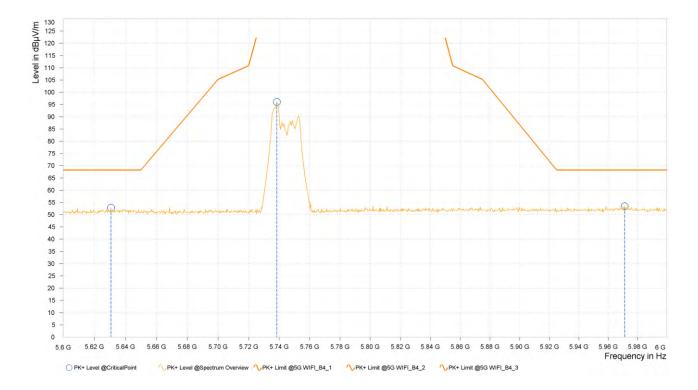



Rg	Frequency [MHz]		PK+ Limit [dBμV/m]		Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,641.563	52.60	68.20	15.60	4.36	V	5.1	1.00
12	5,735.938	97.35			4.52	V	359	1.00
13	5,968.875	53.53	68.20	14.67	5.58	V	359	2.00

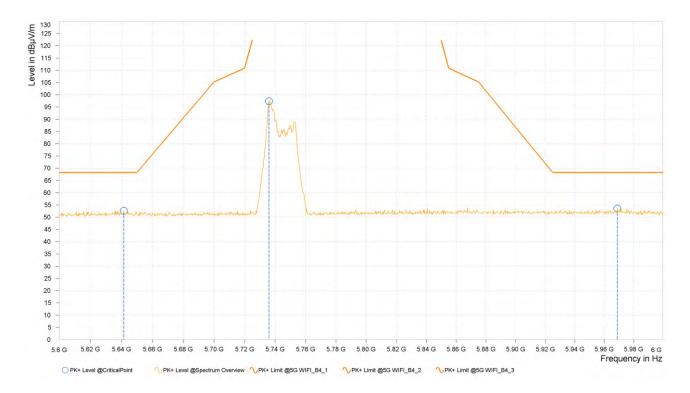

## **REMARKS:**

- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value – Emission level.
- 2. 5260MHz: Fundamental frequency.


Page 541 of 595



802.11ax (20MHz)(RU52):


CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	DETECTOR FUNCTION	Average (AV)

Rg	Frequency [MHz]		PK+ Limit [dBµV/m]		Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,634.063	52.60	68.20	15.60	4.34	Н	225.4	1.00
12	5,780.000	100.01			4.89	Н	88	2.00
13	5,974.500	53.05	68.20	15.15	5.63	Н	184.8	2.00

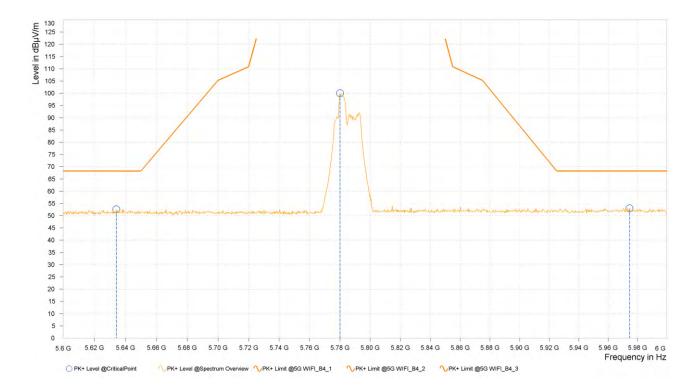



Rg	Frequency [MHz]		PK+ Limit [dBμV/m]		Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,649.063	52.79	68.20	15.41	4.37	V	0.9	2.00
12	5,783.125	93.34			4.92	V	89.2	1.00
13	5,976.375	53.14	68.20	15.06	5.64	V	1	1.00

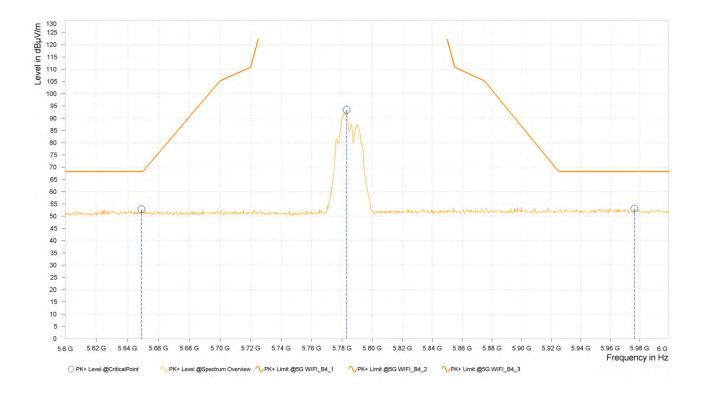

## **REMARKS:**

- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value – Emission level.
- 2. 5260MHz: Fundamental frequency.


Page 543 of 595



802.11ax (20MHz)(RU52):


CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	DETECTOR FUNCTION	Average (AV)

Rg	Frequency [MHz]	PK+ Level [dBµV/m]	РК+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,641.250	52.48	68.20	15.72	4.36	Н	359	2.00
12	5,832.813	99.35			5.30	Н	88	2.00
13	5,960.250	53.27	68.20	14.93	5.51	Н	37.8	2.00

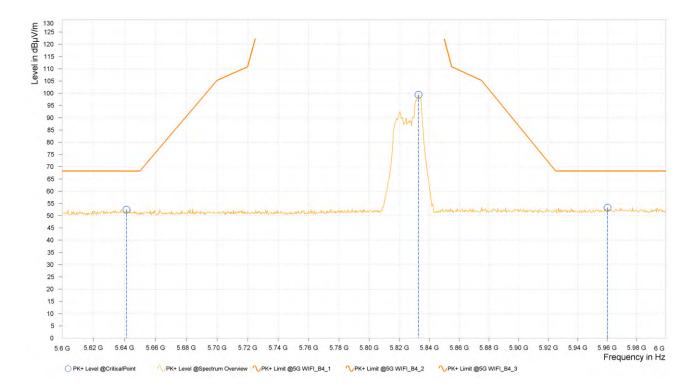



Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,641.250	52.98	68.20	15.22	4.36	V	355.5	2.00
12	5,833.438	93.90			5.30	V	90.5	1.00
13	5,971.500	53.20	68.20	15.00	5.60	V	29.4	2.00

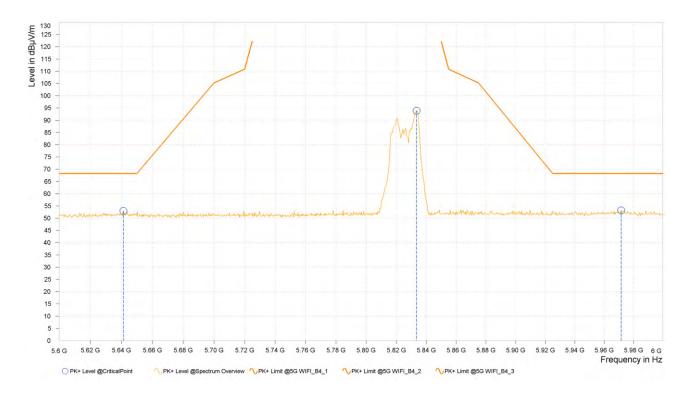

## **REMARKS:**

- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value – Emission level.
- 2. 5260MHz: Fundamental frequency.


Page 545 of 595



802.11ax (20MHz)(RU106):


CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	DETECTOR FUNCTION	Average (AV)

F	٢g	Frequency [MHz]		PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1	5,646.250	52.36	68.20	15.84	4.37	Н	137	2.00
1	2	5,740.625	94.91			4.55	Н	359	1.00
1	3	5,991.375	53.42	68.20	14.78	5.77	Н	0.9	2.00

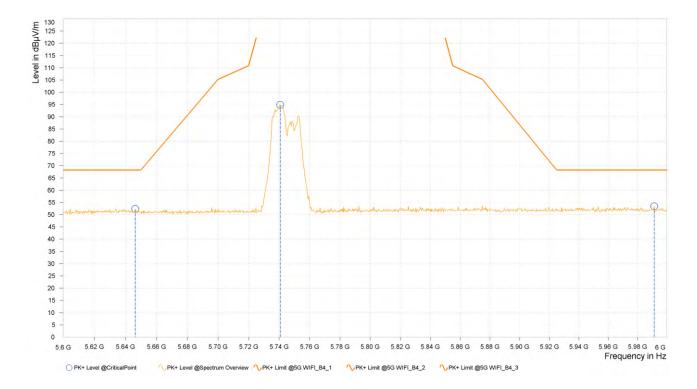



Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,603.125	53.07	68.20	15.13	4.23	V	3.2	2.00
12	5,735.938	<mark>93.43</mark>			4.52	V	359	1.00
13	5,965.875	53.43	68.20	14.77	5.56	V	359	2.00

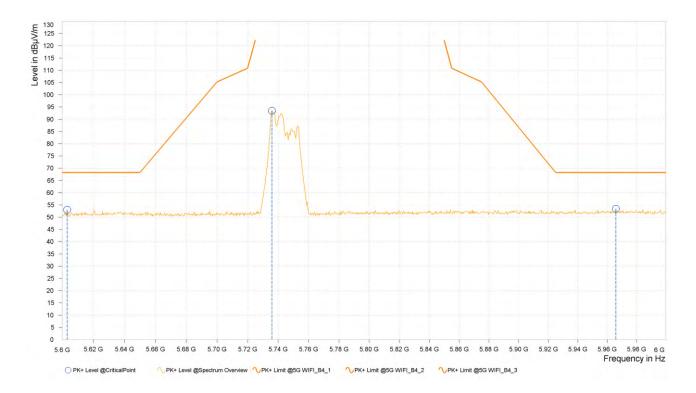

## **REMARKS:**


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value – Emission level.
- 2. 5260MHz: Fundamental frequency.



802.11ax (20MHz)(RU106):


CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

Rg	Frequency [MHz]		РК+ Limit [dBµV/m]		Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,629.063	52.93	68.20	15.27	4.33	Н	359	2.00
12	5,777.500	94.99			4.87	Н	90.5	1.00
13	5,963.250	53.13	68.20	15.07	5.53	Н	323.5	1.00

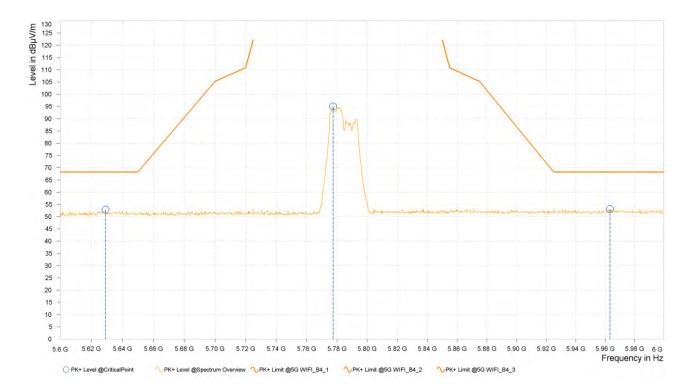



Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,636.563	52.59	68.20	15.61	4.35	V	1	1.00
12	5,777.188	91.96			4.87	V	89.2	1.00
13	5,976.750	53.71	68.20	14.49	5.65	V	1	2.00

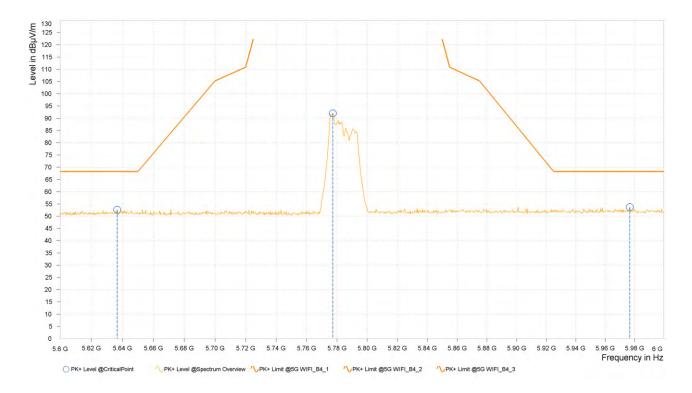

## **REMARKS**:

- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value – Emission level.
- 2. 5260MHz: Fundamental frequency.


Page 549 of 595



802.11ax (20MHz)(RU106):


CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	DETECTOR FUNCTION	Average (AV)

Rg	Frequency [MHz]		РК+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,613.125	52.55	68.20	15.65	4.28	Н	4.6	1.00
12	5,828.438	94.89			5.27	Н	359	1.00
13	5,926.125	53.26	68.20	14.94	5.49	Н	359	2.00

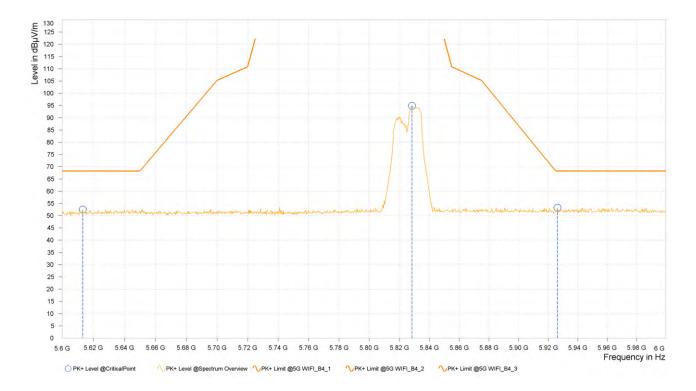



Rg	Frequency [MHz]		PK+ Limit [dBµV/m]		Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,645.000	52.49	68.20	15.71	4.37	V	1	1.00
12	5,833.125	98.18			5.30	V	89.2	1.00
13	5,930.250	53.65	68.20	14.55	5.49	V	1	1.00

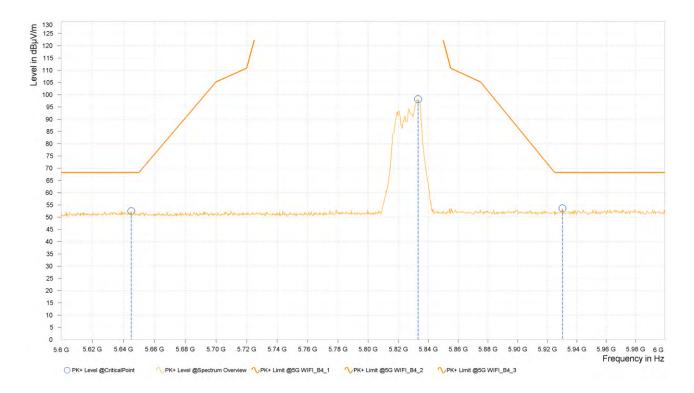

## **REMARKS**:


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value – Emission level.
- 2. 5260MHz: Fundamental frequency.



802.11ax (20MHz)(RU242):


CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	Defector Fonction	Average (AV)

Rg	Frequency [MHz]		РК+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,646.875	52.77	68.20	15.43	4.37	Н	359	2.00
12	5,750.313	90.49			4.62	Н	359	1.00
13	5,943.000	53.11	68.20	15.09	5.49	Н	359	1.00

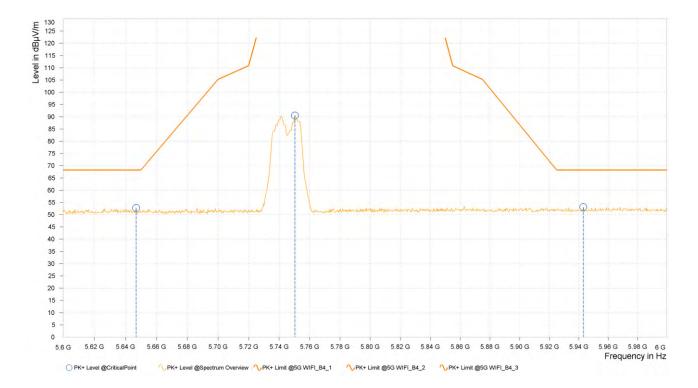



Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,643.125	53.19	68.20	15.01	4.36	V	3.2	2.00
12	5,743.750	91.73			4.58	V	359.1	1.00
13	5,965.500	53.46	68.20	14.74	<mark>5.5</mark> 5	V	0.9	2.00

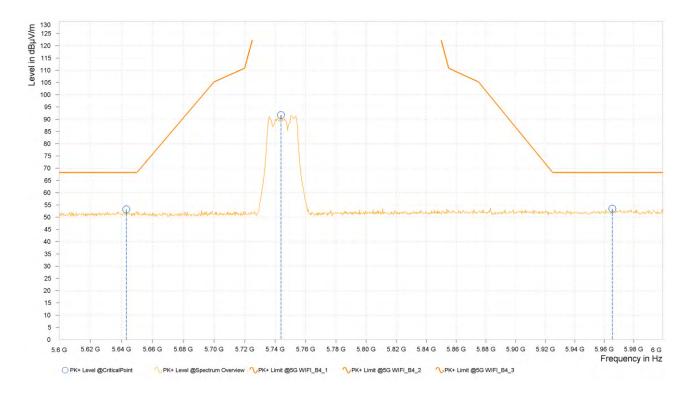

## **REMARKS**:

- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value – Emission level.
- 2. 5260MHz: Fundamental frequency.


Page 553 of 595



802.11ax (20MHz)(RU242):


CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	DETECTOR FUNCTION	Average (AV)

Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,646.875	52.69	68.20	15.51	4.37	Н	356.1	1.00
12	5,790.625	94.46			4.99	Н	359.1	1.00
13	5,967.375	53.76	68.20	14.44	5.57	Н	182.5	2.00

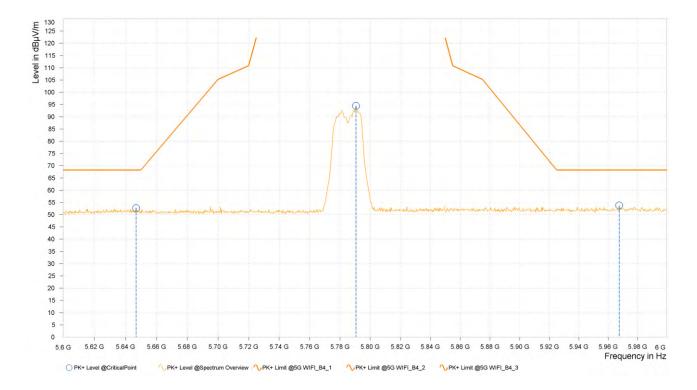



Rg	Frequency [MHz]	PK+ Level [dBμV/m]		PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,646.563	52.86	68.20	15.34	4.37	V	354.9	2.00
12	5,790.625	89.60			4.99	V	269.6	2.00
13	5,997.375	53.92	68.20	14.28	5.82	V	359.1	1.00

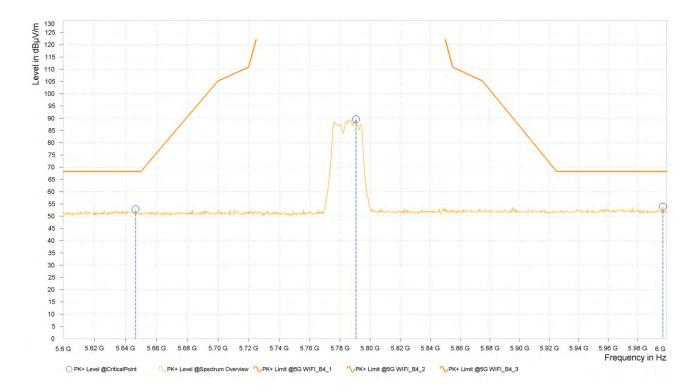

## **REMARKS**:

- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value – Emission level.
- 2. 5260MHz: Fundamental frequency.


Page 555 of 595



802.11ax (20MHz)(RU242):


CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	DETECTOR FUNCTION	Average (AV)

Rg	Frequency [MHz]		PK+ Limit [dBμV/m]		Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,636.875	52.48	68.20	15.72	4.35	Н	1	1.00
12	5,821.563	91.95			5.22	Н	1	1.00
13	5,979.000	52.99	68.20	15.21	5.67	Н	1	1.00

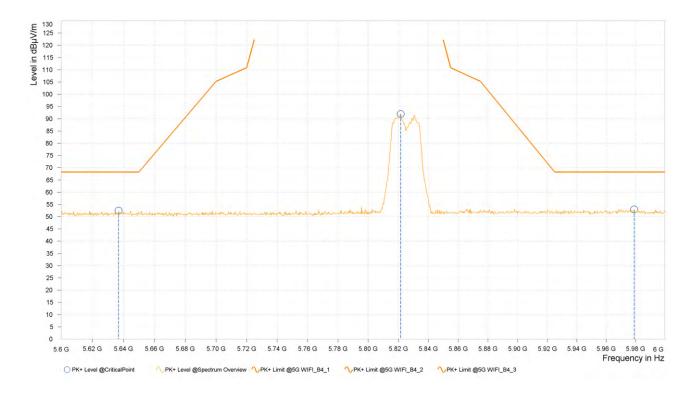



Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,645.313	53.03	68.20	15.17	4.37	V	6.6	2.00
12	5,821.563	97.26			5.22	V	132.2	2.00
13	5,971.875	53.32	68.20	14.88	5.61	V	43.8	2.00

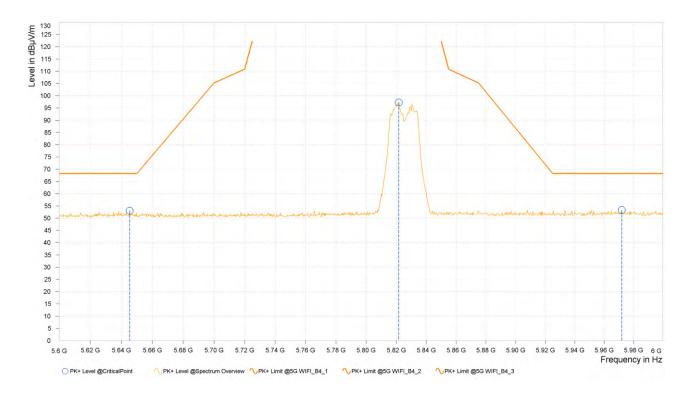

## **REMARKS**:

- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value – Emission level.
- 2. 5260MHz: Fundamental frequency.