

FCC Test Report

Product Name	Bluetooth Headset
Model No.	HSC150W
FCC ID.	BCE-HSC150W

Applicant	GN Audio A/S
Address	Lautrupbjerg 7, 2750 Ballerup, Denmark

Date of Receipt	Jun. 24, 2021
Issued Date	Aug. 19, 2021
Report No.	2161010R-E3032110108
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test Report


Issued Date: Aug. 19, 2021

Report No.: 2161010R-E3032110108




Product Name	Bluetooth Headset
Applicant	GN Audio A/S
Address	Lautrupbjerg 7, 2750 Ballerup, Denmark
Manufacturer	GN Audio A/S
Model No.	HSC150W
FCC ID.	BCE-HSC150W
EUT Rated Voltage	DC 5V by USB or DC 3.8V by Battery
EUT Test Voltage	DC 5V by USB
Trade Name	Jabra
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C ANSI C63.4: 2014, ANSI C63.10: 2013
Test Result	Complied

Documented By :



(Senior Adm. Specialist / April Chen)

Tested By :



(Senior Engineer / Bill Lin)

Approved By :



(Senior Engineer / Alan Chen)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	6
1.1. EUT Description.....	6
1.2. Tested System Details.....	8
1.3. Configuration of Tested System	8
1.4. EUT Exercise Software	9
1.5. Test Facility	10
1.6. List of Test Equipment.....	11
1.7. Uncertainty	12
2. CONDUCTED EMISSION	13
2.1. Test Setup	13
2.2. Limits.....	13
2.3. Test Procedure	14
2.4. Test Result of Conducted Emission.....	15
3. PEAK POWER OUTPUT	19
3.1. Test Setup	19
3.2. Limit	19
3.3. Test Procedure	19
3.4. Test Result of Peak Power Output	20
4. RADIATED EMISSION	22
4.1. Test Setup	22
4.2. Limits.....	23
4.3. Test Procedure	24
4.4. Test Result of Radiated Emission.....	25
5. RF ANTENNA CONDUCTED TEST	41
5.1. Test Setup	41
5.2. Limits.....	41
5.3. Test Procedure	41
5.4. Test Result of RF Antenna Conducted Test.....	42
6. BAND EDGE	44
6.1. Test Setup	44
6.2. Limit	45
6.3. Test Procedure	45
6.4. Test Result of Band Edge	46
7. CHANNEL NUMBER.....	58
7.1. Test Setup	58
7.2. Limit	58
7.3. Test Procedure	58
7.4. Test Result of Channel Number.....	59
8. CHANNEL SEPARATION.....	61
8.1. Test Setup	61
8.2. Limit	61
8.3. Test Procedure	61
8.4. Test Result of Channel Separation.....	62
9. DWELL TIME	66
9.1. Test Setup	66
9.2. Limit	66
9.3. Test Procedure	66

9.4.	Test Result of Dwell Time	67
10.	OCCUPIED BANDWIDTH	71
10.1.	Test Setup	71
10.2.	Limits.....	71
10.3.	Test Procedure	71
10.4.	Test Result of Occupied Bandwidth	72
11.	DUTY CYCLE	76
11.1.	Test Setup	76
11.2.	Test Result of Duty Cycle.....	77
12.	EMI REDUCTION METHOD DURING COMPLIANCE TESTING	79

- Appendix 1: EUT Test Photographs
Appendix 2: EUT Detailed Photographs

Revision History

Report No.	Version	Description	Issued Date
2161010R-E3032110108	V1.0	Initial issue of report.	Aug. 19, 2021

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	Bluetooth Headset
Trade Name	Jabra
Model No.	HSC150W
FCC ID.	BCE-HSC150W
Frequency Range	2402 – 2480MHz
Channel Number	79
Type of Modulation	FHSS: GFSK(1Mbps) / π / 4DQPSK(2Mbps) / 8DPSK(3Mbps)
Antenna Type	PCB Antenna
Channel Control	Auto
Antenna Gain	Refer to the table “Antenna List”
DeskStand for charging	Trade Name: GN Audio A/S, M/N:DIV030
Type A to USB Cable	Trade Name: GN Audio A/S, M/N: Type A to USB Cable 1200 mm
USB Dongle	Trade Name: GN Audio A/S, M/N: END060W

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	GN Audio A/S	HSC150W	PCB Antenna	3.69dBi for 2.4 GHz

Note: The antenna of EUT conforms to FCC 15.203.

Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 00:	2402 MHz	Channel 20:	2422 MHz	Channel 40:	2442 MHz	Channel 60:	2462 MHz
Channel 01:	2403 MHz	Channel 21:	2423 MHz	Channel 41:	2443 MHz	Channel 61:	2463 MHz
Channel 02:	2404 MHz	Channel 22:	2424 MHz	Channel 42:	2444 MHz	Channel 62:	2464 MHz
Channel 03:	2405 MHz	Channel 23:	2425 MHz	Channel 43:	2445 MHz	Channel 63:	2465 MHz
Channel 04:	2406 MHz	Channel 24:	2426 MHz	Channel 44:	2446 MHz	Channel 64:	2466 MHz
Channel 05:	2407 MHz	Channel 25:	2427 MHz	Channel 45:	2447 MHz	Channel 65:	2467 MHz
Channel 06:	2408 MHz	Channel 26:	2428 MHz	Channel 46:	2448 MHz	Channel 66:	2468 MHz
Channel 07:	2409 MHz	Channel 27:	2429 MHz	Channel 47:	2449 MHz	Channel 67:	2469 MHz
Channel 08:	2410 MHz	Channel 28:	2430 MHz	Channel 48:	2450 MHz	Channel 68:	2470 MHz
Channel 09:	2411 MHz	Channel 29:	2431 MHz	Channel 49:	2451 MHz	Channel 69:	2471 MHz
Channel 10:	2412 MHz	Channel 30:	2432 MHz	Channel 50:	2452 MHz	Channel 70:	2472 MHz
Channel 11:	2413 MHz	Channel 31:	2433 MHz	Channel 51:	2453 MHz	Channel 71:	2473 MHz
Channel 12:	2414 MHz	Channel 32:	2434 MHz	Channel 52:	2454 MHz	Channel 72:	2474 MHz
Channel 13:	2415 MHz	Channel 33:	2435 MHz	Channel 53:	2455 MHz	Channel 73:	2475 MHz
Channel 14:	2416 MHz	Channel 34:	2436 MHz	Channel 54:	2456 MHz	Channel 74:	2476 MHz
Channel 15:	2417 MHz	Channel 35:	2437 MHz	Channel 55:	2457 MHz	Channel 75:	2477 MHz
Channel 16:	2418 MHz	Channel 36:	2438 MHz	Channel 56:	2458 MHz	Channel 76:	2478 MHz
Channel 17:	2419 MHz	Channel 37:	2439 MHz	Channel 57:	2459 MHz	Channel 77:	2479 MHz
Channel 18:	2420 MHz	Channel 38:	2440 MHz	Channel 58:	2460 MHz	Channel 78:	2480 MHz
Channel 19:	2421 MHz	Channel 39:	2441 MHz	Channel 59:	2461 MHz		

Note:

1. The EUT is an Bluetooth Headset with built-in Bluetooth V5.0 、V2.1+EDR transceiver, this report for Bluetooth V2.1+EDR.
2. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.
3. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test
4. These tests were conducted on a sample for the purpose of demonstrating compliance of transmitter with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
5. The test mode is based on the Bluetooth technology, while testing 1Mbps, 2Mbps and 3Mbps, the worst case is 1Mbps and 3Mbps, and only worse case data is recorded in this report.

Test Mode	Mode 1: Transmit - 1Mbps Mode 2: Transmit - 3Mbps Mode 3: Charge Mode
-----------	---

1.2. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product		Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook PC	Lenovo	TinkPad X250	N/A	N/A
2	Power Adapter	ChiconyPower	ADLX45NCC3A	N/A	N/A


Signal Cable Type		Signal cable Description
A	Power Cable	Non-shielded, 1m
B	Power Cable	Non-shielded, 1.8m, with one ferrite core bonded.
C	Type A to USB Cable	Shielded, 1.2m

For Charge Mode


Product		Manufacturer	Model No.	Serial No.	Power Cord
1	Power Adapter	Apple	A1385	N/A	N/A

Signal Cable Type		Signal cable Description
A	Type A to USB Cable	Shielded, 1.2m

1.3. Configuration of Tested System

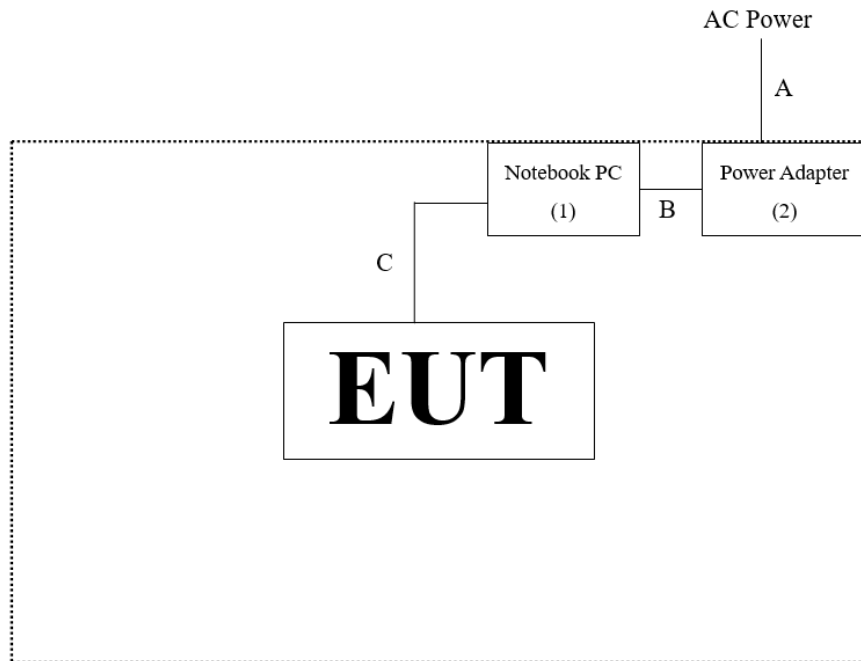

For Charge Mode

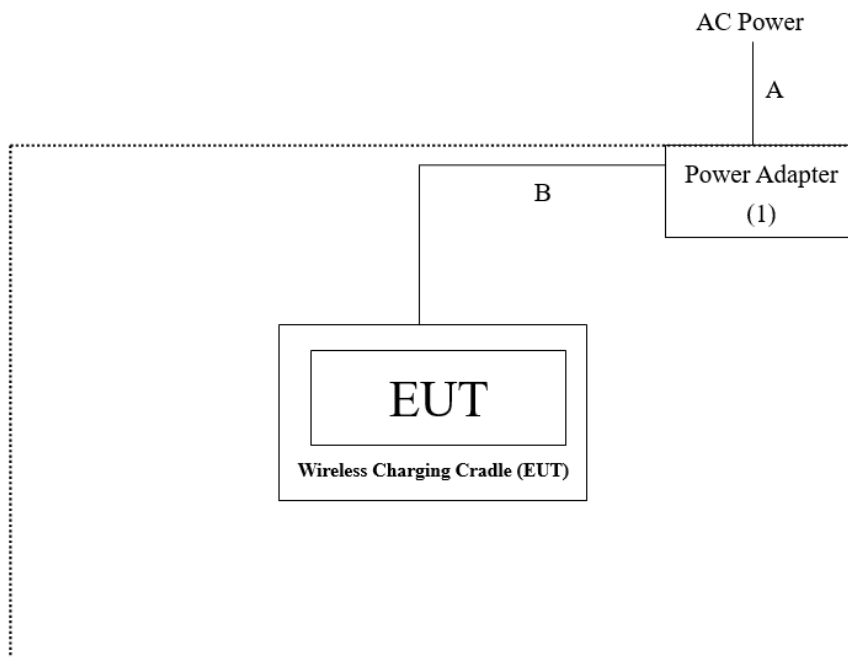

1.4. EUT Exercise Software

1. Setup the EUT as shown in Section 1.3.
2. Execute software "BlueTest3 Version 3.3.5" on the EUT.
3. Configure the test mode, the test channel, and the data rate.
4. Press "OK" to start the continuous Transmit.
5. Verify that the EUT works properly.

1.5. Test Facility

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual
Conducted Emission	Temperature (°C)	10~40 °C	27 °C
	Humidity (%RH)	10~90 %	48.6 %
Radiated Emission	Temperature (°C)	10~40 °C	23.5 °C
	Humidity (%RH)	10~90 %	65 %
Conductive	Temperature (°C)	10~40 °C	27.6 °C
	Humidity (%RH)	10~90 %	62.3 %

USA : FCC Registration Number: TW0033

Canada : IC Registration Number: 26930

Site Description : Accredited by TAF
Accredited Number: 3023

Test Laboratory : DEKRA Testing and Certification Co., Ltd
Address : No. 26, Huaya 1st Rd., Guishan Dist., Taoyuan City
Phone number : 886-2-2602-7968
Fax number : 866-2-2602-3286
Email address : info.tw@dekra.com
Website : <http://www.dekra.com.tw>

1.6. List of Test Equipment

For Conduction measurements /SH1

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due. Date
X	EMI Test Receiver	R&S	ESR7	101601	2021.01.04	2022.01.03
X	Two-Line V-Network	R&S	ENV216	101306	2021.04.08	2022.04.07
X	Two-Line V-Network	R&S	ENV216	101307	2021.05.04	2022.05.03
X	Coaxial Cable	DEKRA	RG400_BNC	RF001	2021.05.24	2022.05.23

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : DEKRA Testing System V2.0

For Conducted measurements /SH2

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due. Date
X	Spectrum Analyzer	R&S	FSV30	103466	2020.12.28	2021.12.27
X	Peak Power Analyzer	Anritsu	ML2496A	1548002	2021.02.24	2022.02.23
X	Wideband Power Sensor	Anritsu	MA2411B	1531023	2021.02.24	2022.02.23
X	Wideband Power Sensor	Anritsu	MA2411B	1531022	2021.02.24	2022.02.23

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : DEKRA Conduction Test System V9.0.5.

For Radiated measurements /966-3

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due. Date
X	Loop Antenna	AMETEK	HLA6121	56736	2021.04.14	2022.04.13
X	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-678	2020.09.04	2021.09.03
X	Horn Antenna	ETS-Lindgren	3117	00201259	2020.10.23	2021.10.22
X	Horn Antenna	Com-Power	AH-840	101087	2021.06.16	2022.06.15
X	Pre-Amplifier	EMCI	EMC001330	980316	2021.06.22	2022.06.21
X	Pre-Amplifier	EMCI	EMC051835SE	980312	2021.02.24	2022.02.23
X	Pre-Amplifier	EMCI	EMC05820SE	980361	2020.12.21	2021.12.20
X	Pre-Amplifier	EMCI	EMC184045SE	980314	2021.06.24	2022.06.23
X	Filter	MICRO TRONICS	BRM50702	G251	2020.09.17	2021.09.16
	Filter	MICRO TRONICS	BRM50716	G188	2020.09.17	2021.09.16
X	EMI Test Receiver	R&S	ESR	102793	2020.12.17	2021.12.16
X	Spectrum Analyzer	R&S	FSV3044	101113	2021.02.03	2022.02.02
X	Coaxial Cable	SUHNER	SUCOFLEX 106	RF002	2021.03.03	2022.03.02
X	Mircoflex Cable	HUBER SUHNER	SUCOFLEX 102	MY3381/2	2021.06.25	2022.06.24

Note:

1. Loop Antenna is calibrated every two years, the other equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : DEKRA Testing System V2.0

1.7. Uncertainty

Uncertainties have been calculated according to the DEKRA internal document, and is described in each test chapter of this report.


The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test item	Uncertainty	
Conducted Emission	± 3.42 dB	
Peak Power Output	± 0.91 dB	
Radiated Emission	Under 1GHz ± 4.06 dB	Above 1GHz ± 3.73 dB
RF Antenna Conducted Test	± 2.53 dB	
Band Edge	Under 1GHz ± 4.06 dB	Above 1GHz ± 3.73 dB
Channel Number	N/A	
Channel Separation	± 682.83 Hz	
Dwell Time	± 2.31 ms	
Occupied Bandwidth	± 682.83 Hz	
Duty Cycle	± 2.31 ms	

2. Conducted Emission

2.1. Test Setup

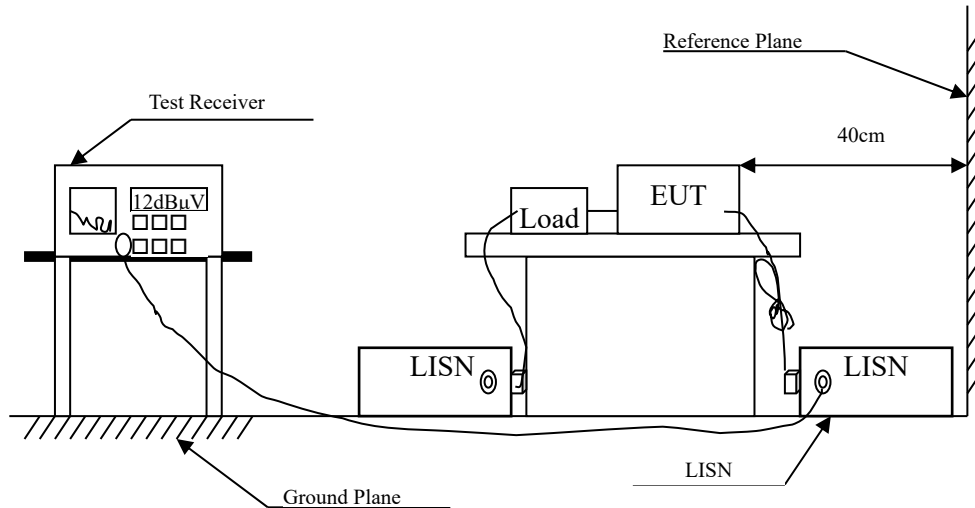

2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dB μ V) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.3. Test Procedure

The EUT and Peripherals are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)


Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

The EUT setup and the test procedure are according to ANSI C63.4, 2014 to comply with the requirements of FCC 47CFR Subpart C.

2.4. Test Result of Conducted Emission

Product : Bluetooth Headset
 Test Item : Conducted Emission Test
 Power Line : L 1
 Test Mode : Mode 2: Transmit - 3Mbps
 Test Date : 2021/08/18

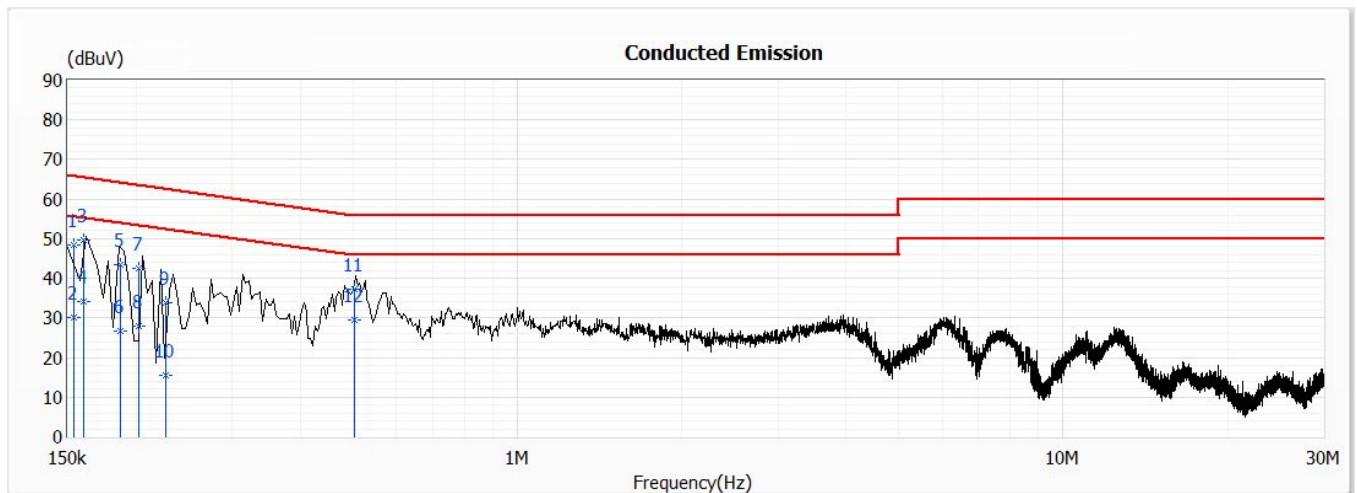


No	Frequency (MHz)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	0.154	48.56	65.79	-17.23	38.89	9.67	QP
2	0.154	29.99	55.79	-25.80	20.32	9.67	AV
*3	0.160	49.66	65.45	-15.79	39.99	9.67	QP
4	0.160	34.02	55.45	-21.43	24.35	9.67	AV
5	0.187	43.39	64.16	-20.77	33.72	9.67	QP
6	0.187	26.84	54.16	-27.32	17.17	9.67	AV
7	0.202	42.51	63.52	-21.01	32.84	9.67	QP
8	0.202	27.83	53.52	-25.69	18.16	9.67	AV
9	0.227	33.97	62.58	-28.61	24.30	9.67	QP
10	0.227	15.39	52.58	-37.19	5.72	9.67	AV
11	0.503	37.14	56.00	-18.86	27.47	9.67	QP
12	0.503	29.62	46.00	-16.38	19.95	9.67	AV

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ * “ means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : Bluetooth Headset
 Test Item : Conducted Emission Test
 Power Line : N
 Test Mode : Mode 2: Transmit - 3Mbps
 Test Date : 2021/08/18

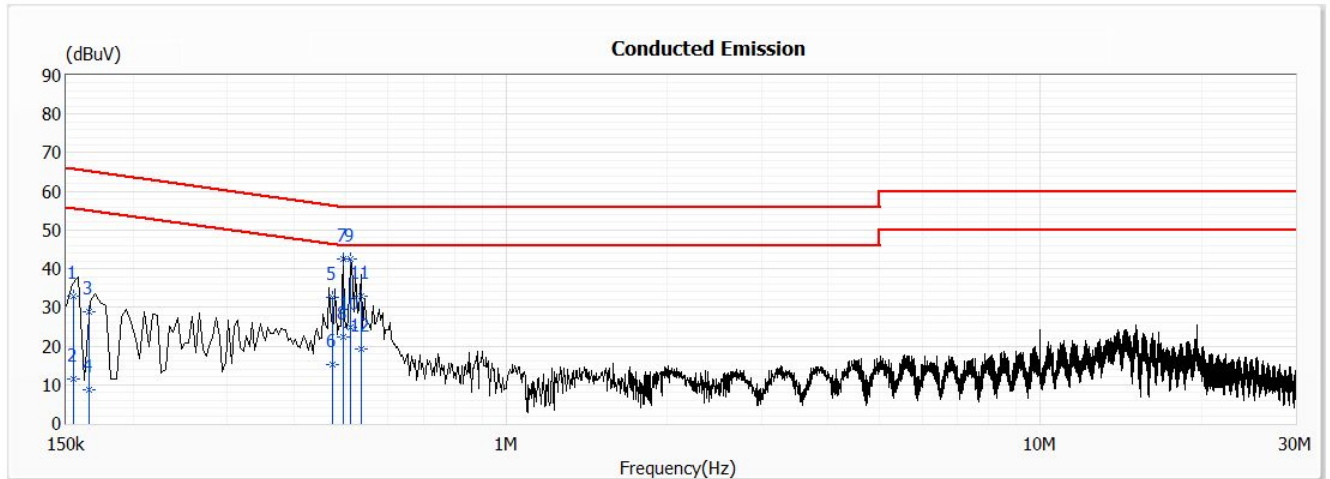


No	Frequency (MHz)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	0.155	32.89	65.75	-32.86	23.22	9.67	QP
2	0.155	11.55	55.75	-44.20	1.88	9.67	AV
3	0.166	28.82	65.17	-36.35	19.15	9.67	QP
4	0.166	8.81	55.17	-46.36	-0.86	9.67	AV
5	0.473	32.56	56.45	-23.89	22.89	9.67	QP
6	0.473	15.32	46.45	-31.13	5.65	9.67	AV
7	0.494	42.53	56.09	-13.56	32.86	9.67	QP
8	0.494	22.48	46.09	-23.61	12.81	9.67	AV
*9	0.512	42.62	56.00	-13.38	32.95	9.67	QP
10	0.512	24.96	46.00	-21.04	15.29	9.67	AV
11	0.535	32.99	56.00	-23.01	23.32	9.67	QP
12	0.535	19.19	46.00	-26.81	9.52	9.67	AV

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ * “ means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : Bluetooth Headset
 Test Item : Conducted Emission Test
 Power Line : L 1
 Test Mode : Mode 3: Charge Mode
 Test Date : 2021/08/18

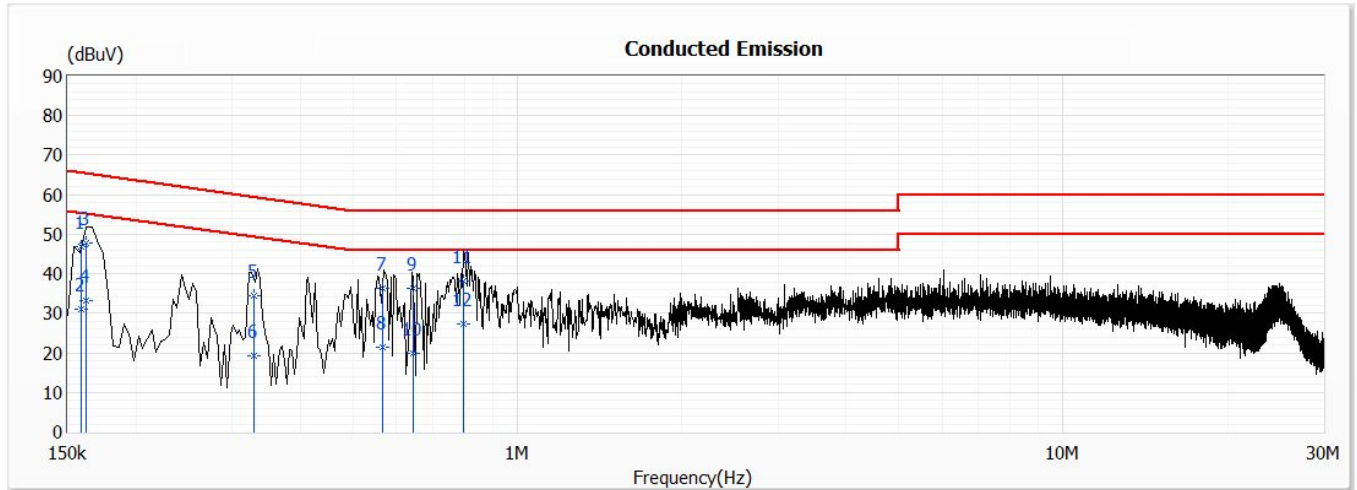


No	Frequency (MHz)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	0.159	47.01	65.52	-18.51	37.35	9.66	QP
2	0.159	30.90	55.52	-24.62	21.24	9.66	AV
*3	0.162	47.77	65.37	-17.60	38.11	9.66	QP
4	0.162	33.29	55.37	-22.08	23.63	9.66	AV
5	0.329	34.33	59.47	-25.14	24.67	9.66	QP
6	0.329	19.25	49.47	-30.22	9.59	9.66	AV
7	0.566	36.46	56.00	-19.54	26.80	9.66	QP
8	0.566	21.53	46.00	-24.47	11.87	9.66	AV
9	0.645	36.18	56.00	-19.82	26.51	9.67	QP
10	0.645	19.87	46.00	-26.13	10.20	9.67	AV
11	0.797	38.17	56.00	-17.83	28.49	9.68	QP
12	0.797	27.30	46.00	-18.70	17.62	9.68	AV

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ * “ means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : Bluetooth Headset
 Test Item : Conducted Emission Test
 Power Line : N
 Test Mode : Mode 3: Charge Mode
 Test Date : 2021/08/18

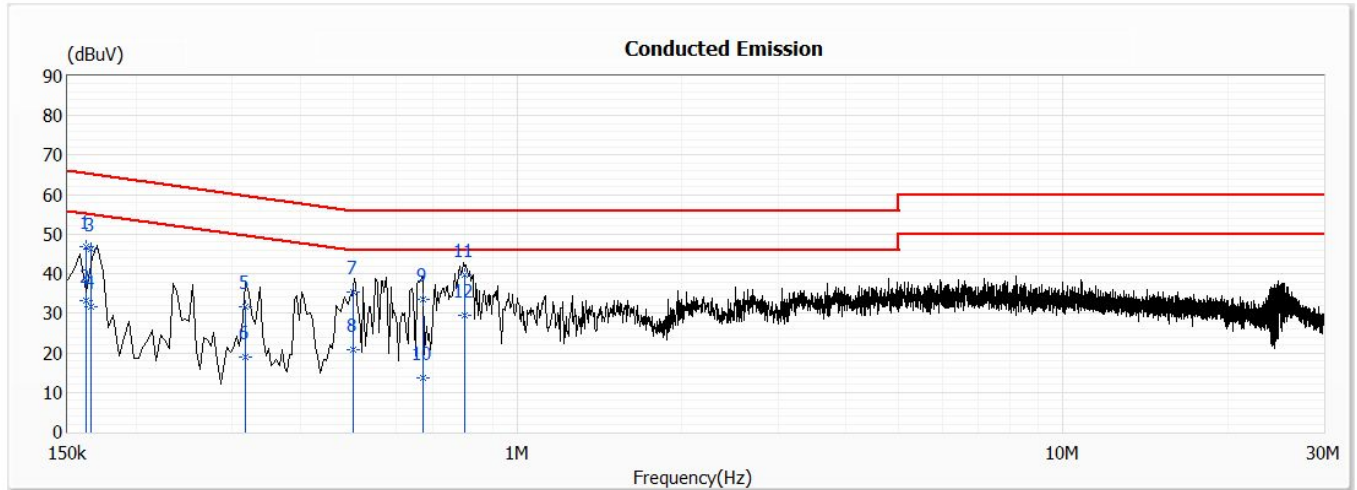


No	Frequency (MHz)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	0.162	46.79	65.37	-18.58	37.12	9.67	QP
2	0.162	33.13	55.37	-22.24	23.46	9.67	AV
3	0.165	46.10	65.21	-19.11	36.43	9.67	QP
4	0.165	31.66	55.21	-23.55	21.99	9.67	AV
5	0.317	31.73	59.77	-28.04	22.07	9.66	QP
6	0.317	18.87	49.77	-30.90	9.21	9.66	AV
7	0.500	35.32	56.00	-20.68	25.65	9.67	QP
8	0.500	20.77	46.00	-25.23	11.10	9.67	AV
9	0.672	33.47	56.00	-22.53	23.79	9.68	QP
10	0.672	13.73	46.00	-32.27	4.05	9.68	AV
*11	0.802	39.78	56.00	-16.22	30.10	9.68	QP
12	0.802	29.60	46.00	-16.40	19.92	9.68	AV

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ * ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

3. Peak Power Output

3.1. Test Setup

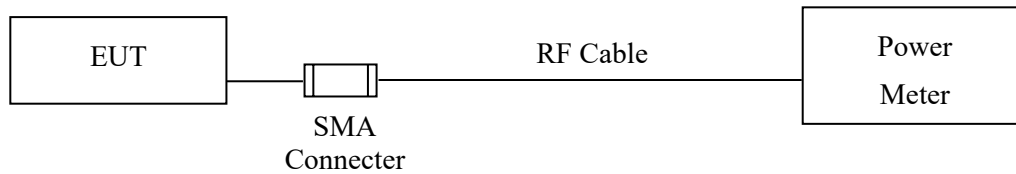

3.2. Limit

The maximum peak power shall be less 1Watt.

3.3. Test Procedure

Tested according to FHSS test procedure of KDB 558074 section 9 (b for compliance to FCC 47CFR 15.247 requirements.

3.4. Test Result of Peak Power Output

Product : Bluetooth Headset
Test Item : Peak Power Output
Test Mode : Mode 1: Transmit - 1Mbps
Test Date : 2021/07/15

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402	11.83	1 Watt= 30 dBm	Pass
Channel 39	2441	11.91	1 Watt= 30 dBm	Pass
Channel 78	2480	11.98	1 Watt= 30 dBm	Pass


Product : Bluetooth Headset
Test Item : Peak Power Output
Test Mode : Mode 2: Transmit - 3Mbps
Test Date : 2021/07/15

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402	11.86	1 Watt= 30 dBm	Pass
Channel 39	2441	11.99	1 Watt= 30 dBm	Pass
Channel 78	2480	12.03	1 Watt= 30 dBm	Pass


4. Radiated Emission

4.1. Test Setup


Radiated Emission Under 30MHz

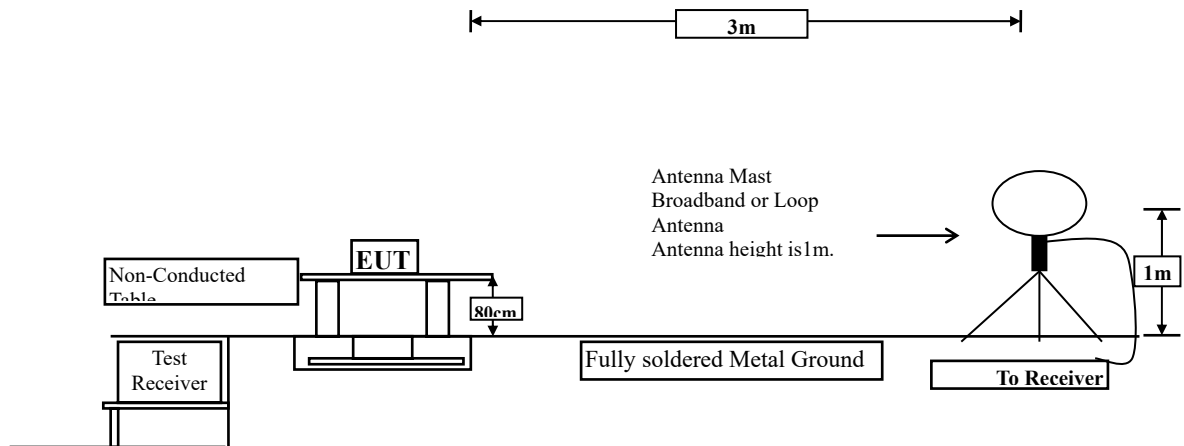

Radiated Emission Below 1GHz

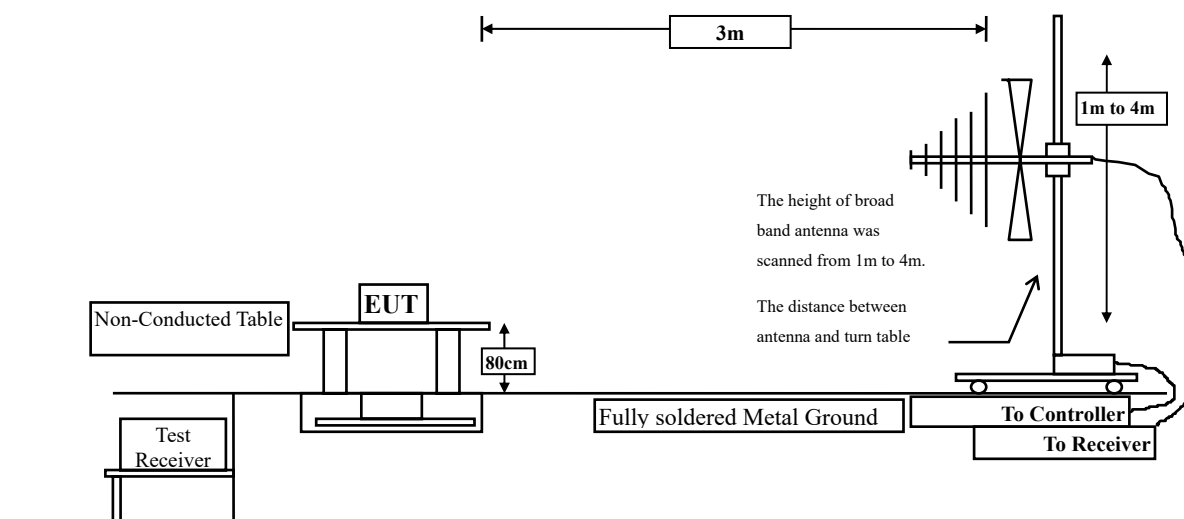

Radiated Emission Above 1GHz

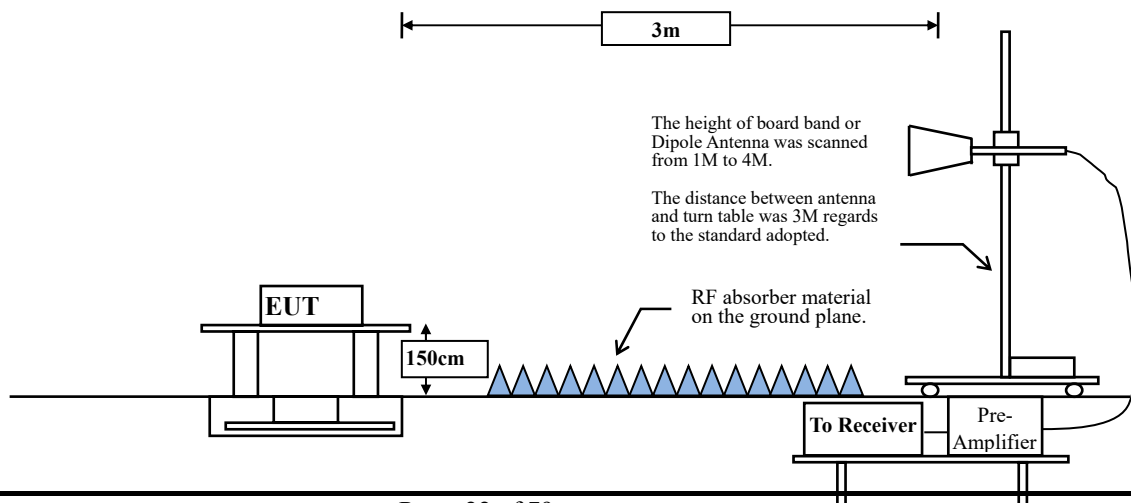

4.2. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

- Remarks:
1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested compliance to FCC 47CFR 15.247 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.


The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

4.4. Test Result of Radiated Emission

Product : Bluetooth Headset
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps(2402MHz)
 Test Date : 2021/07/21

Horizontal

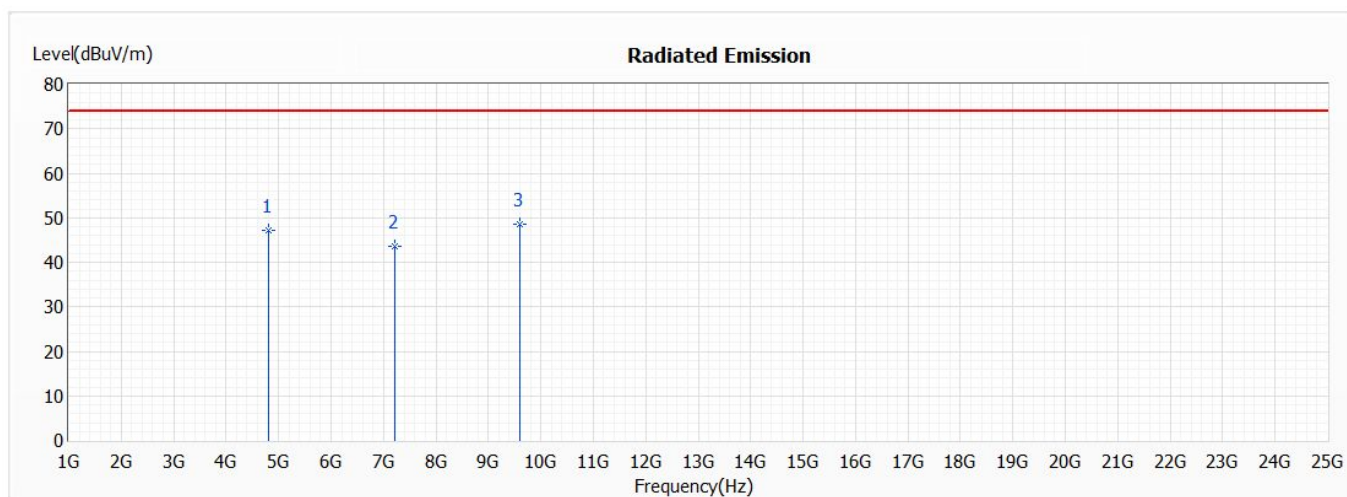


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4804.000	47.07	74.00	-26.93	48.64	-1.57	PK
2	7206.000	43.59	74.00	-30.41	40.67	2.92	PK
* 3	9608.000	48.46	74.00	-25.54	43.53	4.93	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Bluetooth Headset
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps(2402MHz)
 Test Date : 2021/07/21

Vertical

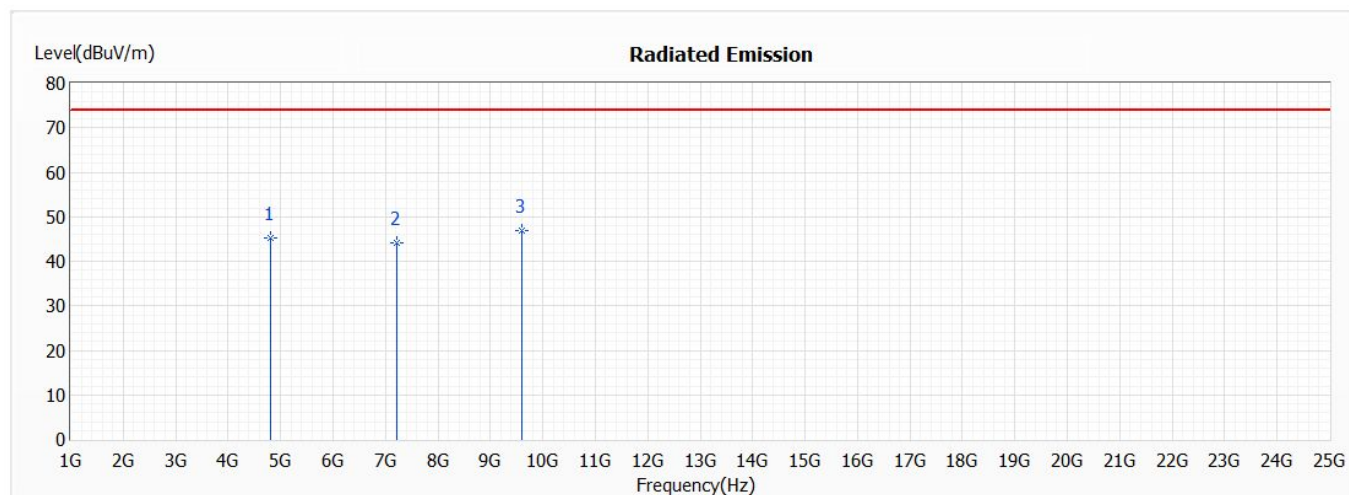


Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Bluetooth Headset
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps(2441MHz)
 Test Date : 2021/07/21

Horizontal

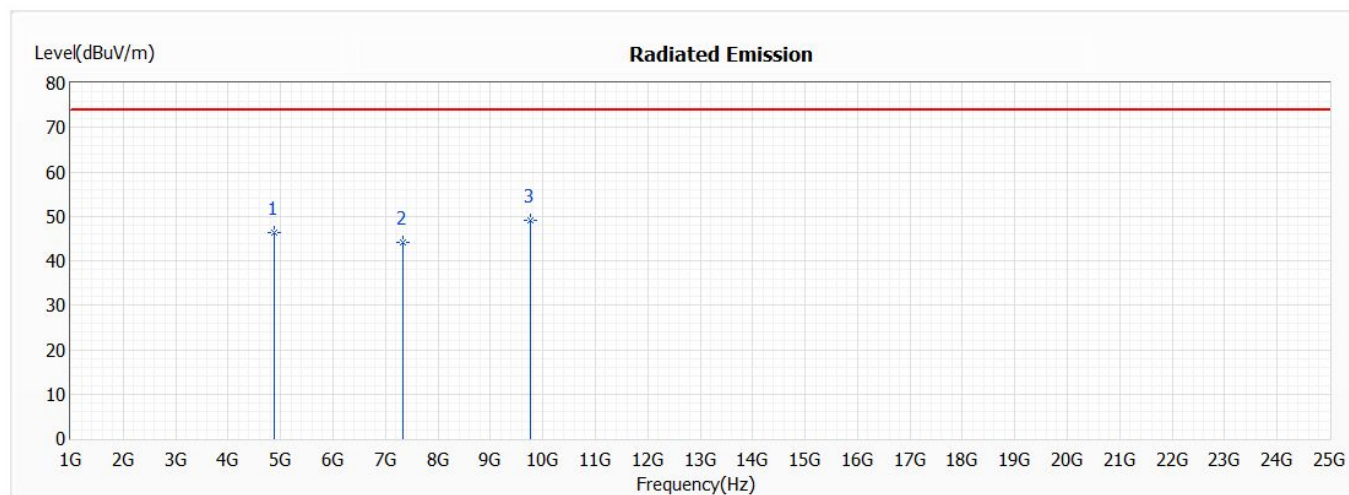


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4882.000	46.27	74.00	-27.73	47.77	-1.50	PK
2	7323.000	44.11	74.00	-29.89	41.18	2.93	PK
* 3	9764.000	49.04	74.00	-24.96	43.79	5.25	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Bluetooth Headset
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps(2441MHz)
 Test Date : 2021/07/21

Vertical

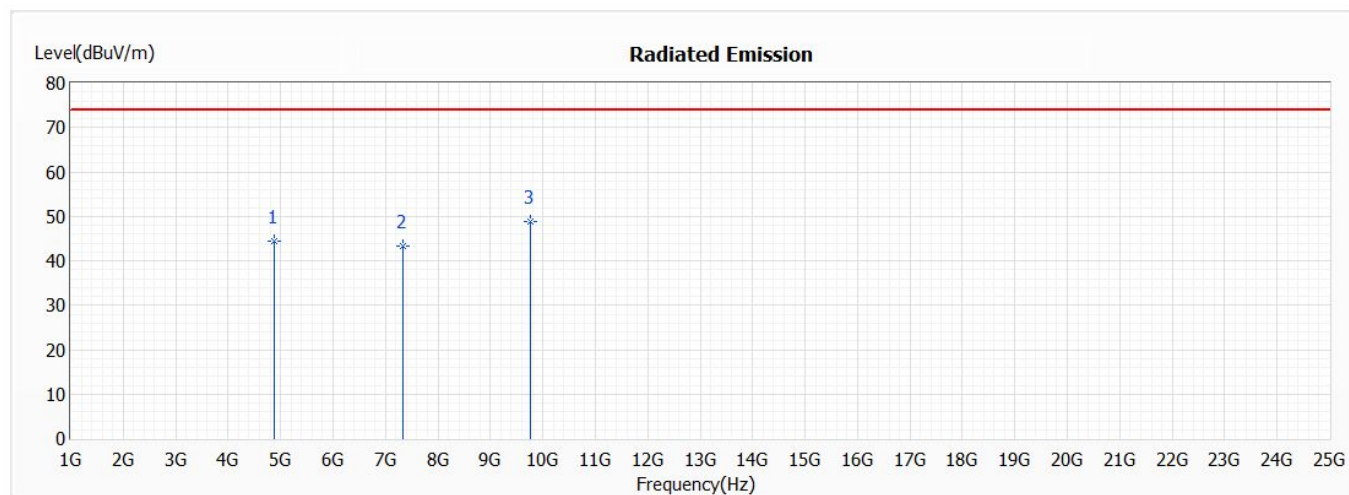


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4882.000	44.46	74.00	-29.54	45.96	-1.50	PK
2	7323.000	43.36	74.00	-30.64	40.43	2.93	PK
* 3	9764.000	48.82	74.00	-25.18	43.57	5.25	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Bluetooth Headset
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps(2480MHz)
 Test Date : 2021/07/21

Horizontal

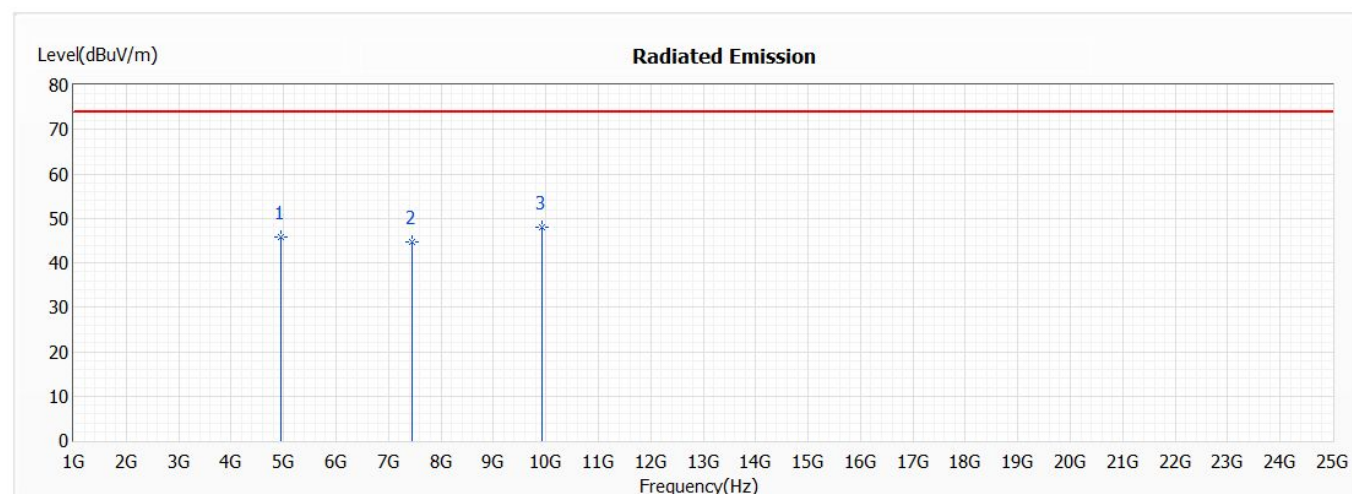


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4960.000	45.91	74.00	-28.09	47.06	-1.15	PK
2	7440.000	44.73	74.00	-29.27	41.66	3.07	PK
* 3	9920.000	47.91	74.00	-26.09	42.46	5.45	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Bluetooth Headset
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps(2480MHz)
 Test Date : 2021/07/21

Vertical

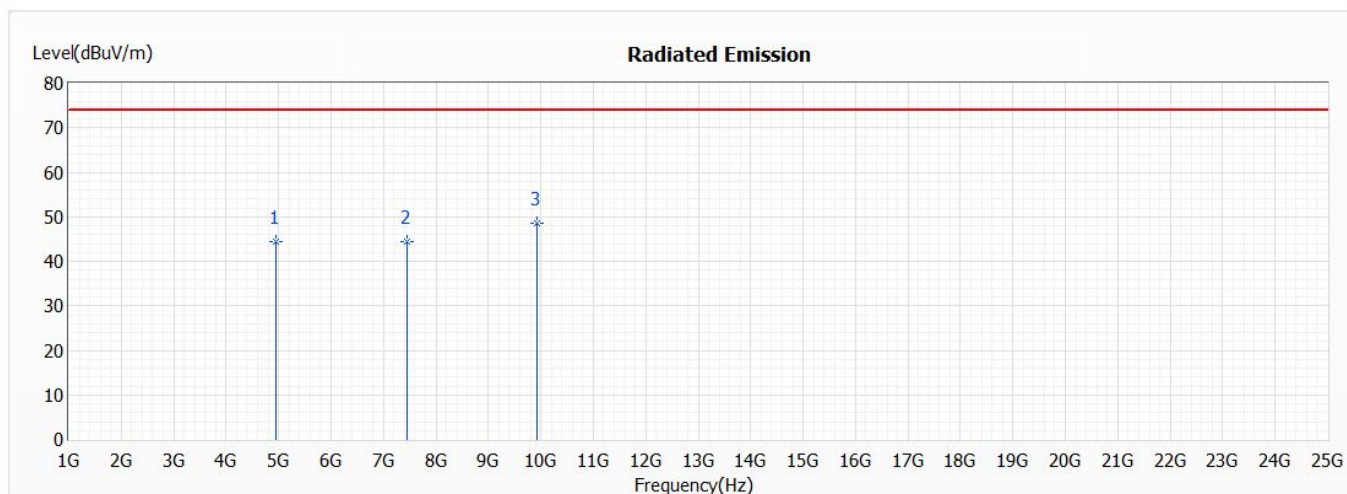

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.