



**FCC 47 CFR PART 15 SUBPART C  
INDUSTRY CANADA RSS-210 ISSUE 8**

**CERTIFICATION TEST REPORT**

**FOR**

**COMMISSIONING TOOL**

**MODEL NUMBER: CCT-CWC-1**

**FCC ID: 2ACQ6-CCT  
IC: 11481A-CCT**

**REPORT NUMBER: R10015053-RF**

**ISSUE DATE: 2014-07-15**

*Prepared for*  
**CREE INC.  
4600 SILICON DR.  
DURHAM, NC 27709 USA**

*Prepared by*  
**UL LLC  
12 LABORATORY DR.  
RESEARCH TRIANGLE PARK, NC 27709 USA  
TEL: (919) 549-1400**



**NVLAP LAB CODE 200246-0**

Revision History

Rev.	Issue Date	Revisions	Revised By
--	2014-04-23	Initial Issue	Jeff Moser
1	2014-07-15	Grantee Code Revised (previous one issued in error)	Jeff Moser

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>4</b>
<b>2. TEST METHODOLOGY .....</b>	<b>5</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>5</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>5</b>
4.1. MEASURING INSTRUMENT CALIBRATION .....	5
4.2. SAMPLE CALCULATION .....	5
4.3. MEASUREMENT UNCERTAINTY .....	5
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>6</b>
5.1. DESCRIPTION OF EUT .....	6
5.2. MAXIMUM OUTPUT POWER.....	6
5.3. DESCRIPTION OF AVAILABLE ANTENNAS .....	6
5.4. SOFTWARE AND FIRMWARE.....	6
5.5. WORST-CASE CONFIGURATION AND MODE.....	7
5.6. DESCRIPTION OF TEST SETUP.....	8
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>10</b>
<b>7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS .....</b>	<b>12</b>
7.1. ON TIME AND DUTY CYCLE RESULTS.....	12
7.2. DUTY CYCLE PLOTS .....	13
7.3. MEASUREMENT METHODS .....	15
<b>8. ANTENNA PORT TEST RESULTS .....</b>	<b>16</b>
8.1. O-QPSK (DSSS) MODE IN THE 2.4 GHz BAND .....	16
8.1.1. 6 dB BANDWIDTH.....	16
8.1.2. 99% BANDWIDTH.....	20
8.1.3. OUTPUT POWER .....	24
8.1.4. AVERAGE POWER.....	28
8.1.5. POWER SPECTRAL DENSITY .....	29
8.1.6. CONDUCTED SPURIOUS EMISSIONS.....	33
<b>9. RADIATED TEST RESULTS.....</b>	<b>40</b>
9.1. LIMITS AND PROCEDURE .....	40
9.2. TRANSMITTER ABOVE 1 GHz.....	41
9.2.1. TX ABOVE 1 GHz FOR O-QPSK (DSSS) MODE IN THE 2.4 GHz BAND.....	41
9.3. WORST-CASE BELOW 1 GHz.....	55
<b>10. AC POWER LINE CONDUCTED EMISSIONS .....</b>	<b>59</b>

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** CREE INC.  
4600 SILICON DR.  
DURHAM, NC 27709 USA

**EUT DESCRIPTION:** Commissioning Tool with Transceiver for Lighting System.

**MODEL:** CCT-CWC-1

**SERIAL NUMBER:** Non-serialized.

**DATE TESTED:** 2014-02-04 through 2014-02-07, 2014-02-11,  
2014-03-03 through 2014-03-05

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 Issue 8 Annex 8	Pass
INDUSTRY CANADA RSS-GEN Issue 3	Pass

UL LLC tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL LLC based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL LLC and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released  
For UL LLC By:



Mike Antola  
EMC Project Lead  
UL – Consumer Technology Division

Prepared By:



Jeff Moser  
EMC Program Manager  
UL – Consumer Technology Division

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 12 Laboratory Dr., Research Triangle Park, NC 27709, USA.

UL LLC (RTP) is accredited by NVLAP, Laboratory Code 200246-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2002460.htm>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	+/- 2.5 dB
Radiated Disturbance, 30 to 1000 MHz	+/- 3.4 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The Commissioning Tool, p/n CCT-CWC-1 is a 2.4 GHz DSSS transceiver used with light fixtures. The Commissioning Tool contains an O-QPSK modulation and a 250 kbps data rate. The Commissioning Tool receives signals from other devices to control the fixture.

The radio module is manufactured by Cree Inc.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2405 - 2480	O-QPSK	4.19	2.62

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a Monopole, PCB-Trace antenna, with a maximum gain of 1.4 dBi.

### 5.4. SOFTWARE AND FIRMWARE

#### Config Tool – CCT-CWC-1

RFR2\_MOD\_11.hex  
RFR2\_MOD\_18.hex  
RFR2\_MOD\_22.hex  
RFR2\_NO\_RADIO.elf  
XMEGA\_STANDARD.elf  
XMEGA\_STRESS.hex

#### All firmware has the following parameters:

- Channel 11 and 18 have transmit power of 3.5dBm, channel 26 has a transmit power of 1.2dBm.
- Channel 11 and 18 have no transmit filter, channel 26 uses a transmit filter.
- All firmware files labelled 128RFR2\_MOD\_XX.hex are radio tests for the ATMEGA128RFR2, where XX is the channel being constantly transmitted on.
- All firmware files labelled RFR2\_MOD\_XX.hex are the equivalent for the ATMEGA256RFR2.
- The 128RFR2\_NO\_RADIO and RFR2\_NO\_RADIO files put the ATMEGAXXXRFR2 into a non-transmitting, idle state.
- The XMEGA\_STRESS.hex file is the stress test that puts the XMEGA into a maximal power usage state.
- The XMEGA.elf file is the standard conditions XMEGA file for testing the CT.

## 5.5. WORST-CASE CONFIGURATION AND MODE

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that the Y orientation (Device on its side.) was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in Y orientation. To see what affects, if any, attaching the device to a laptop PC via its USB cable was also investigated. The presence of the USB cable and laptop PC had negligible effect at the fundamental emission. In fact, the stand-alone configuration's fundamental emission level was slightly higher than with the device attached to the laptop PC. Therefore, the stand-alone configuration was used throughout FCC Part 15, Subpart C radiated emissions testing.

Radiated-emission testing in the 30-1000MHz range and power line conducted-emission testing were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

## 5.6. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop PC	Lenovo	T61 (7661-CC2)	L3-AB229	N/A
Laptop PC power adapter	Lenovo	92P1109	11S92P1109Z1ZBTZ718B5W	N/A
AC power adapter (wall-wart)	Apple	A1265	1X3274T3798QZ	N/A

### I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	USB	1	USB	Shielded	1	
2	AC	1	-	Unshielded	1	1m for PC adapter; 0m for wall-wart.
3	DC	1	-	Unshielded	1.78	Laptop PC power adapter.


### TEST SETUP

Different Commissioning Tool Modules were provided. 3 units were provided for Radiated Emissions testing (Low Channel, Mid Channel and High Channel) and 3 units were provided for Conducted Port tests (Low Channel, Mid-Channel and High-Channel).

Note, the Low and Mid Channel's output power was set for 3.5dBm during testing. The High Channel output power was set for 1.2 dBm during testing.



### SETUP DIAGRAM FOR TESTS

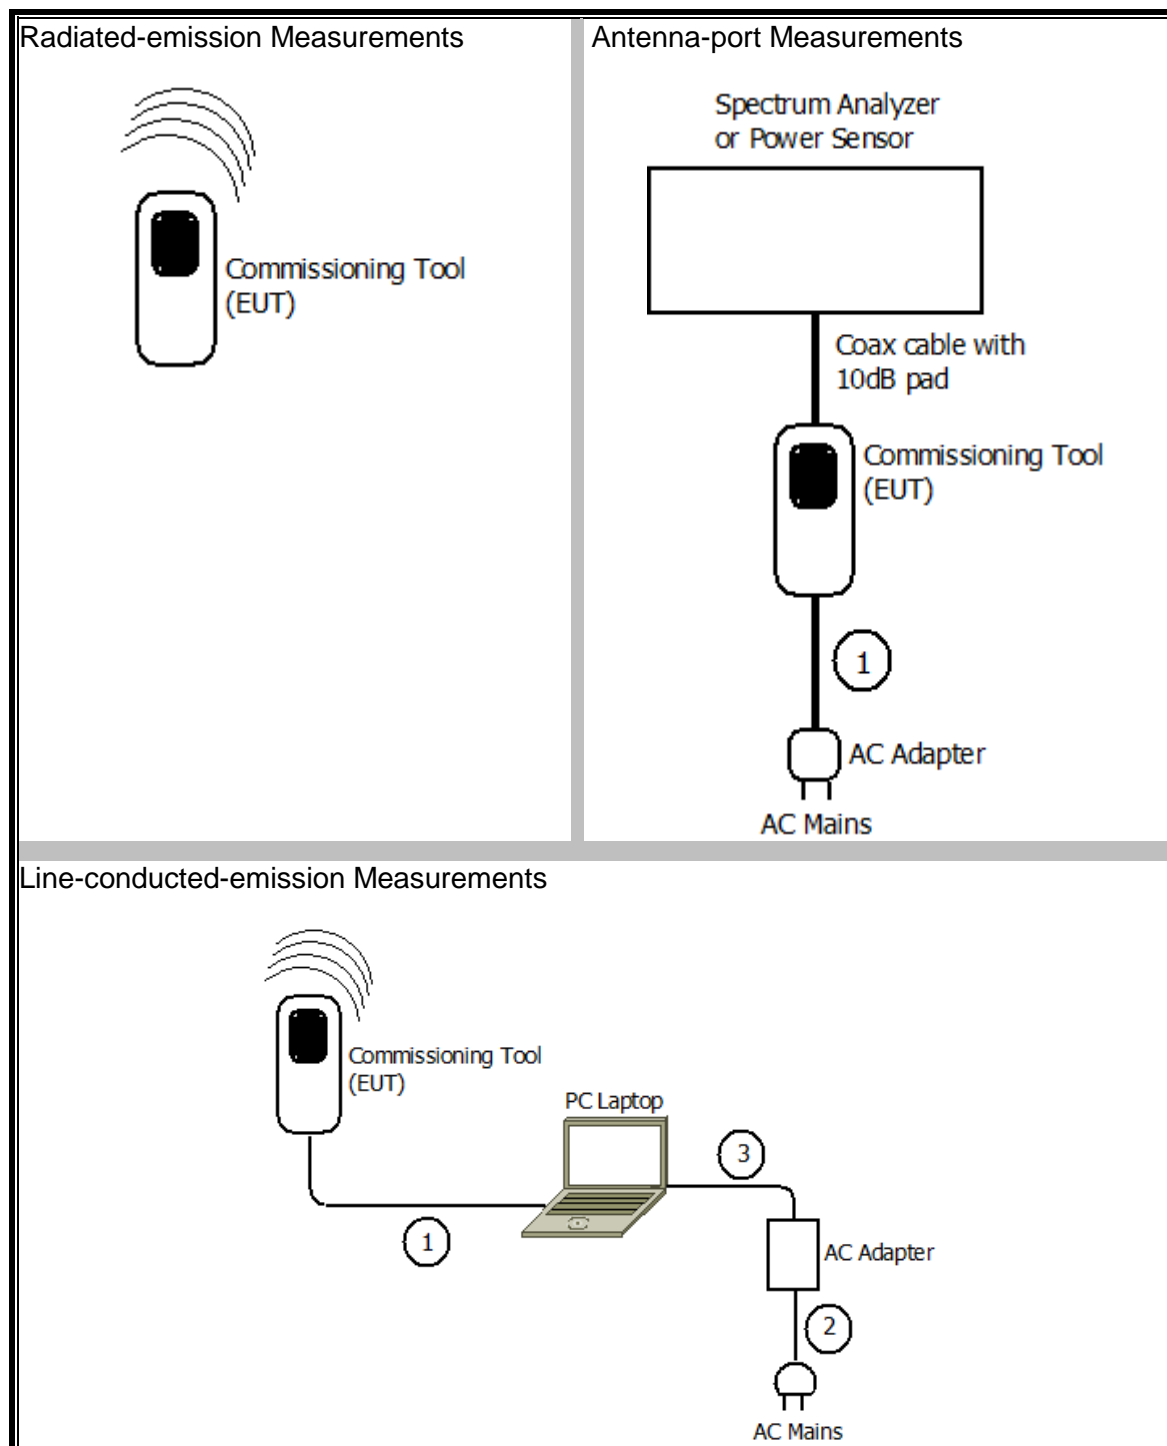

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

### Wireless Conducted Measurement Equipment

Equipment ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
SA0016	Spectrum Analyzer	Agilent Technologies	N9030A	2013-09-04	2014-09-30
PSSENSOR001	RF Power Meter Sensor Head	Rohde & Schwartz	NRP-Z81 (w/ NRP-Z3 USB adapter)	2013-09-27	2014-09-30
HI0069	Temp/Humid/Pressure Meter	Cole-Parmer	99760-00	2013-06-17	2014-06-17

### Radiated Disturbance Emissions (E-field)

Equip. ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
AT0037	Loop Antenna (Low Range)	Electro-Metrics	EM-6871	2013-06-19	2014-06-30
AT0036	Loop Antenna (High Range)	Electro-Metrics	EM-6872	2013-06-20	2014-06-30
AT0025	Biconical Antenna, 30 to 300 MHz	Schaffner-Chase EMC Ltd.	VBA6106A	2013-06-14	2014-06-30
AT0030	Log-periodic Antenna, 200 MHz to 1000 MHz	Schaffner	UPA6109	2013-06-12	2014-06-30
AT0062	Double-Ridged Waveguide Horn Antenna, 1 to 18 GHz	ETS Lindgren	3117	2013-08-27	2014-08-31
AT0063	Horn Antenna, 18-26.5GHz	ARA	MWH-1826/B	2013-11-12	2014-11-30
AT0061	Horn Antenna, 25.5-40GHz	ARA	MWH-2640/B	2013-09-24	2014-09-30
SAC_C (BC antenna 3m location)	Gain-Loss string for biconical antenna at 3m	Various	Various	2013-09-06	2014-09-30
SAC_D (LP antenna 3m location)	Gain-Loss string for log-periodic antenna at 3m	Various	Various	2013-09-06	2014-09-30
SAC_E_LR (Loop antenna 3m location)	Gain-Loss string for loop/rod antenna at 3m	Various	Various	2013-09-06	2014-09-30
SAR003	Spectrum Analyzer / Receiver	Rohde & Schwarz	ESIB40 (1088.7490.40)	2013-09-03	2014-09-30
SA0016	Spectrum Analyzer	Agilent	N9030A	2013-09-04	2014-09-30
SOFTEMI	EMI Software	UL	Version 9.5	NA	NA
AMP011	RF Amp, 1-20GHz	Miteq	AMF-6D-01002000-22-10P	2013-09-04	2014-09-30
AMP013	RF Amp, 18-40GHz	Miteq	JS44-18004000-33-8P	2013-09-04	2014-09-30

Equip. ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
HI0069	Temp/Humid/Pressure Meter	Cole-Parmer	99760-00	2013-06-17	2014-06-17

Conducted Disturbance Emissions - Voltage

Equipment ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
SA0015	EMI Test Receiver 9kHz-7GHz	Rohde & Schwarz	ESCI 7	2013-09-04	2014-09-30
ATA016	Coaxial cable, 20 ft., BNC -male to BNC-male	UL	RG-223	2013-09-05	2014-09-30
HI0069	Temp/Humid/Pressure Meter	Cole-Parmer	99760-00	2013-06-17	2014-06-17
SOFTEMI	EMI Software	UL	Version 9.5	NA	NA
ATA508	Transient Limiter, 0.009 to 100 MHz	Electro-Metrics	EM 7600	2013-09-06	2014-09-30
LISN003	LISN, 50-ohm/50-uH, 2-conductor, 25A	Fischer Custom Com.	FCC-LISN-50-25-2-01-550V	2013-09-03	2014-09-30

## 7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

### LIMITS

None; for reporting purposes only.

### PROCEDURE



KDB 558074 Zero-Span Spectrum Analyzer Method.


#### 7.1. ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
<b>2.4GHz Band</b>						
O-QPSK Mode	1000.000	1000.000	1.000	100.00%	0.00	0.010

## 7.2. DUTY CYCLE PLOTS

### 2.4 GHz BAND

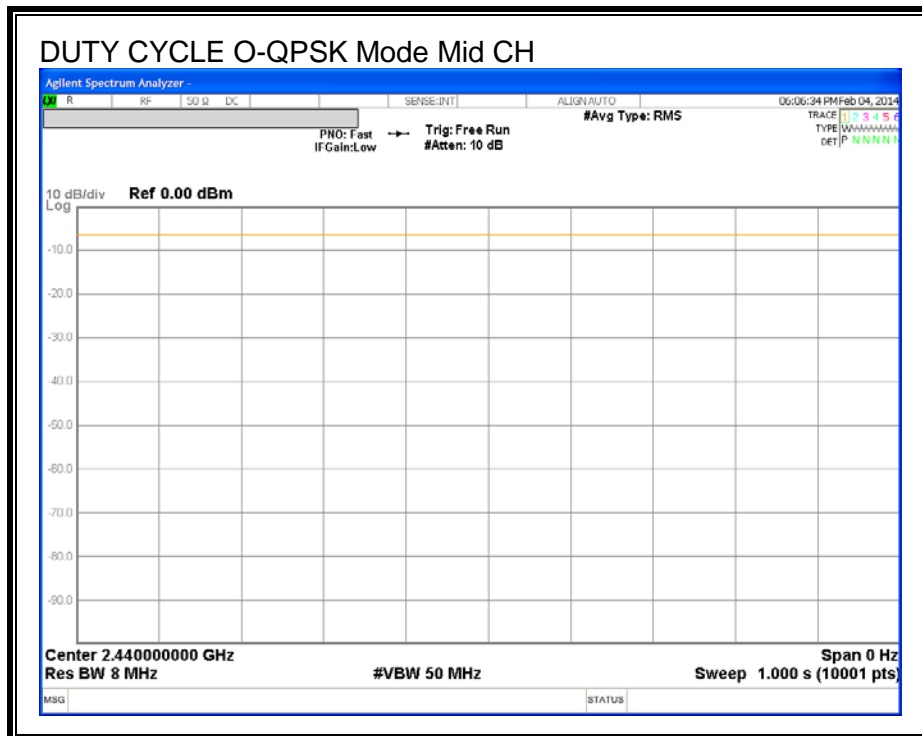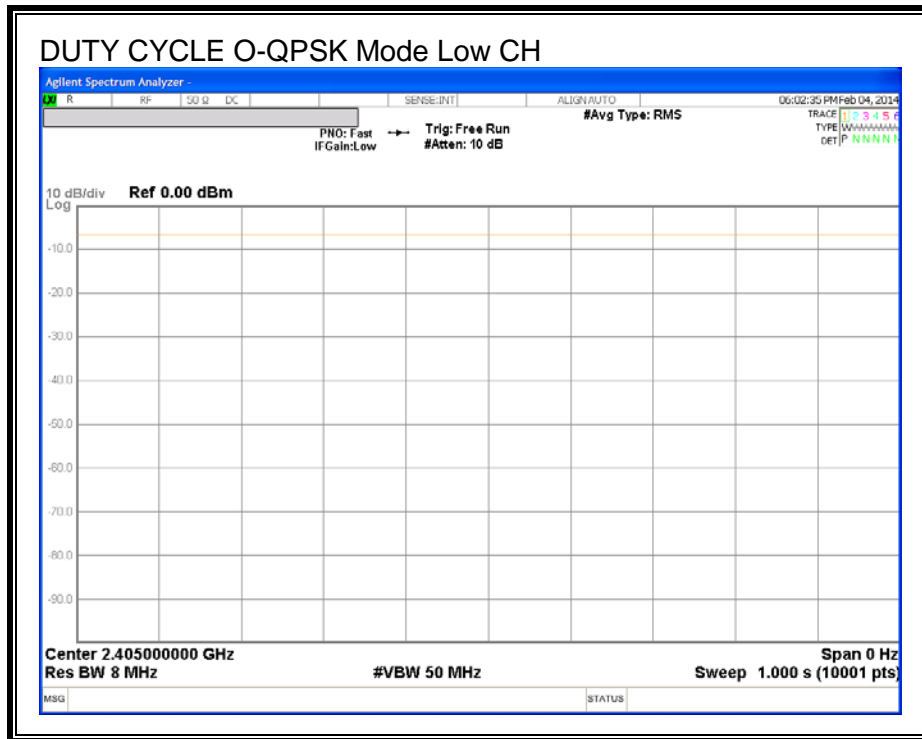

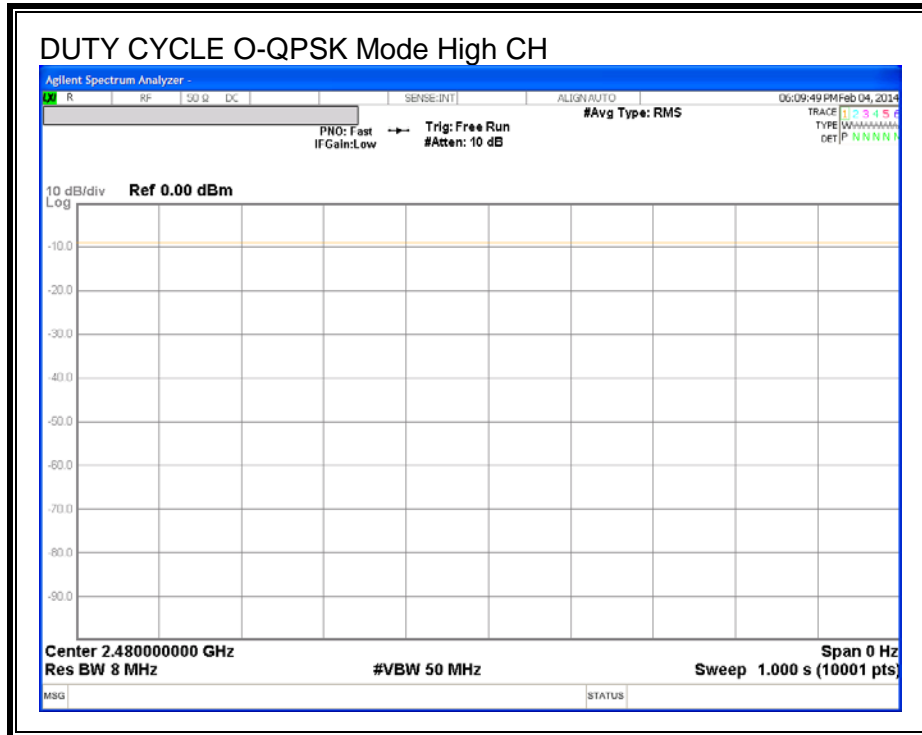

### **7.3. MEASUREMENT METHODS**

6 dB BW: KDB 558074 D01 v03r01, Section 8.1.

Output Power: KDB 558074 D01 v03r01, Section 9.1.1.

Power Spectral Density: KDB 558074 D01 v03r01, Section 10.2.

Out-of-band emissions in non-restricted bands: KDB 558074 D01 v03r01, Section 11.0.

Out-of-band emissions in restricted bands: KDB 558074 D01 v03r01, Section 12.1.

## 8. ANTENNA PORT TEST RESULTS

### 8.1. O-QPSK (DSSS) MODE IN THE 2.4 GHz BAND

#### 8.1.1. 6 dB BANDWIDTH

##### LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.

##### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.


##### RESULTS


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2405	1.589	0.5
Middle	2440	1.586	0.5
High	2480	1.574	0.5



## 6 dB BANDWIDTH

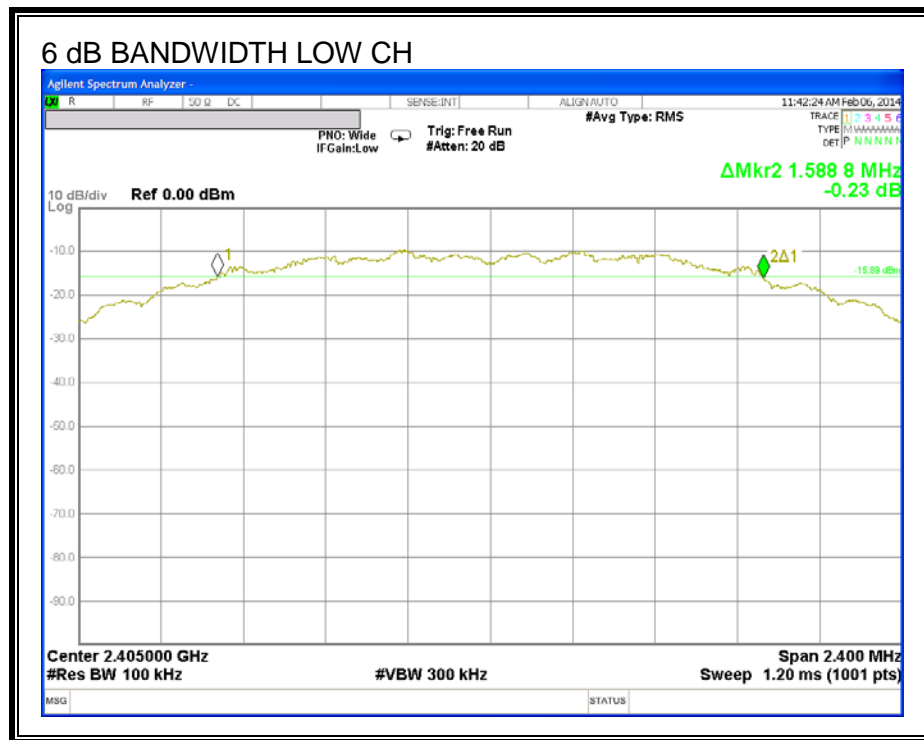

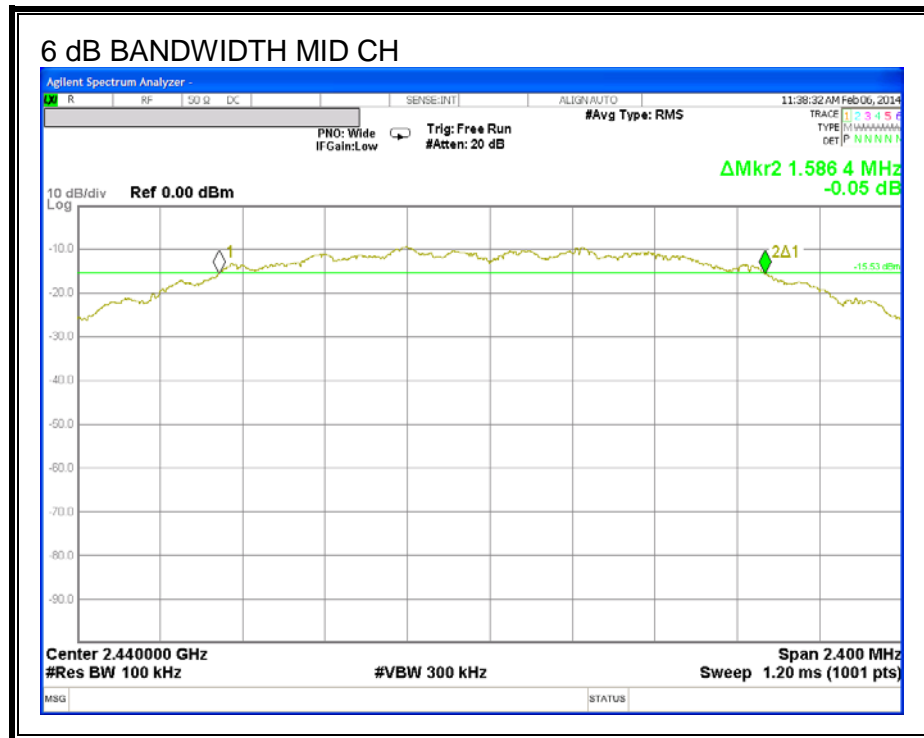

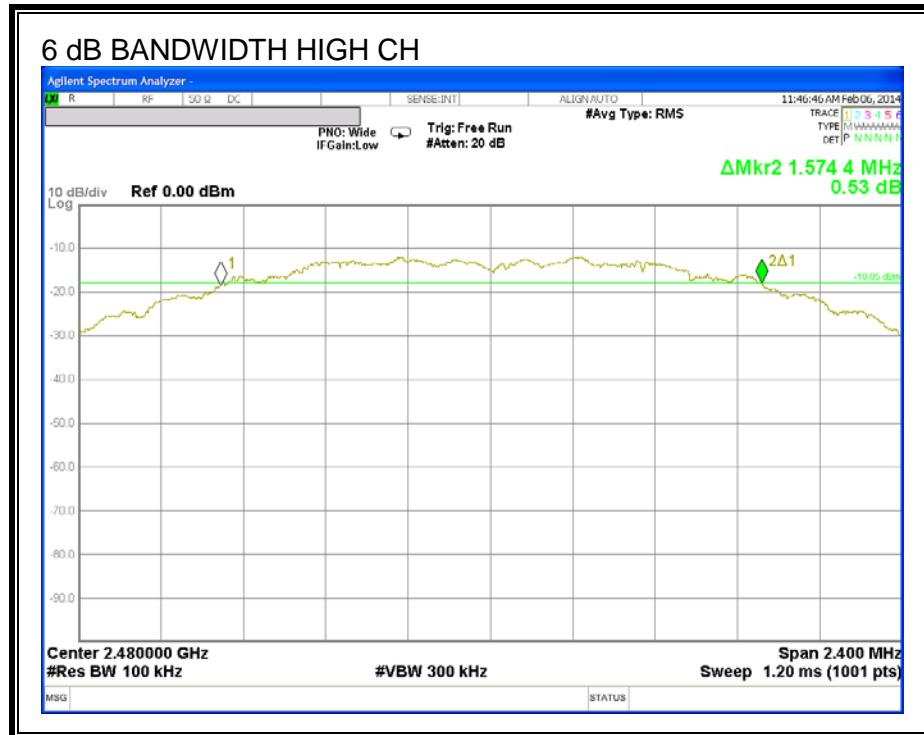

### 8.1.2. 99% BANDWIDTH

#### LIMITS

None; for reporting purposes only.


#### TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.


#### RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2405	2.234
Middle	2440	2.222
High	2480	2.218

**99% BANDWIDTH**

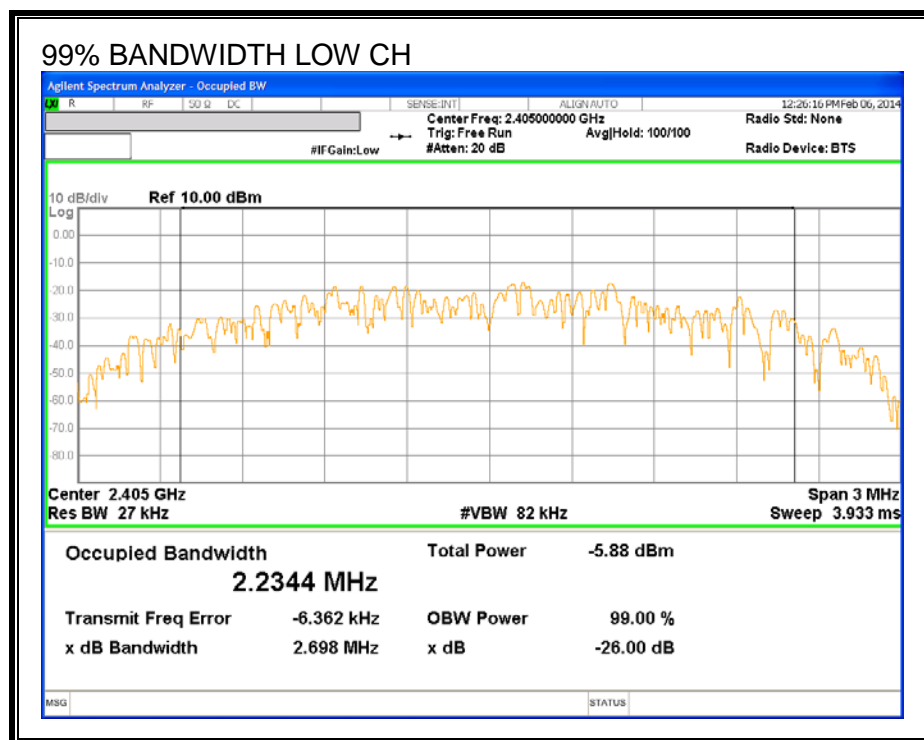

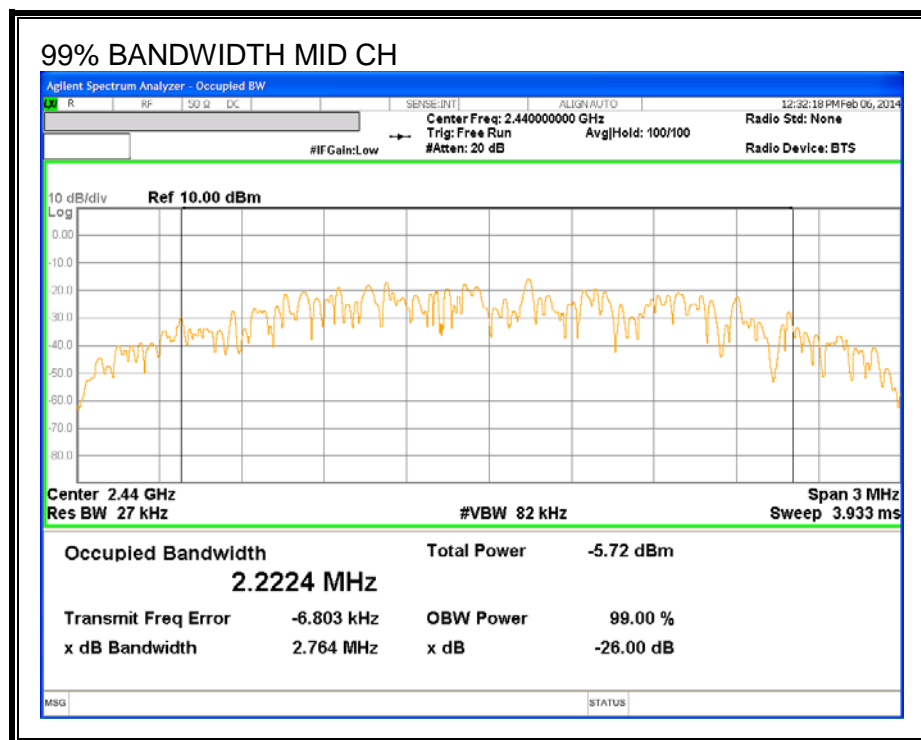

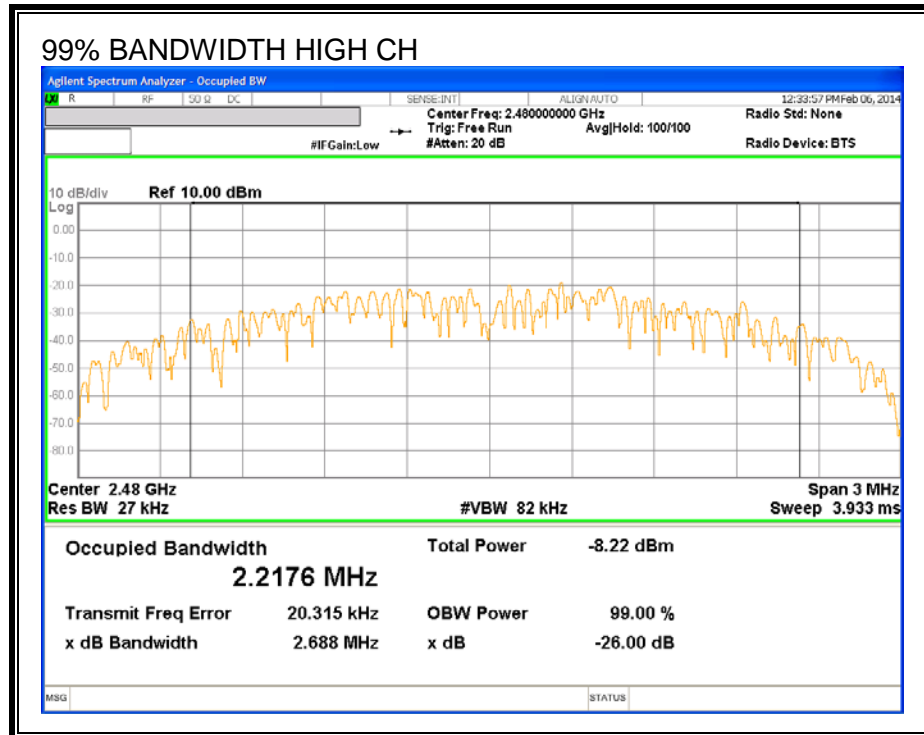

### 8.1.3. OUTPUT POWER

#### LIMITS

FCC §15.247 (b)

IC RSS-210 A8.4

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

#### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 6dB bandwidth of the EUT.


#### RESULTS


Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2405	3.99	30	-26.01
Middle	2440	4.19	30	-25.82
High	2480	1.36	30	-28.64



## OUTPUT POWER

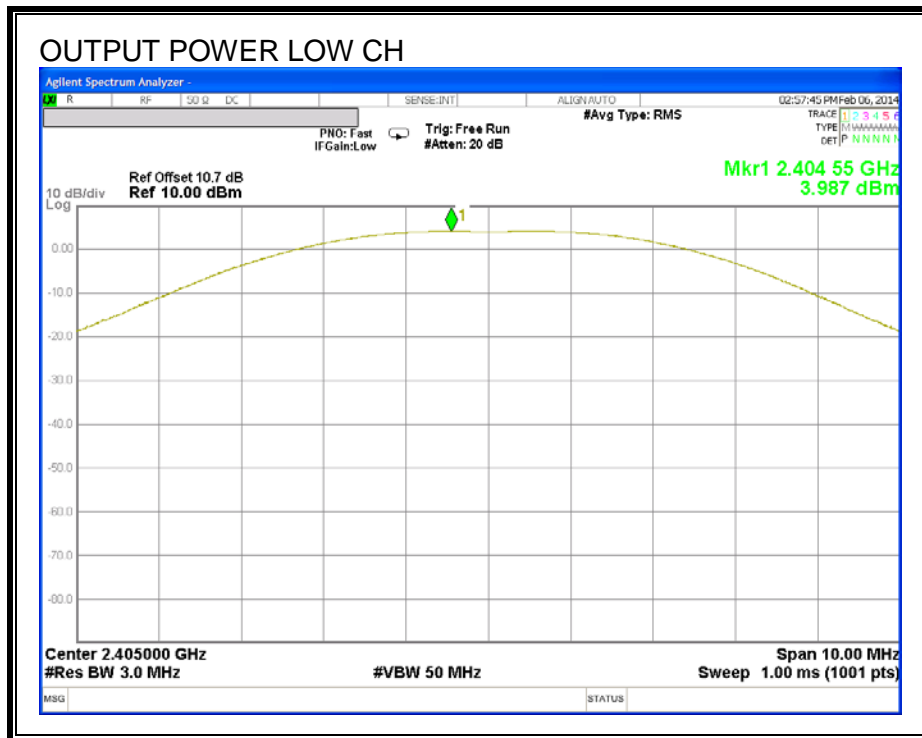

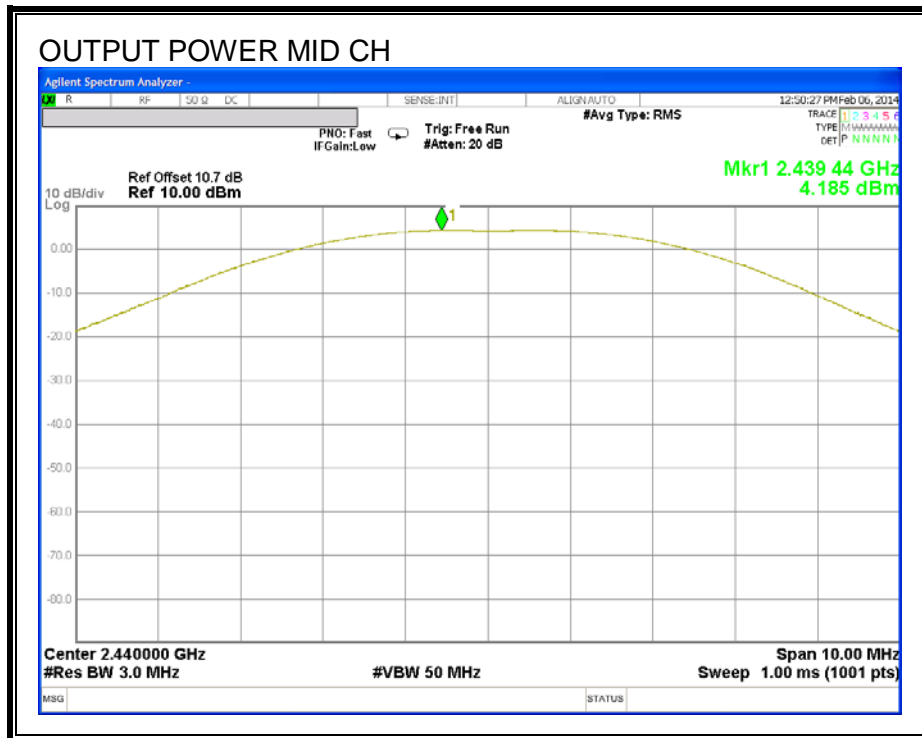

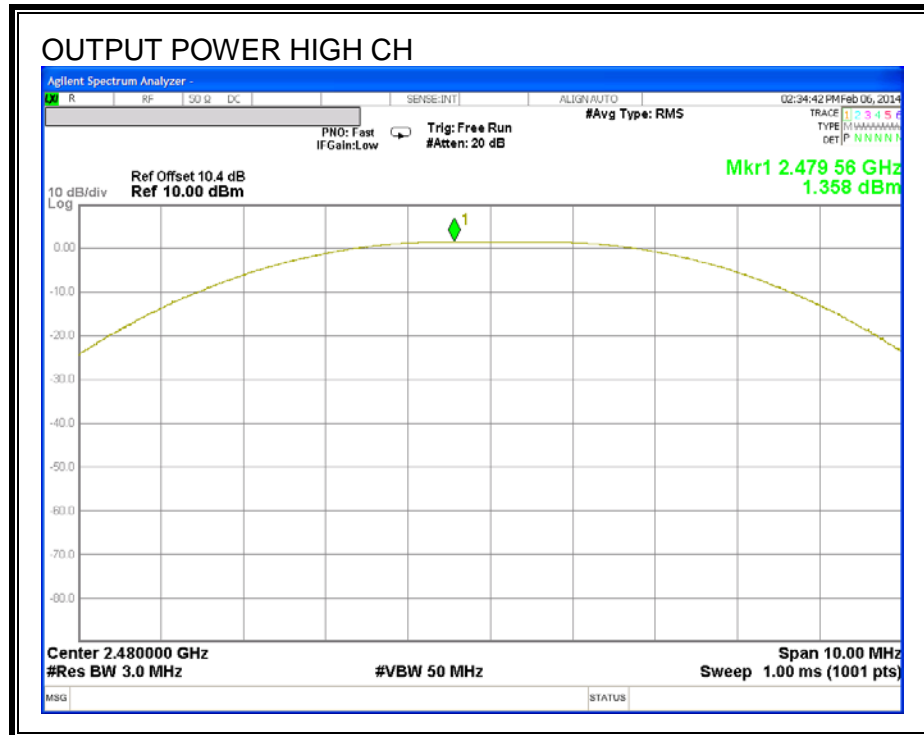

#### 8.1.4. AVERAGE POWER

##### LIMITS

None; for reporting purposes only.

##### TEST PROCEDURE

The transmitter output is connected to a power meter.

##### RESULTS

The cable assembly insertion loss of 10.7dB (including 10 dB pad and 0.7 dB cable) for the low and middle channels and 10.4dB (including 10 dB pad and 0.4 dB cable) for the high channel was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Power (dBm)
Low	2405	3.98
Middle	2440	4.18
High	2480	1.34

### 8.1.5. POWER SPECTRAL DENSITY

#### LIMITS

FCC §15.247 (e)

IC RSS-210 A8.2 (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


#### TEST PROCEDURE


Output power was measured based on the use of a peak measurement in accordance with section 10.2 of KDB 558074 D01 v03r01, Section 10.2.


#### RESULTS

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2405	-10.08	8	-18.08
Middle	2440	-10.78	8	-18.78
High	2480	-13.83	8	-21.83

**POWER SPECTRAL DENSITY**

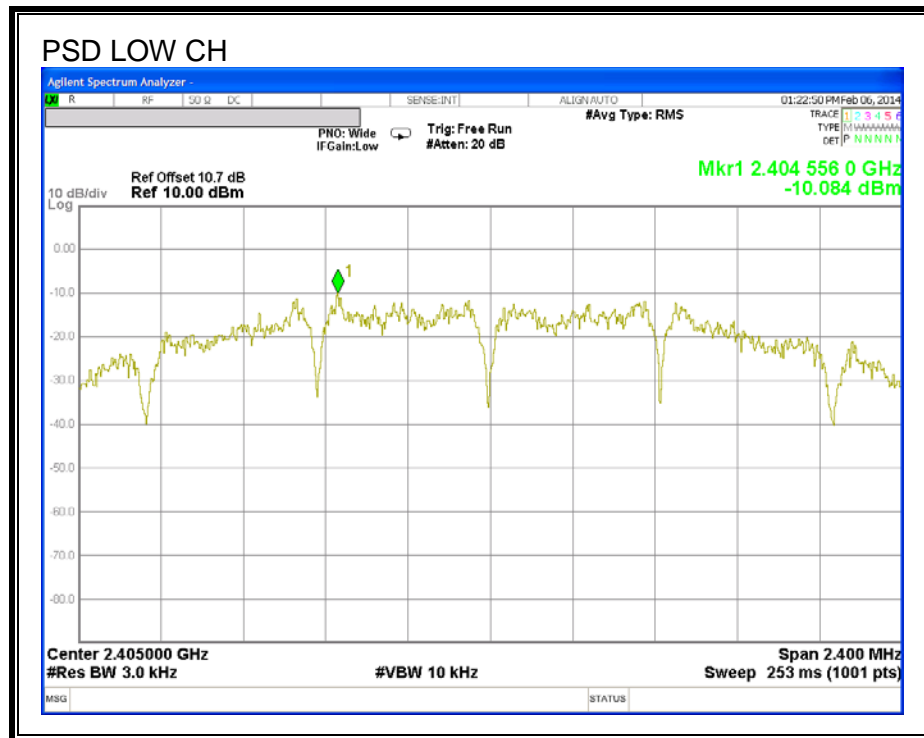

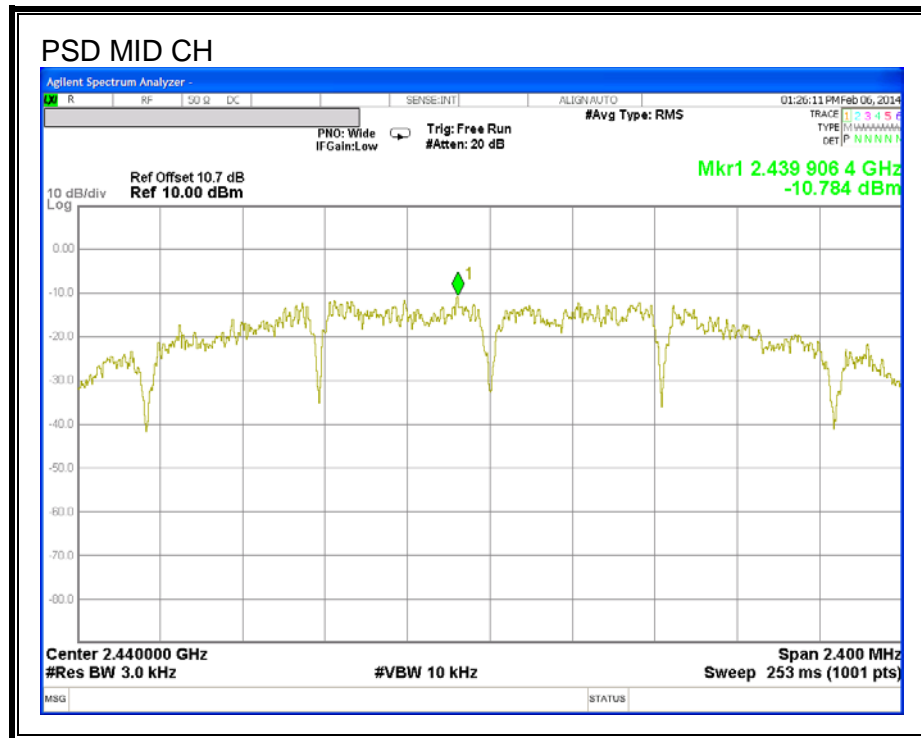

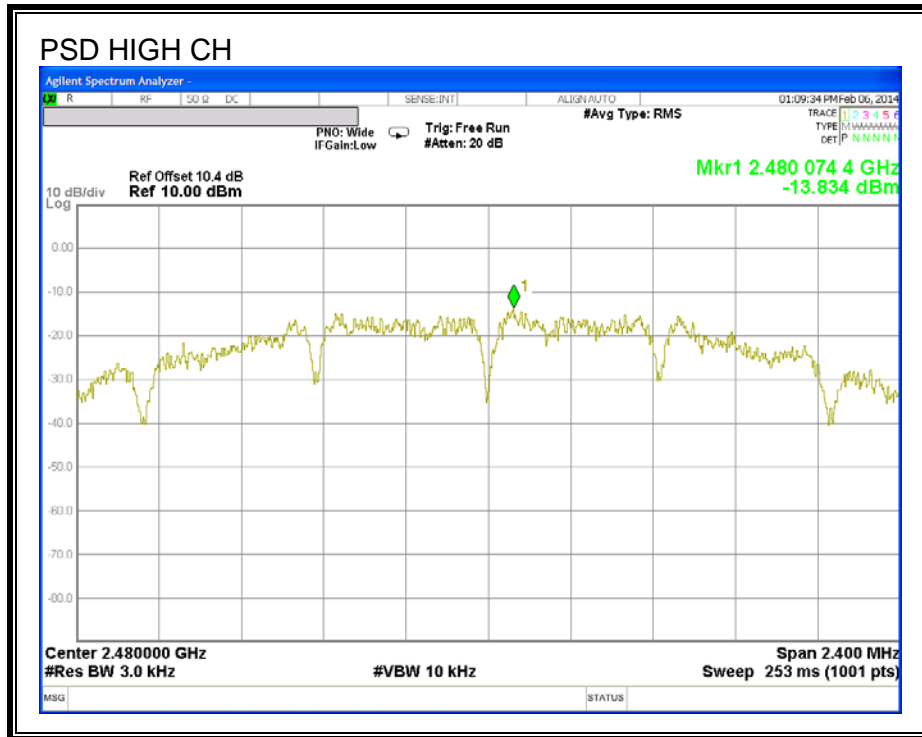



## **8.1.6. CONDUCTED SPURIOUS EMISSIONS**

### **LIMITS**

FCC §15.247 (d)

IC RSS-210 A8.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.


### **TEST PROCEDURE**


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

## RESULTS

### SPURIOUS EMISSIONS, LOW CHANNEL

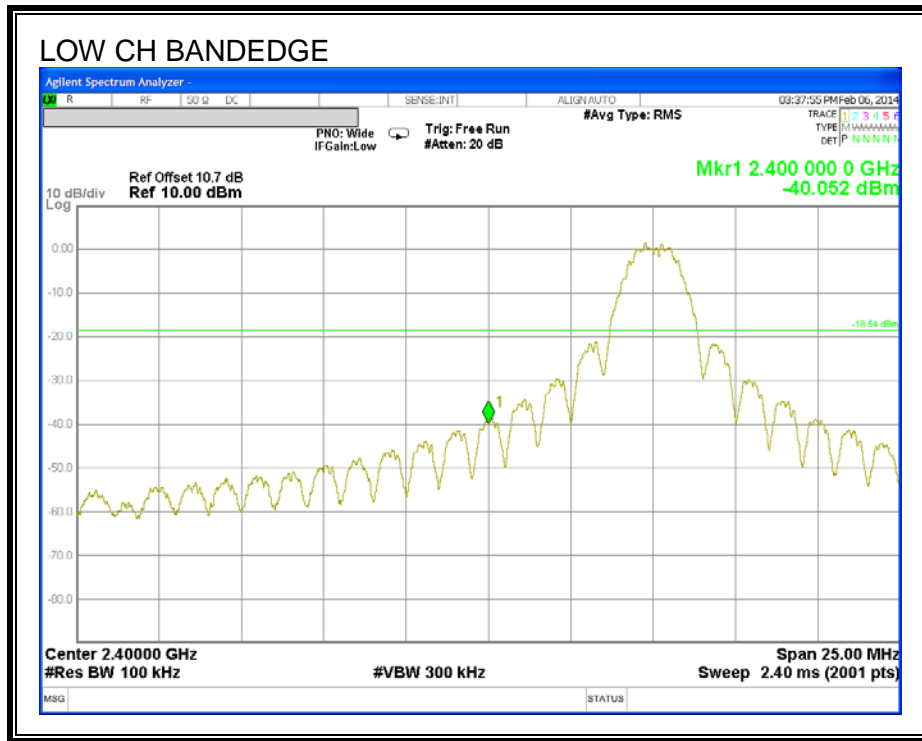

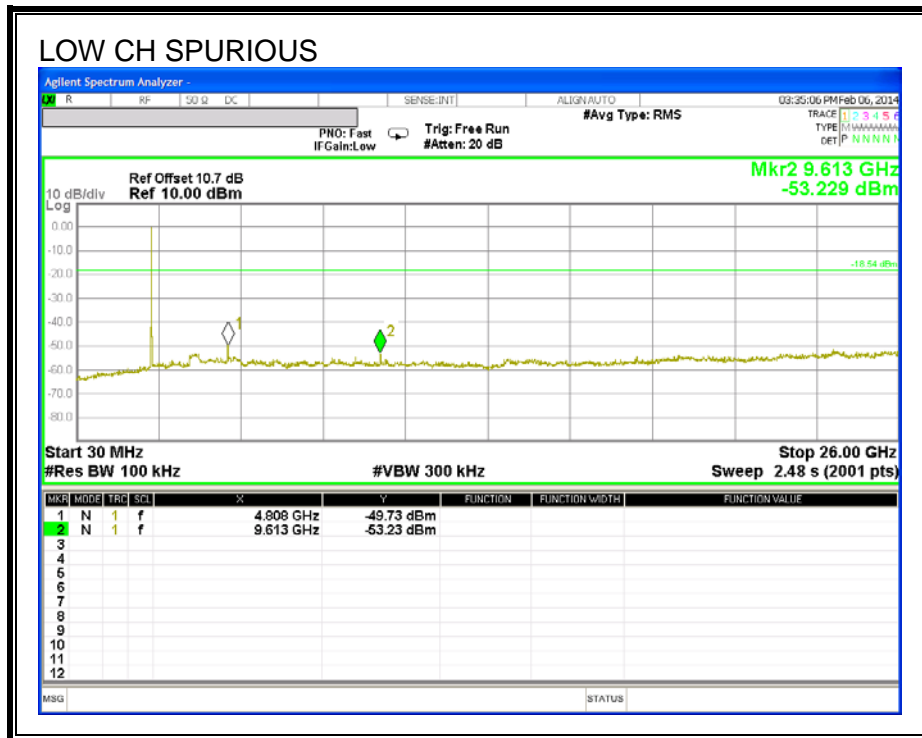

# MID CH REFERENCE

The screenshot displays an Agilent Spectrum Analyzer interface. The top status bar shows the date and time as 03:22:40 PM Feb 06, 2014. The main display area shows a signal trace with a peak at 2.439749 GHz, labeled 'Mkr1 2.439 749 2 GHz' and '1.46 dBm'. The trace is yellow, and the peak is marked with a green diamond and the number '1'. The background is a grid. The left side of the screen shows the frequency scale from -10.0 to -80.0 dB/div Log. The bottom status bar shows the center frequency as 2.440000 GHz, the span as 2.400 MHz, the resolution bandwidth as 100 kHz, the video bandwidth as 300 kHz, and the sweep time as 1.20 ms (2001 pts). The top status bar shows the input signal as R, the sense as INT, and the alignment as AUTO. The bottom status bar shows the message as MSG and the status as STATUS.

Agilent Spectrum Analyzer -

R RF SQ Ω DC SENSE:INT ALIGN:AUTO 03:22:40 PM Feb 06, 2014

PN0: Wide Trig: Free Run #Avg Type: RMS  
IF Gain: Low #Atten: 20 dB


Ref Offset 10.7 dB  
Ref 10.00 dBm

Mkr1 2.439 749 2 GHz  
1.46 dBm


10 dB/div  
Log


Center 2.440000 GHz  
#Res BW 100 kHz  
#VBW 300 kHz  
Span 2.400 MHz  
Sweep 1.20 ms (2001 pts)

MSG STATUS

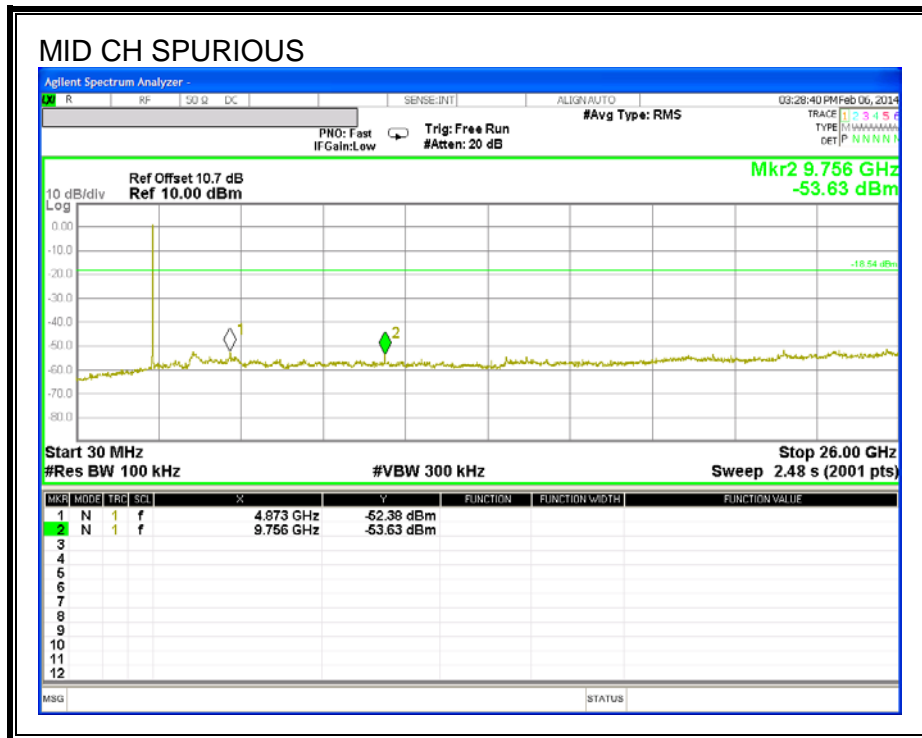

**SPURIOUS EMISSIONS, HIGH CHANNEL**

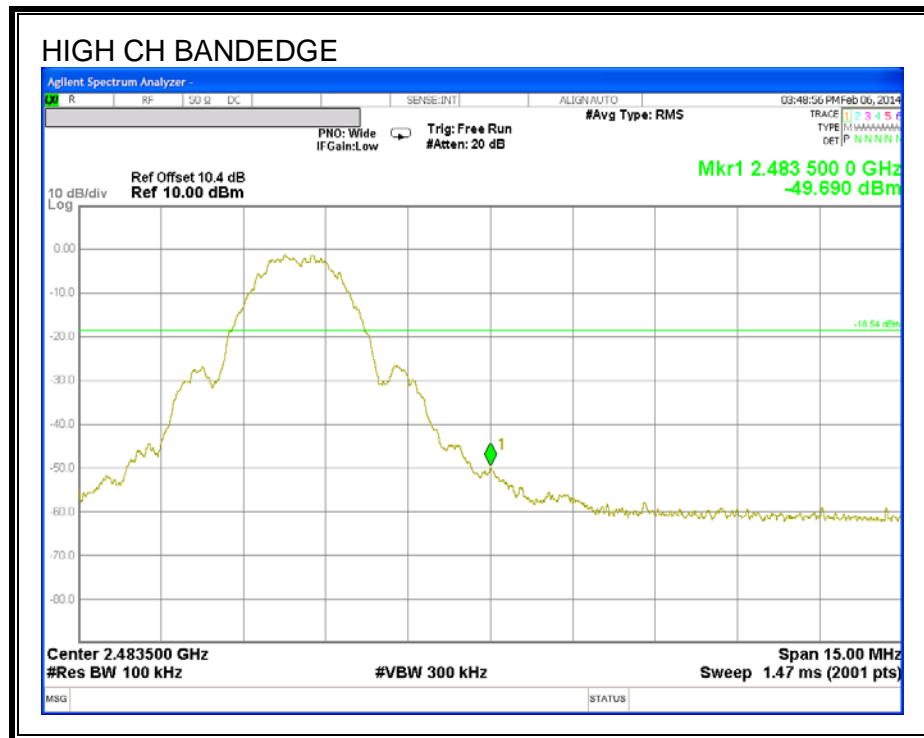

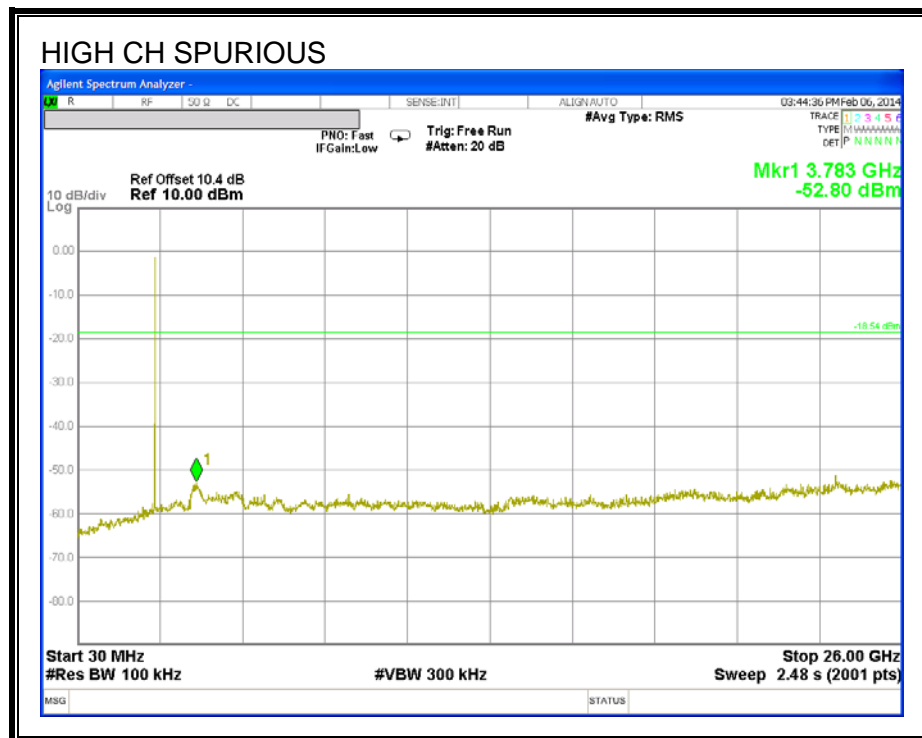

## 9. RADIATED TEST RESULTS

### 9.1. LIMITS AND PROCEDURE

#### LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

#### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements between 30 MHz and 1 GHz the resolution bandwidth is set to 120 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 1 MHz for peak measurements and as applicable for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


For measurements below 30 MHz loop antennas were used per FCC requirements, and measurement equipment settings test method were consistent with ANSI C63.4.




## 9.2. TRANSMITTER ABOVE 1 GHz


### 9.2.1. TX ABOVE 1 GHz FOR O-QPSK (DSSS) MODE IN THE 2.4 GHz BAND


#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

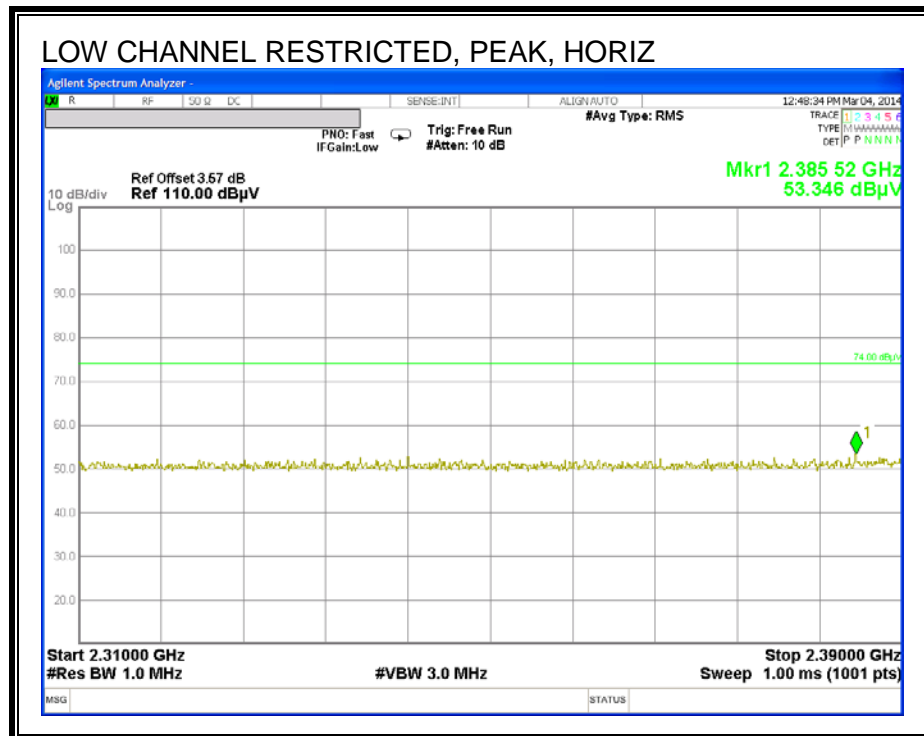

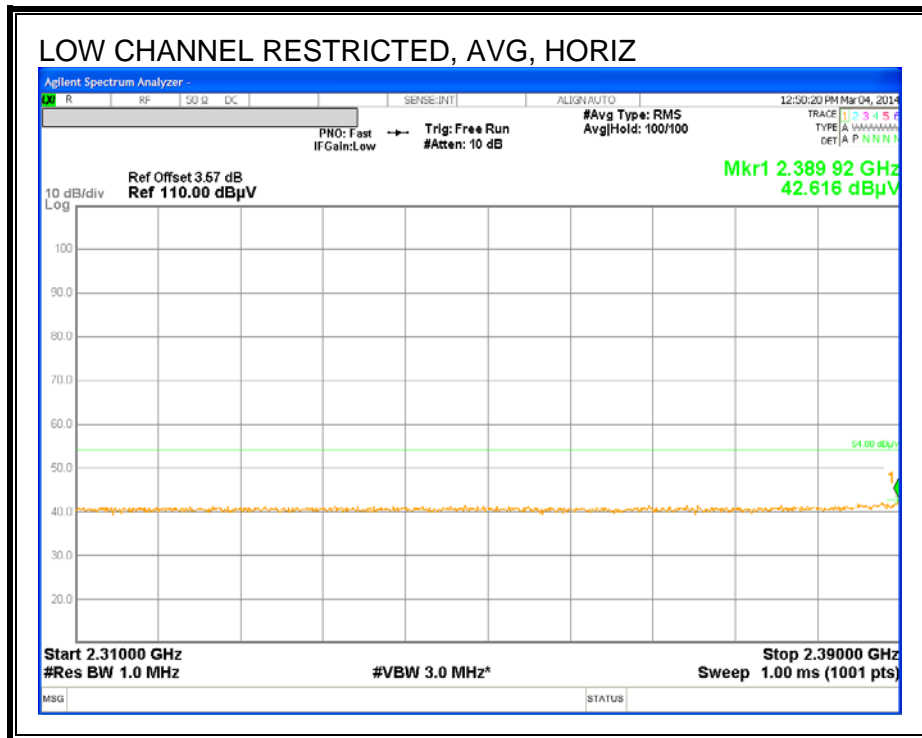



**RESTRICTED BANEDGE (LOW CHANNEL, VERTICAL)**

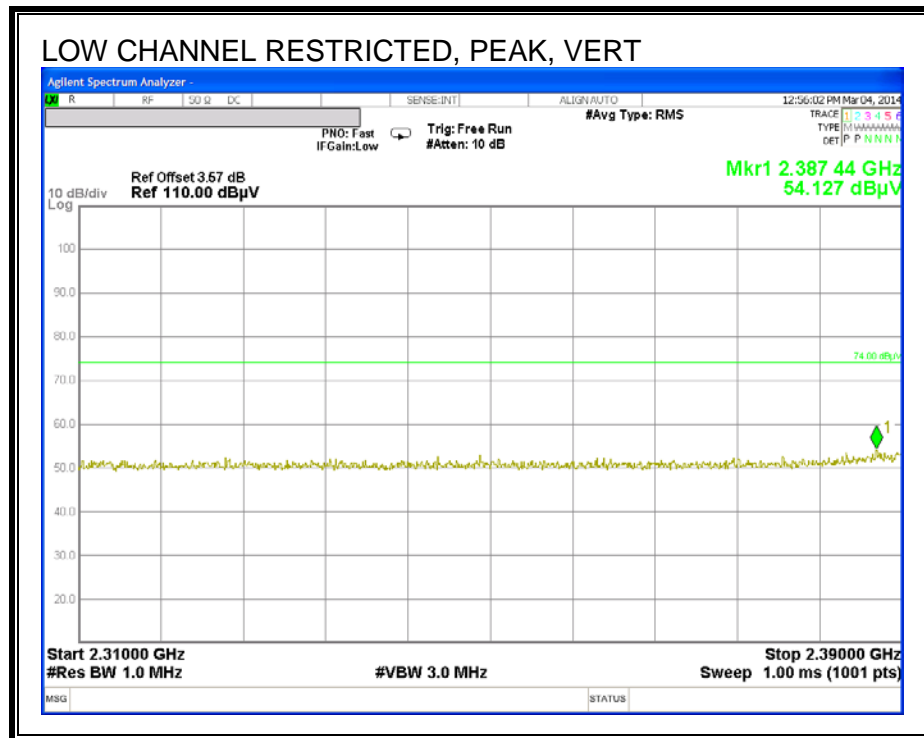

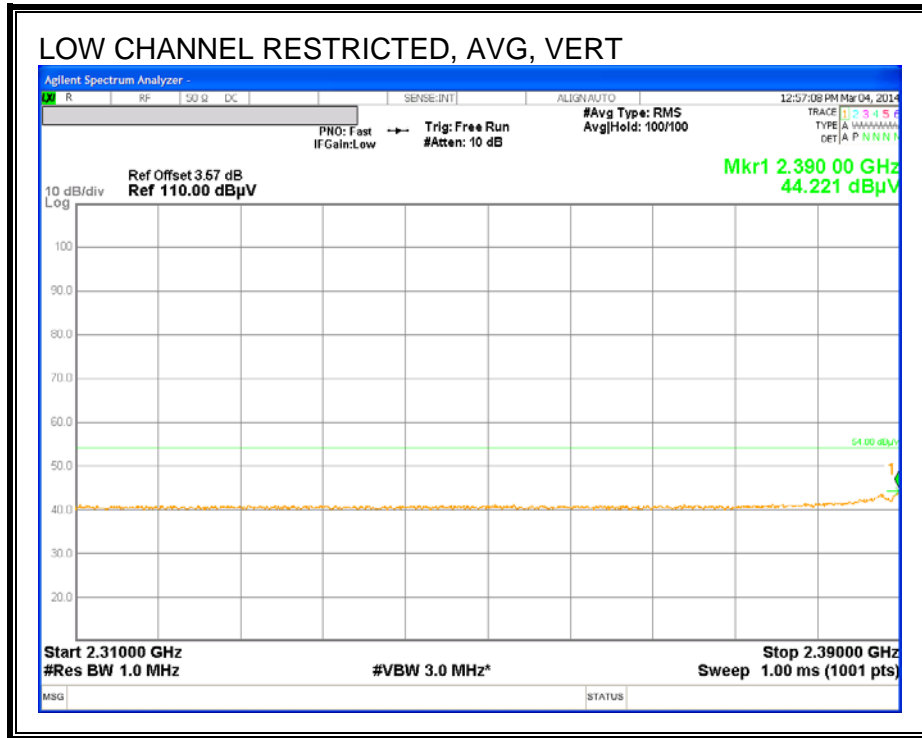



**RESTRICTED BANEDGE (HIGH CHANNEL, HORIZONTAL)**

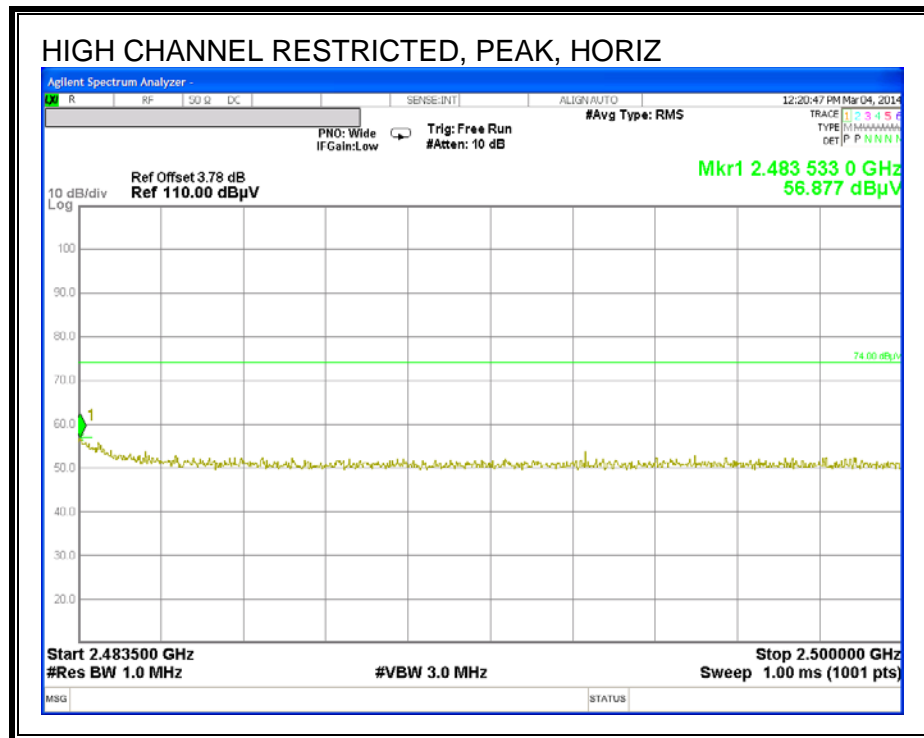

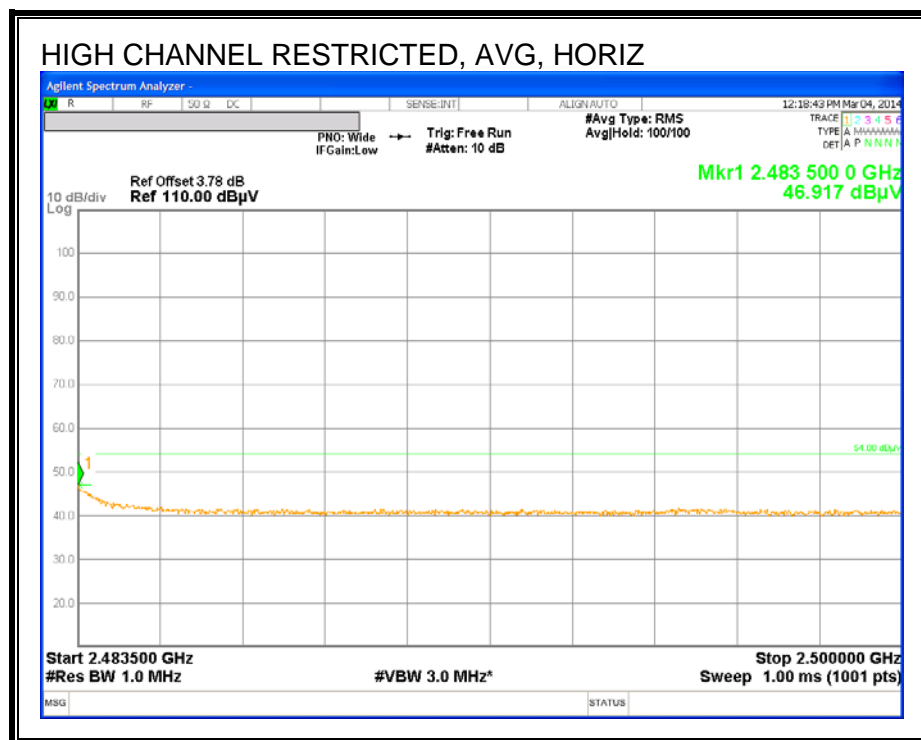


**RESTRICTED BANEDGE (HIGH CHANNEL, VERTICAL)**

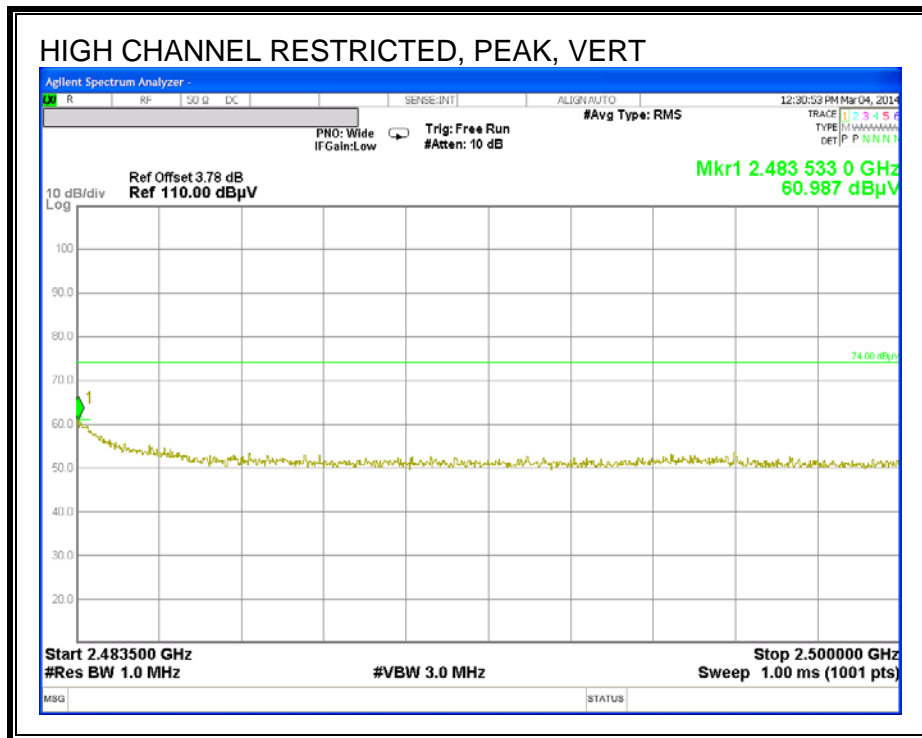

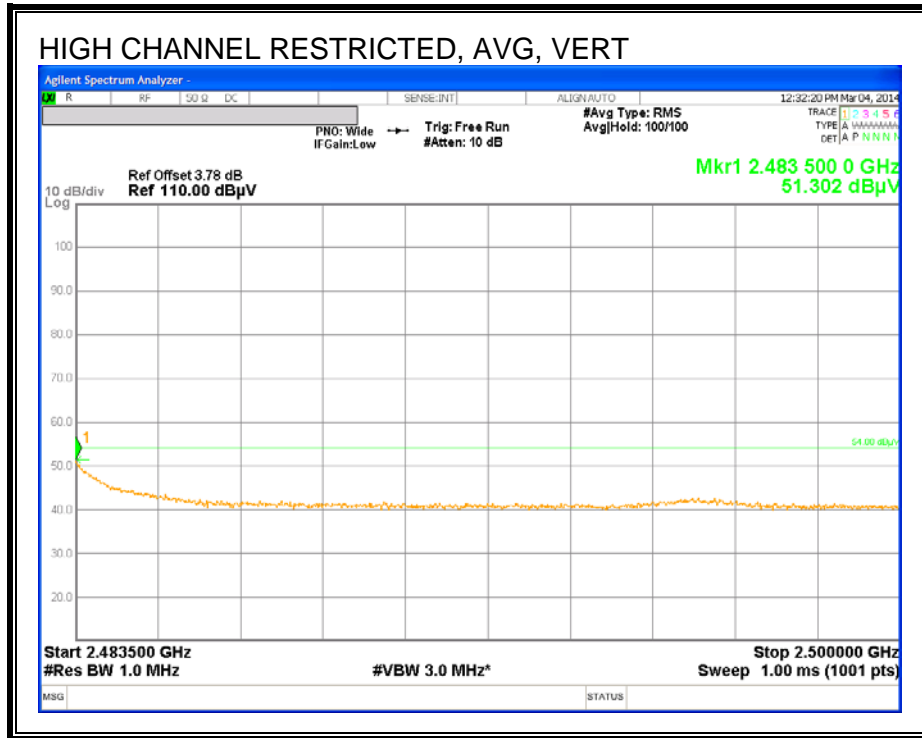



## HARMONICS AND SPURIOUS EMISSIONS

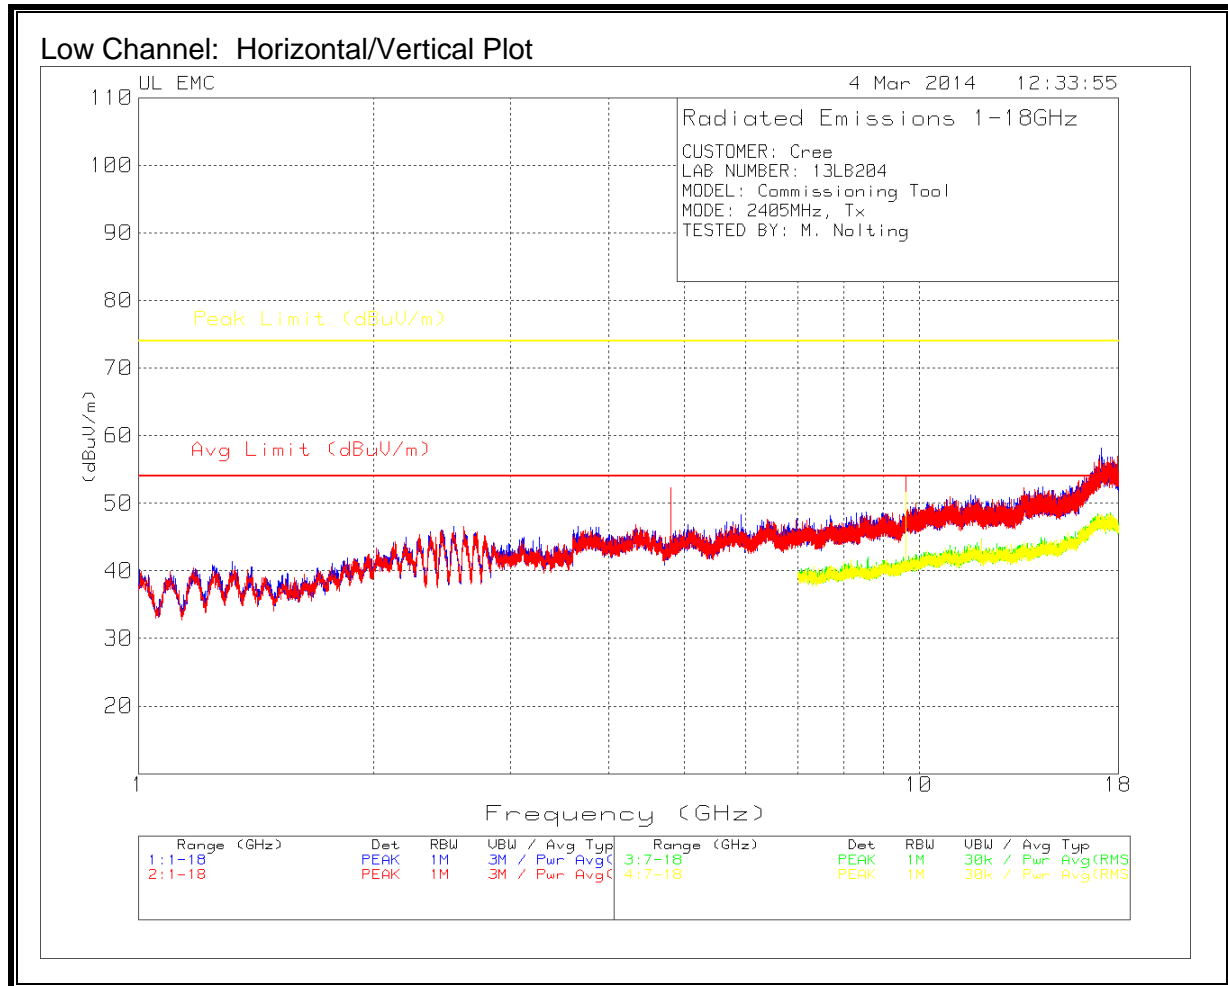

### Low Channel: Tabular Data

CUSTOMER: Cree											
LAB NUMBER: 13LB204											
MODEL: Commissioning Tool											
MODE: 2405MHz, Tx											
TESTED BY: M. Nolting											


Freq (GHz)	Meter Reading [dBuV]	Detector	Antenna Factor [dB/m]	Gain/Loss [dB]	Field Strength [dBuV/m]	Average Limit [dBuV/m]	Margin [dB]	Peak Limit [dBuV/m]	Margin [dB]	Antenna Polarity	In Restricted Band?
4.8110	53.60	PK	34.00	-36.20	51.4	-	-	74.0	-22.6	H	Y
12.0274	43.00	PK	39.10	-31.10	51.0	-	-	74.0	-23.0	H	Y
4.8109	46.90	MAV1	34.00	-36.20	44.7	54.0	-9.2	-	-	H	Y
12.0274	34.10	MAV1	39.10	-31.10	42.1	54.0	-11.8	-	-	H	Y
4.8090	56.20	PK	34.00	-36.20	54.0	-	-	74.0	-20.0	V	Y
12.0271	44.00	PK	39.10	-31.10	52.0	-	-	74.0	-22.0	V	Y
4.8109	49.90	MAV1	34.00	-36.20	47.7	54.0	-6.3	-	-	V	Y
12.0273	34.50	MAV1	39.10	-31.10	42.5	54.0	-11.5	-	-	V	Y
9.6228	46.00	PK	37.00	-31.90	51.1	-	-	-	-	H	N
17.1016	43.37	PK	42.40	-27.60	58.2	-	-	-	-	H	N
9.6194	49.00	PK	37.00	-31.90	54.1	-	-	-	-	V	N

PK - Peak detector

MAV1 - KDB558074 v03 12.2.5.1 d) 1/ Option 1 Maximum RMS Average

MAV2 - KDB558074 v03 12.2.5.1 d) 2/ Option 1 Maximum Voltage Average

18-26GHz frequency range: No EUT-related noise observed in this range.

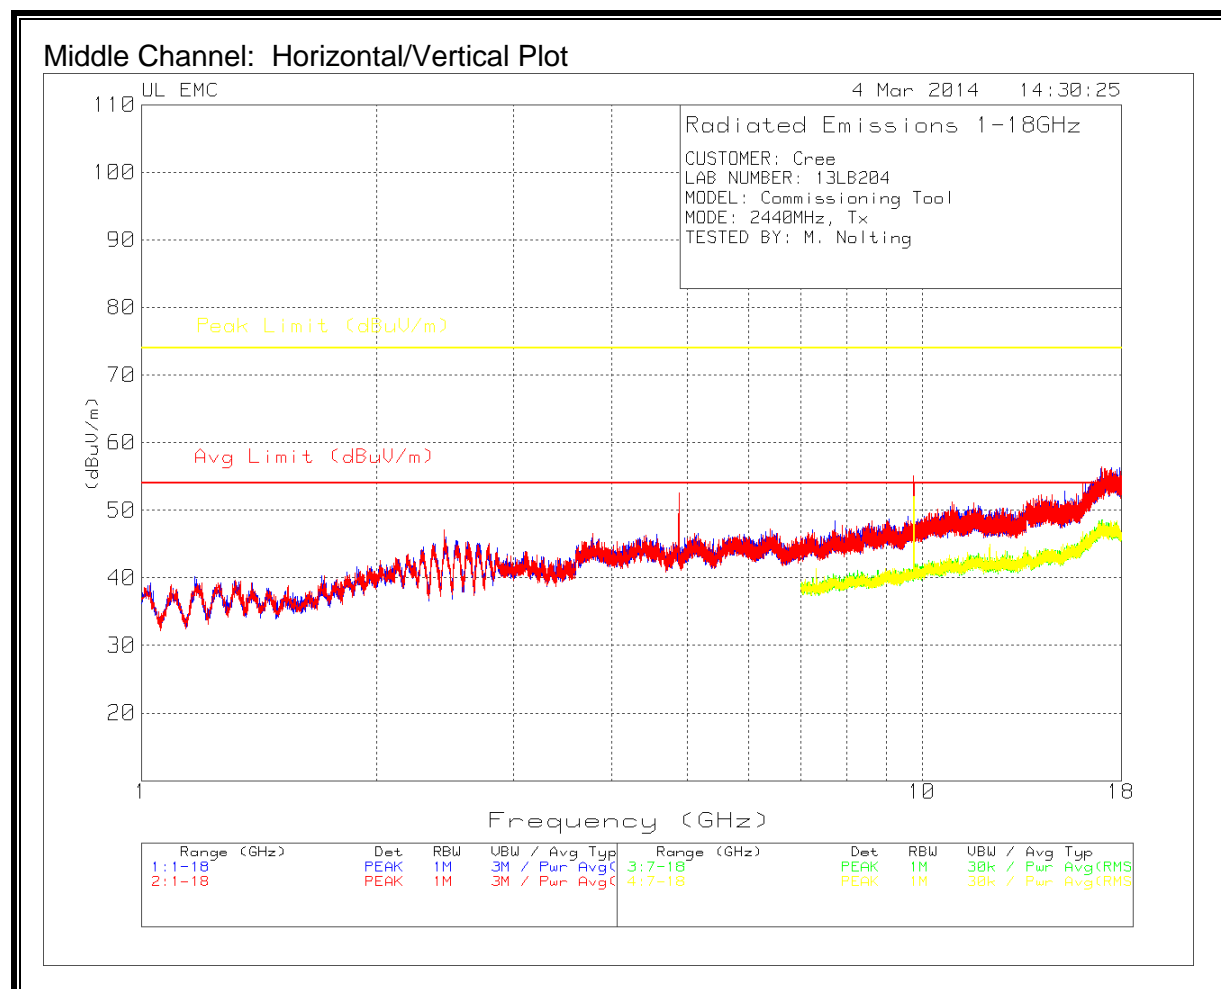

### Middle Channel: Tabular Data

CUSTOMER: Cree											
LAB NUMBER: 13LB204											
MODEL: Commissioning Tool											
MODE: 2440MHz, Tx											
TESTED BY: M. Nolting											


Freq (GHz)	Meter Reading [dBuV]	Detector	Antenna Factor [dB/m]	Gain/Loss [dB]	Field Strength [dBuV/m]	Average Limit [dBuV/m]	Margin [dB]	Peak Limit [dBuV/m]	Margin [dB]	Antenna Polarity	In Restricted Band?
4.8792	54.60	PK	34.00	-36.20	52.4	-	-	74.0	-21.6	H	Y
7.3207	44.10	PK	35.60	-32.60	47.1	-	-	74.0	-26.9	H	Y
12.2021	44.50	PK	39.40	-31.40	52.5	-	-	74.0	-21.4	H	Y
4.8791	48.50	MAv1	34.00	-36.20	46.3	54.0	-7.7	-	-	H	Y
7.3214	33.60	MAv1	35.60	-32.60	36.6	54.0	-17.4	-	-	H	Y
12.2024	35.30	MAv1	39.40	-31.40	43.3	54.0	-10.7	-	-	H	Y
4.8810	56.30	PK	34.00	-36.20	54.1	-	-	74.0	-19.9	V	Y
7.3183	46.20	PK	35.50	-32.60	49.1	-	-	74.0	-24.9	V	Y
12.1975	45.30	PK	39.40	-31.30	53.4	-	-	74.0	-20.5	V	Y
4.8809	50.90	MAv1	34.00	-36.20	48.7	54.0	-5.3	-	-	V	Y
7.3213	37.10	MAv1	35.60	-32.60	40.1	54.0	-13.9	-	-	V	Y
12.1976	37.40	MAv1	39.40	-31.30	45.5	54.0	-8.5	-	-	V	Y

PK - Peak detector

MAv1 - KDB558074 v03 12.2.5.1 d) 1/ Option 1 Maximum RMS Average

MAv2 - KDB558074 v03 12.2.5.1 d) 2/ Option 1 Maximum Voltage Average

18-26GHz frequency range: No EUT-related noise observed in this range.

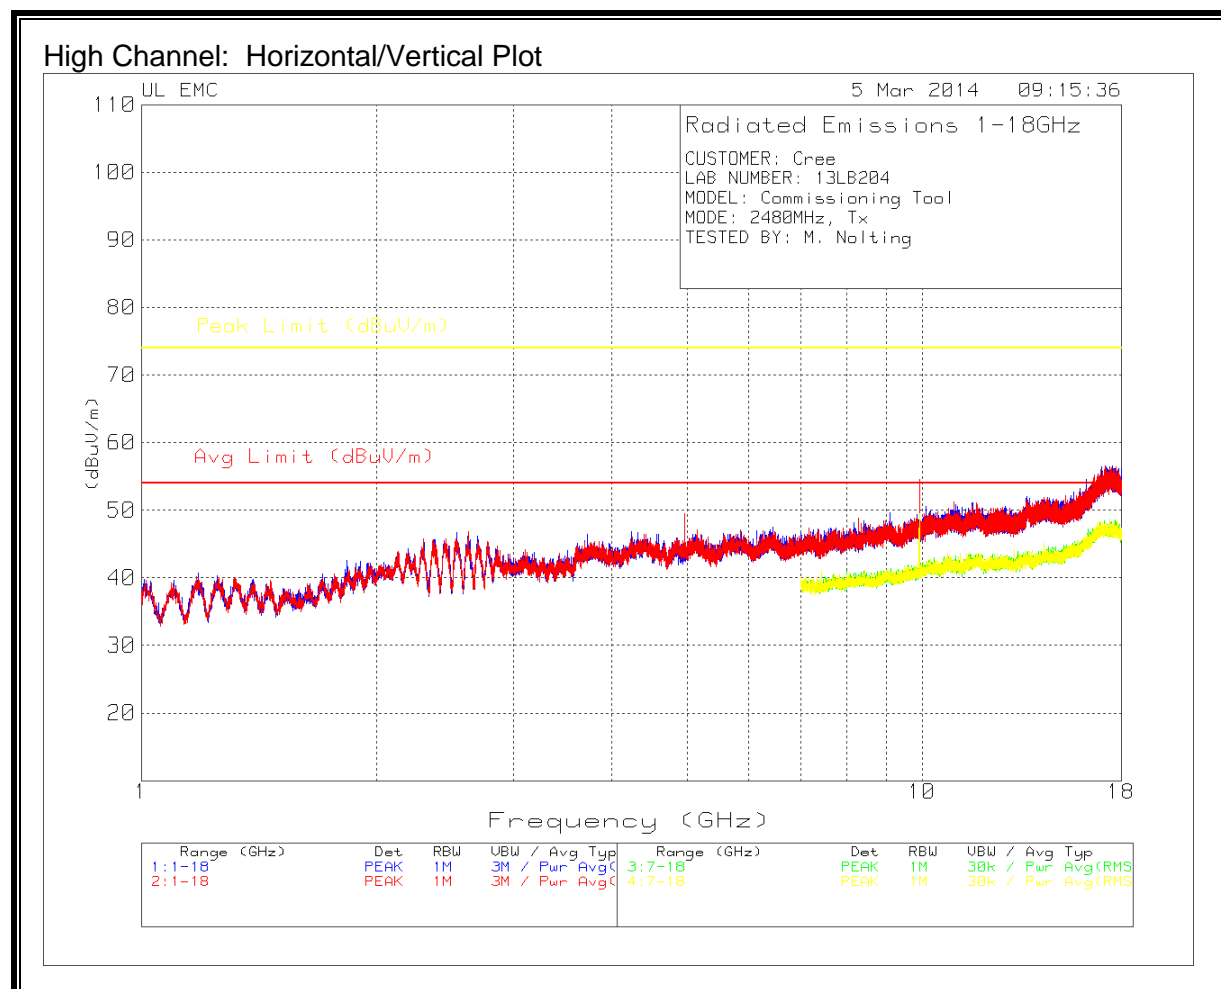

### High Channel: Tabular Data

CUSTOMER: Cree											
LAB NUMBER: 13LB204											
MODEL: Commissioning Tool											
MODE: 2480MHz, Tx											
TESTED BY: M. Nolting											

Freq (GHz)	Meter Reading [dBuV]	Detector	Antenna Factor [dB/m]	Gain/Loss [dB]	Field Strength [dBuV/m]	Average Limit [dBuV/m]	Margin [dB]	Peak Limit [dBuV/m]	Margin [dB]	Antenna Polarity	In Restricted Band?
4.9610	51.59	PK	34.00	-36.00	49.6	-	-	74.0	-24.4	H	Y
7.4389	44.62	PK	35.60	-32.40	47.8	-	-	74.0	-26.2	H	Y
12.4026	42.48	PK	39.20	-31.50	50.2	-	-	74.0	-23.8	H	Y
4.9611	44.61	MAv1	34.00	-36.00	42.6	54.0	-11.4	-	-	H	Y
7.4413	33.91	MAv1	35.60	-32.40	37.1	54.0	-16.9	-	-	H	Y
12.3976	32.89	MAv1	39.20	-31.50	40.6	54.0	-13.4	-	-	H	Y
4.9609	53.69	PK	34.00	-36.00	51.7	-	-	74.0	-22.3	V	Y
7.4411	45.24	PK	35.60	-32.40	48.4	-	-	74.0	-25.5	V	Y
12.4017	42.10	PK	39.20	-31.50	49.8	-	-	74.0	-24.2	V	Y
4.9610	47.57	MAv1	34.00	-36.00	45.6	54.0	-8.4	-	-	V	Y
7.4388	35.81	MAv1	35.60	-32.40	39.0	54.0	-15.0	-	-	V	Y
12.3977	31.15	MAv1	39.20	-31.50	38.9	54.0	-15.1	-	-	V	Y
9.9229	46.59	PK	37.50	-31.70	52.4	-	-	-	-	H	N
9.9195	48.71	PK	37.50	-31.70	54.5	-	-	-	-	V	N

PK - Peak detector

MAv1 - KDB558074 v03 12.2.5.1 d) 1)/ Option 1 Maximum RMS Average

MAv2 - KDB558074 v03 12.2.5.1 d) 2)/ Option 1 Maximum Voltage Average


18-26GHz frequency range: No EUT-related noise observed in this range.

### 9.3. WORST-CASE BELOW 1 GHz


#### **SPURIOUS EMISSIONS BELOW 30 MHz (WORST-CASE CONFIGURATION)**

**Note:** All measurements were made at a test distance of 3 m. The limits in the plots and tabular data are the FCC/IC limits extrapolated from the specification distance (300 m from 9-490 kHz and 30 m from 490 kHz – 30 MHz) to the measurement distance to clearly show the relative levels of fundamental and spurious emissions and demonstrate compliance with the requirement that the level of any spurious emissions be below the level of the intentionally transmitted signal. The extrapolation factor for the limits were  $40 \cdot \log(\text{specification distance} / \text{test distance})$ .

### EUT PLOT

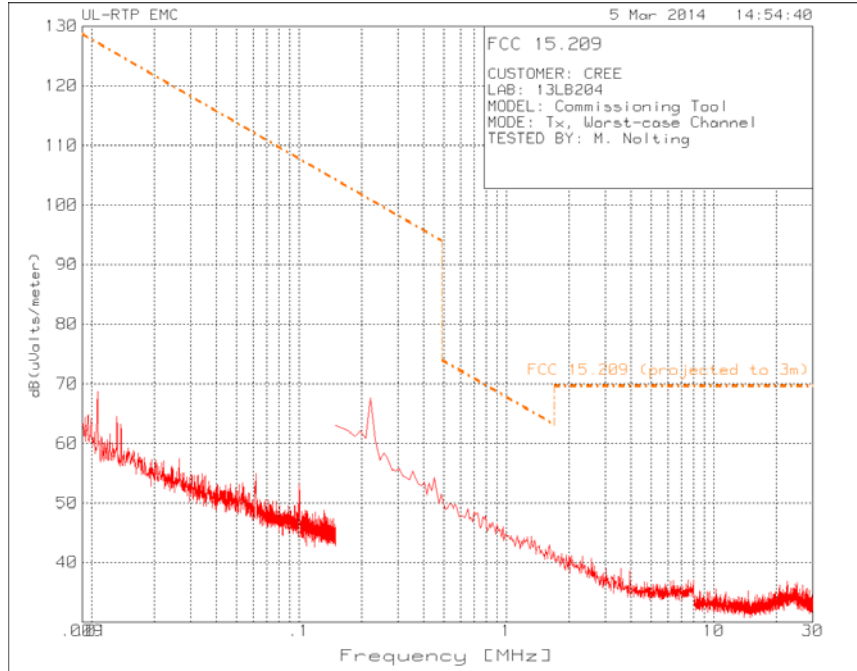


### NOISE-FLOOR PLOT

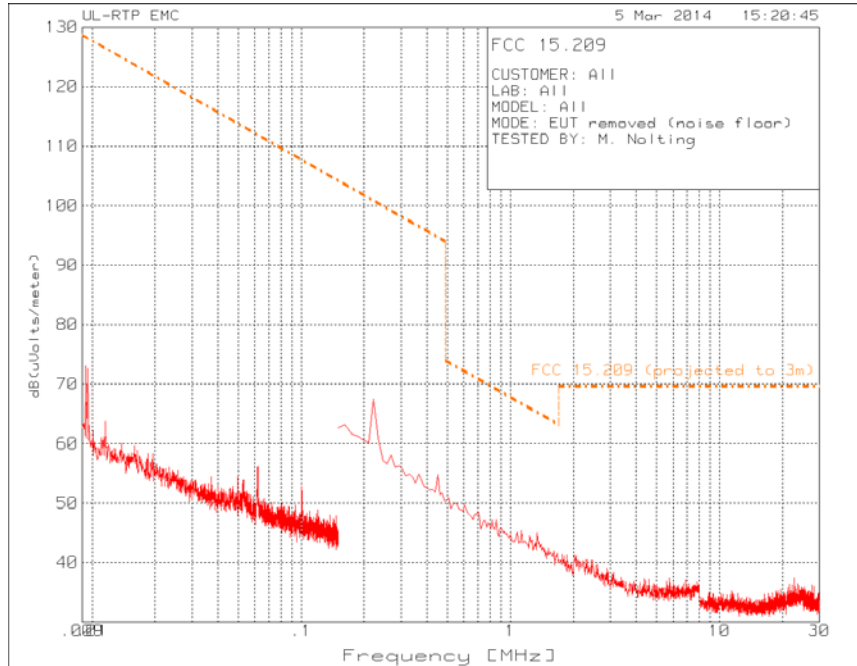

The above plots demonstrate there were no EUT-related emissions of interest relative to the FCC 15.209 limit below 30MHz.



**SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)**

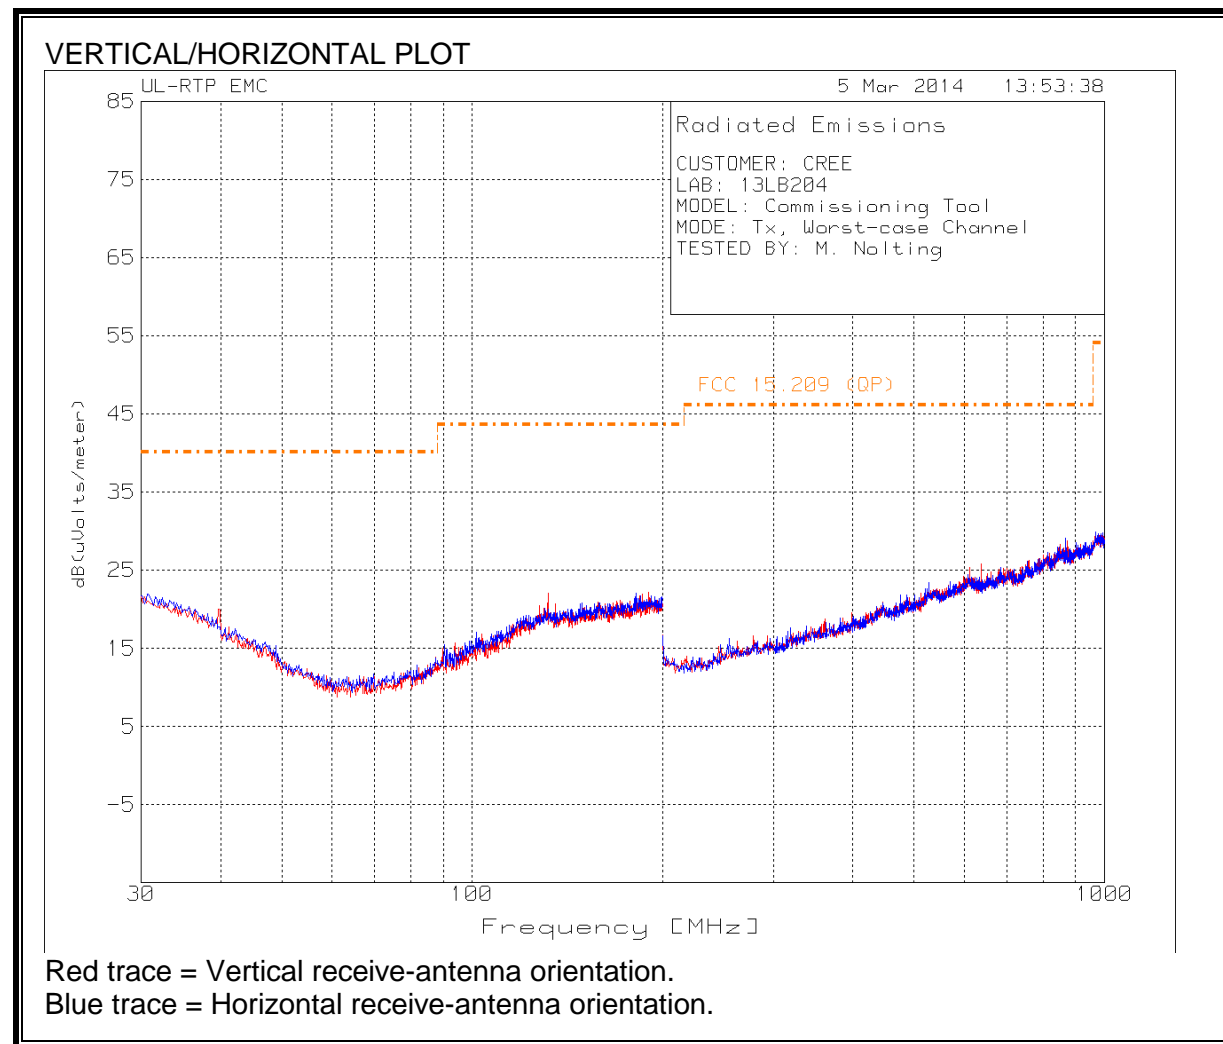

# VERTICAL/HORIZONTAL DATA

CUSTOMER: Cree									
LAB NUMBER: 13LB204									
MODEL: Commissioning Tool									
MODE: Tx, Worst-case Channel									
TESTED BY: M. Nolting									

Freq (MHz)	Meter Reading [dBuV]	Detector	Antenna Factor [dB/m]	Gain/Loss [dB]	Field Strength [dBuV/m]	15.209 QP Limit [dBuV/m]	Margin [dB]	Antenna Polarity	In Restricted Band?
969.580	32.62	PK	24.10	-26.80	29.9	54.0	-24.1	H	Y
131.762	31.41	PK	14.20	-23.60	22.0	43.5	-21.5	V	Y
612.542	31.49	PK	20.40	-26.50	25.4	46.0	-20.6	V	Y
867.645	33.40	PK	22.40	-26.70	29.1	-	-	H	N
39.700	30.64	PK	13.70	-24.30	20.0	-	-	V	N
638.693	32.62	PK	19.70	-26.50	25.8	-	-	V	N
871.915	33.18	PK	22.40	-26.80	28.8	-	-	V	N

PK - Peak detector

QP - Quasi-peak detector

## 10. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 <sup>*</sup>	56 to 46 <sup>*</sup>
0.5-5	56	46
5-30	60	50


<sup>\*</sup> Decreases with the logarithm of the frequency.

### TEST PROCEDURE

ANSI C63.4

## RESULTS

### LINE 1 RESULTS

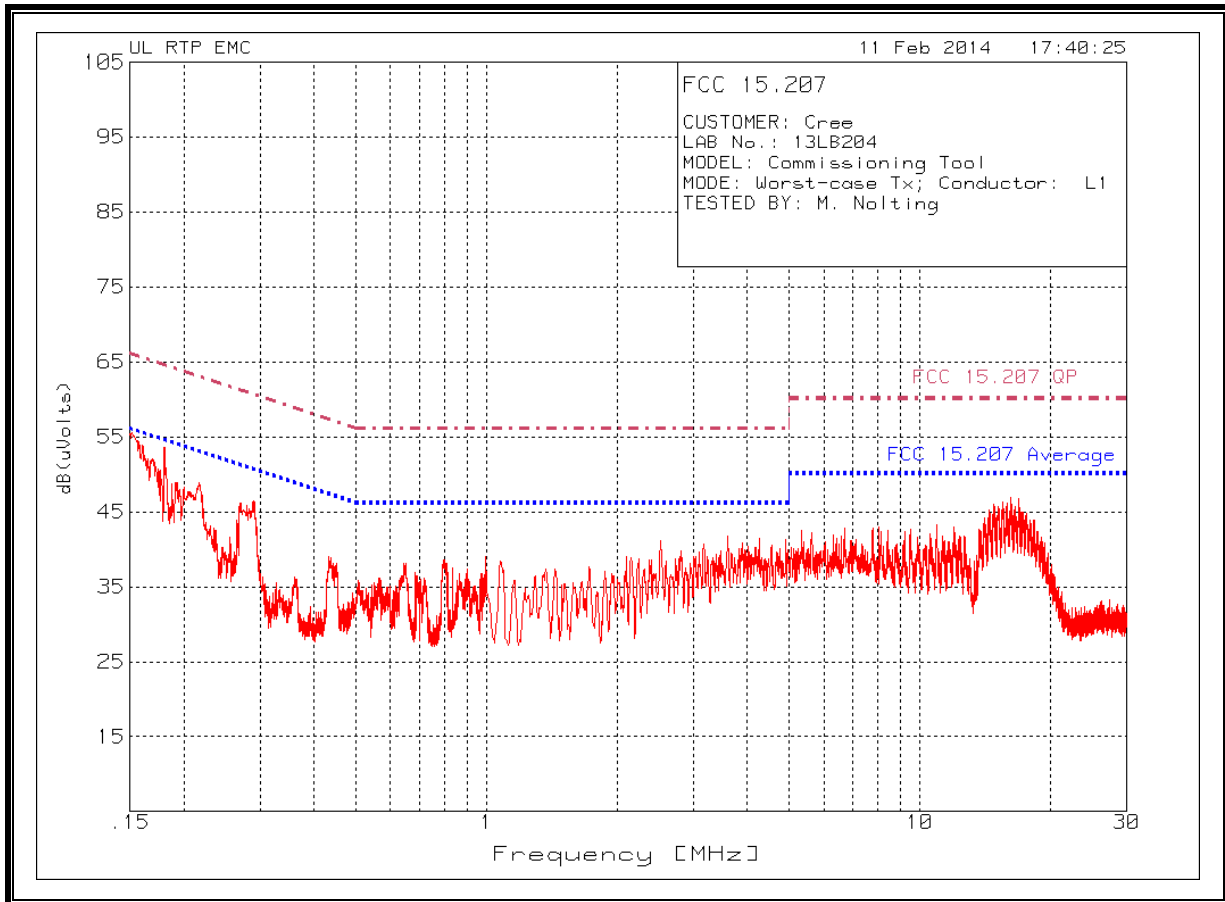


# LINE 1 AC TABULAR DATA

CUSTOMER: Cree									
LAB No.: 13LB204									
MODEL: Commissioning Tool									
MODE: Worst-case Tx; Conductor: L1									
TESTED BY: M. Nolting									

Test Frequency [MHz]	Meter Reading [dBuV]	Detector*	LISN [dB]	Cable Loss [dB]	RF Line Voltage [dBuV]	FCC 15.207 (QP) [dBuV]	Margin [dB]	FCC 15.207 (AV) [dBuV]	Margin [dB]
0.150	43.0	QP	0.4	9.3	52.7	66.0	-13.3	-	-
0.182	30.6	QP	0.3	9.3	40.2	64.4	-24.2	-	-
0.211	34.3	QP	0.2	9.3	43.8	63.1	-19.3	-	-
0.216	33.1	QP	0.2	9.3	42.6	63.0	-20.4	-	-
0.286	31.8	QP	0.1	9.3	41.2	60.6	-19.4	-	-
0.436	29.5	PK	0.1	9.3	38.9	57.1	-18.2	47.1	-8.2
3.598	26.8	QP	0.0	9.4	36.2	56.0	-19.8	-	-
16.096	31.5	QP	0.2	9.6	41.3	60.0	-18.7	-	-
0.150	29.8	CAV	0.4	9.3	39.5	-	-	56.0	-16.5
0.182	18.6	CAV	0.3	9.3	28.2	-	-	54.4	-26.3
0.211	24.8	CAV	0.2	9.3	34.3	-	-	53.1	-18.8
0.216	23.3	CAV	0.2	9.3	32.8	-	-	53.0	-20.2
0.286	25.6	CAV	0.1	9.3	35.0	-	-	50.6	-15.6
3.598	20.8	CAV	0.0	9.4	30.2	-	-	46.0	-15.9
16.096	25.9	CAV	0.2	9.6	35.7	-	-	50.0	-14.3

\*PK = Peak, QP = Quasi-Peak, CAV = CISPR-compliant average

**LINE 2 RESULTS**

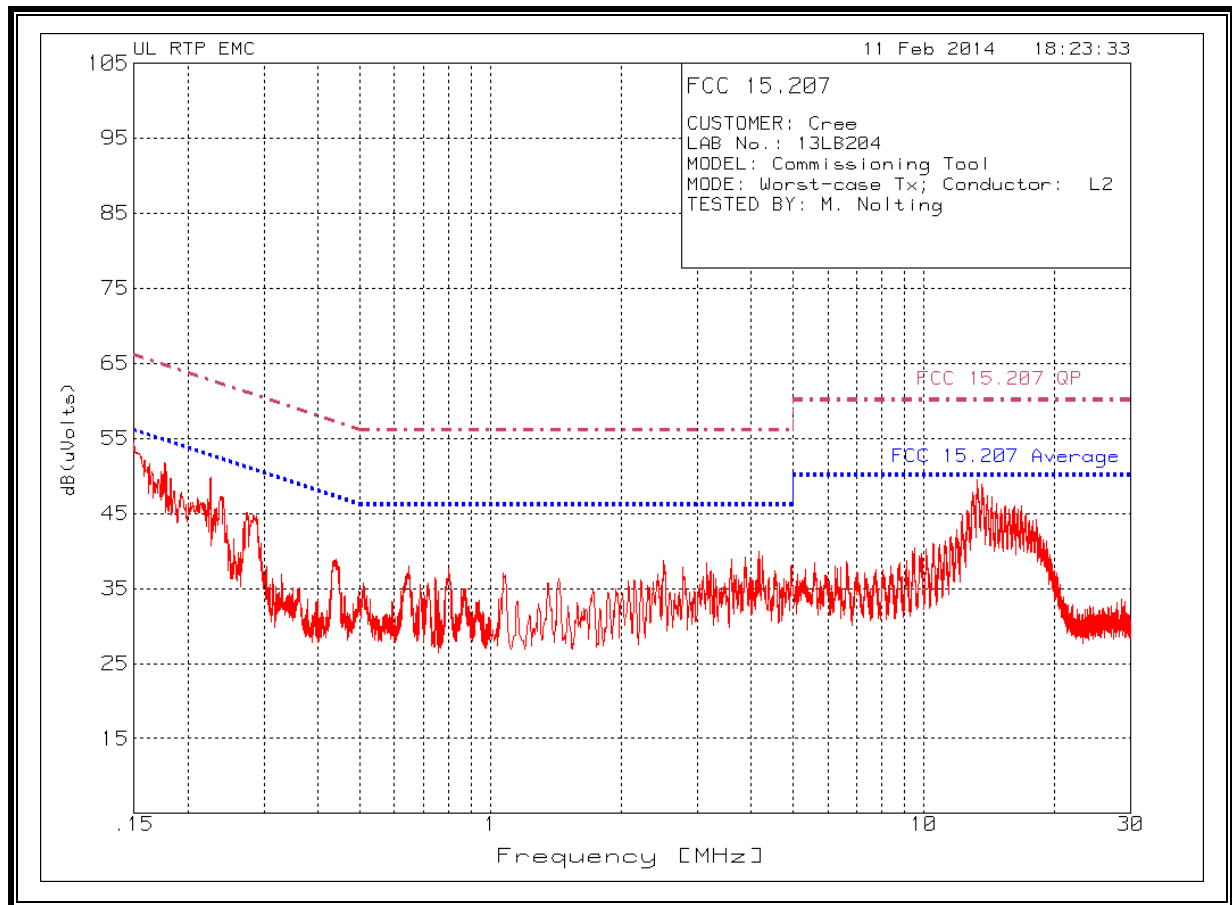

## LINE 2 AC TABULAR DATA

CUSTOMER: Cree									
LAB No.: 13LB204									
MODEL: Commissioning Tool									
MODE: Worst-case Tx; Conductor: L2									
TESTED BY: M. Nolting									

Test Frequency [MHz]	Meter Reading [dBuV]	Detector*	LISN [dB]	Cable Loss [dB]	RF Line Voltage [dBuV]	FCC 15.207 (QP) [dBuV]	Margin [dB]	FCC 15.207 (AV) [dBuV]	Margin [dB]
0.150	42.1	QP	0.4	9.3	51.8	66.0	-14.2	-	-
0.174	35.6	QP	0.3	9.3	45.2	64.8	-19.7	-	-
0.212	33.4	QP	0.2	9.3	42.9	63.1	-20.2	-	-
0.223	29.8	QP	0.2	9.3	39.3	62.7	-23.4	-	-
0.241	20.4	QP	0.2	9.3	29.9	62.1	-32.3	-	-
0.285	32.9	QP	0.1	9.3	42.3	60.7	-18.4	-	-
4.170	30.5	PK	0.0	9.4	39.9	56.0	-16.1	46.0	-6.1
13.308	35.0	QP	0.1	9.5	44.6	60.0	-15.4	-	-
0.150	29.5	CAV	0.4	9.3	39.2	-	-	56.0	-16.8
0.174	17.3	CAV	0.3	9.3	26.9	-	-	54.8	-27.9
0.212	21.1	CAV	0.2	9.3	30.6	-	-	53.1	-22.5
0.223	18.1	CAV	0.2	9.3	27.6	-	-	52.7	-25.1
0.241	10.3	CAV	0.2	9.3	19.8	-	-	52.1	-32.3
0.285	25.0	CAV	0.1	9.3	34.4	-	-	50.7	-16.3
13.308	29.8	CAV	0.1	9.5	39.4	-	-	50.0	-10.6

\*PK = Peak, QP = Quasi-Peak, CAV = CISPR-compliant average

## END OF REPORT