

FCC TEST REPORT

For

DUNE HD(HK) LIMITED

NETWORK MEDIA PLAYER

Model No.: TV-203U

Additional Model No.: TV-203UW

Prepared for : DUNE HD(HK) LIMITED
Address : RMs 1101-1104, 11/F., Nan Fung Tower, 173 Des Voeux Road,
Central, Hong Kong

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an
District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : March 11, 2017
Number of tested samples : 1
Serial number : Prototype
Date of Test : March 11, 2017~March 30, 2017
Date of Report : March 30, 2017

FCC TEST REPORT
FCC CFR 47 PART 15 C(15.247): 2016

Report Reference No. : **LCS1703111497E**

Date of Issue : March 30, 2017

Testing Laboratory Name..... : **Shenzhen LCS Compliance Testing Laboratory Ltd.**

Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,
Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure : Full application of Harmonised standards
Partial application of Harmonised standards
Other standard testing method

Applicant's Name : **DUNE HD(HK) LIMITED**

Address : RMs 1101-1104, 11/F., Nan Fung Tower, 173 Des Voeux Road,
Central, Hong Kong

Test Specification

Standard : FCC CFR 47 PART 15 C(15.247): 2016

Test Report Form No. : LCSEMC-1.0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

EUT Description. : **NETWORK MEDIA PLAYER**

Trade Mark..... : DUNE HD

Model/ Type reference : TV-203U

Ratings..... : DC 12.0V 1000mA

Result : **Positive**

Compiled by:




Aking Jin/ File administrators

Supervised by:



Glin Lu/ Technique principal

Approved by:



Gavin Liang/ Manager

FCC -- TEST REPORT

Test Report No. : LCS1703111497E	<u>March 30, 2017</u> Date of issue
---	--

EUT.....	: NETWORK MEDIA PLAYER
Type / Model.....	: TV-203U
Applicant.....	: DUNE HD(HK) LIMITED
Address.....	: RMs 1101-1104, 11/F., Nan Fung Tower, 173 Des Voeux Road, Central, Hong Kong
Telephone.....	: /
Fax.....	: /
Manufacturer.....	: DUNE HD(HK) LIMITED
Address.....	: RMs 1101-1104, 11/F., Nan Fung Tower, 173 Des Voeux Road, Central, Hong Kong
Telephone.....	: /
Fax.....	: /
Factory.....	: DUNE HD(HK) LIMITED
Address.....	: RMs 1101-1104, 11/F., Nan Fung Tower, 173 Des Voeux Road, Central, Hong Kong
Telephone.....	: /
Fax.....	: /

Test Result	Positive
--------------------	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

Revision	Issue Date	Revisions	Revised By
00	March 30, 2017	Initial Issue	Gavin Liang

TABLE OF CONTENTS

- 1. GENERAL INFORMATION 6**
 - 1.1. DESCRIPTION OF DEVICE (EUT) 6
 - 1.2. HOST SYSTEM CONFIGURATION LIST AND DETAILS 6
 - 1.3. EXTERNAL I/O CABLE 6
 - 1.4. DESCRIPTION OF TEST FACILITY 7
 - 1.5. STATEMENT OF THE MEASUREMENT UNCERTAINTY 7
 - 1.6. MEASUREMENT UNCERTAINTY 7
 - 1.7. DESCRIPTION OF TEST MODES 7
- 2. TEST METHODOLOGY 9**
 - 2.1. EUT CONFIGURATION..... 9
 - 2.2. EUT EXERCISE 9
 - 2.3. GENERAL TEST PROCEDURES 9
- 3. SYSTEM TEST CONFIGURATION..... 10**
 - 3.1. JUSTIFICATION..... 10
 - 3.2. EUT EXERCISE SOFTWARE..... 10
 - 3.3. SPECIAL ACCESSORIES 10
 - 3.4. BLOCK DIAGRAM/SCHEMATICS..... 10
 - 3.5. EQUIPMENT MODIFICATIONS 10
 - 3.6. TEST SETUP 10
- 4. SUMMARY OF TEST RESULTS 11**
- 5. TEST RESULT 12**
 - 5.1. ON TIME AND DUTY CYCLE 12
 - 5.2. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT..... 14
 - 5.3. POWER SPECTRAL DENSITY MEASUREMENT 16
 - 5.4. 6 dB SPECTRUM BANDWIDTH MEASUREMENT 20
 - 5.5. RADIATED EMISSIONS MEASUREMENT..... 24
 - 5.6. CONDUCTED SPURIOUS EMISSIONS AND BAND EDGES TEST..... 40
 - 5.7. AC POWER LINE CONDUCTED EMISSIONS 48
 - 5.8. BAND-EDGE MEASUREMENTS FOR RADIATED EMISSIONS 51
 - 5.9. ANTENNA REQUIREMENTS 57
- 6. LIST OF MEASURING EQUIPMENTS 58**
- 7. TEST SETUP PHOTOGRAPHS OF EUT..... 59**
- 8. EXTERIOR PHOTOGRAPHS OF THE EUT..... 59**
- 9. INTERIOR PHOTOGRAPHS OF THE EUT 59**

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	: NETWORK MEDIA PLAYER
Model Number	: TV-203U, TV-203UW
Model Declaration	: PCB board, structure and internal of these model(s) are the same, So no additional models were tested.
Test Model	: TV-203U
Hardware version	: 3
Software version	: 160831_1537_b9b6
Power Supply	: DC 12.0V 1000mA
WLAN	: Supported 802.11b/802.11g/802.11n
Operation frequency	: IEEE 802.11b:2412-2462MHz IEEE 802.11g:2412-2462MHz IEEE 802.11n HT20:2412-2462MHz IEEE 802.11n HT40:2422-2452MHz
Modulation Type	: IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM,QPSK,BPSK)
Channel Number	: 11 Channels for WIFI 20MHz Bandwidth(802.11b/g/n-HT20) 7 Channels for WIFI 40MHz Bandwidth(802.11n-HT40)
Antenna Type	: External antenna
Antenna Gain	: 2.0dBi (Max.)
Extreme temp. Tolerance	: -10°C to +50°C
Extreme vol. Limits	: 10.8VDC to 13.2VDC (nominal: 12.0VDC)

1.2. Host System Configuration List and Details

Manufacturer	Description	Model	Serial Number	Certificate
YINGYUAN	AC Adapter	SAW12-120-1000UD	--	CE

1.3. External I/O Cable

I/O Port Description	Quantity	Cable
USB Port	2	1.2m, unshielded
LAN Port	1	1.2m, unshielded
DC 12V Input Port	1	N/A
IR EXT	1	N/A
HDMI Input Port	1	1.2m, unshielded
2.4G WLAN Antenna Port	1	N/A

1.4. Description of Test Facility

CNAS Registration Number. is L4595.
 FCC Registration Number. is 899208.
 Industry Canada Registration Number. is 9642A-1.
 ESMD Registration Number. is ARCB0108.
 UL Registration Number. is 100571-492.
 TUV SUD Registration Number. is SCN1081.
 TUV RH Registration Number. is UA 50296516-001

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

1.5. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.6. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty	9KHz~30MHz	±3.10dB	(1)
	30MHz~200MHz	±2.96dB	(1)
	200MHz~1000MHz	±3.10dB	(1)
	1GHz~26.5GHz	±3.80dB	(1)
	26.5GHz~40GHz	±3.90dB	(1)
Conduction Uncertainty	150kHz~30MHz	±1.63dB	(1)
Power disturbance	30MHz~300MHz	±1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.7. Description of Test Modes

The EUT has been tested under operating condition.

This test was performed with EUT in X, Y, Z position and the worst case was found when EUT in X position.

Worst-case mode and channel used for 150 kHz-30 MHz power line conducted emissions was the mode and channel with the highest output power, which was determined to be 802.11b mode (Low Channel).

Worst-case mode and channel used for 9kHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be 802.11b mode(Low Channel).

Worst-Case data rates were utilized from preliminary testing of the Chipset, worst-case data rates used during the testing are as follows:

802.11b Mode: 1 Mbps, DSSS.
 802.11g Mode: 6 Mbps, OFDM.
 802.11n Mode HT20: MCS0, OFDM.
 802.11n Mode HT40: MCS7, OFDM.

Channel List & Frequency

IEEE 802.11b/g/n HT20

Frequency Band	Channel No.	Frequency(MHz)	Channel No.	Frequency(MHz)
2412~2462MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	--	--

IEEE 802.11n HT40

Frequency Band	Channel No.	Frequency(MHz)	Channel No.	Frequency(MHz)
2422~2452MHz	1	--	7	2442
	2	--	8	2447
	3	2422	9	2452
	4	2427	10	--
	5	2432	11	--
	6	2437	--	--

The Radio software & hardware version is same as the product software & hardware version in page6.
The test software is MP Tool, and test configuration of the software shows as below:

Test mode	Channel No.	Frequency(MHz)	Software setting value
802.11b	1	2412	15
	6	2437	15
	11	2462	16
802.11g	1	2412	14
	6	2437	14
	11	2462	14
802.11n20	1	2412	13
	6	2437	13
	11	2462	13
802.11n40	3	2422	12
	6	2437	12
	9	2452	12

2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd.

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to FCC's request, Test Procedure KDB558074 D01 DTS Meas. Guidance v03r05 and KDB 662911 are required to be used for this kind of FCC 15.247 digital modulation device.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

2.3. General Test Procedures

2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013

3. SYSTEM TEST CONFIGURATION

3.1. Justification

The system was configured for testing in a continuous transmit condition.

3.2. EUT Exercise Software

The system was configured for testing in a continuous transmits condition and change test channels by software (MP Tools) provided by application.

3.3. Special Accessories

N/A

3.4. Block Diagram/Schematics

Please refer to the related document

3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6. Test Setup

Please refer to the test setup photo.

4. SUMMARY OF TEST RESULTS

Applied Standard: FCC Part 15 Subpart C		
FCC Rules	Description of Test	Result
/	Duty Cycle	Compliant
§15.247(b)	Maximum Conducted Output Power	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	6dB Bandwidth	Compliant
§15.247(a)	Occupied Bandwidth	Compliant
§15.209, §15.247(d)	Radiated and Conducted Spurious Emissions	Compliant
§15.205	Emissions at Restricted Band	Compliant
§15.207(a)	Conducted Emissions	Compliant
§15.203	Antenna Requirements	Compliant
§15.247(i)§2.1093	RF Exposure	Compliant

5. TEST RESULT

5.1. On Time and Duty Cycle

5.1.1. Standard Applicable

None; for reporting purpose only.


5.1.2. Measuring Instruments and Setting

Please refer to section 6 of equipment's list in this report. The following table is the setting of the spectrum analyse.

5.1.3. Test Procedures

1. Set the centre frequency of the spectrum analyse to the transmitting frequency;
2. Set the span=0MHz, RBW=8MHz, VBW=50MHz, Sweep time=5ms;
3. Detector = peak;
4. Trace mode = Single hold.

5.1.4. Test Setup Layout

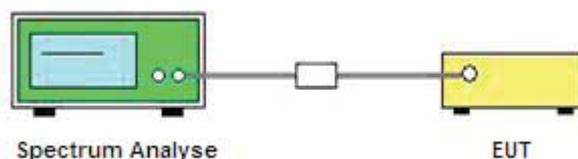


5.1.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


5.1.6. Test result

Mode	On Time B (ms)	Period (ms)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW(KHz)
802.11b	5.0	5.0	1	100	0	0.01
802.11g	5.0	5.0	1	100	0	0.01
802.11n -HT20	5.0	5.0	1	100	0	0.01
802.11n -HT40	5.0	5.0	1	100	0	0.01


Test plot of On Time and Duty Cycle

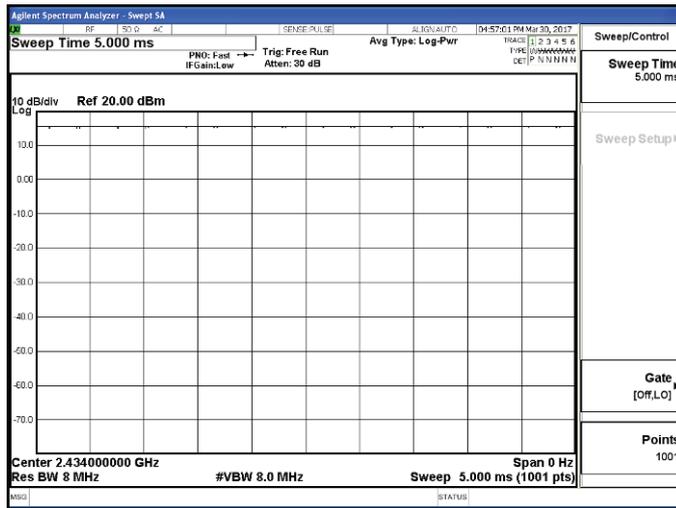


802.11b

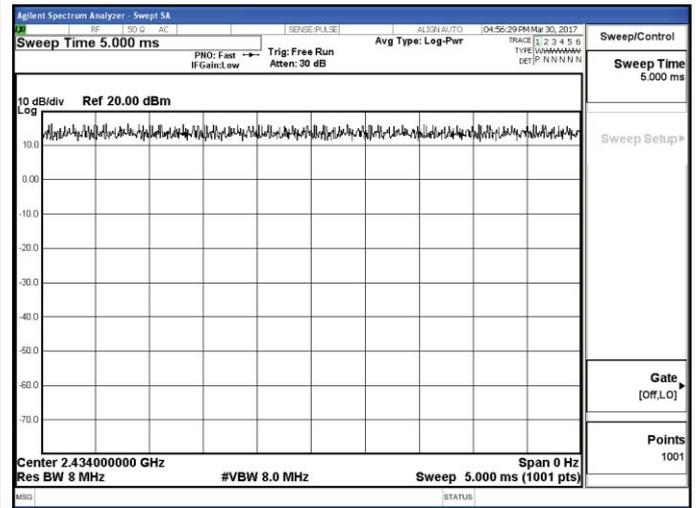

802.11g

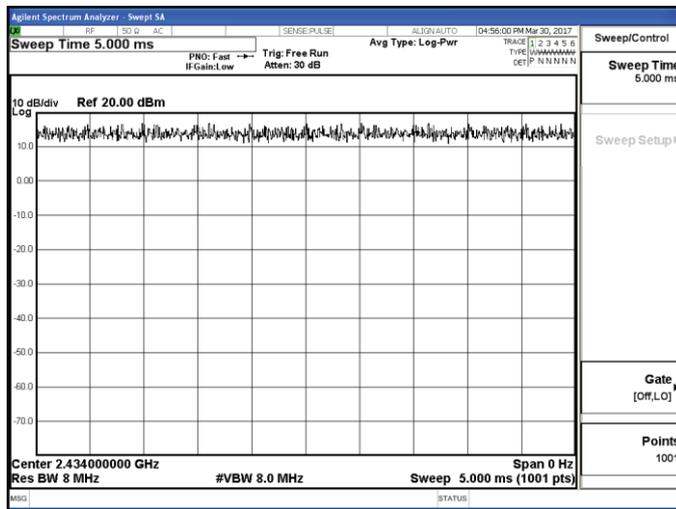

802.11n-HT20

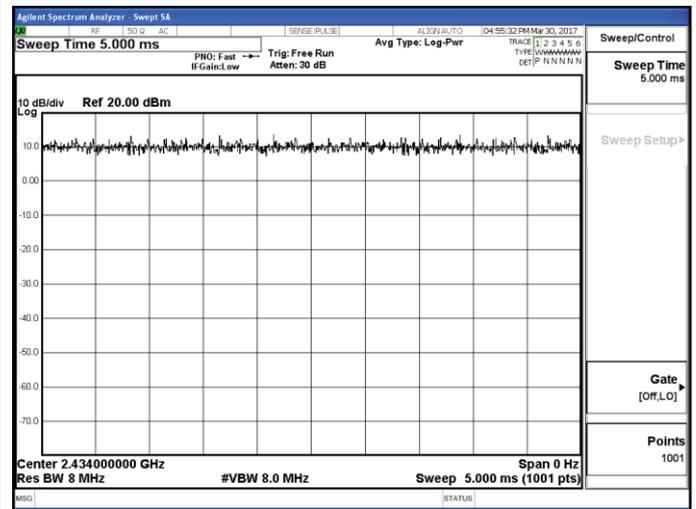

802.11n-HT40

5.2. Maximum Conducted Output Power Measurement

5.2.1. Standard Applicable

According to §15.247(b): For systems using digital modulation in the 2400-2483.5 MHz and 5725-5850 MHz band, the limit for maximum peak conducted output power is 30dBm. The limit has to be reduced by the amount in dB that the gain of the antenna exceeds 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter peak output power.


5.2.2. Measuring Instruments and Setting

Please refer to section 6 of equipment's list in this report. The following table is the setting of the power meter.

5.2.3. Test Procedures

According to KDB558074 D01 DTS Measurement Guidance Section 9.1 Maximum peak conducted output power, 9.1.2 The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

5.2.4. Test Setup Layout

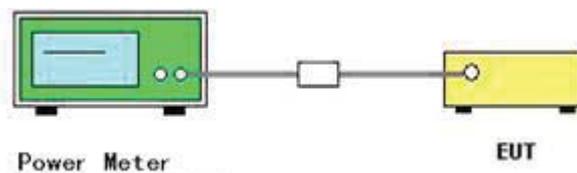

5.2.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.2.6. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	60%
Test Engineer	Chaz Liu	Configurations	802.11b/g/n

Test Mode	Channel	Frequency (MHz)	Measured Peak Output Power (dBm)	Limits (dBm)	Verdict
IEEE 802.11b	1	2412	18.45	≤30	PASS
	6	2437	18.65		
	11	2462	18.51		
IEEE 802.11g	1	2412	18.22	≤30	PASS
	6	2437	18.15		
	11	2462	18.05		
IEEE 802.11n HT20	1	2412	17.32	≤30	PASS
	6	2437	17.69		
	11	2462	17.88		
IEEE 802.11n HT40	3	2422	17.25	≤30	PASS
	6	2437	17.32		
	9	2452	17.08		

Remark:

1. Measured output power at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40;

5.3. Power Spectral Density Measurement

5.3.1. Standard Applicable

According to §15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.


5.3.2. Measuring Instruments and Setting

Please refer to section 6 of equipment's list in this report. The following table is the setting of Spectrum Analyzer.

5.3.3. Test Procedures

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. The power was monitored at the coupler port with a Spectrum Analyzer. The power level was set to the maximum level.
3. Set the RBW = 100 kHz.
4. Set the VBW $\geq 3 \times$ RBW
5. Set the span to 1.5 times the DTS channel bandwidth.
6. Detector = peak.
7. Sweep time = auto couple.
8. Trace mode = max hold.
9. Allow trace to fully stabilize.
10. Use the peak marker function to determine the maximum power level.
11. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
12. The resulting peak PSD level shall not be great than 8dBm.

5.3.4. Test Setup Layout

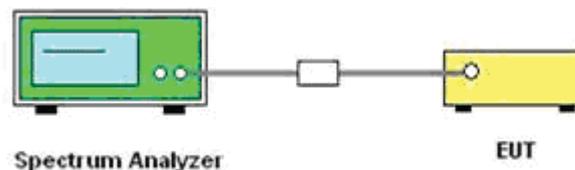

5.3.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.3.6. Test Result of Power Spectral Density



Temperature	25°C	Humidity	60%
Test Engineer	Chaz Liu	Configurations	802.11b/g/n

Test Mode	Channel	Frequency (MHz)	Measured Peak Power Spectral Density (dBm/3KHz)	Limits (dBm/3KHz)	Verdict
IEEE 802.11b	1	2412	-6.959	≤8	PASS
	6	2437	-5.763		
	11	2462	-7.835		
IEEE 802.11g	1	2412	-13.489	≤8	PASS
	6	2437	-11.486		
	11	2462	-13.709		
IEEE 802.11n HT20	1	2412	-11.986	≤8	PASS
	6	2437	-14.716		
	11	2462	-13.986		
IEEE 802.11n HT40	3	2422	-18.284	≤8	PASS
	6	2437	-16.766		
	9	2452	-17.142		

Remark:



1. Measured output power at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40;
4. please refer to following plots;

Peak Power Spectrum Density

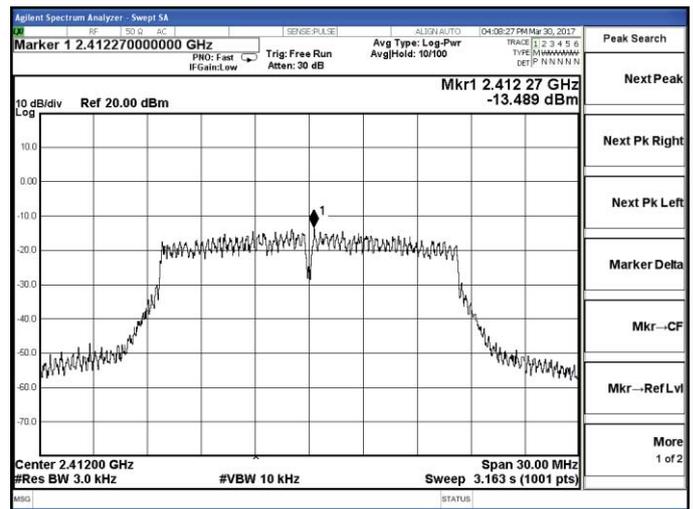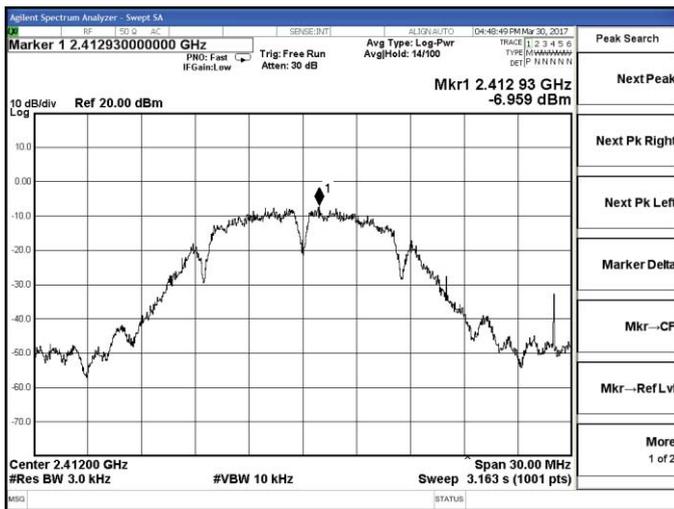



IEEE 802.11b-Channel 1 / 2412 MHz

IEEE 802.11g-Channel 1 / 2412 MHz

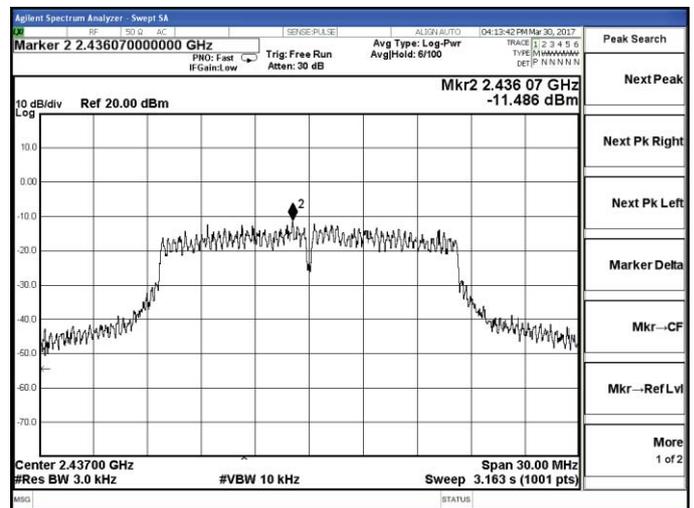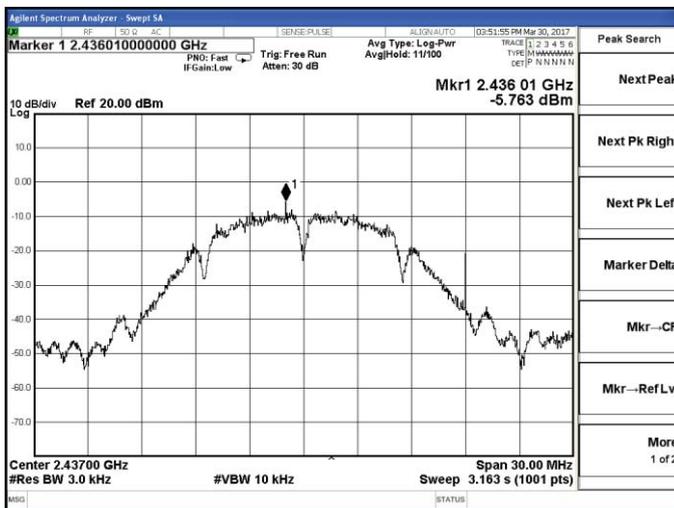

IEEE 802.11b-Channel 6 / 2437 MHz



IEEE 802.11g-Channel 6 / 2437 MHz

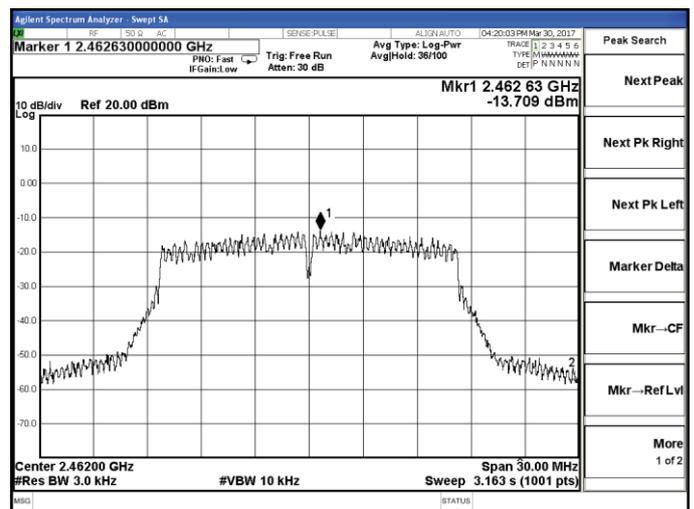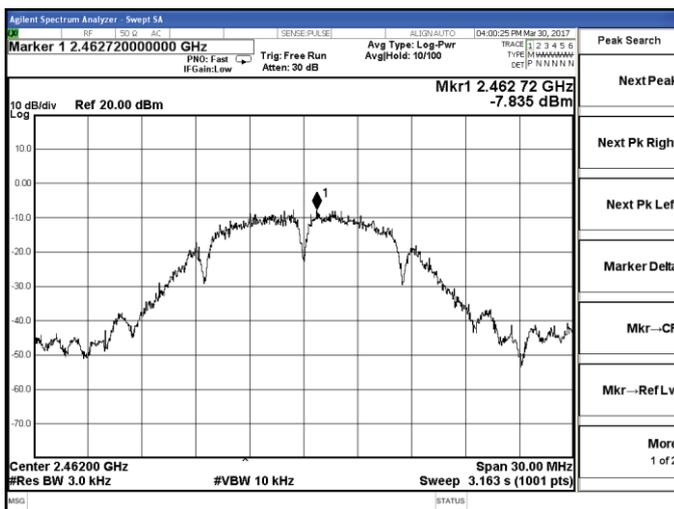

IEEE 802.11b-Channel 11 / 2462 MHz



IEEE 802.11g-Channel 11 / 2462 MHz

Peak Power Spectrum Density

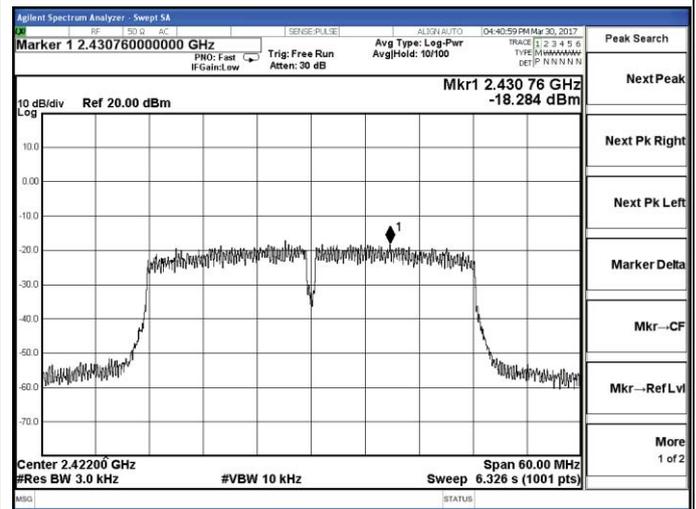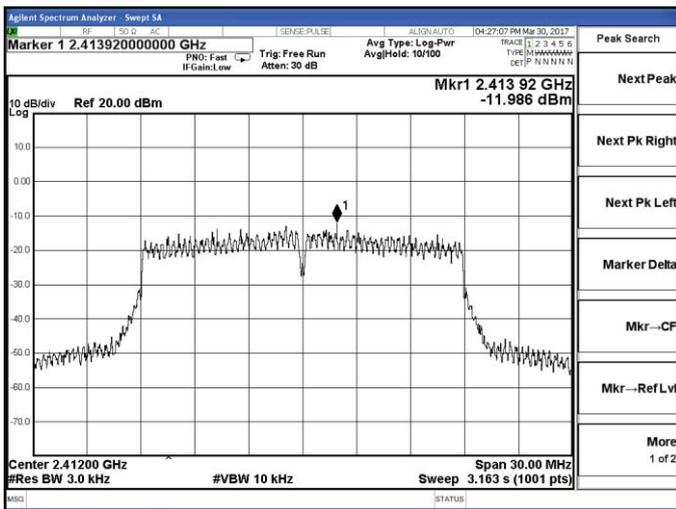



IEEE 802.11n HT20-Channel 1 / 2412 MHz

IEEE 802.11n HT40-Channel 3 / 2422 MHz

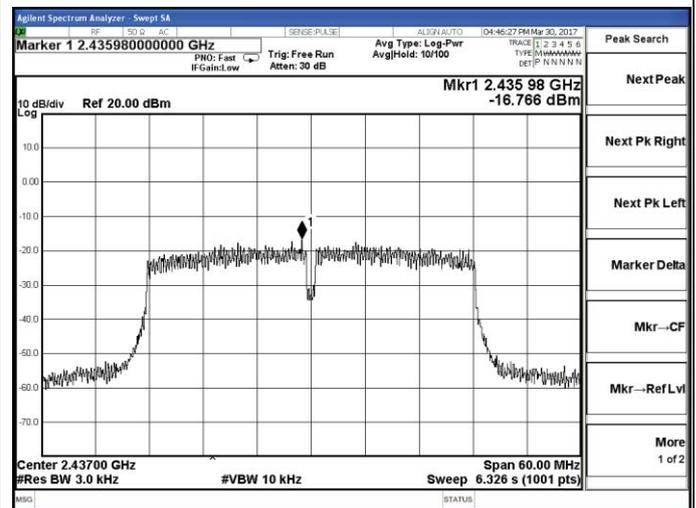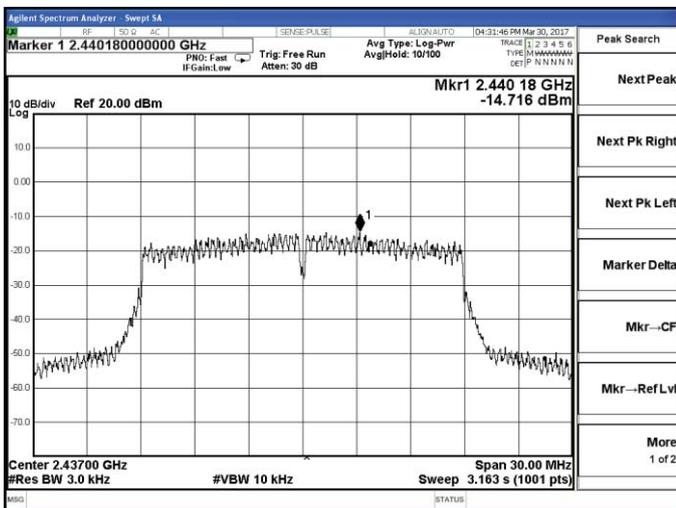

IEEE 802.11n HT20-Channel 6 / 2437 MHz

IEEE 802.11n HT40-Channel 6 / 2437 MHz

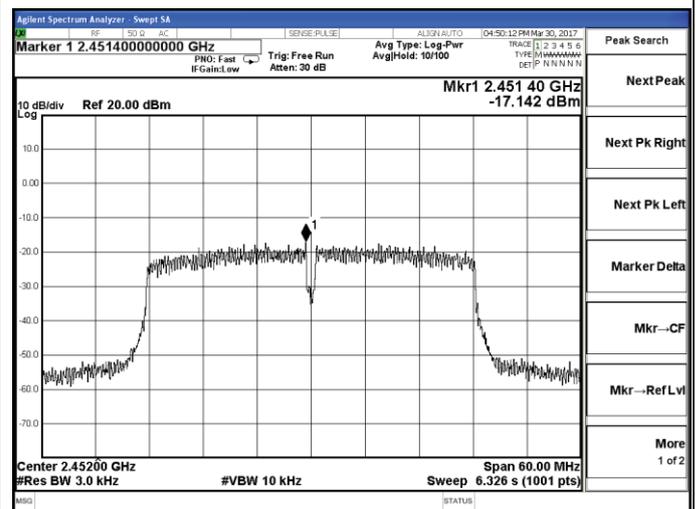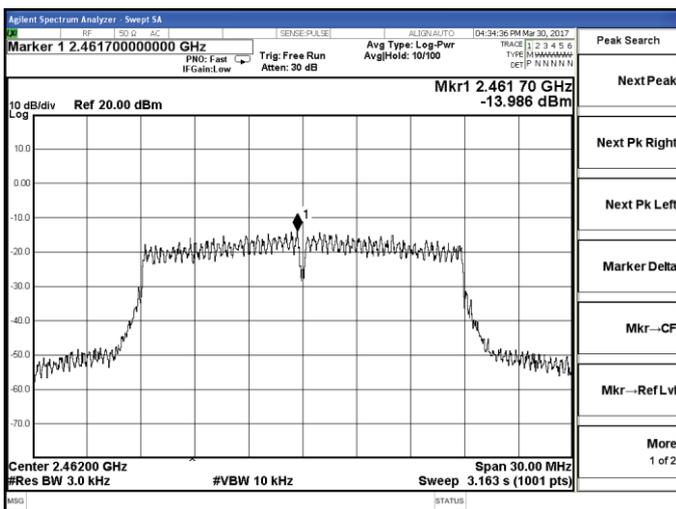

IEEE 802.11n HT20-Channel 11 / 2462 MHz

IEEE 802.11n HT40-Channel 9 / 2452 MHz

5.4. 6 dB Spectrum Bandwidth Measurement

5.4.1. Standard Applicable

According to §15.247(a) (2): For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

5.4.2. Measuring Instruments and Setting


Please refer to section 6 of equipment’s list in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> RBW
Detector	Peak
Trace	Max Hold
Sweep Time	100ms

5.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth and the video bandwidth were set according to KDB558074.
3. Measured the spectrum width with power higher than 6dB below carrier.

5.4.4. Test Setup Layout

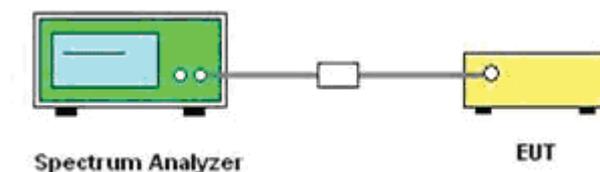

5.4.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.4.6. Test Result of 6dB Spectrum Bandwidth



Temperature	25°C	Humidity	60%
Test Engineer	Chaz Liu	Configurations	802.11b/g/n

Test Mode	Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limits (MHz)	Verdict
IEEE 802.11b	1	2412	10.05	≥0.500	PASS
	6	2437	10.07		
	11	2462	10.05		
IEEE 802.11g	1	2412	15.32	≥0.500	PASS
	6	2437	15.16		
	11	2462	15.14		
IEEE 802.11n HT20	1	2412	15.12	≥0.500	PASS
	6	2437	15.16		
	11	2462	15.16		
IEEE 802.11n HT40	3	2422	35.23	≥0.500	PASS
	6	2437	35.23		
	9	2452	35.24		

Remark:


1. Measured output power at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40;
4. please refer to following plots;

6 dB Bandwidth

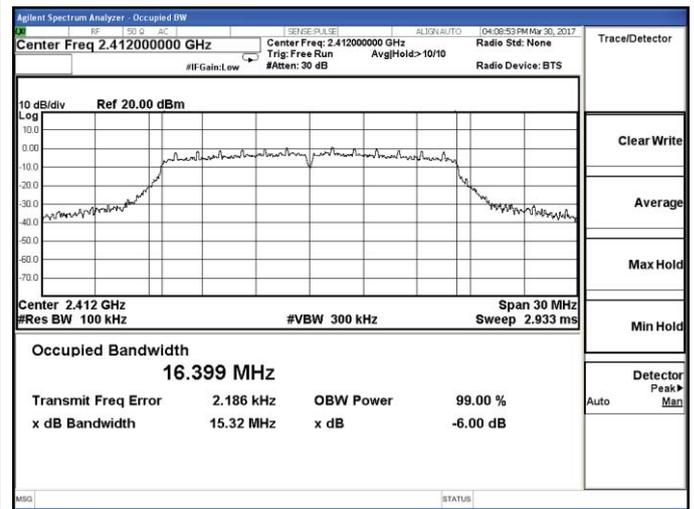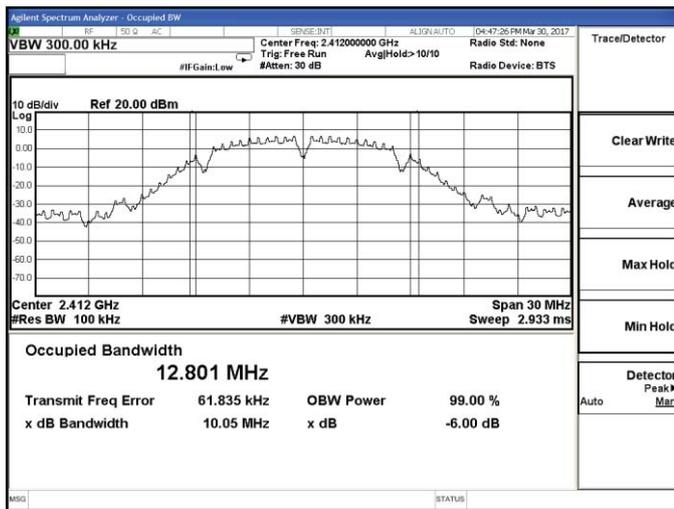



IEEE 802.11b-Channel 1 / 2412 MHz

IEEE 802.11g-Channel 1 / 2412 MHz

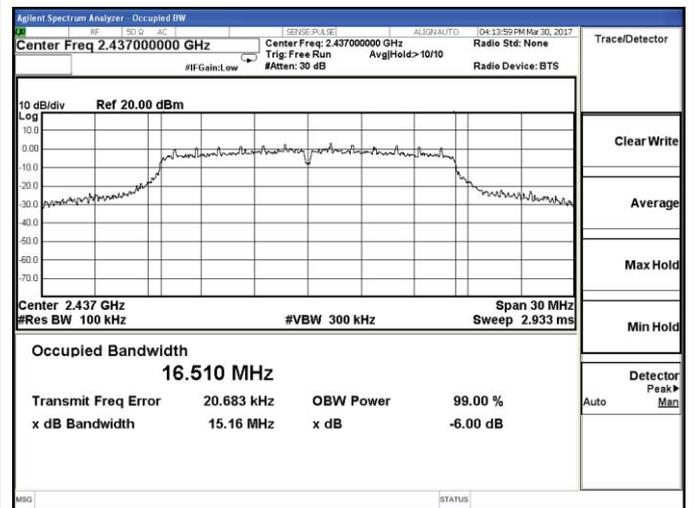

IEEE 802.11b-Channel 6 / 2437 MHz



IEEE 802.11g-Channel 6 / 2437 MHz

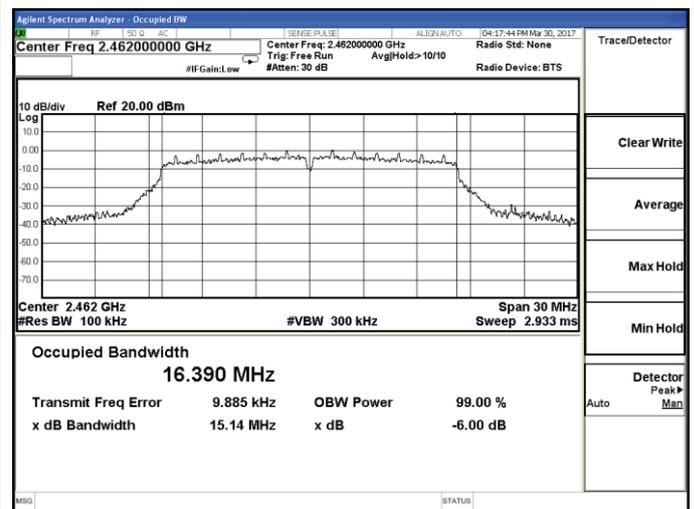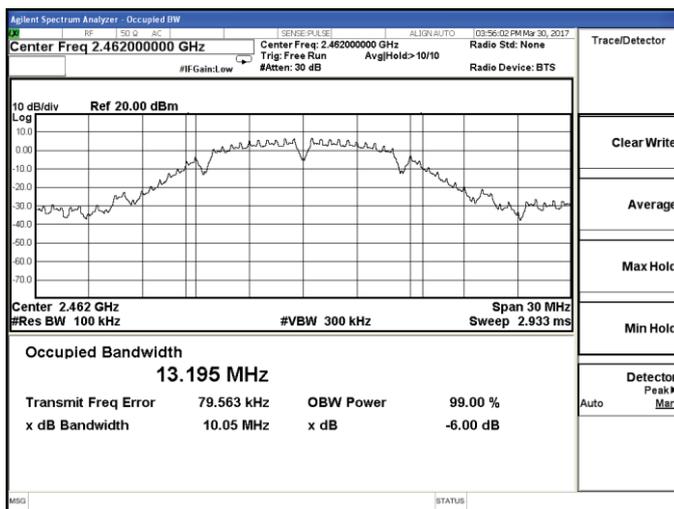

IEEE 802.11b-Channel 11 / 2462 MHz



IEEE 802.11g-Channel 11 / 2462 MHz

6 dB Bandwidth

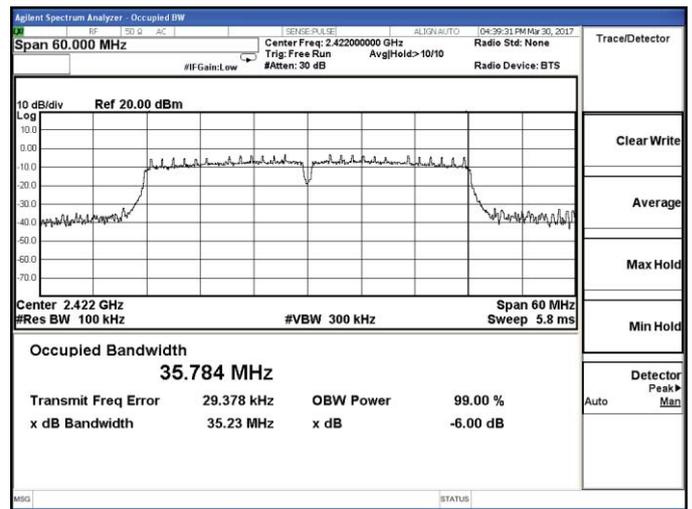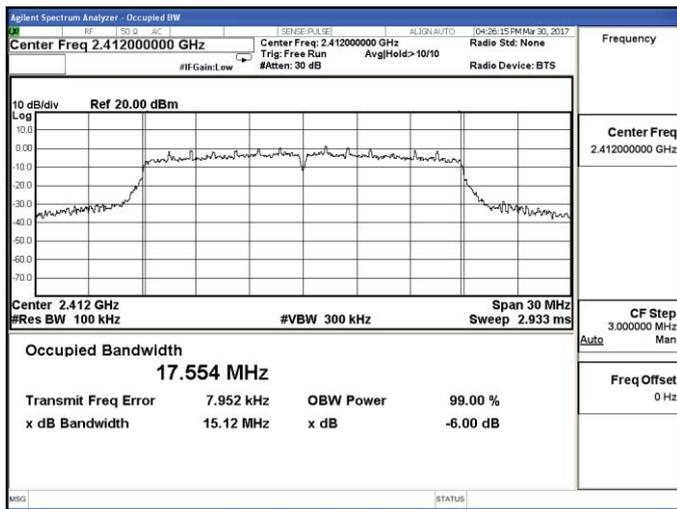



IEEE 802.11n HT20-Channel 1 / 2412 MHz

IEEE 802.11n HT40-Channel 3 / 2422 MHz

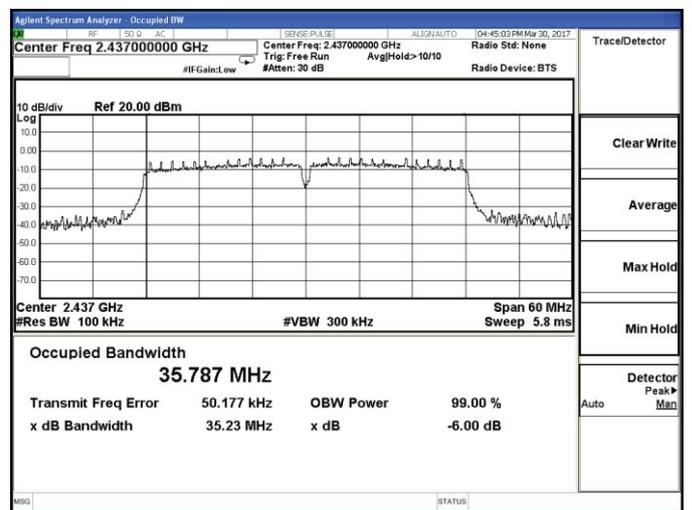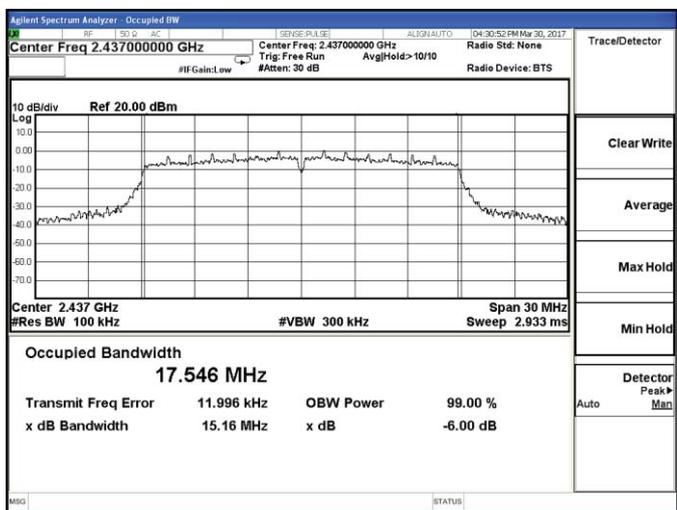

IEEE 802.11n HT20-Channel 6 / 2437 MHz

IEEE 802.11n HT40-Channel 6 / 2437 MHz

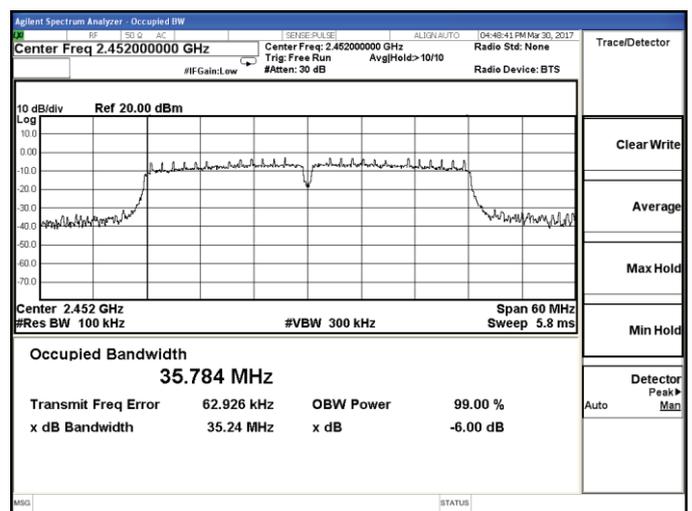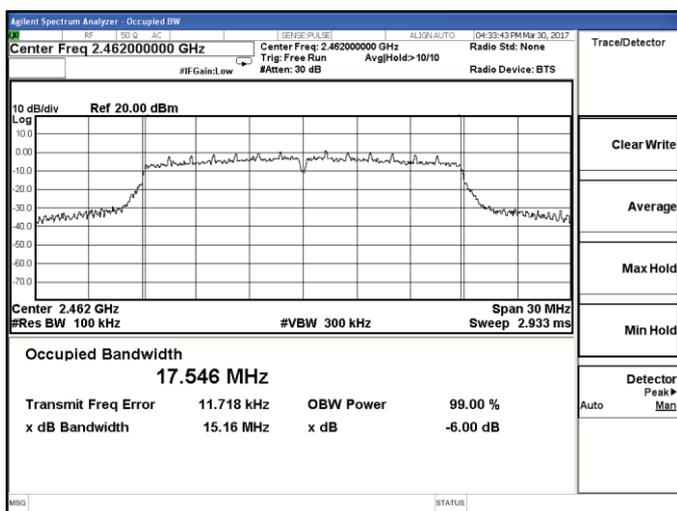

IEEE 802.11n HT20-Channel 11 / 2462 MHz

IEEE 802.11n HT40-Channel 9 / 2452 MHz

5.5. Radiated Emissions Measurement

5.5.1. Standard Applicable

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
\1\ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293.	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(\2\)
13.36-13.41			

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

According to §15.247 (d): 20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

5.5.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP/AVG
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP/AVG
Start ~ Stop Frequency	30MHz~1000MHz / RB 100kHz for QP

5.5.3. Test Procedures

1) Sequence of testing 9 kHz to 30 MHz

Setup:

--- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.

--- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.

--- If the EUT is a floor standing device, it is placed on the ground.

--- Auxiliary equipment and cables were positioned to simulate normal operation conditions.

--- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.

--- The measurement distance is 3 meter.

--- The EUT was set into operation.

Premeasurement:

--- The turntable rotates from 0° to 315° using 45° steps.

--- The antenna height is 0.8 meter.

--- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

--- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).

--- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.

--- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.


Premeasurement:

- The antenna is moved spherical over the EUT in different polarisations of the antenna.


Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.


5.5.4. Test Setup Layout

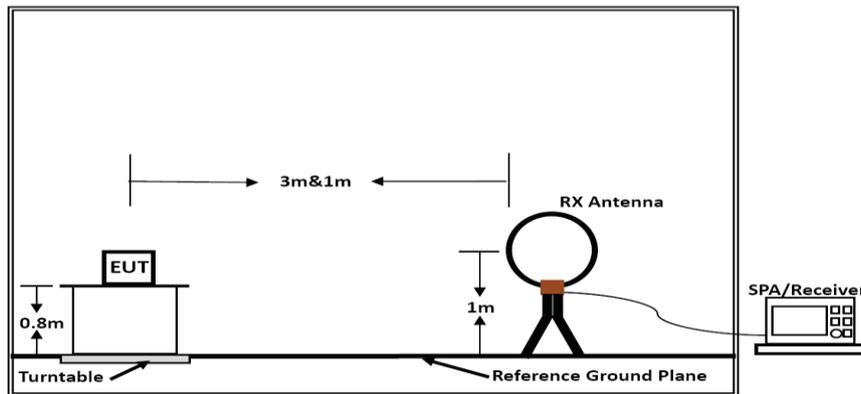

Below 30MHz

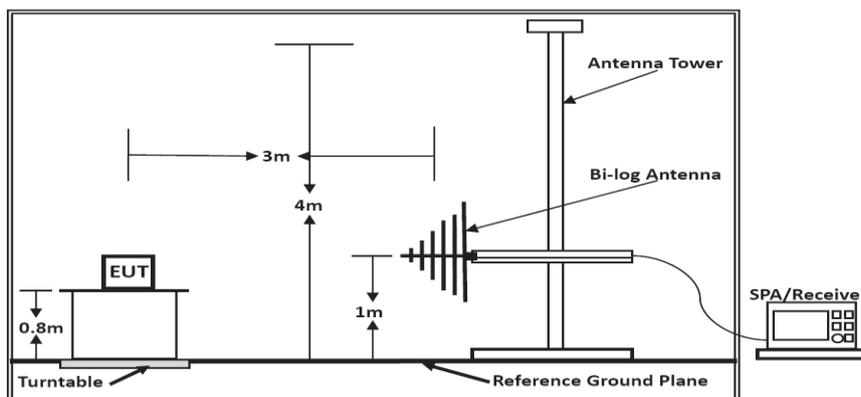

Below 1GHz

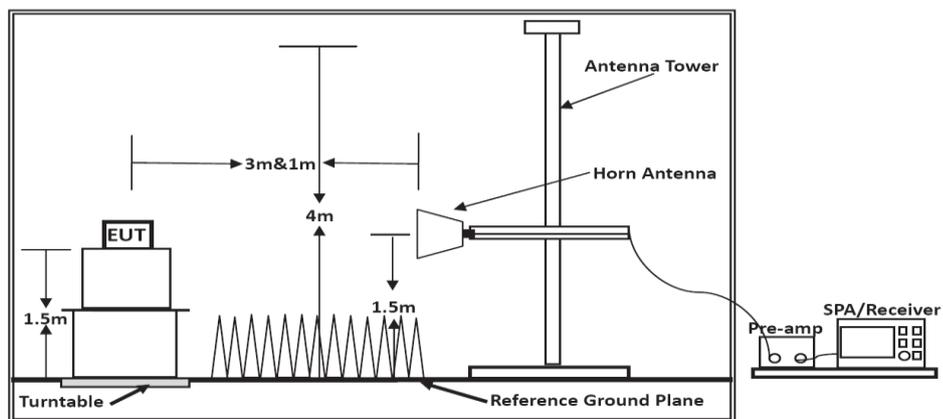

Above 1GHz

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$ (dB);
 Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

5.5.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.5.6. Results of Radiated Emissions (9 KHz~30MHz)

Temperature	25°C	Humidity	60%
Test Engineer	Chaz Liu	Configurations	802.11b/g/n

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = 40 log (specific distance / test distance) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

5.5.7. Results of Radiated Emissions (30MHz~1GHz)

Temperature	25°C	Humidity	60%
Test Engineer	Chaz Liu	Configurations	802.11b (Low CH)


Test result for 802.11b (Low Channel)

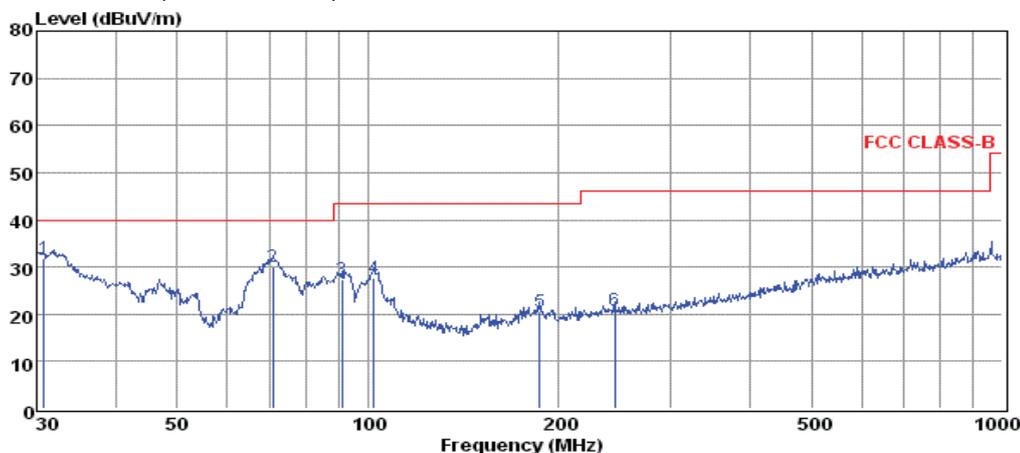

pol: VERTICAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	30.85	19.13	0.39	12.32	31.84	40.00	-8.16	QP
2	70.83	20.88	0.55	8.51	29.94	40.00	-10.06	QP
3	90.86	14.48	0.68	12.06	27.22	43.50	-16.28	QP
4	102.00	14.21	0.60	12.98	27.79	43.50	-15.71	QP
5	186.44	9.33	0.98	10.25	20.56	43.50	-22.94	QP
6	245.09	7.76	0.90	12.08	20.74	46.00	-25.26	QP

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that are 20db below the official limit are not reported

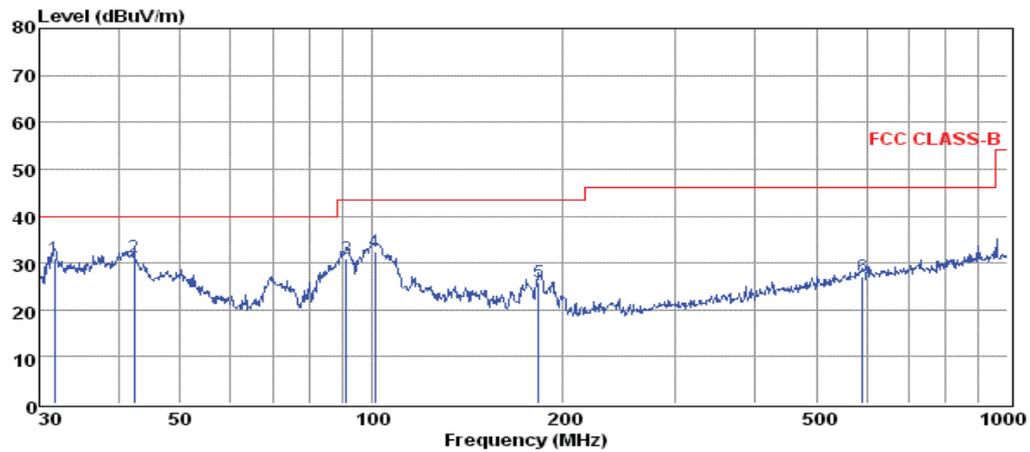

pol: HORIZONTAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	31.73	18.22	0.37	12.32	30.91	40.00	-9.09	QP
2	42.30	17.06	0.50	13.57	31.13	40.00	-8.87	QP
3	91.17	18.34	0.56	12.12	31.02	43.50	-12.48	QP
4	101.29	18.76	0.60	13.04	32.40	43.50	-11.10	QP
5	183.20	15.27	0.70	9.96	25.93	43.50	-17.57	QP
6	590.97	7.11	1.54	18.28	26.93	46.00	-19.07	QP

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that are 20db below the official limit are not reported

Note:

- 1). Pre-scan all mode and recorded the worst case results in this report (802.11b (Low Channel)). Emission level (dBuV/m) = 20 log Emission level (uV/m).
- 2). Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

5.5.8. Results for Radiated Emissions (Above 1GHz)

Please refer to the following page.

Above 1GHz

The result for 802.11b Channel 1 / 2412MHz

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4824.00	54.13	33.30	36.44	7.68	58.67	74	-15.33	Peak	Horizontal
4824.00	39.86	33.30	36.44	7.68	44.40	54	-9.60	Average	Horizontal
4824.00	51.72	33.81	36.44	7.68	56.77	74	-17.23	Peak	Vertical
4824.00	40.74	33.81	36.44	7.68	45.79	54	-8.21	Average	Vertical
7236.00	48.10	36.87	35.28	9.32	59.01	74	-14.99	Peak	Horizontal
7236.00	35.89	36.87	35.28	9.32	46.80	54	-7.20	Average	Horizontal
7236.00	45.66	36.76	35.28	9.32	56.46	74	-17.54	Peak	Vertical
7236.00	33.37	36.76	35.28	9.32	44.17	54	-9.83	Average	Vertical
9648.00	41.22	38.01	35.32	9.98	53.89	74	-20.11	Peak	Horizontal
9648.00	30.11	38.01	35.32	9.98	42.78	54	-11.22	Average	Horizontal
9648.00	41.84	37.73	35.32	9.98	54.23	74	-19.77	Peak	Vertical
9648.00	30.31	37.73	35.32	9.98	42.70	54	-11.30	Average	Vertical
12060.00	45.57	36.52	35.37	10.22	56.94	74	-17.06	Peak	Horizontal
12060.00	31.55	36.52	35.37	10.22	42.92	54	-11.08	Average	Horizontal
12060.00	39.44	36.53	35.37	10.22	50.82	74	-23.18	Peak	Vertical
12060.00	32.40	36.53	35.37	10.22	43.78	54	-10.22	Average	Vertical
14472.00	38.76	40.34	35.66	10.34	53.78	74	-20.22	Peak	Horizontal
14472.00	26.00	40.34	35.66	10.34	41.02	54	-12.98	Average	Horizontal
14472.00	38.06	40.16	35.66	10.34	52.90	74	-21.10	Peak	Vertical
14472.00	24.00	40.16	35.66	10.34	38.84	54	-15.16	Average	Vertical
16884.00	38.57	38.02	35.25	10.70	52.04	74	-21.96	Peak	Horizontal
16884.00	23.83	38.02	35.25	10.70	37.30	54	-16.70	Average	Horizontal
16884.00	37.27	37.93	35.25	10.70	50.65	74	-23.35	Peak	Vertical
16884.00	25.20	37.93	35.25	10.70	38.58	54	-15.42	Average	Vertical

The result for 802.11b Channel 6 / 2437MHz

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4874.00	53.62	33.3	36.44	7.68	58.16	74	-15.84	Peak	Horizontal
4874.00	39.54	33.3	36.44	7.68	44.08	54	-9.92	Average	Horizontal
4874.00	52.29	33.46	36.44	7.68	56.99	74	-17.01	Peak	Vertical
4874.00	40.83	33.46	36.44	7.68	45.53	54	-8.47	Average	Vertical
7311.00	49.28	36.92	35.12	9.36	60.44	74	-13.56	Peak	Horizontal
7311.00	35.02	36.92	35.12	9.36	46.18	54	-7.82	Average	Horizontal
7311.00	45.31	36.75	35.12	9.36	56.30	74	-17.70	Peak	Vertical
7311.00	34.08	36.75	35.12	9.36	45.07	54	-8.93	Average	Vertical
9748.00	42.25	38.06	35.22	10.01	55.10	74	-18.90	Peak	Horizontal
9748.00	30.03	38.06	35.22	10.01	42.88	54	-11.12	Average	Horizontal
9748.00	43.01	38.02	35.22	10.01	55.82	74	-18.18	Peak	Vertical
9748.00	30.82	38.02	35.22	10.01	43.63	54	-10.37	Average	Vertical
12185.00	45.27	36.52	35.37	10.22	56.64	74	-17.36	Peak	Horizontal
12185.00	30.71	36.52	35.37	10.22	42.08	54	-11.92	Average	Horizontal
12185.00	39.24	36.68	35.37	10.22	50.77	74	-23.23	Peak	Vertical
12185.00	31.69	36.68	35.37	10.22	43.22	54	-10.78	Average	Vertical
14622.00	38.32	40.34	35.66	10.34	53.34	74	-20.66	Peak	Horizontal
14622.00	25.87	40.34	35.66	10.34	40.89	54	-13.11	Average	Horizontal
14622.00	36.81	40.27	35.66	10.34	51.76	74	-22.24	Peak	Vertical
14622.00	23.58	40.27	35.66	10.34	38.53	54	-15.47	Average	Vertical
17059.00	38.99	40.11	35.05	11.00	55.05	74	-18.95	Peak	Horizontal
17059.00	25.49	40.11	35.05	11.00	41.55	54	-12.45	Average	Horizontal
17059.00	38.39	40.00	35.05	11.00	54.34	74	-19.66	Peak	Vertical
17059.00	24.18	40.00	35.05	11.00	40.13	54	-13.87	Average	Vertical

The result for 802.11b Channel 11 / 2462MHz

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4924.00	55.06	33.55	36.41	7.74	59.94	74	-14.06	Peak	Horizontal
4924.00	40.75	33.55	36.41	7.74	45.63	54	-8.37	Average	Horizontal
4924.00	52.55	33.43	36.41	7.74	57.31	74	-16.69	Peak	Vertical
4924.00	41.33	33.43	36.41	7.74	46.09	54	-7.91	Average	Vertical
7386.00	48.21	36.92	35.12	9.36	59.37	74	-14.63	Peak	Horizontal
7386.00	35.81	36.92	35.12	9.36	46.97	54	-7.03	Average	Horizontal
7386.00	45.87	37.04	35.12	9.36	57.15	74	-16.85	Peak	Vertical
7386.00	33.08	37.04	35.12	9.36	44.36	54	-9.64	Average	Vertical
9848.00	42.59	38.11	35.12	10.04	55.62	74	-18.38	Peak	Horizontal
9848.00	30.83	38.11	35.12	10.04	43.86	54	-10.14	Average	Horizontal
9848.00	42.36	38.13	35.12	10.04	55.41	74	-18.59	Peak	Vertical
9848.00	30.46	38.13	35.12	10.04	43.51	54	-10.49	Average	Vertical
12310.00	43.73	36.52	35.37	10.22	55.10	74	-18.90	Peak	Horizontal
12310.00	31.55	36.52	35.37	10.22	42.92	54	-11.08	Average	Horizontal
12310.00	40.81	36.57	35.37	10.22	52.23	74	-21.77	Peak	Vertical
12310.00	31.87	36.57	35.37	10.22	43.29	54	-10.71	Average	Vertical
14772.00	39.36	40.34	35.66	10.34	54.38	74	-19.62	Peak	Horizontal
14772.00	25.66	40.34	35.66	10.34	40.68	54	-13.32	Average	Horizontal
14772.00	37.51	40.16	35.66	10.34	52.35	74	-21.65	Peak	Vertical
14772.00	23.35	40.16	35.66	10.34	38.19	54	-15.81	Average	Vertical
17234.00	37.98	40.11	35.05	11.00	54.04	74	-19.96	Peak	Horizontal
17234.00	24.57	40.11	35.05	11.00	40.63	54	-13.37	Average	Horizontal
17234.00	38.21	39.86	35.05	11.00	54.02	74	-19.98	Peak	Vertical
17234.00	25.36	39.86	35.05	11.00	41.17	54	-12.83	Average	Vertical

The result for 802.11g Channel 1 / 2412MHz

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4824.00	55.49	33.3	36.44	7.68	60.03	74	-13.97	Peak	Horizontal
4824.00	40.29	33.3	36.44	7.68	44.83	54	-9.17	Average	Horizontal
4824.00	52.34	33.81	36.44	7.68	57.39	74	-16.61	Peak	Vertical
4824.00	40.47	33.81	36.44	7.68	45.52	54	-8.48	Average	Vertical
7236.00	49.49	36.87	35.28	9.32	60.40	74	-13.60	Peak	Horizontal
7236.00	36.21	36.87	35.28	9.32	47.12	54	-6.88	Average	Horizontal
7236.00	44.60	36.76	35.28	9.32	55.40	74	-18.60	Peak	Vertical
7236.00	32.48	36.76	35.28	9.32	43.28	54	-10.72	Average	Vertical
9648.00	42.69	38.01	35.32	9.98	55.36	74	-18.64	Peak	Horizontal
9648.00	29.56	38.01	35.32	9.98	42.23	54	-11.77	Average	Horizontal
9648.00	42.43	37.73	35.32	9.98	54.82	74	-19.18	Peak	Vertical
9648.00	30.36	37.73	35.32	9.98	42.75	54	-11.25	Average	Vertical
12060.00	43.73	36.52	35.37	10.22	55.10	74	-18.90	Peak	Horizontal
12060.00	31.99	36.52	35.37	10.22	43.36	54	-10.64	Average	Horizontal
12060.00	39.41	36.53	35.37	10.22	50.79	74	-23.21	Peak	Vertical
12060.00	31.23	36.53	35.37	10.22	42.61	54	-11.39	Average	Vertical
14472.00	39.10	40.34	35.66	10.34	54.12	74	-19.88	Peak	Horizontal
14472.00	25.65	40.34	35.66	10.34	40.67	54	-13.33	Average	Horizontal
14472.00	37.71	40.16	35.66	10.34	52.55	74	-21.45	Peak	Vertical
14472.00	22.54	40.16	35.66	10.34	37.38	54	-16.62	Average	Vertical
16884.00	37.63	38.02	35.25	10.70	51.10	74	-22.90	Peak	Horizontal
16884.00	23.60	38.02	35.25	10.70	37.07	54	-16.93	Average	Horizontal
16884.00	37.77	37.93	35.25	10.70	51.15	74	-22.85	Peak	Vertical
16884.00	24.99	37.93	35.25	10.70	38.37	54	-15.63	Average	Vertical

The result for 802.11g Channel 6 / 2437MHz

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4874.00	54.42	33.3	36.44	7.68	58.96	74	-15.04	Peak	Horizontal
4874.00	40.45	33.3	36.44	7.68	44.99	54	-9.01	Average	Horizontal
4874.00	52.68	33.46	36.44	7.68	57.38	74	-16.62	Peak	Vertical
4874.00	40.95	33.46	36.44	7.68	45.65	54	-8.35	Average	Vertical
7311.00	49.24	36.92	35.12	9.36	60.40	74	-13.60	Peak	Horizontal
7311.00	34.50	36.92	35.12	9.36	45.66	54	-8.34	Average	Horizontal
7311.00	44.30	36.75	35.12	9.36	55.29	74	-18.71	Peak	Vertical
7311.00	33.46	36.75	35.12	9.36	44.45	54	-9.55	Average	Vertical
9748.00	42.75	38.06	35.22	10.01	55.60	74	-18.40	Peak	Horizontal
9748.00	30.67	38.06	35.22	10.01	43.52	54	-10.48	Average	Horizontal
9748.00	41.77	38.02	35.22	10.01	54.58	74	-19.42	Peak	Vertical
9748.00	31.22	38.02	35.22	10.01	44.03	54	-9.97	Average	Vertical
12185.00	43.93	36.52	35.37	10.22	55.30	74	-18.70	Peak	Horizontal
12185.00	31.37	36.52	35.37	10.22	42.74	54	-11.26	Average	Horizontal
12185.00	40.96	36.68	35.37	10.22	52.49	74	-21.51	Peak	Vertical
12185.00	31.57	36.68	35.37	10.22	43.10	54	-10.90	Average	Vertical
14622.00	38.93	40.34	35.66	10.34	53.95	74	-20.05	Peak	Horizontal
14622.00	25.98	40.34	35.66	10.34	41.00	54	-13.00	Average	Horizontal
14622.00	37.78	40.27	35.66	10.34	52.73	74	-21.27	Peak	Vertical
14622.00	22.84	40.27	35.66	10.34	37.79	54	-16.21	Average	Vertical
17059.00	37.84	40.11	35.05	11.00	53.90	74	-20.10	Peak	Horizontal
17059.00	25.27	40.11	35.05	11.00	41.33	54	-12.67	Average	Horizontal
17059.00	38.10	40	35.05	11.00	54.05	74	-19.95	Peak	Vertical
17059.00	25.74	40	35.05	11.00	41.69	54	-12.31	Average	Vertical

The result for 802.11g Channel 11 / 2462MHz

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4924.00	54.85	33.55	36.41	7.74	59.73	74	-14.27	Peak	Horizontal
4924.00	40.30	33.55	36.41	7.74	45.18	54	-8.82	Average	Horizontal
4924.00	52.12	33.43	36.41	7.74	56.88	74	-17.12	Peak	Vertical
4924.00	41.50	33.43	36.41	7.74	46.26	54	-7.74	Average	Vertical
7386.00	49.60	36.92	35.12	9.36	60.76	74	-13.24	Peak	Horizontal
7386.00	34.91	36.92	35.12	9.36	46.07	54	-7.93	Average	Horizontal
7386.00	44.99	37.04	35.12	9.36	56.27	74	-17.73	Peak	Vertical
7386.00	32.70	37.04	35.12	9.36	43.98	54	-10.02	Average	Vertical
9848.00	42.10	38.11	35.12	10.04	55.13	74	-18.87	Peak	Horizontal
9848.00	30.50	38.11	35.12	10.04	43.53	54	-10.47	Average	Horizontal
9848.00	42.25	38.13	35.12	10.04	55.30	74	-18.70	Peak	Vertical
9848.00	29.72	38.13	35.12	10.04	42.77	54	-11.23	Average	Vertical
12310.00	44.82	36.52	35.37	10.22	56.19	74	-17.81	Peak	Horizontal
12310.00	30.50	36.52	35.37	10.22	41.87	54	-12.13	Average	Horizontal
12310.00	40.99	36.57	35.37	10.22	52.41	74	-21.59	Peak	Vertical
12310.00	31.09	36.57	35.37	10.22	42.51	54	-11.49	Average	Vertical
14772.00	37.41	40.34	35.66	10.34	52.43	74	-21.57	Peak	Horizontal
14772.00	26.42	40.34	35.66	10.34	41.44	54	-12.56	Average	Horizontal
14772.00	37.74	40.16	35.66	10.34	52.58	74	-21.42	Peak	Vertical
14772.00	23.81	40.16	35.66	10.34	38.65	54	-15.35	Average	Vertical
17234.00	37.29	40.11	35.05	11.00	53.35	74	-20.65	Peak	Horizontal
17234.00	23.99	40.11	35.05	11.00	40.05	54	-13.95	Average	Horizontal
17234.00	38.66	39.86	35.05	11.00	54.47	74	-19.53	Peak	Vertical
17234.00	24.43	39.86	35.05	11.00	40.24	54	-13.76	Average	Vertical

The result for 802.11n HT20 Channel 1 / 2412MHz

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4824.00	53.66	33.3	36.44	7.68	58.20	74	-15.80	Peak	Horizontal
4824.00	40.33	33.3	36.44	7.68	44.87	54	-9.13	Average	Horizontal
4824.00	52.75	33.81	36.44	7.68	57.80	74	-16.20	Peak	Vertical
4824.00	40.36	33.81	36.44	7.68	45.41	54	-8.59	Average	Vertical
7236.00	49.57	36.87	35.28	9.32	60.48	74	-13.52	Peak	Horizontal
7236.00	35.67	36.87	35.28	9.32	46.58	54	-7.42	Average	Horizontal
7236.00	45.93	36.76	35.28	9.32	56.73	74	-17.27	Peak	Vertical
7236.00	33.40	36.76	35.28	9.32	44.20	54	-9.80	Average	Vertical
9648.00	42.38	38.01	35.32	9.98	55.05	74	-18.95	Peak	Horizontal
9648.00	29.23	38.01	35.32	9.98	41.90	54	-12.10	Average	Horizontal
9648.00	42.35	37.73	35.32	9.98	54.74	74	-19.26	Peak	Vertical
9648.00	30.95	37.73	35.32	9.98	43.34	54	-10.66	Average	Vertical
12060.00	45.53	36.52	35.37	10.22	56.90	74	-17.10	Peak	Horizontal
12060.00	31.11	36.52	35.37	10.22	42.48	54	-11.52	Average	Horizontal
12060.00	39.21	36.53	35.37	10.22	50.59	74	-23.41	Peak	Vertical
12060.00	32.81	36.53	35.37	10.22	44.19	54	-9.81	Average	Vertical
14472.00	38.38	40.34	35.66	10.34	53.40	74	-20.60	Peak	Horizontal
14472.00	25.82	40.34	35.66	10.34	40.84	54	-13.16	Average	Horizontal
14472.00	38.03	40.16	35.66	10.34	52.87	74	-21.13	Peak	Vertical
14472.00	23.06	40.16	35.66	10.34	37.90	54	-16.10	Average	Vertical
16884.00	37.55	38.02	35.25	10.70	51.02	74	-22.98	Peak	Horizontal
16884.00	24.29	38.02	35.25	10.70	37.76	54	-16.24	Average	Horizontal
16884.00	37.87	37.93	35.25	10.70	51.25	74	-22.75	Peak	Vertical
16884.00	25.71	37.93	35.25	10.70	39.09	54	-14.91	Average	Vertical

The result for 802.11n HT20 Channel 6 / 2437MHz

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4874.00	54.13	33.3	36.44	7.68	58.67	74	-15.33	Peak	Horizontal
4874.00	40.35	33.3	36.44	7.68	44.89	54	-9.11	Average	Horizontal
4874.00	51.70	33.46	36.44	7.68	56.40	74	-17.60	Peak	Vertical
4874.00	40.22	33.46	36.44	7.68	44.92	54	-9.08	Average	Vertical
7311.00	49.24	36.92	35.12	9.36	60.40	74	-13.60	Peak	Horizontal
7311.00	35.05	36.92	35.12	9.36	46.21	54	-7.79	Average	Horizontal
7311.00	44.13	36.75	35.12	9.36	55.12	74	-18.88	Peak	Vertical
7311.00	33.07	36.75	35.12	9.36	44.06	54	-9.94	Average	Vertical
9748.00	41.64	38.06	35.22	10.01	54.49	74	-19.51	Peak	Horizontal
9748.00	29.94	38.06	35.22	10.01	42.79	54	-11.21	Average	Horizontal
9748.00	42.98	38.02	35.22	10.01	55.79	74	-18.21	Peak	Vertical
9748.00	30.49	38.02	35.22	10.01	43.30	54	-10.70	Average	Vertical
12185.00	45.69	36.52	35.37	10.22	57.06	74	-16.94	Peak	Horizontal
12185.00	31.40	36.52	35.37	10.22	42.77	54	-11.23	Average	Horizontal
12185.00	39.74	36.68	35.37	10.22	51.27	74	-22.73	Peak	Vertical
12185.00	31.13	36.68	35.37	10.22	42.66	54	-11.34	Average	Vertical
14622.00	38.80	40.34	35.66	10.34	53.82	74	-20.18	Peak	Horizontal
14622.00	26.38	40.34	35.66	10.34	41.40	54	-12.60	Average	Horizontal
14622.00	36.76	40.27	35.66	10.34	51.71	74	-22.29	Peak	Vertical
14622.00	22.58	40.27	35.66	10.34	37.53	54	-16.47	Average	Vertical
17059.00	37.42	40.11	35.05	11.00	53.48	74	-20.52	Peak	Horizontal
17059.00	25.15	40.11	35.05	11.00	41.21	54	-12.79	Average	Horizontal
17059.00	39.02	40	35.05	11.00	54.97	74	-19.03	Peak	Vertical
17059.00	24.92	40	35.05	11.00	40.87	54	-13.13	Average	Vertical

The result for 802.11n HT20 Channel 11 / 2462MHz

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4924.00	55.09	33.55	36.41	7.74	59.97	74	-14.03	Peak	Horizontal
4924.00	40.05	33.55	36.41	7.74	44.93	54	-9.07	Average	Horizontal
4924.00	53.21	33.43	36.41	7.74	57.97	74	-16.03	Peak	Vertical
4924.00	40.72	33.43	36.41	7.74	45.48	54	-8.52	Average	Vertical
7386.00	47.83	36.92	35.12	9.36	58.99	74	-15.01	Peak	Horizontal
7386.00	35.76	36.92	35.12	9.36	46.92	54	-7.08	Average	Horizontal
7386.00	44.33	37.04	35.12	9.36	55.61	74	-18.39	Peak	Vertical
7386.00	33.05	37.04	35.12	9.36	44.33	54	-9.67	Average	Vertical
9848.00	42.46	38.11	35.12	10.04	55.49	74	-18.51	Peak	Horizontal
9848.00	30.03	38.11	35.12	10.04	43.06	54	-10.94	Average	Horizontal
9848.00	41.72	38.13	35.12	10.04	54.77	74	-19.23	Peak	Vertical
9848.00	29.26	38.13	35.12	10.04	42.31	54	-11.69	Average	Vertical
12310.00	44.49	36.52	35.37	10.22	55.86	74	-18.14	Peak	Horizontal
12310.00	32.04	36.52	35.37	10.22	43.41	54	-10.59	Average	Horizontal
12310.00	40.37	36.57	35.37	10.22	51.79	74	-22.21	Peak	Vertical
12310.00	32.92	36.57	35.37	10.22	44.34	54	-9.66	Average	Vertical
14772.00	39.26	40.34	35.66	10.34	54.28	74	-19.72	Peak	Horizontal
14772.00	25.31	40.34	35.66	10.34	40.33	54	-13.67	Average	Horizontal
14772.00	38.32	40.16	35.66	10.34	53.16	74	-20.84	Peak	Vertical
14772.00	23.42	40.16	35.66	10.34	38.26	54	-15.74	Average	Vertical
17234.00	37.88	40.11	35.05	11.00	53.94	74	-20.06	Peak	Horizontal
17234.00	24.74	40.11	35.05	11.00	40.80	54	-13.20	Average	Horizontal
17234.00	38.39	39.86	35.05	11.00	54.20	74	-19.80	Peak	Vertical
17234.00	25.41	39.86	35.05	11.00	41.22	54	-12.78	Average	Vertical

The result for 802.11n HT40 Channel 3 / 2422MHz

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4844.00	55.32	33.30	36.44	7.68	59.86	74	-14.14	Peak	Horizontal
4844.00	40.70	33.30	36.44	7.68	45.24	54	-8.76	Average	Horizontal
4844.00	51.84	33.10	36.44	7.68	56.18	74	-17.82	Peak	Vertical
4844.00	41.35	33.10	36.44	7.68	45.69	54	-8.31	Average	Vertical
7266.00	47.72	36.87	35.28	9.32	58.63	74	-15.37	Peak	Horizontal
7266.00	36.01	36.87	35.28	9.32	46.92	54	-7.08	Average	Horizontal
7266.00	44.43	36.71	35.28	9.32	55.18	74	-18.82	Peak	Vertical
7266.00	33.61	36.71	35.28	9.32	44.36	54	-9.64	Average	Vertical
9688.00	41.21	38.01	35.32	9.98	53.88	74	-20.12	Peak	Horizontal
9688.00	29.83	38.01	35.32	9.98	42.50	54	-11.50	Average	Horizontal
9688.00	42.91	37.97	35.32	9.98	55.54	74	-18.46	Peak	Vertical
9688.00	30.13	37.97	35.32	9.98	42.76	54	-11.24	Average	Vertical
12110.00	44.35	36.52	35.37	10.22	55.72	74	-18.28	Peak	Horizontal
12110.00	31.84	36.52	35.37	10.22	43.21	54	-10.79	Average	Horizontal
12110.00	40.81	36.52	35.37	10.22	52.18	74	-21.82	Peak	Vertical
12110.00	32.63	36.52	35.37	10.22	44.00	54	-10.00	Average	Vertical
14532.00	37.42	40.34	35.66	10.34	52.44	74	-21.56	Peak	Horizontal
14532.00	25.79	40.34	35.66	10.34	40.81	54	-13.19	Average	Horizontal
14532.00	37.33	40.52	35.66	10.34	52.53	74	-21.47	Peak	Vertical
14532.00	22.91	40.52	35.66	10.34	38.11	54	-15.89	Average	Vertical
16954.00	37.30	38.02	35.25	10.70	50.77	74	-23.23	Peak	Horizontal
16954.00	24.99	38.02	35.25	10.70	38.46	54	-15.54	Average	Horizontal
16954.00	39.15	37.93	35.25	10.70	52.53	74	-21.47	Peak	Vertical
16954.00	24.73	37.93	35.25	10.70	38.11	54	-15.89	Average	Vertical

The result for 802.11n HT40 Channel 6 / 2437MHz

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4874.00	54.99	33.3	36.44	7.68	59.53	74	-14.47	Peak	Horizontal
4874.00	40.84	33.3	36.44	7.68	45.38	54	-8.62	Average	Horizontal
4874.00	51.95	33.46	36.44	7.68	56.65	74	-17.35	Peak	Vertical
4874.00	40.42	33.46	36.44	7.68	45.12	54	-8.88	Average	Vertical
7311.00	49.02	36.92	35.12	9.36	60.18	74	-13.82	Peak	Horizontal
7311.00	34.40	36.92	35.12	9.36	45.56	54	-8.44	Average	Horizontal
7311.00	45.84	36.75	35.12	9.36	56.83	74	-17.17	Peak	Vertical
7311.00	33.51	36.75	35.12	9.36	44.50	54	-9.50	Average	Vertical
9748.00	42.93	38.06	35.22	10.01	55.78	74	-18.22	Peak	Horizontal
9748.00	30.44	38.06	35.22	10.01	43.29	54	-10.71	Average	Horizontal
9748.00	42.47	38.02	35.22	10.01	55.28	74	-18.72	Peak	Vertical
9748.00	29.41	38.02	35.22	10.01	42.22	54	-11.78	Average	Vertical
12185.00	45.15	36.52	35.37	10.22	56.52	74	-17.48	Peak	Horizontal
12185.00	31.87	36.52	35.37	10.22	43.24	54	-10.76	Average	Horizontal
12185.00	39.63	36.68	35.37	10.22	51.16	74	-22.84	Peak	Vertical
12185.00	32.29	36.68	35.37	10.22	43.82	54	-10.18	Average	Vertical
14622.00	39.35	40.34	35.66	10.34	54.37	74	-19.63	Peak	Horizontal
14622.00	25.38	40.34	35.66	10.34	40.40	54	-13.60	Average	Horizontal
14622.00	37.73	40.27	35.66	10.34	52.68	74	-21.32	Peak	Vertical
14622.00	24.18	40.27	35.66	10.34	39.13	54	-14.87	Average	Vertical
17059.00	37.53	40.11	35.05	11.00	53.59	74	-20.41	Peak	Horizontal
17059.00	24.81	40.11	35.05	11.00	40.87	54	-13.13	Average	Horizontal
17059.00	37.63	40.00	35.05	11.00	53.58	74	-20.42	Peak	Vertical
17059.00	24.06	40.00	35.05	11.00	40.01	54	-13.99	Average	Vertical

The result for 802.11n HT40 Channel 9 / 2452MHz

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4904.00	55.36	33.55	36.41	7.74	60.24	74	-13.76	Peak	Horizontal
4904.00	41.11	33.55	36.41	7.74	45.99	54	-8.01	Average	Horizontal
4904.00	51.79	33.63	36.41	7.74	56.75	74	-17.25	Peak	Vertical
4904.00	40.17	33.63	36.41	7.74	45.13	54	-8.87	Average	Vertical
7356.00	48.67	36.92	35.12	9.36	59.83	74	-14.17	Peak	Horizontal
7356.00	36.20	36.92	35.12	9.36	47.36	54	-6.64	Average	Horizontal
7356.00	44.45	36.64	35.12	9.36	55.33	74	-18.67	Peak	Vertical
7356.00	32.94	36.64	35.12	9.36	43.82	54	-10.18	Average	Vertical
9808.00	41.23	38.11	35.12	10.04	54.26	74	-19.74	Peak	Horizontal
9808.00	30.39	38.11	35.12	10.04	43.42	54	-10.58	Average	Horizontal
9808.00	41.81	38.22	35.12	10.04	54.95	74	-19.05	Peak	Vertical
9808.00	30.41	38.22	35.12	10.04	43.55	54	-10.45	Average	Vertical
12260.00	45.52	36.52	35.37	10.22	56.89	74	-17.11	Peak	Horizontal
12260.00	31.05	36.52	35.37	10.22	42.42	54	-11.58	Average	Horizontal
12260.00	39.89	36.35	35.37	10.22	51.09	74	-22.91	Peak	Vertical
12260.00	32.54	36.35	35.37	10.22	43.74	54	-10.26	Average	Vertical
14712.00	39.17	40.34	35.66	10.34	54.19	74	-19.81	Peak	Horizontal
14712.00	25.53	40.34	35.66	10.34	40.55	54	-13.45	Average	Horizontal
14712.00	36.69	40.05	35.66	10.34	51.42	74	-22.58	Peak	Vertical
14712.00	23.25	40.05	35.66	10.34	37.98	54	-16.02	Average	Vertical
17164.00	38.21	40.11	35.05	11.00	54.27	74	-19.73	Peak	Horizontal
17164.00	23.95	40.11	35.05	11.00	40.01	54	-13.99	Average	Horizontal
17164.00	39.01	39.91	35.05	11.00	54.87	74	-19.13	Peak	Vertical
17164.00	24.22	39.91	35.05	11.00	40.08	54	-13.92	Average	Vertical

Notes:

1. Measuring frequencies from 9k~10th harmonic or 26.5GHz (which is less), No emission found between lowest internal used/generated frequency to 30MHz.
2. Radiated emissions measured in frequency range from 9k~10th harmonic or 26.5GHz (which is less) were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40;

5.6. Conducted Spurious Emissions and Band Edges Test

5.6.1. Standard Applicable

According to §15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

5.6.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Detector	Peak
Attenuation	Auto
RB / VB (Emission in restricted band)	100KHz/300KHz
RB / VB (Emission in non-restricted band)	100KHz/300KHz

5.6.3. Test Procedures

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz

The spectrum from 9 kHz to 26.5GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

5.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 5.4.4.

5.6.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.6.6. Test Results of Conducted Spurious Emissions


Temperature	25°C	Humidity	60%
Test Engineer	Chaz Liu	Configurations	IEEE 802.11b/g/n

Test Mode	Channel	Frequency (MHz)	Reading Frequency (MHz)	Conducted Spurious Emission	Limits (dBc)	Verdict
IEEE 802.11b	1	2412	5781.00	-55.869	<20	PASS
	6	2437	9748.00	-46.471		
	11	2462	9848.10	-48.187		
IEEE 802.11g	1	2412	3615.90	-55.176	<20	PASS
	6	2437	5907.50	-57.215		
	11	2462	3696.80	-54.365		
IEEE 802.11n HT20	1	2412	5812.10	-49.833	<20	PASS
	6	2437	6083.70	-56.567		
	11	2462	6737.60	-56.472		
IEEE 802.11n HT40	3	2422	5340.40	-57.172	<20	PASS
	6	2437	6650.20	-56.815		
	9	2452	6116.20	-56.978		


Remark:

1. Measured output power at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40;
4. “---“means that the fundamental frequency not for 15.209 limits requirement.
5. please refer to following plots;


Test plot of Conducted Spurious Emission

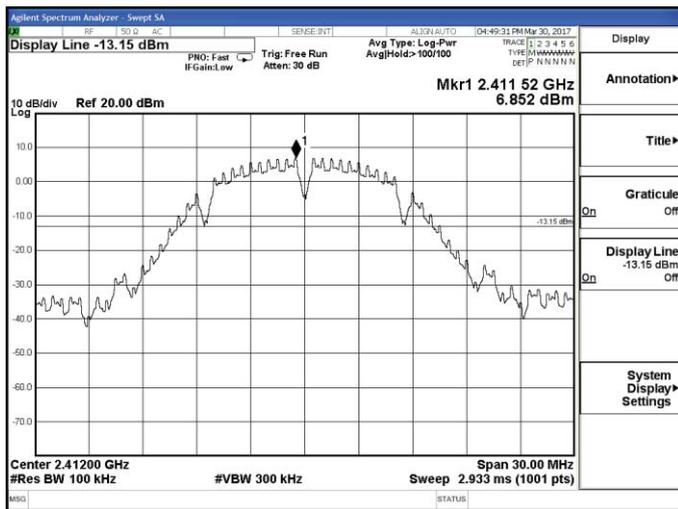


802.11b-Low channel Reference

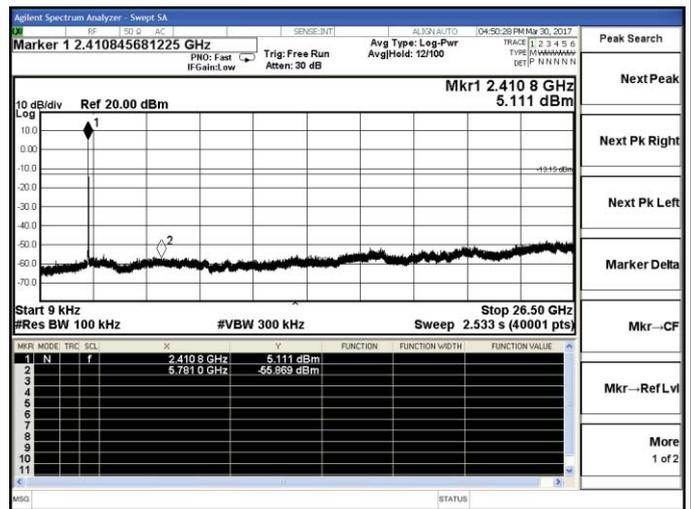


802.11b-Low channel

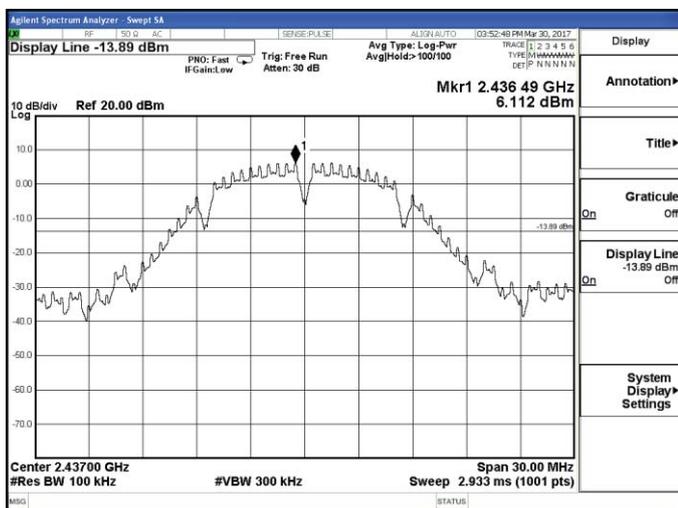


802.11b-Middle channel Reference

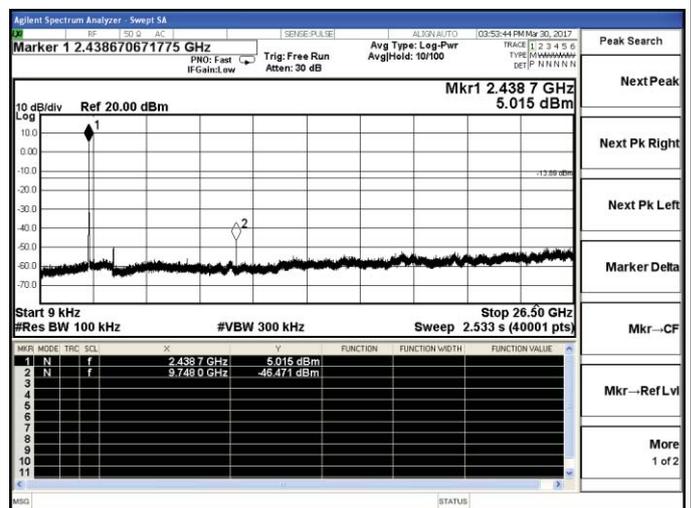

802.11b-Middle channel

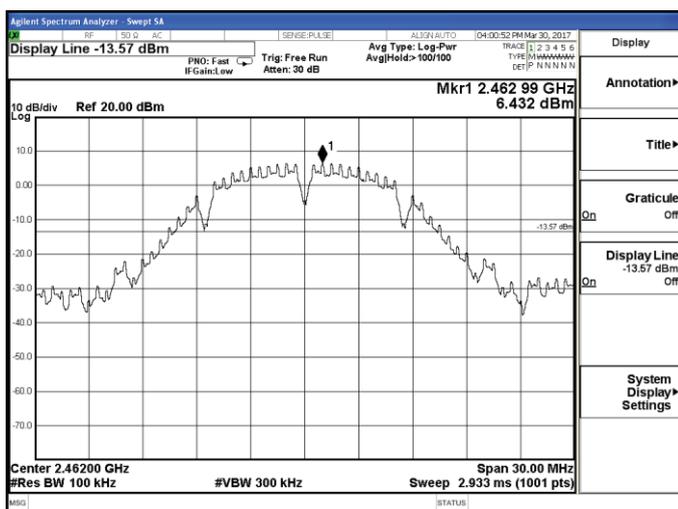


802.11b-High channel Reference

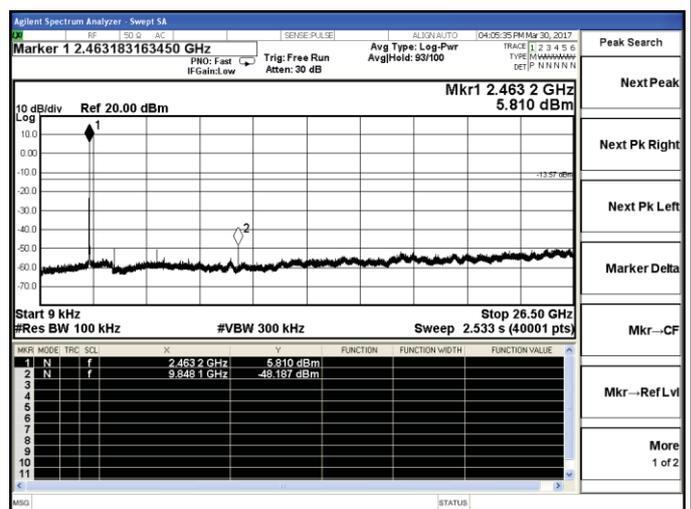


802.11b-High channel


Test plot of Conducted Spurious Emission

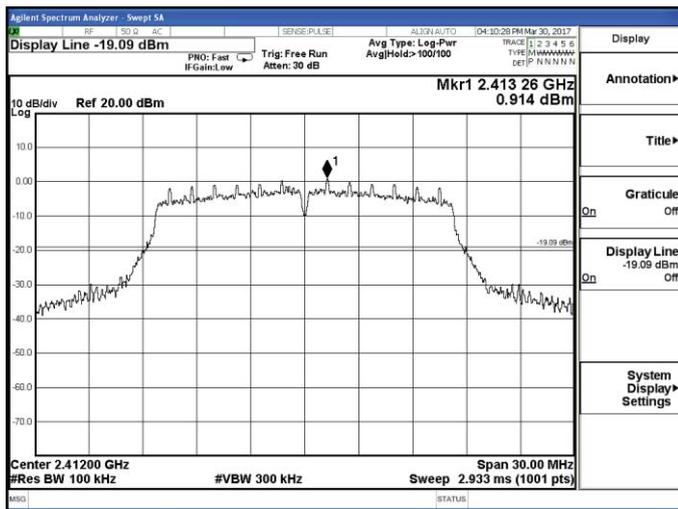


802.11g-Low channel Reference

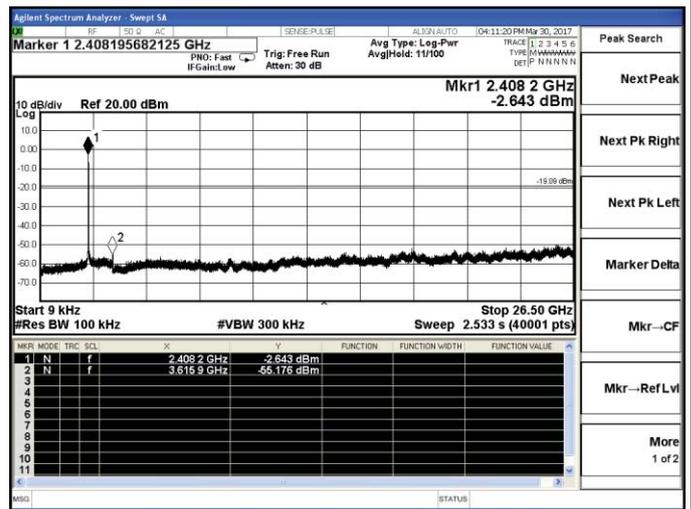


802.11g-Low channel

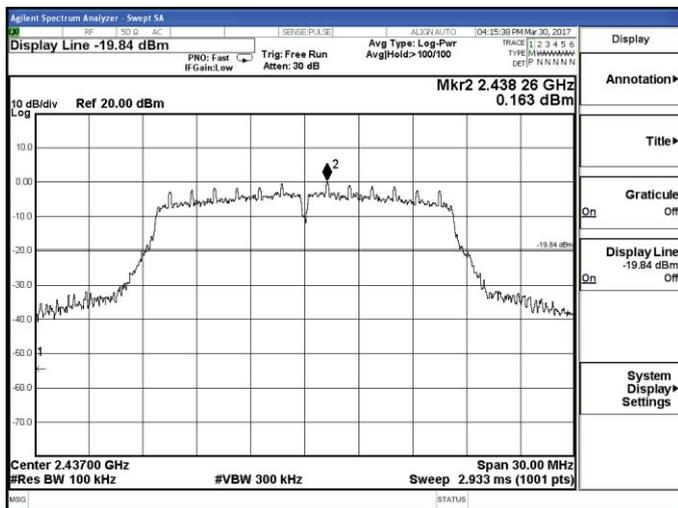


802.11g-Middle channel Reference

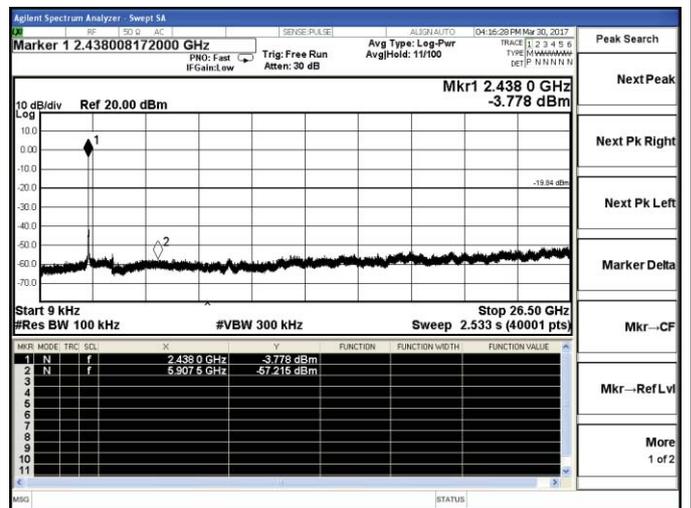

802.11g-Middle channel

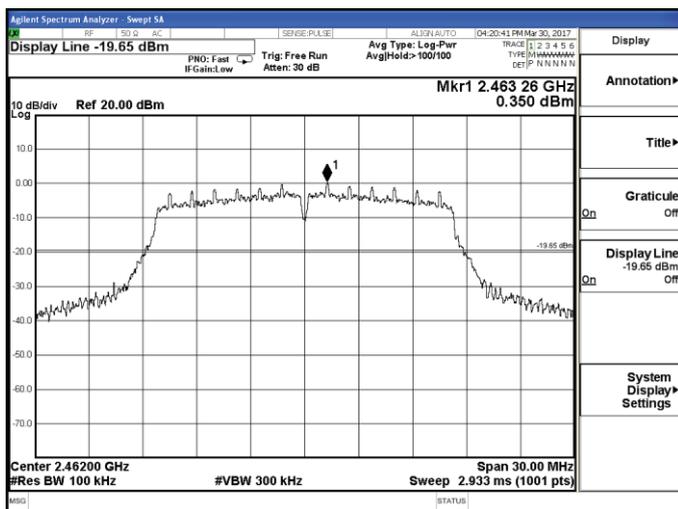


802.11g-High channel Reference

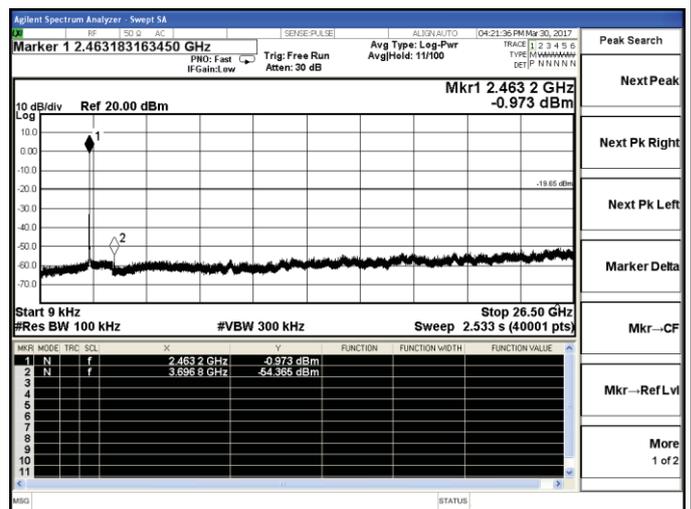


802.11g-High channel


Test plot of Conducted Spurious Emission

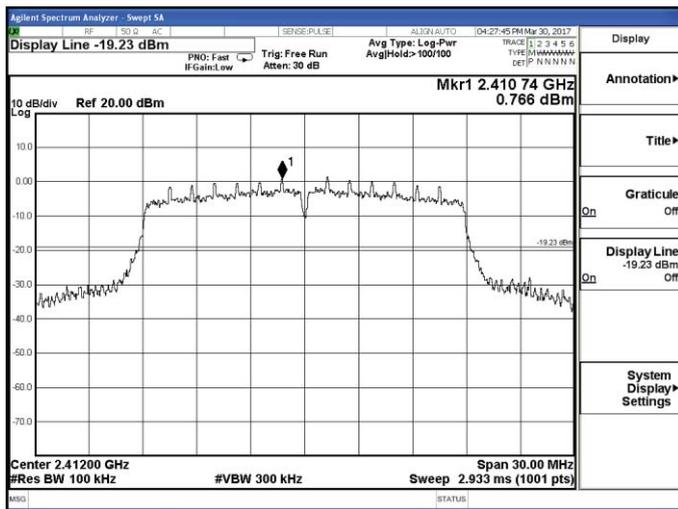


802.11n-HT20-Low channel Reference

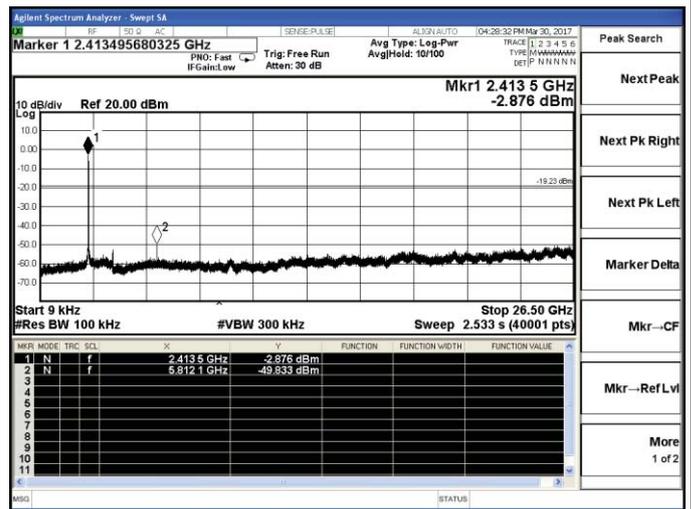


802.11n-HT20-Low channel

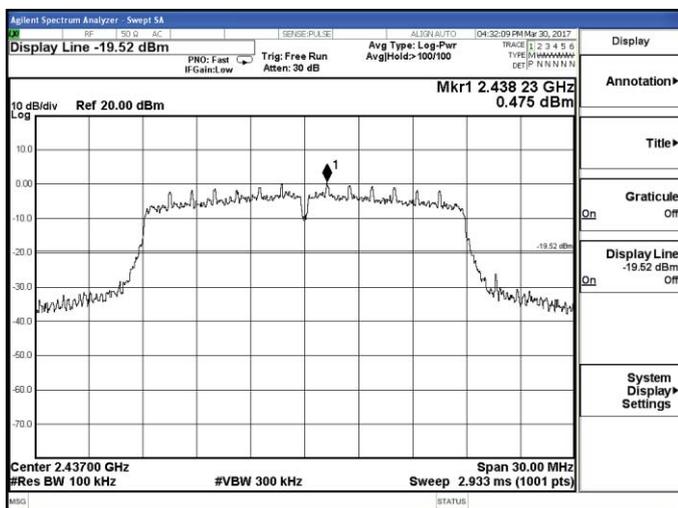


802.11n-HT20-Middle channel Reference

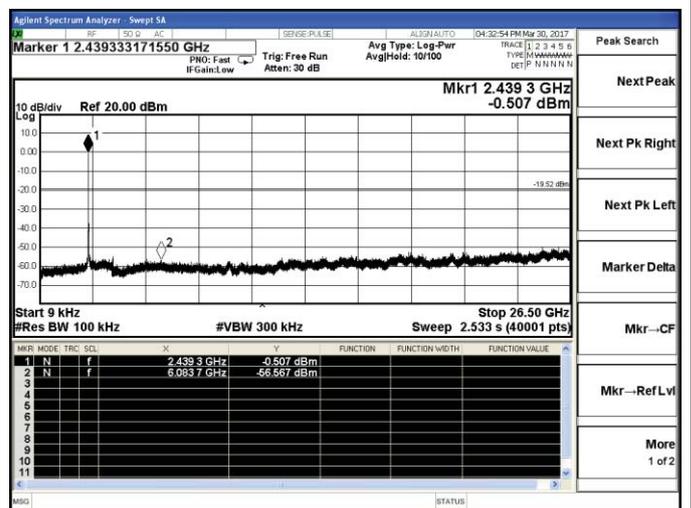

802.11n-HT20-Middle channel

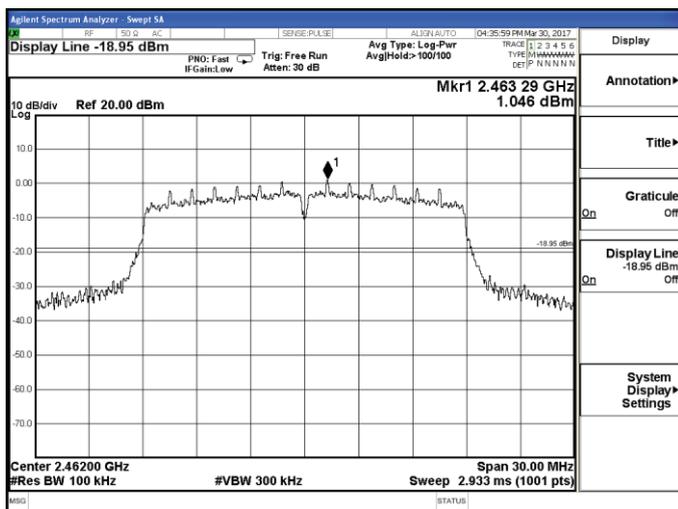


802.11n-HT20-High channel Reference

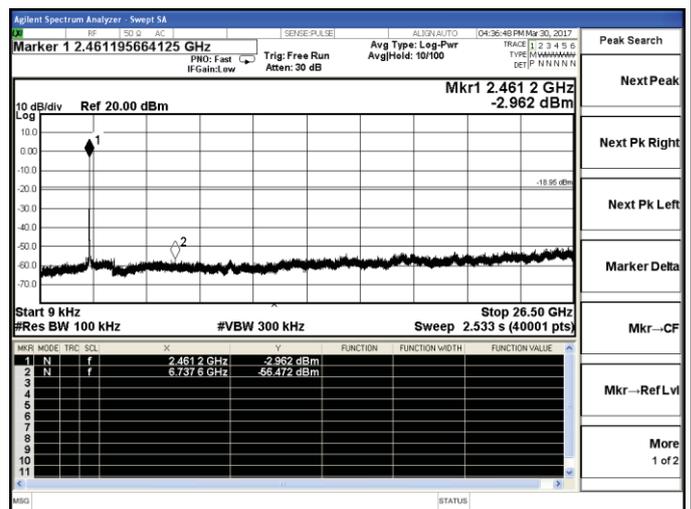


802.11n-HT20-High channel


Test plot of Conducted Spurious Emission

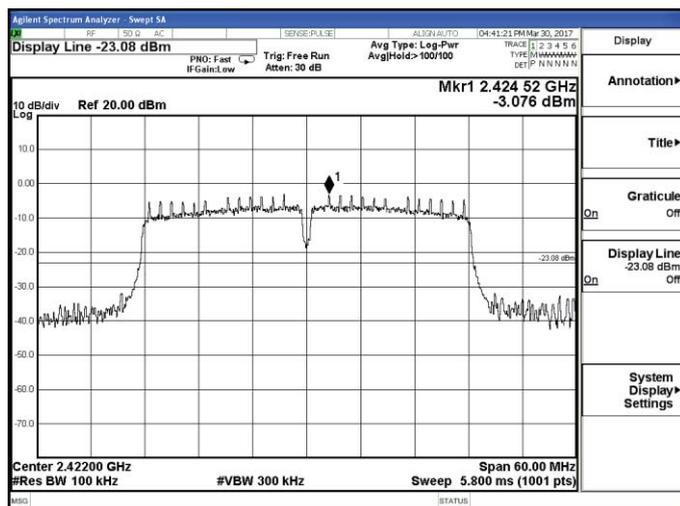


802.11n-HT40-Low channel Reference

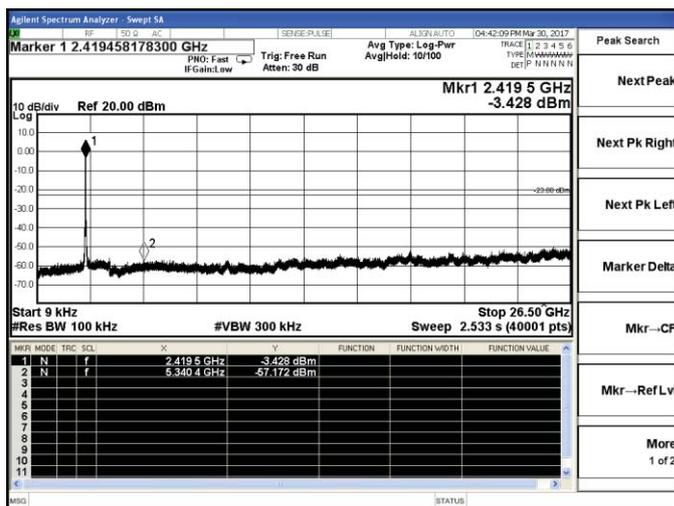


802.11n-HT40-Low channel

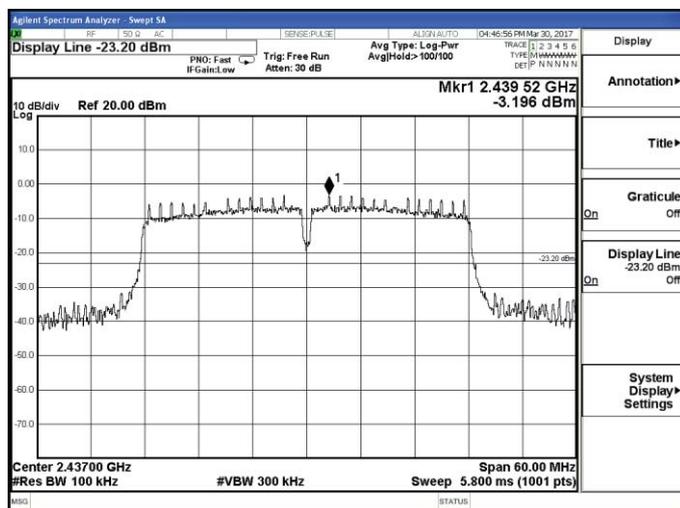


802.11n-HT40-Middle channel Reference

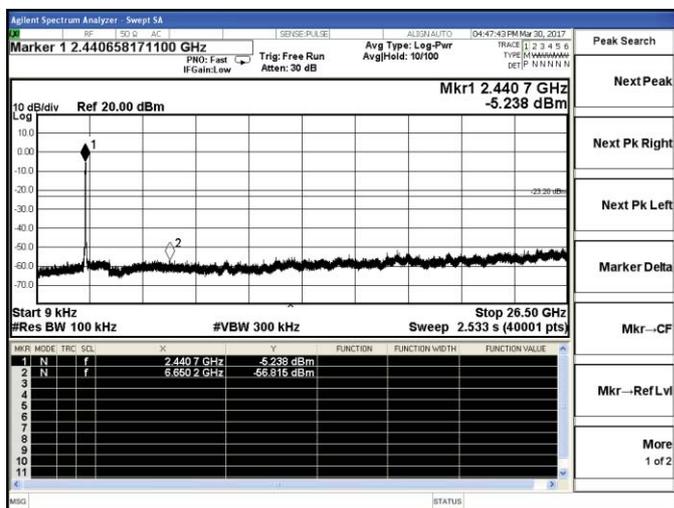

802.11n-HT40-Middle channel

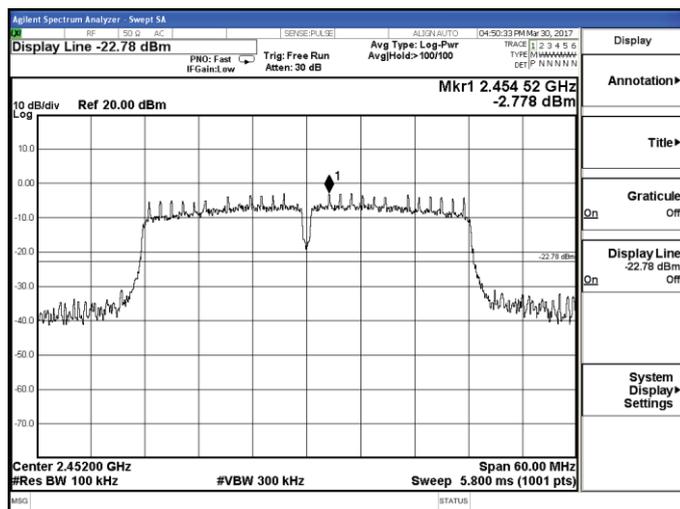


802.11n-HT40-High channel Reference

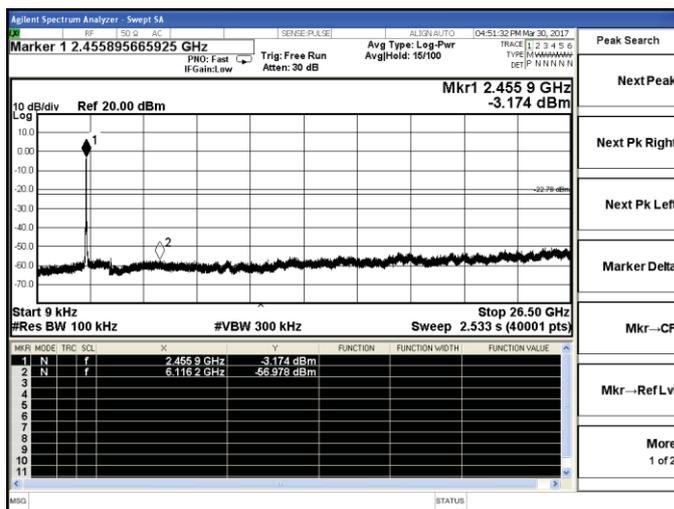



802.11n-HT40-High channel

Test plot of Band Edges Test

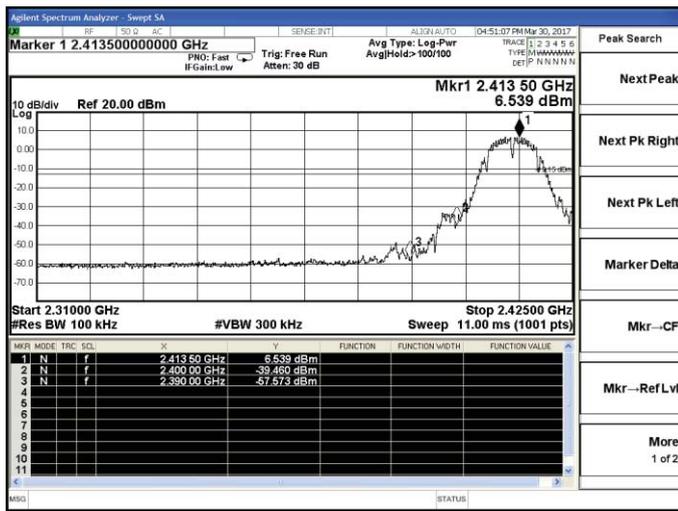



802.11b-Low channel

802.11b-High channel

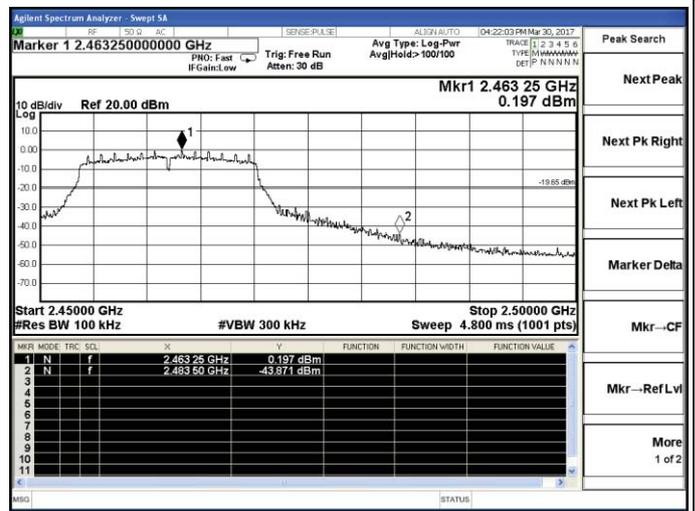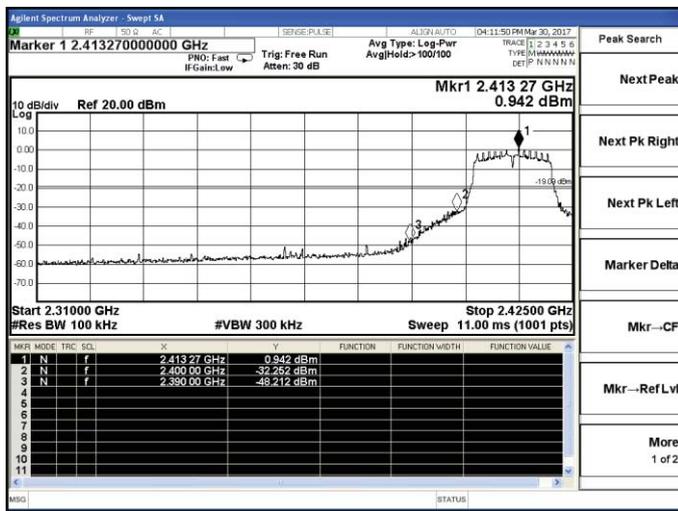

802.11g-Low channel


802.11g-High channel

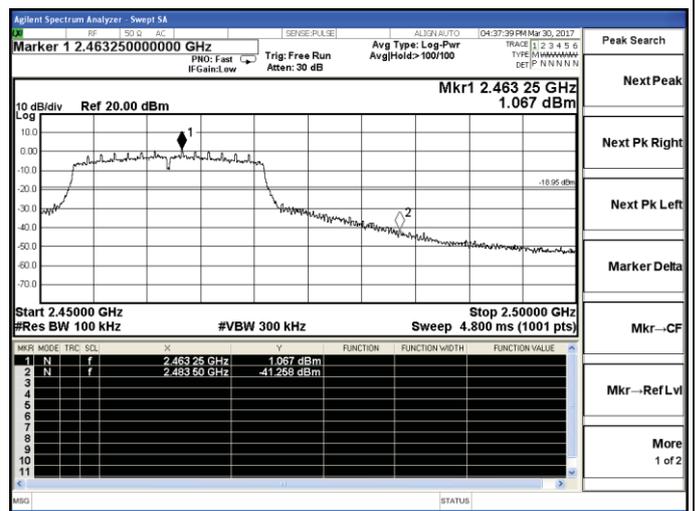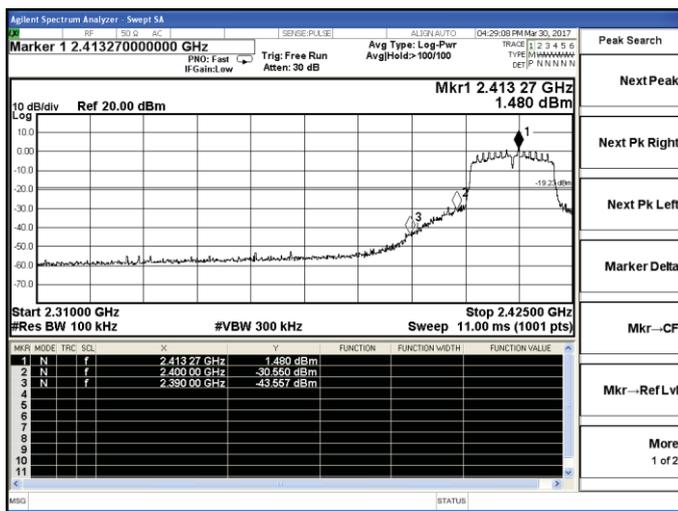


802.11n-HT20-Low channel

802.11n-HT20-High channel

Test plot of Band Edges Test

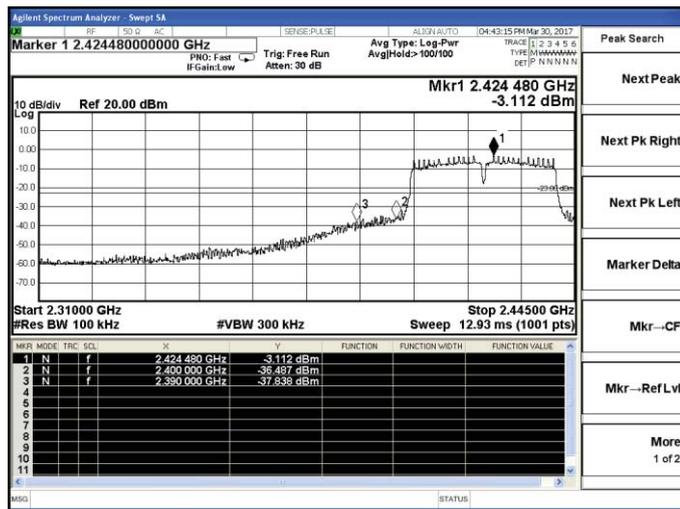

802.11n-HT40-Low channel

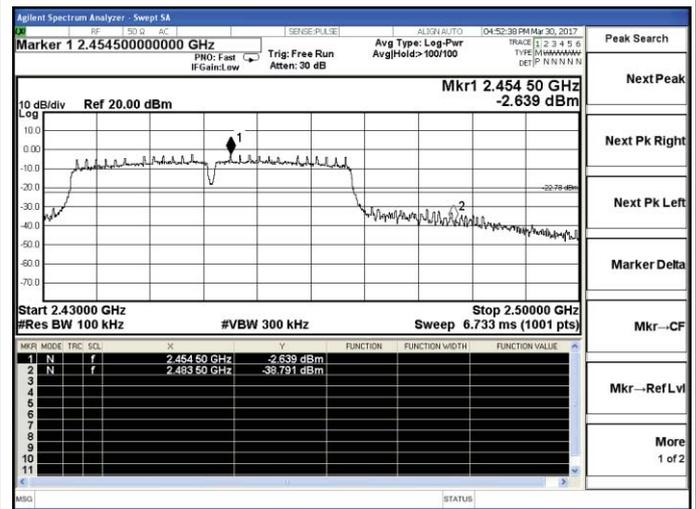

802.11n-HT40-High channel


5.7. AC Power line conducted emissions

5.7.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

5.7.2 Block Diagram of Test Setup

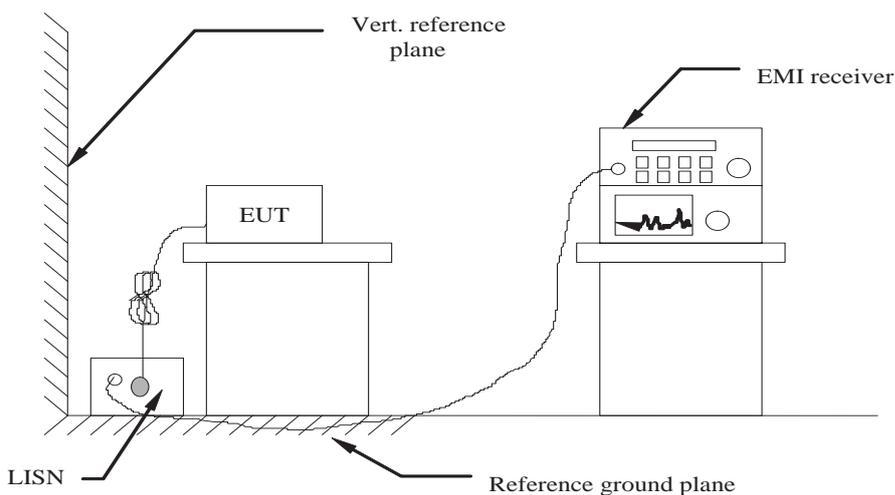


5.7.3 Test Results

PASS.

The test data please refer to following page.

AC Conducted Emission of power adapter @ AC 120V/60Hz @ IEEE 802.11b (worst case)

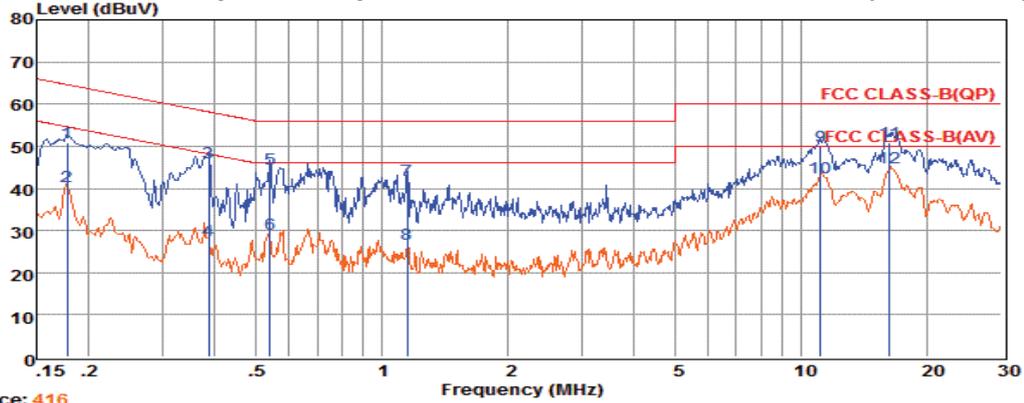


Trace: 416

Power Rating: AC 120V/60Hz
 Pol: NEUTRAL

	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB
1	0.18	31.26	9.64	0.02	10.00	50.92	64.59	-13.67	QP
2	0.18	20.93	9.63	0.02	10.00	40.58	54.59	-14.01	Average
3	0.39	26.56	9.61	0.04	10.00	46.21	58.17	-11.96	QP
4	0.39	7.99	9.61	0.04	10.00	27.64	48.16	-20.52	Average
5	0.54	25.10	9.62	0.04	10.00	44.76	56.00	-11.24	QP
6	0.54	9.50	9.62	0.04	10.00	29.16	46.00	-16.84	Average
7	1.15	22.40	9.63	0.05	10.00	42.08	56.00	-13.92	QP
8	1.15	7.12	9.63	0.05	10.00	26.80	46.00	-19.20	Average
9	11.14	30.02	9.73	0.09	10.00	49.84	60.00	-10.16	QP
10	11.14	22.59	9.73	0.09	10.00	42.41	50.00	-7.59	Average
11	16.23	30.94	9.75	0.11	10.00	50.80	60.00	-9.20	QP
12	16.23	25.07	9.75	0.11	10.00	44.93	50.00	-5.07	Average

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

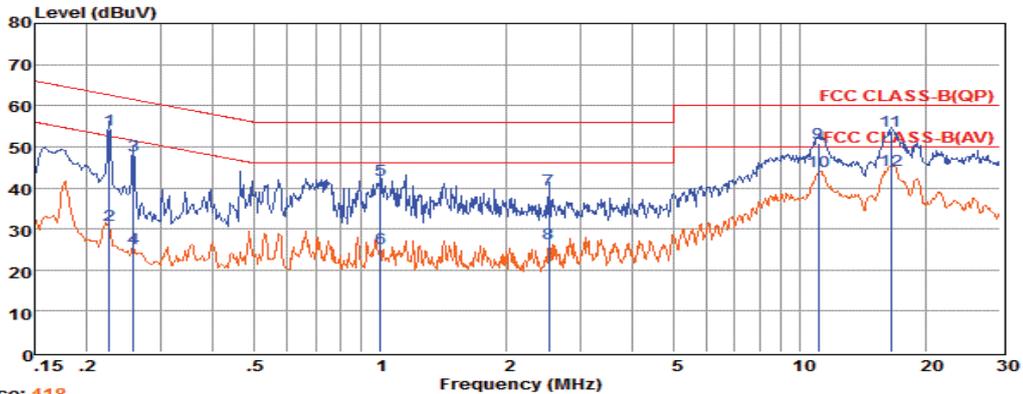


Trace: 418

Power Rating: AC 120V/60Hz
 Pol: LINE


	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB
1	0.23	34.56	9.63	0.03	10.00	54.22	62.61	-8.39	QP
2	0.23	11.24	9.63	0.03	10.00	30.90	52.61	-21.71	Average
3	0.26	28.20	9.63	0.03	10.00	47.86	61.51	-13.65	QP
4	0.26	5.62	9.63	0.03	10.00	25.28	51.51	-26.23	Average
5	1.00	22.28	9.63	0.05	10.00	41.96	56.00	-14.04	QP
6	1.00	5.68	9.63	0.05	10.00	25.36	46.00	-20.64	Average
7	2.53	19.75	9.64	0.05	10.00	39.44	56.00	-16.56	QP
8	2.53	6.67	9.64	0.05	10.00	26.36	46.00	-19.64	Average
9	11.08	31.10	9.70	0.09	10.00	50.89	60.00	-9.11	QP
10	11.08	24.15	9.70	0.09	10.00	43.94	50.00	-6.06	Average
11	16.49	34.00	9.73	0.11	10.00	53.84	60.00	-6.16	QP
12	16.49	24.56	9.73	0.11	10.00	44.40	50.00	-5.60	Average

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

AC Conducted Emission of power adapter @ AC 240V/60Hz @ IEEE 802.11b (worst case)

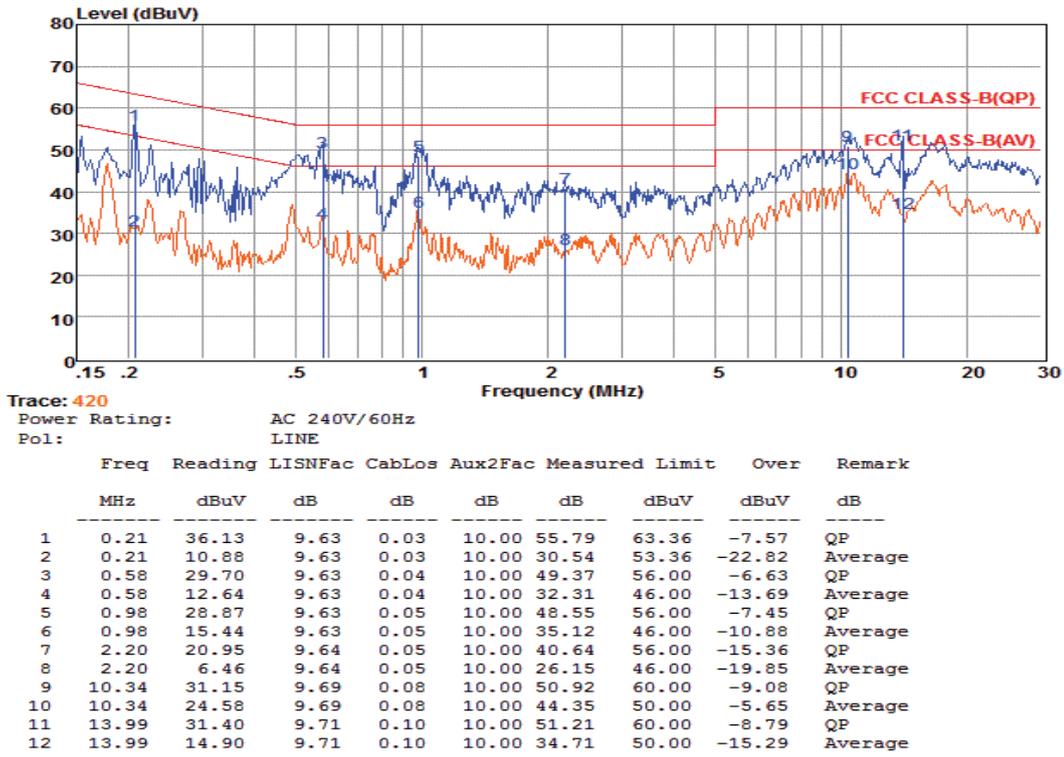

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

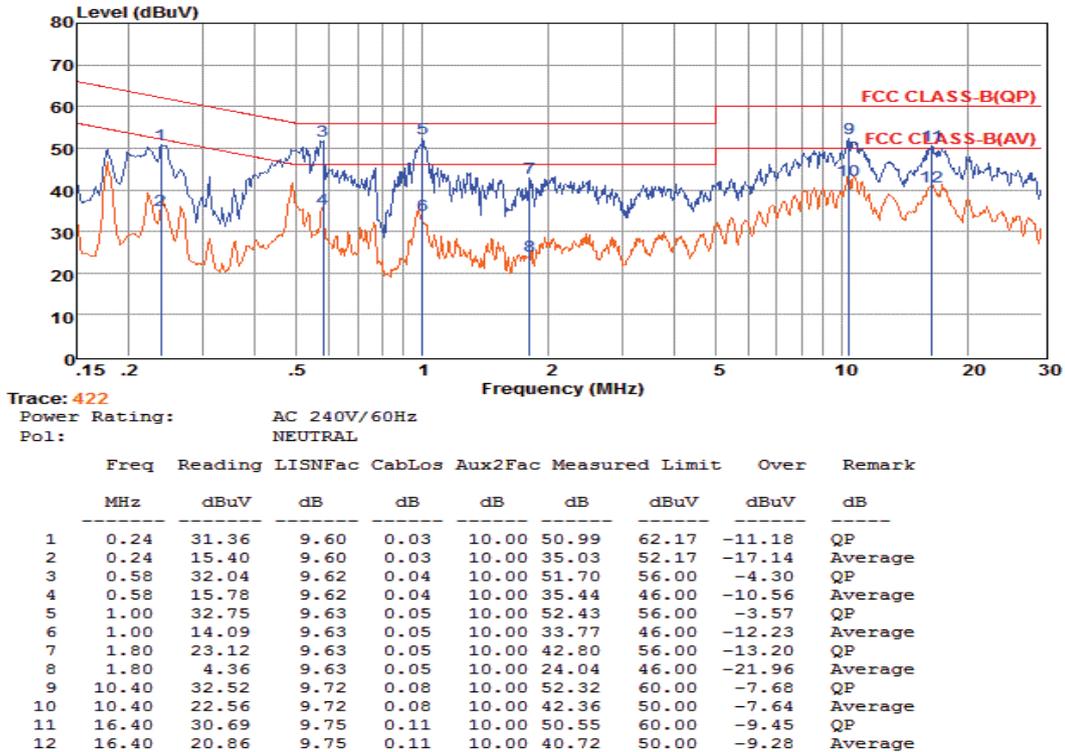

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.
 2. The emission levels that are 20dB below the official limit are not reported.


***Note: Pre-scan all mode and recorded the worst case results in this report (802.11b).

5.8. Band-edge measurements for radiated emissions

5.8.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

5.8.2. Test Setup Layout

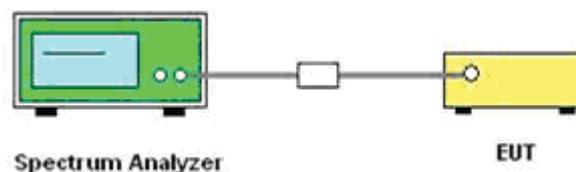

5.8.3. Measuring Instruments and Setting

Please refer to section 6 of equipment list in this report. The following table is the setting of Spectrum Analyzer.

5.8.4. Test Procedures

According to KDB 558074 D01 V03R05 for Antenna-port conducted measurement. Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz for peak detector and RBW=1MHz, VBW=1/B for AV detector.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.
6. Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency (see 12.2.2, 12.2.3, and 12.2.4 for guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
7. Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see 12.2.5 for guidance on determining the applicable antenna gain)
8. Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).

9. For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
10. Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:
 $E = \sqrt{EIRP - 20 \log D + 104.77} = \sqrt{EIRP + 95.23}$

Where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

11. Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.
12. Compare the resultant electric field strength level to the applicable regulatory limit.
13. Perform radiated spurious emission test duress until all measured frequencies were complete.

5.8.5 Test Results

IEEE 802.11b						
Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
2310.000	-50.048	2.0	47.212	Peak	74.00	PASS
2310.000	-61.399	2.0	35.861	AV	54.00	PASS
2390.000	-47.322	2.0	49.938	Peak	74.00	PASS
2390.000	-58.025	2.0	39.235	AV	54.00	PASS
2483.500	-48.611	2.0	48.649	Peak	74.00	PASS
2483.500	-58.342	2.0	38.918	AV	54.00	PASS
2500.000	-48.635	2.0	48.625	Peak	74.00	PASS
2500.000	-59.115	2.0	38.145	AV	54.00	PASS

IEEE 802.11g						
Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
2310.000	-50.977	2.0	46.283	Peak	74.00	PASS
2310.000	-60.604	2.0	36.656	AV	54.00	PASS
2390.000	-44.660	2.0	52.600	Peak	74.00	PASS
2390.000	-54.235	2.0	43.025	AV	54.00	PASS
2483.500	-42.375	2.0	54.885	Peak	74.00	PASS
2483.500	-54.014	2.0	43.246	AV	54.00	PASS
2500.000	-46.401	2.0	50.859	Peak	74.00	PASS
2500.000	-56.229	2.0	41.031	AV	54.00	PASS

IEEE 802.11n-HT20						
Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
2310.000	-48.418	2.0	48.842	Peak	74.00	PASS
2310.000	-60.610	2.0	36.650	AV	54.00	PASS
2390.000	-34.086	2.0	63.174	Peak	74.00	PASS
2390.000	-53.255	2.0	44.005	AV	54.00	PASS
2483.500	-41.240	2.0	56.020	Peak	74.00	PASS
2483.500	-53.728	2.0	43.532	AV	54.00	PASS
2500.000	-45.605	2.0	51.655	Peak	74.00	PASS
2500.000	-56.154	2.0	41.106	AV	54.00	PASS



IEEE 802.11n-HT40						
Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
2310.000	-50.399	2.0	46.861	Peak	74.00	PASS
2310.000	-60.983	2.0	36.277	AV	54.00	PASS
2390.000	-39.255	2.0	58.005	Peak	74.00	PASS
2390.000	-51.603	2.0	45.657	AV	54.00	PASS
2483.500	-41.214	2.0	56.046	Peak	74.00	PASS
2483.500	-53.799	2.0	43.461	AV	54.00	PASS
2500.000	-45.609	2.0	51.651	Peak	74.00	PASS
2500.000	-56.341	2.0	40.919	AV	54.00	PASS

Remark:

1. Measured output power at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40;
4. “---“means that the fundamental frequency not for 15.209 limits requirement.
5. please refer to following plots;



Band-edge measurements for conducted emissions

Test plot of Restricted Bands

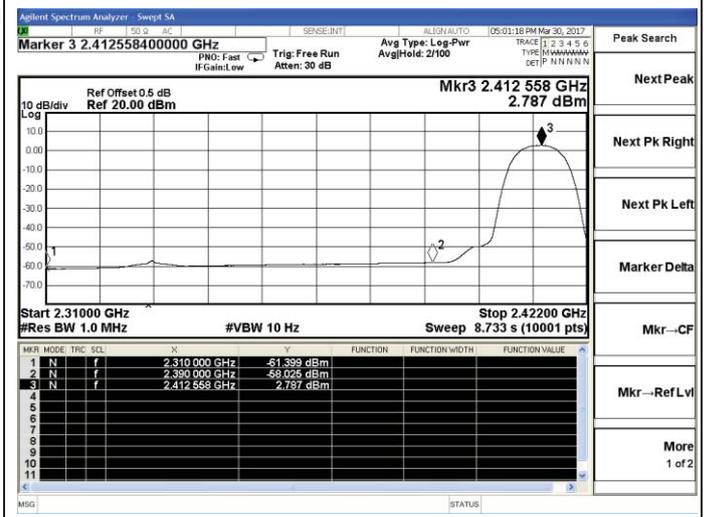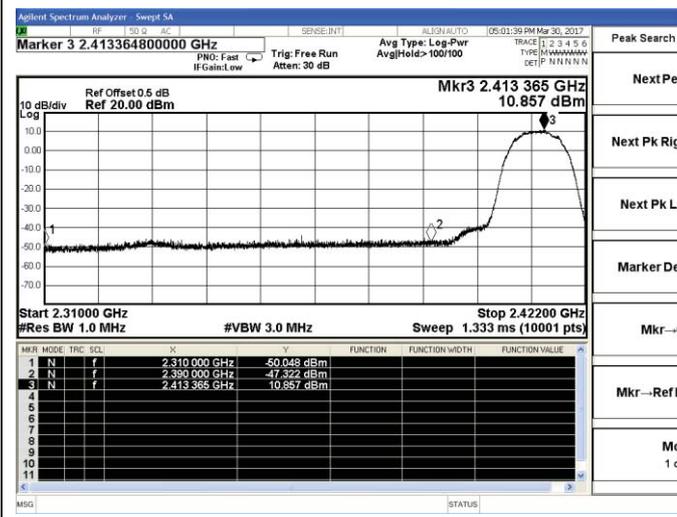



802.11b-Low channel(Peak)

802.11b-Low channel(Average)

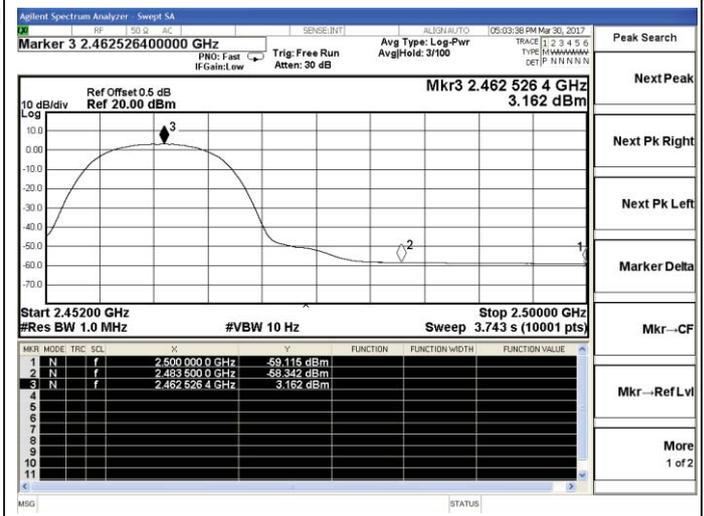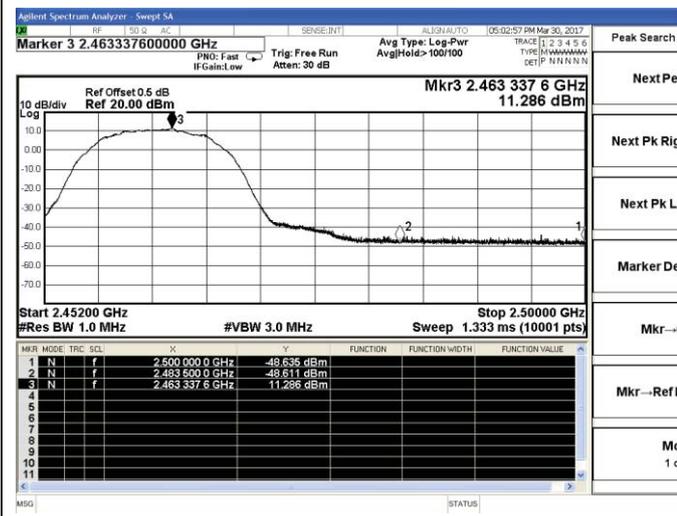

802.11b-High channel(Peak)

802.11b-High channel(Average)

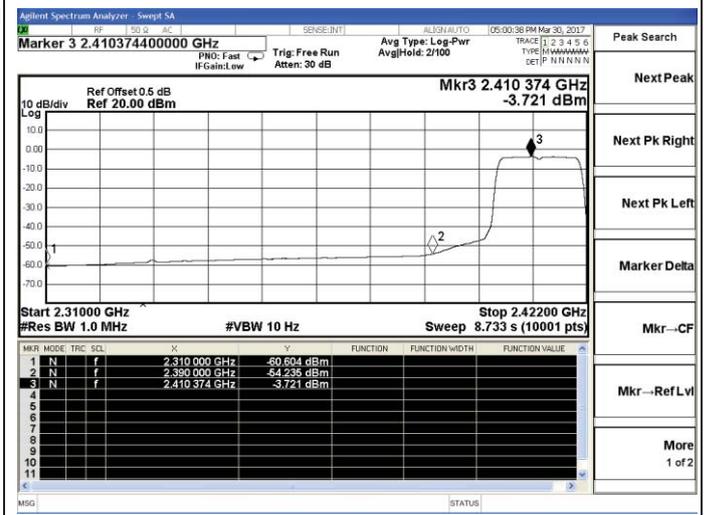
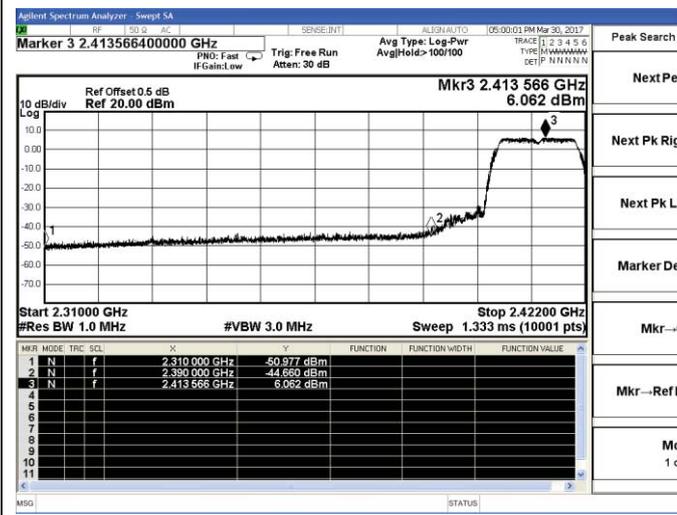


802.11g-Low channel(Peak)

802.11g-Low channel(Average)



Band-edge measurements for conducted emissions

Test plot of Restricted Bands

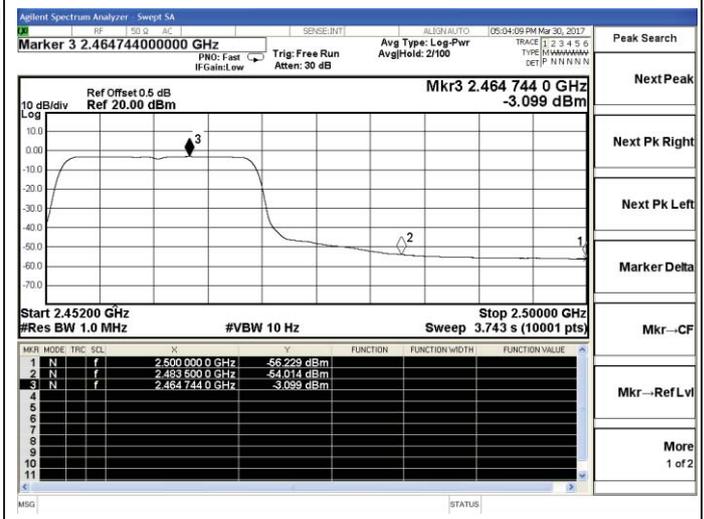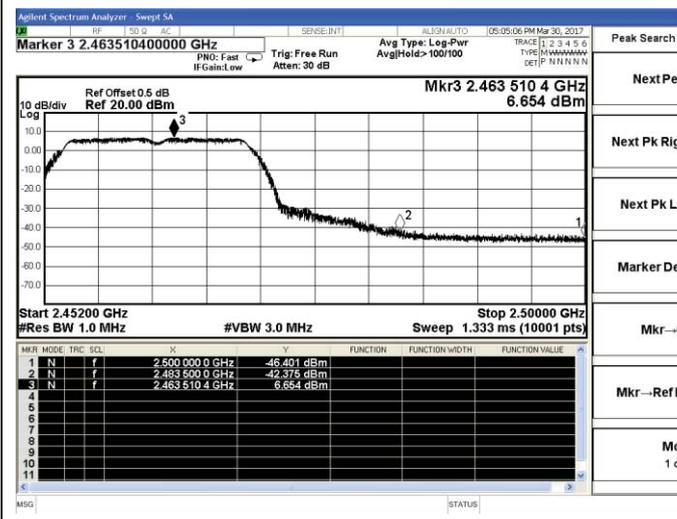



802.11g-High channel(Peak)

802.11g-High channel(Average)

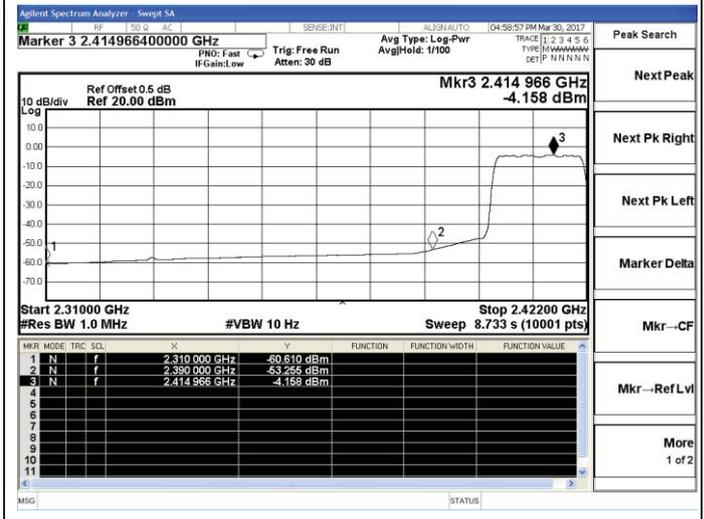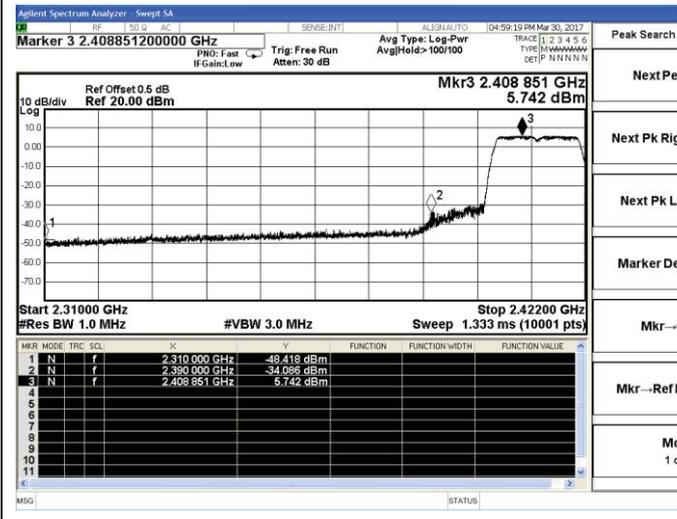

802.11n-HT20-Low channel(Peak)

802.11n-HT20-Low channel(Average)

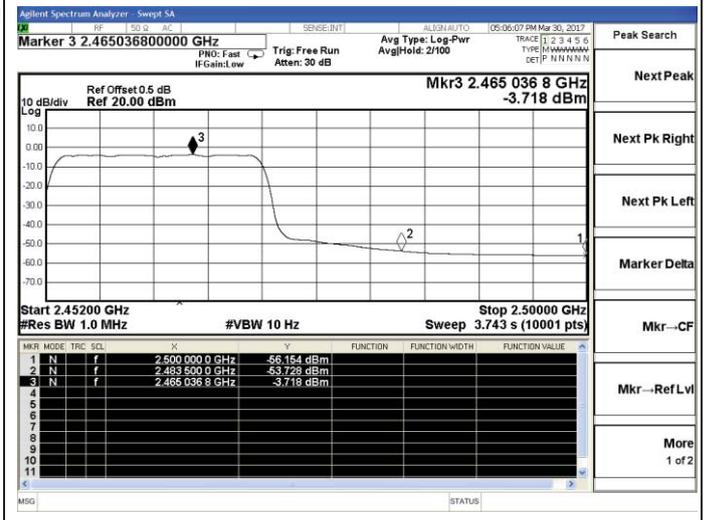
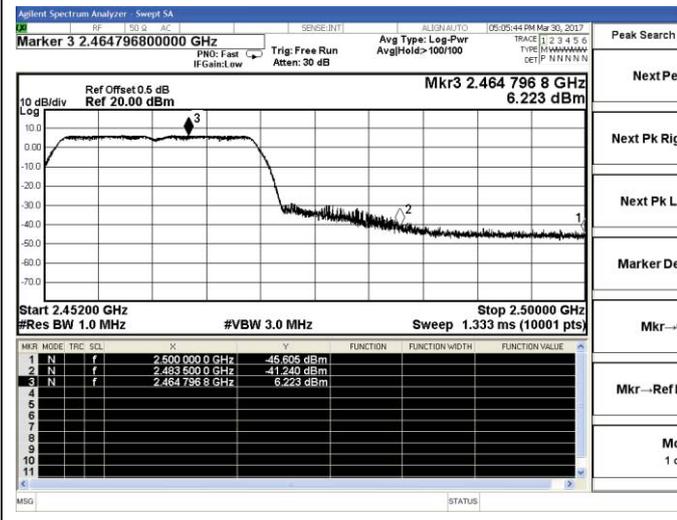


802.11n-HT20-High channel(Peak)

802.11n-HT20-High channel(Average)



Band-edge measurements for conducted emissions

Test plot of Restricted Bands

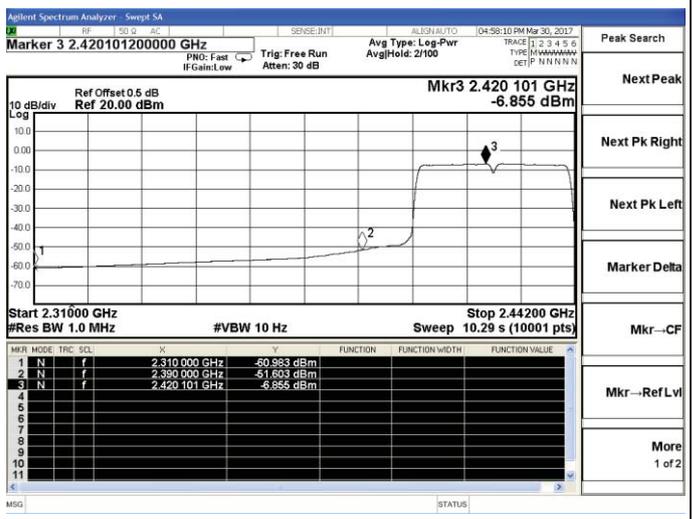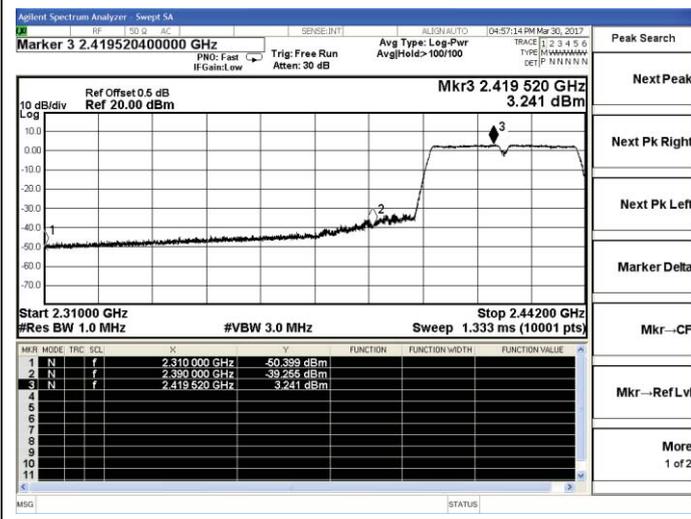

802.11n-HT40-Low channel(Peak)

802.11n-HT40-Low channel(Average)

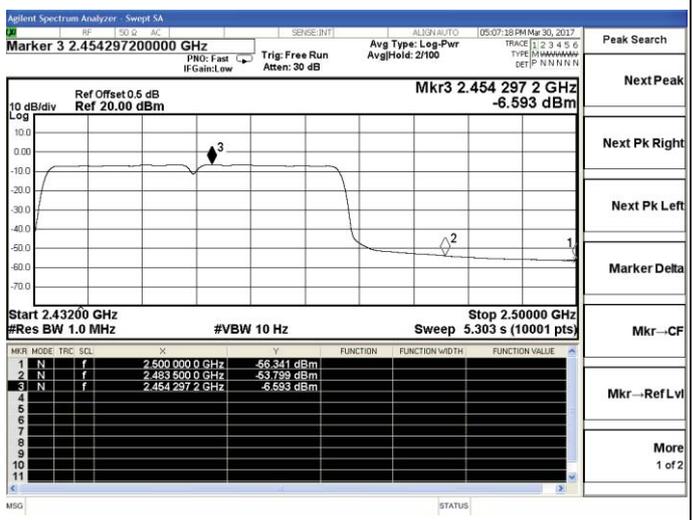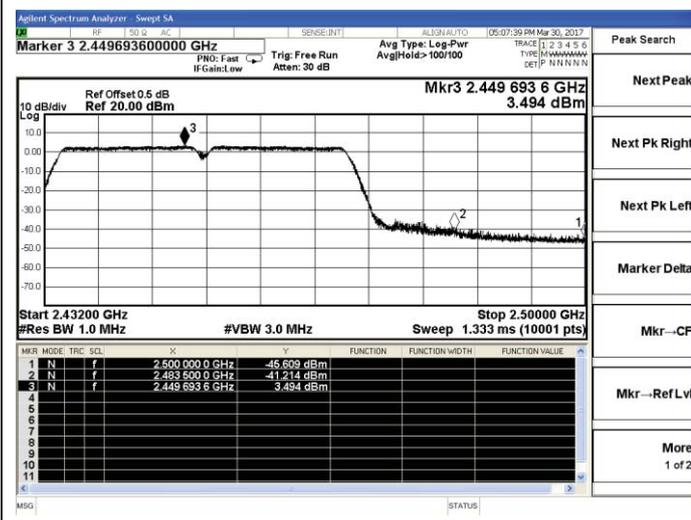

802.11n-HT40-High channel(Peak)

802.11n-HT40-High channel(Average)

5.9. Antenna Requirements

5.9.1 Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

5.9.2 Antenna Connected Construction

5.9.2.1. Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

5.9.2.2. Antenna Connector Construction

The gains of antenna used for transmitting is 2.0dBi, and the antenna is an external antenna connect to PCB board and no consideration of replacement. Please see EUT photo for details.

5.9.2.3. Results: Compliance.

6. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal Date	Due Date
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	June 18, 2016	June 17, 2017
Signal analyzer	Agilent	E4448A(External mixers to 40GHz)	US44300469	9kHz~40GHz	July 16, 2016	July 15, 2017
Signal analyzer	Agilent	N9020A	MY50510140	9kHz~26.5GHz	October 27, 2016	October 27, 2017
LISN	MESS Tec	NNB-2/16Z	99079	9KHz-30MHz	June 18, 2016	June 17, 2017
LISN (Support Unit)	EMCO	3819/2NM	9703-1839	9KHz-30MHz	June 18, 2016	June 17, 2017
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9KHz-30MHz	June 18, 2016	June 17, 2017
ISN	SCHAFFNER	ISN ST08	21653	9KHz-30MHz	June 18, 2016	June 17, 2017
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30M-18GHz 3m	June 18, 2016	June 17, 2017
Amplifier	SCHAFFNER	COA9231A	18667	9kHz-2GHz	June 18, 2016	June 17, 2017
Amplifier	Agilent	8449B	3008A02120	1GHz-26.5GHz	July 16, 2016	July 15, 2017
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5GHz-40GHz	July 16, 2016	July 15, 2017
Loop Antenna	R&S	HFH2-Z2	860004/001	9k-30MHz	June 18, 2016	June 17, 2017
By-log Antenna	SCHWARZBECK	VULB9163	9163-470	30MHz-1GHz	June 10, 2016	June 09, 2017
Horn Antenna	EMCO	3115	6741	1GHz-18GHz	June 10, 2016	June 09, 2017
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz-40GHz	June 10, 2016	June 09, 2017
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz-1GHz	June 18, 2016	June 17, 2017
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz-40GHz	June 18, 2016	June 17, 2017
Power Meter	R&S	NRVS	100444	DC-40GHz	June 18, 2016	June 17, 2017
Power Sensor	R&S	NRV-Z51	100458	DC-30GHz	June 18, 2016	June 17, 2017
Power Sensor	R&S	NRV-Z32	10057	30MHz-6GHz	June 18, 2016	June 17, 2017
AC Power Source	HPC	HPA-500E	HPA-9100024	AC 0~300V	June 18, 2016	June 17, 2017
DC power Source	GW	GPC-6030D	C671845	DC 1V-60V	June 18, 2016	June 17, 2017
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-00	N/A	June 18, 2016	June 17, 2017
RF CABLE-1m	JYE Bao	RG142	CB034-1m	20MHz-7GHz	June 18, 2016	June 17, 2017
RF CABLE-2m	JYE Bao	RG142	CB)35-2m	20MHz-1GHz	June 18, 2016	June 17, 2017

Note: All equipment through GRGT EST calibration

7. TEST SETUP PHOTOGRAPHS OF EUT

Please refer to separated files for Test Setup Photos of the EUT.

8. EXTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photos of the EUT.

9. INTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF REPORT-----