



**FCC CFR47 PART 15 SUBPART C
CERTIFICATION**

TEST REPORT

FOR

802.11B MINI PCI TYPE 3B CARD

MODEL NUMBER: PA3272U-1MPC

FCC ID: CJ6UPA3272WLP

REPORT NUMBER: 03U2195-1

ISSUE DATE: NOVEMBER 12, 2003

Prepared for

**TOSHIBA CORPORATION DIGITAL MEDIA NETWORK COMPANY
2-9 SUEHIRO-CHO, OME
TOKYO, 198-8710, JAPAN**

Prepared by

**COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD,
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888**



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION	3
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
4. FACILITIES AND ACCREDITATION	5
5. CALIBRATION AND UNCERTAINTY	6
5.1. MEASURING INSTRUMENT CALIBRATION	6
5.2. MEASUREMENT UNCERTAINTY	6
6. CALIBRATION AND UNCERTAINTY	7
6.1. MEASURING INSTRUMENT CALIBRATION	7
6.2. MEASUREMENT UNCERTAINTY	7
6.3. TEST AND MEASUREMENT EQUIPMENT	8
7. SETUP OF EQUIPMENT UNDER TEST	9
7.1. RADIATED EMISSIONS	11
7.1.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS	11
7.1.2. TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHZ	14
7.1.3. CO-LOCATED TRANSMITTER RADIATED EMISSIONS	25
7.1.4. WORST-CASE RADIATED EMISSIONS BELOW 1 GHZ	34
7.2. POWERLINE CONDUCTED EMISSIONS	36
8. SETUP PHOTOS	39

1. TEST RESULT CERTIFICATION

COMPANY NAME: TOSHIBA CORPORATION DIGITAL MEDIA NETWORK COMPANY
2-9 SUEHIRO-CHO, OME
TOKYO, 198-8710, JAPAN

EUT DESCRIPTION: 802.11B MINI PCI TYPE 3B CARD

MODEL: PA3272U-1MPC

DATE TESTED: OCTOBER 7 – 9, 2003

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document.

Approved & Released For CCS By:

Tested By:



MIKE HECKROTTE
CHIEF ENGINEER
COMPLIANCE CERTIFICATION SERVICES

YAN ZHENG
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. EUT DESCRIPTION

The EUT is a 802.11b mini PCI type 3B card (Intel 11b) with a co-located Toshiba PA3232U-1BTM Bluetooth radio card. Both radios and their associated antennas are installed in the Toshiba Tablet PC host computer, model PPM20U-AAAA2.

All antennas have integrated coaxial cables; the gains reported below are for the antenna assembly including the coaxial cable.

The 802.11b radio has a limited modular approval, FCC ID: CJ6UPA3272WL. The transmitter has a maximum peak conducted output power of 47 mW.

The WLAN radio utilizes two identical internal film antennas for diversity. Two alternate film antenna models are available; model HTL012 has a maximum gain of 2.0 dBi and model HTL008 has a maximum gain of 0.6 dBi. Tests were performed with the highest gain HTL012 antennas.

The Bluetooth radio card has a modular approval, FCC ID: CJ6UPA3232BT. The Bluetooth radio utilizes a film antenna, model HTL004, with a maximum gain of -0.3 dBi.

The radio cards documented in this report are identical to the radio cards documented in the above referenced modular approvals.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4/1992, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

4. FACILITIES AND ACCREDITATION

The open area test sites and conducted measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.



No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government.

5. CALIBRATION AND UNCERTAINTY

5.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

5.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

6. CALIBRATION AND UNCERTAINTY

6.1. MEASURING INSTRUMENT CALIBRATION

The measurement instruments utilized to perform the tests documented in this report have been calibrated in accordance with the manufacturer's recommendations, and are traceable to national standards.

6.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

6.3. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST AND MEASUREMENT EQUIPMENT LIST				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due Date
EMI Test Receiver	R & S	ESHS 20	827129/006	7/17/2004
LISN, 10 kHz ~ 30 MHz	FCC	50/250-25-2	114	9/6/2004
Spectrum Analyzer	AGILENT	E4446A	US42070220	1/13/04
Pre-amplifier	MITEQ	NSP2600-SP	924341	4/25/04
Horn Antenna	EMCO	3115	6717	2/04/04
Antenna, Biconical	Eaton	94455-1	1214	3/06/04
Antenna, Log Periodic	EMCO	3146	9107-3163	3/06/04
Preamplifier	Miteq	NSP10023988	646456	4/26/04
Band Reject 2.4GHz	Micro-Tronics	BRM50702	003	N.C.R.

7. SETUP OF EQUIPMENT UNDER TEST

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Device Type	Manufacturer	Model	Serial Number	FCC ID
Laptop	Toshiba	PPM20U-AAAA2	93010025	DoC
AC adapter	Toshiba	ADP-60RH A	0394336	DoC


I/O CABLES

Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	US115	Unshielded	1.8m	No
2	DC	1	DC Jack	Unshielded	1.8m	No

TEST SETUP

The EUT is installed in the host laptop.

SETUP DIAGRAM

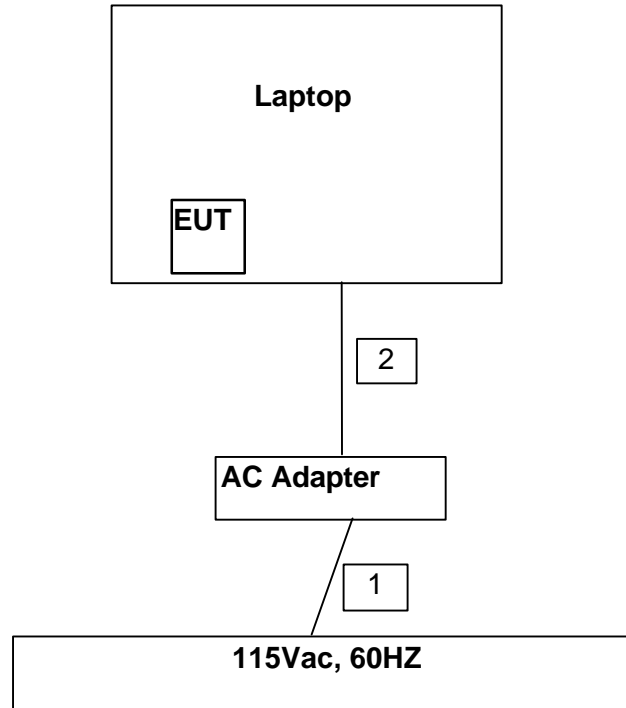

7.1. RADIATED EMISSIONS

7.1.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


The configuration and orientation of the EUT was varied to determine the worst-case. The EUT was first configured as a typical laptop notebook PC resting on the turntable in a normal operating condition. It was then configured as a tablet PC, and evaluated in X, Y and Z orientations. The worst-case condition was observed with the EUT in the laptop configuration. Worst-case results are reported.


RESULTS

No non-compliance noted:


7.1.2. TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHZ


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

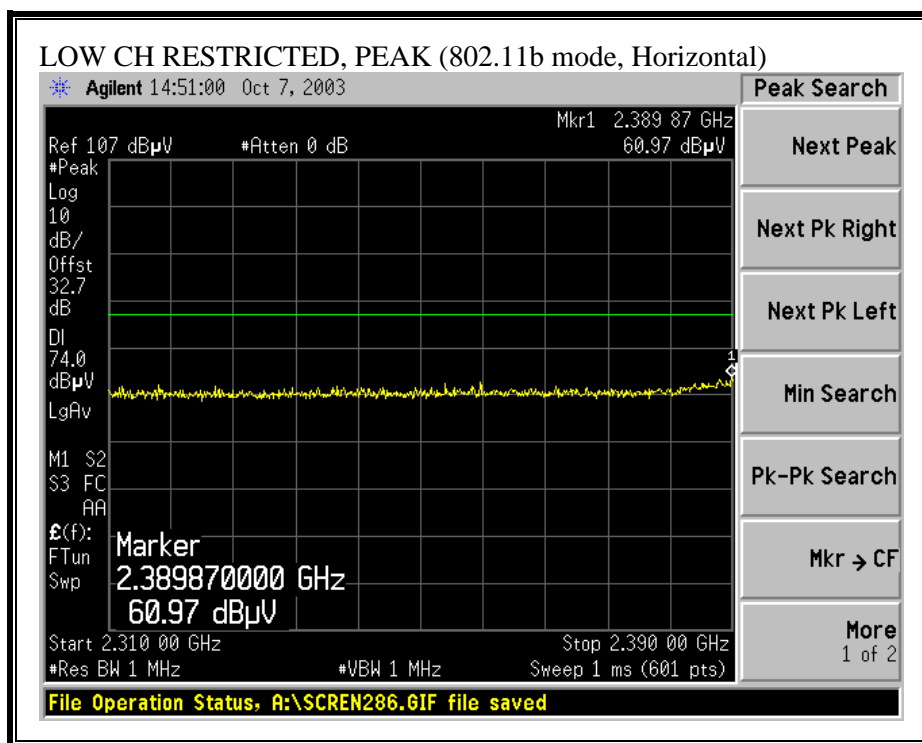

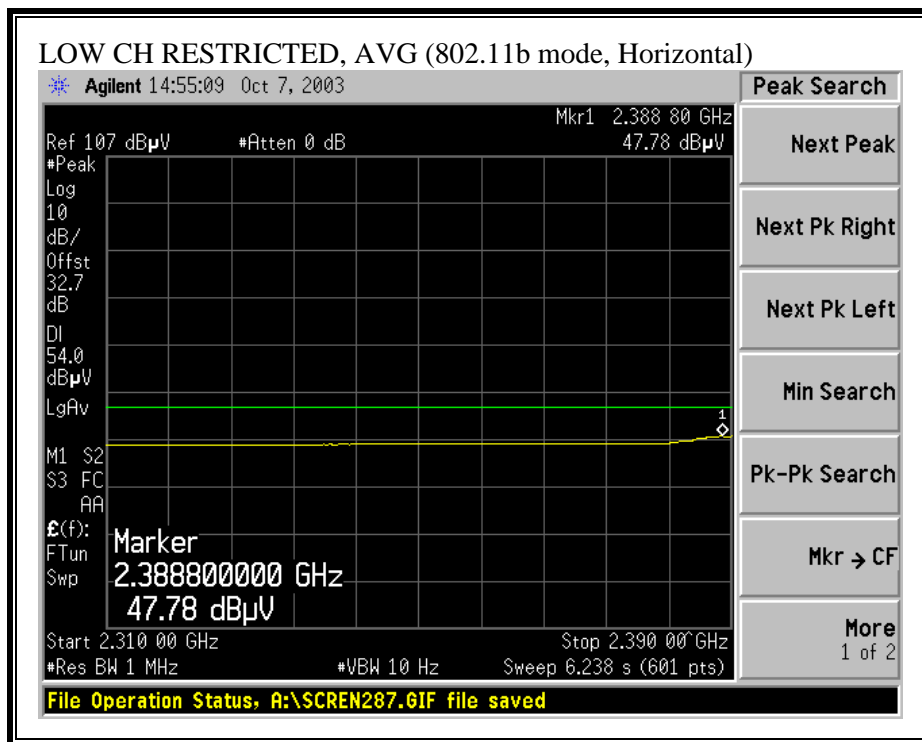



RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

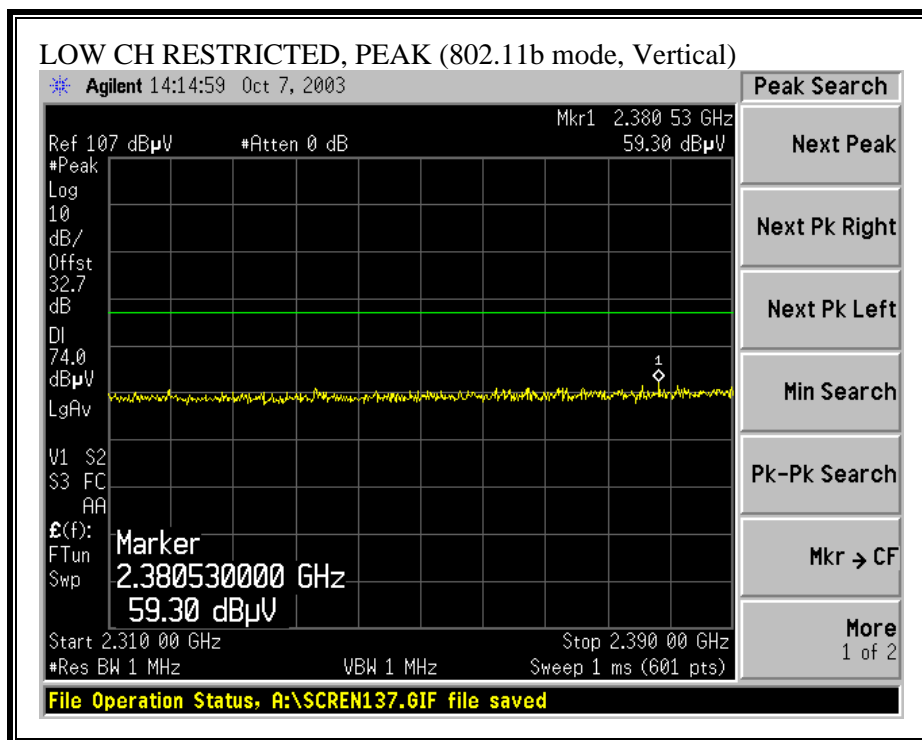

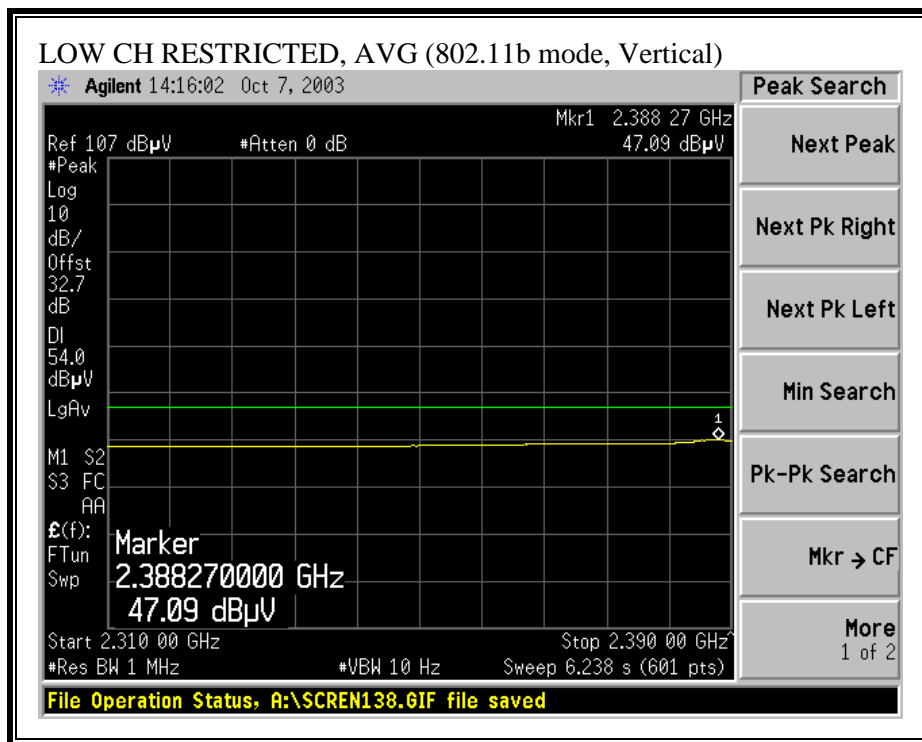



RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

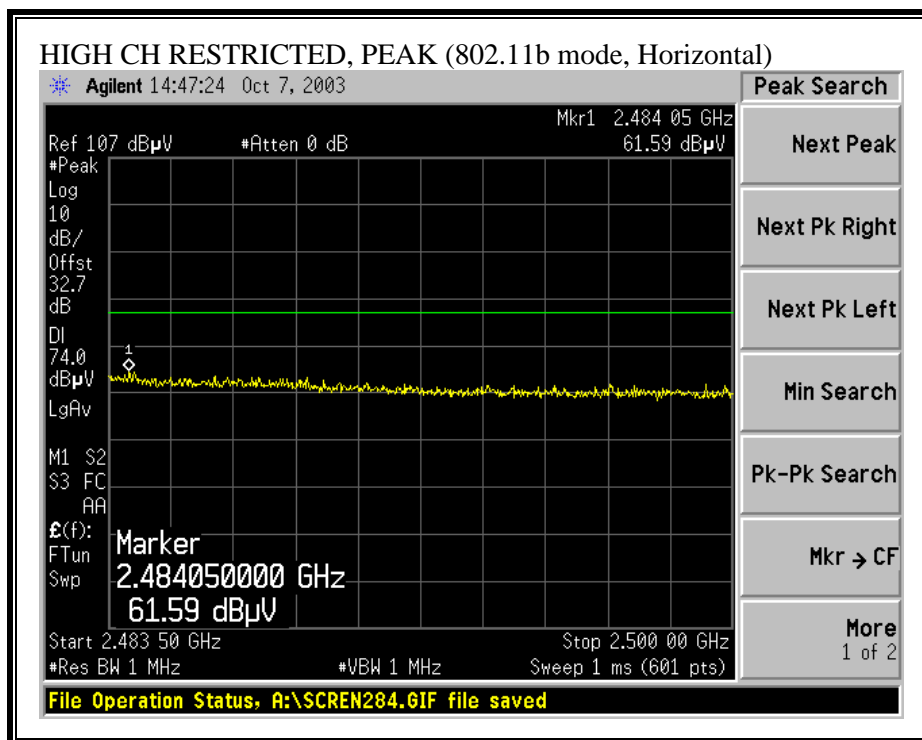

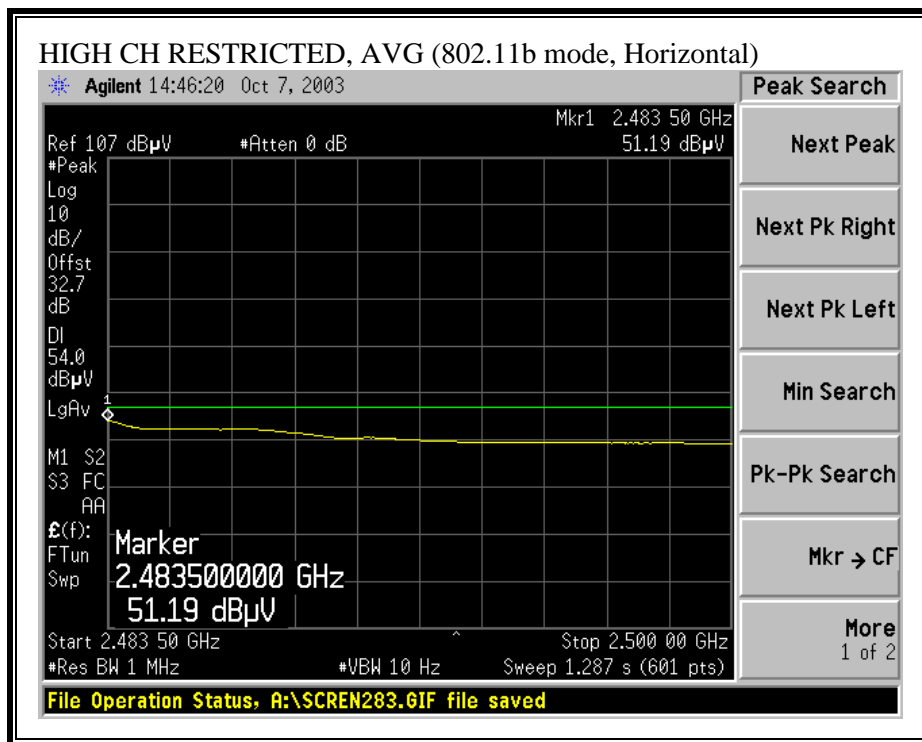

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

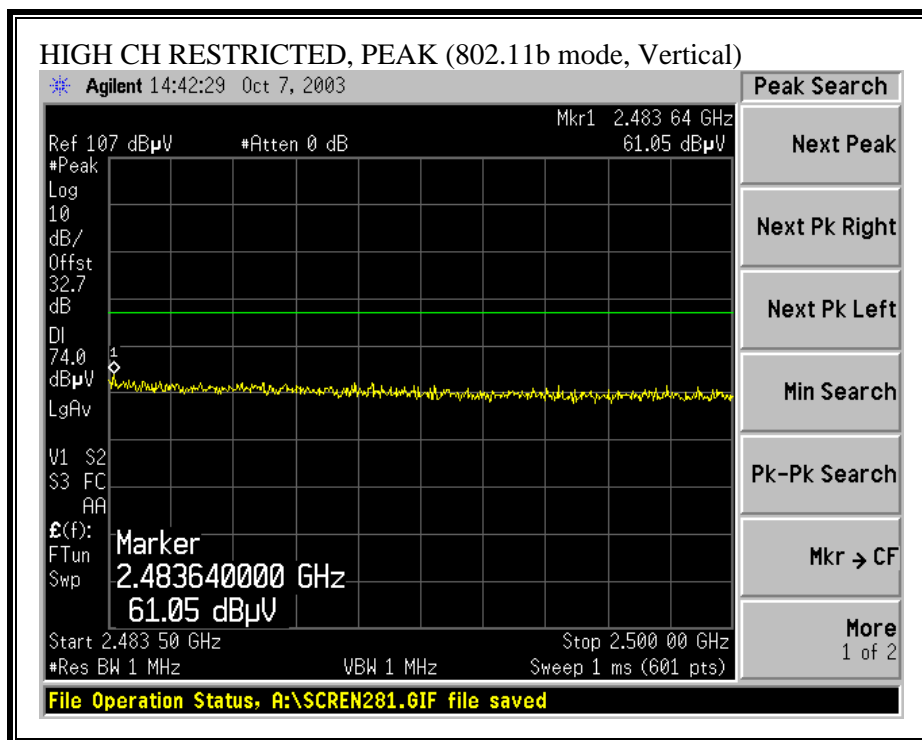

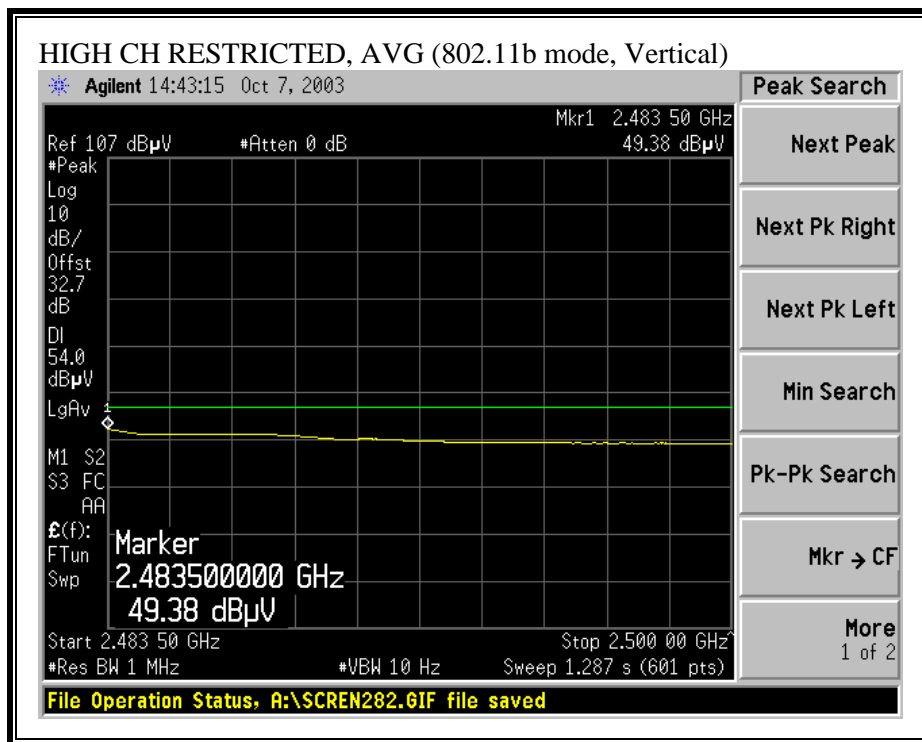

HARMONICS AND SPURIOUS EMISSIONS (b MODE, LOW CHANNEL)

10/07/03 High Frequency Measurement																
Compliance Certification Services, Morgan Hill Open Field Site																
Test Engr:		Yan Zheng														
Project #:		03U2195														
Company:		TOSHIBA AMERICA INFORMATION SYSTEM														
EUT Descrip.:		Intel 802.11b Cus-SB Mini PCI Card in Firebolt10														
EUT M/N:		PA3272U-1MPC														
Test Target:		FCC CLASS B														
Mode Oper:		Transmit, low channel														
Test Equipment:																
EMCO Horn 1-18GHz		Pre-amplifier 1-26GHz		Spectrum Analyzer			Horn > 18GHz			Limit						
T73; S/N: 6717 @1m		T63 Mitroq 646456		Agilent E4446A Analyzer			T117; ARA 18-26GHz; S/N:1013			FCC 15.205						
Hi Frequency Cables																
<input type="checkbox"/> (0 ft) <input type="checkbox"/> (0 ~ 3 ft) <input checked="" type="checkbox"/> (4 ~ 6 ft) <input checked="" type="checkbox"/> (12 ft)																
Peak Measurements: Average Measurements:																
1 MHz Resolution Bandwidth 1 MHz Resolution Bandwidth																
1 MHz Video Bandwidth 10 Hz Video Bandwidth																
f	Dist	Read Pk	Read Avg.	AF	CL	Amp	D Corr	HPF	Peak	Avg	Pk Lim	Avg Lim	Pk Mar	Avg Mar	Notes	
GHz	feet	dBuV	dBuV	dB/m	dB	dB	dB		dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB		
Channel 1 (2412MHz)																
1.888	9.8	51.9	34.1	28.1	2.4	-36.4	0.0	1.0	46.9	29.1	74.0	54.0	-27.1	-24.9	Y	
4.824	9.8	43.4	31.2	33.9	4.6	-35.3	0.0	1.0	47.5	35.3	74.0	54.0	-26.5	-18.7	Y	
4.824	9.8	42.5	31.3	33.9	4.6	-35.3	0.0	1.0	46.6	35.4	74.0	54.0	-27.4	-18.6	H	
No Radiated Emission Found above 5GHz																
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss					HPF	High Pass Filter									

HARMONICS AND SPURIOUS EMISSIONS (b MODE, MID CHANNEL)

10/97/03 High Frequency Measurement																
Compliance Certification Services, Morgan Hill Open Field Site																
Test Engr:		Yan Zheng														
Project #:		03U2195														
Company:		TOSHIBA AMERICA INFORMATION SYSTEM														
EUT Descrip.:		Intel 802.11b G+SB Mini PCI Card in Firebolt10														
EUT M/CN:		PA3272U-IMPC														
Test Target:		FCC CLASS B														
Mode Oper:		Transmit, Middle Channel														
Test Equipment:																
EMCO Horn 1-18GHz				Pre-amplifier 1-26GHz				Spectrum Analyzer				Horn > 18GHz				Limit
T73; S/N: 6717 @1m				T63 Mitroq 646456				Agilent E4446A Analyzer				T117; ARA 18-26GHz; S/N:1013				FCC 15.205
Hi Frequency Cables																
<input type="checkbox"/> (2 ft) <input type="checkbox"/> (2 ~ 3 ft) <input checked="" type="checkbox"/> (4 ~ 6 ft) <input checked="" type="checkbox"/> (12 ft)																
Peak Measurements: 1 MHz Resolution Bandwidth 130Hz Video Bandwidth																
Average Measurements: 1 MHz Resolution Bandwidth 10Hz Video Bandwidth																
f	Dist	Read Pk	Read Avg.	AF	CL	Amp	D Corr	HPF	Peak	Avg	Pk Lim	Avg Lim	Pk Mar	Avg Mar	Notes	
GHz	feet	dBuV	dBuV	dB/m	dB	dB	dB		dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB		
Mid ch=2437MHz																
1.850	9.8	49.8	33.6	27.9	1.9	-36.4	0.0	1.0	44.1	27.9	74.0	54.0	-29.0	-26.1	V	
4.874	9.8	42.9	30.8	33.9	3.8	-35.3	0.0	1.0	46.3	34.2	74.0	54.0	-27.7	-19.8	V	
7.311	9.8	43.0	30.7	36.8	4.8	-34.6	0.0	1.0	51.0	38.7	74.0	54.0	-23.0	-15.3	V	
7.311	9.8	42.0	30.8	36.8	4.8	-34.6	0.0	1.0	50.0	38.8	74.0	54.0	-24.0	-15.2	H	
4.874	9.8	42.5	30.9	33.9	3.8	-35.3	0.0	1.0	45.9	34.3	74.0	54.0	-28.1	-19.7	H	
No Radiated Emission Found above 7.5GHz																
f	Measurement Frequency			Amp	Presamp Gain			Avg Lim	Average Field Strength Limit							
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters			Pk Lim	Peak Field Strength Limit							
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m			Avg Mar	Margin vs. Average Limit							
AF	Antenna Factor			Peak	Calculated Peak Field Strength			Pk Mar	Margin vs. Peak Limit							
CL	Cable Loss			HPF	High Pass Filter											

HARMONICS AND SPURIOUS EMISSIONS (b MODE, HIGH CHANNEL)

10/97/03 High Frequency Measurement																
Compliance Certification Services, Morgan Hill Open Field Site																
Test Eng:		Yan Zheng														
Project #:		03U2195														
Company:		TOSHIBA AMERICA INFORMATION SYSTEM														
EUT Descrip.:		Intel 802.11b Gb-SB Mini PCI Card in Firebolt10														
EUT M/N:		PA3272U-IMPC														
Test Target:		FCC CLASS B														
Mode Oper:		Transmit, High Channel														
Test Equipment:																
EMCO Horn 1-18GHz		Pre-amplifier 1-18GHz		Spectrum Analyzer		Horn > 18GHz		Limit								
T73; S/N: 6717 @1m		T63 Mitroq 646456		Agilent E4446A Analyzer		T117; ARA 18-26GHz; S/N:1013		FCC 15.205								
Hi Frequency Cables																
<input type="checkbox"/> (2 ft) <input type="checkbox"/> (2 ~ 3 ft) <input checked="" type="checkbox"/> (4 ~ 6 ft) <input checked="" type="checkbox"/> (12 ft)																
Peak Measurements: 1 MHz Resolution Bandwidth 15MHz Video Bandwidth																
Average Measurements: 1 MHz Resolution Bandwidth 10Hz Video Bandwidth																
f	Dist	Read Pk	Read Avg.	AF	CL	Amp	D Corr	HPF	Peak	Avg	Pk Lim	Avg Lim	Pk Mar	Avg Mar	Notes	
GHz	feet	dBuV	dBuV	dB/m	dB	dB	dB		dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB		
High ch=2462MHz																
1.850	9.8	49.6	34.1	27.9	1.9	-36.4	0.0	1.0	43.9	28.4	74.0	54.0	-30.1	-25.6	Y	
4.924	9.8	43.1	31.0	34.0	3.8	-35.3	0.0	1.0	46.5	34.4	74.0	54.0	-27.5	-19.6	Y	
7.386	9.8	43.6	30.3	36.9	4.9	-34.5	0.0	1.0	51.8	39.0	74.0	54.0	-22.2	-15.0	Y	
7.386	9.8	42.7	30.7	36.9	4.9	-34.5	0.0	1.0	50.9	38.9	74.0	54.0	-23.1	-15.1	H	
4.924	9.8	42.7	30.3	34.0	3.8	-35.3	0.0	1.0	46.1	34.2	74.0	54.0	-27.9	-19.8	H	
No Radiated Emission Found above 7.5GHz																
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss					HPF	High Pass Filter									

7.1.3. CO-LOCATED TRANSMITTER RADIATED EMISSIONS


SUPPLEMENTAL TEST PROCEDURE


The dominant transmitter is set to the worst-case channel. The spurious emissions performance of the dominant transmitter is investigated as the frequency of the non-dominant transmitter is varied. Worst-case results are reported.

RESULTS


No non-compliance noted:


WORST-CASE RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

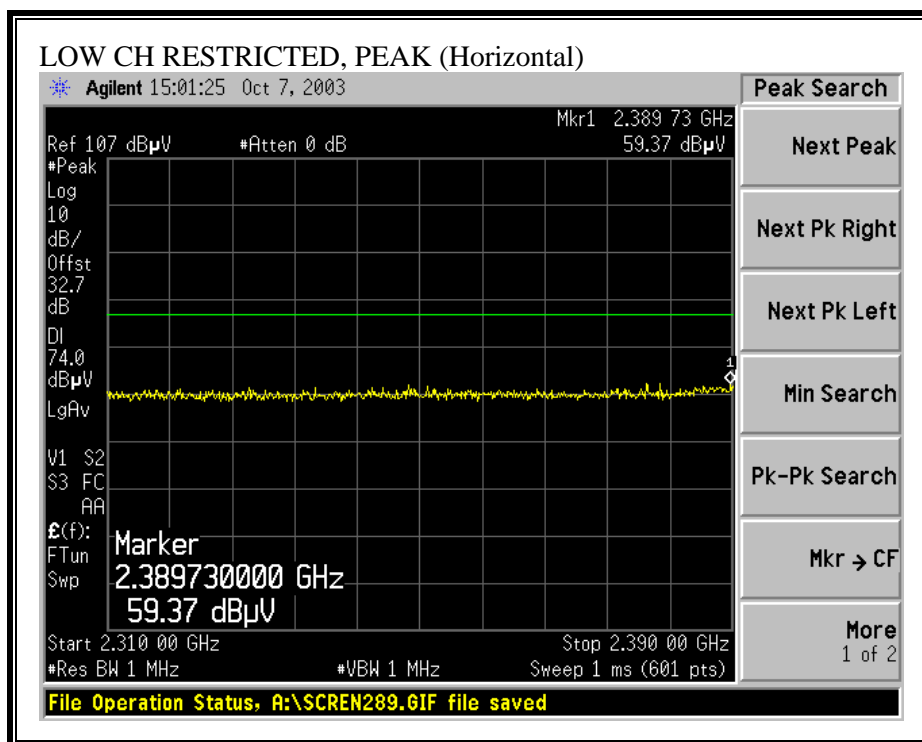

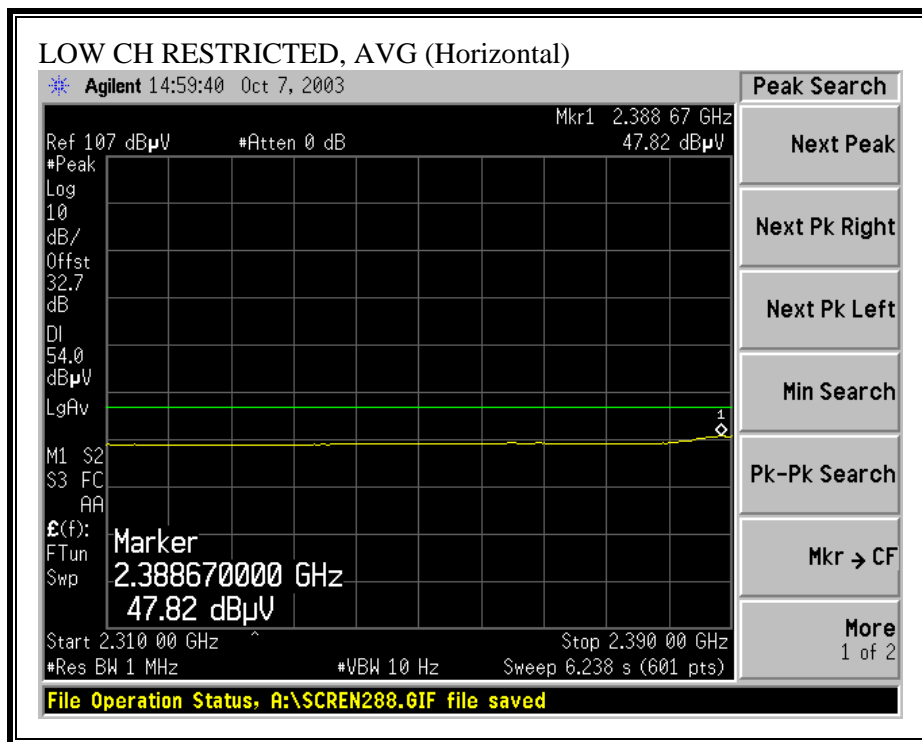



WORST-CASE RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

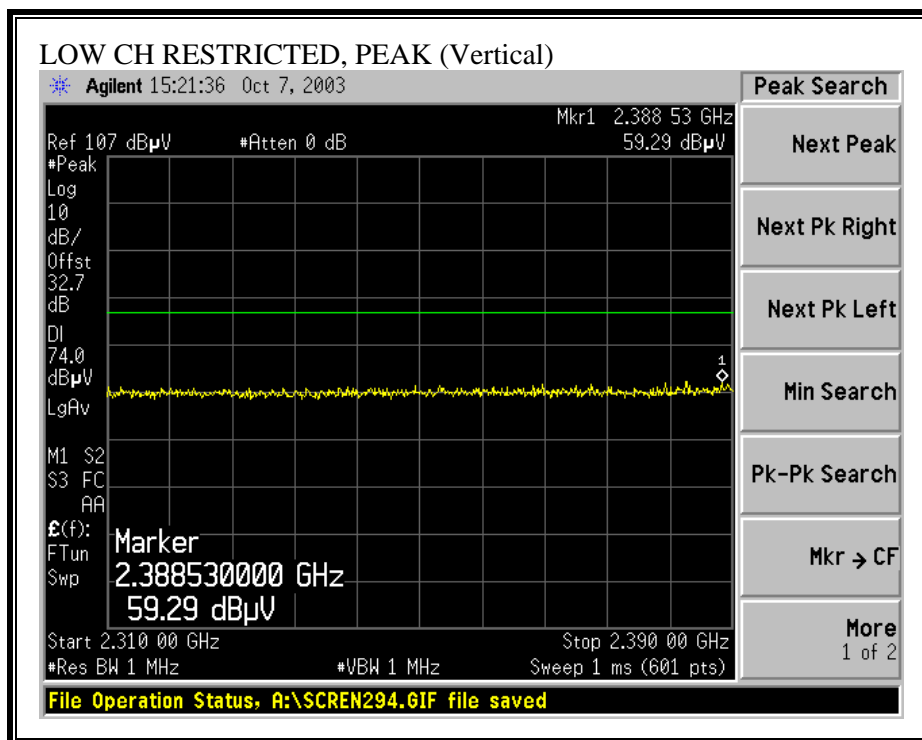

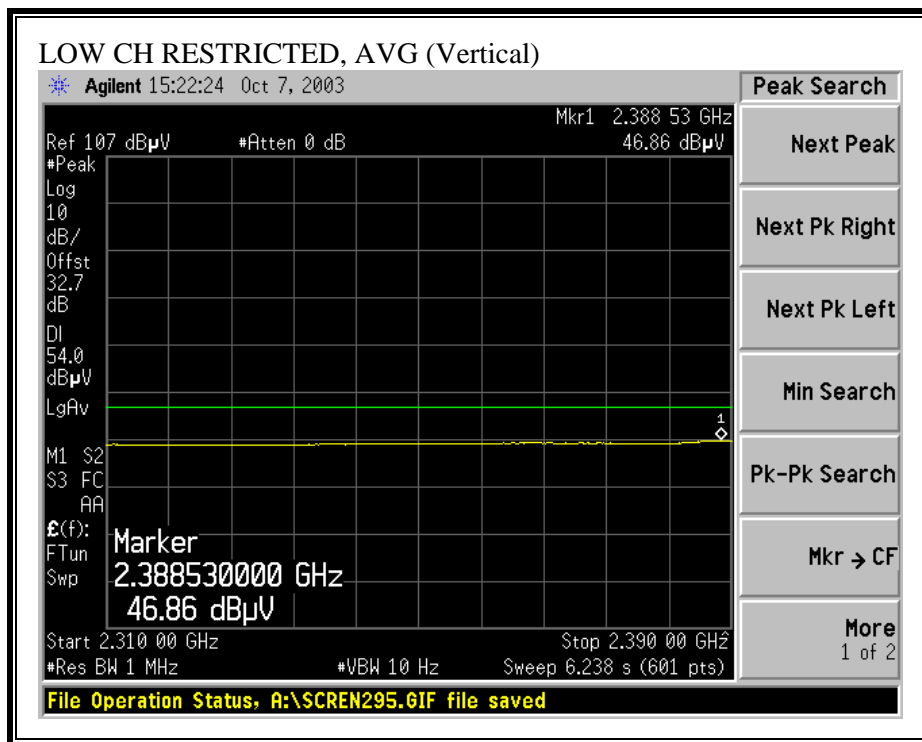



WORST-CASE RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

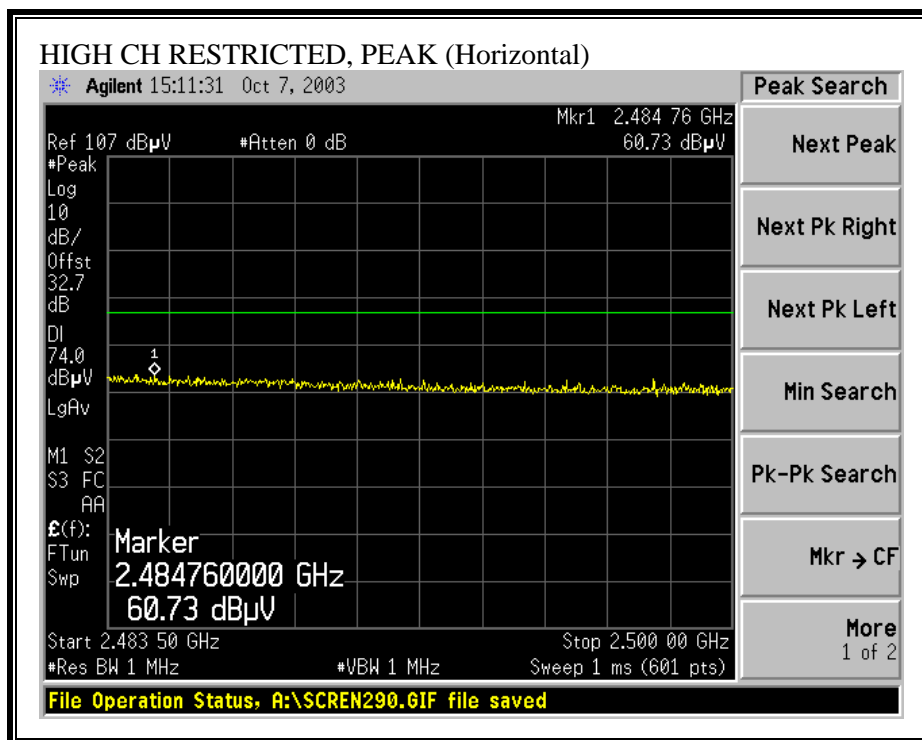

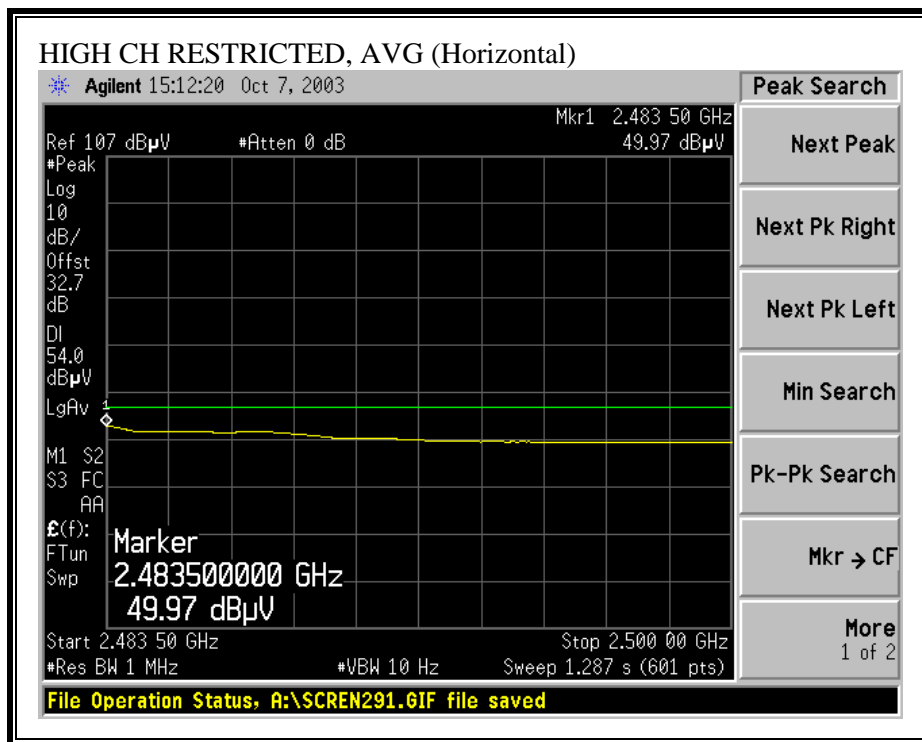

WORST-CASE RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

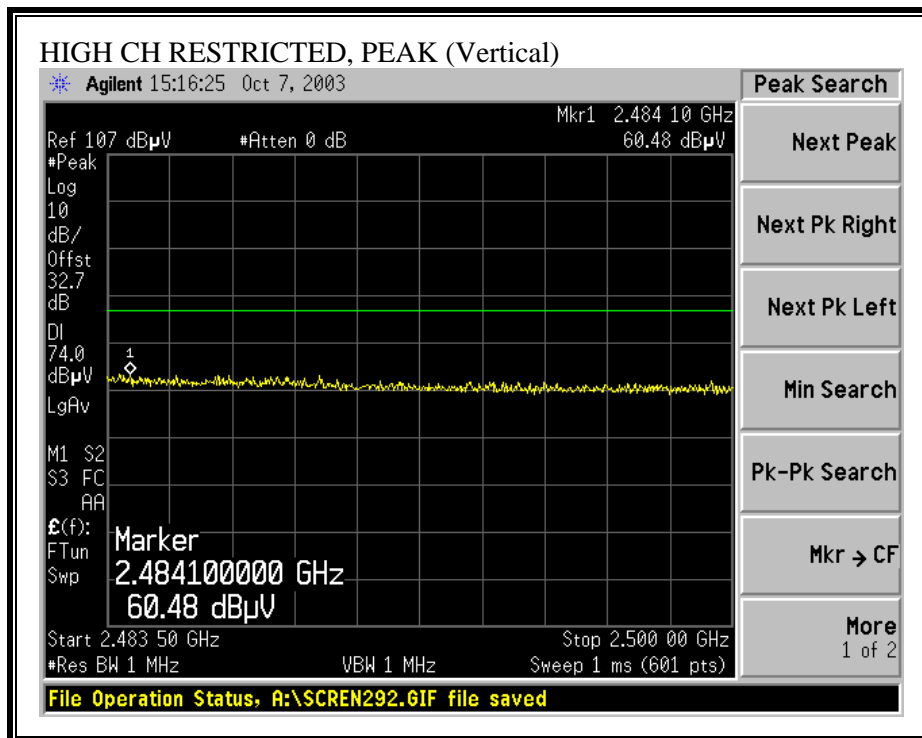

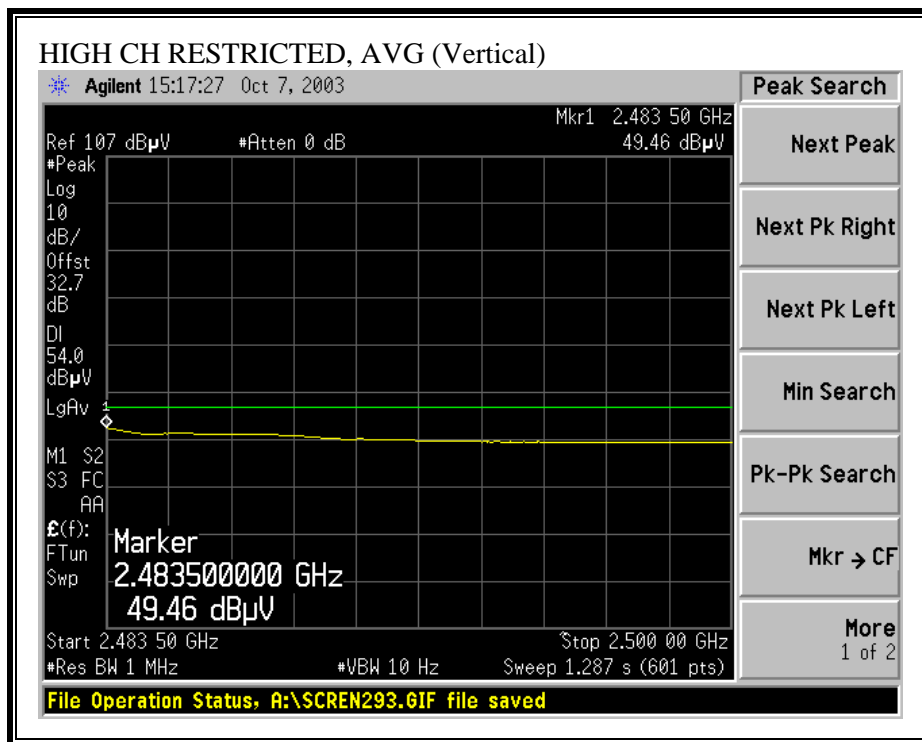


WORST-CASE HARMONICS AND SPURIOUS EMISSIONS


10/97/03 High Frequency Measurement																			
Compliance Certification Services, Morgan Hill Open Field Site																			
Test Eng:		Yan Zheng																	
Project #:		03U2195																	
Company:		TOSHIBA AMERICA INFORMATION SYSTEM																	
EUT Descrip.:		Intel 802.11b Gb-SB Mini PCI Card in Firebolt10																	
EUT MAN:		PA3272U-IMPC																	
Test Target:		FCC CLASS B																	
Mode Oper:		Transmit, High Channel, Co-located with bluetooth in channel 3412MHz (Worst-Case)																	
Test Equipment:																			
EMCO Horn 1-18GHz				Pre-amplifier 1-16GHz				Spectrum Analyzer				Horn > 18GHz				Limit			
T73; S/N: 6717 @1m				T63 Mitroq 646456				Agilent E4446A Analyzer				T117; ARA 18-26GHz; S/N:1013				FCC 15.205			
Hi Frequency Cables																			
<input type="checkbox"/> (2 ft) <input type="checkbox"/> (2 ~ 3 ft) <input checked="" type="checkbox"/> (4 ~ 6 ft) <input checked="" type="checkbox"/> (12 ft)																			
Peak Measurements: 1 MHz Resolution Bandwidth 15MHz Video Bandwidth																			
Average Measurements: 1 MHz Resolution Bandwidth 10Hz Video Bandwidth																			
f	Dist	Read Pk	Read Avg.	AF	CL	Amp	D Corr	HPF	Peak	Avg	Pk Lim	Avg Lim	Pk Mar	Avg Mar	Notes				
GHz	feet	dBuV	dBuV	dB/m	dB	dB	dB		dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB					
High ch=2462MHz																			
1.850	9.8	49.6	33.9	27.0	1.9	-36.4	0.0	1.0	43.9	28.2	74.0	54.0	-30.1	-25.8	Y				
4.924	9.8	43.6	31.0	34.0	3.8	-35.3	0.0	1.0	47.0	34.4	74.0	54.0	-27.0	-19.6	Y				
7.386	9.8	43.3	30.7	36.9	4.9	-34.5	0.0	1.0	51.5	38.9	74.0	54.0	-22.5	-15.1	Y				
7.386	9.8	43.1	30.7	36.9	4.9	-34.5	0.0	1.0	51.3	38.9	74.0	54.0	-22.7	-15.1	H				
4.924	9.8	43.2	30.8	34.0	3.8	-35.3	0.0	1.0	46.6	34.2	74.0	54.0	-27.4	-19.8	H				
No Radiated Emission Found above 7.5GHz																			
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit						
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit						
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit						
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit						
CL	Cable Loss					HPF	High Pass Filter												

7.1.4. WORST-CASE RADIATED EMISSIONS BELOW 1 GHZ

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

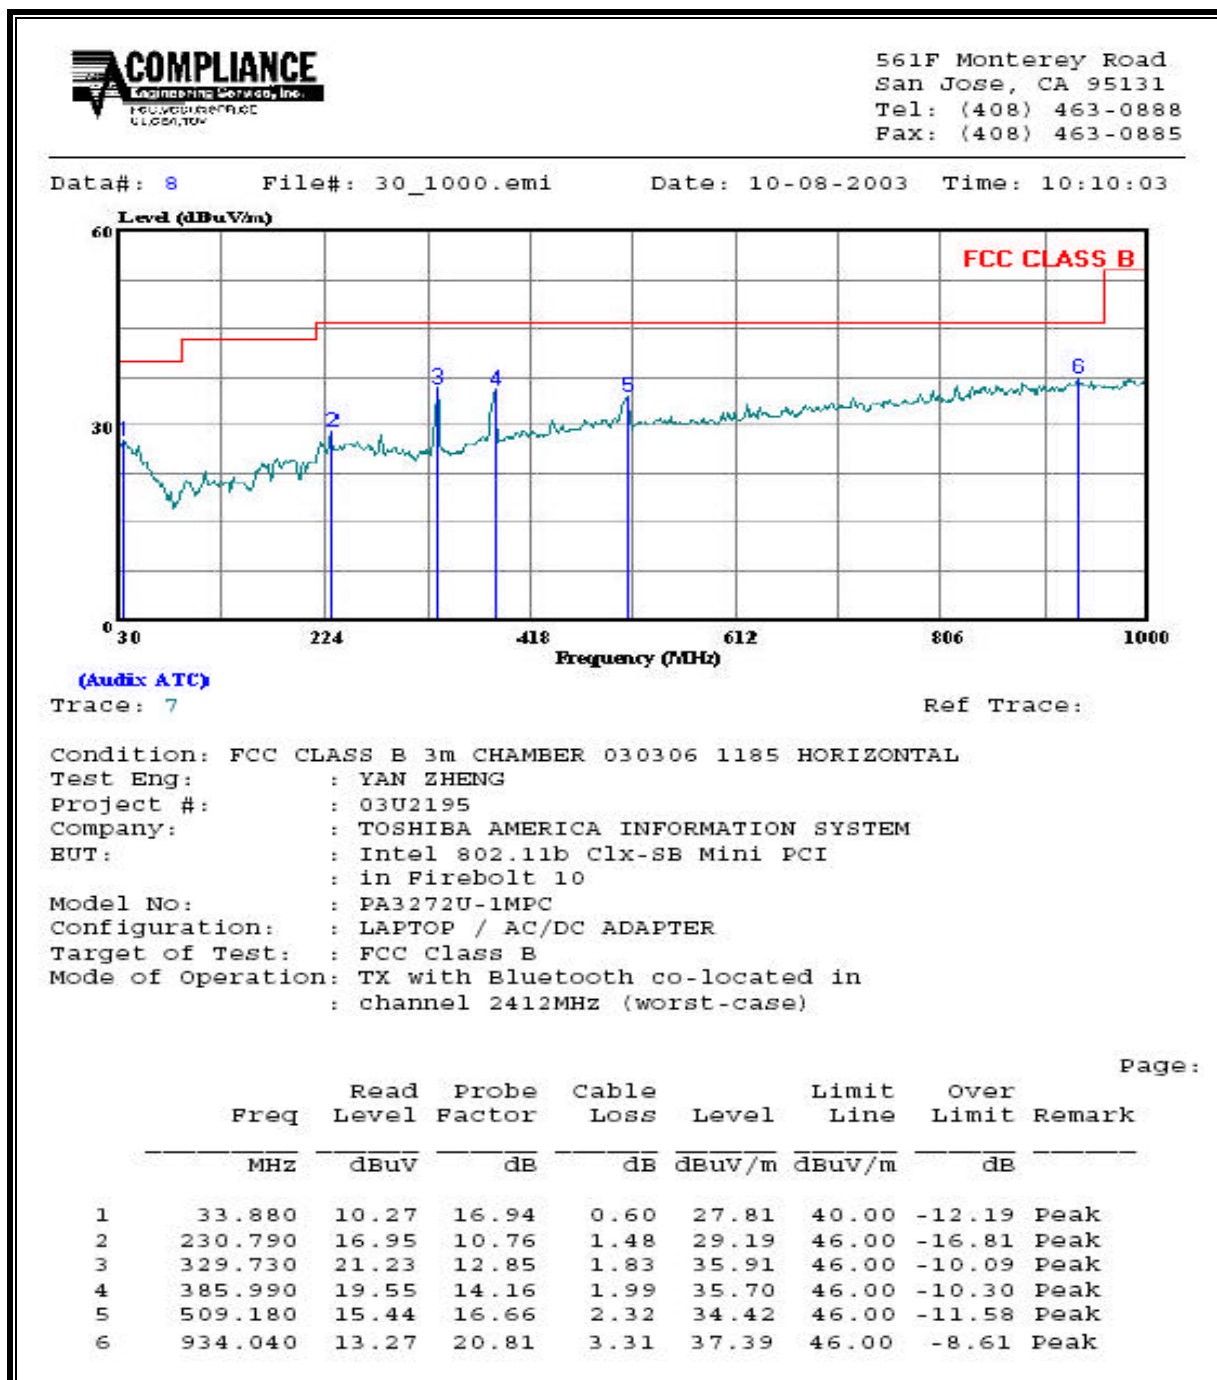

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

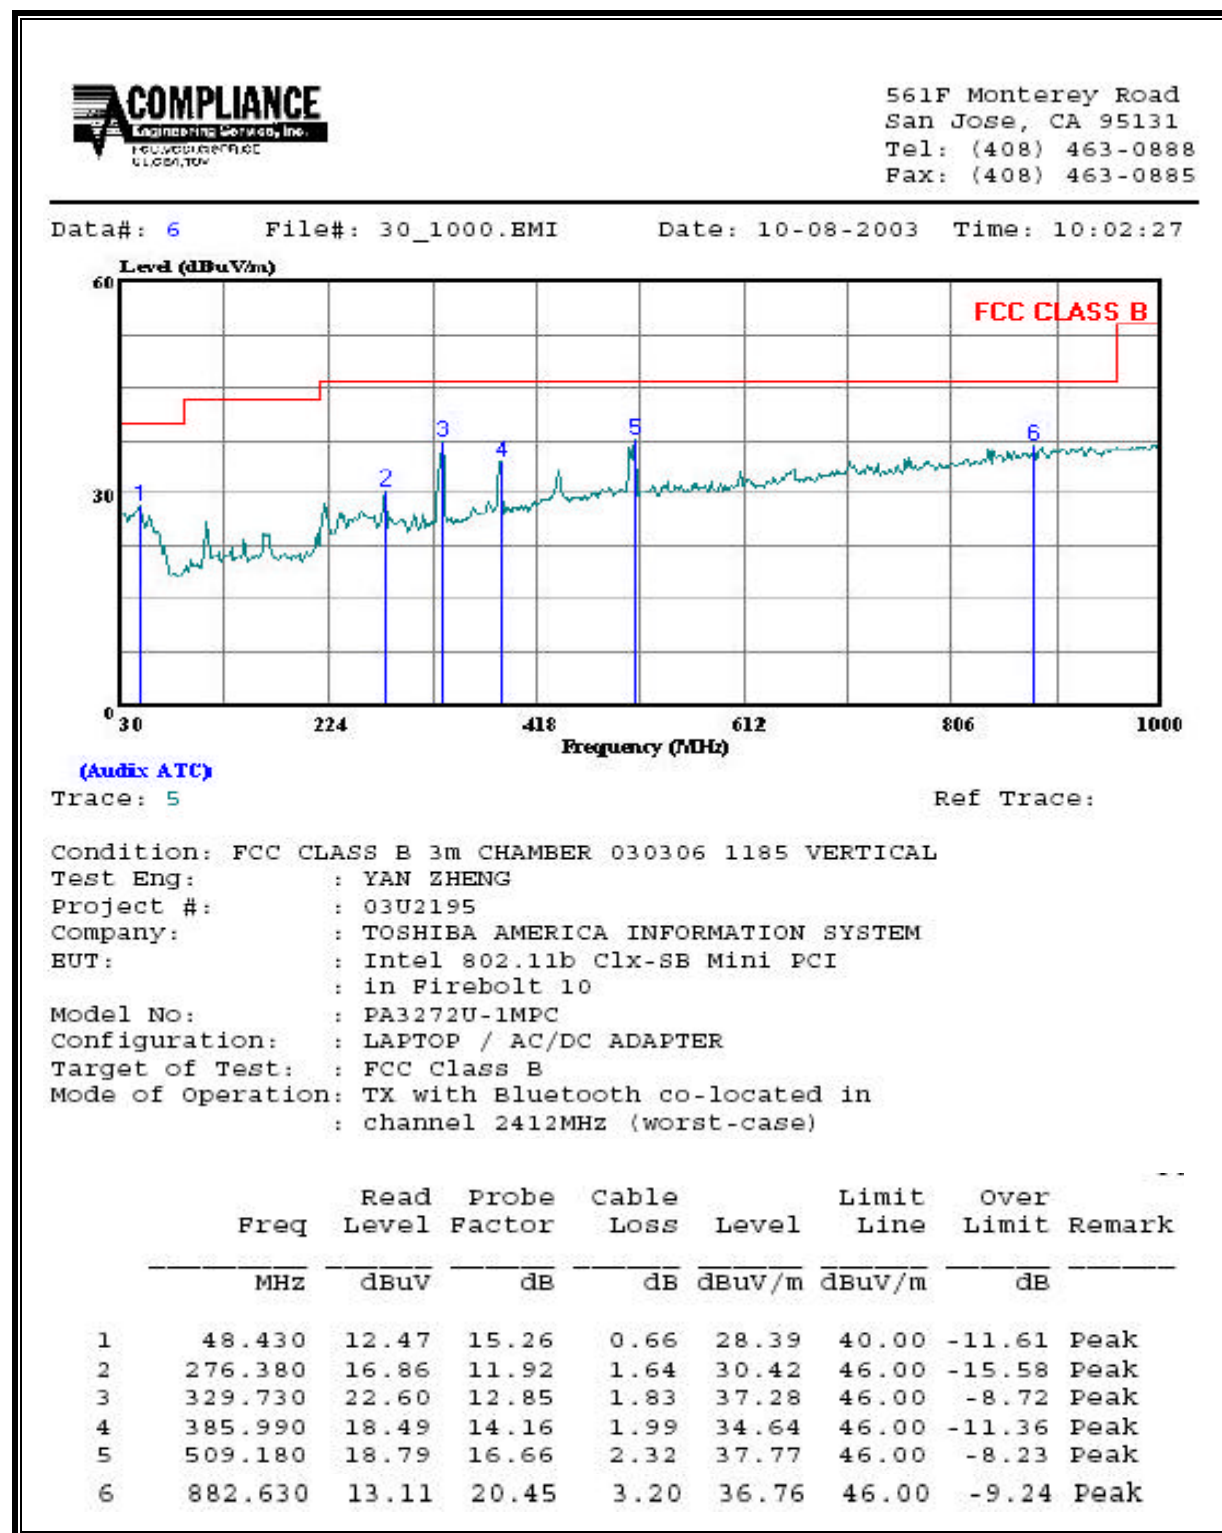

7.2. POWERLINE CONDUCTED EMISSIONS

LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.


RESULTS

No non-compliance noted:

6 WORST EMISSIONS


CONDUCTED EMISSIONS DATA									
Freq.	Reading			Closs	Limit	EN_B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.19	51.54	--	--	0.00	64.86	54.86	-13.32	-3.32	L1
0.25	45.90	--	--	0.00	63.14	53.14	-17.24	-7.24	L1
0.57	42.66	--	--	0.00	56.00	46.00	-13.34	-3.34	L1
0.19	49.34	--	--	0.00	64.86	54.86	-15.52	-5.52	L2
0.26	44.06	--	--	0.00	62.86	52.86	-18.80	-8.80	L2
0.64	34.88	--	--	0.00	56.00	46.00	-21.12	-11.12	L2
6 Worst Data									

LINE 1 AND LINE 2 RESULTS

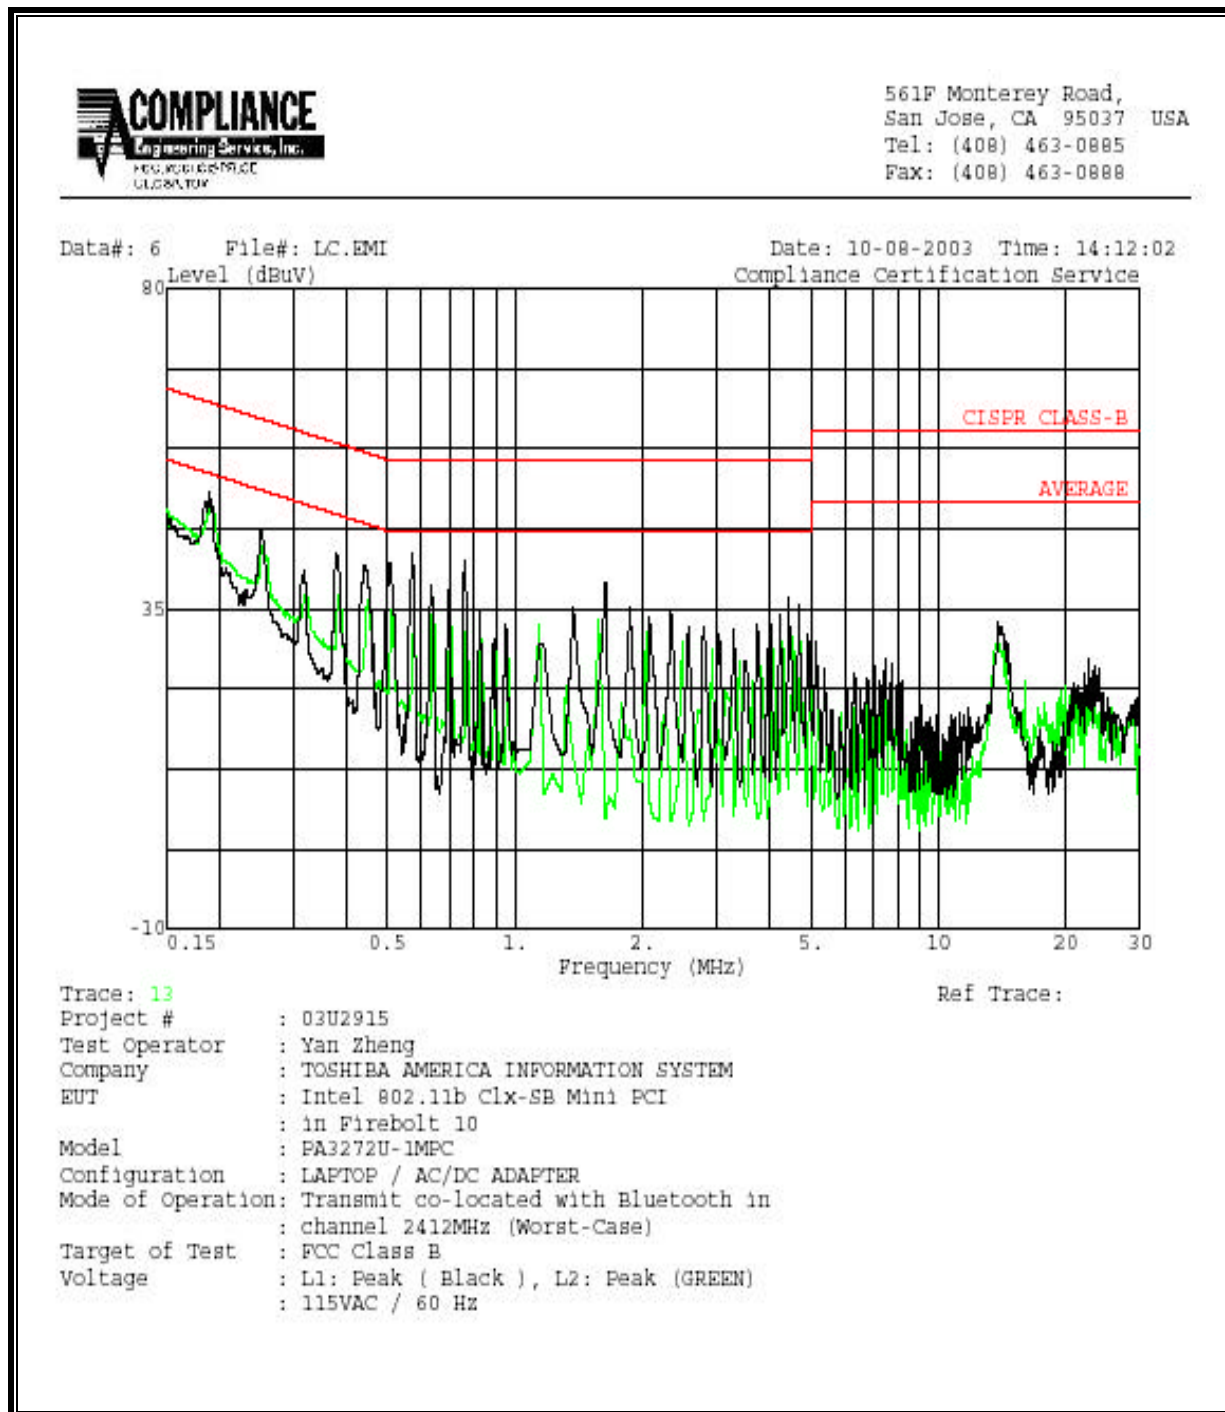

8. SETUP PHOTOS

ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP

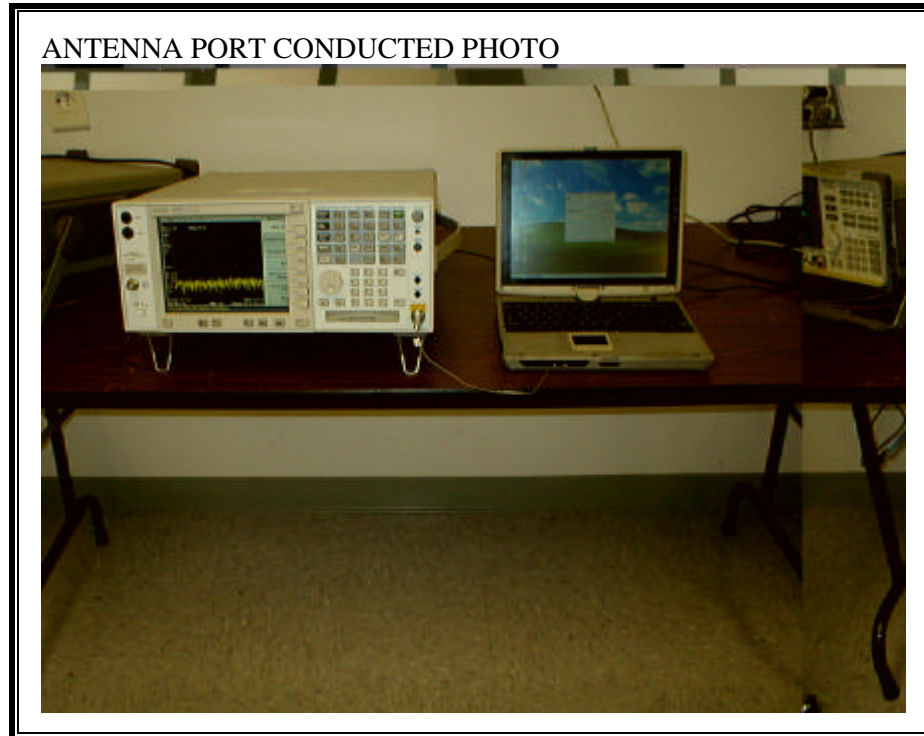

RADIATED RF MEASUREMENT SETUP



LAPTOP CONFIGURATION BACK PHOTO



TABLET CONFIGURATION, X AXIS PHOTO



TABLET CONFIGURATION, Y AXIS FRONT PHOTO



TABLET CONFIGURATION, Y AXIS BACK PHOTO



TABLET CONFIGURATION, Z AXIS FRONT PHOTO



TABLET CONFIGURATION, Z AXIS BACK PHOTO



POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP



LINE CONDUCTED BACK PHOTO



END OF REPORT